



Geotechnical  
Foundations  
Land Planning  
Geo-Structural  
Environmental  
Water Resources

---

*Principals:*

Steven P. Byszewski, PE, PP  
Anthony Castillo, PE  
Fuad Dahan, PhD, PE, LSRP  
Roger Hendrickson  
John M. Nederfield, PE  
Justin M. Protasiewicz, PE  
Kenneth Quazza, PE  
Michael St. Pierre, PE

July 11, 2019

Ms. Kiera Thompson, P.G.  
Project Manager  
Bureau C, Section B  
Division of Environmental Remediation 625 Broadway  
Albany, NY 12233

**RE: Remedial Investigation Work Plan Hamilton Green  
BCP Site No. C360177  
200 Hamilton Avenue  
City of White Plains, Westchester County**

Dear Ms. Thompson

This is a summary report that compiles the September 2018 Remedial Investigation Work Plan (RIWP) by AKRF and the subsequent riders that were submitted by Sesi Consulting Engineers DPC (SESI) in the forms of letters response to the NYSDEC comments on the RIWP in January 2019, April 2019 and May 2019. More specifically this letter includes the following attachments:

- 1) **Attachment 1:** Soil sampling plan that presents the all the soil sample locations with an attached soil sampling table that list the planned collection sample depths and analyses for each boring as submitted in AKRF's RIWP and subsequently in Sesi's responses to the NYSDEC's comments.
- 2) **Attachment 2:** Groundwater sampling plan that presents the groundwater wells locations, the proposed sampling analysis from each well, and sampling method as submitted in AKRF's RIWP and subsequently in Sesi's responses to the NYSDEC's comments.
- 3) **Attachment 3:** Soil vapor sampling plan that presents the locations of the planned soil vapor sampling points, the collection depths and collection method as submitted in AKRF's RIWP and subsequently in Sesi's responses to the NYSDEC's comments.
- 4) **Attachment 4:** The governing documents prepared by Sesi:
  - a. Health and Safety Plan (HASP)
  - b. Community Air Monitoring Plan
  - c. Emerging Contaminant Sampling Plan
  - d. Soil Vapor Sampling Plan
- 5) **Attachment 5:** The response letters as submitted in their entirety.

6) **Attachment 6:** the RIWP by AKRF.

Please do not hesitate to contact me with any questions or concerns. Sincerely,

**SESI CONSULTING ENGINEERS**


Fuad Dahan, PhD, PE  
Principal

N:\PROJECTS\10440 - White Plains, NY (Hamilton Green)\Reports\RIWP-Compiled-07102019\BCP.C360177-RIWP-Compiled-07112019.docx



## **ATTACHMENT 1: SOIL SAMPLING PLAN**

N:\ACAD\10440\CAD\RWP\_SUMMARY\10440\_SESI\_SAMPLE\_LOCATION\_PLAN.DWG 07/11/19 02:43:06PM, jenny, LAYOUT:SESI-2

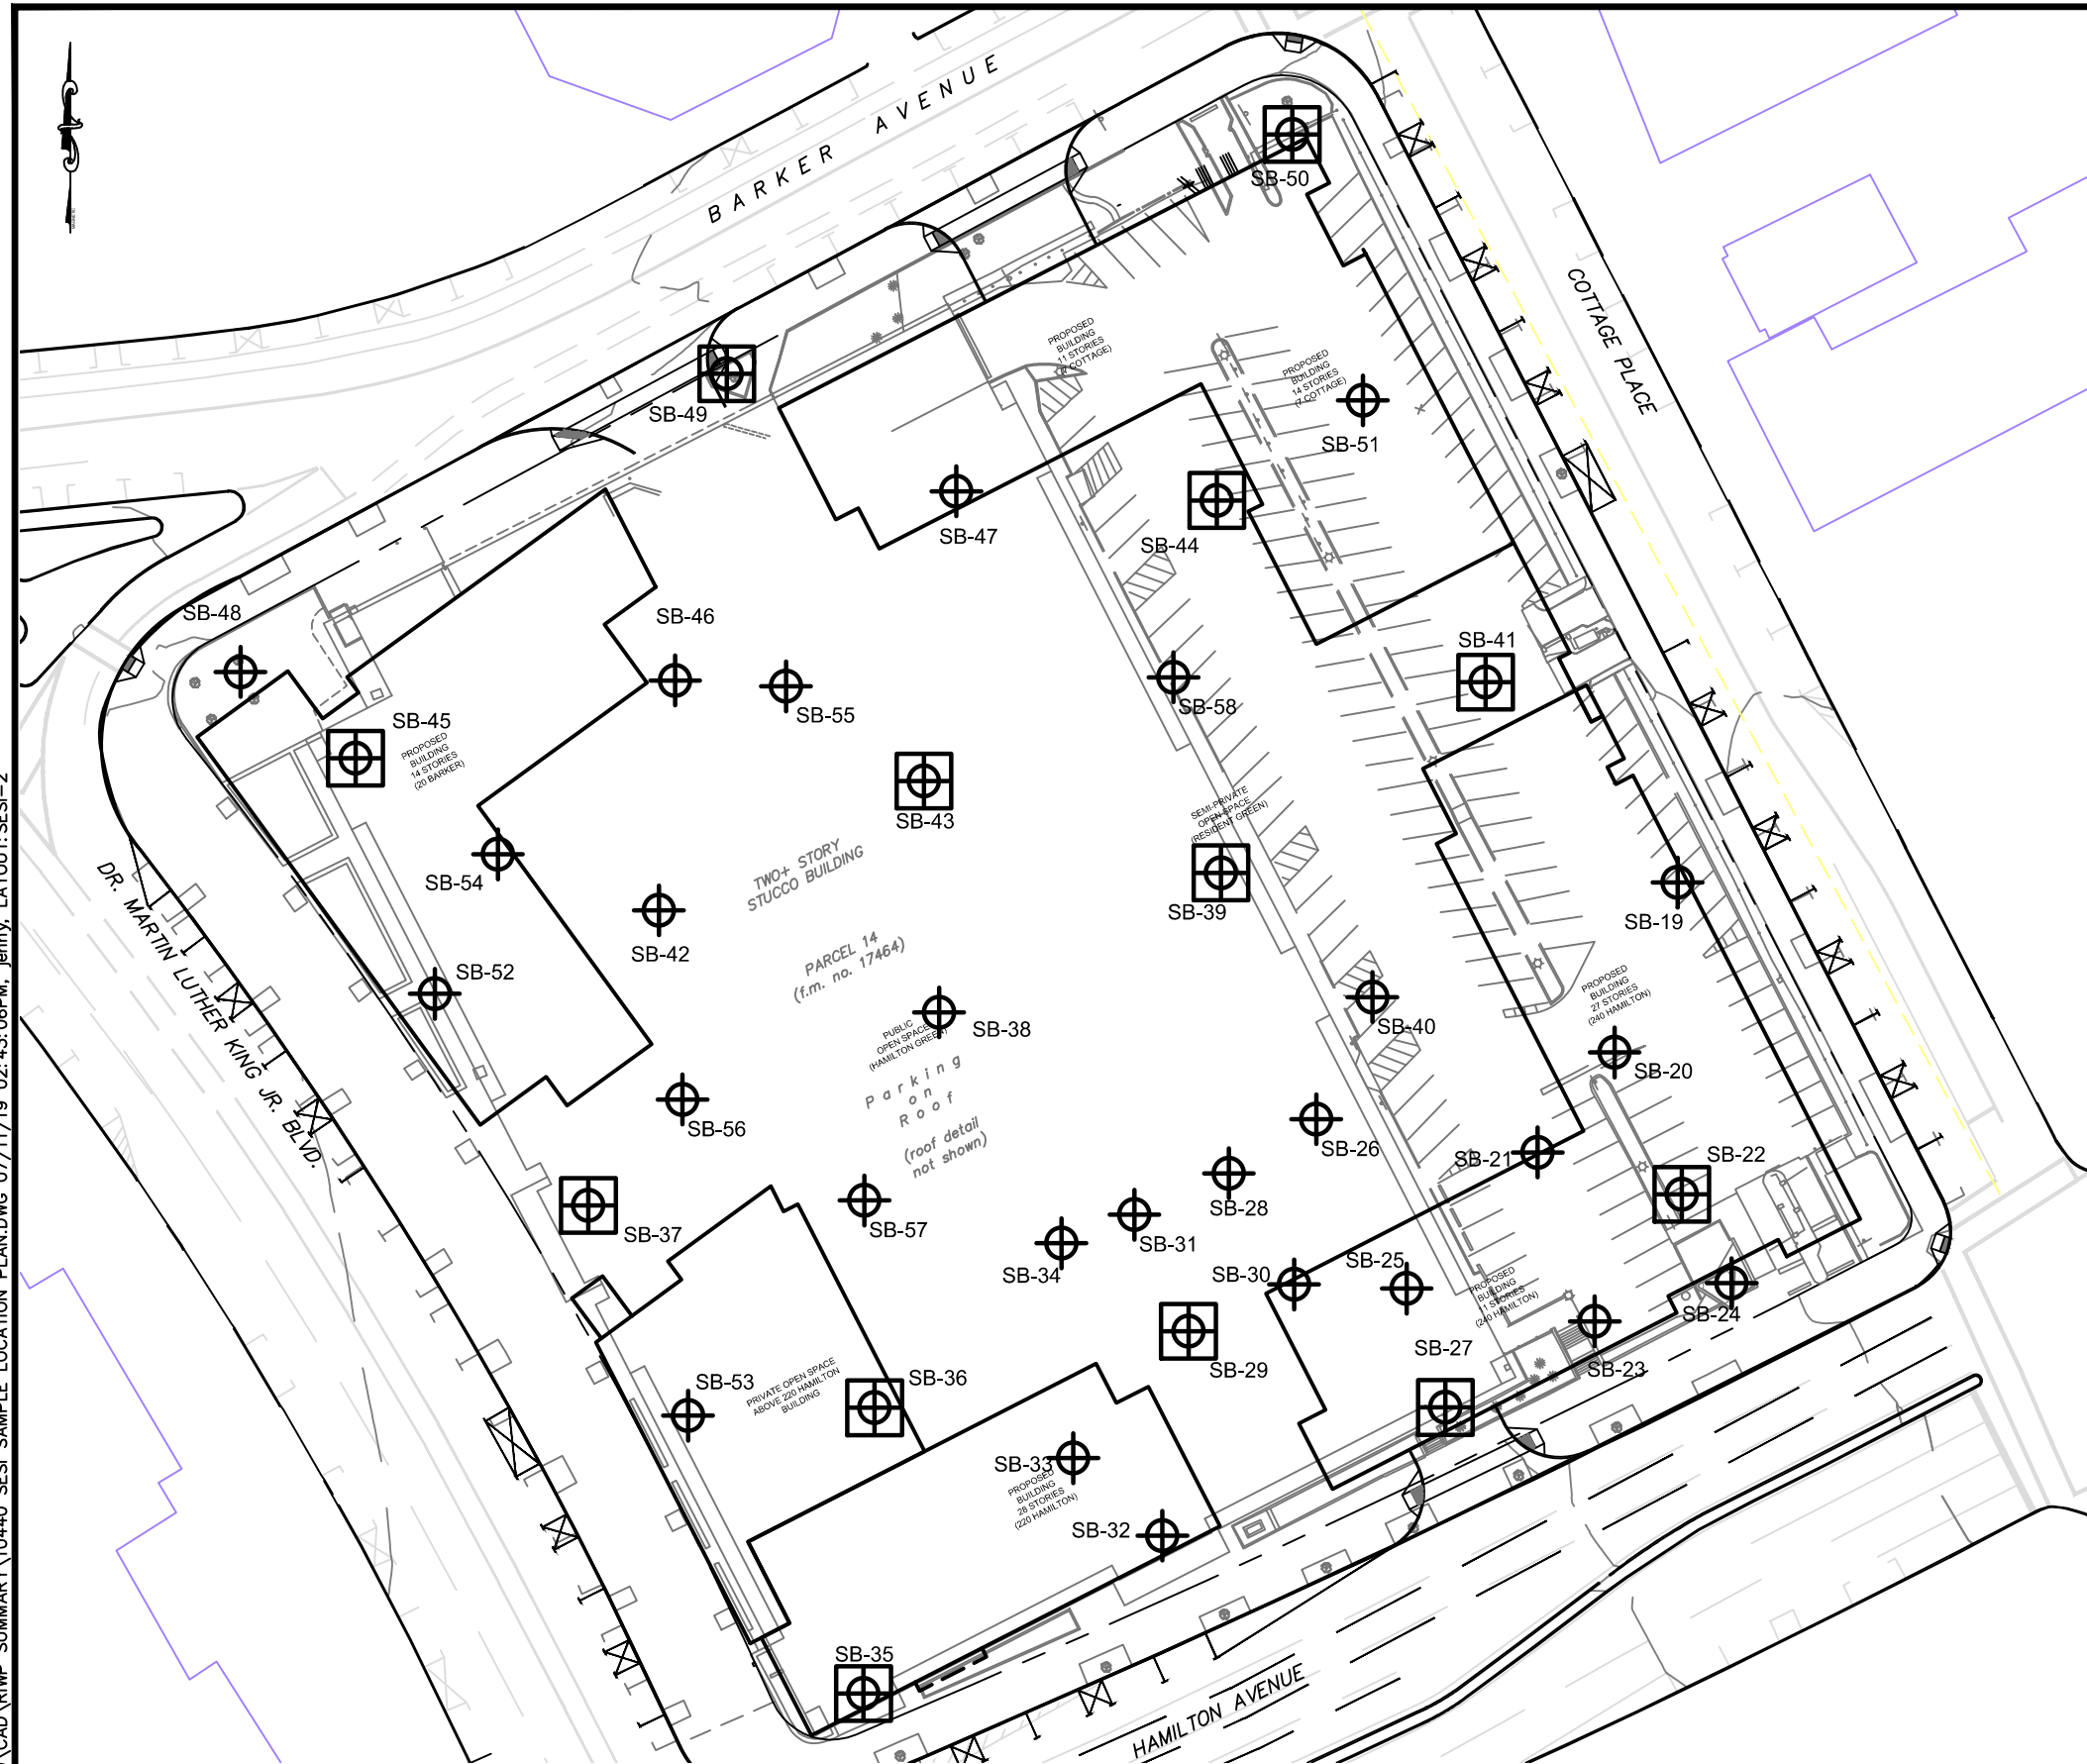


**LEGEND:**

SB-21 - PROPOSED SOIL BORINGS

- PROPOSED BORINGS WITH SAMPLES TO BE ANALYZED FOR TCL/TAL FULL SUITE AND EMERGING CONTAMINANTS

SAMPLED DEPTHS AND ANALYSES SHALL FOLLOW THE ATTACHED TABLE.

© SESI CONSULTING ENGINEERS D.P.C. 2019  
This drawing and all information contained hereon is proprietary information of SESI CONSULTING ENGINEERS D.P.C. and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS D.P.C.



dwg by: yy  
chk by: FL  
scale: 1" = 60'  
date: 07/11/19

SOILS / FOUNDATIONS  
SITE DESIGN  
ENVIRONMENTAL

**SESI**  
CONSULTING  
ENGINEERS D.P.C.

12A MAPLE AVE. PINE BROOK, N.J. 07058 PH: 973-808-9050

project: 200 HAMILTON AVENUE  
WHITE PLAINS, NY  
drawing title: PROPOSED SOIL  
SAMPLE LOCATION PLAN

job no: 10440  
drawing no:

**SESI-2**

**Summary of Proposed Soil Investigation  
Hamilton Green  
White Plains, New York**

<b>Soil Boring ID</b>	<b>Proposed Sampling Interval</b>	<b>Target Analyses</b>	<b>Sampling Rationale</b>
SB-19	12" - 24"	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	Bottom of Fill (10' - 12')	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	Unsaturated Zone - Most Contaminated Interval or 15' - 17'	CP-51 VOCs and SVOCs RCRA Metals + Zn	Delineate petroleum contamination or Characterize soil at anticipated final excavation depth
	Saturated Zone - Most Contaminated Interval or Below GW Interface	CP-51 VOCs	Delineate petroleum contamination/ Determine Clean Endpoint
SB-20	2" - 6"	CP-51 VOCs	Nature and Extent of Shallow Fill layer
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-21	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-22	Bottom of Fill (10' - 12')	TCL/TAL+30 & ECs	Further Characterize shallow fill layer identified in SB-12
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-23	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-24	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-25	Within Fill Layer (5-12')	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-26	2" - 6"	CP-51 VOCs	Nature and Extent of Shallow Soils
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface?		Delineate petroleum contamination/ Determine Clean Endpoint
SB-27	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	TCL/TAL+30 & ECs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-28	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint

**Summary of Proposed Soil Investigation  
Hamilton Green  
White Plains, New York**

<b>Soil Boring ID</b>	<b>Proposed Sampling Interval</b>	<b>Target Analyses</b>	<b>Sampling Rationale</b>
SB-29	6" - 12"	TCL/TAL+30 & ECs	Nature and Extent of Shallow Fill layer
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-30	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-31	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-32	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-33	Within Fill Layer (5'-12')	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-34	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface		Delineate petroleum contamination/ Determine Clean Endpoint
SB-35	2" - 6"	TCL/TAL+30 & ECs	Nature and Extent of Shallow Fill layer
	13-15		Delineate SCO exceedance at 9-11 ft bgs in SB-6
SB-36	12" - 24"	TCL/TAL+30 & ECs	Nature and Extent of Shallow Fill layer
	5' - 7'		Characterize soil at anticipated final excavation depth
	Within Fill Layer (5'-12')		Characterize shallow fill layer
SB-37	5' - 7'	TCL/TAL+30 & ECs	Characterize soil at anticipated final excavation depth
	Within Fill Layer (5'-12')		Characterize shallow fill layer
SB-38	6" - 12'	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	5' - 7'		Characterize soil at anticipated final excavation depth
	Within Fill Layer (5'-12')		Nature and Extent of Shallow Fill layer
SB-39	2" - 6"	TCL/TAL+30 & ECs	Characterize shallow fill layer
	5' - 7'		Characterize soil at anticipated final excavation depth
	Within Fill Layer (5'-12')		Characterize shallow fill layer

**Summary of Proposed Soil Investigation  
Hamilton Green  
White Plains, New York**


<b>Soil Boring ID</b>	<b>Proposed Sampling Interval</b>	<b>Target Analyses</b>	<b>Sampling Rationale</b>
SB-40	Bottom of Fill (10' - 12')	RCRA Metals + Zn BN SVOCs	Further Characterize shallow fill layer identified in SB-10
	15' - 17'		Characterize soil at anticipated final excavation depth
SB-41	6" - 12"	TCL/TAL+30 & ECs	Nature and Extent of Shallow Fill layer
	Within Fill Layer (5'-12')		Characterize shallow fill layer
SB-42	5' - 7'	RCRA Metals + Zn BN SVOCs	Characterize soil at anticipated final excavation depth
	Within Fill Layer (5'-12')		Characterize shallow fill layer
SB-43	12" - 24"	TCL/TAL+30 & ECs	Nature and Extent of Shallow Fill layer
	5' - 7'		Characterize soil at anticipated final excavation depth
	Within Fill Layer (5'-12')		Characterize shallow fill layer
SB-44	12" - 24"	RCRA Metals + Zn BN SVOCs	Nature and Extent of Shallow Fill layer
	Bottom of Fill (10' - 12')		Characterize shallow fill layer
	15' - 17'		Characterize soil at anticipated final excavation depth
SB-45	12" - 24"	TCL/TAL+30 & ECs	Nature and Extent of Shallow Fill layer
	5' - 7'		Characterize soil at anticipated final excavation depth
	Within Fill Layer (5'-12')		Characterize shallow fill layer
SB-46	5' - 7'	RCRA Metals + Zn BN SVOCs	Characterize soil at anticipated final excavation depth
	Within Fill Layer (5'-12')		Characterize shallow fill layer
SB-47	5' - 7'	RCRA Metals + Zn BN SVOCs	Characterize soil at anticipated final excavation depth
	Within Fill Layer (5'-12')		Characterize shallow fill layer
SB-48	Middle of Fill Layer (6'-8')	RCRA Metals + Zn BN SVOCs	Further Characterize shallow fill layer identified in SB-8
	Bottom of Fill (10' - 12')		
SB-49	Middle of Fill Layer (6'-8')	TCL/TAL+30 & ECs	Further Characterize shallow fill layer identified in SB-9
	Bottom of Fill (10' - 12')		
SB-50	2" - 6"	TCL/TAL+30 & ECs	Nature and Extent of Shallow Fill layer
	Middle of Fill Layer (6'-8')		Further Characterize shallow fill layer identified in SB-1
	15' - 17'		Characterize soil at anticipated final excavation depth
SB-51	Within Fill Layer (5'-12')	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	15' - 17'		Characterize soil at anticipated final excavation depth
SB-52	2" - 6"	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	Within Fill Layer (5'-12')		Characterize shallow fill layer
	15' - 17'		Characterize soil at anticipated final excavation depth
SB-53	Within Fill Layer (5'-12')	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	15' - 17'		Characterize soil at anticipated final excavation depth
SB-54	Within Fill Layer (5'-12')	CP-51 VOCs and SVOCs	Characterize shallow fill layer
	15' - 17'	RCRA Metals + Zn	Characterize soil at anticipated final excavation depth

**Summary of Proposed Soil Investigation  
Hamilton Green  
White Plains, New York**

<b>Soil Boring ID</b>	<b>Proposed Sampling Interval</b>	<b>Target Analyses</b>	<b>Sampling Rationale</b>
SB-55	6" - 12"	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	Within Fill Layer (5'-12')		Characterize shallow fill layer
SB-56	Within Fill Layer (5-12')	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	15' - 17'		Characterize soil at anticipated final excavation depth
SB-57	Within Fill Layer (5-12')	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	15' - 17'		Characterize soil at anticipated final excavation depth
SB-58	Within Fill Layer (5-12')	RCRA Metals + Zn BN SVOCs	Characterize shallow fill layer
	15' - 17'		Characterize soil at anticipated final excavation depth

## **ATTACHMENT 2: GROUNDWATER SAMPLING PLAN**

N:\CAD\10440\CAD\10440 SESI SAMPLE LOCATION PLAN.DWG 07/11/19 02:41:32PM, Jenny, LAYOUT:SESI-3

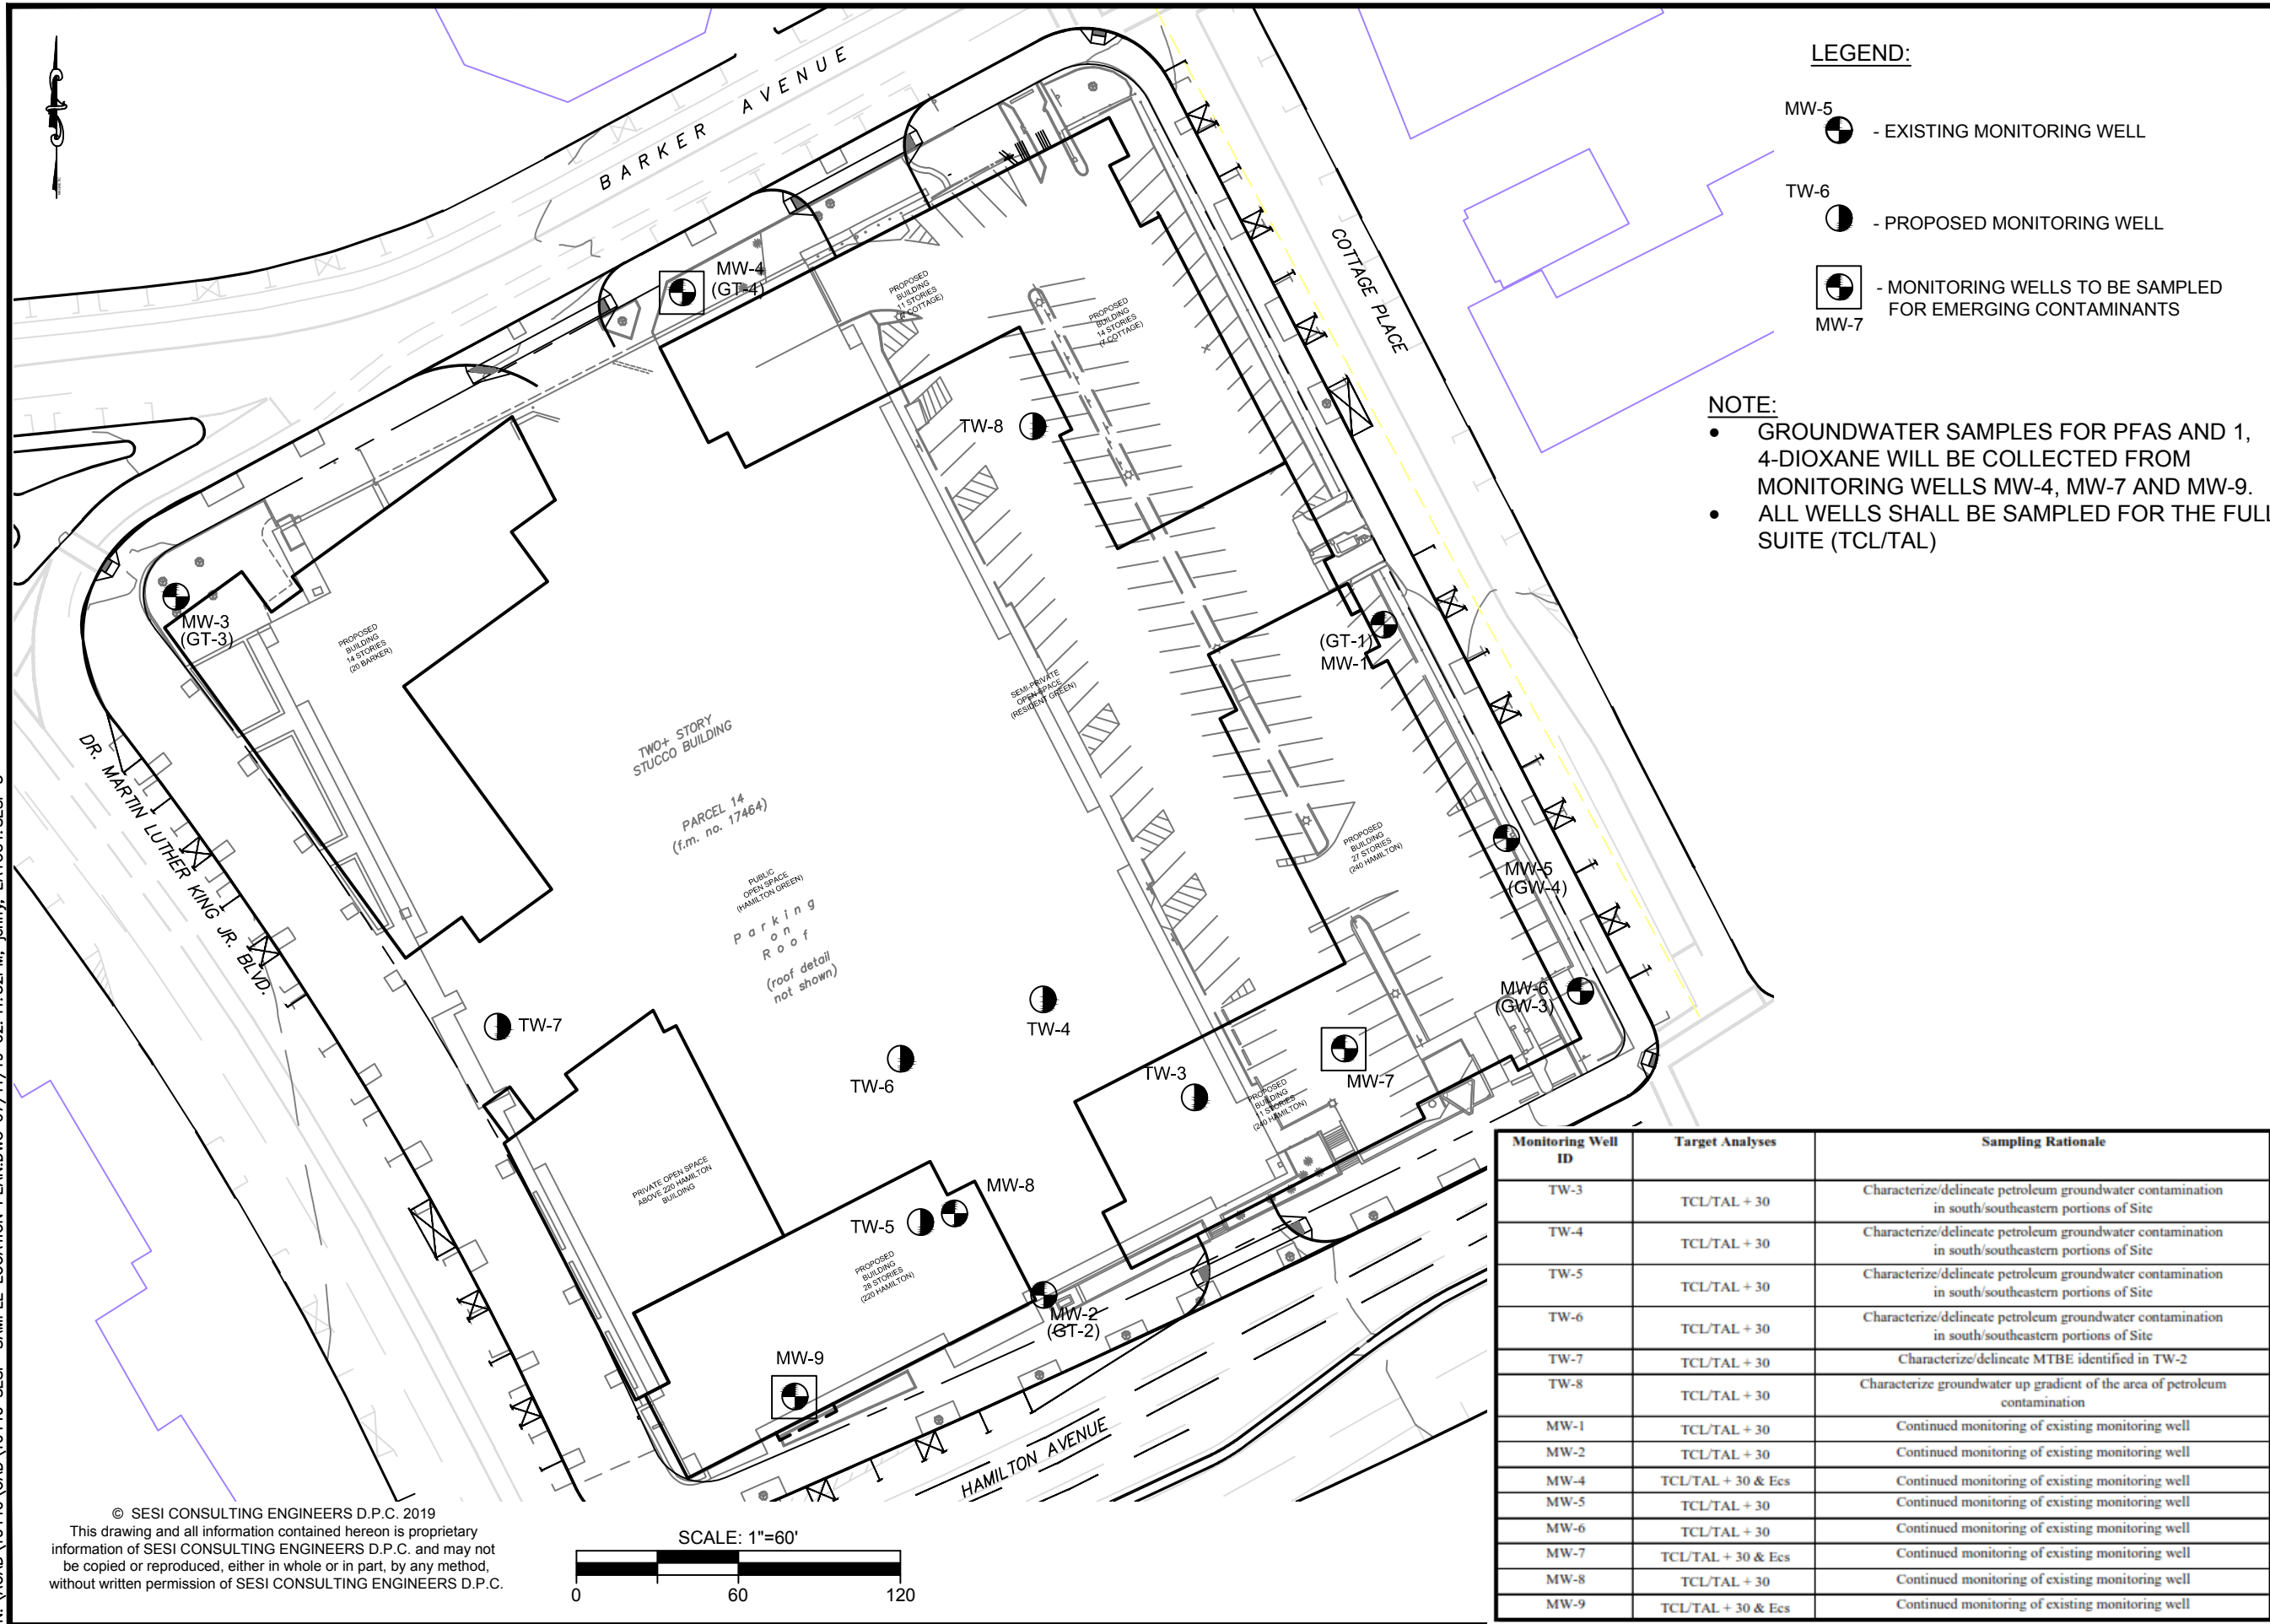

**LEGEND:**

- MW-5 - EXISTING MONITORING WELL
- TW-6 - PROPOSED MONITORING WELL
- MW-7 - MONITORING WELLS TO BE SAMPLED FOR EMERGING CONTAMINANTS

**NOTE:**

- GROUNDWATER SAMPLES FOR PFAS AND 1, 4-DIOXANE WILL BE COLLECTED FROM MONITORING WELLS MW-4, MW-7 AND MW-9.
- ALL WELLS SHALL BE SAMPLED FOR THE FULL SUITE (TCL/TAL)

dwg by: yy  
 chk by: FL  
 scale: 1" = 60'  
 date: 07/11/19

SOILS / FOUNDATIONS  
 SITE DESIGN  
 ENVIRONMENTAL

**SESI**  
 CONSULTING  
 ENGINEERS D.P.C.

12A MAPLE AVE. PINE BROOK, N.J. 07058 PH: 973-808-9050


project: 200 HAMILTON AVENUE  
 WHITE PLAINS, NY

drawing title: PROPOSED GROUNDWATER  
 MONITORING WELL LOCATION PLAN

job no: 10440  
 drawing no:

**SESI-3**

© SESI CONSULTING ENGINEERS D.P.C. 2019  
 This drawing and all information contained hereon is proprietary information of SESI CONSULTING ENGINEERS D.P.C. and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS D.P.C.




Monitoring Well ID	Target Analyses	Sampling Rationale
TW-3	TCL/TAL + 30	Characterize/delineate petroleum groundwater contamination in south/southeastern portions of Site
TW-4	TCL/TAL + 30	Characterize/delineate petroleum groundwater contamination in south/southeastern portions of Site
TW-5	TCL/TAL + 30	Characterize/delineate petroleum groundwater contamination in south/southeastern portions of Site
TW-6	TCL/TAL + 30	Characterize/delineate petroleum groundwater contamination in south/southeastern portions of Site
TW-7	TCL/TAL + 30	Characterize/delineate MTBE identified in TW-2
TW-8	TCL/TAL + 30	Characterize groundwater up gradient of the area of petroleum contamination
MW-1	TCL/TAL + 30	Continued monitoring of existing monitoring well
MW-2	TCL/TAL + 30	Continued monitoring of existing monitoring well
MW-4	TCL/TAL + 30 & Ecs	Continued monitoring of existing monitoring well
MW-5	TCL/TAL + 30	Continued monitoring of existing monitoring well
MW-6	TCL/TAL + 30	Continued monitoring of existing monitoring well
MW-7	TCL/TAL + 30 & Ecs	Continued monitoring of existing monitoring well
MW-8	TCL/TAL + 30	Continued monitoring of existing monitoring well
MW-9	TCL/TAL + 30 & Ecs	Continued monitoring of existing monitoring well



## **ATTACHMENT 3: SOIL VAPOR SAMPLING PLAN**

N:\ACAD\10440\CAD\10440 SEI SAMPLE LOCATION PLAN.DWG 01/17/19 03:04:17PM, jenny, LAYOUT:SEI-1

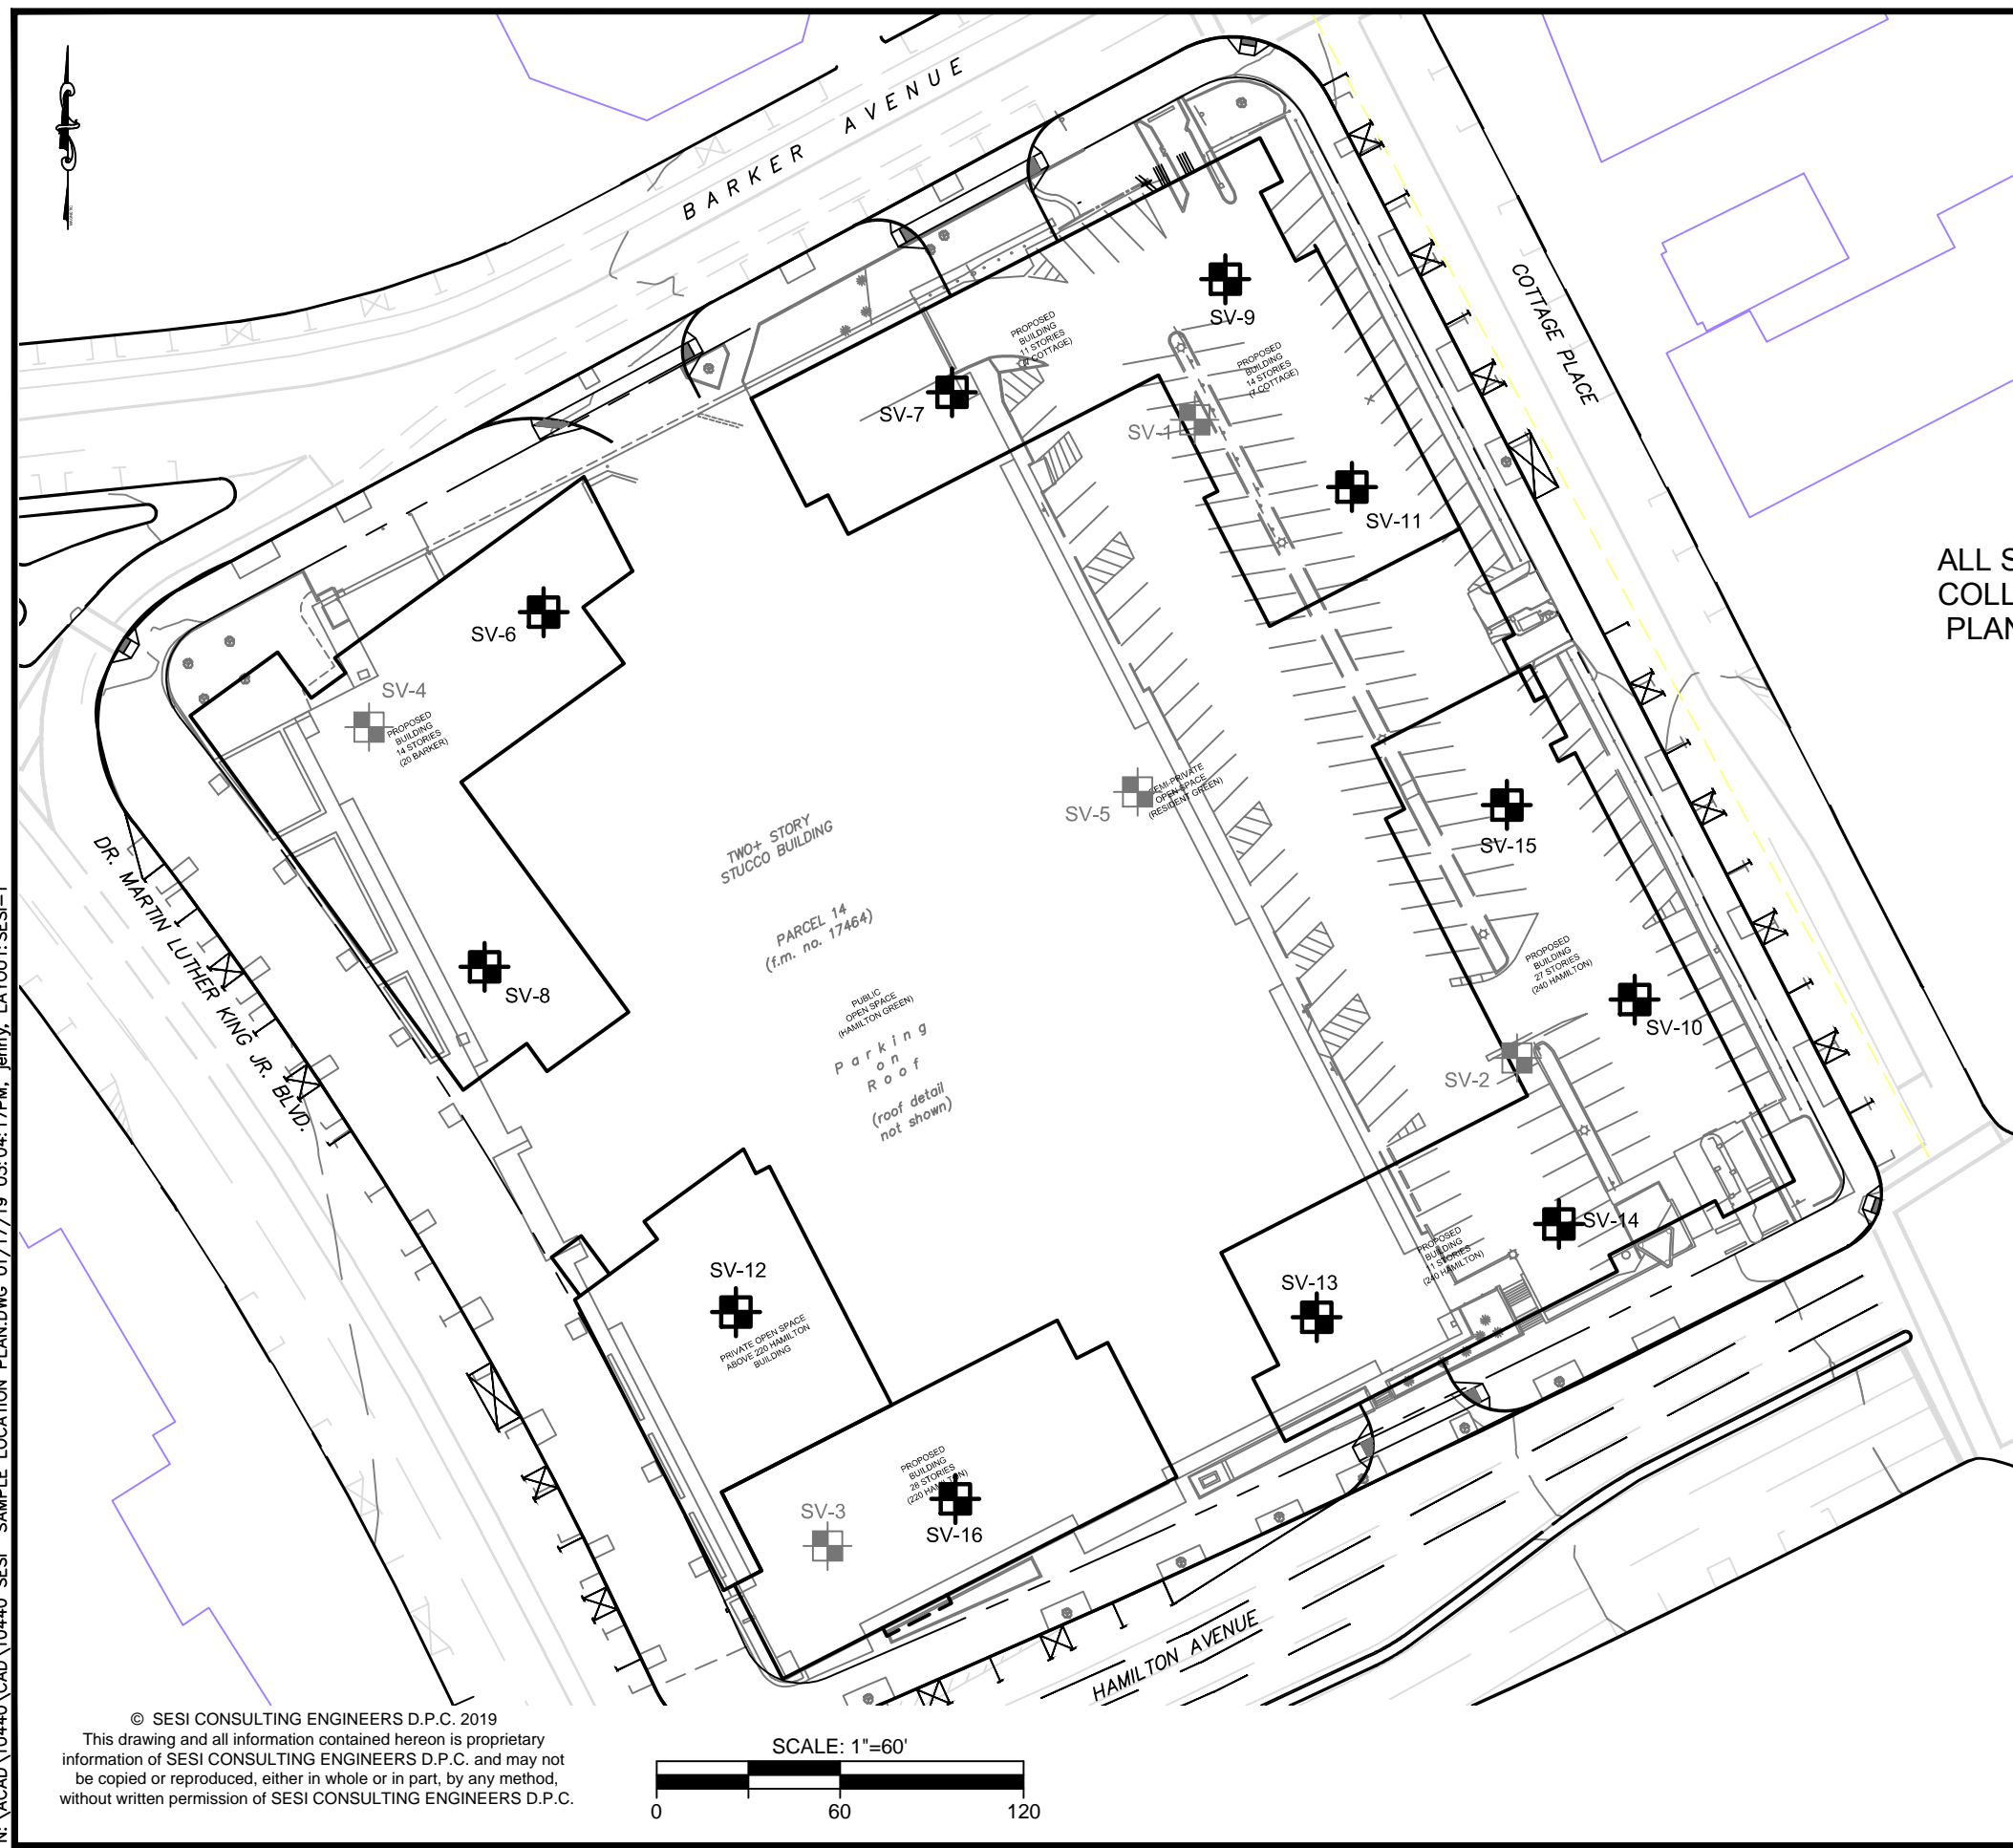


**LEGEND:**

- SV-1 - SOIL VAPOR SAMPLE LOCATION (2017 AKRF)
- SV-15 - PROPOSED SOIL VAPOR SAMPLE LOCATION

ALL SOIL SAMPLES SHALL BE COLLECTED PER THE ATTACHED PLAN

© SESI CONSULTING ENGINEERS D.P.C. 2019  
 This drawing and all information contained hereon is proprietary information of SESI CONSULTING ENGINEERS D.P.C. and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS D.P.C.



dwg by: yy  
 chk by: FL  
 scale: 1" = 60'  
 date: 01/15/19

SOILS / FOUNDATIONS  
 SITE DESIGN  
 ENVIRONMENTAL

**SESI**  
 CONSULTING  
 ENGINEERS D.P.C.

12A MAPLE AVE. PINE BROOK, N.J. 07058 PH: 973-808-9050

project: 200 HAMILTON AVENUE  
 WHITE PLAINS, NY

drawing title: PROPOSED SOIL VAPOR  
 LOCATION PLAN

job no: 10440  
 drawing no:

**SESI-1**

# **HAMILTON GREEN**

**200 HAMILTON AVENUE, WHITE PLAINS, NEW YORK**

---

## **Remedial Investigation Work Plan**

# **SOIL VAPOR INVESTIGATION ADDENDUM**

**NYSDEC Site Number: C360177**

### **Prepared for:**

**S-WD / WP LLC  
168a Irving Avenue  
Suite 200k  
Port Chester, NY 10573**

### **Prepared by:**

**SESI CONSULTING ENGINEERS, P.C.  
12A Maple Avenue  
Pine Brook, NJ 07058**

**April 2019**

# Table of Contents

1.0 INTRODUCTION.....	1
2.0 SV SAMPLING PLAN.....	1
2.1 Sample Locations .....	1
2.2 Sampling Protocol .....	2

## 1.0 INTRODUCTION

The New York State Department of Environmental Conservation (NYSDEC) has accepted into the Brownfield Cleanup Program (BCP) the property at 200 Hamilton Avenue, White Plains, New York (the "Site") with S-WDWP LLC, as Volunteer. A Brownfield Cleanup Agreement (BCA) was executed by the NYSDEC on August 16, 2018, (BCP Site No. C360177).

This document comprises a Soil Vapor (SV) Investigation Addendum to the Remedial Investigation Work Plan (RIWP) (AKRF September 2018) in response to the NYSDEC comment letter on the RIWP dated January 2, 2019. And the NYSDEC email comments on the RIWP dated March 20, 2019.

## 2.0 SV SAMPLING PLAN

### *2.1 Sample Locations*

To evaluate the potential for future exposures of the proposed development eleven (11) SV samples and a contemporaneous outdoor air sample as a control sample will be collected across the Site in the footprint of the proposed development. Figure SESI - 1 in Attachment 2 illustrates the proposed SV sampling locations with respect to the footprint of the proposed development. The previous soil vapor concentrations are provided as Table 1. The SV points were chosen taking into consideration the following:

- In areas where elevated VOC concentrations were detected in soil vapor and groundwater,
- In the proposed building foot prints, and
- At a depth of 12-14 ft below existing grade, which is comparable to the expected depth of the proposed foundation footings. Additional consideration will be given to sample soil vapor at depths at which contaminants have been detected and/or depths that are similar to surrounding structures in order to evaluate the potential for soil vapor intrusion to occur in off-site buildings.

All samples will be sent to an ELAP-certified laboratory for EPA TO-15 analysis.

### *2.2 Sampling Protocol*

Semi-permanent soil vapor probes will be installed with an adequate surface seal to prevent outdoor air infiltration. Soil vapor probes will be constructed in the same

manner at all locations to minimize possible discrepancies. The following procedures will be included in constructing the probes:

- Implants will be installed using a direct push Geoprobe® to attain the desired depth
- Porous, inert backfill material will be used to create a sampling of 2 feet in length;
- The implants will be fitted with inert tubing (e.g., polyethylene or Teflon®) of laboratory or food grade quality to the surface;
- Soil vapor probes will be sealed above the sampling zone with a bentonite slurry for a minimum distance of 3 feet. The remainder of the borehole will be backfilled with clean material; and
- Steps will be taken to minimize infiltration of water or outdoor air and to prevent accidental damage.

Soil vapor samples will be collected in the following manner at all locations:

- Shortly after the installation of the probes, three implant volumes (the volume of the sample probe and tube) will be purged prior to collecting the samples;
- Flow rates for both purging and collecting will not exceed 0.2 liters per minute (30-minute sample interval) to minimize outdoor air infiltration during sampling;
- Samples will be collected in 6-L Summa® canisters that are certified clean by the laboratory;
- A tracer gas (e.g., helium) will be used when collecting soil vapor samples to verify that no infiltration of outdoor air is occurring.

***Tracer Gas Test:***

The tracer gas serves as a quality assurance/quality control measure to verify the integrity of the soil vapor probe seal. The atmosphere in the immediate vicinity of the area where the probe intersects the ground surface will be enriched with the tracer gas. A plastic pail will be installed to enclose the tracer gas and keep in contact with the probe tubing. A soil gas sample will be collected with a Tedlar® bag from the probe while the plastic pail is holding the atmosphere enriched with tracer gas (helium) around the probe tube. A portable Helium monitoring device will analyze the collected Tedlar® sample prior to and after sampling for the compounds of concern. If high concentrations (> 10%) of tracer gas are observed in the Tedlar bag

sample, the probe seal will be enhanced to reduce the infiltration. The tracer test will be repeated until the tracer gas concentration is below 10%.

**Table 1**  
**PREVIOUS SOIL VAPOR DATA**

Sample ID Date Sampled Dilution Factor Units = $\mu\text{g}/\text{m}^3$	USEPA VISL Target Sub-Slab May 2018	NYSDOH Air Guidance Value*	SV-1 8/8/2017 8	SV-2 8/8/2017 13.1	SV-3 8/9/2017 6	SV-4 8/9/2017 1	SV-5 8/9/2017 10
<b>1,3-Butadiene</b>	<i>3.1</i>	<i>NS</i>	<b>7.2</b>	<b>87</b>	--	--	<b>5.4</b>
<b>2,2,4-Trimethylpentane</b>	<i>NS</i>	<i>NS</i>	25	15	--	--	--
<b>Acetone</b>	<i>1100000</i>	<i>NS</i>	170	170	270	--	750
<b>Benzene</b>	<i>12</i>	<i>NS</i>	11	<b>52</b>	--	--	--
<b>Carbon disulfide</b>	<i>24000</i>	<i>NS</i>	--	100	--	--	--
<b>Chloroform</b>	<i>4.1</i>	<i>NS</i>	--	--	--	1.2	<b>10</b>
<b>Chloromethane</b>	<i>3100</i>	<i>NS</i>	--	20	--	--	--
<b>Cumene</b>	<i>14000</i>	<i>NS</i>	--	--	--	--	13
<b>Cyclohexane</b>	<i>35000</i>	<i>NS</i>	--	18	26	--	--
<b>Ethylbenzene</b>	<i>37</i>	<i>NS</i>	<b>50</b>	<b>38</b>	--	--	10
<b>Methyl Ethyl Ketone</b>	<i>170000</i>	<i>NS</i>	36	44	18	--	26
<b>Methylene Chloride</b>	<i>3400</i>	<i>100</i>	--	--	240	--	53
<b>n-Heptane</b>	<i>14000</i>	<i>NS</i>	--	240	--	--	--
<b>n-Hexane</b>	<i>2400</i>	<i>NS</i>	40	590	350	--	100
<b>n-Propylbenzene</b>	<i>35000</i>	<i>NS</i>	8.6	--	--	1.7	--
<b>o-Xylene</b>	<i>3500</i>	<i>NS</i>	7.4	--	--	--	--
<b>Toluene</b>	<i>170000</i>	<i>NS</i>	--	--	250	--	45
<b>Trichloroethene</b>	<i>16</i>	<i>6</i>	--	--	<b>69</b>	--	<b>13</b>

**Notes:**

NS = No Standard

Bold = Exceeded Standards

$\mu\text{g}/\text{m}^3$  = micrograms per cubic meter

-- = No exceedance

\* Guidance for Evaluating Soil Vapor Intrusion in the State of New York (October 2006).



## **ATTACHMENT 4: GOVERNING DOCUMENTS**



## **SITE-SPECIFIC HEALTH AND SAFETY PLAN**

**Hamilton Green BCP Site  
200 Hamilton Avenue  
White Plains, New York  
BCP # C360177**

**Prepared For:**

**S-WD/WP LLC  
186-A Irving Avenue, Suite 200K  
Port Chester, NY 10573**

**Prepared By:**

**SESI CONSULTING ENGINEERS  
12A Maple Avenue  
Pine Brook, NJ 07058**

**Project No.: 10440**

**April 2019**

***Disclaimer:*** This Health and Safety Plan (HASP) is based upon information provided [and, if applicable, conditions discovered during a site visit], and is limited by the project scope.

*The HASP should be periodically reviewed and updated based on a number of factors, including but not limited to: (1) changes in applicable governmental requirements; (2) changes in procedures at the site; and (3) site conditions which were unknown to SESI Consulting Engineers (SESI) as of the time the HASP was prepared.*

*This HASP has been prepared for the sole and exclusive use of S-WD/WP LLC., and may not be relied upon by any other person without the express written consent and authorization of SESI.*

**SITE-SPECIFIC HEALTH AND SAFETY PLAN**

**For**

**Hamilton Green BCP Site  
200 Hamilton Avenue  
White Plains, New York  
BCP # C360177**

Prepared by: \_\_\_\_\_

Date:

\_\_\_\_\_

Steven Gustems  
SESI- Project Manager

Approved by: \_\_\_\_\_

Date:

\_\_\_\_\_

Fuad Dahan  
SESI-Principal

## Table of Contents

<b>HEALTH AND SAFETY PLAN SUMMARY .....</b>	<b>8</b>
<b>1.0 INTRODUCTION .....</b>	<b>9</b>
1.1 OBJECTIVE .....	9
1.2 SITE AND FACILITY DESCRIPTION .....	9
1.3 POLICY STATEMENT .....	9
1.4 REFERENCES .....	10
1.5 DEFINITIONS .....	10
<b>2.0 PROJECT SCOPE OF WORK .....</b>	<b>11</b>
<b>3.0 ROLES AND RESPONSIBILITIES.....</b>	<b>11</b>
3.1 ALL PERSONNEL.....	11
3.2 KEY SAFETY PERSONNEL .....	11
3.2.1 <i>Project Officer (PO)</i> .....	11
3.2.2 <i>Project Manager (PM)</i> .....	11
3.2.3 <i>Health and Safety Manager (HSM)</i> .....	12
3.2.4 <i>Site Safety Officer (SSO)</i> .....	12
3.2.5 <i>Field Supervisor (FS)</i> .....	12
3.2.6 <i>Field Personnel (FP)</i> .....	13
3.3 SUBCONTRACTORS .....	13
3.4 STOP WORK AUTHORITY.....	13
3.5 ALL ON-SITE PERSONNEL .....	13
3.6 VISITORS.....	14
<b>4.0 PERSONAL PROTECTIVE EQUIPMENT .....</b>	<b>14</b>
4.1 LEVELS OF PROTECTION.....	14
4.1.1 <i>Level D Protection</i> .....	15
4.1.2 <i>Modified Level D Protection</i> .....	15
4.1.3 <i>Level C Protection</i> .....	15
4.2 SELECTION OF PPE .....	16
4.3 SITE RESPIRATORY PROTECTION PROGRAM .....	16
4.4 USING PPE.....	16
4.4.1 <i>Donning Procedures</i> .....	16
4.4.2 <i>Doffing Procedures</i> .....	17
4.5 SELECTION MATRIX.....	17
<b>5.0 AIR AND NOISE MONITORING .....</b>	<b>18</b>
5.1 AIR MONITORING .....	18
5.2 NOISE MONITORING.....	18
5.3 MONITORING EQUIPMENT MAINTENANCE AND CALIBRATION .....	18
5.4 ACTION LEVELS .....	19
<b>6.0 WORK ZONES AND DECONTAMINATION .....</b>	<b>19</b>
6.1 WORK ZONES .....	19

6.1.1	<i>Authorization to Enter</i> .....	19
6.1.2	<i>Site Orientation and Hazard Briefing</i> .....	20
6.1.3	<i>Certification Documents</i> .....	20
6.1.4	<i>Entry Log</i> .....	20
6.1.5	<i>Entry Requirements</i> .....	20
6.1.6	<i>Emergency Entry and Exit</i> .....	20
6.1.7	<i>Contamination Control Zones</i> .....	20
6.1.8	<i>Exclusion Zone (EZ)</i> .....	20
6.1.9	<i>Contamination Reduction Zone</i> .....	20
6.1.10	<i>Support Zone (SZ)</i> .....	21
6.1.11	<i>Posting</i> .....	21
6.1.12	<i>Site Inspections</i> .....	21
6.2	DECONTAMINATION.....	21
6.2.1	<i>Personnel Decontamination</i> .....	21
6.2.2	<i>Equipment Decontamination</i> .....	21
6.2.3	<i>Personal Protective Equipment Decontamination</i> .....	21
<b>7.0</b>	<b>TRAINING AND MEDICAL SURVEILLANCE</b> .....	<b>22</b>
7.1	TRAINING.....	22
7.1.1	<i>General</i> .....	22
7.1.2	<i>Basic 40-Hour Course</i> .....	22
7.1.3	<i>Supervisor Course</i> .....	22
7.1.4	<i>Site-Specific Training</i> .....	23
7.1.5	<i>Daily Safety Meetings</i> .....	23
7.1.6	<i>First Aid and CPR</i> .....	23
7.2	MEDICAL SURVEILLANCE.....	23
7.2.1	<i>Medical Examination</i> .....	23
7.2.2	<i>Pre-placement Medical Examination</i> .....	23
7.2.3	<i>Other Medical Examinations</i> .....	24
7.2.4	<i>Periodic Exam</i> .....	24
7.2.5	<i>Medical Restriction</i> .....	24
<b>8.0</b>	<b>GENERAL SAFETY PRACTICES</b> .....	<b>24</b>
8.1	GENERAL SAFETY RULES.....	24
8.2	BUDDY SYSTEM.....	25
8.3	HEAT STRESS.....	26
8.4	HEAT STRESS SAFETY PRECAUTIONS.....	27
	<i>Table 4 – Work/Rest Schedule</i> .....	28
8.5	COLD STRESS.....	29
8.6	SAFETY PRECAUTIONS FOR COLD STRESS PREVENTION.....	30
8.7	SAFE WORK PRACTICES.....	30
8.8	BIOLOGICAL HAZARDS.....	30
8.8.1	<i>Tick Borne Diseases</i> .....	31
8.8.2	<i>Poisonous Plants</i> .....	31
8.8.3	<i>Snakes</i> .....	32
8.8.4	<i>Spiders</i> .....	32
8.9	NOISE.....	32

8.10	SPILL CONTROL.....	33
8.11	SANITATION .....	33
8.11.1	<i>Break Area</i> .....	33
8.11.2	<i>Potable Water</i> .....	33
8.11.3	<i>Sanitary Facilities</i> .....	33
8.11.4	<i>Lavatory</i> .....	34
8.12	EMERGENCY EQUIPMENT.....	34
8.13	LOCKOUT/TAGOUT PROCEDURES .....	34
8.14	ELECTRICAL SAFETY .....	34
8.15	LIFTING SAFETY .....	35
8.16	LADDER SAFETY .....	35
8.17	TRAFFIC SAFETY .....	37
<b>9.0</b>	<b>SITE-SPECIFIC HAZARDS AND CONTROL MEASURES .....</b>	<b>37</b>
9.1	EVALUATION OF HAZARDS.....	37
9.1.1	<i>Hazard Characteristics</i> .....	37
9.1.2	<i>Potential Health and Safety Hazards</i> .....	38
9.2	FIELD ACTIVITIES, HAZARDS, AND CONTROL PROCEDURES .....	38
9.2.1	<i>Mobilization/Construction Stakeout</i> .....	38
9.2.2	<i>Demolition/Site Clearing</i> .....	39
9.2.3	<i>Excavation and Cut/Fill Operations</i> .....	40
9.2.4	<i>Drilling/Subsurface Intrusion Activities</i> .....	42
9.2.5	<i>Subsurface Chemical Sample Collection/Analysis</i> .....	46
9.2.6	<i>UST Closure</i> .....	47
9.2.7	<i>Site Capping System Construction</i> .....	47
9.2.8	<i>Creek Relocation</i> .....	48
9.2.9	<i>Decontamination</i> .....	48
9.2.10	<i>Demobilization</i> .....	48
9.3	CHEMICAL HAZARDS .....	48
<b>10.0</b>	<b>EMERGENCY PROCEDURES .....</b>	<b>50</b>
10.1	GENERAL .....	50
10.2	EMERGENCY RESPONSE .....	50
10.2.1	<i>Fire</i> .....	51
10.2.2	<i>Contaminant Release</i> .....	51
10.3	MEDICAL EMERGENCY .....	51
10.3.1	<i>Emergency Care Steps</i> .....	51
10.4	FIRST AID - GENERAL .....	52
10.4.1	<i>First Aid - Inhalation</i> .....	52
10.4.2	<i>First Aid - Ingestion</i> .....	52
10.4.3	<i>First Aid - Skin Contact</i> .....	52
10.4.4	<i>First Aid - Eye Contact</i> .....	52
10.5	REPORTING INJURIES, ILLNESSES, AND SAFETY INCIDENTS .....	52
10.6	EMERGENCY INFORMATION .....	52
10.6.1	<i>Directions to Hospital</i> .....	53
<b>11.0</b>	<b>LOGS, REPORTS, AND RECORD KEEPING.....</b>	<b>54</b>

11.1	HASP FIELD CHANGE REQUEST .....	54
11.2	MEDICAL AND TRAINING RECORDS .....	54
11.3	EXPOSURE RECORDS.....	55
11.4	ACCIDENT/INCIDENT REPORT.....	55
11.5	OSHA FORM 200.....	55
11.6	ON-SITE HEALTH AND SAFETY FIELD LOGBOOKS.....	55
11.7	MATERIAL SAFETY DATA SHEETS .....	55

## LIST OF FIGURES

**Figure No.**    **Title**

Fig-1    Directions to White Plains Hospital

## LIST OF EMBEDDED TABLES

<b><u>Table</u></b>	<b><u>Title</u></b>	<b><u>Page</u></b>
1.	Key Safety Personnel	14
2.	PPE Selection Matrix	17
3.	Airborne Contaminant Action Levels	19
4.	Work/Rest Schedule	27
5.	Wind Chill Temperature Chart	29
6	List of Primary Contaminants	49
7	Emergency Contacts	52

## LIST OF ATTACHMENTS

Attachment 1	Air Monitoring Log
Attachment 2	OSHA Poster
Attachment 3	HASP Field Change Request Form
Attachment 4	Accident/Incident Report
Attachment 5	Signatory Page
Attachment 6	Material Safety Data Sheets



## LIST OF ACRONYMS AND ABBREVIATIONS

ACGIH	American Conference of Governmental Industrial Hygienists
COC	Constituent(s) of Concern
CRZ	Contamination Reduction Zone
EZ	Exclusion Zone
FS	Field Supervisor
GFCI	Ground Fault Circuit Interrupter
HASP	Health and Safety Plan
HSM	Health and Safety Manager
LEL	Lower Explosive Limit
MSDS	Material Safety Data Sheet
OSHA	Occupational Safety and Health Administration
PCB	Polychlorinated Biphenyls
PEL	Permissible Exposure Limit
PID	Photoionization Detector
PM	Project Manager
PO	Project Officer
PPE	Personal Protective Equipment
SESI	SESI Consulting Engineers
SSO	Site Safety Officer
SVOC	Semi-Volatile Organic Compound
SZ	Support Zone
TLV	Threshold Limit Value
USCG	United States Coast Guard
USEPA	United States Environmental Protection Agency
VOC	Volatile Organic Compound

## HEALTH AND SAFETY PLAN SUMMARY

The chemical hazards associated with site operations are related to inhalation, ingestion, and skin exposure to site Chemicals of Concern (COCs). COCs at the site include metals, some VOC compounds, some SVOC compounds and some pesticides. Concentrations of airborne COCs during site tasks may be measurable and will require air monitoring during certain operations.

The potential for inhalation of site COCs is low. The potential for dermal contact with soils containing site COCs during remedial operations is moderate.

The following table summarizes airborne contaminant action levels that will be used to determine the procedures and protective equipment necessary based on conditions as measured at the site.

Parameter	Reading	Action
Dust	0 to .5 mg/m <sup>3</sup>	Normal operations
	0.5 to 1 mg/m <sup>3</sup>	Begin soil wetting procedure (Level C protection would be needed beyond this point)
	> 1 mg/m <sup>3</sup>	Stop work, fully implement dust control plan
Oxygen	≤ 19.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
	> 19.5% to < 23.5%	Normal operations
	≥ 23.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Carbon Monoxide	0 ppm to ≤ 20 ppm	Normal operations
	> 20 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area

The level of personal protection selected will be based on air monitoring of the work environment and an assessment by the Field Supervisor and Site Safety Officer. The following table presents a selection matrix to determine appropriate Personal Protective Equipment.

Task	Anticipated Level of Protection
Mobilization	Level D
Subsurface Intrusive Activities (Mass Excavation, Drilling, Soil Grouting)	Modified Level D/Level C
Earthwork/Grading	Level D
Additional Chemical Sampling / Delineation	Modified Level D/Level C
Decontamination	Modified Level D
Demobilization	Level D

## 1.0 INTRODUCTION

### 1.1 Objective

The objective of this Health and Safety Plan (HASP) is to provide a mechanism for establishing safe working conditions during activities at the 200 Hamilton Avenue, White Plains, New York (the Site). The safety organization, procedures, and protective equipment have been established based on an analysis of potential physical, chemical, and biological hazards. Specific hazard control methodologies have been evaluated and selected to minimize the potential of injury, illness, or other hazardous incident.

The HASP was written to meet the requirements of all applicable Federal, State, and local health and safety regulations, including 29 CFR 1910.120. The HASP is based on current knowledge regarding the specific chemical and physical hazards that are known or anticipated at the Site. This HASP is a dynamic document, for which changes and/or revisions may be realized as changes in scope and/or site conditions are encountered. Should revised documents be produced, said revised documents will refer to the specific changes and why they were made.

### 1.2 Site and Facility Description

The Site, which is the subject of a Remedial Investigation Report prepared by AKRF, is approximately 3.74-acres occupied the two-story White Plains Mall and east-adjacent asphalt-paved parking lot. The Site properties are identified on the Westchester County Clerk's as a portion of tax parcel map Section 125.67, Block 5, Lot 1.

The Site is bounded by Barker Avenue to the north followed by offices, a hotel, and commercial development; Cottage Place to the east followed by a gasoline station and commercial buildings; Hamilton Avenue to the south followed by commercial and government buildings; and Dr. Martin Luther King Jr. Boulevard to the west followed by commercial development. The surrounding area consists primarily of commercial and governmental uses, with residences further north of the Site.

### 1.3 Policy Statement

The policy of SESI Consulting Engineers (SESI) is to provide a safe and healthful work environment. No aspect of operations is of greater importance than injury and illness prevention. A fundamental principle of safety management is that all injuries, illnesses, and incidents are preventable. SESI will take every reasonable step to eliminate or control hazards in order to minimize the possibility of injury, illness, or incident.

This HASP prescribes the procedures that must be followed by SESI personnel during activities at the site. Operational changes that could affect the health and safety of personnel, the community, or the environment will not be made without the prior approval of the Project Manager (PM) and the Health and Safety Manager (HSM). This document will be reviewed periodically by the HSM to ensure that it is current and technically correct. Any changes in site conditions and/or the scope of work will require a review and modification to this HASP. Such changes will be completed in the form of an addendum or a revision to the plan.

The provisions of this plan are mandatory for all SESI personnel and are advisory for all contractors, and subcontractors assigned to the project. **Subcontractors will be**

**responsible for preparing their own site-specific HASPs that meet the basic requirements outlined in this HASP.** All visitors to SESI work areas at the site must abide by the requirements of this plan.

#### 1.4 References

This HASP complies with applicable Occupational Safety and Health Administration (OSHA) regulations, United States Environmental Protection Agency (USEPA) regulations, and SESI health and safety policies and procedures. This plan follows the guidelines established in the following:

- *Standard Operating Safety Guides*, USEPA (Publication 9285.1-03, June 1992).
- *Occupational Safety and Health Guidance Manual for Hazardous Waste Site Activities*, NIOSH, OSHA, USCG, USEPA (86116, October 1985).
- *Title 29 of the Code of Federal Regulations (CFR)*, Part 1910.
- *Title 29 of the Code of Federal Regulations (CFR)*, Part 1926.
- *Pocket Guide to Chemical Hazards*, DHHS, PHS, CDC, NIOSH (2004).
- *Threshold Limit Values*, ACGIH (2005).
- *Guide to Occupational Exposure Values*, ACGIH (2005).
- *Quick Selection Guide to Chemical Protective Clothing*, Forsberg, K. and S.Z. Mansdorf, 2nd Ed. (1993).

#### 1.5 Definitions

The following definitions (listed alphabetically) are applicable to this HASP:

- *Contamination Reduction Zone (CRZ)* - Area between the exclusion zone and support zone that provides a transition between contaminated and clean areas. Decontamination stations are located in this zone.
- *Exclusion Zone (EZ)* - Any portions of the site where hazardous substances are, or are reasonably suspected to be present, and pose an exposure hazard to on-site personnel.
- *Incident* - All losses, including first aid cases, injuries, illnesses, spills/leaks, equipment and property damage, motor vehicle accidents, regulatory violations, fires, and business interruptions.
- *On-Site Personnel* - All SESI and subcontractors involved with the project.
- *Project* - All on-site work performed under the scope of work.
- *Site* - The area described in Section 1.2, Site and Facility Description, where the work is to be performed by SESI personnel and subcontractors.
- *Support Zone (SZ)* - All areas of the site except the EZ and CRZ. The SZ surrounds the CRZ and EZ. Support equipment and break areas are located in this zone.
- *Subcontractor* - Includes contractor personnel hired by SESI.
- *Visitor* - All other personnel, except the on-site personnel.
- *Work Area* - The portion of the site where work activities are actively being performed. This area may change daily as work progresses and includes the SZ, CRZ, and EZ. If the work area is located in an area on the site that is not contaminated, or suspected of being contaminated, the entire work area may be a SZ.

## **2.0 PROJECT SCOPE OF WORK**

This HASP contains information for the following tasks that SESI is anticipated to conduct at the Site. Should additional and/or different tasks be identified, amendments to this HASP will be required to address these changed items.

- Mobilization/Sample location stakeout;
- Soil Borings and Monitoring Well Installation;
- Excavation of contaminated soil “hot spots”;
- Earthwork and grading;
- Chemical sampling of soil and groundwater; and
- Decontamination and demobilization/site restoration.

## **3.0 ROLES AND RESPONSIBILITIES**

### **3.1 All Personnel**

All SESI project personnel must adhere to the procedures outlined in this HASP during the performance of their work. Each person is responsible for completing tasks safely and reporting any unsafe acts or conditions to their supervisor. No person may work in a manner that conflicts with these procedures. After due warnings, the PM will dismiss from the site any SESI employee or subcontractor who violates safety procedures.

All SESI project personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. In addition, all SESI personnel will attend an initial hazard briefing prior to beginning work at the site.

The roles of key safety personnel and subcontractors are outlined in the following sections. Key project personnel and contacts are summarized in Table 1.

### **3.2 Key Safety Personnel**

#### **3.2.1 Project Officer (PO)**

The PO is responsible for providing resources to assure project activities are completed in accordance with this HASP, and for meeting all regulatory and contractual requirements.

#### **3.2.2 Project Manager (PM)**

The PM is responsible for verifying that project activities are completed in accordance with the requirements of this HASP. The PM is responsible for confirming that the Field Supervisor (FS) has the equipment, materials, and qualified personnel to fully implement the safety requirements of this HASP, and/or that subcontractors assigned to this project meet the requirements established by SESI. It is also the responsibility of the PM to:

- Consult with the HSM on site health and safety issues;
- Verify that subcontractors meet health and safety requirements prior to commencing work;
- Verify that all incidents are thoroughly investigated;
- Approve, in writing, addenda or modifications of this HASP; and

- Suspend work or modify work practices, as necessary, for personal safety, protection of property, and regulatory compliance.

### **3.2.3 Health and Safety Manager (HSM)**

The HSM or his designee, the health and safety manager (HSM), has overall responsibility for the technical health and safety aspects of the project, including review and approval of this HASP. Inquiries regarding health and safety procedures, project procedures, and other technical or regulatory issues should be addressed to this individual. The HSM or his designee must approve changes or addenda to this HASP.

### **3.2.4 Site Safety Officer (SSO)**

The SSO is responsible for field health and safety issues, including the execution of this HASP. Questions in the field regarding health and safety procedures, project procedures, and other technical or regulatory issues should be addressed to this individual. The SSO will advise the PM on health and safety issues and will establish and coordinate the project air-monitoring program if one is deemed necessary (see Section 5.1, Air Monitoring). The SSO is the primary site contact on health and safety matters. It is the responsibility of the SSO to:

- Provide on-site technical assistance, if necessary;
- Participate in all accident/incident reports and ensure that they are reported to the HSM, client, and PM within 24 hours;
- Coordinate site and personal air monitoring as required, including equipment maintenance and calibration;
- Conduct site safety orientation training and safety meetings;
- Verify that project personnel have received the required physical examinations and medical certifications;
- Review site activities with respect to compliance with this HASP;
- Maintain required health and safety documents and records; and
- Assist the FS in instructing field personnel on project hazards and protective procedures.

### **3.2.5 Field Supervisor (FS)**

The FS is responsible for implementing this HASP, including communicating requirements to on-site personnel and subcontractors. The FS will be responsible for informing the PM of changes in the work plan, procedures, or site conditions so that those changes may be addressed in this HASP. Other responsibilities are to:

- Consult with the SSO on site health and safety issues;
- Stop work, as necessary, for personal safety, protection of property, and regulatory compliance;
- Obtain a site map and determine and post routes to medical facilities and emergency telephone numbers;
- Notify local public emergency representatives (as appropriate) of the nature of the site operations, and post their telephone numbers (i.e., local fire department personnel who would respond for a confined space rescue);
- Observe on-site project personnel for signs of ill health effects;
- Investigate and report any incidents to the SSO;
- Verify that all on-site personnel have had applicable training;

- Verify that on-site personnel are informed of the physical, chemical, and biological hazards associated with the site activities, and the procedures and protective equipment necessary to control the hazards; and
- Issue/obtain any required work permits (hot work, confined space, etc.).

### **3.2.6 Field Personnel (FP)**

All SESI field personnel are responsible for following the Health and Safety procedures specified in this HASP and work practices specified in applicable operation procedures. Some specific responsibilities include, but are not limited to:

- Reading and understanding the HASP;
- Reporting all accidents, incidents, injuries, or illnesses to the FS;
- Complying with the requests of the SSO;
- Immediately communicating newly identified hazards or noncompliance issues to the FS or SSO; and
- Stopping work in cases of immediate danger.

### **3.3 Subcontractors**

Subcontractors and their personnel must understand and comply with applicable regulations and site requirements established in this HASP. Subcontractors will prepare their own site-specific HASP that must be consistent with the requirements of this HASP.

All subcontractor personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. All subcontractor personnel will attend an initial hazard briefing prior to beginning work at the site. Additionally, on-site subcontractor personnel must conduct daily site safety meetings.

Subcontractors must designate individuals to function as the PM, HSM, SSO, and FS. In some firms the HSM to be carried out by the PM. This is acceptable provided the PM has the required knowledge, training, and experience to properly address all hazards associated with the work, and to prepare, approve, and oversee the execution of the site-specific HASP. A subcontractor may designate the same person to perform the duties of both the SSO and the FS. However, depending on the level of complexity of a contractor's scope of work, it may be infeasible for one person to perform both functions satisfactorily.

### **3.4 Stop Work Authority**

Every SESI employee and subcontractor is empowered, expected, and has the responsibility to stop the work of another co-worker if the working conditions or behaviors are considered unsafe.

### **3.5 All On-Site Personnel**

All on-site SESI personnel (including SESI subcontractors) must read and acknowledge their understanding of their respective HASPs before commencing work and abide by the requirements of the plans. All on-site SESI personnel shall sign their HASP Acknowledgement Form following their review of their HASP.

All SESI project personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. In addition, all on-site personnel will attend an initial hazard briefing

provided by the SSO prior to beginning work at the site and conduct daily safety meetings thereafter.

On-site personnel will immediately report the following to the FS or SSO:

- Personal injuries and illnesses no matter how minor;
- Unexpected or uncontrolled release of chemical substances;
- Symptoms of chemical exposure;
- Unsafe or hazardous situations;
- Unsafe or malfunctioning equipment;
- Changes in site conditions that may affect the health and safety of project personnel;
- Damage to equipment or property; and
- Situations or activities for which they are not properly trained.

### 3.6 Visitors

All SESI personnel and subcontractors visiting the Site must check in with the FS. Visitors will be cautioned to avoid skin contact with surfaces, soils, groundwater, or other materials that may impacted or be suspected to be impacted by constituents of concern (COCs).

Visitors requesting to observe work at the site must don appropriate personal protective equipment (PPE) prior to entry to the work area and must have the appropriate training and medical clearances to do so. If respiratory protective devices are necessary, visitors who wish to enter the work area must have been respirator-trained and fit tested for a respirator within the past 12 months.

**Table 1 – Key Safety Personnel**

SESI Personnel		
Role	Name	Address/Telephone No.
Project Officer (PO)	TBD	
Project Manager (PM)	TBD	
Senior Project Engineer (SPE)	TBD	
Health and Safety Manager (HSM)	TBD	
Site Safety Officer (SSO)	TBD	
Field Supervisor (FS)	TBD	
Field Personnel	TBD	
Field Personnel	TBD	
Subcontractors		
Company/Role	Name	Address/Telephone No.
TBD	TBD	TBD

## 4.0 PERSONAL PROTECTIVE EQUIPMENT

### 4.1 Levels of Protection

PPE is required to safeguard site personnel from various hazards. Varying levels of protection may be required depending on the levels of COCs and the degree of physical hazard. This section presents the various levels of protection and defines the conditions of use for each level. A summary of the levels is presented in Table 2 in this section.



#### **4.1.1 Level D Protection**

The minimum level of protection that will be required of project personnel at the site will be Level D, which will be worn when site conditions or air monitoring indicates no inhalation hazard exists. The following equipment will be used:

- Work clothing as prescribed by weather;
- Steel toe work boots, meeting American National Standards Institute (ANSI) Z41;
- Safety glasses or goggles, meeting ANSI Z87;
- Leather work gloves and/or nitrile surgical gloves;
- Hard hat, meeting ANSI Z89, when falling object hazards are present;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used); and
- PFD if working on or near the water.

#### **4.1.2 Modified Level D Protection**

Modified Level D will be used when airborne contaminants are not present at levels of concern, but site activities present an increased potential for skin contact with contaminated materials. Modified Level D consists of:

- Nitrile gloves worn over nitrile surgical gloves;
- Latex/polyvinyl chloride (PVC) overboots when contact with COC-impacted media is anticipated;
- Steel toe work boots, meeting ANSI Z41;
- Safety glasses or goggles, meeting ANSI Z87;
- Face shield in addition to safety glasses or goggles when projectiles or splash hazards exist (e.g. during Power Washing activities);
- Hard hat, meeting ANSI Z89, when falling object hazards are present;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used);
- Tyvek<sup>®</sup> suit (polyethylene coated Tyvek<sup>®</sup> suits for handling liquids) when body contact with COC-impacted media is anticipated; and
- PFD if working on or near the water.

#### **4.1.3 Level C Protection**

Level C protection will be required when the airborne concentration of COC reaches one-half of the OSHA Permissible Exposure Limit or ACGIH TLV. The following equipment will be used for Level C protection:

- Full-face, air-purifying respirator with combination organic vapor/HEPA cartridges;
- Polyethylene-coated Tyvek<sup>®</sup> suit, with ankles and cuffs taped to boots and gloves;
- Nitrile gloves worn over nitrile surgical gloves;
- Steel toe work boots, meeting ANSI Z41;
- Chemical-resistant boots with steel toes or latex/PVC overboots over steel toe boots;
- Hard hat, meeting ANSI Z89;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used); and
- PFD if working on or near the water.

## **4.2 Selection of PPE**

Equipment for personal protection will be selected based on the potential for contact, site conditions, ambient air quality, and the judgment of supervising site personnel and health and safety professionals. The PPE used will be chosen to be effective against the COCs present on the site.

## **4.3 Site Respiratory Protection Program**

Respiratory protection is an integral part of employee health and safety at the site due to potentially hazardous concentrations of airborne COCs. The site respiratory protection program will consist of the following (as a minimum):

- All on-site personnel who may use respiratory protection will have an assigned respirator.
- All on-site personnel who may use respiratory protection will have been fit tested and trained in the use of a full-face air-purifying respirator within the past 12 months. Documentation of the fit test must be provided to the SSO prior to commencement of work.
- All on-site personnel who may use respiratory protection must within the past year have been medically certified as being capable of wearing a respirator. Documentation of the medical certification must be provided to the SSO, prior to commencement of site work.
- Only cleaned, maintained, NIOSH-approved respirators will be used.
- If respirators are used, the respirator cartridge is to be properly disposed of at the end of each work shift, or when load-up or breakthrough occurs.
- Contact lenses are not to be worn when a respirator is worn.
- All on-site personnel who may use respiratory protection must be clean-shaven. Mustaches and sideburns are permitted, but they must not touch the sealing surface of the respirator.
- Respirators will be inspected, and a negative pressure test performed prior to each use.
- After each use, the respirator will be wiped with a disinfectant, cleansing wipe. When used, the respirator will be thoroughly cleaned at the end of the work shift. The respirator will be stored in a clean plastic bag, away from direct sunlight in a clean, dry location, in a manner that will not distort the face piece.

## **4.4 Using PPE**

Depending upon the level of protection selected, specific donning and doffing procedures may be required. The procedures presented in this section are mandatory if Modified Level D or Level C PPE is used. All personnel entering the EZ must put on the required PPE in accordance with the requirements of this HASP. When leaving the EZ, PPE will be removed in accordance with the procedures listed, to minimize the spread of COCs.

### **4.4.1 Donning Procedures**

These procedures are mandatory only if Modified Level D or Level C PPE is used on the site:

- Remove bulky outerwear. Remove street clothes and store in clean location;
- Put on work clothes or coveralls;
- Put on the required chemical protective coveralls;

- Put on the required chemical protective boots or boot covers;
- Tape the legs of the coveralls to the boots with duct tape;
- Put on the required chemical protective gloves;
- Tape the wrists of the protective coveralls to the gloves;
- Don the required respirator and perform appropriate fit check (Level C);
- Put hood or head covering over head and respirator straps and tape hood to facepiece (Level C); and
- Don remaining PPE, such as safety glasses or goggles and hard hat.

When these procedures are instituted, one person must remain outside the work area to ensure that each person entering has the proper protective equipment.

#### 4.4.2 Doffing Procedures

The following procedures are only mandatory if Modified Level D or Level C PPE is required for the site. Whenever a person leaves the work area, the following decontamination sequence will be followed:

- Upon entering the CRZ, rinse contaminated materials from the boots or remove contaminated boot covers;
- Clean reusable protective equipment;
- Remove protective garments, equipment, and respirator (Level C). All disposable clothing should be placed in plastic bags, which are labeled with contaminated waste labels;
- Wash hands, face, and neck (or shower if necessary);
- Proceed to clean area and dress in clean clothing; and
- Clean and disinfect respirator for next use.

All disposable equipment, garments, and PPE must be bagged in plastic bags, labeled for disposal. See Section 7, Decontamination, for detailed information on decontamination stations.

#### 4.5 Selection Matrix

The level of personal protection selected will be based on air monitoring of the work environment and an assessment by the FS and SSO of the potential for skin contact with COCs. The PPE selection matrix is presented in Table 2. This matrix is based on information available at the time this plan was written. The Airborne Contaminant Action Levels in Table 3, Airborne Contaminant Action Levels, should be used to verify that the PPE prescribed in these matrices is appropriate.

**Table 2 – PPE Selection Matrix**

<b>Task</b>	<b>Anticipated Level of Protection</b>
Mobilization	Level D
Subsurface Intrusive Activities (Excavation, Drilling)	Modified Level D/Level C
Earthwork/Grading	Level D
Chemical Sampling / Delineation	Modified Level D/Level C
Decontamination	Modified Level D
Demobilization	Level D

## **5.0 AIR AND NOISE MONITORING**

### **5.1 Air Monitoring**

Air monitoring, sampling, and testing will be conducted to determine employee exposure to airborne constituents. The monitoring results will dictate work procedures and the selection of PPE. The SESI SSO will be responsible for defining appropriate air monitoring procedures and for utilizing the air monitoring results to determine appropriate procedures and PPE for project personnel. Air monitoring results should be recorded in field notebooks or on an air monitoring log (see Attachment 1 for a copy of the Air Monitoring Log). Any deviations from the procedures listed here should be documented and explained in the Air Monitoring Log.

The monitoring devices to be used are a PDR1000 particulate monitor (or equivalent) and a Rae Systems MultiRAE detector (PID with a 11.7 eV lamp/oxygen/LEL/hydrogen sulfide sensors). Colorimetric detector tubes may be utilized to estimate airborne concentrations of benzene and should be onsite during any activities that may result in elevated PID readings including drilling, excavating, and groundwater sampling.

Air monitoring will be conducted continuously with the LEL/Oxygen meter during drilling in areas where flammable vapors or gases are suspect. All work activity must stop where tests indicate the concentration of flammable vapors exceeds 10% of the LEL at a location with a potential ignition source. Such an area must be ventilated to reduce the concentration to an acceptable level.

### **5.2 Noise Monitoring**

Noise monitoring may be conducted as required. Hearing protection is mandatory for all employees in noise hazardous areas, such as around heavy equipment. As a general rule, sound levels that cause speech interference at normal conversation distance should require the use of hearing protection.

### **5.3 Monitoring Equipment Maintenance and Calibration**

All direct-reading instrumentation calibrations should be conducted under the approximate environmental conditions the instrument will be used. Instruments must be calibrated before and after use, noting the reading(s) and any adjustments that are necessary. All air monitoring equipment calibrations, including the standard used for calibration, must be documented on a calibration log or in the field notebook. All completed health and safety documentation/forms must be reviewed by the SSO and maintained by the FS.

All air monitoring equipment will be maintained and calibrated in accordance with the specific manufacturer's procedures. Preventive maintenance and repairs will be conducted in accordance with the respective manufacturer's procedures. When applicable, only manufacturer-trained and/or authorized personnel will be allowed to perform instrument repairs or preventive maintenance.

If an instrument is found to be inoperative or suspected of giving erroneous readings, the SSO must be responsible for immediately removing the instrument from service and obtaining a replacement unit. If the instrument is essential for safe operation during a specific activity, that activity must cease until an appropriate replacement unit is obtained. The SSO will be responsible for ensuring a replacement unit is obtained and/or repairs are initiated on the defective equipment.

## 5.4 Action Levels

Table 3 presents airborne contaminant action levels that will be used to determine the procedures and protective equipment necessary based on conditions as measured at the site.

**Table 3 – Airborne Contaminant Action Levels**

Parameter	Reading	Action
Total Hydrocarbons	0 ppm to ≤ 1 ppm	Normal operations; continue hourly breathing zone monitoring
	> 1 ppm to 5 ppm	Increase monitoring frequency to every 15 minutes and use benzene detector tube to screen for the presence of benzene
	≥ 5 ppm to ≤ 50 ppm	Upgrade to Level C PPE; continue screening for benzene
	> 50 ppm	Stop work; investigate cause of reading
	At any reading > 5 ppm	Monitor perimeter per CAMP
Benzene	≥ 1 ppm to 5 ppm	Upgrade to Level C PPE
	> 5 ppm	Stop work; investigate cause of reading
Dust	0 to .05 mg/m <sup>3</sup>	Normal operations
	0.05 to 0.1 mg/m <sup>3</sup>	Begin soil wetting procedure (Level C protection would be needed beyond this point)
	> 0.15 mg/m <sup>3</sup>	Stop work, fully implement dust control plan
Oxygen	≤ 19.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
	> 19.5% to < 23.5%	Normal operations
	≥ 23.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Carbon Monoxide	0 ppm to ≤ 20 ppm	Normal operations
	> 20 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Hydrogen Sulfide	0 ppm to ≤ 5 ppm	Normal operations
	> 5 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Flammable Vapors (LEL)	< 10% LEL	Normal operations
	≥ 10% LEL	Stop work, ventilate area, investigate source of vapors

## 6.0 WORK ZONES AND DECONTAMINATION

### 6.1 Work Zones

#### 6.1.1 Authorization to Enter

Only personnel with the appropriate training and medical certifications (if respirators are required) will be allowed to work at the project site. The FS will maintain a list of authorized persons; only personnel on the authorized persons list will be allowed to enter the site work areas.

### **6.1.2 Site Orientation and Hazard Briefing**

No person will be allowed in the work area during site operations without first being given a site orientation and hazard briefing. This orientation will be presented by the FS or SSO and will consist of a review of this HASP. This review must cover the chemical, physical, and biological hazards, protective equipment, safe work procedures, and emergency procedures for the project. Following this initial meeting, daily safety meetings will be held each day before work begins.

All people entering the site work areas, including visitors, must document their attendance at this briefing, as well as the daily safety meetings on the forms included with this plan.

### **6.1.3 Certification Documents**

A training and medical file may be established for the project and kept on site during all site operations. Specialty training, such as first aid/cardiopulmonary resuscitation (CPR) certificates, as well as current medical clearances for all project field personnel required to wear respirators, will be maintained within that file. All project personnel must provide their training and medical documentation to the SSO prior to starting work.

### **6.1.4 Entry Log**

A log-in/log-out sheet will be maintained at the site by the FS. Personnel must sign in and out on a log sheet as they enter and leave the work area, and the FS may document entry and exit in the field notebook.

### **6.1.5 Entry Requirements**

In addition to the authorization, hazard briefing, and certification requirements listed above, no person will be allowed in any SESI work area unless they are wearing the minimum PPE as described in Section 4.0.

### **6.1.6 Emergency Entry and Exit**

People who must enter the work area on an emergency basis will be briefed of the hazards by the FS or SSO. All activities will cease in the event of an emergency. People exiting the work area because of an emergency will gather in a designated safe area for a head count. The FS is responsible for ensuring that all people who entered the work area have exited in the event of an emergency.

### **6.1.7 Contamination Control Zones**

Contamination control zones are maintained to prevent the spread of contamination and to prevent unauthorized people from entering hazardous areas.

### **6.1.8 Exclusion Zone (EZ)**

An EZ may consist of a specific work area or may be the entire area of potential contamination. All employees entering an EZ must use the required PPE and must have the appropriate training and medical clearance for hazardous waste work. The EZ is the defined area where there is a possible respiratory and/or contact health hazard. Cones, caution tape, or a posted site diagram will identify the location of each EZ.

### **6.1.9 Contamination Reduction Zone**

The CRZ or transition area will be established, if necessary, to perform decontamination of personnel and equipment. All personnel entering or leaving the EZ will pass through this

area to prevent any cross-contamination. Tools, equipment, and machinery will be decontaminated in a specific location. The decontamination of all personnel will be performed on site adjacent to the EZ. Personal protective outer garments and respiratory protection will be removed in the CRZ and prepared for cleaning or disposal. This zone is the only appropriate corridor between the EZ and the support zone (SZ) discussed below.

#### **6.1.10 Support Zone (SZ)**

The SZ is a clean area outside the CRZ located to prevent employee exposure to hazardous substances. Eating and drinking will be permitted in the support area only after proper decontamination. Smoking may be permitted in the SZ, subject to site requirements.

#### **6.1.11 Posting**

Work areas will be prominently marked and delineated using cones, caution tape, or a posted site diagram.

#### **6.1.12 Site Inspections**

The FS will conduct a daily inspection of site activities, equipment, and procedures to verify that the required elements are in place.

### **6.2 Decontamination**

#### **6.2.1 Personnel Decontamination**

All personnel wearing Modified Level D or Level C protective equipment in the EZ must undergo personal decontamination prior to entering the SZ. The personnel decontamination area will consist of the following stations at a minimum:

- *Station 1:* Personnel leaving the contaminated zone will remove the gross contamination from their outer clothing and boots.
- *Station 2:* Personnel will remove their outer garment and gloves and dispose of it in properly labeled containers. Personnel will then decontaminate their hard hats, and boots with an aqueous solution of detergent or other appropriate cleaning solution. These items are then hand carried to the next station.
- *Station 3:* Personnel will thoroughly wash their hands and face before leaving the CRZ. Respirators will be sanitized and then placed in a clean plastic bag.

#### **6.2.2 Equipment Decontamination**

All vehicles that have entered the EZ will be decontaminated at the decontamination pad prior to leaving the zone. If the level of vehicle contamination is low, decontamination may be limited to rinsing of tires and wheel wells with water. If the vehicle is significantly contaminated, steam cleaning or pressure washing of vehicles and equipment may be required.

#### **6.2.3 Personal Protective Equipment Decontamination**

Where and whenever possible, single-use, external protective clothing must be used for work within the EZ or CRZ. This protective clothing must be disposed of in properly labeled containers. Reusable protective clothing will be rinsed at the site with detergent and water. The rinsate will be collected for disposal.

When removed from the CRZ, the respirator will be thoroughly cleaned with soap and water. The respirator face piece, straps, valves, and covers must be thoroughly cleaned at the end of each work shift, and ready for use prior to the next shift. Respirator parts may be disinfected with a solution of bleach and water (mixed at 2% bleach by volume), or by using a spray disinfectant.

## **7.0 TRAINING AND MEDICAL SURVEILLANCE**

### **7.1 Training**

#### **7.1.1 General**

All on-site project personnel who work in areas where they may be exposed to site contaminants must be trained as required by OSHA Regulation 29 CFR 1910.120 (HAZWOPER). Field employees also must receive a minimum of three days of actual field experience under the direct supervision of a trained, experienced supervisor. Personnel who completed their initial training more than 12 months prior to the start of the project must have completed an eight-hour refresher course within the past 12 months. The FS must have completed an additional eight hours of supervisory training and must have a current first-aid/CPR certificate (See Attachment 2).

#### **7.1.2 Basic 40-Hour Course**

The following is a list of the topics typically covered in a 40-hour HAZWOPER training course:

- General safety procedures;
- Physical hazards (fall protection, noise, heat stress, cold stress);
- Names and job descriptions of key personnel responsible for site health and safety;
- Safety, health, and other hazards typically present at hazardous waste sites;
- Use, application, and limitations of PPE;
- Work practices by which employees can minimize risks from hazards;
- Safe use of engineering controls and equipment on site;
- Medical surveillance requirements;
- Recognition of symptoms and signs which might indicate overexposure to hazards;
- Worker right-to-know (Hazard Communication OSHA 1910.1200);
- Routes of exposure to contaminants;
- Engineering controls and safe work practices;
- Components of a health and safety program and a site-specific HASP;
- Decontamination practices for personnel and equipment;
- Confined-space entry procedures; and
- General emergency response procedures.

#### **7.1.3 Supervisor Course**

Management and supervisors must receive an additional eight hours of training, which typically includes:

- General site safety and health procedures;
- PPE programs; and
- Air monitoring techniques.



#### **7.1.4 Site-Specific Training**

Site-specific training will be accomplished by on-site personnel reading this HASP, and through a thorough site briefing by the PM, FS, or SSO on the contents of this HASP before work begins. The review must include a discussion of the chemical, physical, and biological hazards; the protective equipment and safety procedures; and emergency procedures.

#### **7.1.5 Daily Safety Meetings**

Daily safety meetings will be held to cover the work to be accomplished, the hazards anticipated, the PPE and procedures required to minimize site hazards, and emergency procedures. The FS or SSO should present these meetings prior to beginning the day's fieldwork. No work will be performed in an EZ before a daily safety meeting has been held. An additional safety meeting must also be held prior to new tasks, or if new hazards are encountered. The daily safety meetings will be logged in the field notebook.

#### **7.1.6 First Aid and CPR**

At least one employee current in first aid/CPR will be assigned to the work crew and will be on the site during operations. Site records will document the presence of this individual. Refresher training in first aid (triennially) and CPR (annually) is required to keep the certificate current. These individuals must also receive training regarding the precautions and protective equipment necessary to protect against exposure to blood-borne pathogens.

### **7.2 Medical Surveillance**

#### **7.2.1 Medical Examination**

All personnel who are potentially exposed to site contaminants must participate in a medical surveillance program as defined by OSHA at 29 CFR 1910.120 (f).

#### **7.2.2 Pre-placement Medical Examination**

All potentially exposed personnel must have completed a comprehensive medical examination prior to assignment, and periodically thereafter as defined by applicable regulations. The pre-placement and periodic medical examinations typically include the following elements:

- Medical and occupational history questionnaire;
- Physical examination;
- Complete blood count, with differential;
- Liver enzyme profile;
- Chest X-ray, at a frequency determined by the physician;
- Pulmonary function test;
- Audiogram;
- Electrocardiogram for persons older than 45 years of age, or if indicated during the physical examination;
- Drug and alcohol screening, as required by job assignment;
- Visual acuity; and
- Follow-up examinations, at the discretion of the examining physician or the corporate medical director.

The examining physician provides the employee with a letter summarizing his findings and recommendations, confirming the worker's fitness for work and ability to wear a respirator.

Documentation of medical clearance will be available for each employee during all project site work.

Subcontractors will certify that all their employees have successfully completed a physical examination by a qualified physician. The physical examinations must meet the requirements of 29 CFR 1910.120 and 29 CFR 1910.134. Subcontractors will supply copies of the medical examination certificate for each on-site employee.

### **7.2.3 Other Medical Examinations**

In addition to pre-employment, annual, and exit physicals, personnel may be examined:

- At employee request after known or suspected exposure to toxic or hazardous materials; and
- At the discretion of the SSO, HSM, or occupational physician in anticipation of, or after known or suspected exposure to toxic or hazardous materials.

### **7.2.4 Periodic Exam**

Following the placement examination, all employees must undergo a periodic examination, similar in scope to the placement examination. For employees potentially exposed over 30 days per year, the frequency of periodic examinations will be annual. For employees potentially exposed less than 30 days per year, the frequency for periodic examinations will be 24 months.

### **7.2.5 Medical Restriction**

When the examining physician identifies a need to restrict work activity, the employee's supervisor must communicate the restriction to the employee and the SSO. The terms of the restriction will be discussed with the employee and the supervisor.

## **8.0 GENERAL SAFETY PRACTICES**

### **8.1 General Safety Rules**

General safety rules for site activities include, but are not limited to, the following:

- At least one copy of this HASP must be in a location at the site that is readily available to personnel, and all project personnel shall review the plan prior to starting work.
- Consume or use food, beverages, chewing gum, and tobacco products only in the SZ or other designated area outside the EZ and CRZ. Cosmetics shall not be applied in the EZ or CRZ.
- Wash hands before eating, drinking, smoking, or using toilet facilities.
- Wear all PPE as required and stop work and replace damaged PPE immediately.
- Secure disposable coveralls, boots, and gloves at the wrists and legs and ensure closure of the suit around the neck.
- Upon skin contact with materials that may be impacted by COCs, remove contaminated clothing and wash the affected area immediately. Contaminated clothing must be changed. Any skin contact with materials potentially impacted by COCs must be reported to the FS or SSO immediately. If needed, medical attention should be sought.

- Practice contamination avoidance. Avoid contact with surfaces either suspected or known to be impacted by COCs, such as standing water, mud, or discolored soil. Equipment must be stored on elevated or protected surfaces to reduce the potential for incidental contamination.
- Remove PPE as required in the CRZ to limit the spread of COC-containing materials.
- At the end of each shift or as required, dispose of all single-use coveralls, soiled gloves, and respirator cartridges in designated receptacles designated for this purpose.
- Removing soil containing site COCs from protective clothing or equipment with compressed air, shaking, or any other means that disperses contaminants into the air is prohibited.
- Inspect all non-disposable PPE for contamination in the CRZ. Any PPE found to be contaminated must be decontaminated or disposed of appropriately.
- Recognize emergency signals used for evacuation, injury, fire, etc.
- Report all injuries, illnesses, and unsafe conditions or work practices to the FS or SSO.
- Use the “buddy system” during all operations requiring Level C PPE, and when appropriate, during Modified Level D operations.
- Obey all warning signs, tags, and barriers. Do not remove any warnings unless authorized to do so.
- Use, adjust, alter, and repair equipment only if trained and authorized to do so, and in accordance with the manufacturer’s directions.
- Personnel are to perform only tasks for which they have been properly trained and will advise their supervisor if they have been assigned a task for which they are not trained.
- The presence or consumption of alcoholic beverages or illicit drugs during the workday, including breaks, is strictly prohibited. Notify your supervisor if you must take prescription or over-the-counter drugs that indicate they may cause drowsiness or, that you should not operate heavy equipment.
- Remain upwind during site activities whenever possible.

## **8.2 Buddy System**

On-site personnel must use the buddy system as required by operations. Use of the “buddy system” is required during all operations requiring Level C to Level A PPE, and when appropriate, during Level D operations. Crewmembers must observe each other for signs of chemical exposure, and heat or cold stress. Indications of adverse effects include, but are not limited to:

- Changes in complexion and skin coloration;
- Changes in coordination;
- Changes in demeanor;
- Excessive salivation and pupillary response; and
- Changes in speech pattern.

Crewmembers must also be aware of the potential exposure to possible safety hazards, unsafe acts, or non-compliance with safety procedures.

Field personnel must inform their partners or fellow crewmembers of non-visible effects of exposure to toxic materials that they may be experiencing. The symptoms of such exposure may include, but are not limited to:

- Headaches;
- Dizziness;
- Nausea;
- Blurred vision;
- Cramps; and
- Irritation of eyes, skin, or respiratory tract.

If protective equipment or noise levels impair communications, prearranged hand signals must be used for communication. Personnel must stay within line of sight of another team member.

### **8.3 Heat Stress**

Heat stress is caused by a number of interacting factors, including environmental conditions, clothing, workload, etc., as well as the physical and conditioning characteristics of the individual. Since heat stress is one of the most common illnesses associated with heavy outdoor work conducted with direct solar load and, in particular, because wearing PPE can increase the risk of developing heat stress, workers must be capable of recognizing the signs and symptoms of heat-related illnesses. Personnel must be aware of the types and causes of heat-related illnesses and be able to recognize the signs and symptoms of these illnesses in both themselves and their co-workers.

*Heat rashes* are one of the most common problems in hot work environments. Commonly known as prickly heat, a heat rash is manifested as red papules and usually appears in areas where the clothing is restrictive. As sweating increases, these papules give rise to a prickling sensation. Prickly heat occurs in skin that is persistently wetted by unevaporated sweat, and heat rash papules may become infected if they are not treated. In most cases, heat rashes will disappear when the affected individual returns to a cool environment.

*Heat cramps* are usually caused by performing hard physical labor in a hot environment. These cramps have been attributed to an electrolyte imbalance caused by sweating. It is important to understand that cramps can be caused both by too much or too little salt.

Cramps appear to be caused by the lack of water replenishment. Because sweat is a hypotonic solution (plus or minus 0.3% NaCl), excess salt can build up in the body if the water lost through sweating is not replaced. Thirst cannot be relied on as a guide to the need for water; instead, water must be taken every 15 to 20 minutes in hot environments.

Under extreme conditions, such as working for 6 to 8 hours in heavy protective gear, a loss of sodium may occur. Drinking commercially available carbohydrate electrolyte replacement liquids is effective in minimizing physiological disturbances during recovery.

*Heat exhaustion* occurs from increased stress on various body organs due to inadequate blood circulation, cardiovascular insufficiency, or dehydration. Signs and symptoms include pale, cool, moist skin; heavy sweating; dizziness; nausea; headache, vertigo, weakness, thirst, and giddiness. Fortunately, this condition responds readily to prompt treatment.

Heat exhaustion should not be dismissed lightly, however, for several reasons. One is that the fainting associated with heat exhaustion can be dangerous because the victim may be operating machinery or controlling an operation that should not be left unattended; moreover, the victim may be injured when he or she faints. Also, the signs and symptoms seen in heat exhaustion are similar to those of heat stroke, which is a medical emergency.

Workers suffering from heat exhaustion should be removed from the hot environment, be given fluid replacement, and be encouraged to get adequate rest.

*Heat stroke* is the most serious form of heat stress. Heat stroke occurs when the body's system of temperature regulation fails and the body's temperature rises to critical levels. This condition is caused by a combination of highly variable factors, and its occurrence is difficult to predict. Heat stroke is a medical emergency. The primary signs and symptoms of heat stroke are confusion; irrational behavior; loss of consciousness; convulsions; a lack of sweating (usually); hot, dry skin; and an abnormally high body temperature, e.g., a rectal temperature of 41°C (105.8°F). If body temperature is too high, it causes death. The elevated metabolic temperatures caused by a combination of workload and environmental heat load, both of which contribute to heat stroke, are also highly variable and difficult to predict.

If a worker shows signs of possible heat stroke, professional medical treatment should be obtained immediately. The worker should be placed in a shady area and the outer clothing should be removed. The worker's skin should be wetted and air movement around the worker should be increased to improve evaporative cooling until professional methods of cooling are initiated and the seriousness of the condition can be assessed. Fluids should be replaced as soon as possible. The medical outcome of an episode of heat stroke depends on the victim's physical fitness and the timing and effectiveness of first aid treatment.

Regardless of the worker's protestations, no employee suspected of being ill from heat stroke should be sent home or left unattended unless a physician has specifically approved such an order.

Proper training and preventive measures will help avert serious illness and loss of work productivity. Preventing heat stress is particularly important because once someone suffers from heat stroke or exhaustion, that person may be predisposed to additional heat injuries.

#### **8.4 Heat Stress Safety Precautions**

Heat stress monitoring and work rest cycle implementation should commence when the ambient adjusted temperature exceeds 72°F. A minimum work rest regimen and procedures for calculating ambient adjusted temperature are described in Table 4.

**Table 4 – Work/Rest Schedule**

<b>Adjusted Temperature<sup>b</sup></b>	<b>Work/Rest Regimen Normal Work Ensemble<sup>c</sup></b>	<b>Work/Rest Regimen Impermeable Ensemble</b>
90°F (32.2°C) or above	After each 45 minutes of work	After each 15 minutes of work
87.5° - 90°F (30.8°-32.2°C)	After each 60 minutes of work	After each 30 minutes of work
82.5° - 87.5°F (28.1° - 30.8°C)	After each 90 minutes of work	After each 60 minutes of work
77.5° - 82.5°F (25.3° - 28.1°C)	After each 120 minutes of work	After each 90 minutes of work
72.5° - 77.5°F (30.8° - 32.2°C)	After each 150 minutes of work	After each 120 minutes of work

- a. For work levels of 250 kilocalories/hour (Light-Moderate Type of Work)
- b. Calculate the adjusted air temperature (ta adj) by using this equation:  $ta\ adj\ ^\circ F = ta\ ^\circ F + (13 \times \% \text{ sunshine})$ . Measure air temperature (ta) with a standard mercury-in-glass thermometer, with the bulb shielded from radiant heat. Estimate percent sunshine by judging what percent time the sun is not covered by clouds that are thick enough to produce a shadow. (100 percent sunshine = no cloud cover and a sharp, distinct shadow; 0 percent sunshine = no shadows.)
- c. A normal work ensemble consists of cotton coveralls or other cotton clothing with long sleeves and pants.
- d. The information presented above was generated using the information provided in the American Conference of Governmental Industrial Hygienists (ACGIH) Threshold Limit Values (TLV) Handbook.

In order to determine if the work rest cycles are adequate for the personnel and specific site conditions, additional monitoring of individual heart rates will be conducted during the rest cycle. To check the heart rate, count the radial pulse for 30 seconds at the beginning of the rest period. If the heart rate exceeds 110 beats per minute, shorten the next work period by one third and maintain the same rest period.

Additionally, one or more of the following control measures can be used to help control heat stress and are mandatory if any site worker has a heart rate (measure immediately prior to rest period) exceeding 115 beats per minute:

- Site workers will be encouraged to drink plenty of water and electrolyte replacement fluids throughout the day.
- On-site drinking water will be kept cool (50 to 60°F).
- A work regimen that will provide adequate rest periods for cooling down will be established, as required.
- All personnel will be advised of the dangers and symptoms of heat stroke, heat exhaustion, and heat cramps.
- Cooling devices, such as vortex tubes or cooling vests, should be used when personnel must wear impermeable clothing in conditions of extreme heat.
- Employees should be instructed to monitor themselves and co-workers for signs of heat stress and to take additional breaks as necessary.
- A shaded rest area must be provided. All breaks should take place in the shaded rest area.
- Employees must not be assigned to other tasks during breaks.
- Employees must remove impermeable garments during rest periods. This includes white Tyvek-type garments.

All employees must be informed of the importance of adequate rest, acclimation, and proper diet in the prevention of heat stress disorders.

## 8.5 Cold Stress

Cold stress normally occurs in temperatures at or below freezing, or under certain circumstances, in temperatures of 40°F. Extreme cold for a short time may cause severe injury to exposed body surfaces or result in profound generalized cooling, causing death. Areas of the body that have high surface area-to-volume ratio, such as fingers, toes, and ears, are the most susceptible. Two factors influence the development of a cold weather injury: ambient temperature and the velocity of the wind. For instance, 10°F with a wind of 15 miles per hour (mph) is equivalent in chilling effect to still air at 18°F. An equivalent chill temperature chart relating the actual dry bulb temperature and wind velocity is presented in Table 5.

**Table 5 – Wind Chill Temperature Chart**

Estimated Wind Speed (in mph)	Actual Temperature Reading (°F)											
	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
Equivalent Chill Temperature (°F)												
Calm	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
5	48	37	27	16	6	-5	-15	-26	-36	-47	-57	-68
10	40	28	16	4	-9	-24	-33	-46	-58	-70	-83	-95
15	36	22	9	-5	-18	-32	-45	-58	-72	-85	-99	-112
20	32	18	4	-10	-25	-39	-53	-67	-82	-96	-110	-121
25	30	16	0	-15	-29	-44	-59	-74	-88	-104	-118	-133
30	28	13	-2	-18	-33	-48	-63	-79	-94	-109	-125	-140
35	27	11	-4	-20	-35	-51	-67	-82	-98	-113	-129	-145
40	26	10	-6	-21	-37	-53	-69	-85	-100	-116	-132	-148
(Wind speeds greater than 40 mph have little additional effect.)	<b>LITTLE DANGER</b> Maximum danger of false sense of security.				<b>INCREASING DANGER</b> Danger from freezing of exposed flesh within one minute.				<b>GREAT DANGER</b> Flesh may freeze within 30 seconds.			
	Trench foot and immersion foot may occur at any point on this chart.											

[This chart was developed by the U.S. Army Research Institute of Environmental Medicine, Natick, MA (Source: ACGIH Threshold Limit Values for Chemical Substances and Physical Agents)].

Local injury resulting from cold is included in the generic term frostbite. There are several degrees of tissue damage associated with frostbite. Frostbite of the extremities can be categorized into:

- *Frost Nip or Incipient Frostbite* - characterized by sudden blanching or whitening of skin.
- *Superficial Frostbite* - skin has a waxy or white appearance and is firm to the touch, but tissue beneath is resilient.
- *Deep Frostbite* - tissues are cold, pale, and solid; extremely serious injury.

Systemic hypothermia is caused by exposure to freezing or rapidly dropping temperature. It can be fatal. Its symptoms are usually exhibited in five stages: 1) shivering; 2) apathy, listlessness, sleepiness, and (sometimes) rapid cooling of the body to less than 95°F; 3) unconsciousness, glassy stare, slow pulse, and slow respiratory rate; 4) freezing of the extremities; and 5) death. Trauma sustained in freezing or sub-zero conditions requires special attention because an injured worker is predisposed to secondary cold injury. Special provisions must be made to prevent hypothermia and secondary freezing of damaged tissues in addition to providing for first aid treatment. To avoid cold stress, site personnel must wear protective clothing appropriate for the level of cold and physical

activity. In addition to protective clothing, preventive safe work practices, additional training, and warming regimens may be utilized to prevent cold stress.

### **8.6 Safety Precautions for Cold Stress Prevention**

For air temperature of 0°F or less, mittens should be used to protect the hands. For exposed skin, continuous exposure should not be permitted when air speed and temperature results in a wind chill temperature of -25°F.

At air temperatures of 36°F or less, field personnel who become immersed in water or whose clothing becomes wet must be immediately provided with a change of clothing and be treated for hypothermia.

If work is done at normal temperature or in a hot environment before entering the cold, the field personnel must ensure that their clothing is not wet as a consequence of sweating. Wet field personnel must change into dry clothes prior to entering the cold area.

If the available clothing does not give adequate protection to prevent hypothermia or frostbite, work must be modified or suspended until adequate clothing is made available or until weather conditions improve.

Field personnel handling evaporative liquid (e.g., gasoline, alcohol, or cleaning fluids) at air temperatures below 40°F must take special precaution to avoid soaking of clothing or gloves with the liquids because of the added danger of cold injury due to evaporative cooling.

### **8.7 Safe Work Practices**

Direct contact between bare skin and cold surfaces (< 20°F) should be avoided. Metal tool handles and/or equipment controls should be covered by thermal insulating material.

For work performed in a wind chill temperature at or below 10°F, workers should be under constant protective observation (buddy system). The work rate should be established to prevent heavy sweating that will result in wet clothing. For heavy work, rest periods must be taken in heated shelters and workers should be provided with an opportunity to change into dry clothing if needed.

Field personnel should be provided the opportunity to become accustomed to cold-weather working conditions and required protective clothing. Work should be arranged in such a way that sitting or standing still for long periods is minimized.

During the warming regimen (rest period), field personnel should be encouraged to remove outer clothing to permit sweat evaporation or to change into dry work clothing. Dehydration, or loss of body fluids, occurs insidiously in the cold environment and may increase susceptibility to cold injury due to a significant change in blood flow to the extremities. Fluid replacement with warm, sweet drinks and soups is recommended. The intake of coffee should be limited because of diuretic and circulatory effects.

### **8.8 Biological Hazards**

Biological hazards may include poison ivy, snakes, thorny bushes and trees, ticks, mosquitoes, spiders, and other pests.



### **8.8.1 Tick Borne Diseases**

*Lyme Disease* - The disease commonly occurs in summer and is transmitted by the bite of infected ticks. "Hot spots" in the United States include New York, New Jersey, Pennsylvania, Massachusetts, Connecticut, Rhode Island, Minnesota, and Wisconsin.

*Erlchiosis* - The disease also commonly occurs in summer and is transmitted by the bite of infected ticks. "Hot spots" in the United States include New York, Massachusetts, Connecticut, Rhode Island, Minnesota, and Wisconsin.

These diseases are transmitted primarily by the deer tick, which is smaller and redder than the common wood tick. The disease may be transmitted by immature ticks, which are small and hard to see. The tick may be as small as a period on this page.

Symptoms of Lyme disease include a rash or a peculiar red spot, like a bull's eye, which expands outward in a circular manner. The victim may have headache, weakness, fever, a stiff neck, and swelling and pain in the joints, and eventually, arthritis. Symptoms of erlichiosis include muscle and joint aches, flu-like symptoms, but there is typically no skin rash.

*Rocky Mountain Spotted Fever (RMSF)* - This disease is transmitted via the bite of an infected tick. The tick must be attached 4 to 6 hours before the disease-causing organism (*Rickettsia rickettsii*) becomes reactivated and can infect humans. The primary symptom of RMSF is the sudden appearance of a moderate-to-high fever. The fever may persist for two to three weeks. The victim may also have a headache, deep muscle pain, and chills. A rash appears on the hands and feet on about the third day and eventually spreads to all parts of the body. For this reason, RMSF may be confused with measles or meningitis. The disease may cause death, if untreated, but if identified and treated promptly, death is uncommon.

*Control* - Tick repellent containing diethyltoluamide (DEET) should be used when working in tick-infested areas, and pant legs should be tucked into boots. In addition, workers should search the entire body every three or four hours for attached ticks. Ticks should be removed promptly and carefully without crushing, since crushing can squeeze the disease-causing organism into the skin. A gentle and steady pulling action should be used to avoid leaving the head or mouth parts in the skin. Hands should be protected with surgical gloves when removing ticks.

### **8.8.2 Poisonous Plants**

Poisonous plants may be present in the work area. Personnel should be alerted to its presence and instructed on methods to prevent exposure.

*Control* - The main control is to avoid contact with the plant, cover arms and hands, and frequently wash potentially exposed skin. Particular attention must be given to avoiding skin contact with objects or protective clothing that have touched the plants. Treat every surface that may have touched the plant as contaminated, and practice contamination avoidance. If skin contact is made, the area should be washed immediately with soap and water and observed for signs of reddening.

### **8.8.3 Snakes**

The possibility of encountering snakes exists, specifically for personnel working in wooded/vegetated areas. Snake venoms are complex and include proteins, some of which have enzymatic activity. The effects produced by venoms include neurotoxic effects with sensory, motor, cardiac, and respiratory difficulties; cytotoxic effects on red blood cells, blood vessels, heart muscle, kidneys, and lungs; defects in coagulation; and effects from local release of substances by enzymatic actions. Other noticeable effects of venomous snakebites include swelling, edema, and pain around the bite, and the development of ecchymosis (the escape of blood into tissues from ruptured blood vessels).

*Control* - To minimize the threat of snakebites, all personnel walking through vegetated areas must be aware of the potential for encountering snakes, and the need to avoid actions potentiating encounters, such as turning over logs, etc. If a snakebite occurs, an attempt should be made to safely identify the snake via size and markings. The victim must be transported to the nearest hospital within 30 minutes; first aid consists of applying a constriction band and washing the area around the wound to remove any unabsorbed venom.

### **8.8.4 Spiders**

Personnel may encounter spiders during work activities.

Two spiders are of concern, the black widow and the brown recluse. Both prefer dark sheltered areas such as basements, equipment sheds and enclosures, and around woodpiles or other scattered debris. The black widow is shiny black, approximately one inch long, and found throughout the United States. There is a distinctive red hourglass marking on the underside of the black widows body. The bite of a black widow is seldom fatal to healthy adults, but effects include respiratory distress, nausea, vomiting, and muscle spasms. The brown recluse is smaller than the black widow and gets its name from its brown coloring and behavior. The brown recluse is more prevalent in the southern United States. The brown recluse has a distinctive violin shape on the top of its body. The bite of the brown recluse is painful and the bite site ulcerates and takes many weeks to heal completely.

*Control* - To minimize the threat of spider bites, all personnel walking through vegetated areas must be aware of the potential for encountering these arachnids. Personnel need to avoid actions that may result in encounters, such as turning over logs, and placing hands in dark places such as behind equipment or in corners of equipment sheds or enclosures. If a spider bite occurs, the victim must be transported to the nearest hospital as soon as possible; first aid consists of applying ice packs and washing the area around the wound to remove any unabsorbed venom.

## **8.9 Noise**

Exposure to noise over the OSHA action level can cause temporary impairment of hearing; prolonged and repeated exposure can cause permanent damage to hearing. The risk and severity of hearing loss increases with the intensity and duration of exposure to noise. In addition to damaging hearing, noise can impair voice communication, thereby increasing the risk of accidents on site.

*Control* - All personnel must wear hearing protection, with a Noise Reduction Rating (NRR) of at least 20, when noise levels exceed 85 dBA. When it is difficult to hear a co-worker at

normal conversation distance, the noise level is approaching or exceeding 85 dBA, and hearing protection is necessary. All site personnel who may be exposed to noise must also receive baseline and annual audiograms and training as to the causes and prevention of hearing loss. Noise monitoring is discussed in Section 5.2, Noise Monitoring.

Whenever possible, equipment that does not generate excessive noise levels will be selected for this project. If the use of noisy equipment is unavoidable, barriers or increased distance will be used to minimize worker exposure to noise, if feasible.

### **8.10 Spill Control**

All personnel must take every precaution to minimize the potential for spills during site operations. All on-site personnel shall immediately report any discharge, no matter how small, to the FS.

Spill control equipment and materials will be located on the site at locations that present the potential for discharge. All sorbent materials used for the cleanup of spills will be containerized and labeled appropriately. In the event of a spill, the FS will follow the provisions in Section 10.0, Emergency Procedures, to contain and control released materials and to prevent their spread to off-site areas.

### **8.11 Sanitation**

Site sanitation will be maintained according to OSHA requirements.

#### **8.11.1 Break Area**

Breaks must be taken in the SZ, away from the active work area after site personnel go through decontamination procedures. There will be no smoking, eating, drinking, or chewing gum or tobacco in any area other than the SZ.

#### **8.11.2 Potable Water**

The following rules apply to all field operations:

- An adequate supply of potable water will be provided at each project site. Potable water must be kept away from hazardous materials or media, and contaminated clothing or equipment.
- Portable containers used to dispense drinking water must be capable of being tightly closed and must be equipped with a tap dispenser. Water must not be consumed directly from the container (drinking from the tap is prohibited) nor may it be removed from the container by dipping.
- Containers used for drinking water must be clearly marked and shall not be used for any other purpose.
- Disposable drinking cups must be provided. A sanitary container for dispensing cups and a receptacle for disposing of used cups is required.

#### **8.11.3 Sanitary Facilities**

Access to facilities for washing before eating, drinking, or smoking, or alternate methods such as waterless hand-cleaner and paper towels will be provided.

#### **8.11.4 Lavatory**

If permanent toilet facilities are not available, an appropriate number of portable chemical toilets will be provided. This requirement does not apply to mobile crews or to normally unattended site locations so long as employees at these locations have transportation immediately available to nearby toilet facilities.

#### **8.12 Emergency Equipment**

Adequate emergency equipment for the activities being conducted on site and as required by applicable sections of 29 CFR 1910 and 29 CFR 1926 will be on site prior to the commencement of project activities. Personnel will be provided with access to emergency equipment, including, but not limited to, the following:

- Fire extinguishers of adequate size, class, number, and location as required by applicable sections of 29 CFR 1910 and 1926;
- Industrial first aid kits of adequate size for the number of personnel on site; and
- Emergency eyewash and/or shower if required by operations being conducted on site.

#### **8.13 Lockout/Tagout Procedures**

Only fully qualified and trained personnel will perform maintenance procedures. Before maintenance begins, lockout/tagout procedures per OSHA 29 CFR 1910.147 will be followed.

Lockout is the placement of a device that uses a positive means, such as lock, to hold an energy or material-isolating device such that the equipment cannot be operated until the lockout device is removed. If a device cannot be locked out, a tagout system shall be used. Tagout is the placement of a warning tag on an energy or material isolating device indicating that the equipment controls may not be operated until the personnel who attached the tag remove the tag.

#### **8.14 Electrical Safety**

Electricity may pose a particular hazard to site workers due to the use of portable electrical equipment. If wiring or other electrical work is needed, a qualified electrician must perform it.

General electrical safety requirements include:

- All electrical wiring and equipment must be a type listed by Underwriters Laboratories (UL), Factory Mutual Engineering Corporation (FM), or other recognized testing or listing agency.
- All installations must comply with the National Electrical Safety Code (NESC), the National Electrical Code (NEC), or USCG regulations.
- Portable and semi-portable tools and equipment must be grounded by a multi-conductor cord having an identified grounding conductor and a multi-contact polarized plug-in receptacle.
- Tools protected by an approved system of double insulation, or its equivalent, need not be grounded. Double insulated tools must be distinctly marked and listed by UL or FM.

- Live parts of wiring or equipment must be guarded to prevent persons or objects from touching them.
- Electric wire or flexible cord passing through work areas must be covered or elevated to protect it from damage by foot traffic, vehicles, sharp corners, projections, or pinching.
- All circuits must be protected from overload.
- Temporary power lines, switchboxes, receptacle boxes, metal cabinets, and enclosures around equipment must be marked to indicate the maximum operating voltage.
- Plugs and receptacles must be kept out of water unless of an approved submersible construction.
- All extension cord outlets must be equipped with ground fault circuit interrupters (GFCI).
- Attachment plugs or other connectors must be equipped with a cord grip and be constructed to endure rough treatment.
- Extension cords or cables must be inspected prior to each use and replaced if worn or damaged. Cords and cables must not be fastened with staples, hung from nails, or suspended by bare wire.
- Flexible cords must be used only in continuous lengths without splice, with the exception of molded or vulcanized splices made by a qualified electrician.

### **8.15 Lifting Safety**

Using proper lifting techniques may prevent back strain or injury. The fundamentals of proper lifting include:

- Consider the size, shape, and weight of the object to be lifted. A mechanical lifting device or additional persons must be used to lift an object if it cannot be lifted safely alone.
- The hands and the object should be free of dirt or grease that could prevent a firm grip.
- Gloves must be used, and the object inspected for metal slivers, jagged edges, burrs, or rough or slippery surfaces.
- Fingers must be kept away from points that could crush or pinch them, especially when putting an object down.
- Feet must be placed far enough apart for balance. The footing should be solid and the intended pathway should be clear.
- The load should be kept as low as possible, close to the body with the knees bent.
- To lift the load, grip firmly and lift with the legs, keeping the back as straight as possible.
- A worker should not carry a load that he or she cannot see around or over.
- When putting an object down, the stance and position are identical to that for lifting; the legs are bent at the knees, and the back is straight as the object is lowered.

### **8.16 Ladder Safety**

When portable ladders are used for access to an upper landing surface, the ladder side rails shall extend at least 3 feet (9 m) above the upper landing surface to which the ladder is used to gain access; or, when such an extension is not possible because of the ladder's length, then the ladder shall be secured at its top to a rigid support that will not deflect, and a grasping device, such as a grabrail, shall be provided to assist employees in mounting

and dismounting the ladder. In no case shall the extension be such that ladder deflection under a load would, by itself, cause the ladder to slip off its support.

- Ladders shall be maintained free of oil, grease, and other slipping hazards.
- Ladders shall not be loaded beyond the maximum intended load for which they were built, or beyond their manufacturer's rated capacity.
- Ladders shall be used only for the purpose for which they were designed.
- Non-self-supporting ladders shall be used at an angle such that the horizontal distance from the top support to the foot of the ladder is approximately one-quarter of the working length of the ladder (the distance along the ladder between the foot and the top support).
- Wood job-made ladders with spliced side rails shall be used at an angle such that the horizontal distance is one-eighth the working length of the ladder.
- Fixed ladders shall be used at a pitch no greater than 90 degrees from the horizontal, as measured to the back side of the ladder.
- Ladders shall be used only on stable and level surfaces unless secured to prevent accidental displacement.
- Ladders shall not be used on slippery surfaces unless secured or provided with slip-resistant feet to prevent accidental displacement. Slip-resistant feet shall not be used as a substitute for care in placing, lashing, or holding a ladder that is used upon slippery surfaces, including, but not limited to, flat metal or concrete surfaces that are constructed so they cannot be prevented from becoming slippery.
- Ladders placed in any location where they can be displaced by workplace activities or traffic, such as in passageways, doorways, or driveways, shall be secured to prevent accidental displacement, or a barricade shall be used to keep the activities or traffic away from the ladder.
- The area around the top and bottom of ladders shall be kept clear.
- The top of a non-self-supporting ladder shall be placed with the two rails supported equally unless it is equipped with a single support attachment.
- Ladders shall not be moved, shifted, or extended while occupied.
- Ladders shall have non-conductive side rails if they are used where the employee or the ladder could contact exposed energized electrical equipment.
- The top, top step, or the step labeled that it or any step above it should not be used as a step.
- Cross-bracing on the rear section of stepladders shall not be used for climbing unless the ladders are designed and provided with steps for climbing on both front and rear sections.
- Ladders shall be inspected by the HSM for visible defects on a daily basis and after any occurrence that could affect their safe use.
- Portable ladders with structural defects, such as, but not limited to, broken or missing rungs, cleats, or steps; broken or split rails; corroded components; or other faulty or defective components shall either be immediately marked in a manner that readily identifies them as defective or be tagged with "Do Not Use" or similar language and shall be withdrawn from service.
- Fixed ladders with structural defects, such as, but not limited to, broken or missing rungs, cleats, or steps; broken or split rails; or corroded components; shall be withdrawn from service.
- Ladder repairs shall restore the ladder to a condition meeting its original design criteria, before the ladder is returned to use.
- Single-rail ladders shall not be used.

- When ascending or descending a ladder, the user shall face the ladder.
- Each employee shall use at least one hand to grasp the ladder when progressing up and/or down the ladder.
- An employee shall not carry any object or load that could cause the employee to lose balance and fall.

**8.17 Traffic Safety**

The project site may be located adjacent to a public roadway where exposure to vehicular traffic is likely. Traffic may also be encountered as vehicles enter and exit the area. To minimize the likelihood of project personnel and activities being affected by traffic, the following procedures will be implemented.

Cones must be placed along the shoulder of the roadway starting 100 feet from the work area to alert passing motorists to the presence of personnel and equipment. A “Slow” or “Men Working” sign must be placed at the first cone. Barricades with flashing lights should be placed between the roadway and the work area.

During activities along a roadway, equipment will be aligned parallel to the roadway to the extent feasible, facing into the oncoming traffic so as to place a barrier between the work crew and the oncoming traffic. All crewmembers must remain behind the equipment and the traffic barrier.

All site personnel who are potentially exposed to vehicular traffic must wear an outer layer of orange warning garments, such as vests, jackets, or shirts. If work is performed in hours of dusk or darkness, workers will be outfitted with reflective garments either orange, white (including silver-coated reflective coatings or elements that reflect white light), yellow, fluorescent red-orange, or fluorescent yellow-orange.

The flow of traffic into and out of the adjacent business must be assessed, and precautions taken to warn motorists of the presence of workers and equipment. Where possible, vehicles should be aligned to provide physical protection of people and equipment.

**9.0 SITE-SPECIFIC HAZARDS AND CONTROL MEASURES**

**9.1 Evaluation of Hazards**

The evaluation of hazards is provided as a quick reference as to the known conditions for the Site, wherein the level of detail for each of the subsections is identified.

**9.1.1 Hazard Characteristics**

Existing information for Site:

Detailed     Preliminary     None

Hazardous/Contaminated Material Form(s):

Solid     Liquid     Sludge     Gas     Vapor

Containment Type(s):

Drum     Tank     Pit     Debris  
 Pond     Lagoon    Other:

Hazardous Material Characteristics:

Volatile     Corrosive     Reactive     Radioactive  
 Ignitable     Toxic     Unknown

Routes of Exposure:

Oral     Dermal     Eye     Respiratory

**9.1.2 Potential Health and Safety Hazards**

<input checked="" type="checkbox"/> Heat	<input type="checkbox"/> Congested areas
<input checked="" type="checkbox"/> Cold	<input checked="" type="checkbox"/> General Construction
<input type="checkbox"/> Confined space entry	<input checked="" type="checkbox"/> Physical injury
<input type="checkbox"/> Oxygen depletion	<input checked="" type="checkbox"/> Electrical hazards
<input type="checkbox"/> Asphyxiation	<input checked="" type="checkbox"/> Handling and product transfer
<input checked="" type="checkbox"/> Excavation	<input checked="" type="checkbox"/> Fire
<input checked="" type="checkbox"/> Cave-ins	<input checked="" type="checkbox"/> Explosion
<input checked="" type="checkbox"/> Falls, slippage	<input checked="" type="checkbox"/> Biological Hazards
	<input checked="" type="checkbox"/> Plants – Poison Ivy, Poison Oak
	<input checked="" type="checkbox"/> Insects – Ticks
	<input checked="" type="checkbox"/> Insects – Mosquitoes
	<input checked="" type="checkbox"/> Insects – Bees and Wasps
	<input checked="" type="checkbox"/> Rats and Mice
<input checked="" type="checkbox"/> Heavy equipment	<input type="checkbox"/> Non-ionizing Radiation (i.e. UV, IR, etc.)
<input type="checkbox"/> Other: Potential Ignition Hazard.	

**9.2 Field Activities, Hazards, and Control Procedures**

The following task-specific safety analyses identify potential health, safety, and environmental hazards associated with each type of field activity. Because of the complex and changing nature of field projects, supervisors must continually inspect the site to identify hazards that may affect on-site personnel, the community, or the environment. The FS must be aware of these changing conditions and discuss them with the PM whenever these changes impact employee health, safety, the environment, or performance of the project. The FS will keep on-site personnel informed of the changing conditions, and the PM will write and/or approve addenda or revisions to this HASP as necessary.

**9.2.1 Mobilization/Construction Stakeout**

Description of Tasks

Site mobilization will include establishing excavation locations, determining the location of utilities and other installations, and establishing work areas. Mobilization will also include setting up equipment and establishing a temporary site office. A break area will be set up outside of regulated work areas. Mobilization may involve clearing areas for the SZ and CRZ. During this initial phase, project personnel will walk the site to confirm the existence of anticipated hazards and identify safety and health issues that may have arisen since the writing of this plan.

Hazard Identification

The hazards of this phase of activity are associated with heavy equipment operation, manual materials handling, installation of temporary on-site facilities, and manual site preparation.



Manual materials handling and manual site preparation may cause blisters, sore muscles, and joint and skeletal injuries; and may present eye, contusion, and laceration hazards. Installation of temporary field office and support facilities may expose personnel to electrical hazards, underground and overhead utilities, and physical injury due to the manual lifting and moving of materials. The work area presents slip, trip, and fall hazards from scattered debris and irregular walking surfaces. Rainy weather may cause wet, muddy, slick walking surfaces, and unstable soil. Freezing weather hazards include frozen, slick, and irregular walking surfaces.

Environmental hazards include plants, such as poison ivy and poison oak; aggressive fauna, such as ticks, fleas, mosquitoes, wasps, spiders, and snakes; weather, such as sunburn, lightning, rain, and heat- or cold-related illnesses; and pathogens, such as rabies, Lyme disease, and blood-borne pathogens.

#### Controls

Control procedures for these hazards are discussed in Section 8.0, General Safety Practices.

### **9.2.2 Demolition/Site Clearing**

#### Description of Tasks

Site clearance will involve manual or mechanical removal of objects impeding access to the construction footprint. These obstructions are both natural and man-made items and will include, but not be limited to, fabricated metal and concrete structures, trees, vegetation, rubble, and miscellaneous trash/debris.

#### Hazard Identification

Hazards associated with demolition and site clearance include personnel working in and around potentially unstable structures, or locations of potential contact with hazardous chemicals, utilities, and/or falling objects. This task will involve manual, as well as mechanical demolition/clearance efforts so exertion and equipment hazards exist.

#### Controls

*PPE* – Personnel shall be protected from hazards of irritant and toxic plants and suitably instructed in the first aid treatment available.

*Preparatory Operations* – Prior to permitting employees to start demolition operations, an engineering survey shall be made, by a licensed Professional Engineer, of the structure to determine the stability of the structure. Any adjacent structure shall where personnel may be exposed shall also be similarly checked. The PO shall have in writing evidence that such a survey has been performed. All structural instabilities shall be shored or braced, under the supervision of a licensed Professional Engineer, prior to access by an FP.

*Utilities* – All electric, gas, water, steam, sewer, and other service lines shall be shut off, capped, or otherwise controlled, outside the building line before demolition work is started. In each case, any utility company that is involved shall be notified in advance. If it is necessary to maintain any power, water or other utilities during demolition, such lines shall be temporarily relocated, as necessary.

*Hazardous Substances* – It shall also be determined if any type of hazardous chemicals, gases, explosives, flammable materials, or similarly dangerous substances have been used

in any pipes, tanks, or other equipment on the property. When the presence of any such substances is apparent or suspected, testing and purging shall be performed and the hazard eliminated before demolition is started.

*Falling Debris/Objects* – No material shall be dropped to any point lying outside the exterior walls of the structure unless the area is effectively protected. Access to the area where falling objects/debris may be encountered must be gated and controlled.

*Structural Collapse* – Structural or load supporting members on any floor shall not be cut or removed until all stories above such a floor have been demolished and removed. Walls, which are to serve as retaining walls against which debris will be piled, shall not be so used unless capable of safely supporting the imposed load. Mechanical equipment shall not be used on floors or working surfaces unless such floors or surfaces are not of sufficient strength to support the imposed load.

*Rollover Guards* – All equipment used in site clearing operations shall be equipped with rollover guards meeting the applicable requirements. In addition, rider-operated equipment shall be equipped with an overhead and rear canopy guard meeting the applicable requirements.

*Inspections* – During demolition, continuing inspections by a licensed Professional Engineer shall be made as the work progresses to detect hazards resulting from weakened or deteriorated floors, walls, or loosened material. No FP shall be permitted to work where such hazards exist until they are corrected by shoring, bracing, or other effective means.

## **9.2.3 Excavation and Cut/Fill Operations**

### **9.2.3.1 Excavation/Trenching**

#### Description of Tasks

This task includes the excavation of contaminated soils and superficial debris. Excavation depths vary across the site.

#### Hazard Identification

The hazards of this activity are associated with heavy equipment operation, subsurface intrusion, manual materials handling, stockpiling, and disposal. Subsurface intrusion presents hazards associated with negotiating buried utilities, cave-ins of the excavated areas, and regress methods for personnel working inside the excavated areas. Disruption of contaminated soil also presents a health hazard.

#### Controls

*Underground Utilities* – The estimated locations of utility installations, such as sewer, telephone, fuel, electric, water lines, or any other underground installations that reasonably may be expected to be encountered during the excavation work, shall be determined prior to opening an excavation. Utility companies or owners shall be contacted (“Call Before You Dig”) within established or customary local response times, advised of the proposed work, and asked to establish the location of the utility underground installations prior to the start of actual excavation.

When excavation operations approach the estimated location of underground installations, the exact location of the installations shall be determined by safe and acceptable means.

While the excavation is open, underground installations shall be protected, supported, or removed, as necessary, to safeguard site personnel.

*Cave-Ins* – Project personnel in an excavation shall be protected from cave-ins by an adequate protective system, except when:

- Excavations are made entirely in stable rock or excavations are less than five feet in depth and examination of the ground by the SSO provides no indication of a potential cave-in.
- Protective systems shall have the capacity to resist, without failure, all loads that are intended or could reasonably be expected to be applied or transmitted to the system.

Project personnel shall be protected from excavated or other materials or equipment that could pose a hazard by falling or rolling into excavations. Protection shall be provided by placing and keeping such materials or equipment at least two feet from the edge of excavations, or by the use of retaining devices that are sufficient to prevent materials or equipment from falling or rolling into excavations, or by a combination of both if necessary.

Daily inspections of excavations, the adjacent areas, and protective systems shall be made by the SSO for evidence of a situation that could result in possible cave-ins, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions. An inspection shall be conducted by the SSO prior to the start of work and as needed throughout operations. Inspections shall also be made after every rainstorm or other hazard-increasing occurrence. These inspections are only required when project personnel exposure can be reasonably anticipated.

Where the SSO finds evidence of a situation that could result in a possible cave-in, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions, exposed personnel shall be removed from the hazardous area until the necessary precautions have been taken to ensure their safety.

*Excavation Egress* – A stairway, ladder, ramp, or other safe means of egress shall be located in trench excavations that are four feet or more in depth so as to require no more than 25 feet or lateral travel for project personnel.

### **9.2.3.2 Heavy Equipment Operation**

#### Description of Tasks

Heavy equipment to be used for this task include, but are not limited to, excavators, dozers, dump trucks, and water sprayers (if required).

#### Hazard Identification

The most common type of accident that occurs in material handling operations is the “caught between” situation when a load is being handled and an object gets caught between two moving parts of the equipment. Operation of the heavy construction equipment may produce harmful noise.

#### Controls

*Equipment Inspection* – All vehicles in use shall be checked prior to operation to ensure that all parts, equipment, and accessories that affect safe operations are in proper

operating condition and free from defects. All defects shall be corrected before the vehicle is placed in service.

*Ground Guides* – No personnel shall use any motor vehicle, earthmoving, or compacting equipment having an obstructed view to the rear, unless:

- The vehicle has a reverse signal alarm distinguishable from the surrounding noise level; or
- The vehicle is backed up only when an observer signals that it is safe to do so.

*Blocking* – Heavy machinery, equipment, or parts thereof that are suspended or held aloft shall be substantially blocked to prevent falling or shifting before employees are permitted to work under or between them.

*Noise* – Control measures for noise are addressed in Section 4.9.

*Traffic* – Control measures for traffic are addressed in Section 8.17.

### **9.2.3.3 Disturbance/Handling of Contaminated Material**

#### Description of Tasks

After the contaminated soil is excavated from below the Site's surface, the material will be stockpiled, dried, and either transported offsite or relocated and backfilled on site.

#### Hazard Identification

The hazards associated with materials handling include contact of the contaminated material with project personnel, or cross contamination with other site soil.

#### Controls

*Cross Contamination* – Following excavation, contaminated soil stockpiles will be placed on a structure constructed to separate the material from the site soil and collect any groundwater leachate. The material shall be covered to prevent storm water erosion or migration of contaminants through storm water.

*Air Monitoring* – Air and particulate monitoring will be conducted during soil excavation activities to assess the potential for exposure to airborne COCs. If the results of air monitoring indicate the presence of organic vapors or particulates in a concentration causing concern, personnel will upgrade to Level C protection. Refer to Section 5.1, Air Monitoring, for a description of air monitoring requirements and action levels. A description of each level of personal protection is included in Section 4.0, Personal Protective Equipment.

*Traffic* – Control measures for traffic are addressed in Section 8.17.

### **9.2.4 Drilling/Subsurface Intrusion Activities**

#### Description of Tasks

This component of work includes the project tasks of delineation and sampling the PCB-impacted soil, installation of the groundwater cutoff wall, and in-situ soil grouting. Geotechnical testing of the grout and existing site soils will also be conducted.

### Hazard Identification

The primary physical hazards for this activity are associated with the use of soil boring and grouting equipment. The equipment is hydraulically powered and uses static force and dynamic percussion force to advance sampling and penetrating tubes.

Accidents can occur as a result of improperly placing the equipment on uneven or unstable terrain or failing to adequately secure the equipment prior to the start of operations. Overhead utility lines can create hazardous conditions if contacted by the equipment. Underground installations such as electrical lines, conduit, and product lines pose a significant hazard if contacted.

### Controls

*Geoprobe and Drill Rig Safety Procedures* - The operator of the equipment must possess required state or local licenses to perform such work. All members of the crew shall receive site-specific training prior to beginning work.

The operator is responsible for the safe operation of the rig, as well as the crew's adherence to the requirements of this HASP. The operator must ensure that all safety equipment is in proper condition and is properly used. The members of the crew must follow all instructions of the operator, wear all personal protective equipment, and be aware of all hazards and control procedures. The operator and crew must participate in the Daily Safety Meetings and be aware of all emergency procedures.

*Equipment Inspection* - Each day, prior to the start of work, the rig and associated equipment must be inspected by the operator. The following items must be inspected:

- Vehicle condition;
- Proper storage of equipment;
- Condition of all hydraulic lines;
- Fire extinguisher; and
- First aid kit.

*Equipment Set Up* - The drill rig must be properly blocked and leveled prior to raising the derrick. The wheels which remain on the ground must be chocked. The leveling jacks shall not be raised until the derrick is lowered. The rig shall be moved only after the derrick has been lowered.

All well sites will be inspected by the driller prior to the location of the rig to verify a stable surface exists. This is especially important in areas where soft, unstable terrain is common.

The drill rig must be properly blocked and leveled prior to raising the derrick. Blocking provides a more stable drilling structure by evenly distributing the weight of the rig. Proper blocking ensures that differential settling of the rig does not occur.

When the ground surface is soft or otherwise unstable, wooden blocks, at least 24" by 24" and 4" to 8" thick shall be placed between the jack swivels and the ground. The emergency brake shall be engaged, and the wheels that are on the ground shall be chocked.

*Rules for Intrusive Activity* - Before beginning any intrusive activity, the existence and location of underground pipe, conduit, electrical equipment, and other installations will be

determined. This will be done, if possible, by contacting the appropriate client representative to mark the location of the lines. "Call Before You Dig" will verify the potential for encountering subsurface utilities. If the client's knowledge of the area is incomplete, an appropriate device, such as a magnetometer, will be used to locate the line.

Combustible gas readings of the general work area will be made regularly in areas where and/or during operations when the presence of flammable vapors or gases is suspected, such as during intrusive activities (see Section 5.1). Operations must be suspended and corrective action taken if the airborne flammable concentration reaches 10% of the LEL in the immediate area (a one-foot radius) of the point of drilling, or near any other ignition sources.

*Overhead Electrical Clearances* - If equipment is operated in the vicinity of overhead power lines, the power to the lines must be shut off or the equipment must be positioned and blocked such that no part, including cables, can come within the minimum clearances as follows:

<b>Nominal Voltage</b>	<b>System</b>	<b>Minimum Clearance</b>	<b>Required</b>
0-50kV		10 feet	
51-100kV		12 feet	
101-200kV		15 feet	
201-300kV		20 feet	
301-500kV		25 feet	
501-750kV		35 feet	
751-1,000kV		45 feet	

When the drill rig is in transit, with the boom lowered and no load, the equipment clearance must be at least 4 feet for voltages less than 50kV, 10 feet for voltages of 50 kV to 345 kV, and 16 feet for voltages above 345 kV.

*Hoisting Operations* - Drillers should never engage the rotary clutch without watching the rotary table, and ensuring it is clear of personnel and equipment.

Unless the drawworks is equipped with an automatic feed control, the brake should not be left unattended without first being tied down.

Drill pipe, auger strings or casing should be picked up slowly. Drill pipe should not be hoisted until the driller is sure that the pipe is latched in the elevator, or the derrickman has signaled that he may safely hoist the pipe.

During instances of unusual loading of the derrick or mast, such as when making an unusually hard pull, only the driller should be on the rig floor; no one else should be on the rig or derrick.

The brakes on the drawworks of the drill rig should be tested by the driller each day. The brakes should be thoroughly inspected by a competent individual each week.

A hoisting line with a load imposed should not be permitted to be in direct contact with any derrick member or stationary equipment, unless it has been specifically designed for line contact.

Workers should never stand near the borehole whenever any wire line device is being run.

Hoisting control stations should be kept clean and controls labeled as to their functions.

*Catline Operations* - Only experienced workers will be allowed to operate the cathead controls. The kill switch must be clearly labeled and operational prior to operation of the catline. The cathead area must be kept free of obstructions and entanglements.

The operator should not use more wraps than necessary to pick up the load. More than one layer of wrapping is not permitted.

Personnel should not stand near, step over, or go under a cable or catline which is under tension.

Employees rigging loads on catlines shall:

- Keep out from under the load;
- Keep fingers and feet where they will not be crushed;
- Be sure to signal clearly when the load is being picked;
- Use standard visual signals only and not depend on shouting to coworkers; and
- Make sure the load is properly rigged, since a sudden jerk in the catline will shift or drop the load.

*Wire Rope* - When two wires are broken or rust or corrosion is found adjacent to a socket or end fitting, the wire rope shall be removed from service or re-socketed. Special attention shall be given to the inspection of end fittings on boom support, pendants, and guy ropes.

Wire rope removed from service due to defects shall be cut up or plainly marked as being unfit for further use as rigging.

Wire rope clips attached with U-bolts shall have the U-bolts on the dead or short end of the rope; the clip nuts shall be re-tightened immediately after initial load carrying use and at frequent intervals thereafter.

When a wedge socket fastening is used, the dead or short end of the wire rope shall have a clip attached to it or looped back and secured to itself by a clip; the clip shall not be attached directly to the live end.

Protruding ends of strands in splices on slings and bridles shall be covered or blunted.

Except for eye splices in the ends of wires and for endless wire rope slings, wire rope used in hoisting, lowering, or pulling loads, shall consist of one continuous piece without knot or splice.

An eye splice made in any wire rope shall have not less than five full tucks.

Wire rope shall not be secured by knots. Wire rope clips shall not be used to splice rope.

Eyes in wire rope bridles, slings, or bull wires shall not be formed by wire clips or knots.

*Pipe/Auger Handling* - Pipe and auger sections shall be transported by cart or carried by two persons. Individuals should not carry auger or pipe sections without assistance.

Workers should not be permitted on top of the load during loading, unloading, or transferring of pipe or rolling stock.

Employees should be instructed never to try to stop rolling pipe or casing; they should be instructed to stand clear of rolling pipe.

Slip handles should be used to lift and move slips. Employees are not permitted to kick slips into position.

When pipe is being hoisted, personnel should not stand where the bottom end of the pipe could whip and strike them.

Pipe and augers stored in racks, catwalks or on flatbed trucks should be secured to prevent rolling.

## **9.2.5 Subsurface Chemical Sample Collection/Analysis**

### Description of Tasks

This sub-task consists of the collection of soil samples for subsequent field and laboratory analysis. The physical hazards of soil sampling are primarily associated with the sample collection methods, procedures utilized, and the environment itself.

### Hazard Identification

Incidental contact with COCs is the primary hazard associated with sampling the stabilized material. This contact may occur through the manipulation of sample media and equipment, manual transfer of media into sample containers, and proximity of operations to the breathing zone. The primary hazards associated with these sampling procedures are not potentially serious; however, other operations in the area, or the conditions under which samples must be collected, may present chemical and physical hazards. The hazards directly associated with sampling procedures are generally limited to strains/sprains and potential eye hazards. Potential chemical hazards may include contact with media containing site COCs and potential contact with chemicals used for equipment decontamination.



### Controls

*PPE* – To control dermal exposure during sampling activities, a minimum of Level D protection will be worn. If necessary, based on field observations and site conditions, air monitoring may be conducted during sediment sampling activities. If the results of air monitoring indicate the presence of airborne contaminants in a concentration causing concern, personnel will upgrade to Level C protection. Refer to Section 5.1, Air Monitoring, for a description of air monitoring requirements and action levels. A description of each level of personal protection is included in Section 4.0, Personal Protective Equipment.

## **9.2.6 UST Closure**

### **9.2.6.1 Working in Confined Spaces**

#### Description of Tasks

The project will involve the closure of several USTs.

#### Hazard Identification

Closure activities may require the entrance into confined spaces to facilitate cleaning and removal of the USTs.

#### Controls

All personnel required to enter into confined or enclosed spaces must be instructed as to the nature of the hazards involved, the necessary precautions to be taken, and in the use of required protective and emergency equipment. The PO shall comply with all specific regulations that apply to work in dangerous or potentially dangerous areas.

### **9.2.6.2 Working with Compressed Air**

#### Description of Tasks

The proposed method of purging the USTs includes the injection of compressed gas into the tank and attached piping network.

#### Hazard Identification

Uncontrolled release of the highly pressured air can cause injury to FP during this task. Cylinders must also be properly managed to ensure they are not compromised during storage and/or use.

#### Controls

*Pressure Regulation* – Compressed air used for cleaning purposes shall be reduced to less than 30 pounds per square inch and then only with effective chip guarding and personal protective equipment.

*Cylinder Storage* – Valve protection caps shall be in place and secured when compressed gas cylinders are transported, moved, or stored. Cylinder valves shall be closed when work is finished and when cylinders are empty or are moved. Compressed gas cylinders shall be secured in an upright position at all times, except if necessary for short periods of time when cylinders are actually being hoisted or carried. Cylinders shall be placed in a location where they cannot become part of an electrical circuit.

## **9.2.7 Site Capping System Construction**

Refer to Section 8.0 for general safety procedures.

### **9.2.8 Creek Relocation**

Refer to Section 8.0 for general safety procedures.

### **9.2.9 Decontamination**

All equipment will be decontaminated before leaving the site. Personnel involved in decontamination activities may be inadvertently exposed to skin contact with contaminated materials and chemicals brought from the EZ. Personnel involved in decontamination activities must wear PPE that is, at a minimum, one level below the level worn by personnel working in the EZ.

### **9.2.10 Demobilization**

Demobilization involves the removal of all tools, equipment, supplies, and vehicles brought to the site. The hazards of this phase of activity are associated with heavy equipment operation and manual materials handling.

Manual materials handling may cause blisters, sore muscles, and joint and skeletal injuries; and may present eye, contusion, and laceration hazards. Heavy equipment operation presents noise and vibration hazards, and hot surfaces, to operators. Personnel in the vicinity of heavy equipment operation may be exposed to physical hazards resulting in fractures, contusions, and lacerations and may be exposed to high noise levels. The work area presents slip, trip, and fall hazards from scattered debris and irregular walking surfaces. Rainy weather may cause wet, muddy, slick walking surfaces, and unstable soil. Freezing weather hazards include frozen, slick, and irregular walking surfaces.

Environmental hazards include plants, such as poison ivy and poison oak; aggressive fauna, such as ticks, fleas, mosquitoes, wasps, spiders, and snakes; weather, such as sunburn, lightning, rain, and heat-or cold-related illnesses; and pathogens, such as rabies, Lyme disease, and blood-borne pathogens.

Control procedures for these hazards are discussed in Section 8.0, General Safety Practices.

## **9.3 Chemical Hazards**

The chemical hazards associated with site operations are related to inhalation, ingestion, and skin exposure to site COCs. Concentrations of airborne COCs during site tasks may be measurable and will require air monitoring during certain operations. Air monitoring requirements for site tasks are outlined in Section 5.1.

COCs at the site include heavy metals, some VOC compounds, some SVOC compounds and potentially other industrial chemicals including PCBs and pesticides.

The potential for inhalation of site COCs is low. The potential for dermal contact with soils containing site COCs during remedial operations is moderate. Table 6 lists the primary contaminants that have been identified at the Site and the media in which they are present.

Table 6 – List of Primary Contaminants

<b>Media: Soil</b>		
<b>Volatile Organic Compounds</b>	<b>Highest Concentration Previously Detected Units = mg/kg</b>	<b>Applicable Monitoring Instrument</b>
1,2,4-Trimethylbenzene	100	PID
1,3,5-Trimethylbenzene	34	PID
Benzene	0.12	PID
Ethylbenzene	14	PID
Isopropylbenzene	4.1	PID
n-Propylbenzene	15	PID
Toluene	0.87	PID
Xylenes, Total	78	PID
<b>Semi-Volatile Organic Compounds</b>	<b>Highest Concentration Previously Detected Units = mg/kg</b>	<b>Applicable Monitoring Instrument</b>
Benzo(a)anthracene	2.8	PID
Benzo(a)pyrene	2.4	PID
Benzo(b)fluoranthene	3.3	PID
Benzo(k)fluoranthene	0.85	PID
Chrysene	2.2	PID
Dibenzo(a,h)anthracene	0.41	PID
Indeno(1,2,3-cd)pyrene	1.8	PID
<b>Metals</b>	<b>Highest Concentration Previously Detected Units = mg/kg</b>	<b>Applicable Monitoring Instrument</b>
Chromium	39.5	NA
Lead	450	NA
Mercury	0.81	NA
Zinc	10,000	NA

<b>Media: Groundwater</b>		
<b>Volatile Organic Compounds</b>	<b>Highest Concentration Previously Detected Units = µg/L</b>	<b>Applicable Monitoring Instrument</b>
1,2,4-Trimethylbenzene	110	PID
1,3,5-Trimethylbenzene	57	PID
Benzene	14	PID
Ethylbenzene	150	PID
Isopropylbenzene	44	PID
Naphthalene	23	PID
n-Butylbenzene	36	PID
n-Propylbenzene	130	PID

<b>Media: Groundwater</b>		
<b>Volatile Organic Compounds</b>	<b>Highest Concentration Previously Detected Units = µg/L</b>	<b>Applicable Monitoring Instrument</b>
<b>o-Xylene</b>	<b>28</b>	<b>PID</b>
<b>p/m-Xylene</b>	<b>290</b>	<b>PID</b>
<b>p-Isopropyltoluene</b>	<b>8.3</b>	<b>PID</b>
<b>sec-Butylbenzene</b>	<b>25</b>	<b>PID</b>
<b>Toluene</b>	<b>6.1</b>	<b>PID</b>
<b>MTBE</b>	<b>2,000</b>	<b>PID</b>

<b>Media: Soil Vapor</b>		
<b>Volatile Organic Compounds</b>	<b>Highest Concentration Previously Detected Units = µg/m<sup>3</sup></b>	<b>Applicable Monitoring Instrument</b>
<b>1,3-Butadiene</b>	<b>87</b>	<b>PID</b>
<b>2,2,4-Trimethylpentane</b>	<b>25</b>	<b>PID</b>
<b>Acetone</b>	<b>170</b>	<b>PID</b>
<b>Benzene</b>	<b>52</b>	<b>PID</b>
<b>Carbon disulfide</b>	<b>100</b>	<b>PID</b>
<b>Chloroform</b>	<b>10</b>	<b>PID</b>
<b>Chloromethane</b>	<b>20</b>	<b>PID</b>
<b>Cumene</b>	<b>13</b>	<b>PID</b>
<b>Cyclohexane</b>	<b>26</b>	<b>PID</b>
<b>Ethylbenzene</b>	<b>50</b>	<b>PID</b>
<b>Methyl Ethyl Ketone</b>	<b>44</b>	<b>PID</b>
<b>Methylene Chloride</b>	<b>240</b>	<b>PID</b>
<b>n-Heptane</b>	<b>240</b>	<b>PID</b>
<b>n-Hexane</b>	<b>590</b>	<b>PID</b>
<b>n-Propylbenzene</b>	<b>8.6</b>	<b>PID</b>
<b>o-Xylene</b>	<b>7.4</b>	<b>PID</b>
<b>Toluene</b>	<b>250</b>	<b>PID</b>
<b>Trichloroethene</b>	<b>69</b>	<b>PID</b>

## **10.0 EMERGENCY PROCEDURES**

### **10.1 General**

Prior to the start of operations, the work area will be evaluated for the potential for fire, contaminant release, or other catastrophic event. Unusual conditions or events, activities, chemicals, and conditions will be reported to the FS/SSO immediately.

The FS/SSO will establish evacuation routes and assembly areas for the site. All personnel entering the site will be informed of this route and the assembly area.

### **10.2 Emergency Response**

If an incident occurs, the following steps will be taken:

- The FS/SSO will evaluate the incident and assess the need for assistance and/or evacuation;
- The FS/SSO will call for outside assistance as needed;
- The FS/SSO will ensure the PM is notified promptly of the incident; and
- The FS/SSO will take appropriate measures to stabilize the incident scene.

### **10.2.1 Fire**

In the case of a fire at the site, the FS/SSO will assess the situation and direct fire-fighting activities. The FS/SSO will ensure that the PM is immediately notified of any fires. Site personnel will attempt to extinguish the fire with available extinguishers, if safe to do so. In the event of a fire that site personnel are unable to safely extinguish with one fire extinguisher, the local fire department will be summoned.

### **10.2.2 Contaminant Release**

In the event of a contaminant release, the following steps will be taken:

- Notify FS/SSO immediately;
- Evacuate immediate area of release;
- Conduct air monitoring to determine needed level of PPE; and
- Don required level of PPE and prepare to implement control procedures.

The FS/SSO has the authority to commit resources as needed to contain and control released material and to prevent its spread to off-site areas.

### **10.3 Medical Emergency**

All employee injuries must be promptly reported to the SSO/FS, who will:

- Ensure that the injured employee receives prompt first aid and medical attention;
- In emergency situations, the worker is to be transported by appropriate means to the nearest urgent care facility (normally a hospital emergency room); and
- If the injured person is a SESI employee, notify SESI at 973-808-9050.

#### **10.3.1 Emergency Care Steps**

Survey the scene. Determine if it is safe to proceed. Try to determine if the conditions that caused the incident are still a threat. Protect yourself from exposure before attempting to rescue the victim.

- Do a primary survey of the victim. Check for airway obstruction, breathing, and pulse. Assess likely routes of chemical exposure by examining the eyes, mouth, nose, and skin of the victim for symptoms.
- Phone Emergency Medical Services (EMS). Give the location, telephone number used, caller's name, what happened, number of victims, victim's condition, and help being given.
- Maintain airway and perform rescue breathing as necessary.
- Perform CPR as necessary.
- Do a secondary survey of the victim. Check vital signs and do a head-to-toe exam.

Treat other conditions as necessary. If the victim can be moved, take him/her to a location away from the work area where EMS can gain access.

#### **10.4 First Aid - General**

All persons must report any injury or illness to their immediate supervisor or the FS. Trained personnel will provide first aid. Injuries and illnesses requiring medical treatment must be documented. The FS and SSO must fill out an accident/incident report as soon as emergency conditions no longer exist and first aid and/or medical treatment has been ensured. The report must be completed and submitted to the PM within 24 hours after the incident.

If first-aid treatment is required, first aid kits are kept at the CRZ. If treatment beyond first aid is required, the injured person(s) should be transported to the medical facility. If the injured person is not ambulatory or shows any sign of not being in a comfortable and stable condition for transport, then an ambulance/paramedics should be summoned. If there is any doubt as to the injured worker's condition, it is best to let the local paramedic or ambulance service examine and transport the worker.

##### **10.4.1 First Aid - Inhalation**

Any employee complaining of symptoms of chemical overexposure as described in Section 4, General Site Safety Procedures, will be removed from the work area and transported to the designated medical facility for examination and treatment.

##### **10.4.2 First Aid - Ingestion**

Call EMS and consult a poison control center for advice. If available, refer to the MSDS for treatment information. If the victim is unconscious, keep them on their side and clear the airway if vomiting occurs.

##### **10.4.3 First Aid - Skin Contact**

Project personnel who have had skin contact with contaminants will, unless the contact is severe, proceed through the CRZ, to the wash area. Personnel will remove any contaminated clothing, and then flush the affected area with water for at least 15 minutes. The worker should be transported to the medical facility if he/she shows any sign of skin reddening, irritation, or if he/she requests a medical examination.

##### **10.4.4 First Aid - Eye Contact**

Project personnel who have had contaminants splashed in their eyes or who have experienced eye irritation while in the EZ, must immediately proceed to the eyewash station in the CRZ. Do not decontaminate prior to using the eyewash. Remove whatever protective clothing is necessary to use the eyewash. Flush the eye with clean running water for at least 15 minutes. Arrange prompt transport to the designated medical facility.

#### **10.5 Reporting Injuries, Illnesses, and Safety Incidents**

Injuries and illnesses, however minor, will be reported to the FS immediately. The FS will complete an injury report and submit it to the HSM, and the PM by end of shift.

#### **10.6 Emergency Information**

The means to summon local public response agencies such as police, fire, and ambulance will be reviewed in the daily safety meeting. These agencies are identified in Table 7.

**Table 7 – Emergency Contacts**

<b>Local Emergency Contacts</b>	<b>Telephone No.</b>
EMERGENCY	911

White Plains Hospital	(914) 681-0600
Police Emergency	911
Fire Emergency	911
Rescue Squad	911
Ambulance	911
<b>Miscellaneous Contacts</b>	<b>Telephone No.</b>
N.Y. Poison Control Center	(800) 222-1222
National Response Center and Terrorist Hotline	(800) 424-8802
Center for Disease Control	(800) 311-3435
Utility Mark-Out	(800) 962-7962


### 10.6.1 Directions to Hospital

White Plains Hospital  
41 Post Road East  
White Plains, New York 10601  
(914) 681-0600

#### Directions to Hospital:

Head southwest on Hamilton Ave toward Dr.Martin Luther King Jr Blvd  
2. Turn left onto N Lexington Ave  
3. Turn left onto Maple Ave  
4. Turn left at the 1st cross street onto Davis Ave  
5. Turn right  
Destination will be on the right

**Figure 1 – Directions to Hospital**

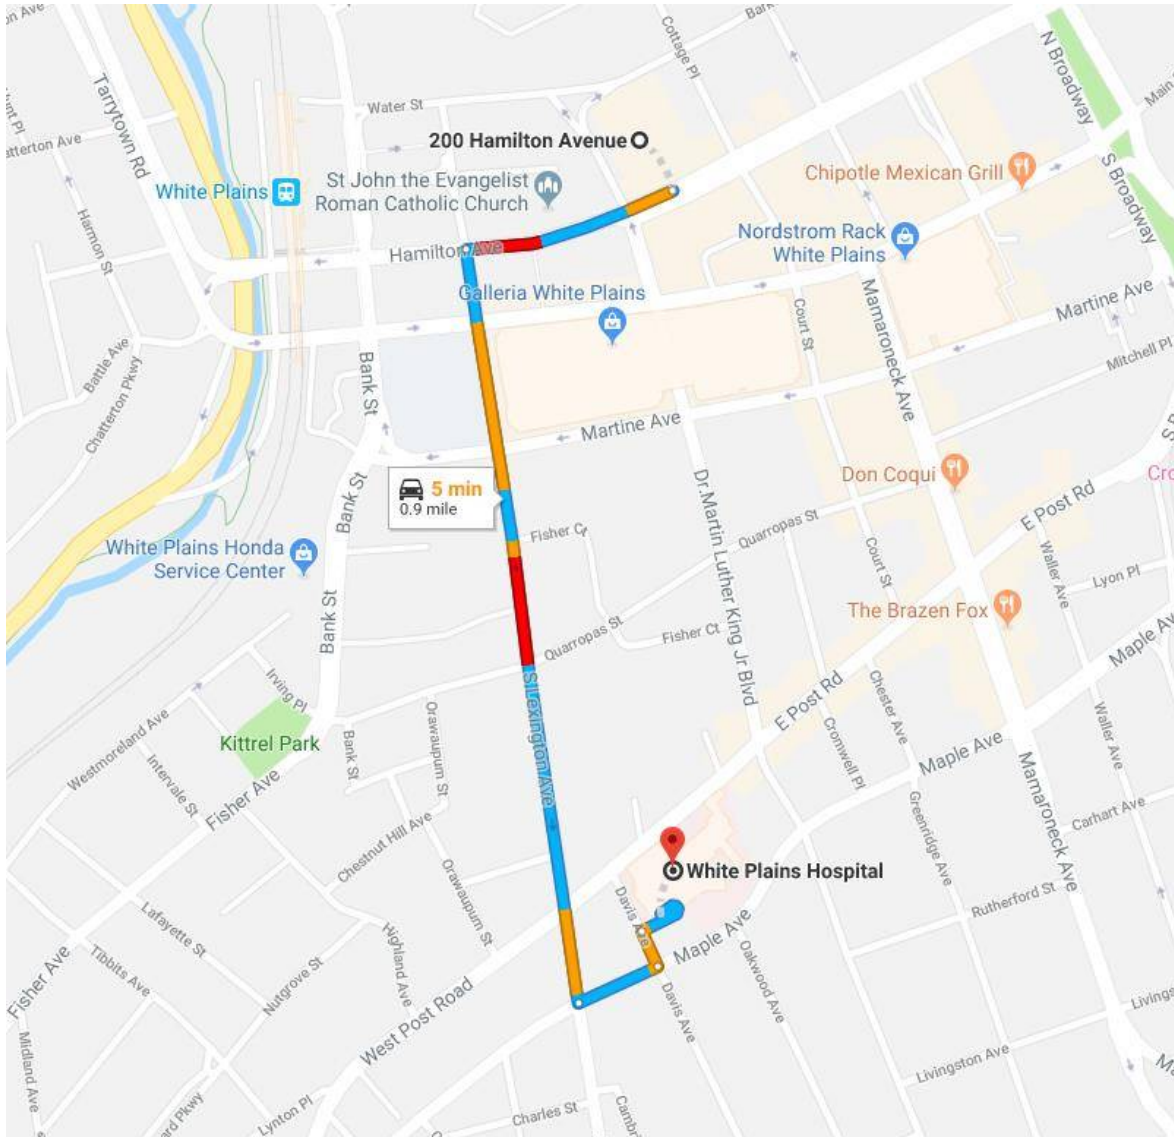

## 11.0 LOGS, REPORTS, AND RECORD KEEPING

The following is a summary of required health and safety logs, reports, and record keeping for the operations at the subject site.

### 11.1 HASP Field Change Request

To be completed for initiating a change to the HASP. PM approval is required. The original will be kept in the project file (See Attachment 3).

### 11.2 Medical and Training Records

The HSM must obtain and keep a log of personnel meeting appropriate training and medical qualifications for the site work. The log will be kept in the project file. Each company's Human Resources Department will maintain medical records, in accordance with 29 CFR 1910.1020.



### **11.3 Exposure Records**

Any personnel monitoring results, laboratory reports, calculations, and air sampling data sheets are part of an employee exposure record. These records will be kept in accordance with 29 CFR 1910.1020. For SESI employees, the originals will be sent to the Human Resources Manager. For subcontractor employees, the original file will be sent to the subcontractor employer with a copy maintained in the SESI project file.

### **11.4 Accident/Incident Report**

Any accident/incident reports must be completed following procedures given in Section 10.5 of this HASP. The originals will be sent to the HSM for maintenance. A copy of the forms will be kept in the project file. (See Attachment 4)

### **11.5 OSHA Form 200**

An OSHA Form 200 (Log of Occupational Injuries and Illnesses) will be kept at the project site. All recordable injuries or illnesses will be recorded on this form. At the end of the project, the original will be sent to the Human Resources Manager for maintenance. Subcontractor employees must also meet the requirements of maintaining an OSHA 200 Form. The accident/incident report meets the requirements of the OSHA Form 101 (Supplemental Record), which must be maintained with the OSHA Form 200 for all recordable injuries or illnesses.

### **11.6 On-Site Health and Safety Field Logbooks**

The HSM or designee will maintain an on-site health and safety log book in which daily Site conditions, activities, personnel, and significant events will be recorded. Calibration records and personnel monitoring results, if available, will also be recorded in the field logbook. The original logbook will be kept in the project file.

Whenever any personnel monitoring is conducted onsite, the monitoring results will be noted in the filed logbook. These will become part of the exposure records file and will be maintained by the HSM.

A signatory page is included (See Attachment 5) and is to be signed by those working on and/or visiting the site.

### **11.7 Material Safety Data Sheets**

Material Safety Data Sheets (MSDS) will be obtained and kept on file at the project site for each hazardous chemical brought to, use, or stored at the Site (See Attachment 6).

**ATTACHMENT 1**  
**AIR MONITOR LOG**



**ATTACHMENT 2**

**OSHA POSTER**

# Job Safety and Health

## It's the law!

**OSHA**<sup>®</sup>  
Occupational Safety  
and Health Administration  
U.S. Department of Labor


### EMPLOYEES:

- You have the right to notify your employer or OSHA about workplace hazards. You may ask OSHA to keep your name confidential.
- You have the right to request an OSHA inspection if you believe that there are unsafe and unhealthful conditions in your workplace. You or your representative may participate in that inspection.
- You can file a complaint with OSHA within 30 days of retaliation or discrimination by your employer for making safety and health complaints or for exercising your rights under the *OSH Act*.
- You have the right to see OSHA citations issued to your employer. Your employer must post the citations at or near the place of the alleged violations.
- Your employer must correct workplace hazards by the date indicated on the citation and must certify that these hazards have been reduced or eliminated.
- You have the right to copies of your medical records and records of your exposures to toxic and harmful substances or conditions.
- Your employer must post this notice in your workplace.
- You must comply with all occupational safety and health standards issued under the *OSH Act* that apply to your own actions and conduct on the job.

### EMPLOYERS:

- You must furnish your employees a place of employment free from recognized hazards.
- You must comply with the occupational safety and health standards issued under the *OSH Act*.

This free poster available from OSHA –  
*The Best Resource for Safety and Health*



Free assistance in identifying and correcting hazards or complying with standards is available to employers, without citation or penalty, through OSHA-supported consultation programs in each state.

**1-800-321-OSHA (6742)**  
[www.osha.gov](http://www.osha.gov)

OSHA 3165-02 2012R



**ATTACHMENT 3**  
**HASP FIELD CHANGE REQUEST FORM**

# HEALTH & SAFETY PLAN CHANGE NOTICE

Pages \_\_\_\_ of \_\_\_\_

Project:

H&S-CN

1) HASP VERSION: \_\_\_\_ SECTION: \_\_\_\_ PAGE (s): \_\_\_\_

RE:     ---    Change to existing HASP                    Anticipated Revision Date: \_\_\_\_

       ---    Addition to existing HASP

       ---    Other: \_\_\_\_\_

\_\_\_\_\_ CONT. \_\_\_\_\_

2) PROPOSED CHANGE: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

3) REASON FOR PROPOSED CHANGE(s):

       ---    Required by SPEC or Change Order             --- Other: \_\_\_\_\_

       ---    Disposition of Deficiency                                                     \_\_\_\_\_ CONT. \_\_\_\_\_

       ---    Change in Regulatory or Other Requirements

       ---    Operational Experience

4) EXHIBITS ATTACHED \_\_\_\_ NO \_\_\_\_ YES (If YES, describe) \_\_\_\_\_

\_\_\_\_\_ CONT. \_\_\_\_\_

5) PMK APPROVALS     PROJECT MANAGER: \_\_\_\_\_ Date: \_\_\_\_\_

                           SITE MANAGER: \_\_\_\_\_ Date: \_\_\_\_\_

                           H&S MANAGER: \_\_\_\_\_ Date: \_\_\_\_\_

Client Approval Required: \_\_\_\_ NO \_\_\_\_ YES (If YES, date submitted) \_\_\_\_\_

6) CLIENT APPROVAL    \_\_\_\_\_ APPROVED    \_\_\_\_\_ REMANDED    \_\_\_\_\_ REJECTED

Comments: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_ CONT. \_\_\_\_\_

Client Representative: \_\_\_\_\_ Date: \_\_\_\_\_

7) DISTRIBUTION AFTER APPROVAL

HASP UPDATE LIST    --- OTHER: \_\_\_\_\_

CLIENT                                                                \_\_\_\_\_

PROJECT FILES                                                           \_\_\_\_\_

8) PREPARED BY: \_\_\_\_\_ Date: \_\_\_\_\_

Title: \_\_\_\_\_

**ATTACHMENT 4**  
**INCIDENT REPORT**



# OSHA's Form 301 Injury and Illness Incident Report

**Attention:** This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.



Form approved OMB no. 1218-0175

This *Injury and Illness Incident Report* is one of the first forms you must fill out when a recordable work-related injury or illness has occurred. Together with the *Log of Work-Related Injuries and Illnesses* and the accompanying *Summary*, these forms help the employer and OSHA develop a picture of the extent and severity of work-related incidents.

Within 7 calendar days after you receive information that a recordable work-related injury or illness has occurred, you must fill out this form or an equivalent. Some state workers' compensation, insurance, or other reports may be acceptable substitutes. To be considered an equivalent form, any substitute must contain all the information asked for on this form.

According to Public Law 91-596 and 29 CFR 1904, OSHA's recordkeeping rule, you must keep this form on file for 5 years following the year to which it pertains.

If you need additional copies of this form, you may photocopy and use as many as you need.

### Information about the employee

- 1) Full name \_\_\_\_\_
- 2) Street \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ ZIP \_\_\_\_\_
- 3) Date of birth \_\_\_\_/\_\_\_\_/\_\_\_\_
- 4) Date hired \_\_\_\_/\_\_\_\_/\_\_\_\_
- 5)  Male  
 Female

### Information about the physician or other health care professional

- 6) Name of physician or other health care professional \_\_\_\_\_
- 7) If treatment was given away from the worksite, where was it given?  
Facility \_\_\_\_\_  
Street \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ ZIP \_\_\_\_\_
- 8) Was employee treated in an emergency room?  
 Yes  
 No
- 9) Was employee hospitalized overnight as an in-patient?  
 Yes  
 No

### Information about the case

- 10) Case number from the Log \_\_\_\_\_ (Transfer the case number from the Log after you record the case.)
- 11) Date of injury or illness \_\_\_\_/\_\_\_\_/\_\_\_\_ AM / PM
- 12) Time employee began work \_\_\_\_ AM / PM  
 Check, if time cannot be determined
- 13) Time of event \_\_\_\_\_ AM / PM  Check, if time cannot be determined
- 14) What was the employee doing just before the incident occurred? Describe the activity, as well as the tools, equipment, or material the employee was using. Be specific. *Examples:* "climbing a ladder while carrying roofing materials"; "spraying chlorine from hand sprayer"; "daily computer key-entry"
- 15) What happened? Tell us how the injury occurred. *Examples:* "When ladder slipped on wet floor, worker fell 20 feet"; "Worker was sprayed with chlorine when gasket broke during replacement"; "Worker developed soreness in wrist over time."
- 16) What was the injury or illness? Tell us the part of the body that was affected and how it was affected. Be more specific than "hurt," "pain," or "sore." *Examples:* "strained back"; "chemical burn, hand"; "carpal tunnel syndrome."
- 17) What object or substance directly harmed the employee? *Examples:* "concrete floor"; "chlorine"; "radial arm saw." If this question does not apply to the incident, leave it blank.
- 18) If the employee died, when did death occur? Date of death \_\_\_\_/\_\_\_\_/\_\_\_\_

Completed by \_\_\_\_\_

Title \_\_\_\_\_

Phone (\_\_\_\_) \_\_\_\_\_ Date \_\_\_\_/\_\_\_\_/\_\_\_\_

Public reporting burden for this collection of information is estimated to average 22 minutes per response, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Persons are not required to respond to the collection of information unless it displays a current valid OMB control number. If you have any comments about this estimate or any other aspect of this data collection, including suggestions for reducing the burden, contact US Department of Labor, OSHA Office of Statistical Analysis, Room N-5054, 200 Constitution Avenue, NW, Washington, DC 20210. Do not send the completed forms to this office.

# Log of Work-Related Injuries and Illnesses

You must record information about every work-related death and about every work-related injury or illness that involves loss of consciousness, restricted work activity or job transfer, days away from work, or medical treatment beyond first aid. You must also record significant work-related injuries and illnesses that are diagnosed by a physician or licensed health care professional. You must also record work-related injuries and illnesses that meet any of the specific recording criteria listed in 29 CFR Part 1904.8 through 1904.12. Read the instructions on the back of this form for a complete list of recording criteria. You must complete an Injury and Illness Incident Report (OSHA Form 301) or equivalent form for each injury or illness recorded on this form, if you're not sure whether a case is recordable, call your local OSHA office for help.

**Attention:** This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.

**Identify the person**

**Describe the case**

**Classify the case**

**Enter the number of days the injured or ill worker was:**

**Check the "injury" column or choose one type of illness:**

(A) Case no.	(B) Employee's name	(C) Job title (e.g., <i>Welder</i> )	(D) Date of injury or onset of illness	(E) Where the event occurred (e.g., <i>Landing dock north end</i> )	(F) Describe injury or illness, parts of body affected, and object/substance that directly injured or made person ill (e.g., <i>Second degree burns on right forearm from electrical burn</i> )	(G) Death	(H) <b>Remained at Work</b>			(K) <b>Away from work</b>	(L) <b>On job transfer or restriction</b>	(M) <b>Injury or illness type</b>					
							Days away from work	Job transfer or restriction	Other recordable cases	days	days	(1)	(2)	(3)	(4)	(5)	(6)
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						
			Monday			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____	_____						

**Public reporting burden for this collection of information is estimated to average 14 minutes per response, including time to review the instructions, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any other aspect of this data collection, contact: US Department of Labor, OSHA Office of Statistical Analysis, Room N-3614, 390 Constitution Avenue, NW, Washington, DC 20210. Do not send the completed forms to this office.**

# Summary of Work-Related Injuries and Illnesses

Year 20\_\_

All establishments covered by Part 1904 must complete this Summary page, even if no work-related injuries or illnesses occurred during the year. Remember to review the Log to verify that the entries are complete and accurate before completing this summary.

Using the Log, count the individual entries you made for each category. Then write the totals below, making sure you've added the entries from every page of the Log. If you had no cases, write "0."

## Number of Cases

Total number of deaths	Total number of cases with days away from work	Total number of cases with job transfer or restriction	Total number of other recordable cases
(g) _____	(h) _____	(i) _____	(j) _____

## Number of Days

Total number of days away from work	Total number of days of job transfer or restriction
(k) _____	(l) _____

## Injury and Illness Types

Total number of ...	(M)	(4) Poisonings	(5) Hearing loss	(6) All other illnesses
(1) Injuries	_____	_____	_____	_____
(2) Skin disorders	_____	_____	_____	_____
(3) Respiratory conditions	_____	_____	_____	_____

Post this Summary page from February 1 to April 30 of the year following the year covered by the form.

Public reporting burden for this collection of information is estimated to average 58 minutes per response, including time to review the instructions, search existing data sources, gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any other aspect of this data collection, contact: US Department of Labor, OSHA Office of Statistical Analysis, Room N-3644, 200 Constitution Avenue, NW, Washington, DC 20210. Do not send this completed form to this office.

### Establishment Information

Your establishment name \_\_\_\_\_  
 Street \_\_\_\_\_  
 City \_\_\_\_\_ State \_\_\_\_\_ ZIP \_\_\_\_\_

Industry description (e.g., *Maintenance of motor truck trailers*) \_\_\_\_\_  
 Standard Industrial Classification (SIC), if known (e.g., 3715) \_\_\_\_\_

OR  
 North American Industrial Classification (NAICS), if known (e.g., 336212) \_\_\_\_\_

**Employment information** (If you don't have these figures, see the Worksheet on the back of this page to estimate.)  
 Annual average number of employees \_\_\_\_\_  
 Total hours worked by all employees last year \_\_\_\_\_

**Sign here**  
 Knowingly falsifying this document may result in a fine.

I certify that I have examined this document and that to the best of my knowledge the entries are true, accurate, and complete.

Temporary/seasonal \_\_\_\_\_ Title \_\_\_\_\_  
 Name \_\_\_\_\_ Date \_\_\_\_\_



**ATTACHMENT 5**  
**SIGNATORY PAGE**





**ATTACHMENT 6**  
**SAFETY DATA SHEETS**

SDS preview

# ALCONOX® DETERGENT

**DANGER**

by SIGMA ALDRICH

---

## Hazard statements

Causes serious eye damage  
Causes skin irritation  
Harmful if swallowed  
May cause respiratory irritation  
Toxic to aquatic life

## Precautions

Avoid breathing dust/fume/gas/mist/vapours/spray  
Wash ... thoroughly after handling  
Do not eat, drink or smoke when using this product  
Use only outdoors or in a well-ventilated area  
Avoid release to the environment  
Wear protective gloves/protective clothing/eye protection/face protection  
IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell  
Rinse mouth  
IF ON SKIN: Wash with plenty of soap and water.  
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing  
Call a POISON CENTER or doctor/physician if you feel unwell  
IF IN EYES: Rinse cautiously with water for several minutes, Remove contact lenses, if present and easy to do. Continue rinsing  
Immediately call a POISON CENTER or doctor/physician  
If skin irritation occurs: Get medical advice/attention  
Take off contaminated clothing and wash before reuse



Store in a well-ventilated place., Keep container tightly closed

Store locked up

Dispose of contents/container to ...

Hazard category

Acute toxicity, oral, Hazardous to the aquatic environment, (Acute), Serious eye damage/eye irritation, Skin corrosion/irritation, Specific target organ toxicity, single exposure; Respiratory tract irritation



20000200GHS02018&param1=ZmRwLjFfNjYxMTgwMDNORQ==&unique=1525286306)

The information contained herein is based on data compiled from the chemical components of the (M)SDS and may not accurately represent the safety hazards for the product. Only the manufacturer of the product can make actual representations about the hazard profile of a chemical product. No warranty is expressed or implied regarding the accuracy of these data or the results to be obtained from the use thereof.

© 2017 Chemical Safety Software

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Acetone

Product Number : 650501

Brand : Sigma-Aldrich

Index-No. : 606-001-00-8

CAS-No. : 67-64-1

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225  
Eye irritation (Category 2A), H319  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.  
H319 Causes serious eye irritation.  
H336 May cause drowsiness or dizziness.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.  
P233 Keep container tightly closed.  
P240 Ground/bond container and receiving equipment.  
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.  
P242 Use only non-sparking tools.  
P243 Take precautionary measures against static discharge.  
P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula	: C <sub>3</sub> H <sub>6</sub> O
Molecular weight	: 58.08 g/mol
CAS-No.	: 67-64-1
EC-No.	: 200-662-2
Index-No.	: 606-001-00-8
Registration number	: 01-2119471330-49-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Acetone</b>		
	Flam. Liq. 2; Eye Irrit. 2A; STOT SE 3; H225, H319, H336	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

##### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Dry powder Dry sand

#### Unsuitable extinguishing media

Do NOT use water jet.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Acetone	67-64-1	TWA	250 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section)		

		Not classifiable as a human carcinogen		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	250 ppm 590 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1,000 ppm 2,400 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		STEL	750 ppm 1,780 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	3,000 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	500 ppm 1,200 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Acetone	25 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			

#### Predicted No Effect Concentration (PNEC)

Compartment	Value
Soil	33.3 mg/kg
Marine water	1.06 mg/l
Fresh water	10.6 mg/l
Marine sediment	3.04 mg/kg
Fresh water sediment	30.4 mg/kg
Onsite sewage treatment plant	100 mg/l

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

Splash contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                             |
|-------------------------------------------------|---------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                                                   |
| b) Odour                                        | No data available                                                                           |
| c) Odour Threshold                              | No data available                                                                           |
| d) pH                                           | No data available                                                                           |
| e) Melting point/freezing point                 | Melting point/range: -94 °C (-137 °F)                                                       |
| f) Initial boiling point and boiling range      | 56 °C (133 °F) at 1,013 hPa (760 mmHg)                                                      |
| g) Flash point                                  | -17.0 °C (1.4 °F) - closed cup                                                              |
| h) Evaporation rate                             | No data available                                                                           |
| i) Flammability (solid, gas)                    | No data available                                                                           |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 13 %(V)<br>Lower explosion limit: 2 %(V)                             |
| k) Vapour pressure                              | 533.3 hPa (400.0 mmHg) at 39.5 °C (103.1 °F)<br>245.3 hPa (184.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                           |
| m) Relative density                             | 0.791 g/mL at 25 °C (77 °F)                                                                 |
| n) Water solubility                             | completely miscible                                                                         |
| o) Partition coefficient: n-octanol/water       | log Pow: -0.24                                                                              |
| p) Auto-ignition temperature                    | 465.0 °C (869.0 °F)                                                                         |
| q) Decomposition temperature                    | No data available                                                                           |

- r) Viscosity No data available
- s) Explosive properties No data available
- t) Oxidizing properties No data available

## 9.2 Other safety information

Surface tension 23.2 mN/m at 20.0 °C (68.0 °F)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Bases, Oxidizing agents, Reducing agents, Acetone reacts violently with phosphorous oxychloride.

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 5,800 mg/kg

Remarks: Behavioral:Altered sleep time (including change in righting reflex). Behavioral:Tremor. Behavioral:Headache. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhoea.

LC50 Inhalation - Rat - 8 h - 50,100 mg/m<sup>3</sup>

Remarks: Drowsiness Dizziness Unconsciousness

LD50 Dermal - Guinea pig - 7,426 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Mild skin irritation - 24 h

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

#### Respiratory or skin sensitisation

- Guinea pig

Result: Does not cause skin sensitisation.

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as

probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### **Reproductive toxicity**

No data available

No data available

#### **Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

#### **Specific target organ toxicity - repeated exposure**

No data available

#### **Aspiration hazard**

No data available

#### **Additional Information**

RTECS: AL3150000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney - Irregularities - Based on Human Evidence

Skin - Dermatitis - Based on Human Evidence

Kidney - Irregularities - Based on Human Evidence

Skin - Dermatitis - Based on Human Evidence

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

Toxicity to fish LC50 - *Oncorhynchus mykiss* (rainbow trout) - 5,540 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates LC50 - *Daphnia magna* (Water flea) - 8,800 mg/l - 48 h

Toxicity to algae Remarks: No data available

### **12.2 Persistence and degradability**

Biodegradability Result: 91 % - Readily biodegradable.  
(OECD Test Guideline 301B)

### **12.3 Bioaccumulative potential**

Does not bioaccumulate.

### **12.4 Mobility in soil**

No data available

### **12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### **12.6 Other adverse effects**

No data available

---

## **13. DISPOSAL CONSIDERATIONS**

### **13.1 Waste treatment methods**

#### **Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Contact a licensed professional waste disposal service to dispose of this material.

#### **Contaminated packaging**

Dispose of as unused product.



---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1090      Class: 3      Packing group: II  
Proper shipping name: Acetone  
Reportable Quantity (RQ): 5000 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1090      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: ACETONE

### IATA

UN number: 1090      Class: 3      Packing group: II  
Proper shipping name: Acetone

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

This material does not contain any components with a section 302 EHS TPQ.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Acetone	67-64-1	1993-02-16

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Acetone	67-64-1	1993-02-16

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
STOT SE	Specific target organ toxicity - single exposure

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.21

Revision Date: 08/21/2018

Print Date: 10/19/2018

# POCH Safety Data Sheet

According to Regulation (EC) No. 1907/2006 (REACH). Creation date / last update: 2002-10-15 / 2005-04-22

## 1. Identification of the substance/preparation and of the company/undertaking

### **BENZENE**

Catalogue Numbers: 99,9% standard for GC-162500320; pure-162500426; pure p. a.-162500110; for HPLC-162503155; Pochsolv-162505156;

Use of the substance / preparation: analytical and chemical reagent for synthesis solvent

POCH SA

44-101 Gliwice, Sowinskiego Str. 11

tel.: +48 32 23-92-381; fax: +48 32 23-92-370; e-mail: export@poch.com.pl

Emergency telephone no: +48 606-659-006

## 2. Hazard identification

*Highly flammable. May cause cancer. Toxic: danger of serious damage to health by prolonged exposure through inhalation, in contact with skin and if swallowed.*



## 3. Composition/information on ingredients

CAS-No.: 71-43-2

Molecular mass: 78.11

Molecular formula:  $C_6H_6$

WE Number: 200-753-7

EC-Index No.: 601-020-00-8

## 4. First aid measures

After eye contact: *rinse out with plenty of water with the eyelid held wide open. Call in ophthalmologist.*

After skin contact: *wash off with plenty of water. Remove contaminated clothing.*

After swallowing: *make victim drink plenty of water. Avoid vomiting (risk of aspiration). Laxative: paraffin oil (3 mg/kg), sodium sulfate (1 tablespoon 1/4 l water). Lavage of stomach only if necessary. Call in physician.*

After inhalation: *fresh air. If necessary, apply mouth- to- mouth resuscitation or mechanical ventilation.*

## 5. Fire-fighting measures

Suitable extinguishing media: *foam, powder*

Special risk: *combustible. Vapours heavier than air. Formation of explosive mixtures possible with air. Keep away from sources of fire.*

*Take measures to prevent electrostatic charging. Development of hazardous gases or vapours possible in the event of fire.*

Special protective equipment for fire fighting:

Other information: *contain escaping vapours with spray water. Do not stay in dangerous zone without self- contained breathing apparatus. Prevent fire- fighting water from entering surface water or groundwater*

Prevent fire-fighting water from entering surface water or groundwater. Cool container with spray water from a safe distance.

Contain escaping vapours with water.

## 6. Accidental release measures

*Do not inhale vapours/aerosols. Avoid substance contact. Ensure supply of fresh air in enclosed rooms. Take up with liquid- absorbent material. Forward for disposal. Clean up affected area. Do not allow to enter sewerage system (risk of explosion).*

## **BENZENE**

### **7. Handling and storage**

Handling: *Use with adequate ventilation. Use of the basic principles of Industrial Hygiene. Use according to good industry practice. Work under hood. Do not inhale substance. Do not empty into sewerage system. Use protective equipment according to p.8. Avoid skin contact. Protect against electrostatic charges. Keep away from source of ignition.*

Storage: *tightly closed. Dry well-ventilated place. Protect from light. Keep away from sources of ignition and heat. At +15 to + 25 deg C.*

### **8. Exposure controls/personal protection**

Specific control parameter:

*Provide exhaust ventilation. Ensure the eye wash station and safety showers. Protective equipment should be selected for the working place, depending on concentration and quantity of the hazardous product handled. The resistance of the protective clothing to chemicals should be ascertained with respective supplier.*

Personal protective equipment:

respiratory protection: *required when vapours/aerosols are generated - gas mask with specific absorber.*

eye protection: *required - safety goggles.*

hand protection: *required - protective clothing.*

body protection: *required - protective clothing.*

industrial hygiene: *immediately change contaminated clothing. Apply skin - protective barrier cream. Wash hands and face after working with substance.*

### **9. Physical and chemical properties**

Form: *liquid*

Colour: *colourless*

Odour: *characteristic*

pH value: *not available*

Melting point: *5°C*

Boiling point: *80°C*

Autoignition temperature: *555°C*

Flash point: *-11°C*

Explosion limit:

lower: *1,4 Vol%*

upper: *8 Vol%*

dynamic viscosity: *(20°C): 0,66 mPa\*s*

kinematical viscosity: *0,75 mm<sup>2</sup>/s*

Vapour pressure: *100 mbar (20°C)*

Density: *0,88 g/cm<sup>3</sup> (20°C)*

Bulk density: *not applicable*

Solubility:

in water: *1,8 g/l (20°C)*

in organic solvents: *soluble*

log P(w/o): *2,65. Bioconcentration factor: 1,10.*

## **BENZENE**

### **10. Stability and reactivity**

Conditions to be avoided: *high temperature*

Substances to be avoided: *nonorganic acids, sulfur, halogen-halogen compounds, oxidizing agents, peroxide compounds, oxyhalogenic compounds, halogenic hydrocarbons, rubber.*

Hazardous decomposition products: *no information available*

Other information: *volatile in steam. Unsuitable workings materials: various plastics*

### **11. Toxicological information**

Toxicological information: *LD50 (oral rat) 930 mg/kg, LC50 (inhalation rat) 10 000 ppm (vol.) /7h. Experience has shown this substance to be carcinogenic to man.*

Other information: *After skin contact: irritations, danger of absorption, Degreasing effect on the skin possibly followed by secondary inflammation; After swallowing: nausea and vomiting; After absorption: pain and dizziness, cardiac arrhythmia, drop in blood pressure, dyspnoea, spasms, narcosis, respiratory paralysis, death; After eye contact: irritations of mucous membranes. Carcinogenic class 1. This substance should be handled with particular care.*

### **12. Ecological information**

*Log P(w/o): 2,65. No appreciable bioaccumulation potential is to be expected. Toxicity: Fish: Onchorhynchus mykiss LC50: 5,3 mg/l/96h. C. auratus LC50: 34 mg/l/96h. Daphnia: Daphnia magma EC50: 200 mg/l/48h. Algae: Chlorella vulgaris: LC50: 530 mg/l/24h. Bacteria: Ps. putida EC10: 168 mg/l. Toxic effect on aquatic organisms. Biologic degradation: ThOD 3,1 g/g, B.O.D 10% ThOD, C.O.D. 19% ThOD. Hazard for drinking water supplies. Do not allow to enter waters, waste water or soil!*

### **13. Disposal considerations**

*POCH product packaging must be disposed of in compliance with the country-specific regulations or must be passed to a packaging return system. Handle contaminated packing in the same way as the substrate itself. Always contact a permitted waste disposal to assure compliance with all current local, state and federal regulations.*

### **14. Transport information**

ADR Class and package group: *3,II*

UN Number: *1114*

Name (acc. to UN): *benzene*

## **BENZENE**

### **15. Regulatory information**

*Labelling according to EC Directives.*

*Symbol: F, T; Flammable. Toxic.*

*R-phrases: 45-11-48/23/24/25; Highly flammable. May cause cancer. Toxic: danger of serious damage to health by prolonged exposure through inhalation, in contact with skin and if swallowed.*

*S-phrases: 53-45; In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). Avoid exposure - obtain special instructions before use. Restricted to professional users.*

*EC label.*

### **16. Other information**

*Reason for alteration: general update.*

*Informations contained in this SDS while accurate to the best knowledge*



---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benzo[a]pyrene

Product Number : 48564  
Brand : Supelco  
Index-No. : 601-032-00-3

CAS-No. : 50-32-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USATelephone : +1 800-325-5832  
Fax : +1 800-325-5052**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**Skin sensitisation (Category 1), H317  
Germ cell mutagenicity (Category 1B), H340  
Carcinogenicity (Category 1B), H350  
Reproductive toxicity (Category 1B), H360  
Acute aquatic toxicity (Category 1), H400  
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H317 : May cause an allergic skin reaction.  
H340 : May cause genetic defects.  
H350 : May cause cancer.  
H360 : May damage fertility or the unborn child.  
H410 : Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 : Obtain special instructions before use.  
P202 : Do not handle until all safety precautions have been read and

P261	understood.
P272	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P273	Contaminated work clothing should not be allowed out of the workplace.
P280	Avoid release to the environment.
	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Synonyms : 3,4-Benzpyrene  
3,4-Benzopyrene  
Benzo[def]chrysene  
benzo[pqr]tetraphene

Formula : C<sub>20</sub>H<sub>12</sub>  
Molecular weight : 252.31 g/mol  
CAS-No. : 50-32-8  
EC-No. : 200-028-5  
Index-No. : 601-032-00-3

#### Hazardous components

Component	Classification	Concentration
<b>Benzo[a]pyrene</b>	Skin Sens. 1; Muta. 1B; Carc. 1B; Repr. 1B; Aquatic Acute 1; Aquatic Chronic 1; H317, H340, H350, H360, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11



#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

#### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

#### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

#### 6.4 Reference to other sections

For disposal see section 13.

---

### 7. HANDLING AND STORAGE

#### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

#### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

#### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

### 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

#### 8.1 Control parameters

##### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Cancer		
		Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs)		
		Exposure by all routes should be carefully controlled to levels as low		

		as possible. Suspected human carcinogen		
		Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		
Benzo[a]pyrene	50-32-8	TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		TWA	0.2 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.1 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		TWA	0.2 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		PEL	0.2 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	0.2 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

**Biological occupational exposure limits**

Component	CAS-No.	Parameters	Value	Biological	Basis
-----------	---------	------------	-------	------------	-------

				specimen	
	-	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |               |                   |
|---------------|-------------------|
| a) Appearance | Form: solid       |
| b) Odour      | No data available |

c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 177 - 180 °C (351 - 356 °F)
f) Initial boiling point and boiling range	495 °C (923 °F)
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	1.35 g/cm <sup>3</sup>
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 5.97
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Subcutaneous - Rat - 50 mg/kg

**Skin corrosion/irritation**

Skin - Mouse

Result: Mild skin irritation

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

Chronic exposure may cause dermatitis.

**Germ cell mutagenicity**

May alter genetic material.

In vivo tests showed mutagenic effects

**Carcinogenicity**

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 1 - Group 1: Carcinogenic to humans (Benzo[a]pyrene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benzo[a]pyrene)

OSHA: OSHA specifically regulated carcinogen (Benzo[a]pyrene)

**Reproductive toxicity**

May cause congenital malformation in the fetus.

Presumed human reproductive toxicant

May cause reproductive disorders.

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 0.25 mg/l - 48 h

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 0.02 mg/l - 72 h

**12.2 Persistence and degradability**

**12.3 Bioaccumulative potential**

Bioaccumulation Lepomis macrochirus (Bluegill) - 48 h - 0.0005 mg/l

Bioconcentration factor (BCF): 3,208

**12.4 Mobility in soil**

No data available

## 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

## 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Benzo[a]pyrene)  
Reportable Quantity (RQ): 1 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benzo[a]pyrene)  
Marine pollutant:yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[a]pyrene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

### SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
--	---------	---------------

Benzo[a]pyrene

50-32-8

2007-03-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.  
Benzo[a]pyrene

CAS-No.  
50-32-8

Revision Date  
1990-01-01

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H317	May cause an allergic skin reaction.
H340	May cause genetic defects.
H350	May cause cancer.
H360	May damage fertility or the unborn child.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Muta.	Germ cell mutagenicity

**HMIS Rating**

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

**NFPA Rating**

Health hazard:	3
Fire Hazard:	0
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.8

Revision Date: 02/02/2018

Print Date: 10/19/2018

## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/17/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benzo[**a**]fluoranthene  
Product Number : 48490  
Brand : Supelco  
Index-No. : 601-034-00-4  
CAS-No. : 205-99-2

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.



Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: 3,4-Benzofluoranthene
Formula	: C<SB>20</SB>H<SB>12</SB>
Molecular weight	: 252.31 g/mol
CAS-No.	: 205-99-2
EC-No.	: 205-911-9
Index-No.	: 601-034-00-4

#### Hazardous components

Component	Classification	Concentration
<b>Benz[e]acephenanthrylene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

Carbon oxides

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

No data available

**6. ACCIDENTAL RELEASE MEASURES**

**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

**6.4 Reference to other sections**

For disposal see section 13.

**7. HANDLING AND STORAGE**

**7.1 Precautions for safe handling**

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

**8. EXPOSURE CONTROLS/PERSONAL PROTECTION**

**8.1 Control parameters**

**Components with workplace control parameters**

	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen
--	---------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Biological occupational exposure limits**

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Benz[e]acephenant hrylene	205-99-2	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                         |
|--------------------------------------------|---------------------------------------------------------|
| a) Appearance                              | Form: solid                                             |
| b) Odour                                   | No data available                                       |
| c) Odour Threshold                         | No data available                                       |
| d) pH                                      | No data available                                       |
| e) Melting point/freezing point            | Melting point/range: 163 - 165 °C (325 - 329 °F) - lit. |
| f) Initial boiling point and boiling range | No data available                                       |
| g) Flash point                             | No data available                                       |
| h) Evaporation rate                        | No data available                                       |
| i) Flammability (solid, gas)               | No data available                                       |

- |    |                                              |                   |
|----|----------------------------------------------|-------------------|
| j) | Upper/lower flammability or explosive limits | No data available |
| k) | Vapour pressure                              | No data available |
| l) | Vapour density                               | No data available |
| m) | Relative density                             | No data available |
| n) | Water solubility                             | No data available |
| o) | Partition coefficient: n-octanol/water       | No data available |
| p) | Auto-ignition temperature                    | No data available |
| q) | Decomposition temperature                    | No data available |
| r) | Viscosity                                    | No data available |
| s) | Explosive properties                         | No data available |
| t) | Oxidizing properties                         | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

TDLo Oral - Mouse - 7.57 mg/kg

Remarks: Liver:Changes in liver weight. Endocrine:Changes in thymus weight.

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

**Respiratory or skin sensitisation**

No data available

**Germ cell mutagenicity**

No data available

**Carcinogenicity**

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[e]acephenanthrylene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[e]acephenanthrylene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available

No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates      Immobilization EC50 - Daphnia magna (Water flea) - > 1.024 mg/l - 24 h(Benz[e]acephenanthrylene)

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Benz[e]acephenanthrylene)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

Not dangerous goods

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F

Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.

(Benz[e]acephenanthrylene)

Marine pollutant : yes

### IATA

UN number: 3077      Class: 9      Packing group: III

Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benz[e]acephenanthrylene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

### SARA 311/312 Hazards

Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

### California Prop. 65 Components

	CAS-No.	Revision Date
, which is/are known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .	205-99-2	2007-09-28
Benz[e]acephenanthrylene		

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

H350      May cause cancer.

H400 Very toxic to aquatic life.  
H410 Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 6.1

Revision Date: 07/17/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/16/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benzo[*k*]fluoranthene  
Product Number : 48492  
Brand : Supelco  
Index-No. : 601-036-00-5  
CAS-No. : 207-08-9

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.



Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>20</sub> H <sub>12</sub>
Molecular weight	: 252.31 g/mol
CAS-No.	: 207-08-9
EC-No.	: 205-916-6
Index-No.	: 601-036-00-5

#### Hazardous components

Component	Classification	Concentration
<b>Benzo[k]fluoranthene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

## 5.2 Special hazards arising from the substance or mixture

Carbon oxides

## 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

## 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Benzo[k]fluoranthene	207-08-9	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### **Skin protection**

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                         |
|-------------------------------------------------|---------------------------------------------------------|
| a) Appearance                                   | Form: crystalline<br>Colour: yellow                     |
| b) Odour                                        | No data available                                       |
| c) Odour Threshold                              | No data available                                       |
| d) pH                                           | No data available                                       |
| e) Melting point/freezing point                 | Melting point/range: 215 - 217 °C (419 - 423 °F) - lit. |
| f) Initial boiling point and boiling range      | No data available                                       |
| g) Flash point                                  | No data available                                       |
| h) Evaporation rate                             | No data available                                       |
| i) Flammability (solid, gas)                    | No data available                                       |
| j) Upper/lower flammability or explosive limits | No data available                                       |
| k) Vapour pressure                              | No data available                                       |
| l) Vapour density                               | No data available                                       |

- |                                           |                   |
|-------------------------------------------|-------------------|
| m) Relative density                       | No data available |
| n) Water solubility                       | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature              | No data available |
| q) Decomposition temperature              | No data available |
| r) Viscosity                              | No data available |
| s) Explosive properties                   | No data available |
| t) Oxidizing properties                   | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

Carcinogenicity- Rat- Implant

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benzo[k]fluoranthene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benzo[k]fluoranthene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### **Reproductive toxicity**

No data available

No data available

#### **Specific target organ toxicity - single exposure**

No data available

#### **Specific target organ toxicity - repeated exposure**

No data available

#### **Aspiration hazard**

No data available

#### **Additional Information**

RTECS: DF6350000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

No data available

### **12.2 Persistence and degradability**

No data available

### **12.3 Bioaccumulative potential**

No data available

### **12.4 Mobility in soil**

No data available(Benzo[k]fluoranthene)

### **12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### **12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

---

## **13. DISPOSAL CONSIDERATIONS**

### **13.1 Waste treatment methods**

#### **Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### **Contaminated packaging**

Dispose of as unused product.

---

## **14. TRANSPORT INFORMATION**

### **DOT (US)**

UN number: 3077

Class: 9

Packing group: III

Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[k]fluoranthene)

Reportable Quantity (RQ) : 5000 lbs

no  
Poison Inhalation Hazard: No

**IMDG**

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benzo[k]fluoranthene)  
Marine pollutant : yes

**IATA**

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[k]fluoranthene)

**Further information**

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Benzo[k]fluoranthene	207-08-9	1994-04-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Benzo[k]fluoranthene	207-08-9	1994-04-01

**California Prop. 65 Components**

	CAS-No.	Revision Date
, which is/are known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> . Benzo[k]fluoranthene	207-08-9	2007-09-28

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.1

Revision Date: 07/16/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/17/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benz[*a*]anthracene

Product Number : 48563  
Brand : Supelco  
Index-No. : 601-033-00-9

CAS-No. : 56-55-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES

Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.



Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms : 1,2-Benzanthracene  
Tetraphene

Formula : C<sub>18</sub>H<sub>12</sub>  
Molecular weight : 228.29 g/mol  
CAS-No. : 56-55-3  
EC-No. : 200-280-6  
Index-No. : 601-033-00-9

#### Hazardous components

Component	Classification	Concentration
<b>Benz[a]anthracene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### **Skin protection**

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                  |
|-------------------------------------------------|--------------------------------------------------|
| a) Appearance                                   | Form: solid                                      |
| b) Odour                                        | No data available                                |
| c) Odour Threshold                              | No data available                                |
| d) pH                                           | No data available                                |
| e) Melting point/freezing point                 | Melting point/range: 157 - 159 °C (315 - 318 °F) |
| f) Initial boiling point and boiling range      | 437.6 °C (819.7 °F)                              |
| g) Flash point                                  | No data available                                |
| h) Evaporation rate                             | No data available                                |
| i) Flammability (solid, gas)                    | No data available                                |
| j) Upper/lower flammability or explosive limits | No data available                                |
| k) Vapour pressure                              | No data available                                |
| l) Vapour density                               | No data available                                |
| m) Relative density                             | No data available                                |

- |                                           |                   |
|-------------------------------------------|-------------------|
| n) Water solubility                       | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature              | No data available |
| q) Decomposition temperature              | No data available |
| r) Viscosity                              | No data available |
| s) Explosive properties                   | No data available |
| t) Oxidizing properties                   | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intravenous - Rat - > 200 mg/kg

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[a]anthracene)  
IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[a]anthracene)  
NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[a]anthracene)  
NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[a]anthracene)  
OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.  
No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available  
No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Benz[a]anthracene)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

---

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

Not dangerous goods

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benz[a]anthracene)  
Marine pollutant : yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benz[a]anthracene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

### California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Benz[a]anthracene	56-55-3	2007-09-28

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Benz[a]anthracene	56-55-3	2007-09-28

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

H350      May cause cancer.  
H400      Very toxic to aquatic life.

H410

Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.1

Revision Date: 07/17/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

Version 4.7  
Revision Date 05/27/2016  
Print Date 10/19/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : 1,3-Butadiene  
Product Number : 295035  
Brand : Aldrich  
Index-No. : 601-013-00-X  
CAS-No. : 106-99-0

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable gases (Category 1), H220  
Gases under pressure (Liquefied gas), H280  
Germ cell mutagenicity (Category 1B), H340  
Carcinogenicity (Category 1A), H350

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H220 : Extremely flammable gas.  
H280 : Contains gas under pressure; may explode if heated.  
H340 : May cause genetic defects.  
H350 : May cause cancer.

Precautionary statement(s)

P201 : Obtain special instructions before use.  
P202 : Do not handle until all safety precautions have been read and understood.  
P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.



P280 Wear protective gloves/ protective clothing/ eye protection/ face protection.  
 P308 + P313 IF exposed or concerned: Get medical advice/ attention.  
 P377 Leaking gas fire: Do not extinguish, unless leak can be stopped safely.  
 P381 Eliminate all ignition sources if safe to do so.  
 P405 Store locked up.  
 P410 + P403 Protect from sunlight. Store in a well-ventilated place.  
 P501 Dispose of contents/ container to an approved waste disposal plant.

**2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none**

---

**3. COMPOSITION/INFORMATION ON INGREDIENTS**

**3.1 Substances**

Formula : C<sub>4</sub>H<sub>6</sub>  
 Molecular weight : 54.09 g/mol  
 CAS-No. : 106-99-0  
 EC-No. : 203-450-8  
 Index-No. : 601-013-00-X

**Hazardous components**

Component	Classification	Concentration
<b>1,3-Butadiene</b>		
	Flam. Gas 1; Press. Gas Liquefied gas; Muta. 1B; Carc. 1A; H220, H280, H340, H350	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

**4. FIRST AID MEASURES**

**4.1 Description of first aid measures**

**General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

**If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES**

**5.1 Extinguishing media**

**Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Clean up promptly by sweeping or vacuum.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Contents under pressure. Air sensitive. Light sensitive. Shock or heat may detonate May explode when heated. Handle and store under inert gas.

Storage class (TRGS 510): Gases

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Potential Occupational Carcinogen See Appendix A		
1,3-Butadiene	106-99-0	TWA	2 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cancer Suspected human carcinogen		
		TWA	2.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cancer Suspected human carcinogen		
		TWA	1 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		

		TWA	1.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		STEL	5.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		STEL	5 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		See 1910.1051		
		PEL	1.000000 ppm	OSHA Specifically Regulated Chemicals/Carcinogens
		<p>1910.1051  This section applies to all occupational exposures to 1,3-Butadiene (BD), Chemical Abstracts Service Registry No. 106-99-0, except as provided in paragraph (a)(2) of this section. Except for the recordkeeping provisions in paragraph (m)(1) of this section, this section does not apply to the processing, use, or handling of products containing BD or to other work operations and streams in which BD is present where objective data are reasonably relied upon that demonstrate the work operation or the product or the group of products or operations to which it belongs may not reasonably be foreseen to release BD in airborne concentrations at or above the action level or in excess of the STEL under the expected conditions of processing, use, or handling that will cause the greatest possible release or in any plausible accident. This section also does not apply to work operations, products or streams where the only exposure to BD is from liquid mixtures containing 0.1% or less of BD by volume or the vapors released from such liquids, unless objective data become available that show that airborne concentrations generated by such mixtures can exceed the action level or STEL under reasonably predictable conditions of processing, use or handling that will cause the greatest possible release. Except for labeling requirements and requirements for emergency response, this section does not apply to the storage, transportation, distribution or sale of BD or liquid mixtures in intact containers or in transportation pipelines sealed in such a manner as to fully contain BD vapors or liquid. Where products or processes containing BD are exempted under paragraph (a)(2) of this section, the employer shall maintain records of the objective data supporting that exemption and the basis for the employer's reliance on the data, as provided in paragraph (m)(1) of this section  1,3-Butadiene means an organic compound with chemical formula <math>CH_2=CH-CH=CH_2</math> that has a molecular weight of approximately 54.15 g/mole  OSHA specifically regulated carcinogen</p>		
		STEL	5.000000 ppm	OSHA Specifically Regulated Chemicals/Carcinogens
		<p>1910.1051  This section applies to all occupational exposures to 1,3-Butadiene (BD), Chemical Abstracts Service Registry No. 106-99-0, except as provided in paragraph (a)(2) of this section. Except for the recordkeeping provisions in paragraph (m)(1) of this section, this section does not apply to the processing, use, or handling of</p>		

		<p>products containing BD or to other work operations and streams in which BD is present where objective data are reasonably relied upon that demonstrate the work operation or the product or the group of products or operations to which it belongs may not reasonably be foreseen to release BD in airborne concentrations at or above the action level or in excess of the STEL under the expected conditions of processing, use, or handling that will cause the greatest possible release or in any plausible accident. This section also does not apply to work operations, products or streams where the only exposure to BD is from liquid mixtures containing 0.1% or less of BD by volume or the vapors released from such liquids, unless objective data become available that show that airborne concentrations generated by such mixtures can exceed the action level or STEL under reasonably predictable conditions of processing, use or handling that will cause the greatest possible release. Except for labeling requirements and requirements for emergency response, this section does not apply to the storage, transportation, distribution or sale of BD or liquid mixtures in intact containers or in transportation pipelines sealed in such a manner as to fully contain BD vapors or liquid. Where products or processes containing BD are exempted under paragraph (a)(2) of this section, the employer shall maintain records of the objective data supporting that exemption and the basis for the employer's reliance on the data, as provided in paragraph (m)(1) of this section</p> <p>1,3-Butadiene means an organic compound with chemical formula CH<sub>2</sub>=CH-CH=CH<sub>2</sub> that has a molecular weight of approximately 54.15 g/mole</p> <p>OSHA specifically regulated carcinogen</p>		
		PEL	1 ppm 2.2 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		see section 5201		
		STEL	5 ppm 11 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		see section 5201		

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
1,3-Butadiene	106-99-0	1,2-Dihydroxy-4-(N-acetylcysteinyl)-butane	2.5000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
		Mixture of N-1 and N-2(hydroxybutenyl)valine	2.5pmol/g	Hemoglobin (Hb) adducts in blood	ACGIH - Biological Exposure Indices (BEI)
		Not critical			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                                                      |
|--------------------------------------------|--------------------------------------------------------------------------------------|
| a) Appearance                              | Form: Liquefied gas                                                                  |
| b) Odour                                   | No data available                                                                    |
| c) Odour Threshold                         | No data available                                                                    |
| d) pH                                      | No data available                                                                    |
| e) Melting point/freezing point            | Melting point/range: -109 °C (-164 °F) - lit.                                        |
| f) Initial boiling point and boiling range | -4.5 °C (23.9 °F) - lit.                                                             |
| g) Flash point                             | -76 °C (-105 °F) - closed cup - Tested according to Annex V of Directive 67/548/EEC. |
| h) Evaporation rate                        | No data available                                                                    |
| i) Flammability (solid, gas)               | No data available                                                                    |

j) Upper/lower flammability or explosive limits	Upper explosion limit: 16.3 %(V) Lower explosion limit: 1.4 %(V)
k) Vapour pressure	ca.2,400 hPa (1,800 mmHg) at 20 °C (68 °F) 3,200 hPa (2,400 mmHg) at 30 °C (86 °F) 5,700 hPa (4,275 mmHg) at 50 °C (122 °F)
l) Vapour density	No data available
m) Relative density	0.62 g/cm <sup>3</sup> at 20 °C (68 °F)
n) Water solubility	0.5 g/l at 20 °C (68 °F) - Tested according to Annex V of Directive 67/548/EEC.
o) Partition coefficient: n-octanol/water	log Pow: 1.85 at 23 °C (73 °F)
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Test for peroxide formation before using or discard after 3 months.  
Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents, Oxygen, Copper, Copper alloys, Carbides, Halogens, Metal oxides, Metals

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides  
Other decomposition products - No data available  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 5,480 mg/kg

LC50 Inhalation - Rat - 4 h - 285 mg/l

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

No data available

**Germ cell mutagenicity**

In vivo tests showed mutagenic effects

**Carcinogenicity**

Carcinogenicity - Rat - Inhalation

Tumorigenic: Carcinogenic by RTECS criteria. Cardiac: Tumors. Lungs, Thorax, or Respiration: Tumors.

This is or contains a component that has been reported to be carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Human carcinogen.

IARC: 1 - Group 1: Carcinogenic to humans (1,3-Butadiene)

NTP: Known to be human carcinogen (1,3-Butadiene)

OSHA: OSHA specifically regulated carcinogen (1,3-Butadiene)

**Reproductive toxicity**

No data available

Reproductive toxicity - Mouse - Inhalation

Effects on Fertility: Post-implantation mortality (e.g., dead and/or resorbed implants per total number of implants).

Effects on Embryo or Fetus: Extra embryonic structures (e.g., placenta, umbilical cord). Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

No data available

Developmental Toxicity - Rat - Inhalation

Specific Developmental Abnormalities: Musculoskeletal system.

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

Cholinesterase inhibitors can cause heavy salivation and secretion in the lungs, lachrymation, blurred vision, involuntary defecation, diarrhea, tremor, ataxia, sweating, hypothermia, lowered heart rate, and/or a fall in blood pressure as a result of their action at cholinergic nerve sites., narcosis, Headache, Nausea, Vomiting, Dizziness, Drowsiness, Confusion., Weakness, Muscle cramps/spasms., Change in pupil size., Tremors, Seizures., Incoordination., Convulsions, Coma

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - other fish - 71.5 mg/l - 24 h

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1010      Class: 2.1  
 Proper shipping name: Butadienes, stabilized  
 Reportable Quantity (RQ): 10 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 1010      Class: 2.1  
 Proper shipping name: BUTADIENES, STABILIZED

EMS-No: F-D, S-U

**IATA**

UN number: 1010      Class: 2.1  
 Proper shipping name: Butadienes, stabilized  
 IATA Passenger: Not permitted for transport

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**SARA 311/312 Hazards**

Fire Hazard, Sudden Release of Pressure Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the		



State of California to cause cancer.  
1,3-Butadiene

106-99-0

2007-09-28

WARNING: This product contains a chemical known to the  
State of California to cause birth defects or other reproductive  
harm.  
1,3-Butadiene

CAS-No.  
106-99-0

Revision Date  
2007-09-28

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Carc.	Carcinogenicity
Flam. Gas	Flammable gases
H220	Extremely flammable gas.
H280	Contains gas under pressure; may explode if heated.
H340	May cause genetic defects.
H350	May cause cancer.
Muta.	Germ cell mutagenicity
Press. Gas	Gases under pressure

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	4
Physical Hazard	3

### NFPA Rating

Health hazard:	0
Fire Hazard:	4
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.  
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.7

Revision Date: 05/27/2016

Print Date: 10/19/2018

## SAFETY DATA SHEET

Version 3.8  
Revision Date 12/29/2016  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Butylbenzene

Product Number : 41105  
Brand : Supelco

CAS-No. : 104-51-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Warning

Hazard statement(s)  
H226 : Flammable liquid and vapour.

Precautionary statement(s)  
P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.  
P233 : Keep container tightly closed.  
P240 : Ground/bond container and receiving equipment.  
P241 : Use explosion-proof electrical/ ventilating/ lighting/ equipment.  
P242 : Use only non-sparking tools.  
P243 : Take precautionary measures against static discharge.  
P280 : Wear protective gloves/ eye protection/ face protection.  
P303 + P361 + P353 : IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.  
P370 + P378 : In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

P403 + P235  
P501

Store in a well-ventilated place. Keep cool.  
Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula : C<sub>10</sub>H<sub>14</sub>  
Molecular weight : 134.22 g/mol  
CAS-No. : 104-51-8  
EC-No. : 203-209-7

#### Hazardous components

Component	Classification	Concentration
<b>Butylbenzene</b>		
	Flam. Liq. 3; H226	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

Use water spray to cool unopened containers.

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Avoid breathing vapours, mist or gas. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

## 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

## 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

## 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an

industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-88.0 °C (-126.4 °F)
f) Initial boiling point and boiling range	182.0 - 183.0 °C (359.6 - 361.4 °F)
g) Flash point	59.0 °C (138.2 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 5.8 %(V) Lower explosion limit: 0.8 %(V)
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	0.86 g/cm <sup>3</sup>
n) Water solubility	insoluble
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	412.0 °C (773.6 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### **9.2 Other safety information**

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

**Additional Information**

RTECS: CY9070000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity****12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 2709      Class: 3      Packing group: III

Proper shipping name: Butyl benzenes

Reportable Quantity (RQ):

Marine pollutant:yes

Poison Inhalation Hazard: No

**IMDG**

UN number: 2709      Class: 3      Packing group: III      EMS-No: F-E, S-D

Proper shipping name: BUTYLBENZENES

Marine pollutant:yes

**IATA**

UN number: 2709      Class: 3      Packing group: III

Proper shipping name: Butylbenzenes

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Fire Hazard

**Massachusetts Right To Know Components**

Butylbenzene

CAS-No.  
104-51-8Revision Date  
1993-04-24

## Pennsylvania Right To Know Components

Butylbenzene	CAS-No. 104-51-8	Revision Date 1993-04-24
--------------	---------------------	-----------------------------

## New Jersey Right To Know Components

Butylbenzene	CAS-No. 104-51-8	Revision Date 1993-04-24
--------------	---------------------	-----------------------------

## California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

### NFPA Rating

Health hazard:	0
Fire Hazard:	2
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.8

Revision Date: 12/29/2016

Print Date: 01/21/2019



### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Carbon disulfide

Product Number : 335266

Brand : Sigma-Aldrich

Index-No. : 006-003-00-3

CAS-No. : 75-15-0

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225

Acute toxicity, Inhalation (Category 4), H332

Skin irritation (Category 2), H315

Eye irritation (Category 2A), H319

Reproductive toxicity (Category 2), H361

Specific target organ toxicity - repeated exposure, Inhalation (Category 1), H372

Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225	Highly flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	:	CS <sub>2</sub>
Molecular weight	:	76.14 g/mol
CAS-No.	:	75-15-0
EC-No.	:	200-843-6
Index-No.	:	006-003-00-3

#### Hazardous components

Component	Classification	Concentration
<b>Carbon disulphide</b>	Flam. Liq. 2; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; Repr. 2; STOT RE 1; Aquatic Acute 2; H225, H315, H319, H332, H361, H372, H401	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Flash back possible over considerable distance., Container explosion may occur under fire conditions., Vapours may form explosive mixture with air., May explode when heated.

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Refrigerate before opening.

Storage class (TRGS 510): 3: Flammable liquids

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Carbon disulphide	75-15-0	TWA	1 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Peripheral Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	1 ppm 3 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	10 ppm 30 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		See Table Z-2		
		TWA	20 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		CEIL	30 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		Peak	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		PEL	1 ppm 3 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		STEL	12 ppm 36 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		C	30 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	2-Thiothiazolidine-4-carboxylic acid (TTCA)	0.5mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                 |                                                      |
|---------------------------------|------------------------------------------------------|
| a) Appearance                   | Form: liquid<br>Colour: colourless                   |
| b) Odour                        | Stench.                                              |
| c) Odour Threshold              | No data available                                    |
| d) pH                           | No data available                                    |
| e) Melting point/freezing point | Melting point/range: -112 - -111 °C (-170 - -168 °F) |

f) Initial boiling point and boiling range	46 °C (115 °F)
g) Flash point	-30 °C (-22 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 50 %(V) Lower explosion limit: 1.3 %(V)
k) Vapour pressure	394.956 hPa (296.241 mmHg) at 20 °C (68 °F) 1,342.711 hPa (1,007.116 mmHg) at 55 °C (131 °F)
l) Vapour density	2.63 - (Air = 1.0)
m) Relative density	1.266 g/mL at 25 °C (77 °F)
n) Water solubility	2.9 g/l at 20 °C (68 °F) - OECD Test Guideline 105
o) Partition coefficient: n-octanol/water	log Pow: 2.7 at 25 °C (77 °F)
p) Auto-ignition temperature	97 - 107 °C (207 - 225 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

Surface tension	71.9 mN/m at 19.5 °C (67.1 °F)
Relative vapour density	2.63 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Alkali metals, Zinc, Amines, Azides, Oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Sulphur oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - female - > 2,000 mg/kg  
(OECD Test Guideline 423)

LC50 Inhalation - Rat - male and female - 4 h - 10.35 mg/l  
(OECD Test Guideline 403)

Dermal: No data available

No data available

**Skin corrosion/irritation**

No data available

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

- Mouse

Result: Does not cause skin sensitisation.  
(OECD Test Guideline 429)

**Germ cell mutagenicity**

Laboratory experiments have shown mutagenic effects.

Ames test

Salmonella typhimurium

Result: negative

**Carcinogenicity**

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

Suspected human reproductive toxicant

May cause reproductive disorders.

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: FF6650000

May cause convulsions.

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to fish LC50 - *Poecilia reticulata* (guppy) - 4 mg/l - 96 h  
(OECD Test Guideline 203)

Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - *Daphnia magna* (Water flea) - 2.1 mg/l - 48 h  
(OECD Test Guideline 202)

Toxicity to algae Growth inhibition EC50 - *Chlorella pyrenoidosa* - 21 mg/l - 96 h  
(OECD Test Guideline 201)

**12.2 Persistence and degradability**

Biodegradability aerobic - Exposure time 28 d  
Result: > 80 % - Readily biodegradable.  
(OECD Test Guideline 301D)

### 12.3 Bioaccumulative potential

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life.

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1131 Class: 3 (6.1) Packing group: I  
Proper shipping name: Carbon disulfide  
Reportable Quantity (RQ): 100 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1131 Class: 3 (6.1) Packing group: I EMS-No: F-E, S-D  
Proper shipping name: CARBON DISULPHIDE

### IATA

UN number: 1131 Class: 3 (6.1)  
Proper shipping name: Carbon disulphide  
IATA Passenger: Not permitted for transport  
IATA Cargo: Not permitted for transport

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

The following components are subject to reporting levels established by SARA Title III, Section 302:

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-11-03

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-11-03

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-11-03



## Pennsylvania Right To Know Components

Carbon disulphide

CAS-No.  
75-15-0

Revision Date  
2008-11-03

## New Jersey Right To Know Components

Carbon disulphide

CAS-No.  
75-15-0

Revision Date  
2008-11-03

## California Prop. 65 Components

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Carbon disulphide

CAS-No.  
75-15-0

Revision Date  
2008-06-17

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.
Repr.	Reproductive toxicity

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.11

Revision Date: 03/19/2018

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 3.18  
Revision Date 08/14/2018  
Print Date 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Chloroform  
  
Product Number : C2432  
Brand : Sigma-Aldrich  
Index-No. : 602-006-00-4  
  
CAS-No. : 67-66-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302  
Acute toxicity, Inhalation (Category 3), H331  
Skin irritation (Category 2), H315  
Eye irritation (Category 2A), H319  
Carcinogenicity (Category 2), H351  
Reproductive toxicity (Category 2), H361d  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336  
Specific target organ toxicity - repeated exposure (Category 1), Liver, Kidney, H372  
Acute aquatic toxicity (Category 3), H402

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H302	Harmful if swallowed.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H331	Toxic if inhaled.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.

H361d	Suspected of damaging the unborn child.
H372	Causes damage to organs (Liver, Kidney) through prolonged or repeated exposure.
H402	Harmful to aquatic life.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P311	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	:	Trichloromethane Methyldyne trichloride
Formula	:	CHCl <sub>3</sub>
Molecular weight	:	119.38 g/mol
CAS-No.	:	67-66-3
EC-No.	:	200-663-8
Index-No.	:	602-006-00-4

### Hazardous components

Component	Classification	Concentration
<b>Chloroform</b>	Acute Tox. 4; Acute Tox. 3; Skin Irrit. 2; Eye Irrit. 2A; Carc. 2; Repr. 2; STOT SE 3; STOT RE 1; Aquatic Acute 3; H302, H315, H319, H331, H336, H351, H361d, H372, H402	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Move out of dangerous area. Consult a physician. Show this safety data sheet to the doctor in attendance.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Chloroform	67-66-3	TWA	10 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Liver damage Embryo/fetal damage Confirmed animal carcinogen with unknown relevance to humans		
		ST	2 ppm 9.78 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		C	50 ppm 240 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate. Ceiling limit is to be determined from breathing-zone air samples.		
		PEL	2 ppm 9.78 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

### 8.2 Exposure controls

#### Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                           |
|-------------------------------------------------|---------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                                 |
| b) Odour                                        | sweet                                                                     |
| c) Odour Threshold                              | No data available                                                         |
| d) pH                                           | No data available                                                         |
| e) Melting point/freezing point                 | Melting point/range: -63 °C (-81 °F)                                      |
| f) Initial boiling point and boiling range      | 60.5 - 61.5 °C (140.9 - 142.7 °F)                                         |
| g) Flash point                                  | - DIN 51755 Part 1 does not flash                                         |
| h) Evaporation rate                             | No data available                                                         |
| i) Flammability (solid, gas)                    | No data available                                                         |
| j) Upper/lower flammability or explosive limits | No data available                                                         |
| k) Vapour pressure                              | 210 hPa (158 mmHg) at 20 °C (68 °F)                                       |
| l) Vapour density                               | 4.12 - (Air = 1.0)                                                        |
| m) Relative density                             | 1.492 g/mL at 25 °C (77 °F)                                               |
| n) Water solubility                             | 8.7 g/l at 23 °C (73 °F) - OECD Test Guideline 105                        |
| o) Partition coefficient: n-octanol/water       | log Pow: 1.97 at 25 °C (77 °F) - (ECHA), Bioaccumulation is not expected. |
| p) Auto-ignition temperature                    | > 600 °C (> 1,112 °F) at 1,013 hPa (760 mmHg) - DIN 51794                 |
| q) Decomposition temperature                    | Distillable in an undecomposed state at normal pressure.                  |
| r) Viscosity                                    | No data available                                                         |
| s) Explosive properties                         | No data available                                                         |
| t) Oxidizing properties                         | No data available                                                         |

### 9.2 Other safety information

- |                              |                                             |
|------------------------------|---------------------------------------------|
| Solubility in other solvents | organic solvent at 20 °C (68 °F) - miscible |
| Surface tension              | 27.1 mN/m at 20.0 °C (68.0 °F)              |
| Relative vapour density      | 4.12 - (Air = 1.0)                          |

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Contains the following stabiliser(s):

2-Methyl-2-butene ( $\geq 0.001$  -  $\leq 0.015$  %)

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

various plastics, Rubber

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male - 908 mg/kg

(OECD Test Guideline 401)

Remarks: Behavioral:Change in motor activity (specific assay). Behavioral:Ataxia. Lungs, Thorax, or Respiration:Respiratory stimulation.

LOEC Inhalation - Rat - male - 6 h - 500 ppm

Remarks: Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

LD50 Dermal - Rabbit -  $> 20,000$  mg/kg

Remarks: (RTECS)

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Irritating to skin. - 24 h

Remarks: (ECHA)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Irritating to eyes.

Remarks: (ECHA)

#### Respiratory or skin sensitisation

Sensitisation test: - Guinea pig

Result: negative

(Maximisation Test)

Remarks: (ECHA)

#### Germ cell mutagenicity

Ames test

Salmonella typhimurium

Result: negative

reverse mutation assay

Escherichia coli

Result: negative

(ECHA)

OECD Test Guideline 474  
Rat - male and female - Bone marrow  
Result: negative

OECD Test Guideline 486  
Rat - male - Other cell types  
Result: negative

### **Carcinogenicity**

Carcinogenicity - Rat - Oral  
Tumorigenic: Carcinogenic by RTECS criteria. Leukaemia

Suspected of causing cancer.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Chloroform)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Chloroform)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

### **Reproductive toxicity**

Suspected of damaging the unborn child.

### **Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

### **Specific target organ toxicity - repeated exposure**

Causes damage to organs through prolonged or repeated exposure. - Liver, Kidney

### **Aspiration hazard**

No data available

### **Additional Information**

RTECS: FS9100000

Vomiting, Cough, irritant effects, Shortness of breath, respiratory arrest, narcosis, Dizziness, Nausea, agitation, spasms, inebriation, Headache, Stomach/intestinal disorders, ataxia (impaired locomotor coordination), cardiovascular disorders  
Drying-out effect resulting in rough and chapped skin.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

Toxicity to fish	flow-through test LC50 - Danio rerio (zebra fish) - 121 mg/l - 48 h (OECD Test Guideline 203)
	static test LC50 - Pimephales promelas (fathead minnow) - 103 - 171 mg/l - 96 h Remarks: (ECHA)
	flow-through test LC50 - Oncorhynchus mykiss (rainbow trout) - 18.2 mg/l - 96 h Remarks: (ECHA)
	flow-through test LC50 - Micropterus dolomieu - 51 mg/l - 96 h Remarks: (ECHA)
Toxicity to daphnia and other aquatic invertebrates	static test EC50 - Daphnia magna (Water flea) - 79 mg/l - 48 h Remarks: (ECHA)
Toxicity to algae	static test ErC50 - Chlamydomonas reinhardtii (green algae) - 13.3 mg/l - 72 h Remarks: (ECHA)

### **12.2 Persistence and degradability**

Biodegradability aerobic - Exposure time 14 d



Result: 0 % - Not readily biodegradable.  
(OECD Test Guideline 301C)

### 12.3 Bioaccumulative potential

#### Bioaccumulation

Cyprinus carpio (Carp) - 42 d  
at 25 °C - 0.1 mg/l

Bioconcentration factor (BCF): 4.1 - 13  
(OECD Test Guideline 305)

Cyprinus carpio (Carp) - 42 d  
at 25 °C - 1 mg/l

Bioconcentration factor (BCF): 1.4 - 4.7  
(OECD Test Guideline 305)

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Harmful to aquatic life.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1888      Class: 6.1      Packing group: III  
Proper shipping name: Chloroform  
Reportable Quantity (RQ): 10 lbs Reportable Quantity (RQ): 10 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1888      Class: 6.1      Packing group: III      EMS-No: F-A, S-A  
Proper shipping name: CHLOROFORM

### IATA

UN number: 1888      Class: 6.1      Packing group: III  
Proper shipping name: Chloroform

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

	CAS-No.	Revision Date
Chloroform	67-66-3	2008-11-03

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Chloroform	67-66-3	2008-11-03

**SARA 311/312 Hazards**

Acute Health Hazard, Chronic Health Hazard

**Reportable Quantity**                      D022 lbs**Massachusetts Right To Know Components**

Chloroform	CAS-No. 67-66-3	Revision Date 2008-11-03
------------	--------------------	-----------------------------

**Pennsylvania Right To Know Components**

Chloroform	CAS-No. 67-66-3	Revision Date 2008-11-03
------------	--------------------	-----------------------------

**California Prop. 65 Components**

, which is/are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> . Chloroform	CAS-No. 67-66-3	Revision Date 2011-09-01
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------	-----------------------------

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H302	Harmful if swallowed.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H331	Toxic if inhaled.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H361d	Suspected of damaging the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H402	Harmful to aquatic life.
Repr.	Reproductive toxicity
Skin Irrit.	Skin irritation
STOT RE	Specific target organ toxicity - repeated exposure
STOT SE	Specific target organ toxicity - single exposure

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.18

Revision Date: 08/14/2018

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Chloromethane solution

Product Number : 294799

Brand : Aldrich

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 1), H224

Acute toxicity, Oral (Category 4), H302

Carcinogenicity (Category 2), H351

Reproductive toxicity (Category 2), H361

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Specific target organ toxicity - repeated exposure, Inhalation (Category 2), Eyes, Nervous system, Testes, H373

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H224

Extremely flammable liquid and vapour.

H302

Harmful if swallowed.

H336

May cause drowsiness or dizziness.

H351

Suspected of causing cancer.

H361

Suspected of damaging fertility or the unborn child.

H373

May cause damage to organs (Eyes, Nervous system, Testes) through prolonged or repeated exposure if inhaled.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and

	understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P281	Use personal protective equipment as required.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides., Repeated exposure may cause skin dryness or cracking.

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.2 Mixtures

Formula	:	CH <sub>3</sub> Cl
Molecular weight	:	50.49 g/mol

#### Hazardous components

Component		Classification	Concentration
<b>Diethyl ether</b>			
CAS-No.	60-29-7	Flam. Liq. 1; Acute Tox. 4; STOT SE 3; H224, H302, H336	90 - 100 %
EC-No.	200-467-2		
Index-No.	603-022-00-4		
<b>Chloromethane</b>			
CAS-No.	74-87-3	Flam. Gas 1; Press. Gas Liquefied gas; Carc. 2; Repr. 2; STOT RE 2; H220, H280, H351, H361fd, H373	5 - 10 %
EC-No.	200-817-4		
Index-No.	602-001-00-7		

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

**If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

Light sensitive. Air sensitive. Heat sensitive. Dry residue is explosive. Refrigerate before opening.

Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Diethyl ether	60-29-7	TWA	400.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		See Appendix D - Substances with No Established RELs		
		TWA	400.000000 ppm 1,200.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	400 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		See Appendix D - Substances with No Established RELs		
		TWA	400 ppm 1,200 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	400 ppm 1,200 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		STEL	500 ppm 1,500 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		PEL	400 ppm 1,200 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		STEL	500 ppm 1,500 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
Chloromethane	74-87-3	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Liver damage Kidney damage Testicular damage Teratogenic effects Not classifiable as a human carcinogen Danger of cutaneous absorption		

		STEL	100.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Liver damage Kidney damage Testicular damage Teratogenic effects Not classifiable as a human carcinogen Danger of cutaneous absorption		
		Potential Occupational Carcinogen See Appendix A		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		Peak	300.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		See Table Z-2		
		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		Peak	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		STEL	100 ppm 210 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	50 ppm 105 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -116 °C (-177 °F)
f) Initial boiling point and boiling range	34.6 °C (94.3 °F) at 1,013 hPa (760 mmHg)
g) Flash point	-40 °C (-40 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 48 %(V) Lower explosion limit: 1.8 %(V)
k) Vapour pressure	590.021 hPa (442.552 mmHg) at 20 °C (68 °F) 1,975.467 hPa (1,481.722 mmHg) at 55 °C (131 °F)
l) Vapour density	No data available
m) Relative density	0.742 g/mL at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	160 °C (320 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### 9.2 Other safety information

No data available



---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents, Strong oxidizing agents, Iron, Strong acids

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

## Additional Information

RTECS: Not available

Methyl chloride is rapidly absorbed through the lungs and is excreted very slowly from the body. Symptoms of exposure include: dizziness, headache, weakness, unsteady walk, nausea, vomiting, abdominal pain, extreme nervousness, mental confusion, tremors, convulsions, unconsciousness and death, damage to the central nervous system. Apparent recovery from a seemingly minor exposure via inhalation may be followed by serious and prolonged aftereffects within a few days or weeks which can be fatal. Repeated exposures to methyl chloride are dangerous because it is eliminated very slowly from the body which converts methyl chloride into hydrochloric acid and methyl alcohol., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Methyl chloride is rapidly absorbed through the lungs and is excreted very slowly from the body. Symptoms of exposure include: dizziness, headache, weakness, unsteady walk, nausea, vomiting, abdominal pain, extreme nervousness, mental confusion, tremors, convulsions, unconsciousness and death, damage to the central nervous system. Apparent recovery from a seemingly minor exposure via inhalation may be followed by serious and prolonged aftereffects within a few days or weeks which can be fatal. Repeated exposures to methyl chloride are dangerous because it is eliminated very slowly from the body which converts methyl chloride into hydrochloric acid and methyl alcohol., Contact with eyes can cause:, Redness, Blurred vision, Provokes tears., Prolonged or repeated contact with skin may cause:, defatting, Dermatitis, Cough, chest pain, Difficulty in breathing, Dizziness, Drowsiness

Liver - Ingestion may provoke the following symptoms:, Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

Liver - Ingestion may provoke the following symptoms:, Irregularities - Based on Human Evidence (Diethyl ether)

Stomach - Irregularities - Based on Human Evidence (Chloromethane)

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1993      Class: 3      Packing group: I  
Proper shipping name: Flammable liquids, n.o.s. (Diethyl ether, Chloromethane)  
Reportable Quantity (RQ): 107 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1993      Class: 3      Packing group: I      EMS-No: F-E, S-E  
Proper shipping name: FLAMMABLE LIQUID, N.O.S. (Chloromethane, Diethyl ether)

**IATA**

UN number: 1993      Class: 3      Packing group: I  
 Proper shipping name: Flammable liquid, n.o.s. (Chloromethane, Diethyl ether)

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Chloromethane	74-87-3	2007-07-01

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Diethyl ether	60-29-7	1993-04-24
Chloromethane	74-87-3	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Diethyl ether	60-29-7	1993-04-24
Chloromethane	74-87-3	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Diethyl ether	60-29-7	1993-04-24
Chloromethane	74-87-3	2007-07-01

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.	74-87-3	2009-09-11
Chloromethane		

**16. OTHER INFORMATION****Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Carc.	Carcinogenicity
Flam. Gas	Flammable gases
Flam. Liq.	Flammable liquids
H220	Extremely flammable gas.
H224	Extremely flammable liquid and vapour.
H280	Contains gas under pressure; may explode if heated.
H302	Harmful if swallowed.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H361	Suspected of damaging fertility or the unborn child.
H361fd	Suspected of damaging fertility. Suspected of damaging the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure if inhaled.
Press. Gas	Gases under pressure
Repr.	Reproductive toxicity
STOT RE	Specific target organ toxicity - repeated exposure
STOT SE	Specific target organ toxicity - single exposure

**HMIS Rating**

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	4

Physical Hazard 3

**NFPA Rating**

Health hazard: 1

Fire Hazard: 4

Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.9

Revision Date: 02/02/2018

Print Date: 01/21/2019



# Fisher Scientific

Part of Thermo Fisher Scientific

## SAFETY DATA SHEET

Creation Date 13-Sep-2013

Revision Date 21-Jul-2015

Revision Number 2

### 1. Identification

**Product Name** Chromium

**Cat No. :** C318-500

**Synonyms** Chrome

**Recommended Use** Laboratory chemicals.

**Uses advised against** No Information available

**Details of the supplier of the safety data sheet**

**Company**

Fisher Scientific  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

**Emergency Telephone Number**

CHEMTREC®, Inside the USA: 800-424-9300  
CHEMTREC®, Outside the USA: 001-703-527-3887

### 2. Hazard(s) identification

**Classification**

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Specific target organ toxicity (single exposure) Category 3  
Target Organs - Respiratory system.

**Label Elements**

**Signal Word**

Warning

**Hazard Statements**

May cause respiratory irritation



**Precautionary Statements**

**Prevention**

Avoid breathing dust/fume/gas/mist/vapors/spray  
Use only outdoors or in a well-ventilated area

**Inhalation**

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing  
Call a POISON CENTER or doctor/physician if you feel unwell

**Storage**

Store in a well-ventilated place. Keep container tightly closed  
Store locked up

**Disposal**

Dispose of contents/container to an approved waste disposal plant

**Hazards not otherwise classified (HNOC)**

Very toxic to aquatic life

### 3. Composition / information on ingredients

Component	CAS-No	Weight %
Chromium	7440-47-3	>95

### 4. First-aid measures

<b>General Advice</b>	If symptoms persist, call a physician.
<b>Eye Contact</b>	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
<b>Skin Contact</b>	Wash off immediately with plenty of water for at least 15 minutes. Obtain medical attention.
<b>Inhalation</b>	Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.
<b>Ingestion</b>	Do not induce vomiting. Obtain medical attention.
<b>Most important symptoms/effects Notes to Physician</b>	None reasonably foreseeable. Treat symptomatically

### 5. Fire-fighting measures

<b>Unsuitable Extinguishing Media</b>	Carbon dioxide (CO <sub>2</sub> )
<b>Flash Point</b>	Not applicable
<b>Method -</b>	No information available
<b>Autoignition Temperature</b>	Not applicable
<b>Explosion Limits</b>	
<b>Upper</b>	No data available
<b>Lower</b>	No data available
<b>Sensitivity to Mechanical Impact</b>	No information available
<b>Sensitivity to Static Discharge</b>	No information available

**Specific Hazards Arising from the Chemical**

Dust can form an explosive mixture in air. Do not allow run-off from fire fighting to enter drains or water courses.

**Hazardous Combustion Products**

Chromium oxide

**Protective Equipment and Precautions for Firefighters**

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

**NFPA**

<b>Health</b> 2	<b>Flammability</b> 1	<b>Instability</b> 1	<b>Physical hazards</b> N/A
--------------------	--------------------------	-------------------------	--------------------------------

## 6. Accidental release measures

<b>Personal Precautions</b>	Ensure adequate ventilation. Use personal protective equipment. Avoid dust formation.
<b>Environmental Precautions</b>	Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.
<b>Methods for Containment and Clean Up</b>	Avoid dust formation. Sweep up or vacuum up spillage and collect in suitable container for disposal. Keep in suitable, closed containers for disposal.

## 7. Handling and storage

<b>Handling</b>	Avoid dust formation. Wear personal protective equipment. Ensure adequate ventilation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation.
<b>Storage</b>	Keep containers tightly closed in a dry, cool and well-ventilated place. Store under an inert atmosphere.

## 8. Exposure controls / personal protection

### Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Chromium	TWA: 0.5 mg/m <sup>3</sup>	(Vacated) TWA: 1 mg/m <sup>3</sup> TWA: 1 mg/m <sup>3</sup>	IDLH: 250 mg/m <sup>3</sup> TWA: 0.5 mg/m <sup>3</sup>

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Chromium	TWA: 0.5 mg/m <sup>3</sup>	TWA: 0.5 mg/m <sup>3</sup>	TWA: 0.5 mg/m <sup>3</sup>

### Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

<b>Engineering Measures</b>	Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location.
-----------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------

### Personal Protective Equipment

<b>Eye/face Protection</b>	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
<b>Skin and body protection</b>	Wear appropriate protective gloves and clothing to prevent skin exposure.
<b>Respiratory Protection</b>	Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.
<b>Hygiene Measures</b>	Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

<b>Physical State</b>	Powder
<b>Appearance</b>	Silver
<b>Odor</b>	Odorless
<b>Odor Threshold</b>	No information available
<b>pH</b>	No information available
<b>Melting Point/Range</b>	1857.2 °C / 3375 °F

<b>Boiling Point/Range</b>	2640 °C / 4784 °F
<b>Flash Point</b>	Not applicable
<b>Evaporation Rate</b>	Not applicable
<b>Flammability (solid,gas)</b>	No information available
<b>Flammability or explosive limits</b>	
<b>Upper</b>	No data available
<b>Lower</b>	No data available
<b>Vapor Pressure</b>	No information available
<b>Vapor Density</b>	Not applicable
<b>Relative Density</b>	7.2
<b>Solubility</b>	Insoluble in water
<b>Partition coefficient; n-octanol/water</b>	No data available
<b>Autoignition Temperature</b>	Not applicable
<b>Decomposition Temperature</b>	No information available
<b>Viscosity</b>	Not applicable
<b>Molecular Formula</b>	Cr
<b>Molecular Weight</b>	51.996

## 10. Stability and reactivity

<b>Reactive Hazard</b>	None known, based on information available
<b>Stability</b>	Sensitive to air.
<b>Conditions to Avoid</b>	Incompatible products. Excess heat. Avoid dust formation.
<b>Incompatible Materials</b>	Strong oxidizing agents, Strong acids
<b>Hazardous Decomposition Products</b>	Chromium oxide
<b>Hazardous Polymerization</b>	Hazardous polymerization does not occur.
<b>Hazardous Reactions</b>	None under normal processing.

## 11. Toxicological information

### Acute Toxicity

#### **Component Information** **Toxicologically Synergistic** **Products**

No information available

#### **Delayed and immediate effects as well as chronic effects from short and long-term exposure**

<b>Irritation</b>	May cause irritation of respiratory tract
<b>Sensitization</b>	No information available
<b>Carcinogenicity</b>	The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Chromium	7440-47-3	Not listed	Not listed	Not listed	Not listed	Not listed

<b>Mutagenic Effects</b>	No information available
<b>Reproductive Effects</b>	No information available.
<b>Developmental Effects</b>	No information available.
<b>Teratogenicity</b>	No information available.
<b>STOT - single exposure</b>	Respiratory system
<b>STOT - repeated exposure</b>	None known



**Aspiration hazard** No information available

**Symptoms / effects, both acute and delayed** No information available

**Endocrine Disruptor Information** No information available

**Other Adverse Effects** The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

## 12. Ecological information

### Ecotoxicity

The product contains following substances which are hazardous for the environment. Very toxic to aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Chromium	Not listed	LC50: 14.3 mg/l/96 H (Pimephales promelas)	Not listed	EC50: 0.07 mg/l/48 H

**Persistence and Degradability** Insoluble in water  
**Bioaccumulation/ Accumulation** No information available.

**Mobility** Is not likely mobile in the environment due its low water solubility.

## 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

## 14. Transport information

### DOT

**UN-No** UN3077  
**Proper Shipping Name** ENVIRONMENTALLY HAZARDOUS SUBSTANCES, SOLID, N.O.S.  
**Proper technical name** Chromium  
**Hazard Class** 9  
**Packing Group** III

### TDG

Not regulated  
**UN-No** UN3077  
**Proper Shipping Name** ENVIRONMENTALLY HAZARDOUS SUBSTANCES, SOLID, N.O.S.  
**Hazard Class** 9  
**Packing Group** III

### IATA

**UN-No** UN3077  
**Proper Shipping Name** Environmentally hazardous substance, solid, n.o.s  
**Hazard Class** 9  
**Packing Group** III

### IMDG/IMO

**UN-No** UN3077  
**Proper Shipping Name** Environmentally hazardous substance, solid, n.o.s  
**Hazard Class** 9  
**Packing Group** III

## 15. Regulatory information

### International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Chromium	X	X	-	231-157-5	-		X	-	X	X	X

#### Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

### U.S. Federal Regulations

TSCA 12(b) Not applicable

### SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Chromium	7440-47-3	>95	1.0

### SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

### Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Chromium	-	-	X	X

### Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Chromium	X		-

OSHA Occupational Safety and Health Administration

Not applicable

### CERCLA

Not applicable

Component	Hazardous Substances RQs	CERCLA EHS RQs
Chromium	5000 lb 10 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals

### State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Chromium	X	X	X	X	X

### U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

### U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

### Other International Regulations

Mexico - Grade No information available

**Canada**

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D2B Toxic materials



## 16. Other information

**Prepared By** Regulatory Affairs  
Thermo Fisher Scientific  
Email: EMSDS.RA@thermofisher.com

**Creation Date** 13-Sep-2013

**Revision Date** 21-Jul-2015

**Print Date** 21-Jul-2015

**Revision Summary** This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

**Disclaimer**

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

**End of SDS**

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Chrysene  
Product Number : 35754  
Brand : Sigma-Aldrich  
Index-No. : 601-048-00-0  
CAS-No. : 218-01-9

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Germ cell mutagenicity (Category 2), H341  
Carcinogenicity (Category 1B), H350  
Acute aquatic toxicity (Category 1), H400  
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H341 Suspected of causing genetic defects.  
H350 May cause cancer.  
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and understood.  
P273 Avoid release to the environment.  
P281 Use personal protective equipment as required.  
P308 + P313 IF exposed or concerned: Get medical advice/ attention.

P391 Collect spillage.  
P405 Store locked up.  
P501 Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula : C<sub>18</sub>H<sub>12</sub>  
Molecular weight : 228.29 g/mol  
CAS-No. : 218-01-9  
EC-No. : 205-923-4  
Index-No. : 601-048-00-0

#### Hazardous components

Component	Classification	Concentration
<b>Chrysene</b>	Muta. 2; Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H341, H350, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.  
For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.  
Provide appropriate exhaust ventilation at places where dust is formed.  
For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.  
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Confirmed animal carcinogen with unknown relevance to humans		
Chrysene	218-01-9	TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen		

		NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		PEL	0.2 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                         |
|-------------------------------------------------|---------------------------------------------------------|
| a) Appearance                                   | Form: solid                                             |
| b) Odour                                        | No data available                                       |
| c) Odour Threshold                              | No data available                                       |
| d) pH                                           | No data available                                       |
| e) Melting point/freezing point                 | Melting point/range: 252 - 254 °C (486 - 489 °F) - lit. |
| f) Initial boiling point and boiling range      | 448 °C (838 °F) - lit.                                  |
| g) Flash point                                  | No data available                                       |
| h) Evaporation rate                             | No data available                                       |
| i) Flammability (solid, gas)                    | No data available                                       |
| j) Upper/lower flammability or explosive limits | No data available                                       |
| k) Vapour pressure                              | No data available                                       |
| l) Vapour density                               | No data available                                       |
| m) Relative density                             | No data available                                       |
| n) Water solubility                             | insoluble                                               |
| o) Partition coefficient: n-octanol/water       | log Pow: 5.73                                           |
| p) Auto-ignition temperature                    | No data available                                       |
| q) Decomposition temperature                    | No data available                                       |
| r) Viscosity                                    | No data available                                       |
| s) Explosive properties                         | No data available                                       |
| t) Oxidizing properties                         | No data available                                       |

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5



---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intraperitoneal - Mouse - > 320 mg/kg

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

In vitro tests showed mutagenic effects

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Chrysene)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: OSHA specifically regulated carcinogen (Chrysene)

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

#### Additional Information

RTECS: GC0700000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 1.90 mg/l - 2 h

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

#### DOT (US)

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Chrysene)  
Reportable Quantity (RQ): 100 lbs  
Poison Inhalation Hazard: No

#### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Chrysene)  
Marine pollutant:yes

#### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Chrysene)

#### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

#### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

#### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

#### SARA 311/312 Hazards

Chronic Health Hazard

#### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

#### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

Chrysene

CAS-No.  
218-01-9

Revision Date  
1994-04-01

**New Jersey Right To Know Components**

Chrysene

CAS-No.  
218-01-9

Revision Date  
1994-04-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

Chrysene

CAS-No.  
218-01-9

Revision Date  
2007-09-28

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

**NFPA Rating**

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.5

Revision Date: 01/10/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

Version 4.11  
Revision Date 05/24/2016  
Print Date 11/10/2018

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Cumene  
  
Product Number : C87657  
Brand : Aldrich  
Index-No. : 601-024-00-X  
  
CAS-No. : 98-82-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226  
Carcinogenicity (Category 2), H351  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H335 May cause respiratory irritation.  
H351 Suspected of causing cancer.  
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: Isopropylbenzene
Formula	: C <sub>9</sub> H <sub>12</sub>
Molecular weight	: 120.19 g/mol
CAS-No.	: 98-82-8
EC-No.	: 202-704-5
Index-No.	: 601-024-00-X

#### Hazardous components

Component	Classification	Concentration
<b>Cumene</b>		
	Flam. Liq. 3; Carc. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H335, H351, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Cumene	98-82-8	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Skin irritation		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		
		PEL	50 ppm 245 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                    |
|-------------------------------------------------|--------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                          |
| b) Odour                                        | No data available                                                  |
| c) Odour Threshold                              | No data available                                                  |
| d) pH                                           | No data available                                                  |
| e) Melting point/freezing point                 | Melting point/range: -96 °C (-141 °F) - lit.                       |
| f) Initial boiling point and boiling range      | 152 - 154 °C (306 - 309 °F) - lit.                                 |
| g) Flash point                                  | 31.0 °C (87.8 °F) - closed cup                                     |
| h) Evaporation rate                             | No data available                                                  |
| i) Flammability (solid, gas)                    | No data available                                                  |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 6.5 %(V)<br>Lower explosion limit: 0.9 %(V) |
| k) Vapour pressure                              | 10.7 hPa (8.0 mmHg) at 20.0 °C (68.0 °F)                           |
| l) Vapour density                               | No data available                                                  |
| m) Relative density                             | 0.864 g/mL at 25 °C (77 °F)                                        |
| n) Water solubility                             | 0.06 g/l at 25 °C (77 °F) - slightly soluble                       |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.55 at 23 °C (73 °F)                                     |
| p) Auto-ignition temperature                    | 425.0 °C (797.0 °F)                                                |
| q) Decomposition temperature                    | No data available                                                  |
| r) Viscosity                                    | No data available                                                  |
| s) Explosive properties                         | No data available                                                  |
| t) Oxidizing properties                         | No data available                                                  |

### 9.2 Other safety information

- |                 |                             |
|-----------------|-----------------------------|
| Surface tension | 27.69 mN/m at 25 °C (77 °F) |
|-----------------|-----------------------------|



---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male - 2,260 mg/kg

Inhalation: No data available

Dermal: No data available

NOAEL Feed - Rat - male - > 535.8 mg/kg

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

- Guinea pig

Result: Did not cause sensitisation on laboratory animals.

(OECD Test Guideline 406)

#### Germ cell mutagenicity

in vitro assay

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Mouse - male and female

Result: negative

#### Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Cumene)

NTP: Reasonably anticipated to be a human carcinogen (Cumene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

No data available

No data available

**Specific target organ toxicity - single exposure**

May cause respiratory irritation.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: GR8575000

narcosis, Central nervous system depression, Dermatitis, Gastrointestinal disturbance, Damage to the lungs., Liver injury may occur., Kidney injury may occur.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 4.8 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia (water flea) - 2.14 mg/l - 48 h (OECD Test Guideline 202)

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 2.60 mg/l - 72 h

**12.2 Persistence and degradability**

Biodegradability Result: - According to the results of tests of biodegradability this product is not readily biodegradable.

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1918 Class: 3

Packing group: III

Proper shipping name: Isopropylbenzene

Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 1918      Class: 3      Packing group: III      EMS-No: F-E, S-E  
Proper shipping name: ISOPROPYLBENZENE  
Marine pollutant:yes

**IATA**

UN number: 1918      Class: 3      Packing group: III  
Proper shipping name: Isopropylbenzene

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Cumene	98-82-8	2010-06-11

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Carc.	Carcinogenicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3

Physical Hazard 0

**NFPA Rating**

Health hazard: 2

Fire Hazard: 3

Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.11

Revision Date: 05/24/2016

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Cyclohexane

Product Number : 227048

Brand : Sigma-Aldrich

Index-No. : 601-017-00-1

CAS-No. : 110-82-7

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 1), H400

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.

H304 May be fatal if swallowed and enters airways.

H315 Causes skin irritation.

H336 May cause drowsiness or dizziness.

H400 Very toxic to aquatic life.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233 Keep container tightly closed.

P240 Ground/bond container and receiving equipment.

P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula	:	C <sub>6</sub> H <sub>12</sub>
Molecular weight	:	84.16 g/mol
CAS-No.	:	110-82-7
EC-No.	:	203-806-2
Index-No.	:	601-017-00-1
Registration number	:	01-2119463273-41-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Cyclohexane</b>	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; H225, H304, H315, H336, H400	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.

Storage class (TRGS 510): 3: Flammable liquids

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

**8. EXPOSURE CONTROLS/PERSONAL PROTECTION****8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Cyclohexane	110-82-7	TWA	100 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment		
		TWA	300 ppm 1,050 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		TWA	300 ppm 1,050 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	300 ppm 1,050 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested:Camatril® (KCL 730 / Aldrich Z677442, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 35 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.



---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                           |
|-------------------------------------------------|-------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                                                        |
| b) Odour                                        | No data available                                                                         |
| c) Odour Threshold                              | No data available                                                                         |
| d) pH                                           | No data available                                                                         |
| e) Melting point/freezing point                 | Melting point/range: 4 - 7 °C (39 - 45 °F) - lit.                                         |
| f) Initial boiling point and boiling range      | 80.7 °C (177.3 °F) - lit.                                                                 |
| g) Flash point                                  | -18.0 °C (-0.4 °F) - closed cup                                                           |
| h) Evaporation rate                             | No data available                                                                         |
| i) Flammability (solid, gas)                    | No data available                                                                         |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 9 %(V)<br>Lower explosion limit: 1 %(V)                            |
| k) Vapour pressure                              | 225.0 hPa (168.8 mmHg) at 37.7 °C (99.9 °F)<br>102.7 hPa (77.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                         |
| m) Relative density                             | 0.779 g/cm <sup>3</sup> at 25 °C (77 °F)                                                  |
| n) Water solubility                             | No data available                                                                         |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.44                                                                             |
| p) Auto-ignition temperature                    | 260.0 °C (500.0 °F)                                                                       |
| q) Decomposition temperature                    | No data available                                                                         |
| r) Viscosity                                    | No data available                                                                         |
| s) Explosive properties                         | No data available                                                                         |
| t) Oxidizing properties                         | No data available                                                                         |

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 12,705 mg/kg

LC50 Inhalation - Rat - 4 h - 34,000 mg/l  
(OECD Test Guideline 403)

LD50 Dermal - Rabbit - > 2,000 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

May be fatal if swallowed and enters airways.

#### Additional Information

RTECS: GU6300000

Central nervous system depression, Drowsiness, Irritability, Dizziness, Gastrointestinal disturbance, Lung irritation, chest pain, pulmonary edema

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish                      flow-through test LC50 - Pimephales promelas (fathead minnow) - 4.53 mg/l - 96 h  
(OECD Test Guideline 203)

Toxicity to daphnia and other aquatic      Immobilization EC50 - Daphnia magna (Water flea) - 0.9 mg/l - 48 h  
(OECD Test Guideline 202)

invertebrates

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 3.4 mg/l - 72 h  
(OECD Test Guideline 201)

12.2 Persistence and degradability

Biodegradability Result: - Readily biodegradable.

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life.

---

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

**Product**

Contact a licensed professional waste disposal service to dispose of this material. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

**Contaminated packaging**

Dispose of as unused product.

---

14. TRANSPORT INFORMATION

**DOT (US)**

UN number: 1145 Class: 3 Packing group: II  
Proper shipping name: Cyclohexane  
Reportable Quantity (RQ): 1000 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1145 Class: 3 Packing group: II EMS-No: F-E, S-D  
Proper shipping name: CYCLOHEXANE  
Marine pollutant:yes

**IATA**

UN number: 1145 Class: 3 Packing group: II  
Proper shipping name: Cyclohexane

---

15. REGULATORY INFORMATION

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cyclohexane	110-82-7	2007-07-01

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Cyclohexane	110-82-7	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Cyclohexane	110-82-7	2007-07-01

**New Jersey Right To Know Components**

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
Skin Irrit.	Skin irritation
STOT SE	Specific target organ toxicity - single exposure

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	
Flammability:	3
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

## Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.9

Revision Date: 06/11/2018

Print Date: 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**Product name : *p*-Cymene

Product Number : C121452

Brand : Aldrich

CAS-No. : 99-87-6

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226

Acute toxicity, Oral (Category 4), H302

Skin irritation (Category 2), H315

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Warning

Hazard statement(s)

H226

Flammable liquid and vapour.

H302

Harmful if swallowed.

H315

Causes skin irritation.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P264

Wash skin thoroughly after handling.

P270

Do not eat, drink or smoke when using this product.

P280	Wear protective gloves/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms : 1-Isopropyl-4-methylbenzene  
4-Isopropyltoluene

Formula : C<sub>10</sub>H<sub>14</sub>  
Molecular weight : 134.22 g/mol  
CAS-No. : 99-87-6  
EC-No. : 202-796-7

#### Hazardous components

Component	Classification	Concentration
<b>p-Cymene</b>	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; H226, H302, H315	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Dry powder Dry sand

#### Unsuitable extinguishing media

Do NOT use water jet.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 129 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                                    |
|--------------------------------------------|--------------------------------------------------------------------|
| a) Appearance                              | Form: liquid, clear<br>Colour: colourless                          |
| b) Odour                                   | No data available                                                  |
| c) Odour Threshold                         | No data available                                                  |
| d) pH                                      | No data available                                                  |
| e) Melting point/freezing point            | No data available                                                  |
| f) Initial boiling point and boiling range | 176 - 178 °C (349 - 352 °F) - lit.                                 |
| g) Flash point                             | 47.0 °C (116.6 °F) - closed cup                                    |
| h) Evaporation rate                        | No data available                                                  |
| i) Flammability (solid, gas)               | No data available                                                  |
| j) Upper/lower flammability or             | Upper explosion limit: 5.6 %(V)<br>Lower explosion limit: 0.7 %(V) |



explosive limits

- |                                           |                                                                                    |
|-------------------------------------------|------------------------------------------------------------------------------------|
| k) Vapour pressure                        | 4.9 hPa (3.7 mmHg) at 37.7 °C (99.9 °F)<br>2.0 hPa (1.5 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                         | No data available                                                                  |
| m) Relative density                       | 0.86 g/cm <sup>3</sup> at 25 °C (77 °F)                                            |
| n) Water solubility                       | No data available                                                                  |
| o) Partition coefficient: n-octanol/water | No data available                                                                  |
| p) Auto-ignition temperature              | 436.0 °C (816.8 °F)                                                                |
| q) Decomposition temperature              | No data available                                                                  |
| r) Viscosity                              | No data available                                                                  |
| s) Explosive properties                   | No data available                                                                  |
| t) Oxidizing properties                   | No data available                                                                  |

## 9.2 Other safety information

Solubility in other solvents	Alcohol - soluble
------------------------------	-------------------

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 1,400 mg/kg

LC50 Inhalation - Mouse - 6.97 mg/l

Remarks: No data available

LD50 Dermal - Rabbit - > 5,000 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation - 24 h

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

No data available

**Germ cell mutagenicity**

No data available

**Carcinogenicity**

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

No data available

No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: GZ5950000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 2046      Class: 3      Packing group: III  
Proper shipping name: Cymenes  
Reportable Quantity (RQ):  
Poison Inhalation Hazard: No

### IMDG

UN number: 2046      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: CYMENES  
Marine pollutant: yes

### IATA

UN number: 2046      Class: 3      Packing group: III  
Proper shipping name: Cymenes

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

### New Jersey Right To Know Components

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H302	Harmful if swallowed.
H315	Causes skin irritation.
Skin Irrit.	Skin irritation

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

**NFPA Rating**

Health hazard: 2  
Fire Hazard: 2  
Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.10

Revision Date: 07/18/2017

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/17/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Dibenz[*a,h*]anthracene  
Product Number : 48574  
Brand : Supelco  
Index-No. : 601-041-00-2  
CAS-No. : 53-70-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: 1,2:5,6-Dibenzanthracene
Formula	: C <sub>22</sub> H <sub>14</sub>
Molecular weight	: 278.35 g/mol
CAS-No.	: 53-70-3
EC-No.	: 200-181-8
Index-No.	: 601-041-00-2

#### Hazardous components

Component	Classification	Concentration
<b>Dibenz[a,h]anthracene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### **Skin protection**

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                         |
|-------------------------------------------------|---------------------------------------------------------|
| a) Appearance                                   | Form: solid                                             |
| b) Odour                                        | No data available                                       |
| c) Odour Threshold                              | No data available                                       |
| d) pH                                           | No data available                                       |
| e) Melting point/freezing point                 | Melting point/range: 262 - 265 °C (504 - 509 °F) - lit. |
| f) Initial boiling point and boiling range      | 524 °C (975 °F) - lit.                                  |
| g) Flash point                                  | No data available                                       |
| h) Evaporation rate                             | No data available                                       |
| i) Flammability (solid, gas)                    | No data available                                       |
| j) Upper/lower flammability or explosive limits | No data available                                       |
| k) Vapour pressure                              | No data available                                       |
| l) Vapour density                               | No data available                                       |
| m) Relative density                             | No data available                                       |



- |                                           |                   |
|-------------------------------------------|-------------------|
| n) Water solubility                       | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature              | No data available |
| q) Decomposition temperature              | No data available |
| r) Viscosity                              | No data available |
| s) Explosive properties                   | No data available |
| t) Oxidizing properties                   | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available  
No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: HN2625000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Lungs -

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates      Immobilization EC50 - Daphnia magna (Water flea) - 0.496 mg/l - 24 h(Dibenz[a,h]anthracene)

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Dibenz[a,h]anthracene)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life with long lasting effects.

---

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION**

**DOT (US)**

Not dangerous goods

**IMDG**

UN number: 3077

Class: 9

Packing group: III

EMS-No: F-A, S-F

Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Dibenz[a,h]anthracene)

Marine pollutant : yes

**IATA**

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Dibenz[a,h]anthracene)

**Further information**

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Dibenz[a,h]anthracene	53-70-3	

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

H350                      May cause cancer.  
H400                      Very toxic to aquatic life.  
H410                      Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.1

Revision Date: 07/17/2018

Print Date: 01/21/2019

SDS preview

# ETHYLBENZENE

**DANGER**

100-41-4

by Fisher Scientific

---

## Synonyms

Aethylbenzol [German], Benzene, ethyl-, CCRIS 916, Etilbenzene, Etylobenzen [Polish], Phenylethane, UNII-L5I45M5G0O, Aethylbenzol, A13-09057, EC 202-849-4, Ethyl benzene, Ethylbenzeen, Ethylbenzeen [Dutch], Etilbenzene [Italian], Etylobenzen, HSDB 84, Ethylbenzene, Ethylbenzol, EB, EINECS 202-849-4, NCI-C56393, NSC 406903

## Hazard statements

Harmful if inhaled

Highly flammable liquid and vapour

May be fatal if swallowed and enters airways

May cause damage to organs through prolonged or repeated exposure

May cause drowsiness or dizziness

May cause respiratory irritation

Suspected of causing cancer

## Precautions

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Use only outdoors or in a well-ventilated area

Keep container tightly closed

Ground/bond container and receiving equipment

Use only non-sparking tools

Take precautionary measures against static discharge



## SAFETY DATA SHEET

Version 5.12  
Revision Date 07/26/2018  
Print Date 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Heptane

Product Number : 246654  
Brand : Sigma-Aldrich  
Index-No. : 601-008-00-2

CAS-No. : 142-82-5

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H304

May be fatal if swallowed and enters airways.

H315

Causes skin irritation.

H336

May cause drowsiness or dizziness.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	:	C <sub>7</sub> H <sub>16</sub>
Molecular weight	:	100.20 g/mol
CAS-No.	:	142-82-5
EC-No.	:	205-563-8
Index-No.	:	601-008-00-2
Registration number	:	01-2119457603-38-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Heptane</b>	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; Aquatic Chronic 1; H225, H304, H315, H336, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.



**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Dry powder Dry sand

**Unsuitable extinguishing media**

Do NOT use water jet.

**5.2 Special hazards arising from the substance or mixture**

Flash back possible over considerable distance.

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

In case of fire: Evacuate area. Fight fire remotely due to the risk of explosion. Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Store under inert gas. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Heptane	142-82-5	TWA	85 ppm 350 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		C	440 ppm 1,800 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
	Remarks	15 minute ceiling value		
		TWA	500 ppm 2,000 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	400 ppm 1,600 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		STEL	500 ppm 2,000 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		TWA	400 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 65 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an

industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                                                         |
|-------------------------------------------------|-----------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid                                                                            |
| b) Odour                                        | No data available                                                                       |
| c) Odour Threshold                              | No data available                                                                       |
| d) pH                                           | No data available                                                                       |
| e) Melting point/freezing point                 | Melting point/range: -91 °C (-132 °F)                                                   |
| f) Initial boiling point and boiling range      | 98 °C (208 °F)                                                                          |
| g) Flash point                                  | 22 °C (72 °F) - closed cup                                                              |
| h) Evaporation rate                             | No data available                                                                       |
| i) Flammability (solid, gas)                    | No data available                                                                       |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7 %(V)<br>Lower explosion limit: 1.1 %(V)                        |
| k) Vapour pressure                              | 110.7 hPa (83.0 mmHg) at 37.7 °C (99.9 °F)<br>53.3 hPa (40.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                       |
| m) Relative density                             | 0.684 g/mL at 25 °C (77 °F)                                                             |
| n) Water solubility                             | insoluble                                                                               |
| o) Partition coefficient: n-octanol/water       | log Pow: > 3.000                                                                        |
| p) Auto-ignition temperature                    | 223.0 °C (433.4 °F)                                                                     |
| q) Decomposition temperature                    | No data available                                                                       |
| r) Viscosity                                    | No data available                                                                       |
| s) Explosive properties                         | No data available                                                                       |
| t) Oxidizing properties                         | No data available                                                                       |

### **9.2 Other safety information**

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - No data available

Hazardous decomposition products formed under fire conditions. - Carbon oxides

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

LC50 Inhalation - Rat - 4 h - 103,000 mg/m<sup>3</sup>

Inhalation: Irritating to respiratory system.

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

**Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: MI7700000

Prolonged or repeated exposure to skin causes defatting and dermatitis., Central nervous system depression, narcosis, Damage to the lungs.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - Carassius auratus (goldfish) - 4 mg/l - 24.0 h

LC50 - Tilapia mossambica - 375 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 1.50 mg/l - 48 h

**12.2 Persistence and degradability**

Ratio BOD/ThBOD 3.5 %

**12.3 Bioaccumulative potential**

Indication of bioaccumulation.

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

Very toxic to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Do not empty into drains. Avoid release to the environment.

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1206 Class: 3 Packing group: II

Proper shipping name: Heptanes

Reportable Quantity (RQ): Marine pollutant:yes

Poison Inhalation Hazard: No

**IMDG**

UN number: 1206 Class: 3 Packing group: II EMS-No: F-E, S-D

Proper shipping name: HEPTANES

Marine pollutant: yes

Marine pollutant: yes

**IATA**

UN number: 1206      Class: 3

Packing group: II

Proper shipping name: Heptanes

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Skin Irrit.	Skin irritation

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.12

Revision Date: 07/26/2018

Print Date: 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Hexane

Product Number : 296090  
Brand : Sigma-Aldrich  
Index-No. : 601-037-00-0

CAS-No. : 110-54-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225  
Skin irritation (Category 2), H315  
Reproductive toxicity (Category 2), H361  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336  
Specific target organ toxicity - repeated exposure, Oral (Category 2), Nervous system, H373  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H315 Causes skin irritation.  
H336 May cause drowsiness or dizziness.  
H361 Suspected of damaging fertility or the unborn child.  
H373 May cause damage to organs (Nervous system) through prolonged or repeated exposure if swallowed.



H411	Toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	:	n-Hexane
Formula	:	C <sub>6</sub> H <sub>14</sub>
Molecular weight	:	86.18 g/mol
CAS-No.	:	110-54-3
EC-No.	:	203-777-6
Index-No.	:	601-037-00-0
Registration number	:	01-2119480412-44-XXXX

### Hazardous components

Component	Classification	Concentration
<b>n-Hexane</b>	Flam. Liq. 2; Skin Irrit. 2; Repr. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H225, H304, H315, H336, H361f, H373, H411	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Flash back possible over considerable distance. Container explosion may occur under fire conditions. Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
n-Hexane	110-54-3	TWA	50 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Eye irritation Peripheral neuropathy Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	50 ppm 180 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		TWA	500 ppm 1,800 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	50 ppm 180 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	2,5-Hexanedione	0.4 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 59 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                            |
|-------------------------------------------------|--------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                                                         |
| b) Odour                                        | No data available                                                                          |
| c) Odour Threshold                              | No data available                                                                          |
| d) pH                                           | 7.0                                                                                        |
| e) Melting point/freezing point                 | Melting point/range: -95 °C (-139 °F)                                                      |
| f) Initial boiling point and boiling range      | 69 °C (156 °F)                                                                             |
| g) Flash point                                  | -26.0 °C (-14.8 °F) - closed cup                                                           |
| h) Evaporation rate                             | 15.8                                                                                       |
| i) Flammability (solid, gas)                    | No data available                                                                          |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7.7 %(V)<br>Lower explosion limit: 1.2 %(V)                         |
| k) Vapour pressure                              | 341.3 hPa (256.0 mmHg) at 37.7 °C (99.9 °F)<br>176.0 hPa (132.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                          |
| m) Relative density                             | 0.659 g/mL at 25 °C (77 °F)                                                                |
| n) Water solubility                             | insoluble                                                                                  |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.90 - 4.11                                                                       |
| p) Auto-ignition temperature                    | 234.0 °C (453.2 °F)                                                                        |

- |                              |                   |
|------------------------------|-------------------|
| q) Decomposition temperature | No data available |
| r) Viscosity                 | No data available |
| s) Explosive properties      | No data available |
| t) Oxidizing properties      | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Exposure to moisture may affect product quality.  
Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - No data available  
Hazardous decomposition products formed under fire conditions. - Carbon oxides  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male and female - 16,000 mg/kg  
(OECD Test Guideline 401)

LC50 Inhalation - Rat - 4 h - 172 mg/l  
Remarks: (RTECS)

LD50 Dermal - Rabbit - > 2,000 mg/kg  
Remarks: (ECHA)

#### Skin corrosion/irritation

#### Serious eye damage/eye irritation

#### Respiratory or skin sensitisation

#### Germ cell mutagenicity

In vitro mammalian cell gene mutation test  
Mouse lymphoma test  
Result: Positive results were obtained in some in vitro tests.

Ames test  
Salmonella typhimurium  
Result: negative

Result: negative  
(National Toxicology Program)

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### **Reproductive toxicity**

Suspected of damaging the unborn child.

Suspected of damaging fertility.

#### **Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness. - Central nervous system

#### **Specific target organ toxicity - repeated exposure**

Inhalation - May cause damage to organs through prolonged or repeated exposure. - Nervous system

#### **Aspiration hazard**

Aspiration hazard, Aspiration may cause pulmonary oedema and pneumonitis.

#### **Additional Information**

RTECS: MN9275000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Drowsiness, irritant effects, somnolence

narcosis, Nausea, Tiredness, CNS disorders, paralysis symptoms

Risk of corneal clouding.

It generally applies for aliphatic hydrocarbons with 6 - 18 carbon atoms that they may cause pneumonia, in some cases also pulmonary oedema, upon direct inhalation, i.e. in conditions that can occur only in very special circumstances (nebulizations, spraying, inhalation of aerosols and similar). After absorption of very large quantities: narcosis.

Testes. - Irregularities - Based on Human Evidence

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - 2.5 mg/l - 96 h Remarks: (ECOTOX Database)
------------------	---------------------------------------------------------------------------------------------

Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 2.1 mg/l - 48 h Remarks: (Lit.)
-----------------------------------------------------	------------------------------------------------------------------------

### 12.2 Persistence and degradability

### **12.3 Bioaccumulative potential**

### **12.4 Mobility in soil**

### **12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### **12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

---

## **13. DISPOSAL CONSIDERATIONS**

### **13.1 Waste treatment methods**

#### **Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### **Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1208      Class: 3      Packing group: II  
Proper shipping name: Hexanes  
Reportable Quantity (RQ): 5000 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1208      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: HEXANES  
Marine pollutant:yes

**IATA**

UN number: 1208      Class: 3      Packing group: II  
Proper shipping name: Hexanes

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H361	Suspected of damaging fertility or the unborn child.
H361f	Suspected of damaging fertility.
H373	May cause damage to organs (/*_2ORG_REP_ORA*/) through prolonged or repeated exposure if swallowed.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:                      2

Chronic Health Hazard: \*  
Flammability: 3  
Physical Hazard 0

**NFPA Rating**

Health hazard: 2  
Fire Hazard: 3  
Reactivity Hazard: 0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.  
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.7

Revision Date: 06/08/2018

Print Date: 11/10/2018



### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Indeno[1,2,3-*cd*]pyrene

Product Number : 48499

Brand : Supelco

CAS-No. : 193-39-5

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Carcinogenicity (Category 2), H351

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H351

Suspected of causing cancer.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P281

Use personal protective equipment as required.

P308 + P313

IF exposed or concerned: Get medical advice/ attention.

P405

Store locked up.

P501

Dispose of contents/ container to an approved waste disposal plant.

#### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula : C<sub>22</sub>H<sub>12</sub>  
Molecular weight : 276.33 g/mol  
CAS-No. : 193-39-5  
EC-No. : 205-893-2

#### Hazardous components

Component	Classification	Concentration
Indeno[1,2,3-cd]pyrene	Carc. 2; H351	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

## 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

## 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

## 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 13: Non Combustible Solids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Indeno[1,2,3-cd]pyrene	193-39-5	1-Hydroxypyrene (1-HP)		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

##### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the

sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

a) Appearance	Form: solid
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	163.6 °C (326.5 °F)
f) Initial boiling point and boiling range	536.0 °C (996.8 °F)
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### **9.2 Other safety information**

No data available

---

## **10. STABILITY AND REACTIVITY**

### **10.1 Reactivity**

No data available

### **10.2 Chemical stability**

Stable under recommended storage conditions.

### **10.3 Possibility of hazardous reactions**

No data available

### **10.4 Conditions to avoid**

No data available

### **10.5 Incompatible materials**

Strong oxidizing agents

## 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Indeno[1,2,3-cd]pyrene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Indeno[1,2,3-cd]pyrene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

#### Additional Information

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION**

**DOT (US)**

Not dangerous goods

**IMDG**

Not dangerous goods

**IATA**

Not dangerous goods

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Chronic Health Hazard

**Massachusetts Right To Know Components**

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

**Pennsylvania Right To Know Components**

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

**New Jersey Right To Know Components**

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.  
Indeno[1,2,3-cd]pyrene

CAS-No.  
193-39-5

Revision Date  
2007-09-28

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Carc. H351	Carcinogenicity Suspected of causing cancer.
---------------	-------------------------------------------------

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	1
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.6

Revision Date: 12/11/2017

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Isopropylbenzene

Product Number : 442630

Brand : Supelco

Index-No. : 601-024-00-X

CAS-No. : 98-82-8

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226

Carcinogenicity (Category 2), H351

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 2), H401

Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.

H304 May be fatal if swallowed and enters airways.

H335 May cause respiratory irritation.

H351 Suspected of causing cancer.

H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202 Do not handle until all safety precautions have been read and



	understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	:	C <sub>9</sub> H <sub>12</sub>
Molecular weight	:	120.2 g/mol
CAS-No.	:	98-82-8
EC-No.	:	202-704-5
Index-No.	:	601-024-00-X

#### Hazardous components

Component	Classification	Concentration
<b>Cumene</b>	Flam. Liq. 3; Carc. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H335, H351, H411	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store at room temperature.

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Cumene	98-82-8	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Skin irritation		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		
		PEL	50 ppm 245 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-95.99 °C (-140.78 °F)
f) Initial boiling point and boiling range	152.0 - 153.0 °C (305.6 - 307.4 °F)
g) Flash point	31.0 °C (87.8 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 6.5 %(V) Lower explosion limit: 0.9 %(V)
k) Vapour pressure	10.7 hPa (8.0 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	0.86 g/cm <sup>3</sup>
n) Water solubility	0.06 g/l at 25 °C (77 °F) - slightly soluble
o) Partition coefficient: n-octanol/water	log Pow: 3.55 at 23 °C (73 °F)
p) Auto-ignition temperature	425.0 °C (797.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### 9.2 Other safety information

Surface tension	27.69 mN/m at 25 °C (77 °F)
-----------------	-----------------------------

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

## 10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

Stable under recommended storage conditions.

## 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air. Vapours may form explosive mixture with air.

## 10.4 Conditions to avoid

Heat, flames and sparks.

## 10.5 Incompatible materials

Strong oxidizing agents

## 10.6 Hazardous decomposition products

Other decomposition products - No data available

Hazardous decomposition products formed under fire conditions. - Carbon oxides

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male - 2,260 mg/kg

Inhalation: No data available

Dermal: No data available

NOAEL Feed - Rat - male - > 535.8 mg/kg

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

- Guinea pig

Result: Did not cause sensitisation on laboratory animals.

(OECD Test Guideline 406)

#### Germ cell mutagenicity

in vitro assay

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Mouse - male and female

Result: negative

#### Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Cumene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Cumene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

May cause respiratory irritation.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: GR8575000

narcosis, Central nervous system depression, Dermatitis, Gastrointestinal disturbance, Damage to the lungs., Liver injury may occur., Kidney injury may occur.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 4.8 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia (water flea) - 2.14 mg/l - 48 h (OECD Test Guideline 202)

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 2.60 mg/l - 72 h

**12.2 Persistence and degradability**

Biodegradability Result: - According to the results of tests of biodegradability this product is not readily biodegradable.

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1918 Class: 3 Packing group: III  
 Proper shipping name: Isopropylbenzene  
 Reportable Quantity (RQ): 5000 lbs  
 Poison Inhalation Hazard: No

**IMDG**

UN number: 1918 Class: 3 Packing group: III EMS-No: F-E, S-E  
 Proper shipping name: ISOPROPYLBENZENE  
 Marine pollutant:yes

**IATA**

UN number: 1918      Class: 3  
 Proper shipping name: Isopropylbenzene

Packing group: III

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Cumene	98-82-8	2010-06-11

**16. OTHER INFORMATION****Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Carc.	Carcinogenicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.  
 The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the

product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.14

Revision Date: 10/03/2017

Print Date: 11/10/2018



SDS preview

# LEAD

**DANGER**

7439-92-1

by Fisher Scientific

---

## Synonyms

C.I. 77575, C.I. Pigment Metal 4, EINECS 231-100-4, Glover, HSDB 231, Lead flake, Olow, Plumbum, CI 77575, Plumbum metallicum, Blei, CI pigment metal 4, EC 231-100-4, KS-4, Lead, Lead element, Lead S2, Olow [Polish], Omaha & grant, Pb-S 100, Rough lead bullion, CCRIS 1581, Lead metal, Lead S 2, SSO 1, UNII-2P299V784P

## Hazard statements

Harmful if inhaled

Harmful if swallowed

May cause cancer

May cause damage to organs through prolonged or repeated exposure

May cause drowsiness or dizziness

## Precautions

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Do not eat, drink or smoke when using this product

Use only outdoors or in a well-ventilated area

Rinse mouth

Store locked up

## Hazard category

Acute toxicity, inhalation, Acute toxicity, oral, Carcinogenicity, Specific target organ toxicity, repeated exposure, Specific target organ toxicity, single exposure; Narcotic effects



2000200020002000&param1=ZmRwLjFfNzE0NjEwMDNORQ==&unique=1525284976)

The information contained herein is based on data compiled from the chemical components of the (M)SDS and may not accurately represent the safety hazards for the product. Only the manufacturer of the product can make actual representations about the hazard profile of a chemical product. No warranty is expressed or implied regarding the accuracy of these data or the results to be obtained from the use thereof.

© 2017 Chemical Safety Software

## SAFETY DATA SHEET

Version 3.12  
Revision Date 12/02/2015  
Print Date 05/01/2016

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Mercury

Product Number : 215457  
Brand : Sigma-Aldrich  
Index-No. : 080-001-00-0

CAS-No. : 7439-97-6

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Inhalation (Category 2), H330

Reproductive toxicity (Category 1B), H360

Specific target organ toxicity - repeated exposure (Category 1), H372

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H330

Fatal if inhaled.

H360

May damage fertility or the unborn child.

H372

Causes damage to organs through prolonged or repeated exposure.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P284	Wear respiratory protection.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	:	Hg
Molecular weight	:	200.59 g/mol
CAS-No.	:	7439-97-6
EC-No.	:	231-106-7
Index-No.	:	080-001-00-0

#### Hazardous components

Component	Classification	Concentration
<b>Mercury</b>	Acute Tox. 2; Repr. 1B; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H330, H360, H372, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Mercury/mercury oxides.

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal. In some instances, a mercury spill kit may be used. Please consult with your site EHS representative to determine the most appropriate clean up method. Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Mercury	7439-97-6	C	0.1 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
	Remarks	Potential for dermal absorption		

		CEIL	1.0mg/10m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	0.05 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		
		TWA	0.025 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Kidney damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	0.05 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Mercury	7439-97-6	Mercury	0.0400 mg/g	In urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Prior to shift (16 hours after exposure ceases)			
		Mercury	15.0000 µg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                |
|-------------------------------------------------|--------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: silver, white                                          |
| b) Odour                                        | odourless                                                                      |
| c) Odour Threshold                              | No data available                                                              |
| d) pH                                           | No data available                                                              |
| e) Melting point/freezing point                 | Melting point/range: -38.87 °C (-37.97 °F) - lit.                              |
| f) Initial boiling point and boiling range      | 356.6 °C (673.9 °F) - lit.                                                     |
| g) Flash point                                  | Not applicable                                                                 |
| h) Evaporation rate                             | No data available                                                              |
| i) Flammability (solid, gas)                    | No data available                                                              |
| j) Upper/lower flammability or explosive limits | No data available                                                              |
| k) Vapour pressure                              | < 0.01 hPa (< 0.01 mmHg) at 20 °C (68 °F)<br>1 hPa (1 mmHg) at 126 °C (259 °F) |
| l) Vapour density                               | 6.93 - (Air = 1.0)                                                             |
| m) Relative density                             | 13.55 g/cm <sup>3</sup> at 25 °C (77 °F)                                       |
| n) Water solubility                             | 0.00006 g/l at 25 °C (77 °F)                                                   |
| o) Partition coefficient: n-octanol/water       | No data available                                                              |
| p) Auto-ignition temperature                    | No data available                                                              |
| q) Decomposition temperature                    | No data available                                                              |
| r) Viscosity                                    | No data available                                                              |
| s) Explosive properties                         | No data available                                                              |
| t) Oxidizing properties                         | No data available                                                              |

### 9.2 Other safety information

- |                         |                    |
|-------------------------|--------------------|
| Relative vapour density | 6.93 - (Air = 1.0) |
|-------------------------|--------------------|

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents, Ammonia, Azides, Nitrates, Chlorates, Copper

### 10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

LC50 Inhalation - Rat - male - 2 h - < 27 mg/m<sup>3</sup>

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Mercury)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

Presumed human reproductive toxicant

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

Causes damage to organs through prolonged or repeated exposure.

#### Aspiration hazard

No data available



**Additional Information**

RTECS: OV4550000

Mercury accumulates in almost all tissues, especially in the: Kidney, Effects due to ingestion may include: Nausea, Vomiting, Diarrhoea, intestinal bleeding

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish mortality LC50 - Cyprinus carpio (Carp) - 0.160 mg/l - 96 h

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**Bioaccumulation Carassius auratus (goldfish) - 1,789 d  
- 0.25 µg/l

Bioconcentration factor (BCF): 155,986

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

No data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 2809 Class: 8 (6.1) Packing group: III

Proper shipping name: A,W Mercury

Reportable Quantity (RQ): 1 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 2809 Class: 8 (6.1) Packing group: III EMS-No: F-A, S-B

Proper shipping name: MERCURY

Marine pollutant:yes

**IATA**

UN number: 2809 Class: 8 (6.1) Packing group: III

Proper shipping name: Mercury

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2007-07-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2007-07-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2007-07-01

### California Prop. 65 Components

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

CAS-No.	Revision Date
7439-97-6	2013-12-20

Mercury

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H330	Fatal if inhaled.
H360	May damage fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Repr.	Reproductive toxicity

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.12

Revision Date: 12/02/2015

Print Date: 05/01/2016

## SAFETY DATA SHEET

Version 6.0  
Revision Date 03/14/2018  
Print Date 01/21/2019

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Methyl Ethyl Ketone, United States Pharmacopeia (USP) Reference Standard

Product Number : 1430101  
Brand : US Pharmacopeia

CAS-No. : 78-93-3

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES

Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

**GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**  
Flammable liquids (Category 2), H225

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)  
H225 : Highly flammable liquid and vapour.  
H319 : Causes serious eye irritation.  
H336 : May cause drowsiness or dizziness.

Precautionary statement(s)	
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Molecular weight	:	72.11 g/mol
CAS-No.	:	78-93-3

#### Hazardous components

Component	Classification	Concentration
<b>Ethyl methyl ketone</b>		
	Flam. Liq. 2; Eye Irrit. 2A; STOT SE 3; H225, H319, H336	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

- 4.2 Most important symptoms and effects, both acute and delayed**  
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11
- 4.3 Indication of any immediate medical attention and special treatment needed**  
No data available
- 

## 5. FIREFIGHTING MEASURES

- 5.1 Extinguishing media**  
**Suitable extinguishing media**  
Dry powder Dry sand  
**Unsuitable extinguishing media**  
Do NOT use water jet.
- 5.2 Special hazards arising from the substance or mixture**  
Carbon oxides
- 5.3 Advice for firefighters**  
Wear self-contained breathing apparatus for firefighting if necessary.
- 5.4 Further information**  
Use water spray to cool unopened containers.
- 

## 6. ACCIDENTAL RELEASE MEASURES

- 6.1 Personal precautions, protective equipment and emergency procedures**  
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.  
For personal protection see section 8.
- 6.2 Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.
- 6.3 Methods and materials for containment and cleaning up**  
Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).
- 6.4 Reference to other sections**  
For disposal see section 13.
- 

## 7. HANDLING AND STORAGE

- 7.1 Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.  
For precautions see section 2.2.
- 7.2 Conditions for safe storage, including any incompatibilities**  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
Storage class (TRGS 510): 3: Flammable liquids
- 7.3 Specific end use(s)**  
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated
- 

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

- 8.1 Control parameters**  
**Components with workplace control parameters**
- 8.2 Exposure controls**  
**Appropriate engineering controls**  
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

### Body Protection

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-87 °C (-125 °F)
f) Initial boiling point and boiling range	79 - 80 °C (174 - 176 °F)
g) Flash point	-3 °C (27 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 10.1 %(V) Lower explosion limit: 1.8 %(V)
k) Vapour pressure	95 hPa at 20 °C (68 °F)
l) Vapour density	2.49 - (Air = 1.0)
m) Relative density	0.805 g/cm <sup>3</sup>
n) Water solubility	soluble
o) Partition coefficient: n-octanol/water	log Pow: 0.29
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

Surface tension 24.6 mN/m at 20 °C (68 °F)

Relative vapour density 2.49 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents, Strong reducing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 2,737 mg/kg

LC50 Inhalation - Mouse - 4 h - 32,000 mg/m<sup>3</sup>

LC50 Inhalation - Mammal - 38,000 mg/m<sup>3</sup>

LD50 Dermal - Rabbit - 6,480 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Irritating to eyes.

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available



**Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

Central nervous system depression, Gastrointestinal disturbance, narcosis

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish                      mortality NOEC - Cyprinodon variegatus (sheepshead minnow) - 400 mg/l - 96 h(Ethyl methyl ketone)

LC50 - Pimephales promelas (fathead minnow) - 3,130 - 3,320 mg/l - 96 h(Ethyl methyl ketone)

Toxicity to daphnia and other aquatic invertebrates      LC50 - Daphnia magna (Water flea) - > 520 mg/l - 48 h(Ethyl methyl ketone)

EC50 - Daphnia magna (Water flea) - 7,060 mg/l - 24 h(Ethyl methyl ketone)

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Ethyl methyl ketone)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Contact a licensed professional waste disposal service to dispose of this material. Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1193              Class: 3                              Packing group: II

Proper shipping name: Ethyl methyl ketone

Reportable Quantity (RQ)              :              5000 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 1193      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: ETHYL METHYL KETONE

**IATA**

UN number: 1193      Class: 3      Packing group: II  
Proper shipping name: Ethyl methyl ketone

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

H225      Highly flammable liquid and vapour.  
H319      Causes serious eye irritation.  
H336      May cause drowsiness or dizziness.

**HMIS Rating**

Health hazard:            2  
Chronic Health Hazard:    \*  
Flammability:            3  
Physical Hazard            0

**NFPA Rating**

Health hazard:            2  
Fire Hazard:              3  
Reactivity Hazard:        0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.0

Revision Date: 03/14/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

according to Regulation (EC) No. 1907/2006

Version 6.0 Revision Date 10.11.2016

Print Date 21.01.2019

GENERIC EU MSDS - NO COUNTRY SPECIFIC DATA - NO OEL DATA

**SECTION 1: Identification of the substance/mixture and of the company/undertaking****1.1 Product identifiers**

Product name : Methylene chloride

Product Number : M1550000

Brand : Sigma-Aldrich

REACH No. : A registration number is not available for this substance as the substance or its uses are exempted from registration, the annual tonnage does not require a registration or the registration is envisaged for a later registration deadline.

CAS-No. : 75-09-2

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Manufacture of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES

Telephone : +1 314 771-5765

Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

**SECTION 2: Hazards identification****2.1 Classification of the substance or mixture****Classification according to Regulation (EC) No 1272/2008**

Skin irritation (Category 2), H315

Eye irritation (Category 2), H319

Carcinogenicity (Category 2), H351

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Specific target organ toxicity - repeated exposure, Oral (Category 2), Liver, Blood, H373

Specific target organ toxicity - repeated exposure, Inhalation (Category 2), Central nervous system, H373

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 Label elements****Labelling according Regulation (EC) No 1272/2008**

Pictogram



Signal word

Warning

Hazard statement(s)

H315

Causes skin irritation.

H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H373	May cause damage to organs (Liver, Blood) through prolonged or repeated exposure if swallowed.
H373	May cause damage to organs (Central nervous system) through prolonged or repeated exposure if inhaled.

Precautionary statement(s)

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

Supplemental Hazard Statements none

### 2.3 Other hazards

This substance/mixture contains no components considered to be either persistent, bioaccumulative and toxic (PBT), or very persistent and very bioaccumulative (vPvB) at levels of 0.1% or higher.

---

## SECTION 3: Composition/information on ingredients

### 3.1 Substances

Formula	:	CH <sub>2</sub> Cl <sub>2</sub>
Molecular weight	:	84.93 g/mol
CAS-No.	:	75-09-2

#### Hazardous ingredients according to Regulation (EC) No 1272/2008

Component	Classification	Concentration
<b>Methylene chloride</b>		
CAS-No.	75-09-2	<= 100 %
EC-No.	200-838-9	
Index-No.	602-004-00-3	
	Skin Irrit. 2; Eye Irrit. 2; Carc. 2; STOT SE 3; STOT RE 2; H315, H319, H351, H336, H335, H373, H373	

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## SECTION 4: First aid measures

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## SECTION 5: Firefighting measures

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## SECTION 6: Accidental release measures

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation.

Evacuate personnel to safe areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## SECTION 7: Handling and storage

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Non Combustible Liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## SECTION 8: Exposure controls/personal protection

### 8.1 Control parameters

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of

contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

The selected protective gloves have to satisfy the specifications of EU Directive 89/686/EEC and the standard EN 374 derived from it.

#### **Body Protection**

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engine protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## **SECTION 9: Physical and chemical properties**

### **9.1 Information on basic physical and chemical properties**

a) Appearance	Form: liquid Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-97.0 °C
f) Initial boiling point and boiling range	40.0 °C at 1,013.2 hPa
g) Flash point	No data available
h) Evaporation rate	0.71
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 19 %(V) Lower explosion limit: 12 %(V)
k) Vapour pressure	470.9 hPa at 20.0 °C
l) Vapour density	2.93 - (Air = 1.0)
m) Relative density	1.32 g/cm <sup>3</sup>
n) Water solubility	slightly soluble
o) Partition coefficient: n-octanol/water	log Pow: 1.25
p) Auto-ignition temperature	556.1 °C 662.0 °C
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

Relative vapour density 2.93 - (Air = 1.0)

---

## SECTION 10: Stability and reactivity

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks. Exposure to sunlight.

### 10.5 Incompatible materials

Alkali metals, Aluminum, Strong oxidizing agents, Bases, Amines, Magnesium, Strong acids and strong bases, Vinyl compounds

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas  
In the event of fire: see section 5

---

## SECTION 11: Toxicological information

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - > 2,000 mg/kg(Methylene chloride)

LC50 Inhalation - Rat - 52,000 mg/m<sup>3</sup>(Methylene chloride)

LD50 Dermal - Rat - > 2,000 mg/kg(Methylene chloride)

(OECD Test Guideline 402)

#### Skin corrosion/irritation

Skin - Rabbit(Methylene chloride)

Result: Irritating to skin. - 24 h

(Draize Test)

#### Serious eye damage/eye irritation

Eyes - Rabbit(Methylene chloride)

Result: Irritating to eyes. - 24 h

(Draize Test)

#### Respiratory or skin sensitisation

No data available(Methylene chloride)

#### Germ cell mutagenicity

(Methylene chloride)

Rat

DNA damage

#### Carcinogenicity

Limited evidence of carcinogenicity in animal studies(Methylene chloride)

Suspected human carcinogens(Methylene chloride)

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

#### Reproductive toxicity

No data available(Methylene chloride)



**Specific target organ toxicity - single exposure**

May cause respiratory irritation.(Methylene chloride)

May cause drowsiness or dizziness.(Methylene chloride)

**Specific target organ toxicity - repeated exposure**

Inhalation - May cause damage to organs through prolonged or repeated exposure. - Central nervous system

Oral - May cause damage to organs through prolonged or repeated exposure. - Liver, Blood

**Aspiration hazard**

No data available(Methylene chloride)

**Additional Information**

RTECS: Not available

Dichloromethane is metabolized in the body producing carbon monoxide which blood, reducing the oxygen-carrying capacity of the blood., Acts as a simple asphyxiant by displacing air., anesthetic effects, Difficulty in breathing, Headache, Dizziness, Prolonged or repeated contact with skin may cause:, defatting, Dermatitis, Contact with eyes can cause:, Redness, Blurred vision, Provokes tears., Effects due to ingestion may include:, Gastrointestinal discomfort, Central nervous system depression, Paresthesia., Drowsiness, Convulsions, Conjunctivitis., Pulmonary edema. Effects may be delayed., Irregular breathing., Stomach/intestinal disorders, Nausea, Vomiting, Increased liver enzymes., Weakness, Heavy or prolonged skin exposure may result in the absorption of harmful amounts of material., Abdominal pain(Methylene chloride)

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.(Methylene chloride)

---

**SECTION 12: Ecological information****12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 193.00 mg/l - 96 h(Methylene chloride)

NOEC - Cyprinodon variegatus (sheepshead minnow) - 130 mg/l - 96 h(Methylene chloride)

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 1,682.00 mg/l - 48 h(Methylene chloride)

**12.2 Persistence and degradability**

Biodegradability Result: < 26 % - Not readily biodegradable. (OECD Test Guideline 301C)

**12.3 Bioaccumulative potential**

Does not bioaccumulate.

**12.4 Mobility in soil**

No data available(Methylene chloride)

**12.5 Results of PBT and vPvB assessment**

This substance/mixture contains no components considered to be either persistent, bioaccumulative and toxic (PBT), or very persistent and very bioaccumulative (vPvB) at levels of 0.1% or higher.

**12.6 Other adverse effects**

---

**SECTION 13: Disposal considerations****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company.

**Contaminated packaging**  
Dispose of as unused product.

---

**SECTION 14: Transport information**

<b>14.1 UN number</b>			
ADR/RID:	IMDG:		IATA:
<b>14.2 UN proper shipping name</b>			
ADR/RID:			
IMDG:			
IATA:			
<b>14.3 Transport hazard class(es)</b>			
ADR/RID:	IMDG:		IATA:
<b>14.4 Packaging group</b>			
ADR/RID:	IMDG:		IATA:
<b>14.5 Environmental hazards</b>			
ADR/RID:	IMDG Marine pollutant:		IATA:
<b>14.6 Special precautions for user</b>			
No data available			

---

**SECTION 15: Regulatory information**

- 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture**  
This safety datasheet complies with the requirements of Regulation (EC) No. 1907/2006.
- 15.2 Chemical safety assessment**  
For this product a chemical safety assessment was not carried out

---

**SECTION 16: Other information****Full text of H-Statements referred to under sections 2 and 3.**

H315	Causes skin irritation.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure if inhaled.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

## SAFETY DATA SHEET

Version 5.8  
 Revision Date 10/03/2017  
 Print Date 01/21/2019

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Methyl tert-butyl ether solution  
 Product Number : CRM48483  
 Brand : Supelco  
 Index-No. : 603-001-00-X

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
 3050 Spruce Street  
 SAINT LOUIS MO 63103  
 USA  
 Telephone : +1 800-325-5832  
 Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225  
 Acute toxicity, Oral (Category 3), H301  
 Acute toxicity, Inhalation (Category 3), H331  
 Acute toxicity, Dermal (Category 3), H311  
 Specific target organ toxicity - single exposure (Category 1), H370

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.  
 H301 + H311 + H331 Toxic if swallowed, in contact with skin or if inhaled.  
 H370 Causes damage to organs.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.  
 P233 Keep container tightly closed.  
 P240 Ground/bond container and receiving equipment.  
 P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.  
 P242 Use only non-sparking tools.  
 P243 Take precautionary measures against static discharge.

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P307 + P311	IF exposed: Call a POISON CENTER or doctor/ physician.
P322	Specific measures (see supplemental first aid instructions on this label).
P330	Rinse mouth.
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.2 Mixtures

#### Hazardous components

Component	Classification	Concentration
<b>Methanol</b>		
CAS-No.	67-56-1	90 - 100 %
EC-No.	200-659-6	
Index-No.	603-001-00-X	
Registration number	01-2119433307-44-XXXX	

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

Use water spray to cool unopened containers.

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

#### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

#### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

#### 6.4 Reference to other sections

For disposal see section 13.

---

### 7. HANDLING AND STORAGE

#### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

#### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store at room temperature.

#### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

### 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

#### 8.1 Control parameters

##### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Methanol	67-56-1	TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Headache Nausea Dizziness Eye damage		

		Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		STEL	250.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Headache Nausea Dizziness Eye damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	200.000000 ppm 260.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	250.000000 ppm 325.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	200.000000 ppm 260.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Headache Nausea Dizziness Eye damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		STEL	250 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Headache Nausea Dizziness Eye damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	200 ppm 260 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	250 ppm 325 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	200 ppm 260 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		STEL	250 ppm 325 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		

		TWA	200 ppm 260 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		
		C	1,000 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		PEL	200 ppm 260 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		STEL	250 ppm 325 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Methanol	67-56-1	Methanol	15.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
		Methanol	15 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

## 8.2 Exposure controls

### Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                            |
|-------------------------------------------------|--------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                                                         |
| b) Odour                                        | pungent                                                                                    |
| c) Odour Threshold                              | No data available                                                                          |
| d) pH                                           | No data available                                                                          |
| e) Melting point/freezing point                 | Melting point/range: -98.0 °C (-144.4 °F)                                                  |
| f) Initial boiling point and boiling range      | 64.0 - 65.0 °C (147.2 - 149.0 °F) at 1,013 hPa (760 mmHg)                                  |
| g) Flash point                                  | 9.7 °C (49.5 °F) - closed cup                                                              |
| h) Evaporation rate                             | No data available                                                                          |
| i) Flammability (solid, gas)                    | No data available                                                                          |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 36 %(V)<br>Lower explosion limit: 6 %(V)                            |
| k) Vapour pressure                              | 546.6 hPa (410.0 mmHg) at 50.0 °C (122.0 °F)<br>130.3 hPa (97.7 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                          |
| m) Relative density                             | 0.79 g/cm <sup>3</sup> at 20 °C (68 °F)                                                    |
| n) Water solubility                             | completely miscible                                                                        |
| o) Partition coefficient: n-octanol/water       | No data available                                                                          |
| p) Auto-ignition temperature                    | No data available                                                                          |
| q) Decomposition temperature                    | No data available                                                                          |
| r) Viscosity                                    | No data available                                                                          |
| s) Explosive properties                         | No data available                                                                          |
| t) Oxidizing properties                         | No data available                                                                          |

### 9.2 Other safety information

Dissociation constant 15.3



---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air. Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

Heat, flames and sparks. Extremes of temperature and direct sunlight.

### 10.5 Incompatible materials

Acid chlorides, Acid anhydrides, Oxidizing agents, Alkali metals, Reducing agents, Acids

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

#### Additional Information

RTECS: Not available

Methyl alcohol may be fatal or cause blindness if swallowed., Cannot be made non-poisonous., Effects due to ingestion may include:, Nausea, Headache, Vomiting, Gastrointestinal disturbance, Dizziness, Weakness, Confusion., Drowsiness, Unconsciousness, May cause convulsions.

Stomach - Irregularities - Based on Human Evidence  
Stomach - Irregularities - Based on Human Evidence  
Central nervous system - (tert-Butyl methyl ether)

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1230      Class: 3      Packing group: II

Proper shipping name: Methanol, solution

Reportable Quantity (RQ):

Poison Inhalation Hazard: No

### IMDG

UN number: 1230      Class: 3 (6.1)      Packing group: II      EMS-No: F-E, S-D

Proper shipping name: METHANOL, SOLUTION

### IATA

UN number: 1230      Class: 3 (6.1)      Packing group: II

Proper shipping name: Methanol, solution

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Methanol	67-56-1	2007-07-01

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

Methanol	CAS-No. 67-56-1	Revision Date 2007-07-01
----------	--------------------	-----------------------------

**Pennsylvania Right To Know Components**

Methanol	CAS-No. 67-56-1	Revision Date 2007-07-01
tert-Butyl methyl ether	1634-04-4	2007-07-01

**New Jersey Right To Know Components**

Methanol	CAS-No. 67-56-1	Revision Date 2007-07-01
----------	--------------------	-----------------------------

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H301	Toxic if swallowed.
H301 + H311 + H331	Toxic if swallowed, in contact with skin or if inhaled.
H311	Toxic in contact with skin.
H331	Toxic if inhaled.
H370	Causes damage to organs.
STOT SE	Specific target organ toxicity - single exposure

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.8

Revision Date: 10/03/2017

Print Date: 01/21/2019

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Naphthalene

Product Number : 84679  
Brand : Sigma-Aldrich  
Index-No. : 601-052-00-2

CAS-No. : 91-20-3

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable solids (Category 2), H228  
Acute toxicity, Oral (Category 4), H302  
Carcinogenicity (Category 2), H351  
Acute aquatic toxicity (Category 1), H400  
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H228 Flammable solid.  
H302 Harmful if swallowed.  
H351 Suspected of causing cancer.  
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and understood.  
P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>10</sub> H <sub>8</sub>
Molecular weight	: 128.17 g/mol
CAS-No.	: 91-20-3
EC-No.	: 202-049-5
Index-No.	: 601-052-00-2
Registration number	: 01-2119561346-37-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Naphthalene</b>	Flam. Sol. 2; Acute Tox. 4; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H228, H302, H351, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Keep in suitable, closed containers for disposal. Contain spillage, pick up with an electrically protected vacuum cleaner or by wet-brushing and transfer to a container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs. Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): 4.1B: Flammable solid hazardous materials

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Naphthalene	91-20-3	TWA	10 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Hemolytic anemia Upper Respiratory Tract irritation Cataract Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		

		TWA	10 ppm 50 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		ST	15 ppm 75 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		TWA	10 ppm 50 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	0.1 ppm 0.5 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	1-Naphthol + 2-Naphthol			ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the

sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                                                       |
|-------------------------------------------------|---------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: flakes, granules<br>Colour: white                                               |
| b) Odour                                        | aromatic                                                                              |
| c) Odour Threshold                              | No data available                                                                     |
| d) pH                                           | No data available                                                                     |
| e) Melting point/freezing point                 | Melting point/range: 79.5 - 81.0 °C (175.1 - 177.8 °F)                                |
| f) Initial boiling point and boiling range      | 218 °C (424 °F) - lit.                                                                |
| g) Flash point                                  | 80.0 °C (176.0 °F) - closed cup                                                       |
| h) Evaporation rate                             | No data available                                                                     |
| i) Flammability (solid, gas)                    | No data available                                                                     |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 5.9 %(V)<br>Lower explosion limit: 0.9 %(V)                    |
| k) Vapour pressure                              | 1.3 hPa (1.0 mmHg) at 53.0 °C (127.4 °F)<br>0.04 hPa (0.03 mmHg) at 25.0 °C (77.0 °F) |
| l) Vapour density                               | No data available                                                                     |
| m) Relative density                             | 1.085 g/cm <sup>3</sup> at 24.7 °C (76.5 °F)                                          |
| n) Water solubility                             | 0.0308 g/l at 25 °C (77 °F) - OECD Test Guideline 105 - slightly soluble              |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.4 at 25 °C (77 °F)                                                         |
| p) Auto-ignition temperature                    | 526.0 °C (978.8 °F)                                                                   |
| q) Decomposition temperature                    | No data available                                                                     |
| r) Viscosity                                    | 1.05 mm <sup>2</sup> /s at 81.5 °C (178.7 °F) -                                       |
| s) Explosive properties                         | No data available                                                                     |
| t) Oxidizing properties                         | No data available                                                                     |

### **9.2 Other safety information**

- |                 |                                  |
|-----------------|----------------------------------|
| Surface tension | 31.8 mN/m at 100.0 °C (212.0 °F) |
|-----------------|----------------------------------|

---

## **10. STABILITY AND REACTIVITY**

### **10.1 Reactivity**

No data available

### **10.2 Chemical stability**

Stable under recommended storage conditions.

### **10.3 Possibility of hazardous reactions**

No data available



#### 10.4 Conditions to avoid

Heat, flames and sparks.

#### 10.5 Incompatible materials

Strong oxidizing agents

#### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

### 11. TOXICOLOGICAL INFORMATION

#### 11.1 Information on toxicological effects

##### Acute toxicity

LD50 Oral - Rat - 490.0 mg/kg

LC50 Inhalation - Rat - male and female - 4 h - > 0.4 mg/l  
(OECD Test Guideline 403)

LD50 Dermal - Rabbit - 20,000 mg/kg

No data available

##### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation - 24 h

##### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation

##### Respiratory or skin sensitisation

Maximisation Test - Guinea pig

Result: Does not cause skin sensitisation.

(OECD Test Guideline 406)

##### Germ cell mutagenicity

Ames test

S. typhimurium

Result: negative

Rat - male

Result: negative

##### Carcinogenicity

Carcinogenicity - Rat - male and female - inhalation (vapour)

Tumorigenic: Tumors at site of application.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Naphthalene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Naphthalene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

##### Reproductive toxicity

No data available

##### Specific target organ toxicity - single exposure

No data available

##### Specific target organ toxicity - repeated exposure

No data available

##### Aspiration hazard

No data available

##### Additional Information

Repeated dose toxicity  
RTECS: QJ0525000

Rat - male and female - Oral - NOAEL : 100 mg/kg - LOAEL : 400 mg/kg - OECD Test Guideline 408

Absorption into the body leads to the formation of methemoglobin which in sufficient concentration causes cyanosis. Onset may be delayed 2 to 4 hours or longer., Naphthalene is retinotoxic and systemic absorption of its vapors above 15ppm, may result in: cataracts, optic neuritis, corneal injury, Eye irritation, Ingestion may provoke the following symptoms: hemolytic anemia, hemoglobinuria, Nausea, Headache, Vomiting, Gastrointestinal disturbance, Convulsions, anemia, Kidney injury may occur., Seizures., Coma.

Heart -

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish flow-through test LC50 - Pimephales promelas (fathead minnow) - 7.9 mg/l - 96 h (OECD Test Guideline 203)

Toxicity to daphnia and other aquatic invertebrates static test EC50 - Daphnia magna (Water flea) - 2.16 mg/l - 48 h

### 12.2 Persistence and degradability

Biodegradability aerobic - Exposure time 28 d  
Result: 2 % - Not readily biodegradable.

### 12.3 Bioaccumulative potential

Bioaccumulation Fish

Bioconcentration factor (BCF): 427 - 1,158

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1334 Class: 4.1 Packing group: III  
Proper shipping name: Naphthalene, crude  
Reportable Quantity (RQ): 100 lbs Marine pollutant: yes  
Poison Inhalation Hazard: No

### IMDG

UN number: 1334 Class: 4.1 Packing group: III EMS-No: F-A, S-G  
Proper shipping name: NAPHTHALENE, CRUDE  
Marine pollutant: yes Marine pollutant: yes

**IATA**

UN number: 1334      Class: 4.1      Packing group: III  
Proper shipping name: Naphthalene, crude

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-09-28

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Flam. Sol.	Flammable solids
H228	Flammable solid.
H302	Harmful if swallowed.
H351	Suspected of causing cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.10

Revision Date: 06/21/2018

Print Date: 11/10/2018



## SAFETY DATA SHEET

Version 4.4  
Revision Date 07/09/2014  
Print Date 11/10/2018

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Propylbenzene

Product Number : P52407  
Brand : Aldrich  
Index-No. : 601-024-00-X

CAS-No. : 103-65-1

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Manufacture of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H226 : Flammable liquid and vapour.  
H304 : May be fatal if swallowed and enters airways.  
H335 : May cause respiratory irritation.  
H411 : Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210 : Keep away from heat/sparks/open flames/hot surfaces. - No smoking.  
P233 : Keep container tightly closed.  
P240 : Ground/bond container and receiving equipment.  
P241 : Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P312	Call a POISON CENTER or doctor/ physician if you feel unwell.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Synonyms	: 1-Phenylpropane
Formula	: C <sub>9</sub> H <sub>12</sub>
Molecular Weight	: 120.19 g/mol
CAS-No.	: 103-65-1
EC-No.	: 203-132-9
Index-No.	: 601-024-00-X

#### Hazardous components

Component	Classification	Concentration
<b>Propylbenzene</b>	Flam. Liq. 3; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H335, H411	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

- 4.2 Most important symptoms and effects, both acute and delayed**  
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11
- 4.3 Indication of any immediate medical attention and special treatment needed**  
no data available
- 

## 5. FIREFIGHTING MEASURES

- 5.1 Extinguishing media**  
**Suitable extinguishing media**  
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
- 5.2 Special hazards arising from the substance or mixture**  
Carbon oxides
- 5.3 Advice for firefighters**  
Wear self contained breathing apparatus for fire fighting if necessary.
- 5.4 Further information**  
Use water spray to cool unopened containers.
- 

## 6. ACCIDENTAL RELEASE MEASURES

- 6.1 Personal precautions, protective equipment and emergency procedures**  
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.  
For personal protection see section 8.
- 6.2 Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.
- 6.3 Methods and materials for containment and cleaning up**  
Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).
- 6.4 Reference to other sections**  
For disposal see section 13.
- 

## 7. HANDLING AND STORAGE

- 7.1 Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.  
For precautions see section 2.2.
- 7.2 Conditions for safe storage, including any incompatibilities**  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.
- 7.3 Specific end use(s)**  
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated
- 

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

- 8.1 Control parameters**  
**Components with workplace control parameters**  
Contains no substances with occupational exposure limit values.
- 8.2 Exposure controls**  
**Appropriate engineering controls**  
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                              |
|--------------------------------------------|----------------------------------------------|
| a) Appearance                              | Form: liquid, clear<br>Colour: colourless    |
| b) Odour                                   | no data available                            |
| c) Odour Threshold                         | no data available                            |
| d) pH                                      | no data available                            |
| e) Melting point/freezing point            | Melting point/range: -99 °C (-146 °F) - lit. |
| f) Initial boiling point and boiling range | 159 °C (318 °F) - lit.                       |
| g) Flash point                             | 42.0 °C (107.6 °F) - closed cup              |
| h) Evaporation rate                        | no data available                            |
| i) Flammability (solid, gas)               | no data available                            |



j) Upper/lower flammability or explosive limits	Upper explosion limit: 6 %(V) Lower explosion limit: 0.8 %(V)
k) Vapour pressure	no data available
l) Vapour density	no data available
m) Relative density	0.862 g/cm <sup>3</sup> at 25 °C (77 °F)
n) Water solubility	slightly soluble
o) Partition coefficient: n-octanol/water	no data available
p) Auto-ignition temperature	450.0 °C (842.0 °F)
q) Decomposition temperature	no data available
r) Viscosity	no data available
s) Explosive properties	no data available
t) Oxidizing properties	no data available

## 9.2 Other safety information

no data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

no data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

no data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - no data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - rat - 6,040 mg/kg

Remarks: Behavioral:Somnolence (general depressed activity).

LC50 Inhalation - rat - 2 h - 65000 ppm

Dermal: no data available

no data available

#### Skin corrosion/irritation

no data available

#### Serious eye damage/eye irritation

no data available

#### Respiratory or skin sensitisation

no data available

**Germ cell mutagenicity**

no data available

**Carcinogenicity**

- IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
- ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.
- NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
- OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

no data available

no data available

**Specific target organ toxicity - single exposure**

May cause respiratory irritation.

**Specific target organ toxicity - repeated exposure**

no data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: DA8750000

Damage to the lungs., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney -

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

- Toxicity to fish LC50 - *Oncorhynchus mykiss* (rainbow trout) - 1.55 mg/l - 96.0 h
- Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - *Daphnia magna* (Water flea) - 2 mg/l - 24 h

**12.2 Persistence and degradability**

no data available

**12.3 Bioaccumulative potential**

no data available

**12.4 Mobility in soil**

no data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Toxic to aquatic life.

Avoid release to the environment.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 2364      Class: 3      Packing group: III  
Proper shipping name: n-Propyl benzene  
Marine pollutant: No  
Poison Inhalation Hazard: No

### IMDG

UN number: 2364      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: n-PROPYLBENZENE  
Marine pollutant: No

### IATA

UN number: 2364      Class: 3      Packing group: III  
Proper shipping name: n-Propylbenzene

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Propylbenzene	103-65-1	1993-04-24

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Propylbenzene	103-65-1	1993-04-24

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Propylbenzene	103-65-1	1993-04-24

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity

Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H335	May cause respiratory irritation.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.
STOT SE	Specific target organ toxicity - single exposure

#### **HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

#### **NFPA Rating**

Health hazard:	2
Fire Hazard:	2
Reactivity Hazard:	0

#### **Further information**

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

#### **Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.4

Revision Date: 07/09/2014

Print Date: 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Toluene

Product Number : 244511  
Brand : Sigma-Aldrich  
Index-No. : 601-021-00-3

CAS-No. : 108-88-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USATelephone : +1 800-325-5832  
Fax : +1 800-325-5052**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Reproductive toxicity (Category 2), H361

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Specific target organ toxicity - repeated exposure (Category 2), H373

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H304

May be fatal if swallowed and enters airways.

H315

Causes skin irritation.

H336

May cause drowsiness or dizziness.

H361

Suspected of damaging fertility or the unborn child.

H373

May cause damage to organs through prolonged or repeated exposure.

H401

Toxic to aquatic life.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>7</sub> H <sub>8</sub>
Molecular weight	: 92.14 g/mol
CAS-No.	: 108-88-3
EC-No.	: 203-625-9
Index-No.	: 601-021-00-3
Registration number	: 01-2119471310-51-XXXX

### Hazardous components

Component	Classification	Concentration
<b>Toluene</b>		
	Flam. Liq. 2; Skin Irrit. 2; Repr. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; H225, H304, H315, H336, H361, H373, H401	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Handle and store under inert gas.

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Toluene	108-88-3	TWA	100 ppm 375 mg/m <sup>3</sup>	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		STEL	150 ppm 560 mg/m <sup>3</sup>	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
	Remarks	Z37.12-1967		
		CEIL	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.12-1967		
		Peak	500 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.12-1967		
		TWA	20 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Visual impairment Female reproductive Pregnancy loss 2015 Adoption Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	100 ppm 375 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		ST	150 ppm 560 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Toluene	108-88-3	Toluene	0.0200 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Prior to last shift of workweek			
		Toluene	0.0300 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		o-Cresol	0.3000 mg/g	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		Toluene	0.02 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		Prior to last shift of workweek			



		Toluene	0.03 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		o-Cresol	0.3mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

#### Derived No Effect Level (DNEL)

Application Area	Exposure routes	Health effect	Value
Workers	Inhalation	Acute systemic effects	384 mg/m3
Workers	Inhalation	Acute local effects	384 mg/m3
Workers	Skin contact	Long-term systemic effects	384mg/kg BW/d
Workers	Inhalation	Long-term systemic effects	192 mg/m3
Workers	Inhalation	Long-term local effects	192 mg/m3
Consumers	Inhalation	Acute systemic effects	226 mg/m3
Consumers	Inhalation	Acute local effects	226 mg/m3
Consumers	Skin contact	Long-term systemic effects	226mg/kg BW/d
Consumers	Inhalation	Long-term systemic effects	56.5 mg/m3
Consumers	Ingestion	Long-term systemic effects	8.13mg/kg BW/d

#### Predicted No Effect Concentration (PNEC)

Compartment	Value
Soil	2.89 mg/kg
Marine water	0.68 mg/l
Fresh water	0.68 mg/l
Marine sediment	16.39 mg/kg
Fresh water sediment	16.39 mg/kg
Sewage treatment plant	13.61 mg/l
Aquatic intermittent release	0.68 mg/l

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### **Body Protection**

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

a) Appearance	Form: liquid Colour: colourless
b) Odour	aromatic
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -93 °C (-135 °F)
f) Initial boiling point and boiling range	110 - 111 °C (230 - 232 °F)
g) Flash point	4.0 °C (39.2 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 7 %(V) Lower explosion limit: 1.2 %(V)
k) Vapour pressure	29.1 hPa (21.8 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	0.865 g/mL at 25 °C (77 °F)
n) Water solubility	0.5 g/l at 15 °C (59 °F)
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	535.0 °C (995.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### **9.2 Other safety information**

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - > 5,580 mg/kg

LC50 Inhalation - Rat - 4 h - 12,500 - 28,800 mg/m<sup>3</sup>

LD50 Dermal - Rabbit - 12,196 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation - 24 h

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Rat

Liver

DNA damage

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

Damage to fetus possible

Suspected human reproductive toxicant

Reproductive toxicity - Rat - Inhalation

Paternal Effects: Spermatogenesis (including genetic material, sperm morphology, motility, and count).

Experiments have shown reproductive toxicity effects in male and female laboratory animals.

Developmental Toxicity - Rat - Oral

Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: XS5250000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to fish	LC50 - Oncorhynchus mykiss (rainbow trout) - 7.63 mg/l - 96 h
	NOEC - Pimephales promelas (fathead minnow) - 5.44 mg/l - 7 d
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 8.00 mg/l - 24 h
	Immobilization EC50 - Daphnia magna (Water flea) - 6 mg/l - 48 h
Toxicity to algae	EC50 - Chlorella vulgaris (Fresh water algae) - 245.00 mg/l - 24 h
	EC50 - Pseudokirchneriella subcapitata (green algae) - 10.00 mg/l - 24 h

**12.2 Persistence and degradability**

Biodegradability Result: - Readily biodegradable.

**12.3 Bioaccumulative potential**

Bioaccumulation Leuciscus idus (Golden orfe) - 3 d  
- 0.05 mg/l

Bioconcentration factor (BCF): 90

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life.

---

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION**

**DOT (US)**

UN number: 1294      Class: 3      Packing group: II  
Proper shipping name: Toluene  
Reportable Quantity (RQ): 1000 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1294      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: TOLUENE

**IATA**

UN number: 1294      Class: 3      Packing group: II  
Proper shipping name: Toluene

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. Toluene	108-88-3	2009-02-01

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H361	Suspected of damaging fertility or the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure.
H401	Toxic to aquatic life.
Repr.	Reproductive toxicity
Skin Irrit.	Skin irritation

**HMIS Rating**

Health hazard:                      2

Chronic Health Hazard: \*  
Flammability: 3  
Physical Hazard 0

**NFPA Rating**

Health hazard: 2  
Fire Hazard: 3  
Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 6.0

Revision Date: 09/21/2017

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Trichloroethylene  
  
Product Number : 251402  
Brand : Sigma-Aldrich  
Index-No. : 602-027-00-9  
  
CAS-No. : 79-01-6

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Skin irritation (Category 2), H315  
Eye irritation (Category 2A), H319  
Germ cell mutagenicity (Category 2), H341  
Carcinogenicity (Category 1B), H350  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336  
Acute aquatic toxicity (Category 3), H402  
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H315 Causes skin irritation.  
H319 Causes serious eye irritation.  
H336 May cause drowsiness or dizziness.  
H341 Suspected of causing genetic defects.  
H350 May cause cancer.  
H412 Harmful to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P281	Use personal protective equipment as required.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Synonyms	:	TCE Trichloroethene
Formula	:	C <sub>2</sub> HCl <sub>3</sub>
Molecular weight	:	131.39 g/mol
CAS-No.	:	79-01-6
EC-No.	:	201-167-4
Index-No.	:	602-027-00-9

#### Hazardous components

Component	Classification	Concentration
<b>Trichloroethylene</b>	Skin Irrit. 2; Eye Irrit. 2A; Muta. 2; Carc. 1B; STOT SE 3; Aquatic Acute 3; Aquatic Chronic 3; H315, H319, H336, H341, H350, H412	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.



**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

**If swallowed**

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

No data available

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Light sensitive. Handle and store under inert gas.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Trichloroethylene	79-01-6	TWA	10.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		STEL	25.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		Potential Occupational Carcinogen See Appendix C See Appendix A		
		See Table Z-2		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		Peak	300.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		Peak	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		

		STEL	100 ppm 537 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	25 ppm 135 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Trichloroacetic acid	15.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		Trichloroethanol	0.5000 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In end-exhaled air	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                   |
|-------------------------------------------------|-------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                         |
| b) Odour                                        | No data available                                                 |
| c) Odour Threshold                              | No data available                                                 |
| d) pH                                           | No data available                                                 |
| e) Melting point/freezing point                 | Melting point/range: -84.8 °C (-120.6 °F) - lit.                  |
| f) Initial boiling point and boiling range      | 86.7 °C (188.1 °F) - lit.                                         |
| g) Flash point                                  | No data available                                                 |
| h) Evaporation rate                             | No data available                                                 |
| i) Flammability (solid, gas)                    | No data available                                                 |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 10.5 %(V)<br>Lower explosion limit: 8 %(V) |
| k) Vapour pressure                              | 81.3 hPa (61.0 mmHg) at 20.0 °C (68.0 °F)                         |
| l) Vapour density                               | No data available                                                 |
| m) Relative density                             | 1.463 g/mL at 25 °C (77 °F)                                       |
| n) Water solubility                             | No data available                                                 |
| o) Partition coefficient: n-octanol/water       | log Pow: 2.29log Pow: 5                                           |
| p) Auto-ignition temperature                    | 410.0 °C (770.0 °F)                                               |
| q) Decomposition temperature                    | No data available                                                 |
| r) Viscosity                                    | No data available                                                 |
| s) Explosive properties                         | No data available                                                 |
| t) Oxidizing properties                         | No data available                                                 |

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

## 10.2 Chemical stability

Stable under recommended storage conditions.

## 10.3 Possibility of hazardous reactions

No data available

## 10.4 Conditions to avoid

No data available

## 10.5 Incompatible materials

Oxidizing agents, Strong bases, Magnesium

## 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 4,920 mg/kg

LC50 Inhalation - Mouse - 4 h - 8450 ppm

LD50 Dermal - Rabbit - > 20,000 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Severe skin irritation - 24 h

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

In vitro tests showed mutagenic effects

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 1 - Group 1: Carcinogenic to humans (Trichloroethylene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Trichloroethylene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

**Additional Information**

RTECS: KX4550000

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, Exposure to and/or consumption of alcohol may increase toxic effects., Gastrointestinal disturbance, Kidney injury may occur., narcosis  
 To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - 41 mg/l - 96.0 h LOEC - other fish - 11 mg/l - 10.0 d NOEC - Oryzias latipes - 40 mg/l - 10.0 d
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 18.00 mg/l - 48 h
Toxicity to algae	IC50 - Pseudokirchneriella subcapitata (green algae) - 175.00 mg/l - 96 h

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

Does not bioaccumulate.

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
 Harmful to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
 Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1710	Class: 6.1	Packing group: III
Proper shipping name: Trichloroethylene		
Reportable Quantity (RQ): 100 lbs		
Poison Inhalation Hazard: No		

**IMDG**

UN number: 1710	Class: 6.1	Packing group: III	EMS-No: F-A, S-A
Proper shipping name: TRICHLOROETHYLENE			

**IATA**

UN number: 1710	Class: 6.1	Packing group: III
-----------------	------------	--------------------

Proper shipping name: Trichloroethylene

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

Trichloroethylene

CAS-No.	Revision Date
79-01-6	2011-09-01

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Trichloroethylene

CAS-No.	Revision Date
79-01-6	2011-09-01

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H402	Harmful to aquatic life.

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.10

Revision Date: 01/04/2018

Print Date: 11/10/2018



---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : 2,2,4-Trimethylpentane

Product Number : 360066  
Brand : Sigma-Aldrich  
Index-No. : 601-009-00-8

CAS-No. : 540-84-1

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USATelephone : +1 800-325-5832  
Fax : +1 800-325-5052**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H304

May be fatal if swallowed and enters airways.

H315

Causes skin irritation.

H336

May cause drowsiness or dizziness.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P312	Call a POISON CENTER/doctor if you feel unwell.
P321	Specific treatment (see supplemental first aid instructions on this label).
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	:	Isooctane
Formula	:	C <sub>8</sub> H <sub>18</sub>
Molecular weight	:	114.23 g/mol
CAS-No.	:	540-84-1
EC-No.	:	208-759-1
Index-No.	:	601-009-00-8
Registration number	:	01-2119457965-22-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>2,2,4-Trimethylpentane</b>	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; Aquatic Chronic 1; H225, H304, H315, H336, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

**If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

For small (incipient) fires, use media such as "alcohol" foam, dry chemicals as far as possible. Use very large quantities (flooding) of water applied ineffective. Cool all affected containers with flooding quantities of water.

**5.2 Special hazards arising from the substance or mixture**

Flash back possible over considerable distance., Container explosion may occur under fire conditions.

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
2,2,4-Trimethylpentane	540-84-1	TWA	300 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Upper Respiratory Tract irritation		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 482 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 90 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

##### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

##### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

##### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                |
|-------------------------------------------------|--------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid                                                                   |
| b) Odour                                        | No data available                                                              |
| c) Odour Threshold                              | No data available                                                              |
| d) pH                                           | No data available                                                              |
| e) Melting point/freezing point                 | Melting point/range: -107 °C (-161 °F)                                         |
| f) Initial boiling point and boiling range      | 98 - 99 °C (208 - 210 °F)                                                      |
| g) Flash point                                  | -12 °C (10 °F) - closed cup                                                    |
| h) Evaporation rate                             | No data available                                                              |
| i) Flammability (solid, gas)                    | No data available                                                              |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 6 %(V)<br>Lower explosion limit: 1 %(V)                 |
| k) Vapour pressure                              | 55 hPa (41 mmHg) at 21 °C (70 °F)<br>117 hPa (88 mmHg) at 37.80 °C (100.04 °F) |
| l) Vapour density                               | 3.94 - (Air = 1.0)                                                             |
| m) Relative density                             | 0.692 g/mL at 25 °C (77 °F)                                                    |
| n) Water solubility                             | insoluble                                                                      |
| o) Partition coefficient: n-octanol/water       | log Pow: 4.6                                                                   |
| p) Auto-ignition temperature                    | No data available                                                              |
| q) Decomposition temperature                    | No data available                                                              |
| r) Viscosity                                    | No data available                                                              |
| s) Explosive properties                         | No data available                                                              |
| t) Oxidizing properties                         | No data available                                                              |

### 9.2 Other safety information

Relative vapour density 3.94 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Irritating to skin.

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Rat

Unscheduled DNA synthesis

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

May cause drowsiness or dizziness.

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

The substance or mixture is known to cause human aspiration toxicity hazards or has to be regarded as if it causes a human aspiration toxicity hazard.

#### Additional Information

RTECS: SA3320000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

### 12.2 Persistence and degradability

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1262      Class: 3      Packing group: II  
Proper shipping name: Octanes  
Reportable Quantity (RQ): 1000 lbs Marine pollutant: yes  
Poison Inhalation Hazard: No

### IMDG

UN number: 1262      Class: 3      Packing group: II      EMS-No: F-E, S-E  
Proper shipping name: OCTANES  
Marine pollutant: yes      Marine pollutant: yes

### IATA

UN number: 1262      Class: 3      Packing group: II  
Proper shipping name: Octanes

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

2,2,4-Trimethylpentane	CAS-No. 540-84-1	Revision Date 2007-03-01
------------------------	---------------------	-----------------------------

### Pennsylvania Right To Know Components

2,2,4-Trimethylpentane	CAS-No. 540-84-1	Revision Date 2007-03-01
------------------------	---------------------	-----------------------------

## New Jersey Right To Know Components

2,2,4-Trimethylpentane

CAS-No.  
540-84-1

Revision Date  
2007-03-01

## California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Skin Irrit.	Skin irritation

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	3
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.7

Revision Date: 06/13/2018

Print Date: 11/10/2018



### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : 1,2,4-Trimethylbenzene  
Product Number : T73601  
Brand : Aldrich  
Index-No. : 601-043-00-3  
CAS-No. : 95-63-6

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226  
Acute toxicity, Inhalation (Category 4), H332  
Skin irritation (Category 2), H315  
Eye irritation (Category 2A), H319  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H315 Causes skin irritation.  
H319 Causes serious eye irritation.  
H332 Harmful if inhaled.  
H335 May cause respiratory irritation.  
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>9</sub> H <sub>12</sub>
Molecular weight	: 120.19 g/mol
CAS-No.	: 95-63-6
EC-No.	: 202-436-9
Index-No.	: 601-043-00-3

#### Hazardous components

Component	Classification	Concentration
<b>1,2,4-Trimethylbenzene</b>	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H315, H319, H332, H335, H411	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,2,4-Trimethylbenzene	95-63-6	TWA	25.000000 ppm 125.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
	Remarks	hemimellitene is a mixture of the 1,2,3-isomer with up to 10% of related aromatics such as the 1,2,4-isomer.		
		TWA	25 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Hematologic effects Asthma		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

##### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-43.69 °C (-46.64 °F)
f) Initial boiling point and boiling range	168.0 - 169.0 °C (334.4 - 336.2 °F)
g) Flash point	48.0 °C (118.4 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 6.4 %(V) Lower explosion limit: 0.9 %(V)
k) Vapour pressure	2.3 hPa (1.7 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	0.88 g/cm <sup>3</sup>
n) Water solubility	0.057 g/l at 25 °C (77 °F) - slightly soluble
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	515.0 °C (959.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

#### 10.4 Conditions to avoid

Heat, flames and sparks.

#### 10.5 Incompatible materials

Strong oxidizing agents

#### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

### 11. TOXICOLOGICAL INFORMATION

#### 11.1 Information on toxicological effects

##### Acute toxicity

LD50 Oral - Rat - male - 6,000 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

##### Skin corrosion/irritation

No data available

##### Serious eye damage/eye irritation

No data available

##### Respiratory or skin sensitisation

No data available

##### Germ cell mutagenicity

in vitro assay

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Rat - male and female - Bone marrow

Result: negative

##### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

##### Reproductive toxicity

No data available

No data available

##### Specific target organ toxicity - single exposure

No data available

##### Specific target organ toxicity - repeated exposure

No data available

##### Aspiration hazard

No data available

##### Additional Information

RTECS: DC3325000

prolonged or repeated exposure can cause:, narcosis, Bronchitis., Symptoms and signs include headache, dizziness, fatigue, muscular weakness, drowsiness and in extreme cases, loss of consciousness., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish	flow-through test LC50 - Pimephales promelas (fathead minnow) - 7.72 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates	static test EC50 - Daphnia magna (Water flea) - 3.6 mg/l - 48 h (OECD Test Guideline 202)

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3295      Class: 3      Packing group: III  
Proper shipping name: Hydrocarbons, liquid, n.o.s.  
Reportable Quantity (RQ):  
Poison Inhalation Hazard: No

### IMDG

UN number: 3295      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: HYDROCARBONS, LIQUID, N.O.S.

### IATA

UN number: 3295      Class: 3      Packing group: III  
Proper shipping name: Hydrocarbons, liquid, n.o.s.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,2,4-Trimethylbenzene	95-63-6	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard

**Massachusetts Right To Know Components**

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

**Pennsylvania Right To Know Components**

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

**New Jersey Right To Know Components**

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

**16. OTHER INFORMATION****Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H335	May cause respiratory irritation.
H401	Toxic to aquatic life.

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	2
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	2
Reactivity Hazard:	0



**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.11

Revision Date: 02/02/2018

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 3.4  
Revision Date 06/26/2014  
Print Date 11/09/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : 1,3,5-Trimethoxybenzene

Product Number : 138827

Brand : Aldrich

CAS-No. : 621-23-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Manufacture of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Warning

Hazard statement(s)

H302 : Harmful if swallowed.

Precautionary statement(s)

P264 : Wash skin thoroughly after handling.

P270 : Do not eat, drink or smoke when using this product.

P301 + P312 : IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell.

P330 : Rinse mouth.

P501 : Dispose of contents/ container to an approved waste disposal plant.

**2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none**

---

**3. COMPOSITION/INFORMATION ON INGREDIENTS****3.1 Substances**

Synonyms : Phloroglucinol trimethyl ether

Formula : C<sub>9</sub>H<sub>12</sub>O<sub>3</sub>  
Molecular Weight : 168.19 g/mol  
CAS-No. : 621-23-8  
EC-No. : 210-673-4

#### Hazardous components

Component	Classification	Concentration
<b>O,O,O-1,3,5-Trimethylresorcinol</b>		
	Acute Tox. 4; H302	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

no data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides

### 5.3 Advice for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

### 5.4 Further information

no data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

## 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection. For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

##### Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

##### Control of environmental exposure

Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                       |
|--------------------------------------------|-------------------------------------------------------|
| a) Appearance                              | Form: crystalline<br>Colour: colourless               |
| b) Odour                                   | no data available                                     |
| c) Odour Threshold                         | no data available                                     |
| d) pH                                      | no data available                                     |
| e) Melting point/freezing point            | Melting point/range: 50 - 53 °C (122 - 127 °F) - lit. |
| f) Initial boiling point and boiling range | 255 °C (491 °F) - lit.                                |

- |                                                 |                                   |
|-------------------------------------------------|-----------------------------------|
| g) Flash point                                  | 86.00 °C (186.80 °F) - closed cup |
| h) Evaporation rate                             | no data available                 |
| i) Flammability (solid, gas)                    | no data available                 |
| j) Upper/lower flammability or explosive limits | no data available                 |
| k) Vapour pressure                              | no data available                 |
| l) Vapour density                               | no data available                 |
| m) Relative density                             | no data available                 |
| n) Water solubility                             | no data available                 |
| o) Partition coefficient: n-octanol/water       | log Pow: 1.965                    |
| p) Auto-ignition temperature                    | no data available                 |
| q) Decomposition temperature                    | no data available                 |
| r) Viscosity                                    | no data available                 |
| s) Explosive properties                         | no data available                 |
| t) Oxidizing properties                         | no data available                 |

## 9.2 Other safety information

no data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

no data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

no data available

### 10.4 Conditions to avoid

no data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - no data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

Inhalation: no data available

Dermal: no data available

no data available

#### Skin corrosion/irritation

no data available

#### Serious eye damage/eye irritation

no data available

**Respiratory or skin sensitisation**

no data available

**Germ cell mutagenicity**

no data available

**Carcinogenicity**

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

no data available

no data available

**Specific target organ toxicity - single exposure**

no data available

**Specific target organ toxicity - repeated exposure**

no data available

**Aspiration hazard**

no data available

**Additional Information**

RTECS: DC2810000

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

no data available

**12.2 Persistence and degradability**

no data available

**12.3 Bioaccumulative potential**

no data available

**12.4 Mobility in soil**

no data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

no data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

Not dangerous goods

### IMDG

Not dangerous goods

### IATA

Not dangerous goods

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Acute Health Hazard

### Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
O,O,O-1,3,5-Trimethylresorcinol	621-23-8	

### New Jersey Right To Know Components

	CAS-No.	Revision Date
O,O,O-1,3,5-Trimethylresorcinol	621-23-8	

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
H302	Harmful if swallowed.

### HMIS Rating

Health hazard:	1
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	1
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling

or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.4

Revision Date: 06/26/2014

Print Date: 11/09/2018



---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Xylenes  
Product Number : 247642  
Brand : Sigma-Aldrich

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226  
Acute toxicity, Inhalation (Category 4), H332  
Skin irritation (Category 2), H315  
Carcinogenicity (Category 2), H351  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Specific target organ toxicity - repeated exposure (Category 2), H373  
Specific target organ toxicity - repeated exposure, Inhalation (Category 2), Central nervous system, Liver, Kidney, H373  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H332	Harmful if inhaled.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure.
H373	May cause damage to organs (Central nervous system, Liver, Kidney)

H401	through prolonged or repeated exposure if inhaled. Toxic to aquatic life.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: Xylene mixture of isomers
Formula	: C <sub>8</sub> H <sub>10</sub>
Molecular weight	: 106.17 g/mol
Registration number	: 01-2119488216-32-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Xylene</b>		
	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; H226, H304, H315, H332, H335, H373, H401	90 - 100 %
<b>Ethylbenzene</b>		
	Flam. Liq. 2; Acute Tox. 4; Carc. 2; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; H225, H304, H332, H351, H373, H401	20 - 30 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Dry powder Dry sand

#### Unsuitable extinguishing media

Do NOT use water jet.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.  
For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Xylene	1330-20-7	STEL	150 ppm 655 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	100 ppm 435 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		TWA	100 ppm 435 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	The value in mg/m <sup>3</sup> is approximate.		
		TWA	100 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	150 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
Ethylbenzene	100-41-4	TWA	20 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cochlear impair Kidney damage (nephropathy) Upper Respiratory Tract irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed animal carcinogen with unknown relevance to humans		

		TWA	100 ppm 435 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	125 ppm 545 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	100 ppm 435 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		PEL	5 ppm 22 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		STEL	30 ppm 130 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Methylhippuric acids	1.5g/g creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
alkylbenzene		Sum of mandelic acid and phenyl glyoxylic acid	0.15g/g creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                  |
|-------------------------------------------------|------------------------------------------------------------------|
| a) Appearance                                   | Form: clear, liquid<br>Colour: colourless                        |
| b) Odour                                        | No data available                                                |
| c) Odour Threshold                              | No data available                                                |
| d) pH                                           | No data available                                                |
| e) Melting point/freezing point                 | < 0 °C (< 32 °F)                                                 |
| f) Initial boiling point and boiling range      | 137 - 140 °C (279 - 284 °F) - lit.                               |
| g) Flash point                                  | 25 °C (77 °F) - closed cup                                       |
| h) Evaporation rate                             | No data available                                                |
| i) Flammability (solid, gas)                    | No data available                                                |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7 %(V)<br>Lower explosion limit: 1.1 %(V) |
| k) Vapour pressure                              | 24 hPa (18 mmHg) at 37.70 °C (99.86 °F)                          |
| l) Vapour density                               | 3.67 - (Air = 1.0)                                               |
| m) Relative density                             | 0.86 g/mL at 25 °C (77 °F)                                       |
| n) Water solubility                             | No data available                                                |
| o) Partition coefficient: n-octanol/water       | No data available                                                |
| p) Auto-ignition temperature                    | No data available                                                |
| q) Decomposition temperature                    | No data available                                                |
| r) Viscosity                                    | No data available                                                |
| s) Explosive properties                         | No data available                                                |
| t) Oxidizing properties                         | No data available                                                |

### 9.2 Other safety information

Relative vapour density 3.67 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

## 10.2 Chemical stability

Stable under recommended storage conditions.

## 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

## 10.4 Conditions to avoid

Heat, flames and sparks.

## 10.5 Incompatible materials

Strong oxidizing agents

## 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

LD50 Oral - Rat - male - 3,523 mg/kg

Remarks: (ECHA)

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

Skin - Rabbit

Result: Irritations

Remarks: (IUCLID)

Drying-out effect resulting in rough and chapped skin. After long-term exposure to the chemical: Dermatitis

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

In animal experiments: - Mouse

Result: Does not cause skin sensitisation.

(OECD Test Guideline 429)

#### Germ cell mutagenicity

No data available

Mutagenicity (mammal cell test): chromosome aberration.

Result: negative

(National Toxicology Program)

Ames test

Salmonella typhimurium

Result: negative

#### Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Ethylbenzene)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available  
No data available

**Specific target organ toxicity - single exposure**

No data available

Acute oral toxicity - Gastrointestinal disturbance

Acute inhalation toxicity - mucosal irritations, Cough, Shortness of breath, Possible damages:, damage of respiratory tract, Inhalation may lead to the formation of oedemas in the respiratory tract.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Blurred vision, Incoordination., Headache, Nausea, Vomiting, Dizziness, Weakness, anemia, Prolonged or repeated exposure to skin causes defatting and dermatitis.

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

After absorption:

Systemic effects:

Headache, somnolence, Dizziness, euphoria, agitation, spasms, respiratory paralysis, Unconsciousness, narcosis, inebriation

Effect potentiated by: ethanol

Other dangerous properties can not be excluded.

Handle in accordance with good industrial hygiene and safety practice.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence (Ethylbenzene)

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

Toxic to aquatic life.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.



---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1307      Class: 3      Packing group: III  
Proper shipping name: Xylenes  
Reportable Quantity (RQ): 100 lbs      Reportable Quantity (RQ): 100 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1307      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: XYLENES

**IATA**

UN number: 1307      Class: 3      Packing group: III  
Proper shipping name: Xylenes

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Ethylbenzene	100-41-4	2007-07-01
Xylene	1330-20-7	1993-04-24

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Reportable Quantity**      F003 lbs

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Xylene	1330-20-7	1993-04-24
Ethylbenzene	100-41-4	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Xylene	1330-20-7	1993-04-24
Ethylbenzene	100-41-4	2007-07-01

**California Prop. 65 Components**

, which is/are known to the State of California to cause cancer.  
For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).  
Ethylbenzene

	CAS-No.	Revision Date
	100-41-4	2007-09-28

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Asp. Tox.	Aspiration hazard
Carc.	Carcinogenicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H332	Harmful if inhaled.

H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.
Skin Irrit.	Skin irritation
STOT RE	Specific target organ toxicity - repeated exposure
STOT SE	Specific target organ toxicity - single exposure

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.19

Revision Date: 08/07/2018

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 5.8  
 Revision Date 10/12/2015  
 Print Date 05/01/2016

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Zinc  
 Product Number : 96454  
 Brand : Sigma-Aldrich  
 CAS-No. : 7440-66-6

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
 3050 Spruce Street  
 SAINT LOUIS MO 63103  
 USA  
 Telephone : +1 800-325-5832  
 Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Combustible dust,  
 Acute aquatic toxicity (Category 1), H400  
 Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H410

May form combustible dust concentrations in air  
 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P273

Avoid release to the environment.

P391

Collect spillage.

P501

Dispose of contents/ container to an approved waste disposal plant.

#### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Combustible dust

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.2 Mixtures

Formula : Zn  
Molecular weight : 65.39 g/mol

#### Hazardous components

Component	Classification	Concentration
<b>Zinc powder (stabilized)</b>		
CAS-No. 7440-66-6 EC-No. 231-175-3 Index-No. 030-001-01-9	Aquatic Acute 1; Aquatic Chronic 1; H410	<= 100 %
<b>Zinc oxide</b>		
CAS-No. 1314-13-2 EC-No. 215-222-5 Index-No. 030-013-00-7	Aquatic Acute 1; Aquatic Chronic 1; H410	>= 5 - < 10 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Special powder against metal fire Dry sand Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

##### Unsuitable extinguishing media

Water

#### 5.2 Special hazards arising from the substance or mixture

Zinc/zinc oxides

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation.  
For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.  
Provide appropriate exhaust ventilation at places where dust is formed.  
For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

Storage class (TRGS 510): Non Combustible Solids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Zinc oxide	1314-13-2	TWA	2.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	metal fume fever		
		STEL	10.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		metal fume fever		

		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		C	15.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	15.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                            |
|-------------------------------------------------|------------------------------------------------------------|
| a) Appearance                                   | Form: powder<br>Colour: grey                               |
| b) Odour                                        | odourless                                                  |
| c) Odour Threshold                              | No data available                                          |
| d) pH                                           | Not applicable                                             |
| e) Melting point/freezing point                 | Melting point/range: 420 °C (788 °F) - lit.                |
| f) Initial boiling point and boiling range      | 907 °C (1,665 °F) - lit.                                   |
| g) Flash point                                  | Not applicable                                             |
| h) Evaporation rate                             | No data available                                          |
| i) Flammability (solid, gas)                    | May form combustible dust concentrations in air            |
| j) Upper/lower flammability or explosive limits | No data available                                          |
| k) Vapour pressure                              | Not applicable                                             |
| l) Vapour density                               | No data available                                          |
| m) Relative density                             | 7.133 g/mL at 25 °C (77 °F)                                |
| n) Water solubility                             | insoluble                                                  |
| o) Partition coefficient: n-octanol/water       | Not applicable                                             |
| p) Auto-ignition temperature                    | does not ignite                                            |
| q) Decomposition temperature                    | No data available                                          |
| r) Viscosity                                    | No data available                                          |
| s) Explosive properties                         | During processing, dust may form explosive mixture in air. |
| t) Oxidizing properties                         | No data available                                          |

### 9.2 Other safety information

- |              |                             |
|--------------|-----------------------------|
| Bulk density | 1.8 - 3.2 kg/m <sup>3</sup> |
|--------------|-----------------------------|

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Dust may form explosive mixture in air.

#### 10.4 Conditions to avoid

No data available

#### 10.5 Incompatible materials

Strong oxidizing agents, Acids and bases

#### 10.6 Hazardous decomposition products

Other decomposition products - No data available  
In the event of fire: see section 5

---

### 11. TOXICOLOGICAL INFORMATION

#### 11.1 Information on toxicological effects

##### Acute toxicity

No data available (Zinc powder (stabilized))

Inhalation: No data available (Zinc powder (stabilized))

Dermal: No data available (Zinc powder (stabilized))

No data available (Zinc powder (stabilized))

##### Skin corrosion/irritation

No data available (Zinc powder (stabilized))

##### Serious eye damage/eye irritation

No data available (Zinc powder (stabilized))

##### Respiratory or skin sensitisation

Did not cause sensitisation on laboratory animals. (Zinc powder (stabilized))

##### Germ cell mutagenicity

No data available (Zinc powder (stabilized))

##### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

##### Reproductive toxicity

No data available (Zinc powder (stabilized))

No data available (Zinc powder (stabilized))

##### Specific target organ toxicity - single exposure

No data available (Zinc powder (stabilized))

##### Specific target organ toxicity - repeated exposure

No data available

##### Aspiration hazard

No data available (Zinc powder (stabilized))

##### Additional Information

RTECS: ZG8600000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Effects due to ingestion may include:, chills, dry throat, sweet taste, Fever, Cough, Nausea, Vomiting, Weakness, Contact with eyes or skin may cause:, Irritation (Zinc powder (stabilized))



---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish	LC50 - Cyprinus carpio (Carp) - 450 µg/l - 96 h (Zinc powder (stabilized))
Toxicity to daphnia and other aquatic invertebrates	LC50 - Daphnia magna (Water flea) - 0.068 mg/l - 48 h (Zinc powder (stabilized))
	mortality NOEC - Daphnia (water flea) - 0.101 - 0.14 mg/l - 7 d (Zinc powder (stabilized))

### 12.2 Persistence and degradability

The methods for determining the biological degradability are not applicable to inorganic substances.

### 12.3 Bioaccumulative potential

Bioaccumulation Algae - 7 d  
at 16 °C - 5 µg/l (Zinc powder (stabilized))

Bioconcentration factor (BCF): 466

### 12.4 Mobility in soil

No data available (Zinc powder (stabilized))

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Zinc powder (stabilized))  
Reportable Quantity (RQ): 1020 lbs

Poison Inhalation Hazard: No

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Zinc powder (stabilized))  
Marine pollutant: yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Zinc powder (stabilized))

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Zinc oxide	1314-13-2	2007-03-01
Zinc powder (stabilized)	7440-66-6	1993-04-24

### SARA 311/312 Hazards

No SARA Hazards

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Zinc powder (stabilized)	7440-66-6	1993-04-24
Zinc oxide	1314-13-2	2007-03-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Zinc powder (stabilized)	7440-66-6	1993-04-24
Zinc oxide	1314-13-2	2007-03-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Zinc powder (stabilized)	7440-66-6	1993-04-24
Zinc oxide	1314-13-2	2007-03-01

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

	May form combustible dust concentrations in air
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.8

Revision Date: 10/12/2015

Print Date: 05/01/2016

# Community Air Monitoring Plan

**Hamilton Green BCP Site  
200 Hamilton Avenue  
White Plains, New York  
BCP # C360177**

## **1.0 INTRODUCTION**

This document presents a Community Air Monitoring Plan (CAMP) for the remedial investigation (RI) and interim remedial measures (IRMs) for the proposed development at 200 Hamilton Avenue, White Plains, New York (the "Site").

The Site, which is the subject of a Remedial Investigation Report prepared by AKRF, is approximately 3.74-acres occupied the two-story White Plains Mall and east-adjacent asphalt-paved parking lot. The Site properties are identified on the Westchester County Clerk's as a portion of tax parcel map Section 125.67, Block 5, Lot 1. The surrounding area consists primarily of commercial and governmental uses, with residences further north of the Site.

Prior to 1970, the Site was historically bisected by a public street (William Street) and contained several private residential dwellings, a candy manufacturer, and two gasoline stations, one at 230 Hamilton Avenue (southeastern portion of the Site) and a second at 250 Hamilton Avenue (southern portion of the Site)

## **1.1 OBJECTIVES**

The objective of this CAMP is to provide a measure of protection for the downwind community from potential airborne contaminant releases that may arise as a result of the planned remedial excavation and construction, which may include temporary soil stockpiling.

## **1.2 METHODS**

The CAMP will include continuous monitoring for particulate matter (e.g., airborne "dust") and volatile organic compounds (VOCs) during the planned remedial

excavation and construction activities. Readings will be recorded and will be available for State (DEC and DOH) personnel to review, as requested.

### **1.3 PERIODIC MONITORING**

Periodic monitoring for VOCs will be conducted during non-intrusive activities such as the collection of soil and sediment samples or the collection of groundwater samples from existing monitoring wells. "Periodic" monitoring during sample collection might reasonably consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. In some instances, depending upon the proximity of potentially exposed individuals, continuous monitoring may be required during sampling activities. Examples of such situations include groundwater sampling at wells on the curb of a busy urban street, in the midst of a public park, or adjacent to a school or residence.

### **1.4 VOC MONITORING, RESPONSE LEVELS, AND ACTIONS**

VOC Monitoring, Response Levels, and Actions Volatile organic compounds (VOCs) must be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis or as otherwise specified. Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work should be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment should be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment should be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less

than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.

- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.

All 15-minute readings must be recorded and be available for State (DEC and DOH) personnel to review. Instantaneous readings, if any, used for decision purposes should also be recorded.

## **1.5 PARTICULATE MONITORING, RESPONSE LEVELS, AND ACTIONS**

Particulate concentrations should be monitored continuously at the upwind and downwind perimeters of the exclusion zone at temporary particulate monitoring stations. The particulate monitoring should be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment must be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during all work activities.

- If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m<sup>3</sup>) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques must be employed. Work may continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed 150 mcg/m<sup>3</sup> above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than 150 mcg/m<sup>3</sup> above the upwind level, work must be stopped and a re-evaluation of activities initiated. Work can resume provided that dust suppression measures and other controls are successful in

reducing the downwind PM-10 particulate concentration to within 150 mcg/m<sup>3</sup> of the upwind level and in preventing visible dust migration.

All readings must be recorded and be available for State (DEC and DOH) personnel to review.

## **1.5 SPECIAL REQUIREMENTS FOR WORK WITHIN 20 FEET OF POTENTIALLY EXPOSED INDIVIDUAL STRUCTURES**

When work areas are within 20 feet of potentially exposed populations or occupied structures, the continuous monitoring locations for VOCs and particulates must reflect the nearest potentially exposed individuals and the location of ventilation system intakes for nearby structures. The use of engineering controls such as vapor/dust barriers, temporary negative-pressure enclosures, or special ventilation devices should be considered to prevent exposures related to the work activities and to control dust and odors. Consideration should be given to implementing the planned activities when potentially exposed populations are at a minimum, such as during weekends or evening hours in non-residential settings.

- If total VOC concentrations opposite the walls of occupied structures or next to intake vents exceed 1 ppm, monitoring should occur within the occupied structure(s). Depending upon the nature of contamination, chemical-specific colorimetric tubes of sufficient sensitivity may be necessary for comparing the exposure point concentrations with appropriate pre-determined response levels (response actions should also be pre-determined). Background readings in the occupied spaces must be taken prior to commencement of the planned work. Any unusual background readings should be discussed with NYSDOH prior to commencement of the work.
- If total particulate concentrations opposite the walls of occupied structures or next to intake vents exceed 150 mcg/m<sup>3</sup>, work activities should be suspended until controls are implemented and are successful in reducing the total particulate concentration to 150 mcg/m<sup>3</sup> or less at the monitoring point.
- Depending upon the nature of contamination and remedial activities, other parameters (e.g., explosivity, oxygen, hydrogen sulfide, carbon monoxide) may also need to be monitored. Response levels and actions should be pre-determined, as necessary, for each site.

**Hamilton Green**  
WHITE PLAINS, NEW YORK

---

**GROUNDWATER SAMPLING PLAN  
FOR  
EMERGING CONTAMINANTS**

**NYSDEC BCP Site Number: C360177**

**Prepared for:**

**S-WD/WP LLC  
186-A Irving Avenue, Suite 200K  
Port Chester, NY 10573**

**Prepared by:  
SESI CONSULTING ENGINEERS, D.P.C.  
12A Maple Avenue  
Pine Brook, NJ 07058**

---

**APRIL 2019**



## 1.0 EMERGING CONTAMINANTS SAMPLING PLAN

This sampling plan is for groundwater sampling at the Hamilton Green BCP Site located in White Plains, New York. SESI will collect ground water samples from one upgradient well (MW-4) and two downgradient wells (MW-7 and MW-9) as shown in Figure SESI-3 of the RIWP response to comment letter, dated **April 2, 2019**.

The sampling will be performed in accordance with the NYSDEC March 1991 Sampling Guidelines and Protocols, with materials limitations for Per- and polyfluoroalkyl substances (PFAS) sampling, the NYSDEC July 2018 letter on Groundwater Sampling for Emerging Contaminants, and the PFAS Groundwater Samples from Monitoring Well Sample Protocols Revision 1.2 August 9, 2019. The groundwater samples will be sent via chain of custody in a cooler at 4 degrees C to Test America Laboratories, which is ELAP-certified, and analyzed for TCL/TAL+30, 1,4-dioxane and the PFAS compounds listed in Table 1. The groundwater samples will be analyzed for PFAS using Modified USEPA Method 537. Reporting limits for PFOA and PFOS will not exceed 2 nanogram per liter (ng/L). Category B deliverables and an electronic data deliverable will be completed. A DUSR will be prepared by a data validator for all the analyses including PFAS and 1,4-dioxane. The method detection limit (MDL) for 1,4-dioxane will be no higher than 0.28 µg/l (ppb). In order to get the appropriate detection limit, the lab will run EPA method 8270 in "selective ion monitoring" (SIM) mode for 1,4-dioxane.

PFAS are very persistent in the environment and in the human body. There is evidence that exposure to PFAS can lead to adverse human health effects. EPA established the health advisory levels for PFAS in drinking water at 70 parts per trillion. Due to their presence in a variety of products, persistence in the environment and very low drinking water standards, care must be used when groundwater sampling for PFAS to avoid cross contamination from the sampling equipment and personal protective equipment (PPE).

No fabric softener will be used on clothing to be worn in field. Cosmetics, moisturizers, hand cream, unauthorized sunscreen, insect repellent or other related products will not be used the morning of sampling. The field samplers will wear nitrile gloves while filling and sealing the sample bottles. The sampling equipment components and sample containers will not come in contact with material that may potentially contain PFAS such as aluminum foil, low density polyethylene (LDPE), glass or polytetrafluoroethylene (PTFE, Teflon™) materials including sample bottle cap liners with a PTFE layer. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFAS materials will be avoided. Food and drink packaging materials will be avoided, as well.

Sampling will be performed using either stainless steel, high density polyethylene (HDPE), PVC, silicone, acetate or polypropylene pump and tubing which do not contain PFAS. Standard two step decontamination using Alconox® detergent and clean water rinse will be performed for equipment that does come in contact with PFAS materials. No waterproof field books, plastic clipboards, binders, or spiral hard cover will be used for PFAS containers. No adhesives (i.e. Post-It® Notes), sharpies, or permanent markers will be used for PFAS containers. The PFAS containers will be labeled with ball point pens. PFAS samples will be stored in separate cooler filled with regular ice only with no chemical (blue) ice packs.

Pre-cleaned sample bottles with closures, coolers, sample labels and a chain of custody form will be provided by Test America. The ground water samples will be collected using low flow purging to obtain representative turbid free samples. The sampling event will include inspection and gauging each well for depth to water and total depth. If free product is detected in a monitoring well, the product thickness will be measured and recorded. Wells, which contain free product, will not be sampled.

The pumping flow rate will be in the range of 100 to 500 ml/min. Field parameters will be measured using a flow through cell before, during and after low flow purging including dissolved oxygen, pH, temperature, and conductivity. The field purging information and parameter data will be recorded on the field parameter sheets. The depth to groundwater will also be recorded throughout the purging process and ideally will not drawdown more than 0.3 foot. The samples will be collected directly from the low flow purging tubing by disconnecting the flow through cell. Two pre-cleaned laboratory supplied 500 ml HDPE or polypropylene bottles will be collected for PFAS analysis first prior to collecting the samples for other analyses. Additional bottles will be supplied by the laboratory for the TCL/TAL+30 and 1,4-dioxane analysis.

Equipment blanks will be collected daily, if the equipment that come in touch with the sample is de-contaminated and re-used. If all the sampling material are disposable, no field blanks will be collected. Field duplicate will be collected on a frequency of 1/20 samples. One matrix spike and matrix spike duplicate (MS/MSD) will also be collected on a frequency of 1/20 samples. A trip blank will accompany each shipment which includes analysis for volatile organic compounds.

Table 1: PFAS compounds list\*

**Full PFAS Target Analyte List**

Group	Chemical Name	Abbreviation	CAS Number
Perfluoroalkyl sulfonates	<b>Perfluorobutanesulfonic acid</b>	<b>PFBS</b>	<b>375-73-5</b>
	<b>Perfluorohexanesulfonic acid</b>	<b>PFHxS</b>	<b>355-46-4</b>
	Perfluoroheptanesulfonic acid	PFHpS	375-92-8
	<b>Perfluorooctanesulfonic acid</b>	<b>PFOS</b>	<b>1763-23-1</b>
	Perfluorodecanesulfonic acid	PFDS	335-77-3
Perfluoroalkyl carboxylates	Perfluorobutanoic acid	PFBA	375-22-4
	Perfluoropentanoic acid	PFPeA	2706-90-3
	Perfluorohexanoic acid	PFHxA	307-24-4
	<b>Perfluoroheptanoic acid</b>	<b>PFHpA</b>	<b>375-85-9</b>
	<b>Perfluorooctanoic acid</b>	<b>PFOA</b>	<b>335-67-1</b>
	<b>Perfluorononanoic acid</b>	<b>PFNA</b>	<b>375-95-1</b>
	Perfluorodecanoic acid	PFDA	335-76-2
	Perfluoroundecanoic acid	PFUA/PFUdA	2058-94-8
	Perfluorododecanoic acid	PFDoA	307-55-1
	Perfluorotridecanoic acid	PFTriA/PFTrDA	72629-94-8
Perfluorotetradecanoic acid	PFTA/PFTeDA	376-06-7	
Fluorinated Telomer Sulfonates	6:2 Fluorotelomer sulfonate	6:2 FTS	27619-97-2
	8:2 Fluorotelomer sulfonate	8:2 FTS	39108-34-4
Perfluorooctane-sulfonamides	Perfluorooctanesulfonamide	FOSA	754-91-6
Perfluorooctane-sulfonamidoacetic acids	N-methyl perfluorooctanesulfonamidoacetic acid	N-MeFOSAA	2355-31-9
	N-ethyl perfluorooctanesulfonamidoacetic acid	N-EtFOSAA	2991-50-6

Bold entries depict the 6 original UCMR3 chemicals

\*Table source is the letter from NYSDEC letter addressing the sampling of the emerging contaminant dated July 2018.



## Sampling for 1,4-Dioxane and Per- and Polyfluoroalkyl Substances (PFAS) Under DEC's Part 375 Remedial Programs

---

### Objective

The Department of Environmental Conservation (DEC) is requiring sampling of all environmental media and subsequent analysis for the emerging contaminants 1,4-Dioxane and PFAS as part of all remedial programs implemented under 6 NYCRR Part 375, as further described in the guidance below.

### Sample Planning

The number of samples required for emerging contaminant analyses is to be the same number of samples where "full TAL/TCL sampling" would typically be required in an investigation or remedial action compliance program.

Upon a new site being brought into any program (e.g., SSF, BCP), PFAS and 1,4-dioxane will be incorporated into the investigation of potentially affected media, including soil, groundwater, surface water, and sediment as an addition to the standard "full TAL/TCL sampling." Biota sampling may be necessary based upon the potential for biota to be affected as determined pursuant to a Fish and Wildlife Impact analysis. Soil vapor sampling for PFAS and 1,4-dioxane is not required.

Upon an emerging contaminant being identified as a contaminant of concern (COC) for a site, those compounds must be assessed as part of the remedy selection process in accordance with Part 375 and DER-10 and included as part of the monitoring program upon entering the site management phase.

Soil imported to a site for use in a soil cap, soil cover, or as backfill must be sampled for 1,4-dioxane and PFAS contamination in general conformance with DER-10, section 5.4(e). Assessment of the soil data will be made on a site-specific basis to determine appropriateness for use.

The work plan should explicitly describe analysis and reporting requirements, including laboratory analytical procedures for modified methods discussed below.

### Analysis and Reporting

Labs should provide a full category B deliverable, and a DUSR should be prepared by an independent 3<sup>rd</sup> party data validator. QA/QC samples should be collected as required in DER-10, Section 2.3(c). The electronic data submission should meet the requirements provided at:

<https://www.dec.ny.gov/chemical/62440.html>.

PFAS analysis and reporting: DEC has developed a *PFAS Analyte List* (below) for remedial programs. It is expected that reported results for PFAS will include, at a minimum, all the compounds listed. If lab and/or matrix specific issues are encountered for any compounds, the DEC project manager, in consultation with the DEC remedial program chemist, will make case-by-case decisions as to whether certain analytes may be temporarily or permanently discontinued from analysis at each site.

Currently, ELAP does not offer certification for PFAS compounds in matrices other than finished drinking water. However, laboratories analyzing environmental samples (e.g., soil, sediments, and groundwater) are required by DER to hold ELAP certification for PFOA and PFOS in drinking water by EPA Method 537 or ISO 25101.



Modified EPA Method 537 is the preferred method to use for environmental samples due to its ability to achieve very low detection limits. Reporting limits for PFAS in groundwater and soil are to be 2 ng/L (ppt) and 1 ug/kg (ppb), respectively. If contract labs or work plans submitted by responsible parties indicate that they are not able to achieve these reporting limits for the entire list of 21 PFAS, site-specific decisions will need to be made by the DEC project manager in consultation with the DEC remedial program chemist. Note: Reporting limits for PFOA and PFOS in groundwater should not exceed 2 ng/L.

Additional laboratory methods for analysis of PFAS may be warranted at a site. These methods include Synthetic Precipitation Leaching Procedure (SPLP) by EPA Method 1312 and Total Oxidizable Precursor Assay (TOP Assay).

SPLP is a technique for determining the potential for chemicals in soil to leach to groundwater and may be helpful in determining the need for addressing PFAS-containing soils or other solid material as part of the remedy. SPLP sampling need not be considered if there are no elevated PFAS levels in groundwater. If elevated levels of PFAS are detected in water, and PFAS are also seen in soil, then an SPLP test should be considered to better understand the relationship between the PFAS in the two media.

The TOP Assay can assist in determining the potential PFAS risk at a site. For example, some polyfluoroalkyl substances may transform to form perfluoroalkyl substances, resulting in an increase in perfluoroalkyl substance concentrations as contaminated groundwater moves away from the site. To conceptualize the amount and type of oxidizable perfluoroalkyl substances which could be liberated in the environment, a "TOP Assay" analysis can be performed, which approximates the maximum concentration of perfluoroalkyl substances that could be generated if all polyfluoroalkyl substances were oxidized.

PFAS-containing materials can be made up of per- and polyfluoroalkyl substances that are not analyzable by routine analytical methodology (LC-MS/MS). The TOP assay converts, through oxidation, polyfluoroalkyl substances (precursors) into perfluoroalkyl substances that can be detected by current analytical methodology. Please note that analysis of highly contaminated samples, such as those from an AFFF site, can result in incomplete oxidation of the samples and an underestimation of the total perfluoroalkyl substances. Please consult with a DEC remedial program chemist for assistance interpreting the results.

1,4-Dioxane analysis and reporting: The reporting limit for 1,4-dioxane in groundwater should be no higher than 0.35 µg/L (ppb) and no higher than 0.1 mg/kg (ppm) in soil. Although ELAP offers certification for both EPA Method 8260 SIM and EPA Method 8270 SIM in waters, DER is advising the use of Method 8270 SIM because it provides a more robust extraction procedure, uses a larger sample volume, and is less vulnerable to interference from chlorinated solvents. The analysis currently performed for SVOCs in soil is adequate for evaluation of 1,4-dioxane in soil, which already has an established SCO.

### Refinement of sample analyses

As with other contaminants that are analyzed for at a site, the emerging contaminant analyte list may be refined for future sampling events based on investigative findings. Initially, however, sampling using this PFAS Analyte List and 1,4-dioxane is needed to understand the nature of contamination.

### PFAS Analyte List

Group	Chemical Name	Abbreviation	CAS Number
Perfluoroalkyl sulfonates	Perfluorobutanesulfonic acid	PFBS	375-73-5
	Perfluorohexanesulfonic acid	PFHxS	355-46-4
	Perfluoroheptanesulfonic acid	PFHpS	375-92-8
	Perfluorooctanesulfonic acid	PFOS	1763-23-1
	Perfluorodecanesulfonic acid	PFDS	335-77-3
Perfluoroalkyl carboxylates	Perfluorobutanoic acid	PFBA	375-22-4
	Perfluoropentanoic acid	PFPeA	2706-90-3
	Perfluorohexanoic acid	PFHxA	307-24-4
	Perfluoroheptanoic acid	PFHpA	375-85-9
	Perfluorooctanoic acid	PFOA	335-67-1
	Perfluorononanoic acid	PFNA	375-95-1
	Perfluorodecanoic acid	PFDA	335-76-2
	Perfluoroundecanoic acid	PFUA/PFUdA	2058-94-8
	Perfluorododecanoic acid	PFDoA	307-55-1
	Perfluorotridecanoic acid	PFTriA/PFTrDA	72629-94-8
	Perfluorotetradecanoic acid	PFTA/PFTeDA	376-06-7
Fluorinated Telomer Sulfonates	6:2 Fluorotelomer sulfonate	6:2 FTS	27619-97-2
	8:2 Fluorotelomer sulfonate	8:2 FTS	39108-34-4
Perfluorooctane-sulfonamides	Perfluorooctanesulfonamide	FOSA	754-91-6
Perfluorooctane-sulfonamidoacetic acids	N-methyl perfluorooctanesulfonamidoacetic acid	N-MeFOSAA	2355-31-9
	N-ethyl perfluorooctanesulfonamidoacetic acid	N-EtFOSAA	2991-50-6

## Collection of Groundwater Samples for Per- and Polyfluoroalkyl Substances (PFAS) from Monitoring Wells Sample Protocol

**Samples collected using this protocol are intended to be analyzed for perfluorooctanoic acid (PFOA) and other perfluorinated compounds by Modified (Low Level) Test Method 537.**

The sampling procedure used must be consistent with the NYSDEC March 1991 Sampling Guidelines and Protocols [http://www.dec.ny.gov/docs/remediation\\_hudson\\_pdf/sgpsect5.pdf](http://www.dec.ny.gov/docs/remediation_hudson_pdf/sgpsect5.pdf) with the following materials limitations.

At this time acceptable materials for sampling include: stainless steel, high density polyethylene (HDPE) and polypropylene. Additional materials may be acceptable if proven not to contain PFAS. **NOTE: Grunfos pumps and some bladder pumps are known to contain PFAS materials (e.g. Teflon™ washers for Grunfos pumps and LDPE bladders for bladder pumps).** All sampling equipment components and sample containers should not come in contact with aluminum foil, low density polyethylene (LDPE), glass or polytetrafluoroethylene (PTFE, Teflon™) materials including sample bottle cap liners with a PTFE layer. Standard two step decontamination using detergent and clean water rinse will be performed for equipment that does come in contact with PFAS materials. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFAS materials must be avoided. Many food and drink packaging materials and “plumbers thread seal tape” contain PFAS.

All clothing worn by sampling personnel must have been laundered multiple times. The sampler must wear nitrile gloves while filling and sealing the sample bottles.

Pre-cleaned sample bottles with closures, coolers, ice, sample labels and a chain of custody form will be provided by the laboratory.

1. Fill two pre-cleaned 250 mL HDPE or polypropylene bottle with the sample.
2. Cap the bottles with an acceptable cap and liner closure system.
3. Label the sample bottles.
4. Fill out the chain of custody.
5. Place in a cooler maintained at  $4 \pm 2^{\circ}$  Celsius.

Collect one equipment blank for every sample batch, not to exceed 20 samples.

Collect one field duplicate for every sample batch, not to exceed 20 samples.

Collect one matrix spike / matrix spike duplicate (MS/MSD) for every sample batch, not to exceed 20 samples.

Request appropriate data deliverable (Category A or B) and an electronic data deliverable.

# **HAMILTON GREEN**

**200 HAMILTON AVENUE, WHITE PLAINS, NEW YORK**

---

## **Remedial Investigation Work Plan**

# **SOIL VAPOR INVESTIGATION ADDENDUM**

**NYSDEC Site Number: C360177**

### **Prepared for:**

**S-WD / WP LLC  
168a Irving Avenue  
Suite 200k  
Port Chester, NY 10573**

### **Prepared by:**

**SESI CONSULTING ENGINEERS, P.C.  
12A Maple Avenue  
Pine Brook, NJ 07058**

**April 2019**



# Table of Contents

1.0 INTRODUCTION.....	1
2.0 SV SAMPLING PLAN.....	1
2.1 Sample Locations .....	1
2.2 Sampling Protocol .....	2

## 1.0 INTRODUCTION

The New York State Department of Environmental Conservation (NYSDEC) has accepted into the Brownfield Cleanup Program (BCP) the property at 200 Hamilton Avenue, White Plains, New York (the "Site") with S-WDWP LLC, as Volunteer. A Brownfield Cleanup Agreement (BCA) was executed by the NYSDEC on August 16, 2018, (BCP Site No. C360177).

This document comprises a Soil Vapor (SV) Investigation Addendum to the Remedial Investigation Work Plan (RIWP) (AKRF September 2018) in response to the NYSDEC comment letter on the RIWP dated January 2, 2019. And the NYSDEC email comments on the RIWP dated March 20, 2019.

## 2.0 SV SAMPLING PLAN

### *2.1 Sample Locations*

To evaluate the potential for future exposures of the proposed development eleven (11) SV samples and a contemporaneous outdoor air sample as a control sample will be collected across the Site in the footprint of the proposed development. Figure SESI - 1 in Attachment 2 illustrates the proposed SV sampling locations with respect to the footprint of the proposed development. The previous soil vapor concentrations are provided as Table 1. The SV points were chosen taking into consideration the following:

- In areas where elevated VOC concentrations were detected in soil vapor and groundwater,
- In the proposed building foot prints, and
- At a depth of 12-14 ft below existing grade, which is comparable to the expected depth of the proposed foundation footings. Additional consideration will be given to sample soil vapor at depths at which contaminants have been detected and/or depths that are similar to surrounding structures in order to evaluate the potential for soil vapor intrusion to occur in off-site buildings.

All samples will be sent to an ELAP-certified laboratory for EPA TO-15 analysis.

### *2.2 Sampling Protocol*

Semi-permanent soil vapor probes will be installed with an adequate surface seal to prevent outdoor air infiltration. Soil vapor probes will be constructed in the same

manner at all locations to minimize possible discrepancies. The following procedures will be included in constructing the probes:

- Implants will be installed using a direct push Geoprobe® to attain the desired depth
- Porous, inert backfill material will be used to create a sampling of 2 feet in length;
- The implants will be fitted with inert tubing (e.g., polyethylene or Teflon ®) of laboratory or food grade quality to the surface;
- Soil vapor probes will be sealed above the sampling zone with a bentonite slurry for a minimum distance of 3 feet. The remainder of the borehole will be backfilled with clean material; and
- Steps will be taken to minimize infiltration of water or outdoor air and to prevent accidental damage.

Soil vapor samples will be collected in the following manner at all locations:

- Shortly after the installation of the probes, three implant volumes (the volume of the sample probe and tube) will be purged prior to collecting the samples;
- Flow rates for both purging and collecting will not exceed 0.2 liters per minute (30-minute sample interval) to minimize outdoor air infiltration during sampling;
- Samples will be collected in 6-L Summa ® canisters that are certified clean by the laboratory;
- A tracer gas (e.g., helium) will be used when collecting soil vapor samples to verify that no infiltration of outdoor air is occurring.

***Tracer Gas Test:***

The tracer gas serves as a quality assurance/quality control measure to verify the integrity of the soil vapor probe seal. The atmosphere in the immediate vicinity of the area where the probe intersects the ground surface will be enriched with the tracer gas. A plastic pail will be installed to enclose the tracer gas and keep in contact with the probe tubing. A soil gas sample will be collected with a Tedlar® bag from the probe while the plastic pail is holding the atmosphere enriched with tracer gas (helium) around the probe tube. A portable Helium monitoring device will analyze the collected Tedlar® sample prior to and after sampling for the compounds of concern. If high concentrations (> 10%) of tracer gas are observed in the Tedlar bag

sample, the probe seal will be enhanced to reduce the infiltration. The tracer test will be repeated until the tracer gas concentration is below 10%.

**Table 1**  
**PREVIOUS SOIL VAPOR DATA**

Sample ID Date Sampled Dilution Factor Units = $\mu\text{g}/\text{m}^3$	USEPA VISL Target Sub-Slab May 2018	NYSDOH Air Guidance Value*	SV-1 8/8/2017 8	SV-2 8/8/2017 13.1	SV-3 8/9/2017 6	SV-4 8/9/2017 1	SV-5 8/9/2017 10
<b>1,3-Butadiene</b>	<i>3.1</i>	<i>NS</i>	<b>7.2</b>	<b>87</b>	--	--	<b>5.4</b>
<b>2,2,4-Trimethylpentane</b>	<i>NS</i>	<i>NS</i>	25	15	--	--	--
<b>Acetone</b>	<i>1100000</i>	<i>NS</i>	170	170	270	--	750
<b>Benzene</b>	<i>12</i>	<i>NS</i>	11	<b>52</b>	--	--	--
<b>Carbon disulfide</b>	<i>24000</i>	<i>NS</i>	--	100	--	--	--
<b>Chloroform</b>	<i>4.1</i>	<i>NS</i>	--	--	--	1.2	<b>10</b>
<b>Chloromethane</b>	<i>3100</i>	<i>NS</i>	--	20	--	--	--
<b>Cumene</b>	<i>14000</i>	<i>NS</i>	--	--	--	--	13
<b>Cyclohexane</b>	<i>35000</i>	<i>NS</i>	--	18	26	--	--
<b>Ethylbenzene</b>	<i>37</i>	<i>NS</i>	<b>50</b>	<b>38</b>	--	--	10
<b>Methyl Ethyl Ketone</b>	<i>170000</i>	<i>NS</i>	36	44	18	--	26
<b>Methylene Chloride</b>	<i>3400</i>	<i>100</i>	--	--	240	--	53
<b>n-Heptane</b>	<i>14000</i>	<i>NS</i>	--	240	--	--	--
<b>n-Hexane</b>	<i>2400</i>	<i>NS</i>	40	590	350	--	100
<b>n-Propylbenzene</b>	<i>35000</i>	<i>NS</i>	8.6	--	--	1.7	--
<b>o-Xylene</b>	<i>3500</i>	<i>NS</i>	7.4	--	--	--	--
<b>Toluene</b>	<i>170000</i>	<i>NS</i>	--	--	250	--	45
<b>Trichloroethene</b>	<i>16</i>	<i>6</i>	--	--	<b>69</b>	--	<b>13</b>

**Notes:**

NS = No Standard

Bold = Exceeded Standards

$\mu\text{g}/\text{m}^3$  = micrograms per cubic meter

-- = No exceedance

\* Guidance for Evaluating Soil Vapor Intrusion in the State of New York (October 2006).

## **ATTACHMENT 5: RESPONSE LETTERS**



Geotechnical  
Foundations  
Land Planning  
Geo-Structural  
Environmental  
Water Resources

---

*Principals:*

Steven P. Byszewski, PE, PP  
Anthony Castillo, PE  
Fuad Dahan, PhD, PE, LSRP  
Roger Hendrickson  
John M. Nederfield, PE  
Justin M. Protasiewicz, PE  
Kenneth Quazza, PE  
Michael St. Pierre, PE

January 24, 2019

Ms. Kiera Thompson, P.G. Project Manager  
Bureau C, Section B  
Division of Environmental Remediation 625 Broadway, 11th Floor  
Albany, NY 12233

**RE: Remedial Investigation Work Plan Hamilton Green  
BCP Site No. C360177  
200 Hamilton Avenue  
City of White Plains, Westchester County**

Dear Ms. Thompson

Our office has received and reviewed your comment letter dated January 2<sup>nd</sup>, 2019 in response to the September 2018 Remedial Investigation Work Plan (RIWP) prepared by AKRF, Inc., for the Hamilton Green Brownfield Cleanup Program (BCP) site located at 200 Hamilton Avenue in White Plains, Westchester County (Site). SESI Consulting Engineers DPC (SESI) was engaged by the BCP volunteer, S-WD/WP LLC (Volunteer), to become the environmental consultant for the BCP after the completion and submission of the RIWP, which was prepared by AKRF.

As per our recent conversation, please accept this response letter as an official rider to the referenced RIWP for the section or items listed below. The remedial investigation field work and the remedial investigation report (RIR) will be based on the RIWP (AKRF September 2018) except for the changes, which address your comments, as described below.

1. Page 2, 1.0 Introduction: *“TCE detected above the NYSDOH AGV in the Phase II soil vapor samples was potentially related to a former on-site dry cleaner; however, the levels detected were not considered indicative of an on-site release.”* Note that soil vapor concentrations alone cannot determine on-site contaminant release. Please remove this statement from the document.

***SESI Response:*** *SESI considers the statement “TCE detected above the NYSDOH AGV in the Phase II soil vapor samples was potentially related to a former on-site dry cleaner; however, the levels detected were not considered indicative of an on-site release.” removed from Page 2, 1.0 Introduction of the RIWP.*

*In the remedial investigation report (RIR), SESI will consider the data from groundwater, soils, soil vapor, and their interrelations to determine the extent of the on-site impacts.*

- Pages 5 & 6, 4.0 Previous Investigations: please revise to include the date of all the reported spills and their status (i.e. open or closed) which are mentioned in the RIWP.

**SESI Response:** *There are two reported spills referenced in the RIWP:*

- Spill No. 9707887 is an off-site spill that was first reported in October of 1997 and is still open.*
- Spill No. 1706297 is an on-site spill that was discovered during the AKRF Phase II investigation. The spill was first reported in September 2017 and is still open.*

*Both spill numbers will be addressed and closed pursuant to the remedial program approved for the Site under the BCP.*

- Page 6, fourth bullet: Please note here and throughout the document that NYSDOH Air Guidance Values (AGV) are not comparable to sub-slab or soil vapor contaminant concentrations.

**SESI Response:** *In the RIR, SESI will compare the soil vapor samples results with the highest value listed for the Sub-Slab Vapor Concentration in the NYSDOH's Soil Vapor/Indoor Air Matrices (May 2017) for Trichloroethene (TCE), cis-1,2- Dichloroethene (c12-DCE), 1,1-Dichloroethene (11-DCE), Carbon Tetrachloride, Tetrachloroethene (PCE), 1,1,1-Trichloroethane (111-TCA), Methylene Chloride, and Vinyl Chloride. For all other VOCs, SESI will use the EPA's Target Sub-Slab and Near-Source Soil Gas Concentration values as listed in the EPA calculator (May 2018).*

- Page 12, Volatile Organic Compounds (VOCs) Detected in Sub-Slab/Soil Vapor Above Air Guidance Values or Background: update to clarify what samples are sub-slab and which are soil vapor. Additionally, as stated above, please remove all comparisons to Air Guidance and Background Values as these values are not applicable comparison values for soil vapor and sub- slab soil vapor concentrations.

**SESI Response:** *SESI reviewed the RIWP and the Phase II Environmental Site Assessment (Phase II ESA) prepared by AKRF and contacted ARKF for clarification. Soil vapor samples SV-1 and SV-2 were collected in the eastern parking lot and are soil vapor samples. Samples SV-3, SV-4, and SV-5 are sub slab samples collected from the footprint of the existing building. All the soil vapor data in the RIR will be compared to the values listed in the response to Comment 3 above.*

- Page 13, 6.0 Field Program: Please note that all data must first be provided for agencies' review to determine mitigation requirements for Soil Vapor Intrusion (SVI). If it is determined that mitigation is necessary, the design should address mitigation of all portions of the building(s) even if portions of the building(s) are not amenable to traditional sub-slab depressurization systems due to variables such as proximity to groundwater.

**SESI Response:** *The proposed remediation or mitigation of any constituents will be discussed with NYSDEC and NYSDOH and presented in the RAWP for approvals prior to design or implementation.*



6. Page 13, 6.0, Field Program: while the Volunteer plans to install at least passive Soil Vapor Intrusion mitigation system(s) in future site construction, the Volunteer is still required to determine the nature and extent of contamination including the potential for SVI, and must prevent any contamination, including that in soil vapor, from migrating off the site. Therefore, it is advised that the collection and assessment of data to make this determination be added to the Remedial Investigation.

***SESI Response:*** *SESI will collect additional soil vapor samples to determine the nature and extent of contamination including the potential for SVI. The vapor samples will be collected in accordance with the attached Soil Vapor Sampling Addendum and the Proposed Soil Vapor Sampling Location Plan (Attachment B Figure SESI-1) provided in Attachment A.*

7. Page 14, 6.2 Soil Sampling: while the Department recognizes that much of the site parcel will be excavated to a depth of 7 feet or below to accommodate the planned site development, a full determination of the nature and extent of contaminants at the site is still required. This will also aid in determining areas subject to the award of Brownfield Cleanup Program tax credits and in addition, if any material may be reused. Also, site development plans can quickly change, and not only could this data prove useful to support a new development plan, only a full RI will be accepted by the Department, regardless of planned site development. With that, the following is recommended:

- a. If necessary, increasing the number of depth intervals sampled beyond 2 per boring should vertical contamination need additional delineation based on field screening.

***SESI Response:*** *The number of depth intervals sampled may be increased beyond 2 per boring should field screening, which includes visual and olfactory observations and screening with Photo Iodization Detector (PID), indicate that additional samples are needed. In addition, samples will be collected at depth intervals which will be varied across the site to ensure vertical characterization of soil contaminants.*

- b. Increasing the number of samples analyzed for the full suite (e.g. target analyte list (TAL) metals, semi-volatile organic compounds (SVOCs), VOCs, pesticides, PCBs) beyond the 10% of the total number of samples proposed in the RIWP. The BCP requires that all exceedances above all relevant Standards, Criteria, and Guidance (SCG) values in all environmental media must be addressed. Discrete/non-homogenized samples are recommended, and for VOC analyses, discrete samples are a requirement.

***SESI Response:*** *SESI will analyze up to 20% of the samples for the full suite TCL/TAL +30. All the samples will be discrete samples for VOCs and other constituents.*

- c. More even distribution of soil samples on the site is recommended, or an increase of samples located toward the center, north, east, and west within the site parcel to better delineate contaminants in these areas. The Department recognizes that the focus on the south and southwest areas of the parcel was due to results from prior investigations.

***SESI Response:*** *SESI has proposed additional soil borings to ensure delineation of contaminants across the site. A revised Proposed Soil Sample Location plan is attached as Figure SESI-2 in Attachment B. In addition, SESI will convert the proposed temporary wells to permanent wells to allow for resampling (if necessary) and for development of the*

*groundwater gradient across the site. SESI Proposed Groundwater Sample Location Plan is provided as Figure SESI-3 in Attachment B.*

- d. For areas which are exposed, surface soil samples must be collected in the 0-2" interval and analyzed for the full suite analysis with the exception of VOCs which should represent the upper 6 inches (typically 2-6" interval).

**SESI Response:** *The Site is currently entirely covered with hard surfaces including buildings and paving. The proposed development will include a sub grade parking garage that encompasses the entire site. The proposed landscaped areas in the planned development will be made of imported soil that must be pre-approved by the DEC prior to import. Therefore, surface sampling of 0-2" interval is not applicable for this Site.*

- e. For nature and extent information, reuse information, and for potential future BCP site cover requirements, subsurface samples from both exposed areas and areas currently under a building, concrete, or asphalt should be collected from each of the following intervals for full- suite analysis: 2-6" (or 0-6" if preferred), 6-12", 12-24", as well as relevant deeper intervals. Also recommended for sampling are areas of potential impact such as those indicated with screening (PID, FID, XRF, etc.), visual signs (source areas – sumps, floor drains, back doors, stains, sheens, blebs, presence of NAPL, etc.), odors, or groundwater and geological unit interfaces (fill, native, top of confining unit, etc.).

**SESI Response:** *The proposed development will include a sub grade parking garage that encompasses the entire site and therefore no existing soils is anticipated to remain exposed. Nonetheless subsurface samples will be collected from select borings across the site from the following intervals for full-suite analysis: 2-6" or 0-6", 6-12", 12-24", and from deeper intervals as explained in the response to 7 (a) above. A minimum of two samples will be collected per boring. The sample depth will be varied between borings across the Site in order to collect data that represents the entire soil column.*

8. Page 15-16, 6.4 Groundwater Sampling: In order to evaluate the nature and extent of groundwater contamination on site, sampling for the full suite of analytes at all monitoring wells is recommended. The Department appreciates the inclusion in the RIWP of sampling for emerging contaminants in groundwater per NYSDEC's current guidance. Emerging contaminants (ECs) can be sampled in fewer wells, but at a minimum, an upgradient and two downgradient wells are recommended for an initial EC screening evaluation.

**SESI Response:** *SESI will sample for the full suite of analytes at all monitoring wells to evaluate the nature and extent of groundwater contamination on site. Emerging contaminants will be sampled in an upgradient and two downgradient wells. A sampling plan for the emerging contaminants is attached with this letter as Attachment E.*

9. Health and Safety Plan and Community Air Monitoring Plan: Please note that the HASP and CAMP have different goals and the revised document should include separate documents. The CAMP should be in accordance with the NYSDOH Generic CAMP.

**SESI Response:** *SESI will conduct the field work under the HASP and CAMP as prepared by SESI provided in Attachments C and D, respectively.*

10. Page 18, 7.0 Reporting Requirements: please include a statement that all environmental data collected during the Remedial Investigation and in future project phases will also be submitted electronically to the Department via a standardized electronic data deliverable (EDD) format and must meet the guidelines specified by the Department.

**SESI Response:** *All environmental data collected during the Remedial Investigation and in future project phases will be submitted electronically to the Department via a standardized electronic data deliverable (EDD) format and will meet the guidelines specified by the Department.*

11. Please revise Table 8: Project Schedule.

**SESI Response:** *Please see the revised Table 8: Project Schedule below. However, the schedule below is subject to change based on approvals and field conditions that may cause delays. SESI will update the DEC with any changes.*

*The demolition and asbestos abatement will be initiated once the RIWP is approved, unless the DEC and DOH agrees it can be initiated sooner. The demolition and asbestos removal will continue coterminous with the remedial investigation to facilitate thorough and complete access for investigatory sampling. It is anticipated that the demolition of all existing structures will be completed by the time the investigation is complete with the reporting on the demolition and asbestos removal contained in the RIR. SESI will notify the DEC before the start of any field work. All asbestos-containing materials (ACM) will be abated prior to demolition of the buildings.*

*The Volunteer will retain a qualified contractor to perform a pre-demolition asbestos inspection and collect bulk material samples from the Site buildings. A New York State Department of Labor (NYSDOL) Certified Asbestos Inspector will perform asbestos inspections and collected bulk material samples from suspect ACM identified to be present on the interior and of the Site buildings. A NYSDOL certified project monitor will perform the third-party project monitoring activities throughout the duration of abatement.*

*Upon completion of the abatement activities, the project monitor will conduct a visual inspection throughout each building to confirm that all surfaces abated contain no visible ACM debris or residue and that all containerized waste has been removed from the facility. The Certified Project Monitor will collect air samples utilizing aggressive sampling procedures from random locations within the abatement work areas as well as representative locations outside of the abatement work areas.*

*Community Air Monitoring Plan (CAMP) will be implemented during the demolition work. Site preparation activities, limited to asbestos abatement and above grade demolition, will be completed prior to the remedial investigation to facilitate access. SESI will notify the DEC before the start of any field work.*

*After the completion of the demolition, a building demolition report will be included in the RIR and at a minimum will include the following:*

- *Plan showing the demolished buildings;*
- *Manifests for the disposal of the ACM and non-ACM material;*
- *Permits obtained for demolition and abatement;*

- *Pre-construction asbestos and lead paint survey and any monitoring conducted during abatement;*
- *CAMP reports and results.*

<b>Activity</b>	<b>Time To Complete</b>
Prepare BCP Application, Submit to NYSDEC	May 2018; Completed
NYSDEC Completeness Review of BCP Application	June 2018; Completed
30-day Public Comment Period for BCP Application Initiated	July 2018; Completed
Public Comment Period for BCP Application Ends	August 2018; Completed
BCP Acceptance	August 2018; Completed
Execute Brownfield Cleanup Agreement (BCA), Enter BCP	August 2018; Completed
Prepare Citizen Participation Plan (CPP)	September 2018; Completed
Prepare RIWP, Submit to NYSDEC	September 2018; Completed
Address NYSDEC Comments to RIWP and Resubmit	January 2019
30-day Public Comment Period for RIWP Initiated	February 2019
Public Comment Period for RIWP Ends	March 2019
Remedial Investigation Field Work and demolition and abatement Completed	July 2019
Draft Remedial Investigation Report (RIR), Submit to NYSDEC	August 2019
Draft Remedial Action Work Plan (RAWP) and Fact Sheet, Submit to NYSDEC	August 2019
45-day Public Comment Period for RAWP is Initiated	September 2019
Public Comment Period for RAWP Ends	November 2019
NYSDEC Approves RAWP and Issues Decision Document	December 2019
Complete Remedial Action	December 2019 – July 2020
Draft Final Engineering Report (FER), Submit FER to NYSDEC	August 2020
Certificate of Completion is Issued	September 2020

Please do not hesitate to contact me with any questions or concerns. Sincerely,

**SESI CONSULTING ENGINEERS**

Fuad Dahan, PhD, PE  
Principal

- Attachment A: Soil Vapor Sampling Addendum
- Attachment B: Soil Vapor, Groundwater Wells, and Soil Boring locations plans
- Attachment C: HASP
- Attachment D: CAMP
- Attachment E: Emerging Contaminants Sampling Plan

**ATTACHMENT A: SOIL VAPOR SAMPLING PLAN ADDENDUM**

# **HAMILTON GREEN**

**200 HAMILTON AVENUE, WHITE PLAINS, NEW YORK**

---

## **Remedial Investigation Work Plan**

# **SOIL VAPOR INVESTIGATION ADDENDUM**

**NYSDEC Site Number: C360177**

### **Prepared for:**

**S-WD / WP LLC  
168a Irving Avenue  
Suite 200k  
Port Chester, NY 10573**

### **Prepared by:**

**SESI CONSULTING ENGINEERS, P.C.  
12A Maple Avenue  
Pine Brook, NJ 07058**

**January 21, 2019**

# Table of Contents

1.0 INTRODUCTION.....	1
2.0 SV SAMPLING PLAN.....	1
2.1 Sample Locations .....	1
2.2 Sampling Protocol .....	2

## 1.0 INTRODUCTION

The New York State Department of Environmental Conservation (NYSDEC) has accepted into the Brownfield Cleanup Program (BCP) the property at 200 Hamilton Avenue, White Plains, New York (the "Site") with S-WDWP LLC, as Volunteer. A Brownfield Cleanup Agreement (BCA) was executed by the NYSDEC on August 16, 2018, (BCP Site No. C360177).

This document comprises a Soil Vapor (SV) Investigation Addendum to the Remedial Investigation Work Plan (RIWP) (AKRF September 2018) in response to the NYSDEC comment letter on the RIWP dated January 2, 2019.

## 2.0 SV SAMPLING PLAN

### *2.1 Sample Locations*

To evaluate the potential for future exposures of the proposed development eleven (11) SV samples will be collected across the Site in the footprint of the proposed development. Figure SESI - 1 in Attachment 2 illustrates the proposed SV sampling locations with respect to the footprint of the proposed development. The previous soil vapor concentrations are provided as Table 1. The SV points were chosen taking into consideration the following:

- In areas where elevated VOC concentrations were detected in soil vapor and groundwater,
- In the proposed building foot prints, and
- At a depth of 12-14 ft below existing grade, which is comparable to the expected depth of the proposed foundation footings.

All samples will be sent to an ELAP-certified laboratory for EPA TO-15 analysis.

### *2.2 Sampling Protocol*

Semi-permanent soil vapor probes will be installed with an adequate surface seal to prevent outdoor air infiltration. Soil vapor probes will be constructed in the same manner at all locations to minimize possible discrepancies. The following procedures will be included in constructing the probes:

- Implants will be installed using a direct push Geoprobe® to attain the desired depth



- Porous, inert backfill material will be used to create a sampling of 2 feet in length;
- The implants will be fitted with inert tubing (e.g., polyethylene or Teflon®) of laboratory or food grade quality to the surface;
- Soil vapor probes will be sealed above the sampling zone with a bentonite slurry for a minimum distance of 3 feet. The remainder of the borehole will be backfilled with clean material; and
- Steps will be taken to minimize infiltration of water or outdoor air and to prevent accidental damage.

Soil vapor samples will be collected in the following manner at all locations:

- Shortly after the installation of the probes, three implant volumes (the volume of the sample probe and tube) will be purged prior to collecting the samples;
- Flow rates for both purging and collecting will not exceed 0.2 liters per minute to minimize outdoor air infiltration during sampling;
- Samples will be collected in 6-L Summa® canisters that are certified clean by the laboratory;
- A tracer gas (e.g., helium) will be used when collecting soil vapor samples to verify that no infiltration of outdoor air is occurring.

***Tracer Gas Test:***

The tracer gas serves as a quality assurance/quality control measure to verify the integrity of the soil vapor probe seal. The atmosphere in the immediate vicinity of the area where the probe intersects the ground surface will be enriched with the tracer gas. A plastic pail will be installed to enclose the tracer gas and keep in contact with the probe tubing. A soil gas sample will be collected with a Tedlar® bag from the probe while the plastic pail is holding the atmosphere enriched with tracer gas (helium) around the probe tube. A portable Helium monitoring device will analyze the collected Tedlar® sample prior to and after sampling for the compounds of concern. If high concentrations (> 10%) of tracer gas are observed in the Tedlar bag sample, the probe seal will be enhanced to reduce the infiltration. The tracer test will be repeated until the tracer gas concentration is below 10%.

**Table 1**  
**PREVIOUS SOIL VAPOR DATA**

Sample ID Date Sampled Dilution Factor Units = $\mu\text{g}/\text{m}^3$	<i>USEPA VISL Target Sub-Slab May 2018</i>	<i>NYSDOH Air Guidance Value*</i>	SV-1 8/8/2017 8	SV-2 8/8/2017 13.1	SV-3 8/9/2017 6	SV-4 8/9/2017 1	SV-5 8/9/2017 10
<b>1,3-Butadiene</b>	<i>3.1</i>	<i>NS</i>	<b>7.2</b>	<b>87</b>	--	--	<b>5.4</b>
<b>2,2,4-Trimethylpentane</b>	<i>NS</i>	<i>NS</i>	25	15	--	--	--
<b>Acetone</b>	<i>1100000</i>	<i>NS</i>	170	170	270	--	750
<b>Benzene</b>	<i>12</i>	<i>NS</i>	11	<b>52</b>	--	--	--
<b>Carbon disulfide</b>	<i>24000</i>	<i>NS</i>	--	100	--	--	--
<b>Chloroform</b>	<i>4.1</i>	<i>NS</i>	--	--	--	1.2	<b>10</b>
<b>Chloromethane</b>	<i>3100</i>	<i>NS</i>	--	20	--	--	--
<b>Cumene</b>	<i>14000</i>	<i>NS</i>	--	--	--	--	13
<b>Cyclohexane</b>	<i>35000</i>	<i>NS</i>	--	18	26	--	--
<b>Ethylbenzene</b>	<i>37</i>	<i>NS</i>	<b>50</b>	<b>38</b>	--	--	10
<b>Methyl Ethyl Ketone</b>	<i>170000</i>	<i>NS</i>	36	44	18	--	26
<b>Methylene Chloride</b>	<i>3400</i>	<i>100</i>	--	--	240	--	53
<b>n-Heptane</b>	<i>14000</i>	<i>NS</i>	--	240	--	--	--
<b>n-Hexane</b>	<i>2400</i>	<i>NS</i>	40	590	350	--	100
<b>n-Propylbenzene</b>	<i>35000</i>	<i>NS</i>	8.6	--	--	1.7	--
<b>o-Xylene</b>	<i>3500</i>	<i>NS</i>	7.4	--	--	--	--
<b>Toluene</b>	<i>170000</i>	<i>NS</i>	--	--	250	--	45
<b>Trichloroethene</b>	<i>16</i>	<i>6</i>	--	--	<b>69</b>	--	<b>13</b>

**Notes:**

NS = No Standard

Bold = Exceeded Standards

$\mu\text{g}/\text{m}^3$  = micrograms per cubic meter


-- = No exceedance

\* Guidance for Evaluating Soil Vapor Intrusion in the State of New York (October 2006).

## **ATTACHMENT B: SAMPLING LOCATIONS FIGURES**




N:\ACAD\10440\CAD\10440 SEI SAMPLE LOCATION PLAN.DWG 01/17/19 03:04:44PM, Jenny, LAYOUT:SEI-2

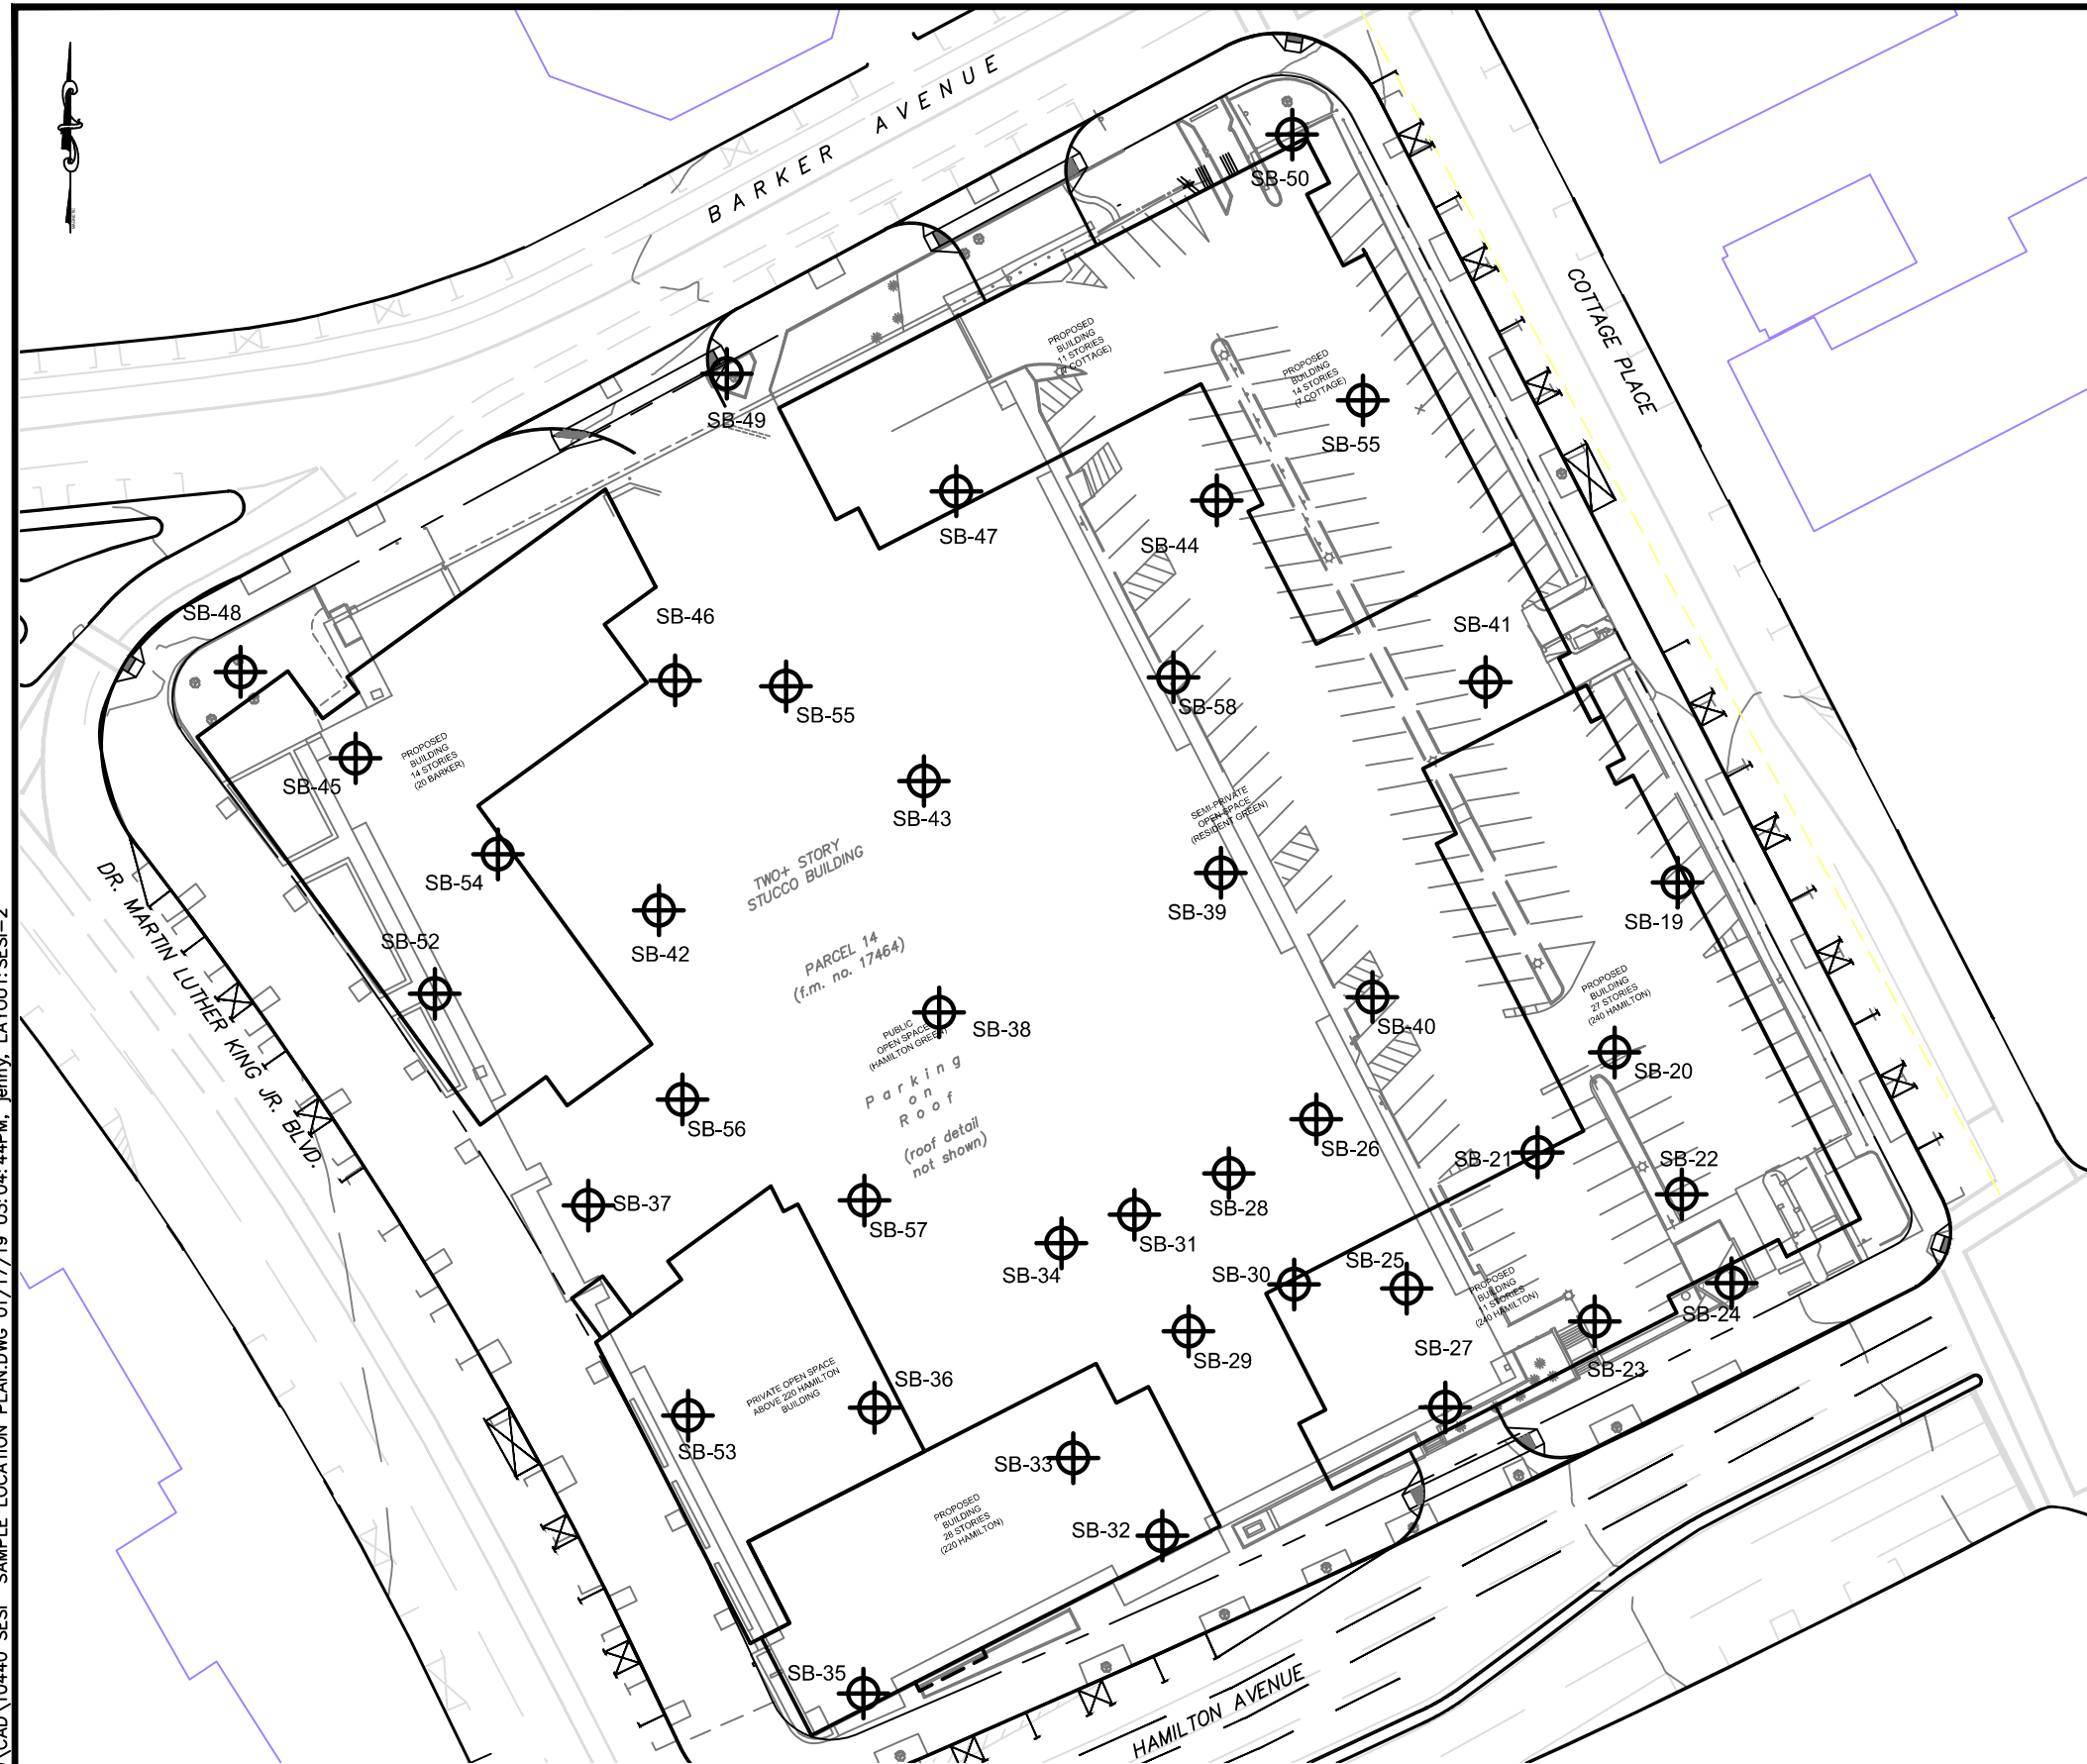

**LEGEND:**

SB-21 - PROPOSED SOIL BORINGS

© SEI CONSULTING ENGINEERS D.P.C. 2019  
This drawing and all information contained hereon is proprietary information of SEI CONSULTING ENGINEERS D.P.C. and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SEI CONSULTING ENGINEERS D.P.C.



dwg by: yy  
chk by: FL  
scale: 1" = 60'  
date: 01/15/19

**SESI**  
CONSULTING ENGINEERS D.P.C.

SOILS / FOUNDATIONS  
SITE DESIGN  
ENVIRONMENTAL

12A MAPLE AVE. PINE BROOK, N.J. 07058 PH: 973-808-9050

project: 200 HAMILTON AVENUE  
WHITE PLAINS, NY


drawing title: PROPOSED SOIL SAMPLE  
LOCATION PLAN

job no: 10440  
drawing no:

# SESI-2




N:\ACAD\10440\CAD\10440 SESI SAMPLE LOCATION PLAN.DWG 01/17/19 03:05:09PM\_jenny\_LAYOUT:SESI-3

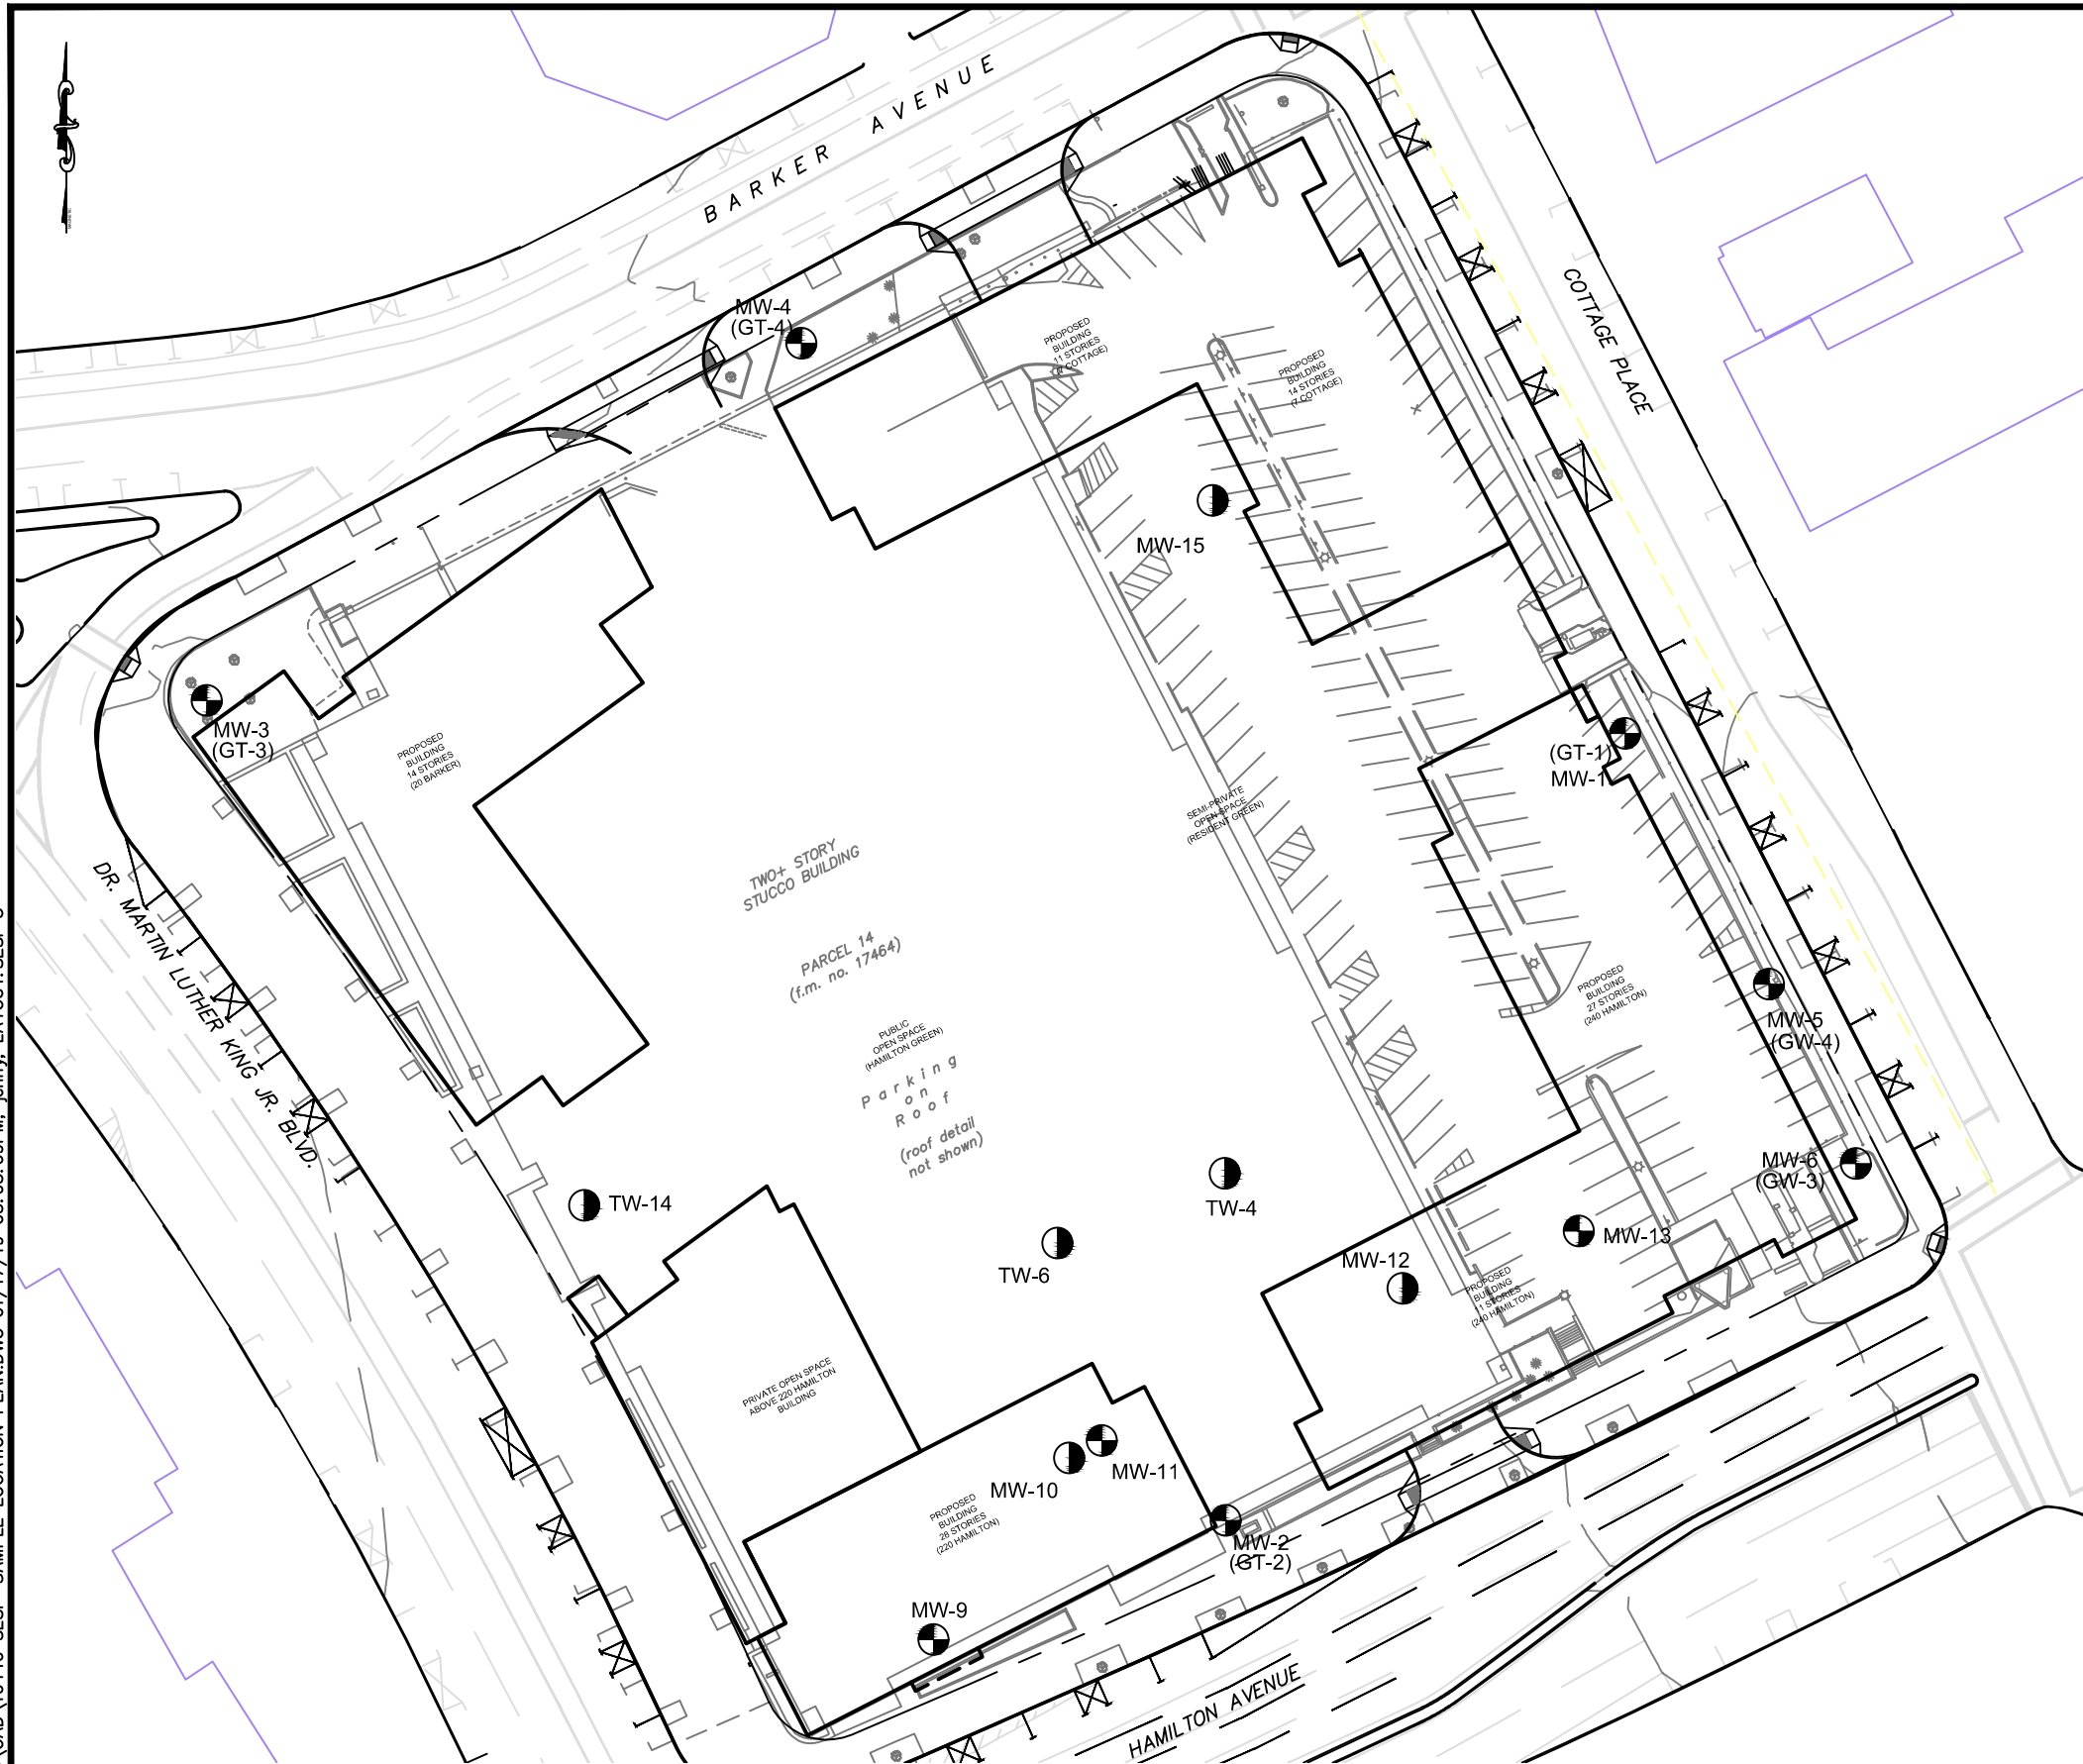

**LEGEND:**

- EXISTING MONITORING WELL
- PROPOSED MONITORING WELL

© SESI CONSULTING ENGINEERS D.P.C. 2019  
 This drawing and all information contained hereon is proprietary information of SESI CONSULTING ENGINEERS D.P.C. and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS D.P.C.



dwg by: yy  
 chk by: FL  
 scale: 1" = 60'  
 date: 01/15/19

**SESI**  
 CONSULTING ENGINEERS D.P.C.  
 SOILS / FOUNDATIONS  
 SITE DESIGN  
 ENVIRONMENTAL  
 12A MAPLE AVE. PINE BROOK, N.J. 07058 PH: 973-808-9050

project: 200 HAMILTON AVENUE  
 WHITE PLAINS, NY  
 drawing title: PROPOSED GROUNDWATER  
 MONITORING WELL LOCATION PLAN

job no: 10440  
 drawing no:  
**SESI-3**

## **ATTACHMENT C: HEALTH AND SAFETY PLAN**



## **SITE-SPECIFIC HEALTH AND SAFETY PLAN**

**Hamilton Green BCP Site  
200 Hamilton Avenue  
White Plains, New York  
BCP # C360177**

**Prepared For:**

**S-WD/WP LLC  
186-A Irving Avenue, Suite 200K  
Port Chester, NY 10573**

**Prepared By:**

**SESI CONSULTING ENGINEERS  
12A Maple Avenue  
Pine Brook, NJ 07058**

**Project No.: 10100**

**January 21, 2019**

***Disclaimer:** This Health and Safety Plan (HASP) is based upon information provided [and, if applicable, conditions discovered during a site visit], and is limited by the project scope.*

*The HASP should be periodically reviewed and updated based on a number of factors, including but not limited to: (1) changes in applicable governmental requirements; (2) changes in procedures at the site; and (3) site conditions which were unknown to SESI Consulting Engineers (SESI) as of the time the HASP was prepared.*

*This HASP has been prepared for the sole and exclusive use of S-WD/WP LLC., and may not be relied upon by any other person without the express written consent and authorization of SESI.*



**SITE-SPECIFIC HEALTH AND SAFETY PLAN**

**For**

**Hamilton Green BCP Site  
200 Hamilton Avenue  
White Plains, New York  
BCP # C360177**

Prepared by: \_\_\_\_\_

Date:

\_\_\_\_\_

Steven Gustems  
SESI- Project Manager

Approved by: \_\_\_\_\_

Date:

\_\_\_\_\_

Fuad Dahan  
SESI-Principal

## Table of Contents

<b>HEALTH AND SAFETY PLAN SUMMARY .....</b>	<b>8</b>
<b>1.0 INTRODUCTION .....</b>	<b>9</b>
1.1 OBJECTIVE .....	9
1.2 SITE AND FACILITY DESCRIPTION .....	9
1.3 POLICY STATEMENT .....	9
1.4 REFERENCES .....	10
1.5 DEFINITIONS .....	10
<b>2.0 PROJECT SCOPE OF WORK .....</b>	<b>11</b>
<b>3.0 ROLES AND RESPONSIBILITIES.....</b>	<b>11</b>
3.1 ALL PERSONNEL.....	11
3.2 KEY SAFETY PERSONNEL .....	11
3.2.1 <i>Project Officer (PO)</i> .....	11
3.2.2 <i>Project Manager (PM)</i> .....	11
3.2.3 <i>Health and Safety Manager (HSM)</i> .....	12
3.2.4 <i>Site Safety Officer (SSO)</i> .....	12
3.2.5 <i>Field Supervisor (FS)</i> .....	12
3.2.6 <i>Field Personnel (FP)</i> .....	13
3.3 SUBCONTRACTORS .....	13
3.4 STOP WORK AUTHORITY.....	13
3.5 ALL ON-SITE PERSONNEL .....	13
3.6 VISITORS.....	14
<b>4.0 PERSONAL PROTECTIVE EQUIPMENT .....</b>	<b>14</b>
4.1 LEVELS OF PROTECTION.....	14
4.1.1 <i>Level D Protection</i> .....	15
4.1.2 <i>Modified Level D Protection</i> .....	15
4.1.3 <i>Level C Protection</i> .....	15
4.2 SELECTION OF PPE .....	16
4.3 SITE RESPIRATORY PROTECTION PROGRAM .....	16
4.4 USING PPE.....	16
4.4.1 <i>Donning Procedures</i> .....	16
4.4.2 <i>Doffing Procedures</i> .....	17
4.5 SELECTION MATRIX.....	17
<b>5.0 AIR AND NOISE MONITORING .....</b>	<b>18</b>
5.1 AIR MONITORING .....	18
5.2 NOISE MONITORING.....	18
5.3 MONITORING EQUIPMENT MAINTENANCE AND CALIBRATION .....	18
5.4 ACTION LEVELS .....	19
<b>6.0 WORK ZONES AND DECONTAMINATION .....</b>	<b>19</b>
6.1 WORK ZONES.....	19

6.1.1	<i>Authorization to Enter</i> .....	19
6.1.2	<i>Site Orientation and Hazard Briefing</i> .....	20
6.1.3	<i>Certification Documents</i> .....	20
6.1.4	<i>Entry Log</i> .....	20
6.1.5	<i>Entry Requirements</i> .....	20
6.1.6	<i>Emergency Entry and Exit</i> .....	20
6.1.7	<i>Contamination Control Zones</i> .....	20
6.1.8	<i>Exclusion Zone (EZ)</i> .....	20
6.1.9	<i>Contamination Reduction Zone</i> .....	20
6.1.10	<i>Support Zone (SZ)</i> .....	21
6.1.11	<i>Posting</i> .....	21
6.1.12	<i>Site Inspections</i> .....	21
6.2	DECONTAMINATION.....	21
6.2.1	<i>Personnel Decontamination</i> .....	21
6.2.2	<i>Equipment Decontamination</i> .....	21
6.2.3	<i>Personal Protective Equipment Decontamination</i> .....	21
<b>7.0</b>	<b>TRAINING AND MEDICAL SURVEILLANCE</b> .....	<b>22</b>
7.1	TRAINING.....	22
7.1.1	<i>General</i> .....	22
7.1.2	<i>Basic 40-Hour Course</i> .....	22
7.1.3	<i>Supervisor Course</i> .....	22
7.1.4	<i>Site-Specific Training</i> .....	23
7.1.5	<i>Daily Safety Meetings</i> .....	23
7.1.6	<i>First Aid and CPR</i> .....	23
7.2	MEDICAL SURVEILLANCE.....	23
7.2.1	<i>Medical Examination</i> .....	23
7.2.2	<i>Pre-placement Medical Examination</i> .....	23
7.2.3	<i>Other Medical Examinations</i> .....	24
7.2.4	<i>Periodic Exam</i> .....	24
7.2.5	<i>Medical Restriction</i> .....	24
<b>8.0</b>	<b>GENERAL SAFETY PRACTICES</b> .....	<b>24</b>
8.1	GENERAL SAFETY RULES.....	24
8.2	BUDDY SYSTEM.....	25
8.3	HEAT STRESS.....	26
8.4	HEAT STRESS SAFETY PRECAUTIONS.....	27
	<i>Table 4 – Work/Rest Schedule</i> .....	28
8.5	COLD STRESS.....	29
8.6	SAFETY PRECAUTIONS FOR COLD STRESS PREVENTION.....	30
8.7	SAFE WORK PRACTICES.....	30
8.8	BIOLOGICAL HAZARDS.....	30
8.8.1	<i>Tick Borne Diseases</i> .....	31
8.8.2	<i>Poisonous Plants</i> .....	31
8.8.3	<i>Snakes</i> .....	32
8.8.4	<i>Spiders</i> .....	32
8.9	NOISE.....	32

8.10	SPILL CONTROL.....	33
8.11	SANITATION.....	33
8.11.1	<i>Break Area</i> .....	33
8.11.2	<i>Potable Water</i> .....	33
8.11.3	<i>Sanitary Facilities</i> .....	33
8.11.4	<i>Lavatory</i> .....	34
8.12	EMERGENCY EQUIPMENT.....	34
8.13	LOCKOUT/TAGOUT PROCEDURES.....	34
8.14	ELECTRICAL SAFETY.....	34
8.15	LIFTING SAFETY.....	35
8.16	LADDER SAFETY.....	35
8.17	TRAFFIC SAFETY.....	37
<b>9.0</b>	<b>SITE-SPECIFIC HAZARDS AND CONTROL MEASURES.....</b>	<b>37</b>
9.1	EVALUATION OF HAZARDS.....	37
9.1.1	<i>Hazard Characteristics</i> .....	37
9.1.2	<i>Potential Health and Safety Hazards</i> .....	38
9.2	FIELD ACTIVITIES, HAZARDS, AND CONTROL PROCEDURES.....	38
9.2.1	<i>Mobilization/Construction Stakeout</i> .....	38
9.2.2	<i>Demolition/Site Clearing</i> .....	39
9.2.3	<i>Excavation and Cut/Fill Operations</i> .....	40
9.2.4	<i>Drilling/Subsurface Intrusion Activities</i> .....	42
9.2.5	<i>Subsurface Chemical Sample Collection/Analysis</i> .....	46
9.2.6	<i>UST Closure</i> .....	47
9.2.7	<i>Site Capping System Construction</i> .....	47
9.2.8	<i>Creek Relocation</i> .....	48
9.2.9	<i>Decontamination</i> .....	48
9.2.10	<i>Demobilization</i> .....	48
9.3	CHEMICAL HAZARDS.....	48
<b>10.0</b>	<b>EMERGENCY PROCEDURES.....</b>	<b>50</b>
10.1	GENERAL.....	50
10.2	EMERGENCY RESPONSE.....	50
10.2.1	<i>Fire</i> .....	50
10.2.2	<i>Contaminant Release</i> .....	51
10.3	MEDICAL EMERGENCY.....	51
10.3.1	<i>Emergency Care Steps</i> .....	51
10.4	FIRST AID - GENERAL.....	51
10.4.1	<i>First Aid - Inhalation</i> .....	52
10.4.2	<i>First Aid - Ingestion</i> .....	52
10.4.3	<i>First Aid - Skin Contact</i> .....	52
10.4.4	<i>First Aid - Eye Contact</i> .....	52
10.5	REPORTING INJURIES, ILLNESSES, AND SAFETY INCIDENTS.....	52
10.6	EMERGENCY INFORMATION.....	52
10.6.1	<i>Directions to Hospital</i> .....	53
<b>11.0</b>	<b>LOGS, REPORTS, AND RECORD KEEPING.....</b>	<b>54</b>

11.1	HASP FIELD CHANGE REQUEST .....	54
11.2	MEDICAL AND TRAINING RECORDS .....	54
11.3	EXPOSURE RECORDS.....	54
11.4	ACCIDENT/INCIDENT REPORT.....	54
11.5	OSHA FORM 200.....	54
11.6	ON-SITE HEALTH AND SAFETY FIELD LOGBOOKS.....	54
11.7	MATERIAL SAFETY DATA SHEETS .....	55

## LIST OF FIGURES

<b><u>Figure No.</u></b>	<b><u>Title</u></b>
--------------------------	---------------------

Fig-1	Directions to White Plains Hospital
-------	-------------------------------------

## LIST OF EMBEDDED TABLES

<b><u>Table</u></b>	<b><u>Title</u></b>	<b><u>Page</u></b>
1.	Key Safety Personnel	14
2.	PPE Selection Matrix	17
3.	Airborne Contaminant Action Levels	19
4.	Work/Rest Schedule	27
5.	Wind Chill Temperature Chart	29
6	List of Primary Contaminants	49
7	Emergency Contacts	52

## LIST OF ATTACHMENTS

Attachment 1	Air Monitoring Log
Attachment 2	OSHA Poster
Attachment 3	HASP Field Change Request Form
Attachment 4	Accident/Incident Report
Attachment 5	Signatory Page
Attachment 6	Material Safety Data Sheets

## LIST OF ACRONYMS AND ABBREVIATIONS

ACGIH	American Conference of Governmental Industrial Hygienists
COC	Constituent(s) of Concern
CRZ	Contamination Reduction Zone
EZ	Exclusion Zone
FS	Field Supervisor
GFCI	Ground Fault Circuit Interrupter
HASP	Health and Safety Plan
HSM	Health and Safety Manager
LEL	Lower Explosive Limit
MSDS	Material Safety Data Sheet
OSHA	Occupational Safety and Health Administration
PCB	Polychlorinated Biphenyls
PEL	Permissible Exposure Limit
PID	Photoionization Detector
PM	Project Manager
PO	Project Officer
PPE	Personal Protective Equipment
SESI	SESI Consulting Engineers
SSO	Site Safety Officer
SVOC	Semi-Volatile Organic Compound
SZ	Support Zone
TLV	Threshold Limit Value
USCG	United States Coast Guard
USEPA	United States Environmental Protection Agency
VOC	Volatile Organic Compound

## HEALTH AND SAFETY PLAN SUMMARY

The chemical hazards associated with site operations are related to inhalation, ingestion, and skin exposure to site Chemicals of Concern (COCs). COCs at the site include metals, some VOC compounds, some SVOC compounds and some pesticides. Concentrations of airborne COCs during site tasks may be measurable and will require air monitoring during certain operations.

The potential for inhalation of site COCs is low. The potential for dermal contact with soils containing site COCs during remedial operations is moderate.

The following table summarizes airborne contaminant action levels that will be used to determine the procedures and protective equipment necessary based on conditions as measured at the site.

Parameter	Reading	Action
Dust	0 to .5 mg/m <sup>3</sup>	Normal operations
	0.5 to 1 mg/m <sup>3</sup>	Begin soil wetting procedure (Level C protection would be needed beyond this point)
	> 1 mg/m <sup>3</sup>	Stop work, fully implement dust control plan
Oxygen	≤ 19.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
	> 19.5% to < 23.5%	Normal operations
	≥ 23.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Carbon Monoxide	0 ppm to ≤ 20 ppm	Normal operations
	> 20 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area

The level of personal protection selected will be based on air monitoring of the work environment and an assessment by the Field Supervisor and Site Safety Officer. The following table presents a selection matrix to determine appropriate Personal Protective Equipment.

Task	Anticipated Level of Protection
Mobilization	Level D
Subsurface Intrusive Activities (Mass Excavation, Drilling, Soil Grouting)	Modified Level D/Level C
Earthwork/Grading	Level D
Additional Chemical Sampling / Delineation	Modified Level D/Level C
Decontamination	Modified Level D
Demobilization	Level D



## 1.0 INTRODUCTION

### 1.1 Objective

The objective of this Health and Safety Plan (HASP) is to provide a mechanism for establishing safe working conditions during activities at the 200 Hamilton Avenue, White Plains, New York (the Site). The safety organization, procedures, and protective equipment have been established based on an analysis of potential physical, chemical, and biological hazards. Specific hazard control methodologies have been evaluated and selected to minimize the potential of injury, illness, or other hazardous incident.

The HASP was written to meet the requirements of all applicable Federal, State, and local health and safety regulations, including 29 CFR 1910.120. The HASP is based on current knowledge regarding the specific chemical and physical hazards that are known or anticipated at the Site. This HASP is a dynamic document, for which changes and/or revisions may be realized as changes in scope and/or site conditions are encountered. Should revised documents be produced, said revised documents will refer to the specific changes and why they were made.

### 1.2 Site and Facility Description

The Site, which is the subject of a Remedial Investigation Report prepared by AKRF, is approximately 3.74-acres occupied the two-story White Plains Mall and east-adjacent asphalt-paved parking lot. The Site properties are identified on the Westchester County Clerk's as a portion of tax parcel map Section 125.67, Block 5, Lot 1.

The Site is bounded by Barker Avenue to the north followed by offices, a hotel, and commercial development; Cottage Place to the east followed by a gasoline station and commercial buildings; Hamilton Avenue to the south followed by commercial and government buildings; and Dr. Martin Luther King Jr. Boulevard to the west followed by commercial development. The surrounding area consists primarily of commercial and governmental uses, with residences further north of the Site.

### 1.3 Policy Statement

The policy of SESI Consulting Engineers (SESI) is to provide a safe and healthful work environment. No aspect of operations is of greater importance than injury and illness prevention. A fundamental principle of safety management is that all injuries, illnesses, and incidents are preventable. SESI will take every reasonable step to eliminate or control hazards in order to minimize the possibility of injury, illness, or incident.

This HASP prescribes the procedures that must be followed by SESI personnel during activities at the site. Operational changes that could affect the health and safety of personnel, the community, or the environment will not be made without the prior approval of the Project Manager (PM) and the Health and Safety Manager (HSM). This document will be reviewed periodically by the HSM to ensure that it is current and technically correct. Any changes in site conditions and/or the scope of work will require a review and modification to this HASP. Such changes will be completed in the form of an addendum or a revision to the plan.

The provisions of this plan are mandatory for all SESI personnel and are advisory for all contractors, and subcontractors assigned to the project. **Subcontractors will be**

**responsible for preparing their own site-specific HASPs that meet the basic requirements outlined in this HASP.** All visitors to SESI work areas at the site must abide by the requirements of this plan.

#### **1.4 References**

This HASP complies with applicable Occupational Safety and Health Administration (OSHA) regulations, United States Environmental Protection Agency (USEPA) regulations, and SESI health and safety policies and procedures. This plan follows the guidelines established in the following:

- *Standard Operating Safety Guides*, USEPA (Publication 9285.1-03, June 1992).
- *Occupational Safety and Health Guidance Manual for Hazardous Waste Site Activities*, NIOSH, OSHA, USCG, USEPA (86116, October 1985).
- *Title 29 of the Code of Federal Regulations (CFR)*, Part 1910.
- *Title 29 of the Code of Federal Regulations (CFR)*, Part 1926.
- *Pocket Guide to Chemical Hazards*, DHHS, PHS, CDC, NIOSH (2004).
- *Threshold Limit Values*, ACGIH (2005).
- *Guide to Occupational Exposure Values*, ACGIH (2005).
- *Quick Selection Guide to Chemical Protective Clothing*, Forsberg, K. and S.Z. Mansdorf, 2nd Ed. (1993).

#### **1.5 Definitions**

The following definitions (listed alphabetically) are applicable to this HASP:

- *Contamination Reduction Zone (CRZ)* - Area between the exclusion zone and support zone that provides a transition between contaminated and clean areas. Decontamination stations are located in this zone.
- *Exclusion Zone (EZ)* - Any portions of the site where hazardous substances are, or are reasonably suspected to be present, and pose an exposure hazard to on-site personnel.
- *Incident* - All losses, including first aid cases, injuries, illnesses, spills/leaks, equipment and property damage, motor vehicle accidents, regulatory violations, fires, and business interruptions.
- *On-Site Personnel* - All SESI and subcontractors involved with the project.
- *Project* - All on-site work performed under the scope of work.
- *Site* - The area described in Section 1.2, Site and Facility Description, where the work is to be performed by SESI personnel and subcontractors.
- *Support Zone (SZ)* - All areas of the site except the EZ and CRZ. The SZ surrounds the CRZ and EZ. Support equipment and break areas are located in this zone.
- *Subcontractor* - Includes contractor personnel hired by SESI.
- *Visitor* - All other personnel, except the on-site personnel.
- *Work Area* - The portion of the site where work activities are actively being performed. This area may change daily as work progresses and includes the SZ, CRZ, and EZ. If the work area is located in an area on the site that is not contaminated, or suspected of being contaminated, the entire work area may be a SZ.

## **2.0 PROJECT SCOPE OF WORK**

This HASP contains information for the following tasks that SESI is anticipated to conduct at the Site. Should additional and/or different tasks be identified, amendments to this HASP will be required to address these changed items.

- Mobilization/Sample location stakeout;
- Soil Borings and Monitoring Well Installation;
- Excavation of contaminated soil “hot spots”;
- Earthwork and grading;
- Chemical sampling of soil and groundwater; and
- Decontamination and demobilization/site restoration.

## **3.0 ROLES AND RESPONSIBILITIES**

### **3.1 All Personnel**

All SESI project personnel must adhere to the procedures outlined in this HASP during the performance of their work. Each person is responsible for completing tasks safely and reporting any unsafe acts or conditions to their supervisor. No person may work in a manner that conflicts with these procedures. After due warnings, the PM will dismiss from the site any SESI employee or subcontractor who violates safety procedures.

All SESI project personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. In addition, all SESI personnel will attend an initial hazard briefing prior to beginning work at the site.

The roles of key safety personnel and subcontractors are outlined in the following sections. Key project personnel and contacts are summarized in Table 1.

### **3.2 Key Safety Personnel**

#### **3.2.1 Project Officer (PO)**

The PO is responsible for providing resources to assure project activities are completed in accordance with this HASP, and for meeting all regulatory and contractual requirements.

#### **3.2.2 Project Manager (PM)**

The PM is responsible for verifying that project activities are completed in accordance with the requirements of this HASP. The PM is responsible for confirming that the Field Supervisor (FS) has the equipment, materials, and qualified personnel to fully implement the safety requirements of this HASP, and/or that subcontractors assigned to this project meet the requirements established by SESI. It is also the responsibility of the PM to:

- Consult with the HSM on site health and safety issues;
- Verify that subcontractors meet health and safety requirements prior to commencing work;
- Verify that all incidents are thoroughly investigated;
- Approve, in writing, addenda or modifications of this HASP; and

- Suspend work or modify work practices, as necessary, for personal safety, protection of property, and regulatory compliance.

### **3.2.3 Health and Safety Manager (HSM)**

The HSM or his designee, the health and safety manager (HSM), has overall responsibility for the technical health and safety aspects of the project, including review and approval of this HASP. Inquiries regarding health and safety procedures, project procedures, and other technical or regulatory issues should be addressed to this individual. The HSM or his designee must approve changes or addenda to this HASP.

### **3.2.4 Site Safety Officer (SSO)**

The SSO is responsible for field health and safety issues, including the execution of this HASP. Questions in the field regarding health and safety procedures, project procedures, and other technical or regulatory issues should be addressed to this individual. The SSO will advise the PM on health and safety issues and will establish and coordinate the project air-monitoring program if one is deemed necessary (see Section 5.1, Air Monitoring). The SSO is the primary site contact on health and safety matters. It is the responsibility of the SSO to:

- Provide on-site technical assistance, if necessary;
- Participate in all accident/incident reports and ensure that they are reported to the HSM, client, and PM within 24 hours;
- Coordinate site and personal air monitoring as required, including equipment maintenance and calibration;
- Conduct site safety orientation training and safety meetings;
- Verify that project personnel have received the required physical examinations and medical certifications;
- Review site activities with respect to compliance with this HASP;
- Maintain required health and safety documents and records; and
- Assist the FS in instructing field personnel on project hazards and protective procedures.

### **3.2.5 Field Supervisor (FS)**

The FS is responsible for implementing this HASP, including communicating requirements to on-site personnel and subcontractors. The FS will be responsible for informing the PM of changes in the work plan, procedures, or site conditions so that those changes may be addressed in this HASP. Other responsibilities are to:

- Consult with the SSO on site health and safety issues;
- Stop work, as necessary, for personal safety, protection of property, and regulatory compliance;
- Obtain a site map and determine and post routes to medical facilities and emergency telephone numbers;
- Notify local public emergency representatives (as appropriate) of the nature of the site operations, and post their telephone numbers (i.e., local fire department personnel who would respond for a confined space rescue);
- Observe on-site project personnel for signs of ill health effects;
- Investigate and report any incidents to the SSO;
- Verify that all on-site personnel have had applicable training;

- Verify that on-site personnel are informed of the physical, chemical, and biological hazards associated with the site activities, and the procedures and protective equipment necessary to control the hazards; and
- Issue/obtain any required work permits (hot work, confined space, etc.).

### **3.2.6 Field Personnel (FP)**

All SESI field personnel are responsible for following the Health and Safety procedures specified in this HASP and work practices specified in applicable operation procedures. Some specific responsibilities include, but are not limited to:

- Reading and understanding the HASP;
- Reporting all accidents, incidents, injuries, or illnesses to the FS;
- Complying with the requests of the SSO;
- Immediately communicating newly identified hazards or noncompliance issues to the FS or SSO; and
- Stopping work in cases of immediate danger.

### **3.3 Subcontractors**

Subcontractors and their personnel must understand and comply with applicable regulations and site requirements established in this HASP. Subcontractors will prepare their own site-specific HASP that must be consistent with the requirements of this HASP.

All subcontractor personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. All subcontractor personnel will attend an initial hazard briefing prior to beginning work at the site. Additionally, on-site subcontractor personnel must conduct daily site safety meetings.

Subcontractors must designate individuals to function as the PM, HSM, SSO, and FS. In some firms the HSM to be carried out by the PM. This is acceptable provided the PM has the required knowledge, training, and experience to properly address all hazards associated with the work, and to prepare, approve, and oversee the execution of the site-specific HASP. A subcontractor may designate the same person to perform the duties of both the SSO and the FS. However, depending on the level of complexity of a contractor's scope of work, it may be infeasible for one person to perform both functions satisfactorily.

### **3.4 Stop Work Authority**

Every SESI employee and subcontractor is empowered, expected, and has the responsibility to stop the work of another co-worker if the working conditions or behaviors are considered unsafe.

### **3.5 All On-Site Personnel**

All on-site SESI personnel (including SESI subcontractors) must read and acknowledge their understanding of their respective HASPs before commencing work and abide by the requirements of the plans. All on-site SESI personnel shall sign their HASP Acknowledgement Form following their review of their HASP.

All SESI project personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. In addition, all on-site personnel will attend an initial hazard briefing

provided by the SSO prior to beginning work at the site and conduct daily safety meetings thereafter.

On-site personnel will immediately report the following to the FS or SSO:

- Personal injuries and illnesses no matter how minor;
- Unexpected or uncontrolled release of chemical substances;
- Symptoms of chemical exposure;
- Unsafe or hazardous situations;
- Unsafe or malfunctioning equipment;
- Changes in site conditions that may affect the health and safety of project personnel;
- Damage to equipment or property; and
- Situations or activities for which they are not properly trained.

**3.6 Visitors**

All SESI personnel and subcontractors visiting the Site must check in with the FS. Visitors will be cautioned to avoid skin contact with surfaces, soils, groundwater, or other materials that may impacted or be suspected to be impacted by constituents of concern (COCs).

Visitors requesting to observe work at the site must don appropriate personal protective equipment (PPE) prior to entry to the work area and must have the appropriate training and medical clearances to do so. If respiratory protective devices are necessary, visitors who wish to enter the work area must have been respirator-trained and fit tested for a respirator within the past 12 months.

**Table 1 – Key Safety Personnel**

<b>SESI Personnel</b>		
<b>Role</b>	<b>Name</b>	<b>Address/Telephone No.</b>
Project Officer (PO)	TBD	
Project Manager (PM)	TBD	
Senior Project Engineer (SPE)	TBD	
Health and Safety Manager (HSM)	TBD	
Site Safety Officer (SSO)	TBD	
Field Supervisor (FS)	TBD	
Field Personnel	TBD	
Field Personnel	TBD	
<b>Subcontractors</b>		
<b>Company/Role</b>	<b>Name</b>	<b>Address/Telephone No.</b>
TBD	TBD	TBD

**4.0 PERSONAL PROTECTIVE EQUIPMENT**

**4.1 Levels of Protection**

PPE is required to safeguard site personnel from various hazards. Varying levels of protection may be required depending on the levels of COCs and the degree of physical hazard. This section presents the various levels of protection and defines the conditions of use for each level. A summary of the levels is presented in Table 2 in this section.

#### **4.1.1 Level D Protection**

The minimum level of protection that will be required of project personnel at the site will be Level D, which will be worn when site conditions or air monitoring indicates no inhalation hazard exists. The following equipment will be used:

- Work clothing as prescribed by weather;
- Steel toe work boots, meeting American National Standards Institute (ANSI) Z41;
- Safety glasses or goggles, meeting ANSI Z87;
- Leather work gloves and/or nitrile surgical gloves;
- Hard hat, meeting ANSI Z89, when falling object hazards are present;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used); and
- PFD if working on or near the water.

#### **4.1.2 Modified Level D Protection**

Modified Level D will be used when airborne contaminants are not present at levels of concern, but site activities present an increased potential for skin contact with contaminated materials. Modified Level D consists of:

- Nitrile gloves worn over nitrile surgical gloves;
- Latex/polyvinyl chloride (PVC) overboots when contact with COC-impacted media is anticipated;
- Steel toe work boots, meeting ANSI Z41;
- Safety glasses or goggles, meeting ANSI Z87;
- Face shield in addition to safety glasses or goggles when projectiles or splash hazards exist (e.g. during Power Washing activities);
- Hard hat, meeting ANSI Z89, when falling object hazards are present;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used);
- Tyvek® suit (polyethylene coated Tyvek® suits for handling liquids) when body contact with COC-impacted media is anticipated; and
- PFD if working on or near the water.

#### **4.1.3 Level C Protection**

Level C protection will be required when the airborne concentration of COC reaches one-half of the OSHA Permissible Exposure Limit or ACGIH TLV. The following equipment will be used for Level C protection:

- Full-face, air-purifying respirator with combination organic vapor/HEPA cartridges;
- Polyethylene-coated Tyvek® suit, with ankles and cuffs taped to boots and gloves;
- Nitrile gloves worn over nitrile surgical gloves;
- Steel toe work boots, meeting ANSI Z41;
- Chemical-resistant boots with steel toes or latex/PVC overboots over steel toe boots;
- Hard hat, meeting ANSI Z89;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used); and
- PFD if working on or near the water.

## **4.2 Selection of PPE**

Equipment for personal protection will be selected based on the potential for contact, site conditions, ambient air quality, and the judgment of supervising site personnel and health and safety professionals. The PPE used will be chosen to be effective against the COCs present on the site.

## **4.3 Site Respiratory Protection Program**

Respiratory protection is an integral part of employee health and safety at the site due to potentially hazardous concentrations of airborne COCs. The site respiratory protection program will consist of the following (as a minimum):

- All on-site personnel who may use respiratory protection will have an assigned respirator.
- All on-site personnel who may use respiratory protection will have been fit tested and trained in the use of a full-face air-purifying respirator within the past 12 months. Documentation of the fit test must be provided to the SSO prior to commencement of work.
- All on-site personnel who may use respiratory protection must within the past year have been medically certified as being capable of wearing a respirator. Documentation of the medical certification must be provided to the SSO, prior to commencement of site work.
- Only cleaned, maintained, NIOSH-approved respirators will be used.
- If respirators are used, the respirator cartridge is to be properly disposed of at the end of each work shift, or when load-up or breakthrough occurs.
- Contact lenses are not to be worn when a respirator is worn.
- All on-site personnel who may use respiratory protection must be clean-shaven. Mustaches and sideburns are permitted, but they must not touch the sealing surface of the respirator.
- Respirators will be inspected, and a negative pressure test performed prior to each use.
- After each use, the respirator will be wiped with a disinfectant, cleansing wipe. When used, the respirator will be thoroughly cleaned at the end of the work shift. The respirator will be stored in a clean plastic bag, away from direct sunlight in a clean, dry location, in a manner that will not distort the face piece.

## **4.4 Using PPE**

Depending upon the level of protection selected, specific donning and doffing procedures may be required. The procedures presented in this section are mandatory if Modified Level D or Level C PPE is used. All personnel entering the EZ must put on the required PPE in accordance with the requirements of this HASP. When leaving the EZ, PPE will be removed in accordance with the procedures listed, to minimize the spread of COCs.

### **4.4.1 Donning Procedures**

These procedures are mandatory only if Modified Level D or Level C PPE is used on the site:

- Remove bulky outerwear. Remove street clothes and store in clean location;
- Put on work clothes or coveralls;
- Put on the required chemical protective coveralls;



- Put on the required chemical protective boots or boot covers;
- Tape the legs of the coveralls to the boots with duct tape;
- Put on the required chemical protective gloves;
- Tape the wrists of the protective coveralls to the gloves;
- Don the required respirator and perform appropriate fit check (Level C);
- Put hood or head covering over head and respirator straps and tape hood to facepiece (Level C); and
- Don remaining PPE, such as safety glasses or goggles and hard hat.

When these procedures are instituted, one person must remain outside the work area to ensure that each person entering has the proper protective equipment.

#### 4.4.2 Doffing Procedures

The following procedures are only mandatory if Modified Level D or Level C PPE is required for the site. Whenever a person leaves the work area, the following decontamination sequence will be followed:

- Upon entering the CRZ, rinse contaminated materials from the boots or remove contaminated boot covers;
- Clean reusable protective equipment;
- Remove protective garments, equipment, and respirator (Level C). All disposable clothing should be placed in plastic bags, which are labeled with contaminated waste labels;
- Wash hands, face, and neck (or shower if necessary);
- Proceed to clean area and dress in clean clothing; and
- Clean and disinfect respirator for next use.

All disposable equipment, garments, and PPE must be bagged in plastic bags, labeled for disposal. See Section 7, Decontamination, for detailed information on decontamination stations.

#### 4.5 Selection Matrix

The level of personal protection selected will be based on air monitoring of the work environment and an assessment by the FS and SSO of the potential for skin contact with COCs. The PPE selection matrix is presented in Table 2. This matrix is based on information available at the time this plan was written. The Airborne Contaminant Action Levels in Table 3, Airborne Contaminant Action Levels, should be used to verify that the PPE prescribed in these matrices is appropriate.

**Table 2 – PPE Selection Matrix**

<b>Task</b>	<b>Anticipated Level of Protection</b>
Mobilization	Level D
Subsurface Intrusive Activities (Excavation, Drilling)	Modified Level D/Level C
Earthwork/Grading	Level D
Chemical Sampling / Delineation	Modified Level D/Level C
Decontamination	Modified Level D
Demobilization	Level D

## **5.0 AIR AND NOISE MONITORING**

### **5.1 Air Monitoring**

Air monitoring, sampling, and testing will be conducted to determine employee exposure to airborne constituents. The monitoring results will dictate work procedures and the selection of PPE. The SESI SSO will be responsible for defining appropriate air monitoring procedures and for utilizing the air monitoring results to determine appropriate procedures and PPE for project personnel. Air monitoring results should be recorded in field notebooks or on an air monitoring log (see Attachment 1 for a copy of the Air Monitoring Log). Any deviations from the procedures listed here should be documented and explained in the Air Monitoring Log.

The monitoring devices to be used are a PDR1000 particulate monitor (or equivalent) and a Rae Systems MultiRAE detector (PID with a 11.7 eV lamp/oxygen/LEL/hydrogen sulfide sensors). Colorimetric detector tubes may be utilized to estimate airborne concentrations of benzene and should be onsite during any activities that may result in elevated PID readings including drilling, excavating, and groundwater sampling.

Air monitoring will be conducted continuously with the LEL/Oxygen meter during drilling in areas where flammable vapors or gases are suspect. All work activity must stop where tests indicate the concentration of flammable vapors exceeds 10% of the LEL at a location with a potential ignition source. Such an area must be ventilated to reduce the concentration to an acceptable level.

### **5.2 Noise Monitoring**

Noise monitoring may be conducted as required. Hearing protection is mandatory for all employees in noise hazardous areas, such as around heavy equipment. As a general rule, sound levels that cause speech interference at normal conversation distance should require the use of hearing protection.

### **5.3 Monitoring Equipment Maintenance and Calibration**

All direct-reading instrumentation calibrations should be conducted under the approximate environmental conditions the instrument will be used. Instruments must be calibrated before and after use, noting the reading(s) and any adjustments that are necessary. All air monitoring equipment calibrations, including the standard used for calibration, must be documented on a calibration log or in the field notebook. All completed health and safety documentation/forms must be reviewed by the SSO and maintained by the FS.

All air monitoring equipment will be maintained and calibrated in accordance with the specific manufacturer's procedures. Preventive maintenance and repairs will be conducted in accordance with the respective manufacturer's procedures. When applicable, only manufacturer-trained and/or authorized personnel will be allowed to perform instrument repairs or preventive maintenance.

If an instrument is found to be inoperative or suspected of giving erroneous readings, the SSO must be responsible for immediately removing the instrument from service and obtaining a replacement unit. If the instrument is essential for safe operation during a specific activity, that activity must cease until an appropriate replacement unit is obtained. The SSO will be responsible for ensuring a replacement unit is obtained and/or repairs are initiated on the defective equipment.

## 5.4 Action Levels

Table 3 presents airborne contaminant action levels that will be used to determine the procedures and protective equipment necessary based on conditions as measured at the site.

**Table 3 – Airborne Contaminant Action Levels**

Parameter	Reading	Action
Total Hydrocarbons	0 ppm to ≤ 1 ppm	Normal operations; continue hourly breathing zone monitoring
	> 1 ppm to 5 ppm	Increase monitoring frequency to every 15 minutes and use benzene detector tube to screen for the presence of benzene
	≥ 5 ppm to ≤ 50 ppm	Upgrade to Level C PPE; continue screening for benzene
	> 50 ppm	Stop work; investigate cause of reading
	At any reading > 5 ppm	Monitor perimeter per CAMP
Benzene	≥ 1 ppm to 5 ppm	Upgrade to Level C PPE
	> 5 ppm	Stop work; investigate cause of reading
Dust	0 to .05 mg/m <sup>3</sup>	Normal operations
	0.05 to 0.1 mg/m <sup>3</sup>	Begin soil wetting procedure (Level C protection would be needed beyond this point)
	> 0.15 mg/m <sup>3</sup>	Stop work, fully implement dust control plan
Oxygen	≤ 19.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
	> 19.5% to < 23.5%	Normal operations
	≥ 23.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Carbon Monoxide	0 ppm to ≤ 20 ppm	Normal operations
	> 20 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Hydrogen Sulfide	0 ppm to ≤ 5 ppm	Normal operations
	> 5 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Flammable Vapors (LEL)	< 10% LEL	Normal operations
	≥ 10% LEL	Stop work, ventilate area, investigate source of vapors

## 6.0 WORK ZONES AND DECONTAMINATION

### 6.1 Work Zones

#### 6.1.1 Authorization to Enter

Only personnel with the appropriate training and medical certifications (if respirators are required) will be allowed to work at the project site. The FS will maintain a list of authorized persons; only personnel on the authorized persons list will be allowed to enter the site work areas.

### **6.1.2 Site Orientation and Hazard Briefing**

No person will be allowed in the work area during site operations without first being given a site orientation and hazard briefing. This orientation will be presented by the FS or SSO and will consist of a review of this HASP. This review must cover the chemical, physical, and biological hazards, protective equipment, safe work procedures, and emergency procedures for the project. Following this initial meeting, daily safety meetings will be held each day before work begins.

All people entering the site work areas, including visitors, must document their attendance at this briefing, as well as the daily safety meetings on the forms included with this plan.

### **6.1.3 Certification Documents**

A training and medical file may be established for the project and kept on site during all site operations. Specialty training, such as first aid/cardiopulmonary resuscitation (CPR) certificates, as well as current medical clearances for all project field personnel required to wear respirators, will be maintained within that file. All project personnel must provide their training and medical documentation to the SSO prior to starting work.

### **6.1.4 Entry Log**

A log-in/log-out sheet will be maintained at the site by the FS. Personnel must sign in and out on a log sheet as they enter and leave the work area, and the FS may document entry and exit in the field notebook.

### **6.1.5 Entry Requirements**

In addition to the authorization, hazard briefing, and certification requirements listed above, no person will be allowed in any SESI work area unless they are wearing the minimum PPE as described in Section 4.0.

### **6.1.6 Emergency Entry and Exit**

People who must enter the work area on an emergency basis will be briefed of the hazards by the FS or SSO. All activities will cease in the event of an emergency. People exiting the work area because of an emergency will gather in a designated safe area for a head count. The FS is responsible for ensuring that all people who entered the work area have exited in the event of an emergency.

### **6.1.7 Contamination Control Zones**

Contamination control zones are maintained to prevent the spread of contamination and to prevent unauthorized people from entering hazardous areas.

### **6.1.8 Exclusion Zone (EZ)**

An EZ may consist of a specific work area or may be the entire area of potential contamination. All employees entering an EZ must use the required PPE and must have the appropriate training and medical clearance for hazardous waste work. The EZ is the defined area where there is a possible respiratory and/or contact health hazard. Cones, caution tape, or a posted site diagram will identify the location of each EZ.

### **6.1.9 Contamination Reduction Zone**

The CRZ or transition area will be established, if necessary, to perform decontamination of personnel and equipment. All personnel entering or leaving the EZ will pass through this

area to prevent any cross-contamination. Tools, equipment, and machinery will be decontaminated in a specific location. The decontamination of all personnel will be performed on site adjacent to the EZ. Personal protective outer garments and respiratory protection will be removed in the CRZ and prepared for cleaning or disposal. This zone is the only appropriate corridor between the EZ and the support zone (SZ) discussed below.

#### **6.1.10 Support Zone (SZ)**

The SZ is a clean area outside the CRZ located to prevent employee exposure to hazardous substances. Eating and drinking will be permitted in the support area only after proper decontamination. Smoking may be permitted in the SZ, subject to site requirements.

#### **6.1.11 Posting**

Work areas will be prominently marked and delineated using cones, caution tape, or a posted site diagram.

#### **6.1.12 Site Inspections**

The FS will conduct a daily inspection of site activities, equipment, and procedures to verify that the required elements are in place.

### **6.2 Decontamination**

#### **6.2.1 Personnel Decontamination**

All personnel wearing Modified Level D or Level C protective equipment in the EZ must undergo personal decontamination prior to entering the SZ. The personnel decontamination area will consist of the following stations at a minimum:

- *Station 1:* Personnel leaving the contaminated zone will remove the gross contamination from their outer clothing and boots.
- *Station 2:* Personnel will remove their outer garment and gloves and dispose of it in properly labeled containers. Personnel will then decontaminate their hard hats, and boots with an aqueous solution of detergent or other appropriate cleaning solution. These items are then hand carried to the next station.
- *Station 3:* Personnel will thoroughly wash their hands and face before leaving the CRZ. Respirators will be sanitized and then placed in a clean plastic bag.

#### **6.2.2 Equipment Decontamination**

All vehicles that have entered the EZ will be decontaminated at the decontamination pad prior to leaving the zone. If the level of vehicle contamination is low, decontamination may be limited to rinsing of tires and wheel wells with water. If the vehicle is significantly contaminated, steam cleaning or pressure washing of vehicles and equipment may be required.

#### **6.2.3 Personal Protective Equipment Decontamination**

Where and whenever possible, single-use, external protective clothing must be used for work within the EZ or CRZ. This protective clothing must be disposed of in properly labeled containers. Reusable protective clothing will be rinsed at the site with detergent and water. The rinsate will be collected for disposal.

When removed from the CRZ, the respirator will be thoroughly cleaned with soap and water. The respirator face piece, straps, valves, and covers must be thoroughly cleaned at the end of each work shift, and ready for use prior to the next shift. Respirator parts may be disinfected with a solution of bleach and water (mixed at 2% bleach by volume), or by using a spray disinfectant.

## **7.0 TRAINING AND MEDICAL SURVEILLANCE**

### **7.1 Training**

#### **7.1.1 General**

All on-site project personnel who work in areas where they may be exposed to site contaminants must be trained as required by OSHA Regulation 29 CFR 1910.120 (HAZWOPER). Field employees also must receive a minimum of three days of actual field experience under the direct supervision of a trained, experienced supervisor. Personnel who completed their initial training more than 12 months prior to the start of the project must have completed an eight-hour refresher course within the past 12 months. The FS must have completed an additional eight hours of supervisory training and must have a current first-aid/CPR certificate (See Attachment 2).

#### **7.1.2 Basic 40-Hour Course**

The following is a list of the topics typically covered in a 40-hour HAZWOPER training course:

- General safety procedures;
- Physical hazards (fall protection, noise, heat stress, cold stress);
- Names and job descriptions of key personnel responsible for site health and safety;
- Safety, health, and other hazards typically present at hazardous waste sites;
- Use, application, and limitations of PPE;
- Work practices by which employees can minimize risks from hazards;
- Safe use of engineering controls and equipment on site;
- Medical surveillance requirements;
- Recognition of symptoms and signs which might indicate overexposure to hazards;
- Worker right-to-know (Hazard Communication OSHA 1910.1200);
- Routes of exposure to contaminants;
- Engineering controls and safe work practices;
- Components of a health and safety program and a site-specific HASP;
- Decontamination practices for personnel and equipment;
- Confined-space entry procedures; and
- General emergency response procedures.

#### **7.1.3 Supervisor Course**

Management and supervisors must receive an additional eight hours of training, which typically includes:

- General site safety and health procedures;
- PPE programs; and
- Air monitoring techniques.

#### **7.1.4 Site-Specific Training**

Site-specific training will be accomplished by on-site personnel reading this HASP, and through a thorough site briefing by the PM, FS, or SSO on the contents of this HASP before work begins. The review must include a discussion of the chemical, physical, and biological hazards; the protective equipment and safety procedures; and emergency procedures.

#### **7.1.5 Daily Safety Meetings**

Daily safety meetings will be held to cover the work to be accomplished, the hazards anticipated, the PPE and procedures required to minimize site hazards, and emergency procedures. The FS or SSO should present these meetings prior to beginning the day's fieldwork. No work will be performed in an EZ before a daily safety meeting has been held. An additional safety meeting must also be held prior to new tasks, or if new hazards are encountered. The daily safety meetings will be logged in the field notebook.

#### **7.1.6 First Aid and CPR**

At least one employee current in first aid/CPR will be assigned to the work crew and will be on the site during operations. Site records will document the presence of this individual. Refresher training in first aid (triennially) and CPR (annually) is required to keep the certificate current. These individuals must also receive training regarding the precautions and protective equipment necessary to protect against exposure to blood-borne pathogens.

### **7.2 Medical Surveillance**

#### **7.2.1 Medical Examination**

All personnel who are potentially exposed to site contaminants must participate in a medical surveillance program as defined by OSHA at 29 CFR 1910.120 (f).

#### **7.2.2 Pre-placement Medical Examination**

All potentially exposed personnel must have completed a comprehensive medical examination prior to assignment, and periodically thereafter as defined by applicable regulations. The pre-placement and periodic medical examinations typically include the following elements:

- Medical and occupational history questionnaire;
- Physical examination;
- Complete blood count, with differential;
- Liver enzyme profile;
- Chest X-ray, at a frequency determined by the physician;
- Pulmonary function test;
- Audiogram;
- Electrocardiogram for persons older than 45 years of age, or if indicated during the physical examination;
- Drug and alcohol screening, as required by job assignment;
- Visual acuity; and
- Follow-up examinations, at the discretion of the examining physician or the corporate medical director.

The examining physician provides the employee with a letter summarizing his findings and recommendations, confirming the worker's fitness for work and ability to wear a respirator.

Documentation of medical clearance will be available for each employee during all project site work.

Subcontractors will certify that all their employees have successfully completed a physical examination by a qualified physician. The physical examinations must meet the requirements of 29 CFR 1910.120 and 29 CFR 1910.134. Subcontractors will supply copies of the medical examination certificate for each on-site employee.

### **7.2.3 Other Medical Examinations**

In addition to pre-employment, annual, and exit physicals, personnel may be examined:

- At employee request after known or suspected exposure to toxic or hazardous materials; and
- At the discretion of the SSO, HSM, or occupational physician in anticipation of, or after known or suspected exposure to toxic or hazardous materials.

### **7.2.4 Periodic Exam**

Following the placement examination, all employees must undergo a periodic examination, similar in scope to the placement examination. For employees potentially exposed over 30 days per year, the frequency of periodic examinations will be annual. For employees potentially exposed less than 30 days per year, the frequency for periodic examinations will be 24 months.

### **7.2.5 Medical Restriction**

When the examining physician identifies a need to restrict work activity, the employee's supervisor must communicate the restriction to the employee and the SSO. The terms of the restriction will be discussed with the employee and the supervisor.

## **8.0 GENERAL SAFETY PRACTICES**

### **8.1 General Safety Rules**

General safety rules for site activities include, but are not limited to, the following:

- At least one copy of this HASP must be in a location at the site that is readily available to personnel, and all project personnel shall review the plan prior to starting work.
- Consume or use food, beverages, chewing gum, and tobacco products only in the SZ or other designated area outside the EZ and CRZ. Cosmetics shall not be applied in the EZ or CRZ.
- Wash hands before eating, drinking, smoking, or using toilet facilities.
- Wear all PPE as required and stop work and replace damaged PPE immediately.
- Secure disposable coveralls, boots, and gloves at the wrists and legs and ensure closure of the suit around the neck.
- Upon skin contact with materials that may be impacted by COCs, remove contaminated clothing and wash the affected area immediately. Contaminated clothing must be changed. Any skin contact with materials potentially impacted by COCs must be reported to the FS or SSO immediately. If needed, medical attention should be sought.



- Practice contamination avoidance. Avoid contact with surfaces either suspected or known to be impacted by COCs, such as standing water, mud, or discolored soil. Equipment must be stored on elevated or protected surfaces to reduce the potential for incidental contamination.
- Remove PPE as required in the CRZ to limit the spread of COC-containing materials.
- At the end of each shift or as required, dispose of all single-use coveralls, soiled gloves, and respirator cartridges in designated receptacles designated for this purpose.
- Removing soil containing site COCs from protective clothing or equipment with compressed air, shaking, or any other means that disperses contaminants into the air is prohibited.
- Inspect all non-disposable PPE for contamination in the CRZ. Any PPE found to be contaminated must be decontaminated or disposed of appropriately.
- Recognize emergency signals used for evacuation, injury, fire, etc.
- Report all injuries, illnesses, and unsafe conditions or work practices to the FS or SSO.
- Use the “buddy system” during all operations requiring Level C PPE, and when appropriate, during Modified Level D operations.
- Obey all warning signs, tags, and barriers. Do not remove any warnings unless authorized to do so.
- Use, adjust, alter, and repair equipment only if trained and authorized to do so, and in accordance with the manufacturer’s directions.
- Personnel are to perform only tasks for which they have been properly trained and will advise their supervisor if they have been assigned a task for which they are not trained.
- The presence or consumption of alcoholic beverages or illicit drugs during the workday, including breaks, is strictly prohibited. Notify your supervisor if you must take prescription or over-the-counter drugs that indicate they may cause drowsiness or, that you should not operate heavy equipment.
- Remain upwind during site activities whenever possible.

## **8.2 Buddy System**

On-site personnel must use the buddy system as required by operations. Use of the “buddy system” is required during all operations requiring Level C to Level A PPE, and when appropriate, during Level D operations. Crewmembers must observe each other for signs of chemical exposure, and heat or cold stress. Indications of adverse effects include, but are not limited to:

- Changes in complexion and skin coloration;
- Changes in coordination;
- Changes in demeanor;
- Excessive salivation and pupillary response; and
- Changes in speech pattern.

Crewmembers must also be aware of the potential exposure to possible safety hazards, unsafe acts, or non-compliance with safety procedures.

Field personnel must inform their partners or fellow crewmembers of non-visible effects of exposure to toxic materials that they may be experiencing. The symptoms of such exposure may include, but are not limited to:

- Headaches;
- Dizziness;
- Nausea;
- Blurred vision;
- Cramps; and
- Irritation of eyes, skin, or respiratory tract.

If protective equipment or noise levels impair communications, prearranged hand signals must be used for communication. Personnel must stay within line of sight of another team member.

### **8.3 Heat Stress**

Heat stress is caused by a number of interacting factors, including environmental conditions, clothing, workload, etc., as well as the physical and conditioning characteristics of the individual. Since heat stress is one of the most common illnesses associated with heavy outdoor work conducted with direct solar load and, in particular, because wearing PPE can increase the risk of developing heat stress, workers must be capable of recognizing the signs and symptoms of heat-related illnesses. Personnel must be aware of the types and causes of heat-related illnesses and be able to recognize the signs and symptoms of these illnesses in both themselves and their co-workers.

*Heat rashes* are one of the most common problems in hot work environments. Commonly known as prickly heat, a heat rash is manifested as red papules and usually appears in areas where the clothing is restrictive. As sweating increases, these papules give rise to a prickling sensation. Prickly heat occurs in skin that is persistently wetted by unevaporated sweat, and heat rash papules may become infected if they are not treated. In most cases, heat rashes will disappear when the affected individual returns to a cool environment.

*Heat cramps* are usually caused by performing hard physical labor in a hot environment. These cramps have been attributed to an electrolyte imbalance caused by sweating. It is important to understand that cramps can be caused both by too much or too little salt.

Cramps appear to be caused by the lack of water replenishment. Because sweat is a hypotonic solution (plus or minus 0.3% NaCl), excess salt can build up in the body if the water lost through sweating is not replaced. Thirst cannot be relied on as a guide to the need for water; instead, water must be taken every 15 to 20 minutes in hot environments.

Under extreme conditions, such as working for 6 to 8 hours in heavy protective gear, a loss of sodium may occur. Drinking commercially available carbohydrate electrolyte replacement liquids is effective in minimizing physiological disturbances during recovery.

*Heat exhaustion* occurs from increased stress on various body organs due to inadequate blood circulation, cardiovascular insufficiency, or dehydration. Signs and symptoms include pale, cool, moist skin; heavy sweating; dizziness; nausea; headache, vertigo, weakness, thirst, and giddiness. Fortunately, this condition responds readily to prompt treatment.

Heat exhaustion should not be dismissed lightly, however, for several reasons. One is that the fainting associated with heat exhaustion can be dangerous because the victim may be operating machinery or controlling an operation that should not be left unattended; moreover, the victim may be injured when he or she faints. Also, the signs and symptoms seen in heat exhaustion are similar to those of heat stroke, which is a medical emergency.

Workers suffering from heat exhaustion should be removed from the hot environment, be given fluid replacement, and be encouraged to get adequate rest.

*Heat stroke* is the most serious form of heat stress. Heat stroke occurs when the body's system of temperature regulation fails and the body's temperature rises to critical levels. This condition is caused by a combination of highly variable factors, and its occurrence is difficult to predict. Heat stroke is a medical emergency. The primary signs and symptoms of heat stroke are confusion; irrational behavior; loss of consciousness; convulsions; a lack of sweating (usually); hot, dry skin; and an abnormally high body temperature, e.g., a rectal temperature of 41°C (105.8°F). If body temperature is too high, it causes death. The elevated metabolic temperatures caused by a combination of workload and environmental heat load, both of which contribute to heat stroke, are also highly variable and difficult to predict.

If a worker shows signs of possible heat stroke, professional medical treatment should be obtained immediately. The worker should be placed in a shady area and the outer clothing should be removed. The worker's skin should be wetted and air movement around the worker should be increased to improve evaporative cooling until professional methods of cooling are initiated and the seriousness of the condition can be assessed. Fluids should be replaced as soon as possible. The medical outcome of an episode of heat stroke depends on the victim's physical fitness and the timing and effectiveness of first aid treatment.

Regardless of the worker's protestations, no employee suspected of being ill from heat stroke should be sent home or left unattended unless a physician has specifically approved such an order.

Proper training and preventive measures will help avert serious illness and loss of work productivity. Preventing heat stress is particularly important because once someone suffers from heat stroke or exhaustion, that person may be predisposed to additional heat injuries.

#### **8.4 Heat Stress Safety Precautions**

Heat stress monitoring and work rest cycle implementation should commence when the ambient adjusted temperature exceeds 72°F. A minimum work rest regimen and procedures for calculating ambient adjusted temperature are described in Table 4.

**Table 4 – Work/Rest Schedule**

<b>Adjusted Temperature<sup>b</sup></b>	<b>Work/Rest Regimen Normal Work Ensemble<sup>c</sup></b>	<b>Work/Rest Regimen Impermeable Ensemble</b>
90°F (32.2°C) or above	After each 45 minutes of work	After each 15 minutes of work
87.5° - 90°F (30.8°-32.2°C)	After each 60 minutes of work	After each 30 minutes of work
82.5° - 87.5°F (28.1° - 30.8°C)	After each 90 minutes of work	After each 60 minutes of work
77.5° - 82.5°F (25.3° - 28.1°C)	After each 120 minutes of work	After each 90 minutes of work
72.5° - 77.5°F (30.8° - 32.2°C)	After each 150 minutes of work	After each 120 minutes of work

- a. For work levels of 250 kilocalories/hour (Light-Moderate Type of Work)
- b. Calculate the adjusted air temperature (ta adj) by using this equation:  $ta\ adj\ ^\circ F = ta\ ^\circ F + (13 \times \% \text{ sunshine})$ . Measure air temperature (ta) with a standard mercury-in-glass thermometer, with the bulb shielded from radiant heat. Estimate percent sunshine by judging what percent time the sun is not covered by clouds that are thick enough to produce a shadow. (100 percent sunshine = no cloud cover and a sharp, distinct shadow; 0 percent sunshine = no shadows.)
- c. A normal work ensemble consists of cotton coveralls or other cotton clothing with long sleeves and pants.
- d. The information presented above was generated using the information provided in the American Conference of Governmental Industrial Hygienists (ACGIH) Threshold Limit Values (TLV) Handbook.

In order to determine if the work rest cycles are adequate for the personnel and specific site conditions, additional monitoring of individual heart rates will be conducted during the rest cycle. To check the heart rate, count the radial pulse for 30 seconds at the beginning of the rest period. If the heart rate exceeds 110 beats per minute, shorten the next work period by one third and maintain the same rest period.

Additionally, one or more of the following control measures can be used to help control heat stress and are mandatory if any site worker has a heart rate (measure immediately prior to rest period) exceeding 115 beats per minute:

- Site workers will be encouraged to drink plenty of water and electrolyte replacement fluids throughout the day.
- On-site drinking water will be kept cool (50 to 60°F).
- A work regimen that will provide adequate rest periods for cooling down will be established, as required.
- All personnel will be advised of the dangers and symptoms of heat stroke, heat exhaustion, and heat cramps.
- Cooling devices, such as vortex tubes or cooling vests, should be used when personnel must wear impermeable clothing in conditions of extreme heat.
- Employees should be instructed to monitor themselves and co-workers for signs of heat stress and to take additional breaks as necessary.
- A shaded rest area must be provided. All breaks should take place in the shaded rest area.
- Employees must not be assigned to other tasks during breaks.
- Employees must remove impermeable garments during rest periods. This includes white Tyvek-type garments.

All employees must be informed of the importance of adequate rest, acclimation, and proper diet in the prevention of heat stress disorders.

## 8.5 Cold Stress

Cold stress normally occurs in temperatures at or below freezing, or under certain circumstances, in temperatures of 40°F. Extreme cold for a short time may cause severe injury to exposed body surfaces or result in profound generalized cooling, causing death. Areas of the body that have high surface area-to-volume ratio, such as fingers, toes, and ears, are the most susceptible. Two factors influence the development of a cold weather injury: ambient temperature and the velocity of the wind. For instance, 10°F with a wind of 15 miles per hour (mph) is equivalent in chilling effect to still air at 18°F. An equivalent chill temperature chart relating the actual dry bulb temperature and wind velocity is presented in Table 5.

**Table 5 – Wind Chill Temperature Chart**

Estimated Wind Speed (in mph)	Actual Temperature Reading (°F)											
	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
Equivalent Chill Temperature (°F)												
Calm	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
5	48	37	27	16	6	-5	-15	-26	-36	-47	-57	-68
10	40	28	16	4	-9	-24	-33	-46	-58	-70	-83	-95
15	36	22	9	-5	-18	-32	-45	-58	-72	-85	-99	-112
20	32	18	4	-10	-25	-39	-53	-67	-82	-96	-110	-121
25	30	16	0	-15	-29	-44	-59	-74	-88	-104	-118	-133
30	28	13	-2	-18	-33	-48	-63	-79	-94	-109	-125	-140
35	27	11	-4	-20	-35	-51	-67	-82	-98	-113	-129	-145
40	26	10	-6	-21	-37	-53	-69	-85	-100	-116	-132	-148
(Wind speeds greater than 40 mph have little additional effect.)	<b>LITTLE DANGER</b> Maximum danger of false sense of security.				<b>INCREASING DANGER</b> Danger from freezing of exposed flesh within one minute.				<b>GREAT DANGER</b> Flesh may freeze within 30 seconds.			
	Trench foot and immersion foot may occur at any point on this chart.											

[This chart was developed by the U.S. Army Research Institute of Environmental Medicine, Natick, MA (Source: ACGIH Threshold Limit Values for Chemical Substances and Physical Agents)].

Local injury resulting from cold is included in the generic term frostbite. There are several degrees of tissue damage associated with frostbite. Frostbite of the extremities can be categorized into:

- *Frost Nip or Incipient Frostbite* - characterized by sudden blanching or whitening of skin.
- *Superficial Frostbite* - skin has a waxy or white appearance and is firm to the touch, but tissue beneath is resilient.
- *Deep Frostbite* - tissues are cold, pale, and solid; extremely serious injury.

Systemic hypothermia is caused by exposure to freezing or rapidly dropping temperature. It can be fatal. Its symptoms are usually exhibited in five stages: 1) shivering; 2) apathy, listlessness, sleepiness, and (sometimes) rapid cooling of the body to less than 95°F; 3) unconsciousness, glassy stare, slow pulse, and slow respiratory rate; 4) freezing of the extremities; and 5) death. Trauma sustained in freezing or sub-zero conditions requires special attention because an injured worker is predisposed to secondary cold injury. Special provisions must be made to prevent hypothermia and secondary freezing of damaged tissues in addition to providing for first aid treatment. To avoid cold stress, site personnel must wear protective clothing appropriate for the level of cold and physical

activity. In addition to protective clothing, preventive safe work practices, additional training, and warming regimens may be utilized to prevent cold stress.

### **8.6 Safety Precautions for Cold Stress Prevention**

For air temperature of 0°F or less, mittens should be used to protect the hands. For exposed skin, continuous exposure should not be permitted when air speed and temperature results in a wind chill temperature of -25°F.

At air temperatures of 36°F or less, field personnel who become immersed in water or whose clothing becomes wet must be immediately provided with a change of clothing and be treated for hypothermia.

If work is done at normal temperature or in a hot environment before entering the cold, the field personnel must ensure that their clothing is not wet as a consequence of sweating. Wet field personnel must change into dry clothes prior to entering the cold area.

If the available clothing does not give adequate protection to prevent hypothermia or frostbite, work must be modified or suspended until adequate clothing is made available or until weather conditions improve.

Field personnel handling evaporative liquid (e.g., gasoline, alcohol, or cleaning fluids) at air temperatures below 40°F must take special precaution to avoid soaking of clothing or gloves with the liquids because of the added danger of cold injury due to evaporative cooling.

### **8.7 Safe Work Practices**

Direct contact between bare skin and cold surfaces (< 20°F) should be avoided. Metal tool handles and/or equipment controls should be covered by thermal insulating material.

For work performed in a wind chill temperature at or below 10°F, workers should be under constant protective observation (buddy system). The work rate should be established to prevent heavy sweating that will result in wet clothing. For heavy work, rest periods must be taken in heated shelters and workers should be provided with an opportunity to change into dry clothing if needed.

Field personnel should be provided the opportunity to become accustomed to cold-weather working conditions and required protective clothing. Work should be arranged in such a way that sitting or standing still for long periods is minimized.

During the warming regimen (rest period), field personnel should be encouraged to remove outer clothing to permit sweat evaporation or to change into dry work clothing. Dehydration, or loss of body fluids, occurs insidiously in the cold environment and may increase susceptibility to cold injury due to a significant change in blood flow to the extremities. Fluid replacement with warm, sweet drinks and soups is recommended. The intake of coffee should be limited because of diuretic and circulatory effects.

### **8.8 Biological Hazards**

Biological hazards may include poison ivy, snakes, thorny bushes and trees, ticks, mosquitoes, spiders, and other pests.

### **8.8.1 Tick Borne Diseases**

*Lyme Disease* - The disease commonly occurs in summer and is transmitted by the bite of infected ticks. "Hot spots" in the United States include New York, New Jersey, Pennsylvania, Massachusetts, Connecticut, Rhode Island, Minnesota, and Wisconsin.

*Erlchiosis* - The disease also commonly occurs in summer and is transmitted by the bite of infected ticks. "Hot spots" in the United States include New York, Massachusetts, Connecticut, Rhode Island, Minnesota, and Wisconsin.

These diseases are transmitted primarily by the deer tick, which is smaller and redder than the common wood tick. The disease may be transmitted by immature ticks, which are small and hard to see. The tick may be as small as a period on this page.

Symptoms of Lyme disease include a rash or a peculiar red spot, like a bull's eye, which expands outward in a circular manner. The victim may have headache, weakness, fever, a stiff neck, and swelling and pain in the joints, and eventually, arthritis. Symptoms of erlichiosis include muscle and joint aches, flu-like symptoms, but there is typically no skin rash.

*Rocky Mountain Spotted Fever (RMSF)* - This disease is transmitted via the bite of an infected tick. The tick must be attached 4 to 6 hours before the disease-causing organism (*Rickettsia rickettsii*) becomes reactivated and can infect humans. The primary symptom of RMSF is the sudden appearance of a moderate-to-high fever. The fever may persist for two to three weeks. The victim may also have a headache, deep muscle pain, and chills. A rash appears on the hands and feet on about the third day and eventually spreads to all parts of the body. For this reason, RMSF may be confused with measles or meningitis. The disease may cause death, if untreated, but if identified and treated promptly, death is uncommon.

*Control* - Tick repellent containing diethyltoluamide (DEET) should be used when working in tick-infested areas, and pant legs should be tucked into boots. In addition, workers should search the entire body every three or four hours for attached ticks. Ticks should be removed promptly and carefully without crushing, since crushing can squeeze the disease-causing organism into the skin. A gentle and steady pulling action should be used to avoid leaving the head or mouth parts in the skin. Hands should be protected with surgical gloves when removing ticks.

### **8.8.2 Poisonous Plants**

Poisonous plants may be present in the work area. Personnel should be alerted to its presence and instructed on methods to prevent exposure.

*Control* - The main control is to avoid contact with the plant, cover arms and hands, and frequently wash potentially exposed skin. Particular attention must be given to avoiding skin contact with objects or protective clothing that have touched the plants. Treat every surface that may have touched the plant as contaminated, and practice contamination avoidance. If skin contact is made, the area should be washed immediately with soap and water and observed for signs of reddening.

### **8.8.3 Snakes**

The possibility of encountering snakes exists, specifically for personnel working in wooded/vegetated areas. Snake venoms are complex and include proteins, some of which have enzymatic activity. The effects produced by venoms include neurotoxic effects with sensory, motor, cardiac, and respiratory difficulties; cytotoxic effects on red blood cells, blood vessels, heart muscle, kidneys, and lungs; defects in coagulation; and effects from local release of substances by enzymatic actions. Other noticeable effects of venomous snakebites include swelling, edema, and pain around the bite, and the development of ecchymosis (the escape of blood into tissues from ruptured blood vessels).

*Control* - To minimize the threat of snakebites, all personnel walking through vegetated areas must be aware of the potential for encountering snakes, and the need to avoid actions potentiating encounters, such as turning over logs, etc. If a snakebite occurs, an attempt should be made to safely identify the snake via size and markings. The victim must be transported to the nearest hospital within 30 minutes; first aid consists of applying a constriction band and washing the area around the wound to remove any unabsorbed venom.

### **8.8.4 Spiders**

Personnel may encounter spiders during work activities.

Two spiders are of concern, the black widow and the brown recluse. Both prefer dark sheltered areas such as basements, equipment sheds and enclosures, and around woodpiles or other scattered debris. The black widow is shiny black, approximately one inch long, and found throughout the United States. There is a distinctive red hourglass marking on the underside of the black widows body. The bite of a black widow is seldom fatal to healthy adults, but effects include respiratory distress, nausea, vomiting, and muscle spasms. The brown recluse is smaller than the black widow and gets its name from its brown coloring and behavior. The brown recluse is more prevalent in the southern United States. The brown recluse has a distinctive violin shape on the top of its body. The bite of the brown recluse is painful and the bite site ulcerates and takes many weeks to heal completely.

*Control* - To minimize the threat of spider bites, all personnel walking through vegetated areas must be aware of the potential for encountering these arachnids. Personnel need to avoid actions that may result in encounters, such as turning over logs, and placing hands in dark places such as behind equipment or in corners of equipment sheds or enclosures. If a spider bite occurs, the victim must be transported to the nearest hospital as soon as possible; first aid consists of applying ice packs and washing the area around the wound to remove any unabsorbed venom.

### **8.9 Noise**

Exposure to noise over the OSHA action level can cause temporary impairment of hearing; prolonged and repeated exposure can cause permanent damage to hearing. The risk and severity of hearing loss increases with the intensity and duration of exposure to noise. In addition to damaging hearing, noise can impair voice communication, thereby increasing the risk of accidents on site.

*Control* - All personnel must wear hearing protection, with a Noise Reduction Rating (NRR) of at least 20, when noise levels exceed 85 dBA. When it is difficult to hear a co-worker at



normal conversation distance, the noise level is approaching or exceeding 85 dBA, and hearing protection is necessary. All site personnel who may be exposed to noise must also receive baseline and annual audiograms and training as to the causes and prevention of hearing loss. Noise monitoring is discussed in Section 5.2, Noise Monitoring.

Whenever possible, equipment that does not generate excessive noise levels will be selected for this project. If the use of noisy equipment is unavoidable, barriers or increased distance will be used to minimize worker exposure to noise, if feasible.

### **8.10 Spill Control**

All personnel must take every precaution to minimize the potential for spills during site operations. All on-site personnel shall immediately report any discharge, no matter how small, to the FS.

Spill control equipment and materials will be located on the site at locations that present the potential for discharge. All sorbent materials used for the cleanup of spills will be containerized and labeled appropriately. In the event of a spill, the FS will follow the provisions in Section 10.0, Emergency Procedures, to contain and control released materials and to prevent their spread to off-site areas.

### **8.11 Sanitation**

Site sanitation will be maintained according to OSHA requirements.

#### **8.11.1 Break Area**

Breaks must be taken in the SZ, away from the active work area after site personnel go through decontamination procedures. There will be no smoking, eating, drinking, or chewing gum or tobacco in any area other than the SZ.

#### **8.11.2 Potable Water**

The following rules apply to all field operations:

- An adequate supply of potable water will be provided at each project site. Potable water must be kept away from hazardous materials or media, and contaminated clothing or equipment.
- Portable containers used to dispense drinking water must be capable of being tightly closed and must be equipped with a tap dispenser. Water must not be consumed directly from the container (drinking from the tap is prohibited) nor may it be removed from the container by dipping.
- Containers used for drinking water must be clearly marked and shall not be used for any other purpose.
- Disposable drinking cups must be provided. A sanitary container for dispensing cups and a receptacle for disposing of used cups is required.

#### **8.11.3 Sanitary Facilities**

Access to facilities for washing before eating, drinking, or smoking, or alternate methods such as waterless hand-cleaner and paper towels will be provided.

#### **8.11.4 Lavatory**

If permanent toilet facilities are not available, an appropriate number of portable chemical toilets will be provided. This requirement does not apply to mobile crews or to normally unattended site locations so long as employees at these locations have transportation immediately available to nearby toilet facilities.

#### **8.12 Emergency Equipment**

Adequate emergency equipment for the activities being conducted on site and as required by applicable sections of 29 CFR 1910 and 29 CFR 1926 will be on site prior to the commencement of project activities. Personnel will be provided with access to emergency equipment, including, but not limited to, the following:

- Fire extinguishers of adequate size, class, number, and location as required by applicable sections of 29 CFR 1910 and 1926;
- Industrial first aid kits of adequate size for the number of personnel on site; and
- Emergency eyewash and/or shower if required by operations being conducted on site.

#### **8.13 Lockout/Tagout Procedures**

Only fully qualified and trained personnel will perform maintenance procedures. Before maintenance begins, lockout/tagout procedures per OSHA 29 CFR 1910.147 will be followed.

Lockout is the placement of a device that uses a positive means, such as lock, to hold an energy or material-isolating device such that the equipment cannot be operated until the lockout device is removed. If a device cannot be locked out, a tagout system shall be used. Tagout is the placement of a warning tag on an energy or material isolating device indicating that the equipment controls may not be operated until the personnel who attached the tag remove the tag.

#### **8.14 Electrical Safety**

Electricity may pose a particular hazard to site workers due to the use of portable electrical equipment. If wiring or other electrical work is needed, a qualified electrician must perform it.

General electrical safety requirements include:

- All electrical wiring and equipment must be a type listed by Underwriters Laboratories (UL), Factory Mutual Engineering Corporation (FM), or other recognized testing or listing agency.
- All installations must comply with the National Electrical Safety Code (NESC), the National Electrical Code (NEC), or USCG regulations.
- Portable and semi-portable tools and equipment must be grounded by a multi-conductor cord having an identified grounding conductor and a multi-contact polarized plug-in receptacle.
- Tools protected by an approved system of double insulation, or its equivalent, need not be grounded. Double insulated tools must be distinctly marked and listed by UL or FM.

- Live parts of wiring or equipment must be guarded to prevent persons or objects from touching them.
- Electric wire or flexible cord passing through work areas must be covered or elevated to protect it from damage by foot traffic, vehicles, sharp corners, projections, or pinching.
- All circuits must be protected from overload.
- Temporary power lines, switchboxes, receptacle boxes, metal cabinets, and enclosures around equipment must be marked to indicate the maximum operating voltage.
- Plugs and receptacles must be kept out of water unless of an approved submersible construction.
- All extension cord outlets must be equipped with ground fault circuit interrupters (GFCI).
- Attachment plugs or other connectors must be equipped with a cord grip and be constructed to endure rough treatment.
- Extension cords or cables must be inspected prior to each use and replaced if worn or damaged. Cords and cables must not be fastened with staples, hung from nails, or suspended by bare wire.
- Flexible cords must be used only in continuous lengths without splice, with the exception of molded or vulcanized splices made by a qualified electrician.

### **8.15 Lifting Safety**

Using proper lifting techniques may prevent back strain or injury. The fundamentals of proper lifting include:

- Consider the size, shape, and weight of the object to be lifted. A mechanical lifting device or additional persons must be used to lift an object if it cannot be lifted safely alone.
- The hands and the object should be free of dirt or grease that could prevent a firm grip.
- Gloves must be used, and the object inspected for metal slivers, jagged edges, burrs, or rough or slippery surfaces.
- Fingers must be kept away from points that could crush or pinch them, especially when putting an object down.
- Feet must be placed far enough apart for balance. The footing should be solid and the intended pathway should be clear.
- The load should be kept as low as possible, close to the body with the knees bent.
- To lift the load, grip firmly and lift with the legs, keeping the back as straight as possible.
- A worker should not carry a load that he or she cannot see around or over.
- When putting an object down, the stance and position are identical to that for lifting; the legs are bent at the knees, and the back is straight as the object is lowered.

### **8.16 Ladder Safety**

When portable ladders are used for access to an upper landing surface, the ladder side rails shall extend at least 3 feet (9 m) above the upper landing surface to which the ladder is used to gain access; or, when such an extension is not possible because of the ladder's length, then the ladder shall be secured at its top to a rigid support that will not deflect, and a grasping device, such as a grabrail, shall be provided to assist employees in mounting

and dismantling the ladder. In no case shall the extension be such that ladder deflection under a load would, by itself, cause the ladder to slip off its support.

- Ladders shall be maintained free of oil, grease, and other slipping hazards.
- Ladders shall not be loaded beyond the maximum intended load for which they were built, or beyond their manufacturer's rated capacity.
- Ladders shall be used only for the purpose for which they were designed.
- Non-self-supporting ladders shall be used at an angle such that the horizontal distance from the top support to the foot of the ladder is approximately one-quarter of the working length of the ladder (the distance along the ladder between the foot and the top support).
- Wood job-made ladders with spliced side rails shall be used at an angle such that the horizontal distance is one-eighth the working length of the ladder.
- Fixed ladders shall be used at a pitch no greater than 90 degrees from the horizontal, as measured to the back side of the ladder.
- Ladders shall be used only on stable and level surfaces unless secured to prevent accidental displacement.
- Ladders shall not be used on slippery surfaces unless secured or provided with slip-resistant feet to prevent accidental displacement. Slip-resistant feet shall not be used as a substitute for care in placing, lashing, or holding a ladder that is used upon slippery surfaces, including, but not limited to, flat metal or concrete surfaces that are constructed so they cannot be prevented from becoming slippery.
- Ladders placed in any location where they can be displaced by workplace activities or traffic, such as in passageways, doorways, or driveways, shall be secured to prevent accidental displacement, or a barricade shall be used to keep the activities or traffic away from the ladder.
- The area around the top and bottom of ladders shall be kept clear.
- The top of a non-self-supporting ladder shall be placed with the two rails supported equally unless it is equipped with a single support attachment.
- Ladders shall not be moved, shifted, or extended while occupied.
- Ladders shall have non-conductive side rails if they are used where the employee or the ladder could contact exposed energized electrical equipment.
- The top, top step, or the step labeled that it or any step above it should not be used as a step.
- Cross-bracing on the rear section of stepladders shall not be used for climbing unless the ladders are designed and provided with steps for climbing on both front and rear sections.
- Ladders shall be inspected by the HSM for visible defects on a daily basis and after any occurrence that could affect their safe use.
- Portable ladders with structural defects, such as, but not limited to, broken or missing rungs, cleats, or steps; broken or split rails; corroded components; or other faulty or defective components shall either be immediately marked in a manner that readily identifies them as defective or be tagged with "Do Not Use" or similar language and shall be withdrawn from service.
- Fixed ladders with structural defects, such as, but not limited to, broken or missing rungs, cleats, or steps; broken or split rails; or corroded components; shall be withdrawn from service.
- Ladder repairs shall restore the ladder to a condition meeting its original design criteria, before the ladder is returned to use.
- Single-rail ladders shall not be used.

- When ascending or descending a ladder, the user shall face the ladder.
- Each employee shall use at least one hand to grasp the ladder when progressing up and/or down the ladder.
- An employee shall not carry any object or load that could cause the employee to lose balance and fall.

**8.17 Traffic Safety**

The project site may be located adjacent to a public roadway where exposure to vehicular traffic is likely. Traffic may also be encountered as vehicles enter and exit the area. To minimize the likelihood of project personnel and activities being affected by traffic, the following procedures will be implemented.

Cones must be placed along the shoulder of the roadway starting 100 feet from the work area to alert passing motorists to the presence of personnel and equipment. A “Slow” or “Men Working” sign must be placed at the first cone. Barricades with flashing lights should be placed between the roadway and the work area.

During activities along a roadway, equipment will be aligned parallel to the roadway to the extent feasible, facing into the oncoming traffic so as to place a barrier between the work crew and the oncoming traffic. All crewmembers must remain behind the equipment and the traffic barrier.

All site personnel who are potentially exposed to vehicular traffic must wear an outer layer of orange warning garments, such as vests, jackets, or shirts. If work is performed in hours of dusk or darkness, workers will be outfitted with reflective garments either orange, white (including silver-coated reflective coatings or elements that reflect white light), yellow, fluorescent red-orange, or fluorescent yellow-orange.

The flow of traffic into and out of the adjacent business must be assessed, and precautions taken to warn motorists of the presence of workers and equipment. Where possible, vehicles should be aligned to provide physical protection of people and equipment.

**9.0 SITE-SPECIFIC HAZARDS AND CONTROL MEASURES**

**9.1 Evaluation of Hazards**

The evaluation of hazards is provided as a quick reference as to the known conditions for the Site, wherein the level of detail for each of the subsections is identified.

**9.1.1 Hazard Characteristics**

Existing information for Site:

Detailed     Preliminary     None

Hazardous/Contaminated Material Form(s):

Solid     Liquid     Sludge     Gas     Vapor

Containment Type(s):

Drum     Tank     Pit     Debris  
 Pond     Lagoon    Other: \_\_\_\_\_

Hazardous Material Characteristics:

Volatile     Corrosive     Reactive     Radioactive  
 Ignitable     Toxic     Unknown

Routes of Exposure:

Oral     Dermal     Eye     Respiratory

**9.1.2 Potential Health and Safety Hazards**

<input checked="" type="checkbox"/> Heat	<input type="checkbox"/> Congested areas
<input checked="" type="checkbox"/> Cold	<input checked="" type="checkbox"/> General Construction
<input type="checkbox"/> Confined space entry	<input checked="" type="checkbox"/> Physical injury
<input type="checkbox"/> Oxygen depletion	<input checked="" type="checkbox"/> Electrical hazards
<input type="checkbox"/> Asphyxiation	<input checked="" type="checkbox"/> Handling and product transfer
<input checked="" type="checkbox"/> Excavation	<input checked="" type="checkbox"/> Fire
<input checked="" type="checkbox"/> Cave-ins	<input checked="" type="checkbox"/> Explosion
<input checked="" type="checkbox"/> Falls, slippage	<input checked="" type="checkbox"/> Biological Hazards
	<input checked="" type="checkbox"/> Plants – Poison Ivy, Poison Oak
	<input checked="" type="checkbox"/> Insects – Ticks
	<input checked="" type="checkbox"/> Insects – Mosquitoes
	<input checked="" type="checkbox"/> Insects – Bees and Wasps
	<input checked="" type="checkbox"/> Rats and Mice
<input checked="" type="checkbox"/> Heavy equipment	<input type="checkbox"/> Non-ionizing Radiation (i.e. UV, IR, etc.)
<input type="checkbox"/> Other: Potential Ignition Hazard.	

**9.2 Field Activities, Hazards, and Control Procedures**

The following task-specific safety analyses identify potential health, safety, and environmental hazards associated with each type of field activity. Because of the complex and changing nature of field projects, supervisors must continually inspect the site to identify hazards that may affect on-site personnel, the community, or the environment. The FS must be aware of these changing conditions and discuss them with the PM whenever these changes impact employee health, safety, the environment, or performance of the project. The FS will keep on-site personnel informed of the changing conditions, and the PM will write and/or approve addenda or revisions to this HASP as necessary.

**9.2.1 Mobilization/Construction Stakeout**

Description of Tasks

Site mobilization will include establishing excavation locations, determining the location of utilities and other installations, and establishing work areas. Mobilization will also include setting up equipment and establishing a temporary site office. A break area will be set up outside of regulated work areas. Mobilization may involve clearing areas for the SZ and CRZ. During this initial phase, project personnel will walk the site to confirm the existence of anticipated hazards and identify safety and health issues that may have arisen since the writing of this plan.

Hazard Identification

The hazards of this phase of activity are associated with heavy equipment operation, manual materials handling, installation of temporary on-site facilities, and manual site preparation.

Manual materials handling and manual site preparation may cause blisters, sore muscles, and joint and skeletal injuries; and may present eye, contusion, and laceration hazards. Installation of temporary field office and support facilities may expose personnel to electrical hazards, underground and overhead utilities, and physical injury due to the manual lifting and moving of materials. The work area presents slip, trip, and fall hazards from scattered debris and irregular walking surfaces. Rainy weather may cause wet, muddy, slick walking surfaces, and unstable soil. Freezing weather hazards include frozen, slick, and irregular walking surfaces.

Environmental hazards include plants, such as poison ivy and poison oak; aggressive fauna, such as ticks, fleas, mosquitoes, wasps, spiders, and snakes; weather, such as sunburn, lightning, rain, and heat- or cold-related illnesses; and pathogens, such as rabies, Lyme disease, and blood-borne pathogens.

#### Controls

Control procedures for these hazards are discussed in Section 8.0, General Safety Practices.

### **9.2.2 Demolition/Site Clearing**

#### Description of Tasks

Site clearance will involve manual or mechanical removal of objects impeding access to the construction footprint. These obstructions are both natural and man-made items and will include, but not be limited to, fabricated metal and concrete structures, trees, vegetation, rubble, and miscellaneous trash/debris.

#### Hazard Identification

Hazards associated with demolition and site clearance include personnel working in and around potentially unstable structures, or locations of potential contact with hazardous chemicals, utilities, and/or falling objects. This task will involve manual, as well as mechanical demolition/clearance efforts so exertion and equipment hazards exist.

#### Controls

*PPE* – Personnel shall be protected from hazards of irritant and toxic plants and suitably instructed in the first aid treatment available.

*Preparatory Operations* – Prior to permitting employees to start demolition operations, an engineering survey shall be made, by a licensed Professional Engineer, of the structure to determine the stability of the structure. Any adjacent structure shall where personnel may be exposed shall also be similarly checked. The PO shall have in writing evidence that such a survey has been performed. All structural instabilities shall be shored or braced, under the supervision of a licensed Professional Engineer, prior to access by an FP.

*Utilities* – All electric, gas, water, steam, sewer, and other service lines shall be shut off, capped, or otherwise controlled, outside the building line before demolition work is started. In each case, any utility company that is involved shall be notified in advance. If it is necessary to maintain any power, water or other utilities during demolition, such lines shall be temporarily relocated, as necessary.

*Hazardous Substances* – It shall also be determined if any type of hazardous chemicals, gases, explosives, flammable materials, or similarly dangerous substances have been used

in any pipes, tanks, or other equipment on the property. When the presence of any such substances is apparent or suspected, testing and purging shall be performed and the hazard eliminated before demolition is started.

*Falling Debris/Objects* – No material shall be dropped to any point lying outside the exterior walls of the structure unless the area is effectively protected. Access to the area where falling objects/debris may be encountered must be gated and controlled.

*Structural Collapse* – Structural or load supporting members on any floor shall not be cut or removed until all stories above such a floor have been demolished and removed. Walls, which are to serve as retaining walls against which debris will be piled, shall not be so used unless capable of safely supporting the imposed load. Mechanical equipment shall not be used on floors or working surfaces unless such floors or surfaces are not of sufficient strength to support the imposed load.

*Rollover Guards* – All equipment used in site clearing operations shall be equipped with rollover guards meeting the applicable requirements. In addition, rider-operated equipment shall be equipped with an overhead and rear canopy guard meeting the applicable requirements.

*Inspections* – During demolition, continuing inspections by a licensed Professional Engineer shall be made as the work progresses to detect hazards resulting from weakened or deteriorated floors, walls, or loosened material. No FP shall be permitted to work where such hazards exist until they are corrected by shoring, bracing, or other effective means.

## **9.2.3 Excavation and Cut/Fill Operations**

### **9.2.3.1 Excavation/Trenching**

#### Description of Tasks

This task includes the excavation of contaminated soils and superficial debris. Excavation depths vary across the site.

#### Hazard Identification

The hazards of this activity are associated with heavy equipment operation, subsurface intrusion, manual materials handling, stockpiling, and disposal. Subsurface intrusion presents hazards associated with negotiating buried utilities, cave-ins of the excavated areas, and regress methods for personnel working inside the excavated areas. Disruption of contaminated soil also presents a health hazard.

#### Controls

*Underground Utilities* – The estimated locations of utility installations, such as sewer, telephone, fuel, electric, water lines, or any other underground installations that reasonably may be expected to be encountered during the excavation work, shall be determined prior to opening an excavation. Utility companies or owners shall be contacted (“Call Before You Dig”) within established or customary local response times, advised of the proposed work, and asked to establish the location of the utility underground installations prior to the start of actual excavation.

When excavation operations approach the estimated location of underground installations, the exact location of the installations shall be determined by safe and acceptable means.



While the excavation is open, underground installations shall be protected, supported, or removed, as necessary, to safeguard site personnel.

*Cave-Ins* – Project personnel in an excavation shall be protected from cave-ins by an adequate protective system, except when:

- Excavations are made entirely in stable rock or excavations are less than five feet in depth and examination of the ground by the SSO provides no indication of a potential cave-in.
- Protective systems shall have the capacity to resist, without failure, all loads that are intended or could reasonably be expected to be applied or transmitted to the system.

Project personnel shall be protected from excavated or other materials or equipment that could pose a hazard by falling or rolling into excavations. Protection shall be provided by placing and keeping such materials or equipment at least two feet from the edge of excavations, or by the use of retaining devices that are sufficient to prevent materials or equipment from falling or rolling into excavations, or by a combination of both if necessary.

Daily inspections of excavations, the adjacent areas, and protective systems shall be made by the SSO for evidence of a situation that could result in possible cave-ins, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions. An inspection shall be conducted by the SSO prior to the start of work and as needed throughout operations. Inspections shall also be made after every rainstorm or other hazard-increasing occurrence. These inspections are only required when project personnel exposure can be reasonably anticipated.

Where the SSO finds evidence of a situation that could result in a possible cave-in, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions, exposed personnel shall be removed from the hazardous area until the necessary precautions have been taken to ensure their safety.

*Excavation Egress* – A stairway, ladder, ramp, or other safe means of egress shall be located in trench excavations that are four feet or more in depth so as to require no more than 25 feet or lateral travel for project personnel.

### **9.2.3.2 Heavy Equipment Operation**

#### Description of Tasks

Heavy equipment to be used for this task include, but are not limited to, excavators, dozers, dump trucks, and water sprayers (if required).

#### Hazard Identification

The most common type of accident that occurs in material handling operations is the “caught between” situation when a load is being handled and an object gets caught between two moving parts of the equipment. Operation of the heavy construction equipment may produce harmful noise.

#### Controls

*Equipment Inspection* – All vehicles in use shall be checked prior to operation to ensure that all parts, equipment, and accessories that affect safe operations are in proper

operating condition and free from defects. All defects shall be corrected before the vehicle is placed in service.

*Ground Guides* – No personnel shall use any motor vehicle, earthmoving, or compacting equipment having an obstructed view to the rear, unless:

- The vehicle has a reverse signal alarm distinguishable from the surrounding noise level; or
- The vehicle is backed up only when an observer signals that it is safe to do so.

*Blocking* – Heavy machinery, equipment, or parts thereof that are suspended or held aloft shall be substantially blocked to prevent falling or shifting before employees are permitted to work under or between them.

*Noise* – Control measures for noise are addressed in Section 4.9.

*Traffic* – Control measures for traffic are addressed in Section 8.17.

### **9.2.3.3 Disturbance/Handling of Contaminated Material**

#### Description of Tasks

After the contaminated soil is excavated from below the Site's surface, the material will be stockpiled, dried, and either transported offsite or relocated and backfilled on site.

#### Hazard Identification

The hazards associated with materials handling include contact of the contaminated material with project personnel, or cross contamination with other site soil.

#### Controls

*Cross Contamination* – Following excavation, contaminated soil stockpiles will be placed on a structure constructed to separate the material from the site soil and collect any groundwater leachate. The material shall be covered to prevent storm water erosion or migration of contaminants through storm water.

*Air Monitoring* – Air and particulate monitoring will be conducted during soil excavation activities to assess the potential for exposure to airborne COCs. If the results of air monitoring indicate the presence of organic vapors or particulates in a concentration causing concern, personnel will upgrade to Level C protection. Refer to Section 5.1, Air Monitoring, for a description of air monitoring requirements and action levels. A description of each level of personal protection is included in Section 4.0, Personal Protective Equipment.

*Traffic* – Control measures for traffic are addressed in Section 8.17.

### **9.2.4 Drilling/Subsurface Intrusion Activities**

#### Description of Tasks

This component of work includes the project tasks of delineation and sampling the PCB-impacted soil, installation of the groundwater cutoff wall, and in-situ soil grouting. Geotechnical testing of the grout and existing site soils will also be conducted.

### Hazard Identification

The primary physical hazards for this activity are associated with the use of soil boring and grouting equipment. The equipment is hydraulically powered and uses static force and dynamic percussion force to advance sampling and penetrating tubes.

Accidents can occur as a result of improperly placing the equipment on uneven or unstable terrain or failing to adequately secure the equipment prior to the start of operations. Overhead utility lines can create hazardous conditions if contacted by the equipment. Underground installations such as electrical lines, conduit, and product lines pose a significant hazard if contacted.

### Controls

*Geoprobe and Drill Rig Safety Procedures* - The operator of the equipment must possess required state or local licenses to perform such work. All members of the crew shall receive site-specific training prior to beginning work.

The operator is responsible for the safe operation of the rig, as well as the crew's adherence to the requirements of this HASP. The operator must ensure that all safety equipment is in proper condition and is properly used. The members of the crew must follow all instructions of the operator, wear all personal protective equipment, and be aware of all hazards and control procedures. The operator and crew must participate in the Daily Safety Meetings and be aware of all emergency procedures.

*Equipment Inspection* - Each day, prior to the start of work, the rig and associated equipment must be inspected by the operator. The following items must be inspected:

- Vehicle condition;
- Proper storage of equipment;
- Condition of all hydraulic lines;
- Fire extinguisher; and
- First aid kit.

*Equipment Set Up* - The drill rig must be properly blocked and leveled prior to raising the derrick. The wheels which remain on the ground must be chocked. The leveling jacks shall not be raised until the derrick is lowered. The rig shall be moved only after the derrick has been lowered.

All well sites will be inspected by the driller prior to the location of the rig to verify a stable surface exists. This is especially important in areas where soft, unstable terrain is common.

The drill rig must be properly blocked and leveled prior to raising the derrick. Blocking provides a more stable drilling structure by evenly distributing the weight of the rig. Proper blocking ensures that differential settling of the rig does not occur.

When the ground surface is soft or otherwise unstable, wooden blocks, at least 24" by 24" and 4" to 8" thick shall be placed between the jack swivels and the ground. The emergency brake shall be engaged, and the wheels that are on the ground shall be chocked.

*Rules for Intrusive Activity* - Before beginning any intrusive activity, the existence and location of underground pipe, conduit, electrical equipment, and other installations will be

determined. This will be done, if possible, by contacting the appropriate client representative to mark the location of the lines. "Call Before You Dig" will verify the potential for encountering subsurface utilities. If the client's knowledge of the area is incomplete, an appropriate device, such as a magnetometer, will be used to locate the line.

Combustible gas readings of the general work area will be made regularly in areas where and/or during operations when the presence of flammable vapors or gases is suspected, such as during intrusive activities (see Section 5.1). Operations must be suspended and corrective action taken if the airborne flammable concentration reaches 10% of the LEL in the immediate area (a one-foot radius) of the point of drilling, or near any other ignition sources.

*Overhead Electrical Clearances* - If equipment is operated in the vicinity of overhead power lines, the power to the lines must be shut off or the equipment must be positioned and blocked such that no part, including cables, can come within the minimum clearances as follows:

<b>Nominal Voltage</b>	<b>System</b>	<b>Minimum Clearance</b>	<b>Required</b>
0-50kV		10 feet	
51-100kV		12 feet	
101-200kV		15 feet	
201-300kV		20 feet	
301-500kV		25 feet	
501-750kV		35 feet	
751-1,000kV		45 feet	

When the drill rig is in transit, with the boom lowered and no load, the equipment clearance must be at least 4 feet for voltages less than 50kV, 10 feet for voltages of 50 kV to 345 kV, and 16 feet for voltages above 345 kV.

*Hoisting Operations* - Drillers should never engage the rotary clutch without watching the rotary table, and ensuring it is clear of personnel and equipment.

Unless the drawworks is equipped with an automatic feed control, the brake should not be left unattended without first being tied down.

Drill pipe, auger strings or casing should be picked up slowly. Drill pipe should not be hoisted until the driller is sure that the pipe is latched in the elevator, or the derrickman has signaled that he may safely hoist the pipe.

During instances of unusual loading of the derrick or mast, such as when making an unusually hard pull, only the driller should be on the rig floor; no one else should be on the rig or derrick.

The brakes on the drawworks of the drill rig should be tested by the driller each day. The brakes should be thoroughly inspected by a competent individual each week.

A hoisting line with a load imposed should not be permitted to be in direct contact with any derrick member or stationary equipment, unless it has been specifically designed for line contact.

Workers should never stand near the borehole whenever any wire line device is being run.

Hoisting control stations should be kept clean and controls labeled as to their functions.

*Catline Operations* - Only experienced workers will be allowed to operate the cathead controls. The kill switch must be clearly labeled and operational prior to operation of the catline. The cathead area must be kept free of obstructions and entanglements.

The operator should not use more wraps than necessary to pick up the load. More than one layer of wrapping is not permitted.

Personnel should not stand near, step over, or go under a cable or catline which is under tension.

Employees rigging loads on catlines shall:

- Keep out from under the load;
- Keep fingers and feet where they will not be crushed;
- Be sure to signal clearly when the load is being picked;
- Use standard visual signals only and not depend on shouting to coworkers; and
- Make sure the load is properly rigged, since a sudden jerk in the catline will shift or drop the load.

*Wire Rope* - When two wires are broken or rust or corrosion is found adjacent to a socket or end fitting, the wire rope shall be removed from service or re-socketed. Special attention shall be given to the inspection of end fittings on boom support, pendants, and guy ropes.

Wire rope removed from service due to defects shall be cut up or plainly marked as being unfit for further use as rigging.

Wire rope clips attached with U-bolts shall have the U-bolts on the dead or short end of the rope; the clip nuts shall be re-tightened immediately after initial load carrying use and at frequent intervals thereafter.

When a wedge socket fastening is used, the dead or short end of the wire rope shall have a clip attached to it or looped back and secured to itself by a clip; the clip shall not be attached directly to the live end.

Protruding ends of strands in splices on slings and bridles shall be covered or blunted.

Except for eye splices in the ends of wires and for endless wire rope slings, wire rope used in hoisting, lowering, or pulling loads, shall consist of one continuous piece without knot or splice.

An eye splice made in any wire rope shall have not less than five full tucks.

Wire rope shall not be secured by knots. Wire rope clips shall not be used to splice rope.

Eyes in wire rope bridles, slings, or bull wires shall not be formed by wire clips or knots.

*Pipe/Auger Handling* - Pipe and auger sections shall be transported by cart or carried by two persons. Individuals should not carry auger or pipe sections without assistance.

Workers should not be permitted on top of the load during loading, unloading, or transferring of pipe or rolling stock.

Employees should be instructed never to try to stop rolling pipe or casing; they should be instructed to stand clear of rolling pipe.

Slip handles should be used to lift and move slips. Employees are not permitted to kick slips into position.

When pipe is being hoisted, personnel should not stand where the bottom end of the pipe could whip and strike them.

Pipe and augers stored in racks, catwalks or on flatbed trucks should be secured to prevent rolling.

### **9.2.5 Subsurface Chemical Sample Collection/Analysis**

#### Description of Tasks

This sub-task consists of the collection of soil samples for subsequent field and laboratory analysis. The physical hazards of soil sampling are primarily associated with the sample collection methods, procedures utilized, and the environment itself.

#### Hazard Identification

Incidental contact with COCs is the primary hazard associated with sampling the stabilized material. This contact may occur through the manipulation of sample media and equipment, manual transfer of media into sample containers, and proximity of operations to the breathing zone. The primary hazards associated with these sampling procedures are not potentially serious; however, other operations in the area, or the conditions under which samples must be collected, may present chemical and physical hazards. The hazards directly associated with sampling procedures are generally limited to strains/sprains and potential eye hazards. Potential chemical hazards may include contact with media containing site COCs and potential contact with chemicals used for equipment decontamination.

### Controls

*PPE* – To control dermal exposure during sampling activities, a minimum of Level D protection will be worn. If necessary, based on field observations and site conditions, air monitoring may be conducted during sediment sampling activities. If the results of air monitoring indicate the presence of airborne contaminants in a concentration causing concern, personnel will upgrade to Level C protection. Refer to Section 5.1, Air Monitoring, for a description of air monitoring requirements and action levels. A description of each level of personal protection is included in Section 4.0, Personal Protective Equipment.

## **9.2.6 UST Closure**

### **9.2.6.1 Working in Confined Spaces**

#### Description of Tasks

The project will involve the closure of several USTs.

#### Hazard Identification

Closure activities may require the entrance into confined spaces to facilitate cleaning and removal of the USTs.

#### Controls

All personnel required to enter into confined or enclosed spaces must be instructed as to the nature of the hazards involved, the necessary precautions to be taken, and in the use of required protective and emergency equipment. The PO shall comply with all specific regulations that apply to work in dangerous or potentially dangerous areas.

### **9.2.6.2 Working with Compressed Air**

#### Description of Tasks

The proposed method of purging the USTs includes the injection of compressed gas into the tank and attached piping network.

#### Hazard Identification

Uncontrolled release of the highly pressured air can cause injury to FP during this task. Cylinders must also be properly managed to ensure they are not compromised during storage and/or use.

#### Controls

*Pressure Regulation* – Compressed air used for cleaning purposes shall be reduced to less than 30 pounds per square inch and then only with effective chip guarding and personal protective equipment.

*Cylinder Storage* – Valve protection caps shall be in place and secured when compressed gas cylinders are transported, moved, or stored. Cylinder valves shall be closed when work is finished and when cylinders are empty or are moved. Compressed gas cylinders shall be secured in an upright position at all times, except if necessary for short periods of time when cylinders are actually being hoisted or carried. Cylinders shall be placed in a location where they cannot become part of an electrical circuit.

## **9.2.7 Site Capping System Construction**

Refer to Section 8.0 for general safety procedures.

### **9.2.8 Creek Relocation**

Refer to Section 8.0 for general safety procedures.

### **9.2.9 Decontamination**

All equipment will be decontaminated before leaving the site. Personnel involved in decontamination activities may be inadvertently exposed to skin contact with contaminated materials and chemicals brought from the EZ. Personnel involved in decontamination activities must wear PPE that is, at a minimum, one level below the level worn by personnel working in the EZ.

### **9.2.10 Demobilization**

Demobilization involves the removal of all tools, equipment, supplies, and vehicles brought to the site. The hazards of this phase of activity are associated with heavy equipment operation and manual materials handling.

Manual materials handling may cause blisters, sore muscles, and joint and skeletal injuries; and may present eye, contusion, and laceration hazards. Heavy equipment operation presents noise and vibration hazards, and hot surfaces, to operators. Personnel in the vicinity of heavy equipment operation may be exposed to physical hazards resulting in fractures, contusions, and lacerations and may be exposed to high noise levels. The work area presents slip, trip, and fall hazards from scattered debris and irregular walking surfaces. Rainy weather may cause wet, muddy, slick walking surfaces, and unstable soil. Freezing weather hazards include frozen, slick, and irregular walking surfaces.

Environmental hazards include plants, such as poison ivy and poison oak; aggressive fauna, such as ticks, fleas, mosquitoes, wasps, spiders, and snakes; weather, such as sunburn, lightning, rain, and heat-or cold-related illnesses; and pathogens, such as rabies, Lyme disease, and blood-borne pathogens.

Control procedures for these hazards are discussed in Section 8.0, General Safety Practices.

## **9.3 Chemical Hazards**

The chemical hazards associated with site operations are related to inhalation, ingestion, and skin exposure to site COCs. Concentrations of airborne COCs during site tasks may be measurable and will require air monitoring during certain operations. Air monitoring requirements for site tasks are outlined in Section 5.1.

COCs at the site include heavy metals, some VOC compounds, some SVOC compounds and potentially other industrial chemicals including PCBs and pesticides.

The potential for inhalation of site COCs is low. The potential for dermal contact with soils containing site COCs during remedial operations is moderate. Table 6 lists the primary contaminants that have been identified at the Site and the media in which they are present.



Table 6 – List of Primary Contaminants

<b>Media: Soil</b>		
<b>Volatile Organic Compounds</b>	<b>Concentration Units = mg/kg</b>	<b>Applicable Monitoring Instrument</b>
1,2,4-Trimethylbenzene	100	PID
1,3,5-Trimethylbenzene	34	PID
Benzene	0.12	PID
Ethylbenzene	14	PID
Isopropylbenzene	4.1	PID
n-Propylbenzene	15	PID
Toluene	0.87	PID
Xylenes, Total	78	PID
<b>Semi-Volatile Organic Compounds</b>	<b>Concentration Units = mg/kg</b>	<b>Applicable Monitoring Instrument</b>
Benzo(a)anthracene	2.8	PID
Benzo(a)pyrene	2.4	PID
Benzo(b)fluoranthene	3.3	PID
Benzo(k)fluoranthene	0.85	PID
Chrysene	2.2	PID
Dibenzo(a,h)anthracene	0.41	PID
Indeno(1,2,3-cd)pyrene	1.8	PID
<b>Metals</b>	<b>Concentration Units = mg/kg</b>	<b>Applicable Monitoring Instrument</b>
Chromium	39.5	NA
Lead	450	NA
Mercury	0.81	NA
Zinc	10,000	NA

<b>Media: Groundwater</b>		
<b>Volatile Organic Compounds</b>	<b>Concentration Units = µg/L</b>	<b>Applicable Monitoring Instrument</b>
1,2,4-Trimethylbenzene	110	PID
1,3,5-Trimethylbenzene	57	PID
Benzene	14	PID
Ethylbenzene	150	PID
Isopropylbenzene	44	PID
Naphthalene	23	PID
n-Butylbenzene	36	PID
n-Propylbenzene	130	PID
o-Xylene	28	PID
p/m-Xylene	290	PID
p-Isopropyltoluene	8.3	PID
sec-Butylbenzene	25	PID
Toluene	6.1	PID
MTBE	2,000	PID

<b>Media: Soil Vapor</b>		
<b>Volatile Organic Compounds</b>	<b>Concentration Units = <math>\mu\text{g}/\text{m}^3</math></b>	<b>Applicable Monitoring Instrument</b>
<b>1,3-Butadiene</b>	<b>87</b>	<b>PID</b>
<b>2,2,4-Trimethylpentane</b>	<b>25</b>	<b>PID</b>
<b>Acetone</b>	<b>170</b>	<b>PID</b>
<b>Benzene</b>	<b>52</b>	<b>PID</b>
<b>Carbon disulfide</b>	<b>100</b>	<b>PID</b>
<b>Chloroform</b>	<b>10</b>	<b>PID</b>
<b>Chloromethane</b>	<b>20</b>	<b>PID</b>
<b>Cumene</b>	<b>13</b>	<b>PID</b>
<b>Cyclohexane</b>	<b>26</b>	<b>PID</b>
<b>Ethylbenzene</b>	<b>50</b>	<b>PID</b>
<b>Methyl Ethyl Ketone</b>	<b>44</b>	<b>PID</b>
<b>Methylene Chloride</b>	<b>240</b>	<b>PID</b>
<b>n-Heptane</b>	<b>240</b>	<b>PID</b>
<b>n-Hexane</b>	<b>590</b>	<b>PID</b>
<b>n-Propylbenzene</b>	<b>8.6</b>	<b>PID</b>
<b>o-Xylene</b>	<b>7.4</b>	<b>PID</b>
<b>Toluene</b>	<b>250</b>	<b>PID</b>
<b>Trichloroethene</b>	<b>69</b>	<b>PID</b>

## **10.0 EMERGENCY PROCEDURES**

### **10.1 General**

Prior to the start of operations, the work area will be evaluated for the potential for fire, contaminant release, or other catastrophic event. Unusual conditions or events, activities, chemicals, and conditions will be reported to the FS/SSO immediately.

The FS/SSO will establish evacuation routes and assembly areas for the site. All personnel entering the site will be informed of this route and the assembly area.

### **10.2 Emergency Response**

If an incident occurs, the following steps will be taken:

- The FS/SSO will evaluate the incident and assess the need for assistance and/or evacuation;
- The FS/SSO will call for outside assistance as needed;
- The FS/SSO will ensure the PM is notified promptly of the incident; and
- The FS/SSO will take appropriate measures to stabilize the incident scene.

#### **10.2.1 Fire**

In the case of a fire at the site, the FS/SSO will assess the situation and direct fire-fighting activities. The FS/SSO will ensure that the PM is immediately notified of any fires. Site personnel will attempt to extinguish the fire with available extinguishers, if safe to do so. In the event of a fire that site personnel are unable to safely extinguish with one fire extinguisher, the local fire department will be summoned.

### **10.2.2 Contaminant Release**

In the event of a contaminant release, the following steps will be taken:

- Notify FS/SSO immediately;
- Evacuate immediate area of release;
- Conduct air monitoring to determine needed level of PPE; and
- Don required level of PPE and prepare to implement control procedures.

The FS/SSO has the authority to commit resources as needed to contain and control released material and to prevent its spread to off-site areas.

### **10.3 Medical Emergency**

All employee injuries must be promptly reported to the SSO/FS, who will:

- Ensure that the injured employee receives prompt first aid and medical attention;
- In emergency situations, the worker is to be transported by appropriate means to the nearest urgent care facility (normally a hospital emergency room); and
- If the injured person is a SESI employee, notify SESI at 973-808-9050.

#### **10.3.1 Emergency Care Steps**

Survey the scene. Determine if it is safe to proceed. Try to determine if the conditions that caused the incident are still a threat. Protect yourself from exposure before attempting to rescue the victim.

- Do a primary survey of the victim. Check for airway obstruction, breathing, and pulse. Assess likely routes of chemical exposure by examining the eyes, mouth, nose, and skin of the victim for symptoms.
- Phone Emergency Medical Services (EMS). Give the location, telephone number used, caller's name, what happened, number of victims, victim's condition, and help being given.
- Maintain airway and perform rescue breathing as necessary.
- Perform CPR as necessary.
- Do a secondary survey of the victim. Check vital signs and do a head-to-toe exam.

Treat other conditions as necessary. If the victim can be moved, take him/her to a location away from the work area where EMS can gain access.

### **10.4 First Aid - General**

All persons must report any injury or illness to their immediate supervisor or the FS. Trained personnel will provide first aid. Injuries and illnesses requiring medical treatment must be documented. The FS and SSO must fill out an accident/incident report as soon as emergency conditions no longer exist and first aid and/or medical treatment has been ensured. The report must be completed and submitted to the PM within 24 hours after the incident.

If first-aid treatment is required, first aid kits are kept at the CRZ. If treatment beyond first aid is required, the injured person(s) should be transported to the medical facility. If the injured person is not ambulatory or shows any sign of not being in a comfortable and stable condition for transport, then an ambulance/paramedics should be summoned. If there is

any doubt as to the injured worker's condition, it is best to let the local paramedic or ambulance service examine and transport the worker.

**10.4.1 First Aid - Inhalation**

Any employee complaining of symptoms of chemical overexposure as described in Section 4, General Site Safety Procedures, will be removed from the work area and transported to the designated medical facility for examination and treatment.

**10.4.2 First Aid - Ingestion**

Call EMS and consult a poison control center for advice. If available, refer to the MSDS for treatment information. If the victim is unconscious, keep them on their side and clear the airway if vomiting occurs.

**10.4.3 First Aid - Skin Contact**

Project personnel who have had skin contact with contaminants will, unless the contact is severe, proceed through the CRZ, to the wash area. Personnel will remove any contaminated clothing, and then flush the affected area with water for at least 15 minutes. The worker should be transported to the medical facility if he/she shows any sign of skin reddening, irritation, or if he/she requests a medical examination.

**10.4.4 First Aid - Eye Contact**

Project personnel who have had contaminants splashed in their eyes or who have experienced eye irritation while in the EZ, must immediately proceed to the eyewash station in the CRZ. Do not decontaminate prior to using the eyewash. Remove whatever protective clothing is necessary to use the eyewash. Flush the eye with clean running water for at least 15 minutes. Arrange prompt transport to the designated medical facility.

**10.5 Reporting Injuries, Illnesses, and Safety Incidents**

Injuries and illnesses, however minor, will be reported to the FS immediately. The FS will complete an injury report and submit it to the HSM, and the PM by end of shift.

**10.6 Emergency Information**

The means to summon local public response agencies such as police, fire, and ambulance will be reviewed in the daily safety meeting. These agencies are identified in Table 7.

**Table 7 – Emergency Contacts**

<b>Local Emergency Contacts</b>	<b>Telephone No.</b>
EMERGENCY	911
White Plains Hospital	(914) 681-0600
Police Emergency	911
Fire Emergency	911
Rescue Squad	911
Ambulance	911
<b>Miscellaneous Contacts</b>	<b>Telephone No.</b>
N.Y. Poison Control Center	(800) 222-1222
National Response Center and Terrorist Hotline	(800) 424-8802
Center for Disease Control	(800) 311-3435
Utility Mark-Out	(800) 962-7962


### 10.6.1 Directions to Hospital

White Plains Hospital  
41 Post Road East  
White Plains, New York 10601  
(914) 681-0600

#### Directions to Hospital:

- Head southwest on Hamilton Ave toward Dr.Martin Luther King Jr Blvd
  - Turn left onto N Lexington Ave
  - Turn left onto Maple Ave
  - Turn left at the 1st cross street onto Davis Ave
  - Turn right
- Destination will be on the right

**Figure 1 – Directions to Hospital**

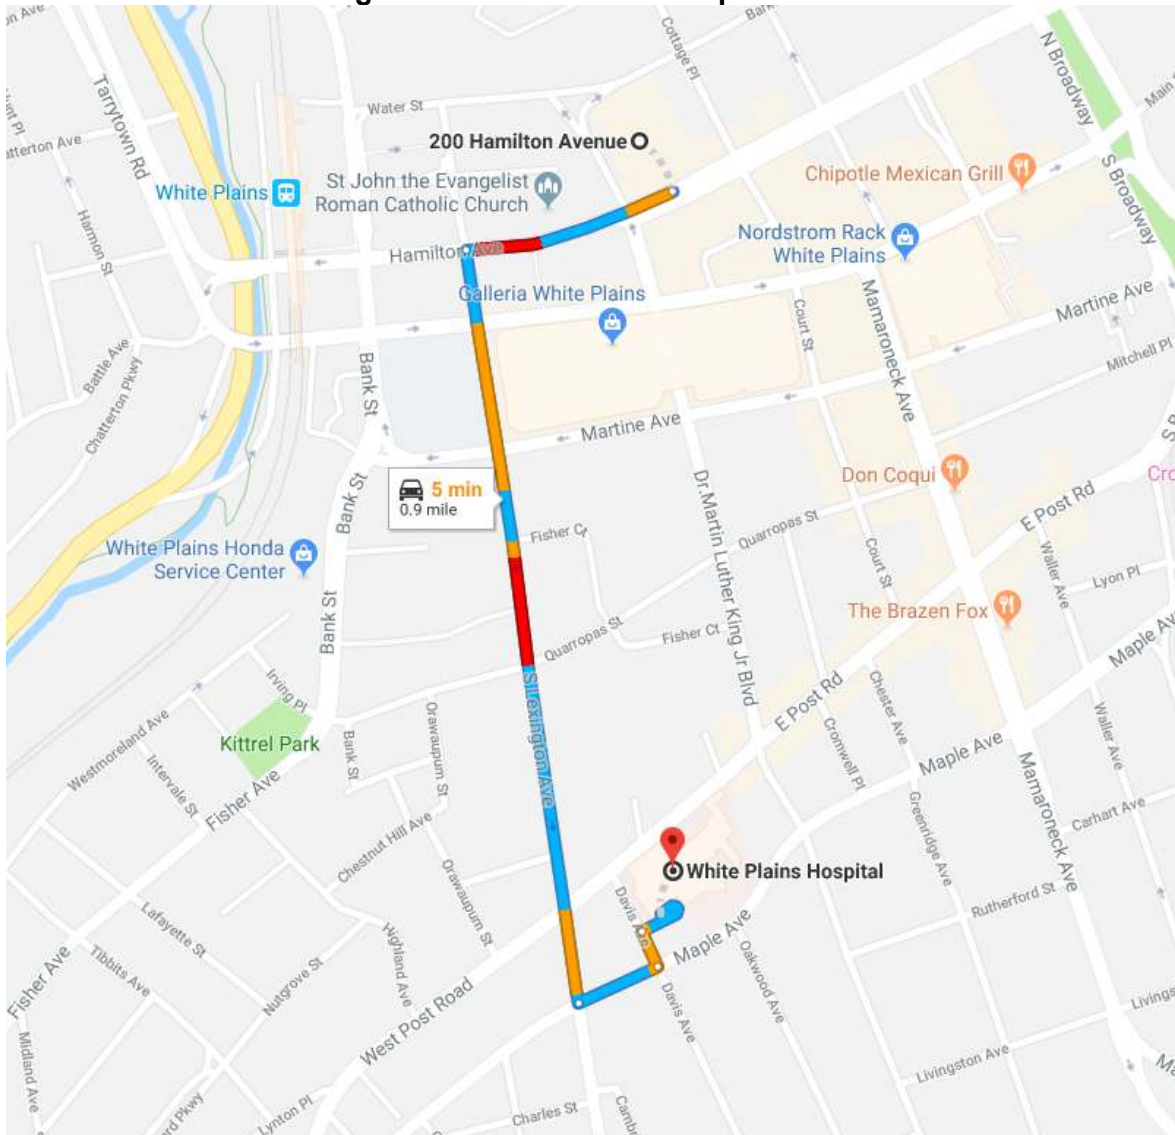

## **11.0 LOGS, REPORTS, AND RECORD KEEPING**

The following is a summary of required health and safety logs, reports, and record keeping for the operations at the subject site.

### **11.1 HASP Field Change Request**

To be completed for initiating a change to the HASP. PM approval is required. The original will be kept in the project file (See Attachment 3).

### **11.2 Medical and Training Records**

The HSM must obtain and keep a log of personnel meeting appropriate training and medical qualifications for the site work. The log will be kept in the project file. Each company's Human Resources Department will maintain medical records, in accordance with 29 CFR 1910.1020.

### **11.3 Exposure Records**

Any personnel monitoring results, laboratory reports, calculations, and air sampling data sheets are part of an employee exposure record. These records will be kept in accordance with 29 CFR 1910.1020. For SESI employees, the originals will be sent to the Human Resources Manager. For subcontractor employees, the original file will be sent to the subcontractor employer with a copy maintained in the SESI project file.

### **11.4 Accident/Incident Report**

Any accident/incident reports must be completed following procedures given in Section 10.5 of this HASP. The originals will be sent to the HSM for maintenance. A copy of the forms will be kept in the project file. (See Attachment 4)

### **11.5 OSHA Form 200**

An OSHA Form 200 (Log of Occupational Injuries and Illnesses) will be kept at the project site. All recordable injuries or illnesses will be recorded on this form. At the end of the project, the original will be sent to the Human Resources Manager for maintenance. Subcontractor employees must also meet the requirements of maintaining an OSHA 200 Form. The accident/incident report meets the requirements of the OSHA Form 101 (Supplemental Record), which must be maintained with the OSHA Form 200 for all recordable injuries or illnesses.

### **11.6 On-Site Health and Safety Field Logbooks**

The HSM or designee will maintain an on-site health and safety log book in which daily Site conditions, activities, personnel, and significant events will be recorded. Calibration records and personnel monitoring results, if available, will also be recorded in the field logbook. The original logbook will be kept in the project file.

Whenever any personnel monitoring is conducted onsite, the monitoring results will be noted in the filed logbook. These will become part of the exposure records file and will be maintained by the HSM.

A signatory page is included (See Attachment 5) and is to be signed by those working on and/or visiting the site.

### **11.7 Material Safety Data Sheets**

Material Safety Data Sheets (MSDS) will be obtained and kept on file at the project site for each hazardous chemical brought to, use, or stored at the Site (See Attachment 6).

**ATTACHMENT 1**  
**AIR MONITOR LOG**





**ATTACHMENT 2**

**OSHA POSTER**

# Job Safety and Health

## It's the law!

**OSHA**<sup>®</sup>  
Occupational Safety  
and Health Administration  
U.S. Department of Labor

### EMPLOYEES:

- You have the right to notify your employer or OSHA about workplace hazards. You may ask OSHA to keep your name confidential.
- You have the right to request an OSHA inspection if you believe that there are unsafe and unhealthful conditions in your workplace. You or your representative may participate in that inspection.
- You can file a complaint with OSHA within 30 days of retaliation or discrimination by your employer for making safety and health complaints or for exercising your rights under the *OSH Act*.
- You have the right to see OSHA citations issued to your employer. Your employer must post the citations at or near the place of the alleged violations.
- Your employer must correct workplace hazards by the date indicated on the citation and must certify that these hazards have been reduced or eliminated.
- You have the right to copies of your medical records and records of your exposures to toxic and harmful substances or conditions.
- Your employer must post this notice in your workplace.
- You must comply with all occupational safety and health standards issued under the *OSH Act* that apply to your own actions and conduct on the job.

### EMPLOYERS:

- You must furnish your employees a place of employment free from recognized hazards.
- You must comply with the occupational safety and health standards issued under the *OSH Act*.

This free poster available from OSHA –  
*The Best Resource for Safety and Health*



Free assistance in identifying and correcting hazards or complying with standards is available to employers, without citation or penalty, through OSHA-supported consultation programs in each state.

**1-800-321-OSHA (6742)**  
[www.osha.gov](http://www.osha.gov)

OSHA 3165-02 2012R



**ATTACHMENT 3**  
**HASP FIELD CHANGE REQUEST FORM**



**ATTACHMENT 4**  
**INCIDENT REPORT**

# OSHA's Form 301 Injury and Illness Incident Report

**Attention:** This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.



Form approved OMB no. 1218-0175

This *Injury and Illness Incident Report* is one of the first forms you must fill out when a recordable work-related injury or illness has occurred. Together with the *Log of Work-Related Injuries and Illnesses* and the accompanying *Summary*, these forms help the employer and OSHA develop a picture of the extent and severity of work-related incidents.

Within 7 calendar days after you receive information that a recordable work-related injury or illness has occurred, you must fill out this form or an equivalent. Some state workers' compensation, insurance, or other reports may be acceptable substitutes. To be considered an equivalent form, any substitute must contain all the information asked for on this form.

According to Public Law 91-596 and 29 CFR 1904, OSHA's recordkeeping rule, you must keep this form on file for 5 years following the year to which it pertains.

If you need additional copies of this form, you may photocopy and use as many as you need.

### Information about the employee

- 1) Full name \_\_\_\_\_
- 2) Street \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ ZIP \_\_\_\_\_
- 3) Date of birth \_\_\_\_\_/\_\_\_\_\_/\_\_\_\_\_  
4) Date hired \_\_\_\_\_/\_\_\_\_\_/\_\_\_\_\_  
5)  Male  
 Female

### Information about the physician or other health care professional

- 6) Name of physician or other health care professional \_\_\_\_\_
- 7) If treatment was given away from the worksite, where was it given?  
Facility \_\_\_\_\_  
Street \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ ZIP \_\_\_\_\_
- 8) Was employee treated in an emergency room?  
 Yes  
 No
- 9) Was employee hospitalized overnight as an in-patient?  
 Yes  
 No

### Information about the case

- 10) Case number from the Log \_\_\_\_\_ (Transfer the case number from the Log after you record the case.)
- 11) Date of injury or illness \_\_\_\_\_/\_\_\_\_\_/\_\_\_\_\_  
AM / PM
- 12) Time employee began work \_\_\_\_\_ AM / PM  
13) Time of event \_\_\_\_\_ AM / PM  Check, if time cannot be determined
- 14) What was the employee doing just before the incident occurred? Describe the activity, as well as the tools, equipment, or material the employee was using. Be specific. *Examples:* "climbing a ladder while carrying roofing materials"; "spraying chlorine from hand sprayer"; "daily computer key-entry"
- 15) What happened? Tell us how the injury occurred. *Examples:* "When ladder slipped on wet floor, worker fell 20 feet"; "Worker was sprayed with chlorine when gasket broke during replacement"; "Worker developed soreness in wrist over time."
- 16) What was the injury or illness? Tell us the part of the body that was affected and how it was affected. Be more specific than "hurt," "pain," or "sore." *Examples:* "strained back"; "chemical burn, hand"; "carpal tunnel syndrome."
- 17) What object or substance directly harmed the employee? *Examples:* "concrete floor"; "chlorine"; "radial arm saw." If this question does not apply to the incident, leave it blank.
- 18) If the employee died, when did death occur? Date of death \_\_\_\_\_/\_\_\_\_\_/\_\_\_\_\_

Completed by \_\_\_\_\_

Title \_\_\_\_\_

Phone (\_\_\_\_\_) \_\_\_\_\_ Date \_\_\_\_/\_\_\_\_/\_\_\_\_

Public reporting burden for this collection of information is estimated to average 22 minutes per response, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Persons are not required to respond to the collection of information unless it displays a current valid OMB control number. If you have any comments about this estimate or any other aspect of this data collection, including suggestions for reducing the burden, contact US Department of Labor, OSHA Office of Statistical Analysis, Room N-5054, 200 Constitution Avenue, NW, Washington, DC 20210. Do not send the completed forms to this office.



# Log of Work-Related Injuries and Illnesses

You must record information about every work-related death and about every work-related injury or illness that involves loss of consciousness, restricted work activity or job transfer, days away from work, or medical treatment beyond first aid. You must also record significant work-related injuries and illnesses that are diagnosed by a physician or licensed health care professional. You must also record work-related injuries and illnesses that meet any of the specific recording criteria listed in 29 CFR Part 1904.8 through 1904.12. Read the use and lines for a single case if you need to. You must complete an injury and illness incident report (OSHA Form 301) or equivalent form for each injury or illness recorded on this form. If you're not sure whether a case is recordable, call your local OSHA office for help.

**Attention:** This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.

Form approved OMB no. 1215-0176

Establishment name \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_

**Identify the person**

**Describe the case**

(A) Case no.	(B) Employee's name	(C) Job title <i>(e.g., Worker)</i>	(D) Date of injury or onset of illness	(E) Where the event occurred <i>(e.g., Landing dock north end)</i>	(F) Describe injury or illness, parts of body affected, and object/substance that directly injured or made person ill <i>(e.g., Second degree burns on right forearm from acetone burn)</i>
-----------------	------------------------	-------------------------------------------	-------------------------------------------	--------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Classify the case**  
CHECK ONLY ONE box for each case based on the most serious outcome for that case:

Enter the number of days the injured or ill worker was:

Check the "injury" column or choose one type of illness:

(G) Death	(H) Days away from work	Remained at Work			(K) Away from work	(L) On job transfer or restriction	(M)						
		(1) Job transfer	(2) Other recordable cases	(3) Injury			(4) Skin disorder	(5) Respiratory condition	(6) Poisoning	(7) Hearing loss	(8) All other illnesses		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____ days	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Public reporting burden for this collection of information is estimated to average 14 minutes per response, including time to review the instructions, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any other aspect of this data collection, contact the US Department of Labor, OSHA Office of Statistical Analysis, Room N-3614, 390 Constitution Avenue, NW, Washington, DC 20210. Do not send the completed forms to this office.



# Summary of Work-Related Injuries and Illnesses

All establishments covered by Part 1904 must complete this Summary page, even if no work-related injuries or illnesses occurred during the year. Remember to review the Log to verify that the entries are complete and accurate before completing this summary.  
 Using the Log, count the individual entries you made for each category. Then write the totals below, making sure you've added the entries from every page of the Log. If you had no cases, write "0."

Employers, former employees, and their representatives have the right to review the OSHA Form 300 in its entirety. They also have limited access to the OSHA Form 301 or its equivalent. See 29 CFR Part 1904.35. In OSHA's recordkeeping rule, for further details on the access provisions for these forms.

### Number of Cases

Total number of deaths	Total number of cases with days away from work	Total number of cases with job transfer or restriction	Total number of other recordable cases
(g) _____	(h) _____	(i) _____	(j) _____

### Number of Days

Total number of days away from work	Total number of days of job transfer or restriction
(k) _____	(l) _____

### Injury and Illness Types

Total number of ...	(M)	(4) Poisonings	(5) Hearing loss	(6) All other illnesses
(1) Injuries	_____	_____	_____	_____
(2) Skin disorders	_____	_____	_____	_____
(3) Respiratory conditions	_____	_____	_____	_____

Post this Summary page from February 1 to April 30 of the year following the year covered by the form.

Public reporting burden for this collection of information is estimated to average 58 minutes per response, including time to review the instructions, search existing data sources, gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any other aspect of this data collection, contact: US Department of Labor, OSHA Office of Statistical Analysis, Room N-3644, 200 Constitution Avenue, NW, Washington, DC 20210. Do not send this completed form to this office.

### Establishment Information

Your establishment name \_\_\_\_\_  
 Street \_\_\_\_\_  
 City \_\_\_\_\_ State \_\_\_\_\_ ZIP \_\_\_\_\_  
 Industry description (e.g., *Maintenance of motor truck trailers*) \_\_\_\_\_  
 Standard Industrial Classification (SIC), if known (e.g., 3715) \_\_\_\_\_  
 OR \_\_\_\_\_  
 North American Industrial Classification (NAICS), if known (e.g., 336212) \_\_\_\_\_

### Employment information (If you don't have these figures, see the Worksheet on the back of this page to estimate.)

Annual average number of employees \_\_\_\_\_  
 Total hours worked by all employees last year \_\_\_\_\_

### Sign here

Knowingly falsifying this document may result in a fine.

I certify that I have examined this document and that to the best of my knowledge the entries are true, accurate, and complete.

Temporary/seasonal \_\_\_\_\_ Title \_\_\_\_\_  
 Name \_\_\_\_\_ Date \_\_\_\_\_

**ATTACHMENT 5**  
**SIGNATORY PAGE**

**Attachment 4 – Site-Specific Health and Safety Orientation Signatory Page**  
**HEALTH AND SAFETY PLAN**  
**200 Hamilton Ave - White Plains, NY**

Title	Name	Signature
Project Manager:	TBD	
Health and Safety Manager:	TBD	

I have read the attached Health and Safety Plan (HASP) and have received site-specific information and orientation regarding the identified physical, chemical, and biological hazards anticipated at this site. My signature certifies that I understand the procedures, equipment, and restrictions applicable to this project site and agree to abide by them.

Signature	Printed Name	Company	Date

**Attachment 4 – Health and Safety Orientation Signatory Page (continued)**

<b>Signature</b>	<b>Printed Name</b>	<b>Company</b>	<b>Date</b>

**ATTACHMENT 6**  
**SAFETY DATA SHEETS**

SDS preview

# ALCONOX® DETERGENT

**DANGER**

by SIGMA ALDRICH

---

## Hazard statements

Causes serious eye damage  
Causes skin irritation  
Harmful if swallowed  
May cause respiratory irritation  
Toxic to aquatic life

## Precautions

Avoid breathing dust/fume/gas/mist/vapours/spray  
Wash ... thoroughly after handling  
Do not eat, drink or smoke when using this product  
Use only outdoors or in a well-ventilated area  
Avoid release to the environment  
Wear protective gloves/protective clothing/eye protection/face protection  
IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell  
Rinse mouth  
IF ON SKIN: Wash with plenty of soap and water.  
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing  
Call a POISON CENTER or doctor/physician if you feel unwell  
IF IN EYES: Rinse cautiously with water for several minutes, Remove contact lenses, if present and easy to do. Continue rinsing  
Immediately call a POISON CENTER or doctor/physician  
If skin irritation occurs: Get medical advice/attention  
Take off contaminated clothing and wash before reuse

Store in a well-ventilated place., Keep container tightly closed

Store locked up

Dispose of contents/container to ...

Hazard category

Acute toxicity, oral, Hazardous to the aquatic environment, (Acute), Serious eye damage/eye irritation, Skin corrosion/irritation, Specific target organ toxicity, single exposure; Respiratory tract irritation



20000200GHS02018&param1=ZmRwLjFfNjYxMTgwMDNORQ==&unique=1525286306)

The information contained herein is based on data compiled from the chemical components of the (M)SDS and may not accurately represent the safety hazards for the product. Only the manufacturer of the product can make actual representations about the hazard profile of a chemical product. No warranty is expressed or implied regarding the accuracy of these data or the results to be obtained from the use thereof.

© 2017 Chemical Safety Software

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Acetone

Product Number : 650501

Brand : Sigma-Aldrich

Index-No. : 606-001-00-8

CAS-No. : 67-64-1

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225  
Eye irritation (Category 2A), H319  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.  
H319 Causes serious eye irritation.  
H336 May cause drowsiness or dizziness.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.  
P233 Keep container tightly closed.  
P240 Ground/bond container and receiving equipment.  
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.  
P242 Use only non-sparking tools.  
P243 Take precautionary measures against static discharge.  
P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.



P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>3</sub> H <sub>6</sub> O
Molecular weight	: 58.08 g/mol
CAS-No.	: 67-64-1
EC-No.	: 200-662-2
Index-No.	: 606-001-00-8
Registration number	: 01-2119471330-49-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Acetone</b>	Flam. Liq. 2; Eye Irrit. 2A; STOT SE 3; H225, H319, H336	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Dry powder Dry sand

#### Unsuitable extinguishing media

Do NOT use water jet.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Acetone	67-64-1	TWA	250 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section)		

		Not classifiable as a human carcinogen		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	250 ppm 590 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1,000 ppm 2,400 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		STEL	750 ppm 1,780 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	3,000 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	500 ppm 1,200 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Acetone	25 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			

#### Predicted No Effect Concentration (PNEC)

Compartment	Value
Soil	33.3 mg/kg
Marine water	1.06 mg/l
Fresh water	10.6 mg/l
Marine sediment	3.04 mg/kg
Fresh water sediment	30.4 mg/kg
Onsite sewage treatment plant	100 mg/l

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

Splash contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                             |
|-------------------------------------------------|---------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                                                   |
| b) Odour                                        | No data available                                                                           |
| c) Odour Threshold                              | No data available                                                                           |
| d) pH                                           | No data available                                                                           |
| e) Melting point/freezing point                 | Melting point/range: -94 °C (-137 °F)                                                       |
| f) Initial boiling point and boiling range      | 56 °C (133 °F) at 1,013 hPa (760 mmHg)                                                      |
| g) Flash point                                  | -17.0 °C (1.4 °F) - closed cup                                                              |
| h) Evaporation rate                             | No data available                                                                           |
| i) Flammability (solid, gas)                    | No data available                                                                           |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 13 %(V)<br>Lower explosion limit: 2 %(V)                             |
| k) Vapour pressure                              | 533.3 hPa (400.0 mmHg) at 39.5 °C (103.1 °F)<br>245.3 hPa (184.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                           |
| m) Relative density                             | 0.791 g/mL at 25 °C (77 °F)                                                                 |
| n) Water solubility                             | completely miscible                                                                         |
| o) Partition coefficient: n-octanol/water       | log Pow: -0.24                                                                              |
| p) Auto-ignition temperature                    | 465.0 °C (869.0 °F)                                                                         |
| q) Decomposition temperature                    | No data available                                                                           |

- r) Viscosity No data available
- s) Explosive properties No data available
- t) Oxidizing properties No data available

## 9.2 Other safety information

Surface tension 23.2 mN/m at 20.0 °C (68.0 °F)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Bases, Oxidizing agents, Reducing agents, Acetone reacts violently with phosphorous oxychloride.

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 5,800 mg/kg

Remarks: Behavioral:Altered sleep time (including change in righting reflex). Behavioral:Tremor. Behavioral:Headache. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhoea.

LC50 Inhalation - Rat - 8 h - 50,100 mg/m<sup>3</sup>

Remarks: Drowsiness Dizziness Unconsciousness

LD50 Dermal - Guinea pig - 7,426 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Mild skin irritation - 24 h

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

#### Respiratory or skin sensitisation

- Guinea pig

Result: Does not cause skin sensitisation.

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as

probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

### Reproductive toxicity

No data available

No data available

### Specific target organ toxicity - single exposure

May cause drowsiness or dizziness.

### Specific target organ toxicity - repeated exposure

No data available

### Aspiration hazard

No data available

### Additional Information

RTECS: AL3150000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney - Irregularities - Based on Human Evidence

Skin - Dermatitis - Based on Human Evidence

Kidney - Irregularities - Based on Human Evidence

Skin - Dermatitis - Based on Human Evidence

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish LC50 - *Oncorhynchus mykiss* (rainbow trout) - 5,540 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates LC50 - *Daphnia magna* (Water flea) - 8,800 mg/l - 48 h

Toxicity to algae Remarks: No data available

### 12.2 Persistence and degradability

Biodegradability Result: 91 % - Readily biodegradable.  
(OECD Test Guideline 301B)

### 12.3 Bioaccumulative potential

Does not bioaccumulate.

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1090      Class: 3      Packing group: II  
Proper shipping name: Acetone  
Reportable Quantity (RQ): 5000 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1090      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: ACETONE

### IATA

UN number: 1090      Class: 3      Packing group: II  
Proper shipping name: Acetone

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

This material does not contain any components with a section 302 EHS TPQ.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Acetone	67-64-1	1993-02-16

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Acetone	67-64-1	1993-02-16

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
STOT SE	Specific target organ toxicity - single exposure

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.21

Revision Date: 08/21/2018

Print Date: 10/19/2018



# POCH Safety Data Sheet

According to Regulation (EC) No. 1907/2006 (REACH). Creation date / last update: 2002-10-15 / 2005-04-22

## 1. Identification of the substance/preparation and of the company/undertaking

### **BENZENE**

Catalogue Numbers: 99,9% standard for GC-162500320; pure-162500426; pure p. a.-162500110; for HPLC-162503155;  
Pochsolv-162505156;

Use of the substance / preparation: analytical and chemical reagent for synthesis solvent

POCH SA

44-101 Gliwice, Sowinskiego Str. 11

tel.: +48 32 23-92-381; fax: +48 32 23-92-370; e-mail: export@poch.com.pl

Emergency telephone no: +48 606-659-006

## 2. Hazard identification

*Highly flammable. May cause cancer. Toxic: danger of serious damage to health by prolonged exposure through inhalation, in contact with skin and if swallowed.*



## 3. Composition/information on ingredients

CAS-No.: 71-43-2

Molecular mass: 78.11

Molecular formula:  $C_6H_6$

WE Number: 200-753-7

EC-Index No.: 601-020-00-8

## 4. First aid measures

After eye contact: *rinse out with plenty of water with the eyelid held wide open. Call in ophthalmologist.*

After skin contact: *wash off with plenty of water. Remove contaminated clothing.*

After swallowing: *make victim drink plenty of water. Avoid vomiting (risk of aspiration). Laxative: paraffin oil (3 mg/kg), sodium sulfate (1 tablespoon 1/4 l water). Lavage of stomach only if necessary. Call in physician.*

After inhalation: *fresh air. If necessary, apply mouth- to- mouth resuscitation or mechanical ventilation.*

## 5. Fire-fighting measures

Suitable extinguishing media: *foam, powder*

Special risk: *combustible. Vapours heavier than air. Formation of explosive mixtures possible with air. Keep away from sources of fire.*

*Take measures to prevent electrostatic charging. Development of hazardous gases or vapours possible in the event of fire.*

Special protective equipment for fire fighting:

Other information: *contain escaping vapours with spray water. Do not stay in dangerous zone without self- contained breathing apparatus. Prevent fire- fighting water from entering surface water or groundwater*

Prevent fire-fighting water from entering surface water or groundwater. Cool container with spray water from a safe distance.

Contain escaping vapours with water.

## 6. Accidental release measures

*Do not inhale vapours/aerosols. Avoid substance contact. Ensure supply of fresh air in enclosed rooms. Take up with liquid- absorbent material. Forward for disposal. Clean up affected area. Do not allow to enter sewerage system (risk of explosion).*

## **BENZENE**

### **7. Handling and storage**

Handling: *Use with adequate ventilation. Use of the basic principles of Industrial Hygiene. Use according to good industry practice. Work under hood. Do not inhale substance. Do not empty into sewerage system. Use protective equipment according to p.8. Avoid skin contact. Protect against electrostatic charges. Keep away from source of ignition.*

Storage: *tightly closed. Dry well-ventilated place. Protect from light. Keep away from sources of ignition and heat. At +15 to + 25 deg C.*

### **8. Exposure controls/personal protection**

Specific control parameter:

*Provide exhaust ventilation. Ensure the eye wash station and safety showers. Protective equipment should be selected for the working place, depending on concentration and quantity of the hazardous product handled. The resistance of the protective clothing to chemicals should be ascertained with respective supplier.*

Personal protective equipment:

respiratory protection: *required when vapours/aerosols are generated - gas mask with specific absorber.*

eye protection: *required - safety goggles.*

hand protection: *required - protective clothing.*

body protection: *required - protective clothing.*

industrial hygiene: *immediately change contaminated clothing. Apply skin - protective barrier cream. Wash hands and face after working with substance.*

### **9. Physical and chemical properties**

Form: *liquid*

Colour: *colourless*

Odour: *characteristic*

pH value: *not available*

Melting point: *5°C*

Boiling point: *80°C*

Autoignition temperature: *555°C*

Flash point: *-11°C*

Explosion limit:

lower: *1,4 Vol%*

upper: *8 Vol%*

dynamic viscosity: *(20°C): 0,66 mPa\*s*

kinematical viscosity: *0,75 mm<sup>2</sup>/s*

Vapour pressure: *100 mbar (20°C)*

Density: *0,88 g/cm<sup>3</sup> (20°C)*

Bulk density: *not applicable*

Solubility:

in water: *1,8 g/l (20°C)*

in organic solvents: *soluble*

log P(w/o): *2,65. Bioconcentration factor: 1,10.*

## **BENZENE**

### **10. Stability and reactivity**

Conditions to be avoided: *high temperature*

Substances to be avoided: *nonorganic acids, sulfur, halogen-halogen compounds, oxidizing agents, peroxide compounds, oxyhalogenic compounds, halogenic hydrocarbons, rubber.*

Hazardous decomposition products: *no information available*

Other information: *volatile in steam. Unsuitable workings materials: various plastics*

### **11. Toxicological information**

Toxicological information: *LD50 (oral rat) 930 mg/kg, LC50 (inhalation rat) 10 000 ppm (vol.) /7h. Experience has shown this substance to be carcinogenic to man.*

Other information: *After skin contact: irritations, danger of absorption, Degreasing effect on the skin possibly followed by secondary inflammation; After swallowing: nausea and vomiting; After absorption: pain and dizziness, cardiac arrhythmia, drop in blood pressure, dyspnoea, spasms, narcosis, respiratory paralysis, death; After eye contact: irritations of mucous membranes. Carcinogenic class 1. This substance should be handled with particular care.*

### **12. Ecological information**

*Log P(w/o): 2,65. No appreciable bioaccumulation potential is to be expected. Toxicity: Fish: Onchorhynchus mykiss LC50: 5,3 mg/l/96h. C. auratus LC50: 34 mg/l/96h. Daphnia: Daphnia magma EC50: 200 mg/l/48h. Algae: Chlorella vulgaris: LC50: 530 mg/l/24h. Bacteria: Ps. putida EC10: 168 mg/l. Toxic effect on aquatic organisms. Biologic degradation: ThOD 3,1 g/g, B.O.D 10% ThOD, C.O.D. 19% ThOD. Hazard for drinking water supplies. Do not allow to enter waters, waste water or soil!*

### **13. Disposal considerations**

*POCH product packaging must be disposed of in compliance with the country-specific regulations or must be passed to a packaging return system. Handle contaminated packing in the same way as the substrate itself. Always contact a permitted waste disposal to assure compliance with all current local, state and federal regulations.*

### **14. Transport information**

ADR Class and package group: *3,II*

UN Number: *1114*

Name (acc. to UN): *benzene*

## **BENZENE**

### **15. Regulatory information**

*Labelling according to EC Directives.*

*Symbol: F, T; Flammable. Toxic.*

*R-phrases: 45-11-48/23/24/25; Highly flammable. May cause cancer. Toxic: danger of serious damage to health by prolonged exposure through inhalation, in contact with skin and if swallowed.*

*S-phrases: 53-45; In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). Avoid exposure - obtain special instructions before use. Restricted to professional users.*

*EC label.*

### **16. Other information**

*Reason for alteration: general update.*

*Informations contained in this SDS while accurate to the best knowledge*



### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Benzo[a]pyrene

Product Number : 48564

Brand : Supelco

Index-No. : 601-032-00-3

CAS-No. : 50-32-8

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Skin sensitisation (Category 1), H317

Germ cell mutagenicity (Category 1B), H340

Carcinogenicity (Category 1B), H350

Reproductive toxicity (Category 1B), H360

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H317 : May cause an allergic skin reaction.

H340 : May cause genetic defects.

H350 : May cause cancer.

H360 : May damage fertility or the unborn child.

H410 : Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 : Obtain special instructions before use.

P202 : Do not handle until all safety precautions have been read and

P261	understood.
P272	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P273	Contaminated work clothing should not be allowed out of the workplace.
P280	Avoid release to the environment.
	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Synonyms : 3,4-Benzpyrene  
3,4-Benzopyrene  
Benzo[def]chrysene  
benzo[pqr]tetraphene

Formula : C<sub>20</sub>H<sub>12</sub>  
Molecular weight : 252.31 g/mol  
CAS-No. : 50-32-8  
EC-No. : 200-028-5  
Index-No. : 601-032-00-3

#### Hazardous components

Component	Classification	Concentration
<b>Benzo[a]pyrene</b>	Skin Sens. 1; Muta. 1B; Carc. 1B; Repr. 1B; Aquatic Acute 1; Aquatic Chronic 1; H317, H340, H350, H360, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

#### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

#### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

#### 6.4 Reference to other sections

For disposal see section 13.

---

### 7. HANDLING AND STORAGE

#### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

#### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

#### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

### 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

#### 8.1 Control parameters

##### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low		

		as possible. Suspected human carcinogen		
		Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		
Benzo[a]pyrene	50-32-8	TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		TWA	0.2 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.1 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		TWA	0.2 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		PEL	0.2 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	0.2 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

**Biological occupational exposure limits**

Component	CAS-No.	Parameters	Value	Biological	Basis
-----------	---------	------------	-------	------------	-------



				specimen	
	-	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |               |                   |
|---------------|-------------------|
| a) Appearance | Form: solid       |
| b) Odour      | No data available |

c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 177 - 180 °C (351 - 356 °F)
f) Initial boiling point and boiling range	495 °C (923 °F)
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	1.35 g/cm <sup>3</sup>
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 5.97
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Subcutaneous - Rat - 50 mg/kg

**Skin corrosion/irritation**

Skin - Mouse

Result: Mild skin irritation

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

Chronic exposure may cause dermatitis.

**Germ cell mutagenicity**

May alter genetic material.

In vivo tests showed mutagenic effects

**Carcinogenicity**

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 1 - Group 1: Carcinogenic to humans (Benzo[a]pyrene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benzo[a]pyrene)

OSHA: OSHA specifically regulated carcinogen (Benzo[a]pyrene)

**Reproductive toxicity**

May cause congenital malformation in the fetus.

Presumed human reproductive toxicant

May cause reproductive disorders.

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 0.25 mg/l - 48 h

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 0.02 mg/l - 72 h

**12.2 Persistence and degradability**

**12.3 Bioaccumulative potential**

Bioaccumulation Lepomis macrochirus (Bluegill) - 48 h - 0.0005 mg/l

Bioconcentration factor (BCF): 3,208

**12.4 Mobility in soil**

No data available

## 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

## 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Benzo[a]pyrene)  
Reportable Quantity (RQ): 1 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benzo[a]pyrene)  
Marine pollutant:yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[a]pyrene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

### SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
--	---------	---------------

Benzo[a]pyrene

50-32-8

2007-03-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.  
Benzo[a]pyrene

CAS-No.  
50-32-8

Revision Date  
1990-01-01

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H317	May cause an allergic skin reaction.
H340	May cause genetic defects.
H350	May cause cancer.
H360	May damage fertility or the unborn child.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Muta.	Germ cell mutagenicity

**HMIS Rating**

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

**NFPA Rating**

Health hazard:	3
Fire Hazard:	0
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.8

Revision Date: 02/02/2018

Print Date: 10/19/2018

## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/17/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benzo[**a**]fluoranthene  
Product Number : 48490  
Brand : Supelco  
Index-No. : 601-034-00-4  
CAS-No. : 205-99-2

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: 3,4-Benzofluoranthene
Formula	: C<SB>20</SB>H<SB>12</SB>
Molecular weight	: 252.31 g/mol
CAS-No.	: 205-99-2
EC-No.	: 205-911-9
Index-No.	: 601-034-00-4

#### Hazardous components

Component	Classification	Concentration
<b>Benz[e]acephenanthrylene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

Carbon oxides

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

No data available

**6. ACCIDENTAL RELEASE MEASURES**

**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

**6.4 Reference to other sections**

For disposal see section 13.

**7. HANDLING AND STORAGE**

**7.1 Precautions for safe handling**

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

**8. EXPOSURE CONTROLS/PERSONAL PROTECTION**

**8.1 Control parameters**

**Components with workplace control parameters**

	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen
--	---------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Biological occupational exposure limits**

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Benz[e]acephenant hrylene	205-99-2	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			



## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                         |
|--------------------------------------------|---------------------------------------------------------|
| a) Appearance                              | Form: solid                                             |
| b) Odour                                   | No data available                                       |
| c) Odour Threshold                         | No data available                                       |
| d) pH                                      | No data available                                       |
| e) Melting point/freezing point            | Melting point/range: 163 - 165 °C (325 - 329 °F) - lit. |
| f) Initial boiling point and boiling range | No data available                                       |
| g) Flash point                             | No data available                                       |
| h) Evaporation rate                        | No data available                                       |
| i) Flammability (solid, gas)               | No data available                                       |

- |    |                                              |                   |
|----|----------------------------------------------|-------------------|
| j) | Upper/lower flammability or explosive limits | No data available |
| k) | Vapour pressure                              | No data available |
| l) | Vapour density                               | No data available |
| m) | Relative density                             | No data available |
| n) | Water solubility                             | No data available |
| o) | Partition coefficient: n-octanol/water       | No data available |
| p) | Auto-ignition temperature                    | No data available |
| q) | Decomposition temperature                    | No data available |
| r) | Viscosity                                    | No data available |
| s) | Explosive properties                         | No data available |
| t) | Oxidizing properties                         | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

TDLo Oral - Mouse - 7.57 mg/kg

Remarks: Liver:Changes in liver weight. Endocrine:Changes in thymus weight.

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

**Respiratory or skin sensitisation**

No data available

**Germ cell mutagenicity**

No data available

**Carcinogenicity**

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[e]acephenanthrylene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[e]acephenanthrylene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available

No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates      Immobilization EC50 - Daphnia magna (Water flea) - > 1.024 mg/l - 24 h(Benz[e]acephenanthrylene)

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Benz[e]acephenanthrylene)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

Not dangerous goods

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F

Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.

(Benz[e]acephenanthrylene)

Marine pollutant : yes

### IATA

UN number: 3077      Class: 9      Packing group: III

Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benz[e]acephenanthrylene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

### SARA 311/312 Hazards

Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

### California Prop. 65 Components

	CAS-No.	Revision Date
, which is/are known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .	205-99-2	2007-09-28
Benz[e]acephenanthrylene		

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

H350      May cause cancer.

H400 Very toxic to aquatic life.  
H410 Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 6.1

Revision Date: 07/17/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/16/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benzo[*k*]fluoranthene  
Product Number : 48492  
Brand : Supelco  
Index-No. : 601-036-00-5  
CAS-No. : 207-08-9

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>20</sub> H <sub>12</sub>
Molecular weight	: 252.31 g/mol
CAS-No.	: 207-08-9
EC-No.	: 205-916-6
Index-No.	: 601-036-00-5

#### Hazardous components

Component	Classification	Concentration
<b>Benzo[k]fluoranthene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

## 5.2 Special hazards arising from the substance or mixture

Carbon oxides

## 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

## 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Benzo[k]fluoranthene	207-08-9	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).



### **Skin protection**

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                         |
|-------------------------------------------------|---------------------------------------------------------|
| a) Appearance                                   | Form: crystalline<br>Colour: yellow                     |
| b) Odour                                        | No data available                                       |
| c) Odour Threshold                              | No data available                                       |
| d) pH                                           | No data available                                       |
| e) Melting point/freezing point                 | Melting point/range: 215 - 217 °C (419 - 423 °F) - lit. |
| f) Initial boiling point and boiling range      | No data available                                       |
| g) Flash point                                  | No data available                                       |
| h) Evaporation rate                             | No data available                                       |
| i) Flammability (solid, gas)                    | No data available                                       |
| j) Upper/lower flammability or explosive limits | No data available                                       |
| k) Vapour pressure                              | No data available                                       |
| l) Vapour density                               | No data available                                       |

- |                                           |                   |
|-------------------------------------------|-------------------|
| m) Relative density                       | No data available |
| n) Water solubility                       | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature              | No data available |
| q) Decomposition temperature              | No data available |
| r) Viscosity                              | No data available |
| s) Explosive properties                   | No data available |
| t) Oxidizing properties                   | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

Carcinogenicity- Rat- Implant

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benzo[k]fluoranthene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benzo[k]fluoranthene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### **Reproductive toxicity**

No data available

No data available

#### **Specific target organ toxicity - single exposure**

No data available

#### **Specific target organ toxicity - repeated exposure**

No data available

#### **Aspiration hazard**

No data available

#### **Additional Information**

RTECS: DF6350000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

No data available

### **12.2 Persistence and degradability**

No data available

### **12.3 Bioaccumulative potential**

No data available

### **12.4 Mobility in soil**

No data available(Benzo[k]fluoranthene)

### **12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### **12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

---

## **13. DISPOSAL CONSIDERATIONS**

### **13.1 Waste treatment methods**

#### **Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### **Contaminated packaging**

Dispose of as unused product.

---

## **14. TRANSPORT INFORMATION**

### **DOT (US)**

UN number: 3077

Class: 9

Packing group: III

Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[k]fluoranthene)

Reportable Quantity (RQ) : 5000 lbs

no  
Poison Inhalation Hazard: No

**IMDG**

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benzo[k]fluoranthene)  
Marine pollutant : yes

**IATA**

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[k]fluoranthene)

**Further information**

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Benzo[k]fluoranthene	207-08-9	1994-04-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Benzo[k]fluoranthene	207-08-9	1994-04-01

**California Prop. 65 Components**

	CAS-No.	Revision Date
, which is/are known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> . Benzo[k]fluoranthene	207-08-9	2007-09-28

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.1

Revision Date: 07/16/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/17/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benz[*a*]anthracene

Product Number : 48563  
Brand : Supelco  
Index-No. : 601-033-00-9

CAS-No. : 56-55-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES

Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms : 1,2-Benzanthracene  
Tetraphene

Formula : C<sub>18</sub>H<sub>12</sub>  
Molecular weight : 228.29 g/mol  
CAS-No. : 56-55-3  
EC-No. : 200-280-6  
Index-No. : 601-033-00-9

#### Hazardous components

Component	Classification	Concentration
<b>Benz[a]anthracene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).



### **Skin protection**

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                  |
|-------------------------------------------------|--------------------------------------------------|
| a) Appearance                                   | Form: solid                                      |
| b) Odour                                        | No data available                                |
| c) Odour Threshold                              | No data available                                |
| d) pH                                           | No data available                                |
| e) Melting point/freezing point                 | Melting point/range: 157 - 159 °C (315 - 318 °F) |
| f) Initial boiling point and boiling range      | 437.6 °C (819.7 °F)                              |
| g) Flash point                                  | No data available                                |
| h) Evaporation rate                             | No data available                                |
| i) Flammability (solid, gas)                    | No data available                                |
| j) Upper/lower flammability or explosive limits | No data available                                |
| k) Vapour pressure                              | No data available                                |
| l) Vapour density                               | No data available                                |
| m) Relative density                             | No data available                                |

- |                                           |                   |
|-------------------------------------------|-------------------|
| n) Water solubility                       | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature              | No data available |
| q) Decomposition temperature              | No data available |
| r) Viscosity                              | No data available |
| s) Explosive properties                   | No data available |
| t) Oxidizing properties                   | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intravenous - Rat - > 200 mg/kg

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[a]anthracene)  
IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[a]anthracene)  
NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[a]anthracene)  
NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[a]anthracene)  
OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.  
No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available  
No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Benz[a]anthracene)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

---

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

Not dangerous goods

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benz[a]anthracene)  
Marine pollutant : yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benz[a]anthracene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

### California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Benz[a]anthracene	56-55-3	2007-09-28

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Benz[a]anthracene	56-55-3	2007-09-28

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

H350      May cause cancer.  
H400      Very toxic to aquatic life.

H410

Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.1

Revision Date: 07/17/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

Version 4.7  
Revision Date 05/27/2016  
Print Date 10/19/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : 1,3-Butadiene  
Product Number : 295035  
Brand : Aldrich  
Index-No. : 601-013-00-X  
CAS-No. : 106-99-0

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable gases (Category 1), H220  
Gases under pressure (Liquefied gas), H280  
Germ cell mutagenicity (Category 1B), H340  
Carcinogenicity (Category 1A), H350

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H220 : Extremely flammable gas.  
H280 : Contains gas under pressure; may explode if heated.  
H340 : May cause genetic defects.  
H350 : May cause cancer.

Precautionary statement(s)

P201 : Obtain special instructions before use.  
P202 : Do not handle until all safety precautions have been read and understood.  
P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P280 Wear protective gloves/ protective clothing/ eye protection/ face protection.  
 P308 + P313 IF exposed or concerned: Get medical advice/ attention.  
 P377 Leaking gas fire: Do not extinguish, unless leak can be stopped safely.  
 P381 Eliminate all ignition sources if safe to do so.  
 P405 Store locked up.  
 P410 + P403 Protect from sunlight. Store in a well-ventilated place.  
 P501 Dispose of contents/ container to an approved waste disposal plant.

**2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none**

---

**3. COMPOSITION/INFORMATION ON INGREDIENTS**

**3.1 Substances**

Formula : C<sub>4</sub>H<sub>6</sub>  
 Molecular weight : 54.09 g/mol  
 CAS-No. : 106-99-0  
 EC-No. : 203-450-8  
 Index-No. : 601-013-00-X

**Hazardous components**

Component	Classification	Concentration
<b>1,3-Butadiene</b>		
	Flam. Gas 1; Press. Gas Liquefied gas; Muta. 1B; Carc. 1A; H220, H280, H340, H350	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

**4. FIRST AID MEASURES**

**4.1 Description of first aid measures**

**General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

**If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES**

**5.1 Extinguishing media**

**Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Clean up promptly by sweeping or vacuum.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Contents under pressure. Air sensitive. Light sensitive. Shock or heat may detonate May explode when heated. Handle and store under inert gas.

Storage class (TRGS 510): Gases

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Potential Occupational Carcinogen See Appendix A		
1,3-Butadiene	106-99-0	TWA	2 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cancer Suspected human carcinogen		
		TWA	2.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cancer Suspected human carcinogen		
		TWA	1 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		



		TWA	1.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		STEL	5.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		STEL	5 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		See 1910.1051		
		PEL	1.000000 ppm	OSHA Specifically Regulated Chemicals/Carcinogens
		<p>1910.1051  This section applies to all occupational exposures to 1,3-Butadiene (BD), Chemical Abstracts Service Registry No. 106-99-0, except as provided in paragraph (a)(2) of this section. Except for the recordkeeping provisions in paragraph (m)(1) of this section, this section does not apply to the processing, use, or handling of products containing BD or to other work operations and streams in which BD is present where objective data are reasonably relied upon that demonstrate the work operation or the product or the group of products or operations to which it belongs may not reasonably be foreseen to release BD in airborne concentrations at or above the action level or in excess of the STEL under the expected conditions of processing, use, or handling that will cause the greatest possible release or in any plausible accident. This section also does not apply to work operations, products or streams where the only exposure to BD is from liquid mixtures containing 0.1% or less of BD by volume or the vapors released from such liquids, unless objective data become available that show that airborne concentrations generated by such mixtures can exceed the action level or STEL under reasonably predictable conditions of processing, use or handling that will cause the greatest possible release. Except for labeling requirements and requirements for emergency response, this section does not apply to the storage, transportation, distribution or sale of BD or liquid mixtures in intact containers or in transportation pipelines sealed in such a manner as to fully contain BD vapors or liquid. Where products or processes containing BD are exempted under paragraph (a)(2) of this section, the employer shall maintain records of the objective data supporting that exemption and the basis for the employer's reliance on the data, as provided in paragraph (m)(1) of this section  1,3-Butadiene means an organic compound with chemical formula <math>CH_2=CH-CH=CH_2</math> that has a molecular weight of approximately 54.15 g/mole  OSHA specifically regulated carcinogen</p>		
		STEL	5.000000 ppm	OSHA Specifically Regulated Chemicals/Carcinogens
		<p>1910.1051  This section applies to all occupational exposures to 1,3-Butadiene (BD), Chemical Abstracts Service Registry No. 106-99-0, except as provided in paragraph (a)(2) of this section. Except for the recordkeeping provisions in paragraph (m)(1) of this section, this section does not apply to the processing, use, or handling of</p>		

		<p>products containing BD or to other work operations and streams in which BD is present where objective data are reasonably relied upon that demonstrate the work operation or the product or the group of products or operations to which it belongs may not reasonably be foreseen to release BD in airborne concentrations at or above the action level or in excess of the STEL under the expected conditions of processing, use, or handling that will cause the greatest possible release or in any plausible accident. This section also does not apply to work operations, products or streams where the only exposure to BD is from liquid mixtures containing 0.1% or less of BD by volume or the vapors released from such liquids, unless objective data become available that show that airborne concentrations generated by such mixtures can exceed the action level or STEL under reasonably predictable conditions of processing, use or handling that will cause the greatest possible release. Except for labeling requirements and requirements for emergency response, this section does not apply to the storage, transportation, distribution or sale of BD or liquid mixtures in intact containers or in transportation pipelines sealed in such a manner as to fully contain BD vapors or liquid. Where products or processes containing BD are exempted under paragraph (a)(2) of this section, the employer shall maintain records of the objective data supporting that exemption and the basis for the employer's reliance on the data, as provided in paragraph (m)(1) of this section</p> <p>1,3-Butadiene means an organic compound with chemical formula CH<sub>2</sub>=CH-CH=CH<sub>2</sub> that has a molecular weight of approximately 54.15 g/mole</p> <p>OSHA specifically regulated carcinogen</p>		
		PEL	1 ppm 2.2 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		see section 5201		
		STEL	5 ppm 11 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		see section 5201		

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
1,3-Butadiene	106-99-0	1,2-Dihydroxy-4-(N-acetylcysteinyl)-butane	2.5000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
		Mixture of N-1 and N-2(hydroxybutenyl)valine	2.5pmol/g	Hemoglobin (Hb) adducts in blood	ACGIH - Biological Exposure Indices (BEI)
		Not critical			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                                                      |
|--------------------------------------------|--------------------------------------------------------------------------------------|
| a) Appearance                              | Form: Liquefied gas                                                                  |
| b) Odour                                   | No data available                                                                    |
| c) Odour Threshold                         | No data available                                                                    |
| d) pH                                      | No data available                                                                    |
| e) Melting point/freezing point            | Melting point/range: -109 °C (-164 °F) - lit.                                        |
| f) Initial boiling point and boiling range | -4.5 °C (23.9 °F) - lit.                                                             |
| g) Flash point                             | -76 °C (-105 °F) - closed cup - Tested according to Annex V of Directive 67/548/EEC. |
| h) Evaporation rate                        | No data available                                                                    |
| i) Flammability (solid, gas)               | No data available                                                                    |

j) Upper/lower flammability or explosive limits	Upper explosion limit: 16.3 %(V) Lower explosion limit: 1.4 %(V)
k) Vapour pressure	ca.2,400 hPa (1,800 mmHg) at 20 °C (68 °F) 3,200 hPa (2,400 mmHg) at 30 °C (86 °F) 5,700 hPa (4,275 mmHg) at 50 °C (122 °F)
l) Vapour density	No data available
m) Relative density	0.62 g/cm <sup>3</sup> at 20 °C (68 °F)
n) Water solubility	0.5 g/l at 20 °C (68 °F) - Tested according to Annex V of Directive 67/548/EEC.
o) Partition coefficient: n-octanol/water	log Pow: 1.85 at 23 °C (73 °F)
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Test for peroxide formation before using or discard after 3 months.  
Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents, Oxygen, Copper, Copper alloys, Carbides, Halogens, Metal oxides, Metals

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides  
Other decomposition products - No data available  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 5,480 mg/kg

LC50 Inhalation - Rat - 4 h - 285 mg/l

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

No data available

**Germ cell mutagenicity**

In vivo tests showed mutagenic effects

**Carcinogenicity**

Carcinogenicity - Rat - Inhalation

Tumorigenic: Carcinogenic by RTECS criteria. Cardiac: Tumors. Lungs, Thorax, or Respiration: Tumors.

This is or contains a component that has been reported to be carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Human carcinogen.

IARC: 1 - Group 1: Carcinogenic to humans (1,3-Butadiene)

NTP: Known to be human carcinogen (1,3-Butadiene)

OSHA: OSHA specifically regulated carcinogen (1,3-Butadiene)

**Reproductive toxicity**

No data available

Reproductive toxicity - Mouse - Inhalation

Effects on Fertility: Post-implantation mortality (e.g., dead and/or resorbed implants per total number of implants).

Effects on Embryo or Fetus: Extra embryonic structures (e.g., placenta, umbilical cord). Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

No data available

Developmental Toxicity - Rat - Inhalation

Specific Developmental Abnormalities: Musculoskeletal system.

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

Cholinesterase inhibitors can cause heavy salivation and secretion in the lungs, lachrymation, blurred vision, involuntary defecation, diarrhea, tremor, ataxia, sweating, hypothermia, lowered heart rate, and/or a fall in blood pressure as a result of their action at cholinergic nerve sites., narcosis, Headache, Nausea, Vomiting, Dizziness, Drowsiness, Confusion., Weakness, Muscle cramps/spasms., Change in pupil size., Tremors, Seizures., Incoordination., Convulsions, Coma

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - other fish - 71.5 mg/l - 24 h

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1010      Class: 2.1  
 Proper shipping name: Butadienes, stabilized  
 Reportable Quantity (RQ): 10 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 1010      Class: 2.1  
 Proper shipping name: BUTADIENES, STABILIZED

EMS-No: F-D, S-U

**IATA**

UN number: 1010      Class: 2.1  
 Proper shipping name: Butadienes, stabilized  
 IATA Passenger: Not permitted for transport

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**SARA 311/312 Hazards**

Fire Hazard, Sudden Release of Pressure Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the		

State of California to cause cancer.  
1,3-Butadiene

106-99-0

2007-09-28

WARNING: This product contains a chemical known to the  
State of California to cause birth defects or other reproductive  
harm.  
1,3-Butadiene

CAS-No.  
106-99-0

Revision Date  
2007-09-28

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Carc.	Carcinogenicity
Flam. Gas	Flammable gases
H220	Extremely flammable gas.
H280	Contains gas under pressure; may explode if heated.
H340	May cause genetic defects.
H350	May cause cancer.
Muta.	Germ cell mutagenicity
Press. Gas	Gases under pressure

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	4
Physical Hazard	3

### NFPA Rating

Health hazard:	0
Fire Hazard:	4
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.  
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.7

Revision Date: 05/27/2016

Print Date: 10/19/2018

## SAFETY DATA SHEET

Version 3.8  
Revision Date 12/29/2016  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Butylbenzene

Product Number : 41105  
Brand : Supelco

CAS-No. : 104-51-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Warning

Hazard statement(s)  
H226 : Flammable liquid and vapour.

Precautionary statement(s)  
P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.  
P233 : Keep container tightly closed.  
P240 : Ground/bond container and receiving equipment.  
P241 : Use explosion-proof electrical/ ventilating/ lighting/ equipment.  
P242 : Use only non-sparking tools.  
P243 : Take precautionary measures against static discharge.  
P280 : Wear protective gloves/ eye protection/ face protection.  
P303 + P361 + P353 : IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.  
P370 + P378 : In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.



P403 + P235  
P501

Store in a well-ventilated place. Keep cool.  
Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula : C<sub>10</sub>H<sub>14</sub>  
Molecular weight : 134.22 g/mol  
CAS-No. : 104-51-8  
EC-No. : 203-209-7

#### Hazardous components

Component	Classification	Concentration
<b>Butylbenzene</b>		
	Flam. Liq. 3; H226	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

Use water spray to cool unopened containers.

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Avoid breathing vapours, mist or gas. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

## 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

## 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

## 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an

industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-88.0 °C (-126.4 °F)
f) Initial boiling point and boiling range	182.0 - 183.0 °C (359.6 - 361.4 °F)
g) Flash point	59.0 °C (138.2 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 5.8 %(V) Lower explosion limit: 0.8 %(V)
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	0.86 g/cm <sup>3</sup>
n) Water solubility	insoluble
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	412.0 °C (773.6 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### **9.2 Other safety information**

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

**Additional Information**

RTECS: CY9070000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity****12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 2709      Class: 3      Packing group: III

Proper shipping name: Butyl benzenes

Reportable Quantity (RQ):

Marine pollutant:yes

Poison Inhalation Hazard: No

**IMDG**

UN number: 2709      Class: 3      Packing group: III      EMS-No: F-E, S-D

Proper shipping name: BUTYLBENZENES

Marine pollutant:yes

**IATA**

UN number: 2709      Class: 3      Packing group: III

Proper shipping name: Butylbenzenes

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Fire Hazard

**Massachusetts Right To Know Components**

Butylbenzene

CAS-No.  
104-51-8Revision Date  
1993-04-24

## Pennsylvania Right To Know Components

Butylbenzene	CAS-No. 104-51-8	Revision Date 1993-04-24
--------------	---------------------	-----------------------------

## New Jersey Right To Know Components

Butylbenzene	CAS-No. 104-51-8	Revision Date 1993-04-24
--------------	---------------------	-----------------------------

## California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

### NFPA Rating

Health hazard:	0
Fire Hazard:	2
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.8

Revision Date: 12/29/2016

Print Date: 01/21/2019

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Carbon disulfide

Product Number : 335266

Brand : Sigma-Aldrich

Index-No. : 006-003-00-3

CAS-No. : 75-15-0

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225

Acute toxicity, Inhalation (Category 4), H332

Skin irritation (Category 2), H315

Eye irritation (Category 2A), H319

Reproductive toxicity (Category 2), H361

Specific target organ toxicity - repeated exposure, Inhalation (Category 1), H372

Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225	Highly flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: CS <sub>2</sub>
Molecular weight	: 76.14 g/mol
CAS-No.	: 75-15-0
EC-No.	: 200-843-6
Index-No.	: 006-003-00-3

#### Hazardous components

Component	Classification	Concentration
<b>Carbon disulphide</b>	Flam. Liq. 2; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; Repr. 2; STOT RE 1; Aquatic Acute 2; H225, H315, H319, H332, H361, H372, H401	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.



---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Flash back possible over considerable distance., Container explosion may occur under fire conditions., Vapours may form explosive mixture with air., May explode when heated.

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Refrigerate before opening.

Storage class (TRGS 510): 3: Flammable liquids

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Carbon disulphide	75-15-0	TWA	1 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Peripheral Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	1 ppm 3 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	10 ppm 30 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		See Table Z-2		
		TWA	20 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		CEIL	30 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		Peak	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		PEL	1 ppm 3 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		STEL	12 ppm 36 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		C	30 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	2-Thiothiazolidine-4-carboxylic acid (TTCA)	0.5mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                 |                                                      |
|---------------------------------|------------------------------------------------------|
| a) Appearance                   | Form: liquid<br>Colour: colourless                   |
| b) Odour                        | Stench.                                              |
| c) Odour Threshold              | No data available                                    |
| d) pH                           | No data available                                    |
| e) Melting point/freezing point | Melting point/range: -112 - -111 °C (-170 - -168 °F) |

f) Initial boiling point and boiling range	46 °C (115 °F)
g) Flash point	-30 °C (-22 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 50 %(V) Lower explosion limit: 1.3 %(V)
k) Vapour pressure	394.956 hPa (296.241 mmHg) at 20 °C (68 °F) 1,342.711 hPa (1,007.116 mmHg) at 55 °C (131 °F)
l) Vapour density	2.63 - (Air = 1.0)
m) Relative density	1.266 g/mL at 25 °C (77 °F)
n) Water solubility	2.9 g/l at 20 °C (68 °F) - OECD Test Guideline 105
o) Partition coefficient: n-octanol/water	log Pow: 2.7 at 25 °C (77 °F)
p) Auto-ignition temperature	97 - 107 °C (207 - 225 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

Surface tension	71.9 mN/m at 19.5 °C (67.1 °F)
Relative vapour density	2.63 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Alkali metals, Zinc, Amines, Azides, Oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Sulphur oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - female - > 2,000 mg/kg  
(OECD Test Guideline 423)

LC50 Inhalation - Rat - male and female - 4 h - 10.35 mg/l  
(OECD Test Guideline 403)

Dermal: No data available

No data available

**Skin corrosion/irritation**

No data available

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

- Mouse

Result: Does not cause skin sensitisation.  
(OECD Test Guideline 429)

**Germ cell mutagenicity**

Laboratory experiments have shown mutagenic effects.

Ames test

Salmonella typhimurium

Result: negative

**Carcinogenicity**

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

Suspected human reproductive toxicant

May cause reproductive disorders.

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: FF6650000

May cause convulsions.

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to fish LC50 - *Poecilia reticulata* (guppy) - 4 mg/l - 96 h  
(OECD Test Guideline 203)

Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - *Daphnia magna* (Water flea) - 2.1 mg/l - 48 h  
(OECD Test Guideline 202)

Toxicity to algae Growth inhibition EC50 - *Chlorella pyrenoidosa* - 21 mg/l - 96 h  
(OECD Test Guideline 201)

**12.2 Persistence and degradability**

Biodegradability aerobic - Exposure time 28 d  
Result: > 80 % - Readily biodegradable.  
(OECD Test Guideline 301D)

### 12.3 Bioaccumulative potential

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life.

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1131 Class: 3 (6.1) Packing group: I  
Proper shipping name: Carbon disulfide  
Reportable Quantity (RQ): 100 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1131 Class: 3 (6.1) Packing group: I EMS-No: F-E, S-D  
Proper shipping name: CARBON DISULPHIDE

### IATA

UN number: 1131 Class: 3 (6.1)  
Proper shipping name: Carbon disulphide  
IATA Passenger: Not permitted for transport  
IATA Cargo: Not permitted for transport

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

The following components are subject to reporting levels established by SARA Title III, Section 302:

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-11-03

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-11-03

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-11-03

## Pennsylvania Right To Know Components

Carbon disulphide

CAS-No.  
75-15-0

Revision Date  
2008-11-03

## New Jersey Right To Know Components

Carbon disulphide

CAS-No.  
75-15-0

Revision Date  
2008-11-03

## California Prop. 65 Components

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Carbon disulphide

CAS-No.  
75-15-0

Revision Date  
2008-06-17

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.
Repr.	Reproductive toxicity

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.11

Revision Date: 03/19/2018

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 3.18  
Revision Date 08/14/2018  
Print Date 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Chloroform  
  
Product Number : C2432  
Brand : Sigma-Aldrich  
Index-No. : 602-006-00-4  
  
CAS-No. : 67-66-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302  
Acute toxicity, Inhalation (Category 3), H331  
Skin irritation (Category 2), H315  
Eye irritation (Category 2A), H319  
Carcinogenicity (Category 2), H351  
Reproductive toxicity (Category 2), H361d  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336  
Specific target organ toxicity - repeated exposure (Category 1), Liver, Kidney, H372  
Acute aquatic toxicity (Category 3), H402

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H302	Harmful if swallowed.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H331	Toxic if inhaled.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.



H361d	Suspected of damaging the unborn child.
H372	Causes damage to organs (Liver, Kidney) through prolonged or repeated exposure.
H402	Harmful to aquatic life.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P311	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	:	Trichloromethane Methyldiyne trichloride
Formula	:	CHCl <sub>3</sub>
Molecular weight	:	119.38 g/mol
CAS-No.	:	67-66-3
EC-No.	:	200-663-8
Index-No.	:	602-006-00-4

### Hazardous components

Component	Classification	Concentration
<b>Chloroform</b>	Acute Tox. 4; Acute Tox. 3; Skin Irrit. 2; Eye Irrit. 2A; Carc. 2; Repr. 2; STOT SE 3; STOT RE 1; Aquatic Acute 3; H302, H315, H319, H331, H336, H351, H361d, H372, H402	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Move out of dangerous area. Consult a physician. Show this safety data sheet to the doctor in attendance.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Chloroform	67-66-3	TWA	10 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Liver damage Embryo/fetal damage Confirmed animal carcinogen with unknown relevance to humans		
		ST	2 ppm 9.78 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		C	50 ppm 240 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate. Ceiling limit is to be determined from breathing-zone air samples.		
		PEL	2 ppm 9.78 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

### 8.2 Exposure controls

#### Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                           |
|-------------------------------------------------|---------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                                 |
| b) Odour                                        | sweet                                                                     |
| c) Odour Threshold                              | No data available                                                         |
| d) pH                                           | No data available                                                         |
| e) Melting point/freezing point                 | Melting point/range: -63 °C (-81 °F)                                      |
| f) Initial boiling point and boiling range      | 60.5 - 61.5 °C (140.9 - 142.7 °F)                                         |
| g) Flash point                                  | - DIN 51755 Part 1 does not flash                                         |
| h) Evaporation rate                             | No data available                                                         |
| i) Flammability (solid, gas)                    | No data available                                                         |
| j) Upper/lower flammability or explosive limits | No data available                                                         |
| k) Vapour pressure                              | 210 hPa (158 mmHg) at 20 °C (68 °F)                                       |
| l) Vapour density                               | 4.12 - (Air = 1.0)                                                        |
| m) Relative density                             | 1.492 g/mL at 25 °C (77 °F)                                               |
| n) Water solubility                             | 8.7 g/l at 23 °C (73 °F) - OECD Test Guideline 105                        |
| o) Partition coefficient: n-octanol/water       | log Pow: 1.97 at 25 °C (77 °F) - (ECHA), Bioaccumulation is not expected. |
| p) Auto-ignition temperature                    | > 600 °C (> 1,112 °F) at 1,013 hPa (760 mmHg) - DIN 51794                 |
| q) Decomposition temperature                    | Distillable in an undecomposed state at normal pressure.                  |
| r) Viscosity                                    | No data available                                                         |
| s) Explosive properties                         | No data available                                                         |
| t) Oxidizing properties                         | No data available                                                         |

### 9.2 Other safety information

- |                              |                                             |
|------------------------------|---------------------------------------------|
| Solubility in other solvents | organic solvent at 20 °C (68 °F) - miscible |
| Surface tension              | 27.1 mN/m at 20.0 °C (68.0 °F)              |
| Relative vapour density      | 4.12 - (Air = 1.0)                          |

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Contains the following stabiliser(s):

2-Methyl-2-butene ( $\geq 0.001$  -  $\leq 0.015$  %)

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

various plastics, Rubber

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male - 908 mg/kg

(OECD Test Guideline 401)

Remarks: Behavioral:Change in motor activity (specific assay). Behavioral:Ataxia. Lungs, Thorax, or Respiration:Respiratory stimulation.

LOEC Inhalation - Rat - male - 6 h - 500 ppm

Remarks: Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

LD50 Dermal - Rabbit - > 20,000 mg/kg

Remarks: (RTECS)

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Irritating to skin. - 24 h

Remarks: (ECHA)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Irritating to eyes.

Remarks: (ECHA)

#### Respiratory or skin sensitisation

Sensitisation test: - Guinea pig

Result: negative

(Maximisation Test)

Remarks: (ECHA)

#### Germ cell mutagenicity

Ames test

Salmonella typhimurium

Result: negative

reverse mutation assay

Escherichia coli

Result: negative

(ECHA)

OECD Test Guideline 474  
Rat - male and female - Bone marrow  
Result: negative

OECD Test Guideline 486  
Rat - male - Other cell types  
Result: negative

### **Carcinogenicity**

Carcinogenicity - Rat - Oral  
Tumorigenic: Carcinogenic by RTECS criteria. Leukaemia

Suspected of causing cancer.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Chloroform)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Chloroform)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

### **Reproductive toxicity**

Suspected of damaging the unborn child.

### **Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

### **Specific target organ toxicity - repeated exposure**

Causes damage to organs through prolonged or repeated exposure. - Liver, Kidney

### **Aspiration hazard**

No data available

### **Additional Information**

RTECS: FS9100000

Vomiting, Cough, irritant effects, Shortness of breath, respiratory arrest, narcosis, Dizziness, Nausea, agitation, spasms, inebriation, Headache, Stomach/intestinal disorders, ataxia (impaired locomotor coordination), cardiovascular disorders  
Drying-out effect resulting in rough and chapped skin.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

Toxicity to fish	flow-through test LC50 - Danio rerio (zebra fish) - 121 mg/l - 48 h (OECD Test Guideline 203)
	static test LC50 - Pimephales promelas (fathead minnow) - 103 - 171 mg/l - 96 h Remarks: (ECHA)
	flow-through test LC50 - Oncorhynchus mykiss (rainbow trout) - 18.2 mg/l - 96 h Remarks: (ECHA)
	flow-through test LC50 - Micropterus dolomieu - 51 mg/l - 96 h Remarks: (ECHA)
Toxicity to daphnia and other aquatic invertebrates	static test EC50 - Daphnia magna (Water flea) - 79 mg/l - 48 h Remarks: (ECHA)
Toxicity to algae	static test ErC50 - Chlamydomonas reinhardtii (green algae) - 13.3 mg/l - 72 h Remarks: (ECHA)

### **12.2 Persistence and degradability**

Biodegradability aerobic - Exposure time 14 d

Result: 0 % - Not readily biodegradable.  
(OECD Test Guideline 301C)

### 12.3 Bioaccumulative potential

#### Bioaccumulation

Cyprinus carpio (Carp) - 42 d  
at 25 °C - 0.1 mg/l

Bioconcentration factor (BCF): 4.1 - 13  
(OECD Test Guideline 305)

Cyprinus carpio (Carp) - 42 d  
at 25 °C - 1 mg/l

Bioconcentration factor (BCF): 1.4 - 4.7  
(OECD Test Guideline 305)

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Harmful to aquatic life.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1888      Class: 6.1      Packing group: III  
Proper shipping name: Chloroform  
Reportable Quantity (RQ): 10 lbs Reportable Quantity (RQ): 10 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1888      Class: 6.1      Packing group: III      EMS-No: F-A, S-A  
Proper shipping name: CHLOROFORM

### IATA

UN number: 1888      Class: 6.1      Packing group: III  
Proper shipping name: Chloroform

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

	CAS-No.	Revision Date
Chloroform	67-66-3	2008-11-03

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Chloroform	67-66-3	2008-11-03

**SARA 311/312 Hazards**

Acute Health Hazard, Chronic Health Hazard

**Reportable Quantity**                      D022 lbs**Massachusetts Right To Know Components**

Chloroform	CAS-No. 67-66-3	Revision Date 2008-11-03
------------	--------------------	-----------------------------

**Pennsylvania Right To Know Components**

Chloroform	CAS-No. 67-66-3	Revision Date 2008-11-03
------------	--------------------	-----------------------------

**California Prop. 65 Components**

, which is/are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> . Chloroform	CAS-No. 67-66-3	Revision Date 2011-09-01
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------	-----------------------------

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H302	Harmful if swallowed.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H331	Toxic if inhaled.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H361d	Suspected of damaging the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H402	Harmful to aquatic life.
Repr.	Reproductive toxicity
Skin Irrit.	Skin irritation
STOT RE	Specific target organ toxicity - repeated exposure
STOT SE	Specific target organ toxicity - single exposure

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.18

Revision Date: 08/14/2018

Print Date: 11/10/2018



### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Chloromethane solution

Product Number : 294799

Brand : Aldrich

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 1), H224

Acute toxicity, Oral (Category 4), H302

Carcinogenicity (Category 2), H351

Reproductive toxicity (Category 2), H361

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Specific target organ toxicity - repeated exposure, Inhalation (Category 2), Eyes, Nervous system, Testes, H373

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H224

Extremely flammable liquid and vapour.

H302

Harmful if swallowed.

H336

May cause drowsiness or dizziness.

H351

Suspected of causing cancer.

H361

Suspected of damaging fertility or the unborn child.

H373

May cause damage to organs (Eyes, Nervous system, Testes) through prolonged or repeated exposure if inhaled.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and

	understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P281	Use personal protective equipment as required.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides., Repeated exposure may cause skin dryness or cracking.

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.2 Mixtures

Formula	:	CH <sub>3</sub> Cl
Molecular weight	:	50.49 g/mol

#### Hazardous components

Component	Classification	Concentration
<b>Diethyl ether</b>		
CAS-No.	60-29-7	Flam. Liq. 1; Acute Tox. 4; STOT SE 3; H224, H302, H336
EC-No.	200-467-2	
Index-No.	603-022-00-4	
<b>Chloromethane</b>		
CAS-No.	74-87-3	Flam. Gas 1; Press. Gas Liquefied gas; Carc. 2; Repr. 2; STOT RE 2; H220, H280, H351, H361fd, H373
EC-No.	200-817-4	
Index-No.	602-001-00-7	
		90 - 100 %
		5 - 10 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

**If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

Light sensitive. Air sensitive. Heat sensitive. Dry residue is explosive. Refrigerate before opening.

Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Diethyl ether	60-29-7	TWA	400.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		See Appendix D - Substances with No Established RELs		
		TWA	400.000000 ppm 1,200.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	400 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		See Appendix D - Substances with No Established RELs		
		TWA	400 ppm 1,200 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	400 ppm 1,200 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		STEL	500 ppm 1,500 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		PEL	400 ppm 1,200 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		STEL	500 ppm 1,500 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
Chloromethane	74-87-3	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Liver damage Kidney damage Testicular damage Teratogenic effects Not classifiable as a human carcinogen Danger of cutaneous absorption		

		STEL	100.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Liver damage Kidney damage Testicular damage Teratogenic effects Not classifiable as a human carcinogen Danger of cutaneous absorption		
		Potential Occupational Carcinogen See Appendix A		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		Peak	300.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		See Table Z-2		
		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		Peak	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		STEL	100 ppm 210 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	50 ppm 105 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -116 °C (-177 °F)
f) Initial boiling point and boiling range	34.6 °C (94.3 °F) at 1,013 hPa (760 mmHg)
g) Flash point	-40 °C (-40 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 48 %(V) Lower explosion limit: 1.8 %(V)
k) Vapour pressure	590.021 hPa (442.552 mmHg) at 20 °C (68 °F) 1,975.467 hPa (1,481.722 mmHg) at 55 °C (131 °F)
l) Vapour density	No data available
m) Relative density	0.742 g/mL at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	160 °C (320 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents, Strong oxidizing agents, Iron, Strong acids

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

## Additional Information

RTECS: Not available

Methyl chloride is rapidly absorbed through the lungs and is excreted very slowly from the body. Symptoms of exposure include: dizziness, headache, weakness, unsteady walk, nausea, vomiting, abdominal pain, extreme nervousness, mental confusion, tremors, convulsions, unconsciousness and death, damage to the central nervous system. Apparent recovery from a seemingly minor exposure via inhalation may be followed by serious and prolonged aftereffects within a few days or weeks which can be fatal. Repeated exposures to methyl chloride are dangerous because it is eliminated very slowly from the body which converts methyl chloride into hydrochloric acid and methyl alcohol., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Methyl chloride is rapidly absorbed through the lungs and is excreted very slowly from the body. Symptoms of exposure include: dizziness, headache, weakness, unsteady walk, nausea, vomiting, abdominal pain, extreme nervousness, mental confusion, tremors, convulsions, unconsciousness and death, damage to the central nervous system. Apparent recovery from a seemingly minor exposure via inhalation may be followed by serious and prolonged aftereffects within a few days or weeks which can be fatal. Repeated exposures to methyl chloride are dangerous because it is eliminated very slowly from the body which converts methyl chloride into hydrochloric acid and methyl alcohol., Contact with eyes can cause:, Redness, Blurred vision, Provokes tears., Prolonged or repeated contact with skin may cause:, defatting, Dermatitis, Cough, chest pain, Difficulty in breathing, Dizziness, Drowsiness

Liver - Ingestion may provoke the following symptoms:, Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

Liver - Ingestion may provoke the following symptoms:, Irregularities - Based on Human Evidence (Diethyl ether)

Stomach - Irregularities - Based on Human Evidence (Chloromethane)

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1993      Class: 3      Packing group: I  
Proper shipping name: Flammable liquids, n.o.s. (Diethyl ether, Chloromethane)  
Reportable Quantity (RQ): 107 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1993      Class: 3      Packing group: I      EMS-No: F-E, S-E  
Proper shipping name: FLAMMABLE LIQUID, N.O.S. (Chloromethane, Diethyl ether)



**IATA**

UN number: 1993      Class: 3      Packing group: I  
 Proper shipping name: Flammable liquid, n.o.s. (Chloromethane, Diethyl ether)

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Chloromethane	74-87-3	2007-07-01

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Diethyl ether	60-29-7	1993-04-24
Chloromethane	74-87-3	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Diethyl ether	60-29-7	1993-04-24
Chloromethane	74-87-3	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Diethyl ether	60-29-7	1993-04-24
Chloromethane	74-87-3	2007-07-01

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.	74-87-3	2009-09-11
Chloromethane		

**16. OTHER INFORMATION****Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Carc.	Carcinogenicity
Flam. Gas	Flammable gases
Flam. Liq.	Flammable liquids
H220	Extremely flammable gas.
H224	Extremely flammable liquid and vapour.
H280	Contains gas under pressure; may explode if heated.
H302	Harmful if swallowed.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H361	Suspected of damaging fertility or the unborn child.
H361fd	Suspected of damaging fertility. Suspected of damaging the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure if inhaled.
Press. Gas	Gases under pressure
Repr.	Reproductive toxicity
STOT RE	Specific target organ toxicity - repeated exposure
STOT SE	Specific target organ toxicity - single exposure

**HMIS Rating**

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	4

Physical Hazard 3

**NFPA Rating**

Health hazard: 1

Fire Hazard: 4

Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.9

Revision Date: 02/02/2018

Print Date: 01/21/2019



# Fisher Scientific

Part of Thermo Fisher Scientific

## SAFETY DATA SHEET

Creation Date 13-Sep-2013

Revision Date 21-Jul-2015

Revision Number 2

### 1. Identification

**Product Name** Chromium

**Cat No. :** C318-500

**Synonyms** Chrome

**Recommended Use** Laboratory chemicals.

**Uses advised against** No Information available

**Details of the supplier of the safety data sheet**

**Company**

Fisher Scientific  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

**Emergency Telephone Number**

CHEMTREC®, Inside the USA: 800-424-9300  
CHEMTREC®, Outside the USA: 001-703-527-3887

### 2. Hazard(s) identification

**Classification**

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Specific target organ toxicity (single exposure) Category 3  
Target Organs - Respiratory system.

**Label Elements**

**Signal Word**

Warning

**Hazard Statements**

May cause respiratory irritation



**Precautionary Statements**

**Prevention**

Avoid breathing dust/fume/gas/mist/vapors/spray  
Use only outdoors or in a well-ventilated area

**Inhalation**

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing  
Call a POISON CENTER or doctor/physician if you feel unwell

**Storage**

Store in a well-ventilated place. Keep container tightly closed  
Store locked up

**Disposal**

Dispose of contents/container to an approved waste disposal plant

**Hazards not otherwise classified (HNOC)**

Very toxic to aquatic life

### 3. Composition / information on ingredients

Component	CAS-No	Weight %
Chromium	7440-47-3	>95

### 4. First-aid measures

<b>General Advice</b>	If symptoms persist, call a physician.
<b>Eye Contact</b>	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
<b>Skin Contact</b>	Wash off immediately with plenty of water for at least 15 minutes. Obtain medical attention.
<b>Inhalation</b>	Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.
<b>Ingestion</b>	Do not induce vomiting. Obtain medical attention.
<b>Most important symptoms/effects Notes to Physician</b>	None reasonably foreseeable. Treat symptomatically

### 5. Fire-fighting measures

<b>Unsuitable Extinguishing Media</b>	Carbon dioxide (CO <sub>2</sub> )
<b>Flash Point</b>	Not applicable
<b>Method -</b>	No information available
<b>Autoignition Temperature</b>	Not applicable
<b>Explosion Limits</b>	
<b>Upper</b>	No data available
<b>Lower</b>	No data available
<b>Sensitivity to Mechanical Impact</b>	No information available
<b>Sensitivity to Static Discharge</b>	No information available

**Specific Hazards Arising from the Chemical**

Dust can form an explosive mixture in air. Do not allow run-off from fire fighting to enter drains or water courses.

**Hazardous Combustion Products**

Chromium oxide

**Protective Equipment and Precautions for Firefighters**

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

**NFPA**

<b>Health</b> 2	<b>Flammability</b> 1	<b>Instability</b> 1	<b>Physical hazards</b> N/A
--------------------	--------------------------	-------------------------	--------------------------------

## 6. Accidental release measures

<b>Personal Precautions</b>	Ensure adequate ventilation. Use personal protective equipment. Avoid dust formation.
<b>Environmental Precautions</b>	Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.
<b>Methods for Containment and Clean Up</b>	Avoid dust formation. Sweep up or vacuum up spillage and collect in suitable container for disposal. Keep in suitable, closed containers for disposal.

## 7. Handling and storage

<b>Handling</b>	Avoid dust formation. Wear personal protective equipment. Ensure adequate ventilation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation.
<b>Storage</b>	Keep containers tightly closed in a dry, cool and well-ventilated place. Store under an inert atmosphere.

## 8. Exposure controls / personal protection

### Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Chromium	TWA: 0.5 mg/m <sup>3</sup>	(Vacated) TWA: 1 mg/m <sup>3</sup> TWA: 1 mg/m <sup>3</sup>	IDLH: 250 mg/m <sup>3</sup> TWA: 0.5 mg/m <sup>3</sup>

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Chromium	TWA: 0.5 mg/m <sup>3</sup>	TWA: 0.5 mg/m <sup>3</sup>	TWA: 0.5 mg/m <sup>3</sup>

### Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

<b>Engineering Measures</b>	Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location.
-----------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------

### Personal Protective Equipment

<b>Eye/face Protection</b>	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
<b>Skin and body protection</b>	Wear appropriate protective gloves and clothing to prevent skin exposure.
<b>Respiratory Protection</b>	Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.
<b>Hygiene Measures</b>	Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

<b>Physical State</b>	Powder
<b>Appearance</b>	Silver
<b>Odor</b>	Odorless
<b>Odor Threshold</b>	No information available
<b>pH</b>	No information available
<b>Melting Point/Range</b>	1857.2 °C / 3375 °F

<b>Boiling Point/Range</b>	2640 °C / 4784 °F
<b>Flash Point</b>	Not applicable
<b>Evaporation Rate</b>	Not applicable
<b>Flammability (solid,gas)</b>	No information available
<b>Flammability or explosive limits</b>	
<b>Upper</b>	No data available
<b>Lower</b>	No data available
<b>Vapor Pressure</b>	No information available
<b>Vapor Density</b>	Not applicable
<b>Relative Density</b>	7.2
<b>Solubility</b>	Insoluble in water
<b>Partition coefficient; n-octanol/water</b>	No data available
<b>Autoignition Temperature</b>	Not applicable
<b>Decomposition Temperature</b>	No information available
<b>Viscosity</b>	Not applicable
<b>Molecular Formula</b>	Cr
<b>Molecular Weight</b>	51.996

## 10. Stability and reactivity

<b>Reactive Hazard</b>	None known, based on information available
<b>Stability</b>	Sensitive to air.
<b>Conditions to Avoid</b>	Incompatible products. Excess heat. Avoid dust formation.
<b>Incompatible Materials</b>	Strong oxidizing agents, Strong acids
<b>Hazardous Decomposition Products</b>	Chromium oxide
<b>Hazardous Polymerization</b>	Hazardous polymerization does not occur.
<b>Hazardous Reactions</b>	None under normal processing.

## 11. Toxicological information

### Acute Toxicity

#### **Component Information** **Toxicologically Synergistic** **Products**

No information available

#### **Delayed and immediate effects as well as chronic effects from short and long-term exposure**

<b>Irritation</b>	May cause irritation of respiratory tract
<b>Sensitization</b>	No information available
<b>Carcinogenicity</b>	The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Chromium	7440-47-3	Not listed	Not listed	Not listed	Not listed	Not listed

<b>Mutagenic Effects</b>	No information available
<b>Reproductive Effects</b>	No information available.
<b>Developmental Effects</b>	No information available.
<b>Teratogenicity</b>	No information available.
<b>STOT - single exposure</b>	Respiratory system
<b>STOT - repeated exposure</b>	None known

**Aspiration hazard** No information available

**Symptoms / effects, both acute and delayed** No information available

**Endocrine Disruptor Information** No information available

**Other Adverse Effects** The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

## 12. Ecological information

### Ecotoxicity

The product contains following substances which are hazardous for the environment. Very toxic to aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Chromium	Not listed	LC50: 14.3 mg/l/96 H (Pimephales promelas)	Not listed	EC50: 0.07 mg/l/48 H

**Persistence and Degradability** Insoluble in water  
**Bioaccumulation/ Accumulation** No information available.

**Mobility** Is not likely mobile in the environment due its low water solubility.

## 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

## 14. Transport information

### DOT

**UN-No** UN3077  
**Proper Shipping Name** ENVIRONMENTALLY HAZARDOUS SUBSTANCES, SOLID, N.O.S.  
**Proper technical name** Chromium  
**Hazard Class** 9  
**Packing Group** III

### TDG

Not regulated  
**UN-No** UN3077  
**Proper Shipping Name** ENVIRONMENTALLY HAZARDOUS SUBSTANCES, SOLID, N.O.S.  
**Hazard Class** 9  
**Packing Group** III

### IATA

**UN-No** UN3077  
**Proper Shipping Name** Environmentally hazardous substance, solid, n.o.s  
**Hazard Class** 9  
**Packing Group** III

### IMDG/IMO

**UN-No** UN3077  
**Proper Shipping Name** Environmentally hazardous substance, solid, n.o.s  
**Hazard Class** 9  
**Packing Group** III

## 15. Regulatory information

### International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Chromium	X	X	-	231-157-5	-		X	-	X	X	X

#### Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

### U.S. Federal Regulations

TSCA 12(b) Not applicable

### SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Chromium	7440-47-3	>95	1.0

### SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

### Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Chromium	-	-	X	X

### Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Chromium	X		-

OSHA Occupational Safety and Health Administration

Not applicable

### CERCLA

Not applicable

Component	Hazardous Substances RQs	CERCLA EHS RQs
Chromium	5000 lb 10 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals

### State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Chromium	X	X	X	X	X

### U.S. Department of Transportation

Reportable Quantity (RQ): N

DOT Marine Pollutant N

DOT Severe Marine Pollutant N

### U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

### Other International Regulations



Mexico - Grade No information available

**Canada**

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D2B Toxic materials



## 16. Other information

**Prepared By** Regulatory Affairs  
Thermo Fisher Scientific  
Email: EMSDS.RA@thermofisher.com

**Creation Date** 13-Sep-2013

**Revision Date** 21-Jul-2015

**Print Date** 21-Jul-2015

**Revision Summary** This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

**Disclaimer**

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

**End of SDS**

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Chrysene  
Product Number : 35754  
Brand : Sigma-Aldrich  
Index-No. : 601-048-00-0  
CAS-No. : 218-01-9

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Germ cell mutagenicity (Category 2), H341  
Carcinogenicity (Category 1B), H350  
Acute aquatic toxicity (Category 1), H400  
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H341 Suspected of causing genetic defects.  
H350 May cause cancer.  
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and understood.  
P273 Avoid release to the environment.  
P281 Use personal protective equipment as required.  
P308 + P313 IF exposed or concerned: Get medical advice/ attention.

P391 Collect spillage.  
P405 Store locked up.  
P501 Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula : C<sub>18</sub>H<sub>12</sub>  
Molecular weight : 228.29 g/mol  
CAS-No. : 218-01-9  
EC-No. : 205-923-4  
Index-No. : 601-048-00-0

#### Hazardous components

Component	Classification	Concentration
<b>Chrysene</b>	Muta. 2; Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H341, H350, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.  
For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.  
Provide appropriate exhaust ventilation at places where dust is formed.  
For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.  
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Confirmed animal carcinogen with unknown relevance to humans		
Chrysene	218-01-9	TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen		

		NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		PEL	0.2 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                         |
|-------------------------------------------------|---------------------------------------------------------|
| a) Appearance                                   | Form: solid                                             |
| b) Odour                                        | No data available                                       |
| c) Odour Threshold                              | No data available                                       |
| d) pH                                           | No data available                                       |
| e) Melting point/freezing point                 | Melting point/range: 252 - 254 °C (486 - 489 °F) - lit. |
| f) Initial boiling point and boiling range      | 448 °C (838 °F) - lit.                                  |
| g) Flash point                                  | No data available                                       |
| h) Evaporation rate                             | No data available                                       |
| i) Flammability (solid, gas)                    | No data available                                       |
| j) Upper/lower flammability or explosive limits | No data available                                       |
| k) Vapour pressure                              | No data available                                       |
| l) Vapour density                               | No data available                                       |
| m) Relative density                             | No data available                                       |
| n) Water solubility                             | insoluble                                               |
| o) Partition coefficient: n-octanol/water       | log Pow: 5.73                                           |
| p) Auto-ignition temperature                    | No data available                                       |
| q) Decomposition temperature                    | No data available                                       |
| r) Viscosity                                    | No data available                                       |
| s) Explosive properties                         | No data available                                       |
| t) Oxidizing properties                         | No data available                                       |

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intraperitoneal - Mouse - > 320 mg/kg

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

In vitro tests showed mutagenic effects

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Chrysene)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: OSHA specifically regulated carcinogen (Chrysene)

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

#### Additional Information

RTECS: GC0700000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 1.90 mg/l - 2 h

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Chrysene)  
Reportable Quantity (RQ): 100 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Chrysene)  
Marine pollutant:yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Chrysene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

### SARA 311/312 Hazards

Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01



Chrysene

CAS-No.  
218-01-9

Revision Date  
1994-04-01

**New Jersey Right To Know Components**

Chrysene

CAS-No.  
218-01-9

Revision Date  
1994-04-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

Chrysene

CAS-No.  
218-01-9

Revision Date  
2007-09-28

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

**NFPA Rating**

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.5

Revision Date: 01/10/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

Version 4.11  
Revision Date 05/24/2016  
Print Date 11/10/2018

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Cumene  
Product Number : C87657  
Brand : Aldrich  
Index-No. : 601-024-00-X  
CAS-No. : 98-82-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226  
Carcinogenicity (Category 2), H351  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H335 May cause respiratory irritation.  
H351 Suspected of causing cancer.  
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: Isopropylbenzene
Formula	: C <sub>9</sub> H <sub>12</sub>
Molecular weight	: 120.19 g/mol
CAS-No.	: 98-82-8
EC-No.	: 202-704-5
Index-No.	: 601-024-00-X

#### Hazardous components

Component	Classification	Concentration
<b>Cumene</b>	Flam. Liq. 3; Carc. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H335, H351, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Cumene	98-82-8	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Skin irritation		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		
		PEL	50 ppm 245 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                    |
|-------------------------------------------------|--------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                          |
| b) Odour                                        | No data available                                                  |
| c) Odour Threshold                              | No data available                                                  |
| d) pH                                           | No data available                                                  |
| e) Melting point/freezing point                 | Melting point/range: -96 °C (-141 °F) - lit.                       |
| f) Initial boiling point and boiling range      | 152 - 154 °C (306 - 309 °F) - lit.                                 |
| g) Flash point                                  | 31.0 °C (87.8 °F) - closed cup                                     |
| h) Evaporation rate                             | No data available                                                  |
| i) Flammability (solid, gas)                    | No data available                                                  |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 6.5 %(V)<br>Lower explosion limit: 0.9 %(V) |
| k) Vapour pressure                              | 10.7 hPa (8.0 mmHg) at 20.0 °C (68.0 °F)                           |
| l) Vapour density                               | No data available                                                  |
| m) Relative density                             | 0.864 g/mL at 25 °C (77 °F)                                        |
| n) Water solubility                             | 0.06 g/l at 25 °C (77 °F) - slightly soluble                       |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.55 at 23 °C (73 °F)                                     |
| p) Auto-ignition temperature                    | 425.0 °C (797.0 °F)                                                |
| q) Decomposition temperature                    | No data available                                                  |
| r) Viscosity                                    | No data available                                                  |
| s) Explosive properties                         | No data available                                                  |
| t) Oxidizing properties                         | No data available                                                  |

### 9.2 Other safety information

- |                 |                             |
|-----------------|-----------------------------|
| Surface tension | 27.69 mN/m at 25 °C (77 °F) |
|-----------------|-----------------------------|

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male - 2,260 mg/kg

Inhalation: No data available

Dermal: No data available

NOAEL Feed - Rat - male - > 535.8 mg/kg

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

- Guinea pig

Result: Did not cause sensitisation on laboratory animals.

(OECD Test Guideline 406)

#### Germ cell mutagenicity

in vitro assay

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Mouse - male and female

Result: negative

#### Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Cumene)

NTP: Reasonably anticipated to be a human carcinogen (Cumene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

No data available

No data available

**Specific target organ toxicity - single exposure**

May cause respiratory irritation.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: GR8575000

narcosis, Central nervous system depression, Dermatitis, Gastrointestinal disturbance, Damage to the lungs., Liver injury may occur., Kidney injury may occur.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 4.8 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia (water flea) - 2.14 mg/l - 48 h (OECD Test Guideline 202)

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 2.60 mg/l - 72 h

**12.2 Persistence and degradability**

Biodegradability Result: - According to the results of tests of biodegradability this product is not readily biodegradable.

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1918 Class: 3

Packing group: III

Proper shipping name: Isopropylbenzene



Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 1918      Class: 3      Packing group: III      EMS-No: F-E, S-E  
Proper shipping name: ISOPROPYLBENZENE  
Marine pollutant:yes

**IATA**

UN number: 1918      Class: 3      Packing group: III  
Proper shipping name: Isopropylbenzene

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Cumene	98-82-8	2010-06-11

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Carc.	Carcinogenicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3

Physical Hazard 0

**NFPA Rating**

Health hazard: 2

Fire Hazard: 3

Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation

Product Safety – Americas Region

1-800-521-8956

Version: 4.11

Revision Date: 05/24/2016

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Cyclohexane

Product Number : 227048

Brand : Sigma-Aldrich

Index-No. : 601-017-00-1

CAS-No. : 110-82-7

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 1), H400

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.

H304 May be fatal if swallowed and enters airways.

H315 Causes skin irritation.

H336 May cause drowsiness or dizziness.

H400 Very toxic to aquatic life.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233 Keep container tightly closed.

P240 Ground/bond container and receiving equipment.

P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula	:	C <sub>6</sub> H <sub>12</sub>
Molecular weight	:	84.16 g/mol
CAS-No.	:	110-82-7
EC-No.	:	203-806-2
Index-No.	:	601-017-00-1
Registration number	:	01-2119463273-41-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Cyclohexane</b>	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; H225, H304, H315, H336, H400	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.

Storage class (TRGS 510): 3: Flammable liquids

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

**8. EXPOSURE CONTROLS/PERSONAL PROTECTION****8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Cyclohexane	110-82-7	TWA	100 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment		
		TWA	300 ppm 1,050 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		TWA	300 ppm 1,050 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	300 ppm 1,050 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested:Camatril® (KCL 730 / Aldrich Z677442, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 35 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                           |
|-------------------------------------------------|-------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                                                        |
| b) Odour                                        | No data available                                                                         |
| c) Odour Threshold                              | No data available                                                                         |
| d) pH                                           | No data available                                                                         |
| e) Melting point/freezing point                 | Melting point/range: 4 - 7 °C (39 - 45 °F) - lit.                                         |
| f) Initial boiling point and boiling range      | 80.7 °C (177.3 °F) - lit.                                                                 |
| g) Flash point                                  | -18.0 °C (-0.4 °F) - closed cup                                                           |
| h) Evaporation rate                             | No data available                                                                         |
| i) Flammability (solid, gas)                    | No data available                                                                         |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 9 %(V)<br>Lower explosion limit: 1 %(V)                            |
| k) Vapour pressure                              | 225.0 hPa (168.8 mmHg) at 37.7 °C (99.9 °F)<br>102.7 hPa (77.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                         |
| m) Relative density                             | 0.779 g/cm <sup>3</sup> at 25 °C (77 °F)                                                  |
| n) Water solubility                             | No data available                                                                         |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.44                                                                             |
| p) Auto-ignition temperature                    | 260.0 °C (500.0 °F)                                                                       |
| q) Decomposition temperature                    | No data available                                                                         |
| r) Viscosity                                    | No data available                                                                         |
| s) Explosive properties                         | No data available                                                                         |
| t) Oxidizing properties                         | No data available                                                                         |

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 12,705 mg/kg

LC50 Inhalation - Rat - 4 h - 34,000 mg/l  
(OECD Test Guideline 403)

LD50 Dermal - Rabbit - > 2,000 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

May be fatal if swallowed and enters airways.

#### Additional Information

RTECS: GU6300000

Central nervous system depression, Drowsiness, Irritability, Dizziness, Gastrointestinal disturbance, Lung irritation, chest pain, pulmonary edema

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish                      flow-through test LC50 - Pimephales promelas (fathead minnow) - 4.53 mg/l -  
96 h  
(OECD Test Guideline 203)

Toxicity to daphnia and              Immobilization EC50 - Daphnia magna (Water flea) - 0.9 mg/l - 48 h  
other aquatic                              (OECD Test Guideline 202)



invertebrates

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 3.4 mg/l - 72 h  
(OECD Test Guideline 201)

12.2 Persistence and degradability

Biodegradability Result: - Readily biodegradable.

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life.

---

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

**Product**

Contact a licensed professional waste disposal service to dispose of this material. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

**Contaminated packaging**

Dispose of as unused product.

---

14. TRANSPORT INFORMATION

**DOT (US)**

UN number: 1145 Class: 3 Packing group: II  
Proper shipping name: Cyclohexane  
Reportable Quantity (RQ): 1000 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1145 Class: 3 Packing group: II EMS-No: F-E, S-D  
Proper shipping name: CYCLOHEXANE  
Marine pollutant:yes

**IATA**

UN number: 1145 Class: 3 Packing group: II  
Proper shipping name: Cyclohexane

---

15. REGULATORY INFORMATION

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cyclohexane	110-82-7	2007-07-01

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Cyclohexane	110-82-7	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Cyclohexane	110-82-7	2007-07-01

**New Jersey Right To Know Components**

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
Skin Irrit.	Skin irritation
STOT SE	Specific target organ toxicity - single exposure

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	
Flammability:	3
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

## Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.9

Revision Date: 06/11/2018

Print Date: 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**Product name : *p*-Cymene

Product Number : C121452

Brand : Aldrich

CAS-No. : 99-87-6

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226

Acute toxicity, Oral (Category 4), H302

Skin irritation (Category 2), H315

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Warning

Hazard statement(s)

H226

Flammable liquid and vapour.

H302

Harmful if swallowed.

H315

Causes skin irritation.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P264

Wash skin thoroughly after handling.

P270

Do not eat, drink or smoke when using this product.

P280	Wear protective gloves/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms : 1-Isopropyl-4-methylbenzene  
4-Isopropyltoluene

Formula : C<sub>10</sub>H<sub>14</sub>  
Molecular weight : 134.22 g/mol  
CAS-No. : 99-87-6  
EC-No. : 202-796-7

#### Hazardous components

Component	Classification	Concentration
<b>p-Cymene</b>	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; H226, H302, H315	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### **Suitable extinguishing media**

Dry powder Dry sand

#### **Unsuitable extinguishing media**

Do NOT use water jet.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### **Components with workplace control parameters**

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

### 8.2 Exposure controls

#### **Appropriate engineering controls**

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 129 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                                    |
|--------------------------------------------|--------------------------------------------------------------------|
| a) Appearance                              | Form: liquid, clear<br>Colour: colourless                          |
| b) Odour                                   | No data available                                                  |
| c) Odour Threshold                         | No data available                                                  |
| d) pH                                      | No data available                                                  |
| e) Melting point/freezing point            | No data available                                                  |
| f) Initial boiling point and boiling range | 176 - 178 °C (349 - 352 °F) - lit.                                 |
| g) Flash point                             | 47.0 °C (116.6 °F) - closed cup                                    |
| h) Evaporation rate                        | No data available                                                  |
| i) Flammability (solid, gas)               | No data available                                                  |
| j) Upper/lower flammability or             | Upper explosion limit: 5.6 %(V)<br>Lower explosion limit: 0.7 %(V) |

explosive limits

- |                                           |                                                                                    |
|-------------------------------------------|------------------------------------------------------------------------------------|
| k) Vapour pressure                        | 4.9 hPa (3.7 mmHg) at 37.7 °C (99.9 °F)<br>2.0 hPa (1.5 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                         | No data available                                                                  |
| m) Relative density                       | 0.86 g/cm <sup>3</sup> at 25 °C (77 °F)                                            |
| n) Water solubility                       | No data available                                                                  |
| o) Partition coefficient: n-octanol/water | No data available                                                                  |
| p) Auto-ignition temperature              | 436.0 °C (816.8 °F)                                                                |
| q) Decomposition temperature              | No data available                                                                  |
| r) Viscosity                              | No data available                                                                  |
| s) Explosive properties                   | No data available                                                                  |
| t) Oxidizing properties                   | No data available                                                                  |

## 9.2 Other safety information

Solubility in other solvents                      Alcohol - soluble

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 1,400 mg/kg

LC50 Inhalation - Mouse - 6.97 mg/l

Remarks: No data available

LD50 Dermal - Rabbit - > 5,000 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation - 24 h

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

No data available

**Germ cell mutagenicity**

No data available

**Carcinogenicity**

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

No data available

No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: GZ5950000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.



---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 2046      Class: 3      Packing group: III  
Proper shipping name: Cymenes  
Reportable Quantity (RQ):  
Poison Inhalation Hazard: No

### IMDG

UN number: 2046      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: CYMENES  
Marine pollutant: yes

### IATA

UN number: 2046      Class: 3      Packing group: III  
Proper shipping name: Cymenes

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

### New Jersey Right To Know Components

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H302	Harmful if swallowed.
H315	Causes skin irritation.
Skin Irrit.	Skin irritation

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

**NFPA Rating**

Health hazard: 2  
Fire Hazard: 2  
Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.10

Revision Date: 07/18/2017

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/17/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Dibenz[*a,h*]anthracene  
Product Number : 48574  
Brand : Supelco  
Index-No. : 601-041-00-2  
CAS-No. : 53-70-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: 1,2:5,6-Dibenzanthracene
Formula	: C <sub>22</sub> H <sub>14</sub>
Molecular weight	: 278.35 g/mol
CAS-No.	: 53-70-3
EC-No.	: 200-181-8
Index-No.	: 601-041-00-2

#### Hazardous components

Component	Classification	Concentration
<b>Dibenz[a,h]anthracene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### **Skin protection**

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                         |
|-------------------------------------------------|---------------------------------------------------------|
| a) Appearance                                   | Form: solid                                             |
| b) Odour                                        | No data available                                       |
| c) Odour Threshold                              | No data available                                       |
| d) pH                                           | No data available                                       |
| e) Melting point/freezing point                 | Melting point/range: 262 - 265 °C (504 - 509 °F) - lit. |
| f) Initial boiling point and boiling range      | 524 °C (975 °F) - lit.                                  |
| g) Flash point                                  | No data available                                       |
| h) Evaporation rate                             | No data available                                       |
| i) Flammability (solid, gas)                    | No data available                                       |
| j) Upper/lower flammability or explosive limits | No data available                                       |
| k) Vapour pressure                              | No data available                                       |
| l) Vapour density                               | No data available                                       |
| m) Relative density                             | No data available                                       |

- |                                           |                   |
|-------------------------------------------|-------------------|
| n) Water solubility                       | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature              | No data available |
| q) Decomposition temperature              | No data available |
| r) Viscosity                              | No data available |
| s) Explosive properties                   | No data available |
| t) Oxidizing properties                   | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available  
No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: HN2625000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Lungs -

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates      Immobilization EC50 - Daphnia magna (Water flea) - 0.496 mg/l - 24 h(Dibenz[a,h]anthracene)

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Dibenz[a,h]anthracene)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life with long lasting effects.

---

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION**

**DOT (US)**

Not dangerous goods

**IMDG**

UN number: 3077

Class: 9

Packing group: III

EMS-No: F-A, S-F

Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Dibenz[a,h]anthracene)



Marine pollutant : yes

**IATA**

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Dibenz[a,h]anthracene)

**Further information**

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Dibenz[a,h]anthracene	53-70-3	

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

H350                      May cause cancer.  
H400                      Very toxic to aquatic life.  
H410                      Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.1

Revision Date: 07/17/2018

Print Date: 01/21/2019

SDS preview

# ETHYLBENZENE

**DANGER**

100-41-4

by Fisher Scientific

---

## Synonyms

Aethylbenzol [German], Benzene, ethyl-, CCRIS 916, Etilbenzene, Etylobenzen [Polish], Phenylethane, UNII-L5I45M5G0O, Aethylbenzol, A13-09057, EC 202-849-4, Ethyl benzene, Ethylbenzeen, Ethylbenzeen [Dutch], Etilbenzene [Italian], Etylobenzen, HSDB 84, Ethylbenzene, Ethylbenzol, EB, EINECS 202-849-4, NCI-C56393, NSC 406903

## Hazard statements

Harmful if inhaled

Highly flammable liquid and vapour

May be fatal if swallowed and enters airways

May cause damage to organs through prolonged or repeated exposure

May cause drowsiness or dizziness

May cause respiratory irritation

Suspected of causing cancer

## Precautions

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Use only outdoors or in a well-ventilated area

Keep container tightly closed

Ground/bond container and receiving equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Keep cool  
Do NOT induce vomiting  
Store locked up

#### Hazard category

Acute toxicity, inhalation, Aspiration hazard, Carcinogenicity, Flammable liquids, Specific target organ toxicity, repeated exposure, Specific target organ toxicity, single exposure; Narcotic effects, Specific target organ toxicity, single exposure; Respiratory tract irritation



200026002152008&param1=ZmRwLjFfMDUyNjEwMDNORQ==&unique=1527865145)

The information contained herein is based on data compiled from the chemical components of the (M)SDS and may not accurately represent the safety hazards for the product. Only the manufacturer of the product can make actual representations about the hazard profile of a chemical product. No warranty is expressed or implied regarding the accuracy of these data or the results to be obtained from the use thereof.

© 2017 Chemical Safety Software

## SAFETY DATA SHEET

Version 5.12  
Revision Date 07/26/2018  
Print Date 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Heptane

Product Number : 246654  
Brand : Sigma-Aldrich  
Index-No. : 601-008-00-2

CAS-No. : 142-82-5

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H304

May be fatal if swallowed and enters airways.

H315

Causes skin irritation.

H336

May cause drowsiness or dizziness.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>7</sub> H <sub>16</sub>
Molecular weight	: 100.20 g/mol
CAS-No.	: 142-82-5
EC-No.	: 205-563-8
Index-No.	: 601-008-00-2
Registration number	: 01-2119457603-38-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Heptane</b>	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; Aquatic Chronic 1; H225, H304, H315, H336, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Dry powder Dry sand

**Unsuitable extinguishing media**

Do NOT use water jet.

**5.2 Special hazards arising from the substance or mixture**

Flash back possible over considerable distance.

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

In case of fire: Evacuate area. Fight fire remotely due to the risk of explosion. Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Store under inert gas. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Heptane	142-82-5	TWA	85 ppm 350 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		C	440 ppm 1,800 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
	Remarks	15 minute ceiling value		
		TWA	500 ppm 2,000 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	400 ppm 1,600 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		STEL	500 ppm 2,000 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		TWA	400 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested:Camatril® (KCL 730 / Aldrich Z677442, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 65 min

Material tested:Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an



industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                                                         |
|-------------------------------------------------|-----------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid                                                                            |
| b) Odour                                        | No data available                                                                       |
| c) Odour Threshold                              | No data available                                                                       |
| d) pH                                           | No data available                                                                       |
| e) Melting point/freezing point                 | Melting point/range: -91 °C (-132 °F)                                                   |
| f) Initial boiling point and boiling range      | 98 °C (208 °F)                                                                          |
| g) Flash point                                  | 22 °C (72 °F) - closed cup                                                              |
| h) Evaporation rate                             | No data available                                                                       |
| i) Flammability (solid, gas)                    | No data available                                                                       |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7 %(V)<br>Lower explosion limit: 1.1 %(V)                        |
| k) Vapour pressure                              | 110.7 hPa (83.0 mmHg) at 37.7 °C (99.9 °F)<br>53.3 hPa (40.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                       |
| m) Relative density                             | 0.684 g/mL at 25 °C (77 °F)                                                             |
| n) Water solubility                             | insoluble                                                                               |
| o) Partition coefficient: n-octanol/water       | log Pow: > 3.000                                                                        |
| p) Auto-ignition temperature                    | 223.0 °C (433.4 °F)                                                                     |
| q) Decomposition temperature                    | No data available                                                                       |
| r) Viscosity                                    | No data available                                                                       |
| s) Explosive properties                         | No data available                                                                       |
| t) Oxidizing properties                         | No data available                                                                       |

### **9.2 Other safety information**

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - No data available

Hazardous decomposition products formed under fire conditions. - Carbon oxides

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

LC50 Inhalation - Rat - 4 h - 103,000 mg/m<sup>3</sup>

Inhalation: Irritating to respiratory system.

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

**Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: MI7700000

Prolonged or repeated exposure to skin causes defatting and dermatitis., Central nervous system depression, narcosis, Damage to the lungs.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - Carassius auratus (goldfish) - 4 mg/l - 24.0 h

LC50 - Tilapia mossambica - 375 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 1.50 mg/l - 48 h

**12.2 Persistence and degradability**

Ratio BOD/ThBOD 3.5 %

**12.3 Bioaccumulative potential**

Indication of bioaccumulation.

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

Very toxic to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Do not empty into drains. Avoid release to the environment.

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1206 Class: 3 Packing group: II

Proper shipping name: Heptanes

Reportable Quantity (RQ): Marine pollutant:yes

Poison Inhalation Hazard: No

**IMDG**

UN number: 1206 Class: 3 Packing group: II EMS-No: F-E, S-D

Proper shipping name: HEPTANES

Marine pollutant: yes

Marine pollutant: yes

**IATA**

UN number: 1206      Class: 3

Packing group: II

Proper shipping name: Heptanes

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Skin Irrit.	Skin irritation

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.12

Revision Date: 07/26/2018

Print Date: 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Hexane

Product Number : 296090  
Brand : Sigma-Aldrich  
Index-No. : 601-037-00-0

CAS-No. : 110-54-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225  
Skin irritation (Category 2), H315  
Reproductive toxicity (Category 2), H361  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336  
Specific target organ toxicity - repeated exposure, Oral (Category 2), Nervous system, H373  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H315 Causes skin irritation.  
H336 May cause drowsiness or dizziness.  
H361 Suspected of damaging fertility or the unborn child.  
H373 May cause damage to organs (Nervous system) through prolonged or repeated exposure if swallowed.

H411	Toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: n-Hexane
Formula	: C <sub>6</sub> H <sub>14</sub>
Molecular weight	: 86.18 g/mol
CAS-No.	: 110-54-3
EC-No.	: 203-777-6
Index-No.	: 601-037-00-0
Registration number	: 01-2119480412-44-XXXX

### Hazardous components

Component	Classification	Concentration
<b>n-Hexane</b>	Flam. Liq. 2; Skin Irrit. 2; Repr. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H225, H304, H315, H336, H361f, H373, H411	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Flash back possible over considerable distance. Container explosion may occur under fire conditions. Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.



For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
n-Hexane	110-54-3	TWA	50 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Eye irritation Peripheral neuropathy Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	50 ppm 180 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		TWA	500 ppm 1,800 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	50 ppm 180 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	2,5-Hexanedione	0.4 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 59 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                            |
|-------------------------------------------------|--------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                                                         |
| b) Odour                                        | No data available                                                                          |
| c) Odour Threshold                              | No data available                                                                          |
| d) pH                                           | 7.0                                                                                        |
| e) Melting point/freezing point                 | Melting point/range: -95 °C (-139 °F)                                                      |
| f) Initial boiling point and boiling range      | 69 °C (156 °F)                                                                             |
| g) Flash point                                  | -26.0 °C (-14.8 °F) - closed cup                                                           |
| h) Evaporation rate                             | 15.8                                                                                       |
| i) Flammability (solid, gas)                    | No data available                                                                          |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7.7 %(V)<br>Lower explosion limit: 1.2 %(V)                         |
| k) Vapour pressure                              | 341.3 hPa (256.0 mmHg) at 37.7 °C (99.9 °F)<br>176.0 hPa (132.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                          |
| m) Relative density                             | 0.659 g/mL at 25 °C (77 °F)                                                                |
| n) Water solubility                             | insoluble                                                                                  |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.90 - 4.11                                                                       |
| p) Auto-ignition temperature                    | 234.0 °C (453.2 °F)                                                                        |

- |                              |                   |
|------------------------------|-------------------|
| q) Decomposition temperature | No data available |
| r) Viscosity                 | No data available |
| s) Explosive properties      | No data available |
| t) Oxidizing properties      | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Exposure to moisture may affect product quality.  
Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - No data available  
Hazardous decomposition products formed under fire conditions. - Carbon oxides  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male and female - 16,000 mg/kg  
(OECD Test Guideline 401)

LC50 Inhalation - Rat - 4 h - 172 mg/l  
Remarks: (RTECS)

LD50 Dermal - Rabbit - > 2,000 mg/kg  
Remarks: (ECHA)

#### Skin corrosion/irritation

#### Serious eye damage/eye irritation

#### Respiratory or skin sensitisation

#### Germ cell mutagenicity

In vitro mammalian cell gene mutation test  
Mouse lymphoma test  
Result: Positive results were obtained in some in vitro tests.

Ames test  
Salmonella typhimurium  
Result: negative

Result: negative  
(National Toxicology Program)

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### **Reproductive toxicity**

Suspected of damaging the unborn child.

Suspected of damaging fertility.

#### **Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness. - Central nervous system

#### **Specific target organ toxicity - repeated exposure**

Inhalation - May cause damage to organs through prolonged or repeated exposure. - Nervous system

#### **Aspiration hazard**

Aspiration hazard, Aspiration may cause pulmonary oedema and pneumonitis.

#### **Additional Information**

RTECS: MN9275000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Drowsiness, irritant effects, somnolence

narcosis, Nausea, Tiredness, CNS disorders, paralysis symptoms

Risk of corneal clouding.

It generally applies for aliphatic hydrocarbons with 6 - 18 carbon atoms that they may cause pneumonia, in some cases also pulmonary oedema, upon direct inhalation, i.e. in conditions that can occur only in very special circumstances (nebulizations, spraying, inhalation of aerosols and similar). After absorption of very large quantities: narcosis.

Testes. - Irregularities - Based on Human Evidence

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - 2.5 mg/l - 96 h Remarks: (ECOTOX Database)
------------------	---------------------------------------------------------------------------------------------

Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 2.1 mg/l - 48 h Remarks: (Lit.)
-----------------------------------------------------	------------------------------------------------------------------------

### 12.2 Persistence and degradability

### **12.3 Bioaccumulative potential**

### **12.4 Mobility in soil**

### **12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### **12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

---

## **13. DISPOSAL CONSIDERATIONS**

### **13.1 Waste treatment methods**

#### **Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### **Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1208      Class: 3      Packing group: II  
Proper shipping name: Hexanes  
Reportable Quantity (RQ): 5000 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1208      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: HEXANES  
Marine pollutant:yes

**IATA**

UN number: 1208      Class: 3      Packing group: II  
Proper shipping name: Hexanes

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H361	Suspected of damaging fertility or the unborn child.
H361f	Suspected of damaging fertility.
H373	May cause damage to organs (/*_2ORG_REP_ORA/*) through prolonged or repeated exposure if swallowed.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:                      2

Chronic Health Hazard: \*  
Flammability: 3  
Physical Hazard 0

**NFPA Rating**

Health hazard: 2  
Fire Hazard: 3  
Reactivity Hazard: 0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.  
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.7

Revision Date: 06/08/2018

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Indeno[1,2,3-cd]pyrene

Product Number : 48499

Brand : Supelco

CAS-No. : 193-39-5

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Carcinogenicity (Category 2), H351

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H351

Suspected of causing cancer.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P281

Use personal protective equipment as required.

P308 + P313

IF exposed or concerned: Get medical advice/ attention.

P405

Store locked up.

P501

Dispose of contents/ container to an approved waste disposal plant.

#### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula : C<sub>22</sub>H<sub>12</sub>  
Molecular weight : 276.33 g/mol  
CAS-No. : 193-39-5  
EC-No. : 205-893-2

#### Hazardous components

Component	Classification	Concentration
Indeno[1,2,3-cd]pyrene	Carc. 2; H351	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.



## 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

## 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

## 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 13: Non Combustible Solids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Indeno[1,2,3-cd]pyrene	193-39-5	1-Hydroxypyrene (1-HP)		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

##### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the

sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

a) Appearance	Form: solid
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	163.6 °C (326.5 °F)
f) Initial boiling point and boiling range	536.0 °C (996.8 °F)
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### **9.2 Other safety information**

No data available

---

## **10. STABILITY AND REACTIVITY**

### **10.1 Reactivity**

No data available

### **10.2 Chemical stability**

Stable under recommended storage conditions.

### **10.3 Possibility of hazardous reactions**

No data available

### **10.4 Conditions to avoid**

No data available

### **10.5 Incompatible materials**

Strong oxidizing agents

## 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Indeno[1,2,3-cd]pyrene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Indeno[1,2,3-cd]pyrene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

#### Additional Information

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION**

**DOT (US)**

Not dangerous goods

**IMDG**

Not dangerous goods

**IATA**

Not dangerous goods

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Chronic Health Hazard

**Massachusetts Right To Know Components**

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

**Pennsylvania Right To Know Components**

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

**New Jersey Right To Know Components**

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.  
Indeno[1,2,3-cd]pyrene

CAS-No.  
193-39-5

Revision Date  
2007-09-28

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Carc. H351	Carcinogenicity Suspected of causing cancer.
---------------	-------------------------------------------------

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	1
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.6

Revision Date: 12/11/2017

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Isopropylbenzene

Product Number : 442630

Brand : Supelco

Index-No. : 601-024-00-X

CAS-No. : 98-82-8

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226

Carcinogenicity (Category 2), H351

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 2), H401

Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.

H304 May be fatal if swallowed and enters airways.

H335 May cause respiratory irritation.

H351 Suspected of causing cancer.

H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202 Do not handle until all safety precautions have been read and

	understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	:	C <sub>9</sub> H <sub>12</sub>
Molecular weight	:	120.2 g/mol
CAS-No.	:	98-82-8
EC-No.	:	202-704-5
Index-No.	:	601-024-00-X

#### Hazardous components

Component	Classification	Concentration
<b>Cumene</b>	Flam. Liq. 3; Carc. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H335, H351, H411	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store at room temperature.

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated



## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Cumene	98-82-8	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Skin irritation		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		
		PEL	50 ppm 245 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-95.99 °C (-140.78 °F)
f) Initial boiling point and boiling range	152.0 - 153.0 °C (305.6 - 307.4 °F)
g) Flash point	31.0 °C (87.8 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 6.5 %(V) Lower explosion limit: 0.9 %(V)
k) Vapour pressure	10.7 hPa (8.0 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	0.86 g/cm <sup>3</sup>
n) Water solubility	0.06 g/l at 25 °C (77 °F) - slightly soluble
o) Partition coefficient: n-octanol/water	log Pow: 3.55 at 23 °C (73 °F)
p) Auto-ignition temperature	425.0 °C (797.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### 9.2 Other safety information

Surface tension	27.69 mN/m at 25 °C (77 °F)
-----------------	-----------------------------

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

## 10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

Stable under recommended storage conditions.

## 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air. Vapours may form explosive mixture with air.

## 10.4 Conditions to avoid

Heat, flames and sparks.

## 10.5 Incompatible materials

Strong oxidizing agents

## 10.6 Hazardous decomposition products

Other decomposition products - No data available

Hazardous decomposition products formed under fire conditions. - Carbon oxides

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male - 2,260 mg/kg

Inhalation: No data available

Dermal: No data available

NOAEL Feed - Rat - male - > 535.8 mg/kg

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

- Guinea pig

Result: Did not cause sensitisation on laboratory animals.

(OECD Test Guideline 406)

#### Germ cell mutagenicity

in vitro assay

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Mouse - male and female

Result: negative

#### Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Cumene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Cumene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

May cause respiratory irritation.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: GR8575000

narcosis, Central nervous system depression, Dermatitis, Gastrointestinal disturbance, Damage to the lungs., Liver injury may occur., Kidney injury may occur.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 4.8 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia (water flea) - 2.14 mg/l - 48 h (OECD Test Guideline 202)

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 2.60 mg/l - 72 h

**12.2 Persistence and degradability**

Biodegradability Result: - According to the results of tests of biodegradability this product is not readily biodegradable.

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1918      Class: 3      Packing group: III  
 Proper shipping name: Isopropylbenzene  
 Reportable Quantity (RQ): 5000 lbs  
 Poison Inhalation Hazard: No

**IMDG**

UN number: 1918      Class: 3      Packing group: III      EMS-No: F-E, S-E  
 Proper shipping name: ISOPROPYLBENZENE  
 Marine pollutant:yes

**IATA**

UN number: 1918      Class: 3  
 Proper shipping name: Isopropylbenzene

Packing group: III

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Cumene	98-82-8	2010-06-11

**16. OTHER INFORMATION****Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Carc.	Carcinogenicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the

product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.14

Revision Date: 10/03/2017

Print Date: 11/10/2018

SDS preview

# LEAD

**DANGER**

7439-92-1

by Fisher Scientific

---

## Synonyms

C.I. 77575, C.I. Pigment Metal 4, EINECS 231-100-4, Glover, HSDB 231, Lead flake, Olow, Plumbum, CI 77575, Plumbum metallicum, Blei, CI pigment metal 4, EC 231-100-4, KS-4, Lead, Lead element, Lead S2, Olow [Polish], Omaha & grant, Pb-S 100, Rough lead bullion, CCRIS 1581, Lead metal, Lead S 2, SSO 1, UNII-2P299V784P

## Hazard statements

Harmful if inhaled

Harmful if swallowed

May cause cancer

May cause damage to organs through prolonged or repeated exposure

May cause drowsiness or dizziness

## Precautions

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Do not eat, drink or smoke when using this product

Use only outdoors or in a well-ventilated area

Rinse mouth

Store locked up

## Hazard category

Acute toxicity, inhalation, Acute toxicity, oral, Carcinogenicity, Specific target organ toxicity, repeated exposure, Specific target organ toxicity, single exposure; Narcotic effects



2000200020002000&param1=ZmRwLjFfNzE0NjEwMDNORQ==&unique=1525284976)

The information contained herein is based on data compiled from the chemical components of the (M)SDS and may not accurately represent the safety hazards for the product. Only the manufacturer of the product can make actual representations about the hazard profile of a chemical product. No warranty is expressed or implied regarding the accuracy of these data or the results to be obtained from the use thereof.

© 2017 Chemical Safety Software



## SAFETY DATA SHEET

Version 3.12  
Revision Date 12/02/2015  
Print Date 05/01/2016

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Mercury

Product Number : 215457  
Brand : Sigma-Aldrich  
Index-No. : 080-001-00-0

CAS-No. : 7439-97-6

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Inhalation (Category 2), H330

Reproductive toxicity (Category 1B), H360

Specific target organ toxicity - repeated exposure (Category 1), H372

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H330

Fatal if inhaled.

H360

May damage fertility or the unborn child.

H372

Causes damage to organs through prolonged or repeated exposure.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P284	Wear respiratory protection.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	:	Hg
Molecular weight	:	200.59 g/mol
CAS-No.	:	7439-97-6
EC-No.	:	231-106-7
Index-No.	:	080-001-00-0

#### Hazardous components

Component	Classification	Concentration
<b>Mercury</b>	Acute Tox. 2; Repr. 1B; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H330, H360, H372, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Mercury/mercury oxides.

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal. In some instances, a mercury spill kit may be used. Please consult with your site EHS representative to determine the most appropriate clean up method. Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Mercury	7439-97-6	C	0.1 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
	Remarks	Potential for dermal absorption		

		CEIL	1.0mg/10m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	0.05 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		
		TWA	0.025 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Kidney damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	0.05 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Mercury	7439-97-6	Mercury	0.0400 mg/g	In urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Prior to shift (16 hours after exposure ceases)			
		Mercury	15.0000 µg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                |
|-------------------------------------------------|--------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: silver, white                                          |
| b) Odour                                        | odourless                                                                      |
| c) Odour Threshold                              | No data available                                                              |
| d) pH                                           | No data available                                                              |
| e) Melting point/freezing point                 | Melting point/range: -38.87 °C (-37.97 °F) - lit.                              |
| f) Initial boiling point and boiling range      | 356.6 °C (673.9 °F) - lit.                                                     |
| g) Flash point                                  | Not applicable                                                                 |
| h) Evaporation rate                             | No data available                                                              |
| i) Flammability (solid, gas)                    | No data available                                                              |
| j) Upper/lower flammability or explosive limits | No data available                                                              |
| k) Vapour pressure                              | < 0.01 hPa (< 0.01 mmHg) at 20 °C (68 °F)<br>1 hPa (1 mmHg) at 126 °C (259 °F) |
| l) Vapour density                               | 6.93 - (Air = 1.0)                                                             |
| m) Relative density                             | 13.55 g/cm <sup>3</sup> at 25 °C (77 °F)                                       |
| n) Water solubility                             | 0.00006 g/l at 25 °C (77 °F)                                                   |
| o) Partition coefficient: n-octanol/water       | No data available                                                              |
| p) Auto-ignition temperature                    | No data available                                                              |
| q) Decomposition temperature                    | No data available                                                              |
| r) Viscosity                                    | No data available                                                              |
| s) Explosive properties                         | No data available                                                              |
| t) Oxidizing properties                         | No data available                                                              |

### 9.2 Other safety information

Relative vapour density 6.93 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents, Ammonia, Azides, Nitrates, Chlorates, Copper

### 10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

LC50 Inhalation - Rat - male - 2 h - < 27 mg/m<sup>3</sup>

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Mercury)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

Presumed human reproductive toxicant

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

Causes damage to organs through prolonged or repeated exposure.

#### Aspiration hazard

No data available

**Additional Information**

RTECS: OV4550000

Mercury accumulates in almost all tissues, especially in the: Kidney, Effects due to ingestion may include: Nausea, Vomiting, Diarrhoea, intestinal bleeding

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish mortality LC50 - Cyprinus carpio (Carp) - 0.160 mg/l - 96 h

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

Bioaccumulation Carassius auratus (goldfish) - 1,789 d  
- 0.25 µg/l

Bioconcentration factor (BCF): 155,986

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

No data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 2809 Class: 8 (6.1) Packing group: III  
Proper shipping name: A,W Mercury  
Reportable Quantity (RQ): 1 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 2809 Class: 8 (6.1) Packing group: III EMS-No: F-A, S-B  
Proper shipping name: MERCURY  
Marine pollutant:yes

**IATA**

UN number: 2809 Class: 8 (6.1) Packing group: III  
Proper shipping name: Mercury

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2007-07-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2007-07-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2007-07-01

### California Prop. 65 Components

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

CAS-No.	Revision Date
7439-97-6	2013-12-20

Mercury

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H330	Fatal if inhaled.
H360	May damage fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Repr.	Reproductive toxicity

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.



**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.12

Revision Date: 12/02/2015

Print Date: 05/01/2016

## SAFETY DATA SHEET

Version 6.0  
Revision Date 03/14/2018  
Print Date 01/21/2019

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Methyl Ethyl Ketone, United States Pharmacopeia (USP) Reference Standard

Product Number : 1430101  
Brand : US Pharmacopeia

CAS-No. : 78-93-3

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES

Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

**GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**  
Flammable liquids (Category 2), H225

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)  
H225 : Highly flammable liquid and vapour.  
H319 : Causes serious eye irritation.  
H336 : May cause drowsiness or dizziness.

Precautionary statement(s)	
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Molecular weight	:	72.11 g/mol
CAS-No.	:	78-93-3

#### Hazardous components

Component	Classification	Concentration
<b>Ethyl methyl ketone</b>		
	Flam. Liq. 2; Eye Irrit. 2A; STOT SE 3; H225, H319, H336	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

- 4.2 Most important symptoms and effects, both acute and delayed**  
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11
- 4.3 Indication of any immediate medical attention and special treatment needed**  
No data available
- 

## 5. FIREFIGHTING MEASURES

- 5.1 Extinguishing media**  
**Suitable extinguishing media**  
Dry powder Dry sand  
**Unsuitable extinguishing media**  
Do NOT use water jet.
- 5.2 Special hazards arising from the substance or mixture**  
Carbon oxides
- 5.3 Advice for firefighters**  
Wear self-contained breathing apparatus for firefighting if necessary.
- 5.4 Further information**  
Use water spray to cool unopened containers.
- 

## 6. ACCIDENTAL RELEASE MEASURES

- 6.1 Personal precautions, protective equipment and emergency procedures**  
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.  
For personal protection see section 8.
- 6.2 Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.
- 6.3 Methods and materials for containment and cleaning up**  
Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).
- 6.4 Reference to other sections**  
For disposal see section 13.
- 

## 7. HANDLING AND STORAGE

- 7.1 Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.  
For precautions see section 2.2.
- 7.2 Conditions for safe storage, including any incompatibilities**  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
Storage class (TRGS 510): 3: Flammable liquids
- 7.3 Specific end use(s)**  
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated
- 

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

- 8.1 Control parameters**  
**Components with workplace control parameters**
- 8.2 Exposure controls**  
**Appropriate engineering controls**  
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

### Body Protection

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-87 °C (-125 °F)
f) Initial boiling point and boiling range	79 - 80 °C (174 - 176 °F)
g) Flash point	-3 °C (27 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 10.1 %(V) Lower explosion limit: 1.8 %(V)
k) Vapour pressure	95 hPa at 20 °C (68 °F)
l) Vapour density	2.49 - (Air = 1.0)
m) Relative density	0.805 g/cm <sup>3</sup>
n) Water solubility	soluble
o) Partition coefficient: n-octanol/water	log Pow: 0.29
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

Surface tension 24.6 mN/m at 20 °C (68 °F)

Relative vapour density 2.49 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents, Strong reducing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 2,737 mg/kg

LC50 Inhalation - Mouse - 4 h - 32,000 mg/m<sup>3</sup>

LC50 Inhalation - Mammal - 38,000 mg/m<sup>3</sup>

LD50 Dermal - Rabbit - 6,480 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Irritating to eyes.

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

**Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

Central nervous system depression, Gastrointestinal disturbance, narcosis

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish mortality NOEC - *Cyprinodon variegatus* (sheepshead minnow) - 400 mg/l - 96 h(Ethyl methyl ketone)

LC50 - *Pimephales promelas* (fathead minnow) - 3,130 - 3,320 mg/l - 96 h(Ethyl methyl ketone)

Toxicity to daphnia and other aquatic invertebrates LC50 - *Daphnia magna* (Water flea) - > 520 mg/l - 48 h(Ethyl methyl ketone)

EC50 - *Daphnia magna* (Water flea) - 7,060 mg/l - 24 h(Ethyl methyl ketone)

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Ethyl methyl ketone)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Contact a licensed professional waste disposal service to dispose of this material. Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1193 Class: 3 Packing group: II

Proper shipping name: Ethyl methyl ketone

Reportable Quantity (RQ) : 5000 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 1193      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: ETHYL METHYL KETONE

**IATA**

UN number: 1193      Class: 3      Packing group: II  
Proper shipping name: Ethyl methyl ketone

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

H225      Highly flammable liquid and vapour.  
H319      Causes serious eye irritation.  
H336      May cause drowsiness or dizziness.

**HMIS Rating**

Health hazard:            2  
Chronic Health Hazard:    \*  
Flammability:            3  
Physical Hazard            0

**NFPA Rating**

Health hazard:            2  
Fire Hazard:              3  
Reactivity Hazard:        0



**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.0

Revision Date: 03/14/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

according to Regulation (EC) No. 1907/2006

Version 6.0 Revision Date 10.11.2016

Print Date 21.01.2019

GENERIC EU MSDS - NO COUNTRY SPECIFIC DATA - NO OEL DATA

**SECTION 1: Identification of the substance/mixture and of the company/undertaking****1.1 Product identifiers**

Product name : Methylene chloride

Product Number : M1550000

Brand : Sigma-Aldrich

REACH No. : A registration number is not available for this substance as the substance or its uses are exempted from registration, the annual tonnage does not require a registration or the registration is envisaged for a later registration deadline.

CAS-No. : 75-09-2

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Manufacture of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES

Telephone : +1 314 771-5765

Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

**SECTION 2: Hazards identification****2.1 Classification of the substance or mixture****Classification according to Regulation (EC) No 1272/2008**

Skin irritation (Category 2), H315

Eye irritation (Category 2), H319

Carcinogenicity (Category 2), H351

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Specific target organ toxicity - repeated exposure, Oral (Category 2), Liver, Blood, H373

Specific target organ toxicity - repeated exposure, Inhalation (Category 2), Central nervous system, H373

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 Label elements****Labelling according Regulation (EC) No 1272/2008**

Pictogram



Signal word

Warning

Hazard statement(s)

H315

Causes skin irritation.

H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H373	May cause damage to organs (Liver, Blood) through prolonged or repeated exposure if swallowed.
H373	May cause damage to organs (Central nervous system) through prolonged or repeated exposure if inhaled.

Precautionary statement(s)

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

Supplemental Hazard Statements none

### 2.3 Other hazards

This substance/mixture contains no components considered to be either persistent, bioaccumulative and toxic (PBT), or very persistent and very bioaccumulative (vPvB) at levels of 0.1% or higher.

---

## SECTION 3: Composition/information on ingredients

### 3.1 Substances

Formula	:	CH <sub>2</sub> Cl <sub>2</sub>
Molecular weight	:	84.93 g/mol
CAS-No.	:	75-09-2

#### Hazardous ingredients according to Regulation (EC) No 1272/2008

Component		Classification	Concentration
<b>Methylene chloride</b>			
CAS-No.	75-09-2	Skin Irrit. 2; Eye Irrit. 2; Carc. 2; STOT SE 3; STOT RE 2; H315, H319, H351, H336, H335, H373, H373	<= 100 %
EC-No.	200-838-9		
Index-No.	602-004-00-3		

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## SECTION 4: First aid measures

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## SECTION 5: Firefighting measures

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## SECTION 6: Accidental release measures

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## SECTION 7: Handling and storage

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist. For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Storage class (TRGS 510): Non Combustible Liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## SECTION 8: Exposure controls/personal protection

### 8.1 Control parameters

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of

contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

The selected protective gloves have to satisfy the specifications of EU Directive 89/686/EEC and the standard EN 374 derived from it.

#### **Body Protection**

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engine protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## **SECTION 9: Physical and chemical properties**

### **9.1 Information on basic physical and chemical properties**

a) Appearance	Form: liquid Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-97.0 °C
f) Initial boiling point and boiling range	40.0 °C at 1,013.2 hPa
g) Flash point	No data available
h) Evaporation rate	0.71
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 19 %(V) Lower explosion limit: 12 %(V)
k) Vapour pressure	470.9 hPa at 20.0 °C
l) Vapour density	2.93 - (Air = 1.0)
m) Relative density	1.32 g/cm <sup>3</sup>
n) Water solubility	slightly soluble
o) Partition coefficient: n-octanol/water	log Pow: 1.25
p) Auto-ignition temperature	556.1 °C 662.0 °C
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

Relative vapour density 2.93 - (Air = 1.0)

---

## SECTION 10: Stability and reactivity

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks. Exposure to sunlight.

### 10.5 Incompatible materials

Alkali metals, Aluminum, Strong oxidizing agents, Bases, Amines, Magnesium, Strong acids and strong bases, Vinyl compounds

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas  
In the event of fire: see section 5

---

## SECTION 11: Toxicological information

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - > 2,000 mg/kg(Methylene chloride)

LC50 Inhalation - Rat - 52,000 mg/m<sup>3</sup>(Methylene chloride)

LD50 Dermal - Rat - > 2,000 mg/kg(Methylene chloride)

(OECD Test Guideline 402)

#### Skin corrosion/irritation

Skin - Rabbit(Methylene chloride)

Result: Irritating to skin. - 24 h

(Draize Test)

#### Serious eye damage/eye irritation

Eyes - Rabbit(Methylene chloride)

Result: Irritating to eyes. - 24 h

(Draize Test)

#### Respiratory or skin sensitisation

No data available(Methylene chloride)

#### Germ cell mutagenicity

(Methylene chloride)

Rat

DNA damage

#### Carcinogenicity

Limited evidence of carcinogenicity in animal studies(Methylene chloride)

Suspected human carcinogens(Methylene chloride)

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

#### Reproductive toxicity

No data available(Methylene chloride)

**Specific target organ toxicity - single exposure**

May cause respiratory irritation.(Methylene chloride)

May cause drowsiness or dizziness.(Methylene chloride)

**Specific target organ toxicity - repeated exposure**

Inhalation - May cause damage to organs through prolonged or repeated exposure. - Central nervous system

Oral - May cause damage to organs through prolonged or repeated exposure. - Liver, Blood

**Aspiration hazard**

No data available(Methylene chloride)

**Additional Information**

RTECS: Not available

Dichloromethane is metabolized in the body producing carbon monoxide which blood, reducing the oxygen-carrying capacity of the blood., Acts as a simple asphyxiant by displacing air., anesthetic effects, Difficulty in breathing, Headache, Dizziness, Prolonged or repeated contact with skin may cause:, defatting, Dermatitis, Contact with eyes can cause:, Redness, Blurred vision, Provokes tears., Effects due to ingestion may include:, Gastrointestinal discomfort, Central nervous system depression, Paresthesia., Drowsiness, Convulsions, Conjunctivitis., Pulmonary edema. Effects may be delayed., Irregular breathing., Stomach/intestinal disorders, Nausea, Vomiting, Increased liver enzymes., Weakness, Heavy or prolonged skin exposure may result in the absorption of harmful amounts of material., Abdominal pain(Methylene chloride)

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.(Methylene chloride)

---

**SECTION 12: Ecological information****12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 193.00 mg/l - 96 h(Methylene chloride)

NOEC - Cyprinodon variegatus (sheepshead minnow) - 130 mg/l - 96 h(Methylene chloride)

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 1,682.00 mg/l - 48 h(Methylene chloride)

**12.2 Persistence and degradability**

Biodegradability Result: < 26 % - Not readily biodegradable. (OECD Test Guideline 301C)

**12.3 Bioaccumulative potential**

Does not bioaccumulate.

**12.4 Mobility in soil**

No data available(Methylene chloride)

**12.5 Results of PBT and vPvB assessment**

This substance/mixture contains no components considered to be either persistent, bioaccumulative and toxic (PBT), or very persistent and very bioaccumulative (vPvB) at levels of 0.1% or higher.

**12.6 Other adverse effects**

---

**SECTION 13: Disposal considerations****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company.

**Contaminated packaging**  
Dispose of as unused product.

---

#### SECTION 14: Transport information

<b>14.1 UN number</b>			
ADR/RID:	IMDG:		IATA:
<b>14.2 UN proper shipping name</b>			
ADR/RID:			
IMDG:			
IATA:			
<b>14.3 Transport hazard class(es)</b>			
ADR/RID:	IMDG:		IATA:
<b>14.4 Packaging group</b>			
ADR/RID:	IMDG:		IATA:
<b>14.5 Environmental hazards</b>			
ADR/RID:	IMDG Marine pollutant:		IATA:
<b>14.6 Special precautions for user</b>			
No data available			

---

#### SECTION 15: Regulatory information

- 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture**  
This safety datasheet complies with the requirements of Regulation (EC) No. 1907/2006.
- 15.2 Chemical safety assessment**  
For this product a chemical safety assessment was not carried out

---

#### SECTION 16: Other information

**Full text of H-Statements referred to under sections 2 and 3.**

H315	Causes skin irritation.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure if inhaled.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.



---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Methyl tert-butyl ether solution

Product Number : CRM48483

Brand : Supelco

Index-No. : 603-001-00-X

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225  
Acute toxicity, Oral (Category 3), H301  
Acute toxicity, Inhalation (Category 3), H331  
Acute toxicity, Dermal (Category 3), H311  
Specific target organ toxicity - single exposure (Category 1), H370

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H301 + H311 + H331

Toxic if swallowed, in contact with skin or if inhaled.

H370

Causes damage to organs.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P307 + P311	IF exposed: Call a POISON CENTER or doctor/ physician.
P322	Specific measures (see supplemental first aid instructions on this label).
P330	Rinse mouth.
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.2 Mixtures

#### Hazardous components

Component	Classification	Concentration
<b>Methanol</b>		
CAS-No.	67-56-1	90 - 100 %
EC-No.	200-659-6	
Index-No.	603-001-00-X	
Registration number	01-2119433307-44-XXXX	

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

Use water spray to cool unopened containers.

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

#### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

#### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

#### 6.4 Reference to other sections

For disposal see section 13.

---

### 7. HANDLING AND STORAGE

#### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

#### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store at room temperature.

#### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

### 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

#### 8.1 Control parameters

##### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Methanol	67-56-1	TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Headache Nausea Dizziness Eye damage		

		Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		STEL	250.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Headache Nausea Dizziness Eye damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	200.000000 ppm 260.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	250.000000 ppm 325.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	200.000000 ppm 260.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Headache Nausea Dizziness Eye damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		STEL	250 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Headache Nausea Dizziness Eye damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	200 ppm 260 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	250 ppm 325 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	200 ppm 260 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		STEL	250 ppm 325 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		

		TWA	200 ppm 260 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		
		C	1,000 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		PEL	200 ppm 260 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		STEL	250 ppm 325 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Methanol	67-56-1	Methanol	15.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
		Methanol	15 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

## 8.2 Exposure controls

### Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                            |
|-------------------------------------------------|--------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                                                         |
| b) Odour                                        | pungent                                                                                    |
| c) Odour Threshold                              | No data available                                                                          |
| d) pH                                           | No data available                                                                          |
| e) Melting point/freezing point                 | Melting point/range: -98.0 °C (-144.4 °F)                                                  |
| f) Initial boiling point and boiling range      | 64.0 - 65.0 °C (147.2 - 149.0 °F) at 1,013 hPa (760 mmHg)                                  |
| g) Flash point                                  | 9.7 °C (49.5 °F) - closed cup                                                              |
| h) Evaporation rate                             | No data available                                                                          |
| i) Flammability (solid, gas)                    | No data available                                                                          |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 36 %(V)<br>Lower explosion limit: 6 %(V)                            |
| k) Vapour pressure                              | 546.6 hPa (410.0 mmHg) at 50.0 °C (122.0 °F)<br>130.3 hPa (97.7 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                          |
| m) Relative density                             | 0.79 g/cm <sup>3</sup> at 20 °C (68 °F)                                                    |
| n) Water solubility                             | completely miscible                                                                        |
| o) Partition coefficient: n-octanol/water       | No data available                                                                          |
| p) Auto-ignition temperature                    | No data available                                                                          |
| q) Decomposition temperature                    | No data available                                                                          |
| r) Viscosity                                    | No data available                                                                          |
| s) Explosive properties                         | No data available                                                                          |
| t) Oxidizing properties                         | No data available                                                                          |

### 9.2 Other safety information

Dissociation constant 15.3

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air. Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

Heat, flames and sparks. Extremes of temperature and direct sunlight.

### 10.5 Incompatible materials

Acid chlorides, Acid anhydrides, Oxidizing agents, Alkali metals, Reducing agents, Acids

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

#### Additional Information

RTECS: Not available

Methyl alcohol may be fatal or cause blindness if swallowed., Cannot be made non-poisonous., Effects due to ingestion may include:, Nausea, Headache, Vomiting, Gastrointestinal disturbance, Dizziness, Weakness, Confusion., Drowsiness, Unconsciousness, May cause convulsions.

Stomach - Irregularities - Based on Human Evidence  
Stomach - Irregularities - Based on Human Evidence  
Central nervous system - (tert-Butyl methyl ether)

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1230      Class: 3      Packing group: II

Proper shipping name: Methanol, solution

Reportable Quantity (RQ):

Poison Inhalation Hazard: No

### IMDG

UN number: 1230      Class: 3 (6.1)      Packing group: II      EMS-No: F-E, S-D

Proper shipping name: METHANOL, SOLUTION

### IATA

UN number: 1230      Class: 3 (6.1)      Packing group: II

Proper shipping name: Methanol, solution

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Methanol	67-56-1	2007-07-01

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components



Methanol	CAS-No. 67-56-1	Revision Date 2007-07-01
----------	--------------------	-----------------------------

**Pennsylvania Right To Know Components**

Methanol	CAS-No. 67-56-1	Revision Date 2007-07-01
tert-Butyl methyl ether	1634-04-4	2007-07-01

**New Jersey Right To Know Components**

Methanol	CAS-No. 67-56-1	Revision Date 2007-07-01
----------	--------------------	-----------------------------

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H301	Toxic if swallowed.
H301 + H311 + H331	Toxic if swallowed, in contact with skin or if inhaled.
H311	Toxic in contact with skin.
H331	Toxic if inhaled.
H370	Causes damage to organs.
STOT SE	Specific target organ toxicity - single exposure

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.8

Revision Date: 10/03/2017

Print Date: 01/21/2019

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Naphthalene

Product Number : 84679  
Brand : Sigma-Aldrich  
Index-No. : 601-052-00-2

CAS-No. : 91-20-3

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable solids (Category 2), H228  
Acute toxicity, Oral (Category 4), H302  
Carcinogenicity (Category 2), H351  
Acute aquatic toxicity (Category 1), H400  
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H228 Flammable solid.  
H302 Harmful if swallowed.  
H351 Suspected of causing cancer.  
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and understood.  
P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>10</sub> H <sub>8</sub>
Molecular weight	: 128.17 g/mol
CAS-No.	: 91-20-3
EC-No.	: 202-049-5
Index-No.	: 601-052-00-2
Registration number	: 01-2119561346-37-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Naphthalene</b>	Flam. Sol. 2; Acute Tox. 4; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H228, H302, H351, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Keep in suitable, closed containers for disposal. Contain spillage, pick up with an electrically protected vacuum cleaner or by wet-brushing and transfer to a container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs. Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): 4.1B: Flammable solid hazardous materials

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Naphthalene	91-20-3	TWA	10 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Hemolytic anemia Upper Respiratory Tract irritation Cataract Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		

		TWA	10 ppm 50 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		ST	15 ppm 75 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		TWA	10 ppm 50 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	0.1 ppm 0.5 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	1-Naphthol + 2-Naphthol			ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the

sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                                                       |
|-------------------------------------------------|---------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: flakes, granules<br>Colour: white                                               |
| b) Odour                                        | aromatic                                                                              |
| c) Odour Threshold                              | No data available                                                                     |
| d) pH                                           | No data available                                                                     |
| e) Melting point/freezing point                 | Melting point/range: 79.5 - 81.0 °C (175.1 - 177.8 °F)                                |
| f) Initial boiling point and boiling range      | 218 °C (424 °F) - lit.                                                                |
| g) Flash point                                  | 80.0 °C (176.0 °F) - closed cup                                                       |
| h) Evaporation rate                             | No data available                                                                     |
| i) Flammability (solid, gas)                    | No data available                                                                     |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 5.9 %(V)<br>Lower explosion limit: 0.9 %(V)                    |
| k) Vapour pressure                              | 1.3 hPa (1.0 mmHg) at 53.0 °C (127.4 °F)<br>0.04 hPa (0.03 mmHg) at 25.0 °C (77.0 °F) |
| l) Vapour density                               | No data available                                                                     |
| m) Relative density                             | 1.085 g/cm <sup>3</sup> at 24.7 °C (76.5 °F)                                          |
| n) Water solubility                             | 0.0308 g/l at 25 °C (77 °F) - OECD Test Guideline 105 - slightly soluble              |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.4 at 25 °C (77 °F)                                                         |
| p) Auto-ignition temperature                    | 526.0 °C (978.8 °F)                                                                   |
| q) Decomposition temperature                    | No data available                                                                     |
| r) Viscosity                                    | 1.05 mm <sup>2</sup> /s at 81.5 °C (178.7 °F) -                                       |
| s) Explosive properties                         | No data available                                                                     |
| t) Oxidizing properties                         | No data available                                                                     |

### **9.2 Other safety information**

- |                 |                                  |
|-----------------|----------------------------------|
| Surface tension | 31.8 mN/m at 100.0 °C (212.0 °F) |
|-----------------|----------------------------------|

---

## **10. STABILITY AND REACTIVITY**

### **10.1 Reactivity**

No data available

### **10.2 Chemical stability**

Stable under recommended storage conditions.

### **10.3 Possibility of hazardous reactions**

No data available

#### 10.4 Conditions to avoid

Heat, flames and sparks.

#### 10.5 Incompatible materials

Strong oxidizing agents

#### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

### 11. TOXICOLOGICAL INFORMATION

#### 11.1 Information on toxicological effects

##### Acute toxicity

LD50 Oral - Rat - 490.0 mg/kg

LC50 Inhalation - Rat - male and female - 4 h - > 0.4 mg/l  
(OECD Test Guideline 403)

LD50 Dermal - Rabbit - 20,000 mg/kg

No data available

##### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation - 24 h

##### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation

##### Respiratory or skin sensitisation

Maximisation Test - Guinea pig

Result: Does not cause skin sensitisation.

(OECD Test Guideline 406)

##### Germ cell mutagenicity

Ames test

S. typhimurium

Result: negative

Rat - male

Result: negative

##### Carcinogenicity

Carcinogenicity - Rat - male and female - inhalation (vapour)

Tumorigenic: Tumors at site of application.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Naphthalene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Naphthalene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

##### Reproductive toxicity

No data available

##### Specific target organ toxicity - single exposure

No data available

##### Specific target organ toxicity - repeated exposure

No data available

##### Aspiration hazard

No data available

##### Additional Information

Repeated dose toxicity  
RTECS: QJ0525000

Rat - male and female - Oral - NOAEL : 100 mg/kg - LOAEL : 400 mg/kg - OECD Test Guideline 408

Absorption into the body leads to the formation of methemoglobin which in sufficient concentration causes cyanosis. Onset may be delayed 2 to 4 hours or longer., Naphthalene is retinotoxic and systemic absorption of its vapors above 15ppm, may result in: cataracts, optic neuritis, corneal injury, Eye irritation, Ingestion may provoke the following symptoms: hemolytic anemia, hemoglobinuria, Nausea, Headache, Vomiting, Gastrointestinal disturbance, Convulsions, anemia, Kidney injury may occur., Seizures., Coma.

Heart -

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish flow-through test LC50 - Pimephales promelas (fathead minnow) - 7.9 mg/l - 96 h (OECD Test Guideline 203)

Toxicity to daphnia and other aquatic invertebrates static test EC50 - Daphnia magna (Water flea) - 2.16 mg/l - 48 h

### 12.2 Persistence and degradability

Biodegradability aerobic - Exposure time 28 d  
Result: 2 % - Not readily biodegradable.

### 12.3 Bioaccumulative potential

Bioaccumulation Fish

Bioconcentration factor (BCF): 427 - 1,158

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1334 Class: 4.1 Packing group: III  
Proper shipping name: Naphthalene, crude  
Reportable Quantity (RQ): 100 lbs Marine pollutant: yes  
Poison Inhalation Hazard: No

### IMDG

UN number: 1334 Class: 4.1 Packing group: III EMS-No: F-A, S-G  
Proper shipping name: NAPHTHALENE, CRUDE  
Marine pollutant: yes Marine pollutant: yes



**IATA**

UN number: 1334      Class: 4.1      Packing group: III  
 Proper shipping name: Naphthalene, crude

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Naphthalene	91-20-3	2007-09-28

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Flam. Sol.	Flammable solids
H228	Flammable solid.
H302	Harmful if swallowed.
H351	Suspected of causing cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.  
 The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
 Product Safety – Americas Region  
 1-800-521-8956

Version: 5.10

Revision Date: 06/21/2018

Print Date: 11/10/2018



## SAFETY DATA SHEET

Version 4.4  
Revision Date 07/09/2014  
Print Date 11/10/2018

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Propylbenzene

Product Number : P52407  
Brand : Aldrich  
Index-No. : 601-024-00-X  
CAS-No. : 103-65-1

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Manufacture of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H335 May cause respiratory irritation.  
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.  
P233 Keep container tightly closed.  
P240 Ground/bond container and receiving equipment.  
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P312	Call a POISON CENTER or doctor/ physician if you feel unwell.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Synonyms	: 1-Phenylpropane
Formula	: C <sub>9</sub> H <sub>12</sub>
Molecular Weight	: 120.19 g/mol
CAS-No.	: 103-65-1
EC-No.	: 203-132-9
Index-No.	: 601-024-00-X

#### Hazardous components

Component	Classification	Concentration
<b>Propylbenzene</b>	Flam. Liq. 3; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H335, H411	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

- 4.2 Most important symptoms and effects, both acute and delayed**  
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11
- 4.3 Indication of any immediate medical attention and special treatment needed**  
no data available
- 

## 5. FIREFIGHTING MEASURES

- 5.1 Extinguishing media**  
**Suitable extinguishing media**  
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
- 5.2 Special hazards arising from the substance or mixture**  
Carbon oxides
- 5.3 Advice for firefighters**  
Wear self contained breathing apparatus for fire fighting if necessary.
- 5.4 Further information**  
Use water spray to cool unopened containers.
- 

## 6. ACCIDENTAL RELEASE MEASURES

- 6.1 Personal precautions, protective equipment and emergency procedures**  
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.  
For personal protection see section 8.
- 6.2 Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.
- 6.3 Methods and materials for containment and cleaning up**  
Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).
- 6.4 Reference to other sections**  
For disposal see section 13.
- 

## 7. HANDLING AND STORAGE

- 7.1 Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.  
For precautions see section 2.2.
- 7.2 Conditions for safe storage, including any incompatibilities**  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.
- 7.3 Specific end use(s)**  
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated
- 

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

- 8.1 Control parameters**  
**Components with workplace control parameters**  
Contains no substances with occupational exposure limit values.
- 8.2 Exposure controls**  
**Appropriate engineering controls**  
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                              |
|--------------------------------------------|----------------------------------------------|
| a) Appearance                              | Form: liquid, clear<br>Colour: colourless    |
| b) Odour                                   | no data available                            |
| c) Odour Threshold                         | no data available                            |
| d) pH                                      | no data available                            |
| e) Melting point/freezing point            | Melting point/range: -99 °C (-146 °F) - lit. |
| f) Initial boiling point and boiling range | 159 °C (318 °F) - lit.                       |
| g) Flash point                             | 42.0 °C (107.6 °F) - closed cup              |
| h) Evaporation rate                        | no data available                            |
| i) Flammability (solid, gas)               | no data available                            |

j) Upper/lower flammability or explosive limits	Upper explosion limit: 6 %(V) Lower explosion limit: 0.8 %(V)
k) Vapour pressure	no data available
l) Vapour density	no data available
m) Relative density	0.862 g/cm <sup>3</sup> at 25 °C (77 °F)
n) Water solubility	slightly soluble
o) Partition coefficient: n-octanol/water	no data available
p) Auto-ignition temperature	450.0 °C (842.0 °F)
q) Decomposition temperature	no data available
r) Viscosity	no data available
s) Explosive properties	no data available
t) Oxidizing properties	no data available

## 9.2 Other safety information

no data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

no data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

no data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - no data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - rat - 6,040 mg/kg

Remarks: Behavioral:Somnolence (general depressed activity).

LC50 Inhalation - rat - 2 h - 65000 ppm

Dermal: no data available

no data available

#### Skin corrosion/irritation

no data available

#### Serious eye damage/eye irritation

no data available

#### Respiratory or skin sensitisation

no data available

**Germ cell mutagenicity**

no data available

**Carcinogenicity**

- IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
- ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.
- NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
- OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

no data available

no data available

**Specific target organ toxicity - single exposure**

May cause respiratory irritation.

**Specific target organ toxicity - repeated exposure**

no data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: DA8750000

Damage to the lungs., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney -

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

- Toxicity to fish LC50 - *Oncorhynchus mykiss* (rainbow trout) - 1.55 mg/l - 96.0 h
- Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - *Daphnia magna* (Water flea) - 2 mg/l - 24 h

**12.2 Persistence and degradability**

no data available

**12.3 Bioaccumulative potential**

no data available

**12.4 Mobility in soil**

no data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Toxic to aquatic life.

Avoid release to the environment.



---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 2364      Class: 3      Packing group: III  
Proper shipping name: n-Propyl benzene  
Marine pollutant: No  
Poison Inhalation Hazard: No

### IMDG

UN number: 2364      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: n-PROPYLBENZENE  
Marine pollutant: No

### IATA

UN number: 2364      Class: 3      Packing group: III  
Proper shipping name: n-Propylbenzene

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Propylbenzene	103-65-1	1993-04-24

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Propylbenzene	103-65-1	1993-04-24

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Propylbenzene	103-65-1	1993-04-24

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity

Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H335	May cause respiratory irritation.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.
STOT SE	Specific target organ toxicity - single exposure

#### **HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

#### **NFPA Rating**

Health hazard:	2
Fire Hazard:	2
Reactivity Hazard:	0

#### **Further information**

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

#### **Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.4

Revision Date: 07/09/2014

Print Date: 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Toluene

Product Number : 244511  
Brand : Sigma-Aldrich  
Index-No. : 601-021-00-3

CAS-No. : 108-88-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USATelephone : +1 800-325-5832  
Fax : +1 800-325-5052**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Reproductive toxicity (Category 2), H361

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Specific target organ toxicity - repeated exposure (Category 2), H373

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H315 Causes skin irritation.  
H336 May cause drowsiness or dizziness.  
H361 Suspected of damaging fertility or the unborn child.  
H373 May cause damage to organs through prolonged or repeated exposure.  
H401 Toxic to aquatic life.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>7</sub> H <sub>8</sub>
Molecular weight	: 92.14 g/mol
CAS-No.	: 108-88-3
EC-No.	: 203-625-9
Index-No.	: 601-021-00-3
Registration number	: 01-2119471310-51-XXXX

### Hazardous components

Component	Classification	Concentration
<b>Toluene</b>	Flam. Liq. 2; Skin Irrit. 2; Repr. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; H225, H304, H315, H336, H361, H373, H401	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Handle and store under inert gas.

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Toluene	108-88-3	TWA	100 ppm 375 mg/m <sup>3</sup>	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		STEL	150 ppm 560 mg/m <sup>3</sup>	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
	Remarks	Z37.12-1967		
		CEIL	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.12-1967		
		Peak	500 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.12-1967		
		TWA	20 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Visual impairment Female reproductive Pregnancy loss 2015 Adoption Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	100 ppm 375 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		ST	150 ppm 560 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Toluene	108-88-3	Toluene	0.0200 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Prior to last shift of workweek			
		Toluene	0.0300 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		o-Cresol	0.3000 mg/g	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		Toluene	0.02 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		Prior to last shift of workweek			

		Toluene	0.03 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		o-Cresol	0.3mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

#### Derived No Effect Level (DNEL)

Application Area	Exposure routes	Health effect	Value
Workers	Inhalation	Acute systemic effects	384 mg/m3
Workers	Inhalation	Acute local effects	384 mg/m3
Workers	Skin contact	Long-term systemic effects	384mg/kg BW/d
Workers	Inhalation	Long-term systemic effects	192 mg/m3
Workers	Inhalation	Long-term local effects	192 mg/m3
Consumers	Inhalation	Acute systemic effects	226 mg/m3
Consumers	Inhalation	Acute local effects	226 mg/m3
Consumers	Skin contact	Long-term systemic effects	226mg/kg BW/d
Consumers	Inhalation	Long-term systemic effects	56.5 mg/m3
Consumers	Ingestion	Long-term systemic effects	8.13mg/kg BW/d

#### Predicted No Effect Concentration (PNEC)

Compartment	Value
Soil	2.89 mg/kg
Marine water	0.68 mg/l
Fresh water	0.68 mg/l
Marine sediment	16.39 mg/kg
Fresh water sediment	16.39 mg/kg
Sewage treatment plant	13.61 mg/l
Aquatic intermittent release	0.68 mg/l

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### **Body Protection**

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                                  |
|-------------------------------------------------|------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                               |
| b) Odour                                        | aromatic                                                         |
| c) Odour Threshold                              | No data available                                                |
| d) pH                                           | No data available                                                |
| e) Melting point/freezing point                 | Melting point/range: -93 °C (-135 °F)                            |
| f) Initial boiling point and boiling range      | 110 - 111 °C (230 - 232 °F)                                      |
| g) Flash point                                  | 4.0 °C (39.2 °F) - closed cup                                    |
| h) Evaporation rate                             | No data available                                                |
| i) Flammability (solid, gas)                    | No data available                                                |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7 %(V)<br>Lower explosion limit: 1.2 %(V) |
| k) Vapour pressure                              | 29.1 hPa (21.8 mmHg) at 20.0 °C (68.0 °F)                        |
| l) Vapour density                               | No data available                                                |
| m) Relative density                             | 0.865 g/mL at 25 °C (77 °F)                                      |
| n) Water solubility                             | 0.5 g/l at 15 °C (59 °F)                                         |
| o) Partition coefficient: n-octanol/water       | No data available                                                |
| p) Auto-ignition temperature                    | 535.0 °C (995.0 °F)                                              |
| q) Decomposition temperature                    | No data available                                                |
| r) Viscosity                                    | No data available                                                |
| s) Explosive properties                         | No data available                                                |
| t) Oxidizing properties                         | No data available                                                |

### **9.2 Other safety information**

No data available



---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - > 5,580 mg/kg

LC50 Inhalation - Rat - 4 h - 12,500 - 28,800 mg/m<sup>3</sup>

LD50 Dermal - Rabbit - 12,196 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation - 24 h

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Rat

Liver

DNA damage

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

Damage to fetus possible

Suspected human reproductive toxicant

Reproductive toxicity - Rat - Inhalation

Paternal Effects: Spermatogenesis (including genetic material, sperm morphology, motility, and count).

Experiments have shown reproductive toxicity effects in male and female laboratory animals.

Developmental Toxicity - Rat - Oral

Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: XS5250000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to fish	LC50 - Oncorhynchus mykiss (rainbow trout) - 7.63 mg/l - 96 h
	NOEC - Pimephales promelas (fathead minnow) - 5.44 mg/l - 7 d
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 8.00 mg/l - 24 h
	Immobilization EC50 - Daphnia magna (Water flea) - 6 mg/l - 48 h
Toxicity to algae	EC50 - Chlorella vulgaris (Fresh water algae) - 245.00 mg/l - 24 h
	EC50 - Pseudokirchneriella subcapitata (green algae) - 10.00 mg/l - 24 h

**12.2 Persistence and degradability**

Biodegradability Result: - Readily biodegradable.

**12.3 Bioaccumulative potential**

Bioaccumulation Leuciscus idus (Golden orfe) - 3 d - 0.05 mg/l

Bioconcentration factor (BCF): 90

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life.

---

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION**

**DOT (US)**

UN number: 1294      Class: 3      Packing group: II  
Proper shipping name: Toluene  
Reportable Quantity (RQ): 1000 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1294      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: TOLUENE

**IATA**

UN number: 1294      Class: 3      Packing group: II  
Proper shipping name: Toluene

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. Toluene	108-88-3	2009-02-01

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H361	Suspected of damaging fertility or the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure.
H401	Toxic to aquatic life.
Repr.	Reproductive toxicity
Skin Irrit.	Skin irritation

**HMIS Rating**

Health hazard:                      2

Chronic Health Hazard: \*  
Flammability: 3  
Physical Hazard 0

**NFPA Rating**

Health hazard: 2  
Fire Hazard: 3  
Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 6.0

Revision Date: 09/21/2017

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Trichloroethylene  
  
Product Number : 251402  
Brand : Sigma-Aldrich  
Index-No. : 602-027-00-9  
  
CAS-No. : 79-01-6

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Skin irritation (Category 2), H315  
Eye irritation (Category 2A), H319  
Germ cell mutagenicity (Category 2), H341  
Carcinogenicity (Category 1B), H350  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336  
Acute aquatic toxicity (Category 3), H402  
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H315 Causes skin irritation.  
H319 Causes serious eye irritation.  
H336 May cause drowsiness or dizziness.  
H341 Suspected of causing genetic defects.  
H350 May cause cancer.  
H412 Harmful to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P281	Use personal protective equipment as required.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Synonyms	:	TCE Trichloroethene
Formula	:	C <sub>2</sub> HCl <sub>3</sub>
Molecular weight	:	131.39 g/mol
CAS-No.	:	79-01-6
EC-No.	:	201-167-4
Index-No.	:	602-027-00-9

#### Hazardous components

Component	Classification	Concentration
<b>Trichloroethylene</b>	Skin Irrit. 2; Eye Irrit. 2A; Muta. 2; Carc. 1B; STOT SE 3; Aquatic Acute 3; Aquatic Chronic 3; H315, H319, H336, H341, H350, H412	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

**If swallowed**

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

No data available

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Light sensitive. Handle and store under inert gas.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Trichloroethylene	79-01-6	TWA	10.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		STEL	25.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		Potential Occupational Carcinogen See Appendix C See Appendix A		
		See Table Z-2		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		Peak	300.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		Peak	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		



		STEL	100 ppm 537 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	25 ppm 135 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Trichloroacetic acid	15.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		Trichloroethanol	0.5000 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In end-exhaled air	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                   |
|-------------------------------------------------|-------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                         |
| b) Odour                                        | No data available                                                 |
| c) Odour Threshold                              | No data available                                                 |
| d) pH                                           | No data available                                                 |
| e) Melting point/freezing point                 | Melting point/range: -84.8 °C (-120.6 °F) - lit.                  |
| f) Initial boiling point and boiling range      | 86.7 °C (188.1 °F) - lit.                                         |
| g) Flash point                                  | No data available                                                 |
| h) Evaporation rate                             | No data available                                                 |
| i) Flammability (solid, gas)                    | No data available                                                 |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 10.5 %(V)<br>Lower explosion limit: 8 %(V) |
| k) Vapour pressure                              | 81.3 hPa (61.0 mmHg) at 20.0 °C (68.0 °F)                         |
| l) Vapour density                               | No data available                                                 |
| m) Relative density                             | 1.463 g/mL at 25 °C (77 °F)                                       |
| n) Water solubility                             | No data available                                                 |
| o) Partition coefficient: n-octanol/water       | log Pow: 2.29log Pow: 5                                           |
| p) Auto-ignition temperature                    | 410.0 °C (770.0 °F)                                               |
| q) Decomposition temperature                    | No data available                                                 |
| r) Viscosity                                    | No data available                                                 |
| s) Explosive properties                         | No data available                                                 |
| t) Oxidizing properties                         | No data available                                                 |

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

## 10.2 Chemical stability

Stable under recommended storage conditions.

## 10.3 Possibility of hazardous reactions

No data available

## 10.4 Conditions to avoid

No data available

## 10.5 Incompatible materials

Oxidizing agents, Strong bases, Magnesium

## 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 4,920 mg/kg

LC50 Inhalation - Mouse - 4 h - 8450 ppm

LD50 Dermal - Rabbit - > 20,000 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Severe skin irritation - 24 h

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

In vitro tests showed mutagenic effects

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 1 - Group 1: Carcinogenic to humans (Trichloroethylene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Trichloroethylene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

**Additional Information**

RTECS: KX4550000

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, Exposure to and/or consumption of alcohol may increase toxic effects., Gastrointestinal disturbance, Kidney injury may occur., narcosis  
To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - 41 mg/l - 96.0 h LOEC - other fish - 11 mg/l - 10.0 d NOEC - Oryzias latipes - 40 mg/l - 10.0 d
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 18.00 mg/l - 48 h
Toxicity to algae	IC50 - Pseudokirchneriella subcapitata (green algae) - 175.00 mg/l - 96 h

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

Does not bioaccumulate.

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Harmful to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1710	Class: 6.1	Packing group: III
Proper shipping name: Trichloroethylene		
Reportable Quantity (RQ): 100 lbs		
Poison Inhalation Hazard: No		

**IMDG**

UN number: 1710	Class: 6.1	Packing group: III	EMS-No: F-A, S-A
Proper shipping name: TRICHLOROETHYLENE			

**IATA**

UN number: 1710	Class: 6.1	Packing group: III
-----------------	------------	--------------------

Proper shipping name: Trichloroethylene

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

Trichloroethylene

CAS-No.	Revision Date
79-01-6	2011-09-01

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Trichloroethylene

CAS-No.	Revision Date
79-01-6	2011-09-01

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H402	Harmful to aquatic life.

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.10

Revision Date: 01/04/2018

Print Date: 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : 2,2,4-Trimethylpentane

Product Number : 360066  
Brand : Sigma-Aldrich  
Index-No. : 601-009-00-8

CAS-No. : 540-84-1

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USATelephone : +1 800-325-5832  
Fax : +1 800-325-5052**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H315 Causes skin irritation.  
H336 May cause drowsiness or dizziness.  
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.  
P233 Keep container tightly closed.

P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P312	Call a POISON CENTER/doctor if you feel unwell.
P321	Specific treatment (see supplemental first aid instructions on this label).
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: Isooctane
Formula	: C <sub>8</sub> H <sub>18</sub>
Molecular weight	: 114.23 g/mol
CAS-No.	: 540-84-1
EC-No.	: 208-759-1
Index-No.	: 601-009-00-8
Registration number	: 01-2119457965-22-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>2,2,4-Trimethylpentane</b>	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; Aquatic Chronic 1; H225, H304, H315, H336, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.



**If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

For small (incipient) fires, use media such as "alcohol" foam, dry chemicals as far as possible. Use very large quantities (flooding) of water applied ineffective. Cool all affected containers with flooding quantities of water.

**5.2 Special hazards arising from the substance or mixture**

Flash back possible over considerable distance., Container explosion may occur under fire conditions.

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
2,2,4-Trimethylpentane	540-84-1	TWA	300 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Upper Respiratory Tract irritation		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 482 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 90 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

##### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

##### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

##### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                |
|-------------------------------------------------|--------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid                                                                   |
| b) Odour                                        | No data available                                                              |
| c) Odour Threshold                              | No data available                                                              |
| d) pH                                           | No data available                                                              |
| e) Melting point/freezing point                 | Melting point/range: -107 °C (-161 °F)                                         |
| f) Initial boiling point and boiling range      | 98 - 99 °C (208 - 210 °F)                                                      |
| g) Flash point                                  | -12 °C (10 °F) - closed cup                                                    |
| h) Evaporation rate                             | No data available                                                              |
| i) Flammability (solid, gas)                    | No data available                                                              |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 6 %(V)<br>Lower explosion limit: 1 %(V)                 |
| k) Vapour pressure                              | 55 hPa (41 mmHg) at 21 °C (70 °F)<br>117 hPa (88 mmHg) at 37.80 °C (100.04 °F) |
| l) Vapour density                               | 3.94 - (Air = 1.0)                                                             |
| m) Relative density                             | 0.692 g/mL at 25 °C (77 °F)                                                    |
| n) Water solubility                             | insoluble                                                                      |
| o) Partition coefficient: n-octanol/water       | log Pow: 4.6                                                                   |
| p) Auto-ignition temperature                    | No data available                                                              |
| q) Decomposition temperature                    | No data available                                                              |
| r) Viscosity                                    | No data available                                                              |
| s) Explosive properties                         | No data available                                                              |
| t) Oxidizing properties                         | No data available                                                              |

### 9.2 Other safety information

Relative vapour density 3.94 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Irritating to skin.

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Rat

Unscheduled DNA synthesis

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

May cause drowsiness or dizziness.

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

The substance or mixture is known to cause human aspiration toxicity hazards or has to be regarded as if it causes a human aspiration toxicity hazard.

#### Additional Information

RTECS: SA3320000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

### 12.2 Persistence and degradability

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1262      Class: 3      Packing group: II  
Proper shipping name: Octanes  
Reportable Quantity (RQ): 1000 lbs Marine pollutant: yes  
Poison Inhalation Hazard: No

### IMDG

UN number: 1262      Class: 3      Packing group: II      EMS-No: F-E, S-E  
Proper shipping name: OCTANES  
Marine pollutant: yes      Marine pollutant: yes

### IATA

UN number: 1262      Class: 3      Packing group: II  
Proper shipping name: Octanes

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

2,2,4-Trimethylpentane	CAS-No. 540-84-1	Revision Date 2007-03-01
------------------------	---------------------	-----------------------------

### Pennsylvania Right To Know Components

2,2,4-Trimethylpentane	CAS-No. 540-84-1	Revision Date 2007-03-01
------------------------	---------------------	-----------------------------

## New Jersey Right To Know Components

2,2,4-Trimethylpentane

CAS-No.  
540-84-1

Revision Date  
2007-03-01

## California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Skin Irrit.	Skin irritation

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	3
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.7

Revision Date: 06/13/2018

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : 1,2,4-Trimethylbenzene

Product Number : T73601

Brand : Aldrich

Index-No. : 601-043-00-3

CAS-No. : 95-63-6

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226

Acute toxicity, Inhalation (Category 4), H332

Skin irritation (Category 2), H315

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 2), H401

Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.

H304 May be fatal if swallowed and enters airways.

H315 Causes skin irritation.

H319 Causes serious eye irritation.

H332 Harmful if inhaled.

H335 May cause respiratory irritation.

H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>9</sub> H <sub>12</sub>
Molecular weight	: 120.19 g/mol
CAS-No.	: 95-63-6
EC-No.	: 202-436-9
Index-No.	: 601-043-00-3

#### Hazardous components

Component	Classification	Concentration
<b>1,2,4-Trimethylbenzene</b>	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H315, H319, H332, H335, H411	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.



---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,2,4-Trimethylbenzene	95-63-6	TWA	25.000000 ppm 125.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
	Remarks	hemimellitene is a mixture of the 1,2,3-isomer with up to 10% of related aromatics such as the 1,2,4-isomer.		
		TWA	25 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Hematologic effects Asthma		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

##### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-43.69 °C (-46.64 °F)
f) Initial boiling point and boiling range	168.0 - 169.0 °C (334.4 - 336.2 °F)
g) Flash point	48.0 °C (118.4 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 6.4 %(V) Lower explosion limit: 0.9 %(V)
k) Vapour pressure	2.3 hPa (1.7 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	0.88 g/cm <sup>3</sup>
n) Water solubility	0.057 g/l at 25 °C (77 °F) - slightly soluble
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	515.0 °C (959.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

#### 10.4 Conditions to avoid

Heat, flames and sparks.

#### 10.5 Incompatible materials

Strong oxidizing agents

#### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

### 11. TOXICOLOGICAL INFORMATION

#### 11.1 Information on toxicological effects

##### Acute toxicity

LD50 Oral - Rat - male - 6,000 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

##### Skin corrosion/irritation

No data available

##### Serious eye damage/eye irritation

No data available

##### Respiratory or skin sensitisation

No data available

##### Germ cell mutagenicity

in vitro assay

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Rat - male and female - Bone marrow

Result: negative

##### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

##### Reproductive toxicity

No data available

No data available

##### Specific target organ toxicity - single exposure

No data available

##### Specific target organ toxicity - repeated exposure

No data available

##### Aspiration hazard

No data available

##### Additional Information

RTECS: DC3325000

prolonged or repeated exposure can cause:, narcosis, Bronchitis., Symptoms and signs include headache, dizziness, fatigue, muscular weakness, drowsiness and in extreme cases, loss of consciousness., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish	flow-through test LC50 - Pimephales promelas (fathead minnow) - 7.72 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates	static test EC50 - Daphnia magna (Water flea) - 3.6 mg/l - 48 h (OECD Test Guideline 202)

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3295      Class: 3      Packing group: III  
Proper shipping name: Hydrocarbons, liquid, n.o.s.  
Reportable Quantity (RQ):  
Poison Inhalation Hazard: No

### IMDG

UN number: 3295      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: HYDROCARBONS, LIQUID, N.O.S.

### IATA

UN number: 3295      Class: 3      Packing group: III  
Proper shipping name: Hydrocarbons, liquid, n.o.s.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,2,4-Trimethylbenzene	95-63-6	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard

**Massachusetts Right To Know Components**

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

**Pennsylvania Right To Know Components**

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

**New Jersey Right To Know Components**

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

**16. OTHER INFORMATION****Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H335	May cause respiratory irritation.
H401	Toxic to aquatic life.

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	2
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	2
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.11

Revision Date: 02/02/2018

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 3.4  
Revision Date 06/26/2014  
Print Date 11/09/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : 1,3,5-Trimethoxybenzene

Product Number : 138827  
Brand : Aldrich

CAS-No. : 621-23-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Manufacture of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Warning

Hazard statement(s)  
H302 : Harmful if swallowed.

Precautionary statement(s)  
P264 : Wash skin thoroughly after handling.  
P270 : Do not eat, drink or smoke when using this product.  
P301 + P312 : IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell.  
P330 : Rinse mouth.  
P501 : Dispose of contents/ container to an approved waste disposal plant.

**2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none**

---

**3. COMPOSITION/INFORMATION ON INGREDIENTS****3.1 Substances**

Synonyms : Phloroglucinol trimethyl ether



Formula : C<sub>9</sub>H<sub>12</sub>O<sub>3</sub>  
Molecular Weight : 168.19 g/mol  
CAS-No. : 621-23-8  
EC-No. : 210-673-4

#### Hazardous components

Component	Classification	Concentration
<b>O,O,O-1,3,5-Trimethylresorcinol</b>		
	Acute Tox. 4; H302	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

no data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides

### 5.3 Advice for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

### 5.4 Further information

no data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

## 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

##### Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

##### Control of environmental exposure

Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                       |
|--------------------------------------------|-------------------------------------------------------|
| a) Appearance                              | Form: crystalline<br>Colour: colourless               |
| b) Odour                                   | no data available                                     |
| c) Odour Threshold                         | no data available                                     |
| d) pH                                      | no data available                                     |
| e) Melting point/freezing point            | Melting point/range: 50 - 53 °C (122 - 127 °F) - lit. |
| f) Initial boiling point and boiling range | 255 °C (491 °F) - lit.                                |

- |                                                 |                                   |
|-------------------------------------------------|-----------------------------------|
| g) Flash point                                  | 86.00 °C (186.80 °F) - closed cup |
| h) Evaporation rate                             | no data available                 |
| i) Flammability (solid, gas)                    | no data available                 |
| j) Upper/lower flammability or explosive limits | no data available                 |
| k) Vapour pressure                              | no data available                 |
| l) Vapour density                               | no data available                 |
| m) Relative density                             | no data available                 |
| n) Water solubility                             | no data available                 |
| o) Partition coefficient: n-octanol/water       | log Pow: 1.965                    |
| p) Auto-ignition temperature                    | no data available                 |
| q) Decomposition temperature                    | no data available                 |
| r) Viscosity                                    | no data available                 |
| s) Explosive properties                         | no data available                 |
| t) Oxidizing properties                         | no data available                 |

## 9.2 Other safety information

no data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

no data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

no data available

### 10.4 Conditions to avoid

no data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - no data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

Inhalation: no data available

Dermal: no data available

no data available

#### Skin corrosion/irritation

no data available

#### Serious eye damage/eye irritation

no data available

**Respiratory or skin sensitisation**

no data available

**Germ cell mutagenicity**

no data available

**Carcinogenicity**

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

no data available

no data available

**Specific target organ toxicity - single exposure**

no data available

**Specific target organ toxicity - repeated exposure**

no data available

**Aspiration hazard**

no data available

**Additional Information**

RTECS: DC2810000

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

no data available

**12.2 Persistence and degradability**

no data available

**12.3 Bioaccumulative potential**

no data available

**12.4 Mobility in soil**

no data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

no data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

Not dangerous goods

### IMDG

Not dangerous goods

### IATA

Not dangerous goods

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Acute Health Hazard

### Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
O,O,O-1,3,5-Trimethylresorcinol	621-23-8	

### New Jersey Right To Know Components

	CAS-No.	Revision Date
O,O,O-1,3,5-Trimethylresorcinol	621-23-8	

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
H302	Harmful if swallowed.

### HMIS Rating

Health hazard:	1
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	1
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling

or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.4

Revision Date: 06/26/2014

Print Date: 11/09/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Xylenes  
Product Number : 247642  
Brand : Sigma-Aldrich

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226  
Acute toxicity, Inhalation (Category 4), H332  
Skin irritation (Category 2), H315  
Carcinogenicity (Category 2), H351  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Specific target organ toxicity - repeated exposure (Category 2), H373  
Specific target organ toxicity - repeated exposure, Inhalation (Category 2), Central nervous system, Liver, Kidney, H373  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H332	Harmful if inhaled.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure.
H373	May cause damage to organs (Central nervous system, Liver, Kidney)

H401	through prolonged or repeated exposure if inhaled. Toxic to aquatic life.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: Xylene mixture of isomers
Formula	: C <sub>8</sub> H <sub>10</sub>
Molecular weight	: 106.17 g/mol
Registration number	: 01-2119488216-32-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Xylene</b>	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; H226, H304, H315, H332, H335, H373, H401	90 - 100 %
<b>Ethylbenzene</b>	Flam. Liq. 2; Acute Tox. 4; Carc. 2; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; H225, H304, H332, H351, H373, H401	20 - 30 %

For the full text of the H-Statements mentioned in this Section, see Section 16.



---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Dry powder Dry sand

#### Unsuitable extinguishing media

Do NOT use water jet.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.  
For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Xylene	1330-20-7	STEL	150 ppm 655 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	100 ppm 435 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		TWA	100 ppm 435 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	The value in mg/m <sup>3</sup> is approximate.		
		TWA	100 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	150 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
Ethylbenzene	100-41-4	TWA	20 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cochlear impair Kidney damage (nephropathy) Upper Respiratory Tract irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed animal carcinogen with unknown relevance to humans		

		TWA	100 ppm 435 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	125 ppm 545 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	100 ppm 435 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		PEL	5 ppm 22 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		STEL	30 ppm 130 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Methylhippuric acids	1.5g/g creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
alkylbenzene		Sum of mandelic acid and phenyl glyoxylic acid	0.15g/g creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                  |
|-------------------------------------------------|------------------------------------------------------------------|
| a) Appearance                                   | Form: clear, liquid<br>Colour: colourless                        |
| b) Odour                                        | No data available                                                |
| c) Odour Threshold                              | No data available                                                |
| d) pH                                           | No data available                                                |
| e) Melting point/freezing point                 | < 0 °C (< 32 °F)                                                 |
| f) Initial boiling point and boiling range      | 137 - 140 °C (279 - 284 °F) - lit.                               |
| g) Flash point                                  | 25 °C (77 °F) - closed cup                                       |
| h) Evaporation rate                             | No data available                                                |
| i) Flammability (solid, gas)                    | No data available                                                |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7 %(V)<br>Lower explosion limit: 1.1 %(V) |
| k) Vapour pressure                              | 24 hPa (18 mmHg) at 37.70 °C (99.86 °F)                          |
| l) Vapour density                               | 3.67 - (Air = 1.0)                                               |
| m) Relative density                             | 0.86 g/mL at 25 °C (77 °F)                                       |
| n) Water solubility                             | No data available                                                |
| o) Partition coefficient: n-octanol/water       | No data available                                                |
| p) Auto-ignition temperature                    | No data available                                                |
| q) Decomposition temperature                    | No data available                                                |
| r) Viscosity                                    | No data available                                                |
| s) Explosive properties                         | No data available                                                |
| t) Oxidizing properties                         | No data available                                                |

### 9.2 Other safety information

Relative vapour density 3.67 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

## 10.2 Chemical stability

Stable under recommended storage conditions.

## 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

## 10.4 Conditions to avoid

Heat, flames and sparks.

## 10.5 Incompatible materials

Strong oxidizing agents

## 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

LD50 Oral - Rat - male - 3,523 mg/kg

Remarks: (ECHA)

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

Skin - Rabbit

Result: Irritations

Remarks: (IUCLID)

Drying-out effect resulting in rough and chapped skin. After long-term exposure to the chemical: Dermatitis

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

In animal experiments: - Mouse

Result: Does not cause skin sensitisation.

(OECD Test Guideline 429)

#### Germ cell mutagenicity

No data available

Mutagenicity (mammal cell test): chromosome aberration.

Result: negative

(National Toxicology Program)

Ames test

Salmonella typhimurium

Result: negative

#### Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Ethylbenzene)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available  
No data available

**Specific target organ toxicity - single exposure**

No data available

Acute oral toxicity - Gastrointestinal disturbance

Acute inhalation toxicity - mucosal irritations, Cough, Shortness of breath, Possible damages:, damage of respiratory tract, Inhalation may lead to the formation of oedemas in the respiratory tract.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Blurred vision, Incoordination., Headache, Nausea, Vomiting, Dizziness, Weakness, anemia, Prolonged or repeated exposure to skin causes defatting and dermatitis.

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

After absorption:

Systemic effects:

Headache, somnolence, Dizziness, euphoria, agitation, spasms, respiratory paralysis, Unconsciousness, narcosis, inebriation

Effect potentiated by: ethanol

Other dangerous properties can not be excluded.

Handle in accordance with good industrial hygiene and safety practice.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence (Ethylbenzene)

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

Toxic to aquatic life.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1307      Class: 3      Packing group: III  
Proper shipping name: Xylenes  
Reportable Quantity (RQ): 100 lbs      Reportable Quantity (RQ): 100 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1307      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: XYLENES

**IATA**

UN number: 1307      Class: 3      Packing group: III  
Proper shipping name: Xylenes

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Ethylbenzene	100-41-4	2007-07-01
Xylene	1330-20-7	1993-04-24

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Reportable Quantity**      F003 lbs

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Xylene	1330-20-7	1993-04-24
Ethylbenzene	100-41-4	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Xylene	1330-20-7	1993-04-24
Ethylbenzene	100-41-4	2007-07-01

**California Prop. 65 Components**

, which is/are known to the State of California to cause cancer.  
For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).  
Ethylbenzene

	CAS-No.	Revision Date
	100-41-4	2007-09-28

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Asp. Tox.	Aspiration hazard
Carc.	Carcinogenicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H332	Harmful if inhaled.

H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.
Skin Irrit.	Skin irritation
STOT RE	Specific target organ toxicity - repeated exposure
STOT SE	Specific target organ toxicity - single exposure

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.19

Revision Date: 08/07/2018

Print Date: 11/10/2018



### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Zinc  
Product Number : 96454  
Brand : Sigma-Aldrich  
CAS-No. : 7440-66-6

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Combustible dust,  
Acute aquatic toxicity (Category 1), H400  
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Warning

Hazard statement(s)

May form combustible dust concentrations in air  
Very toxic to aquatic life with long lasting effects.

H410

Precautionary statement(s)

P273 : Avoid release to the environment.  
P391 : Collect spillage.  
P501 : Dispose of contents/ container to an approved waste disposal plant.

#### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Combustible dust

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.2 Mixtures

Formula : Zn  
Molecular weight : 65.39 g/mol

#### Hazardous components

Component	Classification	Concentration
<b>Zinc powder (stabilized)</b>		
CAS-No. 7440-66-6 EC-No. 231-175-3 Index-No. 030-001-01-9	Aquatic Acute 1; Aquatic Chronic 1; H410	<= 100 %
<b>Zinc oxide</b>		
CAS-No. 1314-13-2 EC-No. 215-222-5 Index-No. 030-013-00-7	Aquatic Acute 1; Aquatic Chronic 1; H410	>= 5 - < 10 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Special powder against metal fire Dry sand Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

##### Unsuitable extinguishing media

Water

#### 5.2 Special hazards arising from the substance or mixture

Zinc/zinc oxides

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation.  
For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.  
Provide appropriate exhaust ventilation at places where dust is formed.  
For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

Storage class (TRGS 510): Non Combustible Solids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Zinc oxide	1314-13-2	TWA	2.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	metal fume fever		
		STEL	10.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		metal fume fever		

		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		C	15.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	15.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                            |
|-------------------------------------------------|------------------------------------------------------------|
| a) Appearance                                   | Form: powder<br>Colour: grey                               |
| b) Odour                                        | odourless                                                  |
| c) Odour Threshold                              | No data available                                          |
| d) pH                                           | Not applicable                                             |
| e) Melting point/freezing point                 | Melting point/range: 420 °C (788 °F) - lit.                |
| f) Initial boiling point and boiling range      | 907 °C (1,665 °F) - lit.                                   |
| g) Flash point                                  | Not applicable                                             |
| h) Evaporation rate                             | No data available                                          |
| i) Flammability (solid, gas)                    | May form combustible dust concentrations in air            |
| j) Upper/lower flammability or explosive limits | No data available                                          |
| k) Vapour pressure                              | Not applicable                                             |
| l) Vapour density                               | No data available                                          |
| m) Relative density                             | 7.133 g/mL at 25 °C (77 °F)                                |
| n) Water solubility                             | insoluble                                                  |
| o) Partition coefficient: n-octanol/water       | Not applicable                                             |
| p) Auto-ignition temperature                    | does not ignite                                            |
| q) Decomposition temperature                    | No data available                                          |
| r) Viscosity                                    | No data available                                          |
| s) Explosive properties                         | During processing, dust may form explosive mixture in air. |
| t) Oxidizing properties                         | No data available                                          |

### 9.2 Other safety information

- |              |                             |
|--------------|-----------------------------|
| Bulk density | 1.8 - 3.2 kg/m <sup>3</sup> |
|--------------|-----------------------------|

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Dust may form explosive mixture in air.

#### 10.4 Conditions to avoid

No data available

#### 10.5 Incompatible materials

Strong oxidizing agents, Acids and bases

#### 10.6 Hazardous decomposition products

Other decomposition products - No data available  
In the event of fire: see section 5

---

### 11. TOXICOLOGICAL INFORMATION

#### 11.1 Information on toxicological effects

##### Acute toxicity

No data available (Zinc powder (stabilized))

Inhalation: No data available (Zinc powder (stabilized))

Dermal: No data available (Zinc powder (stabilized))

No data available (Zinc powder (stabilized))

##### Skin corrosion/irritation

No data available (Zinc powder (stabilized))

##### Serious eye damage/eye irritation

No data available (Zinc powder (stabilized))

##### Respiratory or skin sensitisation

Did not cause sensitisation on laboratory animals. (Zinc powder (stabilized))

##### Germ cell mutagenicity

No data available (Zinc powder (stabilized))

##### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

##### Reproductive toxicity

No data available (Zinc powder (stabilized))

No data available (Zinc powder (stabilized))

##### Specific target organ toxicity - single exposure

No data available (Zinc powder (stabilized))

##### Specific target organ toxicity - repeated exposure

No data available

##### Aspiration hazard

No data available (Zinc powder (stabilized))

##### Additional Information

RTECS: ZG8600000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Effects due to ingestion may include:, chills, dry throat, sweet taste, Fever, Cough, Nausea, Vomiting, Weakness, Contact with eyes or skin may cause:, Irritation (Zinc powder (stabilized))

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish	LC50 - Cyprinus carpio (Carp) - 450 µg/l - 96 h (Zinc powder (stabilized))
Toxicity to daphnia and other aquatic invertebrates	LC50 - Daphnia magna (Water flea) - 0.068 mg/l - 48 h (Zinc powder (stabilized))
	mortality NOEC - Daphnia (water flea) - 0.101 - 0.14 mg/l - 7 d (Zinc powder (stabilized))

### 12.2 Persistence and degradability

The methods for determining the biological degradability are not applicable to inorganic substances.

### 12.3 Bioaccumulative potential

Bioaccumulation Algae - 7 d  
at 16 °C - 5 µg/l (Zinc powder (stabilized))

Bioconcentration factor (BCF): 466

### 12.4 Mobility in soil

No data available (Zinc powder (stabilized))

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Zinc powder (stabilized))  
Reportable Quantity (RQ): 1020 lbs

Poison Inhalation Hazard: No

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Zinc powder (stabilized))  
Marine pollutant: yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Zinc powder (stabilized))

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Zinc oxide	1314-13-2	2007-03-01
Zinc powder (stabilized)	7440-66-6	1993-04-24

### SARA 311/312 Hazards

No SARA Hazards

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Zinc powder (stabilized)	7440-66-6	1993-04-24
Zinc oxide	1314-13-2	2007-03-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Zinc powder (stabilized)	7440-66-6	1993-04-24
Zinc oxide	1314-13-2	2007-03-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Zinc powder (stabilized)	7440-66-6	1993-04-24
Zinc oxide	1314-13-2	2007-03-01

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

	May form combustible dust concentrations in air
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.



**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.8

Revision Date: 10/12/2015

Print Date: 05/01/2016

## **ATTACHMENT D: COMMUNITY AIR MONITORING PLAN**

# **Community Air Monitoring Plan**

**Hamilton Green BCP Site  
200 Hamilton Avenue  
White Plains, New York  
BCP # C360177**

## **1.0 INTRODUCTION**

This document presents a Community Air Monitoring Plan (CAMP) for the remedial investigation (RI) and interim remedial measures (IRMs) for the proposed development at 200 Hamilton Avenue, White Plains, New York (the "Site").

The Site, which is the subject of a Remedial Investigation Report prepared by AKRF, is approximately 3.74-acres occupied the two-story White Plains Mall and east-adjacent asphalt-paved parking lot. The Site properties are identified on the Westchester County Clerk's as a portion of tax parcel map Section 125.67, Block 5, Lot 1. The surrounding area consists primarily of commercial and governmental uses, with residences further north of the Site.

Prior to 1970, the Site was historically bisected by a public street (William Street) and contained several private residential dwellings, a candy manufacturer, and two gasoline stations, one at 230 Hamilton Avenue (southeastern portion of the Site) and a second at 250 Hamilton Avenue (southern portion of the Site)

## **1.1 OBJECTIVES**

The objective of this CAMP is to provide a measure of protection for the downwind community from potential airborne contaminant releases that may arise as a result of the planned remedial excavation and construction, which may include temporary soil stockpiling.

## **1.2 METHODS**

The CAMP will include monitoring for particulate matter (e.g., airborne "dust") during the planned remedial excavation and construction activities. Readings will be recorded and will be available for State (DEC and DOH) personnel to review, as requested.

### **1.3 PARTICULATE MONITORING**

When deemed by SESI to be applicable, particulate (e.g. “dust”) emissions will be measured continuously at the upwind and downwind work zone boundaries. Real time monitoring equipment (e.g. Trak TSI Dust monitors or equivalent), with audible alarms and capable of measuring particulate matter less than 10 micrometers in size (PM-10), will be used. If the wind is calm, the monitors should be placed between each work area and the nearest sensitive receptors. If the wind is variable, the monitors must be placed accordingly to ensure there is a monitor downwind of each work area at all times. Air monitoring locations will be selected daily based on prevailing wind conditions and specific locations where field-work is to be conducted on a daily basis.

- If the downwind particulate level is 100 micrograms per cubic meter (ug/m<sup>3</sup>) greater than background (upwind) for a 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques will be employed. Work will continue with dust suppression provided that downwind particulate levels do not exceed 150 ug/m<sup>3</sup> above upwind levels and provided that no visible dust is migrating from the work area.
- If, after dust suppression techniques, downwind particulate levels are greater than 150 ug/m<sup>3</sup> above upwind levels, work will be stopped and a re-evaluation of activities will be initiated. Work will resume, provided that dust suppression measures and other controls are successful in reducing downwind particulate concentrations to within 150 ug/m<sup>3</sup> of the upwind level and in preventing visible dust migration.
- All readings must be recorded and be available for State (NYSDEC and NYSDOH) and County Health personnel to review.

### **1.4 VOC MONITORING**

Volatile organic compounds (VOCs) must be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis or as otherwise specified. Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions, particularly if wind direction changes. The monitoring work should be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment should be calibrated at least daily for the contaminant(s) of concern or for an appropriate

surrogate. The equipment should be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

1. If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.

2. If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.

3. If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.

4. All 15-minute readings must be recorded and be available for State (DEC and NYSDOH) personnel to review. Instantaneous readings, if any, used for decision purposes should also be recorded.

## **ATTACHMENT E: EMERGING CONTAMINANT SAMPLING PLAN**

**Hamilton Green**  
WHITE PLAINS, NEW YORK

---

**GROUNDWATER SAMPLING PLAN  
FOR  
EMERGING CONTAMINANTS**

**NYSDEC BCP Site Number: C360177**

**Prepared for:**

**S-WD/WP LLC  
186-A Irving Avenue, Suite 200K  
Port Chester, NY 10573**

**Prepared by:**

**SESI CONSULTING ENGINEERS, D.P.C.  
12A Maple Avenue  
Pine Brook, NJ 07058**

---

**JANUARY 21, 2019**

## 1.0 EMERGING CONTAMINANTS SAMPLING PLAN

This sampling plan is for groundwater sampling at the Hamilton Green BCP Site located in White Plains, New York. SESI will collect ground water samples from fifteen groundwater monitoring wells as shown in Figure SESI-3 of the RIWP response to comment letter, dated January 22, 2019.

The sampling will be performed in accordance with the NYSDEC March 1991 Sampling Guidelines and Protocols, with materials limitations for Per- and polyfluoroalkyl substances (PFAS) sampling. The groundwater samples will be sent via chain of custody in a cooler at 4 degrees C to Test America Laboratories, which is ELAP-certified, and analyzed for TCL/TAL+30, 1,4-dioxane and the PFAS compounds listed in Table 1. The groundwater samples will be analyzed for PFAS using Modified USEPA Method 537. Reporting limits for PFOA and PFOS will not exceed 2 nanogram per liter (ng/L). Category B deliverables and an electronic data deliverable will be completed. A DUSR will be prepared by a data validator for all the analyses including PFAS and 1,4-dioxane. The method detection limit (MDL) for 1,4-dioxane will be no higher than 0.28 µg/l (ppb). In order to get the appropriate detection limit, the lab will run EPA method 8270 in "selective ion monitoring" (SIM) mode for 1.4-dioxane.

PFAS are very persistent in the environment and in the human body. There is evidence that exposure to PFAS can lead to adverse human health effects. EPA established the health advisory levels for PFAS in drinking water at 70 parts per trillion. Due to their presence in a variety of products, persistence in the environment and very low drinking water standards, care must be used when groundwater sampling for PFAS to avoid cross contamination from the sampling equipment and personal protective equipment (PPE).

No fabric softener will be used on clothing to be worn in field. Cosmetics, moisturizers, hand cream, unauthorized sunscreen, insect repellent or other related products will not be used the morning of sampling. The field samplers will wear nitrile gloves while filling and sealing the sample bottles. The sampling equipment components and sample containers will not come in contact with material that may potentially contain PFAS such as aluminum foil, low density polyethylene (LDPE), glass or polytetrafluoroethylene (PTFE, Teflon™) materials including sample bottle cap liners with a PTFE layer. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFAS materials will be avoided. Food and drink packaging materials will be avoided, as well.



Sampling will be performed using either stainless steel, high density polyethylene (HDPE), PVC, silicone, acetate or polypropylene pump and tubing which do not contain PFAS. Standard two step decontamination using Alconox® detergent and clean water rinse will be performed for equipment that does come in contact with PFAS materials. No waterproof field books, plastic clipboards, binders, or spiral hard cover will be used for PFAS containers. No adhesives (i.e. Post-It® Notes), sharpies, or permanent markers will be used for PFAS containers. The PFAS containers will be labeled with ball point pens. PFAS samples will be stored in separate cooler filled with regular ice only with no chemical (blue) ice packs.

Pre-cleaned sample bottles with closures, coolers, sample labels and a chain of custody form will be provided by Test America. The ground water samples will be collected using low flow purging to obtain representative turbid free samples. The sampling event will include inspection and gauging each well for depth to water and total depth. If free product is detected in a monitoring well, the product thickness will be measured and recorded. Wells, which contain free product, will not be sampled.

The pumping flow rate will be in the range of 100 to 500 ml/min. Field parameters will be measured using a flow through cell before, during and after low flow purging including dissolved oxygen, pH, temperature, and conductivity. The field purging information and parameter data will be recorded on the field parameter sheets. The depth to groundwater will also be recorded throughout the purging process and ideally will not drawdown more than 0.3 foot. The samples will be collected directly from the low flow purging tubing by disconnecting the flow through cell. Two pre-cleaned laboratory supplied 500 ml HDPE or polypropylene bottles will be collected for PFAS analysis first prior to collecting the samples for other analyses. Additional bottles will be supplied by the laboratory for the TCL/TAL+30 and 1,4-dioxane analysis.

Equipment blanks will be collected daily, if the equipment that come in touch with the sample is de-contaminated and re-used. If all the sampling material are disposable, no field blanks will be collected. Field duplicate will be collected on a frequency of 1/20 samples. One matrix spike and matrix spike duplicate (MS/MSD) will also be collected on a frequency of 1/20 samples. A trip blank will accompany each shipment which includes analysis for volatile organic compounds.

Table 1: PFAS compounds list\*

## Full PFAS Target Analyte List

Group	Chemical Name	Abbreviation	CAS Number
Perfluoroalkyl sulfonates	<b>Perfluorobutanesulfonic acid</b>	<b>PFBS</b>	<b>375-73-5</b>
	<b>Perfluorohexanesulfonic acid</b>	<b>PFHxS</b>	<b>355-46-4</b>
	Perfluoroheptanesulfonic acid	PFHpS	375-92-8
	<b>Perfluorooctanesulfonic acid</b>	<b>PFOS</b>	<b>1763-23-1</b>
	Perfluorodecanesulfonic acid	PFDS	335-77-3
Perfluoroalkyl carboxylates	Perfluorobutanoic acid	PFBA	375-22-4
	Perfluoropentanoic acid	PFPeA	2706-90-3
	Perfluorohexanoic acid	PFHxA	307-24-4
	<b>Perfluoroheptanoic acid</b>	<b>PFHpA</b>	<b>375-85-9</b>
	<b>Perfluorooctanoic acid</b>	<b>PFOA</b>	<b>335-67-1</b>
	<b>Perfluorononanoic acid</b>	<b>PFNA</b>	<b>375-95-1</b>
	Perfluorodecanoic acid	PFDA	335-76-2
	Perfluoroundecanoic acid	PFUA/PFUdA	2058-94-8
	Perfluorododecanoic acid	PFDoA	307-55-1
	Perfluorotridecanoic acid	PFTriA/PFTrDA	72629-94-8
Perfluorotetradecanoic acid	PFTA/PFTeDA	376-06-7	
Fluorinated Telomer Sulfonates	6:2 Fluorotelomer sulfonate	6:2 FTS	27619-97-2
	8:2 Fluorotelomer sulfonate	8:2 FTS	39108-34-4
Perfluorooctane-sulfonamides	Perfluorooctanesulfonamide	FOSA	754-91-6
Perfluorooctane-sulfonamidoacetic acids	N-methyl perfluorooctanesulfonamidoacetic acid	N-MeFOSAA	2355-31-9
	N-ethyl perfluorooctanesulfonamidoacetic acid	N-EtFOSAA	2991-50-6

Bold entries depict the 6 original UCMR3 chemicals

\*Table source is the letter from DEC addressing the sampling of the emerging contaminant dated June 15, 2018.



Geotechnical  
Foundations  
Land Planning  
Geo-Structural  
Environmental  
Water Resources

---

*Principals:*

Steven P. Byszewski, PE, PP  
Anthony Castillo, PE  
Fuad Dahan, PhD, PE, LSRP  
Roger Hendrickson  
John M. Nederfield, PE  
Justin M. Protasiewicz, PE  
Kenneth Quazza, PE  
Michael St. Pierre, PE

April 10, 2019

Ms. Kiera Thompson, P.G. Project Manager  
Bureau C, Section B  
Division of Environmental Remediation 625 Broadway, 11th Floor  
Albany, NY 12233

**RE: Remedial Investigation Work Plan Hamilton Green  
BCP Site No. C360177  
200 Hamilton Avenue  
City of White Plains, Westchester County**

Dear Ms. Thompson

Our office has received and reviewed your comment email dated March 20, 2019 in response to the SESI's Response to comments on January 24, 2019 for the September 2018 Remedial Investigation Work Plan (RIWP) prepared by AKRF, Inc., for the Hamilton Green Brownfield Cleanup Program (BCP) site located at 200 Hamilton Avenue in White Plains, Westchester County (Site).

Please accept this response letter as an official rider to the referenced RIWP for the section or items listed below. The remedial investigation field work and the remedial investigation report (RIR) will be based on the RIWP (AKRF September 2018) except for the changes, which address your comments, as described below.

1. **NYSDEC Comment:** Comment 3, SESI Response: Please note that the NYSDOH Soil Vapor/Indoor Air Matrices (May 2017) and EPA's Target Sub-slab and Near-Source Soil Gas Concentration are not appropriate as used here for comparison to soil vapor concentrations. The NYSDOH does not have soil vapor specific background or guidelines. A number of site specific factors are considered such as concentrations, frequency, whether similar contaminants are present in other media and the current and expected future use of the site when reviewing soil vapor data to assess the potential for soil vapor intrusion in on-site and off-site structures. Please revise the document to reflect this understanding.

***SESI Response:*** *In the RIR we will report the soil gas results without comparison to any specific criteria or standards. A Site evaluation will be conducted to assess the potential of vapor intrusion. This assessment will include evaluation of on-site specific factors such as concentrations, frequency, and whether similar contaminants are present in other media. In addition, the current and expected future use will be included in the evaluation to assess the potential for soil vapor intrusion in on-site and off-site structures.*

2. **NYSDEC Comment:** Comment 7(a), SESI Response: Revise to include additional detail on how the soil sample locations will be selected in addition to visual and olfactory observation and aiming for varied depths to represent concentrations across the site. For instance, if other metrics are to be used for selection, such as highest PID reading, area just above the water table, etc., please state.

**SESI Response:** *The number of depth intervals sampled may be increased beyond 2 per boring should field screening, which includes visual and olfactory observations of contamination and Photo Iodization Detector (PID) readings. In addition to the bias toward the field screening, samples just above the groundwater table will be collected and will be distributed across the site. In addition, samples will be collected at depth intervals which will be varied across the site to ensure vertical characterization of soil contaminants.*

3. **NYSDEC Comment:** Comment 7(b), SESI Response: Revise to state that “at least 20% of the samples will be completed for full suite.” Additionally, provide an understanding of the criteria used to determine how these locations will be selected to characterize the site, and which analytes will be included for the maximum of 80% of samples not undergoing full suite analyses.

**SESI Response:** *The sampling analysis will follow Table 1 of the RIWP submitted by AKRF. All the samples will be discrete samples for VOCs and other constituents. SESI will analyze at least 20% of the samples for the full suite TCL/TAL +30 based on the field screening described above. In addition, the soil sample for the full suite of analysis will be based on evenly distributing their locations across the site, to the extent possible.*

4. **NYSDEC Comment:** Soil Vapor Investigation Addendum, 2.0 SV Sampling Plan: Revise to indicate the proposed sampling duration for the soil vapor samples. Also, providing a contemporaneous outdoor air sample as a control sample is helpful for data analysis.

**SESI Response:** *SESI has revised the Soil Vapor Investigation Addendum to specify the soil vapor sample will be collected in 6 L suma canister on a duration of 30 minutes per sample, which results in a flow reat that does not exceed 200mL/min. Additionally, SESI has included a contemporaneous outdoor air sample as a control sample.*

5. **NYSDEC Comment:** Soil Vapor Investigation Addendum, 2.0 SV Sampling Plan: While the proposed sampling depth is currently 12-14ft below existing grade, and would be a comparable depth to the proposed foundations for new structures developed in the future, please consider including soil vapor sampling depths that are similar to depths at which contaminants have been detected and/or depths that are similar to surrounding structures in order to evaluate the potential for soil vapor intrusion to occur in off-site buildings.

**SESI Response:** *SESI will collect soil vapor sampling depths that are similar to depths at which contaminants have been detected and/or depths that are similar to surrounding structures from four locations. These locations will be placed on each border of the property in order to evaluate the potential for soil vapor intrusion to occur in off-site buildings.*

6. **NYSDEC Comment:** Attachment C: Health and Safety Plan, Table 6: Revise to clarify what the listed concentrations represent (ie. highest detected via PID, highest detected in previous sampling, etc.,).

**SESI Response:** *SESI has revised Table 6 of the HASP to clarify that the listed concentrations represent the highest previously detected concentrations.*

7. **NYSDEC Comment:** Attachment D: Community Air Monitoring Plan: The proposed Community Air Monitoring Plan (CAMP) is not in accordance with the NYSDOH Generic CAMP. The proposed CAMP at a minimum should include sampling during all applicable phases of the project, or during the appropriate remedial investigation/work plan circumstances. As presented, the CAMP is currently not protective of public health and I recommend replacing the current CAMP with the NYSDOH Generic CAMP (attached).

**SESI Response:** *SESI has revised the CAMP using to include the NYSDOH Generic CAMP.*

8. **NYSDEC Comment:** Attachment D: Community Air Monitoring Plan: Based on the location of the site and proposed remedial investigation/remedial actions the potential exists for ground intrusive activities to occur within 20 feet of an occupied structure or receptor. Therefore, a Special Requirements CAMP will be necessary during these actions. Please revise to include a Special Requirements CAMP (attached).

**SESI Response:** *SESI has revised the CAMP to include a Special Requirements for ground intrusive activities to occur within 20 feet of an occupied structure or receptor.*

9. **NYSDEC Comment:** Attachment E: Emerging Contaminant Sampling Plan (ECSP): Revise to include all updated and applicable emerging contaminant sampling guidance documents. All samples should have appropriate analytical methods and reporting limits as outlined in the NYSDEC July 2018 Groundwater Sampling for Emerging Contaminants; and Collection of Groundwater Samples for Per- and Polyfluoroalkyl Substances (PFAS) from Monitoring Wells Sample Protocol. The NYSDEC sampling guideline is recommended to be included in the RIWP.

**SESI Response:** *SESI has revised the Emerging Contaminant Sampling Plan (ECSP) to include all updated and applicable emerging contaminant sampling guidance documents. The NYSDEC sampling guideline is included in the revised RIWP EVSP addendum.*

10. **NYSDEC Comment:** Attachment E: Emerging Contaminant Sampling Plan (ECSP): SESI response to Comment #8 states that one upgradient and two downgradient wells will be sampled for the initial screening for ECs, but the ECSP states that fifteen groundwater wells will be sampled. Please revise, and provide a figure or a list outlining the proposed wells that will be sampled for emerging contaminants.

**SESI Response:** *SESI has revised the Emerging Contaminant Sampling Plan (ECSP) to state that one upgradient well (MW-4) and two downgradient wells (MW-9 and MW-13) will be sampled for the initial screening for ECs. The proposed EC sampling locations are shown in the updated Figure SESI-3.*

11. **NYSDEC Comment:** Please update the provided project schedule.

**SESI Response:** SESI has revised the project schedule below.

<b>Activity</b>	<b>Time To Complete</b>
Prepare BCP Application, Submit to NYSDEC	May 2018; Completed
NYSDEC Completeness Review of BCP Application	June 2018; Completed
30-day Public Comment Period for BCP Application Initiated	July 2018; Completed
Public Comment Period for BCP Application Ends	August 2018; Completed
BCP Acceptance	August 2018; Completed
Execute Brownfield Cleanup Agreement (BCA), Enter BCP	August 2018; Completed
Prepare Citizen Participation Plan (CPP)	September 2018; Completed
Prepare RIWP, Submit to NYSDEC	September 2018; Completed
Address NYSDEC Comments to RIWP and Resubmit	February 2019; Completed
30-day Public Comment Period for RIWP Initiated	March 8, 2019
Public Comment Period for RIWP Ends	April 7, 2019
Start Remedial Investigation Field work	April 22, 2019
Vacate Tenants from buildings	April 30, 2019
Remedial Investigation Field Work Complete; Analytical Results; and Data Validation	June 15, 2019
Asbestos Survey and Abatement and Demolition Start	June 24, 2019
Draft Remedial Investigation Report (RIR), Submit to NYSDEC	August 2019
Draft Remedial Action Work Plan (RAWP), Submit to NYSDEC	August 2019
45-day Public Comment Period for RAWP is Initiated	September 2019
Public Comment Period for RAWP Ends	November 2019
Complete Demolition work	November 22, 2019
NYSDEC Approves RAWP and Issues Decision Document	December 2019
Complete Remedial Action: SOE and excavation	December 2019 – July 2020
Draft Final Engineering Report (FER) and Site Management Plan (if needed), Submit FER and SMP to NYSDEC	August 2020
Certificate of Completion is Issued	November 2020

Please do not hesitate to contact me with any questions or concerns. Sincerely,

**SESI CONSULTING ENGINEERS**



Fuad Dahan, PhD, PE  
Principal

- Attachment A: Revised Soil Vapor Sampling Addendum
- Attachment B: Revised Proposed Groundwater Monitoring Wells Location Plans
- Attachment C: Revised Emerging Contaminants Sampling Plan
- Attachment D: Revised HASP
- Attachment E: Revised CAMP

N:\PROJECTS\10440 - White Plains, NY (Hamilton Green)\Reports\NYDEC Comments Email on 03202019\BCP.C360177-RIWPResposetocomments040102019.docx

**ATTACHMENT A**

**REVISED SOIL VAPOR SAMPLING PLAN ADDENDUM**



# **HAMILTON GREEN**

**200 HAMILTON AVENUE, WHITE PLAINS, NEW YORK**

---

## **Remedial Investigation Work Plan**

# **SOIL VAPOR INVESTIGATION ADDENDUM**

**NYSDEC Site Number: C360177**

### **Prepared for:**

**S-WD / WP LLC  
168a Irving Avenue  
Suite 200k  
Port Chester, NY 10573**

### **Prepared by:**

**SESI CONSULTING ENGINEERS, P.C.  
12A Maple Avenue  
Pine Brook, NJ 07058**

**April 2019**

# Table of Contents

1.0 INTRODUCTION.....	1
2.0 SV SAMPLING PLAN.....	1
2.1 Sample Locations .....	1
2.2 Sampling Protocol .....	2

## 1.0 INTRODUCTION

The New York State Department of Environmental Conservation (NYSDEC) has accepted into the Brownfield Cleanup Program (BCP) the property at 200 Hamilton Avenue, White Plains, New York (the "Site") with S-WDWP LLC, as Volunteer. A Brownfield Cleanup Agreement (BCA) was executed by the NYSDEC on August 16, 2018, (BCP Site No. C360177).

This document comprises a Soil Vapor (SV) Investigation Addendum to the Remedial Investigation Work Plan (RIWP) (AKRF September 2018) in response to the NYSDEC comment letter on the RIWP dated January 2, 2019. And the NYSDEC email comments on the RIWP dated March 20, 2019.

## 2.0 SV SAMPLING PLAN

### *2.1 Sample Locations*

To evaluate the potential for future exposures of the proposed development eleven (11) SV samples and a contemporaneous outdoor air sample as a control sample will be collected across the Site in the footprint of the proposed development. Figure SESI - 1 in Attachment 2 illustrates the proposed SV sampling locations with respect to the footprint of the proposed development. The previous soil vapor concentrations are provided as Table 1. The SV points were chosen taking into consideration the following:

- In areas where elevated VOC concentrations were detected in soil vapor and groundwater,
- In the proposed building foot prints, and
- At a depth of 12-14 ft below existing grade, which is comparable to the expected depth of the proposed foundation footings. Additional consideration will be given to sample soil vapor at depths at which contaminants have been detected and/or depths that are similar to surrounding structures in order to evaluate the potential for soil vapor intrusion to occur in off-site buildings.

All samples will be sent to an ELAP-certified laboratory for EPA TO-15 analysis.

### *2.2 Sampling Protocol*

Semi-permanent soil vapor probes will be installed with an adequate surface seal to prevent outdoor air infiltration. Soil vapor probes will be constructed in the same

manner at all locations to minimize possible discrepancies. The following procedures will be included in constructing the probes:

- Implants will be installed using a direct push Geoprobe® to attain the desired depth
- Porous, inert backfill material will be used to create a sampling of 2 feet in length;
- The implants will be fitted with inert tubing (e.g., polyethylene or Teflon ®) of laboratory or food grade quality to the surface;
- Soil vapor probes will be sealed above the sampling zone with a bentonite slurry for a minimum distance of 3 feet. The remainder of the borehole will be backfilled with clean material; and
- Steps will be taken to minimize infiltration of water or outdoor air and to prevent accidental damage.

Soil vapor samples will be collected in the following manner at all locations:

- Shortly after the installation of the probes, three implant volumes (the volume of the sample probe and tube) will be purged prior to collecting the samples;
- Flow rates for both purging and collecting will not exceed 0.2 liters per minute (30-minute sample interval) to minimize outdoor air infiltration during sampling;
- Samples will be collected in 6-L Summa ® canisters that are certified clean by the laboratory;
- A tracer gas (e.g., helium) will be used when collecting soil vapor samples to verify that no infiltration of outdoor air is occurring.

***Tracer Gas Test:***

The tracer gas serves as a quality assurance/quality control measure to verify the integrity of the soil vapor probe seal. The atmosphere in the immediate vicinity of the area where the probe intersects the ground surface will be enriched with the tracer gas. A plastic pail will be installed to enclose the tracer gas and keep in contact with the probe tubing. A soil gas sample will be collected with a Tedlar® bag from the probe while the plastic pail is holding the atmosphere enriched with tracer gas (helium) around the probe tube. A portable Helium monitoring device will analyze the collected Tedlar® sample prior to and after sampling for the compounds of concern. If high concentrations (> 10%) of tracer gas are observed in the Tedlar bag

sample, the probe seal will be enhanced to reduce the infiltration. The tracer test will be repeated until the tracer gas concentration is below 10%.

**Table 1**  
**PREVIOUS SOIL VAPOR DATA**

Sample ID Date Sampled Dilution Factor Units = $\mu\text{g}/\text{m}^3$	USEPA VISL Target Sub-Slab May 2018	NYSDOH Air Guidance Value*	SV-1 8/8/2017 8	SV-2 8/8/2017 13.1	SV-3 8/9/2017 6	SV-4 8/9/2017 1	SV-5 8/9/2017 10
<b>1,3-Butadiene</b>	<i>3.1</i>	<i>NS</i>	<b>7.2</b>	<b>87</b>	--	--	<b>5.4</b>
<b>2,2,4-Trimethylpentane</b>	<i>NS</i>	<i>NS</i>	25	15	--	--	--
<b>Acetone</b>	<i>1100000</i>	<i>NS</i>	170	170	270	--	750
<b>Benzene</b>	<i>12</i>	<i>NS</i>	11	<b>52</b>	--	--	--
<b>Carbon disulfide</b>	<i>24000</i>	<i>NS</i>	--	100	--	--	--
<b>Chloroform</b>	<i>4.1</i>	<i>NS</i>	--	--	--	1.2	<b>10</b>
<b>Chloromethane</b>	<i>3100</i>	<i>NS</i>	--	20	--	--	--
<b>Cumene</b>	<i>14000</i>	<i>NS</i>	--	--	--	--	13
<b>Cyclohexane</b>	<i>35000</i>	<i>NS</i>	--	18	26	--	--
<b>Ethylbenzene</b>	<i>37</i>	<i>NS</i>	<b>50</b>	<b>38</b>	--	--	10
<b>Methyl Ethyl Ketone</b>	<i>170000</i>	<i>NS</i>	36	44	18	--	26
<b>Methylene Chloride</b>	<i>3400</i>	<i>100</i>	--	--	240	--	53
<b>n-Heptane</b>	<i>14000</i>	<i>NS</i>	--	240	--	--	--
<b>n-Hexane</b>	<i>2400</i>	<i>NS</i>	40	590	350	--	100
<b>n-Propylbenzene</b>	<i>35000</i>	<i>NS</i>	8.6	--	--	1.7	--
<b>o-Xylene</b>	<i>3500</i>	<i>NS</i>	7.4	--	--	--	--
<b>Toluene</b>	<i>170000</i>	<i>NS</i>	--	--	250	--	45
<b>Trichloroethene</b>	<i>16</i>	<i>6</i>	--	--	<b>69</b>	--	<b>13</b>

**Notes:**

NS = No Standard

Bold = Exceeded Standards

$\mu\text{g}/\text{m}^3$  = micrograms per cubic meter


-- = No exceedance

\* Guidance for Evaluating Soil Vapor Intrusion in the State of New York (October 2006).

**ATTACHMENT B**

**REVISED GROUNDWATER MONITORING WELLS LOCATION PLAN**

N:\ACAD\10440\CAD\10440 SEI SAMPLE LOCATION PLAN.DWG 04/02/19 03:14:28PM, jenny, LAYOUT,SEI-3

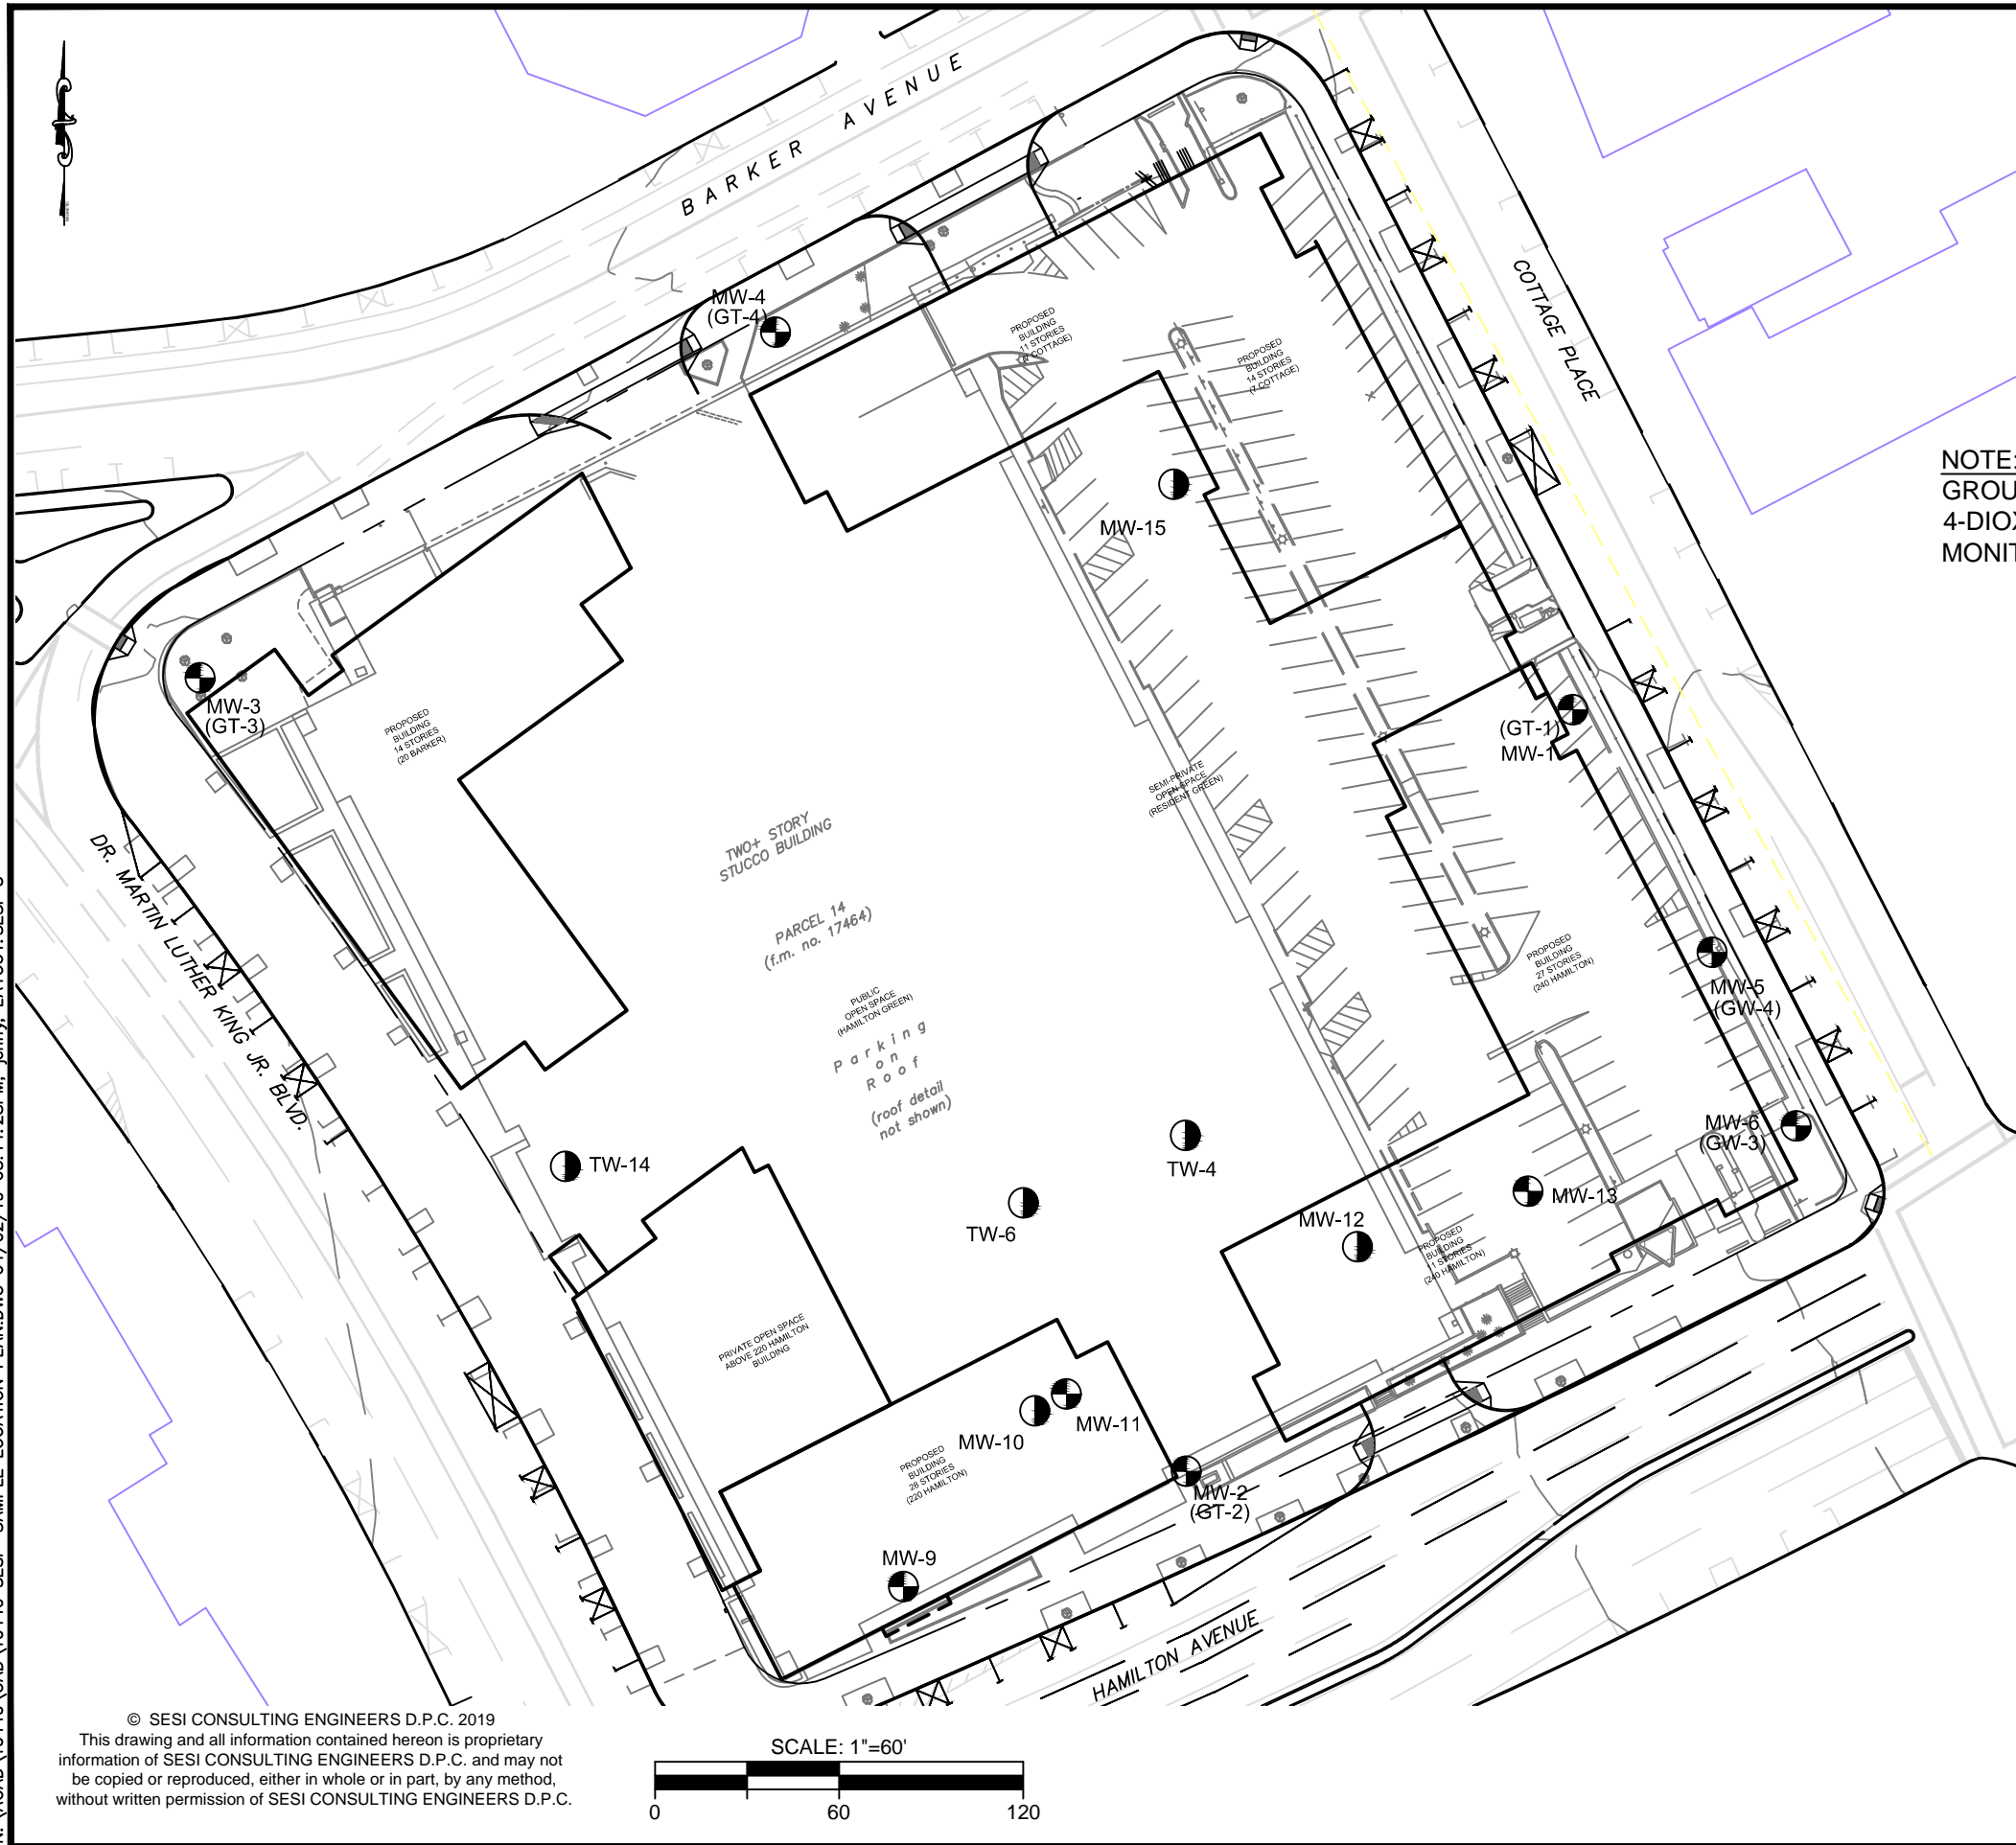


**LEGEND:**

- MW-5 - EXISTING MONITORING WELL
- TW-6 - PROPOSED MONITORING WELL

**NOTE:**  
GROUNDWATER SAMPLES FOR PFAS AND 1, 4-DIOXANE WILL BE COLLECTED FROM MONITORING WELLS MW-3, MW-9 AND MW-13.

© SEI CONSULTING ENGINEERS D.P.C. 2019  
This drawing and all information contained hereon is proprietary information of SEI CONSULTING ENGINEERS D.P.C. and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SEI CONSULTING ENGINEERS D.P.C.



dwg by: yy  
chk by: FL  
scale: 1" = 60'  
date: 04/02/19

SOILS / FOUNDATIONS  
SITE DESIGN  
ENVIRONMENTAL

**SESI**  
CONSULTING  
ENGINEERS D.P.C.

12A MAPLE AVE. PINE BROOK, N.J. 07058 PH: 973-808-9050

project: 200 HAMILTON AVENUE  
WHITE PLAINS, NY

drawing title: PROPOSED GROUNDWATER  
MONITORING WELL LOCATION PLAN

job no: 10440  
drawing no:

**SESI-3**



**ATTACHMENT C**

**REVISED EMERGING CONTAMINANTS SAMPLING PLAN**

**Hamilton Green**  
WHITE PLAINS, NEW YORK

---

**GROUNDWATER SAMPLING PLAN  
FOR  
EMERGING CONTAMINANTS**

**NYSDEC BCP Site Number: C360177**

**Prepared for:**

**S-WD/WP LLC  
186-A Irving Avenue, Suite 200K  
Port Chester, NY 10573**

**Prepared by:  
SESI CONSULTING ENGINEERS, D.P.C.  
12A Maple Avenue  
Pine Brook, NJ 07058**

---

**APRIL 2019**

## 1.0 EMERGING CONTAMINANTS SAMPLING PLAN

This sampling plan is for groundwater sampling at the Hamilton Green BCP Site located in White Plains, New York. SESI will collect ground water samples from one upgradient well (MW-4) and two downgradient wells (MW-9 and MW-13) as shown in Figure SESI-3 of the RIWP response to comment letter, dated **April 2, 2019**.

The sampling will be performed in accordance with the NYSDEC March 1991 Sampling Guidelines and Protocols, with materials limitations for Per- and polyfluoroalkyl substances (PFAS) sampling, the NYSDEC July 2018 letter on Groundwater Sampling for Emerging Contaminants, and the PFAS Groundwater Samples from Monitoring Well Sample Protocols Revision 1.2 August 9, 2019. The groundwater samples will be sent via chain of custody in a cooler at 4 degrees C to Test America Laboratories, which is ELAP-certified, and analyzed for TCL/TAL+30, 1,4-dioxane and the PFAS compounds listed in Table 1. The groundwater samples will be analyzed for PFAS using Modified USEPA Method 537. Reporting limits for PFOA and PFOS will not exceed 2 nanogram per liter (ng/L). Category B deliverables and an electronic data deliverable will be completed. A DUSR will be prepared by a data validator for all the analyses including PFAS and 1,4-dioxane. The method detection limit (MDL) for 1,4-dioxane will be no higher than 0.28 µg/l (ppb). In order to get the appropriate detection limit, the lab will run EPA method 8270 in "selective ion monitoring" (SIM) mode for 1,4-dioxane.

PFAS are very persistent in the environment and in the human body. There is evidence that exposure to PFAS can lead to adverse human health effects. EPA established the health advisory levels for PFAS in drinking water at 70 parts per trillion. Due to their presence in a variety of products, persistence in the environment and very low drinking water standards, care must be used when groundwater sampling for PFAS to avoid cross contamination from the sampling equipment and personal protective equipment (PPE).

No fabric softener will be used on clothing to be worn in field. Cosmetics, moisturizers, hand cream, unauthorized sunscreen, insect repellent or other related products will not be used the morning of sampling. The field samplers will wear nitrile gloves while filling and sealing the sample bottles. The sampling equipment components and sample containers will not come in contact with material that may potentially contain PFAS such as aluminum foil, low density polyethylene (LDPE), glass or polytetrafluoroethylene (PTFE, Teflon™) materials including sample bottle cap liners with a PTFE layer. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFAS materials will be avoided. Food and drink packaging materials will be avoided, as well.

Sampling will be performed using either stainless steel, high density polyethylene (HDPE), PVC, silicone, acetate or polypropylene pump and tubing which do not contain PFAS. Standard two step decontamination using Alconox® detergent and clean water rinse will be performed for equipment that does come in contact with PFAS materials. No waterproof field books, plastic clipboards, binders, or spiral hard cover will be used for PFAS containers. No adhesives (i.e. Post-It® Notes), sharpies, or permanent markers will be used for PFAS containers. The PFAS containers will be labeled with ball point pens. PFAS samples will be stored in separate cooler filled with regular ice only with no chemical (blue) ice packs.

Pre-cleaned sample bottles with closures, coolers, sample labels and a chain of custody form will be provided by Test America. The ground water samples will be collected using low flow purging to obtain representative turbid free samples. The sampling event will include inspection and gauging each well for depth to water and total depth. If free product is detected in a monitoring well, the product thickness will be measured and recorded. Wells, which contain free product, will not be sampled.

The pumping flow rate will be in the range of 100 to 500 ml/min. Field parameters will be measured using a flow through cell before, during and after low flow purging including dissolved oxygen, pH, temperature, and conductivity. The field purging information and parameter data will be recorded on the field parameter sheets. The depth to groundwater will also be recorded throughout the purging process and ideally will not drawdown more than 0.3 foot. The samples will be collected directly from the low flow purging tubing by disconnecting the flow through cell. Two pre-cleaned laboratory supplied 500 ml HDPE or polypropylene bottles will be collected for PFAS analysis first prior to collecting the samples for other analyses. Additional bottles will be supplied by the laboratory for the TCL/TAL+30 and 1,4-dioxane analysis.

Equipment blanks will be collected daily, if the equipment that come in touch with the sample is de-contaminated and re-used. If all the sampling material are disposable, no field blanks will be collected. Field duplicate will be collected on a frequency of 1/20 samples. One matrix spike and matrix spike duplicate (MS/MSD) will also be collected on a frequency of 1/20 samples. A trip blank will accompany each shipment which includes analysis for volatile organic compounds.

Table 1: PFAS compounds list\*

**Full PFAS Target Analyte List**

Group	Chemical Name	Abbreviation	CAS Number
Perfluoroalkyl sulfonates	<b>Perfluorobutanesulfonic acid</b>	<b>PFBS</b>	<b>375-73-5</b>
	<b>Perfluorohexanesulfonic acid</b>	<b>PFHxS</b>	<b>355-46-4</b>
	Perfluoroheptanesulfonic acid	PFHpS	375-92-8
	<b>Perfluorooctanesulfonic acid</b>	<b>PFOS</b>	<b>1763-23-1</b>
	Perfluorodecanesulfonic acid	PFDS	335-77-3
Perfluoroalkyl carboxylates	Perfluorobutanoic acid	PFBA	375-22-4
	Perfluoropentanoic acid	PFPeA	2706-90-3
	Perfluorohexanoic acid	PFHxA	307-24-4
	<b>Perfluoroheptanoic acid</b>	<b>PFHpA</b>	<b>375-85-9</b>
	<b>Perfluorooctanoic acid</b>	<b>PFOA</b>	<b>335-67-1</b>
	<b>Perfluorononanoic acid</b>	<b>PFNA</b>	<b>375-95-1</b>
	Perfluorodecanoic acid	PFDA	335-76-2
	Perfluoroundecanoic acid	PFUA/PFUdA	2058-94-8
	Perfluorododecanoic acid	PFDoA	307-55-1
	Perfluorotridecanoic acid	PFTriA/PFTrDA	72629-94-8
Perfluorotetradecanoic acid	PFTA/PFTeDA	376-06-7	
Fluorinated Telomer Sulfonates	6:2 Fluorotelomer sulfonate	6:2 FTS	27619-97-2
	8:2 Fluorotelomer sulfonate	8:2 FTS	39108-34-4
Perfluorooctane-sulfonamides	Perfluorooctanesulfonamide	FOSA	754-91-6
Perfluorooctane-sulfonamidoacetic acids	N-methyl perfluorooctanesulfonamidoacetic acid	N-MeFOSAA	2355-31-9
	N-ethyl perfluorooctanesulfonamidoacetic acid	N-EtFOSAA	2991-50-6

Bold entries depict the 6 original UCMR3 chemicals

\*Table source is the letter from NYSDEC letter addressing the sampling of the emerging contaminant dated July 2018.

## Collection of Groundwater Samples for Per- and Polyfluoroalkyl Substances (PFAS) from Monitoring Wells Sample Protocol

**Samples collected using this protocol are intended to be analyzed for perfluorooctanoic acid (PFOA) and other perfluorinated compounds by Modified (Low Level) Test Method 537.**

The sampling procedure used must be consistent with the NYSDEC March 1991 Sampling Guidelines and Protocols [http://www.dec.ny.gov/docs/remediation\\_hudson\\_pdf/sgpsect5.pdf](http://www.dec.ny.gov/docs/remediation_hudson_pdf/sgpsect5.pdf) with the following materials limitations.

At this time acceptable materials for sampling include: stainless steel, high density polyethylene (HDPE) and polypropylene. Additional materials may be acceptable if proven not to contain PFAS. **NOTE: Grunfos pumps and some bladder pumps are known to contain PFAS materials (e.g. Teflon™ washers for Grunfos pumps and LDPE bladders for bladder pumps).** All sampling equipment components and sample containers should not come in contact with aluminum foil, low density polyethylene (LDPE), glass or polytetrafluoroethylene (PTFE, Teflon™) materials including sample bottle cap liners with a PTFE layer. Standard two step decontamination using detergent and clean water rinse will be performed for equipment that does come in contact with PFAS materials. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFAS materials must be avoided. Many food and drink packaging materials and “plumbers thread seal tape” contain PFAS.

All clothing worn by sampling personnel must have been laundered multiple times. The sampler must wear nitrile gloves while filling and sealing the sample bottles.

Pre-cleaned sample bottles with closures, coolers, ice, sample labels and a chain of custody form will be provided by the laboratory.

1. Fill two pre-cleaned 250 mL HDPE or polypropylene bottle with the sample.
2. Cap the bottles with an acceptable cap and liner closure system.
3. Label the sample bottles.
4. Fill out the chain of custody.
5. Place in a cooler maintained at  $4 \pm 2^{\circ}$  Celsius.

Collect one equipment blank for every sample batch, not to exceed 20 samples.

Collect one field duplicate for every sample batch, not to exceed 20 samples.

Collect one matrix spike / matrix spike duplicate (MS/MSD) for every sample batch, not to exceed 20 samples.

Request appropriate data deliverable (Category A or B) and an electronic data deliverable.



## Sampling for 1,4-Dioxane and Per- and Polyfluoroalkyl Substances (PFAS) Under DEC's Part 375 Remedial Programs

---

### Objective

The Department of Environmental Conservation (DEC) is requiring sampling of all environmental media and subsequent analysis for the emerging contaminants 1,4-Dioxane and PFAS as part of all remedial programs implemented under 6 NYCRR Part 375, as further described in the guidance below.

### Sample Planning

The number of samples required for emerging contaminant analyses is to be the same number of samples where "full TAL/TCL sampling" would typically be required in an investigation or remedial action compliance program.

Upon a new site being brought into any program (e.g., SSF, BCP), PFAS and 1,4-dioxane will be incorporated into the investigation of potentially affected media, including soil, groundwater, surface water, and sediment as an addition to the standard "full TAL/TCL sampling." Biota sampling may be necessary based upon the potential for biota to be affected as determined pursuant to a Fish and Wildlife Impact analysis. Soil vapor sampling for PFAS and 1,4-dioxane is not required.

Upon an emerging contaminant being identified as a contaminant of concern (COC) for a site, those compounds must be assessed as part of the remedy selection process in accordance with Part 375 and DER-10 and included as part of the monitoring program upon entering the site management phase.

Soil imported to a site for use in a soil cap, soil cover, or as backfill must be sampled for 1,4-dioxane and PFAS contamination in general conformance with DER-10, section 5.4(e). Assessment of the soil data will be made on a site-specific basis to determine appropriateness for use.

The work plan should explicitly describe analysis and reporting requirements, including laboratory analytical procedures for modified methods discussed below.

### Analysis and Reporting

Labs should provide a full category B deliverable, and a DUSR should be prepared by an independent 3<sup>rd</sup> party data validator. QA/QC samples should be collected as required in DER-10, Section 2.3(c). The electronic data submission should meet the requirements provided at:

<https://www.dec.ny.gov/chemical/62440.html>.

PFAS analysis and reporting: DEC has developed a *PFAS Analyte List* (below) for remedial programs. It is expected that reported results for PFAS will include, at a minimum, all the compounds listed. If lab and/or matrix specific issues are encountered for any compounds, the DEC project manager, in consultation with the DEC remedial program chemist, will make case-by-case decisions as to whether certain analytes may be temporarily or permanently discontinued from analysis at each site.

Currently, ELAP does not offer certification for PFAS compounds in matrices other than finished drinking water. However, laboratories analyzing environmental samples (e.g., soil, sediments, and groundwater) are required by DER to hold ELAP certification for PFOA and PFOS in drinking water by EPA Method 537 or ISO 25101.



Modified EPA Method 537 is the preferred method to use for environmental samples due to its ability to achieve very low detection limits. Reporting limits for PFAS in groundwater and soil are to be 2 ng/L (ppt) and 1 ug/kg (ppb), respectively. If contract labs or work plans submitted by responsible parties indicate that they are not able to achieve these reporting limits for the entire list of 21 PFAS, site-specific decisions will need to be made by the DEC project manager in consultation with the DEC remedial program chemist. Note: Reporting limits for PFOA and PFOS in groundwater should not exceed 2 ng/L.

Additional laboratory methods for analysis of PFAS may be warranted at a site. These methods include Synthetic Precipitation Leaching Procedure (SPLP) by EPA Method 1312 and Total Oxidizable Precursor Assay (TOP Assay).

SPLP is a technique for determining the potential for chemicals in soil to leach to groundwater and may be helpful in determining the need for addressing PFAS-containing soils or other solid material as part of the remedy. SPLP sampling need not be considered if there are no elevated PFAS levels in groundwater. If elevated levels of PFAS are detected in water, and PFAS are also seen in soil, then an SPLP test should be considered to better understand the relationship between the PFAS in the two media.

The TOP Assay can assist in determining the potential PFAS risk at a site. For example, some polyfluoroalkyl substances may transform to form perfluoroalkyl substances, resulting in an increase in perfluoroalkyl substance concentrations as contaminated groundwater moves away from the site. To conceptualize the amount and type of oxidizable perfluoroalkyl substances which could be liberated in the environment, a "TOP Assay" analysis can be performed, which approximates the maximum concentration of perfluoroalkyl substances that could be generated if all polyfluoroalkyl substances were oxidized.

PFAS-containing materials can be made up of per- and polyfluoroalkyl substances that are not analyzable by routine analytical methodology (LC-MS/MS). The TOP assay converts, through oxidation, polyfluoroalkyl substances (precursors) into perfluoroalkyl substances that can be detected by current analytical methodology. Please note that analysis of highly contaminated samples, such as those from an AFFF site, can result in incomplete oxidation of the samples and an underestimation of the total perfluoroalkyl substances. Please consult with a DEC remedial program chemist for assistance interpreting the results.

1,4-Dioxane analysis and reporting: The reporting limit for 1,4-dioxane in groundwater should be no higher than 0.35 µg/L (ppb) and no higher than 0.1 mg/kg (ppm) in soil. Although ELAP offers certification for both EPA Method 8260 SIM and EPA Method 8270 SIM in waters, DER is advising the use of Method 8270 SIM because it provides a more robust extraction procedure, uses a larger sample volume, and is less vulnerable to interference from chlorinated solvents. The analysis currently performed for SVOCs in soil is adequate for evaluation of 1,4-dioxane in soil, which already has an established SCO.



### Refinement of sample analyses

As with other contaminants that are analyzed for at a site, the emerging contaminant analyte list may be refined for future sampling events based on investigative findings. Initially, however, sampling using this PFAS Analyte List and 1,4-dioxane is needed to understand the nature of contamination.

### PFAS Analyte List

Group	Chemical Name	Abbreviation	CAS Number
Perfluoroalkyl sulfonates	Perfluorobutanesulfonic acid	PFBS	375-73-5
	Perfluorohexanesulfonic acid	PFHxS	355-46-4
	Perfluoroheptanesulfonic acid	PFHpS	375-92-8
	Perfluorooctanesulfonic acid	PFOS	1763-23-1
	Perfluorodecanesulfonic acid	PFDS	335-77-3
Perfluoroalkyl carboxylates	Perfluorobutanoic acid	PFBA	375-22-4
	Perfluoropentanoic acid	PFPeA	2706-90-3
	Perfluorohexanoic acid	PFHxA	307-24-4
	Perfluoroheptanoic acid	PFHpA	375-85-9
	Perfluorooctanoic acid	PFOA	335-67-1
	Perfluorononanoic acid	PFNA	375-95-1
	Perfluorodecanoic acid	PFDA	335-76-2
	Perfluoroundecanoic acid	PFUA/PFUdA	2058-94-8
	Perfluorododecanoic acid	PFDoA	307-55-1
	Perfluorotridecanoic acid	PFTriA/PFTrDA	72629-94-8
	Perfluorotetradecanoic acid	PFTA/PFTeDA	376-06-7
Fluorinated Telomer Sulfonates	6:2 Fluorotelomer sulfonate	6:2 FTS	27619-97-2
	8:2 Fluorotelomer sulfonate	8:2 FTS	39108-34-4
Perfluorooctane-sulfonamides	Perfluorooctanesulfonamide	FOSA	754-91-6
Perfluorooctane-sulfonamidoacetic acids	N-methyl perfluorooctanesulfonamidoacetic acid	N-MeFOSAA	2355-31-9
	N-ethyl perfluorooctanesulfonamidoacetic acid	N-EtFOSAA	2991-50-6

**ATTACHMENT D**

**REVISED HEALTH AND SAFETY PLAN**



## **SITE-SPECIFIC HEALTH AND SAFETY PLAN**

**Hamilton Green BCP Site  
200 Hamilton Avenue  
White Plains, New York  
BCP # C360177**

**Prepared For:**

**S-WD/WP LLC  
186-A Irving Avenue, Suite 200K  
Port Chester, NY 10573**

**Prepared By:**

**SESI CONSULTING ENGINEERS  
12A Maple Avenue  
Pine Brook, NJ 07058**

**Project No.: 10440**

**April 2019**

***Disclaimer:*** This Health and Safety Plan (HASP) is based upon information provided [and, if applicable, conditions discovered during a site visit], and is limited by the project scope.

*The HASP should be periodically reviewed and updated based on a number of factors, including but not limited to: (1) changes in applicable governmental requirements; (2) changes in procedures at the site; and (3) site conditions which were unknown to SESI Consulting Engineers (SESI) as of the time the HASP was prepared.*

*This HASP has been prepared for the sole and exclusive use of S-WD/WP LLC., and may not be relied upon by any other person without the express written consent and authorization of SESI.*

**SITE-SPECIFIC HEALTH AND SAFETY PLAN**

**For**

**Hamilton Green BCP Site  
200 Hamilton Avenue  
White Plains, New York  
BCP # C360177**

Prepared by: \_\_\_\_\_

Date:

\_\_\_\_\_  
Steven Gustems  
SESI- Project Manager

Approved by: \_\_\_\_\_

Date:

\_\_\_\_\_  
Fuad Dahan  
SESI-Principal

## Table of Contents

<b>HEALTH AND SAFETY PLAN SUMMARY .....</b>	<b>8</b>
<b>1.0 INTRODUCTION .....</b>	<b>9</b>
1.1 OBJECTIVE .....	9
1.2 SITE AND FACILITY DESCRIPTION .....	9
1.3 POLICY STATEMENT .....	9
1.4 REFERENCES .....	10
1.5 DEFINITIONS .....	10
<b>2.0 PROJECT SCOPE OF WORK .....</b>	<b>11</b>
<b>3.0 ROLES AND RESPONSIBILITIES.....</b>	<b>11</b>
3.1 ALL PERSONNEL.....	11
3.2 KEY SAFETY PERSONNEL .....	11
3.2.1 <i>Project Officer (PO)</i> .....	11
3.2.2 <i>Project Manager (PM)</i> .....	11
3.2.3 <i>Health and Safety Manager (HSM)</i> .....	12
3.2.4 <i>Site Safety Officer (SSO)</i> .....	12
3.2.5 <i>Field Supervisor (FS)</i> .....	12
3.2.6 <i>Field Personnel (FP)</i> .....	13
3.3 SUBCONTRACTORS .....	13
3.4 STOP WORK AUTHORITY.....	13
3.5 ALL ON-SITE PERSONNEL .....	13
3.6 VISITORS.....	14
<b>4.0 PERSONAL PROTECTIVE EQUIPMENT .....</b>	<b>14</b>
4.1 LEVELS OF PROTECTION.....	14
4.1.1 <i>Level D Protection</i> .....	15
4.1.2 <i>Modified Level D Protection</i> .....	15
4.1.3 <i>Level C Protection</i> .....	15
4.2 SELECTION OF PPE .....	16
4.3 SITE RESPIRATORY PROTECTION PROGRAM .....	16
4.4 USING PPE.....	16
4.4.1 <i>Donning Procedures</i> .....	16
4.4.2 <i>Doffing Procedures</i> .....	17
4.5 SELECTION MATRIX.....	17
<b>5.0 AIR AND NOISE MONITORING .....</b>	<b>18</b>
5.1 AIR MONITORING .....	18
5.2 NOISE MONITORING.....	18
5.3 MONITORING EQUIPMENT MAINTENANCE AND CALIBRATION .....	18
5.4 ACTION LEVELS .....	19
<b>6.0 WORK ZONES AND DECONTAMINATION .....</b>	<b>19</b>
6.1 WORK ZONES .....	19

6.1.1	<i>Authorization to Enter</i> .....	19
6.1.2	<i>Site Orientation and Hazard Briefing</i> .....	20
6.1.3	<i>Certification Documents</i> .....	20
6.1.4	<i>Entry Log</i> .....	20
6.1.5	<i>Entry Requirements</i> .....	20
6.1.6	<i>Emergency Entry and Exit</i> .....	20
6.1.7	<i>Contamination Control Zones</i> .....	20
6.1.8	<i>Exclusion Zone (EZ)</i> .....	20
6.1.9	<i>Contamination Reduction Zone</i> .....	20
6.1.10	<i>Support Zone (SZ)</i> .....	21
6.1.11	<i>Posting</i> .....	21
6.1.12	<i>Site Inspections</i> .....	21
6.2	DECONTAMINATION.....	21
6.2.1	<i>Personnel Decontamination</i> .....	21
6.2.2	<i>Equipment Decontamination</i> .....	21
6.2.3	<i>Personal Protective Equipment Decontamination</i> .....	21
<b>7.0</b>	<b>TRAINING AND MEDICAL SURVEILLANCE</b> .....	<b>22</b>
7.1	TRAINING.....	22
7.1.1	<i>General</i> .....	22
7.1.2	<i>Basic 40-Hour Course</i> .....	22
7.1.3	<i>Supervisor Course</i> .....	22
7.1.4	<i>Site-Specific Training</i> .....	23
7.1.5	<i>Daily Safety Meetings</i> .....	23
7.1.6	<i>First Aid and CPR</i> .....	23
7.2	MEDICAL SURVEILLANCE.....	23
7.2.1	<i>Medical Examination</i> .....	23
7.2.2	<i>Pre-placement Medical Examination</i> .....	23
7.2.3	<i>Other Medical Examinations</i> .....	24
7.2.4	<i>Periodic Exam</i> .....	24
7.2.5	<i>Medical Restriction</i> .....	24
<b>8.0</b>	<b>GENERAL SAFETY PRACTICES</b> .....	<b>24</b>
8.1	GENERAL SAFETY RULES.....	24
8.2	BUDDY SYSTEM.....	25
8.3	HEAT STRESS.....	26
8.4	HEAT STRESS SAFETY PRECAUTIONS.....	27
	<i>Table 4 – Work/Rest Schedule</i> .....	28
8.5	COLD STRESS.....	29
8.6	SAFETY PRECAUTIONS FOR COLD STRESS PREVENTION.....	30
8.7	SAFE WORK PRACTICES.....	30
8.8	BIOLOGICAL HAZARDS.....	30
8.8.1	<i>Tick Borne Diseases</i> .....	31
8.8.2	<i>Poisonous Plants</i> .....	31
8.8.3	<i>Snakes</i> .....	32
8.8.4	<i>Spiders</i> .....	32
8.9	NOISE.....	32

8.10	SPILL CONTROL.....	33
8.11	SANITATION .....	33
8.11.1	<i>Break Area</i> .....	33
8.11.2	<i>Potable Water</i> .....	33
8.11.3	<i>Sanitary Facilities</i> .....	33
8.11.4	<i>Lavatory</i> .....	34
8.12	EMERGENCY EQUIPMENT.....	34
8.13	LOCKOUT/TAGOUT PROCEDURES .....	34
8.14	ELECTRICAL SAFETY .....	34
8.15	LIFTING SAFETY .....	35
8.16	LADDER SAFETY .....	35
8.17	TRAFFIC SAFETY .....	37
<b>9.0</b>	<b>SITE-SPECIFIC HAZARDS AND CONTROL MEASURES .....</b>	<b>37</b>
9.1	EVALUATION OF HAZARDS.....	37
9.1.1	<i>Hazard Characteristics</i> .....	37
9.1.2	<i>Potential Health and Safety Hazards</i> .....	38
9.2	FIELD ACTIVITIES, HAZARDS, AND CONTROL PROCEDURES .....	38
9.2.1	<i>Mobilization/Construction Stakeout</i> .....	38
9.2.2	<i>Demolition/Site Clearing</i> .....	39
9.2.3	<i>Excavation and Cut/Fill Operations</i> .....	40
9.2.4	<i>Drilling/Subsurface Intrusion Activities</i> .....	42
9.2.5	<i>Subsurface Chemical Sample Collection/Analysis</i> .....	46
9.2.6	<i>UST Closure</i> .....	47
9.2.7	<i>Site Capping System Construction</i> .....	47
9.2.8	<i>Creek Relocation</i> .....	48
9.2.9	<i>Decontamination</i> .....	48
9.2.10	<i>Demobilization</i> .....	48
9.3	CHEMICAL HAZARDS .....	48
<b>10.0</b>	<b>EMERGENCY PROCEDURES .....</b>	<b>50</b>
10.1	GENERAL .....	50
10.2	EMERGENCY RESPONSE .....	50
10.2.1	<i>Fire</i> .....	51
10.2.2	<i>Contaminant Release</i> .....	51
10.3	MEDICAL EMERGENCY .....	51
10.3.1	<i>Emergency Care Steps</i> .....	51
10.4	FIRST AID - GENERAL .....	52
10.4.1	<i>First Aid - Inhalation</i> .....	52
10.4.2	<i>First Aid - Ingestion</i> .....	52
10.4.3	<i>First Aid - Skin Contact</i> .....	52
10.4.4	<i>First Aid - Eye Contact</i> .....	52
10.5	REPORTING INJURIES, ILLNESSES, AND SAFETY INCIDENTS .....	52
10.6	EMERGENCY INFORMATION .....	52
10.6.1	<i>Directions to Hospital</i> .....	53
<b>11.0</b>	<b>LOGS, REPORTS, AND RECORD KEEPING.....</b>	<b>54</b>

11.1	HASP FIELD CHANGE REQUEST .....	54
11.2	MEDICAL AND TRAINING RECORDS .....	54
11.3	EXPOSURE RECORDS.....	55
11.4	ACCIDENT/INCIDENT REPORT.....	55
11.5	OSHA FORM 200.....	55
11.6	ON-SITE HEALTH AND SAFETY FIELD LOGBOOKS.....	55
11.7	MATERIAL SAFETY DATA SHEETS .....	55



## LIST OF FIGURES

**Figure No.**    **Title**

Fig-1    Directions to White Plains Hospital

## LIST OF EMBEDDED TABLES

<b><u>Table</u></b>	<b><u>Title</u></b>	<b><u>Page</u></b>
1.	Key Safety Personnel	14
2.	PPE Selection Matrix	17
3.	Airborne Contaminant Action Levels	19
4.	Work/Rest Schedule	27
5.	Wind Chill Temperature Chart	29
6	List of Primary Contaminants	49
7	Emergency Contacts	52

## LIST OF ATTACHMENTS

Attachment 1	Air Monitoring Log
Attachment 2	OSHA Poster
Attachment 3	HASP Field Change Request Form
Attachment 4	Accident/Incident Report
Attachment 5	Signatory Page
Attachment 6	Material Safety Data Sheets

## LIST OF ACRONYMS AND ABBREVIATIONS

ACGIH	American Conference of Governmental Industrial Hygienists
COC	Constituent(s) of Concern
CRZ	Contamination Reduction Zone
EZ	Exclusion Zone
FS	Field Supervisor
GFCI	Ground Fault Circuit Interrupter
HASP	Health and Safety Plan
HSM	Health and Safety Manager
LEL	Lower Explosive Limit
MSDS	Material Safety Data Sheet
OSHA	Occupational Safety and Health Administration
PCB	Polychlorinated Biphenyls
PEL	Permissible Exposure Limit
PID	Photoionization Detector
PM	Project Manager
PO	Project Officer
PPE	Personal Protective Equipment
SESI	SESI Consulting Engineers
SSO	Site Safety Officer
SVOC	Semi-Volatile Organic Compound
SZ	Support Zone
TLV	Threshold Limit Value
USCG	United States Coast Guard
USEPA	United States Environmental Protection Agency
VOC	Volatile Organic Compound

## HEALTH AND SAFETY PLAN SUMMARY

The chemical hazards associated with site operations are related to inhalation, ingestion, and skin exposure to site Chemicals of Concern (COCs). COCs at the site include metals, some VOC compounds, some SVOC compounds and some pesticides. Concentrations of airborne COCs during site tasks may be measurable and will require air monitoring during certain operations.

The potential for inhalation of site COCs is low. The potential for dermal contact with soils containing site COCs during remedial operations is moderate.

The following table summarizes airborne contaminant action levels that will be used to determine the procedures and protective equipment necessary based on conditions as measured at the site.

Parameter	Reading	Action
Dust	0 to .5 mg/m <sup>3</sup>	Normal operations
	0.5 to 1 mg/m <sup>3</sup>	Begin soil wetting procedure (Level C protection would be needed beyond this point)
	> 1 mg/m <sup>3</sup>	Stop work, fully implement dust control plan
Oxygen	≤ 19.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
	> 19.5% to < 23.5%	Normal operations
	≥ 23.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Carbon Monoxide	0 ppm to ≤ 20 ppm	Normal operations
	> 20 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area

The level of personal protection selected will be based on air monitoring of the work environment and an assessment by the Field Supervisor and Site Safety Officer. The following table presents a selection matrix to determine appropriate Personal Protective Equipment.

Task	Anticipated Level of Protection
Mobilization	Level D
Subsurface Intrusive Activities (Mass Excavation, Drilling, Soil Grouting)	Modified Level D/Level C
Earthwork/Grading	Level D
Additional Chemical Sampling / Delineation	Modified Level D/Level C
Decontamination	Modified Level D
Demobilization	Level D

## 1.0 INTRODUCTION

### 1.1 Objective

The objective of this Health and Safety Plan (HASP) is to provide a mechanism for establishing safe working conditions during activities at the 200 Hamilton Avenue, White Plains, New York (the Site). The safety organization, procedures, and protective equipment have been established based on an analysis of potential physical, chemical, and biological hazards. Specific hazard control methodologies have been evaluated and selected to minimize the potential of injury, illness, or other hazardous incident.

The HASP was written to meet the requirements of all applicable Federal, State, and local health and safety regulations, including 29 CFR 1910.120. The HASP is based on current knowledge regarding the specific chemical and physical hazards that are known or anticipated at the Site. This HASP is a dynamic document, for which changes and/or revisions may be realized as changes in scope and/or site conditions are encountered. Should revised documents be produced, said revised documents will refer to the specific changes and why they were made.

### 1.2 Site and Facility Description

The Site, which is the subject of a Remedial Investigation Report prepared by AKRF, is approximately 3.74-acres occupied the two-story White Plains Mall and east-adjacent asphalt-paved parking lot. The Site properties are identified on the Westchester County Clerk's as a portion of tax parcel map Section 125.67, Block 5, Lot 1.

The Site is bounded by Barker Avenue to the north followed by offices, a hotel, and commercial development; Cottage Place to the east followed by a gasoline station and commercial buildings; Hamilton Avenue to the south followed by commercial and government buildings; and Dr. Martin Luther King Jr. Boulevard to the west followed by commercial development. The surrounding area consists primarily of commercial and governmental uses, with residences further north of the Site.

### 1.3 Policy Statement

The policy of SESI Consulting Engineers (SESI) is to provide a safe and healthful work environment. No aspect of operations is of greater importance than injury and illness prevention. A fundamental principle of safety management is that all injuries, illnesses, and incidents are preventable. SESI will take every reasonable step to eliminate or control hazards in order to minimize the possibility of injury, illness, or incident.

This HASP prescribes the procedures that must be followed by SESI personnel during activities at the site. Operational changes that could affect the health and safety of personnel, the community, or the environment will not be made without the prior approval of the Project Manager (PM) and the Health and Safety Manager (HSM). This document will be reviewed periodically by the HSM to ensure that it is current and technically correct. Any changes in site conditions and/or the scope of work will require a review and modification to this HASP. Such changes will be completed in the form of an addendum or a revision to the plan.

The provisions of this plan are mandatory for all SESI personnel and are advisory for all contractors, and subcontractors assigned to the project. **Subcontractors will be**

**responsible for preparing their own site-specific HASPs that meet the basic requirements outlined in this HASP.** All visitors to SESI work areas at the site must abide by the requirements of this plan.

#### 1.4 References

This HASP complies with applicable Occupational Safety and Health Administration (OSHA) regulations, United States Environmental Protection Agency (USEPA) regulations, and SESI health and safety policies and procedures. This plan follows the guidelines established in the following:

- *Standard Operating Safety Guides*, USEPA (Publication 9285.1-03, June 1992).
- *Occupational Safety and Health Guidance Manual for Hazardous Waste Site Activities*, NIOSH, OSHA, USCG, USEPA (86116, October 1985).
- *Title 29 of the Code of Federal Regulations (CFR)*, Part 1910.
- *Title 29 of the Code of Federal Regulations (CFR)*, Part 1926.
- *Pocket Guide to Chemical Hazards*, DHHS, PHS, CDC, NIOSH (2004).
- *Threshold Limit Values*, ACGIH (2005).
- *Guide to Occupational Exposure Values*, ACGIH (2005).
- *Quick Selection Guide to Chemical Protective Clothing*, Forsberg, K. and S.Z. Mansdorf, 2nd Ed. (1993).

#### 1.5 Definitions

The following definitions (listed alphabetically) are applicable to this HASP:

- *Contamination Reduction Zone (CRZ)* - Area between the exclusion zone and support zone that provides a transition between contaminated and clean areas. Decontamination stations are located in this zone.
- *Exclusion Zone (EZ)* - Any portions of the site where hazardous substances are, or are reasonably suspected to be present, and pose an exposure hazard to on-site personnel.
- *Incident* - All losses, including first aid cases, injuries, illnesses, spills/leaks, equipment and property damage, motor vehicle accidents, regulatory violations, fires, and business interruptions.
- *On-Site Personnel* - All SESI and subcontractors involved with the project.
- *Project* - All on-site work performed under the scope of work.
- *Site* - The area described in Section 1.2, Site and Facility Description, where the work is to be performed by SESI personnel and subcontractors.
- *Support Zone (SZ)* - All areas of the site except the EZ and CRZ. The SZ surrounds the CRZ and EZ. Support equipment and break areas are located in this zone.
- *Subcontractor* - Includes contractor personnel hired by SESI.
- *Visitor* - All other personnel, except the on-site personnel.
- *Work Area* - The portion of the site where work activities are actively being performed. This area may change daily as work progresses and includes the SZ, CRZ, and EZ. If the work area is located in an area on the site that is not contaminated, or suspected of being contaminated, the entire work area may be a SZ.

## **2.0 PROJECT SCOPE OF WORK**

This HASP contains information for the following tasks that SESI is anticipated to conduct at the Site. Should additional and/or different tasks be identified, amendments to this HASP will be required to address these changed items.

- Mobilization/Sample location stakeout;
- Soil Borings and Monitoring Well Installation;
- Excavation of contaminated soil “hot spots”;
- Earthwork and grading;
- Chemical sampling of soil and groundwater; and
- Decontamination and demobilization/site restoration.

## **3.0 ROLES AND RESPONSIBILITIES**

### **3.1 All Personnel**

All SESI project personnel must adhere to the procedures outlined in this HASP during the performance of their work. Each person is responsible for completing tasks safely and reporting any unsafe acts or conditions to their supervisor. No person may work in a manner that conflicts with these procedures. After due warnings, the PM will dismiss from the site any SESI employee or subcontractor who violates safety procedures.

All SESI project personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. In addition, all SESI personnel will attend an initial hazard briefing prior to beginning work at the site.

The roles of key safety personnel and subcontractors are outlined in the following sections. Key project personnel and contacts are summarized in Table 1.

### **3.2 Key Safety Personnel**

#### **3.2.1 Project Officer (PO)**

The PO is responsible for providing resources to assure project activities are completed in accordance with this HASP, and for meeting all regulatory and contractual requirements.

#### **3.2.2 Project Manager (PM)**

The PM is responsible for verifying that project activities are completed in accordance with the requirements of this HASP. The PM is responsible for confirming that the Field Supervisor (FS) has the equipment, materials, and qualified personnel to fully implement the safety requirements of this HASP, and/or that subcontractors assigned to this project meet the requirements established by SESI. It is also the responsibility of the PM to:

- Consult with the HSM on site health and safety issues;
- Verify that subcontractors meet health and safety requirements prior to commencing work;
- Verify that all incidents are thoroughly investigated;
- Approve, in writing, addenda or modifications of this HASP; and

- Suspend work or modify work practices, as necessary, for personal safety, protection of property, and regulatory compliance.

### **3.2.3 Health and Safety Manager (HSM)**

The HSM or his designee, the health and safety manager (HSM), has overall responsibility for the technical health and safety aspects of the project, including review and approval of this HASP. Inquiries regarding health and safety procedures, project procedures, and other technical or regulatory issues should be addressed to this individual. The HSM or his designee must approve changes or addenda to this HASP.

### **3.2.4 Site Safety Officer (SSO)**

The SSO is responsible for field health and safety issues, including the execution of this HASP. Questions in the field regarding health and safety procedures, project procedures, and other technical or regulatory issues should be addressed to this individual. The SSO will advise the PM on health and safety issues and will establish and coordinate the project air-monitoring program if one is deemed necessary (see Section 5.1, Air Monitoring). The SSO is the primary site contact on health and safety matters. It is the responsibility of the SSO to:

- Provide on-site technical assistance, if necessary;
- Participate in all accident/incident reports and ensure that they are reported to the HSM, client, and PM within 24 hours;
- Coordinate site and personal air monitoring as required, including equipment maintenance and calibration;
- Conduct site safety orientation training and safety meetings;
- Verify that project personnel have received the required physical examinations and medical certifications;
- Review site activities with respect to compliance with this HASP;
- Maintain required health and safety documents and records; and
- Assist the FS in instructing field personnel on project hazards and protective procedures.

### **3.2.5 Field Supervisor (FS)**

The FS is responsible for implementing this HASP, including communicating requirements to on-site personnel and subcontractors. The FS will be responsible for informing the PM of changes in the work plan, procedures, or site conditions so that those changes may be addressed in this HASP. Other responsibilities are to:

- Consult with the SSO on site health and safety issues;
- Stop work, as necessary, for personal safety, protection of property, and regulatory compliance;
- Obtain a site map and determine and post routes to medical facilities and emergency telephone numbers;
- Notify local public emergency representatives (as appropriate) of the nature of the site operations, and post their telephone numbers (i.e., local fire department personnel who would respond for a confined space rescue);
- Observe on-site project personnel for signs of ill health effects;
- Investigate and report any incidents to the SSO;
- Verify that all on-site personnel have had applicable training;

- Verify that on-site personnel are informed of the physical, chemical, and biological hazards associated with the site activities, and the procedures and protective equipment necessary to control the hazards; and
- Issue/obtain any required work permits (hot work, confined space, etc.).

### **3.2.6 Field Personnel (FP)**

All SESI field personnel are responsible for following the Health and Safety procedures specified in this HASP and work practices specified in applicable operation procedures. Some specific responsibilities include, but are not limited to:

- Reading and understanding the HASP;
- Reporting all accidents, incidents, injuries, or illnesses to the FS;
- Complying with the requests of the SSO;
- Immediately communicating newly identified hazards or noncompliance issues to the FS or SSO; and
- Stopping work in cases of immediate danger.

### **3.3 Subcontractors**

Subcontractors and their personnel must understand and comply with applicable regulations and site requirements established in this HASP. Subcontractors will prepare their own site-specific HASP that must be consistent with the requirements of this HASP.

All subcontractor personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. All subcontractor personnel will attend an initial hazard briefing prior to beginning work at the site. Additionally, on-site subcontractor personnel must conduct daily site safety meetings.

Subcontractors must designate individuals to function as the PM, HSM, SSO, and FS. In some firms the HSM to be carried out by the PM. This is acceptable provided the PM has the required knowledge, training, and experience to properly address all hazards associated with the work, and to prepare, approve, and oversee the execution of the site-specific HASP. A subcontractor may designate the same person to perform the duties of both the SSO and the FS. However, depending on the level of complexity of a contractor's scope of work, it may be infeasible for one person to perform both functions satisfactorily.

### **3.4 Stop Work Authority**

Every SESI employee and subcontractor is empowered, expected, and has the responsibility to stop the work of another co-worker if the working conditions or behaviors are considered unsafe.

### **3.5 All On-Site Personnel**

All on-site SESI personnel (including SESI subcontractors) must read and acknowledge their understanding of their respective HASPs before commencing work and abide by the requirements of the plans. All on-site SESI personnel shall sign their HASP Acknowledgement Form following their review of their HASP.

All SESI project personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. In addition, all on-site personnel will attend an initial hazard briefing



provided by the SSO prior to beginning work at the site and conduct daily safety meetings thereafter.

On-site personnel will immediately report the following to the FS or SSO:

- Personal injuries and illnesses no matter how minor;
- Unexpected or uncontrolled release of chemical substances;
- Symptoms of chemical exposure;
- Unsafe or hazardous situations;
- Unsafe or malfunctioning equipment;
- Changes in site conditions that may affect the health and safety of project personnel;
- Damage to equipment or property; and
- Situations or activities for which they are not properly trained.

### 3.6 Visitors

All SESI personnel and subcontractors visiting the Site must check in with the FS. Visitors will be cautioned to avoid skin contact with surfaces, soils, groundwater, or other materials that may impacted or be suspected to be impacted by constituents of concern (COCs).

Visitors requesting to observe work at the site must don appropriate personal protective equipment (PPE) prior to entry to the work area and must have the appropriate training and medical clearances to do so. If respiratory protective devices are necessary, visitors who wish to enter the work area must have been respirator-trained and fit tested for a respirator within the past 12 months.

**Table 1 – Key Safety Personnel**

SESI Personnel		
Role	Name	Address/Telephone No.
Project Officer (PO)	TBD	
Project Manager (PM)	TBD	
Senior Project Engineer (SPE)	TBD	
Health and Safety Manager (HSM)	TBD	
Site Safety Officer (SSO)	TBD	
Field Supervisor (FS)	TBD	
Field Personnel	TBD	
Field Personnel	TBD	
Subcontractors		
Company/Role	Name	Address/Telephone No.
TBD	TBD	TBD

## 4.0 PERSONAL PROTECTIVE EQUIPMENT

### 4.1 Levels of Protection

PPE is required to safeguard site personnel from various hazards. Varying levels of protection may be required depending on the levels of COCs and the degree of physical hazard. This section presents the various levels of protection and defines the conditions of use for each level. A summary of the levels is presented in Table 2 in this section.

#### **4.1.1 Level D Protection**

The minimum level of protection that will be required of project personnel at the site will be Level D, which will be worn when site conditions or air monitoring indicates no inhalation hazard exists. The following equipment will be used:

- Work clothing as prescribed by weather;
- Steel toe work boots, meeting American National Standards Institute (ANSI) Z41;
- Safety glasses or goggles, meeting ANSI Z87;
- Leather work gloves and/or nitrile surgical gloves;
- Hard hat, meeting ANSI Z89, when falling object hazards are present;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used); and
- PFD if working on or near the water.

#### **4.1.2 Modified Level D Protection**

Modified Level D will be used when airborne contaminants are not present at levels of concern, but site activities present an increased potential for skin contact with contaminated materials. Modified Level D consists of:

- Nitrile gloves worn over nitrile surgical gloves;
- Latex/polyvinyl chloride (PVC) overboots when contact with COC-impacted media is anticipated;
- Steel toe work boots, meeting ANSI Z41;
- Safety glasses or goggles, meeting ANSI Z87;
- Face shield in addition to safety glasses or goggles when projectiles or splash hazards exist (e.g. during Power Washing activities);
- Hard hat, meeting ANSI Z89, when falling object hazards are present;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used);
- Tyvek<sup>®</sup> suit (polyethylene coated Tyvek<sup>®</sup> suits for handling liquids) when body contact with COC-impacted media is anticipated; and
- PFD if working on or near the water.

#### **4.1.3 Level C Protection**

Level C protection will be required when the airborne concentration of COC reaches one-half of the OSHA Permissible Exposure Limit or ACGIH TLV. The following equipment will be used for Level C protection:

- Full-face, air-purifying respirator with combination organic vapor/HEPA cartridges;
- Polyethylene-coated Tyvek<sup>®</sup> suit, with ankles and cuffs taped to boots and gloves;
- Nitrile gloves worn over nitrile surgical gloves;
- Steel toe work boots, meeting ANSI Z41;
- Chemical-resistant boots with steel toes or latex/PVC overboots over steel toe boots;
- Hard hat, meeting ANSI Z89;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used); and
- PFD if working on or near the water.

## **4.2 Selection of PPE**

Equipment for personal protection will be selected based on the potential for contact, site conditions, ambient air quality, and the judgment of supervising site personnel and health and safety professionals. The PPE used will be chosen to be effective against the COCs present on the site.

## **4.3 Site Respiratory Protection Program**

Respiratory protection is an integral part of employee health and safety at the site due to potentially hazardous concentrations of airborne COCs. The site respiratory protection program will consist of the following (as a minimum):

- All on-site personnel who may use respiratory protection will have an assigned respirator.
- All on-site personnel who may use respiratory protection will have been fit tested and trained in the use of a full-face air-purifying respirator within the past 12 months. Documentation of the fit test must be provided to the SSO prior to commencement of work.
- All on-site personnel who may use respiratory protection must within the past year have been medically certified as being capable of wearing a respirator. Documentation of the medical certification must be provided to the SSO, prior to commencement of site work.
- Only cleaned, maintained, NIOSH-approved respirators will be used.
- If respirators are used, the respirator cartridge is to be properly disposed of at the end of each work shift, or when load-up or breakthrough occurs.
- Contact lenses are not to be worn when a respirator is worn.
- All on-site personnel who may use respiratory protection must be clean-shaven. Mustaches and sideburns are permitted, but they must not touch the sealing surface of the respirator.
- Respirators will be inspected, and a negative pressure test performed prior to each use.
- After each use, the respirator will be wiped with a disinfectant, cleansing wipe. When used, the respirator will be thoroughly cleaned at the end of the work shift. The respirator will be stored in a clean plastic bag, away from direct sunlight in a clean, dry location, in a manner that will not distort the face piece.

## **4.4 Using PPE**

Depending upon the level of protection selected, specific donning and doffing procedures may be required. The procedures presented in this section are mandatory if Modified Level D or Level C PPE is used. All personnel entering the EZ must put on the required PPE in accordance with the requirements of this HASP. When leaving the EZ, PPE will be removed in accordance with the procedures listed, to minimize the spread of COCs.

### **4.4.1 Donning Procedures**

These procedures are mandatory only if Modified Level D or Level C PPE is used on the site:

- Remove bulky outerwear. Remove street clothes and store in clean location;
- Put on work clothes or coveralls;
- Put on the required chemical protective coveralls;

- Put on the required chemical protective boots or boot covers;
- Tape the legs of the coveralls to the boots with duct tape;
- Put on the required chemical protective gloves;
- Tape the wrists of the protective coveralls to the gloves;
- Don the required respirator and perform appropriate fit check (Level C);
- Put hood or head covering over head and respirator straps and tape hood to facepiece (Level C); and
- Don remaining PPE, such as safety glasses or goggles and hard hat.

When these procedures are instituted, one person must remain outside the work area to ensure that each person entering has the proper protective equipment.

#### 4.4.2 Doffing Procedures

The following procedures are only mandatory if Modified Level D or Level C PPE is required for the site. Whenever a person leaves the work area, the following decontamination sequence will be followed:

- Upon entering the CRZ, rinse contaminated materials from the boots or remove contaminated boot covers;
- Clean reusable protective equipment;
- Remove protective garments, equipment, and respirator (Level C). All disposable clothing should be placed in plastic bags, which are labeled with contaminated waste labels;
- Wash hands, face, and neck (or shower if necessary);
- Proceed to clean area and dress in clean clothing; and
- Clean and disinfect respirator for next use.

All disposable equipment, garments, and PPE must be bagged in plastic bags, labeled for disposal. See Section 7, Decontamination, for detailed information on decontamination stations.

#### 4.5 Selection Matrix

The level of personal protection selected will be based on air monitoring of the work environment and an assessment by the FS and SSO of the potential for skin contact with COCs. The PPE selection matrix is presented in Table 2. This matrix is based on information available at the time this plan was written. The Airborne Contaminant Action Levels in Table 3, Airborne Contaminant Action Levels, should be used to verify that the PPE prescribed in these matrices is appropriate.

**Table 2 – PPE Selection Matrix**

<b>Task</b>	<b>Anticipated Level of Protection</b>
Mobilization	Level D
Subsurface Intrusive Activities (Excavation, Drilling)	Modified Level D/Level C
Earthwork/Grading	Level D
Chemical Sampling / Delineation	Modified Level D/Level C
Decontamination	Modified Level D
Demobilization	Level D

## **5.0 AIR AND NOISE MONITORING**

### **5.1 Air Monitoring**

Air monitoring, sampling, and testing will be conducted to determine employee exposure to airborne constituents. The monitoring results will dictate work procedures and the selection of PPE. The SESI SSO will be responsible for defining appropriate air monitoring procedures and for utilizing the air monitoring results to determine appropriate procedures and PPE for project personnel. Air monitoring results should be recorded in field notebooks or on an air monitoring log (see Attachment 1 for a copy of the Air Monitoring Log). Any deviations from the procedures listed here should be documented and explained in the Air Monitoring Log.

The monitoring devices to be used are a PDR1000 particulate monitor (or equivalent) and a Rae Systems MultiRAE detector (PID with a 11.7 eV lamp/oxygen/LEL/hydrogen sulfide sensors). Colorimetric detector tubes may be utilized to estimate airborne concentrations of benzene and should be onsite during any activities that may result in elevated PID readings including drilling, excavating, and groundwater sampling.

Air monitoring will be conducted continuously with the LEL/Oxygen meter during drilling in areas where flammable vapors or gases are suspect. All work activity must stop where tests indicate the concentration of flammable vapors exceeds 10% of the LEL at a location with a potential ignition source. Such an area must be ventilated to reduce the concentration to an acceptable level.

### **5.2 Noise Monitoring**

Noise monitoring may be conducted as required. Hearing protection is mandatory for all employees in noise hazardous areas, such as around heavy equipment. As a general rule, sound levels that cause speech interference at normal conversation distance should require the use of hearing protection.

### **5.3 Monitoring Equipment Maintenance and Calibration**

All direct-reading instrumentation calibrations should be conducted under the approximate environmental conditions the instrument will be used. Instruments must be calibrated before and after use, noting the reading(s) and any adjustments that are necessary. All air monitoring equipment calibrations, including the standard used for calibration, must be documented on a calibration log or in the field notebook. All completed health and safety documentation/forms must be reviewed by the SSO and maintained by the FS.

All air monitoring equipment will be maintained and calibrated in accordance with the specific manufacturer's procedures. Preventive maintenance and repairs will be conducted in accordance with the respective manufacturer's procedures. When applicable, only manufacturer-trained and/or authorized personnel will be allowed to perform instrument repairs or preventive maintenance.

If an instrument is found to be inoperative or suspected of giving erroneous readings, the SSO must be responsible for immediately removing the instrument from service and obtaining a replacement unit. If the instrument is essential for safe operation during a specific activity, that activity must cease until an appropriate replacement unit is obtained. The SSO will be responsible for ensuring a replacement unit is obtained and/or repairs are initiated on the defective equipment.

## 5.4 Action Levels

Table 3 presents airborne contaminant action levels that will be used to determine the procedures and protective equipment necessary based on conditions as measured at the site.

**Table 3 – Airborne Contaminant Action Levels**

Parameter	Reading	Action
Total Hydrocarbons	0 ppm to ≤ 1 ppm	Normal operations; continue hourly breathing zone monitoring
	> 1 ppm to 5 ppm	Increase monitoring frequency to every 15 minutes and use benzene detector tube to screen for the presence of benzene
	≥ 5 ppm to ≤ 50 ppm	Upgrade to Level C PPE; continue screening for benzene
	> 50 ppm	Stop work; investigate cause of reading
	At any reading > 5 ppm	Monitor perimeter per CAMP
Benzene	≥ 1 ppm to 5 ppm	Upgrade to Level C PPE
	> 5 ppm	Stop work; investigate cause of reading
Dust	0 to .05 mg/m <sup>3</sup>	Normal operations
	0.05 to 0.1 mg/m <sup>3</sup>	Begin soil wetting procedure (Level C protection would be needed beyond this point)
	> 0.15 mg/m <sup>3</sup>	Stop work, fully implement dust control plan
Oxygen	≤ 19.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
	> 19.5% to < 23.5%	Normal operations
	≥ 23.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Carbon Monoxide	0 ppm to ≤ 20 ppm	Normal operations
	> 20 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Hydrogen Sulfide	0 ppm to ≤ 5 ppm	Normal operations
	> 5 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Flammable Vapors (LEL)	< 10% LEL	Normal operations
	≥ 10% LEL	Stop work, ventilate area, investigate source of vapors

## 6.0 WORK ZONES AND DECONTAMINATION

### 6.1 Work Zones

#### 6.1.1 Authorization to Enter

Only personnel with the appropriate training and medical certifications (if respirators are required) will be allowed to work at the project site. The FS will maintain a list of authorized persons; only personnel on the authorized persons list will be allowed to enter the site work areas.

### **6.1.2 Site Orientation and Hazard Briefing**

No person will be allowed in the work area during site operations without first being given a site orientation and hazard briefing. This orientation will be presented by the FS or SSO and will consist of a review of this HASP. This review must cover the chemical, physical, and biological hazards, protective equipment, safe work procedures, and emergency procedures for the project. Following this initial meeting, daily safety meetings will be held each day before work begins.

All people entering the site work areas, including visitors, must document their attendance at this briefing, as well as the daily safety meetings on the forms included with this plan.

### **6.1.3 Certification Documents**

A training and medical file may be established for the project and kept on site during all site operations. Specialty training, such as first aid/cardiopulmonary resuscitation (CPR) certificates, as well as current medical clearances for all project field personnel required to wear respirators, will be maintained within that file. All project personnel must provide their training and medical documentation to the SSO prior to starting work.

### **6.1.4 Entry Log**

A log-in/log-out sheet will be maintained at the site by the FS. Personnel must sign in and out on a log sheet as they enter and leave the work area, and the FS may document entry and exit in the field notebook.

### **6.1.5 Entry Requirements**

In addition to the authorization, hazard briefing, and certification requirements listed above, no person will be allowed in any SESI work area unless they are wearing the minimum PPE as described in Section 4.0.

### **6.1.6 Emergency Entry and Exit**

People who must enter the work area on an emergency basis will be briefed of the hazards by the FS or SSO. All activities will cease in the event of an emergency. People exiting the work area because of an emergency will gather in a designated safe area for a head count. The FS is responsible for ensuring that all people who entered the work area have exited in the event of an emergency.

### **6.1.7 Contamination Control Zones**

Contamination control zones are maintained to prevent the spread of contamination and to prevent unauthorized people from entering hazardous areas.

### **6.1.8 Exclusion Zone (EZ)**

An EZ may consist of a specific work area or may be the entire area of potential contamination. All employees entering an EZ must use the required PPE and must have the appropriate training and medical clearance for hazardous waste work. The EZ is the defined area where there is a possible respiratory and/or contact health hazard. Cones, caution tape, or a posted site diagram will identify the location of each EZ.

### **6.1.9 Contamination Reduction Zone**

The CRZ or transition area will be established, if necessary, to perform decontamination of personnel and equipment. All personnel entering or leaving the EZ will pass through this

area to prevent any cross-contamination. Tools, equipment, and machinery will be decontaminated in a specific location. The decontamination of all personnel will be performed on site adjacent to the EZ. Personal protective outer garments and respiratory protection will be removed in the CRZ and prepared for cleaning or disposal. This zone is the only appropriate corridor between the EZ and the support zone (SZ) discussed below.

#### **6.1.10 Support Zone (SZ)**

The SZ is a clean area outside the CRZ located to prevent employee exposure to hazardous substances. Eating and drinking will be permitted in the support area only after proper decontamination. Smoking may be permitted in the SZ, subject to site requirements.

#### **6.1.11 Posting**

Work areas will be prominently marked and delineated using cones, caution tape, or a posted site diagram.

#### **6.1.12 Site Inspections**

The FS will conduct a daily inspection of site activities, equipment, and procedures to verify that the required elements are in place.

### **6.2 Decontamination**

#### **6.2.1 Personnel Decontamination**

All personnel wearing Modified Level D or Level C protective equipment in the EZ must undergo personal decontamination prior to entering the SZ. The personnel decontamination area will consist of the following stations at a minimum:

- *Station 1:* Personnel leaving the contaminated zone will remove the gross contamination from their outer clothing and boots.
- *Station 2:* Personnel will remove their outer garment and gloves and dispose of it in properly labeled containers. Personnel will then decontaminate their hard hats, and boots with an aqueous solution of detergent or other appropriate cleaning solution. These items are then hand carried to the next station.
- *Station 3:* Personnel will thoroughly wash their hands and face before leaving the CRZ. Respirators will be sanitized and then placed in a clean plastic bag.

#### **6.2.2 Equipment Decontamination**

All vehicles that have entered the EZ will be decontaminated at the decontamination pad prior to leaving the zone. If the level of vehicle contamination is low, decontamination may be limited to rinsing of tires and wheel wells with water. If the vehicle is significantly contaminated, steam cleaning or pressure washing of vehicles and equipment may be required.

#### **6.2.3 Personal Protective Equipment Decontamination**

Where and whenever possible, single-use, external protective clothing must be used for work within the EZ or CRZ. This protective clothing must be disposed of in properly labeled containers. Reusable protective clothing will be rinsed at the site with detergent and water. The rinsate will be collected for disposal.



When removed from the CRZ, the respirator will be thoroughly cleaned with soap and water. The respirator face piece, straps, valves, and covers must be thoroughly cleaned at the end of each work shift, and ready for use prior to the next shift. Respirator parts may be disinfected with a solution of bleach and water (mixed at 2% bleach by volume), or by using a spray disinfectant.

## **7.0 TRAINING AND MEDICAL SURVEILLANCE**

### **7.1 Training**

#### **7.1.1 General**

All on-site project personnel who work in areas where they may be exposed to site contaminants must be trained as required by OSHA Regulation 29 CFR 1910.120 (HAZWOPER). Field employees also must receive a minimum of three days of actual field experience under the direct supervision of a trained, experienced supervisor. Personnel who completed their initial training more than 12 months prior to the start of the project must have completed an eight-hour refresher course within the past 12 months. The FS must have completed an additional eight hours of supervisory training and must have a current first-aid/CPR certificate (See Attachment 2).

#### **7.1.2 Basic 40-Hour Course**

The following is a list of the topics typically covered in a 40-hour HAZWOPER training course:

- General safety procedures;
- Physical hazards (fall protection, noise, heat stress, cold stress);
- Names and job descriptions of key personnel responsible for site health and safety;
- Safety, health, and other hazards typically present at hazardous waste sites;
- Use, application, and limitations of PPE;
- Work practices by which employees can minimize risks from hazards;
- Safe use of engineering controls and equipment on site;
- Medical surveillance requirements;
- Recognition of symptoms and signs which might indicate overexposure to hazards;
- Worker right-to-know (Hazard Communication OSHA 1910.1200);
- Routes of exposure to contaminants;
- Engineering controls and safe work practices;
- Components of a health and safety program and a site-specific HASP;
- Decontamination practices for personnel and equipment;
- Confined-space entry procedures; and
- General emergency response procedures.

#### **7.1.3 Supervisor Course**

Management and supervisors must receive an additional eight hours of training, which typically includes:

- General site safety and health procedures;
- PPE programs; and
- Air monitoring techniques.

#### **7.1.4 Site-Specific Training**

Site-specific training will be accomplished by on-site personnel reading this HASP, and through a thorough site briefing by the PM, FS, or SSO on the contents of this HASP before work begins. The review must include a discussion of the chemical, physical, and biological hazards; the protective equipment and safety procedures; and emergency procedures.

#### **7.1.5 Daily Safety Meetings**

Daily safety meetings will be held to cover the work to be accomplished, the hazards anticipated, the PPE and procedures required to minimize site hazards, and emergency procedures. The FS or SSO should present these meetings prior to beginning the day's fieldwork. No work will be performed in an EZ before a daily safety meeting has been held. An additional safety meeting must also be held prior to new tasks, or if new hazards are encountered. The daily safety meetings will be logged in the field notebook.

#### **7.1.6 First Aid and CPR**

At least one employee current in first aid/CPR will be assigned to the work crew and will be on the site during operations. Site records will document the presence of this individual. Refresher training in first aid (triennially) and CPR (annually) is required to keep the certificate current. These individuals must also receive training regarding the precautions and protective equipment necessary to protect against exposure to blood-borne pathogens.

### **7.2 Medical Surveillance**

#### **7.2.1 Medical Examination**

All personnel who are potentially exposed to site contaminants must participate in a medical surveillance program as defined by OSHA at 29 CFR 1910.120 (f).

#### **7.2.2 Pre-placement Medical Examination**

All potentially exposed personnel must have completed a comprehensive medical examination prior to assignment, and periodically thereafter as defined by applicable regulations. The pre-placement and periodic medical examinations typically include the following elements:

- Medical and occupational history questionnaire;
- Physical examination;
- Complete blood count, with differential;
- Liver enzyme profile;
- Chest X-ray, at a frequency determined by the physician;
- Pulmonary function test;
- Audiogram;
- Electrocardiogram for persons older than 45 years of age, or if indicated during the physical examination;
- Drug and alcohol screening, as required by job assignment;
- Visual acuity; and
- Follow-up examinations, at the discretion of the examining physician or the corporate medical director.

The examining physician provides the employee with a letter summarizing his findings and recommendations, confirming the worker's fitness for work and ability to wear a respirator.

Documentation of medical clearance will be available for each employee during all project site work.

Subcontractors will certify that all their employees have successfully completed a physical examination by a qualified physician. The physical examinations must meet the requirements of 29 CFR 1910.120 and 29 CFR 1910.134. Subcontractors will supply copies of the medical examination certificate for each on-site employee.

### **7.2.3 Other Medical Examinations**

In addition to pre-employment, annual, and exit physicals, personnel may be examined:

- At employee request after known or suspected exposure to toxic or hazardous materials; and
- At the discretion of the SSO, HSM, or occupational physician in anticipation of, or after known or suspected exposure to toxic or hazardous materials.

### **7.2.4 Periodic Exam**

Following the placement examination, all employees must undergo a periodic examination, similar in scope to the placement examination. For employees potentially exposed over 30 days per year, the frequency of periodic examinations will be annual. For employees potentially exposed less than 30 days per year, the frequency for periodic examinations will be 24 months.

### **7.2.5 Medical Restriction**

When the examining physician identifies a need to restrict work activity, the employee's supervisor must communicate the restriction to the employee and the SSO. The terms of the restriction will be discussed with the employee and the supervisor.

## **8.0 GENERAL SAFETY PRACTICES**

### **8.1 General Safety Rules**

General safety rules for site activities include, but are not limited to, the following:

- At least one copy of this HASP must be in a location at the site that is readily available to personnel, and all project personnel shall review the plan prior to starting work.
- Consume or use food, beverages, chewing gum, and tobacco products only in the SZ or other designated area outside the EZ and CRZ. Cosmetics shall not be applied in the EZ or CRZ.
- Wash hands before eating, drinking, smoking, or using toilet facilities.
- Wear all PPE as required and stop work and replace damaged PPE immediately.
- Secure disposable coveralls, boots, and gloves at the wrists and legs and ensure closure of the suit around the neck.
- Upon skin contact with materials that may be impacted by COCs, remove contaminated clothing and wash the affected area immediately. Contaminated clothing must be changed. Any skin contact with materials potentially impacted by COCs must be reported to the FS or SSO immediately. If needed, medical attention should be sought.

- Practice contamination avoidance. Avoid contact with surfaces either suspected or known to be impacted by COCs, such as standing water, mud, or discolored soil. Equipment must be stored on elevated or protected surfaces to reduce the potential for incidental contamination.
- Remove PPE as required in the CRZ to limit the spread of COC-containing materials.
- At the end of each shift or as required, dispose of all single-use coveralls, soiled gloves, and respirator cartridges in designated receptacles designated for this purpose.
- Removing soil containing site COCs from protective clothing or equipment with compressed air, shaking, or any other means that disperses contaminants into the air is prohibited.
- Inspect all non-disposable PPE for contamination in the CRZ. Any PPE found to be contaminated must be decontaminated or disposed of appropriately.
- Recognize emergency signals used for evacuation, injury, fire, etc.
- Report all injuries, illnesses, and unsafe conditions or work practices to the FS or SSO.
- Use the “buddy system” during all operations requiring Level C PPE, and when appropriate, during Modified Level D operations.
- Obey all warning signs, tags, and barriers. Do not remove any warnings unless authorized to do so.
- Use, adjust, alter, and repair equipment only if trained and authorized to do so, and in accordance with the manufacturer’s directions.
- Personnel are to perform only tasks for which they have been properly trained and will advise their supervisor if they have been assigned a task for which they are not trained.
- The presence or consumption of alcoholic beverages or illicit drugs during the workday, including breaks, is strictly prohibited. Notify your supervisor if you must take prescription or over-the-counter drugs that indicate they may cause drowsiness or, that you should not operate heavy equipment.
- Remain upwind during site activities whenever possible.

## **8.2 Buddy System**

On-site personnel must use the buddy system as required by operations. Use of the “buddy system” is required during all operations requiring Level C to Level A PPE, and when appropriate, during Level D operations. Crewmembers must observe each other for signs of chemical exposure, and heat or cold stress. Indications of adverse effects include, but are not limited to:

- Changes in complexion and skin coloration;
- Changes in coordination;
- Changes in demeanor;
- Excessive salivation and pupillary response; and
- Changes in speech pattern.

Crewmembers must also be aware of the potential exposure to possible safety hazards, unsafe acts, or non-compliance with safety procedures.

Field personnel must inform their partners or fellow crewmembers of non-visible effects of exposure to toxic materials that they may be experiencing. The symptoms of such exposure may include, but are not limited to:

- Headaches;
- Dizziness;
- Nausea;
- Blurred vision;
- Cramps; and
- Irritation of eyes, skin, or respiratory tract.

If protective equipment or noise levels impair communications, prearranged hand signals must be used for communication. Personnel must stay within line of sight of another team member.

### **8.3 Heat Stress**

Heat stress is caused by a number of interacting factors, including environmental conditions, clothing, workload, etc., as well as the physical and conditioning characteristics of the individual. Since heat stress is one of the most common illnesses associated with heavy outdoor work conducted with direct solar load and, in particular, because wearing PPE can increase the risk of developing heat stress, workers must be capable of recognizing the signs and symptoms of heat-related illnesses. Personnel must be aware of the types and causes of heat-related illnesses and be able to recognize the signs and symptoms of these illnesses in both themselves and their co-workers.

*Heat rashes* are one of the most common problems in hot work environments. Commonly known as prickly heat, a heat rash is manifested as red papules and usually appears in areas where the clothing is restrictive. As sweating increases, these papules give rise to a prickling sensation. Prickly heat occurs in skin that is persistently wetted by unevaporated sweat, and heat rash papules may become infected if they are not treated. In most cases, heat rashes will disappear when the affected individual returns to a cool environment.

*Heat cramps* are usually caused by performing hard physical labor in a hot environment. These cramps have been attributed to an electrolyte imbalance caused by sweating. It is important to understand that cramps can be caused both by too much or too little salt.

Cramps appear to be caused by the lack of water replenishment. Because sweat is a hypotonic solution (plus or minus 0.3% NaCl), excess salt can build up in the body if the water lost through sweating is not replaced. Thirst cannot be relied on as a guide to the need for water; instead, water must be taken every 15 to 20 minutes in hot environments.

Under extreme conditions, such as working for 6 to 8 hours in heavy protective gear, a loss of sodium may occur. Drinking commercially available carbohydrate electrolyte replacement liquids is effective in minimizing physiological disturbances during recovery.

*Heat exhaustion* occurs from increased stress on various body organs due to inadequate blood circulation, cardiovascular insufficiency, or dehydration. Signs and symptoms include pale, cool, moist skin; heavy sweating; dizziness; nausea; headache, vertigo, weakness, thirst, and giddiness. Fortunately, this condition responds readily to prompt treatment.

Heat exhaustion should not be dismissed lightly, however, for several reasons. One is that the fainting associated with heat exhaustion can be dangerous because the victim may be operating machinery or controlling an operation that should not be left unattended; moreover, the victim may be injured when he or she faints. Also, the signs and symptoms seen in heat exhaustion are similar to those of heat stroke, which is a medical emergency.

Workers suffering from heat exhaustion should be removed from the hot environment, be given fluid replacement, and be encouraged to get adequate rest.

*Heat stroke* is the most serious form of heat stress. Heat stroke occurs when the body's system of temperature regulation fails and the body's temperature rises to critical levels. This condition is caused by a combination of highly variable factors, and its occurrence is difficult to predict. Heat stroke is a medical emergency. The primary signs and symptoms of heat stroke are confusion; irrational behavior; loss of consciousness; convulsions; a lack of sweating (usually); hot, dry skin; and an abnormally high body temperature, e.g., a rectal temperature of 41°C (105.8°F). If body temperature is too high, it causes death. The elevated metabolic temperatures caused by a combination of workload and environmental heat load, both of which contribute to heat stroke, are also highly variable and difficult to predict.

If a worker shows signs of possible heat stroke, professional medical treatment should be obtained immediately. The worker should be placed in a shady area and the outer clothing should be removed. The worker's skin should be wetted and air movement around the worker should be increased to improve evaporative cooling until professional methods of cooling are initiated and the seriousness of the condition can be assessed. Fluids should be replaced as soon as possible. The medical outcome of an episode of heat stroke depends on the victim's physical fitness and the timing and effectiveness of first aid treatment.

Regardless of the worker's protestations, no employee suspected of being ill from heat stroke should be sent home or left unattended unless a physician has specifically approved such an order.

Proper training and preventive measures will help avert serious illness and loss of work productivity. Preventing heat stress is particularly important because once someone suffers from heat stroke or exhaustion, that person may be predisposed to additional heat injuries.

#### **8.4 Heat Stress Safety Precautions**

Heat stress monitoring and work rest cycle implementation should commence when the ambient adjusted temperature exceeds 72°F. A minimum work rest regimen and procedures for calculating ambient adjusted temperature are described in Table 4.

**Table 4 – Work/Rest Schedule**

<b>Adjusted Temperature<sup>b</sup></b>	<b>Work/Rest Regimen Normal Work Ensemble<sup>c</sup></b>	<b>Work/Rest Regimen Impermeable Ensemble</b>
90°F (32.2°C) or above	After each 45 minutes of work	After each 15 minutes of work
87.5° - 90°F (30.8°-32.2°C)	After each 60 minutes of work	After each 30 minutes of work
82.5° - 87.5°F (28.1° - 30.8°C)	After each 90 minutes of work	After each 60 minutes of work
77.5° - 82.5°F (25.3° - 28.1°C)	After each 120 minutes of work	After each 90 minutes of work
72.5° - 77.5°F (30.8° - 32.2°C)	After each 150 minutes of work	After each 120 minutes of work

- a. For work levels of 250 kilocalories/hour (Light-Moderate Type of Work)
- b. Calculate the adjusted air temperature (ta adj) by using this equation:  $ta\ adj\ ^\circ F = ta\ ^\circ F + (13 \times \% \text{ sunshine})$ . Measure air temperature (ta) with a standard mercury-in-glass thermometer, with the bulb shielded from radiant heat. Estimate percent sunshine by judging what percent time the sun is not covered by clouds that are thick enough to produce a shadow. (100 percent sunshine = no cloud cover and a sharp, distinct shadow; 0 percent sunshine = no shadows.)
- c. A normal work ensemble consists of cotton coveralls or other cotton clothing with long sleeves and pants.
- d. The information presented above was generated using the information provided in the American Conference of Governmental Industrial Hygienists (ACGIH) Threshold Limit Values (TLV) Handbook.

In order to determine if the work rest cycles are adequate for the personnel and specific site conditions, additional monitoring of individual heart rates will be conducted during the rest cycle. To check the heart rate, count the radial pulse for 30 seconds at the beginning of the rest period. If the heart rate exceeds 110 beats per minute, shorten the next work period by one third and maintain the same rest period.

Additionally, one or more of the following control measures can be used to help control heat stress and are mandatory if any site worker has a heart rate (measure immediately prior to rest period) exceeding 115 beats per minute:

- Site workers will be encouraged to drink plenty of water and electrolyte replacement fluids throughout the day.
- On-site drinking water will be kept cool (50 to 60°F).
- A work regimen that will provide adequate rest periods for cooling down will be established, as required.
- All personnel will be advised of the dangers and symptoms of heat stroke, heat exhaustion, and heat cramps.
- Cooling devices, such as vortex tubes or cooling vests, should be used when personnel must wear impermeable clothing in conditions of extreme heat.
- Employees should be instructed to monitor themselves and co-workers for signs of heat stress and to take additional breaks as necessary.
- A shaded rest area must be provided. All breaks should take place in the shaded rest area.
- Employees must not be assigned to other tasks during breaks.
- Employees must remove impermeable garments during rest periods. This includes white Tyvek-type garments.

All employees must be informed of the importance of adequate rest, acclimation, and proper diet in the prevention of heat stress disorders.

## 8.5 Cold Stress

Cold stress normally occurs in temperatures at or below freezing, or under certain circumstances, in temperatures of 40°F. Extreme cold for a short time may cause severe injury to exposed body surfaces or result in profound generalized cooling, causing death. Areas of the body that have high surface area-to-volume ratio, such as fingers, toes, and ears, are the most susceptible. Two factors influence the development of a cold weather injury: ambient temperature and the velocity of the wind. For instance, 10°F with a wind of 15 miles per hour (mph) is equivalent in chilling effect to still air at 18°F. An equivalent chill temperature chart relating the actual dry bulb temperature and wind velocity is presented in Table 5.

**Table 5 – Wind Chill Temperature Chart**

Estimated Wind Speed (in mph)	Actual Temperature Reading (°F)											
	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
Equivalent Chill Temperature (°F)												
Calm	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
5	48	37	27	16	6	-5	-15	-26	-36	-47	-57	-68
10	40	28	16	4	-9	-24	-33	-46	-58	-70	-83	-95
15	36	22	9	-5	-18	-32	-45	-58	-72	-85	-99	-112
20	32	18	4	-10	-25	-39	-53	-67	-82	-96	-110	-121
25	30	16	0	-15	-29	-44	-59	-74	-88	-104	-118	-133
30	28	13	-2	-18	-33	-48	-63	-79	-94	-109	-125	-140
35	27	11	-4	-20	-35	-51	-67	-82	-98	-113	-129	-145
40	26	10	-6	-21	-37	-53	-69	-85	-100	-116	-132	-148
(Wind speeds greater than 40 mph have little additional effect.)	<b>LITTLE DANGER</b> Maximum danger of false sense of security.				<b>INCREASING DANGER</b> Danger from freezing of exposed flesh within one minute.				<b>GREAT DANGER</b> Flesh may freeze within 30 seconds.			
	Trench foot and immersion foot may occur at any point on this chart.											

[This chart was developed by the U.S. Army Research Institute of Environmental Medicine, Natick, MA (Source: ACGIH Threshold Limit Values for Chemical Substances and Physical Agents)].

Local injury resulting from cold is included in the generic term frostbite. There are several degrees of tissue damage associated with frostbite. Frostbite of the extremities can be categorized into:

- *Frost Nip or Incipient Frostbite* - characterized by sudden blanching or whitening of skin.
- *Superficial Frostbite* - skin has a waxy or white appearance and is firm to the touch, but tissue beneath is resilient.
- *Deep Frostbite* - tissues are cold, pale, and solid; extremely serious injury.

Systemic hypothermia is caused by exposure to freezing or rapidly dropping temperature. It can be fatal. Its symptoms are usually exhibited in five stages: 1) shivering; 2) apathy, listlessness, sleepiness, and (sometimes) rapid cooling of the body to less than 95°F; 3) unconsciousness, glassy stare, slow pulse, and slow respiratory rate; 4) freezing of the extremities; and 5) death. Trauma sustained in freezing or sub-zero conditions requires special attention because an injured worker is predisposed to secondary cold injury. Special provisions must be made to prevent hypothermia and secondary freezing of damaged tissues in addition to providing for first aid treatment. To avoid cold stress, site personnel must wear protective clothing appropriate for the level of cold and physical



activity. In addition to protective clothing, preventive safe work practices, additional training, and warming regimens may be utilized to prevent cold stress.

### **8.6 Safety Precautions for Cold Stress Prevention**

For air temperature of 0°F or less, mittens should be used to protect the hands. For exposed skin, continuous exposure should not be permitted when air speed and temperature results in a wind chill temperature of -25°F.

At air temperatures of 36°F or less, field personnel who become immersed in water or whose clothing becomes wet must be immediately provided with a change of clothing and be treated for hypothermia.

If work is done at normal temperature or in a hot environment before entering the cold, the field personnel must ensure that their clothing is not wet as a consequence of sweating. Wet field personnel must change into dry clothes prior to entering the cold area.

If the available clothing does not give adequate protection to prevent hypothermia or frostbite, work must be modified or suspended until adequate clothing is made available or until weather conditions improve.

Field personnel handling evaporative liquid (e.g., gasoline, alcohol, or cleaning fluids) at air temperatures below 40°F must take special precaution to avoid soaking of clothing or gloves with the liquids because of the added danger of cold injury due to evaporative cooling.

### **8.7 Safe Work Practices**

Direct contact between bare skin and cold surfaces (< 20°F) should be avoided. Metal tool handles and/or equipment controls should be covered by thermal insulating material.

For work performed in a wind chill temperature at or below 10°F, workers should be under constant protective observation (buddy system). The work rate should be established to prevent heavy sweating that will result in wet clothing. For heavy work, rest periods must be taken in heated shelters and workers should be provided with an opportunity to change into dry clothing if needed.

Field personnel should be provided the opportunity to become accustomed to cold-weather working conditions and required protective clothing. Work should be arranged in such a way that sitting or standing still for long periods is minimized.

During the warming regimen (rest period), field personnel should be encouraged to remove outer clothing to permit sweat evaporation or to change into dry work clothing. Dehydration, or loss of body fluids, occurs insidiously in the cold environment and may increase susceptibility to cold injury due to a significant change in blood flow to the extremities. Fluid replacement with warm, sweet drinks and soups is recommended. The intake of coffee should be limited because of diuretic and circulatory effects.

### **8.8 Biological Hazards**

Biological hazards may include poison ivy, snakes, thorny bushes and trees, ticks, mosquitoes, spiders, and other pests.

### **8.8.1 Tick Borne Diseases**

*Lyme Disease* - The disease commonly occurs in summer and is transmitted by the bite of infected ticks. "Hot spots" in the United States include New York, New Jersey, Pennsylvania, Massachusetts, Connecticut, Rhode Island, Minnesota, and Wisconsin.

*Erlchiosis* - The disease also commonly occurs in summer and is transmitted by the bite of infected ticks. "Hot spots" in the United States include New York, Massachusetts, Connecticut, Rhode Island, Minnesota, and Wisconsin.

These diseases are transmitted primarily by the deer tick, which is smaller and redder than the common wood tick. The disease may be transmitted by immature ticks, which are small and hard to see. The tick may be as small as a period on this page.

Symptoms of Lyme disease include a rash or a peculiar red spot, like a bull's eye, which expands outward in a circular manner. The victim may have headache, weakness, fever, a stiff neck, and swelling and pain in the joints, and eventually, arthritis. Symptoms of erlichiosis include muscle and joint aches, flu-like symptoms, but there is typically no skin rash.

*Rocky Mountain Spotted Fever (RMSF)* - This disease is transmitted via the bite of an infected tick. The tick must be attached 4 to 6 hours before the disease-causing organism (*Rickettsia rickettsii*) becomes reactivated and can infect humans. The primary symptom of RMSF is the sudden appearance of a moderate-to-high fever. The fever may persist for two to three weeks. The victim may also have a headache, deep muscle pain, and chills. A rash appears on the hands and feet on about the third day and eventually spreads to all parts of the body. For this reason, RMSF may be confused with measles or meningitis. The disease may cause death, if untreated, but if identified and treated promptly, death is uncommon.

*Control* - Tick repellent containing diethyltoluamide (DEET) should be used when working in tick-infested areas, and pant legs should be tucked into boots. In addition, workers should search the entire body every three or four hours for attached ticks. Ticks should be removed promptly and carefully without crushing, since crushing can squeeze the disease-causing organism into the skin. A gentle and steady pulling action should be used to avoid leaving the head or mouth parts in the skin. Hands should be protected with surgical gloves when removing ticks.

### **8.8.2 Poisonous Plants**

Poisonous plants may be present in the work area. Personnel should be alerted to its presence and instructed on methods to prevent exposure.

*Control* - The main control is to avoid contact with the plant, cover arms and hands, and frequently wash potentially exposed skin. Particular attention must be given to avoiding skin contact with objects or protective clothing that have touched the plants. Treat every surface that may have touched the plant as contaminated, and practice contamination avoidance. If skin contact is made, the area should be washed immediately with soap and water and observed for signs of reddening.

### **8.8.3 Snakes**

The possibility of encountering snakes exists, specifically for personnel working in wooded/vegetated areas. Snake venoms are complex and include proteins, some of which have enzymatic activity. The effects produced by venoms include neurotoxic effects with sensory, motor, cardiac, and respiratory difficulties; cytotoxic effects on red blood cells, blood vessels, heart muscle, kidneys, and lungs; defects in coagulation; and effects from local release of substances by enzymatic actions. Other noticeable effects of venomous snakebites include swelling, edema, and pain around the bite, and the development of ecchymosis (the escape of blood into tissues from ruptured blood vessels).

*Control* - To minimize the threat of snakebites, all personnel walking through vegetated areas must be aware of the potential for encountering snakes, and the need to avoid actions potentiating encounters, such as turning over logs, etc. If a snakebite occurs, an attempt should be made to safely identify the snake via size and markings. The victim must be transported to the nearest hospital within 30 minutes; first aid consists of applying a constriction band and washing the area around the wound to remove any unabsorbed venom.

### **8.8.4 Spiders**

Personnel may encounter spiders during work activities.

Two spiders are of concern, the black widow and the brown recluse. Both prefer dark sheltered areas such as basements, equipment sheds and enclosures, and around woodpiles or other scattered debris. The black widow is shiny black, approximately one inch long, and found throughout the United States. There is a distinctive red hourglass marking on the underside of the black widows body. The bite of a black widow is seldom fatal to healthy adults, but effects include respiratory distress, nausea, vomiting, and muscle spasms. The brown recluse is smaller than the black widow and gets its name from its brown coloring and behavior. The brown recluse is more prevalent in the southern United States. The brown recluse has a distinctive violin shape on the top of its body. The bite of the brown recluse is painful and the bite site ulcerates and takes many weeks to heal completely.

*Control* - To minimize the threat of spider bites, all personnel walking through vegetated areas must be aware of the potential for encountering these arachnids. Personnel need to avoid actions that may result in encounters, such as turning over logs, and placing hands in dark places such as behind equipment or in corners of equipment sheds or enclosures. If a spider bite occurs, the victim must be transported to the nearest hospital as soon as possible; first aid consists of applying ice packs and washing the area around the wound to remove any unabsorbed venom.

## **8.9 Noise**

Exposure to noise over the OSHA action level can cause temporary impairment of hearing; prolonged and repeated exposure can cause permanent damage to hearing. The risk and severity of hearing loss increases with the intensity and duration of exposure to noise. In addition to damaging hearing, noise can impair voice communication, thereby increasing the risk of accidents on site.

*Control* - All personnel must wear hearing protection, with a Noise Reduction Rating (NRR) of at least 20, when noise levels exceed 85 dBA. When it is difficult to hear a co-worker at

normal conversation distance, the noise level is approaching or exceeding 85 dBA, and hearing protection is necessary. All site personnel who may be exposed to noise must also receive baseline and annual audiograms and training as to the causes and prevention of hearing loss. Noise monitoring is discussed in Section 5.2, Noise Monitoring.

Whenever possible, equipment that does not generate excessive noise levels will be selected for this project. If the use of noisy equipment is unavoidable, barriers or increased distance will be used to minimize worker exposure to noise, if feasible.

## **8.10 Spill Control**

All personnel must take every precaution to minimize the potential for spills during site operations. All on-site personnel shall immediately report any discharge, no matter how small, to the FS.

Spill control equipment and materials will be located on the site at locations that present the potential for discharge. All sorbent materials used for the cleanup of spills will be containerized and labeled appropriately. In the event of a spill, the FS will follow the provisions in Section 10.0, Emergency Procedures, to contain and control released materials and to prevent their spread to off-site areas.

## **8.11 Sanitation**

Site sanitation will be maintained according to OSHA requirements.

### **8.11.1 Break Area**

Breaks must be taken in the SZ, away from the active work area after site personnel go through decontamination procedures. There will be no smoking, eating, drinking, or chewing gum or tobacco in any area other than the SZ.

### **8.11.2 Potable Water**

The following rules apply to all field operations:

- An adequate supply of potable water will be provided at each project site. Potable water must be kept away from hazardous materials or media, and contaminated clothing or equipment.
- Portable containers used to dispense drinking water must be capable of being tightly closed and must be equipped with a tap dispenser. Water must not be consumed directly from the container (drinking from the tap is prohibited) nor may it be removed from the container by dipping.
- Containers used for drinking water must be clearly marked and shall not be used for any other purpose.
- Disposable drinking cups must be provided. A sanitary container for dispensing cups and a receptacle for disposing of used cups is required.

### **8.11.3 Sanitary Facilities**

Access to facilities for washing before eating, drinking, or smoking, or alternate methods such as waterless hand-cleaner and paper towels will be provided.

#### **8.11.4 Lavatory**

If permanent toilet facilities are not available, an appropriate number of portable chemical toilets will be provided. This requirement does not apply to mobile crews or to normally unattended site locations so long as employees at these locations have transportation immediately available to nearby toilet facilities.

#### **8.12 Emergency Equipment**

Adequate emergency equipment for the activities being conducted on site and as required by applicable sections of 29 CFR 1910 and 29 CFR 1926 will be on site prior to the commencement of project activities. Personnel will be provided with access to emergency equipment, including, but not limited to, the following:

- Fire extinguishers of adequate size, class, number, and location as required by applicable sections of 29 CFR 1910 and 1926;
- Industrial first aid kits of adequate size for the number of personnel on site; and
- Emergency eyewash and/or shower if required by operations being conducted on site.

#### **8.13 Lockout/Tagout Procedures**

Only fully qualified and trained personnel will perform maintenance procedures. Before maintenance begins, lockout/tagout procedures per OSHA 29 CFR 1910.147 will be followed.

Lockout is the placement of a device that uses a positive means, such as lock, to hold an energy or material-isolating device such that the equipment cannot be operated until the lockout device is removed. If a device cannot be locked out, a tagout system shall be used. Tagout is the placement of a warning tag on an energy or material isolating device indicating that the equipment controls may not be operated until the personnel who attached the tag remove the tag.

#### **8.14 Electrical Safety**

Electricity may pose a particular hazard to site workers due to the use of portable electrical equipment. If wiring or other electrical work is needed, a qualified electrician must perform it.

General electrical safety requirements include:

- All electrical wiring and equipment must be a type listed by Underwriters Laboratories (UL), Factory Mutual Engineering Corporation (FM), or other recognized testing or listing agency.
- All installations must comply with the National Electrical Safety Code (NESC), the National Electrical Code (NEC), or USCG regulations.
- Portable and semi-portable tools and equipment must be grounded by a multi-conductor cord having an identified grounding conductor and a multi-contact polarized plug-in receptacle.
- Tools protected by an approved system of double insulation, or its equivalent, need not be grounded. Double insulated tools must be distinctly marked and listed by UL or FM.

- Live parts of wiring or equipment must be guarded to prevent persons or objects from touching them.
- Electric wire or flexible cord passing through work areas must be covered or elevated to protect it from damage by foot traffic, vehicles, sharp corners, projections, or pinching.
- All circuits must be protected from overload.
- Temporary power lines, switchboxes, receptacle boxes, metal cabinets, and enclosures around equipment must be marked to indicate the maximum operating voltage.
- Plugs and receptacles must be kept out of water unless of an approved submersible construction.
- All extension cord outlets must be equipped with ground fault circuit interrupters (GFCI).
- Attachment plugs or other connectors must be equipped with a cord grip and be constructed to endure rough treatment.
- Extension cords or cables must be inspected prior to each use and replaced if worn or damaged. Cords and cables must not be fastened with staples, hung from nails, or suspended by bare wire.
- Flexible cords must be used only in continuous lengths without splice, with the exception of molded or vulcanized splices made by a qualified electrician.

### **8.15 Lifting Safety**

Using proper lifting techniques may prevent back strain or injury. The fundamentals of proper lifting include:

- Consider the size, shape, and weight of the object to be lifted. A mechanical lifting device or additional persons must be used to lift an object if it cannot be lifted safely alone.
- The hands and the object should be free of dirt or grease that could prevent a firm grip.
- Gloves must be used, and the object inspected for metal slivers, jagged edges, burrs, or rough or slippery surfaces.
- Fingers must be kept away from points that could crush or pinch them, especially when putting an object down.
- Feet must be placed far enough apart for balance. The footing should be solid and the intended pathway should be clear.
- The load should be kept as low as possible, close to the body with the knees bent.
- To lift the load, grip firmly and lift with the legs, keeping the back as straight as possible.
- A worker should not carry a load that he or she cannot see around or over.
- When putting an object down, the stance and position are identical to that for lifting; the legs are bent at the knees, and the back is straight as the object is lowered.

### **8.16 Ladder Safety**

When portable ladders are used for access to an upper landing surface, the ladder side rails shall extend at least 3 feet (9 m) above the upper landing surface to which the ladder is used to gain access; or, when such an extension is not possible because of the ladder's length, then the ladder shall be secured at its top to a rigid support that will not deflect, and a grasping device, such as a grabrail, shall be provided to assist employees in mounting

and dismounting the ladder. In no case shall the extension be such that ladder deflection under a load would, by itself, cause the ladder to slip off its support.

- Ladders shall be maintained free of oil, grease, and other slipping hazards.
- Ladders shall not be loaded beyond the maximum intended load for which they were built, or beyond their manufacturer's rated capacity.
- Ladders shall be used only for the purpose for which they were designed.
- Non-self-supporting ladders shall be used at an angle such that the horizontal distance from the top support to the foot of the ladder is approximately one-quarter of the working length of the ladder (the distance along the ladder between the foot and the top support).
- Wood job-made ladders with spliced side rails shall be used at an angle such that the horizontal distance is one-eighth the working length of the ladder.
- Fixed ladders shall be used at a pitch no greater than 90 degrees from the horizontal, as measured to the back side of the ladder.
- Ladders shall be used only on stable and level surfaces unless secured to prevent accidental displacement.
- Ladders shall not be used on slippery surfaces unless secured or provided with slip-resistant feet to prevent accidental displacement. Slip-resistant feet shall not be used as a substitute for care in placing, lashing, or holding a ladder that is used upon slippery surfaces, including, but not limited to, flat metal or concrete surfaces that are constructed so they cannot be prevented from becoming slippery.
- Ladders placed in any location where they can be displaced by workplace activities or traffic, such as in passageways, doorways, or driveways, shall be secured to prevent accidental displacement, or a barricade shall be used to keep the activities or traffic away from the ladder.
- The area around the top and bottom of ladders shall be kept clear.
- The top of a non-self-supporting ladder shall be placed with the two rails supported equally unless it is equipped with a single support attachment.
- Ladders shall not be moved, shifted, or extended while occupied.
- Ladders shall have non-conductive side rails if they are used where the employee or the ladder could contact exposed energized electrical equipment.
- The top, top step, or the step labeled that it or any step above it should not be used as a step.
- Cross-bracing on the rear section of stepladders shall not be used for climbing unless the ladders are designed and provided with steps for climbing on both front and rear sections.
- Ladders shall be inspected by the HSM for visible defects on a daily basis and after any occurrence that could affect their safe use.
- Portable ladders with structural defects, such as, but not limited to, broken or missing rungs, cleats, or steps; broken or split rails; corroded components; or other faulty or defective components shall either be immediately marked in a manner that readily identifies them as defective or be tagged with "Do Not Use" or similar language and shall be withdrawn from service.
- Fixed ladders with structural defects, such as, but not limited to, broken or missing rungs, cleats, or steps; broken or split rails; or corroded components; shall be withdrawn from service.
- Ladder repairs shall restore the ladder to a condition meeting its original design criteria, before the ladder is returned to use.
- Single-rail ladders shall not be used.

- When ascending or descending a ladder, the user shall face the ladder.
- Each employee shall use at least one hand to grasp the ladder when progressing up and/or down the ladder.
- An employee shall not carry any object or load that could cause the employee to lose balance and fall.

**8.17 Traffic Safety**

The project site may be located adjacent to a public roadway where exposure to vehicular traffic is likely. Traffic may also be encountered as vehicles enter and exit the area. To minimize the likelihood of project personnel and activities being affected by traffic, the following procedures will be implemented.

Cones must be placed along the shoulder of the roadway starting 100 feet from the work area to alert passing motorists to the presence of personnel and equipment. A “Slow” or “Men Working” sign must be placed at the first cone. Barricades with flashing lights should be placed between the roadway and the work area.

During activities along a roadway, equipment will be aligned parallel to the roadway to the extent feasible, facing into the oncoming traffic so as to place a barrier between the work crew and the oncoming traffic. All crewmembers must remain behind the equipment and the traffic barrier.

All site personnel who are potentially exposed to vehicular traffic must wear an outer layer of orange warning garments, such as vests, jackets, or shirts. If work is performed in hours of dusk or darkness, workers will be outfitted with reflective garments either orange, white (including silver-coated reflective coatings or elements that reflect white light), yellow, fluorescent red-orange, or fluorescent yellow-orange.

The flow of traffic into and out of the adjacent business must be assessed, and precautions taken to warn motorists of the presence of workers and equipment. Where possible, vehicles should be aligned to provide physical protection of people and equipment.

**9.0 SITE-SPECIFIC HAZARDS AND CONTROL MEASURES**

**9.1 Evaluation of Hazards**

The evaluation of hazards is provided as a quick reference as to the known conditions for the Site, wherein the level of detail for each of the subsections is identified.

**9.1.1 Hazard Characteristics**

Existing information for Site:

Detailed     Preliminary     None

Hazardous/Contaminated Material Form(s):

Solid     Liquid     Sludge     Gas     Vapor

Containment Type(s):

Drum     Tank     Pit     Debris  
 Pond     Lagoon    Other:



Hazardous Material Characteristics:

Volatile     Corrosive     Reactive     Radioactive  
 Ignitable     Toxic     Unknown

Routes of Exposure:

Oral     Dermal     Eye     Respiratory

**9.1.2 Potential Health and Safety Hazards**

<input checked="" type="checkbox"/> Heat	<input type="checkbox"/> Congested areas
<input checked="" type="checkbox"/> Cold	<input checked="" type="checkbox"/> General Construction
<input type="checkbox"/> Confined space entry	<input checked="" type="checkbox"/> Physical injury
<input type="checkbox"/> Oxygen depletion	<input checked="" type="checkbox"/> Electrical hazards
<input type="checkbox"/> Asphyxiation	<input checked="" type="checkbox"/> Handling and product transfer
<input checked="" type="checkbox"/> Excavation	<input checked="" type="checkbox"/> Fire
<input checked="" type="checkbox"/> Cave-ins	<input checked="" type="checkbox"/> Explosion
<input checked="" type="checkbox"/> Falls, slippage	<input checked="" type="checkbox"/> Biological Hazards
	<input checked="" type="checkbox"/> Plants – Poison Ivy, Poison Oak
	<input checked="" type="checkbox"/> Insects – Ticks
	<input checked="" type="checkbox"/> Insects – Mosquitoes
	<input checked="" type="checkbox"/> Insects – Bees and Wasps
	<input checked="" type="checkbox"/> Rats and Mice
<input checked="" type="checkbox"/> Heavy equipment	<input type="checkbox"/> Non-ionizing Radiation (i.e. UV, IR, etc.)
<input type="checkbox"/> Other: Potential Ignition Hazard.	

**9.2 Field Activities, Hazards, and Control Procedures**

The following task-specific safety analyses identify potential health, safety, and environmental hazards associated with each type of field activity. Because of the complex and changing nature of field projects, supervisors must continually inspect the site to identify hazards that may affect on-site personnel, the community, or the environment. The FS must be aware of these changing conditions and discuss them with the PM whenever these changes impact employee health, safety, the environment, or performance of the project. The FS will keep on-site personnel informed of the changing conditions, and the PM will write and/or approve addenda or revisions to this HASP as necessary.

**9.2.1 Mobilization/Construction Stakeout**

Description of Tasks

Site mobilization will include establishing excavation locations, determining the location of utilities and other installations, and establishing work areas. Mobilization will also include setting up equipment and establishing a temporary site office. A break area will be set up outside of regulated work areas. Mobilization may involve clearing areas for the SZ and CRZ. During this initial phase, project personnel will walk the site to confirm the existence of anticipated hazards and identify safety and health issues that may have arisen since the writing of this plan.

Hazard Identification

The hazards of this phase of activity are associated with heavy equipment operation, manual materials handling, installation of temporary on-site facilities, and manual site preparation.

Manual materials handling and manual site preparation may cause blisters, sore muscles, and joint and skeletal injuries; and may present eye, contusion, and laceration hazards. Installation of temporary field office and support facilities may expose personnel to electrical hazards, underground and overhead utilities, and physical injury due to the manual lifting and moving of materials. The work area presents slip, trip, and fall hazards from scattered debris and irregular walking surfaces. Rainy weather may cause wet, muddy, slick walking surfaces, and unstable soil. Freezing weather hazards include frozen, slick, and irregular walking surfaces.

Environmental hazards include plants, such as poison ivy and poison oak; aggressive fauna, such as ticks, fleas, mosquitoes, wasps, spiders, and snakes; weather, such as sunburn, lightning, rain, and heat- or cold-related illnesses; and pathogens, such as rabies, Lyme disease, and blood-borne pathogens.

#### Controls

Control procedures for these hazards are discussed in Section 8.0, General Safety Practices.

### **9.2.2 Demolition/Site Clearing**

#### Description of Tasks

Site clearance will involve manual or mechanical removal of objects impeding access to the construction footprint. These obstructions are both natural and man-made items and will include, but not be limited to, fabricated metal and concrete structures, trees, vegetation, rubble, and miscellaneous trash/debris.

#### Hazard Identification

Hazards associated with demolition and site clearance include personnel working in and around potentially unstable structures, or locations of potential contact with hazardous chemicals, utilities, and/or falling objects. This task will involve manual, as well as mechanical demolition/clearance efforts so exertion and equipment hazards exist.

#### Controls

*PPE* – Personnel shall be protected from hazards of irritant and toxic plants and suitably instructed in the first aid treatment available.

*Preparatory Operations* – Prior to permitting employees to start demolition operations, an engineering survey shall be made, by a licensed Professional Engineer, of the structure to determine the stability of the structure. Any adjacent structure shall where personnel may be exposed shall also be similarly checked. The PO shall have in writing evidence that such a survey has been performed. All structural instabilities shall be shored or braced, under the supervision of a licensed Professional Engineer, prior to access by an FP.

*Utilities* – All electric, gas, water, steam, sewer, and other service lines shall be shut off, capped, or otherwise controlled, outside the building line before demolition work is started. In each case, any utility company that is involved shall be notified in advance. If it is necessary to maintain any power, water or other utilities during demolition, such lines shall be temporarily relocated, as necessary.

*Hazardous Substances* – It shall also be determined if any type of hazardous chemicals, gases, explosives, flammable materials, or similarly dangerous substances have been used

in any pipes, tanks, or other equipment on the property. When the presence of any such substances is apparent or suspected, testing and purging shall be performed and the hazard eliminated before demolition is started.

*Falling Debris/Objects* – No material shall be dropped to any point lying outside the exterior walls of the structure unless the area is effectively protected. Access to the area where falling objects/debris may be encountered must be gated and controlled.

*Structural Collapse* – Structural or load supporting members on any floor shall not be cut or removed until all stories above such a floor have been demolished and removed. Walls, which are to serve as retaining walls against which debris will be piled, shall not be so used unless capable of safely supporting the imposed load. Mechanical equipment shall not be used on floors or working surfaces unless such floors or surfaces are not of sufficient strength to support the imposed load.

*Rollover Guards* – All equipment used in site clearing operations shall be equipped with rollover guards meeting the applicable requirements. In addition, rider-operated equipment shall be equipped with an overhead and rear canopy guard meeting the applicable requirements.

*Inspections* – During demolition, continuing inspections by a licensed Professional Engineer shall be made as the work progresses to detect hazards resulting from weakened or deteriorated floors, walls, or loosened material. No FP shall be permitted to work where such hazards exist until they are corrected by shoring, bracing, or other effective means.

## **9.2.3 Excavation and Cut/Fill Operations**

### **9.2.3.1 Excavation/Trenching**

#### Description of Tasks

This task includes the excavation of contaminated soils and superficial debris. Excavation depths vary across the site.

#### Hazard Identification

The hazards of this activity are associated with heavy equipment operation, subsurface intrusion, manual materials handling, stockpiling, and disposal. Subsurface intrusion presents hazards associated with negotiating buried utilities, cave-ins of the excavated areas, and regress methods for personnel working inside the excavated areas. Disruption of contaminated soil also presents a health hazard.

#### Controls

*Underground Utilities* – The estimated locations of utility installations, such as sewer, telephone, fuel, electric, water lines, or any other underground installations that reasonably may be expected to be encountered during the excavation work, shall be determined prior to opening an excavation. Utility companies or owners shall be contacted (“Call Before You Dig”) within established or customary local response times, advised of the proposed work, and asked to establish the location of the utility underground installations prior to the start of actual excavation.

When excavation operations approach the estimated location of underground installations, the exact location of the installations shall be determined by safe and acceptable means.

While the excavation is open, underground installations shall be protected, supported, or removed, as necessary, to safeguard site personnel.

*Cave-Ins* – Project personnel in an excavation shall be protected from cave-ins by an adequate protective system, except when:

- Excavations are made entirely in stable rock or excavations are less than five feet in depth and examination of the ground by the SSO provides no indication of a potential cave-in.
- Protective systems shall have the capacity to resist, without failure, all loads that are intended or could reasonably be expected to be applied or transmitted to the system.

Project personnel shall be protected from excavated or other materials or equipment that could pose a hazard by falling or rolling into excavations. Protection shall be provided by placing and keeping such materials or equipment at least two feet from the edge of excavations, or by the use of retaining devices that are sufficient to prevent materials or equipment from falling or rolling into excavations, or by a combination of both if necessary.

Daily inspections of excavations, the adjacent areas, and protective systems shall be made by the SSO for evidence of a situation that could result in possible cave-ins, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions. An inspection shall be conducted by the SSO prior to the start of work and as needed throughout operations. Inspections shall also be made after every rainstorm or other hazard-increasing occurrence. These inspections are only required when project personnel exposure can be reasonably anticipated.

Where the SSO finds evidence of a situation that could result in a possible cave-in, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions, exposed personnel shall be removed from the hazardous area until the necessary precautions have been taken to ensure their safety.

*Excavation Egress* – A stairway, ladder, ramp, or other safe means of egress shall be located in trench excavations that are four feet or more in depth so as to require no more than 25 feet or lateral travel for project personnel.

### **9.2.3.2 Heavy Equipment Operation**

#### Description of Tasks

Heavy equipment to be used for this task include, but are not limited to, excavators, dozers, dump trucks, and water sprayers (if required).

#### Hazard Identification

The most common type of accident that occurs in material handling operations is the “caught between” situation when a load is being handled and an object gets caught between two moving parts of the equipment. Operation of the heavy construction equipment may produce harmful noise.

#### Controls

*Equipment Inspection* – All vehicles in use shall be checked prior to operation to ensure that all parts, equipment, and accessories that affect safe operations are in proper

operating condition and free from defects. All defects shall be corrected before the vehicle is placed in service.

*Ground Guides* – No personnel shall use any motor vehicle, earthmoving, or compacting equipment having an obstructed view to the rear, unless:

- The vehicle has a reverse signal alarm distinguishable from the surrounding noise level; or
- The vehicle is backed up only when an observer signals that it is safe to do so.

*Blocking* – Heavy machinery, equipment, or parts thereof that are suspended or held aloft shall be substantially blocked to prevent falling or shifting before employees are permitted to work under or between them.

*Noise* – Control measures for noise are addressed in Section 4.9.

*Traffic* – Control measures for traffic are addressed in Section 8.17.

### **9.2.3.3 Disturbance/Handling of Contaminated Material**

#### Description of Tasks

After the contaminated soil is excavated from below the Site's surface, the material will be stockpiled, dried, and either transported offsite or relocated and backfilled on site.

#### Hazard Identification

The hazards associated with materials handling include contact of the contaminated material with project personnel, or cross contamination with other site soil.

#### Controls

*Cross Contamination* – Following excavation, contaminated soil stockpiles will be placed on a structure constructed to separate the material from the site soil and collect any groundwater leachate. The material shall be covered to prevent storm water erosion or migration of contaminants through storm water.

*Air Monitoring* – Air and particulate monitoring will be conducted during soil excavation activities to assess the potential for exposure to airborne COCs. If the results of air monitoring indicate the presence of organic vapors or particulates in a concentration causing concern, personnel will upgrade to Level C protection. Refer to Section 5.1, Air Monitoring, for a description of air monitoring requirements and action levels. A description of each level of personal protection is included in Section 4.0, Personal Protective Equipment.

*Traffic* – Control measures for traffic are addressed in Section 8.17.

### **9.2.4 Drilling/Subsurface Intrusion Activities**

#### Description of Tasks

This component of work includes the project tasks of delineation and sampling the PCB-impacted soil, installation of the groundwater cutoff wall, and in-situ soil grouting. Geotechnical testing of the grout and existing site soils will also be conducted.

### Hazard Identification

The primary physical hazards for this activity are associated with the use of soil boring and grouting equipment. The equipment is hydraulically powered and uses static force and dynamic percussion force to advance sampling and penetrating tubes.

Accidents can occur as a result of improperly placing the equipment on uneven or unstable terrain or failing to adequately secure the equipment prior to the start of operations. Overhead utility lines can create hazardous conditions if contacted by the equipment. Underground installations such as electrical lines, conduit, and product lines pose a significant hazard if contacted.

### Controls

*Geoprobe and Drill Rig Safety Procedures* - The operator of the equipment must possess required state or local licenses to perform such work. All members of the crew shall receive site-specific training prior to beginning work.

The operator is responsible for the safe operation of the rig, as well as the crew's adherence to the requirements of this HASP. The operator must ensure that all safety equipment is in proper condition and is properly used. The members of the crew must follow all instructions of the operator, wear all personal protective equipment, and be aware of all hazards and control procedures. The operator and crew must participate in the Daily Safety Meetings and be aware of all emergency procedures.

*Equipment Inspection* - Each day, prior to the start of work, the rig and associated equipment must be inspected by the operator. The following items must be inspected:

- Vehicle condition;
- Proper storage of equipment;
- Condition of all hydraulic lines;
- Fire extinguisher; and
- First aid kit.

*Equipment Set Up* - The drill rig must be properly blocked and leveled prior to raising the derrick. The wheels which remain on the ground must be chocked. The leveling jacks shall not be raised until the derrick is lowered. The rig shall be moved only after the derrick has been lowered.

All well sites will be inspected by the driller prior to the location of the rig to verify a stable surface exists. This is especially important in areas where soft, unstable terrain is common.

The drill rig must be properly blocked and leveled prior to raising the derrick. Blocking provides a more stable drilling structure by evenly distributing the weight of the rig. Proper blocking ensures that differential settling of the rig does not occur.

When the ground surface is soft or otherwise unstable, wooden blocks, at least 24" by 24" and 4" to 8" thick shall be placed between the jack swivels and the ground. The emergency brake shall be engaged, and the wheels that are on the ground shall be chocked.

*Rules for Intrusive Activity* - Before beginning any intrusive activity, the existence and location of underground pipe, conduit, electrical equipment, and other installations will be

determined. This will be done, if possible, by contacting the appropriate client representative to mark the location of the lines. "Call Before You Dig" will verify the potential for encountering subsurface utilities. If the client's knowledge of the area is incomplete, an appropriate device, such as a magnetometer, will be used to locate the line.

Combustible gas readings of the general work area will be made regularly in areas where and/or during operations when the presence of flammable vapors or gases is suspected, such as during intrusive activities (see Section 5.1). Operations must be suspended and corrective action taken if the airborne flammable concentration reaches 10% of the LEL in the immediate area (a one-foot radius) of the point of drilling, or near any other ignition sources.

*Overhead Electrical Clearances* - If equipment is operated in the vicinity of overhead power lines, the power to the lines must be shut off or the equipment must be positioned and blocked such that no part, including cables, can come within the minimum clearances as follows:

<b>Nominal Voltage</b>	<b>System</b>	<b>Minimum Clearance</b>	<b>Required</b>
0-50kV		10 feet	
51-100kV		12 feet	
101-200kV		15 feet	
201-300kV		20 feet	
301-500kV		25 feet	
501-750kV		35 feet	
751-1,000kV		45 feet	

When the drill rig is in transit, with the boom lowered and no load, the equipment clearance must be at least 4 feet for voltages less than 50kV, 10 feet for voltages of 50 kV to 345 kV, and 16 feet for voltages above 345 kV.

*Hoisting Operations* - Drillers should never engage the rotary clutch without watching the rotary table, and ensuring it is clear of personnel and equipment.

Unless the drawworks is equipped with an automatic feed control, the brake should not be left unattended without first being tied down.

Drill pipe, auger strings or casing should be picked up slowly. Drill pipe should not be hoisted until the driller is sure that the pipe is latched in the elevator, or the derrickman has signaled that he may safely hoist the pipe.

During instances of unusual loading of the derrick or mast, such as when making an unusually hard pull, only the driller should be on the rig floor; no one else should be on the rig or derrick.

The brakes on the drawworks of the drill rig should be tested by the driller each day. The brakes should be thoroughly inspected by a competent individual each week.

A hoisting line with a load imposed should not be permitted to be in direct contact with any derrick member or stationary equipment, unless it has been specifically designed for line contact.

Workers should never stand near the borehole whenever any wire line device is being run.

Hoisting control stations should be kept clean and controls labeled as to their functions.

*Catline Operations* - Only experienced workers will be allowed to operate the cathead controls. The kill switch must be clearly labeled and operational prior to operation of the catline. The cathead area must be kept free of obstructions and entanglements.

The operator should not use more wraps than necessary to pick up the load. More than one layer of wrapping is not permitted.

Personnel should not stand near, step over, or go under a cable or catline which is under tension.

Employees rigging loads on catlines shall:

- Keep out from under the load;
- Keep fingers and feet where they will not be crushed;
- Be sure to signal clearly when the load is being picked;
- Use standard visual signals only and not depend on shouting to coworkers; and
- Make sure the load is properly rigged, since a sudden jerk in the catline will shift or drop the load.

*Wire Rope* - When two wires are broken or rust or corrosion is found adjacent to a socket or end fitting, the wire rope shall be removed from service or re-socketed. Special attention shall be given to the inspection of end fittings on boom support, pendants, and guy ropes.

Wire rope removed from service due to defects shall be cut up or plainly marked as being unfit for further use as rigging.

Wire rope clips attached with U-bolts shall have the U-bolts on the dead or short end of the rope; the clip nuts shall be re-tightened immediately after initial load carrying use and at frequent intervals thereafter.

When a wedge socket fastening is used, the dead or short end of the wire rope shall have a clip attached to it or looped back and secured to itself by a clip; the clip shall not be attached directly to the live end.

Protruding ends of strands in splices on slings and bridles shall be covered or blunted.

Except for eye splices in the ends of wires and for endless wire rope slings, wire rope used in hoisting, lowering, or pulling loads, shall consist of one continuous piece without knot or splice.

An eye splice made in any wire rope shall have not less than five full tucks.



Wire rope shall not be secured by knots. Wire rope clips shall not be used to splice rope.

Eyes in wire rope bridles, slings, or bull wires shall not be formed by wire clips or knots.

*Pipe/Auger Handling* - Pipe and auger sections shall be transported by cart or carried by two persons. Individuals should not carry auger or pipe sections without assistance.

Workers should not be permitted on top of the load during loading, unloading, or transferring of pipe or rolling stock.

Employees should be instructed never to try to stop rolling pipe or casing; they should be instructed to stand clear of rolling pipe.

Slip handles should be used to lift and move slips. Employees are not permitted to kick slips into position.

When pipe is being hoisted, personnel should not stand where the bottom end of the pipe could whip and strike them.

Pipe and augers stored in racks, catwalks or on flatbed trucks should be secured to prevent rolling.

## **9.2.5 Subsurface Chemical Sample Collection/Analysis**

### Description of Tasks

This sub-task consists of the collection of soil samples for subsequent field and laboratory analysis. The physical hazards of soil sampling are primarily associated with the sample collection methods, procedures utilized, and the environment itself.

### Hazard Identification

Incidental contact with COCs is the primary hazard associated with sampling the stabilized material. This contact may occur through the manipulation of sample media and equipment, manual transfer of media into sample containers, and proximity of operations to the breathing zone. The primary hazards associated with these sampling procedures are not potentially serious; however, other operations in the area, or the conditions under which samples must be collected, may present chemical and physical hazards. The hazards directly associated with sampling procedures are generally limited to strains/sprains and potential eye hazards. Potential chemical hazards may include contact with media containing site COCs and potential contact with chemicals used for equipment decontamination.

### Controls

*PPE* – To control dermal exposure during sampling activities, a minimum of Level D protection will be worn. If necessary, based on field observations and site conditions, air monitoring may be conducted during sediment sampling activities. If the results of air monitoring indicate the presence of airborne contaminants in a concentration causing concern, personnel will upgrade to Level C protection. Refer to Section 5.1, Air Monitoring, for a description of air monitoring requirements and action levels. A description of each level of personal protection is included in Section 4.0, Personal Protective Equipment.

## **9.2.6 UST Closure**

### **9.2.6.1 Working in Confined Spaces**

#### Description of Tasks

The project will involve the closure of several USTs.

#### Hazard Identification

Closure activities may require the entrance into confined spaces to facilitate cleaning and removal of the USTs.

#### Controls

All personnel required to enter into confined or enclosed spaces must be instructed as to the nature of the hazards involved, the necessary precautions to be taken, and in the use of required protective and emergency equipment. The PO shall comply with all specific regulations that apply to work in dangerous or potentially dangerous areas.

### **9.2.6.2 Working with Compressed Air**

#### Description of Tasks

The proposed method of purging the USTs includes the injection of compressed gas into the tank and attached piping network.

#### Hazard Identification

Uncontrolled release of the highly pressured air can cause injury to FP during this task. Cylinders must also be properly managed to ensure they are not compromised during storage and/or use.

#### Controls

*Pressure Regulation* – Compressed air used for cleaning purposes shall be reduced to less than 30 pounds per square inch and then only with effective chip guarding and personal protective equipment.

*Cylinder Storage* – Valve protection caps shall be in place and secured when compressed gas cylinders are transported, moved, or stored. Cylinder valves shall be closed when work is finished and when cylinders are empty or are moved. Compressed gas cylinders shall be secured in an upright position at all times, except if necessary for short periods of time when cylinders are actually being hoisted or carried. Cylinders shall be placed in a location where they cannot become part of an electrical circuit.

## **9.2.7 Site Capping System Construction**

Refer to Section 8.0 for general safety procedures.

### **9.2.8 Creek Relocation**

Refer to Section 8.0 for general safety procedures.

### **9.2.9 Decontamination**

All equipment will be decontaminated before leaving the site. Personnel involved in decontamination activities may be inadvertently exposed to skin contact with contaminated materials and chemicals brought from the EZ. Personnel involved in decontamination activities must wear PPE that is, at a minimum, one level below the level worn by personnel working in the EZ.

### **9.2.10 Demobilization**

Demobilization involves the removal of all tools, equipment, supplies, and vehicles brought to the site. The hazards of this phase of activity are associated with heavy equipment operation and manual materials handling.

Manual materials handling may cause blisters, sore muscles, and joint and skeletal injuries; and may present eye, contusion, and laceration hazards. Heavy equipment operation presents noise and vibration hazards, and hot surfaces, to operators. Personnel in the vicinity of heavy equipment operation may be exposed to physical hazards resulting in fractures, contusions, and lacerations and may be exposed to high noise levels. The work area presents slip, trip, and fall hazards from scattered debris and irregular walking surfaces. Rainy weather may cause wet, muddy, slick walking surfaces, and unstable soil. Freezing weather hazards include frozen, slick, and irregular walking surfaces.

Environmental hazards include plants, such as poison ivy and poison oak; aggressive fauna, such as ticks, fleas, mosquitoes, wasps, spiders, and snakes; weather, such as sunburn, lightning, rain, and heat-or cold-related illnesses; and pathogens, such as rabies, Lyme disease, and blood-borne pathogens.

Control procedures for these hazards are discussed in Section 8.0, General Safety Practices.

## **9.3 Chemical Hazards**

The chemical hazards associated with site operations are related to inhalation, ingestion, and skin exposure to site COCs. Concentrations of airborne COCs during site tasks may be measurable and will require air monitoring during certain operations. Air monitoring requirements for site tasks are outlined in Section 5.1.

COCs at the site include heavy metals, some VOC compounds, some SVOC compounds and potentially other industrial chemicals including PCBs and pesticides.

The potential for inhalation of site COCs is low. The potential for dermal contact with soils containing site COCs during remedial operations is moderate. Table 6 lists the primary contaminants that have been identified at the Site and the media in which they are present.

Table 6 – List of Primary Contaminants

<b>Media: Soil</b>		
<b>Volatile Organic Compounds</b>	<b>Highest Concentration Previously Detected Units = mg/kg</b>	<b>Applicable Monitoring Instrument</b>
1,2,4-Trimethylbenzene	100	PID
1,3,5-Trimethylbenzene	34	PID
Benzene	0.12	PID
Ethylbenzene	14	PID
Isopropylbenzene	4.1	PID
n-Propylbenzene	15	PID
Toluene	0.87	PID
Xylenes, Total	78	PID
<b>Semi-Volatile Organic Compounds</b>	<b>Highest Concentration Previously Detected Units = mg/kg</b>	<b>Applicable Monitoring Instrument</b>
Benzo(a)anthracene	2.8	PID
Benzo(a)pyrene	2.4	PID
Benzo(b)fluoranthene	3.3	PID
Benzo(k)fluoranthene	0.85	PID
Chrysene	2.2	PID
Dibenzo(a,h)anthracene	0.41	PID
Indeno(1,2,3-cd)pyrene	1.8	PID
<b>Metals</b>	<b>Highest Concentration Previously Detected Units = mg/kg</b>	<b>Applicable Monitoring Instrument</b>
Chromium	39.5	NA
Lead	450	NA
Mercury	0.81	NA
Zinc	10,000	NA

<b>Media: Groundwater</b>		
<b>Volatile Organic Compounds</b>	<b>Highest Concentration Previously Detected Units = µg/L</b>	<b>Applicable Monitoring Instrument</b>
1,2,4-Trimethylbenzene	110	PID
1,3,5-Trimethylbenzene	57	PID
Benzene	14	PID
Ethylbenzene	150	PID
Isopropylbenzene	44	PID
Naphthalene	23	PID
n-Butylbenzene	36	PID
n-Propylbenzene	130	PID

<b>Media: Groundwater</b>		
<b>Volatile Organic Compounds</b>	<b>Highest Concentration Previously Detected Units = µg/L</b>	<b>Applicable Monitoring Instrument</b>
<b>o-Xylene</b>	<b>28</b>	<b>PID</b>
<b>p/m-Xylene</b>	<b>290</b>	<b>PID</b>
<b>p-Isopropyltoluene</b>	<b>8.3</b>	<b>PID</b>
<b>sec-Butylbenzene</b>	<b>25</b>	<b>PID</b>
<b>Toluene</b>	<b>6.1</b>	<b>PID</b>
<b>MTBE</b>	<b>2,000</b>	<b>PID</b>

<b>Media: Soil Vapor</b>		
<b>Volatile Organic Compounds</b>	<b>Highest Concentration Previously Detected Units = µg/m<sup>3</sup></b>	<b>Applicable Monitoring Instrument</b>
<b>1,3-Butadiene</b>	<b>87</b>	<b>PID</b>
<b>2,2,4-Trimethylpentane</b>	<b>25</b>	<b>PID</b>
<b>Acetone</b>	<b>170</b>	<b>PID</b>
<b>Benzene</b>	<b>52</b>	<b>PID</b>
<b>Carbon disulfide</b>	<b>100</b>	<b>PID</b>
<b>Chloroform</b>	<b>10</b>	<b>PID</b>
<b>Chloromethane</b>	<b>20</b>	<b>PID</b>
<b>Cumene</b>	<b>13</b>	<b>PID</b>
<b>Cyclohexane</b>	<b>26</b>	<b>PID</b>
<b>Ethylbenzene</b>	<b>50</b>	<b>PID</b>
<b>Methyl Ethyl Ketone</b>	<b>44</b>	<b>PID</b>
<b>Methylene Chloride</b>	<b>240</b>	<b>PID</b>
<b>n-Heptane</b>	<b>240</b>	<b>PID</b>
<b>n-Hexane</b>	<b>590</b>	<b>PID</b>
<b>n-Propylbenzene</b>	<b>8.6</b>	<b>PID</b>
<b>o-Xylene</b>	<b>7.4</b>	<b>PID</b>
<b>Toluene</b>	<b>250</b>	<b>PID</b>
<b>Trichloroethene</b>	<b>69</b>	<b>PID</b>

## **10.0 EMERGENCY PROCEDURES**

### **10.1 General**

Prior to the start of operations, the work area will be evaluated for the potential for fire, contaminant release, or other catastrophic event. Unusual conditions or events, activities, chemicals, and conditions will be reported to the FS/SSO immediately.

The FS/SSO will establish evacuation routes and assembly areas for the site. All personnel entering the site will be informed of this route and the assembly area.

### **10.2 Emergency Response**

If an incident occurs, the following steps will be taken:

- The FS/SSO will evaluate the incident and assess the need for assistance and/or evacuation;
- The FS/SSO will call for outside assistance as needed;
- The FS/SSO will ensure the PM is notified promptly of the incident; and
- The FS/SSO will take appropriate measures to stabilize the incident scene.

### **10.2.1 Fire**

In the case of a fire at the site, the FS/SSO will assess the situation and direct fire-fighting activities. The FS/SSO will ensure that the PM is immediately notified of any fires. Site personnel will attempt to extinguish the fire with available extinguishers, if safe to do so. In the event of a fire that site personnel are unable to safely extinguish with one fire extinguisher, the local fire department will be summoned.

### **10.2.2 Contaminant Release**

In the event of a contaminant release, the following steps will be taken:

- Notify FS/SSO immediately;
- Evacuate immediate area of release;
- Conduct air monitoring to determine needed level of PPE; and
- Don required level of PPE and prepare to implement control procedures.

The FS/SSO has the authority to commit resources as needed to contain and control released material and to prevent its spread to off-site areas.

### **10.3 Medical Emergency**

All employee injuries must be promptly reported to the SSO/FS, who will:

- Ensure that the injured employee receives prompt first aid and medical attention;
- In emergency situations, the worker is to be transported by appropriate means to the nearest urgent care facility (normally a hospital emergency room); and
- If the injured person is a SESI employee, notify SESI at 973-808-9050.

#### **10.3.1 Emergency Care Steps**

Survey the scene. Determine if it is safe to proceed. Try to determine if the conditions that caused the incident are still a threat. Protect yourself from exposure before attempting to rescue the victim.

- Do a primary survey of the victim. Check for airway obstruction, breathing, and pulse. Assess likely routes of chemical exposure by examining the eyes, mouth, nose, and skin of the victim for symptoms.
- Phone Emergency Medical Services (EMS). Give the location, telephone number used, caller's name, what happened, number of victims, victim's condition, and help being given.
- Maintain airway and perform rescue breathing as necessary.
- Perform CPR as necessary.
- Do a secondary survey of the victim. Check vital signs and do a head-to-toe exam.

Treat other conditions as necessary. If the victim can be moved, take him/her to a location away from the work area where EMS can gain access.

#### 10.4 First Aid - General

All persons must report any injury or illness to their immediate supervisor or the FS. Trained personnel will provide first aid. Injuries and illnesses requiring medical treatment must be documented. The FS and SSO must fill out an accident/incident report as soon as emergency conditions no longer exist and first aid and/or medical treatment has been ensured. The report must be completed and submitted to the PM within 24 hours after the incident.

If first-aid treatment is required, first aid kits are kept at the CRZ. If treatment beyond first aid is required, the injured person(s) should be transported to the medical facility. If the injured person is not ambulatory or shows any sign of not being in a comfortable and stable condition for transport, then an ambulance/paramedics should be summoned. If there is any doubt as to the injured worker's condition, it is best to let the local paramedic or ambulance service examine and transport the worker.

##### 10.4.1 First Aid - Inhalation

Any employee complaining of symptoms of chemical overexposure as described in Section 4, General Site Safety Procedures, will be removed from the work area and transported to the designated medical facility for examination and treatment.

##### 10.4.2 First Aid - Ingestion

Call EMS and consult a poison control center for advice. If available, refer to the MSDS for treatment information. If the victim is unconscious, keep them on their side and clear the airway if vomiting occurs.

##### 10.4.3 First Aid - Skin Contact

Project personnel who have had skin contact with contaminants will, unless the contact is severe, proceed through the CRZ, to the wash area. Personnel will remove any contaminated clothing, and then flush the affected area with water for at least 15 minutes. The worker should be transported to the medical facility if he/she shows any sign of skin reddening, irritation, or if he/she requests a medical examination.

##### 10.4.4 First Aid - Eye Contact

Project personnel who have had contaminants splashed in their eyes or who have experienced eye irritation while in the EZ, must immediately proceed to the eyewash station in the CRZ. Do not decontaminate prior to using the eyewash. Remove whatever protective clothing is necessary to use the eyewash. Flush the eye with clean running water for at least 15 minutes. Arrange prompt transport to the designated medical facility.

#### 10.5 Reporting Injuries, Illnesses, and Safety Incidents

Injuries and illnesses, however minor, will be reported to the FS immediately. The FS will complete an injury report and submit it to the HSM, and the PM by end of shift.

#### 10.6 Emergency Information

The means to summon local public response agencies such as police, fire, and ambulance will be reviewed in the daily safety meeting. These agencies are identified in Table 7.

**Table 7 – Emergency Contacts**

<b>Local Emergency Contacts</b>	<b>Telephone No.</b>
EMERGENCY	911

White Plains Hospital	(914) 681-0600
Police Emergency	911
Fire Emergency	911
Rescue Squad	911
Ambulance	911
<b>Miscellaneous Contacts</b>	<b>Telephone No.</b>
N.Y. Poison Control Center	(800) 222-1222
National Response Center and Terrorist Hotline	(800) 424-8802
Center for Disease Control	(800) 311-3435
Utility Mark-Out	(800) 962-7962

### 10.6.1 Directions to Hospital


White Plains Hospital  
41 Post Road East  
White Plains, New York 10601  
(914) 681-0600

#### Directions to Hospital:

Head southwest on Hamilton Ave toward Dr.Martin Luther King Jr Blvd  
2. Turn left onto N Lexington Ave  
3. Turn left onto Maple Ave  
4. Turn left at the 1st cross street onto Davis Ave  
5. Turn right  
Destination will be on the right

**Figure 1 – Directions to Hospital**



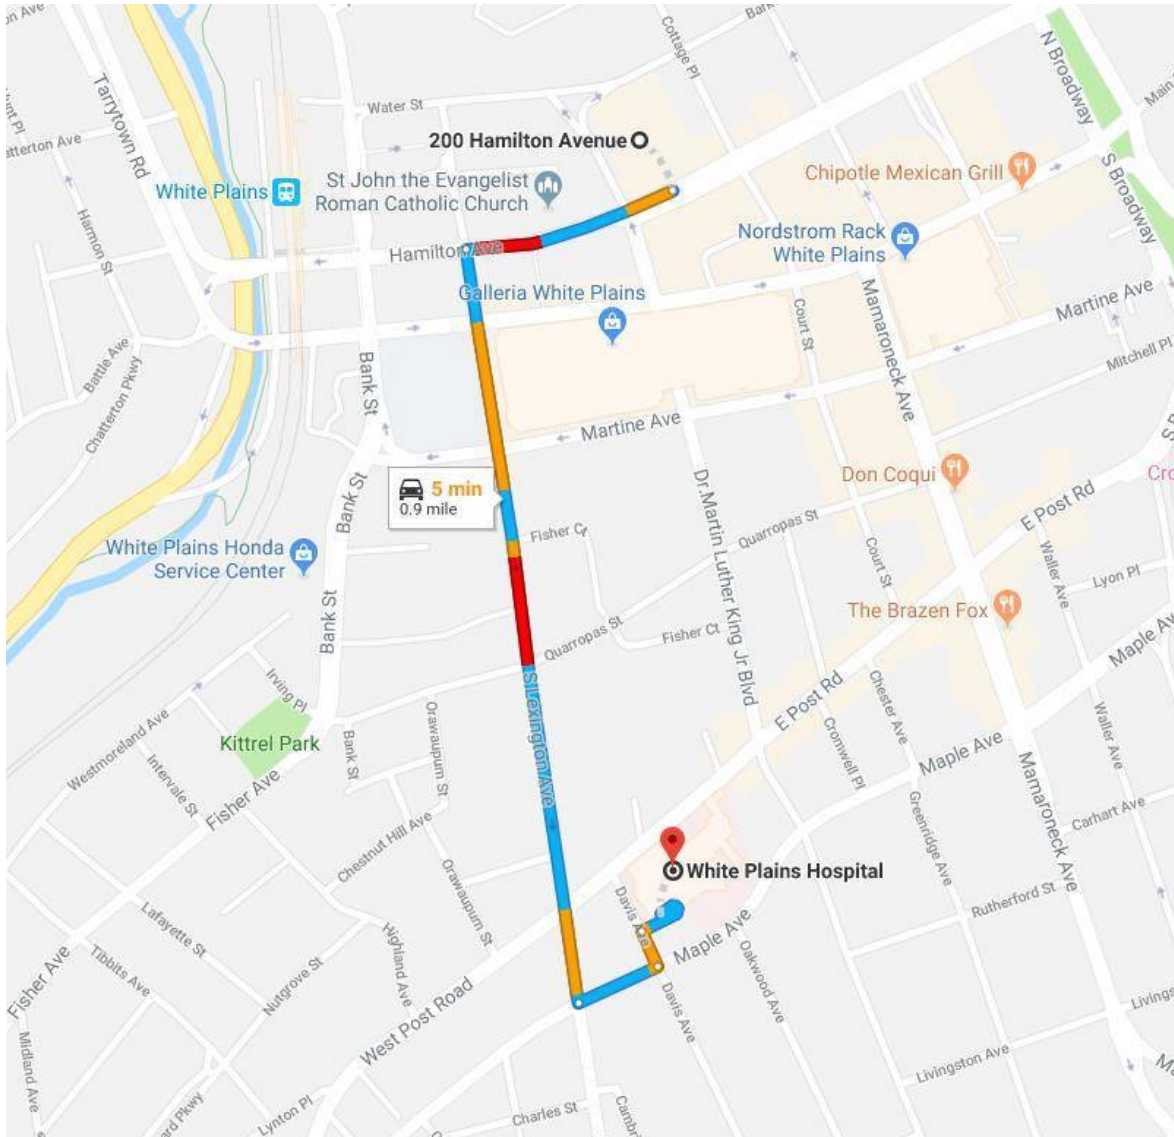

## 11.0 LOGS, REPORTS, AND RECORD KEEPING

The following is a summary of required health and safety logs, reports, and record keeping for the operations at the subject site.

### 11.1 HASP Field Change Request

To be completed for initiating a change to the HASP. PM approval is required. The original will be kept in the project file (See Attachment 3).

### 11.2 Medical and Training Records

The HSM must obtain and keep a log of personnel meeting appropriate training and medical qualifications for the site work. The log will be kept in the project file. Each company's Human Resources Department will maintain medical records, in accordance with 29 CFR 1910.1020.

### **11.3 Exposure Records**

Any personnel monitoring results, laboratory reports, calculations, and air sampling data sheets are part of an employee exposure record. These records will be kept in accordance with 29 CFR 1910.1020. For SESI employees, the originals will be sent to the Human Resources Manager. For subcontractor employees, the original file will be sent to the subcontractor employer with a copy maintained in the SESI project file.

### **11.4 Accident/Incident Report**

Any accident/incident reports must be completed following procedures given in Section 10.5 of this HASP. The originals will be sent to the HSM for maintenance. A copy of the forms will be kept in the project file. (See Attachment 4)

### **11.5 OSHA Form 200**

An OSHA Form 200 (Log of Occupational Injuries and Illnesses) will be kept at the project site. All recordable injuries or illnesses will be recorded on this form. At the end of the project, the original will be sent to the Human Resources Manager for maintenance. Subcontractor employees must also meet the requirements of maintaining an OSHA 200 Form. The accident/incident report meets the requirements of the OSHA Form 101 (Supplemental Record), which must be maintained with the OSHA Form 200 for all recordable injuries or illnesses.

### **11.6 On-Site Health and Safety Field Logbooks**

The HSM or designee will maintain an on-site health and safety log book in which daily Site conditions, activities, personnel, and significant events will be recorded. Calibration records and personnel monitoring results, if available, will also be recorded in the field logbook. The original logbook will be kept in the project file.

Whenever any personnel monitoring is conducted onsite, the monitoring results will be noted in the filed logbook. These will become part of the exposure records file and will be maintained by the HSM.

A signatory page is included (See Attachment 5) and is to be signed by those working on and/or visiting the site.

### **11.7 Material Safety Data Sheets**

Material Safety Data Sheets (MSDS) will be obtained and kept on file at the project site for each hazardous chemical brought to, use, or stored at the Site (See Attachment 6).

**ATTACHMENT 1**  
**AIR MONITOR LOG**

### Air Monitoring: Sample Collection and Analysis

Date & Time of Monitoring	Task / Operation Being	Substance(s)/ Hazard(s) Being	Monitoring Location	Type/Method of Monitoring <small>(provide lines for</small>	Monitoring Results	Exposure Limits	Required Action

**ATTACHMENT 2**

**OSHA POSTER**



# Job Safety and Health

## It's the law!

**OSHA**<sup>®</sup>  
Occupational Safety  
and Health Administration  
U.S. Department of Labor

### EMPLOYEES:

- You have the right to notify your employer or OSHA about workplace hazards. You may ask OSHA to keep your name confidential.
- You have the right to request an OSHA inspection if you believe that there are unsafe and unhealthful conditions in your workplace. You or your representative may participate in that inspection.
- You can file a complaint with OSHA within 30 days of retaliation or discrimination by your employer for making safety and health complaints or for exercising your rights under the *OSH Act*.
- You have the right to see OSHA citations issued to your employer. Your employer must post the citations at or near the place of the alleged violations.
- Your employer must correct workplace hazards by the date indicated on the citation and must certify that these hazards have been reduced or eliminated.
- You have the right to copies of your medical records and records of your exposures to toxic and harmful substances or conditions.
- Your employer must post this notice in your workplace.
- You must comply with all occupational safety and health standards issued under the *OSH Act* that apply to your own actions and conduct on the job.

### EMPLOYERS:

- You must furnish your employees a place of employment free from recognized hazards.
- You must comply with the occupational safety and health standards issued under the *OSH Act*.

This free poster available from OSHA –  
*The Best Resource for Safety and Health*



Free assistance in identifying and correcting hazards or complying with standards is available to employers, without citation or penalty, through OSHA-supported consultation programs in each state.

**1-800-321-OSHA (6742)**  
[www.osha.gov](http://www.osha.gov)

OSHA 3165-02 2012R



**ATTACHMENT 3**  
**HASP FIELD CHANGE REQUEST FORM**





**ATTACHMENT 4**  
**INCIDENT REPORT**

# OSHA's Form 301 Injury and Illness Incident Report

**Attention:** This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.



Form approved OMB no. 1218-0175

This *Injury and Illness Incident Report* is one of the first forms you must fill out when a recordable work-related injury or illness has occurred. Together with the *Log of Work-Related Injuries and Illnesses* and the accompanying *Summary*, these forms help the employer and OSHA develop a picture of the extent and severity of work-related incidents.

Within 7 calendar days after you receive information that a recordable work-related injury or illness has occurred, you must fill out this form or an equivalent. Some state workers' compensation, insurance, or other reports may be acceptable substitutes. To be considered an equivalent form, any substitute must contain all the information asked for on this form.

According to Public Law 91-596 and 29 CFR 1904, OSHA's recordkeeping rule, you must keep this form on file for 5 years following the year to which it pertains.

If you need additional copies of this form, you may photocopy and use as many as you need.

### Information about the employee

- 1) Full name \_\_\_\_\_
- 2) Street \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ ZIP \_\_\_\_\_
- 3) Date of birth \_\_\_\_\_
- 4) Date hired \_\_\_\_\_
- 5)  Male  
 Female

### Information about the physician or other health care professional

- 6) Name of physician or other health care professional \_\_\_\_\_
- 7) If treatment was given away from the worksite, where was it given?  
Facility \_\_\_\_\_  
Street \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ ZIP \_\_\_\_\_
- 8) Was employee treated in an emergency room?  
 Yes  
 No
- 9) Was employee hospitalized overnight as an in-patient?  
 Yes  
 No

### Information about the case

- 10) Case number from the Log \_\_\_\_\_ (Transfer the case number from the Log after you record the case.)
- 11) Date of injury or illness \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_ AM / PM
- 12) Time employee began work \_\_\_\_\_ AM / PM  
 Check, if time cannot be determined
- 13) Time of event \_\_\_\_\_ AM / PM  Check, if time cannot be determined
- 14) What was the employee doing just before the incident occurred? Describe the activity, as well as the tools, equipment, or material the employee was using. Be specific. *Examples:* "climbing a ladder while carrying roofing materials"; "spraying chlorine from hand sprayer"; "daily computer key-entry"
- 15) What happened? Tell us how the injury occurred. *Examples:* "When ladder slipped on wet floor, worker fell 20 feet"; "Worker was sprayed with chlorine when gasket broke during replacement"; "Worker developed soreness in wrist over time."
- 16) What was the injury or illness? Tell us the part of the body that was affected and how it was affected. Be more specific than "hurt," "pain," or "sore." *Examples:* "strained back"; "chemical burn, hand"; "carpal tunnel syndrome."
- 17) What object or substance directly harmed the employee? *Examples:* "concrete floor"; "chlorine"; "radial arm saw." If this question does not apply to the incident, leave it blank.
- 18) If the employee died, when did death occur? Date of death \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_

Completed by \_\_\_\_\_

Title \_\_\_\_\_

Phone (\_\_\_\_) \_\_\_\_\_-\_\_\_\_ Date \_\_\_\_/\_\_\_\_/\_\_\_\_

Public reporting burden for this collection of information is estimated to average 22 minutes per response, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Persons are not required to respond to the collection of information unless it displays a current valid OMB control number. If you have any comments about this estimate or any other aspect of this data collection, including suggestions for reducing this burden, contact US Department of Labor, OSHA Office of Statistical Analysis, Room N-3054, 200 Constitution Avenue, NW, Washington, DC 20210. Do not send the completed forms to this office.

# Log of Work-Related Injuries and Illnesses

You must record information about every work-related death and about every work-related injury or illness that involves loss of consciousness, restricted work activity or job transfer, days away from work, or medical treatment beyond first aid. You must also record significant work-related injuries and illnesses that are diagnosed by a physician or licensed health care professional. You must also record work-related injuries and illnesses that meet any of the specific recording criteria listed in 29 CFR Part 1904.8 through 1904.12. Feel free to use two lines for a single case if you need to. You must complete an Injury and Illness Incident Report (OSHA Form 301) or equivalent form for each injury or illness recorded on this form. If you're not sure whether a case is recordable, call your local OSHA office for help.

**Attention:** This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.

Year 20\_\_\_\_  
U.S. Department of Labor  
Occupational Safety and Health Administration

Form approved OMB no. 1515-0176

Establishment name \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_

## Identify the person

## Describe the case

(A) Case no.	(B) Employee's name	(C) Job title <i>(e.g., Welder)</i>	(D) Date of injury or onset of illness	(E) Where the event occurred <i>(e.g., Landing dock north end)</i>	(F) Describe injury or illness, parts of body affected, and object/substance that directly injured or made person ill <i>(e.g., Second degree burns on right forearm from overhead work)</i>
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		
			month / day /		

## Classify the case

**CHECK ONLY ONE box for each case based on the most serious outcome for that case:**

(G) Death	(H) Days away from work	(I) Job transfer or restriction	(J) Other recordable cases
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

## Enter the number of days the injured or ill worker was

(K) Away from work	(L) On job transfer or restriction
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days
____ days	____ days

## Check the "injury" column or choose one type of illness:

(M) Injury	(1) Skin disorder	(2) Respiratory condition	(3) Poisoning	(4) Hearing loss	(5) All other illnesses
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Public reporting burden for this collection of information is estimated to average 14 minutes per response, including time to review the instructions, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any other aspects of this data collection, contact US Department of Labor, OSHA/Office of Statistical Analysis, Room N-3614, 590 Constitution Avenue, NW, Washington, DC 20210. Do not send the completed forms to this office.

# Summary of Work-Related Injuries and Illnesses

Year 20\_\_

All establishments covered by Part 1904 must complete this Summary page, even if no work-related injuries or illnesses occurred during the year. Remember to review the Log to verify that the entries are complete and accurate before completing this summary.

Using the Log, count the individual entries you made for each category. Then write the totals below, making sure you've added the entries from every page of the Log. If you had no cases, write "0."

Employers, former employees, and their representatives have the right to review the OSHA Form 300 in its entirety. They also have limited access to the OSHA Form 301 or its equivalent. See 29 CFR Part 1904.35, in OSHA's recordkeeping rule, for further details on the access provisions for these forms.

### Number of Cases

Total number of deaths	Total number of cases with days away from work	Total number of cases with job transfer or restriction	Total number of other recordable cases
(g) _____	(h) _____	(i) _____	(j) _____

### Number of Days

Total number of days away from work	Total number of days of job transfer or restriction
(k) _____	(l) _____

### Injury and Illness Types

Total number of ...	(1) Injuries (M)	(2) Poisonings	(3) Hearing loss	(4) All other illnesses
(1) Injuries (M)	_____	_____	_____	_____
(2) Skin disorders	_____	_____	_____	_____
(3) Respiratory conditions	_____	_____	_____	_____

Post this Summary page from February 1 to April 30 of the year following the year covered by the form.

Public reading function for this collection of information is estimated to average 58 minutes per response, including time to review the instructions, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any other aspects of this data collection, contact: US Department of Labor, OSHA Office of Statistical Analysis, Room N-3644, 200 Constitution Avenue, NW, Washington, DC 20210. Do not send this completed form to this office.

### Establishment Information

Your establishment name \_\_\_\_\_

Street \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ ZIP \_\_\_\_\_

Industry description (e.g., *Maintenance of motor truck trailers*) \_\_\_\_\_

Standard Industrial Classification (SIC), if known (e.g., 3715) \_\_\_\_\_

OR \_\_\_\_\_

North American Industrial Classification (NAICS), if known (e.g., 336212) \_\_\_\_\_

**Employment information** (If you don't have these figures, see the Worksheet on the back of this page to estimate.)

Annual average number of employees \_\_\_\_\_

Total hours worked by all employees last year \_\_\_\_\_

### Sign here

Knowingly falsifying this document may result in a fine.

I certify that I have examined this document and that to the best of my knowledge the entries are true, accurate, and complete.

Company/Person: \_\_\_\_\_ Title: \_\_\_\_\_  
 Signature: \_\_\_\_\_ Date: \_\_\_\_/\_\_\_\_/\_\_\_\_

**ATTACHMENT 5**  
**SIGNATORY PAGE**

**Attachment 4 – Site-Specific Health and Safety Orientation Signatory Page**  
**HEALTH AND SAFETY PLAN**  
**200 Hamilton Ave - White Plains, NY**

<b>Title</b>	<b>Name</b>	<b>Signature</b>
Project Manager:	TBD	
Health and Safety Manager:	TBD	

I have read the attached Health and Safety Plan (HASP) and have received site-specific information and orientation regarding the identified physical, chemical, and biological hazards anticipated at this site. My signature certifies that I understand the procedures, equipment, and restrictions applicable to this project site and agree to abide by them.

<b>Signature</b>	<b>Printed Name</b>	<b>Company</b>	<b>Date</b>

**Attachment 4 – Health and Safety Orientation Signatory Page (continued)**

<b>Signature</b>	<b>Printed Name</b>	<b>Company</b>	<b>Date</b>

**ATTACHMENT 6**  
**SAFETY DATA SHEETS**



SDS preview

# ALCONOX® DETERGENT

**DANGER**

by SIGMA ALDRICH

---

## Hazard statements

Causes serious eye damage  
Causes skin irritation  
Harmful if swallowed  
May cause respiratory irritation  
Toxic to aquatic life

## Precautions

Avoid breathing dust/fume/gas/mist/vapours/spray  
Wash ... thoroughly after handling  
Do not eat, drink or smoke when using this product  
Use only outdoors or in a well-ventilated area  
Avoid release to the environment  
Wear protective gloves/protective clothing/eye protection/face protection  
IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell  
Rinse mouth  
IF ON SKIN: Wash with plenty of soap and water.  
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing  
Call a POISON CENTER or doctor/physician if you feel unwell  
IF IN EYES: Rinse cautiously with water for several minutes, Remove contact lenses, if present and easy to do. Continue rinsing  
Immediately call a POISON CENTER or doctor/physician  
If skin irritation occurs: Get medical advice/attention  
Take off contaminated clothing and wash before reuse

Store in a well-ventilated place., Keep container tightly closed

Store locked up

Dispose of contents/container to ...

Hazard category

Acute toxicity, oral, Hazardous to the aquatic environment, (Acute), Serious eye damage/eye irritation, Skin corrosion/irritation, Specific target organ toxicity, single exposure; Respiratory tract irritation



20000200GHS0208&param1=ZmRwLjFfNjYxMTgwMDNORQ==&unique=1525286306)

The information contained herein is based on data compiled from the chemical components of the (M)SDS and may not accurately represent the safety hazards for the product. Only the manufacturer of the product can make actual representations about the hazard profile of a chemical product. No warranty is expressed or implied regarding the accuracy of these data or the results to be obtained from the use thereof.

© 2017 Chemical Safety Software

## SAFETY DATA SHEET

Version 3.21  
Revision Date 08/21/2018  
Print Date 10/19/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Acetone  
  
Product Number : 650501  
Brand : Sigma-Aldrich  
Index-No. : 606-001-00-8  
  
CAS-No. : 67-64-1

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H319

Causes serious eye irritation.

H336

May cause drowsiness or dizziness.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P261

Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula	: C <sub>3</sub> H <sub>6</sub> O
Molecular weight	: 58.08 g/mol
CAS-No.	: 67-64-1
EC-No.	: 200-662-2
Index-No.	: 606-001-00-8
Registration number	: 01-2119471330-49-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Acetone</b>		
	Flam. Liq. 2; Eye Irrit. 2A; STOT SE 3; H225, H319, H336	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

##### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Dry powder Dry sand

#### Unsuitable extinguishing media

Do NOT use water jet.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Acetone	67-64-1	TWA	250 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section)		

		Not classifiable as a human carcinogen		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	250 ppm 590 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1,000 ppm 2,400 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		STEL	750 ppm 1,780 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	3,000 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	500 ppm 1,200 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Acetone	25 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			

#### Predicted No Effect Concentration (PNEC)

Compartment	Value
Soil	33.3 mg/kg
Marine water	1.06 mg/l
Fresh water	10.6 mg/l
Marine sediment	3.04 mg/kg
Fresh water sediment	30.4 mg/kg
Onsite sewage treatment plant	100 mg/l

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

Splash contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                             |
|-------------------------------------------------|---------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                                                   |
| b) Odour                                        | No data available                                                                           |
| c) Odour Threshold                              | No data available                                                                           |
| d) pH                                           | No data available                                                                           |
| e) Melting point/freezing point                 | Melting point/range: -94 °C (-137 °F)                                                       |
| f) Initial boiling point and boiling range      | 56 °C (133 °F) at 1,013 hPa (760 mmHg)                                                      |
| g) Flash point                                  | -17.0 °C (1.4 °F) - closed cup                                                              |
| h) Evaporation rate                             | No data available                                                                           |
| i) Flammability (solid, gas)                    | No data available                                                                           |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 13 %(V)<br>Lower explosion limit: 2 %(V)                             |
| k) Vapour pressure                              | 533.3 hPa (400.0 mmHg) at 39.5 °C (103.1 °F)<br>245.3 hPa (184.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                           |
| m) Relative density                             | 0.791 g/mL at 25 °C (77 °F)                                                                 |
| n) Water solubility                             | completely miscible                                                                         |
| o) Partition coefficient: n-octanol/water       | log Pow: -0.24                                                                              |
| p) Auto-ignition temperature                    | 465.0 °C (869.0 °F)                                                                         |
| q) Decomposition temperature                    | No data available                                                                           |

- r) Viscosity No data available
- s) Explosive properties No data available
- t) Oxidizing properties No data available

## 9.2 Other safety information

Surface tension 23.2 mN/m at 20.0 °C (68.0 °F)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Bases, Oxidizing agents, Reducing agents, Acetone reacts violently with phosphorous oxychloride.

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 5,800 mg/kg

Remarks: Behavioral:Altered sleep time (including change in righting reflex). Behavioral:Tremor. Behavioral:Headache. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhoea.

LC50 Inhalation - Rat - 8 h - 50,100 mg/m<sup>3</sup>

Remarks: Drowsiness Dizziness Unconsciousness

LD50 Dermal - Guinea pig - 7,426 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Mild skin irritation - 24 h

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

#### Respiratory or skin sensitisation

- Guinea pig

Result: Does not cause skin sensitisation.

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as



probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### **Reproductive toxicity**

No data available

No data available

#### **Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

#### **Specific target organ toxicity - repeated exposure**

No data available

#### **Aspiration hazard**

No data available

#### **Additional Information**

RTECS: AL3150000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney - Irregularities - Based on Human Evidence

Skin - Dermatitis - Based on Human Evidence

Kidney - Irregularities - Based on Human Evidence

Skin - Dermatitis - Based on Human Evidence

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

Toxicity to fish LC50 - *Oncorhynchus mykiss* (rainbow trout) - 5,540 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates LC50 - *Daphnia magna* (Water flea) - 8,800 mg/l - 48 h

Toxicity to algae Remarks: No data available

### **12.2 Persistence and degradability**

Biodegradability Result: 91 % - Readily biodegradable.  
(OECD Test Guideline 301B)

### **12.3 Bioaccumulative potential**

Does not bioaccumulate.

### **12.4 Mobility in soil**

No data available

### **12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### **12.6 Other adverse effects**

No data available

---

## **13. DISPOSAL CONSIDERATIONS**

### **13.1 Waste treatment methods**

#### **Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Contact a licensed professional waste disposal service to dispose of this material.

#### **Contaminated packaging**

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1090      Class: 3      Packing group: II  
Proper shipping name: Acetone  
Reportable Quantity (RQ): 5000 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1090      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: ACETONE

### IATA

UN number: 1090      Class: 3      Packing group: II  
Proper shipping name: Acetone

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

This material does not contain any components with a section 302 EHS TPQ.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Acetone	67-64-1	1993-02-16

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Acetone	67-64-1	1993-02-16

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
STOT SE	Specific target organ toxicity - single exposure

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.21

Revision Date: 08/21/2018

Print Date: 10/19/2018

# POCH Safety Data Sheet

According to Regulation (EC) No. 1907/2006 (REACH). Creation date / last update: 2002-10-15 / 2005-04-22

## 1. Identification of the substance/preparation and of the company/undertaking

### **BENZENE**

Catalogue Numbers: 99,9% standard for GC-162500320; pure-162500426; pure p. a.-162500110; for HPLC-162503155; Pochsolv-162505156;

Use of the substance / preparation: analytical and chemical reagent for synthesis solvent

POCH SA

44-101 Gliwice, Sowinskiego Str. 11

tel.: +48 32 23-92-381; fax: +48 32 23-92-370; e-mail: export@poch.com.pl

Emergency telephone no: +48 606-659-006

## 2. Hazard identification

*Highly flammable. May cause cancer. Toxic: danger of serious damage to health by prolonged exposure through inhalation, in contact with skin and if swallowed.*



## 3. Composition/information on ingredients

CAS-No.: 71-43-2

Molecular mass: 78.11

Molecular formula:  $C_6H_6$

WE Number: 200-753-7

EC-Index No.: 601-020-00-8

## 4. First aid measures

After eye contact: *rinse out with plenty of water with the eyelid held wide open. Call in ophthalmologist.*

After skin contact: *wash off with plenty of water. Remove contaminated clothing.*

After swallowing: *make victim drink plenty of water. Avoid vomiting (risk of aspiration). Laxative: paraffin oil (3 mg/kg), sodium sulfate (1 tablespoon 1/4 l water). Lavage of stomach only if necessary. Call in physician.*

After inhalation: *fresh air. If necessary, apply mouth- to- mouth resuscitation or mechanical ventilation.*

## 5. Fire-fighting measures

Suitable extinguishing media: *foam, powder*

Special risk: *combustible. Vapours heavier than air. Formation of explosive mixtures possible with air. Keep away from sources of fire.*

*Take measures to prevent electrostatic charging. Development of hazardous gases or vapours possible in the event of fire.*

Special protective equipment for fire fighting:

Other information: *contain escaping vapours with spray water. Do not stay in dangerous zone without self- contained breathing apparatus. Prevent fire- fighting water from entering surface water or groundwater*

Prevent fire-fighting water from entering surface water or groundwater. Cool container with spray water from a safe distance.

Contain escaping vapours with water.

## 6. Accidental release measures

*Do not inhale vapours/aerosols. Avoid substance contact. Ensure supply of fresh air in enclosed rooms. Take up with liquid- absorbent material. Forward for disposal. Clean up affected area. Do not allow to enter sewerage system (risk of explosion).*

## BENZENE

### 7. Handling and storage

Handling: *Use with adequate ventilation. Use of the basic principles of Industrial Hygiene. Use according to good industry practice. Work under hood. Do not inhale substance. Do not empty into sewerage system. Use protective equipment according to p.8. Avoid skin contact. Protect against electrostatic charges. Keep away from source of ignition.*

Storage: *tightly closed. Dry well-ventilated place. Protect from light. Keep away from sources of ignition and heat. At +15 to + 25 deg C.*

### 8. Exposure controls/personal protection

Specific control parameter:

*Provide exhaust ventilation. Ensure the eye wash station and safety showers. Protective equipment should be selected for the working place, depending on concentration and quantity of the hazardous product handled. The resistance of the protective clothing to chemicals should be ascertained with respective supplier.*

Personal protective equipment:

respiratory protection: *required when vapours/aerosols are generated - gas mask with specific absorber.*

eye protection: *required - safety goggles.*

hand protection: *required - protective clothing.*

body protection: *required - protective clothing.*

industrial hygiene: *immediately change contaminated clothing. Apply skin - protective barrier cream. Wash hands and face after working with substance.*

### 9. Physical and chemical properties

Form: *liquid*

Colour: *colourless*

Odour: *characteristic*

pH value: *not available*

Melting point: *5°C*

Boiling point: *80°C*

Autoignition temperature: *555°C*

Flash point: *-11°C*

Explosion limit:

lower: *1,4 Vol%*

upper: *8 Vol%*

dynamic viscosity: (20°C): *0,66 mPa\*s*

kinematical viscosity: *0,75 mm<sup>2</sup>/s*

Vapour pressure: *100 mbar (20°C)*

Density: *0,88 g/cm<sup>3</sup> (20°C)*

Bulk density: *not applicable*

Solubility:

in water: *1,8 g/l (20°C)*

in organic solvents: *soluble*

log P(w/o): *2,65. Bioconcentration factor: 1,10.*

## **BENZENE**

### **10. Stability and reactivity**

Conditions to be avoided: *high temperature*

Substances to be avoided: *nonorganic acids, sulfur, halogen-halogen compounds, oxidizing agents, peroxide compounds, oxyhalogenic compounds, halogenic hydrocarbons, rubber.*

Hazardous decomposition products: *no information available*

Other information: *volatile in steam. Unsuitable workings materials: various plastics*

### **11. Toxicological information**

Toxicological information: *LD50 (oral rat) 930 mg/kg, LC50 (inhalation rat) 10 000 ppm (vol.) /7h. Experience has shown this substance to be carcinogenic to man.*

Other information: *After skin contact: irritations, danger of absorption, Degreasing effect on the skin possibly followed by secondary inflammation; After swallowing: nausea and vomiting; After absorption: pain and dizziness, cardiac arrhythmia, drop in blood pressure, dyspnoea, spasms, narcosis, respiratory paralysis, death; After eye contact: irritations of mucous membranes. Carcinogenic class 1. This substance should be handled with particular care.*

### **12. Ecological information**

*Log P(w/o): 2,65. No appreciable bioaccumulation potential is to be expected. Toxicity: Fish: Onchorhynchus mykiss LC50: 5,3 mg/l/96h. C. auratus LC50: 34 mg/l/96h. Daphnia: Daphnia magma EC50: 200 mg/l/48h. Algae: Chlorella vulgaris: LC50: 530 mg/l/24h. Bacteria: Ps. putida EC10: 168 mg/l. Toxic effect on aquatic organisms. Biologic degradation: ThOD 3,1 g/g, B.O.D 10% ThOD, C.O.D. 19% ThOD. Hazard for drinking water supplies. Do not allow to enter waters, waste water or soil!*

### **13. Disposal considerations**

*POCH product packaging must be disposed of in compliance with the country-specific regulations or must be passed to a packaging return system. Handle contaminated packing in the same way as the substrate itself. Always contact a permitted waste disposal to assure compliance with all current local, state and federal regulations.*

### **14. Transport information**

ADR Class and package group: *3,II*

UN Number: *1114*

Name (acc. to UN): *benzene*

## **BENZENE**

### **15. Regulatory information**

*Labelling according to EC Directives.*

*Symbol: F, T; Flammable. Toxic.*

*R-phrases: 45-11-48/23/24/25; Highly flammable. May cause cancer. Toxic: danger of serious damage to health by prolonged exposure through inhalation, in contact with skin and if swallowed.*

*S-phrases: 53-45; In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). Avoid exposure - obtain special instructions before use. Restricted to professional users.*

*EC label.*

### **16. Other information**

*Reason for alteration: general update.*

*Informations contained in this SDS while accurate to the best knowledge*



---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benzo[a]pyrene

Product Number : 48564  
Brand : Supelco  
Index-No. : 601-032-00-3

CAS-No. : 50-32-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USATelephone : +1 800-325-5832  
Fax : +1 800-325-5052**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**Skin sensitisation (Category 1), H317  
Germ cell mutagenicity (Category 1B), H340  
Carcinogenicity (Category 1B), H350  
Reproductive toxicity (Category 1B), H360  
Acute aquatic toxicity (Category 1), H400  
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H317 : May cause an allergic skin reaction.  
H340 : May cause genetic defects.  
H350 : May cause cancer.  
H360 : May damage fertility or the unborn child.  
H410 : Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 : Obtain special instructions before use.  
P202 : Do not handle until all safety precautions have been read and



P261	understood.
P272	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P273	Contaminated work clothing should not be allowed out of the workplace.
P280	Avoid release to the environment.
	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Synonyms : 3,4-Benzpyrene  
3,4-Benzopyrene  
Benzo[def]chrysene  
benzo[pqr]tetraphene

Formula : C<sub>20</sub>H<sub>12</sub>  
Molecular weight : 252.31 g/mol  
CAS-No. : 50-32-8  
EC-No. : 200-028-5  
Index-No. : 601-032-00-3

#### Hazardous components

Component	Classification	Concentration
<b>Benzo[a]pyrene</b>	Skin Sens. 1; Muta. 1B; Carc. 1B; Repr. 1B; Aquatic Acute 1; Aquatic Chronic 1; H317, H340, H350, H360, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

#### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

#### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

#### 6.4 Reference to other sections

For disposal see section 13.

---

### 7. HANDLING AND STORAGE

#### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

#### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

#### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

### 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

#### 8.1 Control parameters

##### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low		

		as possible. Suspected human carcinogen		
		Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		
Benzo[a]pyrene	50-32-8	TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		TWA	0.2 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.1 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		TWA	0.2 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		PEL	0.2 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	0.2 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological	Basis
-----------	---------	------------	-------	------------	-------

				specimen	
	-	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |               |                   |
|---------------|-------------------|
| a) Appearance | Form: solid       |
| b) Odour      | No data available |

c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 177 - 180 °C (351 - 356 °F)
f) Initial boiling point and boiling range	495 °C (923 °F)
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	1.35 g/cm <sup>3</sup>
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 5.97
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Subcutaneous - Rat - 50 mg/kg

**Skin corrosion/irritation**

Skin - Mouse

Result: Mild skin irritation

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

Chronic exposure may cause dermatitis.

**Germ cell mutagenicity**

May alter genetic material.

In vivo tests showed mutagenic effects

**Carcinogenicity**

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 1 - Group 1: Carcinogenic to humans (Benzo[a]pyrene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benzo[a]pyrene)

OSHA: OSHA specifically regulated carcinogen (Benzo[a]pyrene)

**Reproductive toxicity**

May cause congenital malformation in the fetus.

Presumed human reproductive toxicant

May cause reproductive disorders.

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 0.25 mg/l - 48 h

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 0.02 mg/l - 72 h

**12.2 Persistence and degradability**

**12.3 Bioaccumulative potential**

Bioaccumulation Lepomis macrochirus (Bluegill) - 48 h - 0.0005 mg/l

Bioconcentration factor (BCF): 3,208

**12.4 Mobility in soil**

No data available

## 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

## 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Benzo[a]pyrene)  
Reportable Quantity (RQ): 1 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benzo[a]pyrene)  
Marine pollutant:yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[a]pyrene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

### SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
--	---------	---------------

Benzo[a]pyrene

50-32-8

2007-03-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.  
Benzo[a]pyrene

CAS-No.  
50-32-8

Revision Date  
1990-01-01

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H317	May cause an allergic skin reaction.
H340	May cause genetic defects.
H350	May cause cancer.
H360	May damage fertility or the unborn child.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Muta.	Germ cell mutagenicity

**HMIS Rating**

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

**NFPA Rating**

Health hazard:	3
Fire Hazard:	0
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.8

Revision Date: 02/02/2018

Print Date: 10/19/2018



## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/17/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benzo[**a**]fluoranthene  
Product Number : 48490  
Brand : Supelco  
Index-No. : 601-034-00-4  
CAS-No. : 205-99-2

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: 3,4-Benzofluoranthene
Formula	: C <sub>20</sub> H <sub>12</sub>
Molecular weight	: 252.31 g/mol
CAS-No.	: 205-99-2
EC-No.	: 205-911-9
Index-No.	: 601-034-00-4

#### Hazardous components

Component	Classification	Concentration
<b>Benz[e]acephenanthrylene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

Carbon oxides

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

No data available

**6. ACCIDENTAL RELEASE MEASURES**

**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

**6.4 Reference to other sections**

For disposal see section 13.

**7. HANDLING AND STORAGE**

**7.1 Precautions for safe handling**

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

**8. EXPOSURE CONTROLS/PERSONAL PROTECTION**

**8.1 Control parameters**

**Components with workplace control parameters**

	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen
--	---------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Biological occupational exposure limits**

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Benz[e]acephenant hrylene	205-99-2	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                         |
|--------------------------------------------|---------------------------------------------------------|
| a) Appearance                              | Form: solid                                             |
| b) Odour                                   | No data available                                       |
| c) Odour Threshold                         | No data available                                       |
| d) pH                                      | No data available                                       |
| e) Melting point/freezing point            | Melting point/range: 163 - 165 °C (325 - 329 °F) - lit. |
| f) Initial boiling point and boiling range | No data available                                       |
| g) Flash point                             | No data available                                       |
| h) Evaporation rate                        | No data available                                       |
| i) Flammability (solid, gas)               | No data available                                       |

- |    |                                              |                   |
|----|----------------------------------------------|-------------------|
| j) | Upper/lower flammability or explosive limits | No data available |
| k) | Vapour pressure                              | No data available |
| l) | Vapour density                               | No data available |
| m) | Relative density                             | No data available |
| n) | Water solubility                             | No data available |
| o) | Partition coefficient: n-octanol/water       | No data available |
| p) | Auto-ignition temperature                    | No data available |
| q) | Decomposition temperature                    | No data available |
| r) | Viscosity                                    | No data available |
| s) | Explosive properties                         | No data available |
| t) | Oxidizing properties                         | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

TDLo Oral - Mouse - 7.57 mg/kg

Remarks: Liver:Changes in liver weight. Endocrine:Changes in thymus weight.

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

**Respiratory or skin sensitisation**

No data available

**Germ cell mutagenicity**

No data available

**Carcinogenicity**

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[e]acephenanthrylene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[e]acephenanthrylene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available

No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates      Immobilization EC50 - Daphnia magna (Water flea) - > 1.024 mg/l - 24 h(Benz[e]acephenanthrylene)

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Benz[e]acephenanthrylene)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

Not dangerous goods

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F

Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.

(Benz[e]acephenanthrylene)

Marine pollutant : yes

### IATA

UN number: 3077      Class: 9      Packing group: III

Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benz[e]acephenanthrylene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

### SARA 311/312 Hazards

Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

### California Prop. 65 Components

	CAS-No.	Revision Date
, which is/are known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .	205-99-2	2007-09-28
Benz[e]acephenanthrylene		

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

H350      May cause cancer.

H400 Very toxic to aquatic life.  
H410 Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 6.1

Revision Date: 07/17/2018

Print Date: 01/21/2019



## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/16/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benzo[*k*]fluoranthene  
Product Number : 48492  
Brand : Supelco  
Index-No. : 601-036-00-5  
CAS-No. : 207-08-9

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>20</sub> H <sub>12</sub>
Molecular weight	: 252.31 g/mol
CAS-No.	: 207-08-9
EC-No.	: 205-916-6
Index-No.	: 601-036-00-5

#### Hazardous components

Component	Classification	Concentration
<b>Benzo[k]fluoranthene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

## 5.2 Special hazards arising from the substance or mixture

Carbon oxides

## 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

## 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Benzo[k]fluoranthene	207-08-9	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### **Skin protection**

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                         |
|-------------------------------------------------|---------------------------------------------------------|
| a) Appearance                                   | Form: crystalline<br>Colour: yellow                     |
| b) Odour                                        | No data available                                       |
| c) Odour Threshold                              | No data available                                       |
| d) pH                                           | No data available                                       |
| e) Melting point/freezing point                 | Melting point/range: 215 - 217 °C (419 - 423 °F) - lit. |
| f) Initial boiling point and boiling range      | No data available                                       |
| g) Flash point                                  | No data available                                       |
| h) Evaporation rate                             | No data available                                       |
| i) Flammability (solid, gas)                    | No data available                                       |
| j) Upper/lower flammability or explosive limits | No data available                                       |
| k) Vapour pressure                              | No data available                                       |
| l) Vapour density                               | No data available                                       |

- |                                           |                   |
|-------------------------------------------|-------------------|
| m) Relative density                       | No data available |
| n) Water solubility                       | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature              | No data available |
| q) Decomposition temperature              | No data available |
| r) Viscosity                              | No data available |
| s) Explosive properties                   | No data available |
| t) Oxidizing properties                   | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

Carcinogenicity- Rat- Implant

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benzo[k]fluoranthene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benzo[k]fluoranthene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### **Reproductive toxicity**

No data available

No data available

#### **Specific target organ toxicity - single exposure**

No data available

#### **Specific target organ toxicity - repeated exposure**

No data available

#### **Aspiration hazard**

No data available

#### **Additional Information**

RTECS: DF6350000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

No data available

### **12.2 Persistence and degradability**

No data available

### **12.3 Bioaccumulative potential**

No data available

### **12.4 Mobility in soil**

No data available(Benzo[k]fluoranthene)

### **12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### **12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

---

## **13. DISPOSAL CONSIDERATIONS**

### **13.1 Waste treatment methods**

#### **Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### **Contaminated packaging**

Dispose of as unused product.

---

## **14. TRANSPORT INFORMATION**

### **DOT (US)**

UN number: 3077

Class: 9

Packing group: III

Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[k]fluoranthene)

Reportable Quantity (RQ) : 5000 lbs

no  
Poison Inhalation Hazard: No

**IMDG**

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benzo[k]fluoranthene)  
Marine pollutant : yes

**IATA**

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[k]fluoranthene)

**Further information**

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Benzo[k]fluoranthene	207-08-9	1994-04-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Benzo[k]fluoranthene	207-08-9	1994-04-01

**California Prop. 65 Components**

	CAS-No.	Revision Date
, which is/are known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> . Benzo[k]fluoranthene	207-08-9	2007-09-28

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.1

Revision Date: 07/16/2018

Print Date: 01/21/2019



## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/17/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Benz[*a*]anthracene

Product Number : 48563  
Brand : Supelco  
Index-No. : 601-033-00-9

CAS-No. : 56-55-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES

Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms : 1,2-Benzanthracene  
Tetraphene

Formula : C<sub>18</sub>H<sub>12</sub>  
Molecular weight : 228.29 g/mol  
CAS-No. : 56-55-3  
EC-No. : 200-280-6  
Index-No. : 601-033-00-9

#### Hazardous components

Component	Classification	Concentration
<b>Benz[a]anthracene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### **Skin protection**

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                  |
|-------------------------------------------------|--------------------------------------------------|
| a) Appearance                                   | Form: solid                                      |
| b) Odour                                        | No data available                                |
| c) Odour Threshold                              | No data available                                |
| d) pH                                           | No data available                                |
| e) Melting point/freezing point                 | Melting point/range: 157 - 159 °C (315 - 318 °F) |
| f) Initial boiling point and boiling range      | 437.6 °C (819.7 °F)                              |
| g) Flash point                                  | No data available                                |
| h) Evaporation rate                             | No data available                                |
| i) Flammability (solid, gas)                    | No data available                                |
| j) Upper/lower flammability or explosive limits | No data available                                |
| k) Vapour pressure                              | No data available                                |
| l) Vapour density                               | No data available                                |
| m) Relative density                             | No data available                                |

- |                                           |                   |
|-------------------------------------------|-------------------|
| n) Water solubility                       | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature              | No data available |
| q) Decomposition temperature              | No data available |
| r) Viscosity                              | No data available |
| s) Explosive properties                   | No data available |
| t) Oxidizing properties                   | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intravenous - Rat - > 200 mg/kg

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[a]anthracene)  
IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[a]anthracene)  
NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[a]anthracene)  
NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[a]anthracene)  
OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.  
No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available  
No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Benz[a]anthracene)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

---

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

Not dangerous goods

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benz[a]anthracene)  
Marine pollutant : yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benz[a]anthracene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

### California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Benz[a]anthracene	56-55-3	2007-09-28

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Benz[a]anthracene	56-55-3	2007-09-28

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

H350      May cause cancer.  
H400      Very toxic to aquatic life.

H410

Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.1

Revision Date: 07/17/2018

Print Date: 01/21/2019



## SAFETY DATA SHEET

Version 4.7  
Revision Date 05/27/2016  
Print Date 10/19/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : 1,3-Butadiene  
Product Number : 295035  
Brand : Aldrich  
Index-No. : 601-013-00-X  
CAS-No. : 106-99-0

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable gases (Category 1), H220  
Gases under pressure (Liquefied gas), H280  
Germ cell mutagenicity (Category 1B), H340  
Carcinogenicity (Category 1A), H350

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H220 Extremely flammable gas.  
H280 Contains gas under pressure; may explode if heated.  
H340 May cause genetic defects.  
H350 May cause cancer.

Precautionary statement(s)

P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and understood.  
P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P280 Wear protective gloves/ protective clothing/ eye protection/ face protection.  
 P308 + P313 IF exposed or concerned: Get medical advice/ attention.  
 P377 Leaking gas fire: Do not extinguish, unless leak can be stopped safely.  
 P381 Eliminate all ignition sources if safe to do so.  
 P405 Store locked up.  
 P410 + P403 Protect from sunlight. Store in a well-ventilated place.  
 P501 Dispose of contents/ container to an approved waste disposal plant.

**2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none**

---

**3. COMPOSITION/INFORMATION ON INGREDIENTS**

**3.1 Substances**

Formula : C<sub>4</sub>H<sub>6</sub>  
 Molecular weight : 54.09 g/mol  
 CAS-No. : 106-99-0  
 EC-No. : 203-450-8  
 Index-No. : 601-013-00-X

**Hazardous components**

Component	Classification	Concentration
<b>1,3-Butadiene</b>		
	Flam. Gas 1; Press. Gas Liquefied gas; Muta. 1B; Carc. 1A; H220, H280, H340, H350	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

**4. FIRST AID MEASURES**

**4.1 Description of first aid measures**

**General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

**If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES**

**5.1 Extinguishing media**

**Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Clean up promptly by sweeping or vacuum.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Contents under pressure. Air sensitive. Light sensitive. Shock or heat may detonate May explode when heated. Handle and store under inert gas.

Storage class (TRGS 510): Gases

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Potential Occupational Carcinogen See Appendix A		
1,3-Butadiene	106-99-0	TWA	2 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cancer Suspected human carcinogen		
		TWA	2.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cancer Suspected human carcinogen		
		TWA	1 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		

		TWA	1.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		STEL	5.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		STEL	5 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Substance listed; for more information see OSHA document 29 CFR 1910.1051; 29 CFR 1910.19(1)		
		See 1910.1051		
		PEL	1.000000 ppm	OSHA Specifically Regulated Chemicals/Carcinogens
		<p>1910.1051  This section applies to all occupational exposures to 1,3-Butadiene (BD), Chemical Abstracts Service Registry No. 106-99-0, except as provided in paragraph (a)(2) of this section. Except for the recordkeeping provisions in paragraph (m)(1) of this section, this section does not apply to the processing, use, or handling of products containing BD or to other work operations and streams in which BD is present where objective data are reasonably relied upon that demonstrate the work operation or the product or the group of products or operations to which it belongs may not reasonably be foreseen to release BD in airborne concentrations at or above the action level or in excess of the STEL under the expected conditions of processing, use, or handling that will cause the greatest possible release or in any plausible accident. This section also does not apply to work operations, products or streams where the only exposure to BD is from liquid mixtures containing 0.1% or less of BD by volume or the vapors released from such liquids, unless objective data become available that show that airborne concentrations generated by such mixtures can exceed the action level or STEL under reasonably predictable conditions of processing, use or handling that will cause the greatest possible release. Except for labeling requirements and requirements for emergency response, this section does not apply to the storage, transportation, distribution or sale of BD or liquid mixtures in intact containers or in transportation pipelines sealed in such a manner as to fully contain BD vapors or liquid. Where products or processes containing BD are exempted under paragraph (a)(2) of this section, the employer shall maintain records of the objective data supporting that exemption and the basis for the employer's reliance on the data, as provided in paragraph (m)(1) of this section  1,3-Butadiene means an organic compound with chemical formula <math>CH_2=CH-CH=CH_2</math> that has a molecular weight of approximately 54.15 g/mole  OSHA specifically regulated carcinogen</p>		
		STEL	5.000000 ppm	OSHA Specifically Regulated Chemicals/Carcinogens
		<p>1910.1051  This section applies to all occupational exposures to 1,3-Butadiene (BD), Chemical Abstracts Service Registry No. 106-99-0, except as provided in paragraph (a)(2) of this section. Except for the recordkeeping provisions in paragraph (m)(1) of this section, this section does not apply to the processing, use, or handling of</p>		

		<p>products containing BD or to other work operations and streams in which BD is present where objective data are reasonably relied upon that demonstrate the work operation or the product or the group of products or operations to which it belongs may not reasonably be foreseen to release BD in airborne concentrations at or above the action level or in excess of the STEL under the expected conditions of processing, use, or handling that will cause the greatest possible release or in any plausible accident. This section also does not apply to work operations, products or streams where the only exposure to BD is from liquid mixtures containing 0.1% or less of BD by volume or the vapors released from such liquids, unless objective data become available that show that airborne concentrations generated by such mixtures can exceed the action level or STEL under reasonably predictable conditions of processing, use or handling that will cause the greatest possible release. Except for labeling requirements and requirements for emergency response, this section does not apply to the storage, transportation, distribution or sale of BD or liquid mixtures in intact containers or in transportation pipelines sealed in such a manner as to fully contain BD vapors or liquid. Where products or processes containing BD are exempted under paragraph (a)(2) of this section, the employer shall maintain records of the objective data supporting that exemption and the basis for the employer's reliance on the data, as provided in paragraph (m)(1) of this section</p> <p>1,3-Butadiene means an organic compound with chemical formula CH<sub>2</sub>=CH-CH=CH<sub>2</sub> that has a molecular weight of approximately 54.15 g/mole</p> <p>OSHA specifically regulated carcinogen</p>		
		PEL	1 ppm 2.2 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		see section 5201		
		STEL	5 ppm 11 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		see section 5201		

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
1,3-Butadiene	106-99-0	1,2-Dihydroxy-4-(N-acetylcysteinyl)-butane	2.5000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
		Mixture of N-1 and N-2(hydroxybutenyl)valine	2.5pmol/g	Hemoglobin (Hb) adducts in blood	ACGIH - Biological Exposure Indices (BEI)
		Not critical			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                                                      |
|--------------------------------------------|--------------------------------------------------------------------------------------|
| a) Appearance                              | Form: Liquefied gas                                                                  |
| b) Odour                                   | No data available                                                                    |
| c) Odour Threshold                         | No data available                                                                    |
| d) pH                                      | No data available                                                                    |
| e) Melting point/freezing point            | Melting point/range: -109 °C (-164 °F) - lit.                                        |
| f) Initial boiling point and boiling range | -4.5 °C (23.9 °F) - lit.                                                             |
| g) Flash point                             | -76 °C (-105 °F) - closed cup - Tested according to Annex V of Directive 67/548/EEC. |
| h) Evaporation rate                        | No data available                                                                    |
| i) Flammability (solid, gas)               | No data available                                                                    |

j) Upper/lower flammability or explosive limits	Upper explosion limit: 16.3 %(V) Lower explosion limit: 1.4 %(V)
k) Vapour pressure	ca.2,400 hPa (1,800 mmHg) at 20 °C (68 °F) 3,200 hPa (2,400 mmHg) at 30 °C (86 °F) 5,700 hPa (4,275 mmHg) at 50 °C (122 °F)
l) Vapour density	No data available
m) Relative density	0.62 g/cm <sup>3</sup> at 20 °C (68 °F)
n) Water solubility	0.5 g/l at 20 °C (68 °F) - Tested according to Annex V of Directive 67/548/EEC.
o) Partition coefficient: n-octanol/water	log Pow: 1.85 at 23 °C (73 °F)
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Test for peroxide formation before using or discard after 3 months.  
Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents, Oxygen, Copper, Copper alloys, Carbides, Halogens, Metal oxides, Metals

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides  
Other decomposition products - No data available  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 5,480 mg/kg

LC50 Inhalation - Rat - 4 h - 285 mg/l

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

No data available

**Germ cell mutagenicity**

In vivo tests showed mutagenic effects

**Carcinogenicity**

Carcinogenicity - Rat - Inhalation

Tumorigenic: Carcinogenic by RTECS criteria. Cardiac: Tumors. Lungs, Thorax, or Respiration: Tumors.

This is or contains a component that has been reported to be carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Human carcinogen.

IARC: 1 - Group 1: Carcinogenic to humans (1,3-Butadiene)

NTP: Known to be human carcinogen (1,3-Butadiene)

OSHA: OSHA specifically regulated carcinogen (1,3-Butadiene)

**Reproductive toxicity**

No data available

Reproductive toxicity - Mouse - Inhalation

Effects on Fertility: Post-implantation mortality (e.g., dead and/or resorbed implants per total number of implants).

Effects on Embryo or Fetus: Extra embryonic structures (e.g., placenta, umbilical cord). Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

No data available

Developmental Toxicity - Rat - Inhalation

Specific Developmental Abnormalities: Musculoskeletal system.

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

Cholinesterase inhibitors can cause heavy salivation and secretion in the lungs, lachrymation, blurred vision, involuntary defecation, diarrhea, tremor, ataxia, sweating, hypothermia, lowered heart rate, and/or a fall in blood pressure as a result of their action at cholinergic nerve sites., narcosis, Headache, Nausea, Vomiting, Dizziness, Drowsiness, Confusion., Weakness, Muscle cramps/spasms., Change in pupil size., Tremors, Seizures., Incoordination., Convulsions, Coma

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - other fish - 71.5 mg/l - 24 h

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available



**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1010      Class: 2.1  
 Proper shipping name: Butadienes, stabilized  
 Reportable Quantity (RQ): 10 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 1010      Class: 2.1  
 Proper shipping name: BUTADIENES, STABILIZED

EMS-No: F-D, S-U

**IATA**

UN number: 1010      Class: 2.1  
 Proper shipping name: Butadienes, stabilized  
 IATA Passenger: Not permitted for transport

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**SARA 311/312 Hazards**

Fire Hazard, Sudden Release of Pressure Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
1,3-Butadiene	106-99-0	1993-04-24

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the		

State of California to cause cancer.  
1,3-Butadiene

106-99-0

2007-09-28

WARNING: This product contains a chemical known to the  
State of California to cause birth defects or other reproductive  
harm.  
1,3-Butadiene

CAS-No.  
106-99-0

Revision Date  
2007-09-28

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Carc.	Carcinogenicity
Flam. Gas	Flammable gases
H220	Extremely flammable gas.
H280	Contains gas under pressure; may explode if heated.
H340	May cause genetic defects.
H350	May cause cancer.
Muta.	Germ cell mutagenicity
Press. Gas	Gases under pressure

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	4
Physical Hazard	3

### NFPA Rating

Health hazard:	0
Fire Hazard:	4
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.  
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.7

Revision Date: 05/27/2016

Print Date: 10/19/2018

## SAFETY DATA SHEET

Version 3.8  
Revision Date 12/29/2016  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Butylbenzene

Product Number : 41105  
Brand : Supelco

CAS-No. : 104-51-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Warning

Hazard statement(s)  
H226 : Flammable liquid and vapour.

Precautionary statement(s)  
P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.  
P233 : Keep container tightly closed.  
P240 : Ground/bond container and receiving equipment.  
P241 : Use explosion-proof electrical/ ventilating/ lighting/ equipment.  
P242 : Use only non-sparking tools.  
P243 : Take precautionary measures against static discharge.  
P280 : Wear protective gloves/ eye protection/ face protection.  
P303 + P361 + P353 : IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.  
P370 + P378 : In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

P403 + P235  
P501

Store in a well-ventilated place. Keep cool.  
Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula : C<sub>10</sub>H<sub>14</sub>  
Molecular weight : 134.22 g/mol  
CAS-No. : 104-51-8  
EC-No. : 203-209-7

#### Hazardous components

Component	Classification	Concentration
<b>Butylbenzene</b>		
	Flam. Liq. 3; H226	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

Use water spray to cool unopened containers.

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Avoid breathing vapours, mist or gas. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

## 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

## 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

## 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an

industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-88.0 °C (-126.4 °F)
f) Initial boiling point and boiling range	182.0 - 183.0 °C (359.6 - 361.4 °F)
g) Flash point	59.0 °C (138.2 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 5.8 %(V) Lower explosion limit: 0.8 %(V)
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	0.86 g/cm <sup>3</sup>
n) Water solubility	insoluble
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	412.0 °C (773.6 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### **9.2 Other safety information**

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

**Additional Information**

RTECS: CY9070000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity****12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 2709      Class: 3      Packing group: III

Proper shipping name: Butyl benzenes

Reportable Quantity (RQ):

Marine pollutant:yes

Poison Inhalation Hazard: No

**IMDG**

UN number: 2709      Class: 3      Packing group: III      EMS-No: F-E, S-D

Proper shipping name: BUTYLBENZENES

Marine pollutant:yes

**IATA**

UN number: 2709      Class: 3      Packing group: III

Proper shipping name: Butylbenzenes

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Fire Hazard

**Massachusetts Right To Know Components**

Butylbenzene

CAS-No.  
104-51-8Revision Date  
1993-04-24



## Pennsylvania Right To Know Components

Butylbenzene	CAS-No. 104-51-8	Revision Date 1993-04-24
--------------	---------------------	-----------------------------

## New Jersey Right To Know Components

Butylbenzene	CAS-No. 104-51-8	Revision Date 1993-04-24
--------------	---------------------	-----------------------------

## California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

### NFPA Rating

Health hazard:	0
Fire Hazard:	2
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.8

Revision Date: 12/29/2016

Print Date: 01/21/2019

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Carbon disulfide

Product Number : 335266

Brand : Sigma-Aldrich

Index-No. : 006-003-00-3

CAS-No. : 75-15-0

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225

Acute toxicity, Inhalation (Category 4), H332

Skin irritation (Category 2), H315

Eye irritation (Category 2A), H319

Reproductive toxicity (Category 2), H361

Specific target organ toxicity - repeated exposure, Inhalation (Category 1), H372

Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225	Highly flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	:	CS <sub>2</sub>
Molecular weight	:	76.14 g/mol
CAS-No.	:	75-15-0
EC-No.	:	200-843-6
Index-No.	:	006-003-00-3

#### Hazardous components

Component	Classification	Concentration
<b>Carbon disulphide</b>	Flam. Liq. 2; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; Repr. 2; STOT RE 1; Aquatic Acute 2; H225, H315, H319, H332, H361, H372, H401	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Flash back possible over considerable distance., Container explosion may occur under fire conditions., Vapours may form explosive mixture with air., May explode when heated.

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Refrigerate before opening.

Storage class (TRGS 510): 3: Flammable liquids

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Carbon disulphide	75-15-0	TWA	1 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Peripheral Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	1 ppm 3 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	10 ppm 30 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		See Table Z-2		
		TWA	20 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		CEIL	30 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		Peak	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		PEL	1 ppm 3 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		STEL	12 ppm 36 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		C	30 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	2-Thiothiazolidine-4-carboxylic acid (TTCA)	0.5mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                 |                                                      |
|---------------------------------|------------------------------------------------------|
| a) Appearance                   | Form: liquid<br>Colour: colourless                   |
| b) Odour                        | Stench.                                              |
| c) Odour Threshold              | No data available                                    |
| d) pH                           | No data available                                    |
| e) Melting point/freezing point | Melting point/range: -112 - -111 °C (-170 - -168 °F) |

f) Initial boiling point and boiling range	46 °C (115 °F)
g) Flash point	-30 °C (-22 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 50 %(V) Lower explosion limit: 1.3 %(V)
k) Vapour pressure	394.956 hPa (296.241 mmHg) at 20 °C (68 °F) 1,342.711 hPa (1,007.116 mmHg) at 55 °C (131 °F)
l) Vapour density	2.63 - (Air = 1.0)
m) Relative density	1.266 g/mL at 25 °C (77 °F)
n) Water solubility	2.9 g/l at 20 °C (68 °F) - OECD Test Guideline 105
o) Partition coefficient: n-octanol/water	log Pow: 2.7 at 25 °C (77 °F)
p) Auto-ignition temperature	97 - 107 °C (207 - 225 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

## 9.2 Other safety information

Surface tension	71.9 mN/m at 19.5 °C (67.1 °F)
Relative vapour density	2.63 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Alkali metals, Zinc, Amines, Azides, Oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Sulphur oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - female - > 2,000 mg/kg  
(OECD Test Guideline 423)

LC50 Inhalation - Rat - male and female - 4 h - 10.35 mg/l  
(OECD Test Guideline 403)

Dermal: No data available

No data available

**Skin corrosion/irritation**

No data available

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

- Mouse

Result: Does not cause skin sensitisation.  
(OECD Test Guideline 429)

**Germ cell mutagenicity**

Laboratory experiments have shown mutagenic effects.

Ames test

Salmonella typhimurium

Result: negative

**Carcinogenicity**

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

Suspected human reproductive toxicant

May cause reproductive disorders.

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: FF6650000

May cause convulsions.

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to fish LC50 - *Poecilia reticulata* (guppy) - 4 mg/l - 96 h  
(OECD Test Guideline 203)

Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - *Daphnia magna* (Water flea) - 2.1 mg/l - 48 h  
(OECD Test Guideline 202)

Toxicity to algae Growth inhibition EC50 - *Chlorella pyrenoidosa* - 21 mg/l - 96 h  
(OECD Test Guideline 201)

**12.2 Persistence and degradability**



Biodegradability aerobic - Exposure time 28 d  
Result: > 80 % - Readily biodegradable.  
(OECD Test Guideline 301D)

### 12.3 Bioaccumulative potential

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life.

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1131 Class: 3 (6.1) Packing group: I  
Proper shipping name: Carbon disulfide  
Reportable Quantity (RQ): 100 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1131 Class: 3 (6.1) Packing group: I EMS-No: F-E, S-D  
Proper shipping name: CARBON DISULPHIDE

### IATA

UN number: 1131 Class: 3 (6.1)  
Proper shipping name: Carbon disulphide  
IATA Passenger: Not permitted for transport  
IATA Cargo: Not permitted for transport

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

The following components are subject to reporting levels established by SARA Title III, Section 302:

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-11-03

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-11-03

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-11-03

## Pennsylvania Right To Know Components

Carbon disulphide

CAS-No.  
75-15-0

Revision Date  
2008-11-03

## New Jersey Right To Know Components

Carbon disulphide

CAS-No.  
75-15-0

Revision Date  
2008-11-03

## California Prop. 65 Components

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Carbon disulphide

CAS-No.  
75-15-0

Revision Date  
2008-06-17

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.
Repr.	Reproductive toxicity

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.11

Revision Date: 03/19/2018

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 3.18  
Revision Date 08/14/2018  
Print Date 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Chloroform  
  
Product Number : C2432  
Brand : Sigma-Aldrich  
Index-No. : 602-006-00-4  
  
CAS-No. : 67-66-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302  
Acute toxicity, Inhalation (Category 3), H331  
Skin irritation (Category 2), H315  
Eye irritation (Category 2A), H319  
Carcinogenicity (Category 2), H351  
Reproductive toxicity (Category 2), H361d  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336  
Specific target organ toxicity - repeated exposure (Category 1), Liver, Kidney, H372  
Acute aquatic toxicity (Category 3), H402

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H302 Harmful if swallowed.  
H315 Causes skin irritation.  
H319 Causes serious eye irritation.  
H331 Toxic if inhaled.  
H336 May cause drowsiness or dizziness.  
H351 Suspected of causing cancer.

H361d	Suspected of damaging the unborn child.
H372	Causes damage to organs (Liver, Kidney) through prolonged or repeated exposure.
H402	Harmful to aquatic life.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P311	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	:	Trichloromethane Methyldyne trichloride
Formula	:	CHCl <sub>3</sub>
Molecular weight	:	119.38 g/mol
CAS-No.	:	67-66-3
EC-No.	:	200-663-8
Index-No.	:	602-006-00-4

### Hazardous components

Component	Classification	Concentration
<b>Chloroform</b>	Acute Tox. 4; Acute Tox. 3; Skin Irrit. 2; Eye Irrit. 2A; Carc. 2; Repr. 2; STOT SE 3; STOT RE 1; Aquatic Acute 3; H302, H315, H319, H331, H336, H351, H361d, H372, H402	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Move out of dangerous area. Consult a physician. Show this safety data sheet to the doctor in attendance.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Chloroform	67-66-3	TWA	10 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Liver damage Embryo/fetal damage Confirmed animal carcinogen with unknown relevance to humans		
		ST	2 ppm 9.78 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		C	50 ppm 240 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate. Ceiling limit is to be determined from breathing-zone air samples.		
		PEL	2 ppm 9.78 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

### 8.2 Exposure controls

#### Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                           |
|-------------------------------------------------|---------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                                 |
| b) Odour                                        | sweet                                                                     |
| c) Odour Threshold                              | No data available                                                         |
| d) pH                                           | No data available                                                         |
| e) Melting point/freezing point                 | Melting point/range: -63 °C (-81 °F)                                      |
| f) Initial boiling point and boiling range      | 60.5 - 61.5 °C (140.9 - 142.7 °F)                                         |
| g) Flash point                                  | - DIN 51755 Part 1 does not flash                                         |
| h) Evaporation rate                             | No data available                                                         |
| i) Flammability (solid, gas)                    | No data available                                                         |
| j) Upper/lower flammability or explosive limits | No data available                                                         |
| k) Vapour pressure                              | 210 hPa (158 mmHg) at 20 °C (68 °F)                                       |
| l) Vapour density                               | 4.12 - (Air = 1.0)                                                        |
| m) Relative density                             | 1.492 g/mL at 25 °C (77 °F)                                               |
| n) Water solubility                             | 8.7 g/l at 23 °C (73 °F) - OECD Test Guideline 105                        |
| o) Partition coefficient: n-octanol/water       | log Pow: 1.97 at 25 °C (77 °F) - (ECHA), Bioaccumulation is not expected. |
| p) Auto-ignition temperature                    | > 600 °C (> 1,112 °F) at 1,013 hPa (760 mmHg) - DIN 51794                 |
| q) Decomposition temperature                    | Distillable in an undecomposed state at normal pressure.                  |
| r) Viscosity                                    | No data available                                                         |
| s) Explosive properties                         | No data available                                                         |
| t) Oxidizing properties                         | No data available                                                         |

### 9.2 Other safety information

- |                              |                                             |
|------------------------------|---------------------------------------------|
| Solubility in other solvents | organic solvent at 20 °C (68 °F) - miscible |
| Surface tension              | 27.1 mN/m at 20.0 °C (68.0 °F)              |
| Relative vapour density      | 4.12 - (Air = 1.0)                          |

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Contains the following stabiliser(s):

2-Methyl-2-butene ( $\geq 0.001$  -  $\leq 0.015$  %)

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

various plastics, Rubber

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male - 908 mg/kg

(OECD Test Guideline 401)

Remarks: Behavioral:Change in motor activity (specific assay). Behavioral:Ataxia. Lungs, Thorax, or Respiration:Respiratory stimulation.

LOEC Inhalation - Rat - male - 6 h - 500 ppm

Remarks: Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

LD50 Dermal - Rabbit - > 20,000 mg/kg

Remarks: (RTECS)

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Irritating to skin. - 24 h

Remarks: (ECHA)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Irritating to eyes.

Remarks: (ECHA)

#### Respiratory or skin sensitisation

Sensitisation test: - Guinea pig

Result: negative

(Maximisation Test)

Remarks: (ECHA)

#### Germ cell mutagenicity

Ames test

Salmonella typhimurium

Result: negative

reverse mutation assay

Escherichia coli

Result: negative

(ECHA)



OECD Test Guideline 474  
Rat - male and female - Bone marrow  
Result: negative

OECD Test Guideline 486  
Rat - male - Other cell types  
Result: negative

### **Carcinogenicity**

Carcinogenicity - Rat - Oral  
Tumorigenic: Carcinogenic by RTECS criteria. Leukaemia

Suspected of causing cancer.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Chloroform)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Chloroform)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

### **Reproductive toxicity**

Suspected of damaging the unborn child.

### **Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

### **Specific target organ toxicity - repeated exposure**

Causes damage to organs through prolonged or repeated exposure. - Liver, Kidney

### **Aspiration hazard**

No data available

### **Additional Information**

RTECS: FS9100000

Vomiting, Cough, irritant effects, Shortness of breath, respiratory arrest, narcosis, Dizziness, Nausea, agitation, spasms, inebriation, Headache, Stomach/intestinal disorders, ataxia (impaired locomotor coordination), cardiovascular disorders  
Drying-out effect resulting in rough and chapped skin.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

Toxicity to fish	flow-through test LC50 - Danio rerio (zebra fish) - 121 mg/l - 48 h (OECD Test Guideline 203)
	static test LC50 - Pimephales promelas (fathead minnow) - 103 - 171 mg/l - 96 h Remarks: (ECHA)
	flow-through test LC50 - Oncorhynchus mykiss (rainbow trout) - 18.2 mg/l - 96 h Remarks: (ECHA)
	flow-through test LC50 - Micropterus dolomieu - 51 mg/l - 96 h Remarks: (ECHA)
Toxicity to daphnia and other aquatic invertebrates	static test EC50 - Daphnia magna (Water flea) - 79 mg/l - 48 h Remarks: (ECHA)
Toxicity to algae	static test ErC50 - Chlamydomonas reinhardtii (green algae) - 13.3 mg/l - 72 h Remarks: (ECHA)

### **12.2 Persistence and degradability**

Biodegradability aerobic - Exposure time 14 d

Result: 0 % - Not readily biodegradable.  
(OECD Test Guideline 301C)

### 12.3 Bioaccumulative potential

Bioaccumulation Cyprinus carpio (Carp) - 42 d  
at 25 °C - 0.1 mg/l

Bioconcentration factor (BCF): 4.1 - 13  
(OECD Test Guideline 305)

Cyprinus carpio (Carp) - 42 d  
at 25 °C - 1 mg/l

Bioconcentration factor (BCF): 1.4 - 4.7  
(OECD Test Guideline 305)

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Harmful to aquatic life.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1888      Class: 6.1      Packing group: III  
Proper shipping name: Chloroform  
Reportable Quantity (RQ): 10 lbs Reportable Quantity (RQ): 10 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1888      Class: 6.1      Packing group: III      EMS-No: F-A, S-A  
Proper shipping name: CHLOROFORM

### IATA

UN number: 1888      Class: 6.1      Packing group: III  
Proper shipping name: Chloroform

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

	CAS-No.	Revision Date
Chloroform	67-66-3	2008-11-03

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Chloroform	67-66-3	2008-11-03

**SARA 311/312 Hazards**

Acute Health Hazard, Chronic Health Hazard

**Reportable Quantity**                      D022 lbs**Massachusetts Right To Know Components**

Chloroform	CAS-No. 67-66-3	Revision Date 2008-11-03
------------	--------------------	-----------------------------

**Pennsylvania Right To Know Components**

Chloroform	CAS-No. 67-66-3	Revision Date 2008-11-03
------------	--------------------	-----------------------------

**California Prop. 65 Components**

, which is/are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> . Chloroform	CAS-No. 67-66-3	Revision Date 2011-09-01
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------	-----------------------------

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H302	Harmful if swallowed.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H331	Toxic if inhaled.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H361d	Suspected of damaging the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H402	Harmful to aquatic life.
Repr.	Reproductive toxicity
Skin Irrit.	Skin irritation
STOT RE	Specific target organ toxicity - repeated exposure
STOT SE	Specific target organ toxicity - single exposure

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.18

Revision Date: 08/14/2018

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Chloromethane solution

Product Number : 294799

Brand : Aldrich

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 1), H224

Acute toxicity, Oral (Category 4), H302

Carcinogenicity (Category 2), H351

Reproductive toxicity (Category 2), H361

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Specific target organ toxicity - repeated exposure, Inhalation (Category 2), Eyes, Nervous system, Testes, H373

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H224

Extremely flammable liquid and vapour.

H302

Harmful if swallowed.

H336

May cause drowsiness or dizziness.

H351

Suspected of causing cancer.

H361

Suspected of damaging fertility or the unborn child.

H373

May cause damage to organs (Eyes, Nervous system, Testes) through prolonged or repeated exposure if inhaled.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and

	understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P281	Use personal protective equipment as required.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides., Repeated exposure may cause skin dryness or cracking.

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.2 Mixtures

Formula	:	CH <sub>3</sub> Cl
Molecular weight	:	50.49 g/mol

#### Hazardous components

Component	Classification	Concentration
<b>Diethyl ether</b>		
CAS-No.	60-29-7	Flam. Liq. 1; Acute Tox. 4; STOT SE 3; H224, H302, H336
EC-No.	200-467-2	
Index-No.	603-022-00-4	
<b>Chloromethane</b>		
CAS-No.	74-87-3	Flam. Gas 1; Press. Gas Liquefied gas; Carc. 2; Repr. 2; STOT RE 2; H220, H280, H351, H361fd, H373
EC-No.	200-817-4	
Index-No.	602-001-00-7	
		90 - 100 %
		5 - 10 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

**If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

Light sensitive. Air sensitive. Heat sensitive. Dry residue is explosive. Refrigerate before opening.

Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Diethyl ether	60-29-7	TWA	400.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		See Appendix D - Substances with No Established RELs		
		TWA	400.000000 ppm 1,200.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	400 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		See Appendix D - Substances with No Established RELs		
		TWA	400 ppm 1,200 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	400 ppm 1,200 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		STEL	500 ppm 1,500 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		PEL	400 ppm 1,200 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		STEL	500 ppm 1,500 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
Chloromethane	74-87-3	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Liver damage Kidney damage Testicular damage Teratogenic effects Not classifiable as a human carcinogen Danger of cutaneous absorption		

		STEL	100.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Liver damage Kidney damage Testicular damage Teratogenic effects Not classifiable as a human carcinogen Danger of cutaneous absorption		
		Potential Occupational Carcinogen See Appendix A		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		Peak	300.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		See Table Z-2		
		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		Peak	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.18-1969		
		STEL	100 ppm 210 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	50 ppm 105 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.



### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -116 °C (-177 °F)
f) Initial boiling point and boiling range	34.6 °C (94.3 °F) at 1,013 hPa (760 mmHg)
g) Flash point	-40 °C (-40 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 48 %(V) Lower explosion limit: 1.8 %(V)
k) Vapour pressure	590.021 hPa (442.552 mmHg) at 20 °C (68 °F) 1,975.467 hPa (1,481.722 mmHg) at 55 °C (131 °F)
l) Vapour density	No data available
m) Relative density	0.742 g/mL at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	160 °C (320 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents, Strong oxidizing agents, Iron, Strong acids

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

## Additional Information

RTECS: Not available

Methyl chloride is rapidly absorbed through the lungs and is excreted very slowly from the body. Symptoms of exposure include: dizziness, headache, weakness, unsteady walk, nausea, vomiting, abdominal pain, extreme nervousness, mental confusion, tremors, convulsions, unconsciousness and death, damage to the central nervous system. Apparent recovery from a seemingly minor exposure via inhalation may be followed by serious and prolonged aftereffects within a few days or weeks which can be fatal. Repeated exposures to methyl chloride are dangerous because it is eliminated very slowly from the body which converts methyl chloride into hydrochloric acid and methyl alcohol., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Methyl chloride is rapidly absorbed through the lungs and is excreted very slowly from the body. Symptoms of exposure include: dizziness, headache, weakness, unsteady walk, nausea, vomiting, abdominal pain, extreme nervousness, mental confusion, tremors, convulsions, unconsciousness and death, damage to the central nervous system. Apparent recovery from a seemingly minor exposure via inhalation may be followed by serious and prolonged aftereffects within a few days or weeks which can be fatal. Repeated exposures to methyl chloride are dangerous because it is eliminated very slowly from the body which converts methyl chloride into hydrochloric acid and methyl alcohol., Contact with eyes can cause:, Redness, Blurred vision, Provokes tears., Prolonged or repeated contact with skin may cause:, defatting, Dermatitis, Cough, chest pain, Difficulty in breathing, Dizziness, Drowsiness

Liver - Ingestion may provoke the following symptoms:, Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

Liver - Ingestion may provoke the following symptoms:, Irregularities - Based on Human Evidence (Diethyl ether)

Stomach - Irregularities - Based on Human Evidence (Chloromethane)

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1993      Class: 3      Packing group: I  
Proper shipping name: Flammable liquids, n.o.s. (Diethyl ether, Chloromethane)  
Reportable Quantity (RQ): 107 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 1993      Class: 3      Packing group: I      EMS-No: F-E, S-E  
Proper shipping name: FLAMMABLE LIQUID, N.O.S. (Chloromethane, Diethyl ether)

**IATA**

UN number: 1993      Class: 3      Packing group: I  
 Proper shipping name: Flammable liquid, n.o.s. (Chloromethane, Diethyl ether)

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Chloromethane	74-87-3	2007-07-01

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Diethyl ether	60-29-7	1993-04-24
Chloromethane	74-87-3	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Diethyl ether	60-29-7	1993-04-24
Chloromethane	74-87-3	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Diethyl ether	60-29-7	1993-04-24
Chloromethane	74-87-3	2007-07-01

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.	74-87-3	2009-09-11
Chloromethane		

**16. OTHER INFORMATION****Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Carc.	Carcinogenicity
Flam. Gas	Flammable gases
Flam. Liq.	Flammable liquids
H220	Extremely flammable gas.
H224	Extremely flammable liquid and vapour.
H280	Contains gas under pressure; may explode if heated.
H302	Harmful if swallowed.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H361	Suspected of damaging fertility or the unborn child.
H361fd	Suspected of damaging fertility. Suspected of damaging the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure if inhaled.
Press. Gas	Gases under pressure
Repr.	Reproductive toxicity
STOT RE	Specific target organ toxicity - repeated exposure
STOT SE	Specific target organ toxicity - single exposure

**HMIS Rating**

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	4

Physical Hazard 3

**NFPA Rating**

Health hazard: 1

Fire Hazard: 4

Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.9

Revision Date: 02/02/2018

Print Date: 01/21/2019



# Fisher Scientific

Part of Thermo Fisher Scientific

## SAFETY DATA SHEET

Creation Date 13-Sep-2013

Revision Date 21-Jul-2015

Revision Number 2

### 1. Identification

**Product Name** Chromium

**Cat No. :** C318-500

**Synonyms** Chrome

**Recommended Use** Laboratory chemicals.

**Uses advised against** No Information available

**Details of the supplier of the safety data sheet**

**Company**

Fisher Scientific  
One Reagent Lane  
Fair Lawn, NJ 07410  
Tel: (201) 796-7100

**Emergency Telephone Number**

CHEMTREC®, Inside the USA: 800-424-9300  
CHEMTREC®, Outside the USA: 001-703-527-3887

### 2. Hazard(s) identification

**Classification**

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Specific target organ toxicity (single exposure) Category 3  
Target Organs - Respiratory system.

**Label Elements**

**Signal Word**

Warning

**Hazard Statements**

May cause respiratory irritation



**Precautionary Statements**

**Prevention**

Avoid breathing dust/fume/gas/mist/vapors/spray  
Use only outdoors or in a well-ventilated area

**Inhalation**

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing  
Call a POISON CENTER or doctor/physician if you feel unwell

**Storage**

Store in a well-ventilated place. Keep container tightly closed  
Store locked up

**Disposal**

Dispose of contents/container to an approved waste disposal plant

**Hazards not otherwise classified (HNOC)**

Very toxic to aquatic life

### 3. Composition / information on ingredients

Component	CAS-No	Weight %
Chromium	7440-47-3	>95

### 4. First-aid measures

<b>General Advice</b>	If symptoms persist, call a physician.
<b>Eye Contact</b>	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
<b>Skin Contact</b>	Wash off immediately with plenty of water for at least 15 minutes. Obtain medical attention.
<b>Inhalation</b>	Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.
<b>Ingestion</b>	Do not induce vomiting. Obtain medical attention.
<b>Most important symptoms/effects Notes to Physician</b>	None reasonably foreseeable. Treat symptomatically

### 5. Fire-fighting measures

<b>Unsuitable Extinguishing Media</b>	Carbon dioxide (CO <sub>2</sub> )
<b>Flash Point</b>	Not applicable
<b>Method -</b>	No information available
<b>Autoignition Temperature</b>	Not applicable
<b>Explosion Limits</b>	
<b>Upper</b>	No data available
<b>Lower</b>	No data available
<b>Sensitivity to Mechanical Impact</b>	No information available
<b>Sensitivity to Static Discharge</b>	No information available

**Specific Hazards Arising from the Chemical**

Dust can form an explosive mixture in air. Do not allow run-off from fire fighting to enter drains or water courses.

**Hazardous Combustion Products**

Chromium oxide

**Protective Equipment and Precautions for Firefighters**

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

**NFPA**

<b>Health</b> 2	<b>Flammability</b> 1	<b>Instability</b> 1	<b>Physical hazards</b> N/A
--------------------	--------------------------	-------------------------	--------------------------------

## 6. Accidental release measures

<b>Personal Precautions</b>	Ensure adequate ventilation. Use personal protective equipment. Avoid dust formation.
<b>Environmental Precautions</b>	Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.
<b>Methods for Containment and Clean Up</b>	Avoid dust formation. Sweep up or vacuum up spillage and collect in suitable container for disposal. Keep in suitable, closed containers for disposal.

## 7. Handling and storage

<b>Handling</b>	Avoid dust formation. Wear personal protective equipment. Ensure adequate ventilation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation.
<b>Storage</b>	Keep containers tightly closed in a dry, cool and well-ventilated place. Store under an inert atmosphere.

## 8. Exposure controls / personal protection

### Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Chromium	TWA: 0.5 mg/m <sup>3</sup>	(Vacated) TWA: 1 mg/m <sup>3</sup> TWA: 1 mg/m <sup>3</sup>	IDLH: 250 mg/m <sup>3</sup> TWA: 0.5 mg/m <sup>3</sup>

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Chromium	TWA: 0.5 mg/m <sup>3</sup>	TWA: 0.5 mg/m <sup>3</sup>	TWA: 0.5 mg/m <sup>3</sup>

### Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

<b>Engineering Measures</b>	Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location.
-----------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------

### Personal Protective Equipment

<b>Eye/face Protection</b>	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
<b>Skin and body protection</b>	Wear appropriate protective gloves and clothing to prevent skin exposure.
<b>Respiratory Protection</b>	Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.
<b>Hygiene Measures</b>	Handle in accordance with good industrial hygiene and safety practice.

## 9. Physical and chemical properties

<b>Physical State</b>	Powder
<b>Appearance</b>	Silver
<b>Odor</b>	Odorless
<b>Odor Threshold</b>	No information available
<b>pH</b>	No information available
<b>Melting Point/Range</b>	1857.2 °C / 3375 °F



<b>Boiling Point/Range</b>	2640 °C / 4784 °F
<b>Flash Point</b>	Not applicable
<b>Evaporation Rate</b>	Not applicable
<b>Flammability (solid,gas)</b>	No information available
<b>Flammability or explosive limits</b>	
<b>Upper</b>	No data available
<b>Lower</b>	No data available
<b>Vapor Pressure</b>	No information available
<b>Vapor Density</b>	Not applicable
<b>Relative Density</b>	7.2
<b>Solubility</b>	Insoluble in water
<b>Partition coefficient; n-octanol/water</b>	No data available
<b>Autoignition Temperature</b>	Not applicable
<b>Decomposition Temperature</b>	No information available
<b>Viscosity</b>	Not applicable
<b>Molecular Formula</b>	Cr
<b>Molecular Weight</b>	51.996

## 10. Stability and reactivity

<b>Reactive Hazard</b>	None known, based on information available
<b>Stability</b>	Sensitive to air.
<b>Conditions to Avoid</b>	Incompatible products. Excess heat. Avoid dust formation.
<b>Incompatible Materials</b>	Strong oxidizing agents, Strong acids
<b>Hazardous Decomposition Products</b>	Chromium oxide
<b>Hazardous Polymerization</b>	Hazardous polymerization does not occur.
<b>Hazardous Reactions</b>	None under normal processing.

## 11. Toxicological information

### Acute Toxicity

#### **Component Information** **Toxicologically Synergistic** **Products**

No information available

#### **Delayed and immediate effects as well as chronic effects from short and long-term exposure**

<b>Irritation</b>	May cause irritation of respiratory tract
<b>Sensitization</b>	No information available
<b>Carcinogenicity</b>	The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Chromium	7440-47-3	Not listed	Not listed	Not listed	Not listed	Not listed

<b>Mutagenic Effects</b>	No information available
<b>Reproductive Effects</b>	No information available.
<b>Developmental Effects</b>	No information available.
<b>Teratogenicity</b>	No information available.
<b>STOT - single exposure</b>	Respiratory system
<b>STOT - repeated exposure</b>	None known

**Aspiration hazard** No information available

**Symptoms / effects, both acute and delayed** No information available

**Endocrine Disruptor Information** No information available

**Other Adverse Effects** The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

## 12. Ecological information

### Ecotoxicity

The product contains following substances which are hazardous for the environment. Very toxic to aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Chromium	Not listed	LC50: 14.3 mg/l/96 H (Pimephales promelas)	Not listed	EC50: 0.07 mg/l/48 H

**Persistence and Degradability** Insoluble in water  
**Bioaccumulation/ Accumulation** No information available.

**Mobility** Is not likely mobile in the environment due its low water solubility.

## 13. Disposal considerations

**Waste Disposal Methods** Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

## 14. Transport information

### DOT

**UN-No** UN3077  
**Proper Shipping Name** ENVIRONMENTALLY HAZARDOUS SUBSTANCES, SOLID, N.O.S.  
**Proper technical name** Chromium  
**Hazard Class** 9  
**Packing Group** III

### TDG

Not regulated  
**UN-No** UN3077  
**Proper Shipping Name** ENVIRONMENTALLY HAZARDOUS SUBSTANCES, SOLID, N.O.S.  
**Hazard Class** 9  
**Packing Group** III

### IATA

**UN-No** UN3077  
**Proper Shipping Name** Environmentally hazardous substance, solid, n.o.s  
**Hazard Class** 9  
**Packing Group** III

### IMDG/IMO

**UN-No** UN3077  
**Proper Shipping Name** Environmentally hazardous substance, solid, n.o.s  
**Hazard Class** 9  
**Packing Group** III

## 15. Regulatory information

### International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Chromium	X	X	-	231-157-5	-		X	-	X	X	X

#### Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

### U.S. Federal Regulations

TSCA 12(b) Not applicable

### SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Chromium	7440-47-3	>95	1.0

### SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

### Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Chromium	-	-	X	X

### Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Chromium	X		-

OSHA Occupational Safety and Health Administration

Not applicable

### CERCLA

Not applicable

Component	Hazardous Substances RQs	CERCLA EHS RQs
Chromium	5000 lb 10 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals

### State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Chromium	X	X	X	X	X

### U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

### U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

### Other International Regulations

Mexico - Grade No information available

**Canada**

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D2B Toxic materials



## 16. Other information

**Prepared By** Regulatory Affairs  
Thermo Fisher Scientific  
Email: EMSDS.RA@thermofisher.com

**Creation Date** 13-Sep-2013

**Revision Date** 21-Jul-2015

**Print Date** 21-Jul-2015

**Revision Summary** This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

**Disclaimer**

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

**End of SDS**

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Chrysene  
Product Number : 35754  
Brand : Sigma-Aldrich  
Index-No. : 601-048-00-0  
CAS-No. : 218-01-9

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Germ cell mutagenicity (Category 2), H341  
Carcinogenicity (Category 1B), H350  
Acute aquatic toxicity (Category 1), H400  
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H341 Suspected of causing genetic defects.  
H350 May cause cancer.  
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and understood.  
P273 Avoid release to the environment.  
P281 Use personal protective equipment as required.  
P308 + P313 IF exposed or concerned: Get medical advice/ attention.

P391 Collect spillage.  
P405 Store locked up.  
P501 Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula : C<sub>18</sub>H<sub>12</sub>  
Molecular weight : 228.29 g/mol  
CAS-No. : 218-01-9  
EC-No. : 205-923-4  
Index-No. : 601-048-00-0

#### Hazardous components

Component	Classification	Concentration
<b>Chrysene</b>	Muta. 2; Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H341, H350, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.  
For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.  
Provide appropriate exhaust ventilation at places where dust is formed.  
For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.  
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Confirmed animal carcinogen with unknown relevance to humans		
Chrysene	218-01-9	TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen		

		NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		PEL	0.2 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.



---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                         |
|-------------------------------------------------|---------------------------------------------------------|
| a) Appearance                                   | Form: solid                                             |
| b) Odour                                        | No data available                                       |
| c) Odour Threshold                              | No data available                                       |
| d) pH                                           | No data available                                       |
| e) Melting point/freezing point                 | Melting point/range: 252 - 254 °C (486 - 489 °F) - lit. |
| f) Initial boiling point and boiling range      | 448 °C (838 °F) - lit.                                  |
| g) Flash point                                  | No data available                                       |
| h) Evaporation rate                             | No data available                                       |
| i) Flammability (solid, gas)                    | No data available                                       |
| j) Upper/lower flammability or explosive limits | No data available                                       |
| k) Vapour pressure                              | No data available                                       |
| l) Vapour density                               | No data available                                       |
| m) Relative density                             | No data available                                       |
| n) Water solubility                             | insoluble                                               |
| o) Partition coefficient: n-octanol/water       | log Pow: 5.73                                           |
| p) Auto-ignition temperature                    | No data available                                       |
| q) Decomposition temperature                    | No data available                                       |
| r) Viscosity                                    | No data available                                       |
| s) Explosive properties                         | No data available                                       |
| t) Oxidizing properties                         | No data available                                       |

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intraperitoneal - Mouse - > 320 mg/kg

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

In vitro tests showed mutagenic effects

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Chrysene)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: OSHA specifically regulated carcinogen (Chrysene)

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

#### Additional Information

RTECS: GC0700000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 1.90 mg/l - 2 h

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Chrysene)  
Reportable Quantity (RQ): 100 lbs  
Poison Inhalation Hazard: No

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Chrysene)  
Marine pollutant:yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Chrysene)

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

### SARA 311/312 Hazards

Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

Chrysene

CAS-No.  
218-01-9

Revision Date  
1994-04-01

**New Jersey Right To Know Components**

Chrysene

CAS-No.  
218-01-9

Revision Date  
1994-04-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

Chrysene

CAS-No.  
218-01-9

Revision Date  
2007-09-28

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

**NFPA Rating**

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.5

Revision Date: 01/10/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

Version 4.11  
Revision Date 05/24/2016  
Print Date 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Cumene  
  
Product Number : C87657  
Brand : Aldrich  
Index-No. : 601-024-00-X  
  
CAS-No. : 98-82-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226  
Carcinogenicity (Category 2), H351  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H335 May cause respiratory irritation.  
H351 Suspected of causing cancer.  
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: Isopropylbenzene
Formula	: C <sub>9</sub> H <sub>12</sub>
Molecular weight	: 120.19 g/mol
CAS-No.	: 98-82-8
EC-No.	: 202-704-5
Index-No.	: 601-024-00-X

#### Hazardous components

Component	Classification	Concentration
<b>Cumene</b>	Flam. Liq. 3; Carc. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H335, H351, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Cumene	98-82-8	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Skin irritation		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		
		PEL	50 ppm 245 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.



### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                    |
|-------------------------------------------------|--------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                          |
| b) Odour                                        | No data available                                                  |
| c) Odour Threshold                              | No data available                                                  |
| d) pH                                           | No data available                                                  |
| e) Melting point/freezing point                 | Melting point/range: -96 °C (-141 °F) - lit.                       |
| f) Initial boiling point and boiling range      | 152 - 154 °C (306 - 309 °F) - lit.                                 |
| g) Flash point                                  | 31.0 °C (87.8 °F) - closed cup                                     |
| h) Evaporation rate                             | No data available                                                  |
| i) Flammability (solid, gas)                    | No data available                                                  |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 6.5 %(V)<br>Lower explosion limit: 0.9 %(V) |
| k) Vapour pressure                              | 10.7 hPa (8.0 mmHg) at 20.0 °C (68.0 °F)                           |
| l) Vapour density                               | No data available                                                  |
| m) Relative density                             | 0.864 g/mL at 25 °C (77 °F)                                        |
| n) Water solubility                             | 0.06 g/l at 25 °C (77 °F) - slightly soluble                       |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.55 at 23 °C (73 °F)                                     |
| p) Auto-ignition temperature                    | 425.0 °C (797.0 °F)                                                |
| q) Decomposition temperature                    | No data available                                                  |
| r) Viscosity                                    | No data available                                                  |
| s) Explosive properties                         | No data available                                                  |
| t) Oxidizing properties                         | No data available                                                  |

### 9.2 Other safety information

- |                 |                             |
|-----------------|-----------------------------|
| Surface tension | 27.69 mN/m at 25 °C (77 °F) |
|-----------------|-----------------------------|

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male - 2,260 mg/kg

Inhalation: No data available

Dermal: No data available

NOAEL Feed - Rat - male - > 535.8 mg/kg

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

- Guinea pig

Result: Did not cause sensitisation on laboratory animals.

(OECD Test Guideline 406)

#### Germ cell mutagenicity

in vitro assay

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Mouse - male and female

Result: negative

#### Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Cumene)

NTP: Reasonably anticipated to be a human carcinogen (Cumene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

No data available

No data available

**Specific target organ toxicity - single exposure**

May cause respiratory irritation.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: GR8575000

narcosis, Central nervous system depression, Dermatitis, Gastrointestinal disturbance, Damage to the lungs., Liver injury may occur., Kidney injury may occur.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 4.8 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia (water flea) - 2.14 mg/l - 48 h (OECD Test Guideline 202)

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 2.60 mg/l - 72 h

**12.2 Persistence and degradability**

Biodegradability Result: - According to the results of tests of biodegradability this product is not readily biodegradable.

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1918 Class: 3

Packing group: III

Proper shipping name: Isopropylbenzene

Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 1918      Class: 3      Packing group: III      EMS-No: F-E, S-E  
Proper shipping name: ISOPROPYLBENZENE  
Marine pollutant:yes

**IATA**

UN number: 1918      Class: 3      Packing group: III  
Proper shipping name: Isopropylbenzene

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Cumene	98-82-8	2010-06-11

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Carc.	Carcinogenicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3

Physical Hazard 0

**NFPA Rating**

Health hazard: 2

Fire Hazard: 3

Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.11

Revision Date: 05/24/2016

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Cyclohexane

Product Number : 227048

Brand : Sigma-Aldrich

Index-No. : 601-017-00-1

CAS-No. : 110-82-7

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 1), H400

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.

H304 May be fatal if swallowed and enters airways.

H315 Causes skin irritation.

H336 May cause drowsiness or dizziness.

H400 Very toxic to aquatic life.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233 Keep container tightly closed.

P240 Ground/bond container and receiving equipment.

P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula	:	C <sub>6</sub> H <sub>12</sub>
Molecular weight	:	84.16 g/mol
CAS-No.	:	110-82-7
EC-No.	:	203-806-2
Index-No.	:	601-017-00-1
Registration number	:	01-2119463273-41-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Cyclohexane</b>	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; H225, H304, H315, H336, H400	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.

Storage class (TRGS 510): 3: Flammable liquids

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

**8. EXPOSURE CONTROLS/PERSONAL PROTECTION****8.1 Control parameters****Components with workplace control parameters**



Component	CAS-No.	Value	Control parameters	Basis
Cyclohexane	110-82-7	TWA	100 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment		
		TWA	300 ppm 1,050 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		TWA	300 ppm 1,050 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	300 ppm 1,050 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested:Camatril® (KCL 730 / Aldrich Z677442, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 35 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                           |
|-------------------------------------------------|-------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                                                        |
| b) Odour                                        | No data available                                                                         |
| c) Odour Threshold                              | No data available                                                                         |
| d) pH                                           | No data available                                                                         |
| e) Melting point/freezing point                 | Melting point/range: 4 - 7 °C (39 - 45 °F) - lit.                                         |
| f) Initial boiling point and boiling range      | 80.7 °C (177.3 °F) - lit.                                                                 |
| g) Flash point                                  | -18.0 °C (-0.4 °F) - closed cup                                                           |
| h) Evaporation rate                             | No data available                                                                         |
| i) Flammability (solid, gas)                    | No data available                                                                         |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 9 %(V)<br>Lower explosion limit: 1 %(V)                            |
| k) Vapour pressure                              | 225.0 hPa (168.8 mmHg) at 37.7 °C (99.9 °F)<br>102.7 hPa (77.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                         |
| m) Relative density                             | 0.779 g/cm <sup>3</sup> at 25 °C (77 °F)                                                  |
| n) Water solubility                             | No data available                                                                         |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.44                                                                             |
| p) Auto-ignition temperature                    | 260.0 °C (500.0 °F)                                                                       |
| q) Decomposition temperature                    | No data available                                                                         |
| r) Viscosity                                    | No data available                                                                         |
| s) Explosive properties                         | No data available                                                                         |
| t) Oxidizing properties                         | No data available                                                                         |

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 12,705 mg/kg

LC50 Inhalation - Rat - 4 h - 34,000 mg/l  
(OECD Test Guideline 403)

LD50 Dermal - Rabbit - > 2,000 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

May be fatal if swallowed and enters airways.

#### Additional Information

RTECS: GU6300000

Central nervous system depression, Drowsiness, Irritability, Dizziness, Gastrointestinal disturbance, Lung irritation, chest pain, pulmonary edema

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish                      flow-through test LC50 - Pimephales promelas (fathead minnow) - 4.53 mg/l - 96 h  
(OECD Test Guideline 203)

Toxicity to daphnia and other aquatic      Immobilization EC50 - Daphnia magna (Water flea) - 0.9 mg/l - 48 h  
(OECD Test Guideline 202)

invertebrates

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 3.4 mg/l - 72 h  
(OECD Test Guideline 201)

12.2 Persistence and degradability

Biodegradability Result: - Readily biodegradable.

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life.

---

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

**Product**

Contact a licensed professional waste disposal service to dispose of this material. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

**Contaminated packaging**

Dispose of as unused product.

---

14. TRANSPORT INFORMATION

**DOT (US)**

UN number: 1145 Class: 3 Packing group: II  
Proper shipping name: Cyclohexane  
Reportable Quantity (RQ): 1000 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1145 Class: 3 Packing group: II EMS-No: F-E, S-D  
Proper shipping name: CYCLOHEXANE  
Marine pollutant:yes

**IATA**

UN number: 1145 Class: 3 Packing group: II  
Proper shipping name: Cyclohexane

---

15. REGULATORY INFORMATION

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cyclohexane	110-82-7	2007-07-01

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Cyclohexane	110-82-7	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Cyclohexane	110-82-7	2007-07-01

**New Jersey Right To Know Components**

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
Skin Irrit.	Skin irritation
STOT SE	Specific target organ toxicity - single exposure

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	
Flammability:	3
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

## Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.9

Revision Date: 06/11/2018

Print Date: 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**Product name : *p*-Cymene

Product Number : C121452

Brand : Aldrich

CAS-No. : 99-87-6

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226

Acute toxicity, Oral (Category 4), H302

Skin irritation (Category 2), H315

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Warning

Hazard statement(s)

H226

Flammable liquid and vapour.

H302

Harmful if swallowed.

H315

Causes skin irritation.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P264

Wash skin thoroughly after handling.

P270

Do not eat, drink or smoke when using this product.

P280	Wear protective gloves/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

---

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms : 1-Isopropyl-4-methylbenzene  
4-Isopropyltoluene

Formula : C<sub>10</sub>H<sub>14</sub>  
Molecular weight : 134.22 g/mol  
CAS-No. : 99-87-6  
EC-No. : 202-796-7

#### Hazardous components

Component	Classification	Concentration
<b>p-Cymene</b>	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; H226, H302, H315	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### **Suitable extinguishing media**

Dry powder Dry sand

#### **Unsuitable extinguishing media**

Do NOT use water jet.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### **Components with workplace control parameters**

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

### 8.2 Exposure controls

#### **Appropriate engineering controls**

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.



## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 129 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                                    |
|--------------------------------------------|--------------------------------------------------------------------|
| a) Appearance                              | Form: liquid, clear<br>Colour: colourless                          |
| b) Odour                                   | No data available                                                  |
| c) Odour Threshold                         | No data available                                                  |
| d) pH                                      | No data available                                                  |
| e) Melting point/freezing point            | No data available                                                  |
| f) Initial boiling point and boiling range | 176 - 178 °C (349 - 352 °F) - lit.                                 |
| g) Flash point                             | 47.0 °C (116.6 °F) - closed cup                                    |
| h) Evaporation rate                        | No data available                                                  |
| i) Flammability (solid, gas)               | No data available                                                  |
| j) Upper/lower flammability or             | Upper explosion limit: 5.6 %(V)<br>Lower explosion limit: 0.7 %(V) |

explosive limits

- |                                           |                                                                                    |
|-------------------------------------------|------------------------------------------------------------------------------------|
| k) Vapour pressure                        | 4.9 hPa (3.7 mmHg) at 37.7 °C (99.9 °F)<br>2.0 hPa (1.5 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                         | No data available                                                                  |
| m) Relative density                       | 0.86 g/cm <sup>3</sup> at 25 °C (77 °F)                                            |
| n) Water solubility                       | No data available                                                                  |
| o) Partition coefficient: n-octanol/water | No data available                                                                  |
| p) Auto-ignition temperature              | 436.0 °C (816.8 °F)                                                                |
| q) Decomposition temperature              | No data available                                                                  |
| r) Viscosity                              | No data available                                                                  |
| s) Explosive properties                   | No data available                                                                  |
| t) Oxidizing properties                   | No data available                                                                  |

## 9.2 Other safety information

Solubility in other solvents                      Alcohol - soluble

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 1,400 mg/kg

LC50 Inhalation - Mouse - 6.97 mg/l

Remarks: No data available

LD50 Dermal - Rabbit - > 5,000 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation - 24 h

**Serious eye damage/eye irritation**

No data available

**Respiratory or skin sensitisation**

No data available

**Germ cell mutagenicity**

No data available

**Carcinogenicity**

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

No data available

No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: GZ5950000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 2046      Class: 3      Packing group: III  
Proper shipping name: Cymenes  
Reportable Quantity (RQ):  
Poison Inhalation Hazard: No

### IMDG

UN number: 2046      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: CYMENES  
Marine pollutant: yes

### IATA

UN number: 2046      Class: 3      Packing group: III  
Proper shipping name: Cymenes

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

### New Jersey Right To Know Components

	CAS-No.	Revision Date
p-Cymene	99-87-6	1993-04-24

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H302	Harmful if swallowed.
H315	Causes skin irritation.
Skin Irrit.	Skin irritation

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

**NFPA Rating**

Health hazard: 2  
Fire Hazard: 2  
Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.10

Revision Date: 07/18/2017

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 6.1  
Revision Date 07/17/2018  
Print Date 01/21/2019

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Dibenz[*a,h*]anthracene  
Product Number : 48574  
Brand : Supelco  
Index-No. : 601-041-00-2  
CAS-No. : 53-70-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES  
Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word : Danger

Hazard statement(s)

H350

May cause cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: 1,2:5,6-Dibenzanthracene
Formula	: C <sub>22</sub> H <sub>14</sub>
Molecular weight	: 278.35 g/mol
CAS-No.	: 53-70-3
EC-No.	: 200-181-8
Index-No.	: 601-041-00-2

#### Hazardous components

Component	Classification	Concentration
<b>Dibenz[a,h]anthracene</b>		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).



### **Skin protection**

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                         |
|-------------------------------------------------|---------------------------------------------------------|
| a) Appearance                                   | Form: solid                                             |
| b) Odour                                        | No data available                                       |
| c) Odour Threshold                              | No data available                                       |
| d) pH                                           | No data available                                       |
| e) Melting point/freezing point                 | Melting point/range: 262 - 265 °C (504 - 509 °F) - lit. |
| f) Initial boiling point and boiling range      | 524 °C (975 °F) - lit.                                  |
| g) Flash point                                  | No data available                                       |
| h) Evaporation rate                             | No data available                                       |
| i) Flammability (solid, gas)                    | No data available                                       |
| j) Upper/lower flammability or explosive limits | No data available                                       |
| k) Vapour pressure                              | No data available                                       |
| l) Vapour density                               | No data available                                       |
| m) Relative density                             | No data available                                       |

- |                                           |                   |
|-------------------------------------------|-------------------|
| n) Water solubility                       | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature              | No data available |
| q) Decomposition temperature              | No data available |
| r) Viscosity                              | No data available |
| s) Explosive properties                   | No data available |
| t) Oxidizing properties                   | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

**Reproductive toxicity**

No data available  
No data available

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: HN2625000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Lungs -

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates      Immobilization EC50 - Daphnia magna (Water flea) - 0.496 mg/l - 24 h(Dibenz[a,h]anthracene)

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Dibenz[a,h]anthracene)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life with long lasting effects.

---

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION**

**DOT (US)**

Not dangerous goods

**IMDG**

UN number: 3077

Class: 9

Packing group: III

EMS-No: F-A, S-F

Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Dibenz[a,h]anthracene)

Marine pollutant : yes

**IATA**

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Dibenz[a,h]anthracene)

**Further information**

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Dibenz[a,h]anthracene	53-70-3	

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Dibenz[a,h]anthracene	53-70-3	

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

H350                      May cause cancer.  
H400                      Very toxic to aquatic life.  
H410                      Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.1

Revision Date: 07/17/2018

Print Date: 01/21/2019

SDS preview

# ETHYLBENZENE

**DANGER**

100-41-4

by Fisher Scientific

---

## Synonyms

Aethylbenzol [German], Benzene, ethyl-, CCRIS 916, Etilbenzene, Etylobenzen [Polish], Phenylethane, UNII-L5I45M5G0O, Aethylbenzol, AI3-09057, EC 202-849-4, Ethyl benzene, Ethylbenzeen, Ethylbenzeen [Dutch], Etilbenzene [Italian], Etylobenzen, HSDB 84, Ethylbenzene, Ethylbenzol, EB, EINECS 202-849-4, NCI-C56393, NSC 406903

## Hazard statements

Harmful if inhaled

Highly flammable liquid and vapour

May be fatal if swallowed and enters airways

May cause damage to organs through prolonged or repeated exposure

May cause drowsiness or dizziness

May cause respiratory irritation

Suspected of causing cancer

## Precautions

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Use only outdoors or in a well-ventilated area

Keep container tightly closed

Ground/bond container and receiving equipment

Use only non-sparking tools

Take precautionary measures against static discharge

Keep cool  
Do NOT induce vomiting  
Store locked up

## Hazard category

Acute toxicity, inhalation, Aspiration hazard, Carcinogenicity, Flammable liquids, Specific target organ toxicity, repeated exposure, Specific target organ toxicity, single exposure; Narcotic effects, Specific target organ toxicity, single exposure; Respiratory tract irritation



20002600215C2108&param1=ZmRwLjFfMDUyNjEwMDNORQ==&unique=1527865145)

The information contained herein is based on data compiled from the chemical components of the (M)SDS and may not accurately represent the safety hazards for the product. Only the manufacturer of the product can make actual representations about the hazard profile of a chemical product. No warranty is expressed or implied regarding the accuracy of these data or the results to be obtained from the use thereof.

© 2017 Chemical Safety Software

## SAFETY DATA SHEET

Version 5.12  
Revision Date 07/26/2018  
Print Date 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Heptane

Product Number : 246654  
Brand : Sigma-Aldrich  
Index-No. : 601-008-00-2

CAS-No. : 142-82-5

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H304

May be fatal if swallowed and enters airways.

H315

Causes skin irritation.

H336

May cause drowsiness or dizziness.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.



P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	:	C <sub>7</sub> H <sub>16</sub>
Molecular weight	:	100.20 g/mol
CAS-No.	:	142-82-5
EC-No.	:	205-563-8
Index-No.	:	601-008-00-2
Registration number	:	01-2119457603-38-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Heptane</b>	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; Aquatic Chronic 1; H225, H304, H315, H336, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Dry powder Dry sand

**Unsuitable extinguishing media**

Do NOT use water jet.

**5.2 Special hazards arising from the substance or mixture**

Flash back possible over considerable distance.

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

In case of fire: Evacuate area. Fight fire remotely due to the risk of explosion. Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Store under inert gas. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Heptane	142-82-5	TWA	85 ppm 350 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		C	440 ppm 1,800 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
	Remarks	15 minute ceiling value		
		TWA	500 ppm 2,000 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	400 ppm 1,600 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		STEL	500 ppm 2,000 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		TWA	400 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 65 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an

industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### **Body Protection**

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                                                         |
|-------------------------------------------------|-----------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid                                                                            |
| b) Odour                                        | No data available                                                                       |
| c) Odour Threshold                              | No data available                                                                       |
| d) pH                                           | No data available                                                                       |
| e) Melting point/freezing point                 | Melting point/range: -91 °C (-132 °F)                                                   |
| f) Initial boiling point and boiling range      | 98 °C (208 °F)                                                                          |
| g) Flash point                                  | 22 °C (72 °F) - closed cup                                                              |
| h) Evaporation rate                             | No data available                                                                       |
| i) Flammability (solid, gas)                    | No data available                                                                       |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7 %(V)<br>Lower explosion limit: 1.1 %(V)                        |
| k) Vapour pressure                              | 110.7 hPa (83.0 mmHg) at 37.7 °C (99.9 °F)<br>53.3 hPa (40.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                       |
| m) Relative density                             | 0.684 g/mL at 25 °C (77 °F)                                                             |
| n) Water solubility                             | insoluble                                                                               |
| o) Partition coefficient: n-octanol/water       | log Pow: > 3.000                                                                        |
| p) Auto-ignition temperature                    | 223.0 °C (433.4 °F)                                                                     |
| q) Decomposition temperature                    | No data available                                                                       |
| r) Viscosity                                    | No data available                                                                       |
| s) Explosive properties                         | No data available                                                                       |
| t) Oxidizing properties                         | No data available                                                                       |

### **9.2 Other safety information**

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - No data available

Hazardous decomposition products formed under fire conditions. - Carbon oxides

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

LC50 Inhalation - Rat - 4 h - 103,000 mg/m<sup>3</sup>

Inhalation: Irritating to respiratory system.

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

**Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: MI7700000

Prolonged or repeated exposure to skin causes defatting and dermatitis., Central nervous system depression, narcosis, Damage to the lungs.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - Carassius auratus (goldfish) - 4 mg/l - 24.0 h

LC50 - Tilapia mossambica - 375 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 1.50 mg/l - 48 h

**12.2 Persistence and degradability**

Ratio BOD/ThBOD 3.5 %

**12.3 Bioaccumulative potential**

Indication of bioaccumulation.

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

Very toxic to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Do not empty into drains. Avoid release to the environment.

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1206 Class: 3 Packing group: II

Proper shipping name: Heptanes

Reportable Quantity (RQ): Marine pollutant:yes

Poison Inhalation Hazard: No

**IMDG**

UN number: 1206 Class: 3 Packing group: II EMS-No: F-E, S-D

Proper shipping name: HEPTANES

Marine pollutant: yes

Marine pollutant: yes

**IATA**

UN number: 1206      Class: 3

Packing group: II

Proper shipping name: Heptanes

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Heptane	142-82-5	1993-02-16

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Skin Irrit.	Skin irritation

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.12

Revision Date: 07/26/2018

Print Date: 11/10/2018



---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Hexane

Product Number : 296090  
Brand : Sigma-Aldrich  
Index-No. : 601-037-00-0

CAS-No. : 110-54-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225  
Skin irritation (Category 2), H315  
Reproductive toxicity (Category 2), H361  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336  
Specific target organ toxicity - repeated exposure, Oral (Category 2), Nervous system, H373  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H315 Causes skin irritation.  
H336 May cause drowsiness or dizziness.  
H361 Suspected of damaging fertility or the unborn child.  
H373 May cause damage to organs (Nervous system) through prolonged or repeated exposure if swallowed.

H411	Toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	:	n-Hexane
Formula	:	C <sub>6</sub> H <sub>14</sub>
Molecular weight	:	86.18 g/mol
CAS-No.	:	110-54-3
EC-No.	:	203-777-6
Index-No.	:	601-037-00-0
Registration number	:	01-2119480412-44-XXXX

### Hazardous components

Component	Classification	Concentration
<b>n-Hexane</b>	Flam. Liq. 2; Skin Irrit. 2; Repr. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H225, H304, H315, H336, H361f, H373, H411	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Flash back possible over considerable distance. Container explosion may occur under fire conditions. Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
n-Hexane	110-54-3	TWA	50 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Eye irritation Peripheral neuropathy Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	50 ppm 180 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		TWA	500 ppm 1,800 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	50 ppm 180 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	2,5-Hexanedione	0.4 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 59 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                            |
|-------------------------------------------------|--------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                                                         |
| b) Odour                                        | No data available                                                                          |
| c) Odour Threshold                              | No data available                                                                          |
| d) pH                                           | 7.0                                                                                        |
| e) Melting point/freezing point                 | Melting point/range: -95 °C (-139 °F)                                                      |
| f) Initial boiling point and boiling range      | 69 °C (156 °F)                                                                             |
| g) Flash point                                  | -26.0 °C (-14.8 °F) - closed cup                                                           |
| h) Evaporation rate                             | 15.8                                                                                       |
| i) Flammability (solid, gas)                    | No data available                                                                          |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7.7 %(V)<br>Lower explosion limit: 1.2 %(V)                         |
| k) Vapour pressure                              | 341.3 hPa (256.0 mmHg) at 37.7 °C (99.9 °F)<br>176.0 hPa (132.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                          |
| m) Relative density                             | 0.659 g/mL at 25 °C (77 °F)                                                                |
| n) Water solubility                             | insoluble                                                                                  |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.90 - 4.11                                                                       |
| p) Auto-ignition temperature                    | 234.0 °C (453.2 °F)                                                                        |

- |                              |                   |
|------------------------------|-------------------|
| q) Decomposition temperature | No data available |
| r) Viscosity                 | No data available |
| s) Explosive properties      | No data available |
| t) Oxidizing properties      | No data available |

## 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Exposure to moisture may affect product quality.  
Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - No data available  
Hazardous decomposition products formed under fire conditions. - Carbon oxides  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male and female - 16,000 mg/kg  
(OECD Test Guideline 401)

LC50 Inhalation - Rat - 4 h - 172 mg/l

Remarks: (RTECS)

LD50 Dermal - Rabbit - > 2,000 mg/kg

Remarks: (ECHA)

#### Skin corrosion/irritation

#### Serious eye damage/eye irritation

#### Respiratory or skin sensitisation

#### Germ cell mutagenicity

In vitro mammalian cell gene mutation test

Mouse lymphoma test

Result: Positive results were obtained in some in vitro tests.

Ames test

Salmonella typhimurium

Result: negative

Result: negative

(National Toxicology Program)

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### **Reproductive toxicity**

Suspected of damaging the unborn child.

Suspected of damaging fertility.

#### **Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness. - Central nervous system

#### **Specific target organ toxicity - repeated exposure**

Inhalation - May cause damage to organs through prolonged or repeated exposure. - Nervous system

#### **Aspiration hazard**

Aspiration hazard, Aspiration may cause pulmonary oedema and pneumonitis.

#### **Additional Information**

RTECS: MN9275000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Drowsiness, irritant effects, somnolence

narcosis, Nausea, Tiredness, CNS disorders, paralysis symptoms

Risk of corneal clouding.

It generally applies for aliphatic hydrocarbons with 6 - 18 carbon atoms that they may cause pneumonia, in some cases also pulmonary oedema, upon direct inhalation, i.e. in conditions that can occur only in very special circumstances (nebulizations, spraying, inhalation of aerosols and similar). After absorption of very large quantities: narcosis.

Testes. - Irregularities - Based on Human Evidence

---

## **12. ECOLOGICAL INFORMATION**

### **12.1 Toxicity**

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - 2.5 mg/l - 96 h Remarks: (ECOTOX Database)
------------------	---------------------------------------------------------------------------------------------

Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 2.1 mg/l - 48 h Remarks: (Lit.)
-----------------------------------------------------	------------------------------------------------------------------------

### **12.2 Persistence and degradability**

### **12.3 Bioaccumulative potential**

### **12.4 Mobility in soil**

### **12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### **12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

---

## **13. DISPOSAL CONSIDERATIONS**

### **13.1 Waste treatment methods**

#### **Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### **Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1208      Class: 3      Packing group: II  
Proper shipping name: Hexanes  
Reportable Quantity (RQ): 5000 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1208      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: HEXANES  
Marine pollutant:yes

**IATA**

UN number: 1208      Class: 3      Packing group: II  
Proper shipping name: Hexanes

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
n-Hexane	110-54-3	2007-07-01

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H361	Suspected of damaging fertility or the unborn child.
H361f	Suspected of damaging fertility.
H373	May cause damage to organs (/*_2ORG_REP_ORA*/) through prolonged or repeated exposure if swallowed.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:                      2



Chronic Health Hazard: \*  
Flammability: 3  
Physical Hazard 0

**NFPA Rating**

Health hazard: 2  
Fire Hazard: 3  
Reactivity Hazard: 0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.  
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.7

Revision Date: 06/08/2018

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Indeno[1,2,3-cd]pyrene

Product Number : 48499

Brand : Supelco

CAS-No. : 193-39-5

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Carcinogenicity (Category 2), H351

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H351

Suspected of causing cancer.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P281

Use personal protective equipment as required.

P308 + P313

IF exposed or concerned: Get medical advice/ attention.

P405

Store locked up.

P501

Dispose of contents/ container to an approved waste disposal plant.

#### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

---

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Formula : C<sub>22</sub>H<sub>12</sub>  
Molecular weight : 276.33 g/mol  
CAS-No. : 193-39-5  
EC-No. : 205-893-2

#### Hazardous components

Component	Classification	Concentration
Indeno[1,2,3-cd]pyrene	Carc. 2; H351	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

## 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

## 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

## 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.

Storage class (TRGS 510): 13: Non Combustible Solids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Indeno[1,2,3-cd]pyrene	193-39-5	1-Hydroxypyrene (1-HP)		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

##### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the

sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

a) Appearance	Form: solid
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	163.6 °C (326.5 °F)
f) Initial boiling point and boiling range	536.0 °C (996.8 °F)
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### **9.2 Other safety information**

No data available

---

## **10. STABILITY AND REACTIVITY**

### **10.1 Reactivity**

No data available

### **10.2 Chemical stability**

Stable under recommended storage conditions.

### **10.3 Possibility of hazardous reactions**

No data available

### **10.4 Conditions to avoid**

No data available

### **10.5 Incompatible materials**

Strong oxidizing agents

## 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Indeno[1,2,3-cd]pyrene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Indeno[1,2,3-cd]pyrene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

#### Additional Information

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION**

**DOT (US)**

Not dangerous goods

**IMDG**

Not dangerous goods

**IATA**

Not dangerous goods

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Chronic Health Hazard

**Massachusetts Right To Know Components**

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

**Pennsylvania Right To Know Components**

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

**New Jersey Right To Know Components**

Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 1993-04-24
------------------------	---------------------	-----------------------------

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.  
Indeno[1,2,3-cd]pyrene

CAS-No.  
193-39-5

Revision Date  
2007-09-28

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Carc. H351	Carcinogenicity Suspected of causing cancer.
---------------	-------------------------------------------------

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	1
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.6

Revision Date: 12/11/2017

Print Date: 11/10/2018



### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Isopropylbenzene  
  
Product Number : 442630  
Brand : Supelco  
Index-No. : 601-024-00-X  
  
CAS-No. : 98-82-8

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226  
Carcinogenicity (Category 2), H351  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H335 May cause respiratory irritation.  
H351 Suspected of causing cancer.  
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and

	understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	:	C <sub>9</sub> H <sub>12</sub>
Molecular weight	:	120.2 g/mol
CAS-No.	:	98-82-8
EC-No.	:	202-704-5
Index-No.	:	601-024-00-X

#### Hazardous components

Component	Classification	Concentration
<b>Cumene</b>	Flam. Liq. 3; Carc. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H335, H351, H411	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store at room temperature.

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Cumene	98-82-8	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Skin irritation		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		
		PEL	50 ppm 245 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-95.99 °C (-140.78 °F)
f) Initial boiling point and boiling range	152.0 - 153.0 °C (305.6 - 307.4 °F)
g) Flash point	31.0 °C (87.8 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 6.5 %(V) Lower explosion limit: 0.9 %(V)
k) Vapour pressure	10.7 hPa (8.0 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	0.86 g/cm <sup>3</sup>
n) Water solubility	0.06 g/l at 25 °C (77 °F) - slightly soluble
o) Partition coefficient: n-octanol/water	log Pow: 3.55 at 23 °C (73 °F)
p) Auto-ignition temperature	425.0 °C (797.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### 9.2 Other safety information

Surface tension	27.69 mN/m at 25 °C (77 °F)
-----------------	-----------------------------

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

## 10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

Stable under recommended storage conditions.

## 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air. Vapours may form explosive mixture with air.

## 10.4 Conditions to avoid

Heat, flames and sparks.

## 10.5 Incompatible materials

Strong oxidizing agents

## 10.6 Hazardous decomposition products

Other decomposition products - No data available

Hazardous decomposition products formed under fire conditions. - Carbon oxides

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - male - 2,260 mg/kg

Inhalation: No data available

Dermal: No data available

NOAEL Feed - Rat - male - > 535.8 mg/kg

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

- Guinea pig

Result: Did not cause sensitisation on laboratory animals.

(OECD Test Guideline 406)

#### Germ cell mutagenicity

in vitro assay

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Mouse - male and female

Result: negative

#### Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Cumene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Cumene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

May cause respiratory irritation.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: GR8575000

narcosis, Central nervous system depression, Dermatitis, Gastrointestinal disturbance, Damage to the lungs., Liver injury may occur., Kidney injury may occur.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 4.8 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia (water flea) - 2.14 mg/l - 48 h (OECD Test Guideline 202)

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 2.60 mg/l - 72 h

**12.2 Persistence and degradability**

Biodegradability Result: - According to the results of tests of biodegradability this product is not readily biodegradable.

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1918      Class: 3      Packing group: III  
 Proper shipping name: Isopropylbenzene  
 Reportable Quantity (RQ): 5000 lbs  
 Poison Inhalation Hazard: No

**IMDG**

UN number: 1918      Class: 3      Packing group: III      EMS-No: F-E, S-E  
 Proper shipping name: ISOPROPYLBENZENE  
 Marine pollutant:yes

**IATA**

UN number: 1918      Class: 3  
 Proper shipping name: Isopropylbenzene

Packing group: III

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Cumene	98-82-8	2010-06-11

**16. OTHER INFORMATION****Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Carc.	Carcinogenicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.  
 The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the



product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.14

Revision Date: 10/03/2017

Print Date: 11/10/2018

SDS preview

# LEAD

**DANGER**

7439-92-1

by Fisher Scientific

---

## Synonyms

C.I. 77575, C.I. Pigment Metal 4, EINECS 231-100-4, Glover, HSDB 231, Lead flake, Olow, Plumbum, CI 77575, Plumbum metallicum, Blei, CI pigment metal 4, EC 231-100-4, KS-4, Lead, Lead element, Lead S2, Olow [Polish], Omaha & grant, Pb-S 100, Rough lead bullion, CCRIS 1581, Lead metal, Lead S 2, SSO 1, UNII-2P299V784P

## Hazard statements

Harmful if inhaled

Harmful if swallowed

May cause cancer

May cause damage to organs through prolonged or repeated exposure

May cause drowsiness or dizziness

## Precautions

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Use personal protective equipment as required

Do not eat, drink or smoke when using this product

Use only outdoors or in a well-ventilated area

Rinse mouth

Store locked up

## Hazard category

Acute toxicity, inhalation, Acute toxicity, oral, Carcinogenicity, Specific target organ toxicity, repeated exposure, Specific target organ toxicity, single exposure; Narcotic effects



2000200020002000&param1=ZmRwLjFfNzE0NjEwMDNORQ==&unique=1525284976)

The information contained herein is based on data compiled from the chemical components of the (M)SDS and may not accurately represent the safety hazards for the product. Only the manufacturer of the product can make actual representations about the hazard profile of a chemical product. No warranty is expressed or implied regarding the accuracy of these data or the results to be obtained from the use thereof.

© 2017 Chemical Safety Software

## SAFETY DATA SHEET

Version 3.12  
Revision Date 12/02/2015  
Print Date 05/01/2016

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Mercury

Product Number : 215457  
Brand : Sigma-Aldrich  
Index-No. : 080-001-00-0

CAS-No. : 7439-97-6

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Inhalation (Category 2), H330  
Reproductive toxicity (Category 1B), H360  
Specific target organ toxicity - repeated exposure (Category 1), H372  
Acute aquatic toxicity (Category 1), H400  
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H330

Fatal if inhaled.

H360

May damage fertility or the unborn child.

H372

Causes damage to organs through prolonged or repeated exposure.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P284	Wear respiratory protection.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	:	Hg
Molecular weight	:	200.59 g/mol
CAS-No.	:	7439-97-6
EC-No.	:	231-106-7
Index-No.	:	080-001-00-0

#### Hazardous components

Component	Classification	Concentration
<b>Mercury</b>	Acute Tox. 2; Repr. 1B; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H330, H360, H372, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Mercury/mercury oxides.

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal. In some instances, a mercury spill kit may be used. Please consult with your site EHS representative to determine the most appropriate clean up method. Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Mercury	7439-97-6	C	0.1 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
	Remarks	Potential for dermal absorption		

		CEIL	1.0mg/10m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	0.05 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		
		TWA	0.025 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Kidney damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	0.05 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Mercury	7439-97-6	Mercury	0.0400 mg/g	In urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Prior to shift (16 hours after exposure ceases)			
		Mercury	15.0000 µg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                |
|-------------------------------------------------|--------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: silver, white                                          |
| b) Odour                                        | odourless                                                                      |
| c) Odour Threshold                              | No data available                                                              |
| d) pH                                           | No data available                                                              |
| e) Melting point/freezing point                 | Melting point/range: -38.87 °C (-37.97 °F) - lit.                              |
| f) Initial boiling point and boiling range      | 356.6 °C (673.9 °F) - lit.                                                     |
| g) Flash point                                  | Not applicable                                                                 |
| h) Evaporation rate                             | No data available                                                              |
| i) Flammability (solid, gas)                    | No data available                                                              |
| j) Upper/lower flammability or explosive limits | No data available                                                              |
| k) Vapour pressure                              | < 0.01 hPa (< 0.01 mmHg) at 20 °C (68 °F)<br>1 hPa (1 mmHg) at 126 °C (259 °F) |
| l) Vapour density                               | 6.93 - (Air = 1.0)                                                             |
| m) Relative density                             | 13.55 g/cm <sup>3</sup> at 25 °C (77 °F)                                       |
| n) Water solubility                             | 0.00006 g/l at 25 °C (77 °F)                                                   |
| o) Partition coefficient: n-octanol/water       | No data available                                                              |
| p) Auto-ignition temperature                    | No data available                                                              |
| q) Decomposition temperature                    | No data available                                                              |
| r) Viscosity                                    | No data available                                                              |
| s) Explosive properties                         | No data available                                                              |
| t) Oxidizing properties                         | No data available                                                              |

### 9.2 Other safety information

- |                         |                    |
|-------------------------|--------------------|
| Relative vapour density | 6.93 - (Air = 1.0) |
|-------------------------|--------------------|



---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

No data available

### 10.5 Incompatible materials

Strong oxidizing agents, Ammonia, Azides, Nitrates, Chlorates, Copper

### 10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

LC50 Inhalation - Rat - male - 2 h - < 27 mg/m<sup>3</sup>

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Mercury)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

Presumed human reproductive toxicant

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

Causes damage to organs through prolonged or repeated exposure.

#### Aspiration hazard

No data available

**Additional Information**

RTECS: OV4550000

Mercury accumulates in almost all tissues, especially in the: Kidney, Effects due to ingestion may include: Nausea, Vomiting, Diarrhoea, intestinal bleeding

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish mortality LC50 - Cyprinus carpio (Carp) - 0.160 mg/l - 96 h

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

Bioaccumulation Carassius auratus (goldfish) - 1,789 d  
- 0.25 µg/l

Bioconcentration factor (BCF): 155,986

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

No data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 2809 Class: 8 (6.1) Packing group: III

Proper shipping name: A,W Mercury

Reportable Quantity (RQ): 1 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 2809 Class: 8 (6.1) Packing group: III EMS-No: F-A, S-B

Proper shipping name: MERCURY

Marine pollutant:yes

**IATA**

UN number: 2809 Class: 8 (6.1) Packing group: III

Proper shipping name: Mercury

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2007-07-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2007-07-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2007-07-01

### California Prop. 65 Components

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

CAS-No.	Revision Date
7439-97-6	2013-12-20

Mercury

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H330	Fatal if inhaled.
H360	May damage fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Repr.	Reproductive toxicity

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.12

Revision Date: 12/02/2015

Print Date: 05/01/2016

## SAFETY DATA SHEET

Version 6.0  
Revision Date 03/14/2018  
Print Date 01/21/2019

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Methyl Ethyl Ketone, United States Pharmacopeia (USP) Reference Standard

Product Number : 1430101  
Brand : US Pharmacopeia

CAS-No. : 78-93-3

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES

Telephone : +1 314 771-5765  
Fax : +1 800 325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

**GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**  
Flammable liquids (Category 2), H225

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)  
H225 : Highly flammable liquid and vapour.  
H319 : Causes serious eye irritation.  
H336 : May cause drowsiness or dizziness.

Precautionary statement(s)	
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Molecular weight	:	72.11 g/mol
CAS-No.	:	78-93-3

#### Hazardous components

Component	Classification	Concentration
<b>Ethyl methyl ketone</b>		
	Flam. Liq. 2; Eye Irrit. 2A; STOT SE 3; H225, H319, H336	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

- 4.2 Most important symptoms and effects, both acute and delayed**  
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11
- 4.3 Indication of any immediate medical attention and special treatment needed**  
No data available
- 

## 5. FIREFIGHTING MEASURES

- 5.1 Extinguishing media**  
**Suitable extinguishing media**  
Dry powder Dry sand  
**Unsuitable extinguishing media**  
Do NOT use water jet.
- 5.2 Special hazards arising from the substance or mixture**  
Carbon oxides
- 5.3 Advice for firefighters**  
Wear self-contained breathing apparatus for firefighting if necessary.
- 5.4 Further information**  
Use water spray to cool unopened containers.
- 

## 6. ACCIDENTAL RELEASE MEASURES

- 6.1 Personal precautions, protective equipment and emergency procedures**  
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.  
For personal protection see section 8.
- 6.2 Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.
- 6.3 Methods and materials for containment and cleaning up**  
Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).
- 6.4 Reference to other sections**  
For disposal see section 13.
- 

## 7. HANDLING AND STORAGE

- 7.1 Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.  
For precautions see section 2.2.
- 7.2 Conditions for safe storage, including any incompatibilities**  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
Storage class (TRGS 510): 3: Flammable liquids
- 7.3 Specific end use(s)**  
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated
- 

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

- 8.1 Control parameters**  
**Components with workplace control parameters**
- 8.2 Exposure controls**  
**Appropriate engineering controls**  
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

### Body Protection

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-87 °C (-125 °F)
f) Initial boiling point and boiling range	79 - 80 °C (174 - 176 °F)
g) Flash point	-3 °C (27 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 10.1 %(V) Lower explosion limit: 1.8 %(V)
k) Vapour pressure	95 hPa at 20 °C (68 °F)
l) Vapour density	2.49 - (Air = 1.0)
m) Relative density	0.805 g/cm <sup>3</sup>
n) Water solubility	soluble
o) Partition coefficient: n-octanol/water	log Pow: 0.29
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available



## 9.2 Other safety information

Surface tension 24.6 mN/m at 20 °C (68 °F)

Relative vapour density 2.49 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Oxidizing agents, Strong reducing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 2,737 mg/kg

LC50 Inhalation - Mouse - 4 h - 32,000 mg/m<sup>3</sup>

LC50 Inhalation - Mammal - 38,000 mg/m<sup>3</sup>

LD50 Dermal - Rabbit - 6,480 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Irritating to eyes.

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

No data available

No data available

**Specific target organ toxicity - single exposure**

May cause drowsiness or dizziness.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

Central nervous system depression, Gastrointestinal disturbance, narcosis

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish                      mortality NOEC - Cyprinodon variegatus (sheepshead minnow) - 400 mg/l - 96 h(Ethyl methyl ketone)

LC50 - Pimephales promelas (fathead minnow) - 3,130 - 3,320 mg/l - 96 h(Ethyl methyl ketone)

Toxicity to daphnia and other aquatic invertebrates      LC50 - Daphnia magna (Water flea) - > 520 mg/l - 48 h(Ethyl methyl ketone)

EC50 - Daphnia magna (Water flea) - 7,060 mg/l - 24 h(Ethyl methyl ketone)

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available(Ethyl methyl ketone)

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

No data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Contact a licensed professional waste disposal service to dispose of this material. Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1193              Class: 3                              Packing group: II

Proper shipping name: Ethyl methyl ketone

Reportable Quantity (RQ)              :              5000 lbs

Poison Inhalation Hazard: No

**IMDG**

UN number: 1193      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: ETHYL METHYL KETONE

**IATA**

UN number: 1193      Class: 3      Packing group: II  
Proper shipping name: Ethyl methyl ketone

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Ethyl methyl ketone	78-93-3	

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

H225      Highly flammable liquid and vapour.  
H319      Causes serious eye irritation.  
H336      May cause drowsiness or dizziness.

**HMIS Rating**

Health hazard:            2  
Chronic Health Hazard:    \*  
Flammability:            3  
Physical Hazard            0

**NFPA Rating**

Health hazard:            2  
Fire Hazard:              3  
Reactivity Hazard:        0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956  
Version: 6.0

Revision Date: 03/14/2018

Print Date: 01/21/2019

## SAFETY DATA SHEET

according to Regulation (EC) No. 1907/2006

Version 6.0 Revision Date 10.11.2016

Print Date 21.01.2019

GENERIC EU MSDS - NO COUNTRY SPECIFIC DATA - NO OEL DATA

**SECTION 1: Identification of the substance/mixture and of the company/undertaking****1.1 Product identifiers**

Product name : Methylene chloride

Product Number : M1550000

Brand : Sigma-Aldrich

REACH No. : A registration number is not available for this substance as the substance or its uses are exempted from registration, the annual tonnage does not require a registration or the registration is envisaged for a later registration deadline.

CAS-No. : 75-09-2

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Manufacture of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich Inc.  
3050 Spruce Street  
ST. LOUIS MO 63103  
UNITED STATES

Telephone : +1 314 771-5765

Fax : +1 800 325-5052

**1.4 Emergency telephone number**

Emergency Phone # : (314) 776-6555

**SECTION 2: Hazards identification****2.1 Classification of the substance or mixture****Classification according to Regulation (EC) No 1272/2008**

Skin irritation (Category 2), H315

Eye irritation (Category 2), H319

Carcinogenicity (Category 2), H351

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Specific target organ toxicity - repeated exposure, Oral (Category 2), Liver, Blood, H373

Specific target organ toxicity - repeated exposure, Inhalation (Category 2), Central nervous system, H373

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 Label elements****Labelling according Regulation (EC) No 1272/2008**

Pictogram



Signal word

Warning

Hazard statement(s)

H315

Causes skin irritation.

H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H373	May cause damage to organs (Liver, Blood) through prolonged or repeated exposure if swallowed.
H373	May cause damage to organs (Central nervous system) through prolonged or repeated exposure if inhaled.

Precautionary statement(s)

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

Supplemental Hazard Statements none

### 2.3 Other hazards

This substance/mixture contains no components considered to be either persistent, bioaccumulative and toxic (PBT), or very persistent and very bioaccumulative (vPvB) at levels of 0.1% or higher.

---

## SECTION 3: Composition/information on ingredients

### 3.1 Substances

Formula	:	CH <sub>2</sub> Cl <sub>2</sub>
Molecular weight	:	84.93 g/mol
CAS-No.	:	75-09-2

#### Hazardous ingredients according to Regulation (EC) No 1272/2008

Component	Classification	Concentration
<b>Methylene chloride</b>		
CAS-No.	75-09-2	<= 100 %
EC-No.	200-838-9	
Index-No.	602-004-00-3	
	Skin Irrit. 2; Eye Irrit. 2; Carc. 2; STOT SE 3; STOT RE 2; H315, H319, H351, H336, H335, H373, H373	

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## SECTION 4: First aid measures

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## SECTION 5: Firefighting measures

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

No data available

---

## SECTION 6: Accidental release measures

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation.

Evacuate personnel to safe areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## SECTION 7: Handling and storage

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Non Combustible Liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## SECTION 8: Exposure controls/personal protection

### 8.1 Control parameters

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of

contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

The selected protective gloves have to satisfy the specifications of EU Directive 89/686/EEC and the standard EN 374 derived from it.

#### **Body Protection**

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engine protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## **SECTION 9: Physical and chemical properties**

### **9.1 Information on basic physical and chemical properties**

a) Appearance	Form: liquid Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-97.0 °C
f) Initial boiling point and boiling range	40.0 °C at 1,013.2 hPa
g) Flash point	No data available
h) Evaporation rate	0.71
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 19 %(V) Lower explosion limit: 12 %(V)
k) Vapour pressure	470.9 hPa at 20.0 °C
l) Vapour density	2.93 - (Air = 1.0)
m) Relative density	1.32 g/cm <sup>3</sup>
n) Water solubility	slightly soluble
o) Partition coefficient: n-octanol/water	log Pow: 1.25
p) Auto-ignition temperature	556.1 °C 662.0 °C
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available



## 9.2 Other safety information

Relative vapour density 2.93 - (Air = 1.0)

---

## SECTION 10: Stability and reactivity

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

### 10.4 Conditions to avoid

Heat, flames and sparks. Exposure to sunlight.

### 10.5 Incompatible materials

Alkali metals, Aluminum, Strong oxidizing agents, Bases, Amines, Magnesium, Strong acids and strong bases, Vinyl compounds

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas  
In the event of fire: see section 5

---

## SECTION 11: Toxicological information

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - > 2,000 mg/kg(Methylene chloride)

LC50 Inhalation - Rat - 52,000 mg/m<sup>3</sup>(Methylene chloride)

LD50 Dermal - Rat - > 2,000 mg/kg(Methylene chloride)  
(OECD Test Guideline 402)

#### Skin corrosion/irritation

Skin - Rabbit(Methylene chloride)

Result: Irritating to skin. - 24 h  
(Draize Test)

#### Serious eye damage/eye irritation

Eyes - Rabbit(Methylene chloride)

Result: Irritating to eyes. - 24 h  
(Draize Test)

#### Respiratory or skin sensitisation

No data available(Methylene chloride)

#### Germ cell mutagenicity

(Methylene chloride)

Rat

DNA damage

#### Carcinogenicity

Limited evidence of carcinogenicity in animal studies(Methylene chloride)

Suspected human carcinogens(Methylene chloride)

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

#### Reproductive toxicity

No data available(Methylene chloride)

**Specific target organ toxicity - single exposure**

May cause respiratory irritation.(Methylene chloride)

May cause drowsiness or dizziness.(Methylene chloride)

**Specific target organ toxicity - repeated exposure**

Inhalation - May cause damage to organs through prolonged or repeated exposure. - Central nervous system

Oral - May cause damage to organs through prolonged or repeated exposure. - Liver, Blood

**Aspiration hazard**

No data available(Methylene chloride)

**Additional Information**

RTECS: Not available

Dichloromethane is metabolized in the body producing carbon monoxide which blood, reducing the oxygen-carrying capacity of the blood., Acts as a simple asphyxiant by displacing air., anesthetic effects, Difficulty in breathing, Headache, Dizziness, Prolonged or repeated contact with skin may cause:, defatting, Dermatitis, Contact with eyes can cause:, Redness, Blurred vision, Provokes tears., Effects due to ingestion may include:, Gastrointestinal discomfort, Central nervous system depression, Paresthesia., Drowsiness, Convulsions, Conjunctivitis., Pulmonary edema. Effects may be delayed., Irregular breathing., Stomach/intestinal disorders, Nausea, Vomiting, Increased liver enzymes., Weakness, Heavy or prolonged skin exposure may result in the absorption of harmful amounts of material., Abdominal pain(Methylene chloride)

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.(Methylene chloride)

---

**SECTION 12: Ecological information****12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 193.00 mg/l - 96 h(Methylene chloride)

NOEC - Cyprinodon variegatus (sheepshead minnow) - 130 mg/l - 96 h(Methylene chloride)

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 1,682.00 mg/l - 48 h(Methylene chloride)

**12.2 Persistence and degradability**

Biodegradability Result: < 26 % - Not readily biodegradable. (OECD Test Guideline 301C)

**12.3 Bioaccumulative potential**

Does not bioaccumulate.

**12.4 Mobility in soil**

No data available(Methylene chloride)

**12.5 Results of PBT and vPvB assessment**

This substance/mixture contains no components considered to be either persistent, bioaccumulative and toxic (PBT), or very persistent and very bioaccumulative (vPvB) at levels of 0.1% or higher.

**12.6 Other adverse effects**

---

**SECTION 13: Disposal considerations****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company.

**Contaminated packaging**  
Dispose of as unused product.

---

**SECTION 14: Transport information****14.1 UN number**

ADR/RID:

IMDG:

IATA:

**14.2 UN proper shipping name**

ADR/RID:

IMDG:

IATA:

**14.3 Transport hazard class(es)**

ADR/RID:

IMDG:

IATA:

**14.4 Packaging group**

ADR/RID:

IMDG:

IATA:

**14.5 Environmental hazards**

ADR/RID:

IMDG Marine pollutant:

IATA:

**14.6 Special precautions for user**

No data available

---

**SECTION 15: Regulatory information****15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture**

This safety datasheet complies with the requirements of Regulation (EC) No. 1907/2006.

**15.2 Chemical safety assessment**

For this product a chemical safety assessment was not carried out

---

**SECTION 16: Other information****Full text of H-Statements referred to under sections 2 and 3.**

H315	Causes skin irritation.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure if inhaled.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Methyl tert-butyl ether solution

Product Number : CRM48483

Brand : Supelco

Index-No. : 603-001-00-X

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Acute toxicity, Oral (Category 3), H301

Acute toxicity, Inhalation (Category 3), H331

Acute toxicity, Dermal (Category 3), H311

Specific target organ toxicity - single exposure (Category 1), H370

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H301 + H311 + H331

Toxic if swallowed, in contact with skin or if inhaled.

H370

Causes damage to organs.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P307 + P311	IF exposed: Call a POISON CENTER or doctor/ physician.
P322	Specific measures (see supplemental first aid instructions on this label).
P330	Rinse mouth.
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.2 Mixtures

#### Hazardous components

Component	Classification	Concentration
<b>Methanol</b>		
CAS-No.	67-56-1	90 - 100 %
EC-No.	200-659-6	
Index-No.	603-001-00-X	
Registration number	01-2119433307-44-XXXX	

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

#### 5.2 Special hazards arising from the substance or mixture

No data available

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

Use water spray to cool unopened containers.

---

### 6. ACCIDENTAL RELEASE MEASURES

#### 6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

#### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

#### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

#### 6.4 Reference to other sections

For disposal see section 13.

---

### 7. HANDLING AND STORAGE

#### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

#### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store at room temperature.

#### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

### 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

#### 8.1 Control parameters

##### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Methanol	67-56-1	TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Headache Nausea Dizziness Eye damage		

		Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		STEL	250.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Headache Nausea Dizziness Eye damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	200.000000 ppm 260.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	250.000000 ppm 325.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	200.000000 ppm 260.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Headache Nausea Dizziness Eye damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		STEL	250 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Headache Nausea Dizziness Eye damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Danger of cutaneous absorption		
		TWA	200 ppm 260 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	250 ppm 325 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	200 ppm 260 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		STEL	250 ppm 325 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		

		TWA	200 ppm 260 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		
		C	1,000 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		PEL	200 ppm 260 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		
		STEL	250 ppm 325 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Methanol	67-56-1	Methanol	15.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
		Methanol	15 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

## 8.2 Exposure controls

### Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.



### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                            |
|-------------------------------------------------|--------------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                                                         |
| b) Odour                                        | pungent                                                                                    |
| c) Odour Threshold                              | No data available                                                                          |
| d) pH                                           | No data available                                                                          |
| e) Melting point/freezing point                 | Melting point/range: -98.0 °C (-144.4 °F)                                                  |
| f) Initial boiling point and boiling range      | 64.0 - 65.0 °C (147.2 - 149.0 °F) at 1,013 hPa (760 mmHg)                                  |
| g) Flash point                                  | 9.7 °C (49.5 °F) - closed cup                                                              |
| h) Evaporation rate                             | No data available                                                                          |
| i) Flammability (solid, gas)                    | No data available                                                                          |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 36 %(V)<br>Lower explosion limit: 6 %(V)                            |
| k) Vapour pressure                              | 546.6 hPa (410.0 mmHg) at 50.0 °C (122.0 °F)<br>130.3 hPa (97.7 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density                               | No data available                                                                          |
| m) Relative density                             | 0.79 g/cm <sup>3</sup> at 20 °C (68 °F)                                                    |
| n) Water solubility                             | completely miscible                                                                        |
| o) Partition coefficient: n-octanol/water       | No data available                                                                          |
| p) Auto-ignition temperature                    | No data available                                                                          |
| q) Decomposition temperature                    | No data available                                                                          |
| r) Viscosity                                    | No data available                                                                          |
| s) Explosive properties                         | No data available                                                                          |
| t) Oxidizing properties                         | No data available                                                                          |

### 9.2 Other safety information

Dissociation constant 15.3

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air. Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

Heat, flames and sparks. Extremes of temperature and direct sunlight.

### 10.5 Incompatible materials

Acid chlorides, Acid anhydrides, Oxidizing agents, Alkali metals, Reducing agents, Acids

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

#### Additional Information

RTECS: Not available

Methyl alcohol may be fatal or cause blindness if swallowed., Cannot be made non-poisonous., Effects due to ingestion may include:, Nausea, Headache, Vomiting, Gastrointestinal disturbance, Dizziness, Weakness, Confusion., Drowsiness, Unconsciousness, May cause convulsions.

Stomach - Irregularities - Based on Human Evidence  
Stomach - Irregularities - Based on Human Evidence  
Central nervous system - (tert-Butyl methyl ether)

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1230      Class: 3      Packing group: II

Proper shipping name: Methanol, solution

Reportable Quantity (RQ):

Poison Inhalation Hazard: No

### IMDG

UN number: 1230      Class: 3 (6.1)      Packing group: II      EMS-No: F-E, S-D

Proper shipping name: METHANOL, SOLUTION

### IATA

UN number: 1230      Class: 3 (6.1)      Packing group: II

Proper shipping name: Methanol, solution

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Methanol	67-56-1	2007-07-01

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

Methanol	CAS-No. 67-56-1	Revision Date 2007-07-01
----------	--------------------	-----------------------------

**Pennsylvania Right To Know Components**

Methanol	CAS-No. 67-56-1	Revision Date 2007-07-01
tert-Butyl methyl ether	1634-04-4	2007-07-01

**New Jersey Right To Know Components**

Methanol	CAS-No. 67-56-1	Revision Date 2007-07-01
----------	--------------------	-----------------------------

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H301	Toxic if swallowed.
H301 + H311 + H331	Toxic if swallowed, in contact with skin or if inhaled.
H311	Toxic in contact with skin.
H331	Toxic if inhaled.
H370	Causes damage to organs.
STOT SE	Specific target organ toxicity - single exposure

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.8

Revision Date: 10/03/2017

Print Date: 01/21/2019

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Naphthalene

Product Number : 84679  
Brand : Sigma-Aldrich  
Index-No. : 601-052-00-2

CAS-No. : 91-20-3

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable solids (Category 2), H228  
Acute toxicity, Oral (Category 4), H302  
Carcinogenicity (Category 2), H351  
Acute aquatic toxicity (Category 1), H400  
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H228 Flammable solid.  
H302 Harmful if swallowed.  
H351 Suspected of causing cancer.  
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and understood.  
P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>10</sub> H <sub>8</sub>
Molecular weight	: 128.17 g/mol
CAS-No.	: 91-20-3
EC-No.	: 202-049-5
Index-No.	: 601-052-00-2
Registration number	: 01-2119561346-37-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Naphthalene</b>	Flam. Sol. 2; Acute Tox. 4; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H228, H302, H351, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Keep in suitable, closed containers for disposal. Contain spillage, pick up with an electrically protected vacuum cleaner or by wet-brushing and transfer to a container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs. Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): 4.1B: Flammable solid hazardous materials

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Naphthalene	91-20-3	TWA	10 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Hemolytic anemia Upper Respiratory Tract irritation Cataract Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		

		TWA	10 ppm 50 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		ST	15 ppm 75 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		TWA	10 ppm 50 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m <sup>3</sup> is approximate.		
		PEL	0.1 ppm 0.5 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	1-Naphthol + 2-Naphthol			ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the



sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                                                       |
|-------------------------------------------------|---------------------------------------------------------------------------------------|
| a) Appearance                                   | Form: flakes, granules<br>Colour: white                                               |
| b) Odour                                        | aromatic                                                                              |
| c) Odour Threshold                              | No data available                                                                     |
| d) pH                                           | No data available                                                                     |
| e) Melting point/freezing point                 | Melting point/range: 79.5 - 81.0 °C (175.1 - 177.8 °F)                                |
| f) Initial boiling point and boiling range      | 218 °C (424 °F) - lit.                                                                |
| g) Flash point                                  | 80.0 °C (176.0 °F) - closed cup                                                       |
| h) Evaporation rate                             | No data available                                                                     |
| i) Flammability (solid, gas)                    | No data available                                                                     |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 5.9 %(V)<br>Lower explosion limit: 0.9 %(V)                    |
| k) Vapour pressure                              | 1.3 hPa (1.0 mmHg) at 53.0 °C (127.4 °F)<br>0.04 hPa (0.03 mmHg) at 25.0 °C (77.0 °F) |
| l) Vapour density                               | No data available                                                                     |
| m) Relative density                             | 1.085 g/cm <sup>3</sup> at 24.7 °C (76.5 °F)                                          |
| n) Water solubility                             | 0.0308 g/l at 25 °C (77 °F) - OECD Test Guideline 105 - slightly soluble              |
| o) Partition coefficient: n-octanol/water       | log Pow: 3.4 at 25 °C (77 °F)                                                         |
| p) Auto-ignition temperature                    | 526.0 °C (978.8 °F)                                                                   |
| q) Decomposition temperature                    | No data available                                                                     |
| r) Viscosity                                    | 1.05 mm <sup>2</sup> /s at 81.5 °C (178.7 °F) -                                       |
| s) Explosive properties                         | No data available                                                                     |
| t) Oxidizing properties                         | No data available                                                                     |

### **9.2 Other safety information**

- |                 |                                  |
|-----------------|----------------------------------|
| Surface tension | 31.8 mN/m at 100.0 °C (212.0 °F) |
|-----------------|----------------------------------|

---

## **10. STABILITY AND REACTIVITY**

### **10.1 Reactivity**

No data available

### **10.2 Chemical stability**

Stable under recommended storage conditions.

### **10.3 Possibility of hazardous reactions**

No data available

#### 10.4 Conditions to avoid

Heat, flames and sparks.

#### 10.5 Incompatible materials

Strong oxidizing agents

#### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

### 11. TOXICOLOGICAL INFORMATION

#### 11.1 Information on toxicological effects

##### Acute toxicity

LD50 Oral - Rat - 490.0 mg/kg

LC50 Inhalation - Rat - male and female - 4 h - > 0.4 mg/l  
(OECD Test Guideline 403)

LD50 Dermal - Rabbit - 20,000 mg/kg

No data available

##### Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation - 24 h

##### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation

##### Respiratory or skin sensitisation

Maximisation Test - Guinea pig

Result: Does not cause skin sensitisation.

(OECD Test Guideline 406)

##### Germ cell mutagenicity

Ames test

S. typhimurium

Result: negative

Rat - male

Result: negative

##### Carcinogenicity

Carcinogenicity - Rat - male and female - inhalation (vapour)

Tumorigenic: Tumors at site of application.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Naphthalene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Naphthalene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

##### Reproductive toxicity

No data available

##### Specific target organ toxicity - single exposure

No data available

##### Specific target organ toxicity - repeated exposure

No data available

##### Aspiration hazard

No data available

##### Additional Information

Repeated dose toxicity  
RTECS: QJ0525000

Rat - male and female - Oral - NOAEL : 100 mg/kg - LOAEL : 400 mg/kg - OECD Test Guideline 408

Absorption into the body leads to the formation of methemoglobin which in sufficient concentration causes cyanosis. Onset may be delayed 2 to 4 hours or longer., Naphthalene is retinotoxic and systemic absorption of its vapors above 15ppm, may result in: cataracts, optic neuritis, corneal injury, Eye irritation, Ingestion may provoke the following symptoms: hemolytic anemia, hemoglobinuria, Nausea, Headache, Vomiting, Gastrointestinal disturbance, Convulsions, anemia, Kidney injury may occur., Seizures., Coma.

Heart -

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish flow-through test LC50 - Pimephales promelas (fathead minnow) - 7.9 mg/l - 96 h (OECD Test Guideline 203)

Toxicity to daphnia and other aquatic invertebrates static test EC50 - Daphnia magna (Water flea) - 2.16 mg/l - 48 h

### 12.2 Persistence and degradability

Biodegradability aerobic - Exposure time 28 d  
Result: 2 % - Not readily biodegradable.

### 12.3 Bioaccumulative potential

Bioaccumulation Fish

Bioconcentration factor (BCF): 427 - 1,158

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1334 Class: 4.1 Packing group: III  
Proper shipping name: Naphthalene, crude  
Reportable Quantity (RQ): 100 lbs Marine pollutant: yes  
Poison Inhalation Hazard: No

### IMDG

UN number: 1334 Class: 4.1 Packing group: III EMS-No: F-A, S-G  
Proper shipping name: NAPHTHALENE, CRUDE  
Marine pollutant: yes Marine pollutant: yes

**IATA**

UN number: 1334      Class: 4.1      Packing group: III  
 Proper shipping name: Naphthalene, crude

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-03-01

**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Naphthalene	91-20-3	2007-09-28

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Flam. Sol.	Flammable solids
H228	Flammable solid.
H302	Harmful if swallowed.
H351	Suspected of causing cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
 Product Safety – Americas Region  
 1-800-521-8956

Version: 5.10

Revision Date: 06/21/2018

Print Date: 11/10/2018



## SAFETY DATA SHEET

Version 4.4  
Revision Date 07/09/2014  
Print Date 11/10/2018

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Propylbenzene

Product Number : P52407  
Brand : Aldrich  
Index-No. : 601-024-00-X

CAS-No. : 103-65-1

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Manufacture of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401  
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.  
H304 May be fatal if swallowed and enters airways.  
H335 May cause respiratory irritation.  
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.  
P233 Keep container tightly closed.  
P240 Ground/bond container and receiving equipment.  
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P312	Call a POISON CENTER or doctor/ physician if you feel unwell.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Synonyms	: 1-Phenylpropane
Formula	: C <sub>9</sub> H <sub>12</sub>
Molecular Weight	: 120.19 g/mol
CAS-No.	: 103-65-1
EC-No.	: 203-132-9
Index-No.	: 601-024-00-X

#### Hazardous components

Component	Classification	Concentration
<b>Propylbenzene</b>	Flam. Liq. 3; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H335, H411	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

- 4.2 Most important symptoms and effects, both acute and delayed**  
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11
- 4.3 Indication of any immediate medical attention and special treatment needed**  
no data available
- 

## 5. FIREFIGHTING MEASURES

- 5.1 Extinguishing media**  
**Suitable extinguishing media**  
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
- 5.2 Special hazards arising from the substance or mixture**  
Carbon oxides
- 5.3 Advice for firefighters**  
Wear self contained breathing apparatus for fire fighting if necessary.
- 5.4 Further information**  
Use water spray to cool unopened containers.
- 

## 6. ACCIDENTAL RELEASE MEASURES

- 6.1 Personal precautions, protective equipment and emergency procedures**  
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.  
For personal protection see section 8.
- 6.2 Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.
- 6.3 Methods and materials for containment and cleaning up**  
Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).
- 6.4 Reference to other sections**  
For disposal see section 13.
- 

## 7. HANDLING AND STORAGE

- 7.1 Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.  
For precautions see section 2.2.
- 7.2 Conditions for safe storage, including any incompatibilities**  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.
- 7.3 Specific end use(s)**  
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated
- 

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

- 8.1 Control parameters**  
**Components with workplace control parameters**  
Contains no substances with occupational exposure limit values.
- 8.2 Exposure controls**  
**Appropriate engineering controls**  
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.



## Personal protective equipment

### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                              |
|--------------------------------------------|----------------------------------------------|
| a) Appearance                              | Form: liquid, clear<br>Colour: colourless    |
| b) Odour                                   | no data available                            |
| c) Odour Threshold                         | no data available                            |
| d) pH                                      | no data available                            |
| e) Melting point/freezing point            | Melting point/range: -99 °C (-146 °F) - lit. |
| f) Initial boiling point and boiling range | 159 °C (318 °F) - lit.                       |
| g) Flash point                             | 42.0 °C (107.6 °F) - closed cup              |
| h) Evaporation rate                        | no data available                            |
| i) Flammability (solid, gas)               | no data available                            |

j) Upper/lower flammability or explosive limits	Upper explosion limit: 6 %(V) Lower explosion limit: 0.8 %(V)
k) Vapour pressure	no data available
l) Vapour density	no data available
m) Relative density	0.862 g/cm <sup>3</sup> at 25 °C (77 °F)
n) Water solubility	slightly soluble
o) Partition coefficient: n-octanol/water	no data available
p) Auto-ignition temperature	450.0 °C (842.0 °F)
q) Decomposition temperature	no data available
r) Viscosity	no data available
s) Explosive properties	no data available
t) Oxidizing properties	no data available

## 9.2 Other safety information

no data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

no data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

no data available

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - no data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - rat - 6,040 mg/kg

Remarks: Behavioral:Somnolence (general depressed activity).

LC50 Inhalation - rat - 2 h - 65000 ppm

Dermal: no data available

no data available

#### Skin corrosion/irritation

no data available

#### Serious eye damage/eye irritation

no data available

#### Respiratory or skin sensitisation

no data available

**Germ cell mutagenicity**

no data available

**Carcinogenicity**

- IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
- ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.
- NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
- OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

no data available

no data available

**Specific target organ toxicity - single exposure**

May cause respiratory irritation.

**Specific target organ toxicity - repeated exposure**

no data available

**Aspiration hazard**

May be fatal if swallowed and enters airways.

**Additional Information**

RTECS: DA8750000

Damage to the lungs., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney -

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

- Toxicity to fish LC50 - *Oncorhynchus mykiss* (rainbow trout) - 1.55 mg/l - 96.0 h
- Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - *Daphnia magna* (Water flea) - 2 mg/l - 24 h

**12.2 Persistence and degradability**

no data available

**12.3 Bioaccumulative potential**

no data available

**12.4 Mobility in soil**

no data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Toxic to aquatic life.

Avoid release to the environment.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 2364      Class: 3      Packing group: III  
Proper shipping name: n-Propyl benzene  
Marine pollutant: No  
Poison Inhalation Hazard: No

### IMDG

UN number: 2364      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: n-PROPYLBENZENE  
Marine pollutant: No

### IATA

UN number: 2364      Class: 3      Packing group: III  
Proper shipping name: n-Propylbenzene

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Propylbenzene	103-65-1	1993-04-24

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Propylbenzene	103-65-1	1993-04-24

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Propylbenzene	103-65-1	1993-04-24

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity

Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H335	May cause respiratory irritation.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.
STOT SE	Specific target organ toxicity - single exposure

#### **HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

#### **NFPA Rating**

Health hazard:	2
Fire Hazard:	2
Reactivity Hazard:	0

#### **Further information**

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

#### **Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.4

Revision Date: 07/09/2014

Print Date: 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Toluene

Product Number : 244511  
Brand : Sigma-Aldrich  
Index-No. : 601-021-00-3

CAS-No. : 108-88-3

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USATelephone : +1 800-325-5832  
Fax : +1 800-325-5052**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Reproductive toxicity (Category 2), H361

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Specific target organ toxicity - repeated exposure (Category 2), H373

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H304

May be fatal if swallowed and enters airways.

H315

Causes skin irritation.

H336

May cause drowsiness or dizziness.

H361

Suspected of damaging fertility or the unborn child.

H373

May cause damage to organs through prolonged or repeated exposure.

H401

Toxic to aquatic life.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>7</sub> H <sub>8</sub>
Molecular weight	: 92.14 g/mol
CAS-No.	: 108-88-3
EC-No.	: 203-625-9
Index-No.	: 601-021-00-3
Registration number	: 01-2119471310-51-XXXX

### Hazardous components

Component	Classification	Concentration
<b>Toluene</b>	Flam. Liq. 2; Skin Irrit. 2; Repr. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; H225, H304, H315, H336, H361, H373, H401	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.



## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Handle and store under inert gas.

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Toluene	108-88-3	TWA	100 ppm 375 mg/m <sup>3</sup>	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		STEL	150 ppm 560 mg/m <sup>3</sup>	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
	Remarks	Z37.12-1967		
		CEIL	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.12-1967		
		Peak	500 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.12-1967		
		TWA	20 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Visual impairment Female reproductive Pregnancy loss 2015 Adoption Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	100 ppm 375 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits
		ST	150 ppm 560 mg/m <sup>3</sup>	USA. NIOSH Recommended Exposure Limits

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Toluene	108-88-3	Toluene	0.0200 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Prior to last shift of workweek			
		Toluene	0.0300 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		o-Cresol	0.3000 mg/g	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		Toluene	0.02 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		Prior to last shift of workweek			

		Toluene	0.03 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		o-Cresol	0.3mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

#### Derived No Effect Level (DNEL)

Application Area	Exposure routes	Health effect	Value
Workers	Inhalation	Acute systemic effects	384 mg/m <sup>3</sup>
Workers	Inhalation	Acute local effects	384 mg/m <sup>3</sup>
Workers	Skin contact	Long-term systemic effects	384mg/kg BW/d
Workers	Inhalation	Long-term systemic effects	192 mg/m <sup>3</sup>
Workers	Inhalation	Long-term local effects	192 mg/m <sup>3</sup>
Consumers	Inhalation	Acute systemic effects	226 mg/m <sup>3</sup>
Consumers	Inhalation	Acute local effects	226 mg/m <sup>3</sup>
Consumers	Skin contact	Long-term systemic effects	226mg/kg BW/d
Consumers	Inhalation	Long-term systemic effects	56.5 mg/m <sup>3</sup>
Consumers	Ingestion	Long-term systemic effects	8.13mg/kg BW/d

#### Predicted No Effect Concentration (PNEC)

Compartment	Value
Soil	2.89 mg/kg
Marine water	0.68 mg/l
Fresh water	0.68 mg/l
Marine sediment	16.39 mg/kg
Fresh water sediment	16.39 mg/kg
Sewage treatment plant	13.61 mg/l
Aquatic intermittent release	0.68 mg/l

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### **Body Protection**

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

#### **Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

#### **Control of environmental exposure**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## **9. PHYSICAL AND CHEMICAL PROPERTIES**

### **9.1 Information on basic physical and chemical properties**

- |                                                 |                                                                  |
|-------------------------------------------------|------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid<br>Colour: colourless                               |
| b) Odour                                        | aromatic                                                         |
| c) Odour Threshold                              | No data available                                                |
| d) pH                                           | No data available                                                |
| e) Melting point/freezing point                 | Melting point/range: -93 °C (-135 °F)                            |
| f) Initial boiling point and boiling range      | 110 - 111 °C (230 - 232 °F)                                      |
| g) Flash point                                  | 4.0 °C (39.2 °F) - closed cup                                    |
| h) Evaporation rate                             | No data available                                                |
| i) Flammability (solid, gas)                    | No data available                                                |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7 %(V)<br>Lower explosion limit: 1.2 %(V) |
| k) Vapour pressure                              | 29.1 hPa (21.8 mmHg) at 20.0 °C (68.0 °F)                        |
| l) Vapour density                               | No data available                                                |
| m) Relative density                             | 0.865 g/mL at 25 °C (77 °F)                                      |
| n) Water solubility                             | 0.5 g/l at 15 °C (59 °F)                                         |
| o) Partition coefficient: n-octanol/water       | No data available                                                |
| p) Auto-ignition temperature                    | 535.0 °C (995.0 °F)                                              |
| q) Decomposition temperature                    | No data available                                                |
| r) Viscosity                                    | No data available                                                |
| s) Explosive properties                         | No data available                                                |
| t) Oxidizing properties                         | No data available                                                |

### **9.2 Other safety information**

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - > 5,580 mg/kg

LC50 Inhalation - Rat - 4 h - 12,500 - 28,800 mg/m<sup>3</sup>

LD50 Dermal - Rabbit - 12,196 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation - 24 h

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Rat

Liver

DNA damage

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

#### Reproductive toxicity

Damage to fetus possible

Suspected human reproductive toxicant

Reproductive toxicity - Rat - Inhalation

Paternal Effects: Spermatogenesis (including genetic material, sperm morphology, motility, and count).

Experiments have shown reproductive toxicity effects in male and female laboratory animals.

Developmental Toxicity - Rat - Oral

Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

**Specific target organ toxicity - single exposure**

No data available

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: XS5250000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

---

**12. ECOLOGICAL INFORMATION**

**12.1 Toxicity**

Toxicity to fish	LC50 - Oncorhynchus mykiss (rainbow trout) - 7.63 mg/l - 96 h
	NOEC - Pimephales promelas (fathead minnow) - 5.44 mg/l - 7 d
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 8.00 mg/l - 24 h
	Immobilization EC50 - Daphnia magna (Water flea) - 6 mg/l - 48 h
Toxicity to algae	EC50 - Chlorella vulgaris (Fresh water algae) - 245.00 mg/l - 24 h
	EC50 - Pseudokirchneriella subcapitata (green algae) - 10.00 mg/l - 24 h

**12.2 Persistence and degradability**

Biodegradability Result: - Readily biodegradable.

**12.3 Bioaccumulative potential**

Bioaccumulation Leuciscus idus (Golden orfe) - 3 d  
- 0.05 mg/l

Bioconcentration factor (BCF): 90

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life.

---

**13. DISPOSAL CONSIDERATIONS**

**13.1 Waste treatment methods**

**Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION**

**DOT (US)**

UN number: 1294      Class: 3      Packing group: II  
Proper shipping name: Toluene  
Reportable Quantity (RQ): 1000 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1294      Class: 3      Packing group: II      EMS-No: F-E, S-D  
Proper shipping name: TOLUENE

**IATA**

UN number: 1294      Class: 3      Packing group: II  
Proper shipping name: Toluene

---

**15. REGULATORY INFORMATION**

**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**New Jersey Right To Know Components**

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

**California Prop. 65 Components**

	CAS-No.	Revision Date
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. Toluene	108-88-3	2009-02-01

---

**16. OTHER INFORMATION**

**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H361	Suspected of damaging fertility or the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure.
H401	Toxic to aquatic life.
Repr.	Reproductive toxicity
Skin Irrit.	Skin irritation

**HMIS Rating**

Health hazard:                      2

Chronic Health Hazard: \*  
Flammability: 3  
Physical Hazard 0

**NFPA Rating**

Health hazard: 2  
Fire Hazard: 3  
Reactivity Hazard: 0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 6.0

Revision Date: 09/21/2017

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Trichloroethylene  
  
Product Number : 251402  
Brand : Sigma-Aldrich  
Index-No. : 602-027-00-9  
  
CAS-No. : 79-01-6

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Skin irritation (Category 2), H315  
Eye irritation (Category 2A), H319  
Germ cell mutagenicity (Category 2), H341  
Carcinogenicity (Category 1B), H350  
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336  
Acute aquatic toxicity (Category 3), H402  
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H315 Causes skin irritation.  
H319 Causes serious eye irritation.  
H336 May cause drowsiness or dizziness.  
H341 Suspected of causing genetic defects.  
H350 May cause cancer.  
H412 Harmful to aquatic life with long lasting effects.



Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P281	Use personal protective equipment as required.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

## 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.1 Substances

Synonyms	:	TCE Trichloroethene
Formula	:	C <sub>2</sub> HCl <sub>3</sub>
Molecular weight	:	131.39 g/mol
CAS-No.	:	79-01-6
EC-No.	:	201-167-4
Index-No.	:	602-027-00-9

#### Hazardous components

Component	Classification	Concentration
<b>Trichloroethylene</b>	Skin Irrit. 2; Eye Irrit. 2A; Muta. 2; Carc. 1B; STOT SE 3; Aquatic Acute 3; Aquatic Chronic 3; H315, H319, H336, H341, H350, H412	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

**If swallowed**

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

**5.2 Special hazards arising from the substance or mixture**

No data available

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

No data available

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Light sensitive. Handle and store under inert gas.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

**7.3 Specific end use(s)**

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Trichloroethylene	79-01-6	TWA	10.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		STEL	25.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		Potential Occupational Carcinogen See Appendix C See Appendix A		
		See Table Z-2		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		Peak	300.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		Peak	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		

		STEL	100 ppm 537 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	25 ppm 135 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

#### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Trichloroacetic acid	15.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		Trichloroethanol	0.5000 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In end-exhaled air	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                   |
|-------------------------------------------------|-------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid, clear<br>Colour: colourless                         |
| b) Odour                                        | No data available                                                 |
| c) Odour Threshold                              | No data available                                                 |
| d) pH                                           | No data available                                                 |
| e) Melting point/freezing point                 | Melting point/range: -84.8 °C (-120.6 °F) - lit.                  |
| f) Initial boiling point and boiling range      | 86.7 °C (188.1 °F) - lit.                                         |
| g) Flash point                                  | No data available                                                 |
| h) Evaporation rate                             | No data available                                                 |
| i) Flammability (solid, gas)                    | No data available                                                 |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 10.5 %(V)<br>Lower explosion limit: 8 %(V) |
| k) Vapour pressure                              | 81.3 hPa (61.0 mmHg) at 20.0 °C (68.0 °F)                         |
| l) Vapour density                               | No data available                                                 |
| m) Relative density                             | 1.463 g/mL at 25 °C (77 °F)                                       |
| n) Water solubility                             | No data available                                                 |
| o) Partition coefficient: n-octanol/water       | log Pow: 2.29log Pow: 5                                           |
| p) Auto-ignition temperature                    | 410.0 °C (770.0 °F)                                               |
| q) Decomposition temperature                    | No data available                                                 |
| r) Viscosity                                    | No data available                                                 |
| s) Explosive properties                         | No data available                                                 |
| t) Oxidizing properties                         | No data available                                                 |

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

## 10.2 Chemical stability

Stable under recommended storage conditions.

## 10.3 Possibility of hazardous reactions

No data available

## 10.4 Conditions to avoid

No data available

## 10.5 Incompatible materials

Oxidizing agents, Strong bases, Magnesium

## 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

LD50 Oral - Rat - 4,920 mg/kg

LC50 Inhalation - Mouse - 4 h - 8450 ppm

LD50 Dermal - Rabbit - > 20,000 mg/kg

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Severe skin irritation - 24 h

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

In vitro tests showed mutagenic effects

#### Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 1 - Group 1: Carcinogenic to humans (Trichloroethylene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Trichloroethylene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

No data available

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

No data available

**Additional Information**

RTECS: KX4550000

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, Exposure to and/or consumption of alcohol may increase toxic effects., Gastrointestinal disturbance, Kidney injury may occur., narcosis  
To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - 41 mg/l - 96.0 h LOEC - other fish - 11 mg/l - 10.0 d NOEC - Oryzias latipes - 40 mg/l - 10.0 d
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 18.00 mg/l - 48 h
Toxicity to algae	IC50 - Pseudokirchneriella subcapitata (green algae) - 175.00 mg/l - 96 h

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

Does not bioaccumulate.

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Harmful to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1710	Class: 6.1	Packing group: III
Proper shipping name: Trichloroethylene		
Reportable Quantity (RQ): 100 lbs		
Poison Inhalation Hazard: No		

**IMDG**

UN number: 1710	Class: 6.1	Packing group: III	EMS-No: F-A, S-A
Proper shipping name: TRICHLOROETHYLENE			

**IATA**

UN number: 1710	Class: 6.1	Packing group: III
-----------------	------------	--------------------

Proper shipping name: Trichloroethylene

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

### California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

Trichloroethylene

CAS-No.	Revision Date
79-01-6	2011-09-01

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Trichloroethylene

CAS-No.	Revision Date
79-01-6	2011-09-01

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H402	Harmful to aquatic life.

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0



**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.10

Revision Date: 01/04/2018

Print Date: 11/10/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : 2,2,4-Trimethylpentane

Product Number : 360066  
Brand : Sigma-Aldrich  
Index-No. : 601-009-00-8

CAS-No. : 540-84-1

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USATelephone : +1 800-325-5832  
Fax : +1 800-325-5052**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Skin irritation (Category 2), H315

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H304

May be fatal if swallowed and enters airways.

H315

Causes skin irritation.

H336

May cause drowsiness or dizziness.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P312	Call a POISON CENTER/doctor if you feel unwell.
P321	Specific treatment (see supplemental first aid instructions on this label).
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: Isooctane
Formula	: C <sub>8</sub> H <sub>18</sub>
Molecular weight	: 114.23 g/mol
CAS-No.	: 540-84-1
EC-No.	: 208-759-1
Index-No.	: 601-009-00-8
Registration number	: 01-2119457965-22-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>2,2,4-Trimethylpentane</b>	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; Aquatic Chronic 1; H225, H304, H315, H336, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

**If inhaled**

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

**In case of skin contact**

Wash off with soap and plenty of water. Consult a physician.

**In case of eye contact**

Flush eyes with water as a precaution.

**If swallowed**

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

**4.2 Most important symptoms and effects, both acute and delayed**

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

**4.3 Indication of any immediate medical attention and special treatment needed**

No data available

---

**5. FIREFIGHTING MEASURES****5.1 Extinguishing media****Suitable extinguishing media**

For small (incipient) fires, use media such as "alcohol" foam, dry chemicals as far as possible. Use very large quantities (flooding) of water applied ineffective. Cool all affected containers with flooding quantities of water.

**5.2 Special hazards arising from the substance or mixture**

Flash back possible over considerable distance., Container explosion may occur under fire conditions.

**5.3 Advice for firefighters**

Wear self-contained breathing apparatus for firefighting if necessary.

**5.4 Further information**

Use water spray to cool unopened containers.

---

**6. ACCIDENTAL RELEASE MEASURES****6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

**6.2 Environmental precautions**

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

**6.3 Methods and materials for containment and cleaning up**

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

**6.4 Reference to other sections**

For disposal see section 13.

---

**7. HANDLING AND STORAGE****7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

**7.2 Conditions for safe storage, including any incompatibilities**

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
2,2,4-Trimethylpentane	540-84-1	TWA	300 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Upper Respiratory Tract irritation		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 482 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 90 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

##### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

##### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

##### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                                |
|-------------------------------------------------|--------------------------------------------------------------------------------|
| a) Appearance                                   | Form: liquid                                                                   |
| b) Odour                                        | No data available                                                              |
| c) Odour Threshold                              | No data available                                                              |
| d) pH                                           | No data available                                                              |
| e) Melting point/freezing point                 | Melting point/range: -107 °C (-161 °F)                                         |
| f) Initial boiling point and boiling range      | 98 - 99 °C (208 - 210 °F)                                                      |
| g) Flash point                                  | -12 °C (10 °F) - closed cup                                                    |
| h) Evaporation rate                             | No data available                                                              |
| i) Flammability (solid, gas)                    | No data available                                                              |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 6 %(V)<br>Lower explosion limit: 1 %(V)                 |
| k) Vapour pressure                              | 55 hPa (41 mmHg) at 21 °C (70 °F)<br>117 hPa (88 mmHg) at 37.80 °C (100.04 °F) |
| l) Vapour density                               | 3.94 - (Air = 1.0)                                                             |
| m) Relative density                             | 0.692 g/mL at 25 °C (77 °F)                                                    |
| n) Water solubility                             | insoluble                                                                      |
| o) Partition coefficient: n-octanol/water       | log Pow: 4.6                                                                   |
| p) Auto-ignition temperature                    | No data available                                                              |
| q) Decomposition temperature                    | No data available                                                              |
| r) Viscosity                                    | No data available                                                              |
| s) Explosive properties                         | No data available                                                              |
| t) Oxidizing properties                         | No data available                                                              |

### 9.2 Other safety information

Relative vapour density 3.94 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

### 10.4 Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available  
In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

#### Skin corrosion/irritation

Skin - Rabbit

Result: Irritating to skin.

(OECD Test Guideline 404)

#### Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

Rat

Unscheduled DNA synthesis

#### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

#### Reproductive toxicity

No data available

No data available

#### Specific target organ toxicity - single exposure

May cause drowsiness or dizziness.

#### Specific target organ toxicity - repeated exposure

No data available

#### Aspiration hazard

The substance or mixture is known to cause human aspiration toxicity hazards or has to be regarded as if it causes a human aspiration toxicity hazard.

#### Additional Information

RTECS: SA3320000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

No data available

### 12.2 Persistence and degradability

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 1262      Class: 3      Packing group: II  
Proper shipping name: Octanes  
Reportable Quantity (RQ): 1000 lbs      Marine pollutant: yes  
Poison Inhalation Hazard: No

### IMDG

UN number: 1262      Class: 3      Packing group: II      EMS-No: F-E, S-E  
Proper shipping name: OCTANES  
Marine pollutant: yes      Marine pollutant: yes

### IATA

UN number: 1262      Class: 3      Packing group: II  
Proper shipping name: Octanes

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

### Massachusetts Right To Know Components

2,2,4-Trimethylpentane	CAS-No. 540-84-1	Revision Date 2007-03-01
------------------------	---------------------	-----------------------------

### Pennsylvania Right To Know Components

2,2,4-Trimethylpentane	CAS-No. 540-84-1	Revision Date 2007-03-01
------------------------	---------------------	-----------------------------



## New Jersey Right To Know Components

2,2,4-Trimethylpentane

CAS-No.  
540-84-1

Revision Date  
2007-03-01

## California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Skin Irrit.	Skin irritation

### HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	3
Physical Hazard	0

### NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

### Preparation Information

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.7

Revision Date: 06/13/2018

Print Date: 11/10/2018

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : 1,2,4-Trimethylbenzene

Product Number : T73601

Brand : Aldrich

Index-No. : 601-043-00-3

CAS-No. : 95-63-6

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226

Acute toxicity, Inhalation (Category 4), H332

Skin irritation (Category 2), H315

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Aspiration hazard (Category 1), H304

Acute aquatic toxicity (Category 2), H401

Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 : Flammable liquid and vapour.

H304 : May be fatal if swallowed and enters airways.

H315 : Causes skin irritation.

H319 : Causes serious eye irritation.

H332 : Harmful if inhaled.

H335 : May cause respiratory irritation.

H411 : Toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Formula	: C <sub>9</sub> H <sub>12</sub>
Molecular weight	: 120.19 g/mol
CAS-No.	: 95-63-6
EC-No.	: 202-436-9
Index-No.	: 601-043-00-3

#### Hazardous components

Component	Classification	Concentration
<b>1,2,4-Trimethylbenzene</b>	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H315, H319, H332, H335, H411	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

## 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 3: Flammable liquids

## 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,2,4-Trimethylbenzene	95-63-6	TWA	25.000000 ppm 125.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
	Remarks	hemimellitene is a mixture of the 1,2,3-isomer with up to 10% of related aromatics such as the 1,2,4-isomer.		
		TWA	25 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Hematologic effects Asthma		

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

##### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

##### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-43.69 °C (-46.64 °F)
f) Initial boiling point and boiling range	168.0 - 169.0 °C (334.4 - 336.2 °F)
g) Flash point	48.0 °C (118.4 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 6.4 %(V) Lower explosion limit: 0.9 %(V)
k) Vapour pressure	2.3 hPa (1.7 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	0.88 g/cm <sup>3</sup>
n) Water solubility	0.057 g/l at 25 °C (77 °F) - slightly soluble
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	515.0 °C (959.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

### 9.2 Other safety information

No data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

No data available

#### 10.4 Conditions to avoid

Heat, flames and sparks.

#### 10.5 Incompatible materials

Strong oxidizing agents

#### 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

### 11. TOXICOLOGICAL INFORMATION

#### 11.1 Information on toxicological effects

##### Acute toxicity

LD50 Oral - Rat - male - 6,000 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

##### Skin corrosion/irritation

No data available

##### Serious eye damage/eye irritation

No data available

##### Respiratory or skin sensitisation

No data available

##### Germ cell mutagenicity

in vitro assay

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Rat - male and female - Bone marrow

Result: negative

##### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

##### Reproductive toxicity

No data available

No data available

##### Specific target organ toxicity - single exposure

No data available

##### Specific target organ toxicity - repeated exposure

No data available

##### Aspiration hazard

No data available

##### Additional Information

RTECS: DC3325000

prolonged or repeated exposure can cause:, narcosis, Bronchitis., Symptoms and signs include headache, dizziness, fatigue, muscular weakness, drowsiness and in extreme cases, loss of consciousness., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish	flow-through test LC50 - Pimephales promelas (fathead minnow) - 7.72 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates	static test EC50 - Daphnia magna (Water flea) - 3.6 mg/l - 48 h (OECD Test Guideline 202)

### 12.2 Persistence and degradability

No data available

### 12.3 Bioaccumulative potential

No data available

### 12.4 Mobility in soil

No data available

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Toxic to aquatic life with long lasting effects.

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3295      Class: 3      Packing group: III  
Proper shipping name: Hydrocarbons, liquid, n.o.s.  
Reportable Quantity (RQ):  
Poison Inhalation Hazard: No

### IMDG

UN number: 3295      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: HYDROCARBONS, LIQUID, N.O.S.

### IATA

UN number: 3295      Class: 3      Packing group: III  
Proper shipping name: Hydrocarbons, liquid, n.o.s.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,2,4-Trimethylbenzene	95-63-6	2007-07-01



**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard

**Massachusetts Right To Know Components**

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

**Pennsylvania Right To Know Components**

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

**New Jersey Right To Know Components**

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

1,2,4-Trimethylbenzene	CAS-No. 95-63-6	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

**16. OTHER INFORMATION****Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H335	May cause respiratory irritation.
H401	Toxic to aquatic life.

**HMIS Rating**

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	2
Physical Hazard	0

**NFPA Rating**

Health hazard:	2
Fire Hazard:	2
Reactivity Hazard:	0

**Further information**

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.11

Revision Date: 02/02/2018

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 3.4  
Revision Date 06/26/2014  
Print Date 11/09/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : 1,3,5-Trimethoxybenzene  
Product Number : 138827  
Brand : Aldrich  
CAS-No. : 621-23-8

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Manufacture of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Warning

Hazard statement(s)

H302

Harmful if swallowed.

Precautionary statement(s)

P264

Wash skin thoroughly after handling.

P270

Do not eat, drink or smoke when using this product.

P301 + P312

IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell.

P330

Rinse mouth.

P501

Dispose of contents/ container to an approved waste disposal plant.

**2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none**

---

**3. COMPOSITION/INFORMATION ON INGREDIENTS****3.1 Substances**

Synonyms : Phloroglucinol trimethyl ether

Formula : C<sub>9</sub>H<sub>12</sub>O<sub>3</sub>  
Molecular Weight : 168.19 g/mol  
CAS-No. : 621-23-8  
EC-No. : 210-673-4

#### Hazardous components

Component	Classification	Concentration
<b>O,O,O-1,3,5-Trimethylresorcinol</b>		
	Acute Tox. 4; H302	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

#### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

no data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

### 5.2 Special hazards arising from the substance or mixture

Carbon oxides

### 5.3 Advice for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

### 5.4 Further information

no data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Avoid breathing dust.

For personal protection see section 8.

### 6.2 Environmental precautions

Do not let product enter drains.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

## 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection. For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Contains no substances with occupational exposure limit values.

### 8.2 Exposure controls

#### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

#### Personal protective equipment

##### Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

##### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

##### Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

##### Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

##### Control of environmental exposure

Do not let product enter drains.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                            |                                                       |
|--------------------------------------------|-------------------------------------------------------|
| a) Appearance                              | Form: crystalline<br>Colour: colourless               |
| b) Odour                                   | no data available                                     |
| c) Odour Threshold                         | no data available                                     |
| d) pH                                      | no data available                                     |
| e) Melting point/freezing point            | Melting point/range: 50 - 53 °C (122 - 127 °F) - lit. |
| f) Initial boiling point and boiling range | 255 °C (491 °F) - lit.                                |

- |                                                 |                                   |
|-------------------------------------------------|-----------------------------------|
| g) Flash point                                  | 86.00 °C (186.80 °F) - closed cup |
| h) Evaporation rate                             | no data available                 |
| i) Flammability (solid, gas)                    | no data available                 |
| j) Upper/lower flammability or explosive limits | no data available                 |
| k) Vapour pressure                              | no data available                 |
| l) Vapour density                               | no data available                 |
| m) Relative density                             | no data available                 |
| n) Water solubility                             | no data available                 |
| o) Partition coefficient: n-octanol/water       | log Pow: 1.965                    |
| p) Auto-ignition temperature                    | no data available                 |
| q) Decomposition temperature                    | no data available                 |
| r) Viscosity                                    | no data available                 |
| s) Explosive properties                         | no data available                 |
| t) Oxidizing properties                         | no data available                 |

## 9.2 Other safety information

no data available

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

no data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

no data available

### 10.4 Conditions to avoid

no data available

### 10.5 Incompatible materials

Strong oxidizing agents

### 10.6 Hazardous decomposition products

Other decomposition products - no data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

Inhalation: no data available

Dermal: no data available

no data available

#### Skin corrosion/irritation

no data available

#### Serious eye damage/eye irritation

no data available

**Respiratory or skin sensitisation**

no data available

**Germ cell mutagenicity**

no data available

**Carcinogenicity**

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

**Reproductive toxicity**

no data available

no data available

**Specific target organ toxicity - single exposure**

no data available

**Specific target organ toxicity - repeated exposure**

no data available

**Aspiration hazard**

no data available

**Additional Information**

RTECS: DC2810000

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

no data available

**12.2 Persistence and degradability**

no data available

**12.3 Bioaccumulative potential**

no data available

**12.4 Mobility in soil**

no data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

no data available

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

**Contaminated packaging**

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

Not dangerous goods

### IMDG

Not dangerous goods

### IATA

Not dangerous goods

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

### SARA 311/312 Hazards

Acute Health Hazard

### Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
O,O,O-1,3,5-Trimethylresorcinol	621-23-8	

### New Jersey Right To Know Components

	CAS-No.	Revision Date
O,O,O-1,3,5-Trimethylresorcinol	621-23-8	

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
H302	Harmful if swallowed.

### HMIS Rating

Health hazard:	1
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	1
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling



or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 3.4

Revision Date: 06/26/2014

Print Date: 11/09/2018

---

**1. PRODUCT AND COMPANY IDENTIFICATION****1.1 Product identifiers**

Product name : Xylenes  
Product Number : 247642  
Brand : Sigma-Aldrich

**1.2 Relevant identified uses of the substance or mixture and uses advised against**

Identified uses : Laboratory chemicals, Synthesis of substances

**1.3 Details of the supplier of the safety data sheet**

Company : Sigma-Aldrich  
3050 Spruce Street  
SAINT LOUIS MO 63103  
USA  
Telephone : +1 800-325-5832  
Fax : +1 800-325-5052

**1.4 Emergency telephone number**

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

---

**2. HAZARDS IDENTIFICATION****2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226  
Acute toxicity, Inhalation (Category 4), H332  
Skin irritation (Category 2), H315  
Carcinogenicity (Category 2), H351  
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335  
Specific target organ toxicity - repeated exposure (Category 2), H373  
Specific target organ toxicity - repeated exposure, Inhalation (Category 2), Central nervous system, Liver, Kidney, H373  
Aspiration hazard (Category 1), H304  
Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

**2.2 GHS Label elements, including precautionary statements**

Pictogram



Signal word

Danger

Hazard statement(s)

H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H332	Harmful if inhaled.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure.
H373	May cause damage to organs (Central nervous system, Liver, Kidney)

H401	through prolonged or repeated exposure if inhaled. Toxic to aquatic life.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

## 3. COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Synonyms	: Xylene mixture of isomers
Formula	: C <sub>8</sub> H <sub>10</sub>
Molecular weight	: 106.17 g/mol
Registration number	: 01-2119488216-32-XXXX

#### Hazardous components

Component	Classification	Concentration
<b>Xylene</b>		
	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; H226, H304, H315, H332, H335, H373, H401	90 - 100 %
<b>Ethylbenzene</b>		
	Flam. Liq. 2; Acute Tox. 4; Carc. 2; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; H225, H304, H332, H351, H373, H401	20 - 30 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

---

## 4. FIRST AID MEASURES

### 4.1 Description of first aid measures

#### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

#### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

#### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

#### In case of eye contact

Flush eyes with water as a precaution.

#### If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

---

## 5. FIREFIGHTING MEASURES

### 5.1 Extinguishing media

#### Suitable extinguishing media

Dry powder Dry sand

#### Unsuitable extinguishing media

Do NOT use water jet.

### 5.2 Special hazards arising from the substance or mixture

No data available

### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

### 5.4 Further information

Use water spray to cool unopened containers.

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13).

### 6.4 Reference to other sections

For disposal see section 13.

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.  
For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
Storage class (TRGS 510): 3: Flammable liquids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Xylene	1330-20-7	STEL	150 ppm 655 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	100 ppm 435 mg/m <sup>3</sup>	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		TWA	100 ppm 435 mg/m <sup>3</sup>	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	The value in mg/m <sup>3</sup> is approximate.		
		TWA	100 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	150 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
Ethylbenzene	100-41-4	TWA	20 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Cochlear impair Kidney damage (nephropathy) Upper Respiratory Tract irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed animal carcinogen with unknown relevance to humans		

		TWA	100 ppm 435 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	125 ppm 545 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	100 ppm 435 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		PEL	5 ppm 22 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		STEL	30 ppm 130 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

### Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Methylhippuric acids	1.5g/g creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
alkylbenzene		Sum of mandelic acid and phenyl glyoxylic acid	0.15g/g creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

#### Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

### Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                                  |
|-------------------------------------------------|------------------------------------------------------------------|
| a) Appearance                                   | Form: clear, liquid<br>Colour: colourless                        |
| b) Odour                                        | No data available                                                |
| c) Odour Threshold                              | No data available                                                |
| d) pH                                           | No data available                                                |
| e) Melting point/freezing point                 | < 0 °C (< 32 °F)                                                 |
| f) Initial boiling point and boiling range      | 137 - 140 °C (279 - 284 °F) - lit.                               |
| g) Flash point                                  | 25 °C (77 °F) - closed cup                                       |
| h) Evaporation rate                             | No data available                                                |
| i) Flammability (solid, gas)                    | No data available                                                |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7 %(V)<br>Lower explosion limit: 1.1 %(V) |
| k) Vapour pressure                              | 24 hPa (18 mmHg) at 37.70 °C (99.86 °F)                          |
| l) Vapour density                               | 3.67 - (Air = 1.0)                                               |
| m) Relative density                             | 0.86 g/mL at 25 °C (77 °F)                                       |
| n) Water solubility                             | No data available                                                |
| o) Partition coefficient: n-octanol/water       | No data available                                                |
| p) Auto-ignition temperature                    | No data available                                                |
| q) Decomposition temperature                    | No data available                                                |
| r) Viscosity                                    | No data available                                                |
| s) Explosive properties                         | No data available                                                |
| t) Oxidizing properties                         | No data available                                                |

### 9.2 Other safety information

Relative vapour density 3.67 - (Air = 1.0)

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

## 10.2 Chemical stability

Stable under recommended storage conditions.

## 10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

## 10.4 Conditions to avoid

Heat, flames and sparks.

## 10.5 Incompatible materials

Strong oxidizing agents

## 10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

---

## 11. TOXICOLOGICAL INFORMATION

### 11.1 Information on toxicological effects

#### Acute toxicity

No data available

LD50 Oral - Rat - male - 3,523 mg/kg

Remarks: (ECHA)

Dermal: No data available

No data available

#### Skin corrosion/irritation

No data available

Skin - Rabbit

Result: Irritations

Remarks: (IUCLID)

Drying-out effect resulting in rough and chapped skin. After long-term exposure to the chemical: Dermatitis

#### Serious eye damage/eye irritation

No data available

#### Respiratory or skin sensitisation

No data available

In animal experiments: - Mouse

Result: Does not cause skin sensitisation.

(OECD Test Guideline 429)

#### Germ cell mutagenicity

No data available

Mutagenicity (mammal cell test): chromosome aberration.

Result: negative

(National Toxicology Program)

Ames test

Salmonella typhimurium

Result: negative

#### Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Ethylbenzene)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.



**Reproductive toxicity**

No data available  
No data available

**Specific target organ toxicity - single exposure**

No data available

Acute oral toxicity - Gastrointestinal disturbance

Acute inhalation toxicity - mucosal irritations, Cough, Shortness of breath, Possible damages:, damage of respiratory tract, Inhalation may lead to the formation of oedemas in the respiratory tract.

**Specific target organ toxicity - repeated exposure**

No data available

**Aspiration hazard**

No data available

**Additional Information**

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Blurred vision, Incoordination., Headache, Nausea, Vomiting, Dizziness, Weakness, anemia, Prolonged or repeated exposure to skin causes defatting and dermatitis.

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

After absorption:

Systemic effects:

Headache, somnolence, Dizziness, euphoria, agitation, spasms, respiratory paralysis, Unconsciousness, narcosis, inebriation

Effect potentiated by: ethanol

Other dangerous properties can not be excluded.

Handle in accordance with good industrial hygiene and safety practice.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence (Ethylbenzene)

---

**12. ECOLOGICAL INFORMATION****12.1 Toxicity**

No data available

**12.2 Persistence and degradability**

No data available

**12.3 Bioaccumulative potential**

No data available

**12.4 Mobility in soil**

No data available

**12.5 Results of PBT and vPvB assessment**

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

**12.6 Other adverse effects**

Toxic to aquatic life.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

---

**13. DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Contact a licensed professional waste disposal service to dispose of this material.

**Contaminated packaging**

Dispose of as unused product.

---

**14. TRANSPORT INFORMATION****DOT (US)**

UN number: 1307      Class: 3      Packing group: III  
Proper shipping name: Xylenes  
Reportable Quantity (RQ): 100 lbs      Reportable Quantity (RQ): 100 lbs  
Poison Inhalation Hazard: No

**IMDG**

UN number: 1307      Class: 3      Packing group: III      EMS-No: F-E, S-D  
Proper shipping name: XYLENES

**IATA**

UN number: 1307      Class: 3      Packing group: III  
Proper shipping name: Xylenes

---

**15. REGULATORY INFORMATION****SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**SARA 313 Components**

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Ethylbenzene	100-41-4	2007-07-01
Xylene	1330-20-7	1993-04-24

**SARA 311/312 Hazards**

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

**Reportable Quantity**      F003 lbs

**Massachusetts Right To Know Components**

	CAS-No.	Revision Date
Xylene	1330-20-7	1993-04-24
Ethylbenzene	100-41-4	2007-07-01

**Pennsylvania Right To Know Components**

	CAS-No.	Revision Date
Xylene	1330-20-7	1993-04-24
Ethylbenzene	100-41-4	2007-07-01

**California Prop. 65 Components**

, which is/are known to the State of California to cause cancer.  
For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).  
Ethylbenzene

	CAS-No.	Revision Date
	100-41-4	2007-09-28

---

**16. OTHER INFORMATION**

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Asp. Tox.	Aspiration hazard
Carc.	Carcinogenicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H332	Harmful if inhaled.

H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.
Skin Irrit.	Skin irritation
STOT RE	Specific target organ toxicity - repeated exposure
STOT SE	Specific target organ toxicity - single exposure

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**

Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 4.19

Revision Date: 08/07/2018

Print Date: 11/10/2018

## SAFETY DATA SHEET

Version 5.8  
 Revision Date 10/12/2015  
 Print Date 05/01/2016

### 1. PRODUCT AND COMPANY IDENTIFICATION

#### 1.1 Product identifiers

Product name : Zinc  
 Product Number : 96454  
 Brand : Sigma-Aldrich  
 CAS-No. : 7440-66-6

#### 1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

#### 1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich  
 3050 Spruce Street  
 SAINT LOUIS MO 63103  
 USA  
 Telephone : +1 800-325-5832  
 Fax : +1 800-325-5052

#### 1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

### 2. HAZARDS IDENTIFICATION

#### 2.1 Classification of the substance or mixture

##### GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Combustible dust,  
 Acute aquatic toxicity (Category 1), H400  
 Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

#### 2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

May form combustible dust concentrations in air  
 Very toxic to aquatic life with long lasting effects.

H410

Precautionary statement(s)

P273

Avoid release to the environment.

P391

Collect spillage.

P501

Dispose of contents/ container to an approved waste disposal plant.

#### 2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Combustible dust

### 3. COMPOSITION/INFORMATION ON INGREDIENTS

#### 3.2 Mixtures

Formula : Zn  
Molecular weight : 65.39 g/mol

#### Hazardous components

Component		Classification	Concentration
<b>Zinc powder (stabilized)</b>			
CAS-No.	7440-66-6	Aquatic Acute 1; Aquatic Chronic 1; H410	<= 100 %
EC-No.	231-175-3		
Index-No.	030-001-01-9		
<b>Zinc oxide</b>			
CAS-No.	1314-13-2	Aquatic Acute 1; Aquatic Chronic 1; H410	>= 5 - < 10 %
EC-No.	215-222-5		
Index-No.	030-013-00-7		

For the full text of the H-Statements mentioned in this Section, see Section 16.

### 4. FIRST AID MEASURES

#### 4.1 Description of first aid measures

##### General advice

Consult a physician. Show this safety data sheet to the doctor in attendance.

##### If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

##### In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

##### In case of eye contact

Flush eyes with water as a precaution.

##### If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

#### 4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

#### 4.3 Indication of any immediate medical attention and special treatment needed

No data available

### 5. FIREFIGHTING MEASURES

#### 5.1 Extinguishing media

##### Suitable extinguishing media

Special powder against metal fire Dry sand Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

##### Unsuitable extinguishing media

Water

#### 5.2 Special hazards arising from the substance or mixture

Zinc/zinc oxides

#### 5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

#### 5.4 Further information

No data available

---

## 6. ACCIDENTAL RELEASE MEASURES

### 6.1 Personal precautions, protective equipment and emergency procedures

Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation.  
For personal protection see section 8.

### 6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

### 6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

### 6.4 Reference to other sections

For disposal see section 13.

---

## 7. HANDLING AND STORAGE

### 7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.  
Provide appropriate exhaust ventilation at places where dust is formed.  
For precautions see section 2.2.

### 7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

Storage class (TRGS 510): Non Combustible Solids

### 7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

---

## 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1 Control parameters

#### Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Zinc oxide	1314-13-2	TWA	2.000000 mg/m <sup>3</sup>	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	metal fume fever		
		STEL	10.000000 mg/m <sup>3</sup>	USA. ACGIH Threshold Limit Values (TLV)
		metal fume fever		

		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		C	15.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	15.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants

## 8.2 Exposure controls

### Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

### Personal protective equipment

#### Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

#### Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

#### Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

#### Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

#### Body Protection

Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

### Respiratory protection

Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

### Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

---

## 9. PHYSICAL AND CHEMICAL PROPERTIES

### 9.1 Information on basic physical and chemical properties

- |                                                 |                                                            |
|-------------------------------------------------|------------------------------------------------------------|
| a) Appearance                                   | Form: powder<br>Colour: grey                               |
| b) Odour                                        | odourless                                                  |
| c) Odour Threshold                              | No data available                                          |
| d) pH                                           | Not applicable                                             |
| e) Melting point/freezing point                 | Melting point/range: 420 °C (788 °F) - lit.                |
| f) Initial boiling point and boiling range      | 907 °C (1,665 °F) - lit.                                   |
| g) Flash point                                  | Not applicable                                             |
| h) Evaporation rate                             | No data available                                          |
| i) Flammability (solid, gas)                    | May form combustible dust concentrations in air            |
| j) Upper/lower flammability or explosive limits | No data available                                          |
| k) Vapour pressure                              | Not applicable                                             |
| l) Vapour density                               | No data available                                          |
| m) Relative density                             | 7.133 g/mL at 25 °C (77 °F)                                |
| n) Water solubility                             | insoluble                                                  |
| o) Partition coefficient: n-octanol/water       | Not applicable                                             |
| p) Auto-ignition temperature                    | does not ignite                                            |
| q) Decomposition temperature                    | No data available                                          |
| r) Viscosity                                    | No data available                                          |
| s) Explosive properties                         | During processing, dust may form explosive mixture in air. |
| t) Oxidizing properties                         | No data available                                          |

### 9.2 Other safety information

- |              |                             |
|--------------|-----------------------------|
| Bulk density | 1.8 - 3.2 kg/m <sup>3</sup> |
|--------------|-----------------------------|

---

## 10. STABILITY AND REACTIVITY

### 10.1 Reactivity

No data available

### 10.2 Chemical stability

Stable under recommended storage conditions.

### 10.3 Possibility of hazardous reactions

Dust may form explosive mixture in air.



#### 10.4 Conditions to avoid

No data available

#### 10.5 Incompatible materials

Strong oxidizing agents, Acids and bases

#### 10.6 Hazardous decomposition products

Other decomposition products - No data available  
In the event of fire: see section 5

---

### 11. TOXICOLOGICAL INFORMATION

#### 11.1 Information on toxicological effects

##### Acute toxicity

No data available (Zinc powder (stabilized))

Inhalation: No data available (Zinc powder (stabilized))

Dermal: No data available (Zinc powder (stabilized))

No data available (Zinc powder (stabilized))

##### Skin corrosion/irritation

No data available (Zinc powder (stabilized))

##### Serious eye damage/eye irritation

No data available (Zinc powder (stabilized))

##### Respiratory or skin sensitisation

Did not cause sensitisation on laboratory animals. (Zinc powder (stabilized))

##### Germ cell mutagenicity

No data available (Zinc powder (stabilized))

##### Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

##### Reproductive toxicity

No data available (Zinc powder (stabilized))

No data available (Zinc powder (stabilized))

##### Specific target organ toxicity - single exposure

No data available (Zinc powder (stabilized))

##### Specific target organ toxicity - repeated exposure

No data available

##### Aspiration hazard

No data available (Zinc powder (stabilized))

##### Additional Information

RTECS: ZG8600000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Effects due to ingestion may include:, chills, dry throat, sweet taste, Fever, Cough, Nausea, Vomiting, Weakness, Contact with eyes or skin may cause:, Irritation (Zinc powder (stabilized))

---

## 12. ECOLOGICAL INFORMATION

### 12.1 Toxicity

Toxicity to fish	LC50 - Cyprinus carpio (Carp) - 450 µg/l - 96 h (Zinc powder (stabilized))
Toxicity to daphnia and other aquatic invertebrates	LC50 - Daphnia magna (Water flea) - 0.068 mg/l - 48 h (Zinc powder (stabilized))
	mortality NOEC - Daphnia (water flea) - 0.101 - 0.14 mg/l - 7 d (Zinc powder (stabilized))

### 12.2 Persistence and degradability

The methods for determining the biological degradability are not applicable to inorganic substances.

### 12.3 Bioaccumulative potential

Bioaccumulation Algae - 7 d  
at 16 °C - 5 µg/l (Zinc powder (stabilized))

Bioconcentration factor (BCF): 466

### 12.4 Mobility in soil

No data available (Zinc powder (stabilized))

### 12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

### 12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.  
Very toxic to aquatic life with long lasting effects.

No data available

---

## 13. DISPOSAL CONSIDERATIONS

### 13.1 Waste treatment methods

#### Product

Offer surplus and non-recyclable solutions to a licensed disposal company.

#### Contaminated packaging

Dispose of as unused product.

---

## 14. TRANSPORT INFORMATION

### DOT (US)

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Zinc powder (stabilized))  
Reportable Quantity (RQ): 1020 lbs

Poison Inhalation Hazard: No

### IMDG

UN number: 3077      Class: 9      Packing group: III      EMS-No: F-A, S-F  
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Zinc powder (stabilized))  
Marine pollutant: yes

### IATA

UN number: 3077      Class: 9      Packing group: III  
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Zinc powder (stabilized))

### Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

---

## 15. REGULATORY INFORMATION

### SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

### SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Zinc oxide	1314-13-2	2007-03-01
Zinc powder (stabilized)	7440-66-6	1993-04-24

### SARA 311/312 Hazards

No SARA Hazards

### Massachusetts Right To Know Components

	CAS-No.	Revision Date
Zinc powder (stabilized)	7440-66-6	1993-04-24
Zinc oxide	1314-13-2	2007-03-01

### Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Zinc powder (stabilized)	7440-66-6	1993-04-24
Zinc oxide	1314-13-2	2007-03-01

### New Jersey Right To Know Components

	CAS-No.	Revision Date
Zinc powder (stabilized)	7440-66-6	1993-04-24
Zinc oxide	1314-13-2	2007-03-01

### California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

---

## 16. OTHER INFORMATION

### Full text of H-Statements referred to under sections 2 and 3.

	May form combustible dust concentrations in air
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

### HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

### NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

### Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See [www.sigma-aldrich.com](http://www.sigma-aldrich.com) and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

**Preparation Information**  
Sigma-Aldrich Corporation  
Product Safety – Americas Region  
1-800-521-8956

Version: 5.8

Revision Date: 10/12/2015

Print Date: 05/01/2016

**ATTACHMENT E**

**REVISED COMMUNITY AIR MONITORING PLAN**

# Community Air Monitoring Plan

**Hamilton Green BCP Site  
200 Hamilton Avenue  
White Plains, New York  
BCP # C360177**

## 1.0 INTRODUCTION

This document presents a Community Air Monitoring Plan (CAMP) for the remedial investigation (RI) and interim remedial measures (IRMs) for the proposed development at 200 Hamilton Avenue, White Plains, New York (the "Site").

The Site, which is the subject of a Remedial Investigation Report prepared by AKRF, is approximately 3.74-acres occupied the two-story White Plains Mall and east-adjacent asphalt-paved parking lot. The Site properties are identified on the Westchester County Clerk's as a portion of tax parcel map Section 125.67, Block 5, Lot 1. The surrounding area consists primarily of commercial and governmental uses, with residences further north of the Site.

Prior to 1970, the Site was historically bisected by a public street (William Street) and contained several private residential dwellings, a candy manufacturer, and two gasoline stations, one at 230 Hamilton Avenue (southeastern portion of the Site) and a second at 250 Hamilton Avenue (southern portion of the Site)

## 1.1 OBJECTIVES

The objective of this CAMP is to provide a measure of protection for the downwind community from potential airborne contaminant releases that may arise as a result of the planned remedial excavation and construction, which may include temporary soil stockpiling.

## 1.2 METHODS

The CAMP will include continuous monitoring for particulate matter (e.g., airborne "dust") and volatile organic compounds (VOCs) during the planned remedial

excavation and construction activities. Readings will be recorded and will be available for State (DEC and DOH) personnel to review, as requested.

### **1.3 PERIODIC MONITORING**

Periodic monitoring for VOCs will be conducted during non-intrusive activities such as the collection of soil and sediment samples or the collection of groundwater samples from existing monitoring wells. "Periodic" monitoring during sample collection might reasonably consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. In some instances, depending upon the proximity of potentially exposed individuals, continuous monitoring may be required during sampling activities. Examples of such situations include groundwater sampling at wells on the curb of a busy urban street, in the midst of a public park, or adjacent to a school or residence.

### **1.4 VOC MONITORING, RESPONSE LEVELS, AND ACTIONS**

VOC Monitoring, Response Levels, and Actions Volatile organic compounds (VOCs) must be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis or as otherwise specified. Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work should be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment should be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment should be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less

than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.

- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.

All 15-minute readings must be recorded and be available for State (DEC and DOH) personnel to review. Instantaneous readings, if any, used for decision purposes should also be recorded.

## **1.5 PARTICULATE MONITORING, RESPONSE LEVELS, AND ACTIONS**

Particulate concentrations should be monitored continuously at the upwind and downwind perimeters of the exclusion zone at temporary particulate monitoring stations. The particulate monitoring should be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment must be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during all work activities.

- If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m<sup>3</sup>) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques must be employed. Work may continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed 150 mcg/m<sup>3</sup> above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than 150 mcg/m<sup>3</sup> above the upwind level, work must be stopped and a re-evaluation of activities initiated. Work can resume provided that dust suppression measures and other controls are successful in



reducing the downwind PM-10 particulate concentration to within 150 mcg/m<sup>3</sup> of the upwind level and in preventing visible dust migration.

All readings must be recorded and be available for State (DEC and DOH) personnel to review.

## **1.5 SPECIAL REQUIREMENTS FOR WORK WITHIN 20 FEET OF POTENTIALLY EXPOSED INDIVIDUAL STRUCTURES**

When work areas are within 20 feet of potentially exposed populations or occupied structures, the continuous monitoring locations for VOCs and particulates must reflect the nearest potentially exposed individuals and the location of ventilation system intakes for nearby structures. The use of engineering controls such as vapor/dust barriers, temporary negative-pressure enclosures, or special ventilation devices should be considered to prevent exposures related to the work activities and to control dust and odors. Consideration should be given to implementing the planned activities when potentially exposed populations are at a minimum, such as during weekends or evening hours in non-residential settings.

- If total VOC concentrations opposite the walls of occupied structures or next to intake vents exceed 1 ppm, monitoring should occur within the occupied structure(s). Depending upon the nature of contamination, chemical-specific colorimetric tubes of sufficient sensitivity may be necessary for comparing the exposure point concentrations with appropriate pre-determined response levels (response actions should also be pre-determined). Background readings in the occupied spaces must be taken prior to commencement of the planned work. Any unusual background readings should be discussed with NYSDOH prior to commencement of the work.
- If total particulate concentrations opposite the walls of occupied structures or next to intake vents exceed 150 mcg/m<sup>3</sup>, work activities should be suspended until controls are implemented and are successful in reducing the total particulate concentration to 150 mcg/m<sup>3</sup> or less at the monitoring point.
- Depending upon the nature of contamination and remedial activities, other parameters (e.g., explosivity, oxygen, hydrogen sulfide, carbon monoxide) may also need to be monitored. Response levels and actions should be pre-determined, as necessary, for each site.



Geotechnical  
Foundations  
Land Planning  
Geo-Structural  
Environmental  
Water Resources

---

*Principals:*

Steven P. Byszewski, PE, PP  
Anthony Castillo, PE  
Fuad Dahan, PhD, PE, LSRP  
Roger Hendrickson  
John M. Nederfield, PE  
Justin M. Protasiewicz, PE  
Kenneth Quazza, PE  
Michael St. Pierre, PE

June 6, 2019

Ms. Kiera Thompson, P.G. Project Manager  
Bureau C, Section B  
Division of Environmental Remediation 625 Broadway, 11th  
Floor  
Albany, NY 12233

**RE: Remedial Investigation Work Plan Hamilton Green  
BCP Site No. C360177  
200 Hamilton Avenue  
City of White Plains, Westchester County**

Dear Ms. Thompson

Our office has received and reviewed your comment email dated May 23, 2019 in response to the SESI's Response to comments on April 10, 2019 for the September 2018 Remedial Investigation Work Plan (RIWP) prepared by AKRF, Inc., for the Hamilton Green Brownfield Cleanup Program (BCP) site located at 200 Hamilton Avenue in White Plains, Westchester County (Site).

Please accept this response letter as an additional rider to the referenced RIWP and subsequent responses to comments. The remedial investigation field work and the remedial investigation report (RIR) will be based on the RIWP (AKRF September 2018) except for the changes listed in the previous responses to comments and as described below.

- 1. NYSDEC Comment:** Page 2, Comment 3: Based on the limited analyte list and sampling locations during the Phase II Investigation and Spill Investigations, additional sampling locations included in the RIWP for full suite analysis (TCL VOCs, TCL SVOCs, PCBs, Pesticides, Herbicides, dissolved TAL metals, 1,4-dioxane and Per and Polyfluoroalkyl Substances - PFAS) must be spatially (vertical and lateral including site boundary) representative of the entire footprint of the site for both soil and groundwater. This information is essential in determining the presence of site contaminants and guiding future remedial actions. Please provide a revised figure outlining the additional full suite locations for approval. As discussed before, a full analysis must be performed for at least 20% of the samples collected. Please note that if analytes outside the contaminants of concern are detected in the full suite samples, the NYSDEC reserves the right to require additional sampling.

**SESI Response:** *In accordance with SESI response to comments provide to NYSDEC on April 10, 2019, SESI will analyze at least 20% of the samples for the full suite TCL/TAL +30*

*based on the field screening described above. The soil sample for the full suite of analysis will be evenly distributed across the site, to the extent possible, as shown in the attached Figure SESI-2. Proposed full suite analysis is provided on the attached Table 1 and Figure SESI-2. Every sample in the noted locations will be analyzed for the full suite.*

2. **NYSDEC Comment:** 2. Page 2, Comment 4: In order to allow for potential variability in the sampling flow controller and ensure that the flow rate does not exceed 200mL/min, I recommend soil vapor sampling occurs over at least an hour.

**SESI Response:** Note - *The soil vapor sample will be collected in 6 L suma canister on a duration of 60 minutes per sample, which results in a flow rate that does not exceed 200mL/min. Additionally, SESI will collect a contemporaneous outdoor air sample as a control sample.*

Please do not hesitate to contact me with any questions or concerns. Sincerely,

**SESI CONSULTING ENGINEERS**




Fuad Dahan, PhD, PE  
Principal

Attachment A: Sampling Plan Figures  
Attachment B: Revised Table 1



\\sesi2013\data\PROJECTS\10440 - White Plains, NY (Hamilton Green)\Reports\NYSDEC Comments Email on 05232019\BCP.C360177-RIWPResposetocomments06032019.docx

## **ATTACHMENT A: SAMPLING LOCATIONS FIGURES**

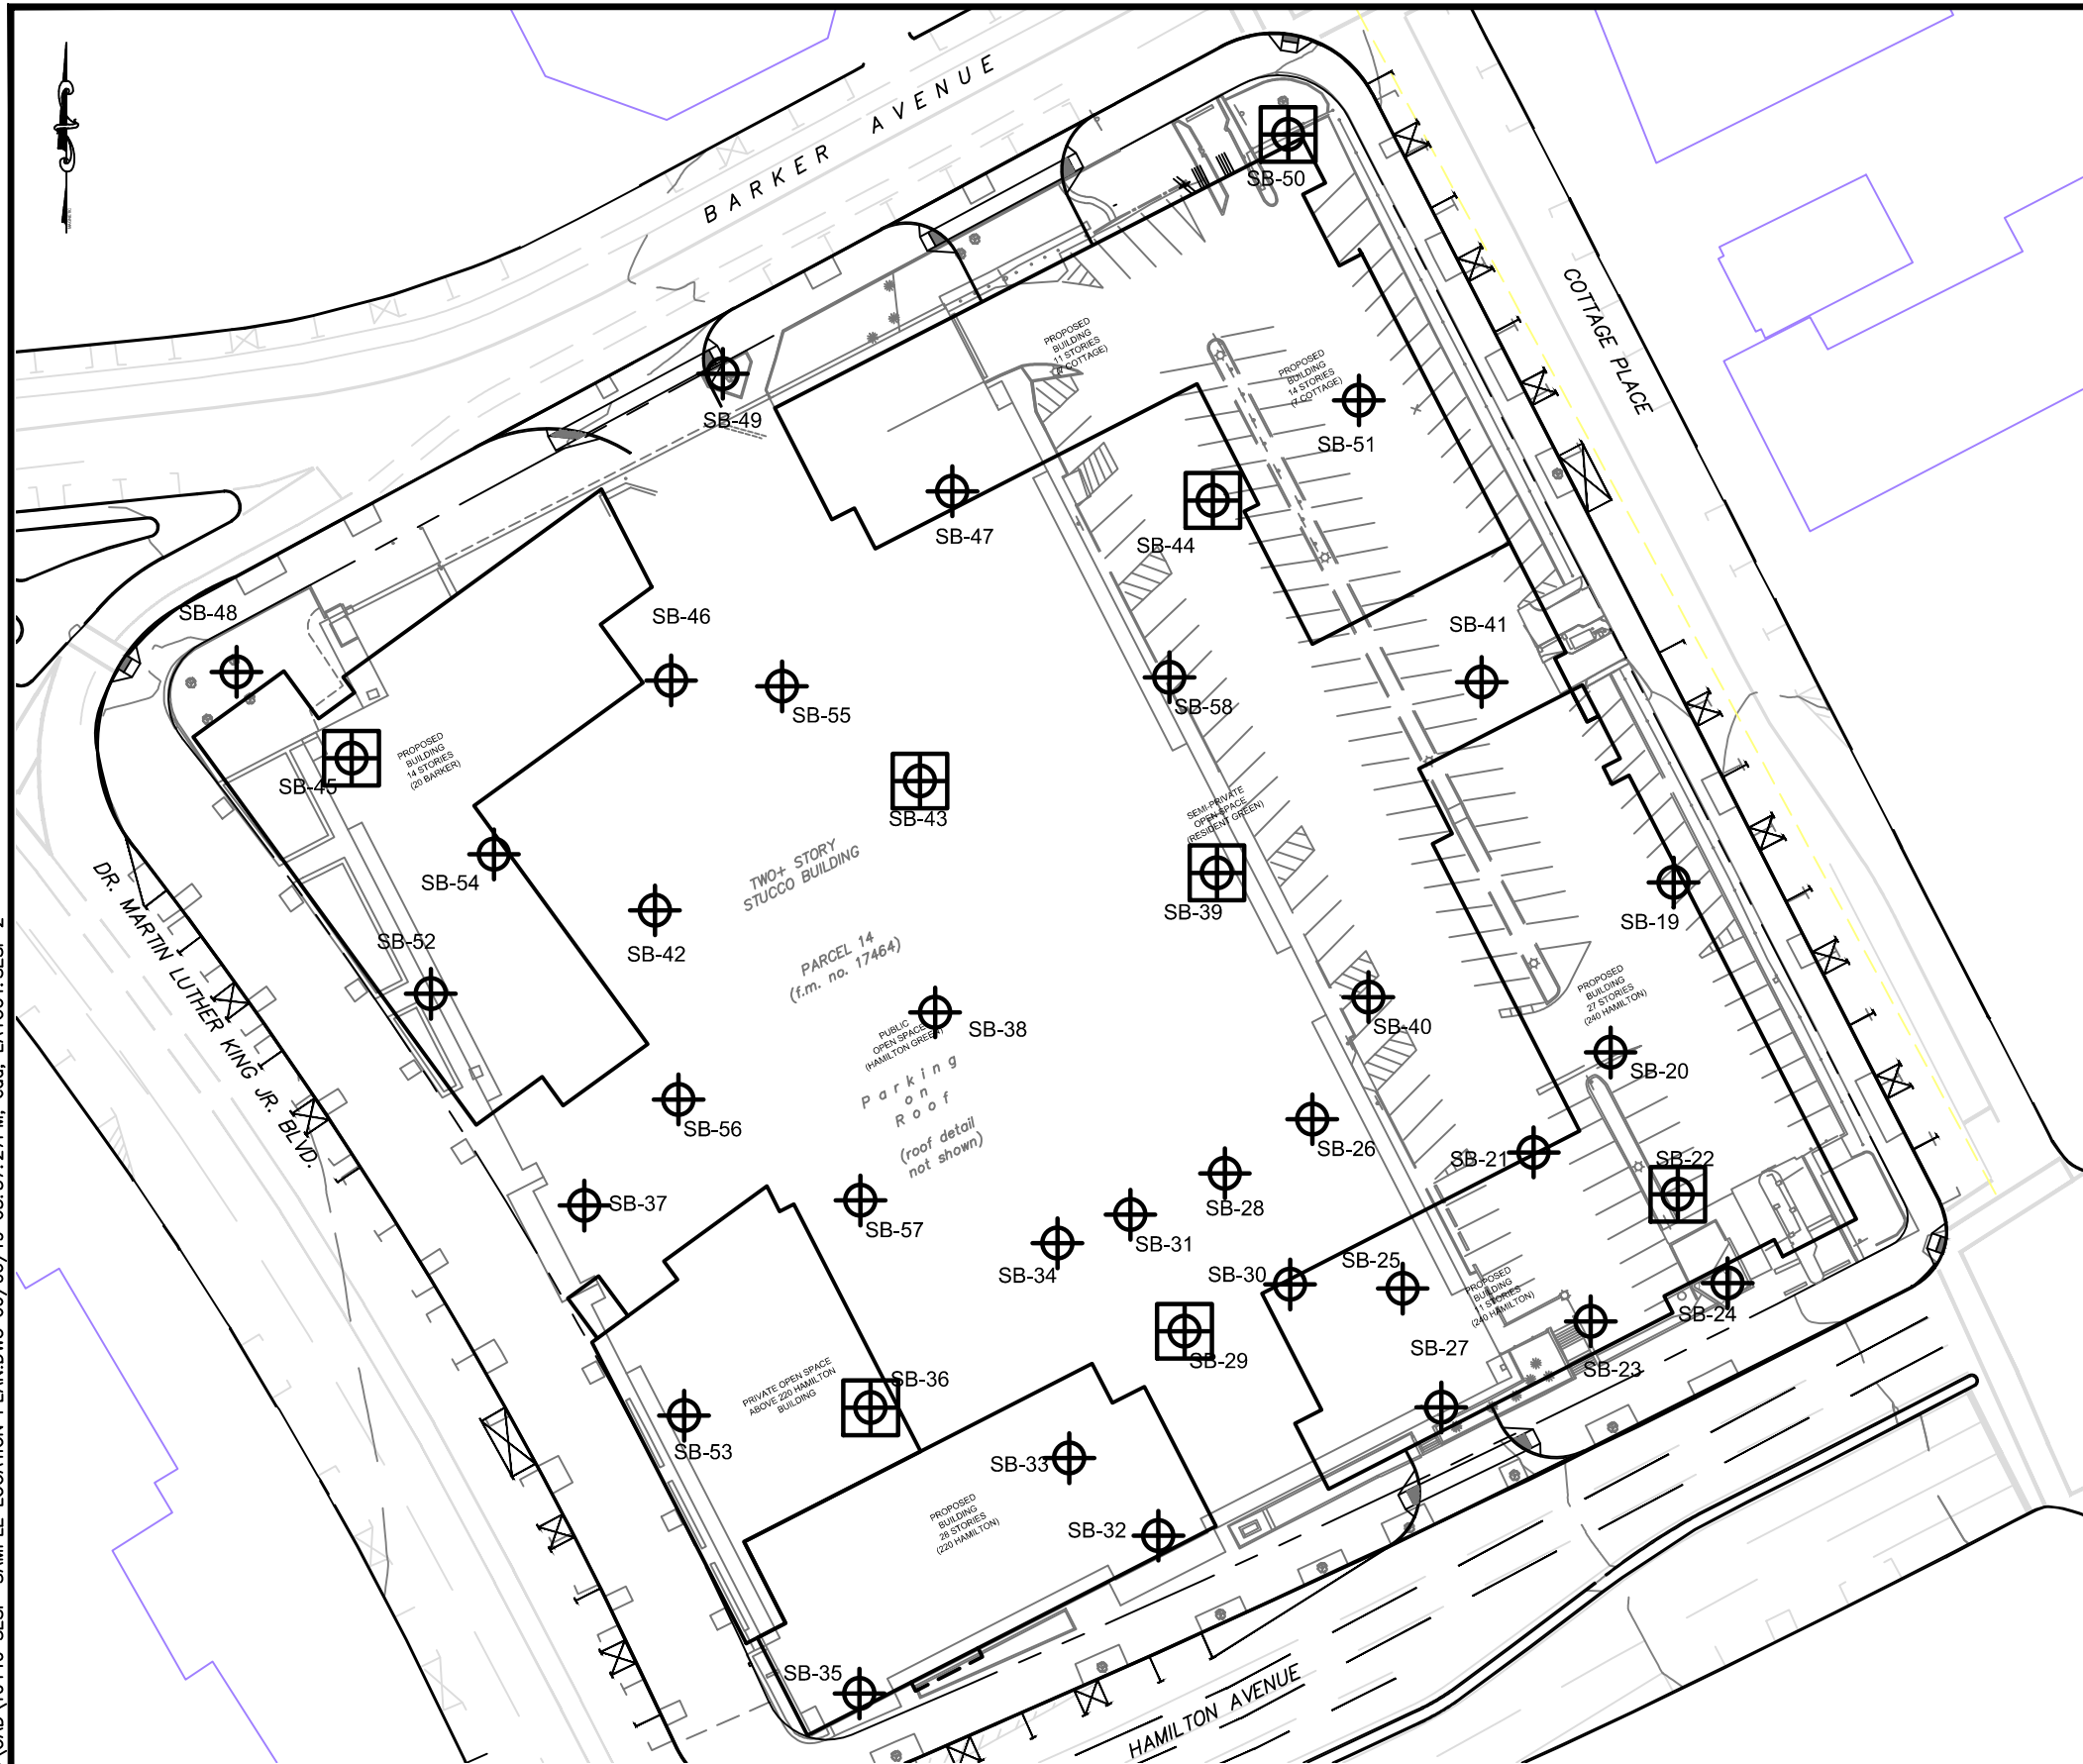
N:\ACAD\10440\CAD\10440 SEI SAMPLE LOCATION PLAN.DWG 06/06/19 03:37:27PM, cad, LAYOUT:SEI-2



LEGEND:

-  - PROPOSED SOIL BORINGS
-  - SAMPLES TO BE ANALYZED FOR TCL/TAC FULL SUITE

© SESI CONSULTING ENGINEERS D.P.C. 2019  
This drawing and all information contained hereon is proprietary information of SESI CONSULTING ENGINEERS D.P.C. and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS D.P.C.



dwg by: yy  
chk by: FL  
scale: 1" = 60'  
date: 06/06/19

SOILS / FOUNDATIONS  
SITE DESIGN  
ENVIRONMENTAL

**SESI**  
CONSULTING  
ENGINEERS D.P.C.

12A MAPLE AVE. PINE BROOK, N.J. 07058 PH: 973-808-9050

project: 200 HAMILTON AVENUE  
WHITE PLAINS, NY


drawing title: PROPOSED SOIL SAMPLE  
LOCATION PLAN

job no: 10440  
drawing no:

**SESI-2**



N:\ACAD\10440\CAD\10440 SESI SAMPLE LOCATION PLAN.DWG 06/06/19 04:00:15PM, cad, LAYOUT:SESI-3

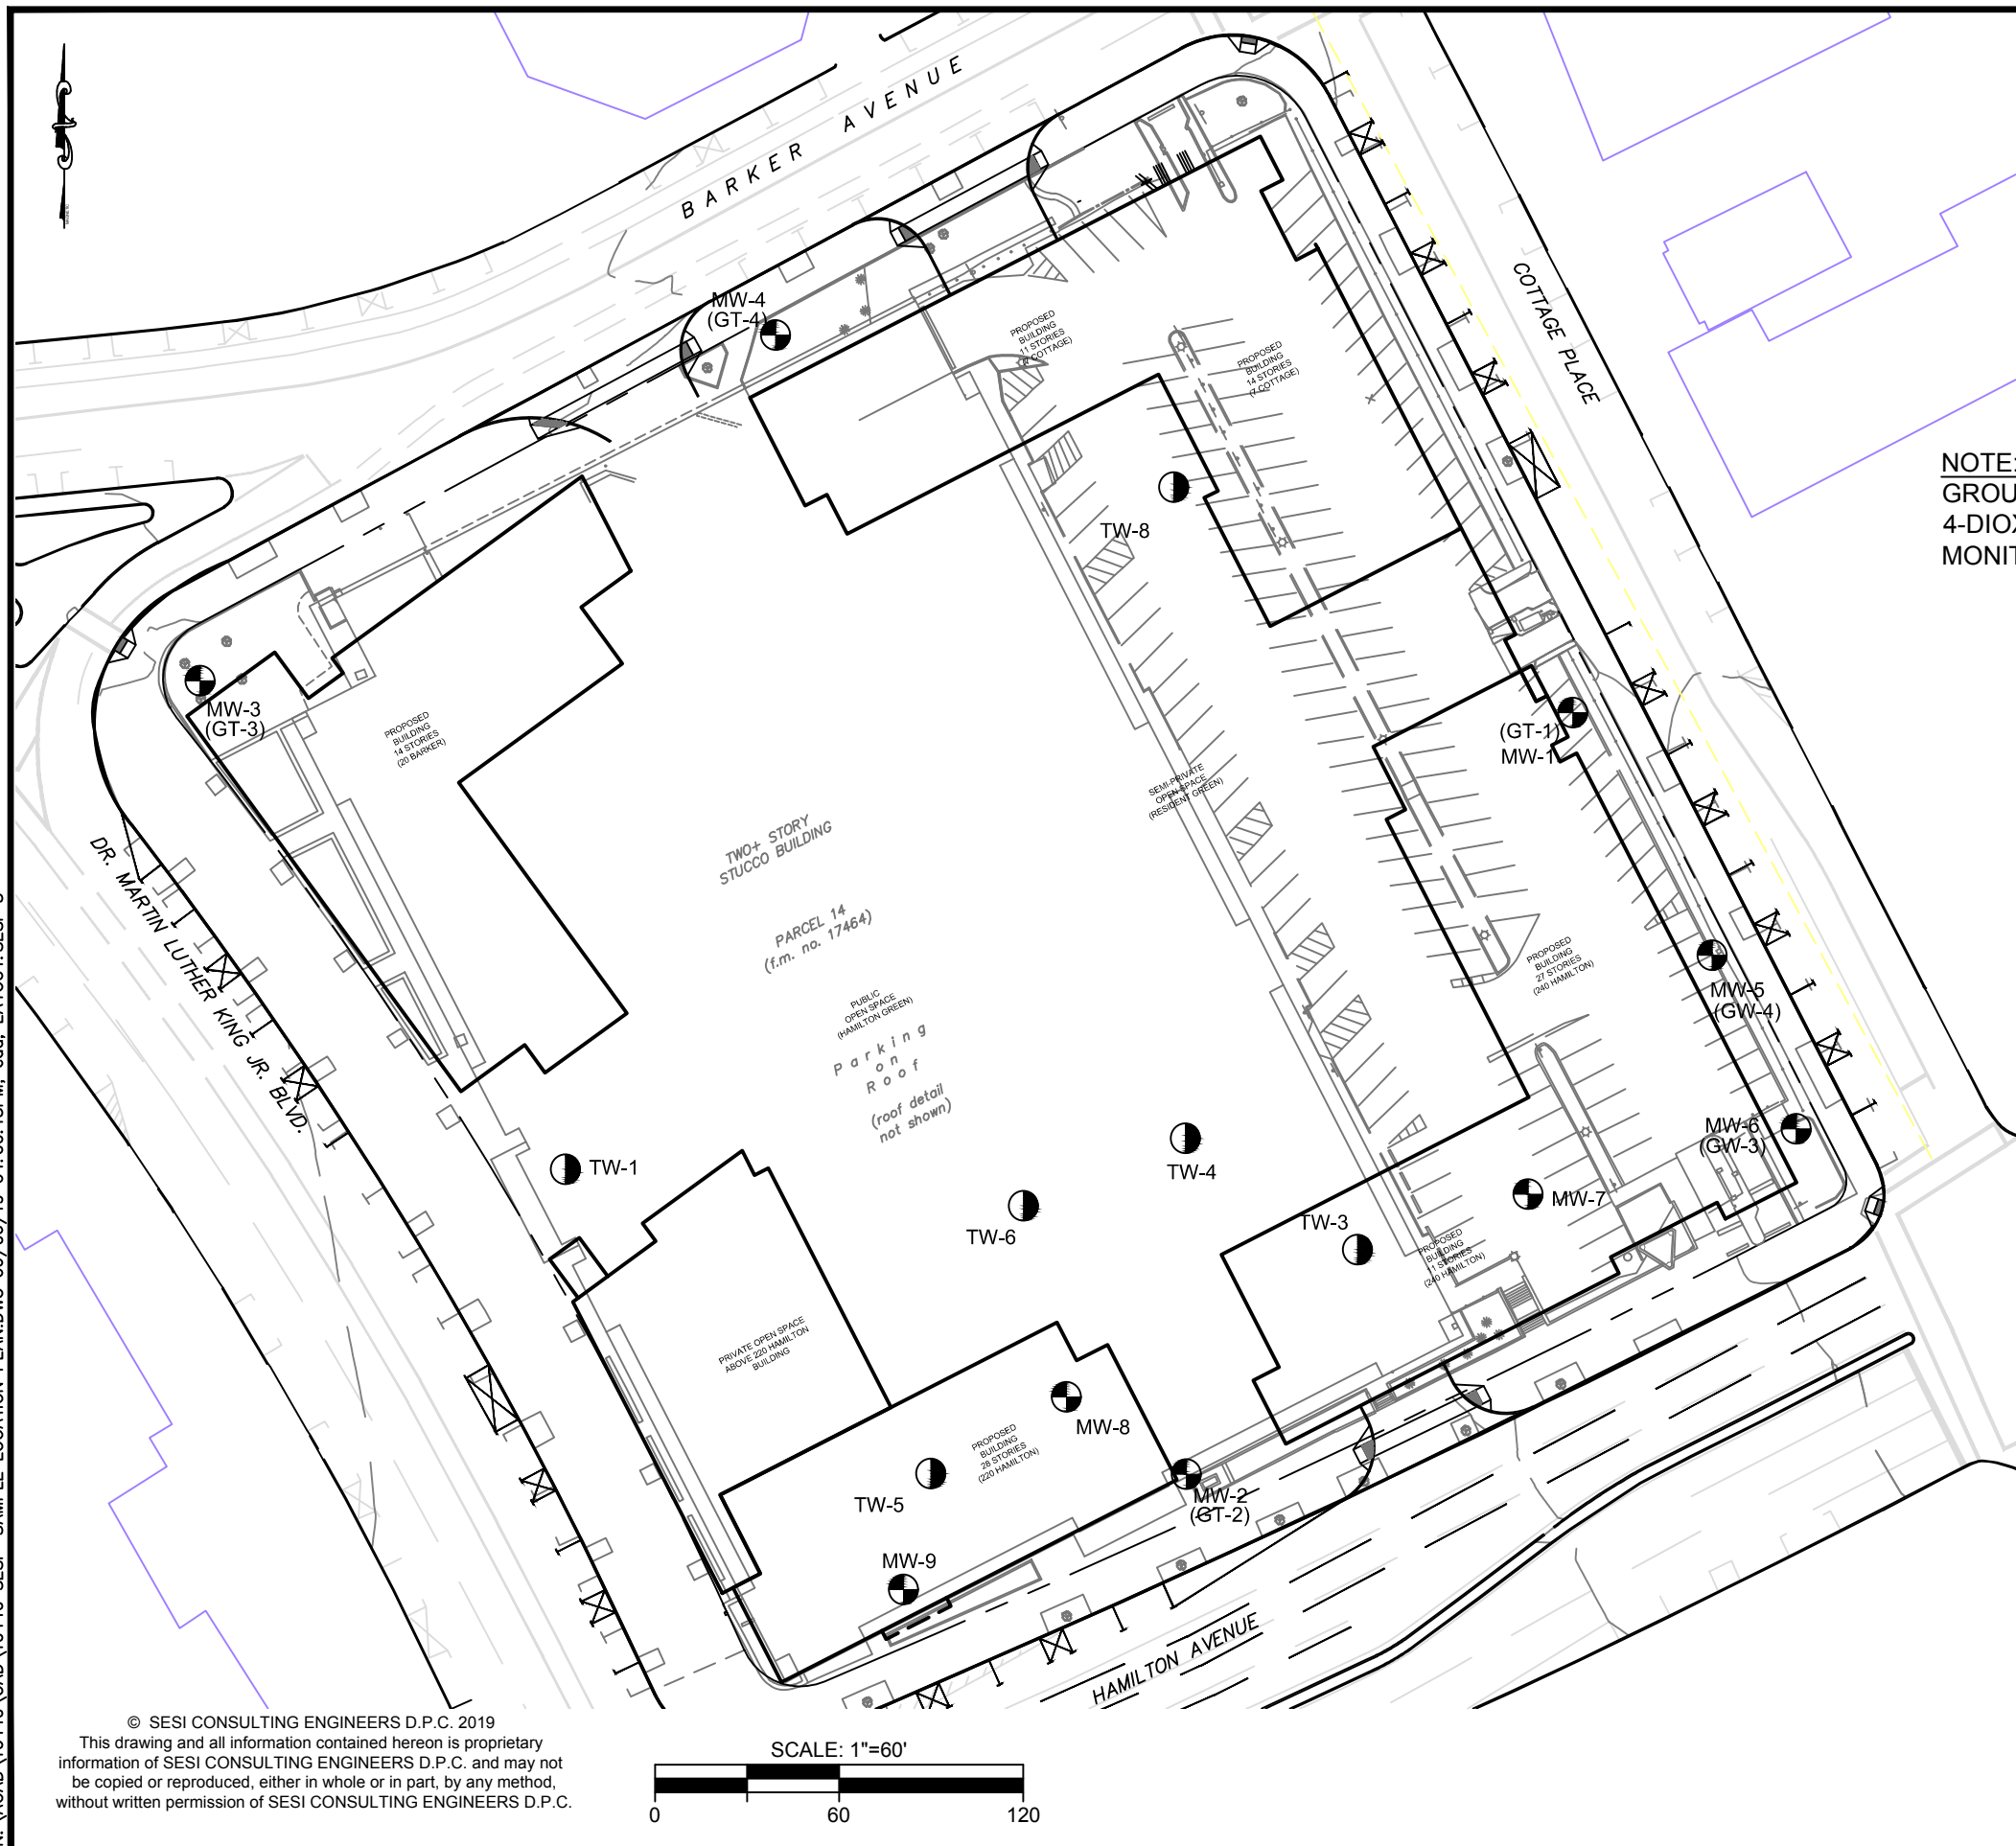


**LEGEND:**

- MW-5 - EXISTING MONITORING WELL
- TW-6 - PROPOSED MONITORING WELL

**NOTE:**  
GROUNDWATER SAMPLES FOR PFAS AND 1, 4-DIOXANE WILL BE COLLECTED FROM MONITORING WELLS MW-1, MW-7 AND MW-9.

© SESI CONSULTING ENGINEERS D.P.C. 2019  
This drawing and all information contained hereon is proprietary information of SESI CONSULTING ENGINEERS D.P.C. and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS D.P.C.



dwg by: yy  
chk by: FL  
scale: 1" = 60'  
date: 06/06/19

SOILS / FOUNDATIONS  
SITE DESIGN  
ENVIRONMENTAL

**SESI**  
CONSULTING  
ENGINEERS D.P.C.

12A MAPLE AVE. PINE BROOK, N.J. 07058 PH: 973-808-9050

project: 200 HAMILTON AVENUE  
WHITE PLAINS, NY

drawing title: PROPOSED GROUNDWATER  
MONITORING WELL LOCATION PLAN

job no: 10440  
drawing no:

**SESI-3**

## **ATTACHMENT B: SAMPLING TABLE**

Soil Boring ID	Proposed Sampling Interval	Target Analyses	Additional Analyses <sup>5</sup>	Sampling Rationale
SB-19	Top of Fill	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	Bottom of Fill	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	Unsaturated Zone - Most Contaminated Interval or 15-17'	CP-51 VOCs or RCRA Metals + Zn BN SVOCs		Delineate petroleum contamination or Characterize soil at anticipated final excavation depth
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-20	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-21	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-22	Bottom of Fill	RCRA Metals + Zn BN SVOCs		Further Characterize shallow fill layer identified in SB-12
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs	Full Part 375 List	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-23	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-24	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-25	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-26	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-27	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-28	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-29	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs	Full Part 375 List	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination



Soil Boring ID	Proposed Sampling Interval	Target Analyses	Additional Analyses <sup>5</sup>	Sampling Rationale
Soil Boring ID	Proposed Sampling Interval	Target Analyses	Additional Analyses	Sampling Rationale
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>e</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-31	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>e</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>e</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-32	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>e</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-33	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interfaces	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>e</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-34	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>e</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>e</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-35	13-15	RCRA Metals + Zn BN SVOCs		Delineate SCO exceedance at 9-11 ft bgs in SB-6
SB-36	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sub>4</sub>	RCRA Metals + Zn BN SVOCs	Full Part 375 List	Characterize soil at anticipated final excavation depth
SB-37	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sub>4</sub>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-38	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sub>4</sub>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-39	Within Fill Layer	RCRA Metals + Zn BN SVOCs	Full Part 375 List	Characterize shallow fill layer
	5-7 <sub>4</sub>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-40	Bottom of Fill Layer	RCRA Metals + Zn BN SVOCs		Further Characterize shallow fill layer identified in SB-10
	15-17 <sub>4</sub>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-41	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
SB-42	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sub>4</sub>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-43	Within Fill Layer	RCRA Metals + Zn BN SVOCs	Full Part 375 List	Characterize shallow fill layer
	5-7 <sub>4</sub>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-44	Top of Fill	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	Bottom of Fill	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	15-17 <sub>4</sub>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-45	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sub>4</sub>	RCRA Metals + Zn BN SVOCs	Full Part 375 List	Characterize soil at anticipated final excavation depth

Soil Boring ID	Proposed Sampling Interval	Target Analyses	Additional Analyses <sup>5</sup>	Sampling Rationale
SB-46	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-47	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-48	Bottom of Fill Layer	RCRA Metals + Zn BN SVOCs		Further Characterize shallow fill layer identified in SB-8
SB-49	Middle of Fill Layer	RCRA Metals + Zn BN SVOCs		Further Characterize shallow fill layer identified in SB-9
SB-50	Middle of Fill Layer	RCRA Metals + Zn BN SVOCs	Full Part 375 List	Further Characterize shallow fill layer identified in SB-1
	15-17 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-51	15-17 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-52				
SB-53				
SB-54				
SB-55				
SB-56				
SB-57				
SB-58				

<sup>1</sup> Sample to be collected at anticipated final excavation depth if no field evidence of petroleum contamination is identified.

<sup>2</sup> Sample to be collected below GW Interface if no field evidence of petroleum contamination is identified in the saturated zone.

<sup>3</sup> Sample to be collected immediately above the GW Interface if no field evidence of petroleum contamination is identified in the unsaturated zone.

<sup>4</sup> An additional sample will be collected below the anticipated final excavation depth to submit "on-hold" for potential delineation.

<sup>5</sup> Additional analysis of 10% of soil samples to provide full Part 375 List characterization.

## **ATTACHMENT 6: AKRF RIWP**

# **HAMILTON GREEN**

**200 HAMILTON AVENUE, WHITE PLAINS, NEW YORK**

---

## **Draft Remedial Investigation Work Plan**

**BCP Site #: C360177**

**AKRF Project Number: 170029**

### **Prepared for:**

S-WD/WP LLC dba Street-Works Development  
168-A Irving Avenue, Suite 200K  
Port Chester, NY 10573

### **Prepared by:**



AKRF, Inc.  
440 Park Avenue South  
New York, New York 10016  
(212) 696-0670

---

**SEPTEMBER 2018**

**TABLE OF CONTENTS**

1.0	INTRODUCTION .....	1
2.0	SITE DESCRIPTION AND HISTORY .....	3
2.1	Site Description and Surrounding Land Use .....	3
2.2	Site Geology, Hydrogeology, and Subsurface Characteristics .....	3
2.3	Site History .....	3
3.0	Proposed Site Development .....	4
4.0	Previous Investigations .....	5
5.0	Environmental Assessment .....	8
5.1	Soil.....	8
5.2	Groundwater .....	10
5.3	Sub-Slab/Soil Vapor .....	11
6.0	FIELD PROGRAM .....	13
6.1	Field Program Summary.....	13
6.2	Soil Sampling .....	14
6.3	Temporary Well Point Installation and Well Development .....	15
6.4	Groundwater Sampling.....	15
6.5	Fluid Level Gauging.....	16
6.6	Quality Assurance / Quality Control (QA/QC) .....	16
6.7	Decontamination Procedures .....	17
6.8	Management of Investigation-Derived Waste (IDW) .....	17
7.0	REPORTING REQUIREMENTS .....	18
7.1	Remedial Investigation Report (RIR).....	18
7.1.1	Description of Field Activities .....	18
7.1.2	Soil Boring Assessment .....	18
7.1.3	Groundwater Assessment.....	18
7.1.4	Qualitative Human Health Exposure Assessment.....	18
8.0	SCHEDULE OF WORK .....	19
9.0	CERTIFICATION .....	20
10.0	REFERENCES .....	21

## **FIGURES**

Figure 1 – Site Location

Figure 2 – Site Plan

Figure 3 – Groundwater Elevation Contour Map – February 16, 2018

Figure 4 – Groundwater Elevation Contour Map – February 26, 2018

Figure 5 – Soil Sample Concentrations Above NYSDEC Soil Cleanup Objectives (SCOs)

Figure 6 – Groundwater Sample Concentrations Above NYSDEC Ambient Water Quality Standards and Guidance Values (AWQSSs)

Figure 7 – Sub-Slab Soil Vapor Sample Concentrations Above Air Guidance Values

Figure 8 – Proposed Sample Locations

## **TABLES**

Table 1 – Proposed Soil Sample Depths and Analyses

Table 2 – Proposed Groundwater Samples and Analyses

## **APPENDICES**

Appendix A – Quality Assurance Project Plan (QAPP)

Appendix B – Health and Safety Plan (HASP) and Community Air Monitoring Plan (CAMP)

Appendix C – Previous Investigation Reports

## 1.0 INTRODUCTION

This Draft Remedial Investigation Work Plan (RIWP) has been prepared by AKRF, Inc. (AKRF) on behalf of S-WD/WP LLC (the Volunteer) for the Hamilton Green site located at 200 Hamilton Avenue in the City of White Plains, Westchester County, New York (the "Site"). The 3.74-acre Site, as shown on Figure 1, includes the two-story White Plains Mall and east-adjacent asphalt-paved parking lot, and is identified as Tax Map ID Section 125.67, Block 5, Lot 1 on the City of White Plains tax map.

S-WD/WP LLC has been accepted into the New York State Department of Environmental Conservation (NYSDEC) Brownfield Cleanup Program (BCP) as a Volunteer (BCP Site No. C360177), and entered into a Brownfield Cleanup Agreement (BCA) with the NYSDEC (BCA Index No. C360177-08-03) on August 16, 2018. The Volunteer entered into the BCP to facilitate the continued investigation and ultimate remediation of contaminated soil, groundwater, and soil vapor that has been identified at the Site, as summarized below.

A Phase I Environmental Site Assessment (ESA) indicated that, prior to 1970, the Site was historically bisected by a public street (William Street) and contained several private residential dwellings, a candy manufacturer, and two gasoline stations, one at 230 Hamilton Avenue (southeastern portion of the Site) and a second at 250 Hamilton Avenue (southern portion of the Site). A Subsurface (Phase II) Investigation conducted at the Site identified evidence of petroleum contamination at the groundwater interface in the vicinity of the former on-site gasoline stations, and petroleum-related volatile organic compounds (VOCs), including methyl tert-butyl ether (MTBE), were detected in groundwater above the NYSDEC Ambient Water Quality Standards (AWQSs). The petroleum-related groundwater contamination was reported to the NYSDEC Spills division, and Spill Number 1706297 was assigned to the Site. Petroleum-related VOCs and the chlorinated solvent trichloroethene (TCE) were detected above New York State Department of Health background levels and or Air Guideline Values (AGVs) in soil vapor samples collected during the Phase II investigation.

The findings from a Spill Investigation (SI) conducted to further assess the extent of the contamination revealed petroleum-contaminated soil and VOCs exceeding the NYSDEC soil cleanup levels in the footprint of the former gasoline station in the southeastern portion of the Site. Field evidence of petroleum contamination was also noted at the groundwater interface in the footprint and immediately downgradient of the former gasoline station in the southern portion of the Site. Consistent with the Phase II investigation, petroleum-related VOCs, including MTBE, were detected in groundwater at concentrations above the NYSDEC AWQSs.

Based on the results of the Phase II investigation and SI, an area of petroleum-contaminated soil and groundwater exists in the southeastern and southern portions of the Site. The petroleum contamination is attributed to a historic release or releases from the former on-site gasoline stations, with the presence of MTBE in groundwater indicating that an off-site source (e.g., the up-gradient east-adjacent gasoline station) has also contributed to the documented on-site groundwater contamination. MTBE is an oxygenate that was used as a gasoline additive in New York State between 1979 and 2004, and since the former on-site gasoline stations were closed prior to 1970, the source of the MTBE contamination could not have originated on-site. Therefore, it is likely that the groundwater contamination at the Site represents a comingled plume from historic releases from both the former on-site and existing off-site gasoline stations. In addition to the petroleum-related contamination, semivolatile organic compounds (SVOCs) and metals were detected in a shallow fill layer at the Site at levels above the 6 NYCRR Part 375 Soil Cleanup Objectives (SCOs). Petroleum-related VOCs detected above NYSDOH background levels in soil vapor samples collected during the Phase II investigation were attributed to the petroleum groundwater contamination and any residual soil contamination. TCE detected above the NYSDOH AGV

in the Phase II soil vapor samples was potentially related to a former on-site dry cleaner; however, the levels detected were not considered indicative of an on-site release.

This RIWP describes the procedures to be used to further define the nature and extent of the known contamination at the Site through the collection of soil and groundwater data from locations in and adjacent to the footprints of the former on-site gasoline stations, and other areas of the Site to be excavated as part of the proposed redevelopment. The current on-site structure occupies approximately two-thirds of the Site, including the footprint of the former gasoline station in its southern portion, limiting the locations available for soil and groundwater sampling. As such, the proposed Remedial Investigation (RI) field program will not be completed until the on-site structure has been demolished, and access to all areas of the Site is available.

In conjunction with the data from the Phase II investigation and SI, the information compiled from the RI will be used to develop a Remedial Action Work Plan (RAWP) for the remediation of the known and any newly-identified contamination. All work will be completed in accordance with this RIWP, which includes a Quality Assurance Project Plan (QAPP) (Appendix A) and a Health and Safety Plan and Community Air Monitoring Plan (HASP and CAMP) (Appendix B).



## 2.0 SITE DESCRIPTION AND HISTORY

### 2.1 Site Description and Surrounding Land Use

The 3.74-acre Site consists of a rectangular-shaped, two-story shopping mall and an east-adjacent asphalt-paved parking lot, with additional parking on the building roof, accessed by a ramp on the northern side of the building. The Site is bounded by Barker Avenue to the north followed by offices, a hotel, and commercial development; Cottage Place to the east followed by a gasoline station and commercial buildings; Hamilton Avenue to the south followed by commercial and government buildings; and Dr. Martin Luther King Jr. Boulevard to the west followed by commercial development. The surrounding area consists primarily of commercial and governmental uses, with residences further north of the Site. A Site Plan is provided as Figure 2.

### 2.2 Site Geology, Hydrogeology, and Subsurface Characteristics

The topography surrounding the Site slopes downward to the west from approximately 200 feet above mean sea level [referenced to North American Vertical Datum of 1988 (NAVD 88)] along Cottage Place to approximately 190 feet along Martin Luther King Jr. Boulevard. Subsurface soil encountered during previous environmental and geotechnical investigations indicated that the Site is underlain by a layer of fill extending from ground surface to depths ranging from 5 to 12 feet below ground surface (bgs). The fill layer included sand, silt, gravel, organics (wood/grass), brick, asphalt, and rubber. Apparent native soil composed of varying amounts of sand, silt, and gravel was identified underlying the fill layer. During a recent geotechnical investigation of the Site, bedrock was reported at depths ranging from approximately 13 feet below existing grade in the northeastern portion of the parking lot to approximately 37 feet below existing grade in the central portion of the parking lot, corresponding to approximate elevations of 183 and 165 feet, respectively.

During the recent SI, the water table was measured in the nine on-site groundwater monitoring wells at depths ranging from 9.58 to 23.90 feet bgs, corresponding to elevations ranging from 178.70 to 181.89 feet. Higher elevations were observed in the eastern portion of the Site (along Cottage Place), and lower elevations were observed in the southern and western portions of the Site (along Hamilton Avenue and Martin Luther King Boulevard). Groundwater elevation contour maps indicated that groundwater generally flows in a southwesterly direction across the Site. Groundwater elevation contour maps are provided as Figure 3 and Figure 4. Groundwater at the Site and in the surrounding area is not used as a potable source. There are no surface water bodies or streams on or adjacent to the Site.

### 2.3 Site History

Historic Sanborn fire insurance maps, as outlined in AKRF's Phase I ESA, indicate that the Site was historically bisected by a public street (William Street) and contained several private residential dwellings, a candy manufacturer, and two gasoline stations. The gasoline stations included one facility with three gasoline tanks at 230 Hamilton Avenue (southeastern portion of the Site) on the 1930 through 1950 maps, and a second facility with greasing operations and four gasoline tanks at 250 Hamilton Avenue (southern portion of the Site) on the 1950 map. The former on-site structures were likely present until construction of the current two-story shopping mall and east-adjacent asphalt-paved parking lot. Based on historic records and interviews, the shopping mall was constructed in 1972 and has operated as the White Plains Mall with a variety of tenants since its construction, including potential dry cleaners listed in historic City Directories. As documented in Section 4.0, previous investigations conducted at the Site have identified soil and groundwater contamination resulting from the historic uses of the Site.

### 3.0 PROPOSED SITE DEVELOPMENT

The proposed Site redevelopment includes demolition of the existing mall structure (including asbestos abatement) and construction of a mixed-use transit oriented community development occupying nearly the entire Site footprint. The proposed project comprises four residential buildings totaling approximately 860 units and 762,300 gross square feet (GSF) set on a “Public Platform” that includes 85,400 GSF of specialty retail and restaurant space, including an upscale Food + Craft Hall; 40,000 GSF of dynamic programmed public open space; and 27,000 GSF of office space. A sub-grade level below the platform would include a loading area in the western portion, and a parking garage, accessory storage areas, and mechanical spaces in the eastern portion, all at an elevation of approximately 184 feet. Retail spaces in the southwestern and northwestern portions of the Site would be constructed at street level, with no sub-grade space below. Based on the current Site elevations, the overall excavation depths for Site redevelopment are anticipated to be approximately 7 feet below grade in the area of the existing mall building and approximately 14 to 20 feet below grade in the area of the existing parking lot, with deeper excavations required for pile caps and elevator pits. Based on groundwater elevations recorded during the most recent investigation (approximately 178.70 to 181.89 feet), dewatering for select foundation elements such as pile caps and elevator pits is anticipated.

## 4.0 PREVIOUS INVESTIGATIONS

### Phase I Environmental Site Assessment (ESA), 200 Hamilton Avenue, AKRF, Inc. – May 2017

AKRF conducted a Phase I ESA as detailed in a May 2017 report. The objective of the Phase I ESA was to evaluate the Site for Recognized Environmental Conditions (RECs) and environmental concerns resulting from past or current uses of the Site and neighboring properties. The Phase I ESA identified the following RECs:

#### ***On-Site Recognized Environmental Conditions***

- Based on review of historic records, two gasoline service stations were located on the Site prior to construction of the White Plains Mall. Historic Sanborn (fire insurance) maps depicted one gasoline station with three gas tanks on the 1930 through 1950 maps at the corner of Hamilton Avenue and William Street (230 Hamilton Avenue), and a second gasoline station with greasing operations and four gasoline tanks at the corner of Hamilton Avenue and Cottage Place (250 Hamilton Avenue). These gasoline stations may have been present until construction of the current building in approximately 1970. Over 20 private dwellings were shown within the current building footprint on historic Sanborn maps from 1894 to 1950. Based on these findings, the Phase I ESA identified the potential for abandoned underground storage tanks (USTs) and/or associated petroleum contamination in the Site subsurface associated with the gasoline stations and/or heating oil for the residential dwellings.
- The Site was identified in the EDR Historic Cleaners database from 2004 to 2011 and potential dry cleaners (“Mall Cleaners” and “White Plains Mall Cleaners”) were listed in the City Directories at 200 Hamilton Avenue in 1992, 1995, 1999, and 2008. The Site was not listed on the Resource Conservation and Recovery Act (RCRA) generator report or any other database.

#### ***Off-Site Recognized Environmental Conditions***

- The regulatory database, historic city directories, site reconnaissance, and Sanborn maps identified an east-adjacent operating gasoline station with an open NYSDEC Spill (Spill No. 97-07887), and also listed on the petroleum bulk storage (PBS), RCRA, and Historic Auto databases.
- The regulatory database and Sanborn maps identified facilities in the surrounding area with some potential to have affected the Site subsurface, including: RCRA generators, Spills, PBS facilities, a NYSDEC Brownfield Cleanup (BCP) site, and a NYSDEC Voluntary Cleanup (VCP) site.

The Phase I concluded with a recommendation to conduct a Phase II investigation to determine whether soil and groundwater at the Site were affected by the identified RECs.

### Subsurface (Phase II) Investigation, White Plains Mall, 200 Hamilton Avenue, AKRF, Inc. – October 2017

AKRF conducted a Phase II investigation at the Site that was detailed in an October 2017 report. The objectives of the Phase II investigation were to further assess the RECs identified in AKRF’s May 2017 Phase I ESA for the Site. The scope of the Phase II investigation included a sampling program to characterize soil, soil vapor, and groundwater in the area of RECs and areas that would be disturbed during the proposed redevelopment of the Site. Based on the field observations and laboratory analytical results, the following conclusions were presented:

- A fill layer was encountered extending from ground surface to depths ranging from 5 to 10 feet bgs. Apparent native soil composed of varying amounts of sand, silt, and gravel was identified underlying the fill layer extending to approximately 25 feet bgs (the maximum boring depth).

- Groundwater was recorded at depths ranging from 9.9 feet bgs to 23 feet bgs. The deeper groundwater depths were noted at higher elevations in the eastern portion of the Site (along Cottage Place) and at shallower depths in lower elevations in the southern and western portions of the Site (along Hamilton Avenue and Martin Luther King Boulevard).
- A historical petroleum release or releases was identified that affected groundwater beneath the Site, resulting in the presence of petroleum-related VOCs above the NYSDEC AWQSSs. The observed groundwater contamination was attributed to the former on-site gasoline stations. The presence of MTBE in groundwater suggested that an off-site source (e.g., the existing gas station across Cottage Place) also contributed to the contamination, since the on-site gasoline stations closed before 1970 (before MTBE was used in New York State). Field evidence of petroleum contamination observed in the “smear zone” in two soil borings (SB-4 and SB-5), and petroleum-related VOCs detected above New York State Department of Health (NYSDOH) background levels in soil vapor were attributed to the groundwater contamination and any residual soil contamination. The petroleum-related contamination was reported to the NYSDEC Spills division, and Spill Number 1706297 was assigned to the Site.
- The chlorinated solvent trichloroethene (TCE) was detected in two sub-slab vapor samples at concentrations (13 and 69 micrograms per cubic meter) above the NYSDOH Air Guidance Value (AGV), with one concentration (69 micrograms per cubic meter) exceeding the “mitigate” level in NYSDOH Soil Vapor/Indoor Air Matrix A. However, TCE was not detected above the regulatory standards or guidance values in any soil or groundwater samples collected during the Phase II investigation. Although TCE may have been used by one of the potential former on-site dry cleaners identified in the May 2017 Phase I ESA, the levels detected in soil vapor were not considered to be indicative of a widespread release or on-site source area.
- Metals and semivolatile organic compounds (SVOCs) were detected in soil at levels above their respective Part 375 Unrestricted and/or Restricted Residential Use Soil Cleanup Objectives which were likely attributable to contaminants in the shallow fill layer observed in the Site subsurface or to background conditions, and not likely to an on-site release or other source area.

The Phase II investigation report concluded with a recommendation to conduct a Spill Investigation (SI) to assess the extent of the petroleum-related contamination in groundwater and to further investigate potential on-site source area(s).

*Spill Investigation, White Plains Mall, 200 Hamilton Avenue, AKRF, Inc. – April 2007*

A Spill Investigation (SI) was conducted in February 2018 and documented in an April 2018 report. The investigation was conducted to further delineate the extent of the petroleum-related contamination identified in the southeastern and southern portions of the Site during the Phase II investigation. The investigation scope of work included the collection of soil and groundwater samples from accessible areas in and adjacent to the footprints of the former gasoline stations, and water level gauging of newly installed and existing monitoring wells to verify the assumed southwesterly groundwater flow direction. Based on the field observations and laboratory analytical results, the following conclusions were presented:

- Soil encountered included a fill layer extending from ground surface to depths ranging from 5 to 12 feet bgs. Apparent native soil composed of varying amounts of sand, silt, and gravel was identified underlying the fill layer extending to approximately 30 feet bgs (the maximum boring depth).
- Groundwater elevation contour maps indicated that groundwater flows in a southwesterly direction across the Site, with groundwater elevations ranging from 178.70 to 181.89 feet.

- Petroleum-contaminated soil was identified in the unsaturated zone and extended below the water table within the footprint of the former gasoline station in the southeastern portion of the Site. Evidence of contamination included field observations of staining and odors as shallow as 5 feet bgs, and detection of petroleum-related VOCs exceeding the NYSDEC soil cleanup levels in samples as shallow as 10 feet bgs from soil borings in this area. This contamination was likely the result of a historic petroleum release or releases from the former gasoline station in this area and represented an on-site source of the documented groundwater contamination at the Site.
- Field evidence of petroleum-contamination was noted just above and extending into the saturated zone in soil borings located within the footprint and immediately downgradient of former on-site gasoline station in the southern portion of the site; however, VOCs were not detected above the NYSDEC soil cleanup levels in soil samples collected from this area. The contamination observed in this area was likely associated with groundwater contamination identified at the Site. Results were inconclusive as to whether this contamination was indicative of a second on-site source area as much of the former gasoline station footprint was inaccessible during the investigation.
- The presence of MTBE in groundwater suggested that an off-site source (e.g., the existing gas station across Cottage Place) has contributed to the documented on-site groundwater contamination. Since the on-site gasoline stations were closed prior to 1970, the source of the MTBE contamination could not have originated on-site. Therefore, it is likely that the groundwater contamination at the Site represents a comingled plume from historic releases from both the former on-site and existing off-site gasoline stations. It appears that the original source of the MTBE contamination is no longer present or has diminished significantly, since the highest levels were detected over 300 feet downgradient of the nearest off-site gasoline station.
- The metals and SVOCs detected in soil at levels above their respective Part 375 Unrestricted and/or Restricted Residential Use Soil Cleanup Objectives, and CP-51 Soil Cleanup Levels were likely attributable to contaminants in the shallow fill layer observed in the Site subsurface or to background conditions, and not likely to an on-site release or other source area.

The SI report concluded with recommendations to pursue enrollment in the NYSDEC BCP to facilitate the continued investigation and ultimate remediation of the contamination identified at the Site. A remedial investigation was also recommended to further delineate the extent of contamination, and to provide additional data to integrate the designs for the remediation and proposed redevelopment.

Digital copies of the previous investigation reports are provided on the CD in Appendix C.

## 5.0 ENVIRONMENTAL ASSESSMENT

Based on the results of the Phase II investigation and SI, an area of petroleum-contaminated soil and groundwater exists in the southeastern and southern portions of the Site. The petroleum contamination is attributed to a historic release or releases from the former on-site gasoline stations. The presence of MTBE in groundwater suggests that an off-site source (e.g., the up-gradient east-adjacent gasoline station) has also contributed to the documented on-site groundwater contamination. It is likely that the groundwater contamination at the Site represents a commingled plume from historic releases from both the former on-site and existing off-site gasoline stations. Metals and SVOCs identified during previous investigation are generally attributable to the shallow fill layer observed at the Site. Petroleum-related VOCs detected in soil vapor samples are attributed to the petroleum contamination in soil and groundwater; and trichloroethene detected in soil vapor is potentially related to a former on-site dry cleaner. A summary of the exceedances to applicable regulatory standards and guidance values identified in the soil, groundwater, and soil vapor samples collected during previous investigations are provided below, and summarized on Figures 5 through 7.

### 5.1 Soil

Evidence of petroleum contamination (petroleum-like odors and staining) and elevated photoionization detector (PID) readings as high as 1,370 parts per million (ppm) were noted above the saturated zone, as shallow as 8 feet bgs, and extending to below the water table in soil borings advanced in and adjacent to the footprint of the former gasoline station in the southeastern portion of the Site (SB-4, SB-11, SB-13, SB-14, and SB-18). Evidence of petroleum contamination and elevated PID readings as high as 1,101 ppm were observed in the smear zone and extending below the water table in soil borings advanced in and adjacent to the footprint of the former gasoline station in the southern portion of the Site (SB-5, SB-15, SB-16, and SB-17).

As summarized below, soil samples collected from four of the borings exhibiting field evidence of petroleum contamination also contained petroleum-related VOCs at concentrations above the NYSDEC Part 375 Unrestricted Use Soil Cleanup Objectives (UUSCOs), Protection of Groundwater Soil Cleanup Objectives (PGWSCOs), and Restricted Residential Soil Cleanup Objectives (RRSCOs), and the Soil Cleanup Levels (SCLs) for gasoline-contaminated soil listed in CP-51 Table 2. In addition, SVOCs and metals were detected above the Part 375 SCOs in soil samples collected during the Phase II investigation and SI. The SVOC and metals exceedances were in soil samples collected from the shallow fill layer identified at the Site that did not exhibit other field evidence of contamination.

#### Volatile Organic Compounds (VOCs)

The VOC exceedances in soil are summarized in the following table and on Figure 5.

#### Volatile Organic Compounds Detected in Soil Above the Part 375 SCOs and CP-51 SCLs

Boring ID Depth (ft bgs) Date Sampled Units = mg/kg	Part 375 UUSCO/ CP-51 SCL	Part 375 PGWSCO	Part 375 RRSCO	SB-11 (17-19) 2/6/2018	SB-13 (10-12) 2/6/2018	SB-14 (15-16) 2/6/2018	SB-18 (12-14) 2/6/2018
1,2,4-Trimethylbenzene	3.6	3.6	52	60	69	19	100
1,3,5-Trimethylbenzene	8.4	8.4	52	17	22	11	34
Benzene	0.06	0.06	4.8	--	--	0.12 J	--
Ethylbenzene	1	1	41	11	14	4.9	11
Isopropylbenzene	2.3	NS	NS	4.1	3.1	2.5	2.4
n-Propylbenzene	3.9	3.9	100	15	12	4.1	7.2

Boring ID Depth (ft bgs) Date Sampled Units = mg/kg	Part 375 UUSCO/ CP-51 SCL	Part 375 PGWSCO	Part 375 RRSCO	SB-11 (17-19) 2/6/2018	SB-13 (10-12) 2/6/2018	SB-14 (15-16) 2/6/2018	SB-18 (12-14) 2/6/2018
<b>Toluene</b>	<b>0.7</b>	<b>0.7</b>	<b>100</b>	--	<b>0.87</b>	--	--
<b>Xylenes, Total</b>	<b>0.26</b>	<b>1.6</b>	<b>100</b>	<b>18</b>	<b>68</b>	<b>17 J</b>	<b>78</b>

**Notes:**

**Bold** = Exceeds Unrestricted Use Soil Cleanup Objective (UUSCO)/CP-51 Table 2 Soil Cleanup Level (SCL), and/or Protection of Groundwater Soil Cleanup Objective (PGWSCO)

**Highlighted** = Exceeds Restricted Residential Soil Cleanup Objective (RRSCO)

NS = No published Soil Cleanup Objective

J = Estimated concentration

ft bgs = feet below ground surface

mg/kg = milligrams per kilogram

-- = No exceedance

Semivolatile Organic Compounds (SVOCs)

The SVOC exceedances in soil are summarized in the following table and on Figure 5.

**Semivolatile Organic Compounds Detected in Soil  
Above the Part 375 SCOs and CP-51 SCLs**

Boring ID Depth (ft bgs) Date Sampled Units = mg/kg	Part 375 UUSCO/ CP-51 SCL	Part 375 PGWSCO	Part 375 RRSCO	SB-6 (2-4) 8/8/2017	SB-17 (5-7) 2/9/2018
<b>Benzo(a)anthracene</b>	<b>1</b>	<b>1</b>	<b>1</b>	--	<b>2.8</b>
<b>Benzo(a)pyrene</b>	<b>1</b>	<b>22</b>	<b>1</b>	--	<b>2.4</b>
<b>Benzo(b)fluoranthene</b>	<b>1</b>	<b>1.7</b>	<b>1</b>	--	<b>3.3</b>
<b>Benzo(k)fluoranthene</b>	<b>0.8</b>	<b>1.7</b>	<b>3.9</b>	--	<b>0.85</b>
<b>Chrysene</b>	<b>1</b>	<b>1</b>	<b>3.9</b>	--	<b>2.2</b>
<b>Dibenzo(a,h)anthracene</b>	<b>0.33</b>	<b>1,000</b>	<b>0.33</b>	--	<b>0.41</b>
<b>Indeno(1,2,3-cd)pyrene</b>	<b>0.5</b>	<b>8.2</b>	<b>0.5</b>	<b>0.54</b>	<b>1.8</b>

**Notes:**

**Bold** = Exceeds Unrestricted Use Soil Cleanup Objective (UUSCO)/CP-51 Table 3 Soil Cleanup Level (SCL), and/or Protection of Groundwater Soil Cleanup Objective (PGWSCO)

**Highlighted** = Exceeds Restricted Residential Soil Cleanup Objective (RRSCO)

ft bgs = feet below ground surface

mg/kg = milligrams per kilogram

-- = No exceedance

Metals

The metals exceedances in soil are summarized in the following table and on Figure 5.

## Metals Detected in Soil Above the Part 375 SCOs

Boring ID Depth (ft bgs) Date Sampled Dilution Factor Units = mg/kg	Part 375 UUSCO	Part 375 PGWSCO	Part 375 RRSCO	SB-1 (2-4) 8/8/2017 ¼ †	SB-5 (2-4) 8/8/2017 ¼ †	SB-6 (2-4) 8/8/2017 ¼ †	SB-6 (9-11) 8/8/2017 ¼ †	SB-7 (1-3) 8/9/2017 ¼ †	SB-8 (2-4) 8/8/2017 ¼ †
Chromium	30*	NS	180*	--	--	33.8	36.8	--	31.4
Lead	63	450	400	--	295	77.9	--	67.3	--
Mercury	0.18	0.73	0.81	--	--	--	--	0.48	--
Zinc	109	2,480	10,000	568	247	--	--	--	--

Boring ID Depth (ft bgs) Date Sampled Dilution Factor Units = mg/kg	Part 375 UUSCO	Part 375 PGWSCO	Part 375 RRSCO	SB-9 (1-3) 8/8/2017 ¼ †	SB-10 (3-5) 2/7/2018 1	SB-12 (2-4) 2/6/2018 1	SB-14 (2-4) 2/6/2018 1	SB-15 (2-4) 2/9/2018 1
Chromium	30*	NS	180*	--	39.5	113	--	--
Lead	63	450	400	92.1	--	--	140	--
Mercury	0.18	0.73	0.81	--	--	--	--	0.4
Zinc	109	2,480	10,000	--	--	--	--	--

## Notes:

**Bold** = Exceeds Unrestricted Use SCO (UUSCO)

NS = No published Soil Cleanup Objective

mg/kg = milligrams per kilogram

ft bgs = feet below ground surface

¼ † = Dilution factor varies

\* = Standard reflects trivalent chromium, not total chromium

-- = No exceedance

## 5.2 Groundwater

Groundwater sampling completed during the Phase II investigation and SI included the collection of samples from both temporary well points and permanent groundwater monitoring wells. No separate phase product was detected in the on-site monitoring wells; however, petroleum-like odors and sheen were noted on purge water during one or both sampling events at permanent wells MW-2, MW-6, MW-7, and MW-8; and in temporary well point TW-1 during the Phase II investigation.

As summarized below, groundwater samples collected from TW-1 and MW-6 during the Phase II investigation, and from MW-7 and MW-8 during the SI contained petroleum-related VOCs at concentrations above the NYSDEC AWQs. In addition, the gasoline additive MTBE was detected at concentrations above the NYSDEC AWQS in groundwater samples collected from TW-1, TW-2, and MW-2 during the Phase II investigation, and from MW-2, MW-7, MW-8, and MW-9 during the SI. The presence of MTBE in groundwater suggests that an off-site source (e.g., the existing gas station across Cottage Place) has contributed to the documented on-site groundwater contamination. The highest MTBE concentrations were detected in MW-2, located approximately 300 feet from the nearest off-site gas station, suggesting that the original source is no longer present or has diminished significantly.

Volatile Organic Compounds (VOCs) and Methyl tert-butyl ether (MTBE)

The VOC and MTBE exceedances in groundwater are summarized in the following tables and on Figure 6.



**Volatile Organic Compounds Detected in Groundwater Above the Class GA AWQVs  
(Excluding MTBE)**

Sample ID Date Sampled Dilution Factor Units = µg/L	Class GA AWQS	TW-1 8/9/2017 5	MW-6 * 8/10/2017 1	MW-7 2/16/2018 2	MW-8 2/16/2018 2
<b>1,2,4-Trimethylbenzene</b>	5	NA	NA	<b>110</b>	--
<b>1,3,5-Trimethylbenzene</b>	5	NA	NA	<b>56</b>	<b>57</b>
<b>Benzene</b>	<b>1</b>	<b>14</b>	--	--	--
<b>Ethylbenzene</b>	5	<b>150</b>	<b>5.2</b>	<b>92</b>	<b>33</b>
<b>Isopropylbenzene</b>	5	<b>35</b>	--	<b>14</b>	<b>44</b>
<b>Naphthalene</b>	<b>10</b>	--	--	<b>14</b>	<b>23</b>
<b>n-Butylbenzene</b>	5	NA	NA	--	<b>36</b>
<b>n-Propylbenzene</b>	5	NA	NA	<b>14</b>	<b>130</b>
<b>o-Xylene</b>	5	--	--	<b>28</b>	--
<b>p/m-Xylene</b>	5	<b>46</b>	--	<b>290</b>	<b>22</b>
<b>p-Isopropyltoluene</b>	5	NA	NA	--	<b>8.3</b>
<b>sec-Butylbenzene</b>	5	NA	NA	--	<b>25</b>
<b>Toluene</b>	5	<b>6.1</b>	--	--	--

**Notes:****Bold** = Exceeds the Class GA AWQS

µg/L = micrograms per liter

NA = Not analyzed

\* = Referred to as GW-3 in the Phase II investigation (re-designated as MW-6 for the SI)

-- = No exceedance

**MTBE Detected in Groundwater Above the Class GA AWQVs**

Sample ID Date Sampled Dilution Factor Units = µg/L	Class GA AWQS	TW-1 8/9/2017 5	TW-2 8/9/2017 1	MW-2** 8/10/2017 10	MW-2 2/16/2018 10	MW-7 2/16/2018 2	MW-8 2/16/2018 2	MW-9 2/16/2018 1
<b>MTBE</b>	<b>10</b>	<b>260</b>	<b>23</b>	<b>2,000</b>	<b>1,800</b>	<b>15</b>	<b>20</b>	<b>34</b>

**Notes:****Bold** = Exceeds the Class GA AWQS

µg/L = micrograms per liter

\*\* = Referred to as GT-2 in the Phase II investigation (re-designated as MW-2 for the SI)

### 5.3 Sub-Slab/Soil Vapor

Five sub-slab/soil vapor points (SV-1 through SV-5) were installed during the Phase II investigation to facilitate the collection of vapor samples for laboratory analysis. The sub-slab/soil vapor sampling included two exterior locations in the current asphalt-paved parking lot (SV-1 and SV-2) and three interior locations inside the current Site building (SV-3 through SV-5).

As summarized below, VOC concentrations above the NYSDOH published background levels were detected in the five sub-slab/soil vapor samples collected. In addition, the chlorinated solvent TCE was detected above the NYSDOH AGV in two samples, and above the "Mitigate" level for sub-slab soil vapor concentrations listed in Matrix A of the NYSDOH *Guidance for Evaluating Soil Vapor Intrusion in New York State* in one sample. The petroleum-related VOCs detected above background levels in soil vapor are attributed to the petroleum contamination

identified in soil and groundwater at the Site. TCE was not detected above the regulatory standards or guidance values in any soil or groundwater samples collected during the Phase II investigation. Although TCE may have been used by one of the potential former on-site dry cleaners identified in the May 2017 Phase I ESA, the levels detected in soil vapor are not considered to be indicative of a widespread release or on-site source area.

Volatile Organic Compounds (VOCs)

The VOC exceedances in sub-slab/soil vapor are summarized in the following table and on Figure 7.

**Volatile Organic Compounds Detected in Sub-Slab/  
Soil Vapor Above Air Guidance Values or Background Levels**

Sample ID Date Sampled Dilution Factor Units = $\mu\text{g}/\text{m}^3$	<i>NYSDOH</i> AGV	<i>NYSDOH</i> Upper Fence/ EPA 90 <sup>th</sup> Percentile	SV-1 8/8/2017 8	SV-2 8/8/2017 13.1	SV-3 8/9/2017 6	SV-4 8/9/2017 1	SV-5 8/9/2017 10
1,3-Butadiene	NS	NS / <3.0	7.2	87	--	--	5.4
2,2,4-Trimethylpentane	NS	5 / NS	25	15	--	--	--
Acetone	NS	115 / 98.9	170	170	270	--	750
Benzene	NS	13 / 9.4	11	52	--	--	--
Carbon disulfide	NS	NS / 4.2	--	100	--	--	--
Chloroform	NS	1.2 / 1.1	--	--	--	1.2	10
Chloromethane	NS	4.2 / 3.7	--	20	--	--	--
Cumene	NS	0.8 / NS	--	--	--	--	13
Cyclohexane	NS	6.3 / NS	--	18	26	--	--
Ethylbenzene	NS	6.4 / 5.7	50	38	--	--	10
Methyl Ethyl Ketone	NS	16 / 12	36	44	18	--	26
Methylene Chloride	60	16 / 10	--	--	240	--	53
n-Heptane	NS	18 / NS	--	240	--	--	--
n-Hexane	NS	14 / 10.2	40	590	350	--	100
n-Propylbenzene	NS	1.5 / NS	8.6	--	--	1.7	--
o-Xylene	NS	7.1 / 7.9	7.4	--	--	--	--
Toluene	NS	57 / 43	--	--	250	--	45
Trichloroethene	2	0.5 / 4.2	--	--	69	--	13

**Notes:**

**Bold** = Exceeds the Soil Vapor Intrusion Air Guidance Values (AGVs)

**Highlighted** = Exceeds the Soil Vapor Indoor Upper Fence Air Values

**Bold Border** = Exceeds the EPA Base 90<sup>th</sup> Percentile Indoor Air Values

$\mu\text{g}/\text{m}^3$  = micrograms per cubic meter

-- = No exceedance

## 6.0 FIELD PROGRAM

The RI field program will focus on collecting soil and groundwater data to further determine the nature and extent of known contamination at the Site and to assist with determining the appropriate remedial action going forward. The current on-site structure occupies approximately two-thirds of the Site, including the footprint of the former gasoline station in its southern portion, limiting the locations available for soil and groundwater sampling. As such, much of the proposed RI field program will not be completed until the on-site structure has been demolished, and access to all areas of the Site is available. This will allow for Site-wide delineation of known contamination in and adjacent to the footprints of the former on-site gasoline stations, and further investigation of other areas of the Site. Notwithstanding, some RI work may commence in currently accessible areas (e.g., in the current parking lot) prior to the start or during demolition. As of the date of this report, the demolition work including asbestos abatement has been tentatively scheduled to begin in January 2019 and is expected to be completed by March 2019.

Based on results from soil vapor sampling conducted during the previous Phase II investigation, it is anticipated that remedial action for the Site will include a vapor barrier/waterproofing installed under the entire new building slab, with a passive sub-slab depressurization system (SSDS) installed under any occupied spaces where the bottom of slab is not in contact or in close proximity to the water table. Therefore, the RI field program does not include additional soil vapor sampling. Testing would be conducted in accordance with NYSDOH protocols after building construction to determine whether the SSDS would need to be upgraded to an active system.

### 6.1 Field Program Summary

The field sampling scope of work consists of: the advancement of 33 soil borings to further delineate the extent of the petroleum-related contamination in and adjacent to the footprints of the former on-site gasoline stations, and to characterize the condition of the fill layer identified at the Site; the installation of six 2-inch diameter temporary well points to delineate the extent of the petroleum-related contamination and to further characterize groundwater across the Site; and the collection of soil and groundwater samples from the soil borings, select existing monitoring wells, and the newly installed temporary well points for laboratory analysis. If warranted based on field observations, additional soil borings and/or temporary well points may be advanced to further delineate the horizontal and vertical extent of contamination at the Site. The proposed sample locations are shown on Figure 8. As previously noted, due to access limitations associated with the current on-site structure, much of the field program will not be implemented until the mall building has been demolished. The following sections describe the methods that will be used to complete the scope of work. The rationale for the proposed sample locations is summarized in the following table.

**Proposed Sample Locations**

Sample Locations	Location	Rationale
SB-19 through SB-24	Southeastern portion of the Site; in and adjacent to the footprint of the former gasoline station.	To further assess and delineate the extent of petroleum-contaminated soil, and to characterize the condition of the fill layer.
SB-25 through SB-34	Southern portion of the Site; in, adjacent to, and downgradient of the footprint of the former gasoline station.	To further assess and delineate the extent of petroleum-contaminated soil, and to characterize the condition of the fill layer.
SB-35	Southern corner of the Site; adjacent to SB-6.	To further characterize the condition of the fill layer, and delineate the vertical extent of documented SCO exceedances.
SB-36 through SB-51	Within the footprint of the mall building and in the parking lot area.	To further characterize the fill layer.

TW-3 through TW-6	Southern portion of the Site; installed at soil borings SB-25, SB-28, SB-33, and SB-34.	To further assess and delineate the nature and extent of the petroleum-contaminated groundwater in this area.
TW-7	Western portion of the Site; installed at soil boring SB-37.	To characterize groundwater in this area.
TW-8	Northern portion of the Site; installed at soil boring SB-44.	To characterize groundwater in this area.
MW-1, MW-2, and MW-5 through MW-9	Existing monitoring wells in the eastern and southern portions of the Site.	Sampling of existing groundwater monitoring wells in, adjacent to, and downgradient of petroleum-contaminated areas.

## 6.2 Soil Sampling

All soil borings (SB-19 through SB-51) will be advanced with a track-mounted Geoprobe® direct push probe (DPP) unit to a minimum of 5 feet below the groundwater interface or until refusal, whichever is shallower, and samples will be collected continuously using 2-inch diameter macrocore piston rod samplers fitted with dedicated acetate liners. Each macrocore sample liner will be split lengthwise and AKRF field personnel will record and document subsurface conditions. Macrocore samples will be inspected for evidence of contamination (e.g., odors, staining), screened for the presence of volatile organics with a PID equipped with a 10.6 electron volt (eV) lamp, and logged using the modified Burmister Soil Classification system. The PID will be calibrated in accordance with manufacturer's specifications prior to sampling.

Two soil samples will be collected from each soil boring advanced in, adjacent to, and downgradient of the former gasoline stations (SB-19 through SB-34). One sample will be collected from the 2-foot interval in the unsaturated zone that exhibits the greatest evidence of contamination (i.e., PID readings, odors, staining) and a second sample will be collected from the 2-foot interval in the saturated zone exhibiting the greatest evidence of contamination. In the absence of contamination, the samples will be collected from the interval directly above and below the groundwater interface. In an effort to characterize the condition of the fill layer at the Site, one to three samples will be collected from a 2-foot interval within and/or below the fill layer from select soil borings (SB-19, SB-22, SB-25, SB-33, and SB-35 through SB-51). Additional samples may be collected for laboratory analysis based on field observations to further delineate petroleum contamination, extent of fill, etc. All sampling equipment (e.g., drilling/direct push probe rods and macrocore samplers) will be either dedicated or decontaminated between sampling locations. Disposable sampling equipment, including spoons, gloves, bags, paper towels, etc. that come in contact with environmental media will be double bagged and disposed of as municipal trash in a facility trash dumpster as non-hazardous refuse.

Soil samples slated for laboratory analysis will be labeled and placed in laboratory-supplied containers and shipped to a NYSDOH Environmental Laboratory Approval Program (ELAP)-certified laboratory via courier with appropriate chain of custody documentation in accordance with appropriate EPA protocols. The samples collected from the locations in, adjacent to, and downgradient of the former gasoline stations will be analyzed for the VOCs listed in NYSDEC Commissioners Policy CP-51: Table 2 – Soil Cleanup Levels for Gasoline Contaminated Soil by EPA Method 8260. The samples collected from within and below the fill layer will be analyzed for Base Neutral (BN)-SVOCs by EPA Method 8270 and Resource Conservation and Recovery Act (RCRA) 8 Metals (arsenic, barium, cadmium, chromium, lead, mercury, selenium, and silver) plus zinc by the EPA's 6000/7000 series methods. In addition, a minimum of 10% of the soil samples (approximately 7 samples) collected will be analyzed for the full NYSDEC Part 375 List,

including target compound list (TCL) VOCs by EPA Method 8260, TCL SVOCs by EPA Method 8270, PCBs by EPA Method 8082, Pesticides by EPA Method 8081, Herbicides by EPA Method 8151, and Target Analyte List (TAL) metals by EPA's 6000/7000 series methods. As discussed in Section 6.6, additional samples will be collected and analyzed for quality assurance/quality control (QA/QC) purposes. The associated laboratory analytical data report will be prepared using Category B deliverables. A table summarizing the target depth of the soil borings, anticipated sampling intervals, and corresponding analytical parameters is provided as Table 1.

After each soil boring is completed, soil borings not designated for installation of temporary well points will be backfilled with drill cuttings (if not grossly contaminated), sand, and/or hydrated bentonite and patched to match existing surface conditions. All investigation derived waste (IDW) associated with the soil borings (i.e., grossly contaminated drill cuttings) will be containerized in properly labeled Department of Transportation (DOT)-approved 55-gallon drums for future off-site disposal at a permitted facility as described in Section 6.8.

### **6.3 Temporary Well Point Installation and Well Development**

Temporary well points TW-3 through TW-8 will be installed at soil borings SB-25, SB-28, SB-33, SB-34, SB-37, and SB-44, respectively. The temporary well points will be installed in the open bore holes, and will be constructed using 2-inch diameter, 10-foot long polyvinyl chloride (PVC) well screen set at a minimum of 5 feet below the observed groundwater table. Solid PVC riser pipe will be used to bring each well point to grade surface. Following installation, a peristaltic pump (or equivalent) will be used to purge approximately three well volumes from each well point. The purged water will be monitored for turbidity and water quality indicators (i.e., pH, temperature, and specific conductivity) to ensure that sedimentation/turbidity is reduced, to the extent practical. The development water will be containerized in properly labelled DOT-approved 55-gallon drums for future off-site disposal at a permitted facility as described in Section 6.8.

### **6.4 Groundwater Sampling**

Groundwater samples for laboratory analysis will be collected from the six newly installed temporary well points (TW-3 through TW-8), and seven of the existing on-site monitoring wells located in, adjacent to, and downgradient of petroleum-contaminated areas (MW-1, MW-2, and MW-5 through MW-9). The existing permanent monitoring wells may be sampled during a separate event just prior to or during demolition. Prior to collecting groundwater samples, the headspace at each monitoring well will be screened for the presence of VOCs using a calibrated PID after removing the well cap. An electronic oil/water interface probe accurate to 0.01 feet will be used to measure the depth to groundwater in each well, and to check for the potential presence of light non-aqueous phase liquid (LNAPL).

Low-flow sampling techniques and dedicated tubing will be utilized to purge the monitoring wells and temporary well points prior to sample collection in accordance with EPA and prevailing NYSDEC protocols. The QAPP included in Appendix A specifies detailed protocols that will be followed for the emerging contaminant sample collection, including acceptable equipment, supplies, and personal protective equipment. A peristaltic pump will be used to purge and sample the 1-inch diameter permanent monitoring well (MW-8), and a submersible bladder pump will be used to purge and sample the 2-inch diameter temporary well points (TW-3 through TW-8) and the 2-inch diameter permanent monitoring wells (MW-1, MW-2, MW-5 through MW-7, and MW-9). The purged water will be monitored for turbidity and water quality indicators (i.e., pH, temperature, dissolved oxygen, oxidation-reduction potential, and specific conductivity) with measurements collected approximately every five minutes. Purging of the wells will continue

until the turbidity is less than 50 NTU for three successive readings and water quality indicators stabilize to the extent practicable. If turbidity and/or water quality indicators did not stabilize after two hours, purging will be discontinued and samples will be collected.

Groundwater samples slated for laboratory analysis will be labeled and placed in laboratory-supplied containers and shipped to a NYSDOH ELAP-certified laboratory via courier with appropriate chain of custody documentation in accordance with appropriate EPA protocols. All groundwater samples will be analyzed for the VOCs listed in CP-51: Table 2 by EPA Method 8260. In addition, at least three of the groundwater samples collected will be analyzed for the full NYSDEC Part 375 and Emerging Contaminants Lists, including TCL VOCs by EPA Method 8260, TCL SVOCs by EPA Method 8270, PCBs by EPA Method 8082, Pesticides by EPA Method 8081, Herbicides by EPA Method 8151, dissolved TAL metals by EPA's 6000/7000 series methods, 1,4-dioxane by EPA Method 8270 SIM, and TAL Per- and Polyfluoroalkyl Substances (PFAS) by Modified EPA Method 537. As discussed in Section 6.6, additional samples will be collected and analyzed for QA/QC purposes. The associated laboratory analytical data report will be prepared using Category B deliverables. A table summarizing the groundwater sampling locations and corresponding analytical parameters is provided as Table 2.

Following collection of the samples at the temporary well points, the wells will be removed and the boreholes will be backfilled with drill cuttings (if not grossly contaminated), sand, and/or hydrated bentonite and patched to match existing surface conditions.

## **6.5 Fluid Level Gauging**

Two rounds of fluid level gauging will be conducted on the nine permanent groundwater monitoring wells at the Site (MW-1 through MW-9) as part of the RI. The headspace at each monitoring well will be screened for the presence of VOCs using a calibrated PID after removing the well cap and an electronic oil/water interface probe accurate to 0.01 feet will be used to measure the depth to groundwater in each well, and to check for the potential presence of LNAPL. The fluid level measurements will be used to supplement the current groundwater elevation data and to create updated groundwater elevation contour maps.

## **6.6 Quality Assurance / Quality Control (QA/QC)**

Additional analysis will be included for quality control/quality assurance measures, as required by the Category B sampling techniques. The QA/QC samples for soil and groundwater will include one field blank, one trip blank, one matrix spike/matrix spike duplicate (MS/MSD), and one blind duplicate sample at a frequency of one sample set per 20 field samples per media. The MS/MSD and blind duplicate samples will be analyzed for the same list of parameters as the corresponding field sample. The field blank will be analyzed for the cumulative list of parameters designated for all corresponding field samples included in the same sample delivery group for each media. The laboratory-prepared trip blank will be analyzed for VOCs by EPA Method 8260 to determine the potential for cross-contamination during sample shipment. The associated laboratory analytical data reports will be prepared using Category B deliverables.

A QAPP describing the QA/QC protocols and procedures that will be followed during implementation of the RIWP, including a table summarizing the required analyses for the QA/QC samples, is provided as Appendix A. The laboratory analytical data generated from the RI will be reviewed by a third-party validator and a Data Usability Summary Report (DUSR) will be prepared to document the usability and validity of the data.

**6.7 Decontamination Procedures**

All non-dedicated sampling equipment (e.g., drilling/direct push probe rods, macrocore samplers, submersible pumps, and oil/water interface probes) will be decontaminated between sampling locations using the following procedure:

1. Scrub equipment with a bristle brush using a tap water/Simple Green® solution.
2. Rinse with tap water.
3. Scrub again with a bristle brush using a tap water/Simple Green® solution.
4. Rinse with tap water.
5. Rinse with distilled water.
6. Air-dry the equipment.

**6.8 Management of Investigation-Derived Waste (IDW)**

Equipment decontamination fluids, grossly contaminated soil cuttings, and monitoring well purge water will be containerized in properly labeled DOT-approved 55-gallon drums for future off-site disposal at a permitted facility. The drums will be sealed at the end of each work day and labeled with the date, the well or boring number(s), the type of waste (i.e., drill cuttings, decontamination fluids, or purge water) and the name of an AKRF point-of-contact. All drums will be labeled "pending analysis" until laboratory data is available. All IDW will be disposed of or treated according to applicable local, state, and federal regulations. Disposable sampling equipment, including spoons, gloves, bags, paper towels, etc. that come in contact with environmental media will be double bagged and disposed of as municipal trash in a facility trash dumpster as non-hazardous refuse.

## **7.0 REPORTING REQUIREMENTS**

### **7.1 Remedial Investigation Report (RIR)**

Upon completion of all field work and receipt of laboratory analytical results, a Remedial Investigation Report (RIR) will be prepared that will: document field activities; present field and laboratory data; evaluate exposure pathways in an exposure assessment; and discuss conclusions and recommendations drawn from the results of the investigation.

#### **7.1.1 Description of Field Activities**

This section of the RIR will describe the field methods used to characterize the Site conditions, including: sampling techniques; field screening equipment; drilling equipment; monitoring well installation procedures; and management of IDW.

#### **7.1.2 Soil Boring Assessment**

The RIR will include a section that presents field and laboratory data for soil results. This section will include a description of soil characteristics and provide figures that illustrate soil boring locations. Field and laboratory analytical results will be presented in the body of the report and summarized in tables and figures, with the detected concentrations compared to regulatory standards and/or guidance values. Soil boring logs and laboratory analytical reports will be provided as attachments. Category B deliverables will be provided by the laboratory, and a third-party DUSR will be prepared to document the usability and validity of the data.

#### **7.1.3 Groundwater Assessment**

The RIR will include a section that presents field and laboratory data from the groundwater sampling. This section will include a description of groundwater characteristics and provide figures that illustrate the monitoring well locations. Monitoring well survey data for the existing monitoring wells and fluid level gauging measurements will be used to create an updated groundwater elevation contour map that will document groundwater flow direction. Field and laboratory analytical results will be presented and compared with regulatory standards and/or guidance values. Groundwater sampling logs and the laboratory analytical data reports will be provided as attachments. Category B deliverables will be provided by the laboratory, and a third-party DUSR will be prepared to document the usability and validity of the data.

#### **7.1.4 Qualitative Human Health Exposure Assessment**

A Qualitative Human Health Exposure Assessment will be performed in accordance with DER-10 Section 3.3. The assessment will be included in the RIR.



## 8.0 SCHEDULE OF WORK

The following tentative schedule has been developed for the project. This schedule is subject to change, in consultation with NYSDEC.

**Table 8**  
**Project Schedule**

<b>Activity</b>	<b>Time To Complete</b>
Prepare BCP Application, Submit to NYSDEC	May 2018; Completed
NYSDEC Completeness Review of BCP Application	June 2018; Completed
30-day Public Comment Period for BCP Application Initiated	July 2018; Completed
Public Comment Period for BCP Application Ends	August 2018; Completed
BCP Acceptance	August 2018; Completed
Execute Brownfield Cleanup Agreement (BCA), Enter BCP	August 2018; Completed
Prepare Citizen Participation Plan (CPP)	September 2018
Prepare RIWP, Submit to NYSDEC	September 2018
30-day Public Comment Period for RIWP Initiated	October 2018
Public Comment Period for RIWP Ends	November 2018
Remedial Investigation Field Work Completed	March 2019
Draft Remedial Investigation Report (RIR), Submit to NYSDEC	April 2019
Draft Remedial Action Work Plan (RAWP) and Fact Sheet, Submit to NYSDEC	April 2019
45-day Public Comment Period for RAWP is Initiated	May 2019
Public Comment Period for RAWP Ends	July 2019
NYSDEC Approves RAWP and Issues Decision Document	August 2019
Complete Remedial Action	August 2019 – March 2020
Draft Final Engineering Report (FER), Submit FER to NYSDEC	April 2020
Certificate of Completion is Issued	May 2020

## 9.0 CERTIFICATION

I, Rebecca A. Kinal, P.E., certify that I am currently a Qualified Environmental Professional as defined in 6 NYCRR Part 375 and that this Remedial Investigation Work Plan was prepared in accordance with all applicable statutes and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10).

Rebecca A. Kinal, P.E.

---

Name

Signature



Date

## 10.0 REFERENCES

- Phase I Environmental Site Assessment (ESA), 200 Hamilton Avenue, White Plains, New York; AKRF, Inc.; prepared for SWD II, LLC; dated May 2017.
- Subsurface (Phase II) Investigation, White Plains Mall, 200 Hamilton Avenue, White Plains, New York; AKRF, Inc.; prepared for SWD II, LLC; dated October 2017.
- Spill Investigation, White Plains Mall, 200 Hamilton Avenue, White Plains, New York; AKRF, Inc.; prepared for SWD II, LLC; dated April 2018.
- U.S. Geological Survey, *White Plains, NY Quadrangle*, 7.5 minute Series (Topographic), Scale 1:24,000, 2010.
- DER-10 Technical Guidance for Site Investigation and Remediation, May 3, 2010.
- 6 NYCRR § 375, New York State Department of Environmental Conservation Rules and Regulations, Remedial Program Requirements, December 14, 2006.
- 6 NYCRR Chapter X § 700 – 706, New York State Department of Environmental Conservation Water Quality Regulations, Surface Water and Ground Water Classifications and Standards, June 12, 2008.
- Commissioners Policy CP-51 Soil Cleanup Guidance; New York State Department of Environmental Conservation, October 21, 2010.
- DER-10 Technical Guidance for Site Investigation and Remediation, May 3, 2010.
- Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October 2006, New York State Department of Health Center for Environmental Health, Bureau of Environmental Exposure Investigation; including the September 2013 NYSDOH Fact Sheet update for tetrachloroethene (PCE), the August 2015 NYSDOH Fact Sheet update for trichloroethene (TCE), and the May 2017 NYSDOH Matrices update for 1,1,1-trichloroethane, 1,1-dichloroethene, carbon tetrachloride, cis-1,2-dichloroethylene, methylene chloride, PCE, TCE, and vinyl chloride.

## FIGURES

© 2018 AKRF Q:\Projects\170029 - 200 HAMILTON AVENUE\Technical\GIS and Graphics\hazmat\170029 BCP Fig 1 Site loc map.mxd 4/19/2018 10:18:52 AM mvelleux

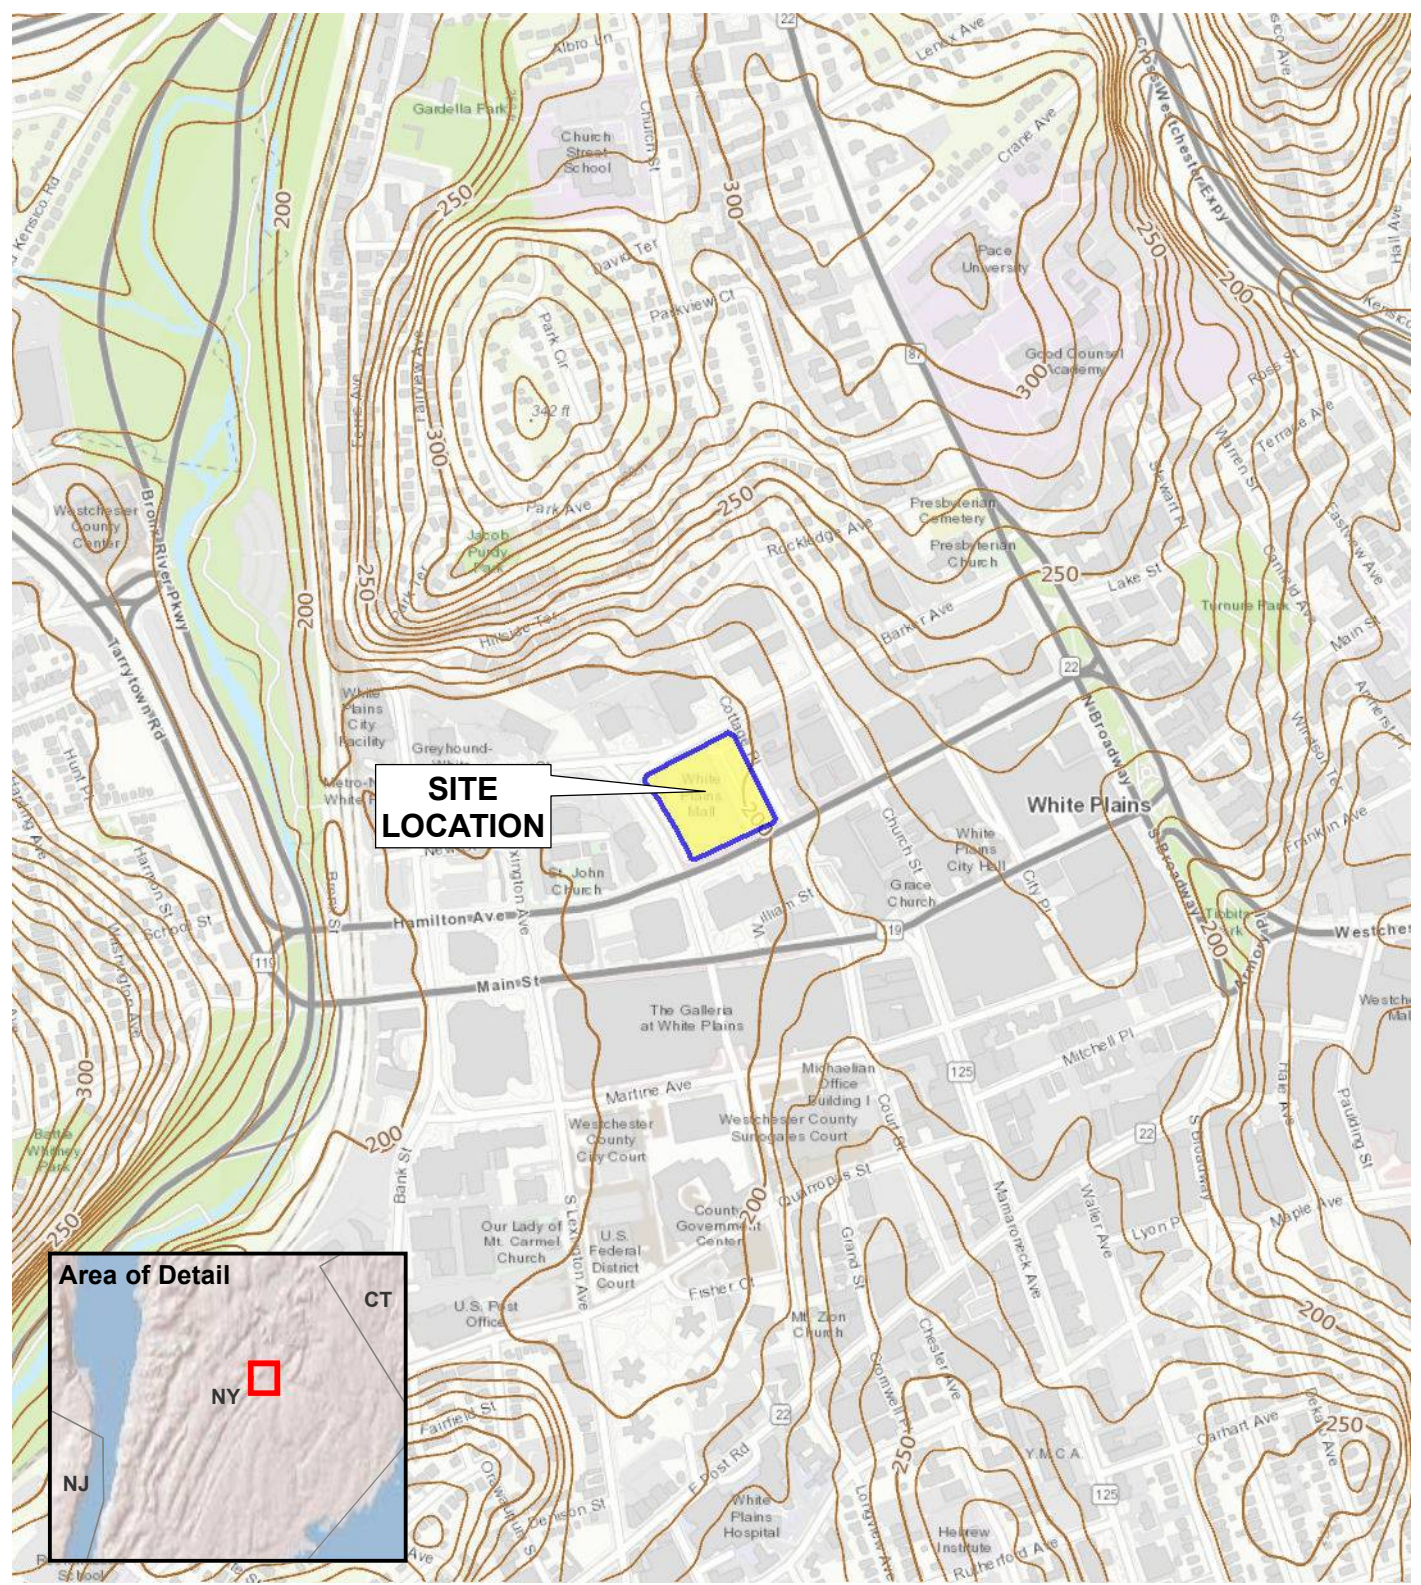

440 Park Avenue South, New York, NY 10016


**200 Hamilton Avenue**  
White Plains, New York

**SITE LOCATION**

DATE	<b>5/2/2018</b>
PROJECT NO.	<b>170029</b>
FIGURE	<b>1</b>




© 2018 AKRF Q:\Projects\170029 - 200 HAMILTON AVENUE\Technical\GIS and Graphics\shazmat\170029 BCP Fig 2 Site Plan.mxd 19/2018 11:04:04 AM mveilleux

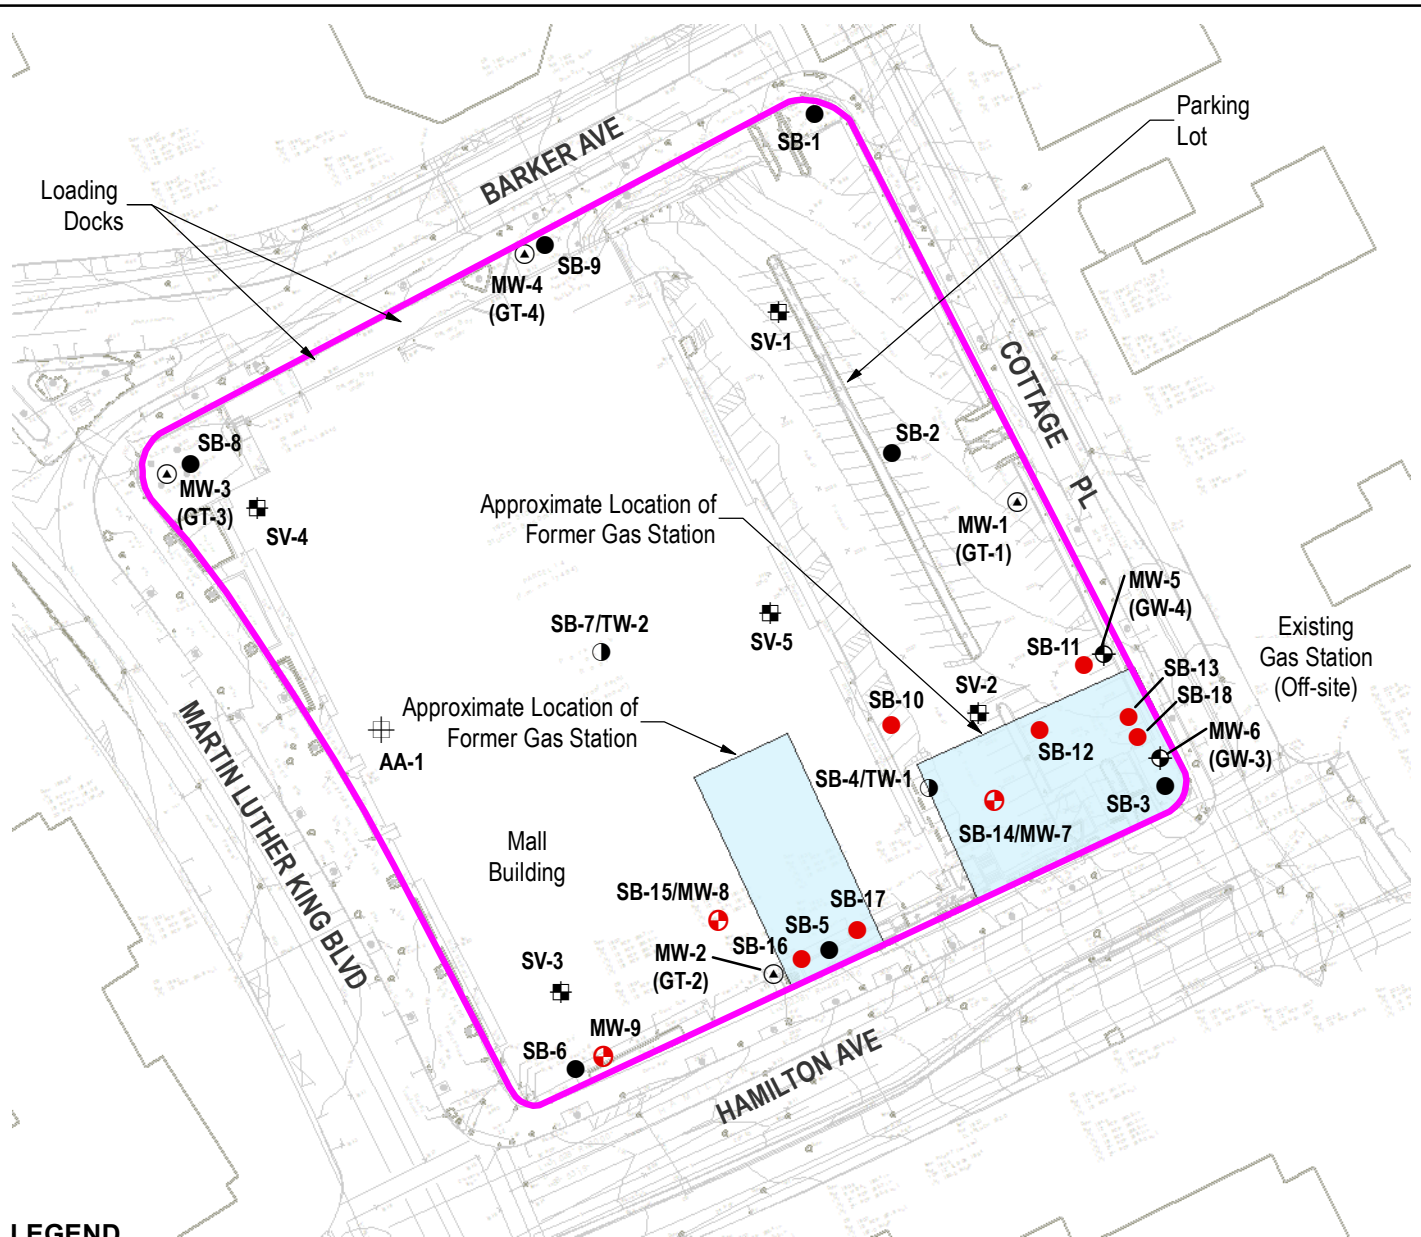

**LEGEND**

- PROPERTY BOUNDARY
- EXISTING MONITORING WELL LOCATION (FROM 2015 GEOTECHNICAL INVESTIGATION)
- EXISTING MONITORING WELL (UNKNOWN)
- SOIL BORING/TEMPORARY WELL (FROM 2017 PHASE II INVESTIGATION)
- SOIL BORING LOCATION (FROM 2017 PHASE II INVESTIGATION)
- SUB-SLAB SOIL VAPOR SAMPLE LOCATION (FROM 2017 PHASE II INVESTIGATION)
- AMBIENT AIR SAMPLE LOCATION (FROM 2017 PHASE II INVESTIGATION)
- SOIL BORING/MONITORING WELL LOCATION (FROM 2018 SPILL INVESTIGATION)
- SOIL BORING LOCATION (FROM 2018 SPILL INVESTIGATION)

Map Source:  
 Insite Engineering, Surveying & Landscape Architecture, P.C.  
 May 4, 2017.

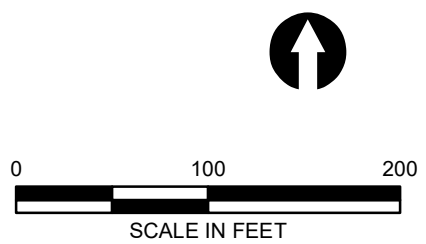


**AKRF**  
 440 Park Avenue South, New York, NY 10016

**200 Hamilton Avenue**  
 White Plains, New York

**SITE PLAN**

DATE	<b>5/2/2018</b>
PROJECT NO.	<b>170029</b>
FIGURE	<b>2</b>

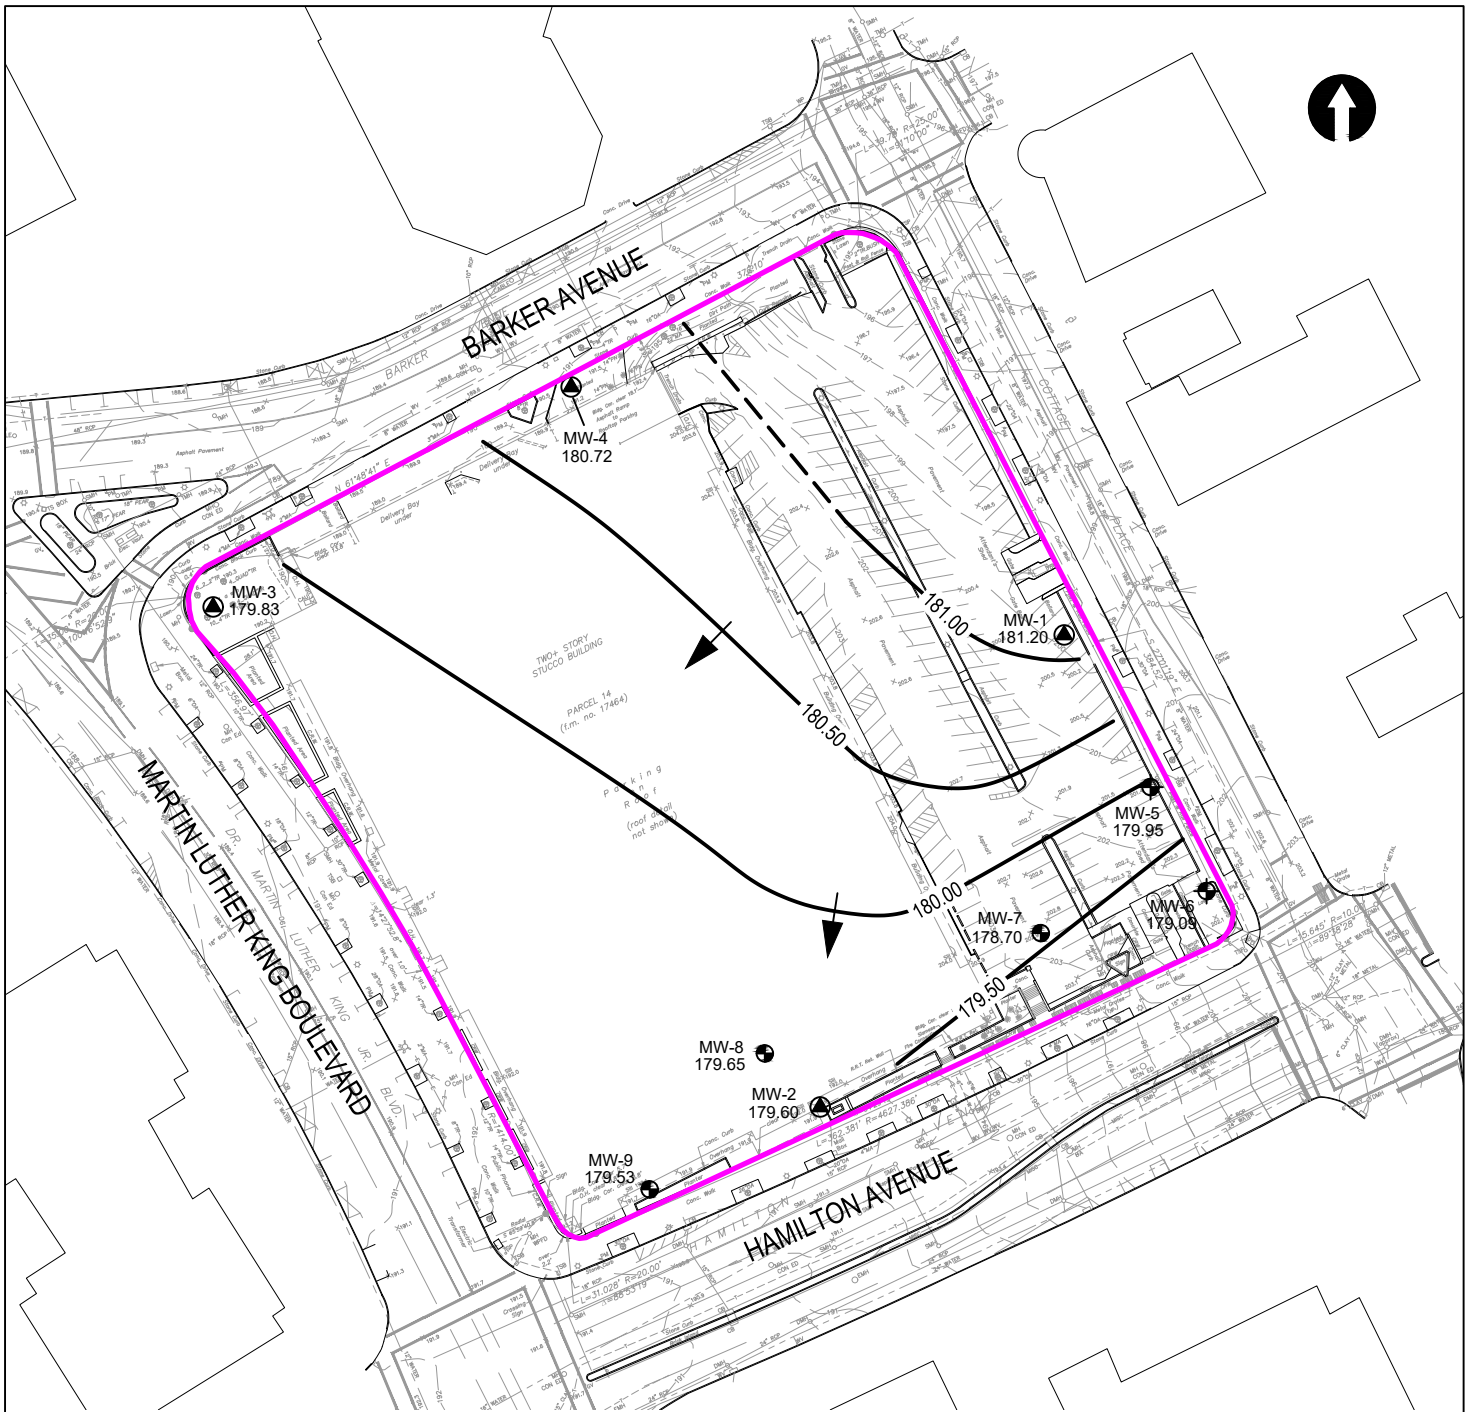


**LEGEND**

- PROPERTY BOUNDARY
- EXISTING MONITORING WELL LOCATION (FROM 2015 GEOTECHNICAL INVESTIGATION)
- EXISTING MONITORING WELL (UNKNOWN)
- MONITORING WELL (2018 SPILL INVESTIGATION)
- 180.00 — GROUNDWATER ELEVATION CONTOUR IN FEET (DASHED WHERE INFERRED)
- INFERRED GROUNDWATER FLOW DIRECTION

Map Source: Insite Engineering, Surveying & Landscaping Architecture, P.C. May 4, 2017.

NOTE: ELEVATION DATA FROM MW-7 NOT USED IN CREATING CONTOURS DUE TO SLOW RECHARGE IN THIS WELL.



440 Park Avenue South, New York, NY 10016


**200 Hamilton Avenue**  
White Plains, New York

**GROUNDWATER ELEVATION CONTOUR MAP**  
**FEBRUARY 16, 2018**

DATE  
**5/10/2018**

PROJECT NO.  
**170029**


FIGURE  
**3**

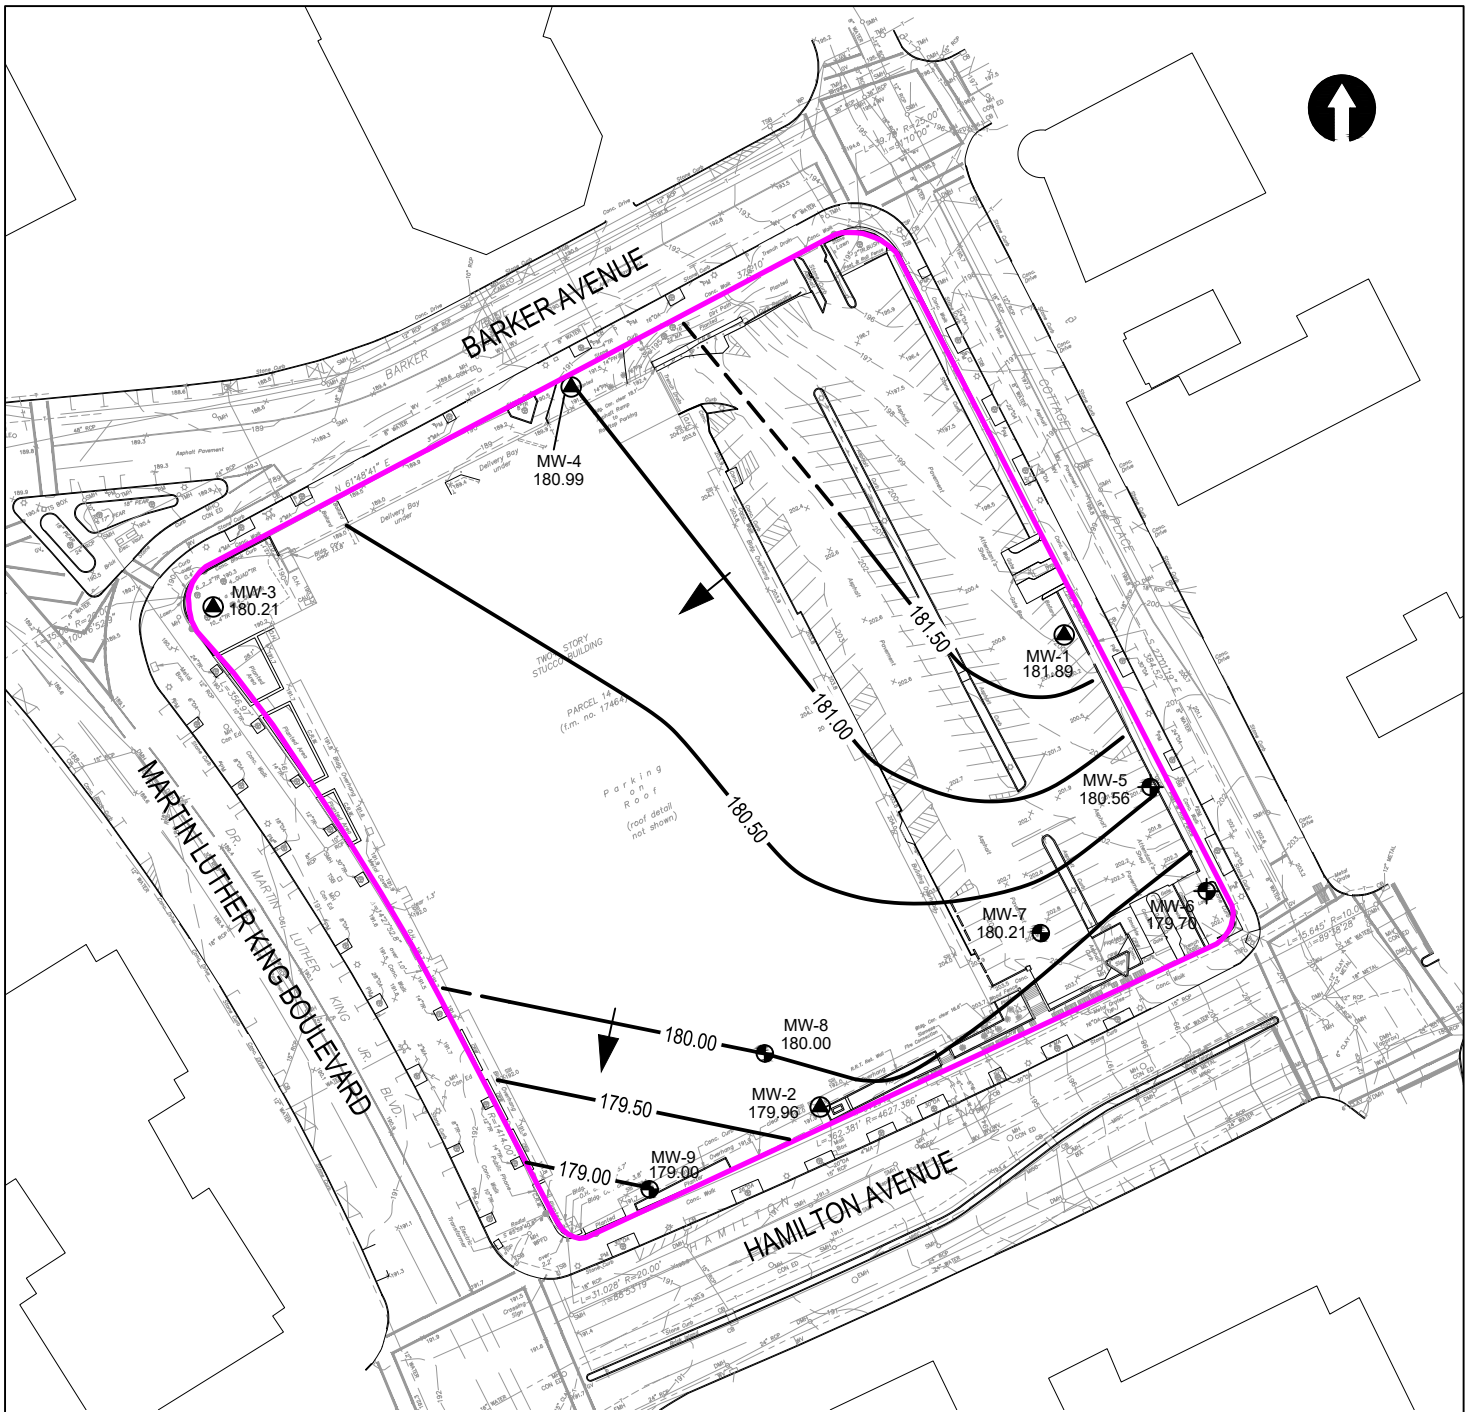

Map Source: Insite Engineering, Surveying & Landscaping Architecture, P.C. May 4, 2017.

**LEGEND**

- PROPERTY BOUNDARY
- 180.00 GROUNDWATER ELEVATION CONTOUR IN FEET (DASHED WHERE INFERRED)
- EXISTING MONITORING WELL LOCATION (FROM 2015 GEOTECHNICAL INVESTIGATION)
- EXISTING MONITORING WELL (UNKNOWN)
- MONITORING WELL (2018 SPILL INVESTIGATION)
- INFERRED GROUNDWATER FLOW DIRECTION



440 Park Avenue South, New York, NY 10016

**200 Hamilton Avenue**  
White Plains, New York

**GROUNDWATER ELEVATION CONTOUR MAP**  
**FEBRUARY 26, 2018**


DATE  
**5/10/2018**

PROJECT NO.  
**170029**

FIGURE  
**4**



©2018 AKRF, Inc. Q:\Projects\170029 - 200 HAMILTON AVENUE\Technical\BOP\CAD\170029 BOP Fig 8 RIMP Fig 5 Soil Concs.dwg last save: mveilleux 5/2/2018 3:48 PM

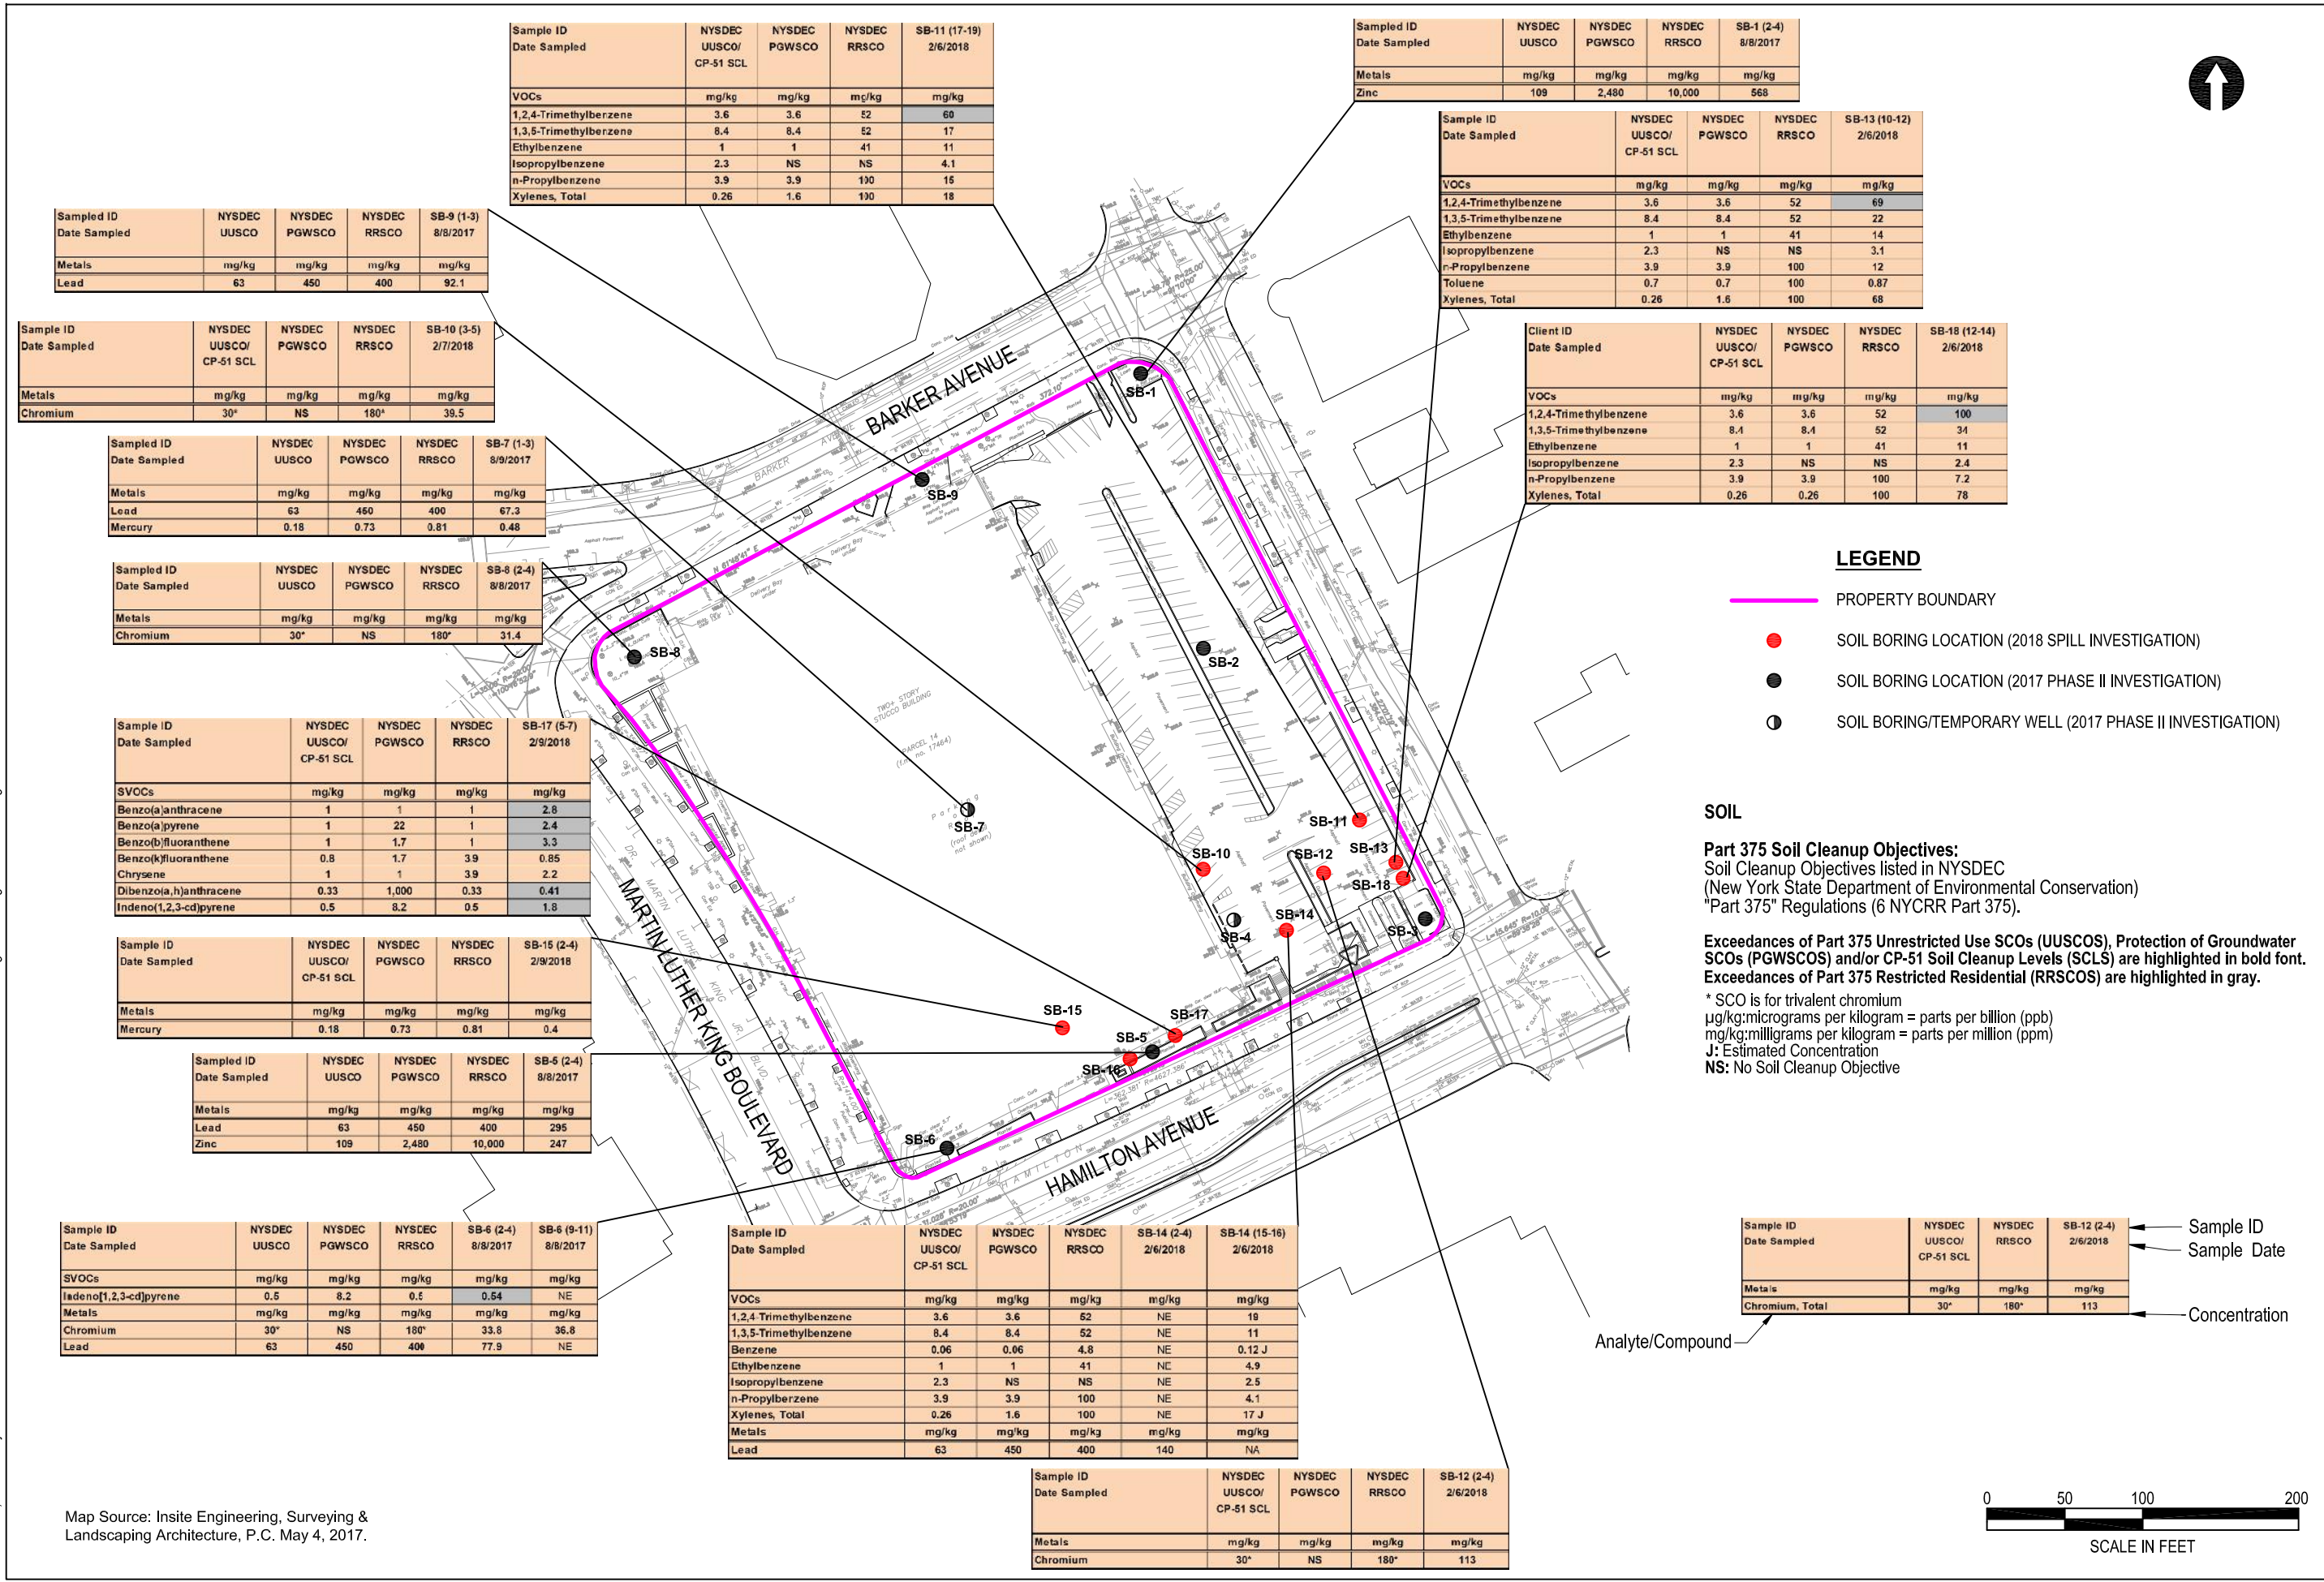

Sample ID	NYSDEC UUSCO	NYSDEC PGWSCO	NYSDEC RRSCO	SB-9 (1-3)
Date Sampled				8/8/2017
Metals	mg/kg	mg/kg	mg/kg	mg/kg
Lead	63	450	400	92.1

Sample ID	NYSDEC UUSCO/CP-51 SCL	NYSDEC PGWSCO	NYSDEC RRSCO	SB-11 (17-19)
Date Sampled				2/6/2018
VOCs	mg/kg	mg/kg	mg/kg	mg/kg
1,2,4-Trimethylbenzene	3.6	3.6	E2	60
1,3,5-Trimethylbenzene	8.4	8.4	E2	17
Ethylbenzene	1	1	41	11
Isopropylbenzene	2.3	NS	NS	4.1
n-Propylbenzene	3.9	3.9	100	15
Xylenes, Total	0.26	1.6	100	18

Sample ID	NYSDEC UUSCO	NYSDEC PGWSCO	NYSDEC RRSCO	SB-1 (2-4)
Date Sampled				8/8/2017
Metals	mg/kg	mg/kg	mg/kg	mg/kg
Zinc	109	2,480	10,000	568

Sample ID	NYSDEC UUSCO/CP-51 SCL	NYSDEC PGWSCO	NYSDEC RRSCO	SB-13 (10-12)
Date Sampled				2/6/2018
VOCs	mg/kg	mg/kg	mg/kg	mg/kg
1,2,4-Trimethylbenzene	3.6	3.6	52	69
1,3,5-Trimethylbenzene	8.4	8.4	52	22
Ethylbenzene	1	1	41	14
Isopropylbenzene	2.3	NS	NS	3.1
n-Propylbenzene	3.9	3.9	100	12
Toluene	0.7	0.7	100	0.87
Xylenes, Total	0.26	1.6	100	68

Sample ID	NYSDEC UUSCO/CP-51 SCL	NYSDEC PGWSCO	NYSDEC RRSCO	SB-10 (3-5)
Date Sampled				2/7/2018
Metals	mg/kg	mg/kg	mg/kg	mg/kg
Chromium	30*	NS	180*	39.5

Client ID	NYSDEC UUSCO/CP-51 SCL	NYSDEC PGWSCO	NYSDEC RRSCO	SB-18 (12-14)
Date Sampled				2/6/2018
VOCs	mg/kg	mg/kg	mg/kg	mg/kg
1,2,4-Trimethylbenzene	3.6	3.6	52	100
1,3,5-Trimethylbenzene	8.4	8.4	52	34
Ethylbenzene	1	1	41	11
Isopropylbenzene	2.3	NS	NS	2.4
n-Propylbenzene	3.9	3.9	100	7.2
Xylenes, Total	0.26	0.26	100	78

Sample ID	NYSDEC UUSCO	NYSDEC PGWSCO	NYSDEC RRSCO	SB-7 (1-3)
Date Sampled				8/9/2017
Metals	mg/kg	mg/kg	mg/kg	mg/kg
Lead	63	450	400	67.3
Mercury	0.18	0.73	0.81	0.48

Sample ID	NYSDEC UUSCO	NYSDEC PGWSCO	NYSDEC RRSCO	SB-8 (2-4)
Date Sampled				8/8/2017
Metals	mg/kg	mg/kg	mg/kg	mg/kg
Chromium	30*	NS	180*	31.4

Sample ID	NYSDEC UUSCO/CP-51 SCL	NYSDEC PGWSCO	NYSDEC RRSCO	SB-17 (5-7)
Date Sampled				2/9/2018
SVOCs	mg/kg	mg/kg	mg/kg	mg/kg
Benzo(a)anthracene	1	1	1	2.8
Benzo(a)pyrene	1	22	1	2.4
Benzo(b)fluoranthene	1	1.7	1	3.3
Benzo(k)fluoranthene	0.8	1.7	3.9	0.85
Chrysene	1	1	3.9	2.2
Dibenzo(a,h)anthracene	0.33	1,000	0.33	0.41
Indeno(1,2,3-cd)pyrene	0.5	8.2	0.5	1.8

Sample ID	NYSDEC UUSCO/CP-51 SCL	NYSDEC PGWSCO	NYSDEC RRSCO	SB-15 (2-4)
Date Sampled				2/9/2018
Metals	mg/kg	mg/kg	mg/kg	mg/kg
Mercury	0.18	0.73	0.81	0.4

Sample ID	NYSDEC UUSCO	NYSDEC PGWSCO	NYSDEC RRSCO	SB-5 (2-4)
Date Sampled				8/8/2017
Metals	mg/kg	mg/kg	mg/kg	mg/kg
Lead	63	450	400	295
Zinc	109	2,480	10,000	247

Sample ID	NYSDEC UUSCO	NYSDEC PGWSCO	NYSDEC RRSCO	SB-6 (2-4)	SB-6 (9-11)
Date Sampled				8/8/2017	8/8/2017
SVOCs	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg
Indeno[1,2,3-cd]pyrene	0.5	8.2	0.5	0.54	NE
Metals	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg
Chromium	30*	NS	180*	33.8	36.8
Lead	63	450	400	77.9	NE

Sample ID	NYSDEC UUSCO/CP-51 SCL	NYSDEC PGWSCO	NYSDEC RRSCO	SB-14 (2-4)	SB-14 (15-16)
Date Sampled				2/6/2018	2/6/2018
VOCs	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg
1,2,4-Trimethylbenzene	3.6	3.6	52	NE	18
1,3,5-Trimethylbenzene	8.4	8.4	52	NE	11
Benzene	0.06	0.06	4.8	NE	0.12 J
Ethylbenzene	1	1	41	NE	4.9
Isopropylbenzene	2.3	NS	NS	NE	2.5
n-Propylbenzene	3.9	3.9	100	NE	4.1
Xylenes, Total	0.26	1.6	100	NE	17 J
Metals	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg
Lead	63	450	400	140	NA

Sample ID	NYSDEC UUSCO/CP-51 SCL	NYSDEC PGWSCO	NYSDEC RRSCO	SB-12 (2-4)
Date Sampled				2/6/2018
Metals	mg/kg	mg/kg	mg/kg	mg/kg
Chromium	30*	NS	180*	113

**LEGEND**

- PROPERTY BOUNDARY
- SOIL BORING LOCATION (2018 SPILL INVESTIGATION)
- SOIL BORING LOCATION (2017 PHASE II INVESTIGATION)
- SOIL BORING/TEMPORARY WELL (2017 PHASE II INVESTIGATION)

**SOIL**

**Part 375 Soil Cleanup Objectives:**  
Soil Cleanup Objectives listed in NYSDEC (New York State Department of Environmental Conservation) "Part 375" Regulations (6 NYCRR Part 375).

Exceedances of Part 375 Unrestricted Use SCOs (UUSCOs), Protection of Groundwater SCOs (PGWSCOs) and/or CP-51 Soil Cleanup Levels (SCLs) are highlighted in bold font. Exceedances of Part 375 Restricted Residential (RRSCOs) are highlighted in gray.


\* SCO is for trivalent chromium  
µg/kg:micrograms per kilogram = parts per billion (ppb)  
mg/kg:milligrams per kilogram = parts per million (ppm)  
J: Estimated Concentration  
NS: No Soil Cleanup Objective

Sample ID	NYSDEC UUSCO/CP-51 SCL	NYSDEC RRSCO	SB-12 (2-4)
Date Sampled			2/6/2018
Metals	mg/kg	mg/kg	mg/kg
Chromium, Total	30*	180*	113

← Sample ID  
← Sample Date  
← Concentration

Analyte/Compound

Map Source: Insite Engineering, Surveying & Landscaping Architecture, P.C. May 4, 2017.



200 Hamilton Avenue  
White Plains, New York




440 Park Avenue South, New York, NY 10016

**SOIL SAMPLE CONCENTRATIONS ABOVE NYSDEC SCOS**

DATE	5/2/2018
PROJECT NO.	170029
FIGURE	5



©2018 AKRF, Inc. Q:\Projects\170029 - 200 HAMILTON AVENUE\Technical\Hazmat\BCP\CAD\170029 BCP Fig 9 RIWP Fig 6 GW Concs.dwg last save: mveilleux 5/2/2018 4:00 PM

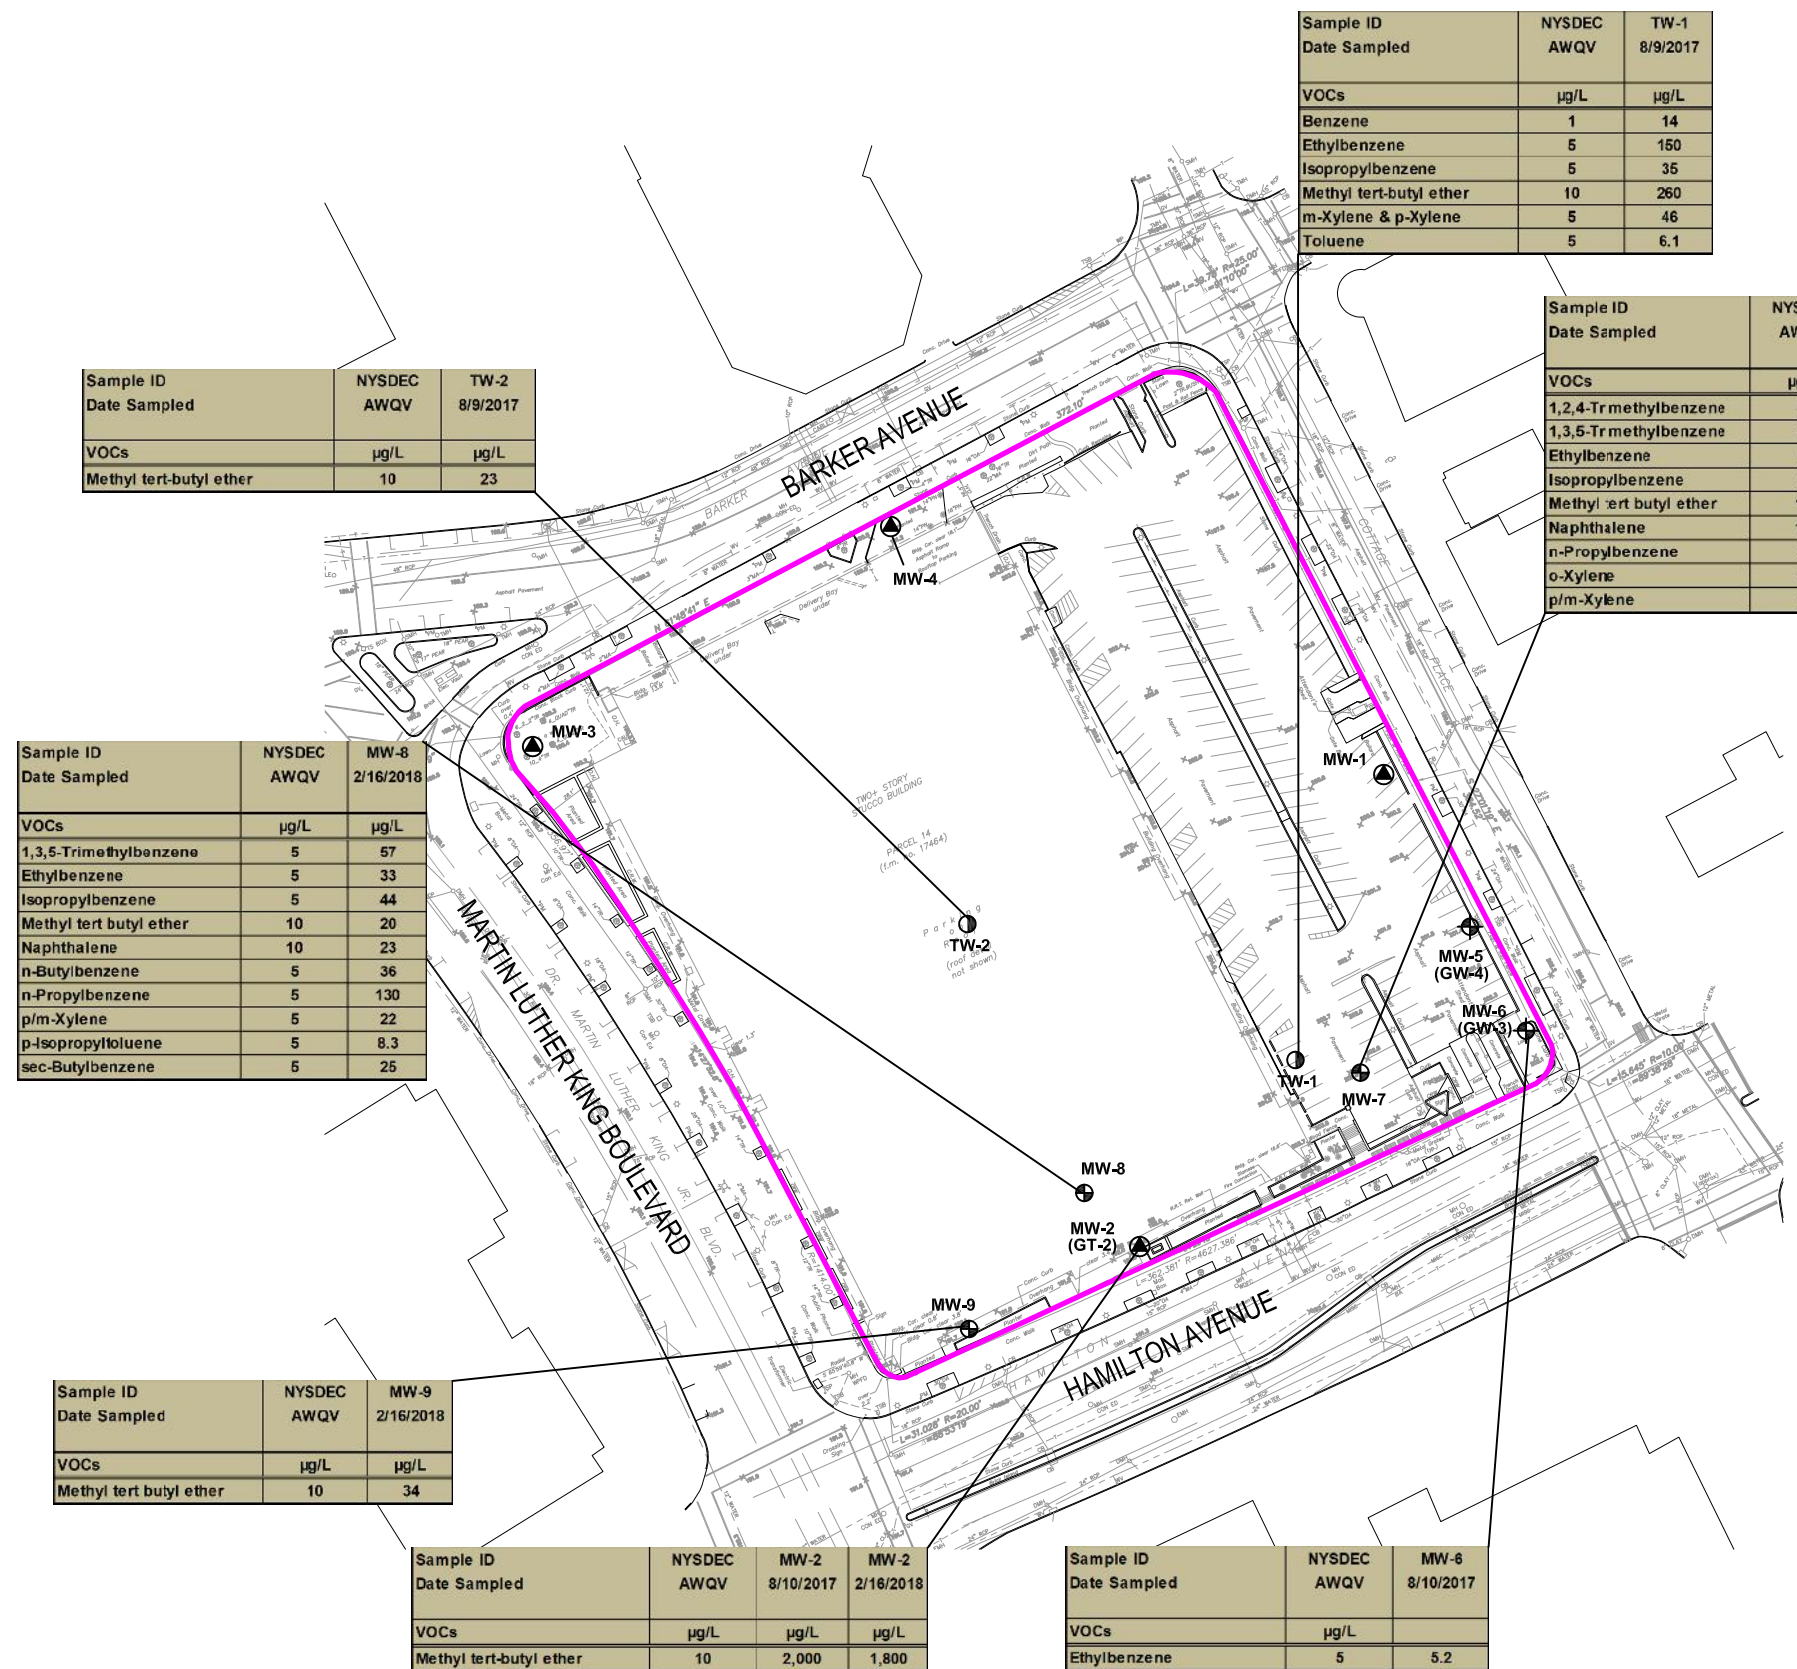

Sample ID	NYSDEC AWQV	TW-2
Date Sampled		8/9/2017
VOCs	µg/L	µg/L
Methyl tert-butyl ether	10	23

Sample ID	NYSDEC AWQV	TW-1
Date Sampled		8/9/2017
VOCs	µg/L	µg/L
Benzene	1	14
Ethylbenzene	5	150
Isopropylbenzene	5	35
Methyl tert-butyl ether	10	260
m-Xylene & p-Xylene	5	46
Toluene	5	6.1

Sample ID	NYSDEC AWQV	MW-7
Date Sampled		2/16/2018
VOCs	µg/L	µg/L
1,2,4-Tr methylbenzene	5	110
1,3,5-Tr methylbenzene	5	56
Ethylbenzene	5	92
Isopropylbenzene	5	14
Methyl tert butyl ether	10	15
Naphthalene	10	14
n-Propylbenzene	5	14
o-Xylene	5	28
p/m-Xylene	5	290

Sample ID	NYSDEC AWQV	MW-8
Date Sampled		2/16/2018
VOCs	µg/L	µg/L
1,3,5-Trimethylbenzene	5	57
Ethylbenzene	5	33
Isopropylbenzene	5	44
Methyl tert butyl ether	10	20
Naphthalene	10	23
n-Butylbenzene	5	36
n-Propylbenzene	5	130
p/m-Xylene	5	22
p-Isopropyltoluene	5	8.3
sec-Butylbenzene	5	25

Sample ID	NYSDEC AWQV	MW-9
Date Sampled		2/16/2018
VOCs	µg/L	µg/L
Methyl tert butyl ether	10	34

Sample ID	NYSDEC AWQV	MW-2	MW-2
Date Sampled		8/10/2017	2/16/2018
VOCs	µg/L	µg/L	µg/L
Methyl tert-butyl ether	10	2,000	1,800

Sample ID	NYSDEC AWQV	MW-6
Date Sampled		8/10/2017
VOCs	µg/L	
Ethylbenzene	5	5.2

**LEGEND**

- PROPERTY BOUNDARY
- EXISTING MONITORING WELL LOCATION (FROM 2015 GEOTECHNICAL INVESTIGATION)
- MONITORING WELL (2018 SPILL INVESTIGATION)
- EXISTING MONITORING WELL (UNKNOWN)
- SOIL BORING/TEMPORARY WELL (2017 PHASE II INVESTIGATION)

**GROUNDWATER**


**NYSDEC Class GA Ambient Standard:**  
New York State Department of Environmental Conservation Technical and Operational Guidance Series (1.1.1): Class GA Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations. (AWQS)

**Exceedances of NYSDEC Class GA Ambient Standards are highlighted in bold font.**

(µg/L) - micrograms per Liter = parts per billion (ppb)

Sample ID	NYSDEC AWQV	MW-2
Date Sampled		2/16/2018
VOCs	µg/L	µg/L
Methyl tert butyl ether	10	1,800

← Sample ID  
← Sample Date  
← Concentration  
Analyte/Compound



Map Source: Insite Engineering, Surveying & Landscaping Architecture, P.C. May 4, 2017.

200 Hamilton Avenue  
White Plains, New York



**GROUNDWATER SAMPLE CONCENTRATIONS ABOVE NYSDEC AWQS**

DATE  
**5/2/2018**

PROJECT NO.  
**170029**

FIGURE  
**6**



©2018 AKRF, Inc. Q:\Projects\170029 - 200 HAMILTON AVENUE\Technical\BOP\CAD\170029 BCP Fig 10 RIWP Fig 7 SV Concs.dwg last save: mvalleux 5/2/2018 4:19 PM


Sample ID	NYSDOH AGV	NYSDOH Upper Fence	EPA 90 <sup>th</sup> Percentile	SV-5 8/9/2017
VOCs	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>
1,3-Butadiene	NS	NS	<3.0	5.4
Acetone	NS	115	98.9	750
Chloroform	NS	1.2	1.1	10
Cumene	NS	0.8	NS	13
Ethylbenzene	NS	6.4	5.7	10
Methyl Ethyl Ketone	NS	36	12	26
Methylene Chloride	60	16	10	53
n-Hexane	NS	14	10.2	100
Toluene	NS	57	43	45
Trichloroethene	2	0.5	4.2	13

Sample ID	NYSDOH AGV	NYSDOH Upper Fence	EPA 90 <sup>th</sup> Percentile	SV-4 8/9/2017
VOCs	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>
Chloroform	NS	1.2	1.1	1.2
n-Propylbenzene	NS	1.5	NS	1.7

Sample ID	NYSDOH AGV	NYSDOH Upper Fence	EPA 90 <sup>th</sup> Percentile	SV-3 8/9/2017
VOCs	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>
Acetone	NS	115	98.9	270
Cyclohexane	NS	6.3	NS	26
Methyl Ethyl Ketone	NS	36	12	18
Methylene Chloride	60	16	10	240
n-Hexane	NS	14	10.2	350
Toluene	NS	57	43	250
Trichloroethene	2	0.5	4.2	69

Sample ID	NYSDOH AGV	NYSDOH Upper Fence	EPA 90 <sup>th</sup> Percentile	SV-1 8/8/2017
VOCs	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>
1,3-Butadiene	NS	NS	<3.0	7.2
2,2,4-Trimethylpentane	NS	5	NS	25
Acetone	NS	115	98.9	170
Benzene	NS	13	9.4	11
Ethylbenzene	NS	6.4	5.7	50
Methyl Ethyl Ketone	NS	36	12	36
n-Hexane	NS	18	10.2	40
n-Propylbenzene	NS	1.5	NS	8.6
o-Xylene	NS	7.1	7.9	7.4

Sample ID	NYSDOH AGV	NYSDOH Upper Fence	EPA 90 <sup>th</sup> Percentile	SV-2 8/8/2017
VOCs	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>
1,3-Butadiene	NS	NS	<3.0	87
2,2,4-Trimethylpentane	NS	5	NS	15
Acetone	NS	115	98.9	170
Benzene	NS	13	9.4	52
Carbon disulfide	NS	NS	4.2	100
Chloromethane	NS	4.2	3.7	20
Cyclohexane	NS	6.3	NS	18
Ethylbenzene	NS	6.4	5.7	38
Methyl Ethyl Ketone	NS	36	12	44
n-Heptane	NS	18	NS	240
n-Hexane	NS	18	10.2	590

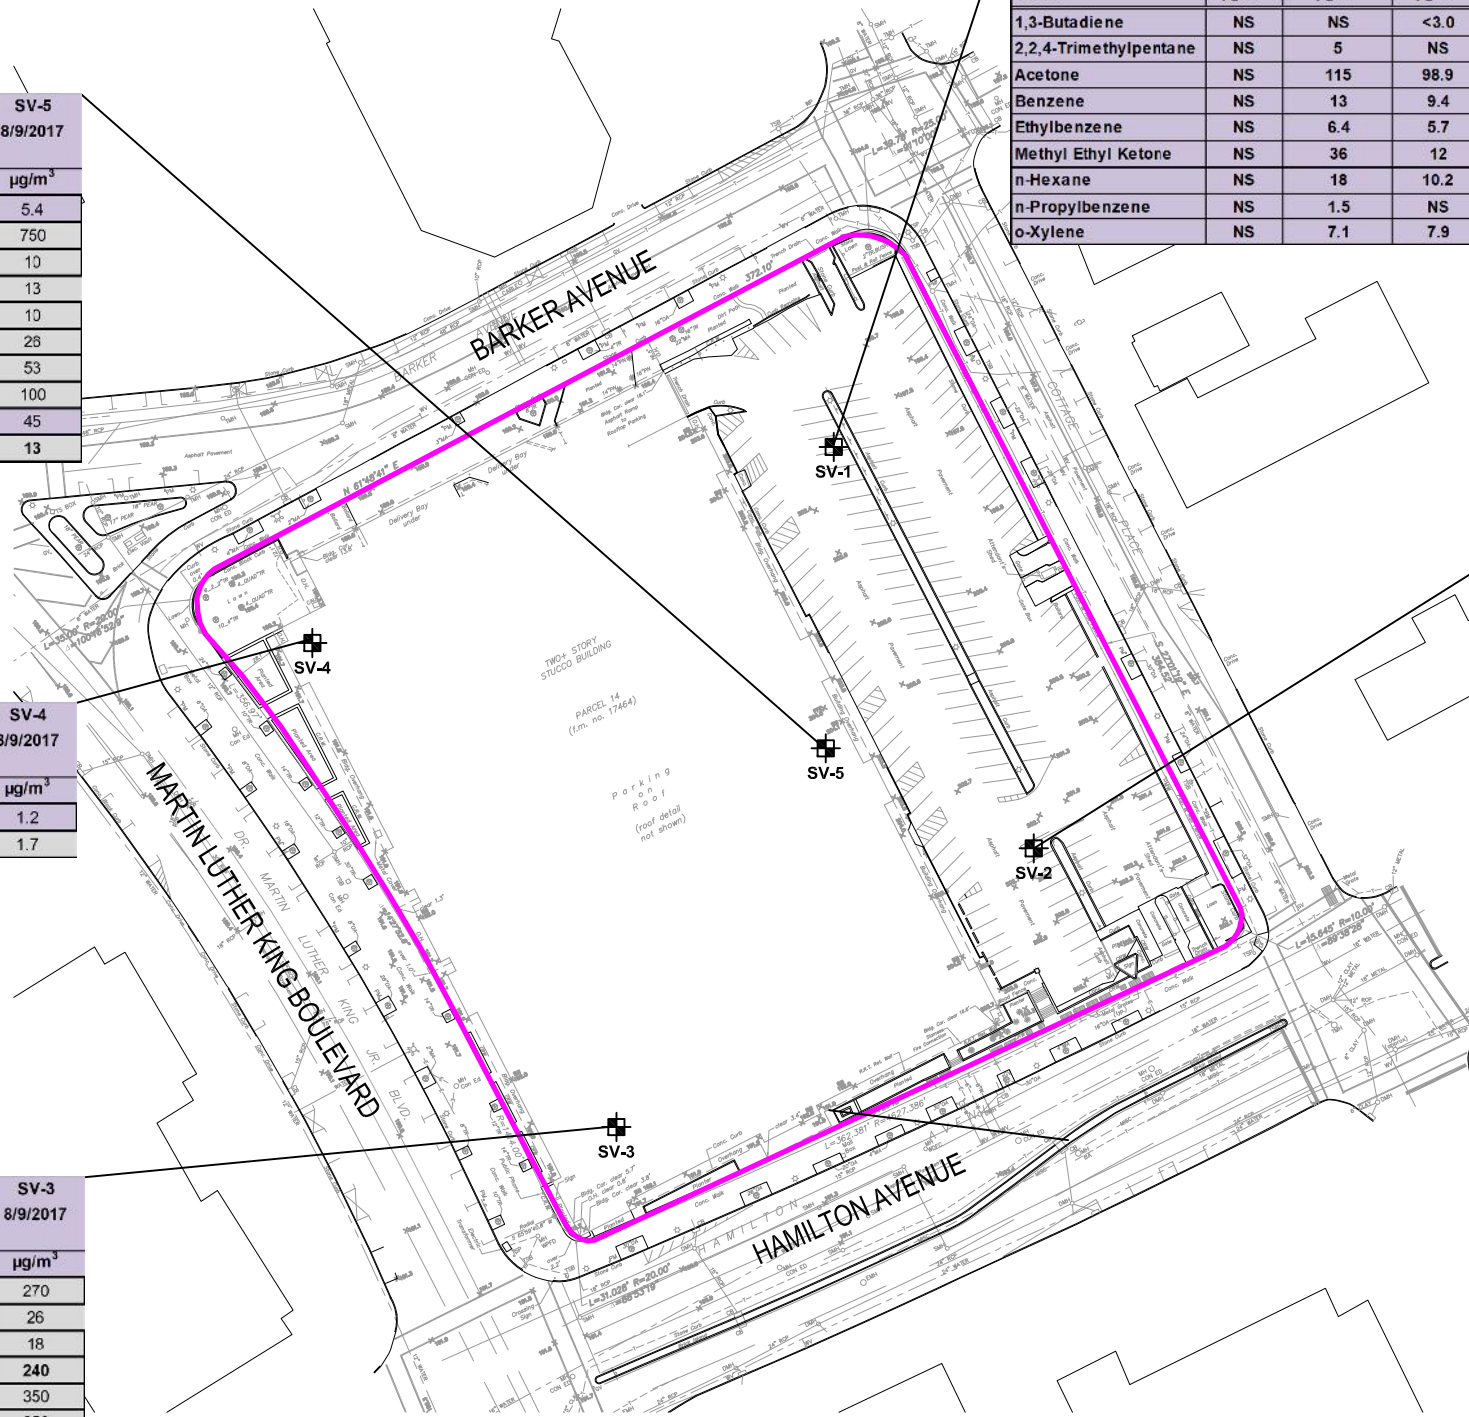

**LEGEND**

- PROPERTY BOUNDARY
- + SUB-SLAB SOIL VAPOR SAMPLE LOCATION (FROM 2017 PHASE II INVESTIGATION)

**SOIL VAPOR**

**NYSDOH Soil Vapor Intrusion Air Guidance Value:**  
 NYSDOH Air Guideline Values (AGVs) presented in the Final Guidance for Evaluating Soil Vapor Intrusion in the State of New York, dated October 2006 (NYSDOH Vapor Intrusion Guidance Document).

**Exceedances of NYSDOH Soil Vapor Intrusion Air Guidance Values are highlighted in bold font.**


**Bold** = Exceeds the Soil Vapor Intrusion Air Guidance Values (AGVs)  
**Highlighted** = Exceeds the Soil Vapor Indoor Upper Fence Air Values  
**Bold Border** = Exceeds the EPA Base 90th Percentile Indoor Air Values  
 µg/m<sup>3</sup> = microgram per cubic meter

Sample ID	NYSDOH AGV	NYSDOH Upper Fence	EPA 90 <sup>th</sup> Percentile	SV-5 8/9/2017
VOCs	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>	µg/m <sup>3</sup>
1,3-Butadiene	NS	NS	<3.0	5.4
Acetone	NS	115	98.9	750
Chloroform	NS	1.2	1.1	10


← Sample ID  
 ← Sample Date  
 ← Concentration

Analyte/Compound

Map Source: Insite Engineering, Surveying & Landscaping Architecture, P.C. May 4, 2017.






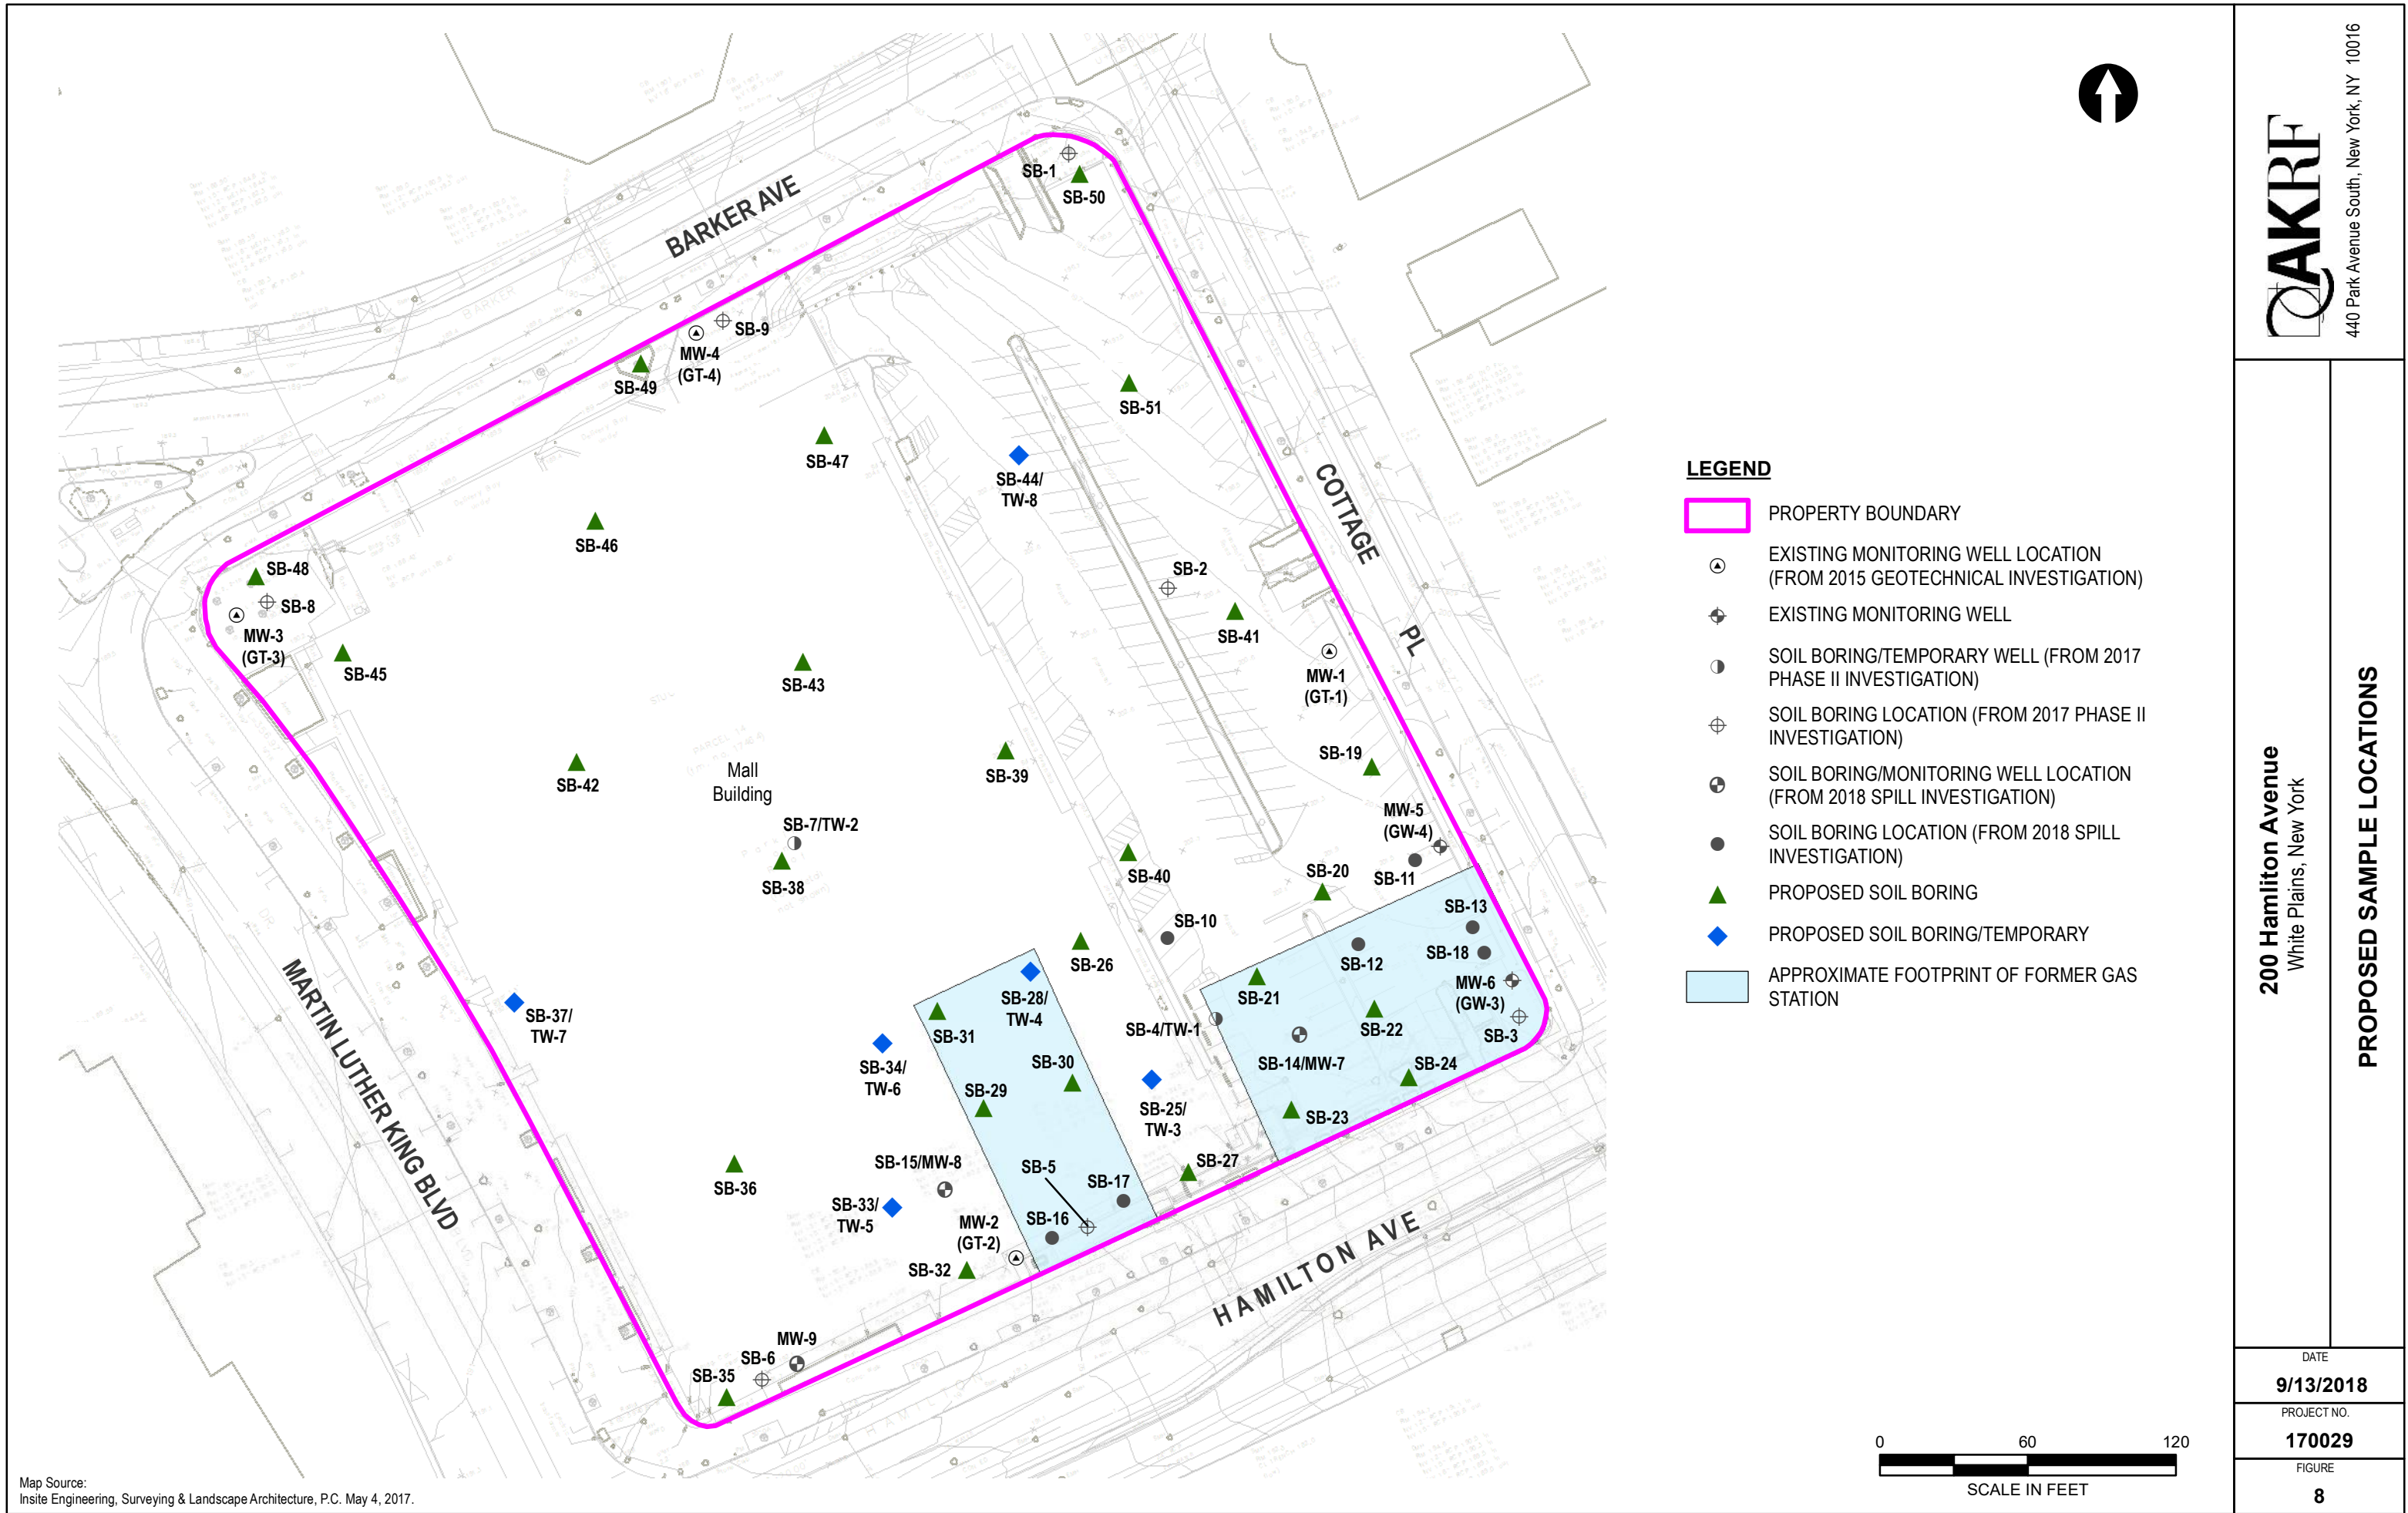

Map Source:  
 Insite Engineering, Surveying & Landscape Architecture, P.C. May 4, 2017.

**LEGEND**

- PROPERTY BOUNDARY
- EXISTING MONITORING WELL LOCATION (FROM 2015 GEOTECHNICAL INVESTIGATION)
- EXISTING MONITORING WELL
- SOIL BORING/TEMPORARY WELL (FROM 2017 PHASE II INVESTIGATION)
- SOIL BORING LOCATION (FROM 2017 PHASE II INVESTIGATION)
- SOIL BORING/MONITORING WELL LOCATION (FROM 2018 SPILL INVESTIGATION)
- SOIL BORING LOCATION (FROM 2018 SPILL INVESTIGATION)
- ▲ PROPOSED SOIL BORING
- ◆ PROPOSED SOIL BORING/TEMPORARY
- APPROXIMATE FOOTPRINT OF FORMER GAS STATION



## TABLES

**TABLE 1  
PROPOSED SOIL SAMPLE DEPTHS AND ANALYSES**

Soil Boring ID	Proposed Sampling Interval	Target Analyses	Additional Analyses <sup>5</sup>	Sampling Rationale
SB-19	Top of Fill	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	Bottom of Fill	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	Unsaturated Zone - Most Contaminated Interval or 15-17 <sup>1</sup>	CP-51 VOCs or RCRA Metals + Zn BN SVOCs		Delineate petroleum contamination or Characterize soil at anticipated final excavation depth
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-20	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-21	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-22	Bottom of Fill	RCRA Metals + Zn BN SVOCs		Further Characterize shallow fill layer identified in SB-12
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs	Full Part 375 List	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-23	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-24	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-25	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint

**TABLE 1  
PROPOSED SOIL SAMPLE DEPTHS AND ANALYSES**

Soil Boring ID	Proposed Sampling Interval	Target Analyses	Additional Analyses <sup>5</sup>	Sampling Rationale
SB-26	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-27	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-28	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-29	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs	Full Part 375 List	Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-30	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-31	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-32	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-33	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint

**TABLE 1  
PROPOSED SOIL SAMPLE DEPTHS AND ANALYSES**

Soil Boring ID	Proposed Sampling Interval	Target Analyses	Additional Analyses <sup>5</sup>	Sampling Rationale
SB-34	Unsaturated Zone - Most Contaminated Interval or Immediately Above GW Interface <sup>3</sup>	CP-51 VOCs		Delineate petroleum contamination
	Saturated Zone - Most Contaminated Interval or Below GW Interface <sup>2</sup>	CP-51 VOCs		Delineate petroleum contamination/ Determine Clean Endpoint
SB-35	13-15	RCRA Metals + Zn BN SVOCs		Delineate SCO exceedance at 9-11 ft bgs in SB-6
SB-36	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs	Full Part 375 List	Characterize soil at anticipated final excavation depth
SB-37	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-38	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-39	Within Fill Layer	RCRA Metals + Zn BN SVOCs	Full Part 375 List	Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-40	Bottom of Fill Layer	RCRA Metals + Zn BN SVOCs		Further Characterize shallow fill layer identified in SB-10
	15-17 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-41	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
SB-42	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-43	Within Fill Layer	RCRA Metals + Zn BN SVOCs	Full Part 375 List	Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-44	Top of Fill	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	Bottom of Fill	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	15-17 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-45	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs	Full Part 375 List	Characterize soil at anticipated final excavation depth
SB-46	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-47	Within Fill Layer	RCRA Metals + Zn BN SVOCs		Characterize shallow fill layer
	5-7 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-48	Bottom of Fill Layer	RCRA Metals + Zn BN SVOCs		Further Characterize shallow fill layer identified in SB-8
SB-49	Middle of Fill Layer	RCRA Metals + Zn BN SVOCs		Further Characterize shallow fill layer identified in SB-9
SB-50	Middle of Fill Layer	RCRA Metals + Zn BN SVOCs	Full Part 375 List	Further Characterize shallow fill layer identified in SB-1
	15-17 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth
SB-51	15-17 <sup>4</sup>	RCRA Metals + Zn BN SVOCs		Characterize soil at anticipated final excavation depth

<sup>1</sup> Sample to be collected at anticipated final excavation depth if no field evidence of petroleum contamination is identified.

<sup>2</sup> Sample to be collected below GW Interface if no field evidence of petroleum contamination is identified in the saturated zone.

<sup>3</sup> Sample to be collected immediately above the GW Interface if no field evidence of petroleum contamination is identified in the unsaturated zone.

<sup>4</sup> An additional sample will be collected below the anticipated final excavation depth to submit "on-hold" for potential delineation.

<sup>5</sup> Additional analysis of 10% of soil samples to provide full Part 375 List characterization.



**TABLE 2  
PROPOSED GROUNDWATER SAMPLES AND ANALYSES**

<b>Monitoring Well ID</b>	<b>Target Analyses</b>	<b>Additional Analyses<sup>1</sup></b>	<b>Sampling Rationale</b>
TW-3	CP-51 VOCs		Characterize/delineate petroleum groundwater contamination in south/southeastern portions of Site
TW-4	CP-51 VOCs		Characterize/delineate petroleum groundwater contamination in south/southeastern portions of Site
TW-5	CP-51 VOCs		Characterize/delineate petroleum groundwater contamination in south/southeastern portions of Site
TW-6	CP-51 VOCs		Characterize/delineate petroleum groundwater contamination in south/southeastern portions of Site
TW-7	CP-51 VOCs		Characterize/delineate MTBE identified in TW-2
TW-8	CP-51 VOCs		Characterize groundwater up gradient of the area of petroleum contamination
MW-1	CP-51 VOCs	Full Part 375 + 1,4-Dioxane/PFAS	Continued monitoring of existing monitoring well
MW-2	CP-51 VOCs		Continued monitoring of existing monitoring well
MW-5	CP-51 VOCs		Continued monitoring of existing monitoring well
MW-6	CP-51 VOCs		Continued monitoring of existing monitoring well
MW-7	CP-51 VOCs	Full Part 375 + 1,4-Dioxane/PFAS	Continued monitoring of existing monitoring well
MW-8	CP-51 VOCs	Full Part 375 + 1,4-Dioxane/PFAS	Continued monitoring of existing monitoring well
MW-9	CP-51 VOCs		Continued monitoring of existing monitoring well

<sup>1</sup> Additional analysis to provide full Part 375 list and emerging contaminants characterization.

**APPENDIX A**  
**QUALITY ASSURANCE PROJECT PLAN**

# **HAMILTON GREEN**

**200 HAMILTON AVENUE, WHITE PLAINS, NEW YORK**

---

## **Quality Assurance Project Plan**

**BCP Site #: C360177**

**AKRF Project Number: 170029**

### **Prepared for:**

S-WD/WP LLC dba Street-Works Development  
168-A Irving Avenue, Suite 200K  
Port Chester, NY 10573

### **Prepared by:**



AKRF, Inc.  
440 Park Avenue South  
New York, New York 10016  
(212) 696-0670

---

**SEPTEMBER 2018**

**TABLE OF CONTENTS**

1.0 INTRODUCTION ..... 2

2.0 PROJECT TEAM ..... 3

    2.1 Project Director and Remedial Engineer ..... 3

    2.2 Quality Assurance / Quality Control (QA/QC) Officer..... 3

    2.3 Project Manager..... 3

    2.4 Deputy Project Manager..... 3

    2.5 Field Team Leader and Alternate ..... 3

    2.6 Laboratory Quality Assurance / Quality Control (QA/QC) Officer ..... 3

    2.7 Laboratory Data Validator..... 4

3.0 STANDARD OPERATING PROCEDURES (SOPs)..... 5

    3.1 Soil Sampling ..... 5

    3.2 Temporary Well Point Installation and Well Development ..... 6

    3.3 Groundwater Sampling..... 6

    3.4 Fluid Level Gauging..... 7

    3.5 Decontamination of Sampling Equipment..... 7

    3.6 Management of Investigation Derived Waste (IDW)..... 7

4.0 SAMPLING AND LABORATORY PROCEDURES ..... 9

    4.1 Soil Sampling ..... 9

    4.2 Monitoring Well Sampling..... 9

    4.3 Laboratory Methods ..... 11

    4.4 Quality Control (QC) Sampling ..... 12

    4.5 Sample Handling ..... 12

        4.5.1 Sample Identification ..... 12

        4.5.2 Waste Classification Sample Identification ..... 13

        4.5.3 Sample Labeling and Sample Shipment..... 13

    4.6 Field Instrumentation..... 14

    4.7 Quality Assurance (QA)..... 14

**TABLES**

- Table 1 – Groundwater Sampling Stabilization Criteria
- Table 2 – Laboratory Analytical Methods for Analysis Groups
- Table 3 – Remedial Investigation Sample Nomenclature
- Table 4 – Waste Classification Sample Nomenclature

**ATTACHMENTS**

- Attachment A – Resumes for Project Director, Quality Assurance/Quality Control Officer, Project Manager, Deputy Project Manager, and Field Team Leader and Alternate
- Attachment B – NYSDEC Emerging Contaminant Sampling Guidance Documents

## 1.0 INTRODUCTION

This Quality Assurance Project Plan (QAPP) describes the protocols and procedures that will be followed during implementation of all environmental sampling associated with the Remedial Investigation Work Plan (RIWP) at the Hamilton Green site located at 200 Hamilton Avenue in the City of White Plains, Westchester County, New York (the "Site"). The 3.74-acre Site, as shown on Figure 1, includes the two-story White Plains Mall and east-adjacent asphalt-paved parking lot, and is identified as Tax Map ID Section 125.67, Block 5, Lot 1 on the City of White Plains tax map.

S-WD/WP LLC has been accepted into the New York State Department of Environmental Conservation (NYSDEC) Brownfield Cleanup Program (BCP) as a Volunteer (BCP Site No. C360177), and entered into a Brownfield Cleanup Agreement (BCA) with the NYSDEC (BCA Index No. C360177-08-03) on August 16, 2018. The Volunteer entered into the BCP to facilitate the continued investigation and ultimate remediation of contaminated soil and groundwater that has been identified at the Site. The objective of this QAPP is to provide for Quality Assurance (QA) and Quality Control (QC) over environmental investigative, sampling, and remedial activities under NYSDEC oversight following approval of the RIWP. Adherence to the QAPP will ensure that defensible data will be obtained during all environmental work at the Site.

## 2.0 PROJECT TEAM

The project team will be drawn from AKRF professional and technical personnel, and AKRF's subcontractors. All field personnel and subcontractors will have completed a 40-hour training course and updated 8-hour refresher course that meet the Occupational Safety and Health Administration (OSHA) requirements of 29 CFR Part 1910. The following sections describe the key project personnel and their responsibilities.

### 2.1 Project Director and Remedial Engineer

The project director will be responsible for the general oversight of all aspects of the project, including scheduling, budgeting, data management, and field program decision-making. The project director will communicate regularly with all members of the AKRF project team and the NYSDEC to ensure a smooth flow of information between involved parties. Ms. Rebecca Kinal, P.E. will serve as the project director for the RIWP. Ms. Kinal's resume is included in Attachment A.

### 2.2 Quality Assurance / Quality Control (QA/QC) Officer

Ms. Marc Godick will serve as the QA/QC officer and will be responsible for adherence to the QAPP. The QA/QC officer will review the procedures with all personnel prior to commencing any fieldwork and will conduct periodic Site visits to assess implementation of the procedures. The QA/QC officer will also be responsible for reviewing Data Usability Summary Reports (DUSRs) for soil analytical results. Mr. Godick's resume is included in Attachment A.

### 2.3 Project Manager

The project manager will be responsible for directing and coordinating all elements of the RIWP. The project manager will prepare reports and participate in meetings with the Site owner/Volunteer, and/or the NYSDEC. Mr. Timothy McClintock will serve as the project manager for the RIWP. Mr. McClintock's resume is included in Attachment A.

### 2.4 Deputy Project Manager

The deputy project manager will be responsible for assisting the project manager. The deputy project manager will help prepare reports and will participate in meetings with the Site owner/Volunteer, and/or the NYSDEC. Mr. Patrick McHugh will serve as the deputy project manager for the RIWP. Mr. McHugh's resume is included in Attachment A.

### 2.5 Field Team Leader and Alternate

The field team leader will be responsible for supervising the daily sampling and health and safety activities in the field and will ensure adherence to the RIWP, and the Health and Safety Plan (HASP) and Community Air Monitoring Plan (CAMP), included in Appendix B of the RIWP. The field team leader will also act as the field technician and Site safety officer (SSO), and will report to the project manager or deputy project manager on a regular basis regarding daily progress and any deviations from the work plan. The field team leader will be a qualified and responsible person able to act professionally and promptly during environmental work at the Site. Mr. Jacob Menken will act as the field team leader. Mr. John Sulich will act as the field team leader alternate. Resumes for Mr. Menken and Mr. Sulich are included in Attachment A.

### 2.6 Laboratory Quality Assurance / Quality Control (QA/QC) Officer

The laboratory QA/QC officer will be responsible for quality control procedures and checks in the laboratory and ensuring adherence to laboratory protocols. The QA/QC officer will track the

movement of samples from the time they are checked in at the laboratory to the time that analytical results are issued, and will conduct a final check on the analytical calculations and sign off on the laboratory reports. The laboratory QA/QC officers will be Carl Ambruster, Luke Orchard, and Lisa Stafford of TestAmerica Laboratories (TestAmerica), the New York State Department of Health (NYSDOH) Environmental Laboratory Accreditation Program (ELAP)-certified laboratory being employed for all environmental sampling at the Site.

## **2.7 Laboratory Data Validator**

The laboratory data validator will be responsible for third party data validation and preparation of Data Usability Summary Reports (DUSRs). The third-party laboratory data validator will be Lori Beyer of L.A.B. Validation Corp.

### 3.0 STANDARD OPERATING PROCEDURES (SOPS)

The following sections describe the Scope of Work (SOW) and Standard Operating Procedures (SOPs) for the remedial investigative activities included in the RIWP. During these operations, safety monitoring will be performed as described in the HASP and CAMP, included as Appendix B of the RIWP. The current on-site structure occupies approximately two-thirds of the Site, including the footprint of the former gasoline station in its southern portion, limiting the locations available for soil and groundwater sampling. As such, much of the proposed Remedial Investigation (RI) field program will not be completed until the on-site structure has been demolished, and access to all areas of the Site is available. This will allow for Site-wide delineation of known contamination in and adjacent to the footprints of the former on-site gasoline stations, and other areas of the Site to be excavated as part of the proposed redevelopment.

#### 3.1 Soil Sampling

Thirty-three soil borings (SB-19 through SB-51) will be advanced to characterize subsurface soils and collect soil samples for laboratory analysis. Figure 8 of the RIWP depicts the proposed soil boring locations as well as the location of the existing on-site structure, which will be demolished prior to implementation of the RI field program. All soil borings will be advanced with a track-mounted Geoprobe® direct push probe (DPP) unit to a minimum of 5 feet below the groundwater interface or until refusal, whichever is shallower, and samples will be collected continuously using 2-inch diameter macrocore piston rod samplers fitted with dedicated acetate liners. Each macrocore sample liner will be split lengthwise and AKRF field personnel will record and document subsurface conditions. As described in Section 4.1, macrocore samples will be inspected for evidence of contamination (e.g., odors, staining), screened for the presence of volatile organics with a photoionization detector (PID) equipped with a 10.6 electron volt (eV) lamp, and logged using the modified Burmister Soil Classification system. The PID will be calibrated in accordance with manufacturer's specifications prior to sampling.

Two soil samples will be collected from each soil boring advanced in, adjacent to, and downgradient of the former gasoline stations (SB-19 through SB-34). One sample will be collected from the 2-foot interval in the unsaturated zone that exhibits the greatest evidence of contamination (i.e., PID readings, odors, staining) and a second sample will be collected from the 2-foot interval in the saturated zone exhibiting the greatest evidence of contamination. In the absence of contamination, the samples will be collected from the interval directly above and below the groundwater interface. In an effort to characterize the condition of the fill layer at the Site, one to three samples from a 2-foot interval within and/or below the fill layer from select soil borings (SB-19, SB-22, SB-25, SB-33, and SB-35 through SB-51) will be collected. Additional samples may be collected for laboratory analysis based on field observations to further delineate petroleum contamination, extent of fill, etc. All sampling equipment (e.g., drilling/direct push probe rods and macrocore samplers) will be either dedicated or decontaminated between sampling locations in accordance with Section 3.5.

As described in Section 4.0, soil samples slated for laboratory analysis will be labeled and placed in laboratory-supplied containers and shipped to a NYSDOH Environmental Laboratory Approval Program (ELAP)-certified laboratory via courier with appropriate chain of custody documentation in accordance with appropriate EPA protocols. The samples collected from the locations in, adjacent to, and downgradient of the former gasoline stations will be analyzed for the VOCs listed in NYSDEC Commissioners Policy CP-51: Table 2 – Soil Cleanup Levels for Gasoline Contaminated Soil by EPA Method 8260. The samples collected from within or below the fill layer will be analyzed for Base Neutral (BN)-SVOCs by EPA Method 8270 and Resource Conservation and Recovery Act (RCRA) 8 Metals (arsenic, barium, cadmium, chromium, lead,



mercury, selenium, and silver) plus zinc by the EPA's 6000/7000 series methods. In addition, a minimum of 10% of the soil samples collected will be analyzed for the full NYSDEC Part 375 List, including target compound list (TCL) VOCs by EPA Method 8260, TCL SVOCs by EPA Method 8270, PCBs by EPA Method 8082, Pesticides by EPA Method 8081, Herbicides by EPA Method 8151, and Target Analyte List (TAL) metals by EPA's 6000/7000 series methods. Additional samples will be collected and analyzed for quality assurance/quality control (QA/QC) purposes in accordance with Section 4.4. The associated laboratory analytical data report will be prepared using Category B deliverables. A table summarizing the target depth of the soil borings, anticipated sampling intervals, and corresponding analytical parameters is included as Table 1 in the RIWP.

After each soil boring is completed, soil borings not designated for installation of temporary well points will be backfilled with drill cuttings (if not grossly contaminated) and/or hydrated bentonite and patched to match existing surface conditions. All contaminated investigation derived waste (IDW) associated with the soil borings (i.e., grossly contaminated drill cuttings) will be containerized in properly labeled Department of Transportation (DOT)-approved 55-gallon drums for future off-site disposal at a permitted facility in accordance with Section 3.5 of this document.

### **3.2 Temporary Well Point Installation and Well Development**

As depicted on Figure 8 of the RIWP, temporary well points TW-3 through TW-8 will be installed at soil borings SB-25, SB-28, SB-33, SB-34, SB-37, and SB-44, respectively. The temporary well points will be installed in the open bore holes, and will be constructed using 2-inch diameter, 10-foot long polyvinyl chloride (PVC) well screen set at a minimum of 5 feet below the observed groundwater table. Solid PVC riser pipe will be used to bring each well point to grade surface. Following installation, a peristaltic pump (or equivalent) will be used to purge approximately three well volumes from each well point. The purged water will be monitored for turbidity and water quality indicators (i.e., pH, temperature, and specific conductivity) to ensure that sedimentation/turbidity is reduced, to the extent practical. The development water will be containerized in properly labelled DOT-approved 55-gallon drums for future off-site disposal at a permitted facility in accordance with Section 3.6.

### **3.3 Groundwater Sampling**

Groundwater samples for laboratory analysis will be collected from the six newly installed temporary well points (TW-3 through TW-8), and seven of the existing on-site monitoring wells located in, adjacent to, and downgradient of petroleum-contaminated areas (MW-1, MW-2, and MW-5 through MW-9). Prior to collecting groundwater samples, the headspace at each monitoring well will be screened for the presence of VOCs using a calibrated PID after removing the well cap. An electronic oil/water interface probe accurate to 0.01 feet will be used to measure the depth to groundwater in each well, and to check for the potential presence of light non-aqueous phase liquid (LNAPL).

Low-flow sampling techniques and dedicated tubing will be utilized to purge the monitoring wells and temporary well points prior to sample collection in accordance with EPA and prevailing NYSDEC protocols. A peristaltic pump will be used to purge and sample the 1-inch diameter permanent monitoring well (MW-8), and a submersible bladder pump will be used to purge and sample the 2-inch diameter temporary well points (TW-3 through TW-8) and the 2-inch diameter permanent monitoring wells (MW-1, MW-2, MW-5 through MW-7, and MW-9). The purged water will be monitored for turbidity and water quality indicators (i.e., pH, temperature, dissolved oxygen, oxidation-reduction potential, and specific conductivity) with measurements collected

approximately every five minutes. Purging of the wells will continue until the turbidity is less than 50 NTU for three successive readings and water quality indicators stabilize to the extent practicable. If turbidity and/or water quality indicators did not stabilize after two hours, purging will be discontinued and samples will be collected.

As described in Section 4.0, groundwater samples slated for laboratory analysis will be labeled and placed in laboratory-supplied containers and shipped to a NYSDOH ELAP-certified laboratory via courier with appropriate chain of custody documentation in accordance with appropriate EPA protocols. All groundwater samples will be analyzed for the VOCs listed in CP-51: Table 2 by EPA Method 8260. In addition, a minimum of three (or 20%) of the groundwater samples collected will be analyzed for the full NYSDEC Part 375 and Emerging Contaminants Lists, including TCL VOCs by EPA Method 8260, TCL SVOCs by EPA Method 8270, PCBs by EPA Method 8082, Pesticides by EPA Method 8081, Herbicides by EPA Method 8151, dissolved TAL metals by EPA's 6000/7000 series methods, 1,4-dioxane by EPA Method 8270 Selective Ion Monitoring (SIM), and TAL Per- and Polyfluoroalkyl Substances (PFAS) by Modified EPA Method 537. Additional samples will be collected and analyzed for QA/QC purposes in accordance with Section 4.4. The associated laboratory analytical data report will be prepared using Category B deliverables. A table summarizing the groundwater sampling locations and corresponding analytical parameters is included as Table 2 in the RIWP.

### **3.4 Fluid Level Gauging**

Two rounds of fluid level gauging will be conducted on the nine permanent groundwater monitoring wells at the Site (MW-1 through MW-9) as part of the RI. The headspace at each monitoring well will be screened for the presence of VOCs using a calibrated PID after removing the well cap and an electronic oil/water interface probe accurate to 0.01 feet will be used to measure the depth to groundwater in each well, and to check for the potential presence of LNAPL. The fluid level measurements will be used to supplement the current groundwater elevation data and to create updated groundwater elevation contour maps.

### **3.5 Decontamination of Sampling Equipment**

All sampling equipment (e.g., drilling rods, macrocore samplers, pumps, etc.) will be either dedicated or decontaminated between sampling locations. Decontamination will be conducted on plastic sheeting (or equivalent) that is bermed to prevent discharge to the ground. The decontamination procedure will be as follows:

1. Scrub using tap water/Simple Green® mixture and bristle brush.
2. Rinse with tap water.
3. Scrub again with tap water/Simple Green® mixture and bristle brush.
4. Rinse with tap water.
5. Rinse with distilled water.
6. Air-dry the equipment, if possible.

### **3.6 Management of Investigation Derived Waste (IDW)**

Equipment decontamination fluids, grossly contaminated soil cuttings, and monitoring well purge water will be containerized in properly labeled DOT-approved 55-gallon drums for future off-site disposal at a permitted facility. The drums will be sealed at the end of each work day and labeled with the date, the well or boring number(s), the type of waste (i.e., contaminated drill cuttings, decontamination fluids, or purge water) and the name of an AKRF point-of-contact. All drums will be labeled "pending analysis" until laboratory data is available. All IDW will be disposed of or treated according to applicable local, state, and federal regulations. Disposable sampling

equipment, including spoons, gloves, bags, paper towels, etc. that come in contact with environmental media will be double bagged and disposed of as municipal trash in a facility trash dumpster as non-hazardous refuse.

## 4.0 SAMPLING AND LABORATORY PROCEDURES

### 4.1 Soil Sampling

Soil sampling will be conducted in accordance with the following procedures:

- Characterize the soil samples according to the modified Burmister soil classification system.
- Describe any evidence of contamination (e.g., non-aqueous phase liquid (NAPL), staining, sheens, and/or odors).
- Inspect the soil samples for evidence of contamination (e.g., odors and/or staining) using visual and olfactory methods and screen the samples for VOCs using a PID equipped with a 10.6 eV lamp. The PID will be calibrated each day in accordance with the manufacturer's specifications.
- Collect an aliquot of soil from each proposed sample location/interval, place the aliquot in laboratory-supplied containers as described in Section 4.3, Table 2, label the sample in accordance with Section 4.5.2, Table 3, and place the sample containers in an ice-filled cooler for shipment to the laboratory.
- Complete the proper chain of custody documentation and seal the cooler.
- Record the sample location, sample depth, and sample observations (evidence of contamination, PID readings, soil classification, etc.) in field log book and boring log data sheet, if applicable.
- Decontaminate reusable soil sampling equipment and discard disposal equipment between sample locations as described in Section 3.5.

### 4.2 Monitoring Well Sampling

Low flow sampling techniques, as described in U.S. EPA's Ground-Water Sampling Guidelines for Superfund and RCRA Project Managers [EPA 542-S-02-001, May 2002], will be used to collect groundwater samples. As described in Section 3.3, a minimum of 10% of the groundwater samples collected will be analyzed for the for emerging contaminants (1,4-dioxane and PFAS) as required by the NYSDEC. The sampling for emerging contaminants will be conducted in accordance with the protocols for acceptable/specific sampling materials, equipment, QA/QC requirements, and personnel protective equipment published in the NYSDEC's Groundwater Sampling for Emerging Contaminants (April 2018) and Collection of Groundwater Samples for Perfluorooctonic Acid (PFOA) and Perfluorinated Compounds (PFCs) from Monitoring Wells Sample Protocol (Revision 1.2, June 29, 2016) guidance documents. Copies of the NYSDEC's guidance documents are included as Attachment B. Sampling will be conducted in accordance with the following procedure:

- Prepare the sampling area by placing plastic sheeting over the well. Cut a hole in the sheeting to provide access to the well cover.
- Slowly remove the well cap and immediately measure the vapor concentrations in the well with a PID calibrated in accordance with the manufacturer's specifications.
- Measure the depth to water and total well depth, and check for the presence of NAPL using an oil/water interface probe. Measure the thickness of NAPL, if any, and record in field book and well log. Groundwater samples will not be collected from wells containing measurable NAPL.

- Use the water level and total well depth measurements to calculate the length of the mid-point of the water column within the screened interval. For example, for a well where the total depth is 20 feet, screened interval is 10 to 20 feet, and depth to water is 14 feet, the mid-point of the water column within the screened interval would be 17 feet.
- Connect dedicated tubing to a peristaltic pump and/or submersible bladder pump, and lower the tubing and/or pump into the well such that the intake is set at the mid-point of the water column within the screened interval. Connect the discharge end of the tubing to the flow-through cell of a multi-parameter groundwater meter. Connect a length of tubing to the output of the flow-through cell and place the discharge end of the tubing in a five-gallon bucket. A peristaltic pump will be used to purge and sample the 1-inch diameter permanent monitoring well (MW-8), and a submersible bladder pump will be used to purge and sample the 2-inch diameter temporary well points (TW-3 through TW-8) and the 2-inch diameter permanent monitoring wells (MW-1, MW-2, MW-5 through MW-7, and MW-9).
- Activate the pump at the lowest flow rate setting of the pump.
- Measure the depth to water within the well following activation of the pump. The pump flow rate may be increased such that the water level measurements do not change by more than 0.3 feet as compared to the initial static reading. The well-purging rate should be adjusted so as to produce a smooth, constant (laminar) flow rate and so as not to produce excessive turbulence in the well. The expected targeted purge rate will be approximately 100 milliliters/minute.
- Collect water quality indicator parameters (e.g., turbidity, pH, temperature, dissolved oxygen, reduction-oxidation potential, and specific conductivity) during purging with measurements collected approximately every five minutes.
- Continue purging the well until turbidity is less than 50 NTU and water quality indicators have stabilized to the extent practicable. The criteria for stabilization will be three successive readings for the following parameters and criteria:

**Table 1**  
**Groundwater Sampling Stabilization Criteria**

Parameter	Stabilization Criteria
Specific Conductance	+/- 3 mS/cm
Dissolved Oxygen	+/- 0.3 mg/l
pH	+/- 0.1 pH units
ORP/Eh	+/- 10mV
Turbidity	<50 NTU

**Notes:**

mS/cm = millisiemens per centimeter

mV = millivolts

NTU = nephthalometric turbidity units

mg/l = milligrams per liter

- If the water quality parameters do not stabilize and/or turbidity is greater than 50 NTU after two hours, purging may be discontinued. Efforts to stabilize the water quality for the well must be recorded in the field book, and samples may then be collected as described herein.
- After purging, disconnect the tubing to the inlet of the flow-through cell. Collect groundwater samples directly from the discharge end of the tubing and place into the required laboratory-supplied containers as described in Section 4.3, Table 2. Use an in-line filter to collect

samples slated for dissolved metals analysis. Label the sample in accordance with Section 4.5.2, Table 3, and place the sample in an ice-filled cooler for shipment to the laboratory.

- Once sampling is complete, remove the tubing and/or submersible pump from the well. Decontaminate the pump (if applicable), oil/water interface probe, and flow-through cell, as described in Section 3.5. Dispose of the dedicated sampling equipment, and transfer decontamination fluid and purge water to properly labeled DOT-approved 55-gallon drums for future off-site disposal at a permitted facility in accordance with Section 3.6.
- Record all measurements (depth to water, depth to NAPL, water quality parameters, turbidity), calculations (well volume) and observations in the project logbook and field data sheet, if applicable.

### 4.3 Laboratory Methods

Table 2 summarizes the laboratory methods that will be used to analyze field samples and describes the laboratory-supplied sample container type, preservation, and applicable holding times for each analysis. TestAmerica of Edison, NJ and Sacramento, CA, NYSDOH ELAP-certified laboratories subcontracted by AKRF, will be used for all chemical analyses in accordance with the Division of Environmental Remediation (DER)-10 Chapter 2. All analytical results will be reported with Category B deliverables. TestAmerica will achieve a minimum detection limit of 0.28 micrograms per liter ( $\mu\text{g/L}$ ) for 1-4-dioxane and 2 nanograms per liter ( $\text{ng/L}$ ) for the standard list of 21 PFAS compounds.

**Table 2**  
**Laboratory Analytical Methods for Analysis Groups**

Matrix	Analysis	EPA Method	Container Type	Preservative	Hold Time
Soil and Soil QA/QC	Volatile Organic Compounds (VOCs)	8260C	EnCore Samplers (3) and 2 oz. Plastic Jar	$\leq 6^\circ\text{C}$	48 hours to extract; 14 days to analyze
	Semivolatile Organic Compounds (SVOCs)	8270D	8 oz. Glass Jar	$\leq 6^\circ\text{C}$	14 days to extract; 40 days to analyze
	Polychlorinated Biphenyls (PCBs)	8082A	8 oz. Glass Jar	$\leq 6^\circ\text{C}$	14 days to extract; 40 days to analyze
	Pesticides	8081B	8 oz. Glass Jar	$\leq 6^\circ\text{C}$	14 days to extract; 40 days to analyze
	Herbicides	8151A	8 oz. Glass Jar	$\leq 6^\circ\text{C}$	14 days to extract; 40 days to analyze
	Target Analyte List (TAL) Metals, and Resource Conservation and Recovery (RCRA) 8 Metals plus Zinc	6000/7000 Series	8 oz. Glass Jar	$\leq 6^\circ\text{C}$	6 months for metals; 28 days for mercury

Matrix	Analysis	EPA Method	Container Type	Preservative	Hold Time
Groundwater and Groundwater QA/QC	VOCs	8260C	40 mL Glass Vials (3)	HCl to pH < 2 and $\leq 6$ °C	14 days to analyze
	SVOCs and 1,4-Dioxane	8270D plus Selective Ion Monitoring (SIM) for 1,4-Dioxane	2,000 mL Amber Jar	$\leq 6$ °C	7 days to extract; 40 days to analyze
	Polychlorinated Biphenyls (PCBs)	8082A	2,000 mL Amber Jar	$\leq 6$ °C	7 days to extract; 40 days to analyze
	Pesticides	8081B	2,000 mL Amber Jar	$\leq 6$ °C	7 days to extract; 40 days to analyze
	Herbicides	8151A	2,000 mL Amber Jar	$\leq 6$ °C	7 days to extract; 40 days to analyze
	Target Analyte List (TAL) Metals	6000/7000 Series	500 mL Plastic	HNO <sub>3</sub> to pH < 2	6 months for metals; 28 days for mercury
	Per- and Polyfluoroalkyl Substances (PFAS) Compounds	Modified 537	3 x 250 mL Polypropylene Bottles	$\leq 6$ °C, Trizma	14 days to analyze
Notes: EPA - Environmental Protection Agency					

#### 4.4 Quality Control (QC) Sampling

In addition to the laboratory analysis of the soil and groundwater samples, additional analysis will be included for QC measures, as required by the Category B sampling methods. These samples will include field blank, trip blank, matrix spike/matrix spike duplicate (MS/MSD), and blind duplicate samples at a frequency of one sample per 20 field samples per media or per sample delivery group (SDG). The MS/MSD and blind duplicate samples will be analyzed for the same list of parameters as the corresponding field sample. The field blank will be analyzed for the cumulative list of parameters designated for all corresponding field samples included in the same sample delivery group for each media. The laboratory-prepared trip blank will be analyzed for the VOC list only.

#### 4.5 Sample Handling

##### 4.5.1 Sample Identification

All samples will be consistently identified in all field documentation, chain-of-custody (COC) documents, and laboratory reports. Soil and groundwater samples collected during the RI will be identified with "SB-" for soil borings, "MW-" for groundwater monitoring wells, and "TW-" for temporary well points, and the soil boring, groundwater monitoring well, or temporary well point identification number. All sample IDs will be appended with a collection date at the end of the sample name in a year, month, day (YYYYMMDD) format. Soil sample IDs will also be appended with the sample collection depth interval in parentheses. Blind duplicate sample nomenclature will consist of the sample type, followed by an "X"; MS/MSD samples nomenclature will consist of the corresponding sample name and collection date, followed by "MS/MSD"; and trip and field blanks will consist of "TB-" and "FB-", respectively, followed by a sequential number of the trip/field blanks collected within the SDG. Special characters, including primes and/or apostrophes, will not be used for sample nomenclature. Table 3

provides examples of the sampling identification scheme for samples collected during the RI.

**Table 3**  
**Remedial Investigation Sample Nomenclature**

Sample Description	Sample Designation
Groundwater sample collected from groundwater monitoring well MW-7 on November 1, 2018	MW-07_20181101
Matrix spike/matrix spike duplicate sample of groundwater sample collected from groundwater monitoring well MW-7 on November 1, 2018	MW-07_20181101_MS/MSDS
Blind duplicate sample of groundwater sample collected from groundwater monitoring well MW-7 on November 1, 2018	MW-X_20181101
Second field blank collected on November 1, 2018	FB-02_20181101
Soil sample collected from soil boring SB-26 between 7 and 9 feet below grade on November 1, 2018	SB-26_(7-9)_20181101
Blind duplicate sample of soil sample collected from soil boring SB-26 between 7 and 9 feet below grade on November 1, 2018	SB-X_(7-9)_20181101

#### 4.5.2 Waste Classification Sample Identification

Any waste classification sample IDs associated with the IDW will be appended with “WC-” and the alphanumeric IDW drum identification number. Table 4 provides examples of the sampling identification scheme for proposed waste classification samples collected during the RI.

**Table 4**  
**Waste Classification Sample Nomenclature**

Sample Description	Sample Designation
Waste classification sample collected from Drum 1 on November 1, 2018	WC-D1-20181101

#### 4.5.3 Sample Labeling and Sample Shipment

All sample container labels will contain the following information:

- Project identification, including the Site name, BCP Site number, and Site address;
- Sample identification;
- Date and time of sample collection;
- Analysis(es) to be performed; and
- Sampler’s initials.

Once the samples are collected and labeled, they will be wrapped in bubble wrap to prevent breakage and placed in chilled coolers that will be stored in a cool area away from direct sunlight. Field personnel will be responsible for maintaining the sample cooler(s) in a secured location until they are shipped to the laboratory, and will add ice to the cooler(s) as needed. The samples will be shipped to the laboratory via courier with appropriate COC documentation in accordance with EPA protocols. The COC documentation will be properly completed by the sampler in ink and will contain the



following information: project name; names of sampling personnel; sample name; sample matrix; date and time of collection; and signatures of individuals involved in sample transfer, including the dates and times of transfers. All coolers shipped to the laboratory will be sealed with a COC seal to ensure that the samples remain under strict COC protocol. Laboratory personnel will note the condition of the custody seal and sample containers at sample check-in. It is anticipated that samples will be shipped to the laboratory on a daily basis.

#### **4.6 Field Instrumentation**

Field personnel will be trained in the proper operation of all field instruments at the start of the field program. Instruction manuals for the equipment will be on file at the Site for referencing proper operation, maintenance, and calibration procedures. The equipment will be calibrated according to manufacturer specifications at the start of each day of fieldwork. If an instrument fails calibration, the project manager or QA/QC officer will be contacted immediately to obtain a replacement instrument. A calibration log will be maintained to record the date of each calibration, any failure to calibrate, and corrective actions taken. The PID will be equipped with a 10.6 eV lamp and will be calibrated each day using 100 parts per million (ppm) isobutylene standard gas in accordance with the manufacturer's specifications.

#### **4.7 Quality Assurance (QA)**

All soil and groundwater laboratory analytical data will be reviewed by a third-party validator and a Data Usability Summary Report (DUSR) will be prepared to document the usability and validity of the data. The RIR will include a detailed description of the RI sampling activities, data summary tables, figures showing sample locations and concentrations, laboratory reports, and DUSRs.

**ATTACHMENT A**

**RESUMES OF PROJECT DIRECTOR, QUALITY ASSURANCE/QUALITY CONTROL OFFICER, PROJECT  
MANAGER, DEPUTY PROJECT MANAGER, AND FIELD TEAM LEADER AND ALTERNATE**

## **REBECCA KINAL, P.E.**

### **VICE PRESIDENT**

Rebecca Kinal has over 20 years of experience in the assessment and remediation of soil and groundwater contamination and other hazardous/non-hazardous waste problems. Ms. Kinal's experience includes environmental due diligence, soil and groundwater investigations, leaking underground storage tank studies, soil gas/vapor intrusion surveys, and oversight of small- and large-scale remediation programs, including design of groundwater remediation systems and vapor mitigation systems. She has directed numerous Phase I and Phase II investigations and remediation programs, many of them in conjunction with commercial/residential developers, law firms, lending institutions, and public agencies. She is experienced in the cleanup of contaminated properties under New York State Brownfield Cleanup Program (BCP) regulations and the New York City "E-designation" program. As a part of this work, her duties have included technical and report review, proposal writing, scheduling, budgeting, and acting as liaison between clients and regulatory agencies, and project coordination with federal, state, and local authorities.

### **BACKGROUND**

#### **Education**

M.S., Hydrogeology, Rensselaer Polytechnic Institute, 1995

B.S., Civil Engineering, Lafayette College, 1992

#### **Licenses/Certifications**

State of New York, P.E. Registration No. 082046, 2004

#### **Years of Experience**

Year started in company: 2000

Year started in industry: 1996

### **RELEVANT EXPERIENCE**

#### **New York City School Construction Authority On-Call Contract for Environmental Consulting Services, Various Sites, NY**

Ms. Kinal serves as the project manager for AKRF's on-call hazardous materials consulting contract with the New York City School Construction Authority for over 8 years. For potential new school sites, assignments include initial due diligence, Phase I environmental site assessments, (ESAs) and subsurface investigation of soil, groundwater, and soil vapor to determine the suitability of a site for development as a school, likely remediation requirements, and associated costs. For sites undergoing design and development, assignments include preparation of remediation plan, contract specifications, and design drawings. The work has also included conducting indoor air quality testing, vapor intrusion assessments, preparation of specifications, supervision of storage tank removals, and investigation and remediation of spills for existing schools. Due to the sensitivity of school sites, work under this contract is often conducted on short notice and during non-school hours.

#### **USTA National Tennis Center, Queens, NY**

AKRF prepared an EIS for the New York City Departments of City Planning (DCP) and Environmental Protection (DEP) as co-lead agencies to analyze the expansion of the National Tennis Center, which includes



## **REBECCA KINAL, P.E.**

**TECHNICAL DIRECTOR-  
ENVIRONMENTAL ENGINEER**

| p. 2

multiple improvements and construction projects at the USTA campus over several years. As part of the EIS requirements, AKRF prepared a Remedial Action Plan for implementation during the proposed project's construction. In accordance with the RAP, vapor mitigation systems were incorporated into the design for several of the proposed structures at the facility, including two new stadiums, a new transportation center, and several practice court facilities. Ms. Kinal prepared the specifications and design drawings for the vapor mitigation and is providing on-going construction support to review contractor submittals and inspect the vapor barrier and sub-slab depressurization system installations.

### **Montefiore Medical Center, Various Locations, NY**

Ms. Kinal provides due diligence assistance to Montefiore Medical Center (MMC) for the ongoing expansion of their facilities, primarily in the Bronx and Westchester County. She conducts and manages environmental due diligence tasks related to their property transactions, including Phase I Environmental Site Assessments (ESAs), Phase II investigations, and geophysical surveys. She also assists MMC in making decisions with respect to environmental risk issues.

### **Queens West Development Project, Long Island City, NY**

For over 20 years, AKRF has played a key role in advancing the Queens West development, which promises to transform an underused industrial waterfront property into one of largest and most vibrant mixed-use communities just across the East River from the United Nations. AKRF has prepared an Environmental Impact Statement that examines issues pertaining to air quality, land use and community character, economic impacts, historic and archaeological resources, and infrastructure. As part of the project, AKRF also undertook the largest remediation ventures completed to date under the NYSDEC Brownfields Cleanup Program (BCP). Ms. Kinal helped prepare the Remedial Work Plan (RWP) and oversaw the remediation of Parcel 9, a 1.8-acre former industrial site. Remediation includes installation of a sheet pile containment wall, excavation of coal tar- and petroleum-contaminated soil under a temporary structure to control odors during remediation, vapor mitigation for the future buildings, and institutional controls. Upon completion of the remediation activities, Ms. Kinal managed the preparation of a Final Engineering Report (FER) to document the clean-up activities. The NYSDEC issued a Certificate of Completion (COC) for the Parcel 9 site in December 2006. Ms. Kinal continues to oversee post-remediation monitoring and site management activities to ensure that the remedy remains in-place and effective.

### **Roosevelt Union Free School District, Roosevelt, NY**

Ms. Kinal is managing environmental investigation and remediation activities for the sites of three new elementary schools and a new middle school in Roosevelt, New York. Remediation activities include removal/closure of contaminated dry wells and underground petroleum storage tanks, and excavation and off-site disposal of petroleum- and pesticide-contaminated soil.

### **Proposed NYC Public School Campus, Bronx, NY**

Ms. Kinal provided environmental consulting services to the selected environmental remediation contractor for this former manufactured gas plant in the Mott Haven neighborhood of the Bronx, which was remediated under the NYSDEC BCP. These services included: preparation of an in situ sampling plan and excavation plan for waste characterization and disposal; supervision of waste characterization sampling activities; development and implementation of a community air monitoring program during all remediation activities; and daily reporting to the NYC School Construction Authority.

### **National Grid – Halesite Manufactured Gas Plant Site, Town of Huntington, NY**

Ms. Kinal served as the project manager for the remedial design and engineering work associated with remediation of National Grid's former manufactured gas plant (MGP) located in the Town of Huntington. The site is situated



## **REBECCA KINAL, P.E.**

**TECHNICAL DIRECTOR-  
ENVIRONMENTAL ENGINEER**

| p. 3

in a sensitive location along the waterfront, surround by commercial and residential properties, and half the property where the remediation was conducted is a steep slope. The remedy consisted of soil removal, oxygen injection, and non-aqueous phase liquid recovery. Ms. Kinal developed the remedial work plans, design/construction documents, and managed environmental oversight of the remedial work, including waste characterization and tracking, confirmatory endpoint sampling, air monitoring, and reporting to the NYSDEC. After the remediation work was completed, Ms. Kinal prepared appropriate close-out documentation in accordance with NYSDEC requirements.

### **Shell Service Station, Millwood, NY**

Ms. Kinal planned and oversaw a Phase I Environmental Site Assessment and Phase II Subsurface Investigation of this active gasoline station in northern Westchester County. The Phase I/Phase II investigations were performed for the potential buyer of the property who wished to redevelop it with a more modern service station and convenience store. Ms. Kinal also prepared a conceptual remediation plan to address several areas of petroleum contamination identified during the Phase II. The plan, which was approved by NYSDEC, will be implemented in conjunction with the site redevelopment activities to achieve closure for several spills reported at the site.

### **Pelham Plaza Shopping Center Site Investigation & Remediation, Pelham Manor, NY**

Ms. Kinal managed a Site Investigation at Pelham Plaza, an approximately ten-acre site that formerly contained a manufactured gas plant. The site was investigated under a voluntary clean-up agreement entered into with the NYSDEC by the site owner. The site investigation included advancing over 100 soil borings with continuous soil sampling to bedrock, installing monitoring and recovery wells, and conducting test pitting both indoor and outdoor locations to collect soil and groundwater samples and determine the extent of Non-Aqueous Phase Liquid (NAPL). The investigation also included: soil gas sampling to determine contaminant concentrations in the vapors beneath the foundation of an on-site retail store; sediment sampling in an adjacent creek to identify off-site impacts; and a tidal survey to determine tidal influence on groundwater levels at the site. Ms. Kinal also oversaw on-going interim remedial measures, which include biweekly pumping of recovery wells to remove dense NAPL (DNAPL) from the site subsurface.

### **Shaws Supermarket Redevelopment Project, New Fairfield, CT**

Ms. Kinal managed the Remedial Investigation (RI) for an approximately nine-acre shopping center site that was contaminated by releases from former dry cleaning operations. The site was being redeveloped with a new supermarket and separate retail stores. The investigation included the installation of monitoring wells in the intermediate overburden aquifer and bedrock aquifer, sampling of existing and newly installed wells, geophysical logging in bedrock wells, and pump testing in intermediate and bedrock wells. Ms. Kinal prepared a Remedial Action Work Plan (RAWP) based on results from the RI, which included a groundwater pump and treat system to contain a plume of perchlorethylene (PCE)-contaminated groundwater, and excavation and disposal of contaminated soil in the presumed source area. Following CTDEP approval of the RAWP, Ms. Kinal prepared bid specifications for soil excavation and remediation system installation, and oversaw their implementation. Ms. Kinal also prepared NPDES permit applications for discharges from construction dewatering and the groundwater remediation system, and conducted associated discharge monitoring.

### **Yankee Stadium, Bronx, NY**

Ms. Kinal performed the hazardous materials analysis for the Draft Environmental Impact Statement for the proposed new Yankee Stadium. The analysis included a Phase I Environmental Site Assessment of the entire project area and Subsurface (Phase II) Investigation in areas where environmental conditions were identified. The Phase II investigation included geophysical surveys to search for potential underground storage tanks; and soil, soil gas, and groundwater sampling at over 40 locations to determine potential environmental impacts during and after the proposed construction.



## **REBECCA KINAL, P.E.**

**TECHNICAL DIRECTOR-  
ENVIRONMENTAL ENGINEER**

| p. 4

### **Avalon on the Sound, New Rochelle, NY**

Ms. Kinal oversaw environmental investigation and soil remediation during the construction of two luxury high-rise apartment buildings and an associated parking garage. Investigation activities included an electromagnetic survey to search for possible underground storage tanks, and subsurface sampling to characterize soil and groundwater. Remediation activities included removing underground storage tanks, excavating and disposing of soil contaminated with volatile and semi-volatile organic compounds, and collecting end-of-excavation confirmation samples.

### **Dauids Island Environmental Audit, New Rochelle, NY**

Ms. Kinal managed the hazardous materials portion of the audit of this undeveloped island site, including a Phase I Environmental Site Assessment (ESA) and Subsurface (Phase II) Investigation in areas where environmental conditions were identified. The Phase II investigation included collecting soil samples from more than 100 locations and analyzing them for targeted compounds, including volatile organic compounds, semi-volatile compounds, metals, pesticides, and polychlorinated biphenyls (PCBs). Ms. Kinal also oversaw an electromagnetic (EM) survey conducted to identify the location of suspected underground storage tanks on the island. Based on soil sample results, Ms. Kinal estimated the volume of contaminated soil requiring remediation and prepared cost estimates for soil excavation and for transportation and disposal of contaminated soil and hazardous materials.

### **Outlet City Site Investigation, Queens, NY**

Ms. Kinal prepared a work plan for remedial investigation of the Outlet City site, a property in Long Island City that was formerly occupied by a manufacturer of industrial cleaners and pharmaceuticals. The site is being investigated and remediated under the NYSDEC voluntary clean-up program. In preparing the work plan, Ms. Kinal evaluated results from several previous investigations and conducted a limited groundwater sampling program to determine future data needs for designing remediation of creosote-contaminated soil and groundwater. The work plan included additional soil and groundwater sampling, a tidal survey to determine tidal influence on groundwater levels, and pilot free product recovery testing. Ms. Kinal also helped design a venting system for an on-site basement and performed exposure calculations for the vented vapors.

### **Yonkers Waterfront Redevelopment Project, Yonkers, NY**

For this redevelopment along Yonkers' Hudson River waterfront, Ms. Kinal supervised the remediation of Parcels H and I that were contaminated with hazardous soil. During the remediation process, she reviewed the subcontractor health and safety plans, delineated the areas of excavation, and oversaw field activities to ensure compliance with the specifications and appropriate regulations. This property was remediated under the NYSDEC Environmental Restoration Program (ERP).

### **U.S. Post Office Main Vehicle Maintenance Facility, Washington, D.C.**

While with another firm, Ms. Kinal designed and supervised the installation of a remediation system to treat petroleum-contaminated groundwater. Ms. Kinal also established O&M and monitoring protocols to ensure efficient operation of the air sparging/soil vapor extraction system, and to monitor contaminant recovery/degradation rates.

### **Aberdeen Proving Ground Building 4025 Site, Aberdeen, MD**

While with another firm, Ms. Kinal provided services for this leaking underground storage tank site, Ms. Kinal planned and oversaw investigation and pilot testing activities to delineate contamination and determine feasible in-situ remediation options. Investigation activities included soil and groundwater sampling using a direct-push (Geoprobe) rig and mobile laboratory. Pilot testing included in-situ respirometry testing, and field testing of bioremediation and free-product recovery technologies.



## **MICHELLE LAPIN, P.E.**

### **SENIOR VICE PRESIDENT**

Michelle Lapin is a Senior Vice President with more than 30 years of experience in the assessment and remediation of hazardous waste issues. She leads the firm's Hazardous Materials group and offers extensive experience providing strategic planning and management for clients. Ms. Lapin has been responsible for the administration of technical solutions to contaminated soil, groundwater, air and geotechnical problems. Her other duties have included technical and report review, proposal writing, scheduling, budgeting, and acting as liaison between clients and regulatory agencies, and project coordination with federal, state, and local authorities.

Ms. Lapin's hydrogeologic experience includes groundwater investigations, formulation and administration of groundwater monitoring programs and remediation throughout the Northeast. Her experience with groundwater contamination includes Level B hazardous waste site investigations; leaking underground storage tank studies, including hazardous soil removal and disposal and associated soil and water issues; soil gas/vapor intrusion surveys; and wetlands issues. Ms. Lapin is experienced in coordinating and monitoring field programs concerning hazardous waste cell closures. She has directed hundreds of Phase I, Phase II, and Phase III investigations and remediations, many of them in conjunction with developers, law firms, lending institutions, and national retail chains. She is also experienced in the cleanup of contaminated properties under Brownfield Cleanup Program (BCP) and Voluntary Cleanup Program (VCP) regulations.

### **BACKGROUND**

#### **Education**

M.S., Civil Engineering, Syracuse University, 1985

B.S., Civil Engineering, Clarkson University, 1983

#### **Professional Licenses/Certifications**

New York State P.E.

State of Connecticut P.E.

#### **Professional Memberships**

Member, National Society of Professional Engineers (NSPE), National and CT Chapters

Member, American Society of Civil Engineers (ASCE), National and CT Chapters

Member, Connecticut Business & Industry Association (CBIA), CBIA Environmental Policies Council (EPC)

Member, Environmental Professionals' Organization of Connecticut (EPOC)

Board Member, New York City Brownfield Partnership

Member, NAIOP, a Commercial Real Estate Development Association

#### **Years of Experience**

Year started in company: 1994

Year started in industry: 1986

### **RELEVANT EXPERIENCE**

Memorial Sloan Kettering Cancer Center-CUNY 74th Street EIS, New York, NY





## **MICHELLE LAPIN, P.E.**

**SENIOR VICE PRESIDENT**

| p. 2

AKRF was engaged by Memorial Sloan-Kettering Cancer Center (MSK) and CUNY-Hunter College (CUNY) to prepare an EIS for a proposed joint facility located on a New York City-owned parcel located between East 73rd Street and East 74th Street adjacent to the FDR Drive in Manhattan. The proposed facility was formerly occupied by the Department of Sanitation, with over 41 underground storage tanks, will include an ambulatory medical care center for MSK and educational and medical research facilities for CUNY.

Ms. Lapin led the hazardous materials work, which included the preparation of the Phase I and II environmental site assessments, remedial action work plans (RAWPs), and construction health and safety plans (CHASPs) for submission to the New York City Office of Environmental Remediation (OER) for the Voluntary Cleanup Program (VCP) and to the New York State Department of Environmental Conservation (NYSDEC) for remediation of a petroleum spill. The RAWPs and CHASPs included provisions for excavation of contaminated soil and rock, removal of tanks and environmental monitoring during the construction activities. AKRF also performed a pre-demolition asbestos survey of the remaining concrete foundation structures and prepared specifications for asbestos abatement, soil management and underground storage tank removal and disposal.

The subgrade remediation was completed in compliance with the OER-approved RAWP and the spill was closed by the NYSDEC. The project has been completed, the spill was closed by the NYSDEC, and a Notice of Satisfaction was issued from the OER.

### **New York City Transit Hazardous Materials On-Call Contract, Various Locations, New York City, NY**

As part of a five-year, \$10 million on-call environmental engineering and consulting services contract with MTA New York City Transit (NYCT), AKRF performed phase I Environmental Site Assessments (ESAs), asbestos, lead paint, indoor air quality and hazardous materials consulting services at various stations, tunnels and structures. Ms. Lapin oversaw the firm's team of technicians responsible for work at construction work sites occupied by multiple contractors and trades, monitoring contractor work practices, and inspection hazardous waste storage activities. She also reviewed AKRF's asbestos consulting services, coordinating the efforts of AKRF team members who conducted asbestos surveys and reporting, design services, and asbestos abatement oversight at manholes, stations, tunnels and other structures throughout New York.

### **Brooklyn Bridge Park, Brooklyn, NY**

AKRF prepared an Environmental Impact Statement (EIS) and is continuing to provide technical and planning support services for Brooklyn Bridge Park, which revitalizing the 1.3-mile stretch of the East River waterfront between Jay Street on the north and Atlantic Avenue on the south. The new park, allows public access to the water's edge, allowing people to enjoy the spectacular views of the Manhattan skyline and New York Harbor. It also provides an array of passive and active recreational opportunities, including lawns, pavilions, and a marina. As with many waterfront sites around New York City, the lands along the Brooklyn waterfront have a long history of industrial activities. Some of these industries used dangerous chemicals and generated toxic by-products that could have entered the soil and groundwater. In addition, landfilling activities along the shoreline also used ash and other waste materials from industrial processes. Based on site inspections, historical maps, government records, and other sources, AKRF has been investigating the potential for the presence for hazardous materials in the park. This information was compiled into a Phase 1 Environmental Site Assessment report. AKRF has also provided and continues to support to the design team related to designing the project to minimize costs related to remediating hazardous materials where possible. Ms. Lapin is serving as senior manager for the hazardous materials investigations.

### **Columbia University Manhattanville Academic Mixed-Use Development, New York, NY**

Ms. Lapin served as Hazardous Materials Task Leader on this Environmental Impact Statement (EIS) for approximately 4 million square feet of new academic, research and neighborhood uses to be constructed north of Columbia University's existing Morningside campus. The work included Phase I Environmental Site Assessments for the properties within the site boundaries, and estimates for a Subsurface (Phase II) Investigation of the entire





## **MICHELLE LAPIN, P.E.**

**SENIOR VICE PRESIDENT**

| p. 3

development area. The firm's Hazardous Materials group performed over 30 individual Phase I Environmental Site Assessments for properties within the development area. In addition, a Preliminary Environmental Site Assessment (PESA) was completed in conjunction with the Environmental Impact Statement (EIS). Based on the Phase I studies, AKRF conducted a subsurface (Phase II) investigation in accordance with a New York City Department of Environmental Protection (NYCDEP) approved investigative work plan and health and safety plan. Subsurface activities included the advancement of soil borings, groundwater monitor wells, and the collection of soil and groundwater samples for laboratory analysis. This study was used to estimate costs to remediate contaminated soil and groundwater, and underground storage tanks and hazardous building materials, including lead-based paint and asbestos-containing materials.

### **Albert Einstein College of Medicine Center for Genetic and Translational Medicine, Bronx, NY**

Ms. Lapin directed the firm's hazardous materials work in connection with the construction a new Center for Genetics and Translational Medicine (CGTM) building on the Bronx campus of the Albert Einstein College of Medicine of Yeshiva University. AKRF prepared an Environmental Assessment Statement (EAS) that examined such issues as land use, zoning, air quality, urban design and visual resources, hazardous materials, traffic, noise, and air quality. Ms. Lapin's work included analysis of the existing conditions and potential impacts that the construction could cause to the environment and human health.

### **West 61<sup>st</sup> Street Rezoning/Residential Development, New York, NY**

Ms. Lapin directed the firm's hazardous materials work for this mixed-use development in Manhattan. The Algin Management Company hired AKRF to prepare an environmental impact statement (EIS) for the proposed rezoning of the western portion of the block between West 60th and 61st Streets, between Amsterdam and West End Avenues. The purpose of the proposed action was to facilitate the development of two 30-story residential towers with accessory parking spaces, and landscaped open space. The EIS examined a "worst case" condition for rezoning the block, which allowed Algin to build a residential building of approximately 375,000 square feet at their site. The building now contains 475 apartments, 200 accessory parking spaces, a health club, and community facility space. This site, with the services of AKRF, entered into New York State's Brownfield Cleanup Program (BCP). On-site issues included underground storage tanks remaining from previous on-site buildings, petroleum contamination from these tanks and possibly from off-site sources, and other soil contaminants (metals, semi-volatile organic compounds, etc.) from fill materials and previous on-site buildings. AKRF oversaw the adherence to the Construction Health and Safety Plan (HASP), which was submitted to and approved by the New York State Department of Environmental Conservation (NYSDEC), and monitored the waste streams, to ensure that the different types of waste were disposed of at the correct receiving facilities. This oversight also included confirmation and characteristic soil sampling for the receiving facilities and NYSDEC. A "Track 1" Clean up of the majority of the property (the portion including the buildings) was completed and the final Engineering Report was approved by the NYSDEC. AKRF has also completed a smaller portion of the property as a "Track 4" cleanup, which includes a tennis court and landscaped areas. Ms. Lapin continues to manage the annual inspections for the property owner in accordance with the Brownfield Cleanup Agreement.

### **2477 Third Avenue, Bronx, NY**

AKRF conducted the investigation and remediation of the former 2477 Third Avenue gasoline station property under the New York State Department of Environmental Conservation's (NYSDEC's) Brownfield Cleanup Program (BCP). The work included shallow and deep aquifer groundwater testing, delineation of known areas of soil contamination, soil vapor analyses, and investigation and delineation of non-aqueous phase liquid (DNAPL) from past industrial activities. Upon NYSDEC approval of the Remedial Action Work Plan (RAWP), AKRF conducted the removal of the nine on-site underground storage tanks (USTs) and 1,100 tons of petroleum-contaminated soil, the application of six in-situ chemical oxidation (ISCO) groundwater treatments, and the implementation of four Enhanced Fluid Recovery (EFR) events to remove desorbed gasoline-related hydrocarbons in the groundwater. The site received a Certificate of Completion (COC) from the BCP in



## **MICHELLE LAPIN, P.E.**

**SENIOR VICE PRESIDENT**

| p. 4

December 2015 and a Notice of Satisfaction (NOS) in October 2016 from the Mayor's Office of Environmental Remediation (OER) in connection with the hazardous materials E-Designation assigned to the property. Ms. Lapin was the professional engineer of record, responsible for the remediation design elements and overall adherence to the NYSDEC and New York City Office of Environmental Remediation (OER) regulations.

### **Larkin Plaza, Yonkers, NY – Remedial Investigation, Construction Oversight**

AKRF assisted RXR Realty with enrolling the 1.1-acre Larkin Plaza site in the New York State Department of Environmental Conservation's (NYSDEC's) Brownfield Cleanup Program (BCP). Since being accepted into the program, AKRF conducted an extensive remedial investigation, prepared the necessary remedial action plans, managed the citizen participation tasks, and is in the process of conducting the remediation in conjunction with NYSDEC oversight. To date, the remedial work has included in-situ chemical oxidation (ISCO) treatments, contaminated soil removal, and petroleum product recovery. AKRF also assisted RXR with various construction-related services, including dewatering discharge permitting, soil disposal characterization testing, and storm water pollution prevention plan (SWPPP) preparation. AKRF's Cultural Resources department is in the process of preparing a submission to the State Historic Preservation Office (SHPO) on behalf of RXR related to the acquisition of additional public funding sources for the construction project. A Certificate of Completion (COC) from the NYSDEC is anticipated at the end of 2018. Ms. Lapin is the professional engineer of record, responsible for the remediation design elements and adherence to the NYSDEC-approved work plans and remediation design.

### **NY Wheel, Staten Island, NY**

Working with the New York City Department of Small Business Services (SBS) as lead agency, AKRF conducted an environmental review for the forthcoming Empire Outlets and New York Observation Wheel (NY Wheel), a mixed-use development situated on a State Voluntary Cleanup Program (VCP) site managed by the New York City Economic Development Corporation (EDC), on the northern Staten Island waterfront. AKRF provided an EIS analyzing the combined project. In addition, AKRF prepared an updated Site Management Plan (SMP) reflecting the proposed development for the VCP site. The SMP was approved by the New York State Department of Environmental Conservation (NYSDEC) in March 2015.

Hazardous materials services provided by AKRF for New York Wheel LLC during construction on the NY Wheel site include environmental construction oversight, inspection and documentation of SSDS installation, soil sampling, and reporting to ensure compliance with the SMP, storm water pollution prevention plan (SWPPP) inspections, and site design services. AKRF's work entails regular coordination with EDC for reporting to NYSDEC, modifications to the SMP, etc. Ms. Lapin is the professional engineer of record, responsible for adherence to the NYSDEC-approved plans and coordination with the NYSDEC regarding the design elements.

### **443 Greenwich Street, Manhattan, NY**

This Site was assigned an E-Designation for hazardous materials (as well as air quality and noise) during the North Tribeca Rezoning in 2010, which requires environmental testing and, if necessary, remediation to the satisfaction of the New York City Mayor's Office of Environmental Remediation (OER). After years of public opposition to the original redevelopment scheme calling for a boutique hotel, this former manufacturing building and its current developer gained acceptance through the Department of City Planning and the Landmarks Preservation Commission to move forward with redevelopment as residential lofts. The redevelopment process began in 2012 and led to initial re-occupancy in 2016 after overcoming several regulatory challenges while seeking LEED® certification.

Once trichloroethene (TCE) was identified on-site, the typically straight forward assignment of delineating contaminant sources for AKRF became much more complex following the identification of an off-site TCE groundwater plume. Based on the completion of several rounds of additional sampling and investigation activities including a compound specific isotopic analysis (CSIA) of the chlorinated volatile organic compounds (VOCs) detected in the central portion of the Site and the off-site monitor wells south of the Site, the presence of two



## **MICHELLE LAPIN, P.E.**

**SENIOR VICE PRESIDENT**

| p. 5

separate releases (one originating on-site and one originating off-site) of TCE was confirmed. Based on the confirmation that the Site was not the contamination source associated with the off-site plume, the redevelopment of the Site proceeded under the review of the OER, and did not require direct or continued oversight from the New York State Department of Environmental Conservation (NYSDEC). Furthermore, the developer of the Site, who had become the owner, was not deemed responsible to complete additional off-site investigation or remediation associated with the separate, off-site TCE groundwater plume.

For this project, AKRF utilized forensic-based analysis of chlorinated VOC plumes and was one of the first projects that included a groundwater treatment technology managed by the OER in its E-Designation program. The Site also includes an engineered cap to prevent exposure to underlying soil/fill, a vapor barrier/waterproofing system beneath the building slab and along foundation sidewalls, and the operation of an active sub-slab depressurization (SSD) system. The project was awarded the 2017 Environmental Protection award by the New York City Brownfield Partnership. Ms. Lapin was the professional engineer of record, responsible for the remediation design and adherence of the remediation and remediation systems installation and ongoing operation.

### **Hudson River Park, New York, NY**

Ms. Lapin is directing AKRF's hazardous materials work during construction of Hudson River Park, a five-mile linear park along Manhattan's West Side. As the Hudson River Park Trust's (HRPT's) environmental consultant, AKRF has overseen preparation and implementation of additional soil and groundwater investigations [working with both the New York State Department of Environmental Conservation (NYSDEC) and the New York City Department of Environmental Protection (NYCDEP)], all health and safety activities, and removal of both known underground storage tanks and those encountered during construction. Previously, the firm performed hazardous materials assessments as part of the Environmental Impact Statement (EIS) process, including extensive database and historical research, and soil and groundwater investigations. Ms. Lapin has been the senior consultant for the soil and groundwater investigations and remediation, and the asbestos investigations and abatement oversight.

### **Roosevelt Union Free School District – District-wide Improvement Program, Roosevelt, NY**

Ms. Lapin managed the hazardous materials investigation for the Draft and Final Environmental Impact Statements (EIS) for the improvement program, which included the demolition of three existing elementary schools and portions of the junior-senior high school, and the reconstruction of three replacement elementary schools, a separate replacement middle school, and renovations to the high school. Following the EIS, additional hazardous materials investigations were completed, including comprehensive asbestos and lead surveys; Phase I and Phase II Environmental Site Assessments; the preparation of asbestos, lead, hazardous materials and demolition specifications; and obtaining site-specific variances from the New York State Department of Labor (NYSDOL). The middle school remediation was conducted through coordination with the New York State Department of Environmental Conservation (NYSDEC), the New York State Department of Health (NYSDOH), the New York State Education Department (NYSED) and the local school district. The project was approved, and construction/renovation for the new middle school completed such that the school opened for the Fall 2008 semester as planned.

### **Fiterman Hall Deconstruction and Decontamination Project, New York, NY**

The 15-story Fiterman Hall building, located at 30 West Broadway between Barclay and Murray Streets, originally constructed as an office building in the 1950s, had served as an extension of the City University of New York (CUNY) Borough of Manhattan Community College (BMCC) since 1993. The building was severely damaged during the September 11, 2001, attack on the World Trade Center (WTC) when 7 WTC collapsed and struck the south façade of the building, resulting in the partial collapse of the southwest corner of the structure. The building was subsequently stabilized, with breaches closed and major debris removed, however, extensive mold and WTC dust contaminants remain within the building, which must be taken down. The project required the preparation of two Environmental Assessment Statements (EASs) for the redevelopment of Fiterman Hall—one for the deconstruction and decontamination of the building and one for the construction of a replacement building on the



## **MICHELLE LAPIN, P.E.**

**SENIOR VICE PRESIDENT**

| p. 6

site. AKRF prepared the EAS for the Deconstruction and Decontamination project, which included the decontamination of the interior and exterior of the building, the removal and disposal of all building contents, and the deconstruction of the existing, approximately 377,000-gross-square-foot partially collapsed structure. Ms. Lapin reviewed the deconstruction and decontamination plans for the EAS. The cleanup plan was submitted to the United States Environmental Protection Agency (USEPA).

### **Yonkers Waterfront Redevelopment Project, Yonkers, NY**

For this redevelopment along Yonkers' Hudson River waterfront, Ms. Lapin headed the remedial investigation and remediation work that included Phase I Environmental Site Assessments of 12 parcels, investigations of underground storage tank removals and associated soil remediation, remedial alternatives reports, and remedial work plans for multiple parcels. Several of the city-owned parcels were remediated under a Voluntary Cleanup Agreement; others were administered with state Brownfields grants. Hazardous waste remediation was completed on both brownfield and voluntary clean-up parcels, which enabled construction of mixed-use retail, residential development, and parking.

### **Davids Island Site Investigations, New Rochelle, NY**

Ms. Lapin managed the hazardous materials investigation of Davids Island, the largest undeveloped island on the Long Island Sound in Westchester County. The 80-acre island features pre- and post-Civil War military buildings and parade grounds, and is viewed as a major heritage, tourism, and recreational amenity. The island, formerly known as Fort Slocum, was used by the U.S. military, beginning in the 19th century, as an Army base, hospital, and training center. The island was planned for county park purposes. The investigation included a Phase I Environmental Site Assessment, with historical research going back to the 17th century, a Phase II (Subsurface) Investigation, underground storage tank investigations, asbestos surveys, and conditions surveys of all remaining structures. Cost estimates were submitted to Westchester County for soil remediation, asbestos abatement, and building demolition.

### **Site Selection and Installation of 11 Turbine Generators, New York and Long Island, NY**

AKRF was retained by the New York Power Authority (NYPA) to assist in the State Environmental Quality Review Act (SEQRA) review of the proposed siting, construction, and operation of 11 single-cycle gas turbine generators in the New York metropolitan area. Ms. Lapin managed the hazardous materials investigation of the sites. The work has included Phase I Environmental Site Assessments, subsurface investigations, and construction health and safety plans.

### **Cross Westchester (I-287) Expressway Phases V and VI, Westchester County, NY**

For the New York State Department of Transportation's (NYSDOT) I-287 reconstruction project, Ms. Lapin served as Project Manager and was responsible for directing the contaminated materials aspect of the final design effort for the reconstruction of Westchester County's major east-west artery. As part of her duties, Ms. Lapin managed the asbestos investigations at eight bridges and wetland delineation along the entire corridor and wrote the scope of work and provided general management of the project.

### **Supermarket Redevelopment, New Fairfield, CT**

AKRF provided consulting services to the developer and owner of a nine-acre site, including conducting a remedial investigation and remediation of a site contaminated from former dry cleaning operations and off-site gasoline spills. The investigation included the installation of monitoring wells in three distinct aquifers, geophysical logging, pump tests, and associated data analysis. Ms. Lapin presented the environmental issues and planned remediation to local and state officials during the early stages of the planning process to incorporate their comments into the final remedial design. A remedial action work plan (RAWP) was completed and approved by the Connecticut Department of Environmental Protection (CTDEP) within a year to enable redevelopment work for a new supermarket and shopping center. The RAWP included the remediation of soil within the source area



## **MICHELLE LAPIN, P.E.**

**SENIOR VICE PRESIDENT**

| p. 7

and a multi-well pump and treat system for the recovery of non-aqueous and dissolved phase contamination in groundwater. The design of the recovery well system included extensive groundwater modeling to ensure capture of the contaminant plume and the appropriate quantity and spacing of the wells. Ms. Lapin directed the soil removal remedial activities and monitoring for additional potential contamination during construction. In addition, AKRF performed comprehensive pre-demolition asbestos and lead-based paint surveys of the former site structures, conducted abatement, air monitoring and oversight, and provided environmental consulting support for the development of the site. The groundwater remediation system was installed during site development and began operation once development was complete.

### **Broad Street, Stamford, CT [former Project name: Target Stamford]**

AKRF originally completed a Phase I Environmental Site Assessment (ESA) for a developer of this property, located at southeastern corner of Broad Street and Washington Boulevard in downtown Stamford, Connecticut, for a proposed residential development. Four years later, an update of this Phase I ESA was conducted for a proposed Target retail development. The study area included the current Target site and the west-adjacent site which was subsequently developed as a luxury residential tower. Following the Phase I report, a subsurface (Phase II) investigation was conducted, which included soil borings, groundwater monitor wells, soil and groundwater sample collection and analysis. The results of the Phase II investigation were used to develop a remediation strategy. An additional Phase I/Phase II investigation was conducted of the adjacent former transmission repair facility, which included a site inspection, review of local and state records, an underground storage tank markout survey, advancement of soil borings, and collection of soil samples for laboratory analysis. AKRF also conducted asbestos surveys prior to abatement and demolition of the former Broad Street and Washington Boulevard buildings.

### **EPA Brownfields Assessment Program, Naugatuck, CT**

Ms. Lapin is currently serving as the Principal-in-Charge for a USEPA Brownfields Assessment program project in Naugatuck, Connecticut. She is overseeing the assessment and investigation of key development parcels, including Work Plan and QAPP preparation, and conducting community outreach tasks to communicate site risks and the project process. Mr. Stefaniak plays the lead role in administering the USEPA Cooperative Agreement on behalf of the Borough.

### **East 75th/East 76th Street Site, New York, NY**

Ms. Lapin served as Senior Manager for this project that encompassed coordination and direct remediation efforts of this former dry cleaning facility and parking garage prior to the sale of the property and its ultimate redevelopment for use as a private school. A preliminary site investigation identified 20 current and former petroleum and solvent tanks on the property. A soil and groundwater testing program was designed and implemented to identify the presence and extent of contamination resulting from potential tank spills. This investigation confirmed the presence of subsurface petroleum contamination in the soil and solvent contamination from former dry cleaning activities in the bedrock. AKRF completed oversight of the remediation under the State's Voluntary Cleanup Program. Remediation, consisting of tank removals and excavation of contaminated soil and the removal of solvent-contaminated bedrock down to 30 feet below grade, has been completed. AKRF completed oversight of the pre-treatment of groundwater prior to discharge to the municipal sewer system and an off-site study to determine impacts to groundwater in downgradient locations.

### **Former Macy's Site, White Plains, NY**

While assisting Tishman Speyer with plans to redevelop this site, Ms. Lapin managed the pre-demolition work, which included a Phase I site assessment; subsurface investigation (Phase II), including the analysis of soil and groundwater samples for contamination; a comprehensive asbestos, lead paint, and PCB investigation; radon analysis; and coordination and oversight of the removal of hazardous materials left within the building by previous





## **MICHELLE LAPIN, P.E.**

**SENIOR VICE PRESIDENT**

| p. 8

tenants. Work also included asbestos abatement specifications and specifications for the removal of two 10,000-gallon vaulted fuel-oil underground storage tanks.

### **Storage Deluxe, Various Locations, NY**

Ms. Lapin manages the firm's ongoing work with Storage Deluxe, which includes Phase I Environmental Site Assessments and Phase II Subsurface Investigations, underground storage tank removals and associated remediation, asbestos surveys and abatement oversight, and contaminated soil removal and remediation for sites in Connecticut, the Bronx, Brooklyn, Manhattan, Westchester County, and Long Island.

### **Home Depot, Various Locations, NY and CT**

Ms. Lapin, serving as either Project Manager or Senior Manager, has managed the investigations and remediation at multiple Home Depot sites in the five boroughs, Long Island, and Connecticut. The investigations have included Phase I, II, and III site assessments, asbestos and lead paint surveys, abatement specifications and oversight, and soil and groundwater remediation.

### **Avalon on the Sound, New Rochelle, NY**

For Avalon Bay Communities, Ms. Lapin managed the investigations and remediation of two phases of this residential development, including two luxury residential towers and an associated parking garage. Remediation of the first phase of development (the first residential tower and the parking garage) included gasoline contamination from a former taxi facility, fuel oil contamination from multiple residential underground storage tanks, and chemical contamination from former on-site manufacturing facilities. The remediation and closure of the tank spills was coordinated with the New York State Department of Environmental Conservation (NYSDEC). The initial investigation of the Phase II development—an additional high-rise luxury residential building—detected petroleum contamination. A second investigation was conducted to delineate the extent of the contamination and estimate the costs for remediation. AKRF oversaw the remediation and conducted the Health and Safety monitoring. The remediation was completed with closure and approvals of the NYSDEC.

### **Mill Basin, Gerritsen Inlet, and Paerdegat Basin Bridges, Final Design, Shore Parkway, Brooklyn, NY**

Following the preparation of the Generic Environmental Impact Statement (GEIS) for the Belt Parkway Bridges Project, the firm was retained for supplemental work during the final design phase of the project. This included National Environmental Policy Act (NEPA) and State Environmental Quality Review Act (SEQRA) documentation for three of the bridges—Mill Basin, Gerritsen Inlet, and Paerdegat Basin—which will be federally funded. Ms. Lapin managed the contaminated materials investigation that included a detailed subsurface contaminated materials assessment, both subaqueous and along the upland approaches.

### **NYSDOT Transportation Management Center (TMC), Hawthorne, NY**

AKRF conducted environmental studies for the New York State Department of Transportation (NYSDOT) at the current troopers' headquarters in Hawthorne, NY. The property is the proposed site of a new Transportation Management Center. AKRF completed a comprehensive asbestos survey of the on-site building and prepared asbestos abatement specifications; performed a Phase I site assessment; conducted an electromagnetic (EM) survey that located two fuel oil underground storage tanks, and developed removal specifications for the two underground storage tanks and an aboveground storage tank.

### **Metro-North Railroad Poughkeepsie Intermodal Station/Parking Improvement Project, Poughkeepsie, NY**

Ms. Lapin served as Project Manager of the hazardous materials investigation in connection with AKRF's provision of planning and environmental services for parking improvement projects at this station along the Hudson Line. The project included an approximately 600-space garage, additional surface parking, and an intermodal station to facilitate bus, taxi, and kiss-and-ride movements. Ms. Lapin conducted Phase I and II



## **MICHELLE LAPIN, P.E.**

**SENIOR VICE PRESIDENT**

| p. 9

contaminated materials assessments and worked with the archaeologists to locate an historical roundhouse/turntable.

### **Metro-North Railroad Golden's Bridge Station Parking Project, Westchester County, New York**

For Metro-North Railroad, Ms. Lapin managed a Phase I Environmental Site Assessment of a property that has since become the new parking area, used by the existing Golden's Bridge train station. Ms. Lapin also conducted a subsurface (Phase II) investigation of the original parking area, track area, and existing platform for the potential impact of moving tracks in the siding area to extend the existing parking area and adding an access from a proposed overhead walkway (connecting the train station to the new parking area over a highway). The study also included an assessment for lead-based paint and asbestos on the platform structures.

### **East River Science Park, New York, NY**

Originally, New York University School of Medicine (NYUSOM) retained the firm to prepare a full Environmental Impact Statement (EIS) for its proposed East River Science Park (ERSP). The proposed complex was to occupy an underutilized portion of the Bellevue Hospital campus between East 30th Street and approximately East 28th Street, immediately south of NYU's campus. As originally contemplated, Phase I was to include 618,000 square feet of development, including a clinical practice and research building, a biotech center, 220 housing units for post-doctorate staff, a child care center, and a conference center. This phase would include reuse of the former Bellevue Psychiatric Building, a historic structure on East 30th Street east of First Avenue. Phase II was to include a second biotech building with a library to serve NYU and Bellevue at the eastern end of the block between 29th and 30th Streets. Phase III was to include a third biotech building and parking. The project's EIS considered a full range of issues, including land use, socioeconomics, shadows, historic resources, open space, traffic and transportation, air quality, noise, and construction. The firm also prepared all of the traffic and transportation studies for the urban design and master planning efforts. Ms. Lapin managed the Phase I Environmental Site Assessment and other hazardous materials-related issues.

Events relating to September 11, 2001 put a hold on the project for a number of years. When the project resurfaced, it had a new developer and a decreased scope. Ms. Lapin updated the hazardous materials issues for the new developer and consulted with them regarding remediation strategies and involvement of regulatory agencies. For the actual remediation/development, the city requested oversight by AKRF to represent its interests (the city is retaining ownership of the land). Ms. Lapin completed directing the remediation oversight on behalf of the City of New York for the remediation of the former psychiatric hospital building, laundry building and parking areas associated with Bellevue Hospital. The new development includes a biotechnology center (Commercial Life Science Research and Office Park) comprising two buildings (combined 550,000 square feet), street level retail, and an elevated plaza.

### **68, 76 and 78 Forest Street and 96-98 Grove Street, Stamford, CT**

Ms. Lapin led this project, for which AKRF was retained to complete a Phase I Environmental Site Assessment (ESA) of five residential properties, and asbestos surveys and lead-based paint surveys of the five multi-family residential structures prior to a real estate transaction. The investigations were completed to allow demolition of the residential structures and prepare the properties for development into the Highgrove high rise condominium complex. AKRF represented the purchaser and site developer during the due diligence process, identified areas of environmental concern, and completed underground storage tank closure activities prior to initiating site development. In addition, AKRF conducted a Phase I ESA of a property on Summer Street that was being used by the developer as a "temporary" office building and a parking area utilized as a sales center and apartment model for the Highgrove residential development.

### **Shelton Storage Deluxe, Shelton, CT**

AKRF completed Phase I, Phase II and Tank Removal/Remediation services for a storage facility in Shelton, Connecticut. Based on this information from the Phase I ESA, AKRF conducted a Phase II study that revealed



## **MICHELLE LAPIN, P.E.**

**SENIOR VICE PRESIDENT**

| p. 10

groundwater impact (gasoline), possibly from an off-site source. Additional testing was then conducted to determine the source of the gasoline contamination. Testing of a wood block floor revealed concentrations of volatile and semivolatile organic compounds and total petroleum hydrocarbons; therefore, disposal of this material had to be as a petroleum-contaminated waste. The additional testing included upstream and downstream surface water samples, and on-site detention pond water and sediment samples. Subsequent to the Phase II testing, a 4,000-gallon on-site underground storage tank was removed. Upon removal, contaminated soil and groundwater were observed and a spill was called into the Connecticut Department of Environmental Protection (CTDEP). Following completion of remedial activities and submission of a closure report, the spill was closed by the CTDEP. Ms. Lapin directed the firm's efforts to complete this project.

### **DPR Soundview Park Playgrounds and Open Space, Bronx, NY**

AKRF is part of a team working on the reconstruction of this 212-acre NYCDPR public park located along the Bronx River in the Bronx, New York. The park was identified as an underutilized park and is being improved in accordance with the goals of PlaNYC. Ms. Lapin is overseeing AKRF's hazardous materials investigations including environmental and remediation-related work. AKRF prepared the Environmental Assessment Statement (EAS) and the project has moved into the design and construction phase. The remediation/construction of multiple phases of the development is currently underway.

### **164 Kent Avenue, Brooklyn, NY (AKA Northside Piers and 1 North 4th Place)**

The project was a multi-phase development consisting of a large waterfront block in the Williamsburg Rezoning Area. The project site has been developed with a mixed-use residential-commercial high rise towers with an esplanade and a pier along the East River. AKRF provided acquisition and development support, including performing Phase I and II environmental site assessments, and preparation of Remedial Action Plans (RAPs) and Construction Health and Safety Plan (CHASPs) for approval by DEP and OER. AKRF provided assistance with construction oversight during soil handling activities and managing the Community Air Monitoring Plan (CAMP) activities. To date, closure reports have been prepared and occupancy achieved for three of the four buildings. Ms. Lapin is the Professional Engineer (P.E.) of record for the DEP and OER RAPs, CHASPs and Remedial Closure Reports (RCRs).

### **Rego Park Home Depot, Queens, NY**

Solvent contamination was encountered during retail development of a former industrial property in Rego Park, Queens, New York. The site work included an extensive investigation and a multi-phase remediation performed under the NYSDEC Voluntary Cleanup Program (BCP). Remediation included removal of aboveground and underground storage tanks (ASTs and USTs) and hotspot soil removal. An Air Sparging/Soil Vapor Extraction (AS/SVE) groundwater remediation system designed by AKRF was installed as part of the building construction. Continued remediation work included upgrading and expanding the AS/SVE system after the store was opened. AKRF prepared the Final Engineering Report and obtained closure with a Release and Covenant Not to Sue issued by NYSDEC in 2013. AKRF continues operations, maintenance, and monitoring under the NYSDEC-approved Site Management Plan. Ms. Lapin is the Professional Engineer (P.E.) of record for the remediation design and implementation in accordance with the NYSDEC Brownfield Cleanup Program (BCP).

### **250 North 10th Street, LLC., Residential Redevelopment Site, Brooklyn, NY**

AKRF was retained to investigate and remediate this former industrial property in the Williamsburg section of Brooklyn, New York in connection with site redevelopment. The site is approximately 50,000 square feet, and redevelopment included a six story residential building and parking garage. The work was completed to satisfy the requirements of the NYC E-designation Program and NYC Voluntary Cleanup Program (NYC VCP). AKRF completed a Remedial Investigation (RI) to evaluate the nature and extent of site contamination, and developed a Remedial Action Work Plan (RAWP) to properly address site contamination during redevelopment. Remediation included removal of underground storage tanks, more than 7,500 tons of contaminated soil, and installation of a





## **MICHELLE LAPIN, P.E.**

**SENIOR VICE PRESIDENT**

| p. 11

vapor barrier and site cap across the entire property. The remediation was completed under oversight of the NYC Office of Environmental Remediation (OER), and in a manner that has rendered the Site protective of public health and the environment consistent with residential use of the property. Ms. Lapin is the Professional Engineer (P.E.) of record for the remedial effort in accordance with the OER Voluntary Cleanup Program (VCP).

### **AP-Williamsburg, LLC, 50 North 5th Street Development, Brooklyn, NY**

AKRF directed the remedial program at a 55,000-square foot site located in the Williamsburg section of Brooklyn, New York. The site had an industrial and manufacturing history for over 100 years that included a barrel making factory, use of kilns, and a carpet and flooring materials warehouse. AKRF completed a Remedial Investigation (RI) to evaluate the nature and extent of site contamination, and developed a Remedial Action Work Plan (RAWP) to properly address site contamination during redevelopment. Remediation included removal of more than 5,000 tons of contaminated soil, and installation of a vapor barrier and sub-slab depressurization system (SSDS) beneath the site building. The remediation was completed in a manner that has rendered the Site protective of public health and the environment consistent with commercial and residential use of the property, and in accordance with the requirements of the NYC OER E-designation program. The site includes a seven story residential apartment building with street level retail space and a parking garage. Ms. Lapin is the Professional Engineer (P.E.) of record for the NYC OER RAWP and Remedial Closure Report (RCR).

### **New York City School Construction Authority (NYCSCA), Environmental Consulting Hazardous Materials Services**

AKRF has undertaken various assignments under consecutive hazardous materials on-call contracts, including environmental assessment, remedial design, and plumbing disinfection consulting tasks. For potential new school sites, assignments include initial due diligence, Phase I environmental site assessments (ESAs) and multi-media subsurface investigation of soil, groundwater, and soil vapor to determine the suitability of a site for development as a school, likely remediation requirements, and associated costs. For sites undergoing design and development, assignments include preparation of remediation plans, design of sub-slab depressurization systems (SSDS) and contract specifications, and construction oversight. The work has also included conducting Phase I ESAs and indoor air quality testing, preparation of specifications, supervision of storage tank removals, and investigation and remediation of spills for existing schools. Due to the sensitivity of school sites, work under this contract is often conducted on short notice and during non-school hours. Ms. Lapin is the QA/QC officer for all of the SCA hazardous materials assignments and the Professional Engineer (P.E.) of record for the various remediation systems, including SSDS. In addition, Ms. Lapin is also the QA/QC officer for the lead in drinking water and plumbing disinfection tasks also under AKRF's on-call hazardous materials consulting contract with the NYCSCA. AKRF performed lead in drinking water sampling in about 160 schools during two three-month periods in 2016 and 2017 and continues to provide lead sampling, reporting, and recommendations as new plumbing is installed. AKRF also oversees plumbing disinfection work, which is required prior to new plumbing being placed into service. The assignments involve reviewing and commenting on disinfection plans, supervision of the disinfection and confirmation testing, and preparation of reports documenting that the work was conducted in accordance with the specifications and applicable requirements. As with the Phase I/II studies, work under the lead testing and plumbing disinfection contract is often conducted on short notice during non-school hours.



## **TIMOTHY McCLINTOCK**

### **ENVIRONMENTAL SCIENTIST**

Mr. McClintock has over 9 years of environmental consulting experience, including implementing and managing Phase I Environmental Site Assessments, Phase II Environmental Site Investigations and Remedial Investigations, overseeing remedial action programs including soil excavation, groundwater handling, remediation system installation, operation and maintenance, and project management and reporting. He has successfully remediated projects and obtained closure from several northeast authorities, including the New York State Department of Environmental Conservation (NYSDEC), New Jersey Department of Environmental Protection (NJDEP), Pennsylvania Department of Department of Environmental Protection (PADEP), Connecticut Department of Energy & Environmental Protection (CTDEEP) and Massachusetts Department of Environmental Protection (MassDEP).

### **BACKGROUND**

#### **Education**

B.S. Environmental Science/Earth Science, University at Albany, 2008

#### **Licenses & Certifications**

OSHA 40-hour Health & Safety Training for Hazardous Waste Operations (September, 2019)

OSHA 10-hour Health and Safety Training for Construction Safety and Health

NJDEP Subsurface Evaluator & UST Closure (December, 2019)

NYSDOH Certified Asbestos Inspector (March, 2019)

NYSDOH Mold Assessor (November, 2018)

#### **Years of Experience**

Date started at AKRF: August, 2017

Prior industry experience: Dorson Environmental Management, Inc. – August 2008 to August 2017 (9 years)

### **RELEVANT EXPERIENCE**

#### **Former Farm Gasoline Underground Storage Tank Remediation, Somerset County, NJ**

Mr. McClintock serves as the field team leader and deputy project manager for the LSRP-led remediation of a former gasoline UST located on a farm property in the Watchung Mountain region of New Jersey. Following a site investigation (contamination screening), AKRF is currently conducting an investigation to bioremediate groundwater at the site, which contains residual benzene and MTBE. Mr. McClintock is integral to the preparation of a Remedial Action Workplan (RAWP), for the carrying out of groundwater sampling investigations, a biotreatability study, and the evaluation of data resulting from the site work.

#### **1-65 North 12th Street, Brooklyn, New York**

The former Bayside Fuel Oil Company operated a commercial petroleum bulk storage facility at the property for several decades. Soil and groundwater contamination resultant of on-site and off-site petroleum releases, off-site manufactured gas plant (MGP) releases, and historic fill have been identified throughout the property. Mr. McClintock assisted senior AKRF project staff with the evaluation of historical assessment information, the preparation of a Remedial Action Plan (RAP), and a Construction Health and Safety Plan (CHASP) for this site.

#### **Confidential Client: New York City Institutional Site - Soil Classification:**

Mr. McClintock is the field team leader for the soil classification work associated with the proposed development of an addition at a New York City institutional site. He assisted senior project staff with the coordination of site work,



## **TIMOTHY MCCLINTOCK**

**ENVIRONMENTAL SCIENTIST** | p. 2

and directed the field effort including the collection of soil samples to characterize the current subsurface conditions. Mr. McClintock's role included evaluating soil analytical data and project reporting.

### **White Plains Mall, 200 Hamilton Avenue, White Plains, New York - Spill Investigation and Brownfield Cleanup Program Enrollment**

Mr. McClintock served as the field team leader for the Spill Investigation work associated with historic gasoline stations at the White Plains Mall. He assisted senior project staff with the evaluation of historical assessment information, and the development and implementation of a Spill Investigation to delineate the extent of petroleum-contaminated soil and groundwater. He directed field sampling, including soil and groundwater samples, and evaluated the data and associated reporting. The project would apply for the NYSDEC Brownfield Cleanup Program.

### **Proposed Public School, Queens, New York - Phase II Investigation**

Mr. McClintock served as field team leader for the Phase II Investigation work associated with proposed development of NYCDOE Public School at a vacant lot in Queens, New York. He assisted senior project staff with the evaluation of historical assessment information, the development and implementation of the Phase II Investigation to characterize the current subsurface conditions, and directed the field effort including the collection of soil, soil vapor, and groundwater samples. Mr. McClintock evaluated analytical data, and contributed to the reporting effort.

### **Petroleum Release/Oil Tank Remediation Projects – New York, New Jersey, Pennsylvania and Connecticut (2008 – 2017)**

Mr. McClintock completed the design and implementation of environmental investigations and remediation projects associated with petroleum releases at residential and commercial sites throughout the northeast. Tasks included project design, site investigation, project direction and oversight, soil and groundwater sampling, data evaluation, client and contractor coordination, regulatory agency interaction and associated reporting and deliverable production.

### **Phase I Environmental Site Assessment and Phase II Environmental Site Investigation Projects – New York and New Jersey (2008 – 2017)**

Mr. McClintock completed Phase I and Phase II environmental site assessments (ESAs) and investigations (ESIs) at residential and commercial properties associated with real estate transactions. Tasks included site inspections, historic environmental data report and regulatory record evaluations, environmental media sampling, client and contractor coordination, and associated reporting and deliverable production.

### **Storm Water Investigation Projects – New York (2008 – 2017)**

Mr. McClintock assisted senior project staff with the investigation of actual and suspected storm water discharges at various sites throughout New York while at Dorson Environmental Management, Inc. Tasks included investigation into suspected non-permitted storm water discharges for environmental attorneys, preparation of Storm Water Pollution Prevention Plans (SWPPP) to assist property owners with obtaining the NYSDEC General Permit for Storm Water Discharges, storm water sampling, storm water drainage mapping, data evaluation, and associated reporting and deliverable production.

### **Former Flamingo Cleaners, 149 North Avenue, New Rochelle, New York**

Mr. McClintock completed site investigations, developed a Remedial Action Work Plan (RAWP), provided remediation oversight and regulatory agency interaction, conducted environmental media sampling, and prepared report packages associated with combined petroleum and chlorinated contamination at a former dry cleaning facility. The work was conducted in accordance with the NYSDEC Brownfield Cleanup Program and included site characterization, excavation and disposal of contaminated source material, removal and treatment of contaminated



## **TIMOTHY McCLINTOCK**

**ENVIRONMENTAL SCIENTIST | p. 3**

groundwater, in situ chemical oxidation of residual contamination and the implementation of institutional and engineering controls.

### **Former Gasoline Station, 66 Milton Road, Rye, NY**

Mr. McClintock designed and implemented a site investigation and remedial excavation program to address historic contamination at a former gasoline station. The site work included the delineation of the residual soil and groundwater contamination, excavation of contaminated source material, removal of contaminated groundwater, post-remedial soil and groundwater sampling and associated reporting to close the NYSDEC spill number associated with the property. All site work was coordinated through the current building management and tenant association, the NYSDEC and the City of Rye.

### **Water and Mold Damage Investigation and Remediation Projects – New York, New Jersey, and Connecticut (2008 – 2017)**

Mr. McClintock completed the design and implementation of environmental investigations, cause and origin analyses, and remedial projects associated with water and mold damage claims for various insurance carriers during his tenure with Dorson Environmental Management. Tasks included site investigation, cause and origin determination, project direction and oversight, environmental media sampling, data evaluation, client and contractor coordination, and associated reporting and deliverable production.



# **PATRICK MCHUGH, PROFESSIONAL ENGINEER**

## **SENIOR PROFESSIONAL**

Patrick McHugh is a Senior Professional with more than five years of professional experience in assessment, investigation, and remediation of environmental contamination-related issues. Mr. McHugh also has 16 months' experience in petroleum engineering associated with exploration of oil and gas aquifers.

Mr. McHugh has managed a variety of environmental projects with multi-disciplinary teams, including public agencies, developers, property owners, architects, and construction managers. His projects have fallen under the regulatory oversight of the USEPA and NYSDEC, including the New York State Brownfield Cleanup Program (BCP) and NY petroleum spills program, as well as multiple agencies in the Midwest. His proficiency in all aspects of remedial design—supplemented by his field-experience, his knowledge of regulations and regulatory programs, and his excellent rapport with regulatory personnel—allows him to lead field efforts toward remediation and development, and to achieve project objectives effectively.

Mr. McHugh's experience includes the design, implementation, and management of environmental assessment, investigation and remediation projects in the New York Metropolitan Area and the Minneapolis, Minnesota Metropolitan Area, including soil and groundwater investigation, monitoring, and sampling programs; Brownfield and hazardous waste site investigations; and underground storage tank studies, which involved soil contamination delineation, classification, and waste removal and disposal. Mr. McHugh has also led remediation design efforts, including in-situ chemical oxidation, in-situ soil stabilization, soil vapor extraction systems, and pump and treat groundwater systems. In addition, Mr. McHugh has designed and implemented indoor air and soil vapor intrusion surveys at industrial, commercial, and residential properties in accordance with NYSDOH protocols, some requiring sub-slab depressurization systems.

## **BACKGROUND**

### **Education**

M.S., Engineering Management, Duke University

B.S., Civil Engineering, University of Notre Dame

### **Licenses/Certifications**

New York State Professional Engineer - 098204

Minnesota State Professional Engineer -53131

Health and Safety Operations at Hazardous Materials Sites 29 CFR 1910.120

### **Professional Memberships**

Member, American Society of Civil Engineers (ASCE)

### **Years of Experience**

Year started in company: 2017

Year started in industry: 2012



# **PATRICK MCHUGH, PE**

**SENIOR PROFESSIONAL**

| p. 2

## **RELEVANT EXPERIENCE**

### **Redevelopment at Polychrome West Research and Development Site, AvalonBay, Yonkers, NY**

Mr. McHugh served as the Project Manager responsible for the preparation and submission of the Remedial Investigation Report (RIR), which included multiple phases of remedial investigation for the former research and development (R & D) site, a NYSDEC Brownfield redevelopment project along the Hudson River. The RIR included soil, groundwater and soil vapor environmental sampling as well as LNAPL and DNAPL source identification and evaluation. As part of the remedial investigation efforts, TarGOST drilling techniques (laser induced fluorescence) and modeling were utilized to determine the extent of LNAPL and DNAPL. Mr. McHugh was the Project Engineer responsible for the preparation and NYSDEC submission of the Remedial Action Work Plan (RAWP) for the proposed hot spot excavation, LNAPL collection, in-situ soil stabilization (ISS), soil management, building abatement and demolition, site-wide engineered cover systems with a vapor management system (VMS) and stormwater management system. Mr. McHugh will serve as the project manager for oversight of the remedial work, anticipated to begin in early 2018.

### **Redevelopment at Polychrome East Manufacturing Site, AvalonBay, Yonkers, NY**

Mr. McHugh served as the Project Manager responsible for preparation and submission of a supplemental remedial investigation for the site, a NYSDEC Brownfield redevelopment project along Alexander Street. The investigation included soil, groundwater and vapor environmental sampling as well as direct correspondence with NYSDEC project management. Mr. McHugh was the project engineer responsible for the preparation and negotiations with NYSDEC and for the concepts of the RAWP, which included hot spot excavations, UST removal, building abatement and demolition, ISS, site-wide engineered cover systems with a VMS and stormwater management system. Mr. McHugh will serve as the project manager for oversight of the remedial work, anticipated to begin in early 2018.

### **Redevelopment at Former Halstead Quinn/ATI Tank Farm Site, AvalonBay, Yonkers, NY**

Mr. McHugh serves as the Project Manager responsible for implementation of the Site Management Plan (SMP) at the Former Halstead Quinn/ATI Tank Farm Site, a NYSDEC Brownfield redevelopment project along the Hudson River. As part of redevelopment efforts, Mr. McHugh is responsible for design and completion of an active sub-slab depressurization system. Mr. McHugh leads direct communication with NYSDEC regarding redevelopment activities at the site, including the remedial design components of the shoreline stabilization measures (bulkhead and rip-rap design) and its efficacy in controlling LNAPL at the Site.

### **Former General Motors Assembly Plant Technical Lead, Edge on Hudson, Sleepy Hollow, NY**

Mr. McHugh served as the technical lead responsible for the SMP and Excavation Workplan (EWP) compliance documentation and reporting during the phased mixed use redevelopment at the former GM facility. Field activities included the operation and maintenance of the community air monitoring program (CAMP) and the tracking of over 200,000 cubic yards of on-site soil reuse and imported fill material activities. Mr. McHugh also managed and led correspondence and field efforts related to a soil vapor intrusion investigation undertaken as part of redevelopment activities.

### **Spill Management/In-situ Chemical Oxidation, City of Yonkers Department of Public Works, Yonkers, NY**

Mr. McHugh served as the Project Manager responsible for groundwater monitoring and remediation for the City of Yonkers Department of Public Works site. The site is in the NYSDEC spill program and had ongoing monitoring and remediation requirements. As part of the remediation, Mr. McHugh designed an in-situ chemical oxidation (ISCO) feasibility program to assess the viability of ISCO as a remedial strategy, and was in charge of the





# **PATRICK MCHUGH, PE**

**SENIOR PROFESSIONAL**

| p. 3

performance monitoring and reporting requirements. As part of remedial efforts, Mr. McHugh was responsible for leading direct communication with NYSDEC spill program management in relation to remediation and monitoring activities at the site.

## **Remedial Investigation at the Former Glenwood Container Site, Fondak Enterprises, LLC, Yonkers, NY**

Mr. McHugh served as the Project Manager for a remedial investigation and soil vapor intrusion assessment at an industrial property in the City of Yonkers. The intended final use of the property was a brewery in which the existing structure would be reused. Mr. McHugh served as the lead engineer and was in charge of development of the remedial investigation work plan (RIWP) and its associated approval and remedial investigation oversight.

## **Phase Is and Phase IIs, Multiple Clients, MN and NY**

Mr. McHugh has completed numerous Phase I environmental assessments and file reviews for various industrial, commercial, and residential sites in accordance with the ASTM E-1527-13 standard. He has performed Phase II environmental assessments (including but not limited to: drilling, groundwater/soil/vapor sampling, contract drafting, contractor scheduling and reporting) on a variety of residential and commercial properties.

## **Saint Paul Park Refining Company, Minneapolis, MN**

Mr. McHugh served as a staff engineer for a local refinery and took on a variety of different roles and responsibilities. One of these tasks was the management of an ISCO bench test for the refinery. The initial phase of this effort was drafting a work plan and gaining approval from the Minnesota Pollution Control Agency (MPCA). After approval, further duties included coordination and contract negotiations with subcontractors; TarGOST drilling investigation oversight; interpretation of TarGOST data; interpretation of environmental sampling results; design of bench testing of the environmental sampling material collected during the TarGOST investigation; analysis of the bench testing results; and design of the potential injection options for ISCO.

Mr. McHugh also worked as a staff engineer collecting groundwater and soil vapor concentrations from various onsite production wells in order to complete a natural source zone depletion analysis in support of Monitored Natural Attenuation (MNA) evaluation. The main contaminants of concern onsite were associated with the various types of petroleum produced or used at the Refinery.

Additionally, Mr. McHugh directed and participated in field operations of the soil vapor extraction (SVE) systems and groundwater pump and treat systems that operated onsite. He also collected groundwater samples, performed transmissivity testing on LNAPL, interpreted NAPL fingerprint analytical results, and performed a variety of additional environmental activities. All site work required extensive, site specific safety training to complete within normal facility operations. Mr. McHugh was also in charge of drafting annual reporting requirements to the MPCA.

## **Groundwater Monitoring and Assessment, Solvay Manufacturing Company, Butte, MT**

Mr. McHugh completed multiple groundwater sampling and monitoring investigations, serving as a field and Project Manager. The site had various industrial contaminants of concern (COCs), but the main COC was elemental phosphorous. Mr. McHugh helped design an enhanced cap system for the main area of concern, and was in charge of estimating costs for remedial options, including capping of the contaminants in place, incineration of waste material and a mud still secondary processing of the historic phosphorous waste material. This project required submission of multiple documents and drafting of reports for EPA review as well as site specific safety training due to the high risks associated with the contaminants.

## **Vapor Intrusion Assessment and Monitoring at City Landfill, City of New Brighton, Minneapolis, MN**

Mr. McHugh worked as both a Staff Engineer and Project Manager for the City of New Brighton to help address various vapor intrusion issues identified by the MPCA in connection to an old City of New Brighton owned construction and demolition landfill. The main vapor intrusion concern for the MPCA was methane, but volatile



# **PATRICK MCHUGH, PE**

**SENIOR PROFESSIONAL**

| p. 4

organic compounds were a secondary concern. Redevelopment of the area surrounding the landfill was ongoing and a variety of soil vapor investigations and monitoring activities were conducted in both commercial and residential redevelopment areas. Mr. McHugh managed the environmental monitoring program for the City and, as a staff engineer, oversaw the installation of a passive soil gas venting and collection system which was designed to alleviate methane migration from the landfill.

## **MGP Investigation and Remediation, Confidential Utility Client, Fargo, ND**

Mr. McHugh served as a field engineer for an investigation at a former manufactured gas plant (MGP) property. The MGP property had been developed into an apartment complex prior to a full environmental investigation and remediation. As the site had not been remediated, Mr. McHugh was part of the field team responsible with the initial field investigation (groundwater, soil vapor and soil sampling). The project was located within a high traffic area and had considerable public interest.

## **TCE Feasibility Study, Confidential Industrial Client, Minneapolis, MN**

Mr. McHugh participated as a staff engineer on a team tasked with completing a feasibility study for mitigation of a Trichloroethene (TCE) groundwater plume within a large residential and mixed use commercial area. Mr. McHugh was directly responsible for drafting the sections of the feasibility report regarding in-situ chemical oxidation, enhanced reductive de-chlorination and aerobic cometabolism. Remedial options were evaluated for cost, contaminant reduction efficacy and implementability. Mr. McHugh participated as a field engineer in the initial sub-slab and indoor air investigation efforts and completed extensive sub-slab and indoor air sampling. After the extent of the TCE impacts had been evaluated for vapor intrusion, Mr. McHugh provided oversight of the construction and design input of multiple sub-slab depressurization systems for both commercial and residential buildings.

## **Field Compliance Manager, Confidential Utility Client, Minneapolis, MN**

Mr. McHugh served as the Project Manager of four environmental inspectors tasked with monitoring field compliance of maintenance excavations/activities of a multi-state pipeline. Pipeline maintenance excavations occurred in IL, IN, OH, MI and NY. As the field compliance manager, duties included logistical support of active maintenance crews, correspondence with state and local regulators regarding the maintenance activities, compliance, spill report review and cost estimating/invoice review of subcontractors for the client. Mr. McHugh also assisted with upfront permitting for these maintenance activities, including permitting efforts through the US Army Corps of Engineers.

## **Refinery/Terminal Groundwater Operations, Confidential Refinery/Pipeline Client, Fairbanks, AK**

Mr. McHugh spent time in Alaska assisting a pipeline refinery client transition to a pipeline terminal while continuing the operational requirements of their environmental monitoring program after a sudden loss of their lead onsite environmental personnel. Duties included teaching onsite personnel how to operate multiple wastewater treatment systems (working with engineers and operators to help identify optimal times for carbon change out of granulated activated carbon (GAC) treatment vessels, backwashing of the GAC treatment vessels, etc.), LNAPL recovery (skimmer pumps, hand pumps, coalescer, etc.) and environmental sampling. Mr. McHugh also assisted senior staff with annual state reporting requirements.

## **Pump and Treat Groundwater System Installation, Confidential Industrial Client, Cass Lake, MN**

Mr. McHugh was in charge of oversight of a pump and treat system extension on a superfund site in northern Minnesota. Approximately four miles of HDPE forcemain were installed in accordance with design specifications to connect supplemental pumping well locations to the existing pump and treat system. Duties included soil management, groundwater dewatering management, safety, air monitoring, field oversight and hazardous waste disposal.





## **PATRICK MCHUGH, PE**

**SENIOR PROFESSIONAL**

| p. 5

### **CCR Compliance Engineer, Confidential Utility Client (Various Sites in Midwest)**

Mr. McHugh served as a Project Manager and a Staff Engineer for a utility client by providing assistance with various field and closure planning efforts at an electric generating facility. The client was adjusting to the EPA's new coal combustion residual (CCR) rules for coal fired power plants. Mr. McHugh guided the client in the updated legislation to help ensure a smooth transition to compliance under the new CCR rules and spent time at the client's site to observe CCR removal and consolidation operations. Additionally, Mr. McHugh was tasked with helping the client interpret the rules' operational and financial impacts and reporting requirements associated with partial and complete closure of plant areas containing CCR material.

### **EPA Penalty and Financial Modeling Assessment, Confidential Industrial Client, Minneapolis, MN**

Mr. McHugh assisted his client by utilizing the EPA's BEN software to determine the client's perceived economic benefit received during litigation from the EPA's perspective. This process was essential in identifying the assumptions taken by the EPA. The calculations and analysis were used to help the client negotiate a settlement with the EPA in avoidance of excessive fines.

### **Borehole Geophysics for Wireline Operations, Various Clients, Peru, South America**

Mr. McHugh implemented WireLine tools and techniques in order to evaluate oilfield reservoirs using borehole geophysics for production of oil and/or gas. Mr. McHugh managed a crew of two to four technicians, often in very remote locations, with the task of planning operations from the beginning, including job preparation, fatigue management, logistics, client relations, on site safety, data acquisition, field tickets (costs for work done) and data delivery. As part of these duties, he was also in charge of radioactive sources used for density and porosity evaluations as well as explosives for perforation activities. These duties required extensive safety and technical training which was completed over a period of three and a half months. Additionally, Mr. McHugh was responsible for helping teach a new software package (MaxWell) to other Field and Senior Field Engineers throughout Peru. This included troubleshooting with other field staff while they were in the field.



# **JACOB MENKEN**

## **FIELD TECHNICIAN**

Mr. Menken has a Master of Science in Geology, Bachelor of Arts in Geology, and Bachelor of Science in Environmental Science from the University of Vermont. He is familiar with the following professional techniques: powder and single crystal x-ray diffraction; field geology; remote sensing of natural resources using airborne and satellite imagery; geophysical survey using ground penetrating radar, electromagnetic induction and seismic refraction; optical and hand sample identification of minerals; aseptic laboratory techniques; and stable isotope geochemistry. Mr. Menken's familiarity with hardware includes the following: Crystallography: APEX II Single Crystal X-Ray Diffractometer, Rigaku Powder X-Ray Diffractometer; Geophysical: Ground Penetrating Radar: GSSI SIR 3000 with 400 and 200MHz antennas, Electromagnetic Induction: SSI Profiler EMP-400; Stable Isotope: VG/Fisons SIRA Series II Stable Isotope Ratio Mass Spectrometer Honeywell Photoionization Detector; HACH Portable Water Quality Meter. Mr. Menken is familiar with the following software: X-Ray Crystallography: PDXL, Standard Measurement, APEX 2, ATOMS; Statistical Software: R, SPSS, Geophysical, Geogiga Pro, GSSI Radan 7, GSSI Profiler; Microsoft Office Suite, Adobe Creative Suite; Geospatial: ENVI 5.0, 4.0 and Classic ArcGIS.

## **BACKGROUND**

### **Education**

M.S., Geology, University of Vermont, 2014

B.A., Geology, University of Vermont, 2012

B.S., Environmental Science, University of Vermont, 2012

### **Certifications**

OSHA 40-Hour Health & Safety Training for Hazardous Waste Operations, May 2011

OSHA 8-Hour Health & Safety Training for Hazardous Waste Operations, September, 2016

OSHA 10-Hour Health & Safety Training for Hazardous Waste Operations, August, 2016

### **Professional Memberships**

Mineralogical Society of America

Mineralogical Society of Canada

Geological Society of America

The Society of Sigma Gamma Epsilon, Eta Kappa, National Honor Society in the Earth Sciences

Burlington Gem and Mineral Club

### **Years of Experience**

Year started in company: 2016

Year started in industry: 2012

## **RELEVANT EXPERIENCE - AKRF**



## **JACOB MENKEN**

**FIELD TECHNICIAN**

| p. 2

### **3200 Jerome Ave, Bronx, NY 10468 – Groundwater and Soil Vapor Sampling**

AKRF provided groundwater and soil vapor testing for the NYCSCA at the former P.S. 51X. Mr. Menken assisted with the collection of groundwater and soil vapor sampling for waste characterization purposes. Groundwater was sampled from wellheads and soil vapor was sampled from a Sub-Slab Depressurization System (SSDS). All samples were collected in accordance with existing protocol.

### **112 Atlantic Ave, Brooklyn, NY 11201 – Construction Oversight and Community Air Monitoring**

AKRF provided community air monitoring on this site for dust and volatile organic compounds (VOCs) in accordance with existing community air quality standards. Additionally, AKRF provided onsite oversight to ensure additional discovered soil contamination was left in place for determination of the extent of soil. AKRF was also responsible for logging any incoming or outgoing soil or fill laden trucks. For this project Mr. Menken provided on-site monitoring.

### **285 East 138th Street, Bronx, NY 10454 – Construction Oversight and Community Air Monitoring**

AKRF is overseeing implementation of the NYSDEC-approved RAWP and Site Management Plan (SMP) for this BCP site in the Bronx. AKRF serves as the on-site contact who conducts waste characterization sampling, oversees soil management, conducts community air monitoring, and prepares daily reports for submittal to the AKRF and NYSDEC project managers. For this project Mr. Menken provided on-site monitoring.

### **4950 Arthur Kill Road, Staten Island, NY 10309 – Groundwater and Soil Vapor Sampling and Subsurface Characterization Phase II**

AKRF provided Phase II services for a wooded site in Staten Island. AKRF characterized eight drill bores drilled by a contractor. Groundwater and soil vapor samples from four of the sites. Additionally, AKRF provided oversight for the excavation of six test pits on the site to characterize the surficial materials and explore subsurface anomalies as detected by previously conducted ground penetrating radar (GPR).

### **32 N. Main Street, New City, NY – Wastewater Drum Disposal**

Mr. Menken oversaw the disposal of two wastewater drums by a contractor. Mr. Menken ensured that the contractor completed the appropriate documented, the wastewater was properly transferred from a damaged to undamaged drum and that the appropriate drums were removed from the site.

### **158<sup>th</sup> Street and Brooks Ave, Bronx, NY – Wastewater Drum Disposal**

Mr. Menken oversaw the disposal of two wastewater drums by a contractor. Mr. Menken ensured that the contractor completed the appropriate documented, the wastewater was properly transferred from a damaged to undamaged drum and that the appropriate drums were removed from the site.

### **3610 Glenwood Rd, Brooklyn, NY 11210 – Drinking Water Sampling Oversight**

AKRF provided oversight of water quality testing for the NYCSCA at K042. AKRF oversaw the drinking water sampling of a newly installed plumbing at a Brooklyn, NY pre-kindergarten for compliance with drinking water bacteria level guidelines. Sampling was observed to ensure compliance with pre-existing water disinfecting and



## **JACOB MENKEN**

**FIELD TECHNICIAN**

| p. 3

testing standard operating procedures (SOPs) for total coliform, E. Coli bacteria and heterotrophic plate count analysis.

### **34 Berry Street, Williamsburg, NY**

AKRF was retained to prepare close-out documentation for this former industrial/warehouse facility in Williamsburg, which was remediated under the New York City Office of Environmental Remediation (OER) E-designation and NYSDEC Spills programs. The closure report, which was based on documentation provided by the environmental contractor, was prepared on an expedited basis so that the developer could obtain a Certificate of Occupancy in time for the scheduled opening of the new building. AKRF is currently providing on-going remediation monitoring services to fulfill NYSDEC Spill closure requirements. For this project, Mr. Menken performed monthly/quarterly groundwater monitoring.

### **11 Greene Street, Manhattan, NY 10013 – Construction Oversight and Community Air Monitoring**

AKRF is overseeing implementation of the approved RAWP and Site Management Plan (SMP) for this OER site in Manhattan. AKRF serves as the on-site contact who conducts waste characterization sampling, oversees soil management and conducts community air monitoring and completes daily reports for submittal to the AKRF and NYCDEP project managers. For this project Mr. Menken provided on-site monitoring.

### **SCA City Wide Portable Water Lead Sampling – Drinking Water Sampling**

As part of an on-call contract with the SCA, AKRF provided water sampling services at various public schools in New York City. AKRF sampled potable water fixtures for lead concentration at public schools in all five boroughs. Work was performed at night or when school was not in session and coordinated with the SCA, custodial engineers and various contractors.

### **Staten Island Wheel, Staten Island, New York 10301 – Construction Oversight and Community Air Monitoring**

AKRF is overseeing implementation of the approved RAWP and Site Management Plan (SMP) for this site in the Staten Island. AKRF serves as the on-site contact who conducts waste characterization sampling, oversees soil management, conducts community air monitoring, and prepares daily reports for submittal to the AKRF. For this project Mr. Menken provided on-site monitoring.

### **Adelaar/Concord Resort, 219 Concord Road, Monticello, New York 12751 – Construction Oversight and Community Air Monitoring**

AKRF is overseeing implementation of the NYSDEC-approved RAWP and Site Management Plan (SMP) for this BCP site in the Catskills. AKRF serves as the on-site contact who conducts waste characterization sampling, oversees soil management and conducts community air monitoring for submittal to the AKRF and NYSDEC project managers. For this project Mr. Menken provided on-site monitoring.

#### **References:**

Ilan Rubinstein



## **JACOB MENKEN**

**FIELD TECHNICIAN**

| p. 4

11 Greene Street LLC  
174 Hudson Street  
Sixth Floor  
New York, New York 10013  
[inquiries@rubyventures.com](mailto:inquiries@rubyventures.com)

Jason Persico  
OTL Enterprises  
58 Thomas Street  
New York, New York 10013  
[jason@otl.net](mailto:jason@otl.net)

Mr. Paul Sherwood  
Industrial and Environmental Hygiene Division  
New York City School Construction Authority  
30-30 Thompson Avenue  
Long Island City, NY 11101  
[psherwood@nycsca.org](mailto:psherwood@nycsca.org)

**ATTACHMENT B**  
**NYSDEC EMERGING CONTAMINANT SAMPLING GUIDANCE DOCUMENTS**

# Groundwater Sampling for Emerging Contaminants

April 2018

---

Issue: NYSDEC has committed to analyzing representative groundwater samples at remediation sites for emerging contaminants (1,4-dioxane and PFAS) as described in the below guidance.

## Implementation

NYSDEC project managers will be contacting site owners to schedule sampling for these chemicals. Only groundwater sampling is required. The number of samples required will be similar to the number of samples where “full TAL/TCL sampling” would typically be required in a remedial investigation. If sampling is not feasible (e.g., the site no longer has any monitoring wells in place), sampling may be waived on a site-specific basis after first considering potential sources of these chemicals and whether there are water supplies nearby.

Upon a new site being brought into any program (i.e., SSF, BCP), PFAS and 1,4-dioxane will be incorporated into the investigation of groundwater as part of the standard “full TAL/TCL” sampling. Until an SCO is established for PFAS, soil samples do not need to be analyzed for PFAS unless groundwater contamination is detected. Separate guidance will be developed to address sites where emerging contaminants are found in the groundwater. The analysis currently performed for SVOCs in soil is adequate for evaluation of 1,4-dioxane, which already has an established SCO.

## Analysis and Reporting

Labs should provide a full category B deliverable, and a DUSR should be prepared by a data validator, and the electronic data submission should meet the requirements provided at: <https://www.dec.ny.gov/chemical/62440.html> ,

The work plan should explicitly describe analysis and reporting requirements.

PFAS sample analysis: Currently, ELAP does not offer certification for PFAS compounds in matrices other than finished drinking water. However, laboratories analyzing environmental samples (ex. soil, sediments, and groundwater) are required, by DER, to hold ELAP certification for PFOA and PFOS in drinking water by EPA Method 537 or ISO 25101.

Modified EPA Method 537 is the preferred method to use for groundwater samples due to the ability to achieve 2 ng/L (ppt) detection limits. If contract labs or work plans submitted by responsible parties indicate that they are not able to achieve similar reporting limits, the project manager should discuss this with a DER chemist. Note: Reporting limits for PFOA and PFOS should not exceed 2 ng/L.

PFAS sample reporting: DER has developed a PFAS target analyte list (below) with the intent of achieving reporting consistency between labs for commonly reportable analytes. It is expected that reported results for PFAS will include, at a minimum, all the compounds listed. This list may be updated in the future as new information is learned and as labs develop new capabilities. If lab and/or matrix specific issues are encountered for any particular compounds, the NYSDEC project manager will make case-by-case decisions as to whether particular analytes may be temporarily or permanently discontinued from analysis for each site. Any technical lab issues should be brought to the attention of a NYSDEC chemist.

Some sampling using this full PFAS target analyte list is needed to understand the nature of contamination. It may also be critical to differentiate PFAS compounds associated with a site from other

sources of these chemicals. Like routine refinements to parameter lists based on investigative findings, the full PFAS target analyte list may not be needed for all sampling intended to define the extent of contamination. Project managers may approve a shorter analyte list (e.g., just the UCMR3 list) for some reporting on a case by case basis.

1,4-Dioxane Analysis and Reporting: The method detection limit (MDL) for 1,4-dioxane should be no higher than 0.28 µg/l (ppb). ELAP offers certification for both EPA Methods 8260 and 8270. In order to get the appropriate detection limits, the lab would need to run either of these methods in “selective ion monitoring” (SIM) mode. DER is advising the use of method 8270, since this method provides a more robust extraction procedure, uses a larger sample volume, and is less vulnerable to interference from chlorinated solvents (we acknowledge that 8260 has been shown to have a higher recovery in some studies).

### Full PFAS Target Analyte List

Group	Chemical Name	Abbreviation	CAS Number
Perfluoroalkyl sulfonates	<b>Perfluorobutanesulfonic acid</b>	<b>PFBS</b>	<b>375-73-5</b>
	<b>Perfluorohexanesulfonic acid</b>	<b>PFHxS</b>	<b>355-46-4</b>
	Perfluoroheptanesulfonic acid	PFHpS	375-92-8
	<b>Perfluorooctanesulfonic acid</b>	<b>PFOS</b>	<b>1763-23-1</b>
	Perfluorodecanesulfonic acid	PFDS	335-77-3
Perfluoroalkyl carboxylates	Perfluorobutanoic acid	PFBA	375-22-4
	Perfluoropentanoic acid	PFPeA	2706-90-3
	Perfluorohexanoic acid	PFHxA	307-24-4
	<b>Perfluoroheptanoic acid</b>	<b>PFHpA</b>	<b>375-85-9</b>
	<b>Perfluorooctanoic acid</b>	<b>PFOA</b>	<b>335-67-1</b>
	<b>Perfluorononanoic acid</b>	<b>PFNA</b>	<b>375-95-1</b>
	Perfluorodecanoic acid	PFDA	335-76-2
	Perfluoroundecanoic acid	PFUA/PFUdA	2058-94-8
	Perfluorododecanoic acid	PFDoA	307-55-1
	Perfluorotridecanoic acid	PFTriA/PFTrDA	72629-94-8
Perfluorotetradecanoic acid	PFTA/PFTeDA	376-06-7	
Fluorinated Telomer Sulfonates	6:2 Fluorotelomer sulfonate	6:2 FTS	27619-97-2
	8:2 Fluorotelomer sulfonate	8:2 FTS	39108-34-4
Perfluorooctane-sulfonamides	Perfluorooctanesulfonamide	FOSA	754-91-6
Perfluorooctane-sulfonamidoacetic acids	N-methyl perfluorooctanesulfonamidoacetic acid	N-MeFOSAA	2355-31-9
	N-ethyl perfluorooctanesulfonamidoacetic acid	N-EtFOSAA	2991-50-6

Bold entries depict the 6 original UCMR3 chemicals



# Collection of Groundwater Samples for Perfluorooctanoic Acid (PFOA) and Perfluorinated Compounds (PFCs) from Monitoring Wells Sample Protocol

**Samples collected using this protocol are intended to be analyzed for perfluorooctanoic acid (PFOA) and other perfluorinated compounds by Modified (Low Level) Test Method 537.**

The procedure used must be consistent with the NYSDEC March 1991 Sampling Guidelines and Protocols [http://www.dec.ny.gov/docs/remediation\\_hudson\\_pdf/sgpsect5.pdf](http://www.dec.ny.gov/docs/remediation_hudson_pdf/sgpsect5.pdf) with the following materials limitations.

At this time acceptable materials for sampling include: stainless steel, high density polyethylene (HDPE), PVC, silicone, acetate and polypropylene. Equipment blanks should be generated at least daily. Additional materials may be acceptable if pre-approved by NYSDEC. Requests to use alternate equipment should include clean equipment blanks. **NOTE: Grunfos pumps and bladder pumps are known to contain PFC materials (e.g. Teflon™ washers for Grunfos pumps and LDPE bladders for bladder pumps).** All sampling equipment components and sample containers should not come in contact with aluminum foil, low density polyethylene (LDPE), glass or polytetrafluoroethylene (PTFE, Teflon™) materials including sample bottle cap liners with a PTFE layer. Standard two step decontamination using detergent and clean water rinse will be performed for equipment that does come in contact with PFC materials. Clothing that contains PTFE material (including GORE-TEX®) or that have been waterproofed with PFC materials must be avoided. Many food and drink packaging materials and “plumbers thread seal tape” contain PFCs.

All clothing worn by sampling personnel must have been laundered multiple times. The sampler must wear nitrile gloves while filling and sealing the sample bottles.

Pre-cleaned sample bottles with closures, coolers, ice, sample labels and a chain of custody form will be provided by the laboratory.

1. Fill two pre-cleaned 500 mL HDPE or polypropylene bottle with the sample.
2. Cap the bottles with an acceptable cap and liner closure system.
3. Label the sample bottles.
4. Fill out the chain of custody.
5. Place in a cooler maintained at  $4 \pm 2^{\circ}$  Celsius.

Collect one equipment blank for every sample batch, not to exceed 20 samples.

Collect one field duplicate for every sample batch, not to exceed 20 samples.

Collect one matrix spike / matrix spike duplicate (MS/MSD) for every sample batch, not to exceed 20 samples.

Request appropriate data deliverable (Category A or B) and an electronic data deliverable.

**APPENDIX B**  
**HEALTH AND SAFETY PLAN AND COMMUNITY AIR MONITORING PLAN**

# **HAMILTON GREEN**

**200 HAMILTON AVENUE, WHITE PLAINS, NEW YORK**

---

## **Health and Safety Plan and Community Air Monitoring Plan**

**BCP Site #: C360177**

**AKRF Project Number: 170029**

### **Prepared for:**

SW-D/WP LLC dba Street-Works Development  
168-A Irving Avenue, Suite 200K  
Port Chester, NY 10573

### **Prepared by:**



AKRF, Inc.  
440 Park Avenue South  
New York, New York 10016  
(212) 696-0670

---

**SEPTEMBER 2018**

**TABLE OF CONTENTS**

1.0 INTRODUCTION ..... 1  
1.1 Scope and Applicability of the Health and Safety Plan..... 2  
1.2 General Information ..... 2  
1.3 Organizational Structure..... 2  
2.0 HEALTH AND SAFETY GUIDELINES AND PROCEDURES..... 3  
2.1 Hazard Evaluation ..... 3  
2.1.1 Hazards of Concern..... 3  
2.1.2 Physical Characteristics..... 3  
2.1.3 Hazardous Materials..... 3  
2.1.4 Chemicals of Concern ..... 4  
2.2 Designated Personnel ..... 5  
2.3 Training ..... 5  
2.4 Medical Surveillance Program ..... 5  
2.5 Site Work Zones ..... 5  
2.6 Air Monitoring..... 6  
2.6.1 Volatile Organic Compounds..... 6  
2.6.2 Work Zone Air Monitoring ..... 6  
2.6.3 Community Air Monitoring Plan ..... 6  
2.7 Personal Protection Equipment ..... 8  
2.8 General Work Practices ..... 8  
3.0 EMERGENCY PROCEDURES AND EMERGENCY RESPONSE PLAN ..... 10  
3.1 Hospital Directions ..... 10  
3.2 Emergency Contacts ..... 11  
4.0 APPROVAL & ACKNOWLEDGMENTS OF HASP ..... 12

**FIGURE**

Figure 1 – Hospital Route Map

**APPENDICES**

- ATTACHMENT A – Potential Health Effects from On-site Contaminants
- ATTACHMENT B – Report Forms
- ATTACHMENT C – Emergency Hand Signals

## 1.0 INTRODUCTION

This Health and Safety Plan (HASP) and Community Air Monitoring Plan (CAMP) has been prepared by AKRF, Inc. (AKRF) to describe the protocols and procedures that will be followed during the implementation of all environmental sampling associated with the Remedial Investigation Work Plan (RIWP) at the Hamilton Green site located at 200 Hamilton Avenue in the City of White Plains, Westchester County, New York (the “Site”). The 3.74-acre Site includes the two-story White Plains Mall and east-adjacent asphalt-paved parking lot, and is identified as Tax Map ID Section 125.67, Block 5, Lot 1 on the City of White Plains tax map.

As described in Section 3.0 of the RIWP, a Phase I Environmental Site Assessment (ESA) of the Site indicated that, prior to 1970, the Site was historically bisected by a public street (William Street) and contained several private residential dwellings, a candy manufacturer, and two gasoline stations, one at 230 Hamilton Avenue (southeastern portion of the Site) and the second at 250 Hamilton Avenue (southern portion of the Site). A Subsurface (Phase II) Investigation conducted at the Site identified evidence of petroleum contamination at the groundwater interface in the vicinity of the former on-site gasoline stations, and petroleum-related volatile organic compounds (VOCs), including methyl tert-butyl ether (MTBE), were detected in groundwater above the New York State Department of Environmental Conservation (NYSDEC) Ambient Water Quality Standards (AWQSs).

The findings from a Spill Investigation (SI) conducted to further investigate the extent of the petroleum-related contamination revealed petroleum-contaminated soil and VOCs exceeding the NYSDEC soil cleanup levels in the footprint of the former gasoline station in the southeastern portion of the Site. Field evidence of petroleum contamination was also noted at the groundwater interface in the footprint and immediately downgradient of the former gasoline station in the southern portion of the Site. Consistent with the Phase II investigation, petroleum-related VOCs, including MTBE, were detected in groundwater at concentrations above the NYSDEC AWQSs. Based on the results of the previous investigations, an area of petroleum-contaminated soil and groundwater exists in the southeastern and southern portions of the Site. The petroleum contamination is attributed to a historic release or releases from the former on-site gasoline stations, with the presence of MTBE in groundwater indicating that an off-site source (e.g., the up-gradient east-adjacent gasoline station) has contributed to the documented on-site groundwater contamination since the former on-site gasoline stations were closed prior to the use of MTBE in New York State. In addition, metals and semi-volatile organic compounds (SVOCs) were identified at concentrations exceeding NYSDEC Unrestricted and Restricted Residential Soil Cleanup Objectives (SCOs) soil samples collected from a shallow fill layer at the Site. Petroleum-related VOCs detected above New York State Department of Health (NYSDOH) background levels in soil vapor samples collected during the Phase II investigation were attributed to the petroleum groundwater contamination and any residual soil contamination. The chlorinated solvent trichloroethene (TCE) was detected above the NYSDOH Air Guideline Value in the Phase II soil vapor samples and is potentially related to a former on-site dry cleaner; however, the levels detected are not considered indicative of an on-site release.

Based on the findings from the previous investigations and the proposed future use of the Site, AKRF developed a Remedial Investigation (RI) scope of work to further characterize the shallow fill layer and define the nature and extent of the known petroleum contamination at the Site through the collection of soil and groundwater data from locations in and adjacent to the footprints of the former on-site gasoline stations, and other areas of the Site to be excavated as part of the proposed redevelopment. The RI scope of work, as described in the RIWP, includes the installation of soil borings and temporary groundwater monitoring wells for the collection of soil and groundwater samples for field-screening and laboratory analysis. The current on-site structure occupies approximately two-thirds of the Site, including the footprint of the former gasoline station in its southern portion, limiting the locations available for soil and

groundwater sampling. As such, much of the proposed RI field program will not be completed until the on-site structure has been demolished, and access to all areas of the Site is available.

### 1.1 Scope and Applicability of the Health and Safety Plan

All AKRF employees are directed that all work must be performed in accordance with this HASP, the Company's Generic HASP, and all Occupational Safety and Health Administration (OSHA) applicable regulations for the work activities required for the project. All project personnel are furthermore directed that they are not permitted to enter Permit Required Confined Spaces (as defined by OSHA). For issues unrelated to contaminated materials, all non-AKRF employees are to be bound by all applicable OSHA regulations as well as any more stringent requirements specified by their employer in their corporate HASP or otherwise. AKRF is not responsible for providing oversight for issues unrelated to contaminated materials for non-employees. This oversight shall be the responsibility of the employer of that worker or other officials designated by that employer.

### 1.2 General Information

Site Name: Hamilton Green – 200 Hamilton Avenue, White Plains, NY

Client/Volunteer: S-WD/WP LLC

Site Location: The Site is located at 200 Hamilton Avenue in the City of White Plains, New York, and is identified as Tax Map ID Section 125.67, Block 5, Lot 1 on the City of White Plains tax map.

HASP Prepared By: AKRF, Inc.

Project Objective: Remedial Investigation

Proposed Date(s) of Field Work: January through March 2019

Proposed On-Site Work Duration: 10 days

### 1.3 Organizational Structure

<b>Title</b>	<b>Name</b>	<b>Responsibilities</b>
Principal-In-Charge and Project Director	Rebecca Kinal	Overall project direction and responsibility.
Project Manager and Project Health and Safety Officer (PHSO)	Timothy McClintock	Day to day responsibility for project management and implementation, and enforcement of the HASP. Review site-specific safety issues and provide oversight of the Site Safety Officers (SSOs).
Field Representative – Site Safety Officer (SSO)	Jacob Menken	Monitor health and safety, and act as the SSO. The SSOs are the only full-time Project Team personnel with authority under this HASP.

## 2.0 HEALTH AND SAFETY GUIDELINES AND PROCEDURES

### 2.1 Hazard Evaluation

#### 2.1.1 Hazards of Concern

Check all that apply		
<input checked="" type="checkbox"/> Organic Chemicals	<input checked="" type="checkbox"/> Inorganic Chemicals	<input type="checkbox"/> Radiological
<input type="checkbox"/> Biological	<input checked="" type="checkbox"/> Explosive/Flammable	<input type="checkbox"/> Oxygen Deficient Atm.
<input checked="" type="checkbox"/> Heat Stress	<input checked="" type="checkbox"/> Cold Stress	<input type="checkbox"/> Other
Comments: No personnel are permitted to enter permit required confined spaces.		

#### 2.1.2 Physical Characteristics

Check all that apply		
<input checked="" type="checkbox"/> Liquid	<input checked="" type="checkbox"/> Solid	<input type="checkbox"/> Sludge
<input checked="" type="checkbox"/> Vapors	<input type="checkbox"/> Unknown	<input type="checkbox"/> Other
Comments:		

#### 2.1.3 Hazardous Materials

Check all that apply					
Chemicals	Solids	Sludges	Solvents	Oils	Other
<input type="checkbox"/> Acids	<input type="checkbox"/> Ash	<input type="checkbox"/> Paints	<input checked="" type="checkbox"/> Halogens	<input type="checkbox"/> Transformer	<input type="checkbox"/> Lab
<input type="checkbox"/> Caustics	<input type="checkbox"/> Asbestos	<input type="checkbox"/> Metals	<input checked="" type="checkbox"/> Petroleum	<input type="checkbox"/> Other DF	<input type="checkbox"/> Pharm
<input type="checkbox"/> Pesticides	<input type="checkbox"/> Tailings	<input type="checkbox"/> POTW	<input type="checkbox"/> Other	<input checked="" type="checkbox"/> Motor or Hydraulic Oil	<input type="checkbox"/> Hospital
<input checked="" type="checkbox"/> Petroleum	<input checked="" type="checkbox"/> Other	<input type="checkbox"/> Other		<input checked="" type="checkbox"/> Gasoline	<input type="checkbox"/> Rad
<input type="checkbox"/> Inks	Fill material			<input checked="" type="checkbox"/> Fuel Oil	<input type="checkbox"/> MGP
<input type="checkbox"/> PCBs					<input type="checkbox"/> Mold
<input checked="" type="checkbox"/> Metals					<input type="checkbox"/> Cyanide
<input checked="" type="checkbox"/> Other: SVOCs					

## 2.1.4 Chemicals of Concern

Chemicals	REL/PEL/STEL (ppm)	Health Hazards
Benzene	REL = 0.1 ppm PEL = 1 ppm STEL = 5 ppm	Irritation eyes, skin, nose, respiratory system; dizziness; headache, nausea, staggered gait; anorexia, lassitude, dermatitis; bone marrow depression, potential occupational carcinogen.
Toluene	REL = 100 ppm PEL = 200 ppm STEL = 300 ppm	Irritation eyes, nose; lassitude, confusion, euphoria, dizziness, headache; dilated pupils, lacrimation (discharge of tears); anxiety, muscle fatigue, insomnia; paresthesia; dermatitis; liver, kidney damage.
Ethylbenzene	REL = 100 ppm PEL = 100 ppm	Irritation eyes, skin, mucous membrane; headache; dermatitis; narcosis, coma.
Xylenes	REL = 100 ppm PEL = 100 ppm	Irritation eyes, skin, nose, throat; dizziness, excitement, drowsiness, poor coordination, staggering gait; corneal vacuolization; anorexia, nausea, vomiting, abdominal pain; dermatitis.
Methyl Tert-Butyl Ether (MTBE)	ACGIH TLV as TWA: 50 ppm PEL (CalOSHA): 40 ppm	Potential Symptoms: Drowsiness, dizziness, headache, weakness, unconsciousness; redness of skin and eyes; Acute ingestion: Nausea, vomiting, abdominal pain; chemical pneumonitis (by aspiration). Health Effects: Irritation-Eyes, skin---mild (HE16); Nervous system disturbances. Explosive, flammable. Confirmed Animal Carcinogen with Unknown Relevance to Humans.
Polyaromatic Hydrocarbons (PAHs)	REL= 0.1 mg/m <sup>3</sup> PEL= 5 mg/m <sup>3</sup>	Harmful effects on the skin, body fluids, and ability to fight disease after both short and long term exposure, birth defects, and potential occupational carcinogen.
Naphthalene	REL = 10 ppm PEL = 10 ppm	Irritation eyes; headache, confusion, excitement, malaise; nausea, vomiting, abdominal pain; irritation bladder; profuse sweating; jaundice; hematuria (blood in the urine), renal shutdown; dermatitis, optical neuritis, corneal damage.
Chromium	REL = 0.5 mg/m <sup>3</sup> PEL - 1 mg/m <sup>3</sup>	Irritation eyes, skin; lung fibrosis (histologic).
Lead	REL= 0.1 mg/m <sup>3</sup> PEL= 0.05 mg/m <sup>3</sup>	Weak, lassitude, insomnia; facial pallor, pale eye, anorexia, low-weight, malnutrition, constipation, abdominal pain, colic; anemia; gingival lead line; tremors, paralysis wrists and ankles; encephalopathy; kidney disease; irritation eyes; hypotension.
Mercury	REL = 0.1 mg/m <sup>3</sup> PEL = 0.05 mg/m <sup>3</sup>	Irritation eyes, skin; cough, chest pain, dyspnea (breathing difficulty), bronchitis, pneumonitis; tremor, insomnia, irritability, indecision, headache, lassitude (weakness, exhaustion); stomatitis, salivation; gastrointestinal disturbance, anorexia, weight loss; proteinuria.
Trichloroethene	REL = 25 ppm PEL = 100 ppm	Headaches, lung irritation, dizziness, poor coordination, impaired heart function, unconsciousness, and nerve, kidney and liver damage.
Comments: REL = NIOSH Recommended Exposure Limit		



Chemicals	REL/PEL/STEL (ppm)	Health Hazards
PEL = OSHA Permissible Exposure Limit STEL = OSHA Short Term Exposure Limit TLV as TWA = ACGIH Threshold Limit Value as Time Weighted Average		

## 2.2 Designated Personnel

AKRF will appoint one of its on-site personnel as the Site Safety Officer (SSO). This individual will be responsible for the implementation of the HASP. The SSO will have a 4-year college degree in occupational safety or a related science/engineering field, and experience in implementation of air monitoring and hazardous materials sampling programs. Health and safety training required for the SSO and all field personnel is outlined in Section 2.3 of this HASP.

## 2.3 Training

All personnel who enter the work area while intrusive activities are being performed will have completed a 40-hour training course that meets OSHA requirements of 29 CFR Part 1910, Occupational Safety and Health Standards. In addition, all personnel will have up-to-date 8-hour refresher training. The training will allow personnel to recognize and understand the potential hazards to health and safety. All field personnel must attend a training program, whose purpose is to:

- Make them aware of the potential hazards they may encounter;
- Provide the knowledge and skills necessary for them to perform the work with minimal risk to health and safety; make them aware of the purpose and limitations of safety equipment; and
- Ensure that they can safely avoid or escape from emergencies.

Each member of the field crew will be instructed in these objectives before he/she goes onto the Site. A site safety meeting will be conducted at the start of the project. Additional meetings shall be conducted, as necessary, for new personnel working at the Site.

## 2.4 Medical Surveillance Program

All AKRF and subcontractor personnel performing field work involving subsurface disturbance at the site are required to have passed a complete medical surveillance examination in accordance with 29 CFR 1910.120 (f). A physician's medical release for work will be confirmed by the SSO before an employee can begin site activities. The medical release shall consider the type of work to be performed and the required PPE. The medical examination will, at a minimum, be provided annually and upon termination of hazardous waste site work.

## 2.5 Site Work Zones

During any activities involving subsurface disturbance, the work area must be divided into various zones to prevent the spread of contamination, ensure that proper protective equipment is donned, and provide an area for decontamination.

The Exclusion Zone is defined as the area where exposure to impacted media could be encountered. The Contamination Reduction Zone (CRZ) is the area where decontamination procedures take place and is located next to the Exclusion Zone. The Support Zone is the area where support facilities such as vehicles, fire extinguisher, and first aid supplies are located. The emergency staging area (part of the Support Zone) is the area where all workers on-site would

assemble in the event of an emergency. A summary of these areas is provided below. These zones may be changed by the SSO, depending on that day's activities. All field personnel will be informed of the location of these zones before work begins.

Site Work Zones			
Task	Exclusion Zone	CRZ	Support Zone
Soil Borings	10 ft from Drill Rig	20 ft from Drill Rig	As Needed
Monitoring Well Installation	10 ft from Drill Rig	20 ft from Drill Rig	As Needed
Comments: Control measures such as "caution tape" and/or traffic cones will be placed around the perimeter of the work area when work is being done in a public area.			

## 2.6 Air Monitoring

The purpose of the air monitoring program is to identify any exposure of the field personnel to potential environmental hazards in the soil and groundwater. Results of the air monitoring will be used to determine the appropriate response action, if needed.

### 2.6.1 Volatile Organic Compounds

A photoionization detector (PID) will be used to perform air monitoring during soil disturbance activities to determine airborne levels of total VOCs. The PID will be calibrated at the start of the work day with a 100 ppm isobutylene standard in accordance with the manufacture's specifications.

### 2.6.2 Work Zone Air Monitoring

Real time air monitoring will be performed with the PID. Measurements will be taken prior to commencement of work and continuously during the work, as outlined in the following table. Measurements will be made as close to the workers as practicable and at the breathing height of the workers. The SSO shall set up the equipment and confirm that it is working properly. His/her designee may oversee the air measurements during the day. The initial measurement for the day will be performed before the start of work and will establish the background level for that day. The final measurement for the day will be performed after the end of work. The action levels and required responses are listed in the following table.

Instrument	Action Level	Response Action
PID	Less than 10 ppm in breathing zone	Level D or D-Modified
	Between 10 ppm and 50 ppm	Level C
	More than 50 ppm	Stop work. Resume work when readings are less than 50 ppm.
CO Detector	Less than 25 ppm	Level D or D-Modified
	Above 25 ppm	Stop work, ventilate, and evacuate work area. Resume work when readings are less than 25 ppm.

### 2.6.3 Community Air Monitoring Plan

Community air monitoring will be conducted during all intrusive site activities in compliance with the New York State Department of Health (NYSDOH) Generic

Community Air Monitoring Plan (CAMP). Real-time air monitoring for volatile compounds at the perimeter of the exclusion zone will be performed as described below.

#### VOC Monitoring

Periodic monitoring for VOCs will be conducted during non-intrusive activities such as the collection of groundwater samples. Periodic monitoring may include obtaining measurements upon arrival at a location, while opening a monitoring well cap, when bailing/purging a well, and upon leaving the location. In some instances, depending on the proximity of exposed individuals, continuous monitoring may be conducted during these activities.

Continuous monitoring for VOCs will be conducted during all ground intrusive activities (i.e., soil boring and monitoring well/soil gas point installation). Upwind concentrations will be measured at the start of each workday and periodically thereafter to establish background concentrations. VOCs will be monitored continuously at the downwind perimeter of the exclusion zone. Monitoring will be conducted with a PID equipped with a 10.6 eV lamp capable of calculating 15-minute running average concentrations. The following actions will be taken based on organic vapor levels measured:

- If total organic vapor levels exceed 5 ppm above background for the 15-minute average at the exclusion zone perimeter, work activities will be temporarily halted and monitoring continued. If levels readily decrease (per instantaneous readings) below 5 ppm above background, work activities will resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the exclusion zone persist at levels in excess of 5 ppm above background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities will resume provided that the total organic vapor level 200 feet downwind of the hot zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less – but in no case less than 20 feet – is below 5 ppm above background for the 15-minute average.
- If the total organic vapor level is above 25 ppm at the perimeter of the exclusion zone, activities will be shutdown.

More frequent intervals of monitoring will be conducted if required as determined by the SSO. All 15-minute readings will be recorded and available for NYSDEC and NYSDOH personnel to review. Instantaneous readings, if any, will also be recorded.

#### Major Vapor Emission Response Plan

If any organic levels greater than 5 ppm over background are identified 200 feet downwind from the work Site, or half the distance to the nearest residential or commercial property, whichever is less, all work activities must be halted or vapor controls must be implemented.

If, following the cessation of the work activities, or as the result of an emergency, organic levels persist above 5 ppm above background 200 feet downwind or half the distance to the nearest residential or commercial property from the exclusion zone, then the air quality must be monitored within 20 feet of the perimeter of the nearest residential or commercial structure (20 Foot Zone).

If either of the following criteria is exceeded in the 20 Foot Zone, then the Major Vapor Emission Response Plan shall automatically be implemented.

- Sustained organic vapor levels approaching 1 ppm above background for a period of more than 30 minutes, or
- Organic vapor levels greater than 5 ppm above background for any time period.

Upon activation, the following activities shall be undertaken as part of the Major Vapor Emission Response Plan:

- The NYSDEC, NYSDOH, and local police authorities will immediately be contacted by the SSO and advised of the situation;
- Frequent air monitoring will be conducted at 30-minute intervals within the 20 Foot Zone. If two successive readings below action levels are measured, air monitoring may be halted or modified by the Site Health and Safety Officer; and
- All Emergency contacts will go into effect as appropriate.

All readings will be recorded and be available for NYSDEC and NYSDOH personnel to review.

**2.7 Personal Protection Equipment**

The personal protection equipment required for various kinds of investigation tasks are based on 29 CFR 1910.120, Hazardous Waste Operations and Emergency Response, Appendix B, “General Description and Discussion of the Levels of Protection and Protective Gear.”

AKRF field personnel and other site personnel shall wear, at a minimum, Level D personal protective equipment. The protection will be based on the air monitoring described in Section 2.6.

LEVEL OF PROTECTION & PPE		Soil Boring/Water Sampling
<b>Level D</b> (X) Steel Toe Shoes (X) Hard Hat (within 20 ft of drill rig) (X) Work Gloves	(X) Safety Glasses ( ) Face Shield (X) Ear Plugs (within 20 ft of drill rig) (X) Nitrile Gloves (X) Tyvek for drill operator if NAPL present	Yes
<b>Level C (in addition to Level D)</b> (X) Half-Face Respirator OR (X) Full Face Respirator ( ) Full-Face PAPR	( ) Particulate Cartridge ( ) Organic Cartridge (X) Dual Organic/Particulate Cartridge	If PID > 10 ppm (breathing zone)
Comments: Cartridges to be changed out at least once per shift unless warranted beforehand (e.g., more difficult to breathe or any odors detected).		

**2.8 General Work Practices**

To protect the health and safety of the field personnel, field personnel will adhere to the guidelines listed below during activities involving subsurface disturbance:

- Eating, drinking, chewing gum or tobacco, and smoking are prohibited, except in designated areas on the site. These areas will be designated by the SSO.
- Workers must wash their hands thoroughly on leaving the work area and before eating, drinking, or any other such activity.
- The workers should shower as soon as possible after leaving the site. Contact with contaminated or suspected surfaces should be avoided.
- The buddy system should always be used; each buddy should watch for signs of fatigue, exposure, and heat/cold stress.


### 3.0 EMERGENCY PROCEDURES AND EMERGENCY RESPONSE PLAN

The field crew will be equipped with emergency equipment, such as a first aid kit and disposable eye washes. In the case of a medical emergency, the SSO will determine the nature of the emergency and he/she will have someone call for an ambulance, if needed. If the nature of the injury is not serious, i.e., the person can be moved without expert emergency medical personnel, he/she should be driven to the White Plains Hospital by on-site personnel. Directions to the hospital are provided below, and a hospital route map is included as Figure 1.

#### 3.1 Hospital Directions

<b>Hospital Name:</b>	White Plains Hospital
<b>Phone Number:</b>	(914) 681-0600
<b>Address/Location:</b>	41 East Post Road White Plains, NY 10601 The Emergency Department is located on East Post Road
<b>Directions:</b>	1. Go <b>SOUTHWEST</b> on <i>Hamilton Avenue</i> toward <i>Dr. Martin Luther King, Jr. Boulevard</i> 2. Turn <b>LEFT</b> onto <i>North Lexington Avenue</i> 3. Turn <b>LEFT</b> onto <i>East Post Road</i> The Emergency Department entrance is located on East Post Road

A map illustrating where the White Plains Hospital is located relative to the 200 Hamilton Avenue property is provided in the insert map below, and attached as Figure 1.

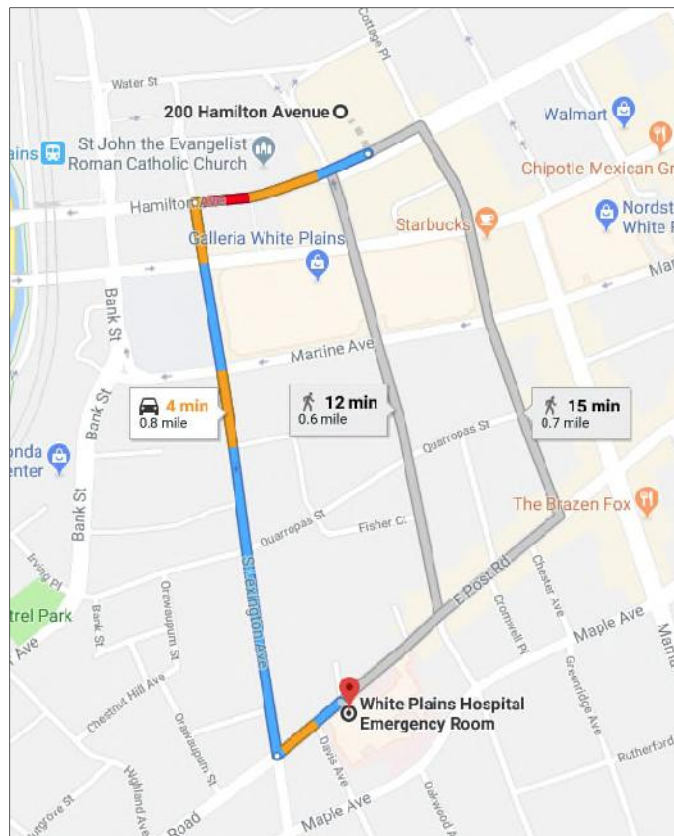

### 3.2 Emergency Contacts

<b>Company</b>	<b>Individual Name</b>	<b>Title</b>	<b>Contact Number</b>
AKRF	Rebecca Kinal	Project Director	914-922-2362 (office) 914-263-8739 (cell)
	Timothy McClintock	Project Manager	914-922-2374 (office) 914-439-1629 (cell)
	Jacob Menken	Site Safety Officer	914-922-2373 (office) 914-552-7694 (cell)
Ambulance, Fire Department & Police Department	-	-	911
NYSDEC Spill Hotline	-	-	800-457-7362

### 4.0 APPROVAL & ACKNOWLEDGMENTS OF HASP

#### APPROVAL

Signed: \_\_\_\_\_ Date: \_\_\_\_\_  
AKRF Principal-In-Charge and Project  
Director – Rebecca Kinal, P.E.

Signed: \_\_\_\_\_ Date: \_\_\_\_\_  
AKRF Project Manager and Health and  
Safety Officer - Timothy McClintock

Below is an affidavit that must be signed by all workers who enter the Site. A copy of the HASP must be on-site at all times and will be kept by the SSO.


#### AFFIDAVIT

I, \_\_\_\_\_ (name), of \_\_\_\_\_ (company name),  
have read the Health and Safety Plan (HASP) for the Hamilton Green site. I agree to conduct all on-site work in accordance with the requirements set forth in this HASP and understand that failure to comply with this HASP could lead to my removal from the Site.

Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____
Signed: _____	Company: _____	Date: _____



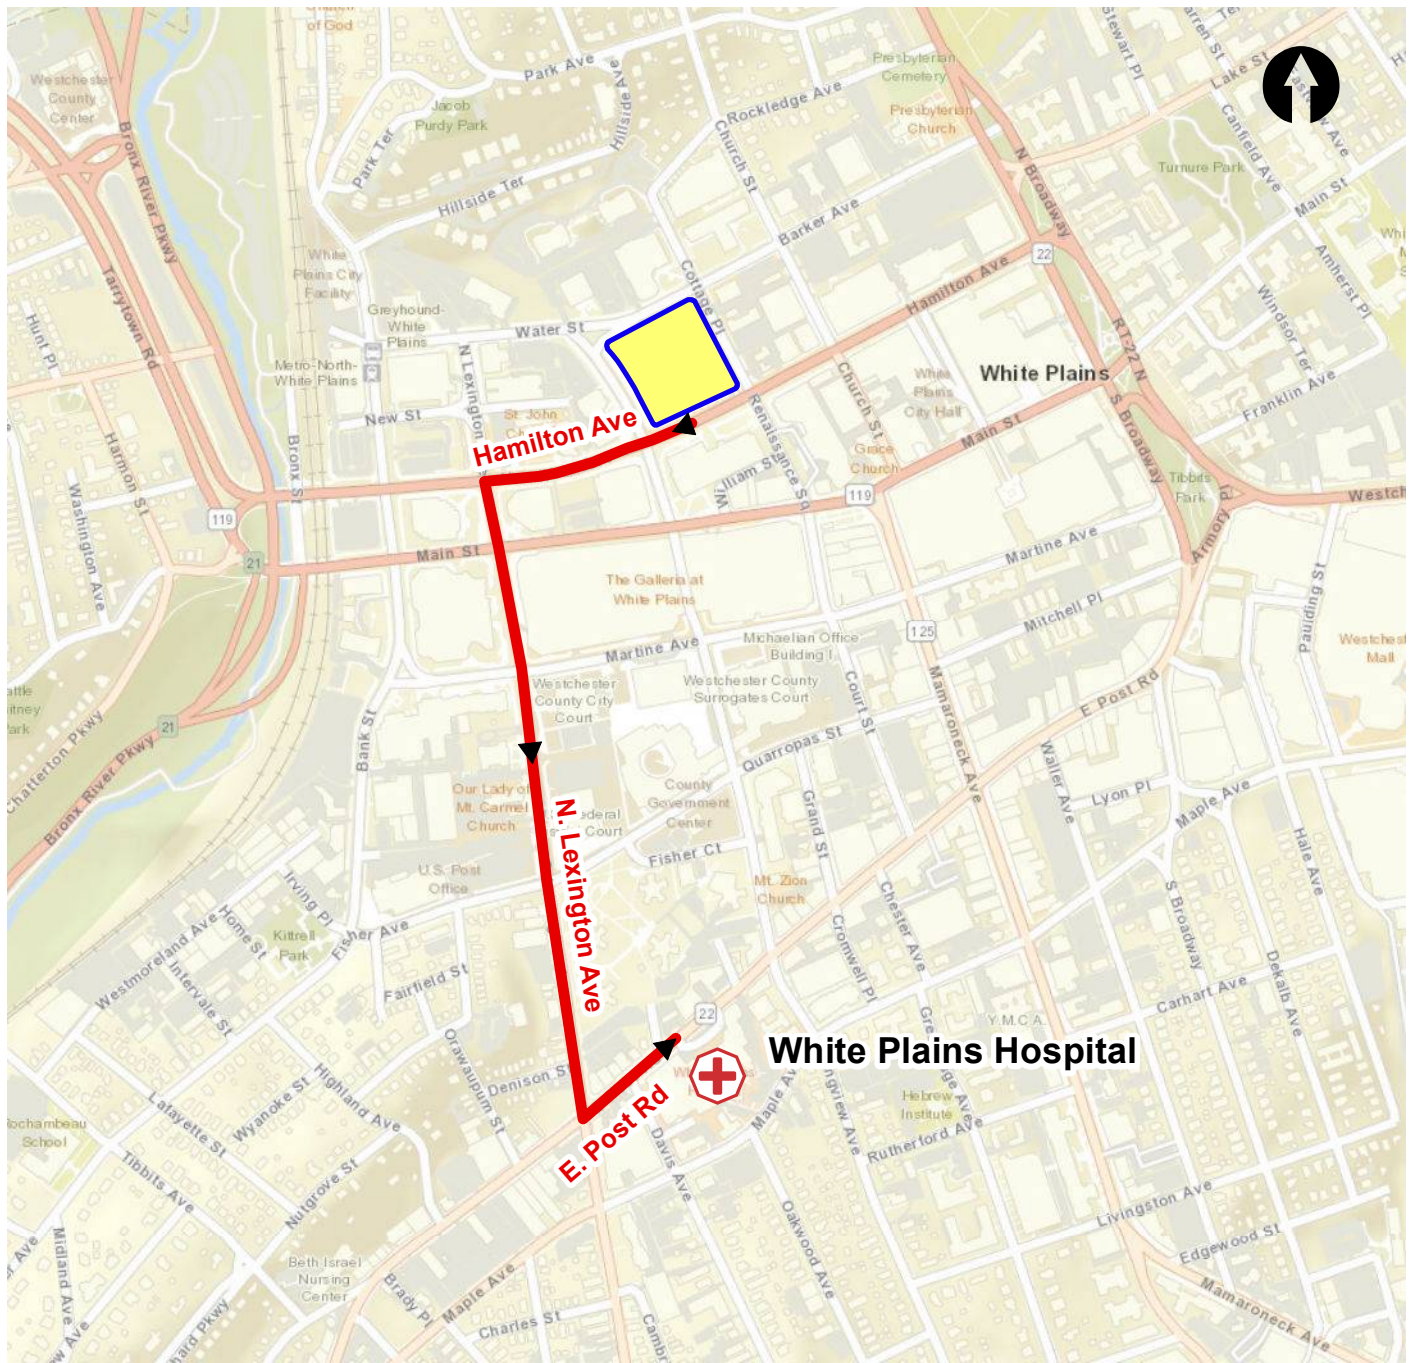


**FIGURE 1**  
**HOSPITAL ROUTE MAP**



Service Layer Credits: ESRC World Street Map 2018

White Plains Hospital  
 41 E. Post Road  
 White Plains, NY 10601  
 (914) 681-0600

**LEGEND**

-  PROJECT SITE BOUNDARY
-  ROUTE TO HOSPITAL
-  HOSPITAL LOCATION



440 Park Avenue South, New York, NY 10016

**200 Hamilton Avenue**  
 White Plains, New York

**HOSPITAL ROUTE MAP**

DATE

**5/2/2018**

PROJECT NO.

**170029**

FIGURE

**1**

**ATTACHMENT A**  
**POTENTIAL HEALTH EFFECTS FROM ON-SITE CONTAMINANTS**

This fact sheet answers the most frequently asked health questions (FAQs) about benzene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. This information is important because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

**HIGHLIGHTS: Benzene is a widely used chemical formed from both natural processes and human activities. Breathing benzene can cause drowsiness, dizziness, and unconsciousness; long-term benzene exposure causes effects on the bone marrow and can cause anemia and leukemia. Benzene has been found in at least 813 of the 1,430 National Priorities List sites identified by the Environmental Protection Agency (EPA).**

## What is benzene?

(Pronounced bĕn'zĕn')

Benzene is a colorless liquid with a sweet odor. It evaporates into the air very quickly and dissolves slightly in water. It is highly flammable and is formed from both natural processes and human activities.

Benzene is widely used in the United States; it ranks in the top 20 chemicals for production volume. Some industries use benzene to make other chemicals which are used to make plastics, resins, and nylon and synthetic fibers. Benzene is also used to make some types of rubbers, lubricants, dyes, detergents, drugs, and pesticides. Natural sources of benzene include volcanoes and forest fires. Benzene is also a natural part of crude oil, gasoline, and cigarette smoke.

## What happens to benzene when it enters the environment?

- Industrial processes are the main source of benzene in the environment.
- Benzene can pass into the air from water and soil.
- It reacts with other chemicals in the air and breaks down within a few days.
- Benzene in the air can attach to rain or snow and be carried back down to the ground.

- It breaks down more slowly in water and soil, and can pass through the soil into underground water.
- Benzene does not build up in plants or animals.

## How might I be exposed to benzene?

- Outdoor air contains low levels of benzene from tobacco smoke, automobile service stations, exhaust from motor vehicles, and industrial emissions.
- Indoor air generally contains higher levels of benzene from products that contain it such as glues, paints, furniture wax, and detergents.
- Air around hazardous waste sites or gas stations will contain higher levels of benzene.
- Leakage from underground storage tanks or from hazardous waste sites containing benzene can result in benzene contamination of well water.
- People working in industries that make or use benzene may be exposed to the highest levels of it.
- A major source of benzene exposures is tobacco smoke.

## How can benzene affect my health?

Breathing very high levels of benzene can result in death, while high levels can cause drowsiness, dizziness, rapid heart rate, headaches, tremors, confusion, and unconsciousness. Eating or drinking foods containing high levels of benzene can cause vomiting, irritation of the stomach, dizziness, sleepiness, convulsions, rapid heart rate, and death.

ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

The major effect of benzene from long-term (365 days or longer) exposure is on the blood. Benzene causes harmful effects on the bone marrow and can cause a decrease in red blood cells leading to anemia. It can also cause excessive bleeding and can affect the immune system, increasing the chance for infection.

Some women who breathed high levels of benzene for many months had irregular menstrual periods and a decrease in the size of their ovaries. It is not known whether benzene exposure affects the developing fetus in pregnant women or fertility in men.

Animal studies have shown low birth weights, delayed bone formation, and bone marrow damage when pregnant animals breathed benzene.

### **How likely is benzene to cause cancer?**

The Department of Health and Human Services (DHHS) has determined that benzene is a known human carcinogen. Long-term exposure to high levels of benzene in the air can cause leukemia, cancer of the blood-forming organs.

### **Is there a medical test to show whether I've been exposed to benzene?**

Several tests can show if you have been exposed to benzene. There is test for measuring benzene in the breath; this test must be done shortly after exposure. Benzene can also be measured in the blood, however, since benzene disappears rapidly from the blood, measurements are accurate only for recent exposures.

In the body, benzene is converted to products called metabolites. Certain metabolites can be measured in the urine. However, this test must be done shortly after exposure and is not a reliable indicator of how much benzene you have been exposed to, since the metabolites may be present in urine from other sources.

### **Has the federal government made recommendations to protect human health?**

The EPA has set the maximum permissible level of benzene in drinking water at 0.005 milligrams per liter (0.005 mg/L). The EPA requires that spills or accidental releases into the environment of 10 pounds or more of benzene be reported to the EPA.

The Occupational Safety and Health Administration (OSHA) has set a permissible exposure limit of 1 part of benzene per million parts of air (1 ppm) in the workplace during an 8-hour workday, 40-hour workweek.

### **Glossary**

Anemia: A decreased ability of the blood to transport oxygen.

Carcinogen: A substance with the ability to cause cancer.

CAS: Chemical Abstracts Service.

Chromosomes: Parts of the cells responsible for the development of hereditary characteristics.

Metabolites: Breakdown products of chemicals.

Milligram (mg): One thousandth of a gram.

Pesticide: A substance that kills pests.

### **References**

This ToxFAQs information is taken from the 1997 Toxicological Profile for Benzene (update) produced by the Agency for Toxic Substances and Disease Registry, Public Health Service, U.S. Department of Health and Human Services, Public Health Service in Atlanta, GA.

**Where can I get more information?** For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.





This fact sheet answers the most frequently asked health questions (FAQs) about toluene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

**HIGHLIGHTS:** Exposure to toluene occurs from breathing contaminated workplace air, in automobile exhaust, some consumer products paints, paint thinners, fingernail polish, lacquers, and adhesives. Toluene affects the nervous system. Toluene has been found at 959 of the 1,591 National Priority List sites identified by the Environmental Protection Agency

### What is toluene?

Toluene is a clear, colorless liquid with a distinctive smell. Toluene occurs naturally in crude oil and in the tolu tree. It is also produced in the process of making gasoline and other fuels from crude oil and making coke from coal.

Toluene is used in making paints, paint thinners, fingernail polish, lacquers, adhesives, and rubber and in some printing and leather tanning processes.

### What happens to toluene when it enters the environment?

Toluene enters the environment when you use materials that contain it. It can also enter surface water and groundwater from spills of solvents and petroleum products as well as from leaking underground storage tanks at gasoline stations and other facilities.

When toluene-containing products are placed in landfills or waste disposal sites, the toluene can enter the soil or water near the waste site.

Toluene does not usually stay in the environment long.

Toluene does not concentrate or buildup to high levels in animals.

### How might I be exposed to toluene?

Breathing contaminated workplace air or automobile exhaust.

Working with gasoline, kerosene, heating oil, paints, and lacquers.

Drinking contaminated well-water.

Living near uncontrolled hazardous waste sites containing toluene products.

### How can toluene affect my health?

Toluene may affect the nervous system. Low to moderate levels can cause tiredness, confusion, weakness, drunken-type actions, memory loss, nausea, loss of appetite, and

**ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>**

hearing and color vision loss. These symptoms usually disappear when exposure is stopped.

Inhaling High levels of toluene in a short time can make you feel light-headed, dizzy, or sleepy. It can also cause unconsciousness, and even death.

High levels of toluene may affect your kidneys.

### **How likely is toluene to cause cancer?**

Studies in humans and animals generally indicate that toluene does not cause cancer.

The EPA has determined that the carcinogenicity of toluene can not be classified.

### **How can toluene affect children?**

It is likely that health effects seen in children exposed to toluene will be similar to the effects seen in adults. Some studies in animals suggest that babies may be more sensitive than adults.

Breathing very high levels of toluene during pregnancy can result in children with birth defects and retard mental abilities, and growth. We do not know if toluene harms the unborn child if the mother is exposed to low levels of toluene during pregnancy.

### **How can families reduce the risk of exposure to toluene?**

- Use toluene-containing products in well-ventilated areas.

- When not in use, toluene-containing products should be tightly covered to prevent evaporation into the air.

### **Is there a medical test to show whether I've been exposed to toluene?**

There are tests to measure the level of toluene or its breakdown products in exhaled air, urine, and blood. To determine if you have been exposed to toluene, your urine or blood must be checked within 12 hours of exposure. Several other chemicals are also changed into the same breakdown products as toluene, so some of these tests are not specific for toluene.

### **Has the federal government made recommendations to protect human health?**

EPA has set a limit of 1 milligram per liter of drinking water (1 mg/L).

Discharges, releases, or spills of more than 1,000 pounds of toluene must be reported to the National Response Center.

The Occupational Safety and Health Administration has set a limit of 200 parts toluene per million of workplace air (200 ppm).

### **References**

Agency for Toxic Substances and Disease Registry (ATSDR). 2000. Toxicological Profile for Toluene. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

**Where can I get more information?** For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about ethylbenzene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

**HIGHLIGHTS:** Ethylbenzene is a colorless liquid found in a number of products including gasoline and paints. Breathing very high levels can cause dizziness and throat and eye irritation. Ethylbenzene has been found in at least 731 of the 1,467 National Priorities List sites identified by the Environmental Protection Agency (EPA).

### What is ethylbenzene?

(Pronounced ĕth' əl bĕn' zĕn')

Ethylbenzene is a colorless, flammable liquid that smells like gasoline. It is found in natural products such as coal tar and petroleum and is also found in manufactured products such as inks, insecticides, and paints.

Ethylbenzene is used primarily to make another chemical, styrene. Other uses include as a solvent, in fuels, and to make other chemicals.

### What happens to ethylbenzene when it enters the environment?

- Ethylbenzene moves easily into the air from water and soil.
- It takes about 3 days for ethylbenzene to be broken down in air into other chemicals.
- Ethylbenzene may be released to water from industrial discharges or leaking underground storage tanks.
- In surface water, ethylbenzene breaks down by reacting with other chemicals found naturally in water.
- In soil, it is broken down by soil bacteria.

### How might I be exposed to ethylbenzene?

- Breathing air containing ethylbenzene, particularly in areas near factories or highways.
- Drinking contaminated tap water.
- Working in an industry where ethylbenzene is used or made.
- Using products containing it, such as gasoline, carpet glues, varnishes, and paints.

### How can ethylbenzene affect my health?

Limited information is available on the effects of ethylbenzene on people's health. The available information shows dizziness, throat and eye irritation, tightening of the chest, and a burning sensation in the eyes of people exposed to high levels of ethylbenzene in air.

Animals studies have shown effects on the nervous system, liver, kidneys, and eyes from breathing ethylbenzene in air.

### How likely is ethylbenzene to cause cancer?

The EPA has determined that ethylbenzene is not classified as to human carcinogenicity.



ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

No studies in people have shown that ethylbenzene exposure can result in cancer. Two available animal studies suggest that ethylbenzene may cause tumors.

### How can ethylbenzene affect children?

Children may be exposed to ethylbenzene through inhalation of consumer products, including gasoline, paints, inks, pesticides, and carpet glue. We do not know whether children are more sensitive to the effects of ethylbenzene than adults.

It is not known whether ethylbenzene can affect the development of the human fetus. Animal studies have shown that when pregnant animals were exposed to ethylbenzene in air, their babies had an increased number of birth defects.

### How can families reduce the risk of exposure to ethylbenzene?

Exposure to ethylbenzene vapors from household products and newly installed carpeting can be minimized by using adequate ventilation.

Household chemicals should be stored out of reach of children to prevent accidental poisoning. Always store household chemicals in their original containers; never store them in containers children would find attractive to eat or drink from, such as old soda bottles. Gasoline should be stored in a gasoline can with a locked cap.

Sometimes older children sniff household chemicals, including ethylbenzene, in an attempt to get high. Talk with your children about the dangers of sniffing chemicals.

### Is there a medical test to show whether I've been exposed to ethylbenzene?

Ethylbenzene is found in the blood, urine, breath, and

some body tissues of exposed people. The most common way to test for ethylbenzene is in the urine. This test measures substances formed by the breakdown of ethylbenzene. This test needs to be done within a few hours after exposure occurs, because the substances leave the body very quickly.

These tests can show you were exposed to ethylbenzene, but cannot predict the kind of health effects that might occur.

### Has the federal government made recommendations to protect human health?

The EPA has set a maximum contaminant level of 0.7 milligrams of ethylbenzene per liter of drinking water (0.7 mg/L).

The EPA requires that spills or accidental releases into the environment of 1,000 pounds or more of ethylbenzene be reported to the EPA.

The Occupational Safety and Health Administration (OSHA) has set an occupational exposure limit of 100 parts of ethylbenzene per million parts of air (100 ppm) for an 8-hour workday, 40-hour workweek.

### References

Agency for Toxic Substances and Disease Registry (ATSDR). 1999. Toxicological profile for ethylbenzene. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

**Where can I get more information?** For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about xylene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

**SUMMARY: Exposure to xylene occurs in the workplace and when you use paint, gasoline, paint thinners and other products that contain it. People who breathe high levels may have dizziness, confusion, and a change in their sense of balance. This substance has been found in at least 658 of the 1,430 National Priorities List sites identified by the Environmental Protection Agency (EPA).**

## What is xylene?

(Pronounced zī'lēn)

Xylene is a colorless, sweet-smelling liquid that catches on fire easily. It occurs naturally in petroleum and coal tar and is formed during forest fires. You can smell xylene in air at 0.08–3.7 parts of xylene per million parts of air (ppm) and begin to taste it in water at 0.53–1.8 ppm.

Chemical industries produce xylene from petroleum. It's one of the top 30 chemicals produced in the United States in terms of volume.

Xylene is used as a solvent and in the printing, rubber, and leather industries. It is also used as a cleaning agent, a thinner for paint, and in paints and varnishes. It is found in small amounts in airplane fuel and gasoline.

## What happens to xylene when it enters the environment?

- Xylene has been found in waste sites and landfills when discarded as used solvent, or in varnish, paint, or paint thinners.
- It evaporates quickly from the soil and surface water into the air.

- In the air, it is broken down by sunlight into other less harmful chemicals.
- It is broken down by microorganisms in soil and water.
- Only a small amount of it builds up in fish, shellfish, plants, and animals living in xylene-contaminated water.

## How might I be exposed to xylene?

- Breathing xylene in workplace air or in automobile exhaust.
- Breathing contaminated air.
- Touching gasoline, paint, paint removers, varnish, shellac, and rust preventatives that contain it.
- Breathing cigarette smoke that has small amounts of xylene in it.
- Drinking contaminated water or breathing air near waste sites and landfills that contain xylene.
- The amount of xylene in food is likely to be low.

## How can xylene affect my health?

Xylene affects the brain. High levels from exposure for short periods (14 days or less) or long periods (more than 1 year) can cause headaches, lack of muscle coordination, dizziness, confusion, and changes in one's sense of balance. Exposure of

ToxFAQs Internet home page via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

people to high levels of xylene for short periods can also cause irritation of the skin, eyes, nose, and throat; difficulty in breathing; problems with the lungs; delayed reaction time; memory difficulties; stomach discomfort; and possibly changes in the liver and kidneys. It can cause unconsciousness and even death at very high levels.

Studies of unborn animals indicate that high concentrations of xylene may cause increased numbers of deaths, and delayed growth and development. In many instances, these same concentrations also cause damage to the mothers. We do not know if xylene harms the unborn child if the mother is exposed to low levels of xylene during pregnancy.

### How likely is xylene to cause cancer?

The International Agency for Research on Cancer (IARC) has determined that xylene is not classifiable as to its carcinogenicity in humans.

Human and animal studies have not shown xylene to be carcinogenic, but these studies are not conclusive and do not provide enough information to conclude that xylene does not cause cancer.

### Is there a medical test to show whether I've been exposed to xylene?

Laboratory tests can detect xylene or its breakdown products in exhaled air, blood, or urine. There is a high degree of agreement between the levels of exposure to xylene and the levels of xylene breakdown products in the urine. However, a urine sample must be provided very soon after exposure ends because xylene quickly leaves the body. These tests are not routinely available at your doctor's office.

### Has the federal government made recommendations to protect human health?

The EPA has set a limit of 10 ppm of xylene in drinking water.

The EPA requires that spills or accidental releases of xylenes into the environment of 1,000 pounds or more must be reported.

The Occupational Safety and Health Administration (OSHA) has set a maximum level of 100 ppm xylene in workplace air for an 8-hour workday, 40-hour workweek.

The National Institute for Occupational Safety and Health (NIOSH) and the American Conference of Governmental Industrial Hygienists (ACGIH) also recommend exposure limits of 100 ppm in workplace air.

NIOSH has recommended that 900 ppm of xylene be considered immediately dangerous to life or health. This is the exposure level of a chemical that is likely to cause permanent health problems or death.

### Glossary

Evaporate: To change from a liquid into a vapor or a gas.

Carcinogenic: Having the ability to cause cancer.

CAS: Chemical Abstracts Service.

ppm: Parts per million.

Solvent: A liquid that can dissolve other substances.

### References

Agency for Toxic Substances and Disease Registry (ATSDR). 1995. Toxicological profile for xylenes (update). Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

**Where can I get more information?** For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about methyl *tert*-butyl ether (MTBE). For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. This information is important because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

**HIGHLIGHTS:** Methyl *tert*-butyl ether (MTBE) is a flammable liquid which is used as an additive in unleaded gasoline. Drinking or breathing MTBE may cause nausea, nose and throat irritation, and nervous system effects. MTBE has been found in at least 11 of the 1,430 National Priorities List sites identified by the Environmental Protection Agency (EPA).

### What is methyl *tert*-butyl ether?

(Pronounced mĕth/əl tŭr/shĕ-ĕr'ĕ byōōt/l ĕ'thĕr)

Methyl *tert*-butyl ether (MTBE) is a flammable liquid with a distinctive, disagreeable odor. It is made from blending chemicals such as isobutylene and methanol, and has been used since the 1980s as an additive for unleaded gasolines to achieve more efficient burning.

MTBE is also used to dissolve gallstones. Patients treated in this way have MTBE delivered directly to their gall bladders through special tubes that are surgically inserted.

### What happens to MTBE when it enters the environment?

- MTBE quickly evaporates from open containers and surface water, so it is commonly found as a vapor in the air.
- Small amounts of MTBE may dissolve in water and get into underground water.
- It remains in underground water for a long time.

- MTBE may stick to particles in water, which will cause it to eventually settle to the bottom sediment.
- MTBE may be broken down quickly in the air by sunlight.
- MTBE does not build up significantly in plants and animals.

### How might I be exposed to MTBE?

- Touching the skin or breathing contaminated air while pumping gasoline.
- Breathing exhaust fumes while driving a car.
- Breathing air near highways or in cities.
- Drinking, swimming, or showering in water that has been contaminated with MTBE.
- Receiving MTBE treatment for gallstones.

### How can MTBE affect my health?

Breathing small amounts of MTBE for short periods may cause nose and throat irritation. Some people exposed to MTBE while pumping gasoline, driving their cars, or working

ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

in gas stations have reported having headaches, nausea, dizziness, and mental confusion. However, the actual levels of exposure in these cases are unknown. In addition, these symptoms may have been caused by exposure to other chemicals.

There are no data on the effects in people of drinking MTBE. Studies with rats and mice suggest that drinking MTBE may cause gastrointestinal irritation, liver and kidney damage, and nervous system effects.

### How likely is MTBE to cause cancer?

There is no evidence that MTBE causes cancer in humans. One study with rats found that breathing high levels of MTBE for long periods may cause kidney cancer. Another study with mice found that breathing high levels of MTBE for long periods may cause liver cancer.

The Department of Health and Human Services (DHHS), the International Agency for Research on Cancer (IARC), and the EPA have not classified MTBE as to its carcinogenicity.

### Is there a medical test to show whether I've been exposed to MTBE?

MTBE and its breakdown product, butyl alcohol, can be detected in your breath, blood, or urine for up to 1 or 2 days after exposure. These tests aren't available at most doctors' offices, but can be done at special laboratories that have the right equipment. There is no other test specific to determining MTBE exposure.

### Has the federal government made recommendations to protect human health?

The EPA has issued guidelines recommending that, to protect children, drinking water levels of MTBE not exceed 4 milligrams per liter of water (4 mg/L) for an exposure of 1-10 days, and 3 mg/L for longer-term exposures.

The American Conference of Governmental Industrial Hygienists (ACGIH) has recommended an exposure limit of 40 parts of MTBE per million parts of air (40 ppm) for an 8-hour workday, 40-hour workweek.

### Glossary

Carcinogenicity: Ability to cause cancer.

CAS: Chemical Abstracts Service.

Evaporate: To change into a vapor or gas.

Milligram (mg): One thousandth of a gram.

ppm: Parts per million.

Sediment: Mud and debris that have settled to the bottom of a body of water.

### References

This ToxFAQs information is taken from the 1996 Toxicological Profile for Methyl *tert*-Butyl Ether produced by the Agency for Toxic Substances and Disease Registry, Public Health Service, U.S. Department of Health and Human Services, Public Health Service in Atlanta, GA.

**Where can I get more information?** For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



**This fact sheet answers the most frequently asked health questions (FAQs) about polycyclic aromatic hydrocarbons (PAHs). For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. This information is important because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.**

**SUMMARY: Exposure to polycyclic aromatic hydrocarbons usually occurs by breathing air contaminated by wild fires or coal tar, or by eating foods that have been grilled. PAHs have been found in at least 600 of the 1,430 National Priorities List sites identified by the Environmental Protection Agency (EPA).**

## What are polycyclic aromatic hydrocarbons?

(Pronounced pŏl'ī-sī'klīk ār'ə-măt'īk hī'drə-kar'bənz)

Polycyclic aromatic hydrocarbons (PAHs) are a group of over 100 different chemicals that are formed during the incomplete burning of coal, oil and gas, garbage, or other organic substances like tobacco or charbroiled meat. PAHs are usually found as a mixture containing two or more of these compounds, such as soot.

Some PAHs are manufactured. These pure PAHs usually exist as colorless, white, or pale yellow-green solids. PAHs are found in coal tar, crude oil, creosote, and roofing tar, but a few are used in medicines or to make dyes, plastics, and pesticides.

## What happens to PAHs when they enter the environment?

- PAHs enter the air mostly as releases from volcanoes, forest fires, burning coal, and automobile exhaust.
- PAHs can occur in air attached to dust particles.
- Some PAH particles can readily evaporate into the air from soil or surface waters.
- PAHs can break down by reacting with sunlight and other chemicals in the air, over a period of days to weeks.

- PAHs enter water through discharges from industrial and wastewater treatment plants.
- Most PAHs do not dissolve easily in water. They stick to solid particles and settle to the bottoms of lakes or rivers.
- Microorganisms can break down PAHs in soil or water after a period of weeks to months.
- In soils, PAHs are most likely to stick tightly to particles; certain PAHs move through soil to contaminate underground water.
- PAH contents of plants and animals may be much higher than PAH contents of soil or water in which they live.

## How might I be exposed to PAHs?

- Breathing air containing PAHs in the workplace of coking, coal-tar, and asphalt production plants; smokehouses; and municipal trash incineration facilities.
- Breathing air containing PAHs from cigarette smoke, wood smoke, vehicle exhausts, asphalt roads, or agricultural burn smoke.
- Coming in contact with air, water, or soil near hazardous waste sites.
- Eating grilled or charred meats; contaminated cereals, flour, bread, vegetables, fruits, meats; and processed or pickled foods.
- Drinking contaminated water or cow's milk.



ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

- ❑ Nursing infants of mothers living near hazardous waste sites may be exposed to PAHs through their mother's milk.

### How can PAHs affect my health?

Mice that were fed high levels of one PAH during pregnancy had difficulty reproducing and so did their offspring. These offspring also had higher rates of birth defects and lower body weights. It is not known whether these effects occur in people.

Animal studies have also shown that PAHs can cause harmful effects on the skin, body fluids, and ability to fight disease after both short- and long-term exposure. But these effects have not been seen in people.

### How likely are PAHs to cause cancer?

The Department of Health and Human Services (DHHS) has determined that some PAHs may reasonably be expected to be carcinogens.

Some people who have breathed or touched mixtures of PAHs and other chemicals for long periods of time have developed cancer. Some PAHs have caused cancer in laboratory animals when they breathed air containing them (lung cancer), ingested them in food (stomach cancer), or had them applied to their skin (skin cancer).

### Is there a medical test to show whether I've been exposed to PAHs?

In the body, PAHs are changed into chemicals that can attach to substances within the body. There are special tests that can detect PAHs attached to these substances in body tissues or blood. However, these tests cannot tell whether any

health effects will occur or find out the extent or source of your exposure to the PAHs. The tests aren't usually available in your doctor's office because special equipment is needed to conduct them.

### Has the federal government made recommendations to protect human health?

The Occupational Safety and Health Administration (OSHA) has set a limit of 0.2 milligrams of PAHs per cubic meter of air (0.2 mg/m<sup>3</sup>). The OSHA Permissible Exposure Limit (PEL) for mineral oil mist that contains PAHs is 5 mg/m<sup>3</sup> averaged over an 8-hour exposure period.

The National Institute for Occupational Safety and Health (NIOSH) recommends that the average workplace air levels for coal tar products not exceed 0.1 mg/m<sup>3</sup> for a 10-hour workday, within a 40-hour workweek. There are other limits for workplace exposure for things that contain PAHs, such as coal, coal tar, and mineral oil.

### Glossary

Carcinogen: A substance that can cause cancer.

Ingest: Take food or drink into your body.

### References

Agency for Toxic Substances and Disease Registry (ATSDR). 1995. Toxicological profile for polycyclic aromatic hydrocarbons. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

**Where can I get more information?** For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about naphthalene, 1-methylnaphthalene, and 2-methylnaphthalene. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It is important you understand this information because these substances may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

**HIGHLIGHTS:** Exposure to naphthalene, 1-methylnaphthalene, or 2-methylnaphthalene happens mostly from breathing air contaminated from the burning of wood, tobacco, or fossil fuels, industrial discharges, or moth repellents. Exposure to large amounts of naphthalene may damage or destroy some of your red blood cells. Naphthalene has caused cancer in animals. Naphthalene, 1-methylnaphthalene, and 2-methylnaphthalene have been found in at least 687, 36, and 412, respectively, of the 1,662 National Priority List sites identified by the Environmental Protection Agency (EPA).

### **What are naphthalene, 1-methylnaphthalene, and 2-methylnaphthalene?**

Naphthalene is a white solid that evaporates easily. Fuels such as petroleum and coal contain naphthalene. It is also called white tar, and tar camphor, and has been used in mothballs and moth flakes. Burning tobacco or wood produces naphthalene. It has a strong, but not unpleasant smell. The major commercial use of naphthalene is in the manufacture of polyvinyl chloride (PVC) plastics. Its major consumer use is in moth repellents and toilet deodorant blocks.

1-Methylnaphthalene and 2-methylnaphthalene are naphthalene-related compounds. 1-Methylnaphthalene is a clear liquid and 2-methylnaphthalene is a solid; both can be smelled in air and in water at very low concentrations.

1-Methylnaphthalene and 2-methylnaphthalene are used to make other chemicals such as dyes and resins. 2-Methylnaphthalene is also used to make vitamin K.

### **What happens to naphthalene, 1-methylnaphthalene, and 2-methylnaphthalene when they enter the environment?**

- Naphthalene enters the environment from industrial and domestic sources, and from accidental spills.
- Naphthalene can dissolve in water to a limited degree and may be present in drinking water from wells close to hazardous waste sites and landfills.
- Naphthalene can become weakly attached to soil or pass through soil into underground water.
- In air, moisture and sunlight break it down within 1 day. In water, bacteria break it down or it evaporates into the air.
- Naphthalene does not accumulate in the flesh of animals or fish that you might eat.

1-Methylnaphthalene and 2-methylnaphthalene are expected to act like naphthalene in air, water, or soil because they have similar chemical and physical properties.

### **How might I be exposed to naphthalene, 1-methylnaphthalene, and 2-methylnaphthalene?**

- Breathing low levels in outdoor air.
- Breathing air contaminated from industrial discharges or smoke from burning wood, tobacco, or fossil fuels.
- Using or making moth repellents, coal tar products, dyes or inks could expose you to these chemicals in the air.
- Drinking water from contaminated wells.
- Touching fabrics that are treated with moth repellents containing naphthalene.
- Exposure to naphthalene, 1-methylnaphthalene and 2-methylnaphthalene from eating foods or drinking beverages is unlikely.

### **How can naphthalene, 1-methylnaphthalene, and 2-methylnaphthalene affect my health?**

Exposure to large amounts of naphthalene may damage or destroy some of your red blood cells. This could cause you to have too few red blood cells until your body replaces the destroyed cells. This condition is called hemolytic anemia. Some symptoms of hemolytic anemia are fatigue, lack of appetite, restlessness, and pale skin. Exposure to large amounts of naphthalene may also cause nausea, vomiting, diarrhea, blood in the urine, and a yellow color to the skin. Animals sometimes develop cloudiness in their eyes after swallowing high amounts of naphthalene. It is not clear whether this also develops in people. Rats and mice that breathed naphthalene vapors daily for a lifetime developed irritation and inflammation of their nose and lungs. It is unclear if naphthalene



ToxFAQs™ Internet address is <http://www.atsdr.cdc.gov/toxfaq.html>

causes reproductive effects in animals; most evidence says it does not.

There are no studies of humans exposed to 1-methylnaphthalene or 2-methylnaphthalene.

Mice fed food containing 1-methylnaphthalene and 2-methylnaphthalene for most of their lives had part of their lungs filled with an abnormal material.

### **How likely are naphthalene, 1-methylnaphthalene, or 2-methylnaphthalene to cause cancer?**

There is no direct evidence in humans that naphthalene, 1-methylnaphthalene, or 2-methylnaphthalene cause cancer.

However, cancer from naphthalene exposure has been seen in animal studies. Some female mice that breathed naphthalene vapors daily for a lifetime developed lung tumors. Some male and female rats exposed to naphthalene in a similar manner also developed nose tumors.

Based on the results from animal studies, the Department of Health and Human Services (DHHS) concluded that naphthalene is reasonably anticipated to be a human carcinogen. The International Agency for Research on Cancer (IARC) concluded that naphthalene is possibly carcinogenic to humans. The EPA determined that naphthalene is a possible human carcinogen (Group C) and that the data are inadequate to assess the human carcinogenic potential of 2-methylnaphthalene.

### **How can naphthalene, 1-methylnaphthalene, or 2-methylnaphthalene affect children?**

Hospitals have reported many cases of hemolytic anemia in children, including newborns and infants, who either ate naphthalene mothballs or deodorants cakes or who were in close contact with clothing or blankets stored in naphthalene mothballs. Naphthalene can move from a pregnant woman's blood to the unborn baby's blood. Naphthalene has been detected in some samples of breast milk from the general U.S. population, but not at levels that are expected to be of concern.

There is no information on whether naphthalene has affected development in humans. No developmental abnormalities were observed in the offspring from rats, mice, and rabbits fed naphthalene during pregnancy.

We do not have any information on possible health effects of 1-methylnaphthalene or 2-methylnaphthalene on children.

### **How can families reduce the risks of exposure to naphthalene, 1-methylnaphthalene, and 2-methylnaphthalene?**

Families can reduce the risks of exposure to naphthalene, 1-methylnaphthalene, and 2-methylnaphthalene by avoiding smoking tobacco, generating smoke during cooking, or using

fireplaces or heating appliances in their homes.

If families use naphthalene-containing moth repellents, the material should be enclosed in containers that prevent vapors from escaping, and kept out of the reach from children.

Blankets and clothing stored with naphthalene moth repellents should be aired outdoors to remove naphthalene odors and washed before they are used.

Families should inform themselves of the contents of air deodorizers that are used in their homes and refrain from using deodorizers with naphthalene.

### **Is there a medical test to determine whether I've been exposed to naphthalene, 1-methylnaphthalene, and 2-methylnaphthalene?**

Tests are available that measure levels of these chemicals and their breakdown products in samples of urine, feces, blood, maternal milk, or body fat. These tests are not routinely available in a doctor's office because they require special equipment, but samples can be sent to special testing laboratories. These tests cannot determine exactly how much naphthalene, 1-methylnaphthalene, or 2-methylnaphthalene you were exposed to or predict whether harmful effects will occur. If the samples are collected within a day or two of exposure, then the tests can show if you were exposed to a large or small amount of naphthalene, 1-methylnaphthalene, or 2-methylnaphthalene.

### **Has the federal government made recommendations to protect human health?**

The EPA recommends that children not drink water with over 0.5 parts per million (0.5 ppm) naphthalene for more than 10 days or over 0.4 ppm for any longer than 7 years. Adults should not drink water with more than 1 ppm for more than 7 years. For water consumed over a lifetime (70 years), the EPA suggests that it contain no more than 0.1 ppm naphthalene.

The Occupational Safety and Health Administration (OSHA) set a limit of 10 ppm for the level of naphthalene in workplace air during an 8-hour workday, 40-hour workweek. The National Institute for Occupational Safety and Health (NIOSH) considers more than 500 ppm of naphthalene in air to be immediately dangerous to life or health. This is the exposure level of a chemical that is likely to impair a worker's ability to leave a contaminate area and therefore, results in permanent health problems or death.

### **References**

Agency for Toxic Substances and Disease Registry (ATSDR). 2005. Toxicological Profile for Naphthalene, 1-Methylnaphthalene, and 2-Methylnaphthalene (Update). Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

**Where can I get more information?** For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>. ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.



This fact sheet answers the most frequently asked health questions (FAQs) about chromium. For more information, call the CDC Information Center at 1-800-232-4636. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It is important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

**HIGHLIGHTS:** Exposure to chromium occurs from ingesting contaminated food or drinking water or breathing contaminated workplace air. Chromium(VI) at high levels can damage the nose and cause cancer. Ingesting high levels of chromium(VI) may result in anemia or damage to the stomach or intestines. Chromium(III) is an essential nutrient. Chromium has been found in at least 1,127 of the 1,669 National Priorities List (NPL) sites identified by the Environmental Protection Agency (EPA).

## What is chromium?

Chromium is a naturally occurring element found in rocks, animals, plants, and soil. It can exist in several different forms. Depending on the form it takes, it can be a liquid, solid, or gas. The most common forms are chromium(0), chromium(III), and chromium(VI). No taste or odor is associated with chromium compounds.

The metal chromium, which is the chromium(0) form, is used for making steel. Chromium(VI) and chromium(III) are used for chrome plating, dyes and pigments, leather tanning, and wood preserving.

## What happens to chromium when it enters the environment?

- Chromium can be found in air, soil, and water after release from the manufacture, use, and disposal of chromium-based products, and during the manufacturing process.
- Chromium does not usually remain in the atmosphere, but is deposited into the soil and water.
- Chromium can easily change from one form to another in water and soil, depending on the conditions present.
- Fish do not accumulate much chromium in their bodies from water.

## How might I be exposed to chromium?

- Eating food containing chromium(III).
- Breathing contaminated workplace air or skin contact during use in the workplace.

- Drinking contaminated well water.
- Living near uncontrolled hazardous waste sites containing chromium or industries that use chromium.

## How can chromium affect my health?

Chromium(III) is an essential nutrient that helps the body use sugar, protein, and fat.

Breathing high levels of chromium(VI) can cause irritation to the lining of the nose, nose ulcers, runny nose, and breathing problems, such as asthma, cough, shortness of breath, or wheezing. The concentrations of chromium in air that can cause these effects may be different for different types of chromium compounds, with effects occurring at much lower concentrations for chromium(VI) compared to chromium(III).

The main health problems seen in animals following ingestion of chromium(VI) compounds are irritation and ulcers in the stomach and small intestine and anemia. Chromium(III) compounds are much less toxic and do not appear to cause these problems.

Sperm damage and damage to the male reproductive system have also been seen in laboratory animals exposed to chromium(VI).

Skin contact with certain chromium(VI) compounds can cause skin ulcers. Some people are extremely sensitive to chromium(VI) or chromium(III). Allergic reactions consisting of severe redness and swelling of the skin have been noted.

# Chromium

CAS # 7440-47-3

## How likely is chromium to cause cancer?

The Department of Health and Human Services (DHHS), the International Agency for Research on Cancer (IARC), and the EPA have determined that chromium(VI) compounds are known human carcinogens.

In workers, inhalation of chromium(VI) has been shown to cause lung cancer. Chromium(VI) also causes lung cancer in animals. An increase in stomach tumors was observed in humans and animals exposed to chromium(VI) in drinking water.

## How can chromium affect children?

It is likely that health effects seen in children exposed to high amounts of chromium will be similar to the effects seen in adults.

We do not know if exposure to chromium will result in birth defects or other developmental effects in people. Some developmental effects have been observed in animals exposed to chromium(VI).

## How can families reduce the risk of exposure to chromium?

- Children should avoid playing in soils near uncontrolled hazardous waste sites where chromium may have been discarded.
- Chromium is a component of tobacco smoke. Avoid smoking in enclosed spaces like inside the home or car in order to limit exposure to children and other family members.
- Although chromium(III) is an essential nutrient, you should avoid excessive use of dietary supplements containing chromium.

## Is there a medical test to determine whether I've been exposed to chromium?

Since chromium(III) is an essential element and naturally occurs in food, there will always be some level of chromium in your body. Chromium can be measured in hair, urine, and blood.

Higher than normal levels of chromium in blood or urine may indicate that a person has been exposed to chromium. However, increases in blood and urine chromium levels cannot be used to predict the kind of health effects that might develop from that exposure.

## Has the federal government made recommendations to protect human health?

The EPA has established a maximum contaminant level of 0.1 mg/L for total chromium in drinking water.

The FDA has determined that the chromium concentration in bottled drinking water should not exceed 0.1 mg/L.

The Occupational Health and Safety Administration (OSHA) has limited workers' exposure to an average of 0.005 mg/m<sup>3</sup> chromium(VI), 0.5 mg/m<sup>3</sup> chromium(III), and 1.0 mg/m<sup>3</sup> chromium(0) for an 8-hour workday, 40-hour workweek.

## References

Agency for Toxic Substances and Disease Registry (ATSDR). 2012. Toxicological Profile for Chromium. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

## Where can I get more information?

For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology and Human Health Sciences, 1600 Clifton Road NE, Mailstop F-57, Atlanta, GA 30329-4027.

Phone: 1-800-232-4636

ToxFAQs™ Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaqs/index.asp>.

ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.

This fact sheet answers the most frequently asked health questions (FAQs) about lead. For more information, call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

**HIGHLIGHTS:** Exposure to lead can happen from breathing workplace air or dust, eating contaminated foods, or drinking contaminated water. Children can be exposed from eating lead-based paint chips or playing in contaminated soil. Lead can damage the nervous system, kidneys, and reproductive system. Lead has been found in at least 1,026 of 1,467 National Priorities List sites identified by the Environmental Protection Agency (EPA).

## What is lead?

(Pronounced lĕd)

Lead is a naturally occurring bluish-gray metal found in small amounts in the earth's crust. Lead can be found in all parts of our environment. Much of it comes from human activities including burning fossil fuels, mining, and manufacturing.

Lead has many different uses. It is used in the production of batteries, ammunition, metal products (solder and pipes), and devices to shield X-rays.

Because of health concerns, lead from gasoline, paints and ceramic products, caulking, and pipe solder has been dramatically reduced in recent years.

## What happens to lead when it enters the environment?

- Lead itself does not break down, but lead compounds are changed by sunlight, air, and water.
- When lead is released to the air, it may travel long distances before settling to the ground.
- Once lead falls onto soil, it usually sticks to soil particles.
- Movement of lead from soil into groundwater will depend on the type of lead compound and the characteristics of the soil.
- Much of the lead in inner-city soils comes from old houses painted with lead-based paint.

## How might I be exposed to lead?

- Eating food or drinking water that contains lead.
- Spending time in areas where lead-based paints have been used and are deteriorating.
- Working in a job where lead is used.
- Using health-care products or folk remedies that contain lead.
- Engaging in certain hobbies in which lead is used (for example, stained glass).

## How can lead affect my health?

Lead can affect almost every organ and system in your body. The most sensitive is the central nervous system, particularly in children. Lead also damages kidneys and the reproductive system. The effects are the same whether it is breathed or swallowed.

At high levels, lead may decrease reaction time, cause weakness in fingers, wrists, or ankles, and possibly affect the memory. Lead may cause anemia, a disorder of the blood. It can also damage the male reproductive system. The connection between these effects and exposure to low levels of lead is uncertain.

## How likely is lead to cause cancer?

The Department of Health and Human Services has determined that lead acetate and lead phosphate may reasonably

ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html>

be anticipated to be carcinogens based on studies in animals. There is inadequate evidence to clearly determine lead's carcinogenicity in people.

### How can lead affect children?

Small children can be exposed by eating lead-based paint chips, chewing on objects painted with lead-based paint, or swallowing house dust or soil that contains lead.

Children are more vulnerable to lead poisoning than adults. A child who swallows large amounts of lead may develop blood anemia, severe stomachache, muscle weakness, and brain damage. A large amount of lead might get into a child's body if the child ate small pieces of old paint that contained large amounts of lead. If a child swallows smaller amounts of lead, much less severe effects on blood and brain function may occur. Even at much lower levels of exposure, lead can affect a child's mental and physical growth.

Exposure to lead is more dangerous for young and unborn children. Unborn children can be exposed to lead through their mothers. Harmful effects include premature births, smaller babies, decreased mental ability in the infant, learning difficulties, and reduced growth in young children. These effects are more common if the mother or baby was exposed to high levels of lead.

### How can families reduce the risk of exposure to lead?

Avoid exposure to sources of lead. Do not allow children to chew or mouth painted surfaces that may have been painted with lead-based paint (homes built before 1978). Run your water for 15 to 30 seconds before drinking or cooking with it. This will get rid of lead that may have leached out of pipes. Some types of paints and pigments that are used as make-up or hair coloring contain lead. Keep these kinds of products away from children. Wash children's hands and faces often to remove lead dusts and soil, and regularly clean the house of dust and tracked in soil.

### Is there a medical test to show whether I've been exposed to lead?

A blood test is available to measure the amount of lead in your blood and to estimate the amount of your exposure to lead. Blood tests are commonly used to screen children for lead poisoning. Lead in teeth and bones can be measured with X-rays, but this test is not as readily available. Medical treatment may be necessary in children if the lead concentration in blood is higher than 45 micrograms per deciliter (45 µg/dL).

### Has the federal government made recommendations to protect human health?

The Centers for Disease Control and Prevention (CDC) recommends that children ages 1 and 2 be screened for lead poisoning. Children who are 3 to 6 years old should be tested for lead if they have never been tested for lead before and if they receive services from public assistance programs; if they live in or regularly visit a building built before 1950; if they live in or visit a home built before 1978 that is being remodeled; or if they have a brother, sister, or playmate who has had lead poisoning. CDC considers children to have an elevated level of lead if the amount in the blood is 10 µg/dL.

The EPA requires lead in air not to exceed 1.5 micrograms per cubic meter (1.5 µg/m<sup>3</sup>) averaged over 3 months. EPA limits lead in drinking water to 15 µg per liter.

The Occupational Health and Safety Administration (OSHA) develops regulations for workers exposed to lead. The Clean Air Act Amendments of 1990 banned the sale of leaded gasoline. The Federal Hazardous Substance Act bans children's products that contain hazardous amounts of lead.

### References

Agency for Toxic Substances and Disease Registry (ATSDR). 1999. Toxicological profile for lead. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

**Where can I get more information?** For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology, 1600 Clifton Road NE, Mailstop F-32, Atlanta, GA 30333. Phone: 1-888-422-8737, FAX: 770-488-4178. ToxFAQs Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaq.html> ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.





This fact sheet answers the most frequently asked health questions (FAQs) about mercury. For more information, call the CDC Information Center at 1-800-232-4636. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It's important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

**HIGHLIGHTS:** Exposure to mercury occurs from breathing contaminated air, ingesting contaminated water and food, and having dental and medical treatments. Mercury, at high levels, may damage the brain, kidneys, and developing fetus. This chemical has been found in at least 714 of 1,467 National Priorities List (NPL) sites identified by the Environmental Protection Agency (EPA).

## What is mercury?

Mercury is a naturally occurring metal which has several forms. The metallic mercury is a shiny, silver-white, odorless liquid. If heated, it is a colorless, odorless gas.

Mercury combines with other elements, such as chlorine, sulfur, or oxygen, to form inorganic mercury compounds or "salts," which are usually white powders or crystals. Mercury also combines with carbon to make organic mercury compounds. The most common one, methylmercury, is produced mainly by microscopic organisms in the water and soil. More mercury in the environment can increase the amounts of methylmercury that these small organisms make.

Metallic mercury is used to produce chlorine gas and caustic soda, and is also used in thermometers, some dental fillings, and batteries. Mercury salts are sometimes used in skin lightening creams and as antiseptic creams and ointments.

## What happens to mercury when it enters the environment?

- Inorganic mercury (metallic mercury and inorganic mercury compounds) enters the air from mining ore deposits, burning coal and waste, and from manufacturing plants.
- It enters the water or soil from natural deposits, disposal of wastes, and volcanic activity.
- Methylmercury may be formed in water and soil by small organisms called bacteria.

- Methylmercury builds up in the tissues of fish. Larger and older fish tend to have the highest levels of mercury.

## How might I be exposed to mercury?

- Eating fish or shellfish contaminated with methylmercury.
- Breathing vapors in air from spills, incinerators, and industries that burn mercury-containing fossil fuels.
- Release of mercury from dental work and medical treatments.
- Breathing contaminated workplace air or skin contact during use in the workplace.
- Practicing rituals that include mercury.

## How can mercury affect my health?

The nervous system is very sensitive to all forms of mercury. Methylmercury and metallic mercury vapors are more harmful than other forms, because more mercury in these forms reaches the brain. Exposure to high levels of metallic, inorganic, or organic mercury can permanently damage the brain, kidneys, and developing fetus. Effects on brain functioning may result in irritability, shyness, tremors, changes in vision or hearing, and memory problems.

Short-term exposure to high levels of metallic mercury vapors may cause effects including lung damage, nausea, vomiting, diarrhea, increases in blood pressure or heart rate, skin rashes, and eye irritation.

# Mercury

CAS # 7439-97-6

## How likely is mercury to cause cancer?

There are inadequate human cancer data available for all forms of mercury. Mercuric chloride has caused increases in several types of tumors in rats and mice, and methylmercury has caused kidney tumors in male mice. The EPA has determined that mercuric chloride and methylmercury are possible human carcinogens.

## How can mercury affect children?

Very young children are more sensitive to mercury than adults. Mercury in the mother's body passes to the fetus and may accumulate there, possibly causing damage to the developing nervous system. It can also pass to a nursing infant through breast milk. However, the benefits of breast feeding may be greater than the possible adverse effects of mercury in breast milk.

Mercury's harmful effects that may affect the fetus include brain damage, mental retardation, incoordination, blindness, seizures, and inability to speak. Children poisoned by mercury may develop problems of their nervous and digestive systems, and kidney damage.

## How can families reduce the risk of exposure to mercury?

Carefully handle and dispose of products that contain mercury, such as thermometers or fluorescent light bulbs. Do not vacuum up spilled mercury, because it will vaporize and increase exposure. If a large amount of mercury has been spilled, contact your health department. Teach children not to play with shiny, silver liquids.

Properly dispose of older medicines that contain mercury. Keep all mercury-containing medicines away from children.

Pregnant women and children should keep away from rooms where liquid mercury has been used.

Learn about wildlife and fish advisories in your area from your public health or natural resources department.

## Is there a medical test to determine whether I've been exposed to mercury?

Tests are available to measure mercury levels in the body. Blood or urine samples are used to test for exposure to metallic mercury and to inorganic forms of mercury. Mercury in whole blood or in scalp hair is measured to determine exposure to methylmercury. Your doctor can take samples and send them to a testing laboratory.

## Has the federal government made recommendations to protect human health?

The EPA has set a limit of 2 parts of mercury per billion parts of drinking water (2 ppb).

The Food and Drug Administration (FDA) has set a maximum permissible level of 1 part of methylmercury in a million parts of seafood (1 ppm).

The Occupational Safety and Health Administration (OSHA) has set limits of 0.1 milligram of organic mercury per cubic meter of workplace air (0.1 mg/m<sup>3</sup>) and 0.05 mg/m<sup>3</sup> of metallic mercury vapor for 8-hour shifts and 40-hour work weeks.

## References

Agency for Toxic Substances and Disease Registry (ATSDR). 1999. Toxicological profile for mercury. Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

## Where can I get more information?

For more information, contact the Agency for Toxic Substances and Disease Registry, Division of Toxicology and Human Health Sciences, 1600 Clifton Road NE, Mailstop F-57, Atlanta, GA 30329-4027.

Phone: 1-800-232-4636.

ToxFAQs™ Internet address via WWW is <http://www.atsdr.cdc.gov/toxfaqs/index.asp>.

ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.

**ATTACHMENT B**  
**REPORT FORMS**



## WEEKLY SAFETY REPORT FORM

Week Ending: \_\_\_\_\_ Project Name/Number: \_\_\_\_\_

Report Date: \_\_\_\_\_ Project Manager Name: \_\_\_\_\_

Summary of any violations of procedures occurring that week:

---

---

---

Summary of any job related injuries, illnesses, or near misses that week:

---

---

---

---

Summary of air monitoring data that week (include and sample analyses, action levels exceeded, and actions taken):

---

---

---

Comments:

---

---

---

Name: \_\_\_\_\_ Company: \_\_\_\_\_

Signature: \_\_\_\_\_ Title: \_\_\_\_\_

## INCIDENT REPORT FORM

Date of Report: \_\_\_\_\_

Injured: \_\_\_\_\_

Employer: \_\_\_\_\_

Site: \_\_\_\_\_ Site Location: \_\_\_\_\_

Report Prepared By: \_\_\_\_\_  
Signature Title

**ACCIDENT/INCIDENT CATEGORY** (check all that applies)

<input type="checkbox"/> Injury	<input type="checkbox"/> Illness	<input type="checkbox"/> Near Miss
<input type="checkbox"/> Property Damage	<input type="checkbox"/> Fire	<input type="checkbox"/> Chemical Exposure
<input type="checkbox"/> On-site Equipment	<input type="checkbox"/> Motor Vehicle	<input type="checkbox"/> Electrical
<input type="checkbox"/> Mechanical	<input type="checkbox"/> Spill	<input type="checkbox"/> Other

**DATE AND TIME OF ACCIDENT/INCIDENT:** Narrative report of Accident/Incident: Identify: 1) actions leading to or contributing to the accident/incident; 2) the accident/incident occurrence; and 3) actions following the accident/incident.

---

---

---

---

---

---

---

---

---

---

**WITNESS TO ACCIDENT/INCIDENT:**

Name: _____	Company: _____
Address: _____	Address: _____
Phone No.: _____	Phone No.: _____
Name: _____	Company: _____
Address: _____	Address: _____
Phone No.: _____	Phone No.: _____

**INJURED - ILL:**

Name: \_\_\_\_\_ SSN: \_\_\_\_\_

Address: \_\_\_\_\_ Age: \_\_\_\_\_

Length of Service: \_\_\_\_\_ Time on Present Job: \_\_\_\_\_

Time/Classification: \_\_\_\_\_

**SEVERITY OF INJURY OR ILLNESS:**

\_\_\_ Disabling                      \_\_\_ Non-disabling                      \_\_\_ Fatality

\_\_\_ Medical Treatment                      \_\_\_ First Aid Only

**ESTIMATED NUMBER OF DAYS AWAY FROM JOB:** \_\_\_\_\_

**NATURE OF INJURY OR ILLNESS:** \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_

**CLASSIFICATION OF INJURY:**

- |                    |                       |                            |
|--------------------|-----------------------|----------------------------|
| ___ Abrasions      | _____ Dislocations    | _____ Punctures            |
| ___ Bites          | _____ Faint/Dizziness | _____ Radiation Burns      |
| ___ Blisters       | _____ Fractures       | _____ Respiratory Allergy  |
| ___ Bruises        | _____ Frostbite       | _____ Sprains              |
| ___ Chemical Burns | _____ Heat Burns      | _____ Toxic Resp. Exposure |
| ___ Cold Exposure  | _____ Heat Exhaustion | _____ Toxic Ingestion      |
| ___ Concussion     | _____ Heat Stroke     | _____ Dermal Allergy       |
| ___ Lacerations    |                       |                            |

Part of Body Affected: \_\_\_\_\_

Degree of Disability: \_\_\_\_\_

Date Medical Care was Received: \_\_\_\_\_

Where Medical Care was Received: \_\_\_\_\_

Address (if off-site): \_\_\_\_\_

(If two or more injuries, record on separate sheets)

**PROPERTY DAMAGE:**

Description of Damage: \_\_\_\_\_

Cost of Damage:                   \$ \_\_\_\_\_

**ACCIDENT/INCIDENT LOCATION:** \_\_\_\_\_

**ACCIDENT/INCIDENT ANALYSIS:** Causative agent most directly related to accident/incident  
(Object, substance, material, machinery, equipment, conditions)

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Was weather a factor?: \_\_\_\_\_

Unsafe mechanical/physical/environmental condition at time of accident/incident (Be specific):

\_\_\_\_\_  
\_\_\_\_\_

Personal factors (Attitude, knowledge or skill, reaction time, fatigue):

\_\_\_\_\_

**ON-SITE ACCIDENTS/INCIDENTS:**

Level of personal protection equipment required in Site Safety Plan:

\_\_\_\_\_

Modifications:

Was injured using required equipment?:

\_\_\_\_\_

If not, how did actual equipment use differ from plan?:

\_\_\_\_\_  
\_\_\_\_\_

**ACTION TAKEN TO PREVENT RECURRENCE:** (Be specific. What has or will be done? When will it be done? Who is the responsible party to insure that the correction is made?)

---

---

---

---

**ACCIDENT/INCIDENT REPORT REVIEWED BY:**

\_\_\_\_\_  
SSO Name Printed

\_\_\_\_\_  
SSO Signature

**OTHERS PARTICIPATING IN INVESTIGATION:**

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Title

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Title

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Title

**ACCIDENT/INCIDENT FOLLOW-UP:**    Date: \_\_\_\_\_

Outcome of accident/incident: \_\_\_\_\_

---

---

---

Physician's recommendations: \_\_\_\_\_

---

---

---

Date injured returned to work: \_\_\_\_\_

Follow-up performed by: \_\_\_\_\_

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Title

**ATTACH ANY ADDITIONAL INFORMATION TO THIS FORM**

**ATTACHMENT C**  
**EMERGENCY HAND SIGNALS**

## EMERGENCY SIGNALS

In most cases, field personnel will carry portable radios for communication. If this is the case, a transmission that indicates an emergency will take priority over all other transmissions. All other site radios will yield the frequency to the emergency transmissions.

Where radio communications is not available, the following air-horn and/or hand signals will be used:

### EMERGENCY HAND SIGNALS

**OUT OF AIR, CAN'T BREATHE!**



**Hand gripping throat**

**LEAVE AREA IMMEDIATELY,  
NO DEBATE!**


(No Picture) Grip partner's wrist or place both hands around waist

**NEED ASSISTANCE!**




**Hands on top of head**

**OKAY! – I'M ALL RIGHT!  
- I UNDERSTAND!**



**Thumbs up**

**NO! - NEGATIVE!**



**Thumbs down**

**APPENDIX C**  
**PREVIOUS INVESTIGATION REPORTS**