SESI
CONSULTING ENGINEERS

REMEDIAL ACTION WORKPLAN

For:

St. Clair Hotel Dry Cleaners Site
34, 36, and 38 Main Street
Yonkers, Westchester County, New York 10701
BCP # C360220

Prepared for:

St. Clair Development, LLC,
c/o MacQuesten Companies
438 Fifth Avenue, Suite 100
Pelham, New York 10803

Prepared by:

SESI CONSULTING ENGINEERS, D.P.C.
959 Route 46E, Floor 3, Suite 300
Parsippany, New Jersey 07054

SESI PROJECT NO. 11846

FEBRUARY 2023/REVISED JUNE 2023

CERTIFICATIONS

I, Fuad Dahan, certify that I am currently a NYS registered professional engineer as defined in 6 NYCRR Part 375 and that this Remedial Action Work Plan was prepared in accordance with all applicable statutes and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10)



Fuad Dahan	6/13/2023	
NYS Professional Engineer (# 090531)	Date	Signature

It is a violation of Article 130 of New York State Education Law for any person to alter this document in any way without the express written verification of adoption by any New York State licensed engineer in accordance with Section 7209(2), Article 130, New York State Education.

Table of Contents

LIST OF ACRONYMS ..... **i**

EXCUTIVE SUMMARY **1**

1.0 INTRODUCTION **6**

1.1 SITE LOCATION AND DESCRIPTION 6

1.2 PROPOSED REDEVELOPMENT PLAN 7

1.3 DESCRIPTION OF SURROUNDING PROPERTY 7

2.0 DESCRIPTION OF REMEDIAL INVESTIGATION FINDINGS **8**

2.1 SOIL REMEDIAL INVESTIGATION FINDINGS 8

2.2 GROUNDWATER REMEDIAL INVESTIGATION RESULTS 15

2.3 SOIL VAPOR REMEDIAL INVESTIGATION RESULTS 17

2.4 GEOLOGICAL CONDITIONS 19

2.5 CONCEPTUAL SITE MODEL 20

2.6 IDENTIFICATION OF STANDARDS, CRITERIA AND GUIDANCE 20

2.7 ENVIRONMENTAL AND PUBLIC HEALTH ASSESSMENTS 22

2.7.1 QUALITATIVE HUMAN HEALTH EXPOSURE ASSESSMENT 22

2.7.2 FISH AND WILDLIFE IMPACT ANALYSIS 24

2.8 REMEDIAL ACTION OBJECTIVES 25

2.8.1 SOIL 25

2.8.2 GROUNDWATER 25

2.8.3 SOIL VAPOR RAOs 25

3.0 DESCRIPTION OF REMEDIAL ACTION PLAN **26**

3.1 EVALUATION OF REMEDIAL ALTERNATIVES 26

3.2 SELECTION OF THE PREFERRED METHOD 32

3.3 SUMMARY OF SELECTED REMEDIAL ACTIONS 33

3.4 PRE-DESIGN INVESTIGATION 34

4.0 REMEDIAL ACTION PROGRAM **36**

4.1 GOVERNING DOCUMENTS 36

4.1.1 SITE-SPECIFIC HEALTH AND SAFETY PLAN 36

4.1.2 QUALITY ASSURANCE PROJECT PLAN (QAPP) 36

4.1.3 SOIL/MATERIALS MANAGEMENT PLAN (SoMP) 36

4.1.4 STORM WATER POLLUTION PREVENTION PLAN (SWPPP) 36

4.1.5 COMMUNITY AIR MONITORING PLAN 37

4.2 GENERAL REMEDIAL CONSTRUCTION INFORMATION 37

4.2.1 PROJECT ORGANIZATION 37
4.2.2 REMEDIAL ENGINEER 37
4.2.3 REMEDIAL ACTION SCHEDULE 38
4.2.4 WORK HOURS 38
4.2.5 SITE SECURITY 38
4.2.6 PRE-CONSTRUCTION MEETING WITH NYSDEC 38
4.2.7 EMERGENCY CONTACT INFORMATION 39
4.3 SITE PREPARATION 39
4.3.1 MOBILIZATION 39
4.3.2 EROSION AND SEDIMENTATION CONTROLS 39
4.3.3 UTILITY MARKER AND EASEMENTS LAYOUT 40
4.3.4 SHEETING AND SHORING 40
4.3.5 DEWATERING 40
4.3.6 EQUIPMENT AND MATERIAL STAGING 41
4.3.7 DECONTAMINATION AREA 41
4.3.8 SITE FENCING 41
4.3.9 DEMOBILIZATION 41
4.4 REPORTING 41
4.4.1 WEEKLY REPORTS 41
4.4.2 OTHER REPORTING 42
4.4.3 COMPLAINT MANAGEMENT PLAN 42
4.4.4 DEVIATIONS FROM THE REMEDIAL ACTION WORK PLAN 43
5.0 REMEDIAL ACTION 44
5.1 CLEANUP OBJECTIVES 44
5.2 REMEDIAL PERFORMANCE EVALUATION 44
5.2.1 END-POINT SAMPLING FREQUENCY 44
5.2.2 GROUNDWATER SAMPLING 45
5.2.3 VI MITIGATION AND EVALUATION SAMPLING 45
5.3 METHODOLOGY 46
5.4 REPORTING OF RESULTS 46
5.5 QA/QC 46
5.6 DATA USABILITY SUMMARY REPORT (DUSR) 46
5.7 REPORTING OF END-POINT DATA IN FER 46
5.8 ESTIMATED MATERIAL REMOVAL QUANTITIES 47

5.9 SOIL/MATERIALS MANAGEMENT PLAN 47
5.9.1 SOIL SCREENING METHODS 48
5.9.2 STOCKPILE METHODS FOR CONTAMINATED SOILS 48
5.9.3 MATERIALS EXCAVATION AND LOAD-OUT 48
5.9.4 MATERIALS TRANSPORT OFF-SITE 49
5.9.5 MATERIALS DISPOSAL OFF-SITE 50
5.9.6 FLUIDS MANAGEMENT 52
5.9.7 DEMARCATION 52
5.9.8 BACKFILL FROM OFF-SITE SOURCES 53
5.9.9 CONTINGENCY PLAN 54
5.9.10 COMMUNITY AIR MONITORING PLAN 54
5.9.11 ODOR, DUST, AND NUISANCE CONTROL PLAN 54
6.0 ENGINEERING CONTROLS 57
6.1 GROUNDWATER MONITORING SYSTEM 57
6.1.1 CRITERIA FOR COMPLETION OF REMEDIATION/TERMINATION OF GROUNDWATER MONITORING 57
6.2 SSDS PIPING AND VAPOR BARRIER 57
7.0 INSTITUTIONAL CONTROLS 58
7.1 ENVIRONMENTAL EASEMENT 58
7.2 SITE MANAGEMENT PLAN 58
8.0 FINAL ENGINEERING REPORT 60
8.1 CERTIFICATIONS 61

TABLES

TABLE 1.1 SUMMARY OF SURROUNDING PROPERTIES
TABLE 2.1 SUMMARY OF SVOC EXCEEDANCES IN SOIL
TABLE 2.2 SUMMARY OF PESTICIDES AND METALS EXCEEDANCES IN SOIL
TABLE 2.3 SUMMARY OF EMERGING CONTAMINANT EXCEEDANCES IN SOIL
TABLE 2.4 SUMMARY OF GROUNDWATER EXCEEDANCES IN SHALLOW GROUNDWATER
TABLE 2.5 SUMMARY OF GROUNDWATER EXCEEDANCES IN DEEP GROUNDWATER
TABLE 2.6 SUMMARY OF SOIL VAPOR DETECTIONS
TABLE 4.1 PROJECT PERSONNEL

TABLE 4.2 REMEDIAL ACTION SCHEDULE
TABLE 4.3 EMERGENCY CONTACT NUMBER

FIGURES

FIGURE 1.1 SITE LOCATION MAP (USGS TOPOGRAPHIC MAP)
FIGURE 1.2 SITE PLAN
FIGURE 2.1 SOIL BORING LOCATIONS AND CONCENTRATIONS
FIGURE 2.2 GROUNDWATER SAMPLE LOCATIONS AND CONCENTRATIONS
FIGURE 2.3 SOIL VAPOR SAMPLE LOCATIONS AND CONCENTRATIONS
FIGURE 3.1 PRE-DESIGN INVESTIGATION GROUNDWATER SAMPLING PLAN
FIGURE 5.1 PROPOSED EXCAVATION PLAN

APPENDICES

APPENDIX A HEALTH AND SAFETY PLAN
APPENDIX B QUALITY ASSURANCE PROJECT PLAN
APPENDIX C COMMUNITY AIR MONITORING PLAN
APPENDIX D NYSDEC SOIL CLEANUP OBJECTIVES

LIST OF ACRONYMS

Acronym	Definition
ALPHA	Alpha Analytical Laboratories
AWQS	Ambient Water Quality Standards
BCA	Brownfield Cleanup Agreement
BCP	Brownfield Cleanup Program
C/D	Construction and Demolition
CAMP	Community Air Monitoring Plan
CPP	Citizens Participation Plan
CVOC	Chlorinated Volatile Organic Compound
cy	Cubic yard
DER	Division of Environmental Remediation
DER-10	NYSDEC Technical Guidance for Site Investigation & Remediation
ECs	Engineering Controls
EE	Environmental Easement
ESA	Environmental Site Assessment
FER	Final Engineering Report
ft-bgs	feet below ground surface
HASP	Health and Safety Plan
ICs	Institutional Controls
MCL	Maximum Contaminant Level
MNA	Monitored Natural Attenuation
MW	Monitoring Well
NYSDEC	New York State Department of Environmental Conservation
NYSDOH	New York State Department of Health
PCB	Polychlorinated Biphenyls
PCE	Tetrachloroethene
PFAS	Per and Polyfluoroalkyl Substances
PFOA	Perfluorooctanoic Acid
PFOS	Perfluorooctanesulfonic Acid
PGWSCOs	Protection of Groundwater Soil Cleanup Objectives
PHC	Petroleum Hydrocarbon
PID	Photoionization Detector
POTW	City of Yonkers Public Owned Treatment Works

Acronym	Definition
ppt	parts per trillion
PRB	Permeable Reactive Barrier
PRR	Periodic Review Report
QAPP	Quality Assurance Project Plan
QA/QC	Quality Assurance/Quality Control
RA	Remedial Action
RAO	Remedial Action Objective
RAWP	Remedial Action Work Plan
RI	Remedial Investigation
RIR	Remedial Investigation Report
RIWP	Remedial Investigation Work Plan
RRSCO	Restricted Residential Soil Cleanup Objectives
SCG	Standards, Criteria, and Guidance
SCO	Soil Cleanup Objectives
SESI	SESI Consulting Engineers, DPC
SMP	Site Management Plan
SOE	Support of Excavation
SoMP	Soil/Materials Management Plan
SSDS	Sub-slab Depressurization System
SWPPP	Stormwater Pollution Prevention Plan
SVOCs	Semi-Volatile Organic Compounds
TAL	Target Analyte List
TCE	Trichloroethene
TCL	Target Compound List
TOGS	Technical and Operations Guidance Series
USCO	Unrestricted Use Soil Cleanup Objectives
VI	Vapor Intrusion
VOCs	Volatile Organic Compounds
YCDA	Yonkers Community Development Agency
ZVI	Zero-Valent Iron

EXCUTIVE SUMMARY

Site Description/Physical Setting/Site History

The St. Clair Hotel Dry Cleaners Site (herein referred to as the "Site") was accepted into the New York Brownfield Cleanup Program (BCP) by the New York State Department of Environmental Conservation (NYSDEC) on February 4, 2022, and is known as the St. Clair Hotel Dry Cleaners Site (BCP Site No. C360220). The original BCP Site was approximately 0.24 acres in size and is located at 32, 36, and 38 Main Street and 1 and 3 Riverdale Avenue, Westchester County, Yonkers, New York. On October 12, 2022, a BCA Amendment application was submitted to inform the NYSDEC that:

- Volunteer, St. Clair Development, LLC has purchased Lots 18 (38 Main Street) and 19 (36 Main Street) of the BCP Site;
- Lots 20 (32 Main Street), 22 (1 Riverdale Avenue) and 23 (3 Riverdale Avenue) were merged into one (1) lot, the new Lot 20 (34 Main Street);
- A portion of the new Lot 20 was then subdivided to create a new Lot 22. The new Lot 22, which is 0.019 acres, is being removed from the BCP Site due to its ownership being retained by the Yonkers Community Development Agency ("YCDA") and;
- The Volunteer is under contract with YCDA to purchase the new Lot 20 and plans to purchase the lot by the end of the year.

Therefore, the reduced BCP Site acreage is 0.214 acres. The Site is located in a commercial area and is bounded to the north by Main Street, to the west by a one-story commercial building, to the south by commercial buildings, and to the east by Riverdale Avenue.

Historic operations at the Site include several businesses and storefronts from 1886 to 1942 including a furniture store, salon and billiards hall. Most notably, a hotel was listed on the Site from 1942. Hotels are historically known to have provided in-house dry-cleaning services, which would have used compounds that may have been released and have the potential for impacting the Site soil and groundwater. Two (2) underground ovens were identified on the Site from 1898 to 1956 but no additional details regarding the ovens' uses were available. Paint-Dressmaking was listed on the Site from 1971 to 1973. No details regarding whether the business was manufacturing paints and/or dresses or the types of chemicals that were used/stored on Site were available.

This Remedial Action Work Plan (RAWP) includes an analysis of the planned Conditional Track 1 remedial action to remediate the nature and extent of contamination as determined from data gathered during the Remedial Investigation (RI), performed by SESI in August 2022. A Track 1 remedy has been selected by the Volunteer as the preferred remedial alternative.

Summary of Remedial Investigation

The RI was conducted in accordance with NYSDEC's Technical Guidance for Site Investigation and Remediation (DER-10) and the Remedial Investigation Work Plan (RIWP) for the Site, last revised and approved by NYSDEC in April 2022, and the supplemental soil vapor investigation plan submitted to NYSDEC by email on March 23, 2023, and approved on March 24, 2023. The objectives of the RI were to complete the investigation of all media on the Site by delineating the nature and extent of contamination, and to complete an on- and off-Site exposure assessment in order to develop appropriate remedial actions. The Remedial Investigation Report (RIR), prepared by SESI, dated November 2022 and last revised April 2023, summarizes the results of prior investigations and the Remedial investigations performed. The RIR was accepted with modifications by NYSDEC on April 17, 2023. The RIR final approval was provided concurrently with the NYSDEC's issuance of the Decision Document on May 31, 2023 and the letter from NYSDEC on June 7, 2023.

The RI consisted of collection of seventy-five (75) soil samples from twenty-one (21) soil borings, installation of eight (8) permanent groundwater monitoring wells and groundwater sampling, and installation and sampling of six (6) temporary soil vapor points. Samples were collected for the investigation of Areas of Concern that were identified during the previous Phase I Environmental Site Assessment (ESA) and Phase II ESA by SESI.

Soil and groundwater samples were analyzed for a combination of full target compound list (TCL) and target analyte list (TAL) analytes – which include volatile organic compounds (VOCs, USEPA Method 8260), metals (USEPA Methods 6010/7471), semi-volatile organic compounds (SVOCs, USEPA Method 8270), polychlorinated biphenyls (PCBs) and pesticides (USEPA Methods 8081/8082). In addition, samples were analyzed for per- and poly-fluoroalkyl substances (PFAS, USEPA Method 537), and 1,4-dioxane (USEPA Method 8270). Duplicate samples were collected in general accordance with frequencies specified in DER-10. Sub-slab vapor and ambient air samples were analyzed for VOCs (USEPA Method TO-15).

Based on the field investigation, the overall depth of impacted soils exceeding the Unrestricted Use Soil Cleanup Objectives (USCOs), Restricted Residential Use Soil Cleanup Objectives (RRSCOs) and the Protection of Groundwater Soil Cleanup Objectives (PGWSCOs) ranged from 0.5 foot to 25 feet below ground surface (ft-bgs). Overall, SVOC impacts exceeding the USCOs and RRSCOs extended to soils at 1 to 15 ft-bgs depth Site-wide. Metals contaminated soils exceeding the USCOs, RRSCOs and PGWSCOs extend to depths of 23 ft-bgs. Pesticides contamination exceeding the USCOs was identified to depths of 25 ft-bgs. Perfluorooctanoic acid (PFOA) and perfluorooctanesulfonic acid (PFOS) impacts exceeding the proposed USCOs were detected to depths of 10.5 ft-bgs.

In the shallow unconsolidated aquifer (to a depth of 25 ft-bgs), groundwater was impacted with tetrachloroethene (PCE), dieldrin, iron, lead, manganese, sodium at concentrations in excess of the TOGS Ambient Water Quality Standards (AWQS). PFOA and PFAS were detected at concentrations exceeding the maximum contaminant level (MCL). In the deeper glacial till aquifer from depths of 36 to 45 ft-bgs, groundwater was impacted by chloroform, PCE, iron and sodium at concentrations in excess of the NYSDEC Division of Water Technical and Operational Guidance Series (1.1.1) Class GA AWQS. PFOA and PFOS were detected at concentrations exceeding the MCL. The depth of the water table was determined to vary from 11.6 to 17.6 ft-bgs across the Site.

In soil vapor, both petroleum hydrocarbons (PHC) and chlorinated VOCs (CVOCs) were detected. The highest concentration of PHC VOCs detected were ethanol at 29.4 ug/m^3 and tertiary butyl alcohol at 49.7 ug/m^3. The highest concentrations of CVOCs detected were PCE at 589 ug/m^3 and trichloroethene (TCE) at 11 ug/m^3. PCE (633 ug/m^3) and TCE (12 ug/m^3) were also detected in the corresponding ambient air sample. Supplemental remedial investigation vapor samples RI-SV-101 and RI-SV-102 were collected on the northeastern edge of the Site to delineate the PCE impacts identified in vapor sample RI-SV-2. Analytical results have identified PCE at a concentration of 79.3 ug/m3 in RI-SV-101 and 54 ug/m3 in RI-SV-102, indicating the PCE impacts decrease as the sample location gets closer to the northern and eastern property boundaries.

Summary of Selected Remedial Actions

The remedy for the Site is planned to meet Track 1 throughout the Site with no engineering or institutional controls except a short-term engineering control for soil vapors.

The remedial actions selected for the Site include the following:

1. Removal of asphalt pavement and installation of a support of excavation (SOE) system along the sidewalls of the entire Site for structure stability of the remedial excavation pit and to prevent off-Site migration and impacts to off-site structures.
2. Excavation of all Site soils to achieve an unrestricted Track 1 cleanup by removing the contaminated fill/ soil. Endpoint confirmatory sampling will be required to prove Track 1 was achieved and sidewall sampling will be implemented to document any remaining contamination in sidewalls at the property boundary.
3. Zero valent iron (ZVI) will be injected into the subsurface to form a vertical permeable reactive barrier (PRB) along the upgradient and downgradient boundaries of the Site to destroy contaminants entering or leaving the Site. If post-excavation monitoring of VOCs does not show achievement of groundwater remedial objectives within five (5) years of the date of the Certificate of Completion, then the remedy will achieve a Track 2 residential cleanup.
4. Installation of the elements of a sub-slab depressurization system (SSDS) underneath the building foundation if the sub-slab of the proposed building is not under the water table during the seasonal low. A soil vapor intrusion evaluation will be conducted to determine if the soil vapor (SV) levels constitute a vapor intrusion (VI) . The elements of the SSDS will be turned into engineering control (EC) as an active SSDS if the soil vapor evaluation determines that vapor mitigation is needed.
5. Recording of an Environmental Easement (EE) for the entire Site. The EE will remain effective until the Engineering Controls (ECs) and Institutional Controls (ICs) are removed if a Track 1 remedy is accomplished within five (5) years. If the Track 1 remedy is not achieved in this timeframe as a result of any remaining on-Site conditions, the EE will continue under a Track 2 remedy for any residual groundwater and soil vapor contamination provided the vapor on Site is not still emanating from an off-site source.
6. Preparation of a Site Management Plan (SMP), for the conditional Track 1 or Track 2 remedy, for long-term management of residual contamination as required by the Environmental Easement, particularly as they pertain to future phases of construction, including plans for: (1) Institutional and Engineering Controls, (2) groundwater (if required) and soil vapor monitoring, and (3) reporting.

7. Documentation of all appropriate off-site disposal of all material removed from the Site in accordance with all Federal, State and local rules and regulations for handling, transport, and disposal.
8. Import of backfill materials during redevelopment construction activities, to be used for backfilling and soil cover, if necessary, must be in compliance with: (1) chemical limits and other specifications included in NYCRR Sections 375-6.7(d) and 375-6.8 (b) and DER-10 (2) all Federal, State, local rules and regulations and site-specific approvals for handling/reuse and transport of material.
9. All responsibilities associated with the Remedial Action, including permitting requirements and pretreatment requirements, will be addressed in accordance with all applicable Federal, State and local rules and regulations and overseen and certified by the SESI Remedial Engineer of Record described below.

1.0 INTRODUCTION

This RAWP includes an analysis of the planned Track 1 remedial action to remediate the nature and extent of contamination as determined from data gathered during the RI, performed by SESI in August 2022 and March 2023. Since a Track 1 remedy has been selected by the Volunteer as the preferred remedial alternative, an analysis of other alternatives is not required other than as contingencies in the event a Track 1 remedy cannot be achieved.

A formal Remedial Design Document will not be prepared as the remedy for this Site entails principally a Site-wide source removal effort in order to achieve a Track 1 Unrestricted Use remedy.

1.1 SITE LOCATION AND DESCRIPTION

The original 0.24-acre BCP Site was five (5) contiguous parcels identified on the Westchester County tax records as tax parcels 1-501-18 (38 Main Street), 1-501-19 (36 Main Street), 1-501-20 (32 Main Street), 1-501-22 (1 Riverdale Avenue), and 1-501-23 (3 Riverdale Avenue). Pursuant to a BCA Amendment submitted on October 12, 2022, the Site acreage was reduced to is 0.214 acres in size and after the lot mergers is now located at 38 Main Street (1.-501-18), 36 Main Street (1.-501-19), and 34 Main Street (1.-501-20, which was formerly Lots 20, 22, and 23 were merged into a new Lot 20). Westchester County, Yonkers, New York. The Site does not contain any buildings or permanent structures; however, the eastern portion of the Site is improved by concrete walkways, brick walls and landscaping elements. A Site Location Map (topographic map) is provided as **Figure 1.1**. A map depicting the boundaries of the overall property and BCP Site is provided as **Figure 1.2**.

Historic operations at the Site include several businesses and storefronts from 1886 to 1942 including a furniture store, salon and billiards hall. Most notably, a hotel was listed on the Site from 1942. Hotels are historically known to have provided in-house dry-cleaning services, which would have used compounds that may have been released and have the potential for impacting the Site soil and groundwater. Two (2) underground ovens were identified on the Site from 1898 to 1956 but no additional details regarding the ovens' uses were available. Paint-Dressmaking was listed on the Site from 1971 to 1973. No details regarding whether the business was manufacturing paints and/or dresses or the types of chemicals that were used/stored on Site were available.

1.2 PROPOSED REDEVELOPMENT PLAN

The Site is located in a commercial area, and the property is currently proposed to be redeveloped as 100 percent affordable housing. The proposed building would consist of a total of 78,553 square feet. The first floor of the building would include 4,344 square feet of commercial uses and the residential lobby, for a total of 9,276 square feet on the first floor. The nine (9) floors of residences would total 69,277 square feet with floors two to six including 7,949 square feet per floor and floors 7 to 10 including 7,383 square feet per floor. The project would encompass a total of 76 dwelling units, including 12 studios, 36 one-bedrooms, 23 two bedrooms, and five (5) three-bedroom units. The project building would also include two (2) levels of subgrade parking to accommodate parking for residents.

1.3 DESCRIPTION OF SURROUNDING PROPERTY

The Site is located in a commercial area and is bounded to the north by Main Street, to the west by a one-story commercial building, to the south by commercial buildings, and to the east by Riverdale Avenue. Surrounding properties are described on **Table 1.1** below.

Table 1.1 - Summary of Surrounding Properties

Direction	Adjacent Property
North	Main Street, beyond which lies La Bella Havanna Restaurant, Water front on the Go Store, Beato Beauty Salon
South	New York Telephone Building
East	Riverdale Ave., beyond which lies Paxos Grill & Café
West	Kala An Mjul Bar and Grill

2.0 DESCRIPTION OF REMEDIAL INVESTIGATION FINDINGS

The Site was investigated in accordance with the scope of work presented in the NYSDEC-approved RIWP prepared in April 2022, which was approved by the NYSDEC on April 27, 2022, and the supplemental soil vapor investigation plan submitted to NYSDEC by email on March 23, 2023, and approved on March 24, 2023. The investigation was conducted in August 2022 and March 2023. The Remedial Investigation Report (RIR), prepared by SESI, dated November 2022 and last revised April 2023, summarizes the results of prior investigations and the Remedial investigations performed. The RIR was accepted with modifications by NYSDEC on April 17, 2023. The RIR final approval was provided concurrently with the NYSDEC's issuance of the Decision Document on May 31, 2023 and the letter from NYSDEC on June 7, 2023.

For purposes of evaluating the remedial alternatives associated with the proposed Site remediation and redevelopment, the analytical results of the soil samples were compared to the NYSDEC USCOs and RRSCOs. Soil results were also compared to the PGWSCOs for contaminants also exceeding the AWQS.

2.1 SOIL REMEDIAL INVESTIGATION FINDINGS

During the August 2022 investigation, a total of 75 soil samples were collected from 21 soil borings (RI-1 through RI-17, and SS-1 to SS-4) between August 15 and 23, 2022. The borings were advanced utilizing hand-held and direct-push drilling techniques. Borings were advanced to depths ranging from 1.5 to 25 ft. Soil samples were collected at each boring utilizing a macro-core sampler. Samples for laboratory chemical analyses were collected based on field screening, which includes visual and olfactory observations and screening with photo-ionization detector. Soil samples were submitted to SGS North America for analysis of full suite TCL/TAL + 30, 1,4-dioxane and PFAS with NYSDEC Category B deliverables. The soil boring locations and analytical results are shown on **Figure 2.1**. Boring logs documenting soil classifications, photoionization detector (PID) readings, and visual observations are included in Appendix B of the RIR.

Volatile Organic Compounds

As shown on **Figure 2.1**, one (1) exceedance was detected for acetone in soil boring RI-SB3 (7-7.5) at a concentration of 0.629 mg/kg, exceeding the USCO of 0.05 mg/kg.

Semi- Volatile Organic Compounds

As shown on **Figure 2.1** and **Table 2.1** below, SVOCs including benzo[a]anthracene (4.09 mg/kg R1SB15 (2- 2.5)), benzo(a)pyrene (4.19 mg/kg R1SB15 (2-2.5)), benzo(b)fluoranthene (4.76 mg/kg R1SB15 (2-2.5)), benzo(k)fluoranthene (1.48 mg/kg R1SB8 (5-5.5)), chrysene (3.98 mg/kg R1SB15 (2- 2.5)), dibenzo(a,h)anthracene (0.629 mg/kg R1SB15 (2-2.5)), and indeno(1,2,3-cd)pyrene (3.08 mg/kg R1SB15 (2-2.5)) were identified in 17 samples collected from 13 soil borings at concentrations that exceed their USCOs and/or RRSCOs at depths ranging from 1 to 15 ft-bgs.

Table 2.1: Summary of SVOC Exceedances in Soil

Client Sample ID:		USCOs	RRSCOs	PGWSCOs	R1SB1 (4-4.5)	R1SB1 (6-6.5)	R1SB1 (14.5-15)	R1SB2 (1.5-2)
Date Sampled:					8/16/2022	8/16/2022	8/16/2022	8/16/2022
Matrix:					Soil	Soil	Soil	Soil
MS Semi-volatiles (SW846 8270E)								
Benzo(a)anthracene	mg/kg	1	1	1	1.6	2.88	1.35	2.2
Benzo(a)pyrene	mg/kg	1	1	22	1.39	2.81	1.35	2.18
Benzo(b)fluoranthene	mg/kg	1	1	1.7	2.03	3.56	1.72	2.8
Benzo(k)fluoranthene	mg/kg	0.8	3.9	1.7	0.588	1.45	0.539	0.968
Chrysene	mg/kg	1	3.9	1	1.5	2.81	1.25	1.91
Dibenzo(a,h)anthracene	mg/kg	0.33	0.33	1000	0.257	0.545	0.222	0.34
Indeno(1,2,3-cd)pyrene	mg/kg	0.5	0.5	8.2	1.12	2.34	0.934	1.66

Client Sample ID:		USCOs	RRSCOs	PGWSCOs	R1SB4 (3-3.5)	R1SB5 (3-3.5)	R1SB5 (7-7.5)	R1SB6 (8.5-9)
Date Sampled:					8/16/2022	8/16/2022	8/16/2022	8/18/2022
Matrix:					Soil	Soil	Soil	Soil
MS Semi-volatiles (SW846 8270E)								
Benzo(a)anthracene	mg/kg	1	1	1	2.21	1.59	2.29	3.33
Benzo(a)pyrene	mg/kg	1	1	22	2.09	1.5	2.17	2.51
Benzo(b)fluoranthene	mg/kg	1	1	1.7	2.96	2.12	3.26	3
Benzo(k)fluoranthene	mg/kg	0.8	3.9	1.7	0.972	0.784	1.25	1.06
Chrysene	mg/kg	1	3.9	1	2.3	1.81	2.6	2.92
Dibenzo(a,h)anthracene	mg/kg	0.33	0.33	1000	0.397	0.358	0.489	0.377
Indeno(1,2,3-cd)pyrene	mg/kg	0.5	0.5	8.2	1.74	1.31	1.97	1.52

Client Sample ID:		USCOs	RRSCOs	PGWSCOs	R1SB8 (2.5-3)	R1SB8 (5-5.5)	R1SB11 (4-4.5)	R1SB12 (.5-1)
Date Sampled:					8/16/2022	8/16/2022	8/16/2022	8/17/2022
Matrix:					Soil	Soil	Soil	Soil
MS Semi-volatiles (SW846 8270E)								
Benzo(a)anthracene	mg/kg	1	1	1	1.8	3.86	1.14	1.03
Benzo(a)pyrene	mg/kg	1	1	22	1.81	3.61	1.1	0.945
Benzo(b)fluoranthene	mg/kg	1	1	1.7	2.38	4.4	2.5	1.32
Benzo(k)fluoranthene	mg/kg	0.8	3.9	1.7	0.817	1.48	0.878	0.476
Chrysene	mg/kg	1	3.9	1	1.73	3.55	1.4	1.04
Dibenzo(a,h)anthracene	mg/kg	0.33	0.33	1000	0.3	0.597	0.28	0.177
Indeno(1,2,3-cd)pyrene	mg/kg	0.5	0.5	8.2	1.55	2.89	1.52	0.78

Client Sample ID:		USCOs	RRSCOs	PGWSCOs	R1SB15 (2-2.5)	R1-SS1 (.5-1)	R1-SS2 (.5-1)	R1-SS3 (.5-1)	R1-SS4 (.5-1)
Date Sampled:					8/17/2022	8/17/2022	8/17/2022	8/17/2022	8/17/2022
Matrix:					Soil	Soil	Soil	Soil	Soil
MS Semi-volatiles (SW846 8270E)									
Benzo(a)anthracene	mg/kg	1	1	1	**4.09**	**1.42**	**1.77**	**2.95**	**2.53**
Benzo(a)pyrene	mg/kg	1	1	22	**4.19**	**1.16**	**1.62**	**2.31**	**2.29**
Benzo(b)fluoranthene	mg/kg	1	1	1.7	**4.76**	**1.52**	**2.12**	**2.97**	**2.85**
Benzo(k)fluoranthene	mg/kg	0.8	3.9	1.7	**1.47**	**0.621**	**0.75**	**1.06**	**1.2**
Chrysene	mg/kg	1	3.9	1	**3.98**	**1.29**	**1.64**	**2.57**	**2.31**
Dibenzo(a,h)anthracene	mg/kg	0.33	0.33	1000	**0.629**	**0.203**	**0.305**	**0.394**	**0.391**
Indeno(1,2,3-cd)pyrene	mg/kg	0.5	0.5	8.2	**3.08**	**0.806**	**1.3**	**1.53**	**1.64**

Notes:

1. Bold = Compound Detected
2. All results in Milligrams per kilograms (mg/kg) (parts per million)
3. USCO = Highlighted Concentration exceeds the Unrestricted Use Soil Cleanup Objective
4. RRSCO = Highlighted Concentration exceeds the Restricted Residential Use Soil Cleanup Objective
5. PGWSCO = Highlighted Concentration exceeds the Protection of Groundwater Soil Cleanup Objective

Metals and Pesticides

As shown on **Figure 2.1** and **Table 2.2** below, the metals barium, chromium, copper, lead, mercury, nickel, and zinc were detected in 33 samples collected from 20 borings at concentrations exceeding the USCO at depths ranging from 0.5 to 23 ft-bgs. Barium was detected at a concentration exceeding the RRSCO in one (1) soil sample at a depth of 3.5 ft-bgs. Lead was detected at a concentration exceeding the RRSCO in one (1) soil sample at a depth of 2 ft-bgs. Mercury was detected at a concentration exceeding the RRSCO in one (1) soil sample at a depth of 8 ft-bgs. Finally, lead was detected in two (2) soil samples collected from one (1) soil boring at a concentration exceeding the PGWSCO.

Also as shown on **Table 2.2** below, the pesticides alpha chlordane and 4,4-DDD were detected in three (3) soil samples collected from three (3) soil borings at concentrations exceeding the USCO at depths up to 15 ft-bgs. The pesticide 4,4-DDT was detected in 59 samples collected from 21 borings at concentrations exceeding the applicable USCO at depths to 25 ft-bgs.

The pesticide and metals exceedances are summarized on **Table 2.2** below.

Table 2.2: Summary of Pesticides and Metals Exceedances in Soil

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1SB1 (4-4.5)		R1SB1 (6-6.5)		R1SB1 (14.5-15)		R1SB2 (1.5-2)		R1SB2 (9-9.5)	
Date Sampled:				8/16/2022		8/16/2022		8/16/2022		8/16/2022		8/16/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil	
GC/LC Semi-volatiles (mg/kg)													
alpha-Chlordane	0.094	4.2	2.9	**0.0132**		**0.0083**		**0.0437**		ND (0.00069)		**0.005**	
Dieldrin	0.005	0.2	0.1	ND (0.00071)		ND (0.00072)		ND (0.00071)		ND (0.00069)		ND (0.00068)	
4,4'-DDD	0.0033	13	14	**0.0025**		**0.003**		**0.0074**		**0.0016**		**0.00085**	
4,4'-DDT	0.0033	7.9	136	**0.0135**	B	**0.0151**	B	**0.0166**	B	**0.007**	B	**0.0076**	B
Metals Analysis (mg/kg)													
Barium	350	400	820	**172**		**142**		**126**		**98.5**		**70.5**	
Chromium	30	180	-	**25.2**		**18.3**		**15.8**		**18.7**		**19**	
Copper	50	270	1720	**21.7**		**22**		**33.3**		**17.1**		**21.6**	
Lead	63	400	450	**172**		**143**		**99.9**		**107**		**67.8**	
Mercury	0.18	0.81	0.73	**0.14**		**0.39**		**0.21**		**0.41**		**0.17**	
Nickel	30	310	130	**23.9**		**16.5**		**18.1**		**16.1**		**19.1**	
Zinc	109	10000	2480	**267**		**177**		**118**		**138**		**105**	

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1SB2 (12-12.5)		R1SB2 (19.5-20)		R1SB3 (1.5-2)		R1SB3 (7-7.5)		R1SB3 (13-13.5)		R1SB3 (19.5-20)	
Date Sampled:				8/16/2022		8/16/2022		8/18/2022		8/18/2022		8/18/2022		8/18/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil		Soil	
GC/LC Semi-volatiles (mg/kg)															
alpha-Chlordane	0.094	4.2	2.9	ND (0.00070)		ND (0.00075)		ND (0.00074)		ND (0.00080)		ND (0.00072)		ND (0.00077)	
Dieldrin	0.005	0.2	0.1	**0.0015**		ND (0.00075)		ND (0.00074)		ND (0.00080)		ND (0.00072)		ND (0.00077)	
4,4'-DDD	0.0033	13	14	ND (0.00070)		ND (0.00075)		**0.0013**		ND (0.00080)		ND (0.00072)		ND (0.00077)	
4,4'-DDT	0.0033	7.9	136	**0.0066**	B	**0.0057**	B	**0.008**	B	**0.0064**	B	**0.0103**	B	**0.0065**	B
Metals Analysis (mg/kg)															
Barium	350	400	820	**35**		**27.9**		**50.8**		**58.7**		<24		**29.9**	
Chromium	30	180	-	**16.2**		**10.9**		**11.2**		**26.2**		**9.7**		**10.7**	
Copper	50	270	1720	**13.3**		**7.9**		**20**		**22**		**12.7**		**20.6**	
Lead	63	400	450	**5.4**		**6.1**		**50.3**		**33.5**		**2.5**		**3.4**	
Mercury	0.18	0.81	0.73	**0.14**		<0.039		**0.18**		**0.41**		<0.031		<0.040	
Nickel	30	310	130	**18.6**		**9.9**		**14.8**		**24.6**		**14.2**		**16.2**	
Zinc	109	10000	2480	**20.8**		**17.7**		**51.3**		**46.4**		**16.3**		**19.2**	

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1SB4 (3-3.5)		R1SB4 (9.5-10)		R1SB4 (14.5-15)		R1SB5 (3-3.5)		R1SB5 (7-7.5)		R1SB5 (13-13.5)	
Date Sampled:				8/16/2022		8/16/2022		8/16/2022		8/16/2022		8/16/2022		8/16/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil		Soil	
GC/LC Semi-volatiles (mg/kg)															
alpha-Chlordane	0.094	4.2	2.9	**0.0085**		**0.0493**		ND (0.00081)		**0.0307**		**0.0147**		ND (0.00075)	
Dieldrin	0.005	0.2	0.1	ND (0.00071)		ND (0.00073)		ND (0.00081)		ND (0.00071)		ND (0.00077)		ND (0.00075)	
4,4'-DDD	0.0033	13	14	**0.002**		ND (0.00073)		ND (0.00081)		**0.0031**		**0.0025**		ND (0.00075)	
4,4'-DDT	0.0033	7.9	136	**0.0103**	B	**0.0062**	B	**0.0052**	B	**0.0088**	B	**0.0067**	B	**0.0046**	B
Metals Analysis (mg/kg)															
Barium	350	400	820	**171**		**96.3**		**39.8**		**413**		**332**		<24	
Chromium	30	180	-	**20.5**		**20.1**		**9.4**		**12.9**		**11.3**		**9.4**	
Copper	50	270	1720	**19**		**16.3**		**9**		**13.5**		**11.5**		**6.3**	
Lead	63	400	450	**235**		**63.7**		**9.5**		**507**		**558**		**4.6**	
Mercury	0.18	0.81	0.73	**0.056**		**0.056**		<0.034		**0.26**		**0.23**		<0.032	
Nickel	30	310	130	**15.5**		**15.6**		**9.8**		**8.2**		**7.8**		**8.3**	
Zinc	109	10000	2480	**209**		**113**		**17.6**		**276**		**215**		**15.5**	

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1SB5 (19-19.5)		R1SB6 (2-2.5)		R1SB6 (8.5-9)		R1SB6 (16.5-17)		R1SB7 (2.5-3)		R1SB7 (8-8.5)	
Date Sampled:				8/16/2022		8/18/2022		8/18/2022		8/18/2022		8/16/2022		8/16/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil		Soil	
GC/LC Semi-volatiles (mg/kg)															
alpha-Chlordane	0.094	4.2	2.9	ND (0.00077)		**0.0058**		ND (0.00067)		ND (0.00077)		**0.0111**		**0.316**	
Dieldrin	0.005	0.2	0.1	ND (0.00077)		ND (0.00075)		ND (0.00067)		ND (0.00077)		ND (0.00069)		ND (0.00070)	
4,4'-DDD	0.0033	13	14	ND (0.00077)		ND (0.00075)		**0.0038**		ND (0.00077)		**0.0013**		ND (0.00070)	
4,4'-DDT	0.0033	7.9	136	**0.0041**	B	**0.0123**	B	**0.0406** [s]	B	**0.0069**	B	**0.0121**	B	**0.0123**	B
Metals Analysis (mg/kg)															
Barium	350	400	820	**31.3**		**107**		**76.3**		**44.5**		**121**		**148**	
Chromium	30	180	-	**10.9**		**20.9**		**21.4**		**20.9**		**22.2**		**15**	
Copper	50	270	1720	**7.3**		**41.6**		**27.3**		**12.5**		**21.6**		**28.1**	
Lead	63	400	450	**5.6**		**256**		**92.6**		**3.9**		**179**		**154**	
Mercury	0.18	0.81	0.73	<0.033		**0.31**		**0.68**	H	<0.042		**0.13**		0.11	
Nickel	30	310	130	**12.5**		**24.2**		**23.2**		**21.2**		**15.3**		**13.2**	
Zinc	109	10000	2480	**16.5**		**168**		**57.4**		**31.7**		**95.2**		**331**	

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1SB8 (2.5-3)		R1SB8 (5-5.5)		R1SB8 (10-10.5)		R1SB8 (17.5-18)		R1SB8 (24.5-25)		R1-SB-9 (2-2.5)	
Date Sampled:				8/16/2022		8/16/2022		8/16/2022		8/16/2022		8/16/2022		8/15/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil		Soil	
GC/LC Semi-volatiles (mg/kg)															
alpha-Chlordane	0.094	4.2	2.9	**0.0011**		**0.0255**		**0.0044**		ND (0.00078)		ND (0.00081)		**0.0019**	
Dieldrin	0.005	0.2	0.1	ND (0.00071)		ND (0.00070)		ND (0.00066)		ND (0.00078)		ND (0.00081)		ND (0.00070)	
4,4'-DDD	0.0033	13	14	**0.0022**		**0.0054**		**0.00068**		**0.00078**		ND (0.00081)		ND (0.00070)	
4,4'-DDT	0.0033	7.9	136	**0.0122**	B	**0.0137**		**0.0116**	B	**0.0102**	B	**0.0034**	B	**0.0093**	B
Metals Analysis (mg/kg)															
Barium	350	400	820	**96.8**		**152**		**22.8**		**36.7**		**49.1**		**55.7**	
Chromium	30	180	-	**22.1**		**22.6**		**8.7**		**12.6**		**15.6**		**19**	
Copper	50	270	1720	**21.6**		**20.1**		**7.7**		**10.1**		**15.9**		**72.4**	
Lead	63	400	450	**90.5**		**236**		**6**		**7**		**8.4**		**39**	
Mercury	0.18	0.81	0.73	**0.35**		**0.2**		**0.05**		<0.035		<0.037		**0.082**	
Nickel	30	310	130	**24.2**		**20.7**		**9.1**		**11.9**		**15.2**		**17.8**	
Zinc	109	10000	2480	**155**		**181**		**14**		**25.4**		**29.6**		**52.3**	

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1-SB-9 (9.5-10)		R1-SB-9 (14.5-15)		R1-SB-9 (17-17.5)		R1-SB-10 (4-4.5)		R1-SB-10 (7.5-8)		R1-SB-10 (11-11.5)	
Date Sampled:				8/15/2022		8/15/2022		8/15/2022		8/15/2022		8/15/2022		8/15/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil		Soil	
GC/LC Semi-volatiles (mg/kg)															
alpha-Chlordane	0.094	4.2	2.9	**0.0113**		ND (0.00077)		ND (0.00078)		**0.005**		ND (0.00071)		ND (0.00065)	
Dieldrin	0.005	0.2	0.1	**0.0102**		ND (0.00077)		ND (0.00078)		ND (0.00069)		ND (0.00071)		ND (0.00065)	
4,4'-DDD	0.0033	13	14	**0.0021**		ND (0.00077)		ND (0.00078)		ND (0.00069)		ND (0.00071)		ND (0.00065)	
4,4'-DDT	0.0033	7.9	136	**0.02**	B	**0.0036**	B	**0.0052**	B	**0.0068**	B	**0.0105**	B	**0.0056**	B
Metals Analysis (mg/kg)															
Barium	350	400	820	**134**		**45.9**		**38.7**		**49.3**		**38.1**		**47.6**	
Chromium	30	180	-	**11**		**23.6**		**18.5**		**15.7**		**17.6**		**22.3**	
Copper	50	270	1720	**11.1**		**11.8**		**11.5**		**24.4**		**95.8**		**24**	
Lead	63	400	450	**195**		**3.7**		**4.1**		**28.2**		**191**		**20.7**	
Mercury	0.18	0.81	0.73	**0.2**		<0.037		<0.034		**0.036**		**1.2**		<0.028	
Nickel	30	310	130	**8.6**		**19.2**		**16.4**		**16**		**19.7**		**20.3**	
Zinc	109	10000	2480	**88.6**		**35.4**		**29.1**		**33.9**		**597**		**36.2**	

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1-SB-10 (16-16.5)		R1-SB-10 (24.5-25)		R1SB11 (4-4.5)		R1SB12 (.5-1)		R1SB12 (9-9.5)		R1SB12 (11-11.5)	
Date Sampled:				8/15/2022		8/15/2022		8/16/2022		8/17/2022		8/17/2022		8/17/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil		Soil	
GC/LC Semi-volatiles (mg/kg)															
alpha-Chlordane	0.094	4.2	2.9	ND (0.00068)		ND (0.00069)		**0.00058**	J	**0.01**		**0.178**		**0.0179**	
Dieldrin	0.005	0.2	0.1	ND (0.00068)		ND (0.00069)		ND (0.00070)		ND (0.00074)		**0.0044**		**0.0006**	J
4,4'-DDD	0.0033	13	14	ND (0.00068)		ND (0.00069)		ND (0.00070)		0.0018		ND (0.00072)		ND (0.00072)	
4,4'-DDT	0.0033	7.9	136	**0.013**	B	**0.006**	B	**0.0054**	B	**0.0221**	B	**0.0073**	B	**0.0041**	B
Metals Analysis (mg/kg)															
Barium	350	400	820	<22		**31**		**44.7**		**150**		**54.2**		**43.8**	
Chromium	30	180	-	**9.8**		**13.6**		**16.1**		**26.1**		**17.5**		**16.8**	
Copper	50	270	1720	**11.3**		**21.6**		**161**		**18.6**		**23.4**		**8.9**	
Lead	63	400	450	**2.6**		**6.6**		**234**		**104**		**94.4**		**8.4**	
Mercury	0.18	0.81	0.73	<0.033		<0.029		<0.036		**0.58**		**0.52**		<0.028	
Nickel	30	310	130	**9.2**		**22.5**		11.1		**19.9**		**16.8**		**15.7**	
Zinc	109	10000	2480	**15.4**		**21.4**		**121**		**137**		**45.2**		**25.9**	

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1SB12 (17-17.5)		R1SB12 (23.5-24)		R1-SB-13 (3.5-4)		R1-SB-13 (5-5.5)		R1-SB-13 (13-13.5)		R1-SB-14 (2.5-3)	
Date Sampled:				8/17/2022		8/17/2022		8/15/2022		8/15/2022		8/15/2022		8/15/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil		Soil	
GC/LC Semi-volatiles (mg/kg)															
alpha-Chlordane	0.094	4.2	2.9	ND (0.00081)		ND (0.00081)		**0.00089**		ND (0.00068)		ND (0.00070)		**0.0061**	
Dieldrin	0.005	0.2	0.1	ND (0.00081)		ND (0.00081)		ND (0.00071)		ND (0.00068)		ND (0.00070)		ND (0.00067)	
4,4'-DDD	0.0033	13	14	ND (0.00081)		ND (0.00081)		ND (0.00071)		ND (0.00068)		**0.00094**		ND (0.00067)	
4,4'-DDT	0.0033	7.9	136	**0.0122**	B	**0.0052**	B	**0.0075**	B	**0.0072**	B	**0.0095**	B	**0.0105**	B
Metals Analysis (mg/kg)															
Barium	350	400	820	**39.2**		**68.3**		**75.8**		**53**		**34.8**		**42.3**	
Chromium	30	180	-	**16.6**		**20.5**		**26.4**		**16**		**18.9**		**14.1**	
Copper	50	270	1720	**10.6**		**17**		**43.6**		**16.9**		**11.1**		**19.8**	
Lead	63	400	450	**2.8**		**4.1**		**42**		**8.2**		**3.4**		**52.1**	
Mercury	0.18	0.81	0.73	<0.033		<0.037		**0.045**		<0.028		<0.031		**0.068**	
Nickel	30	310	130	**14.4**		**18.2**		**33.2**		**17.9**		**15.5**		**13.9**	
Zinc	109	10000	2480	**21.8**		30.4		**51.3**		**30.4**		**27.5**		**43.3**	

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1SB15 (2-2.5)		R1SB15 (7-7.5)		R1SB15 (13-13.5)		R1SB15 (15-15.5)		R1SB15 (24.5-25)		R1-SB-16 (1.5-2)	
Date Sampled:				8/17/2022		8/17/2022		8/17/2022		8/17/2022		8/17/2022		8/15/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil		Soil	
GC/LC Semi-volatiles (mg/kg)															
alpha-Chlordane	0.094	4.2	2.9	ND (0.00073)		ND (0.00076)		ND (0.00081)		ND (0.00081)		ND (0.00079)		**0.103**	
Dieldrin	0.005	0.2	0.1	ND (0.00073)		ND (0.00076)		ND (0.00081)		ND (0.00081)		ND (0.00079)		ND (0.00069)	
4,4'-DDD	0.0033	13	14	ND (0.00073)		ND (0.00076)		ND (0.00081)		ND (0.00081)		ND (0.00079)		ND (0.00069)	
4,4'-DDT	0.0033	7.9	136	**0.0059**	B	**0.0041**	B	**0.0042**	B	**0.0059**	B	**0.0056**	B	**0.0303**	B
Metals Analysis (mg/kg)															
Barium	350	400	820	**73.7**		**49**		**94.6**		**65.1**		**33.4**		**92.8**	
Chromium	30	180	-	**13.4**		**11.8**		**29.7**		**27**		**13.7**		**33.1**	
Copper	50	270	1720	**49.3**		**29.6**		**23.2**		**19.9**		**14.9**		**45.1**	
Lead	63	400	450	**285**		**6.8**		**12.4**		**5.9**		**3.4**		**407**	
Mercury	0.18	0.81	0.73	**0.17**		<0.037		<0.036		<0.032		<0.032		**0.075**	
Nickel	30	310	130	**12.2**		**35.6**		**27.1**		**23.3**		**11.9**		**24.2**	
Zinc	109	10000	2480	**83.6**		**27.6**		**54.8**		**42**		**17.2**		**86.6**	

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1-SB-17 (3-3.5)		R1-SB-17 (8-8.5)		R1-SB-17 (22.5-23)		R1-SS1 (.5-1)		R1-SS2 (.5-1)		R1-SS3 (.5-1)		R1-SS4 (.5-1)	
Date Sampled:				8/15/2022		8/15/2022		8/15/2022		8/17/2022		8/17/2022		8/17/2022		8/17/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil		Soil		Soil	
GC/LC Semi-volatiles (mg/kg)																	
alpha-Chlordane	0.094	4.2	2.9	**0.0044**		ND (0.0032)		ND (0.00076)		**0.0281**		**0.0434**		**0.0294**		**0.0839**	
Dieldrin	0.005	0.2	0.1	ND (0.00068)		ND (0.0032)		ND (0.00076)		0.0022		ND (0.00070)		ND (0.00071)		ND (0.00071)	
4,4'-DDD	0.0033	13	14	ND (0.00068)		ND (0.0032)		ND (0.00076)		**0.0018**		**0.0014**		**0.0029**		**0.0011**	
4,4'-DDT	0.0033	7.9	136	**0.008**	B	**0.0175**	B	**0.0026**	B	**0.0172**	B	**0.0162**	B	**0.0173**	B	**0.0152**	B
Metals Analysis (mg/kg)																	
Barium	350	400	820	**41.8**		**40.8**		**73**		**118**		**142**		**107**		**124**	
Chromium	30	180	-	**17.1**		**6.5**		**23.6**		**30.9**		**30.7**		**30.3**		35.7	
Copper	50	270	1720	**24.7**		**21.5**		**32.4**		**32.5**		**32.8**		**42.6**		**30.8** [t]	
Lead	63	400	450	**68.6**		**79.4**		**3.5**		**83.8**		**138**		**74**		**76.3**	
Mercury	0.18	0.81	0.73	**0.058**		**0.063**		<0.033		**0.12**		**0.22**		**0.11**		**0.17**	
Nickel	30	310	130	**17.6**		**7.5**		**34.4**		**22.6**		**25.2**		**23.6**		**27.1**	
Zinc	109	10000	2480	**49.5**		**50.3**		**51.1**		**131**		**154**		**99.2**		**113**	

Notes:

1. Bold = Compound Detected
2. J = Estimated Concentration
3. B= Compound Detected in Lab Blank
4. All results in Milligrams per kilograms (mg/kg) (parts per million)
5. USCO = Highlighted Concentration exceeds the Unrestricted Use Soil Cleanup Objective
6. RRSCO = Highlighted Concentration exceeds the Restricted Residential Use Soil Cleanup Objective
7. PGWSCO = Highlighted Concentration exceeds the Protection of Groundwater Soil Cleanup Objective

Emerging Contaminants

The emerging contaminant PFOS was detected in 11 soil samples collected from seven (7) soil borings at concentrations exceeding the proposed USCO of 0.66 µg/kg to depths of 10.5 ft-bgs. However, the PFOS concentrations are below the PGWSCO of 3.7 ug/kg in all samples collected. The emerging contaminant exceedances are summarized on **Table 2.3** below.

Table 2.3: Summary of Emerging Contaminant Exceedances in Soil

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1SB1 (4-4.5)		R1SB1 (6-6.5)		R1SB2 (1.5-2)		R1SB3 (1.5-2)		R1SB4 (3-3.5)	
Date Sampled:				8/16/2022		8/16/2022		8/16/2022		8/18/2022		8/16/2022	
Matrix:				Soil		Soil		Soil		Soil		Soil	
MS Semi-volatiles (EPA 537M BY ID) (ug/kg)													
Perfluorooctanesulfonic acid (PFOS)	0.88	44	3.7	**1.5**		**2.8**		**1**		**1.1**		**1.5**	

Client Sample ID:	USCOs	RRSCOs	PGWSCOs	R1SB5 (3-3.5)		R1SB5 (7-7.5)		R1SB7 (2.5-3)		R1SB8 (5-5.5)		R1SB8 (10-10.5)		R1-SB-10 (4-4.5)		
Date Sampled:				8/16/2022		8/16/2022		8/16/2022		8/16/2022		8/16/2022		8/15/2022		
Matrix:				Soil		Soil		Soil		Soil		Soil		Soil		
MS Semi-volatiles (EPA 537M BY ID) (ug/kg)																
Perfluorooctanesulfonic acid (PFOS)	0.88	44	3.7	**1.6**		**2.3**		**1.6**		**1.4**		**2.2**		**0.93**		J

Notes:

1. Bold = Compound Detected
2. J = Estimated Concentration
3. All results in micrograms per kilogram (ug/kg) (parts per billion)
4. USCO = Highlighted Concentration exceeds the Unrestricted Use Soil Cleanup Objective
5. RRSCO = Highlighted Concentration exceeds the Restricted Residential Use Soil Cleanup Objective
6. PGWSCO = Highlighted Concentration exceeds the Protection of Groundwater Soil Cleanup Objective

2.2 GROUNDWATER REMEDIAL INVESTIGATION RESULTS

The eight (8) RI monitoring wells were sampled in August 2022 for TCL/TAL+30 including VOCs, SVOCs, PCBs, pesticides, and metals, PFAS, and 1,4-dioxane. Groundwater sample results of shallow monitoring wells exceeding the AWQSs are presented on **Table 2.4** below and on **Figure 2.2**.

Shallow Groundwater

Groundwater sample results of shallow monitoring wells exceeding the AWQSs are presented on **Table 2.4,** below, and on **Figure 2.2**.

- The CVOC PCE was detected in RI-MW-1, RI-MW-3, RI-MW-4, RI-MW-5, RI-MW-6, SB1-GW, and SB3-GW, at concentrations exceeding the AWQS. Chloroform was detected exceeding the AWQS in RI-MW-3, RI-MW-5, and RI-MW-6.
- The pesticide dieldrin was detected in wells RI-MW-1 and RI-MW-4 at a concentration exceeding the AWQS.
- The metal iron was detected in wells RI-MW-3, RI-MW-4, and RI-MW-5 at concentrations exceeding the AWQS. Lead was detected in RI-MW-3, SB1-GW and SB3-GW exceeding the AWQS. Manganese was detected in RI-MW-4 exceeding the AWQS. Sodium was detected in RI-MW-1, RI-MW-2 RI-MW-3, RI-MW-4, RI-MW-5, and RI-MW-6 at concentrations exceeding the AWQS.
- PFOA and PFOS were detected in RW-MW-1, RI-MW-3, RI-MW-4, RI-MW-5, and RI-MW-6 at concentrations exceeding the NYSDEC MCL of 10 parts per trillion (ppt). To address New York State Department of Health (NYSDOH) comments, one (1) off-site downgradient monitoring well will be installed and sampled for PFAS as a pre-design investigation activity as discussed in Section 3.4.

Table 2.4: Summary of Groundwater Exceedances in Shallow Groundwater

Client Sample ID:		NYSDEC AWQS	R1-MW-1		R1-MW-3		R1-MW-4		R1-MW-5		R1-MW-6	
Lab Sample ID:			JD50655-1		JD50655-4		JD50758-1		JD50758-2		JD50758-3	
Date Sampled:			8/24/2022		8/24/2022		8/25/2022		8/25/2022		8/25/2022	
Matrix:			Ground Water		Ground Water		Ground Water		Ground Water		Ground Water	
MS Volatiles (SW846 8260D)												
Chloroform	ug/l	7	**5**		**12.7**		**5.8**		**9.7**		**7.1**	
Tetrachloroethene	ug/l	5	**8.2**		**15.3**		**15.9**		**13.5**		**9.6**	
MS Semi-volatiles (EPA 537M BY ID)												
Perfluorooctanoic acid (PFOA)	ng/l	10	**58**		**29.1**		**36.4**		**31.7**		**34**	
Perfluorooctanesulfonic acid (PFOS)	ng/l	10	**78**		**66.3**		**49.3**		**70.6**		**60.5**	
GC/LC Semi-volatiles (SW846 8081B)												
Dieldrin	ug/l	0.004	**0.016**		ND (0.0069)		**0.082**		ND (0.0080)		ND (0.0077)	
Metals Analysis												
Iron	ug/l	300	**209**		**5270**		**5600**		**542**		<100	
Lead	ug/l	25	<3.0		**38.8**		**23.2**		**9.7**		<3.0	
Manganese	ug/l	300	**97.8**		**189**		**1420**		**104**		<15	
Sodium	ug/l	20000	**372000**		**338000**		**411000**		**374000**		**393000**	

Notes:

1. ug/L = micrograms per liter
2. ng/L = nanograms per liter
3. NU = compound not detected
4. Bold = compounds detected
5. Highlight = Concentration exceeds AWQS

Deep Groundwater

Groundwater sample results of deep monitoring wells exceeding the AWQSs are presented on **Table 2.5,** below, and on **Figure 2.2**.

- Chloroform was detected in RI-MW-7 (28.7 ug/l), RI-MW-8 (9.5 ug/l), and RI-MW-9 (20.6 ug/l) at concentrations exceeding the AWQS. The CVOC PCE was detected in RI-MW-8 (18.5 ug/l) exceeding the AWQS.
- The metal iron was detected in RI-MW-9, and sodium was detected in RI-MW-7, RI-MW-8, and RI-MW-9 at concentrations exceeding the AWQS.
- PFOA and PFOS were detected in RI-MW-7 and RI-MW-8 at concentrations exceeding the MCL of 10 ppt. To address NYSDOH comments, one (1) off-site downgradient monitoring well will be installed and sampled for PFAS as a pre-design investigation activity as discussed in Section 3.4.

Table 2.5 Summary of Groundwater Exceedances in Deep Groundwater

Client Sample ID:		NYSDEC AWQS	R1-MW-7		R1-MW-8		R1-MW-9	
Lab Sample ID:			JD50655-2		JD50655-3		JD50758-4	
Date Sampled:			8/24/2022		8/24/2022		8/25/2022	
Matrix:			Ground Water		Ground Water		Ground Water	
MS Volatiles (SW846 8260D)								
Chloroform	ug/l	7	**28.7**		**9.5**		**20.6**	
Tetrachloroethene	ug/l	5	**4.7**		**18.5**		**2.2**	
MS Semi-volatiles (EPA 537M BY ID)								
Perfluorooctanoic acid (PFOA)	ng/l	10	**17.9**		**35.9**		**10.3**	
Perfluorooctanesulfonic acid (PFOS)	ng/l	10	**53.4**		**59**		**30.1**	
GC/LC Semi-volatiles (SW846 8081B)								
Dieldrin	ug/l	0.004	ND (0.0069)		ND (0.0069)		ND (0.0069)	
Metals Analysis								
Iron	ug/l	300	**199**		**298**		**1430**	
Lead	ug/l	25	<3.0		<3.0		<3.0	
Manganese	ug/l	300	**20.3**		**153**		**22**	
Sodium	ug/l	20000	**137000**		**345000**		**108000**	

Notes:

1. ug/L = micrograms per liter
2. ng/L = nanograms per liter
3. NU = compound not detected
4. Bold = compounds detected
5. Highlight = Concentration exceeds AWQS

2.3 SOIL VAPOR REMEDIAL INVESTIGATION RESULTS

SESI collected four (4) soil vapor samples (RI-SV-1 through RI-SV-4) and four (4) collocated ambient air samples across the Site in August 2022, and two (2) soil vapor samples (RI-SV-1- and RI-SV-102) and one collocated ambient air sample (RI-SV-100) in March 2023. New York State does not have standards for soil vapor. However, SESI has used the NYSDOH Matrices lower threshold levels to evaluate the Matrix A, B, and C listed compounds for samples where both on-Site sub-slab soil vapor and indoor air sampling or ambient air sampling was conducted. A summary of soil vapor sampling data is presented in **Table 2.6.**

Results of soil vapor sampling are presented on **Table 2.6**. and **Figure 2.3**. As shown on **Table 2.6** below, numerous VOCs were detected in sub-surface vapor across the Site. The highest concentration of PHC VOCs was detected in vapor sample RI-SV-1, with an ethanol concentration of 29.4 ug/m^3 and a tertiary butyl alcohol concentration of 49.7 ug/m^3. The highest concentration of chlorinated VOCs was detected in sample RI-SV-2, with PCE detected at 589 ug/m^3 and TCE detected at 11 ug/m^3. PCE (633 ug/m^3) and TCE (12 ug/m^3) were also detected in the

corresponding ambient air sample RI-AMB-2. Cis-1,2-DCE (11 ug/m^3) was also detected in ambient air sample RI-AMB-2.

Supplemental remedial investigation vapor samples RI-SV-101 and RI-SV-102 were collected on the northeastern edge of the Site in March 2023 to delineate the PCE impacts identified in vapor sample RI-SV-2. Analytical results have identified PCE at a concentration of 79.3 ug/m^3 in RI-SV-101 and 54 ug/m^3 in RI-SV-102, indicating the PCE impacts decrease as the sample location gets closer to the northern and eastern property boundaries.

Table 2.6: Summary of Soil Vapor Detections

Client Sample ID:	NYSDOH Matrix A	NYSDOH Matrix B	R1-SV-1		R1-AMB-1		R1-SV-2		R1-AMB-2		R1-SV-3		R1-AMB-3		R1-SV-4		R1-AMB-4	
Lab Sample ID:			JD50547-1		JD50547-2		JD50547-7		JD50547-8		JD50547-3		JD50547-4		JD50547-5		JD50547-6	
Date Sampled:			8/22/2022		8/22/2022		8/22/2022		8/22/2022		8/22/2022		8/22/2022		8/22/2022		8/22/2022	
Matrix:			Soil Vapor Comp.		Ambient Air Comp.		Soil Vapor Comp.		Ambient Air Comp.		Soil Vapor Comp.		Ambient Air Comp.		Soil Vapor Comp.		Ambient Air Comp.	
Acetone (2-Propanone)			**151**		**12**		**15**		**12**		**116**		**9.3**		**115**		**12**	
Benzene			ND (2.6)		**0.48**	J	ND (2.6)		ND (1.3)		ND (2.6)		**0.45**	J	ND (2.6)		**0.51**	J
Carbon disulfide			ND (2.5)		ND (0.62)		**1.4**	J	ND (1.2)		ND (2.5)		ND (0.62)		ND (2.5)		ND (0.62)	
Chloroform			**7.3**		ND (0.98)		**12**		ND (2.0)		ND (3.9)		ND (0.98)		ND (3.9)		ND (0.98)	
Chloromethane			ND (1.7)		**1.1**		ND (1.7)		**1.4**		**1.5**	J	**1.2**		ND (1.7)		**1.4**	
1,1-Dichloroethane	6		ND (3.2)		ND (0.81)		ND (3.2)		**2.6**		ND (3.2)		ND (0.81)		ND (3.2)		ND (0.81)	
1,1-Dichloroethylene			ND (0.63)		ND (0.16)		ND (0.63)		**2.6**		ND (0.63)		ND (0.16)		ND (0.63)		ND (0.16)	
Dichlorodifluoromethane			**2.5**	J	**2.3**		**4.9**		**2.5**		**2.6**	J	**2.2**		**2.2**	J	**2.4**	
trans-1,2-Dichloroethylene			ND (3.2)		ND (0.79)		ND (3.2)		**0.91**	J	ND (3.2)		ND (0.79)		ND (3.2)		ND (0.79)	
cis-1,2-Dichloroethylene	6		ND (0.63)		**1.1**		**5.2**		**11**		ND (0.63)		**0.67**		ND (0.63)		ND (0.16)	
p-Dichlorobenzene			**13**		ND (0.60)		ND (2.4)		ND (1.2)		ND (2.4)		ND (0.60)		ND (2.4)		ND (0.60)	
Ethanol			**29.4**		**13**		**5.5**		**11**		**15**		**6.4**		**15**		**13**	
Ethylbenzene			ND (3.5)		ND (0.87)		ND (3.5)		ND (1.7)		ND (3.5)		ND (0.87)		ND (3.5)		**1.2**	
Ethyl Acetate			**7.9**		**16**		**2.8**	J	**18**		**4.3**		**2.2**		**2.4**	J	**2.9**	
4-Ethyltoluene			ND (3.9)		ND (0.98)		ND (3.9)		ND (2.0)		ND (3.9)		ND (0.98)		ND (3.9)		**4.5**	
Hexane			ND (2.8)		**2.2**		**2.8**	J	**2**		ND (2.8)		**2.1**		**2.2**	J	**3.1**	
2-Hexanone			ND (3.3)		**3.4**		ND (3.3)		ND (1.6)		ND (3.3)		**1.1**		ND (3.3)		ND (0.82)	
Isopropyl Alcohol			**3.9**		**2.7**		**4.7**		**4.7**		**2.5**		**1.3**		**2.7**		**1.5**	
Methylene chloride		100	**5.6**		**9**		**10**		**3.2**		**4.2**		**8.3**		**8.7**		**15**	
Methyl ethyl ketone			**8.8**		**1.3**		**1.5**	J	**1.4**		**6.8**		**1**		**6.2**		**1.7**	
Propylene			**2.2**	J	ND (0.86)		ND (3.4)		ND (1.7)		**2.1**	J	**0.98**		**1.6**	J	ND (0.86)	
1,1,1-Trichloroethane		100	ND (2.2)		ND (0.55)		**2.2**		ND (1.1)		ND (2.2)		ND (0.55)		ND (2.2)		ND (0.55)	
1,2,4-Trimethylbenzene			ND (3.9)		ND (0.98)		ND (3.9)		ND (2.0)		ND (3.9)		ND (0.98)		ND (3.9)		**30**	
1,3,5-Trimethylbenzene			ND (3.9)		ND (0.98)		ND (3.9)		ND (2.0)		ND (3.9)		ND (0.98)		ND (3.9)		**12**	
Tertiary Butyl Alcohol			**49.7**		**0.49**	J	**5.5**		ND (1.2)		**38.2**		ND (0.61)		**39.4**		**0.3**	J
Tetrachloroethylene		100	**33**		**41**		**589**		**633**		**26**		**28**		**41**		ND (0.27)	
Toluene			**3.3**		**1.2**		ND (3.0)		**1.3**	J	ND (3.0)		**1.3**		ND (3.0)		**4.9**	
Trichloroethylene	6		ND (0.86)		**0.86**		**11**		**12**		**1.5**		**0.7**		**0.91**		ND (0.21)	
Trichlorofluoromethane			**15**		**2.1**		**8.4**		**1.7**		**2.7**		**2.5**		**2.3**		**2.6**	
Vinyl Acetate			ND (2.8)		ND (0.70)		**2.5**	J	ND (1.4)		ND (2.8)		ND (0.70)		ND (2.8)		**1.9**	
m,p-Xylene			ND (3.5)		ND (0.87)		ND (3.5)		**1.4**	J	ND (3.5)		**0.83**	J	ND (3.5)		**14**	
o-Xylene			ND (3.5)		ND (0.87)		ND (3.5)		ND (1.7)		ND (3.5)		ND (0.87)		ND (3.5)		**13**	
Xylenes (total)			ND (3.5)		ND (0.87)		ND (3.5)		**1.4**	J	ND (3.5)		**0.83**	J	ND (3.5)		**28**	

Client Sample ID:	NYSDOH Matrix B	R1-SV-101	R1-SV-102	R1-AMB-100
Lab Sample ID:		JD62755-1	JD62755-2	JD62755-3
Matrix:		Soil Vapor Comp.	Soil Vapor Comp.	Ambient Air Comp.
Sample Date:		3/27/2023 1:21 PM	3/27/2023 1:15 PM	3/27/2023 1:19 PM
Analyte				
1,2,4-Trimethylbenzene		**4.5**	**4.6**	ND
1,3-Butadiene		**1.9**	**2.4**	ND
2-Hexanone		**7**	**5.3**	ND
Acetone (2-Propanone)		**99.8**	**67.2**	**8.1**
Benzene		**3.8**	**5.1**	**0.54 J**
Carbon disulfide		**5**	**11**	ND
Chloroform		**6.3**	**3.4 J**	ND
Chloromethane		ND	ND	**1.5**
Cyclohexane		ND	**1.8 J**	ND
Dichlorodifluoromethane		**3.1 J**	**2.8 J**	**2**
Ethanol		**27.3**	**11**	**6.8**
Ethyl Acetate		**10**	**5.4**	**8.6**
Ethylbenzene		**4.8**	**4.8**	ND
Heptane		**2.6 J**	**2.7 J**	ND
Hexane		**13**	**6**	**0.46 J**
Isopropyl Alcohol		**23**	**16**	**1.6**
Methyl Isobutyl Ketone		**3.8**	**2.6 J**	ND
Methyl ethyl ketone		**26**	**17**	**0.59**
Methylene chloride	100	**24**	ND	**0.94**
Propylene		**13**	**18.6**	**0.72 J**
Styrene		**4**	**3.0 J**	ND
Tertiary Butyl Alcohol		**13**	**10**	ND
Tetrachloroethylene	100	**79.3**	**54**	**0.28**
Tetrahydrofuran		ND	ND	ND
Toluene		**71.6**	**62.6**	**1.1**
Trichlorofluoromethane		**4.3**	ND	**1**
Xylenes (total)		**29**	**26**	ND
m,p-Xylene		**23**	**20**	ND
o-Xylene		**6.1**	**5.6**	ND

Notes:
1. ug/m^3 = micrograms per cubic meter
2. U = compound not detected
3. Bold = compounds detected
4. Highlighted cell exceeds NYSDOH matrices values

2.4 GEOLOGICAL CONDITIONS

SESI conducted a geotechnical investigation at the Site in June 2021 at the time of SESI's Phase II Environmental Site Assessment. A total of five (5) geotechnical borings were advanced using hollow stem auger and air rotary drilling equipment. The surficial material characterized as a historical fill layer was encountered below the surface materials in all borings to depths of 5 to 10 ft-bgs. This fill layer generally consists of a predominately granular soil intermixed with construction debris, containing concrete and brick. The fill layer is underlain by glacial deposits to at least 35 ft-bgs and generally consists of brown coarse to fine sand with varying amounts of silt and gravel. Bedrock was not encountered. In August 2022, groundwater was observed to range from 11.1 ft-bgs (RI-MW-1) to 17.6 ft-bgs (RI-MW-6) across the Site. The groundwater has been determined to flow in a northerly direction across the Site.

2.5 CONCEPTUAL SITE MODEL

The overall depth of impacted soils exceeding the USCOs, RRSCOs and the PGWSCOs ranged from 0.5 foot to 25 ft-bgs. SVOC impacts exceeding the USCOs and RSCOs extended to soils at 1 to 15 ft-bgs depth Site-wide. Metals contaminated soils exceeding the USCOs, RRSCOs and PGWSCOs extend to depths of 23 ft-bgs. Pesticides contamination exceeding the USCOs was identified to depths of 25 ft-bgs. PFOA and PFOS contaminated soils exceeding the proposed USCOs were detected to depths of 10.5 ft-bgs.

The applicable standards criteria and guidance (SCGs) for the Site groundwater are the AWQS. The Site's groundwater has been impacted with CVOCs, pesticides, and metal compounds above AWQS, and PFOA/PFOS above the MCLs across the Site as a result of the historical land uses.

Depth to groundwater has been measured at depths of 11.1 to 17.6 ft-bgs across the Site. Groundwater flow has been calculated to flow in a northerly direction across the Site.

Both PHC and chlorinated VOCs were detected in soil vapor samples. A vapor intrusion evaluation will be needed for this Site since these PHC VOCs and CVOCs could result in soil vapor intrusion into the future on-Site buildings.

2.6 IDENTIFICATION OF STANDARDS, CRITERIA AND GUIDANCE

The following standards and criteria typically will apply to Site Characterizations, Remedial Investigations, remedy selection, underground storage tank closures, remedial actions and Site management activities:

- DER-10 / Technical Guidance for Site Investigation and Remediation
- DER-13 / Strategy for Evaluating Soil Vapor Intrusion at Remedial Sites in New York New York State Department of Environmental Conservation
- 6 NYCRR Part 257 - Air Quality Standards
- 29 CFR Part 1910.120 - Hazardous Waste Operations and Emergency Response
- TOGS 1.1.1 - Ambient Water Quality Standards & Guidance Values and Groundwater Effluent Limitations
- Fish and Wildlife Impact Analysis for Inactive Hazardous Waste Sites (October 1994)
- NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York (Final October 2006)

- DER Interim Strategy for Groundwater Remediation at Contaminated Sites in New York State
- 6 NYCRR Part 375 - Regulations Subparts 1, 3 and 6 applicable to the Brownfield Cleanup Program
- Citizen Participation in New York's Hazardous Waste Site Remediation Program: A Guidebook (June 1998)
- USEPA Office of Solid Waste and Emergency Response Directive 9355.047FS Presumptive Remedies: Policy and Procedures (September 1993)
- USEPA Office of Solid Waste and Emergency Response Directive 9355.048FS Presumptive Remedies
- Site Characterization and Technology Selection for CERCLA sites with Volatile Organic Compounds in Soils (September 1993)
- 6 NYCRR Part 612 - Registration of Petroleum Storage Facilities (February 1992)
- 6 NYCRR Part 613 - Handling and Storage of Petroleum (February 1992)
- 6 NYCRR Part 614 - Standards for New and Substantially Modified Petroleum Storage Tanks (February 1992)
- 6 NYCRR Part 371 - Identification and Listing of Hazardous Wastes (November 1998)
- 6 NYCRR Subpart 374-2 - Standards for the Management of Used Oil (November 1998)
- 6 NYCRR 375 Table 375-6.8(a) and Table 375-6.8(b)
- 6 NYCRR Parts 700-706 - Water Quality Standards (June 1998)
- 40 CFR Part 280 - Technical Standards and Corrective Action Requirements for Owners and Operators of Underground Storage Tanks
- STARS #1 - Petroleum-Contaminated Soil Guidance Policy
- STARS #2 - Biocell and Biopile Designs for Small-Scale Petroleum-Contaminated Soil Projects
- SPOTS #14 - Site Assessments at Bulk Storage Facilities (August 1994)
- Spill Response Guidance Manual
- Permanent Closure of Petroleum Storage Tanks (July 1988)
- NYSDOH Environmental Health Manual CSFP-530 - "Individual Water Supplies - Activated Carbon Treatment Systems"
- 40 CFR Part 144 - Underground Injection Control Program

- 10 NYCRR Part 67 – Lead
- 12 NYCRR Part 56 - Industrial Code Rule 56 (Asbestos)
- 6 NYCRR Part 175 - Special Licenses and Permits--Definitions and Uniform Procedures
- 6 NYCRR Part 371 - Identification and Listing of Hazardous Wastes (November 1998)
- 6 NYCRR Part 372 - Hazardous Waste Manifest System and Related Standards for Generators, Transporters and Facilities (November 1998)
- 6 NYCRR Subpart 374-1 - Standards for the Management of Specific Hazardous Wastes and Specific Types of Hazardous Waste Management Facilities (November 1998)
- 6 NYCRR Subpart 374-3 - Standards for Universal Waste (November 1998)
- 6 NYCRR Part 608 - Use and Protection of Waters
- TAGM 4013 - Emergency Hazardous Waste Drum Removal/ Surficial Cleanup Procedures (March 1996)
- TAGM 4059 - Making Changes to Selected Remedies (May 1998)
- Groundwater Effluent Limitations
- TOGS 1.3.8 - New Discharges to Publicly Owned Treatment Works
- TOGS 2.1.2 - Underground Injection/Recirculation (UIR) at Groundwater Remediation Sites
- OSWER Directive 9200.4-17 - Use of Monitored Natural Attenuation at Superfund, RCRA Corrective Action, and Underground Storage Tank Sites (November 1997)
- CP-43: Groundwater Monitoring Well Decommissioning Policy (November 2009)
- Sampling, Analysis, and Assessment of Per-and-Polyfluoroalkyl Substances (November 2022)
- The activity is a component of a program selected by a process complying with the public participation requirements of section 1.10, to the extent applicable.

2.7 ENVIRONMENTAL AND PUBLIC HEALTH ASSESSMENTS

2.7.1 QUALITATIVE HUMAN HEALTH EXPOSURE ASSESSMENT

This exposure assessment discusses potential migration routes by which contaminants in the environment may be able to reach human receptors in accordance with NYSDEC DER-10 sections 3.14(c)17, 3.3(c)4 and Appendix 3B. This discussion is based on current and hypothetical future Site conditions at the investigation area.

An exposure assessment must evaluate five (5) elements that comprise an exposure pathway. A complete exposure pathway includes the following:

1. A description of the contaminant source. If the original source is unknown, then a description of the contaminated environmental medium at the point of exposure;
2. An explanation of the transport mechanism;
3. An identification of all potential exposure points;
4. A description of the exposure route at the contact point; and
5. A receptor population.

There are some exposure pathways related to the contamination if left unaddressed:

Potential routes of exposure to impacted soil include dermal contact, ingestion, and inhalation of soil particulates. At present, potential exposure points have been eliminated by restricting public access to the Site through fencing. During future construction activities, specifically, the disturbance of soils, the potential for exposure to soils would increase for on-Site workers, utility workers, visitors, and trespassers.

SVOC, pesticides, PFAS, and metals exceedances of the RRSCOs in the Site soil from grade to approximately 25 ft-bgs pose a potential risk to human health if left unaddressed. The exposure pathway to humans can be through direct dermal contact with contaminated soils or incidental ingestion without the implementation of the remedial action. However, these potential exposures to workers will be mitigated through the implementation of the Health and Safety Plan (HASP) and use of personal protective equipment. Dust generation will be managed in accordance with the Community Air Monitoring Plan (CAMP) during excavation operations through the use of a water truck and truck wash at the point trucks exit the Site and monitored by air monitoring stations upgradient and downgradient of future excavation activities.

<u>Groundwater</u>

Potential groundwater exposure points include dermal contact and inhalation of vapors. The City of Yonkers utilizes municipal treated water (not groundwater) for drinking purposes; therefore, ingestion of on-Site groundwater as a potential exposure point may be eliminated from further evaluation with adequate treatment.

Potential exposure through dermal contact and vapor inhalation could arise during future excavation, re-development, or utility repairs where workers, visitors, or trespassers may be

exposed to on-Site groundwater.

During the Site remediation, dewatering will be implemented during the excavation work where groundwater is encountered in order to prevent direct contact with the groundwater. The water will be properly contained, treated and disposed off-Site either in the City of Yonkers Public Owned Treatment Works (POTW) sewer or shipped to an approved off-Site treatment facility. Further groundwater remediation will aim to mitigate potential groundwater and vapor concerns and try to reduce contamination to levels below the AWQSs. If groundwater is discharged to the sanitary sewer, a groundwater remediation permit will be obtained from the Westchester County Department of Environmental Facilities. In addition, the groundwater remedy includes ZVI injections that are expected to reduce VOC concentrations to below the AWQS.

Surface Water and Sediment

Surface water and sediment is not present on the Site. Thus, this exposure pathway may be eliminated from further evaluation. However, construction water and/or rainwater will be contained or managed appropriately so as to not to become a contaminated groundwater/surface water source at the Site.

Soil Vapor

When VOCs are detected in soil gas, there is potential exposure to building occupants through vapors accumulating beneath structures and impacting indoor air quality within a structure. Currently, all potential human receptors are restricted from entering by fencing. Thus, a potential exposure point does not currently exist. However, after the Site is remediated and redeveloped, a potential that vapors could accumulate in enclosed areas such as basements, crawl spaces, etc. of the proposed building could arise.

Elevated VOC concentrations were identified. The exposure route for soil vapor is through the inhalation of the contaminated soil vapor entering enclosed spaces in structures. Nevertheless, the planned excavation of the most contaminated source areas on the Site, combined with vapor mitigation measures, such as the installation of an SSDS, will address this potential exposure pathway.

2.7.2 FISH AND WILDLIFE IMPACT ANALYSIS

The Fish and Wildlife Resources Impact Analysis Decision Key (NYSDEC, 2010; DER-10 Appendix 3C) was utilized to evaluate the Site for potential fish and wildlife impacts. The result of

the assessment as presented in Appendix F of the RIR determined that the Site does not contain any ecologically sensitive resources and hence the contaminated soils are not expected to have any impacts on any ecological resources.

2.8 REMEDIAL ACTION OBJECTIVES

Based on the results of the Remedial Investigation, the following Remedial Action Objectives (RAOs) have been identified for this Site.

2.8.1 SOIL

RAOs for Public Health Protection

- Prevent ingestion/direct contact with contaminated soil.
- Prevent inhalation of, or exposure to, contaminants volatilizing from contaminated soil.

RAOs for Environmental Protection

- Prevent migration of contaminants that would result in groundwater contamination.
- Prevent impacts to biota due to ingestion/direct contact with contaminated soil that would cause toxicity or bioaccumulation through the terrestrial food chain.

2.8.2 GROUNDWATER

RAOs for Public Health Protection

- Prevent ingestion of groundwater containing contaminant levels exceeding drinking water standards.
- Prevent contact with, or inhalation of, volatiles emanating from contaminated groundwater.

RAOs for Environmental Protection

- Restore ground water aquifer, to the extent practicable, to pre-disposal/pre-release conditions.
- Remove the source of groundwater contamination.

2.8.3 SOIL VAPOR RAOs

RAOs for Public Health Protection

- Mitigate impacts to public health resulting from potential present and future soil vapor intrusion into buildings at the site.

3.0 DESCRIPTION OF REMEDIAL ACTION PLAN

3.1 EVALUATION OF REMEDIAL ALTERNATIVES

The objective of the remedy, a mixed use residential and commercial development, is to achieve a cleanup that is the most protective of human health and the environment and that does not rely on ECs or ICs. This objective will most likely be accomplished under a Track 1 remedy by achieving the USCOs.

Track 1

A remedy pursuant to this track must achieve compliance with the USCOs set forth in 6 NYCRR Table 375-6.8(a). In a conditional Track 1 remedy, temporary institutional and engineering controls are allowed only for periods of less than five (5) years except in the limited instance where a volunteer has conducted remedial activities resulting in a bulk reduction in groundwater contamination to asymptotic levels. This alternative would involve the complete removal and/or remediation of the soil with exceedances to the USCO, which were encountered at up to 25 ft-bgs across the Site. A feasible remedial technology that may be used to implement this alternative involves the excavation of the contaminated soil up to 26 ft-bgs and transportation to an approved off-Site facility for disposal. Construction at the Site requires excavation to 35 ft-bgs. Therefore, the planned excavation will be sufficient to fulfill Track 1 remedy requirements.

Temporary institutional and engineering controls may be implemented to address contamination in groundwater and soil vapor for a conditional Track 1 remedy. The groundwater remediation proposed will include the design and implementation of an in-situ treatment of the CVOC contamination. ZVI will be injected to destroy CVOC contaminants (mainly PCE). This in-situ chemical reduction treatment method involves the transfer of electrons from a reductant such as ZVI to a contaminant such as PCE, whereby the molecule is converted to harmless compounds. The micron-size ZVI is blended in a liquid-suspension that is injected, via Direct Push Technology or injection wells. The liquid suspension promotes broad dispersion in the subsurface at low and below fracture injection pressures, which optimizes distribution and contact. Through the process of reductive dichlorination, the PCE is degraded upon contact with the ZVI, and the byproducts are broken down into ethene.

The detailed design of the treatment, which will include the location of the injection points, quantity of ZVI to be injected and injection method, will be provided to NYSDEC and NYSDOH for review and approval prior to implementation. Following remediation, monitored natural attenuation

(MNA) that consists of periodic monitoring of the contaminant levels in the Site groundwater monitoring wells will constitute an engineering and institutional control until the groundwater levels are below the standards or until they reach asymptotic levels that are accepted by the NYSDEC. Given the low levels of groundwater exceedances, it is possible that the groundwater will meet the AWQS or stabilize at asymptotic levels within five (5) years after the remedial actions. If groundwater levels do not reach AWQS or the asymptotic levels are not accepted by the NYSDEC or NYSDOH, then the remedy will be considered a Track 2 remedy as described below.

Due to the elevated levels of chlorinated VOCs (PCE and TCE) in soil vapor, the remedy will include the installation of the elements of an SSDS underneath the building if the sub slab of the proposed building is not totally submerged under the water table during the seasonal low. The design for the proposed buildings has not been completed as of the time of writing this RAWP. Once the building design is completed, the design for the SSDS piping, if needed, will be developed and will be submitted for NYSDEC and NYSDOH approvals.

A soil vapor intrusion evaluation will be completed. If within the five-year period the VOC concentrations in the sub slab and indoor air drop to levels below the mitigate threshold requirements, a work plan will be submitted to NYSDEC and NYSDOH for their review and approval to shutdown and/or remove the SSDS. If the work plan is approved and the SSDS shut down, it will not be considered an EC anymore and the condition on the Track 1 remedy will be removed.

Track 2

Cleanups pursuant to this track may consider the intended future use in determining the appropriate cleanup levels for soil. This track requires the Volunteer implement a cleanup that achieves a soil cleanup objective (SCO) from tables in 6 NYCRR 375-6.7(b) that is consistent with the intended Site use for the top 15 feet of soil (or bedrock if less than 15 feet). The Site remediation pursuant to Track 2 would involve excavation and disposal of the contaminated soils to meet the objective SCOs.

The way to meet Track 2 would be to perform complete excavation down to at least 15 feet since the fill material contained contaminants that exceeded the Track 2 SCOs down to this depth, but this would leave contamination known to exist down to 25 ft bgs. Institutional and engineering controls that limit Site use and on-Site groundwater use can be used without regard to duration.

The groundwater remediation would be as described under Track 1 or MNA. If the active remedy is applied and groundwater concentrations do not meet the AWQS or reach levels accepted by the NYSDEC within five (5) years, then the MNA and wells will be considered a long-term engineering control under this track.

If the soil vapor levels do not reach the "no action" level as described in the matrices (May 2017), then the SSDS will continue to act as a permanent EC and the remedy will be Track 2.

A Track 2 cleanup at a restricted residential use site requires an SMP to ensure that any institutional and engineering controls are maintained, and material removed from the Site (post remedial action) is managed properly.

Track 3

The Track 3 cleanup is not applicable to this site because the contaminants present on this Site are common and are listed in the SCOs in NYCRR 375-6.8(b) tables.

Track 4

A Track 4 remedy for restricted residential use does not need to meet specific soil cleanup objectives but requires source removal and typically a Site-wide cover system where, as here, there is Site-wide surficial contamination.

Short- and long-term institutional and engineering controls can achieve protection of public health and the environment. In the event a remedy under Track 4 were to be implemented for this Site, it must provide a cover system over exposed remaining soil contamination. Soils that are not otherwise covered by structures such as buildings, sidewalks or pavement must be covered with 18 inches of soil that complies with the unrestricted or restricted residential SCOs and clean unrestricted topsoil in the top six (6) inches.

Track 4 also includes an SMP as an institutional control to ensure that any institutional and engineering controls are maintained, and material removed from the site (post remedial action) is managed properly. The SMP will include periodic (annual) monitoring and reporting of the cover system to ensure continued protection of the human health and the environment.

No Action Alternative

The no action alternative would leave existing sources of contamination in soil and groundwater and soil vapor. The no action alternative is thus unacceptable and has not been compared to the factors below.

Protection of human health and the environment:

Although all tracks will provide adequate protection of human health and the environment, Track 1 would be more protective than the other cleanup tracks because it would remove all soil contamination, which also act as on-Site sources of groundwater contamination. This conditional Track 1 remedy requires short-term ongoing temporary institutional and engineering controls to manage the vapor contamination to effectively protect human health and the environment and remediate groundwater. A Track 1 remedy also initially costs more and is less implementable than Track 2 and 4 remedies. However, if Track 1 can be implemented through the complete removal of all the contaminated soil, and implementation of a PRB, then groundwater should be able to naturally attenuate more rapidly than from the other remedies. Moreover, because a Track 1 remedy requires no long-term institutional or engineering controls, it is potentially less costly and more implementable in the long run than remedies that rely on such controls for long-term effectiveness. A Track 4 remedy would also be protective of human health and the environment if the proper long-term engineering and institutional controls are put in place and managed in an SMP. However, groundwater would remain contaminated for a longer time.

Compliance with standards, criteria, and guidelines (SCGs):

All cleanup tracks will achieve applicable cleanup standards. A Track 1 cleanup achieves a more stringent set of standards than a Track 2 cleanup. A Track 4 cleanup is not driven by standards but rather by source removal and SMP ECs and ICs to manage the remaining contamination in place to enable the safe reuse of the site for restricted residential purposes.

Short-term effectiveness and impacts:

Generally, Track 1 provides the best short-term effectiveness because it promptly removes the most contaminant mass from the Site. Track 2 also accomplishes this, but to a lesser extent. Track 4 is less effective in this regard. Tracks 1 and 2 are somewhat less favorable in terms of short-term impacts primarily because mass removal of the contaminated soils generates more truck trips than a Track 4 limited removal remedy. A Track 4 approach also reduces the risk of construction worker exposure by reducing the volume of contaminated soil being managed and has less potential to cause dust and traffic issues. Excavation may result in a greater potential

for migration of impacts from the open excavation (e.g. wind erosion, stormwater intrusion, etc.); however, an air monitoring program and erosion and sediment controls will be implemented to minimize and control any migration.

Long-term Effectiveness and Performance:

Because Tracks 1 and 2 would involve removal of the greatest amount of contaminated soil, they will provide the most long-term effectiveness. As already discussed above, a Track 1 cleanup will allow the Site to be used for any purpose without restriction and without reliance on the long-term employment ICs or ECs (which can fail and require ongoing monitoring and maintenance to remain effective over the long-term). A restricted residential Track 2 clean-up allows the Site to be used for almost all possible uses in an urban setting but requires ECs and ICs to ensure there is no exposure to residual contamination.

The long-term effectiveness of the Track 4 clean-up will be ensured with adherence to the SMP and recording of an EE. Although contaminants are left on Site, a properly maintained cover system is effective at eliminating the risk of dermal exposure and the planned soil vapor mitigation measures will also help to ensure lack of exposure to any remaining on-Site vapors.

Reduction of toxicity, mobility, or volume of contaminated material:

Tracks 1 through 4 will reduce toxicity and mobility. A Track 1 or 2 would result in more reduction in the volume of contaminated soil than a Track 4 clean-up. While Track 4 provides a relatively smaller reduction in volume than the other tracks, it relies primarily on the decrease of contaminant mobility.

Constructability:

Tracks 1, 2 and 4 are all implementable given the location and the planned use for the Site. While there are short-term potential impacts from a Track 1 or 2 remedy, the Site is located in the middle of an urban area, and therefore disposal of the contaminated soil and truck access will not be a problem. Moreover, these short-term impacts will be avoided through implementation of the CAMP and HASP, which will employ truck washing and odor and dust control measures. Therefore, Tracks 1 or 2 are implementable remedies for this Site.

Cost Effectiveness:

The preferred alternative should provide optimal suitability of the eight (8) accompanying evaluation factors with minimal remedial cost. The contaminated fill and soil layer extends from the surface to a maximum depth of 25 ft-bgs. Removal of the fill and soil layer and metal, SVOC and pesticide exceedances of the USCOs to achieve Tracks 1 or 2 Site wide will be more costly than a Track 4 remedy. However, this mass removal results in long-term savings by eliminating (or, in Track 2, significantly reducing) the need for indefinite cap monitoring and maintenance. In addition, a Track 1 or 2 remedy should eliminate any on-Site soil source that maybe contributing to soil vapor issues at the Site. Therefore, a Track 1 or 2 remedy for the Site is cost effective.

The implementation of a PRB for groundwater will be costly. However, it will enhance the removal of dissolved VOCs on the Site and prevent off-site migration. Some cost savings may be derived if the duration of MNA monitoring of groundwater is reduced. This is especially so in Track 1 or 2 if the mass of contaminants that could be a source of groundwater contamination is removed from the Site.

Community Acceptance:

A community outreach program will be incorporated into all remedial alternatives, per NYSDEC Brownfield Program law and regulations. The Site development will include an affordable housing component and is part of an area wide redevelopment that includes a mix of modern residences and retail stores in downtown Yonkers. The community should accept any of the remedies; however, the Track 1 or 2 remedy is preferable to the community since it will reduce the most contamination and prevent off-Site migration.

Land use:

Tracks 1 and 2 would achieve remediation for the planned residential use of the Site, which is consistent with the proposed plans Yonkers has for the area. Developing the property will create short-term construction impacts, but the creation of a new downtown housing project will provide significant community benefits.

Zoning: All of the proposed remedies under each track will facilitate the Site to be utilized for a proposed mixed commercial-residential development, which is consistent with applicable zoning laws and anticipated future use of the site.

Applicable comprehensive community master plans or land use plans: Implementation of all tracks (with institutional controls) cleanup will facilitate the proposed commercial-residential development, which is consistent with the current local land use plan.

Surrounding property uses: Any cleanup approach is not expected to significantly impact land use of the surrounding properties as the truck traffic and access will be on public roads. There will be short-term impacts from the remediation and construction project, but these will result in long-term benefits of converting defunct, abandoned and contaminated property into new affordable housing and commercial uses.

Citizen Participation: Citizen Participation during implementation of a remedial program will proceed in accordance with the Citizen Participation Plan included as Appendix F of the RIWP and as noted above will have minimal community impact. Any short-term impacts will be addressed by the CAMP and the HASP.

Environmental justice concerns: There are no known environmental justice concerns associated with this project.

Land use designations: A Track 1 remedy will not restrict any current or future land use designations. A restricted residential Track 2 remedy will have very minimal restrictions on the future land use of the property. A Track 2 remedy will have restrictions that will be managed in the SMP.

Population growth patterns: Any of the proposed remedies will not impact reasonably anticipated population growth patterns in the area other than to better accommodate growth by providing for new downtown affordable housing.

Accessibility to existing infrastructure: Access to existing infrastructure is present in the surrounding area, and there is access to mass transit via the Metro North train station 0.15 miles away. Some on-site utility infrastructure will likely have to be demolished and removed as part of the remediation. However, new infrastructure will be installed subsequent to the remediation as part of the redevelopment.

Proximity to natural resources: The closest surface water body is the Hudson River, which is located 0.23 miles to the east of the subject property. Stormwater drainage patterns are generally consistent with the surrounding topography and primarily flow to the north.

Geography and geology of the Site: See Section 2.4 above.

Current Institutional Controls: There are no current institutional controls associated with the Site.

3.2 SELECTION OF THE PREFERRED METHOD

The remedial alternatives analysis determined that a Track 1 (if achievable) or 2 remedy will be the goal for the Site.

3.3 SUMMARY OF SELECTED REMEDIAL ACTIONS

A summary of the selected Track 1 or 2 remedial actions to address the impacts identified are discussed below:

1 Removal of asphalt pavement and installation of an SOE system along the sidewalls of the entire Site for structure stability of the remedial excavation pit and to prevent off-Site migration and impacts to off-site structures.

2 Excavation of all Site soils to achieve an unrestricted Track 1 cleanup by removing the contaminated fill/ soil. Endpoint confirmatory sampling will be required to prove Track 1 was achieved and sidewall sampling will be implemented to document any remaining contamination in sidewalls at the property boundary.

3 ZVI will be injected into the subsurface to form a vertical PRB along the upgradient and downgradient boundaries of the Site to destroy contaminants entering or leaving the Site. If post-excavation monitoring of VOCs does not show achievement of groundwater remedial objectives within five (5) years of the date of the Certificate of Completion, then the remedy will achieve a Track 2 residential cleanup.

4 Installation of the elements of a sub-slab depressurization system (SSDS) underneath the building foundation if the sub-slab of the proposed building is not under the water table during the seasonal low. A soil vapor intrusion evaluation will be conducted to determine if the soil vapor (SV) levels constitute a vapor intrusion (VI) . The elements of the SSDS will be turned into engineering control (EC) as an active SSDS if the soil vapor evaluation determines that vapor mitigation is needed.

5 Following installation of the SSDS, a soil vapor intrusion evaluation will be conducted to determine if the SSDS needs to be made active.

6 Recording of an EE for the entire Site. The EE will remain effective until the EC and ICs are removed if a Track 1 remedy is accomplished within five (5) years. If the Track 1 remedy is not achieved in this timeframe as a result of any remaining on-Site conditions, the EE will continue under a Track 2 remedy for any residual groundwater and soil vapor contamination provided the vapor on Site is not still emanating from an off-site source.

7 Preparation of an SMP, for the conditional Track 1 or Track 2 remedy, for long-term management of residual contamination as required by the Environmental Easement, particularly as they pertain to future phases of construction, including plans for: (1) Institutional and Engineering Controls, (2) groundwater (if required) and soil vapor monitoring, and (3) reporting.

8 Documentation of all appropriate off-site disposal of all material removed from the Site in accordance with all Federal, State and local rules and regulations for handling, transport, and disposal.

9 Import of backfill materials during redevelopment construction activities, to be used for backfilling and soil cover, if necessary, must be in compliance with: (1) chemical limits and other specifications included in NYCRR Sections 375-6.7(d) and 375-6.8 (b) and DER-10 (2) all Federal, State, local rules and regulations and site-specific approvals for handling/reuse and transport of material;

10 All responsibilities associated with the Remedial Action, including permitting requirements and pretreatment requirements, will be addressed in accordance with all applicable Federal, State and local rules and regulations and overseen and certified by the SESI Remedial Engineer of Record described below.

Remedial activities will be performed at the Site in accordance with this NYSDEC-approved RAWP. All deviations from the RAWP will be promptly reported to NYSDEC for approval and fully explained in the Final Engineering Report (FER).

3.4 PRE-DESIGN INVESTIGATION

In order to delineate off-Site groundwater quality not investigated during the RI, one (1) downgradient monitoring well will be advanced in the sidewalk along Main Street as shown on **Figure 3.1**. The depth to groundwater is anticipated to be approximately 11 ft-bgs, and the well boring will be advanced to a maximum of 20 ft-bgs. The well will be constructed with 1-inch diameter pre-packed well screening. The well screening will intersect the water table and extend to the bottom of the well boring. The annular space of each well will be filled with well sand to at least 2 feet above the screening and will be sealed with hydrated bentonite or cement grout. The monitoring well will be completed with a flush-mount road-box.

Following installation, the well will be developed and then sampled using low flow techniques. A flow rate of 100 ml to 250 ml per minute is used to purge the wells. Drawdown should not exceed 0.3 feet. At the initiation of low-flow purging, water levels and field parameters are recorded. Field parameters are then monitored every five minutes during low-flow purging using a flow-through cell. When three consecutive measurements of pH differ by 0.1 units or less, with ORP within 10 mv or less, turbidity

varies 10 percent or less, conductivity differs by 3 percent or less and dissolved oxygen by 10 percent or less, sampling may begin. Flow-through cells allow continuous real-time readings. When the parameters stabilize, the flow-through cell is disconnected and sample bottles are filled directly from the tubing. If the parameters of a well do not stabilize in a timely manner, the groundwater sample will be collected after emptying three (3) well volumes from the well to be sampled. A groundwater sample will be collected in accordance with NYSDEC's *Sampling, Analysis, and Assessment of Per- and Polyfluoroalkyl Substances (PFAS)* (April 2023) and submitted for PFAS analysis by EPA Method 1633 from an ELAP-certified laboratory.

4.0 REMEDIAL ACTION PROGRAM

4.1 GOVERNING DOCUMENTS

4.1.1 SITE-SPECIFIC HEALTH AND SAFETY PLAN

A copy of the SESI HASP is included as **Appendix A**. All remedial work performed under this plan will be in full compliance with governmental requirements, including Site and worker safety requirements mandated by Federal OSHA.

The Volunteer and associated parties preparing the remedial documents submitted to the State and those performing the construction work, are completely responsible for the preparation of an appropriate HASP and for the appropriate performance of work according to that plan and applicable laws.

The HASP and requirements defined in this RAWP pertain to all remedial and invasive work performed at the Site until the issuance of a Certificate of Completion.

4.1.2 QUALITY ASSURANCE PROJECT PLAN (QAPP)

A copy of SESI QAPP is included as **Appendix B**. All field sampling procedures and analytical methods will be implemented in accordance with this QAPP.

4.1.3 SOIL/MATERIALS MANAGEMENT PLAN (SoMP)

The SoMP is included as Section 5.9 and includes detailed plans for managing all soils/materials that are disturbed at the Site, including excavation, handling, storage, transport and disposal. It also includes all of the controls that will be applied to these efforts to assure effective, nuisance-free performance in compliance with all applicable Federal, State and local laws and regulations.

4.1.4 STORM WATER POLLUTION PREVENTION PLAN (SWPPP)

An SWPPP will be prepared prior to start of remediation or construction work. The SWPPP will address requirements of the New York State Storm-Water Management Regulations including physical methods to control and/or divert surface water flows and to limit the potential for erosion and migration of Site soils, via wind or water.

The erosion and sediment controls included in the SWPPP will be in conformance with requirements presented in the New York State Guidelines for Urban Erosion and Sediment Control and will be thoroughly analyzed during the SEQRA EIS process.

4.1.5 COMMUNITY AIR MONITORING PLAN

A copy of the CAMP for the Site is included as **Appendix C**.

4.2 GENERAL REMEDIAL CONSTRUCTION INFORMATION

4.2.1 PROJECT ORGANIZATION

St. Clair Development, LLC is the BCP Volunteer and redeveloper of the Site. SESI is the environmental consultant for the Volunteer. A table summarizing the various personnel associated with the project is included as **Table 4.1** below.

Table 4.1 – Project Personnel

Name	Company	Project Position	Address	Phone Number
Joseph Apicella	Macquesten Companies	Volunteer Contact	438 Fifth Avenue - Suite 100 - Pelham, NY 10803	914.667.7227
Steven Gustems, PG	SESI Consulting Engineers, P.C.	Environmental Consultant's Project Manager	959 Route 46E Parsippany, NJ 07054	(973) 808-9050
Fuad Dahan, PE	SESI Consulting Engineers, P.C.	Remedial Engineer	959 Route 46E Parsippany, NJ 07054	(973) 808-9050
Rachel Savarie, PE	NYSDEC	Project Manager	625 Broadway,12th Floor Albany, NY 12233-7014	(518) 402-9717

4.2.2 REMEDIAL ENGINEER

The Remedial Engineer for this project will be Fuad Dahan, PE. The Remedial Engineer is a registered professional engineer licensed by the State of New York. The Remedial Engineer will have primary direct responsibility for implementation of the remedial program for the St. Clair Hotel Dry Cleaners Site (Site No. C360220). The Remedial Engineer will certify the FER that the remedial activities were observed by qualified environmental professionals under his supervision and that the remediation requirements set forth in the RAWP and any other relevant provisions of ECL 27-1419 have been achieved in full conformance with that Plan. Other Remedial Engineer certification requirements are listed later in this RAWP.

The Remedial Engineer will review all pre-remedial plans submitted by contractors for compliance with this RAWP and will certify compliance in the FER.

The Remedial Engineer will provide the certifications listed in the FER.

4.2.3 REMEDIAL ACTION SCHEDULE

A remedial action schedule is included as **Table 4.2** below. The schedule includes estimates of time required to complete the activities associated with the remedial action. It is based on elapsed time from receipt of NYSDEC approval. Once NYSDEC approves this RAWP, an updated schedule showing actual dates will be provided to the NYSDEC as an addendum to this plan.

Table 4.2 – Remedial Action Schedule

Activity	Date
RIR submission	November 2022
RAWP Submission	February 2023
Start of RAWP Public Comment period	March 2023
NYSDEC approves RAWP and issues decision document	April 2023
Start of remedial work (excavation and soil disposal, dewatering)	July 2023
Completion of soil excavation	October 2023
Submission of Environmental Easement and SMP	December 2023
Draft FER, submit FER to NYSDEC	December 2023
Certificate of Completion	January 2024

4.2.4 WORK HOURS

The hours for operation of remedial construction will conform to the City of Yonkers Department of Housing and Buildings construction code requirements or according to specific variances issued by that agency. NYSDEC will be notified by the Applicant of any variances issued by the Department of Buildings.

4.2.5 SITE SECURITY

The Site will be secured with fences and locked gates.

4.2.6 PRE-CONSTRUCTION MEETING WITH NYSDEC

A pre-construction meeting will be held with NYSDEC prior to the start of major remedial construction activities.

4.2.7 EMERGENCY CONTACT INFORMATION

An emergency contact sheet with names and phone numbers is included in **Table 4.3** below. That document will define the specific project contacts for use by NYSDEC and NYSDOH in case of a day or night emergency.

Table 4.3 - Emergency and Contact Numbers

Medical, Fire, and Police:	911
One Call Center:	(800) 272-4480 (3-day notice required for utility markout)
Poison Control Center:	(800) 222-1222
Pollution Toxic Chemical Oil Spills:	(800) 424-8802
NYSDEC Spills Hotline	(800) 457-7362
Fuad Dahan – Remedial Engineer (SESI Consulting Engineers)	(973) 808-9050
Director of Construction	TBD

* Note: Contact numbers subject to change and will be updated as necessary

4.3 SITE PREPARATION

4.3.1 MOBILIZATION

Mobilization tasks will include:

- Construction of temporary facilities and utilities;
- Set-up of construction equipment and facilities;
- Construction of fencing and barriers;
- Construction of erosion control measures; and
- Construction of decontamination and materials staging areas.

4.3.2 EROSION AND SEDIMENTATION CONTROLS

Erosion and sediment control measures are outlined in the SWPPP (see Section 4.1.4).

4.3.3 UTILITY MARKER AND EASEMENTS LAYOUT

The Volunteer and its contractors will be solely responsible for the identification of utilities that might be affected by work under the RAWP and implementation of all required, appropriate, or necessary health and safety measures during performance of work under this RAWP. The Volunteer and its contractors are solely responsible for safe execution of all invasive and other work performed under this RAWP. The Volunteer and its contractors will obtain any local, State or Federal permits or approvals pertinent to such work that may be required to perform work under this RAWP. Approval of this RAWP by NYSDEC does not constitute satisfaction of these requirements.

4.3.4 SHEETING AND SHORING

A SOE system consisting of steel sheeting will be installed prior to the excavation activities as part of the Site preparation activities pursuant to this RAWP.

The Volunteer and its contractors will be solely responsible for safe execution of all invasive and other work performed under this Plan and the implementation of safety measures (Sheeting and Shoring) as necessary to maintain safe working environment. The Volunteer and its contractors will obtain any local, State or Federal permits or approvals that may be required to perform work under this Plan. Further, the Volunteer and its contractors are solely responsible for the implementation of all required, appropriate, or necessary health and safety measures during performance of work under the approved Plan.

4.3.5 DEWATERING

Dewatering will be required as part of this remedy because groundwater was identified at depths ranging from 11.6 to 17.6 ft-bgs. During the Site remediation, dewatering will be implemented during the excavation work where groundwater is encountered in order to prevent direct contact with the groundwater. The water will be properly contained, treated and disposed off-Site either in the POTW sewer or shipped to an approved off-Site treatment facility. Further groundwater remediation will aim to mitigate potential groundwater and vapor concerns and try to reduce contamination to levels below the AWQSs. If groundwater is discharged to the sanitary sewer, a groundwater remediation permit will be obtained from the Westchester County Department of Environmental Facilities.

4.3.6 EQUIPMENT AND MATERIAL STAGING

Equipment and material staging areas are expected to be relocated throughout the Site during remedial construction.

4.3.7 DECONTAMINATION AREA

A tracking pad will be required for any vehicles going off-site that have come in contact with on-Site soils. The decontamination area construction and operational requirements are provided in the HASP. All vehicle tires must be washed before exiting the Site.

4.3.8 SITE FENCING

A construction safety fence will be installed around the entire perimeter of the Site. Access through gates will be provided at various points as required by the Volunteer and its contractors. These gates will be locked during non-construction hours.

4.3.9 DEMOBILIZATION

Demobilization will include the following:

- Restoration of areas that may have been disturbed to accommodate support areas (e.g., staging areas, decontamination areas, storage areas, temporary water management area[s], and access area);
- Removal of temporary access areas (whether on-Site or off-Site) and restoration of disturbed access areas to pre-remediation conditions;
- Removal of sediment and erosion control measures and disposal of materials in accordance with acceptable rules and regulations;
- Equipment decontamination; and
- General refuse disposal.

4.4 REPORTING

4.4.1 WEEKLY REPORTS

Weekly reports will be submitted to NYSDEC and NYSDOH Project Managers on Monday following the end of the week of the reporting period and will include:

- Activities relative to the Site during the previous reporting period and those anticipated for the next reporting period, including a quantitative presentation of work performed (i.e. tons of material exported and imported, etc.);

- Description of approved activity modifications, including changes of work scope and/or schedule;
- Sampling results received following internal data review and validation, as applicable; and,
- An update of the remedial schedule including the percentage of project completion, unresolved delays encountered or anticipated that may affect the future schedule, and efforts made to mitigate such delays.
- A description of any CAMP exceedances recorded, and actions taken, and the effectiveness of actions taken to remedy any exceedances. In addition to the weekly reporting, any CAMP exceedances recorded will be reported to the NYSDEC and NYSDOH project managers on a daily basis.
- A description of CAMP noise, odor, and/or vibration complaints will be reported to the NYSDEC and NYSDOH project managers on a daily basis.

4.4.2 OTHER REPORTING

Photographs will be taken of all remedial activities and submitted to NYSDEC in digital (JPEG) format. Photos will illustrate all remedial program elements and will be of acceptable quality. Representative photos of the Site prior to any Remedial Actions will be provided. Representative photos will be provided of each contaminant source, source area and Site structures before, during and after remediation. Photos will be submitted to NYSDEC on CD or other acceptable electronic media and will be sent to NYSDEC's Project Manager (2 copies) and to NYSDOH's Project Manager (1 copy). CDs will have a label and a general file inventory structure that separates photos into directories and sub-directories according to logical Remedial Action components. A photo log keyed to photo file ID numbers will be prepared to provide explanation for all representative photos.

Job-site record keeping for all remedial work will be appropriately documented. These records will be maintained on-site at all times during the project and be available for inspection by NYSDEC and NYSDOH staff.

4.4.3 COMPLAINT MANAGEMENT PLAN

A public information board will be constructed at the perimeter of the Site. This information board will contain the phone number of the Volunteer where complaints may be directed. General information notices to the public will also be posted on this board for their benefit.

4.4.4 DEVIATIONS FROM THE REMEDIAL ACTION WORK PLAN

If there are any deviations from the RAWP, the following steps will be taken:

- Reasons for deviating from the approved RAWP will be identified and communicated directly to the NYSDEC Project Manager;
- All deviations will be communicated verbally and in writing (by letter or email) to the NYSDEC Project Manager;
- The deviations will be implemented based on verbal or written approval of the NYSDEC Project Manager. All verbal approvals will be followed-up in writing.
- The effect of the deviations on the overall remedy will be described/addressed in the FER.

5.0 REMEDIAL ACTION

Removal of all contaminated soil under the Remedial Action for the Site will be implemented in accordance with the Site-specific QAPP (**Appendix B**). Soil exceeding the Trac k 1 SCOs extends to a depth of 25 ft-bgs. A plan depicting the locations where the excavation activities will be carried out is included as **Figure 5.1**. The estimated excavation volume is approximately 8,600 cubic yards (CY) of planned remedial excavation.

Temporary institutional and engineering controls may be implemented to address contamination in groundwater and soil vapor for a conditional Track 1 remedy. The groundwater remediation proposed will include the design and implementation of an in-situ ZVI treatment of the CVOC contamination. The soil vapor pathway will be addressed with the piping for a temporary SSDS and soil vapor sealing layer. The SSDS could be made active as described herein pending future soil vapor sampling results.

5.1 CLEANUP OBJECTIVES

The Soil Cleanup Objectives for this Site are the Track 1 USCOs as listed in **Appendix D**.

- Soil and materials management on-site will be conducted in accordance with the Soil Management Plan as described below (Section 5.9).
- Groundwater cleanup objectives will be the NYSDEC TOGS AWQS.
- Soil vapor mitigation objectives will be the NYSDOH Guideline Values and Decision Matrices for the specific contaminants of concern.

5.2 REMEDIAL PERFORMANCE EVALUATION

5.2.1 END-POINT SAMPLING FREQUENCY

End point sampling, including bottom and sidewall sampling, will be performed in accordance with DER-10 sample frequency requirements. Sidewall samples will be collected at a minimum of one (1) every 30 linear feet. Bottom samples will be collected at a rate of one (1) for every 900 square feet. A post-excavation sampling plan is shown in **Figure 5.1**, where the grids are 30 by 30 feet. Post-excavation samples will be collected from the center of each grid once the excavation has been completed to 25 ft-bgs. The collection and analysis of confirmation samples and documentation samples at the remedial excavation depths will be used to verify that the USCOs have been achieved. If confirmation sampling indicates there are still soil exceedances in excess of the USCOs excavation will continue until confirmation sampling results indicate no

exceedances of the USCOs. If soil impacts continue to extend deeper and further excavation is not desired, the excavation will not be sufficient to fulfill Track 1 remedy requirements and the remedy will be Track 2. Further excavation for development will proceed after confirmation samples demonstrate SCOs for the Site have been achieved. The results will be shared with the NYSDEC in the weekly report. The FER will provide a tabular and map summary of all end-point sample results and exceedances of SCOs.

5.2.2 GROUNDWATER SAMPLING

The remedy will include mass source removal during the remedial excavation, dewatering to remove some contaminated groundwater, and in-situ ZVI injections. Groundwater sampling will be conducted in order to verify that the groundwater remedy is effective. The goal of the groundwater remedy is to achieve the TOGS AWQS standards or to reach asymptotic levels. Residual groundwater VOC contamination will be monitored following treatment to determine if additional injections are required to meet remedial objectives and prevent off-site migration. Groundwater treatment will be implemented until the groundwater levels are below the standards or until they reach asymptotic levels that are accepted by the NYSDEC.

5.2.3 VI MITIGATION AND EVALUATION SAMPLING

Installation of the elements of a sub-slab depressurization system (SSDS) underneath the building foundation if the sub-slab of the proposed building is not under the water table including during the seasonal low. The venting layer consists of six to eight inches of sand or crushed stone with a network of perforated pipes that act as transmission conduits for the contaminated soil gas. The perforated pipes are vented to the outside with risers. The system will be designed as passive with the possibility of switching to active if active venting is needed to meet the VI indoor air objectives. The sealing methodology will consist of a vapor barrier comprised of 20-mils thickness of high or low-density polyethylene (H or LDPE) or an approved equal. The vapor barrier will be installed on top of the venting layer just below the slab to provide the required sealing layer as stated in the NYSDOH Guidance. All the utility penetrations into the slab will also be sealed. Sampling ports will be built into the vapor barrier to prevent future sampling penetrations.

The SSDS operation and monitoring will be described in a SMP. Following installation of the SSDS, a soil vapor intrusion evaluation will be conducted to determine if the SSDS needs to be made active, and thereafter if an active system is required, to determine the ongoing long-term presence or mitigation of VI. If within the five-year period the VOC concentrations in the sub slab

and indoor air drop to levels below the mitigate threshold requirements, a work plan will be submitted to NYSDEC and NYSDOH for their review and approval to shutdown and/or remove the SSDS. If the work plan is approved and the SSDS shut down, it will not be considered an EC anymore and the condition on the Track 1 remedy will be removed.

5.3 METHODOLOGY

Soil samples will be collected in accordance with the QAPP using disposable gloves/trowels or dedicated, decontaminated stainless steel spoons. Groundwater samples will be collected in accordance with the QAPP using the low-flow purging and sampling method and associated decontamination and quality control procedures.

5.4 REPORTING OF RESULTS

The samples will be submitted to a NYSDOH Environmental Laboratory Accreditation Program (ELAP) certified laboratory. The results will be reported in accordance with NYSDEC requirements for Category B data deliverables (as outlined in DER-10). In addition, all data collected during the remedial action will be submitted in the NYSDEC approved Electronic Data Deliverable format using the NYSDEC's Environmental Information Management System database software application EQuIS™.

5.5 QA/QC

Collection of quality assurance/quality control (QA/QC) samples to evaluate potential cross-contamination from sampling equipment and during shipment of samples and repeatability of laboratory analytical practices will be in accordance with the QAPP included as **Appendix B**. Field blanks, trip blanks and duplicate samples associated with daily sampling activities will be collected as a part of the QA/QC practices.

5.6 DATA USABILITY SUMMARY REPORT (DUSR)

To ensure that the field sampling and laboratory analytical practices are acceptable, the data associated with all the samples will be validated by a third party (in accordance with requirements of DER-10). The validation approach and results will be presented in a DUSR to be included in the FER.

5.7 REPORTING OF END-POINT DATA IN FER

The FER will include a table of final soil and groundwater sample data with highlights or a

summary of exceedances of the Track 1 USCOs and AWQS.

The FER will include a table of end point data with highlights or a summary of exceedances of SCOs. A spider map showing all SCO exceedances will also be presented in the FER.

Chemical labs used for all end-point sample results and contingency sampling will be NYSDOH ELAP certified.

End point sampling, including bottom and sidewall sampling, will be performed in accordance with DER-10 sample frequency requirements. Sidewall samples will be collected a minimum of every 30 linear feet. Bottom samples will be collected at a rate of one for every 900 square feet. A post-excavation sampling plan is shown in **Figure 5.1**, where the grids are 30 by 30 feet. Post-excavation samples will be collected from center of each grid as the excavation proceeds. The results will be shared with the NYSDEC in the weekly report. The FER will provide a tabular and map summary of all end-point sample results and exceedances of SCOs.

5.8 ESTIMATED MATERIAL REMOVAL QUANTITIES

Source removal excavation activities will be implemented during the course of the remediation activities throughout the footprint of the Site. The entire Site within the SOE will be excavated to remove all soil exceedances in order to achieve a Track 1 remedy. Endpoint and sidewall sampling will document remaining soil conditions. Backfilling is expected to be needed in certain of areas on the Site.

The estimated quantity of soil/fill to be removed from the Site is approximately 8,600 CY. A plan depicting the proposed 25 foot excavation depth is included as **Figure 5.1**. The actual excavated volume will be reported in the FER as a tally of the manifests and tickets of the soils disposed off-Site.

5.9 SOIL/MATERIALS MANAGEMENT PLAN

Approximately 8,600 CY of material may be required to be excavated during construction activities. Any required fill will consist of imported clean fill that meets the requirements per 6 NYCRR Part 375-6.7(d) and the requirements for emerging contaminants sampling per the November 2022 NYSDEC Guidance Document.

5.9.1 SOIL SCREENING METHODS

Visual, olfactory and PID soil screening and assessment will be performed by a qualified environmental professional during all remedial and development excavations into known or potentially contaminated material (Residual Contamination Zone). Soil screening will be performed regardless of when the invasive work is done and will include all excavation and invasive work performed during the remedy and during development phase, such as excavations for foundations and utility work, prior to issuance of the Certificate of Completion.

All primary contaminant sources identified during Site Characterization, Remedial Investigation, and Remedial Action will be surveyed by a surveyor licensed to practice in the State of New York. This information will be provided on maps in the FER.

Screening will be performed by qualified environmental professionals. Resumes will be provided for all personnel responsible for field screening (i.e. those representing the Remedial Engineer) of invasive work for unknown contaminant sources during remediation and development work.

5.9.2 STOCKPILE METHODS FOR CONTAMINATED SOILS

Stockpiles of contaminated materials, if needed, will be inspected at a minimum once each week and after every storm event. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by NYSDEC.

Stockpiles will be kept covered at all times with appropriately anchored tarps. Stockpiles will be routinely inspected and damaged tarp covers will be promptly replaced.

Soil stockpiles will be encircled with silt fences. Hay bales will be used as needed near catch basins, surface waters and other discharge points.

5.9.3 MATERIALS EXCAVATION AND LOAD-OUT

The Remediation Engineer or a qualified environmental professional under his/her supervision will oversee all invasive work and the excavation and load-out of all excavated material.

The Applicant and its contractors are solely responsible for safe execution of all invasive and other work performed under this Plan.

The presence of utilities and easements on the Site has been investigated during the remedial investigation work. It has been determined that no risk or impediment to the planned work under this RAWP is posed by utilities or easements on the Site.

Loaded vehicles leaving the Site will be appropriately lined, tarped, securely covered, manifested, and placarded in accordance with appropriate Federal, State, local, and New York State Department of Transportation requirements (and all other applicable transportation requirements).

A truck wash associated with construction activities will be operational during construction. A truck wash is always required for large soil excavation projects such as this. The Remediation Engineer will be responsible for ensuring that all outbound trucks are not causing any off-site tracking of the contaminated soils.

Locations where vehicles enter or exit the Site will be inspected daily for evidence of off-Site sediment tracking.

The Remediation Engineer will ensure that all egress points for truck and equipment transported from the Site will be clean of dirt and other materials derived from the Site during Site remediation and development. Cleaning of the adjacent streets will be performed as needed to maintain a clean condition with respect to Site-derived materials.

The Volunteer and associated parties preparing the remedial documents submitted to the State, and parties performing this work, are completely responsible for the safe performance of all invasive work, the structural integrity of excavations, and for structures that may be affected by excavations (such as building foundations and bridge footings).

The Remedial Engineer will ensure that Site development activities will not interfere with, or otherwise impair or compromise, remedial activities proposed in this RAWP.

5.9.4 MATERIALS TRANSPORT OFF-SITE

All transport of materials will be performed by licensed haulers in accordance with appropriate local, State, and Federal regulations, including 6 NYCRR Part 364. Haulers will be appropriately licensed and trucks properly placarded.

Truck transport routes will be included in the SOP. All trucks loaded with Site materials will exit the vicinity of the Site using only these approved truck routes.

Proposed inbound and outbound truck routes to the Site will take into account: (a) limiting transport through residential areas and past sensitive sites; (b) use of city mapped truck routes; (c) prohibiting off-site queuing of trucks entering the facility; (d) limiting total distance to major highways; (e) promoting safety in access to highways; (f) overall safety in transport; and (g) community input, which was sought and obtained during the SEQRA EIS process.

Trucks will be prohibited from stopping and idling in the neighborhood outside the project Site. Egress points for truck and equipment transport from the Site will be kept clean of dirt and other materials during Site remediation and development.
Queuing of trucks will be performed on-Site in order to minimize off-Site disturbance. Off-Site queuing will be prohibited.

Material transported by trucks exiting the Site will be secured with tight-fitting covers. Loose-fitting canvas-type truck covers will be prohibited. If loads contain wet material capable of producing free liquid, truck liners will be used.

A tracking pad will be installed at the Site egress to ensure clean-up of the soils from the truck tires. If needed, truck tires will be washed. Truck wash waters will be collected and disposed of off-Site in an appropriate manner.

5.9.5 MATERIALS DISPOSAL OFF-SITE

Approval from appropriate disposal facilities will be received prior to start of work. The total quantity of material expected to be disposed off-Site is 8,600 CY.

All soil/fill/solid waste excavated and removed from the Site will be treated as contaminated and regulated material and will be disposed in accordance with all local, State (including 6NYCRR Part 360) and Federal regulations. If disposal of soil/fill from this Site is proposed for unregulated disposal (i.e. clean soil removed for development purposes), a formal request with an associated plan will be made to NYSDEC's Project Manager. Unregulated off-Site management of materials from this Site will not be undertaken without formal NYSDEC approval.

Material that does not meet Track 1 unrestricted SCOs is prohibited from being taken to a New York State recycling facility (6NYCRR Part 360-16 Registration Facility).

The following documentation will be obtained and reported by the Remedial Engineer for each disposal location used in this project to fully demonstrate and document that the disposal of material derived from the Site conforms with all applicable laws: (1) a letter from the Remedial Engineer or Volunteer to the receiving facility describing the material to be disposed and requesting formal written acceptance of the material. This letter will state that material to be disposed is contaminated material generated at an environmental remediation Site in New York State. The letter will provide the project identity and the name and phone number of the Remedial Engineer. The letter will include as an attachment a summary of all chemical data for the material being transported (including Site Characterization data); and (2) a letter from all receiving facilities stating it is in receipt of the correspondence (above) and is approved to accept the material. These documents will be included in the FER.

Non-hazardous historic fill and contaminated soils taken off-Site will be handled, at minimum, as a Municipal Solid Waste per 6NYCRR Part 360-1.2.

Historical fill and contaminated soils from the Site are prohibited from being disposed at Part 360-16 Registration Facilities (also known as Soil Recycling Facilities).

Soils that are contaminated but non-hazardous and are being removed from the Site are considered by the Division of Materials Management (DMM) in NYSDEC to be Construction and Demolition (C/D) materials with contamination not typical of virgin soils. These soils may be sent to a permitted Part 360 landfill. They may be sent to a permitted C/D processing facility without permit modifications only upon prior notification of NYSDEC Region 3 DMM. This material is prohibited from being sent or redirected to a Part 360-16 Registration Facility. In this case, as dictated by DMM, special procedures will include, at a minimum, a letter to the C/D facility that provides a detailed explanation that the material is derived from a NYSDEC remediation Site, that the soil material is contaminated and that it must not be redirected to on-site or off-site Soil Recycling Facilities. The letter will provide the project identity and the name and phone number of the Remedial Engineer. The letter will include as an attachment a summary of all chemical data for the material being transported.

The FER will include an accounting of the destination of all material removed from the Site during this Remedial Action, including excavated soil, contaminated soil, historic fill, solid waste, and hazardous waste, non-regulated material, and fluids. Documentation associated with disposal of all material must also include records and approvals for receipt of the material. This information will also be presented in a tabular form in the FER.

Bill of Lading system or equivalent will be used for off-Site movement of non-hazardous wastes and contaminated soils. This information will be reported in the FER.

Hazardous wastes, if any, derived from on-Site will be stored, transported, and disposed of in full compliance with applicable local, State, and Federal regulations.

Appropriately licensed haulers will be used for material removed from this Site and will be in full compliance with all applicable local, State and Federal regulations.

Waste characterization will be performed for off-Site disposal in a manner suitable to the receiving facility and in conformance with applicable permits. Sampling and analytical methods, sampling frequency, analytical results and QA/QC will be reported in the FER. All data available for soil/material to be disposed at a given facility must be submitted to the disposal facility with suitable explanation prior to shipment and receipt.

5.9.6 FLUIDS MANAGEMENT

All liquids to be removed from the Site, including dewatering fluids, will be handled, transported and disposed in accordance with applicable local, State, and Federal regulations. If any liquids need to be discharged into the sewer system, then approval by local utility authority and NYSDEC will be sought prior to the discharge. Dewatered fluids will not be recharged back to the land surface or subsurface of the Site without NYSDEC approval.

Water generated during remedial construction will not be discharged to surface waters (i.e. a local pond, stream or river) without a state pollutant discharge elimination system permit.

5.9.7 DEMARCATION

A land survey of the Site will be performed by a New York State licensed surveyor, if a Track 4 clean-up has been selected, after the completion of related construction activities. The survey will define the top elevation of residual contaminated soils. This survey will constitute the written

record of the upper surface of the 'Residuals Management Zone' in the Site Management Plan. A map showing the survey results will be included in the FER and the SMP.

5.9.8 BACKFILL FROM OFF-SITE SOURCES

Material imported to be used on-site as backfill will be sampled at a frequency of one (1) composite sample per 500 cubic yards of material from each off-site borrow area. If more than 1,000 cubic yards of soil are needed from the same source area and both samples of the first 1,000 cubic yards meet the USCOs, the sample frequency will be reduced to one (1) composite for every 2,500 cubic yards of additional soils from the same source, up to 5,000 cubic yards. For borrow sources greater than 5,000 cubic yards, sampling frequency may be reduced to one (1) sample per 5,000 cubic yards, provided all earlier samples met the USCOs. The samples will be analyzed for TCL VOCs, TCL SVOCs, pesticides, PCBs, and TAL metals, including cyanide. The soil may be used as cover material provided that all parameters meet the USCOs, per the NYSDEC regulatory requirements. The imported material, if needed, will be sampled in accordance with DER-10 Section 5.4 (e) Table 5.4 (e)10 and paragraph 10. In addition, composite samples will be collected for emerging contaminants in accordance with the NYSDEC Sampling, Analysis, and Assessment of Per-and-Polyfluoroalkyl Substances (November 2022).

All materials proposed for import onto the Site will meet the USCO, will be approved by the Remedial Engineer and will be in compliance with provisions in this RAWP prior to receipt at the Site. A "Soil Reuse/Import" form will be submitted to the NYSDEC for pre-approval prior to importing any soils on -Site. Bills of Lading or equivalent documentation will be obtained to track the amount soil arriving onto the Site and verify the source of soil being imported.

Material from industrial sites, spill sites, other environmental remediation sites or other potentially contaminated sites will not be imported to the Site.

The Final Engineering Report will include the following certification by the Remedial Engineer: "I certify that all import of soils from off-Site, including source evaluation, approval and sampling, has been performed in a manner that is consistent with the methodology defined in the Remedial Action Work Plan".

All imported soils will meet NYSDEC approved backfill or cover soil quality objectives for this Site. Non-compliant soils will not be imported onto the Site without prior approval by NYSDEC. Nothing

in the approved Remedial Action Work Plan or its approval by NYSDEC will be construed as an approval for this purpose.

Soils that meet 'exempt' fill requirements under 6 NYCRR Part 360, but do not meet backfill or cover soil objectives for this Site, will not be imported onto the Site without prior approval by NYSDEC. Nothing in this Remedial Action Work Plan will be construed as an approval for this purpose.

Solid waste will not be imported onto the Site. Trucks entering the Site with imported soils will be securely covered with tight fitting covers.

5.9.9 CONTINGENCY PLAN

If underground tanks or other previously unidentified contaminant sources are found during on-Site remedial excavation or development related construction, sampling will be performed on product, sediment and surrounding soils, etc. Chemical analytical work will be for full scan parameters (TAL metals; TCL volatiles and semi-volatiles, TCL pesticides and PCBs, and emerging contaminants).

Identification of unknown or unexpected contaminated media identified by screening during invasive Site work will be promptly communicated by phone to NYSDEC's Project Manager. These findings will be also included in daily and periodic electronic media reports.

5.9.10 COMMUNITY AIR MONITORING PLAN

A copy of the CAMP for the Site is included as **Appendix C.** Exceedances observed in the CAMP will be reported to NYSDEC and NYSDOH Project Managers report to DEC within 24 hours and included in the weekly reports.

5.9.11 ODOR, DUST, AND NUISANCE CONTROL PLAN

Odor, dust and nuisance control will be in accordance with the Site-specific Health and Safety Plan included as **Appendix A**.

The FER will include the following certification by the Remedial Engineer: "I certify that all invasive work during the remediation and all invasive development work were conducted in accordance with dust and odor suppression methodology defined in the Remedial Action Work Plan."

Odor Control Plan

This odor control plan is designed to control emissions of nuisance odors off-Site. If nuisance odors are identified, work will be halted and the source of odors will be identified and corrected. Work will not resume until all nuisance odors have been abated. NYSDEC and NYSDOH will be notified of all odor events and of all other complaints about the project. Implementation of all odor controls, including the halt of work, will be the responsibility of the Applicant's Remediation Engineer, who is responsible for certifying the Final Engineering Report.

All necessary means will be employed to prevent on- and off-Site nuisances. At a minimum, procedures will include: (a) limiting the area of open excavations; (b) shrouding open excavations with tarps and other covers; and (c) using foams to cover exposed odorous soils. If odors develop and cannot be otherwise controlled, additional means to eliminate odor nuisances will include: (d) direct load-out of soils to trucks for off-Site disposal; (e) use of chemical deodorants in spray or misting systems; and, (f) use of staff to monitor odors in surrounding neighborhoods.

Where odor nuisances have developed during remedial work and cannot be corrected, or where the release of nuisance odors cannot otherwise be avoided due to on-Site conditions or close proximity to sensitive receptors, odor control will be achieved, as appropriate, by a combination of work stoppages, sheltering excavation and handling areas under tented containment structures equipped with appropriate air venting/filtering systems.

Dust Control Plan

A dust suppression plan that addresses dust management during invasive on-Site work, will include, at a minimum, the items listed below:

- Dust suppression will be achieved through the use of a dedicated on-Site water truck for road wetting. The truck will be equipped with a water cannon capable of spraying water directly onto off-road areas including excavations and stockpiles.
- Clearing and grubbing will be done in stages to limit the area of exposed, unvegetated soils vulnerable to dust production.
- Gravel will be used on roadways to provide a clean and dust-free road surface.
- On-Site roads will be limited in total area to minimize the area required for water truck sprinkling.

Other Nuisances

A plan for rodent control will be developed and utilized by the contractor prior to and during Site clearing and Site grubbing, and during all remedial work.

A plan will be developed and utilized by the contractor for all remedial work and will conform, at a minimum, to local noise control standards.

6.0 ENGINEERING CONTROLS

6.1 GROUNDWATER MONITORING SYSTEM

A network of groundwater monitoring wells will be installed in locations approximate to the RI monitoring well network that will be utilized to monitor the groundwater quality and to demonstrate the reduction in groundwater contamination to asymptotic levels. As the dissolved groundwater impacts detected during the remedial investigation are relatively low, a long-term monitoring program with associated institutional controls will be a cost-effective remedial alternative to address these impacts. Long-term groundwater monitoring protocols and frequency will be described in the Site Management Plan.

6.1.1 CRITERIA FOR COMPLETION OF REMEDIATION/TERMINATION OF GROUNDWATER MONITORING

Groundwater monitoring activities to assess natural attenuation will continue, as determined by the NYSDEC, until remaining groundwater contaminant of concern concentrations are found to be consistently below NYSDEC standards or have become asymptotic at levels accepted by the NYSDEC over a period of time. Monitoring will continue until permission to discontinue is granted in writing by the NYSDEC. If groundwater contaminant levels become asymptotic at a level that is not acceptable to the NYSDEC, additional treatment and/or control measures will be evaluated. These monitoring activities will be outlined in the Monitoring Plan of the SMP.

6.2 SSDS PIPING AND VAPOR BARRIER

A passive SSDS including the following elements will be installed in any proposed building:

- Venting layer: a layer of stone installed underneath the building slab;
- Pipes: A network or perforated pipes that are embedded in the venting layer and connected with header pipes;
- Risers: the risers are solid pipes that are connected to the header pipes and vent to the outside of the building;
- Vapor barrier: a layer of impermeable membrane installed directly under the building slab and directly above the venting layer; and
- Sampling ports to collect sub-slab soil vapor samples.

The sub-slab soil vapor samples, along with indoor air samples, will be collected when the first floor of the building is enclosed.

7.0 INSTITUTIONAL CONTROLS

In the event that the remedy does not achieve Track 1 unrestricted use, institutional controls in the form of an environmental easement will be imposed.

7.1 ENVIRONMENTAL EASEMENT

An EC (passive SSDS and soil vapor sealing layer) and institutional control (IC) for soil vapor will be incorporated into a Site Management Plan and will be enforceable through an Environmental Easement. An Environmental Easement, as defined in Article 71 Title 36 of the Environmental Conservation Law, is required when residual contamination is left on-Site after the Remedial Action is complete.

As part of this remedy, if required, an Environmental Easement approved by NYSDEC will be filed and recorded with the Westchester County Clerk. The Environmental Easement will be submitted as required by the NYSDEC.

The Environmental Easement renders the Site a Controlled Property. The Environmental Easement will be recorded with the Westchester County Clerk before the Certificate of Completion is issued by NYSDEC.

7.2 SITE MANAGEMENT PLAN

Site Management is the last phase of remediation and begins with the approval of the FER and issuance of the Certificate of Completion for the Remedial Action. If an SMP is needed because of remaining groundwater and soil vapor contamination, it will be submitted for approval prior to the approval of the FER. Site Management will not be discontinued unless prior written approval is granted by the NYSDEC and NYSDOH. The property owner is responsible to ensure that all Site Management responsibilities defined in the Environmental Easement and the Site Management Plan are performed.

The SMP is intended to provide a detailed description of the procedures required to manage the Site in the event that a Track 1 unrestricted use is not achieved. This includes: (1) development, implementation, and management of all Engineering and Institutional Controls; (2) development and implementation of a Monitoring Plan; (3) submittal of Site Management Reports, performance of inspections and certification of results, and demonstration of proper communication of Site information to NYSDEC; and (4) defining criteria for termination of monitoring. The SMP for this

Site, if needed, will not require the development of a plan to operate and maintain treatment, collection, containment, or recovery systems because the only proposed ongoing remedy will be monitoring the wells and evaluating soil vapor intrusion.

To address these needs, this SMP will include three (3) plans as applicable: (1) an Engineering and Institutional Control Plan for implementation and management of EC/ICs; (2) a Monitoring Plan for implementation of Site Monitoring; and (3) a Site Management Reporting Plan for submittal of data, information, recommendations, and certifications to NYSDEC. The SMP will be prepared in accordance with the requirements in NYSDEC Draft DER-10 Technical Guidance for Site Investigation and Remediation, dated December 2002, and the guidelines provided by NYSDEC.

Site management activities, reporting, and EC/IC certification will be scheduled on a certification period basis. A Periodic Review Report (PRR) will be submitted to the NYSDEC beginning 16 months after the Certificate of Completion is issued. After the initial PRR, the next PRR will be submitted annually to the NYSDEC.

The SMP and the FER will include a monitoring plan for groundwater at the upgradient and the downgradient Site perimeter to evaluate Site-wide performance of the remedy. Groundwater monitoring wells will be installed immediately downgradient of all remediation areas to monitor the natural attenuation. If the contaminants in groundwater do not attenuate below the Class GA AWQS concentrations or reach an asymptotic level that is accepted by the NYSDEC, an active treatment (e.g. oxidant injection) will be proposed and designed based on the monitoring data.

No exclusions for handling of remaining contaminated soils will be provided in the Site SMP. All handling of remaining contaminated material will be subject to provisions contained in the SMP.

8.0 FINAL ENGINEERING REPORT

A FER and Site Management Plan will be submitted to NYSDEC following implementation of the Remedial Action defined in this RAWP. The FER provides documentation that the remedial work required under this RAWP has been completed and has been performed in compliance with this plan. The FER will provide a comprehensive account of the locations and characteristics of all material removed from the Site including the surveyed map(s) of all sources. The FER will include as-built drawings for all constructed elements, certifications, manifests, bills of lading as well as the complete Site Management Plan. The FER will provide a description of the changes in the Remedial Action from the elements provided in the RAWP and associated design documents. The FER will provide a tabular summary of all performance evaluation sampling results and all material characterization results and other sampling, and chemical analysis performed as part of the Remedial Action. The FER will provide test results demonstrating that all mitigation and remedial systems are functioning properly. Applicable analytical data collected under this RAWP will be accompanied by DUSRs in the FER. The FER will document that all applicable analytical data was submitted to and accepted by the Department in the Department's approved Electronic Data Deliverable format. The FER will be prepared in conformance with DER-10.

Where determined to be necessary by NYSDEC, a Financial Assurance Plan will be required to ensure the sufficiency of revenue to perform long-term operations, maintenance and monitoring tasks defined in the Site Management Plan and Environmental Easement. This determination will be made by NYSDEC in the context of the FER review.

The FER will include written and photographic documentation of all remedial work performed under this remedy.

The FER will include an itemized tabular description of actual costs incurred during all aspects of the Remedial Action.

The FER will provide a thorough summary of all residual contamination left on the Site after the remedy is complete. Residual contamination includes all contamination that exceeds the Track 1 USCO in 6NYCRR Part 375-6. A table that shows exceedances of Track 1 USCOs for all soil/fill remaining at the Site after the Remedial Action will be included in the FER. A map that shows the location and summarizes exceedances of Track 1 USCOs for all soil/fill remaining at the Site after the Remedial Action will be included in the FER.

The FER will provide a thorough summary of all residual contamination that exceeds the SCOs defined for the Site in the RAWP and must provide an explanation for why the material was not removed as part of the Remedial Action. A table that shows residual contamination in excess of Site SCOs and a map that shows residual contamination in excess of Site SCOs will be included in the FER.

The FER will include an accounting of the destination of all material removed from the Site, including excavated contaminated soil, historic fill, solid waste, hazardous waste, non-regulated material and fluids. Documentation associated with disposal of all material must also include records and approvals for receipt of the material. It will provide an accounting of the origin and chemical quality of all material imported onto the Site.

Before approval of a FER and issuance of a Certificate of Completion, all project reports must be submitted in digital form on electronic media (PDF).

8.1 CERTIFICATIONS


The following certification will appear in front of the Executive Summary of the Final Engineering Report. The certification will be signed by the Remedial Engineer, Fuad Dahan, who is a Professional Engineer registered in New York State. This certification will be appropriately signed and stamped. The certification will include the following statements:

I _____certify that I am currently a NYS registered professional engineer, I had primary direct responsibility for the implementation of the subject construction program, and I certify that the Remedial Work Plan was implemented and that all construction activities were completed in substantial conformance with the DER-approved Remedial Work Plan.

I certify that all use restrictions, institutional controls, engineering controls and/or any operation and maintenance requirements applicable to the site are contained in an environmental easement created and recorded pursuant to ECL 71-3605 and that any affected local governments, as defined in ECL 71-3603, have been notified that such easement has been recorded.

I certify that a Site Management Plan has been submitted for the continual and proper operation, maintenance, and monitoring of any engineering controls employed at the site including the proper maintenance of any remaining monitoring wells, and that such plan has been approved by DER.

Figures

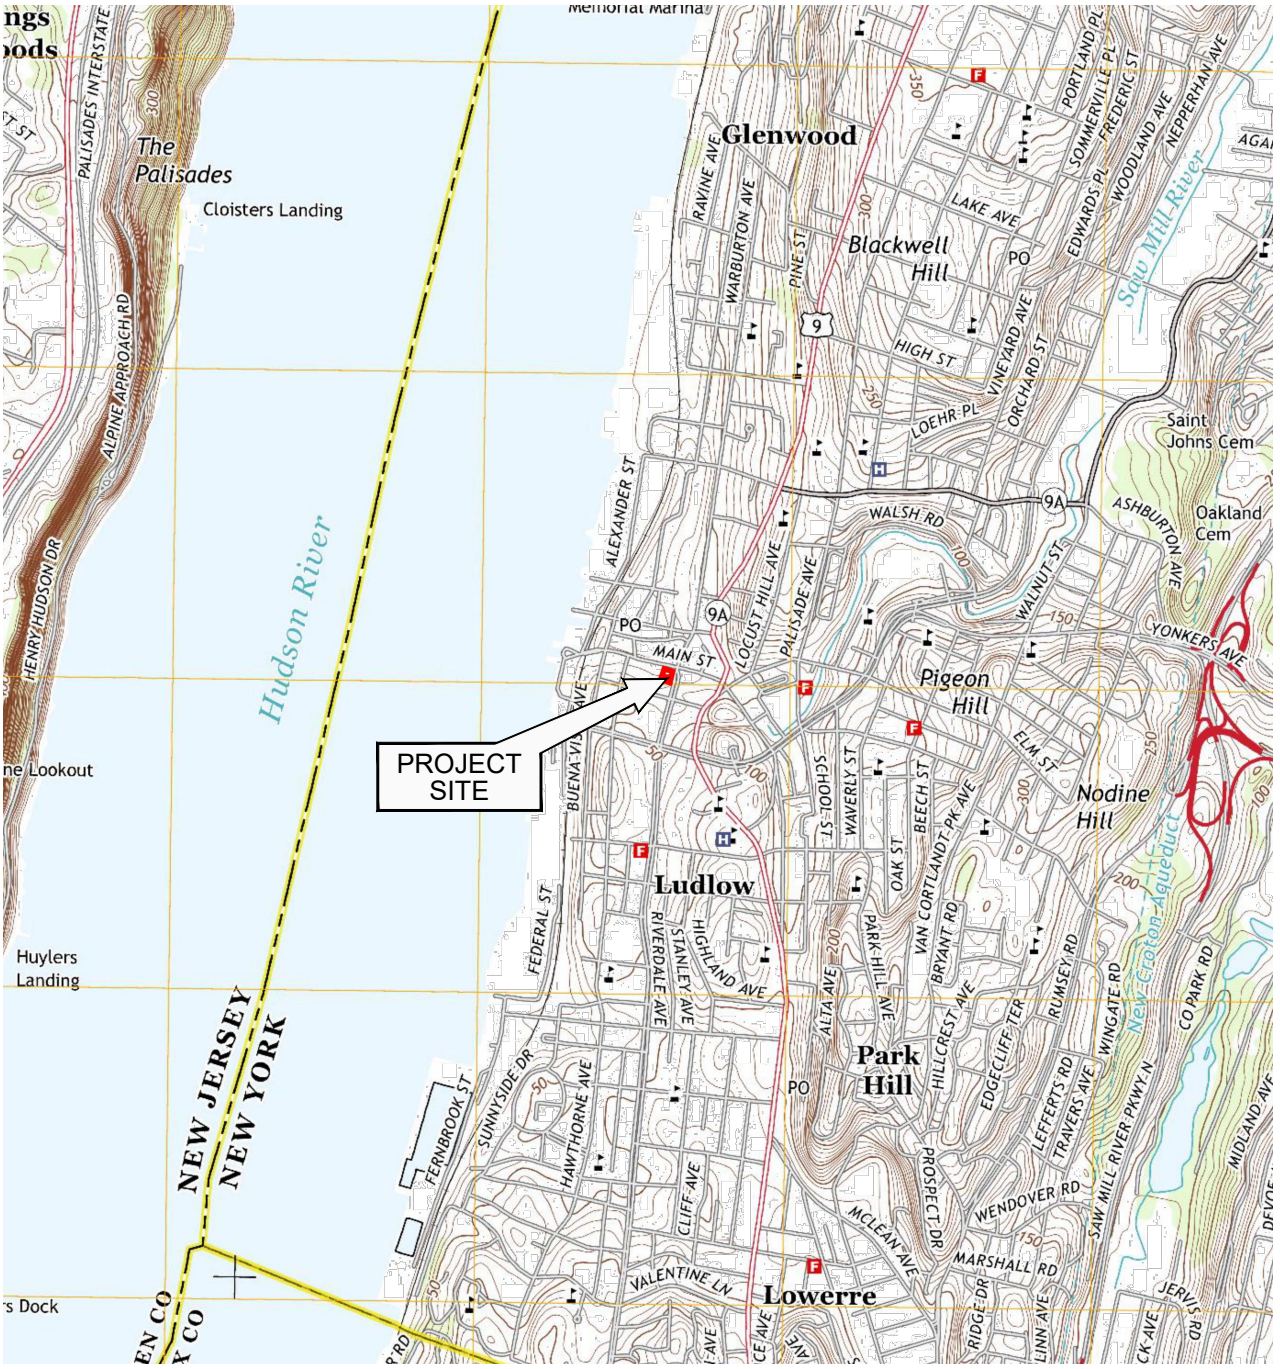

REFERENCE:
HISTORICAL TOPOGRAPHICAL MAP PREPARED BY EDR, MAP DATED 2013.

NW N NE
W E
SW S SE

TP, Yonkers, 2013, 7.5-minute
E, Mount Vernon, 2013, 7.5-minute

SCALE: 1"=2,000'

0 2,000 4,000

FIG-1.1

32, 36, AND 38 MAIN STREET
& 1 AND 3 RIVERDALE AVENUE
YONKERS, WESTCHESTER COUNTY, NEW YORK

SITE LOCATION MAP

SESI
CONSULTING ENGINEERS
CERT. OF AUTH. # 24GA27934700
SOILS / FOUNDATIONS
SITE DESIGN
ENVIRONMENTAL
12A MAPLE AVE. PINE BROOK, N.J. 07058 PH: 973-808-9050

DRAWN BY: aas
CHECKED BY: RW
SCALE: AS NOTED
DATE: 06/16/2021
JOB NO.: 11846

N:\ACAD\11846\CAD\PHASE II ESA REPORT\11846 – FIG-1 – SITE LOCATION MAP.DWG 06/16/21 01:49:23PM, jenny, LAYOUT:FIG-1



LEGEND:

- PROPERTY LINE

SCALE: 1"=30'

0 30 60

REFERENCE
AERIAL IMAGE TAKEN FROM GOOGLE MAPS, DATED 2020.

© SESI CONSULTING ENGINEERS 2022
This drawing and all information contained here on is proprietary information of SESI CONSULTING ENGINEERS and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS.

SESI CONSULTING ENGINEERS D.P.C.
SOILS / FOUNDATIONS
SITE DESIGN
ENVIRONMENTAL
959 ROUTE 46E, 3RD FLOOR, PARSIPPANY, N.J. 07054 PH: 973-808-9050

dwg by: aas
chk by: RW
scale: AS NOTED
date: 11/18/2022

project: 32, 36, AND 38 MAIN STREET & 1 AND 3 RIVERDALE AVENUE YONKERS, WESTCHESTER COUNTY, NEW YORK

title: SITE PLAN

job no: 11846
drawing no:

FIG-1.2

N:\ACAD\11846\CAD\ENVIRONMENTAL\PHASE II ESA REPORT\11846.DWG.SITE PLAN.DWG 11/18/22 12:40:12PM, yelena.zolotova, LAYOUT:FIG-1.2

Client Sample ID:	R1SB1 (4-4.5)	R1SB1 (6-6.5)	R1SB1 (14.5-15)
Date Sampled:	8/16/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	1.5	2.8	0.7
Benzo(a)anthracene	1.6	2.88	1.35
Benzo(a)pyrene	1.39	2.81	1.35
Benzo(b)fluoranthene	2.03	3.56	1.72
Benzo(k)fluoranthene	0.588	1.45	0.539
Chrysene	1.5	2.81	1.25
Dibenzo(a,h)anthracene	0.257	0.545	0.222
Indeno(1,2,3-cd)pyrene	1.42	2.94	0.939
4,4'-DDD	0.0025	0.003	0.0074
4,4'-DDT	0.0135 B	0.0151 B	0.0166 B
Lead	172	143	99.9
Mercury	0.14	0.39	0.21
Nickel	23.9	16.5	18.1
Zinc	267	177	118

Client Sample ID:	R1SB5 (3-3.5)	R1SB5 (7-7.5)	R1SB5 (13-13.5)	R1SB5 (19-19.5)
Date Sampled:	8/16/2022	8/16/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	1.6	2.3	ND (0.60)	ND (0.60)
Benzo(a)anthracene	1.59	2.29	ND (0.038)	ND (0.039)
Benzo(a)pyrene	1.5	2.17	ND (0.038)	ND (0.039)
Benzo(b)fluoranthene	2.12	3.26	ND (0.038)	ND (0.039)
Benzo(k)fluoranthene	0.784	1.25	ND (0.038)	ND (0.039)
Chrysene	1.81	2.6	ND (0.038)	ND (0.039)
Dibenzo(a,h)anthracene	0.325	0.459	ND (0.038)	ND (0.039)
Indeno(1,2,3-cd)pyrene	1.31	1.97	ND (0.038)	ND (0.039)
4,4'-DDT	0.0088 B	0.0067 B	0.0046 B	0.0041 B
Barium	413	332	<24	31.3
Lead	507	558	4.6	5.6
Mercury	0.26	0.23	<0.032	<0.033
Zinc	276	215	15.5	16.5

Client Sample ID:	R1SB2 (1.5-2)	R1SB2 (9-9.5)	R1SB2 (12-12.5)	R1SB2 (19.5-20)
Date Sampled:	8/16/2022	8/16/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	1	0.82	0.87	ND (0.60)
Benzo(a)anthracene	2.2	0.243	ND (0.036)	ND (0.040)
Benzo(a)pyrene	2.19	0.23	ND (0.036)	ND (0.040)
Benzo(b)fluoranthene	2.8	0.289	ND (0.036)	ND (0.040)
Benzo(k)fluoranthene	0.968	0.096	ND (0.036)	ND (0.040)
Chrysene	1.91	0.295	ND (0.036)	ND (0.040)
Dibenzo(a,h)anthracene	0.34	0.0416	ND (0.036)	ND (0.040)
Indeno(1,2,3-cd)pyrene	1.66	0.173	ND (0.036)	ND (0.040)
4,4'-DDT	0.007 B	0.0076 B	0.0066 B	0.0057 B
Lead	107	67.8	5.4	6.1
Mercury	0.41	0.17	0.14	<0.039
Zinc	138	105	20.8	17.7

Client Sample ID:	SB-4 (2.5-3)	SB-4 (5.5-6)
Date Sampled:	5/26/2021	5/26/2021
Matrix:	Soil	Soil
Benzo(a)anthracene	1.3	1.6
Benzo(a)pyrene	1.2	1.5
Benzo(b)fluoranthene	1.7	2.3
Chrysene	1.4	1.9
Indeno(1,2,3-cd)pyrene	0.8	0.98
Lead, Total	258	189
Mercury, Total	0.215	0.238
Zinc, Total	235	120

Client Sample ID:	R1SB6 (2-2.5)	R1SB6 (8.5-9)	R1SB6 (11.5-12)	R1SB6 (16.5-17)
Date Sampled:	8/18/2022	8/18/2022	8/18/2022	8/18/2022
Matrix:	Soil	Soil	Soil	Soil
Benzo(a)anthracene	0.201	2.03	ND (0.039)	ND (0.041)
Benzo(a)pyrene	0.2	2.51	ND (0.039)	ND (0.041)
Benzo(b)fluoranthene	0.246	3.1	ND (0.039)	ND (0.041)
Benzo(k)fluoranthene	0.094	1.06	ND (0.039)	ND (0.041)
Chrysene	0.194	2.92	ND (0.039)	ND (0.041)
Dibenzo(a,h)anthracene	0.0331 J	0.377	ND (0.039)	ND (0.041)
Indeno(1,2,3-cd)pyrene	0.143	1.52	ND (0.039)	ND (0.041)
4,4'-DDD	ND (0.00075)	0.0038	ND (0.00074)	ND (0.00077)
4,4'-DDT	0.0123 B	0.0406 B	0.0018 B	0.0069 B
Lead	256	92.6	8.4	3.9
Mercury	0.31	0.88 H	<0.033	<0.042
Zinc	168	57.4	30.6	31.7

Client Sample ID:	R1SB3 (1.5-2)	R1SB3 (7-7.5)	R1-SB3 (7-7.5)	R1SB3 (13-13.5)	R1SB3 (19.5-20)
Date Sampled:	8/16/2022	8/16/2022	8/23/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil	Soil	Soil
Acetone	-	-	0.0629	-	-
Perfluorooctanesulfonic acid (PFOS)	1.1	0.32 J	-	ND (0.61)	ND (0.63)
4,4'-DDT	0.008 B	0.0064 B	-	0.0103 B	0.0065 B
Mercury	0.18	0.41	-	<0.031	<0.040

Client Sample ID:	R1-SB-9 (2-2.5)	R1-SB-9 (9.5-10)	R1-SB-9 (14.5-15)	R1-SB-9 (17-17.5)
Date Sampled:	8/15/2022	8/15/2022	8/15/2022	8/15/2022
Matrix:	Soil	Soil	Soil	Soil
Dieldrin	ND (0.00070)	0.0102	ND (0.00077)	ND (0.00078)
4,4'-DDT	0.0093 B	0.02 B	0.0036 B	0.0052 B
Copper	72.4	11.1	11.8	11.5
Lead	39	195	3.7	4.1
Mercury	0.082	0.2	<0.037	<0.034

Client Sample ID:	R1-SS1 (.5-1)
Date Sampled:	8/17/2022
Matrix:	Soil
Benzo(a)anthracene	1.42
Benzo(a)pyrene	1.16
Benzo(b)fluoranthene	1.52
Chrysene	1.29
Indeno(1,2,3-cd)pyrene	0.808
4,4'-DDT	0.0172 B
Chromium	30.9
Lead	83.8
Zinc	131

Client Sample ID:	R1SB4 (3-3.5)	R1SB4 (9.5-10)	R1SB4 (14.5-15)
Date Sampled:	8/16/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	1.5	0.71	ND (0.62)
Benzo(a)anthracene	2.21	0.203	ND (0.041)
Benzo(a)pyrene	2.09	0.196	ND (0.041)
Benzo(b)fluoranthene	2.96	0.21	ND (0.041)
Benzo(k)fluoranthene	0.972	0.0815	ND (0.041)
Chrysene	2.3	0.19	ND (0.041)
Dibenzo(a,h)anthracene	0.397	0.0328 J	ND (0.041)
Indeno(1,2,3-cd)pyrene	1.74	0.135	ND (0.041)
4,4'-DDT	0.0103 B	0.0062 B	0.0052 B
Lead	235	63.7	9.5
Zinc	209	113	17.6

Client Sample ID:	R1-SS2 (.5-1)
Date Sampled:	8/17/2022
Matrix:	Soil
Benzo(a)anthracene	1.77
Benzo(a)pyrene	1.62
Benzo(b)fluoranthene	2.12
Chrysene	1.64
Indeno(1,2,3-cd)pyrene	1.3
4,4'-DDT	0.0162 B
Chromium	30.7
Lead	138
Mercury	0.22
Zinc	154

Client Sample ID:	SB-3 (5.5-6')
Date Sampled:	5/25/2021
Matrix:	Soil
4,4'-DDE	0.00431
Indeno(1,2,3-cd)pyrene	6.2
Benzo(b)fluoranthene	11
Benzo(k)fluoranthene	3.8
Chrysene	9.1
Benzo(a)pyrene	8.5
Dibenzo(a,h)anthracene	1.5
Benzo(a)anthracene	11
Lead, Total	213
Mercury, Total	0.258
Zinc, Total	132

Client Sample ID:	R1SB7 (2-3)	R1SB7 (8-8.5)
Date Sampled:	8/16/2022	8/16/2022
Matrix:	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	1.6	0.87
alpha-Chlordane	0.0111	0.316
4,4'-DDT	0.0121 B	0.0123 B
Lead	179	154
Zinc	95.2	331

Client Sample ID:	SB-5 (3.5-4)
Date Sampled:	5/26/2021
Matrix:	Soil
Benzo(a)anthracene	2.3
Benzo(a)pyrene	2
Benzo(b)fluoranthene	2.6
Benzo(k)fluoranthene	0.92
Chrysene	2.1
Indeno(1,2,3-cd)pyrene	1.2
Mercury, Total	0.199
Zinc, Total	69.9

Client Sample ID:	R1-SB3 (.5-1)
Date Sampled:	8/17/2022
Matrix:	Soil
Benzo(a)anthracene	2.95
Benzo(a)pyrene	2.31
Benzo(b)fluoranthene	2.97
Benzo(k)fluoranthene	1.06
Chrysene	2.57
Dibenzo(a,h)anthracene	0.394
Indeno(1,2,3-cd)pyrene	1.53
4,4'-DDT	0.0173 B
Chromium	30.3
Lead	74

Client Sample ID:	R1SB8 (2.5-3)	R1SB8 (5-5.5)	R1SB8 (10-10.5)	R1SB8 (17.5-18)	R1SB8 (24.5-25)
Date Sampled:	8/16/2022	8/16/2022	8/16/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	0.85	1.4	2.2	ND (0.61)	ND (0.62)
Benzo(a)anthracene	1.8	1.86	ND (0.035)	ND (0.039)	ND (0.039)
Benzo(a)pyrene	1.81	3.61	ND (0.035)	ND (0.039)	ND (0.039)
Benzo(b)fluoranthene	2.39	4.6	ND (0.035)	ND (0.039)	ND (0.039)
Benzo(k)fluoranthene	0.817	1.48	ND (0.035)	ND (0.039)	ND (0.039)
Chrysene	1.73	3.55	ND (0.035)	ND (0.039)	ND (0.039)
Dibenzo(a,h)anthracene	0.3	0.597	ND (0.035)	ND (0.039)	ND (0.039)
Indeno(1,2,3-cd)pyrene	1.05	2.59	ND (0.035)	ND (0.039)	ND (0.039)
4,4'-DDD	0.0022	0.0054	0.00068	0.00078	ND (0.00081)
4,4'-DDT	0.0122 B	0.0137	0.0116 B	0.0102 B	0.0034 B
Lead	90.5	236	6	7	8.4
Mercury	0.35	0.2	0.05	<0.035	<0.037
Zinc	155	181	14	25.4	29.6

Client Sample ID:	R1SB11 (4-4.5)
Date Sampled:	8/16/2022
Matrix:	Soil
Benzo(a)anthracene	1.14
Benzo(a)pyrene	1.1
Benzo(b)fluoranthene	2.5
Benzo(k)fluoranthene	0.878
Chrysene	1.4
Indeno(1,2,3-cd)pyrene	1.02
4,4'-DDT	0.0054 B
Copper	161
Lead	234
Zinc	121

Client Sample ID:	R1-SS4 (.5-1)
Date Sampled:	8/17/2022
Matrix:	Soil
Benzo(a)anthracene	2.53
Benzo(a)pyrene	2.29
Benzo(b)fluoranthene	2.85
Benzo(k)fluoranthene	1.2
Chrysene	2.31
Dibenzo(a,h)anthracene	0.351
Indeno(1,2,3-cd)pyrene	1.64
4,4'-DDT	0.0152 B
Chromium	35.7
Lead	76.3
Zinc	113

Client Sample ID:	SB-1 (1.5-2')
Date Sampled:	5/25/2021
Matrix:	Soil
Indeno(1,2,3-cd)pyrene	0.72
Benzo(b)fluoranthene	1.4
Chrysene	1.2
Benzo(a)pyrene	1
Benzo(a)anthracene	1.3
Lead, Total	80
Mercury, Total	0.937
Zinc, Total	188

Client Sample ID:	R1SB15 (2-2.5)	R1SB15 (7-7.5)	R1SB15 (13-13.5)	R1SB15 (15-15.5)	R1SB15 (24.5-25)
Date Sampled:	8/17/2022	8/17/2022	8/17/2022	8/17/2022	8/17/2022
Matrix:	Soil	Soil	Soil	Soil	Soil
Benzo(a)anthracene	4.09	0.0177 J	ND (0.041)	ND (0.040)	ND (0.040)
Benzo(a)pyrene	4.19	ND (0.037)	ND (0.041)	ND (0.040)	ND (0.040)
Benzo(b)fluoranthene	4.78	0.0214 J	ND (0.041)	ND (0.040)	ND (0.040)
Benzo(k)fluoranthene	1.47	ND (0.037)	ND (0.041)	ND (0.040)	ND (0.040)
Chrysene	3.98	0.0135 J	ND (0.041)	ND (0.040)	ND (0.040)
Dibenzo(a,h)anthracene	0.629	ND (0.037)	ND (0.041)	ND (0.040)	ND (0.040)
Indeno(1,2,3-cd)pyrene	3.08	ND (0.037)	ND (0.041)	ND (0.040)	ND (0.040)
4,4'-DDT	0.0059 B	0.0041 B	0.0042 B	0.0059 B	0.0056 B
Lead	285	6.8	12.4	5.9	3.4
Nickel	12.2	35.6	27.1	23.3	11.9

Client Sample ID:	R1SB12 (.5-1)	R1SB12 (9-9.5)	R1SB12 (11-11.5)	R1SB12 (17-17.5)	R1SB12 (23.5-24)
Date Sampled:	8/17/2022	8/17/2022	8/17/2022	8/17/2022	8/17/2022
Matrix:	Soil	Soil	Soil	Soil	Soil
Benzo(a)anthracene	1.03	0.494	ND (0.036)	ND (0.040)	ND (0.041)
Benzo(b)fluoranthene	1.22	0.571	ND (0.036)	ND (0.040)	ND (0.041)
Chrysene	1.04	0.487	ND (0.036)	ND (0.040)	ND (0.041)
Indeno(1,2,3-cd)pyrene	0.78	0.254	ND (0.036)	ND (0.040)	ND (0.041)
alpha-Chlordane	0.01	0.178	0.0179	ND (0.00081)	ND (0.00081)
4,4'-DDT	0.0221 B	0.0073 B	0.0041 B	0.0122 B	0.0032 B
Lead	104	94.4	8.4	2.8	4.1
Mercury	0.58	0.52	<0.028	<0.033	<0.037
Zinc	137	45.2	25.9	21.8	30.4

Client Sample ID:	R1-SB-16 (1.5-2)
Date Sampled:	8/15/2022
Matrix:	Soil
alpha-Chlordane	0.103
4,4'-DDT	0.0303 B
Chromium	33.1
Lead	407

Client Sample ID:	R1-SB-17 (3-3.5)	R1-SB-17 (8-8.5)	R1-SB-17 (22.5-23)
Date Sampled:	8/15/2022	8/15/2022	8/15/2022
Matrix:	Soil	Soil	Soil
4,4'-DDT	0.008 B	0.0175 B	0.0026 B
Lead	68.6	79.4	3.5
Nickel	17.6	7.5	34.4

Client Sample ID:	R1-SB-13 (3.5-4)	R1-SB-13 (5-5.5)	R1-SB-13 (13-13.5)
Date Sampled:	8/15/2022	8/15/2022	8/15/2022
Matrix:	Soil	Soil	Soil
4,4'-DDT	0.0075 B	0.0072 B	0.0095 B
Nickel	33.2	17.9	15.5

Client Sample ID:	R1-SB-14 (2.5-3)
Date Sampled:	8/15/2022
Matrix:	Soil
4,4'-DDT	0.0105 B

Client Sample ID:	R1-SB-10 (4-4.5)	R1-SB-10 (7.5-8)	R1-SB-10 (11-11.5)	R1-SB-10 (16-16.5)	R1-SB-10 (24.5-25)
Date Sampled:	8/15/2022	8/15/2022	8/15/2022	8/15/2022	8/15/2022
Matrix:	Soil	Soil	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	0.93	0.58	0.45 J	0.64	ND (0.55)
4,4'-DDT	0.0068 B	0.0105 B	0.0056 B	0.013 B	0.006 B
Copper	24.4	95.8	24	11.3	21.6
Lead	28.2	191	2.5	2.6	6.6
Mercury	0.036	1.2	<0.028	<0.033	<0.029
Zinc	33.9	597	36.2	15.4	21.4

Client Sample ID:	SB-2 (2.5-3)
Date Sampled:	5/26/2021
Matrix:	Soil
Benzo(a)anthracene	1.7
Benzo(a)pyrene	1.4
Benzo(b)fluoranthene	1.7
Chrysene	1.6
Indeno(1,2,3-cd)pyrene	0.93

		USCOs	RRSCOs	PGWSCOs
MS Volatiles (SW846 8260D)				
Acetone	mg/kg	0.05	100	0.05
MS Semi-volatiles (SW846 8270E)				
Benzo(a)anthracene	mg/kg	1	1	1
Benzo(a)pyrene	mg/kg	1	1	22
Benzo(b)fluoranthene	mg/kg	1	1	1.7
Benzo(k)fluoranthene	mg/kg	0.8	3.9	1.7
Chrysene	mg/kg	1	3.9	1
Dibenzo(a,h)anthracene	mg/kg	0.33	0.33	1000
Indeno(1,2,3-cd)pyrene	mg/kg	0.5	0.5	8.2
OCLC Semi-volatiles (SW846 8081B)				
alpha-Chlordane	mg/kg	0.094	4.2	2.9
Dieldrin	mg/kg	0.005	0.2	0.1
4,4'-DDD	mg/kg	0.0033	13	14
4,4'-DDT	mg/kg	0.0033	7.9	136
Metals Analysis				
Barium	mg/kg	350	400	820
Chromium	mg/kg	30	180	-
Copper	mg/kg	50	270	1720
Lead	mg/kg	63	400	450
Mercury	mg/kg	0.18	0.81	0.73
Nickel	mg/kg	30	310	130
Zinc	mg/kg	109	10000	2480

LEGEND:

- PROPERTY BOUNDARY
- RI-SB1 - SOIL SAMPLE NUMBER & APPROX. LOCATION (AUGUST 2022)
- RI-SS1 - SURFICIAL SOIL SAMPLE NUMBER & APPROXIMATE LOCATION (AUGUST 2022)
- SB-2 - SOIL BORING NUMBER & APPROX. LOCATION (MAY 2021)
- SB-1/GW-1 - SOIL BORING & GROUNDWATER NUMBER & APPROX. LOCATION (MAY 2021)
- 1.2 - RSCO: NEW YORK NYCRR PART 375 RESIDENTIAL CRITERIA, NEW YORK RESTRICTED USE CRITERIA PER 6 NYCRR PART 375 ENVIRONMENTAL REMEDIATION PROGRAMS, EFFECTIVE DECEMBER 14, 2006.
- 1.3 - RRSCO: NEW YORK NYCRR PART 375 RESTRICTED-RESIDENTIAL CRITERIA, NEW YORK RESTRICTED USE CRITERIA PER 6 NYCRR PART 375 ENVIRONMENTAL REMEDIATION PROGRAMS, EFFECTIVE DECEMBER 14, 2006.
- 80 - USCO: NEW YORK NYCRR PART 375 NEW YORK UNRESTRICTED USE CRITERIA CRITERIA PER 6 NYCRR PART 375 ENVIRONMENTAL REMEDIATION PROGRAMS, EFFECTIVE DECEMBER 14, 2006.

SCALE: 1"=10'
0 10 20

© SESI CONSULTING ENGINEERS 2022
This drawing and all information contained here on is proprietary information of SESI CONSULTING ENGINEERS and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS.

REFERENCE
SITE INFORMATION TAKEN FROM SITE SURVEY PREPARED BY GABRIEL E. SENOR, DATED JULY 5, 2022, REVISED JULY 21 2022 AND MAP OF MONITORING WELLS PREPARED BY GABRIEL E. SENOR, DATED OCTOBER 24, 2022.

SESI CONSULTING ENGINEERS
SOILS / FOUNDATIONS
SITE DESIGN
ENVIRONMENTAL
459 ROUTE 46E, 3RD FLOOR, PARSIPPANY, NJ 07054 PH 973-808-0050

dwg by: YZ
chk by: SG
scale: AS NOTED
date: 11/18/2022

rev	date	description	by

ST. CLAIR HOTEL DRY CLEANERS SITE (BCP C360220)
32, 36 AND 38 MAIN STREET
& 1 AND 23 RIVERDALE AVENUE
YONKERS, WESTCHESTER COUNTY, NEW YORK

SOIL SAMPLE LOCATION AND CONCENTRATION PLAN

bldg:

job no. 11846
drawing no.

FIG-2.1

N:\YCAD\11846\CAD\ENVIRONMENTAL\PHASE II ESA\ REPORT\11846 DWG\FIG-4.1 – 4.3 – SAMPLE LOCATION PLAN.DWG 11/18/22 11:59:37AM jeffers.zoslove, LAYOUT:FIG-4.1

Client Sample ID:		R1-MW-1
Date Sampled:		8/24/2022
Matrix:		Ground Water
Tetrachloroethene	ug/l	8.2
Perfluorooctanoic acid (PFOA)	ng/l	58
Perfluorooctanesulfonic acid (PFOS)	ng/l	78
Dieldrin	ug/l	0.016
Sodium	ug/l	372000

Client Sample ID:		R1-MW-7
Date Sampled:		8/24/2022
Matrix:		Ground Water
Chloroform	ug/l	28.7
Perfluorooctanoic acid (PFOA)	ng/l	17.9
Perfluorooctanesulfonic acid (PFOS)	ng/l	53.4
Sodium	ug/l	137000

LOCATION	SB-3 GW	
SAMPLING DATE	5/26/2021	Q
Tetrachloroethene	9.8	
Benzo(a)anthracene	0.03	J
Benzo(a)pyrene	0.02	J
Benzo(b)fluoranthene	0.03	J
Chrysene	0.01	J
Indeno(1,2,3-cd)pyrene	0.02	J
Arsenic, Total	34.37	
Barium, Total	6046	
Beryllium, Total	13.71	
Cadmium, Total	5.2	
Chromium, Total	667.9	
Copper, Total	2436	
Iron, Total	397000	
Lead, Total	730.6	
Magnesium, Total	166000	
Manganese, Total	36070	
Nickel, Total	2009	
Selenium, Total	17.6	J
Sodium, Total	424000	
Thallium, Total	5.75	

Client Sample ID:		R1-MW-3
Date Sampled:		8/24/2022
Matrix:		Ground Water
Chloroform	ug/l	12.7
Tetrachloroethene	ug/l	15.3
Perfluorooctanoic acid (PFOA)	ng/l	29.1
Perfluorooctanesulfonic acid (PFOS)	ng/l	66.3
Iron	ug/l	5270
Lead	ug/l	38.8
Sodium	ug/l	338000

Client Sample ID:		R1-MW-8
Date Sampled:		8/24/2022
Matrix:		Ground Water
Chloroform	ug/l	9.5
Tetrachloroethene	ug/l	18.5
Perfluorooctanoic acid (PFOA)	ng/l	35.9
Perfluorooctanesulfonic acid (PFOS)	ng/l	59
Sodium	ug/l	345000

LOCATION	SB-1 GW	
SAMPLING DATE	5/26/2021	
Tetrachloroethene	33	
Toluene	15	
Benzo(a)anthracene	0.23	
Benzo(a)pyrene	0.16	
Benzo(b)fluoranthene	0.33	
Benzo(k)fluoranthene	0.1	
Chrysene	0.28	
Indeno(1,2,3-cd)pyrene	0.18	
Arsenic, Total	84.31	
Barium, Total	51980	
Beryllium, Total	41.74	
Cadmium, Total	13.7	
Chromium, Total	3310	
Copper, Total	6880	
Iron, Total	1460000	
Lead, Total	1323	
Magnesium, Total	796000	
Manganese, Total	73680	
Nickel, Total	3312	
Sodium, Total	406000	
Thallium, Total	17.36	J
Zinc, Total	4850	

Client Sample ID:		R1-MW-5
Date Sampled:		8/25/2022
Matrix:		Ground Water
Chloroform	ug/l	9.7
Tetrachloroethene	ug/l	31.7
Perfluorooctanoic acid (PFOA)	ng/l	70.6
Perfluorooctanesulfonic acid (PFOS)	ng/l	78
Iron	ug/l	542
Sodium	ug/l	374000

Client Sample ID:		R1-MW-9
Date Sampled:		8/25/2022
Matrix:		Ground Water
Chloroform	ug/l	20.6
Iron	ug/l	1430
Sodium	ug/l	108000

Client Sample ID:		R1-MW-4
Date Sampled:		8/25/2022
Matrix:		Ground Water
Tetrachloroethene	ug/l	15.9
Perfluorooctanoic acid (PFOA)	ng/l	36.4
Perfluorooctanesulfonic acid (PFOS)	ng/l	49.3
Dieldrin	ug/l	0.082
Iron	ug/l	5600
Manganese	ug/l	1420
Sodium	ug/l	411000

Client Sample ID:		R1-MW-6
Date Sampled:		8/25/2022
Matrix:		Ground Water
Chloroform	ug/l	7.1
Tetrachloroethene	ug/l	9.6
Perfluorooctanoic acid (PFOA)	ng/l	34
Perfluorooctanesulfonic acid (PFOS)	ng/l	60.5
Sodium	ug/l	393000

Compound		AWQS
MS Volatiles (SW846 8260D)		
Chloroform	ug/l	7
Tetrachloroethene	ug/l	5
MS Semi-volatiles (EPA 537M BY ID)		
Perfluorooctanoic acid (PFOA)	ng/l	10
Perfluorooctanesulfonic acid (PFOS)	ng/l	10
GC/LC Semi-volatiles (SW846 8081B)		
Dieldrin	ug/l	0.004
Metals Analysis		
Iron	ug/l	300
Lead	ug/l	25
Manganese	ug/l	300
Sodium	ug/l	20000

LEGEND:

- PROPERTY BOUNDARY
- GROUNWATER ELEVATION CONTOUR (FT AMSL) (DASHED WHERE INFERRED)
- 11' - GROUNDWATER ELEVATION (FT AMSL)
- GROUNDWATER FLOW DIRECTION
- RI-MW1 - GROUNDWATER SAMPLE NUMBER & APPROX. LOCATION (AUGUST 2022)
- SB-1/GW-1 - SOIL BORING & GROUNDWATER NUMBER & APPROX. LOCATION (MAY 2021)
- 80 - CONCENTRATION EXCEEDS AWQS

SCALE: 1"=10'
0 10 20

© SESI CONSULTING ENGINEERS 2023
This drawing and all information contained here on is proprietary information of SESI CONSULTING ENGINEERS and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS.

REFERENCE
SITE INFORMATION TAKEN FROM SITE SURVEY PREPARED BY GABRIEL E. SENOR, DATED JULY 5, 2022, REVISED JULY 21 2022 AND MAP OF MONITORING WELLS PREPARED BY GABRIEL E. SENOR, DATED OCTOBER 24, 2022.

SESI CONSULTING ENGINEERS
GEOTECHNICAL | ENVIRONMENTAL | SITE CIVIL
959 route 46e, 3rd floor, parsippany, nj 07054 ph: 973.808.9050

dwg by: YZ
chk by: SG
scale: AS NOTED
date: 01/18/2023

inv	date	description	by

ST. CLAIR HOTEL DRY CLEANERS SITE (BCP C360220)
32, 36 AND 38 MAIN STREET
& 1 AND 23 RIVERDALE AVENUE
YONKERS, WESTCHESTER COUNTY, NEW YORK

title: GROUNDWATER SAMPLE LOCATION AND CONCENTRATION PLAN

job no. 11846
drawing no. FIG-2.2

N:\VCAD\11846\CAD\ENVIRONMENTAL\PHASE II ESA REPORT\11846 DWG\FIG-4.1 – 4.3 – SAMPLE LOCATION PLAN.dwg 02/20/23 09:04:12AM dgn.wed5, LAYOUT(FIG-4.2

Client Sample ID:	R1-SV-1		R1-AMB-1	
Date Sampled:	8/22/2022		8/22/2022	
Matrix:	Soil Vapor Comp.		Ambient Air Comp.	
Acetone (2-Propanone)	**151**		**12**	
Benzene	ND (2.6)		**0.48**	J
Chloroform	**7.3**		ND (0.98)	
Chloromethane	ND (1.7)		**1.1**	
Dichlorodifluoromethane	**2.5**	J	**2.3**	
cis-1,2-Dichloroethylene	ND (0.63)		**1.1**	
p-Dichlorobenzene	**13**		ND (0.60)	
Ethanol	**29.4**		**13**	
Ethyl Acetate	**7.9**		**16**	
Hexane	ND (2.8)		**2.2**	
2-Hexanone	ND (3.3)		**3.4**	
Isopropyl Alcohol	**3.9**		**2.7**	
Methylene chloride	**5.6**		**9**	
Methyl ethyl ketone	**8.8**		**1.3**	
Propylene	**2.2**	J	ND (0.86)	
Tertiary Butyl Alcohol	**49.7**		**0.49**	J
Tetrachloroethylene	**33**		**41**	
Toluene	**3.3**		**1.2**	
Trichloroethylene	ND (0.86)		**0.86**	
Trichlorofluoromethane	**15**		**2.1**	

Client Sample ID:	R1-SV-102
Sample Date:	3/27/2023 1:15 PM
Matrix:	Soil Vapor Comp.
Depth(ft bgs):	5
Analyte	ug/m3
1,2,4-Trimethylbenzene	4.6
1,3-Butadiene	2.4
2-Hexanone	5.3
Acetone (2-Propanone)	67.2
Benzene	5.1
Carbon disulfide	11
Chloroform	3.4 J
Cyclohexane	1.8 J
Dichlorodifluoromethane	2.8 J
Ethanol	11
Ethyl Acetate	5.4
Ethylbenzene	4.8
Heptane	2.7 J
Hexane	6
Isopropyl Alcohol	16
Methyl Isobutyl Ketone	2.6 J
Methyl ethyl ketone	17
Propylene	18.6
Styrene	3.0 J
Tertiary Butyl Alcohol	10
Tetrachloroethylene	54
Toluene	62.6
Xylenes (total)	26
m,p-Xylene	20
o-Xylene	5.6

Client Sample ID:	R1-SV-2		R1-AMB-2	
Date Sampled:	8/22/2022		8/22/2022	
Matrix:	Soil Vapor Comp.		Ambient Air Comp.	
Acetone (2-Propanone)	**15**		**12**	
Carbon disulfide	**1.4**	J	ND (1.2)	
Chloroform	**12**		ND (2.0)	
Chloromethane	ND (1.7)		**1.4**	
1,1-Dichloroethane	ND (3.2)		**2.6**	
1,1-Dichloroethylene	ND (0.63)		**2.6**	
Dichlorodifluoromethane	**4.9**		**2.5**	
trans-1,2-Dichloroethylene	ND (3.2)		**0.91**	J
Ethanol	**5.5**		**11**	
Ethyl Acetate	**2.8**	J	**18**	
Hexane	**2.8**	J	**2**	
Isopropyl Alcohol	**4.7**		**4.7**	
Methylene chloride	**10**		**3.2**	
Methyl ethyl ketone	**1.5**	J	**1.4**	
1,1,1-Trichloroethane	**2.2**		ND (1.1)	
Tertiary Butyl Alcohol	**5.5**		ND (1.2)	
Tetrachloroethylene	**589**		**633**	
Toluene	ND (3.0)		**1.3**	J
Trichloroethylene	**11**		**12**	
Trichlorofluoromethane	**8.4**		**1.7**	
Vinyl Acetate	**2.5**	J	ND (1.4)	
m,p-Xylene	ND (3.5)		**1.4**	J
Xylenes (total)	ND (3.5)		**1.4**	J

Client Sample ID:	R1-AMB-100
Sample Date:	3/27/2023 1:19 PM
Matrix:	Ambient Air Comp.
Depth(ft bgs):	N/A
Analyte	ug/m3
Acetone (2-Propanone)	8.1
Benzene	0.54 J
Dichlorodifluoromethane	2
Ethanol	6.8
Ethyl Acetate	8.6
Hexane	0.46 J
Isopropyl Alcohol	1.6
Methyl ethyl ketone	0.59
Methylene chloride	0.94
Propylene	0.72 J
Tetrachloroethylene	0.28
Toluene	1.1
Trichlorofluoromethane	1

LOCATION	SVP-4	
SAMPLING DATE	5/25/2021	
SAMPLE DEPTH (ft.)	5	
	Results	Qual
1,1,1-Trichloroethane	2.18	U
Trichloroethene	2.15	U
Tetrachloroethene	**4.62**	
Acetone	**61.8**	
2-Butanone	**375**	
Carbon Disiulfied	**3.36**	
2-Hexanone	**50.8**	
1,3-Butadiene	0.885	U
Ethanol	**21.9**	
n-Hexane	**4.48**	
Benzene	**2.38**	
Heptane	**3.96**	
Toluene	**47.1**	
Ethylbenzene	**5.56**	
p/m-Xylene	**18.2**	
o-Xylene	**6.56**	
Total Xylenes	**24.76**	
1,3,5-Trimethylbenzene	1.97	U
1,2,4-Trimethylbenzene	**4.17**	

Client Sample ID:	R1-SV-101
Sample Date:	3/27/2023 1:21 PM
Matrix:	Soil Vapor Comp.
Depth(ft bgs):	5
Analyte	ug/m3
1,2,4-Trimethylbenzene	4.5
1,3-Butadiene	1.9
2-Hexanone	7
Acetone (2-Propanone)	99.8
Benzene	3.8
Carbon disulfide	5
Chloroform	6.3
Cyclohexane	ND
Dichlorodifluoromethane	3.1 J
Ethanol	27.3
Ethyl Acetate	10
Ethylbenzene	4.8
Heptane	2.6 J
Hexane	13
Isopropyl Alcohol	23
Methyl Isobutyl Ketone	3.8
Methyl ethyl ketone	26
Methylene chloride	24
Propylene	13
Styrene	4
Tertiary Butyl Alcohol	13
Tetrachloroethylene	79.3
Toluene	71.6
Trichlorofluoromethane	4.3
Xylenes (total)	29
m,p-Xylene	23
o-Xylene	6.1

Client Sample ID:	R1-SV-3		R1-AMB-3	
Date Sampled:	8/22/2022		8/22/2022	
Matrix:	Soil Vapor Comp.		Ambient Air Comp.	
Acetone (2-Propanone)	**116**		**9.3**	
Benzene	ND (2.6)		**0.45**	J
Chloromethane	**1.5**	J	**1.2**	
Dichlorodifluoromethane	**2.6**	J	**2.2**	
cis-1,2-Dichloroethylene	ND (0.63)		**0.67**	
Ethanol	**15**		**6.4**	
Ethyl Acetate	**4.3**		**2.2**	
Hexane	ND (2.8)		**2.1**	
2-Hexanone	ND (3.3)		**1.1**	
Isopropyl Alcohol	**2.5**		**1.3**	
Methylene chloride	**4.2**		**8.3**	
Methyl ethyl ketone	**6.8**		**1**	
Propylene	**2.1**	J	**0.98**	
Tertiary Butyl Alcohol	**38.2**		ND (0.61)	
Tetrachloroethylene	**26**		**28**	
Toluene	ND (3.0)		**1.3**	
Trichloroethylene	**1.5**		**0.7**	
Trichlorofluoromethane	**2.7**		**2.5**	
m,p-Xylene	ND (3.5)		**0.83**	J
Xylenes (total)	ND (3.5)		**0.83**	J

LOCATION	SVP-3	
SAMPLING DATE	5/25/2021	
SAMPLE DEPTH (ft.)	5	
	Results	Qual
1,1,1-Trichloroethane	**5.3**	
Trichloroethene	2.69	U
Tetrachloroethene	**67.8**	
Acetone	**138**	
2-Butanone	**268**	
Carbon Disiulfied	**31.8**	
2-Hexanone	**81.1**	
1,3-Butadiene	**48**	
Ethanol	**36**	
n-Hexane	**73.7**	
Benzene	**53**	
Heptane	**56.6**	
Toluene	**78.8**	
Ethylbenzene	**27.3**	
p/m-Xylene	**96.4**	
o-Xylene	**50.4**	
Total Xylenes	**146.8**	
1,3,5-Trimethylbenzene	2.46	U
1,2,4-Trimethylbenzene	**3.58**	

LOCATION	AMB-1	
SAMPLING DATE	5/25/2021	
	Results	Qual
1,1,1-Trichloroethane	1.09	U
Trichloroethene	1.07	U
Tetrachloroethene	1.36	U
Acetone	**7.27**	
2-Butanone	1.47	U
Carbon Disiulfied	0.623	U
2-Hexanone	0.82	U
1,3-Butadiene	0.442	U
Ethanol	**10.6**	
n-Hexane	0.705	U
Benzene	0.639	U
Heptane	0.82	U
Toluene	**1.7**	
Ethylbenzene	0.869	U
p/m-Xylene	**2.15**	
o-Xylene	0.869	U
Total Xylenes	**3.019**	
1,3,5-Trimethylbenzene	0.983	U
1,2,4-Trimethylbenzene	0.983	U

LOCATION	SVP-2	
SAMPLING DATE	5/25/2021	
SAMPLE DEPTH (ft.)	5	
	Results	Qual
1,1,1-Trichloroethane	**4.04**	
Trichloroethene	**3.15**	
Tetrachloroethene	**107**	
Acetone	**133**	
2-Butanone	**265**	
Carbon Disiulfied	**7.38**	
2-Hexanone	**57.4**	
1,3-Butadiene	**4.09**	
Ethanol	**82**	
n-Hexane	**17.8**	
Benzene	**5.78**	
Heptane	**19.4**	
Toluene	**76.5**	
Ethylbenzene	**354**	
p/m-Xylene	**1060**	
o-Xylene	**397**	
Total Xylenes	**1457**	
1,3,5-Trimethylbenzene	**4.69**	
1,2,4-Trimethylbenzene	**22.9**	

Client Sample ID:	R1-SV-4		R1-AMB-4	
Date Sampled:	8/22/2022		8/22/2022	
Matrix:	Soil Vapor Comp.		Ambient Air Comp.	
Acetone (2-Propanone)	**115**		**12**	
Benzene	ND (2.6)		**0.51**	J
Chloromethane	ND (1.7)		**1.4**	
Dichlorodifluoromethane	**2.2**	J	**2.4**	
Ethanol	**15**		**13**	
Ethylbenzene	ND (3.5)		**1.2**	
Ethyl Acetate	**2.4**	J	**2.9**	
4-Ethyltoluene	ND (3.9)		**4.5**	
Hexane	**2.2**	J	**3.1**	
Isopropyl Alcohol	**2.7**		**1.5**	
Methylene chloride	**8.7**		**15**	
Methyl ethyl ketone	**6.2**		**1.7**	
Propylene	**1.6**	J	ND (0.86)	
1,2,4-Trimethylbenzene	ND (3.9)		**30**	
1,3,5-Trimethylbenzene	ND (3.9)		**12**	
Tertiary Butyl Alcohol	**39.4**		**0.3**	J
Tetrachloroethylene	**41**		ND (0.27)	
Toluene	ND (3.0)		**4.9**	
Trichloroethylene	**0.91**		ND (0.21)	
Trichlorofluoromethane	**2.3**		**2.6**	
Vinyl Acetate	ND (2.8)		**1.9**	
m,p-Xylene	ND (3.5)		**14**	
o-Xylene	ND (3.5)		**13**	
Xylenes (total)	ND (3.5)		**28**	

NYSDOH Matrix	NY-SSC-A	NY-SSC-B	NY-SSC-C
Analyte (ug/m3)			
Carbon tetrachloride	6		
cis-1,2-Dichloroethylene	**6**		
1,1-Dichloroethylene	**6**		
Trichloroethene (TCE)	6		
Tetrachloroethylene (PCE)		100	
1,1,1-Trichloroethane		100	
Methylene chloride		100	
Vinyl chloride			6

LEGEND:

- PROPERTY BOUNDARY
- RI-SV1/RI-AMB-1 - SOIL VAPOR AND OUTDOOR AIR SAMPLE LOCATION (AUGUST 2022)
- SVP-4 - VAPOR POINT NUMBER & APPROX. LOCATION (MAY 2021)
- AMB-1 - AMBIENT AIR SAMPLE APPROX. LOCATION (MAY 2021)
- 80 - CONCENTRATION EXCEEDS NY-SSC-B
- RI-SV-102 - SOIL VAPOR AND OUTDOOR AIR SAMPLE LOCATION

SCALE: 1"=10'

0 10 20

© SESI CONSULTING ENGINEERS 2023
This drawing and all information contained here on is proprietary information of SESI CONSULTING ENGINEERS and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS.

REFERENCE:
SITE INFORMATION TAKEN FROM SITE SURVEY PREPARED BY GABRIEL E. SENOR, DATED JULY 5, 2022, REVISED JULY 21 2022 AND MAP OF MONITORING WELLS PREPARED BY GABRIEL E. SENOR, DATED OCTOBER 24, 2022.

SESI CONSULTING ENGINEERS
GEOTECHNICAL | ENVIRONMENTAL | SITE CIVIL
959 route 46e, 3rd floor, parsippany, nj 07054 ph: 973.808.9050

dwg by: YZ
chk by: SG
scale: AS NOTED
date: 03/31/2023


no.	description	date	by

ST. CLAIR HOTEL DRY CLEANERS SITE (BCP C360220)
32, 36 AND 38 MAIN STREET
& 1 AND 23 RIVERDALE AVENUE
YONKERS, WESTCHESTER COUNTY, NEW YORK

title: SOIL VAPOR SAMPLE LOCATION AND CONCENTRATION PLAN

job no. 11846
drawing no. FIG-2.3

N:\VCAD\11846\CAD\ENVIRONMENTAL\PHASE II ESA REPORT\11846.DWG/FIG-4.1 – 4.3 – SAMPLE LOCATION PLAN.DWG 04/03/23 09:08:02AM, sgs, LAYOUT:FIG-4.3

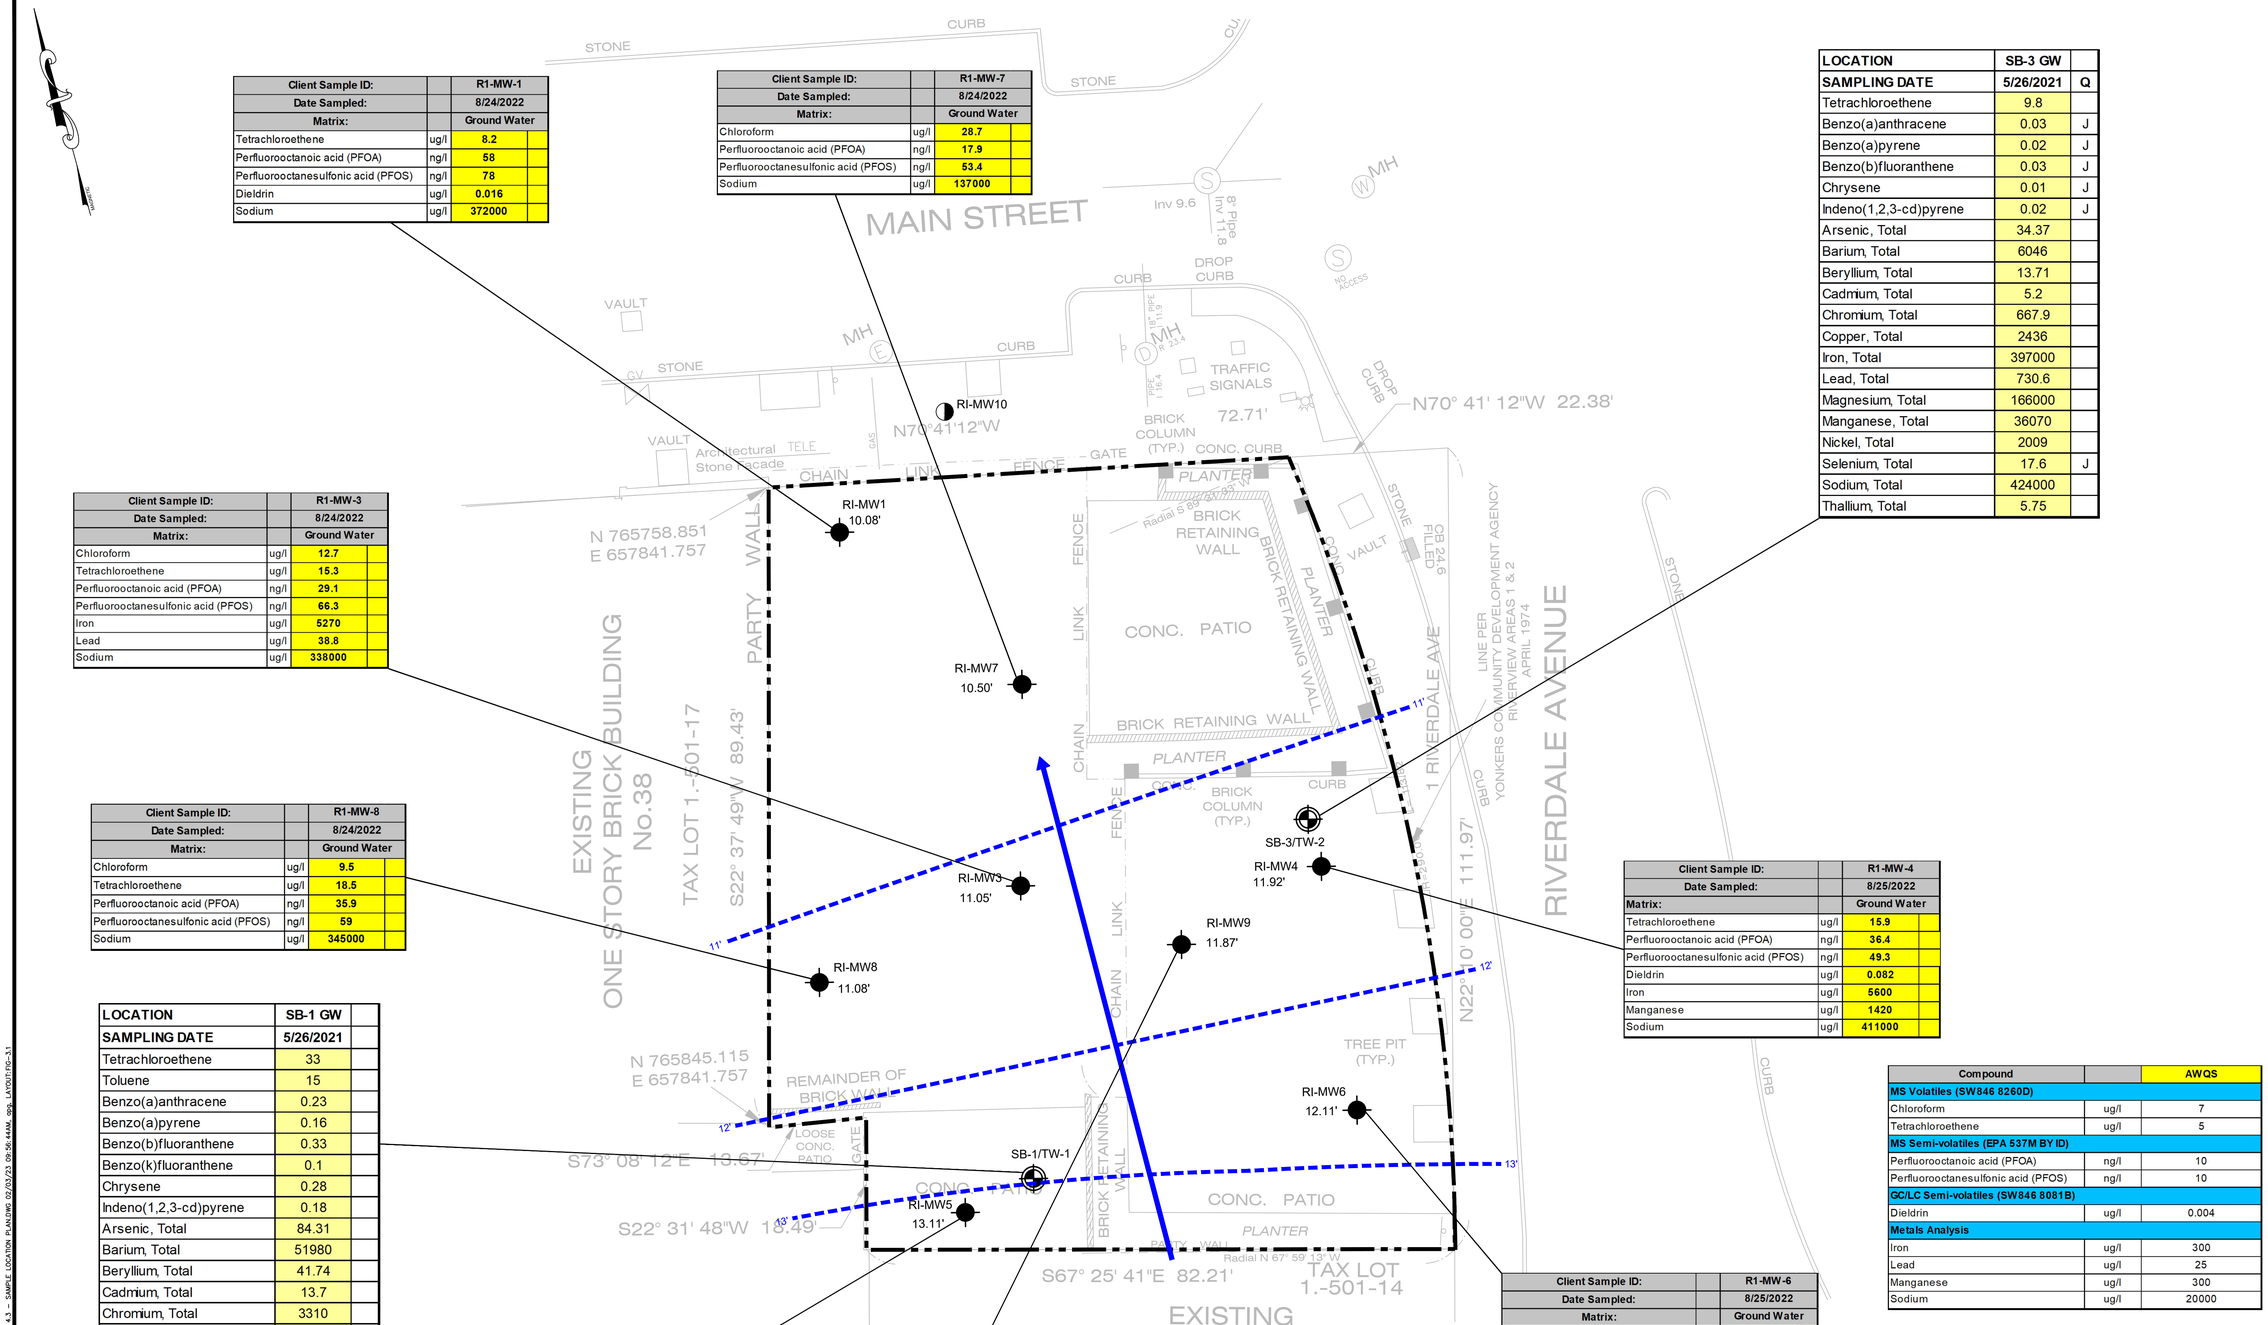

Client Sample ID:		R1-MW-1
Date Sampled:		8/24/2022
Matrix:		Ground Water
Tetrachloroethene	ug/l	8.2
Perfluorooctanoic acid (PFOA)	ng/l	58
Perfluorooctanesulfonic acid (PFOS)	ng/l	78
Dieldrin	ug/l	0.016
Sodium	ug/l	372000

Client Sample ID:		R1-MW-7
Date Sampled:		8/24/2022
Matrix:		Ground Water
Chloroform	ug/l	28.7
Perfluorooctanoic acid (PFOA)	ng/l	17.9
Perfluorooctanesulfonic acid (PFOS)	ng/l	53.4
Sodium	ug/l	137000

LOCATION	SB-3 GW	
SAMPLING DATE	5/26/2021	Q
Tetrachloroethene	9.8	
Benzo(a)anthracene	0.03	J
Benzo(a)pyrene	0.02	J
Benzo(b)fluoranthene	0.03	J
Chrysene	0.01	J
Indeno(1,2,3-cd)pyrene	0.02	J
Arsenic, Total	34.37	
Barium, Total	6046	
Beryllium, Total	13.71	
Cadmium, Total	5.2	
Chromium, Total	667.9	
Copper, Total	2436	
Iron, Total	397000	
Lead, Total	730.6	
Magnesium, Total	166000	
Manganese, Total	36070	
Nickel, Total	2009	
Selenium, Total	17.6	J
Sodium, Total	424000	
Thallium, Total	5.75	

Client Sample ID:		R1-MW-3
Date Sampled:		8/24/2022
Matrix:		Ground Water
Chloroform	ug/l	12.7
Tetrachloroethene	ug/l	15.3
Perfluorooctanoic acid (PFOA)	ng/l	29.1
Perfluorooctanesulfonic acid (PFOS)	ng/l	66.3
Iron	ug/l	5270
Lead	ug/l	38.8
Sodium	ug/l	338000

Client Sample ID:		R1-MW-8
Date Sampled:		8/24/2022
Matrix:		Ground Water
Chloroform	ug/l	9.5
Tetrachloroethene	ug/l	18.5
Perfluorooctanoic acid (PFOA)	ng/l	35.9
Perfluorooctanesulfonic acid (PFOS)	ng/l	59
Sodium	ug/l	345000

Client Sample ID:		R1-MW-4
Date Sampled:		8/25/2022
Matrix:		Ground Water
Tetrachloroethene	ug/l	15.9
Perfluorooctanoic acid (PFOA)	ng/l	36.4
Perfluorooctanesulfonic acid (PFOS)	ng/l	49.3
Dieldrin	ug/l	0.082
Iron	ug/l	5600
Manganese	ug/l	1420
Sodium	ug/l	411000

LOCATION	SB-1 GW	
SAMPLING DATE	5/26/2021	
Tetrachloroethene	33	
Toluene	15	
Benzo(a)anthracene	0.23	
Benzo(a)pyrene	0.16	
Benzo(b)fluoranthene	0.33	
Benzo(k)fluoranthene	0.1	
Chrysene	0.28	
Indeno(1,2,3-cd)pyrene	0.18	
Arsenic, Total	84.31	
Barium, Total	51980	
Beryllium, Total	41.74	
Cadmium, Total	13.7	
Chromium, Total	3310	
Copper, Total	6880	
Iron, Total	1460000	
Lead, Total	1323	
Magnesium, Total	796000	
Manganese, Total	73680	
Nickel, Total	3312	
Sodium, Total	406000	
Thallium, Total	17.36	J
Zinc, Total	4850	

Client Sample ID:		R1-MW-5
Date Sampled:		8/25/2022
Matrix:		Ground Water
Chloroform	ug/l	9.7
Tetrachloroethene	ug/l	31.7
Perfluorooctanoic acid (PFOA)	ng/l	70.6
Perfluorooctanesulfonic acid (PFOS)	ng/l	78
Iron	ug/l	542
Sodium	ug/l	374000

Client Sample ID:		R1-MW-9
Date Sampled:		8/25/2022
Matrix:		Ground Water
Chloroform	ug/l	20.6
Iron	ug/l	1430
Sodium	ug/l	108000

Client Sample ID:		R1-MW-6
Date Sampled:		8/25/2022
Matrix:		Ground Water
Chloroform	ug/l	7.1
Tetrachloroethene	ug/l	9.6
Perfluorooctanoic acid (PFOA)	ng/l	34
Perfluorooctanesulfonic acid (PFOS)	ng/l	60.5
Sodium	ug/l	393000

Compound		AWQS
MS Volatiles (SW846 8260D)		
Chloroform	ug/l	7
Tetrachloroethene	ug/l	5
MS Semi-volatiles (EPA 537M BY ID)		
Perfluorooctanoic acid (PFOA)	ng/l	10
Perfluorooctanesulfonic acid (PFOS)	ng/l	10
GC/LC Semi-volatiles (SW846 8081B)		
Dieldrin	ug/l	0.004
Metals Analysis		
Iron	ug/l	300
Lead	ug/l	25
Manganese	ug/l	300
Sodium	ug/l	20000

LEGEND:

- PROPERTY BOUNDARY
- GROUNWATER ELEVATION CONTOUR (FT AMSL) (DASHED WHERE INFERRED)
- 11' - GROUNDWATER ELEVATION (FT AMSL)
- GROUNDWATER FLOW DIRECTION
- RI-MW1 - GROUNDWATER SAMPLE NUMBER & APPROX. LOCATION (AUGUST 2022)
- SB-1/GW-1 - SOIL BORING & GROUNDWATER NUMBER & APPROX. LOCATION (MAY 2021)
- RI-MW10 - PROPOSED OFF-SITE WELL
- 80 - CONCENTRATION EXCEEDS AWQS

SCALE: 1"=10'
0 10 20

© SESI CONSULTING ENGINEERS 2023
This drawing and all information contained here on is proprietary information of SESI CONSULTING ENGINEERS and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS.

REFERENCE
SITE INFORMATION TAKEN FROM SITE SURVEY PREPARED BY GABRIEL E. SENOR, DATED JULY 5, 2022, REVISED JULY 21 2022 AND MAP OF MONITORING WELLS PREPARED BY GABRIEL E. SENOR, DATED OCTOBER 24, 2022.

SESI CONSULTING ENGINEERS
GEOTECHNICAL | ENVIRONMENTAL | SITE CIVIL
959 route 46e, 3rd floor, parsippany, nj 07054 ph: 973.808.9050

dwg by: YZ
chk by: SG
scale: AS NOTED
date: 02/03/2023

inv | date | description | by

ST. CLAIR HOTEL DRY CLEANERS SITE (BCP C360220)
32, 36 AND 38 MAIN STREET
& 1 AND 23 RIVERDALE AVENUE
YONKERS, WESTCHESTER COUNTY, NEW YORK

title: PROPOSED MONITORING WELL LOCATION PLAN

job no. 11846
drawing no. FIG-3.1

N:\VCAD\11846\CAD\ENVIRONMENTAL\PHASE II ESA\REPORT\11846 DWG\FIG-3.1 - 4.3 - SAMPLE LOCATION PLAN.dwg 02/03/23 09:36:44AM -sgs- LAYOUT:FIG-3.1

Client Sample ID:	R1SB1 (4-4.5)	R1SB1 (6-6.5)	R1SB1 (14.5-15)
Date Sampled:	8/16/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	1.5	2.8	0.7
Benzo(a)anthracene	1.6	2.88	1.35
Benzo(a)pyrene	1.39	2.81	1.35
Benzo(b)fluoranthene	2.03	3.56	1.72
Benzo(k)fluoranthene	0.588	1.45	0.539
Chrysene	1.5	2.81	1.25
Dibenzo(a,h)anthracene	0.257	0.505	0.222
Indeno(1,2,3-cd)pyrene	1.12	2.34	0.934
4,4'-DDD	0.0025	0.003	0.0074
4,4'-DDT	0.01135 B	0.0151 B	0.0166 B
Lead	172	143	99.9
Mercury	0.14	0.39	0.21
Nickel	23.9	16.5	18.1
Zinc	267	177	118

Client Sample ID:	R1SB5 (3-3.5)	R1SB5 (7-7.5)	R1SB5 (13-13.5)	R1SB5 (19-19.5)
Date Sampled:	8/16/2022	8/16/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	1.6	2.3	ND (0.60)	ND (0.60)
Benzo(a)anthracene	1.59	2.29	ND (0.038)	ND (0.039)
Benzo(a)pyrene	1.5	2.17	ND (0.038)	ND (0.039)
Benzo(b)fluoranthene	2.12	3.26	ND (0.038)	ND (0.039)
Benzo(k)fluoranthene	0.784	1.25	ND (0.038)	ND (0.039)
Chrysene	1.81	2.6	ND (0.038)	ND (0.039)
Dibenzo(a,h)anthracene	0.305	0.489	ND (0.038)	ND (0.039)
Indeno(1,2,3-cd)pyrene	1.31	1.97	ND (0.038)	ND (0.039)
4,4'-DDT	0.0088 B	0.0067 B	0.0046 B	0.0041 B
Barium	418	332	<24	31.3
Lead	507	558	4.6	5.6
Mercury	0.26	0.23	<0.032	<0.033
Zinc	276	215	15.5	16.5

Client Sample ID:	R1SB2 (1.5-2)	R1SB2 (6-8.5)	R1SB2 (12-12.5)	R1SB2 (19.5-20)
Date Sampled:	8/16/2022	8/16/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	1	0.82	0.87	ND (0.60)
Benzo(a)anthracene	2.2	0.243	ND (0.036)	ND (0.040)
Benzo(a)pyrene	2.18	0.23	ND (0.036)	ND (0.040)
Benzo(b)fluoranthene	2.8	0.289	ND (0.036)	ND (0.040)
Benzo(k)fluoranthene	0.968	0.096	ND (0.036)	ND (0.040)
Chrysene	1.91	0.295	ND (0.036)	ND (0.040)
Dibenzo(a,h)anthracene	0.34	0.0416	ND (0.036)	ND (0.040)
Indeno(1,2,3-cd)pyrene	1.66	0.173	ND (0.036)	ND (0.040)
4,4'-DDT	0.007 B	0.0076 B	0.0066 B	0.0057 B
Lead	107	67.8	5.4	6.1
Mercury	0.41	0.17	0.14	<0.039
Zinc	138	105	20.8	17.7

Client Sample ID:	SB-4 (2.5-3)	SB-4 (5.5-6)
Date Sampled:	5/26/2021	5/26/2021
Matrix:	Soil	Soil
Benzo(a)anthracene	1.3	1.6
Benzo(a)pyrene	1.2	1.5
Benzo(b)fluoranthene	1.7	2.3
Chrysene	1.4	1.9
Indeno(1,2,3-cd)pyrene	0.8	0.98
Lead, Total	258	189
Mercury, Total	0.215	0.238
Zinc, Total	235	120

Client Sample ID:	R1-SS1 (.5-1)
Date Sampled:	8/17/2022
Matrix:	Soil
Benzo(a)anthracene	1.62
Benzo(a)pyrene	1.16
Benzo(b)fluoranthene	1.53
Chrysene	1.29
Indeno(1,2,3-cd)pyrene	0.805
4,4'-DDT	0.0172 B
Chromium	30.9
Lead	83.8
Zinc	131

Client Sample ID:	R1-SS2 (.5-1)
Date Sampled:	8/17/2022
Matrix:	Soil
Benzo(a)anthracene	1.77
Benzo(a)pyrene	1.62
Benzo(b)fluoranthene	2.12
Chrysene	1.64
Indeno(1,2,3-cd)pyrene	1.0
4,4'-DDT	0.0162 B
Chromium	30.7
Lead	138
Mercury	0.22
Zinc	154

Client Sample ID:	R1SB4 (3-3.5)	R1SB4 (9.5-10)	R1SB4 (14.5-15)
Date Sampled:	8/16/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	1.5	0.71	ND (0.62)
Benzo(a)anthracene	2.21	0.203	ND (0.041)
Benzo(a)pyrene	2.09	0.196	ND (0.041)
Benzo(b)fluoranthene	2.96	0.21	ND (0.041)
Benzo(k)fluoranthene	0.972	0.0815	ND (0.041)
Chrysene	2.3	0.19	ND (0.041)
Dibenz(a,h)anthracene	0.397	0.0328 J	ND (0.041)
Indeno(1,2,3-cd)pyrene	1.74	0.135	ND (0.041)
4,4'-DDT	0.0103 B	0.0062 B	0.0052 B
Lead	235	63.7	9.5
Zinc	209	113	17.6

Client Sample ID:	R1SB7 (2.5-3)	R1SB7 (8-8.5)
Date Sampled:	8/16/2022	8/16/2022
Matrix:	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	1.6	0.87
alpha-Chlordane	0.0111	0.316
4,4'-DDT	0.0121 B	0.0123 B
Lead	179	154
Zinc	95.2	331

Client Sample ID:	SB-5 (3.5-4)
Date Sampled:	5/26/2021
Matrix:	Soil
Benzo(a)anthracene	2.3
Benzo(a)pyrene	2
Benzo(b)fluoranthene	2.5
Benzo(k)fluoranthene	0.92
Chrysene	2.1
Indeno(1,2,3-cd)pyrene	1.2
Mercury, Total	0.199
Zinc, Total	69.9

Client Sample ID:	R1-SS3 (.5-1)
Date Sampled:	8/17/2022
Matrix:	Soil
Benzo(a)anthracene	2.93
Benzo(a)pyrene	2.31
Benzo(b)fluoranthene	2.97
Benzo(k)fluoranthene	1.06
Chrysene	2.57
Dibenzo(a,h)anthracene	0.394
Indeno(1,2,3-cd)pyrene	1.53
4,4'-DDT	0.0173 B
Chromium	30.3
Lead	74

Client Sample ID:	R1SB8 (2.5-3)	R1SB8 (5-5.5)	R1SB8 (10-10.5)	R1SB8 (17.5-18)	R1SB8 (24.5-25)
Date Sampled:	8/16/2022	8/16/2022	8/16/2022	8/16/2022	8/16/2022
Matrix:	Soil	Soil	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	0.85	1.4	2.2	ND (0.61)	ND (0.62)
Benzo(a)anthracene	1.8	3.86	ND (0.035)	ND (0.039)	ND (0.039)
Benzo(a)pyrene	1.81	3.51	ND (0.035)	ND (0.039)	ND (0.039)
Benzo(b)fluoranthene	2.38	4.4	ND (0.035)	ND (0.039)	ND (0.039)
Benzo(k)fluoranthene	0.817	1.48	ND (0.035)	ND (0.039)	ND (0.039)
Chrysene	1.73	3.55	ND (0.035)	ND (0.039)	ND (0.039)
Dibenzo(a,h)anthracene	0.3	0.597	ND (0.035)	ND (0.039)	ND (0.039)
Indeno(1,2,3-cd)pyrene	1.05	2.03	ND (0.035)	ND (0.039)	ND (0.039)
4,4'-DDD	0.0022	0.0054	0.00068	0.00078	ND (0.00081)
4,4'-DDT	0.012 B	0.0137 B	0.0116 B	0.0102 B	0.0034 B
Lead	90.5	236	6	7	8.4
Mercury	0.35	0.2	0.05	<0.035	<0.037
Zinc	155	181	14	25.4	29.6

Client Sample ID:	R1SB11 (4-4.5)
Date Sampled:	8/16/2022
Matrix:	Soil
Benzo(a)anthracene	1.14
Benzo(a)pyrene	1.1
Benzo(b)fluoranthene	2.5
Benzo(k)fluoranthene	0.878
Chrysene	1.4
Indeno(1,2,3-cd)pyrene	1.52
4,4'-DDT	0.0054 B
Copper	161
Lead	234
Zinc	121

Client Sample ID:	R1-SS4 (.5-1)
Date Sampled:	8/17/2022
Matrix:	Soil
Benzo(a)anthracene	2.53
Benzo(a)pyrene	2.29
Benzo(b)fluoranthene	2.85
Benzo(k)fluoranthene	1.2
Chrysene	2.31
Dibenzo(a,h)anthracene	0.391
Indeno(1,2,3-cd)pyrene	1.64
4,4'-DDT	0.0152 B
Chromium	35.7
Lead	76.3
Zinc	113

Client Sample ID:	SB-1 (1.5-2')
Date Sampled:	5/25/2021
Matrix:	Soil
Indeno(1,2,3-cd)pyrene	0.72
Benzo(b)fluoranthene	1.4
Chrysene	1.2
Benzo(a)pyrene	1
Benzo(a)anthracene	1.3
Lead, Total	80
Mercury, Total	0.057
Zinc, Total	188

Client Sample ID:	R1SB15 (2-2.5)	R1SB15 (7-7.5)	R1SB15 (13-13.5)	R1SB15 (15-15.5)	R1SB15 (24.5-25)
Date Sampled:	8/17/2022	8/17/2022	8/17/2022	8/17/2022	8/17/2022
Matrix:	Soil	Soil	Soil	Soil	Soil
Benzo(a)anthracene	4.09	0.0177 J	ND (0.041)	ND (0.040)	ND (0.040)
Benzo(a)pyrene	4.19	ND (0.037)	ND (0.041)	ND (0.040)	ND (0.040)
Benzo(b)fluoranthene	4.76	0.0214 J	ND (0.041)	ND (0.040)	ND (0.040)
Benzo(k)fluoranthene	1.47	ND (0.037)	ND (0.041)	ND (0.040)	ND (0.040)
Chrysene	3.48	0.0135 J	ND (0.041)	ND (0.040)	ND (0.040)
Dibenzo(a,h)anthracene	0.629	ND (0.037)	ND (0.041)	ND (0.040)	ND (0.040)
Indeno(1,2,3-cd)pyrene	3.08	ND (0.037)	ND (0.041)	ND (0.040)	ND (0.040)
4,4'-DDT	0.0159 B	0.0041 B	0.0042 B	0.0059 B	0.0056 B
Lead	285	6.8	12.4	5.9	3.4
Nickel	12.2	35.6	27.1	23.3	11.9

Client Sample ID:	R1SB12 (.5-1)	R1SB12 (9-9.5)	R1SB12 (11-11.5)	R1SB12 (17-17.5)	R1SB12 (23.5-24)
Date Sampled:	8/17/2022	8/17/2022	8/17/2022	8/17/2022	8/17/2022
Matrix:	Soil	Soil	Soil	Soil	Soil
Benzo(a)anthracene	1.53	0.494	ND (0.036)	ND (0.040)	ND (0.041)
Benzo(b)fluoranthene	1.32	0.571	ND (0.036)	ND (0.040)	ND (0.041)
Chrysene	1.04	0.487	ND (0.036)	ND (0.040)	ND (0.041)
Indeno(1,2,3-cd)pyrene	0.84	0.254	ND (0.036)	ND (0.040)	ND (0.041)
alpha-Chlordane	0.01	0.178	0.0179	ND (0.00081)	ND (0.00081)
4,4'-DDT	0.0221 B	0.0073 B	0.0041 B	0.0122 B	0.0052 B
Lead	104	94.4	2.8	4.1	3.2
Mercury	0.38	0.52	<0.028	<0.033	<0.037
Zinc	137	45.2	25.9	21.8	30.4

Client Sample ID:	R1SB6 (2-2.5)	R1SB6 (8.5-9)	R1SB6 (11.5-12)	R1SB6 (16.5-17)
Date Sampled:	8/18/2022	8/18/2022	8/18/2022	8/18/2022
Matrix:	Soil	Soil	Soil	Soil
Benzo(a)anthracene	0.201	3.33	ND (0.039)	ND (0.041)
Benzo(a)pyrene	0.2	2.51	ND (0.039)	ND (0.041)
Benzo(b)fluoranthene	0.246	3	ND (0.039)	ND (0.041)
Benzo(k)fluoranthene	0.094	1.06	ND (0.039)	ND (0.041)
Chrysene	0.194	2.92	ND (0.039)	ND (0.041)
Dibenz(a,h)anthracene	0.0331 J	0.377	ND (0.039)	ND (0.041)
Indeno(1,2,3-cd)pyrene	0.143	1.52	ND (0.039)	ND (0.041)
4,4'-DDD	ND (0.00075)	0.0038	ND (0.00074)	ND (0.00077)
4,4'-DDT	0.0123 B	0.0406 B	0.0018 B	0.0069 B
Lead	256	92.6	8.4	3.9
Mercury	0.31	0.68 H	<0.033	<0.042
Zinc	168	57.4	30.6	31.7

Client Sample ID:	R1SB3 (1.5-2)	R1SB3 (7-7.5)	R1-SB3 (7-7.5)	R1SB3 (13-13.5)	R1SB3 (19.5-20)
Date Sampled:	8/18/2022	8/18/2022	8/23/2022	8/18/2022	8/18/2022
Matrix:	Soil	Soil	Soil	Soil	Soil
Acetone	-	-	0.0629	-	-
Perfluorooctanesulfonic acid (PFOS)	1.1	0.32 J	-	ND (0.61)	ND (0.63)
4,4'-DDT	0.008 B	0.0064 B	-	0.0103 B	0.0065 B
Mercury	0.18	0.41	-	<0.031	<0.040

Client Sample ID:	SB-3 (5.5-6')
Date Sampled:	5/25/2021
Matrix:	Soil
4,4'-DDE	0.00431
Indeno(1,2,3-cd)pyrene	0.92
Benzo(b)fluoranthene	11
Benzo(k)fluoranthene	3.8
Chrysene	9.1
Benzo(a)pyrene	8.5
Dibenzo(a,h)anthracene	1.5
Benzo(a)anthracene	11
Lead, Total	213
Mercury, Total	0.258
Zinc, Total	132

Client Sample ID:	R1-SB-9 (2-2.5)	R1-SB-9 (8.5-10)	R1-SB-9 (14.5-15)	R1-SB-9 (17-17.5)
Date Sampled:	8/15/2022	8/15/2022	8/15/2022	8/15/2022
Matrix:	Soil	Soil	Soil	Soil
Dieldrin	ND (0.00070)	0.0102	ND (0.00077)	ND (0.00078)
4,4'-DDT	0.0093 B	0.02 B	0.0036 B	0.0052 B
Copper	72.4	11.1	11.8	11.5
Lead	39	195	3.7	4.1
Mercury	0.082	0.2	<0.037	<0.034

Client Sample ID:	R1-SB-10 (4-4.5)	R1-SB-10 (7.5-8)	R1-SB-10 (11-11.5)	R1-SB-10 (16-16.5)	R1-SB-10 (24.5-25)
Date Sampled:	8/15/2022	8/15/2022	8/15/2022	8/15/2022	8/15/2022
Matrix:	Soil	Soil	Soil	Soil	Soil
Perfluorooctanesulfonic acid (PFOS)	0.93	0.58	0.45 J	0.64	ND (0.55)
4,4'-DDT	0.0068 B	0.0105 B	0.0056 B	0.013 B	0.006 B
Copper	24.4	95.8	24	11.3	21.6
Lead	28.2	191	20.7	2.6	6.6
Mercury	0.036	1.2	<0.028	<0.033	<0.029
Zinc	33.9	597	36.2	15.4	21.4

Client Sample ID:	SB-2 (2.5-3)
Date Sampled:	5/26/2021
Matrix:	Soil
Benzo(a)anthracene	1.7
Benzo(a)pyrene	1.4
Benzo(b)fluoranthene	1.7
Chrysene	1.6
Indeno(1,2,3-cd)pyrene	0.93

Client Sample ID:	R1-SB-14 (2.5-3)
Date Sampled:	8/15/2022
Matrix:	Soil
4,4'-DDT	0.0105 B

Client Sample ID:	R1-SB-17 (3-3.5)	R1-SB-17 (8-8.5)	R1-SB-17 (22.5-23)
Date Sampled:	8/15/2022	8/15/2022	8/15/2022
Matrix:	Soil	Soil	Soil
4,4'-DDT	0.008 B	0.0175 B	0.0026 B
Lead	17.6	7.5	34.4
Nickel			

Client Sample ID:	R1-SB-13 (3.5-4)	R1-SB-13 (5-5.5)	R1-SB-13 (13-13.5)
Date Sampled:	8/15/2022	8/15/2022	8/15/2022
Matrix:	Soil	Soil	Soil
4,4'-DDT	0.0075 B	0.0072 B	0.0095 B
Nickel	33.2	17.9	15.5


Client Sample ID:	R1-SB-16 (1.5-2)
Date Sampled:	8/15/2022
Matrix:	Soil
alpha-Chlordane	0.103
4,4'-DDT	0.0303 B
Chromium	33.1
Lead	407


		USCOs	RRSCOs	PGWSCOs
MS Volatiles (SW846 8260D)				
Acetone	67-64-1 mg/kg	0.05	100	0.05
MS Semivolatiles (SW846 8270E)				
Benzo(a)anthracene	56-55-3 mg/kg	1	1	1
Benzo(a)pyrene	50-32-8 mg/kg	1	1	22
Benzo(b)fluoranthene	205-99-2 mg/kg	1	1	1.7
Benzo(k)fluoranthene	207-08-9 mg/kg	0.8	3.9	1.7
Chrysene	218-01-9 mg/kg	1	3.9	1
Dibenzo(a,h)anthracene	53-70-3 mg/kg	0.33	0.33	1000
Indeno(1,2,3-cd)pyrene	193-39-5 mg/kg	0.5	0.5	8.2
OC-LC Semivolatiles (SW846 8081B)				
alpha-Chlordane	5103-71-9 mg/kg	0.094	4.2	2.9
Dieldrin	60-57-1 mg/kg	0.005	0.2	0.1
4,4'-DDD	72-54-8 mg/kg	0.0033	13	14
4,4'-DDT	50-29-3 mg/kg	0.0033	7.9	136
Metals Analysis				
Barium	7440-39-3 mg/kg	350	400	820
Chromium	7440-47-3 mg/kg	30	180	-
Copper	7440-50-8 mg/kg	50	270	1720
Lead	7439-92-1 mg/kg	63	400	450
Mercury	7439-97-6 mg/kg	0.18	0.81	0.73
Nickel	7440-02-0 mg/kg	30	310	130
Zinc	7440-66-6 mg/kg	109	10000	2480

PROFILE A-A

Scale : 1" = 15'

0 7.5 15 30 45 60

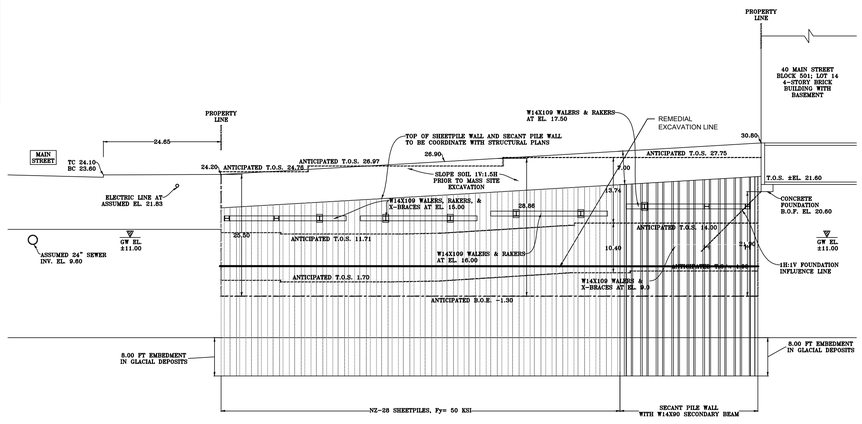

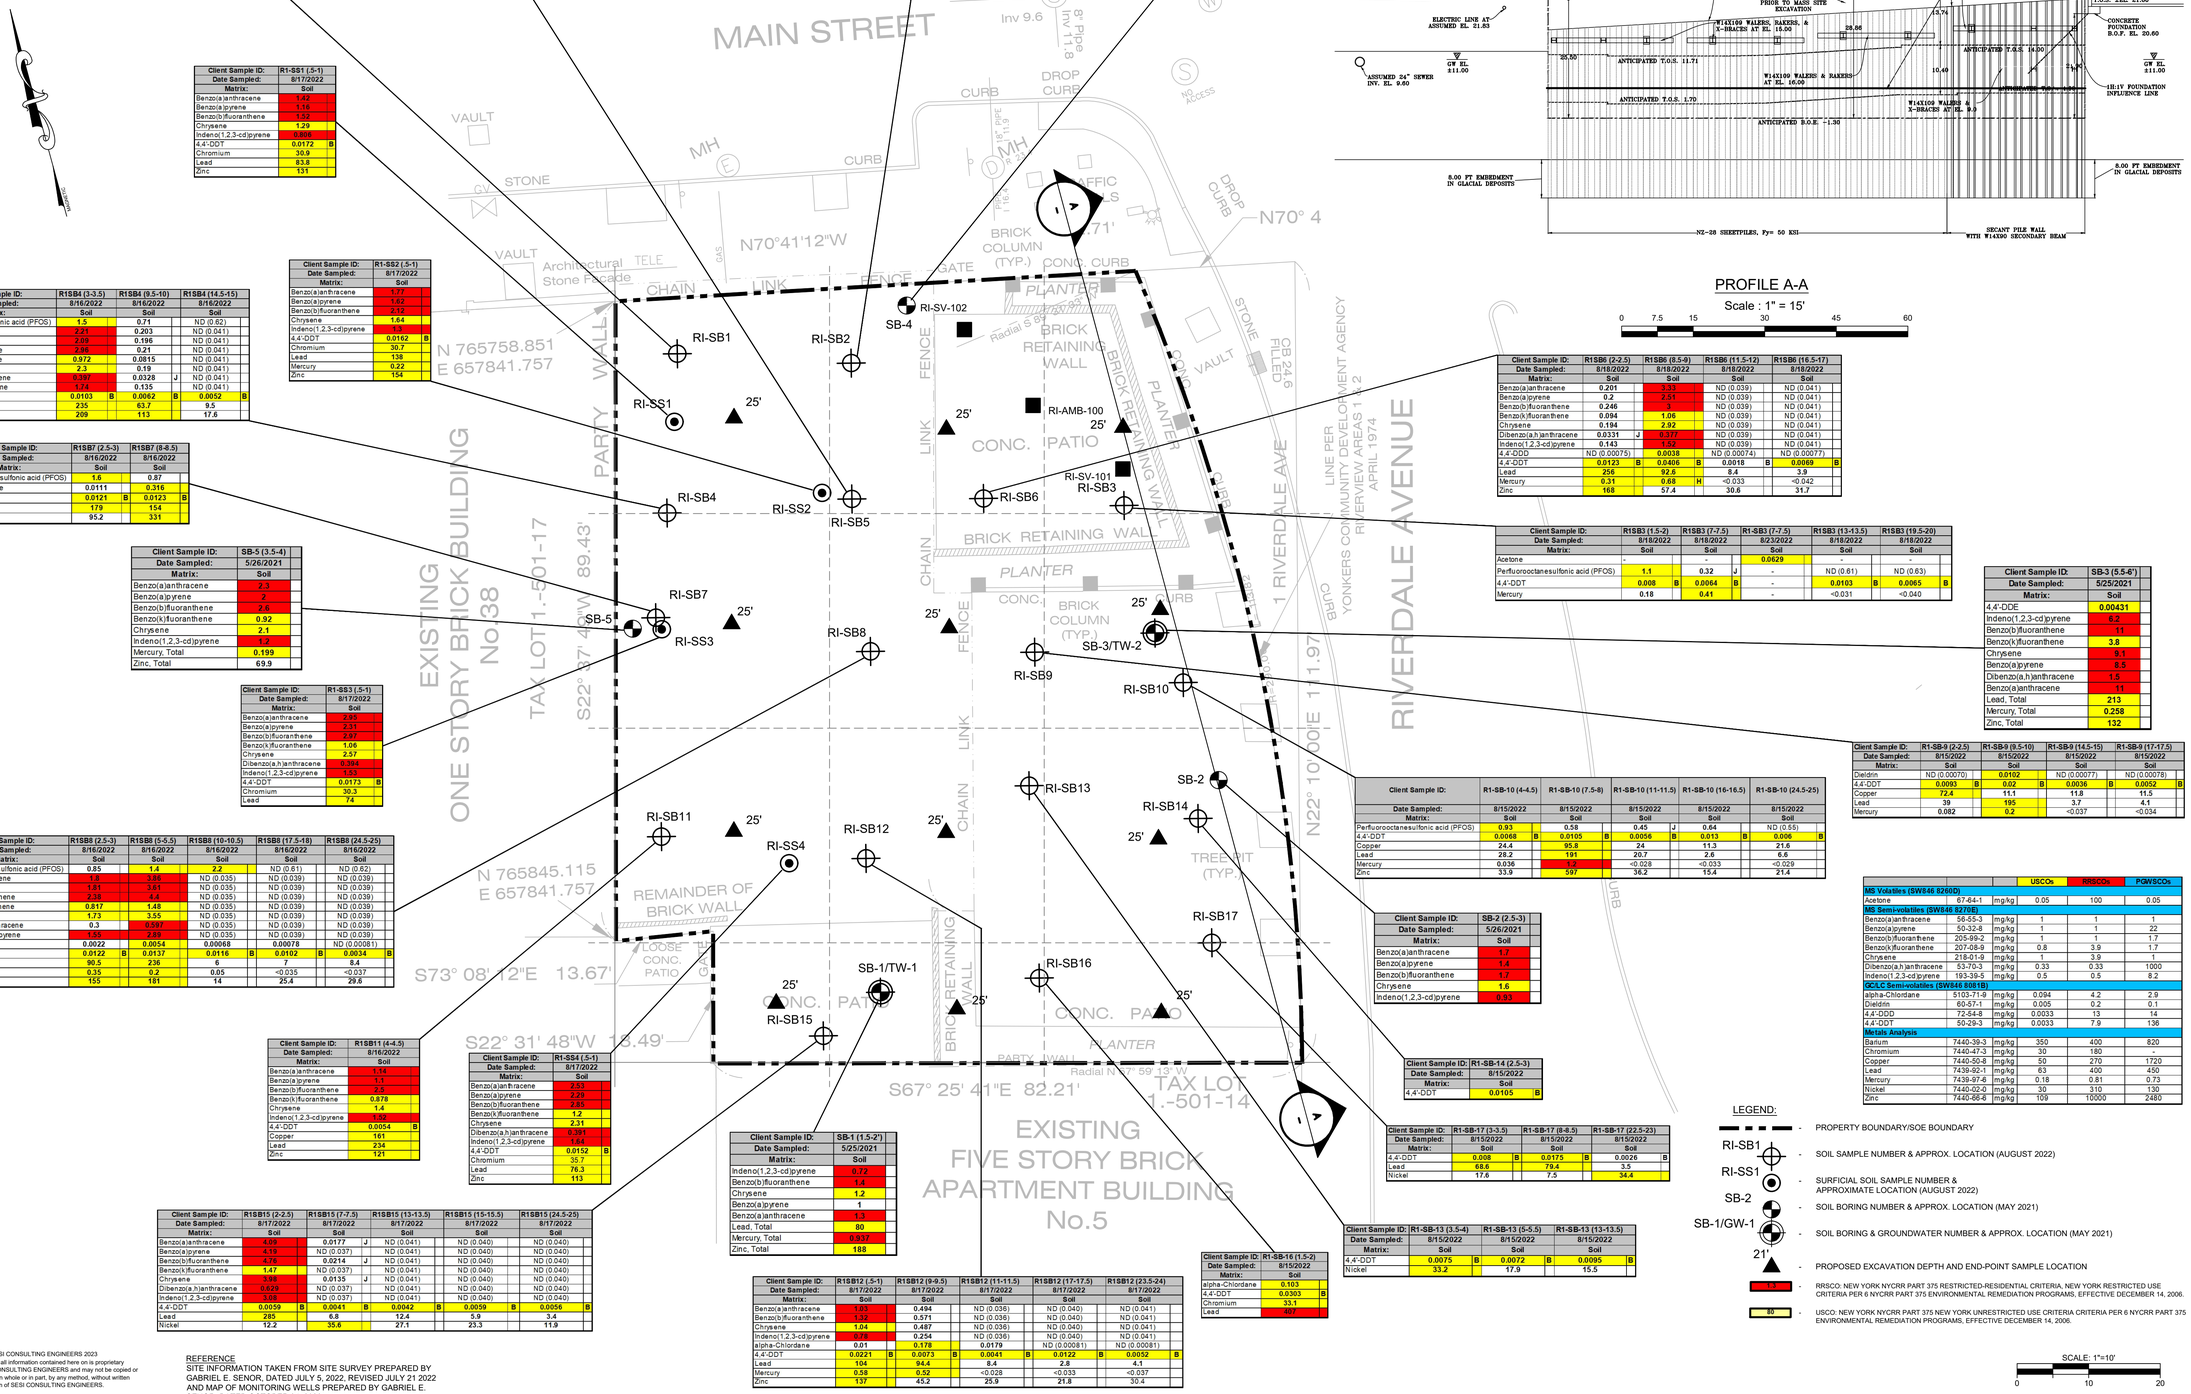

LEGEND:

- PROPERTY BOUNDARY/SOE BOUNDARY
- RI-SB1 - SOIL SAMPLE NUMBER & APPROX. LOCATION (AUGUST 2022)
- RI-SS1 - SURFICIAL SOIL SAMPLE NUMBER & APPROXIMATE LOCATION (AUGUST 2022)
- SB-2 - SOIL BORING NUMBER & APPROX. LOCATION (MAY 2021)
- SB-1/GW-1 - SOIL BORING & GROUNDWATER NUMBER & APPROX. LOCATION (MAY 2021)
- 21' - PROPOSED EXCAVATION DEPTH AND END-POINT SAMPLE LOCATION
- 10.5 - RRSCO: NEW YORK NYCRR PART 375 RESTRICTED-RESIDENTIAL CRITERIA, NEW YORK RESTRICTED USE CRITERIA PER 6 NYCRR PART 375 ENVIRONMENTAL REMEDIATION PROGRAMS, EFFECTIVE DECEMBER 14, 2006.
- 86 - USCO: NEW YORK NYCRR PART 375 NEW YORK UNRESTRICTED USE CRITERIA CRITERIA PER 6 NYCRR PART 375 ENVIRONMENTAL REMEDIATION PROGRAMS, EFFECTIVE DECEMBER 14, 2006.

SCALE: 1"=10'

0 10 20

© SESI CONSULTING ENGINEERS 2023
This drawing and all information contained here on is proprietary information of SESI CONSULTING ENGINEERS and may not be copied or reproduced, either in whole or in part, by any method, without written permission of SESI CONSULTING ENGINEERS.

REFERENCE
SITE INFORMATION TAKEN FROM SITE SURVEY PREPARED BY GABRIEL E. SENOR, DATED JULY 5, 2022, REVISED JULY 21 2022 AND MAP OF MONITORING WELLS PREPARED BY GABRIEL E. SENOR, DATED OCTOBER 24, 2022.

no.	description	date	by

dwg by: YZ
chk by: SG
scale: AS NOTED
date: 06/01/2023

SESI CONSULTING ENGINEERS
GEOTECHNICAL | ENVIRONMENTAL | SITE CIVIL
959 route 46e, 3rd floor, parsippany, nj 07054 ph: 973.808.9050

ST. CLAIR HOTEL DRY CLEANERS SITE (BCP C360220)
32, 36 AND 38 MAIN STREET
& 1 AND 23 RIVERDALE AVENUE
YONKERS, WESTCHESTER COUNTY, NEW YORK

title: PROPOSED EXCAVATION PLAN

job no. 11846
drawing no. FIG-5.1

N:\ACAD\11846\CAD\ENVIRONMENTAL\PHASE II ESA REPORT\11846 ENG FIG-4-1 – 4-3 – SAMPLE LOCATION PLAN.DWG 05/03/23 11:40:36AM jdelmo.zzzdoc, LAYOUT1-FIG-5.1

Appendix A:

Health and Safety Plan

SITE-SPECIFIC HEALTH AND SAFETY PLAN

St. Clair Hotel Dry Cleaners Site
34, 36, and 38 Main Street
Yonkers, Westchester County, New York 10701

Prepared For:

St. Clair Development, LLC,
c/o MacQuesten Companies
438 Fifth Avenue, Suite 100
Pelham, New York 10803

Prepared By:

SESI CONSULTING ENGINEERS
959 Route 46E, Floor 3, Suite 300
Parsippany, NJ 07054

Project No.: 11846

FEBRUARY 2023

Disclaimer: *This Health and Safety Plan (HASP) is based upon information provided [and, if applicable, conditions discovered during a site visit], and is limited by the project scope.*

The HASP should be periodically reviewed and updated based on a number of factors, including but not limited to: (1) changes in applicable governmental requirements; (2) changes in procedures at the site; and (3) site conditions which were unknown to SESI Consulting Engineers (SESI) as of the time the HASP was prepared.

This HASP has been prepared for the sole and exclusive use of St Clair Development, LLC, and may not be relied upon by any other person without the express written consent and authorization of SESI.

SITE-SPECIFIC HEALTH AND SAFETY PLAN

For
34, 36, and 38 Main Street
Yonkers, Westchester County, New York 10701

Prepared by: _____ Date:

_____

Steven Gustems
SESI- Project Manager

Approved by: _____ Date:

_____

Fuad Dahan
SESI-Principal

Table of Contents

HEALTH AND SAFETY PLAN SUMMARY 1

1.0 INTRODUCTION 2

1.1 OBJECTIVE 2
1.2 SITE AND FACILITY DESCRIPTION 2
1.3 POLICY STATEMENT 2
1.4 REFERENCES 3
1.5 DEFINITIONS 3

2.0 PROJECT SCOPE OF WORK 4

3.0 ROLES AND RESPONSIBILITIES 4

3.1 ALL PERSONNEL 4
3.2 KEY SAFETY PERSONNEL 4
3.2.1 Project Officer (PO) 4
3.2.2 Project Manager (PM) 4
3.2.3 Health and Safety Manager (HSM) 5
3.2.4 Site Safety Officer (SSO) 5
3.2.5 Field Supervisor (FS) 5
3.2.6 Field Personnel (FP) 6
3.3 SUBCONTRACTORS 6
3.4 STOP WORK AUTHORITY 6
3.5 ALL ON-SITE PERSONNEL 6
3.6 VISITORS 7

4.0 PERSONAL PROTECTIVE EQUIPMENT 7

4.1 LEVELS OF PROTECTION 7
4.1.1 Level D Protection 8
4.1.2 Modified Level D Protection 8
4.1.3 Level C Protection 8
4.2 SELECTION OF PPE 9
4.3 SITE RESPIRATORY PROTECTION PROGRAM 9
4.4 USING PPE 9
4.4.1 Donning Procedures 9
4.4.2 Doffing Procedures 10
4.5 SELECTION MATRIX 10

5.0 AIR AND NOISE MONITORING 11

5.1 AIR MONITORING 11
5.2 NOISE MONITORING 11
5.3 MONITORING EQUIPMENT MAINTENANCE AND CALIBRATION 11
5.4 ACTION LEVELS 12

6.0 WORK ZONES AND DECONTAMINATION 13

6.1 WORK ZONES 13
6.1.1 Authorization to Enter *13*
6.1.2 Site Orientation and Hazard Briefing *13*
6.1.3 Certification Documents *13*
6.1.4 Entry Log *13*
6.1.5 Entry Requirements *13*
6.1.6 Emergency Entry and Exit *13*
6.1.7 Contamination Control Zones *13*
6.1.8 Exclusion Zone (EZ) *14*
6.1.9 Contamination Reduction Zone *14*
6.1.10 Support Zone (SZ) *14*
6.1.11 Posting *14*
6.1.12 Site Inspections *14*
6.2 DECONTAMINATION 14
6.2.1 Personnel Decontamination *14*
6.2.2 Equipment Decontamination *14*
6.2.3 Personal Protective Equipment Decontamination *15*

7.0 TRAINING AND MEDICAL SURVEILLANCE 15

7.1 TRAINING 15
7.1.1 General *15*
7.1.2 Basic 40-Hour Course *15*
7.1.3 Supervisor Course *16*
7.1.4 Site-Specific Training *16*
7.1.5 Daily Safety Meetings *16*
7.1.6 First Aid and CPR *16*
7.2 MEDICAL SURVEILLANCE 16
7.2.1 Medical Examination *16*
7.2.2 Pre-placement Medical Examination *16*
7.2.3 Other Medical Examinations *17*
7.2.4 Periodic Exam *17*
7.2.5 Medical Restriction *17*

8.0 GENERAL SAFETY PRACTICES 17

8.1 GENERAL SAFETY RULES 17
8.2 BUDDY SYSTEM 18
8.3 HEAT STRESS 19
8.4 HEAT STRESS SAFETY PRECAUTIONS 20
Table 4 – Work/Rest Schedule *21*
8.5 COLD STRESS 21
8.6 SAFETY PRECAUTIONS FOR COLD STRESS PREVENTION 23
8.7 SAFE WORK PRACTICES 23
8.8 BIOLOGICAL HAZARDS 23
8.8.1 Tick Borne Diseases *24*
8.8.2 Poisonous Plants *24*
8.8.3 Snakes *25*
8.8.4 Spiders *25*

8.9 NOISE 25
8.10 SPILL CONTROL 26
8.11 SANITATION 26
8.11.1 Break Area 26
8.11.2 Potable Water 26
8.11.3 Sanitary Facilities 26
8.11.4 Lavatory 27
8.12 EMERGENCY EQUIPMENT 27
8.13 LOCKOUT/TAGOUT PROCEDURES 27
8.14 ELECTRICAL SAFETY 27
8.15 LIFTING SAFETY 28
8.16 LADDER SAFETY 28
8.17 TRAFFIC SAFETY 30

9.0 SITE-SPECIFIC HAZARDS AND CONTROL MEASURES 30

9.1 EVALUATION OF HAZARDS 30
9.1.1 Hazard Characteristics 30
9.1.2 Potential Health and Safety Hazards 31
9.2 FIELD ACTIVITIES, HAZARDS, AND CONTROL PROCEDURES 31
9.2.1 Mobilization/Construction Stakeout 31
9.2.2 Demolition/Site Clearing 32
9.2.3 Excavation and Cut/Fill Operations 33
9.2.4 Drilling/Subsurface Intrusion Activities 35
9.2.5 Subsurface Chemical Sample Collection/Analysis 39
9.2.6 UST Closure 40
9.2.7 Decontamination 40
9.2.8 Demobilization 41
9.3 CHEMICAL HAZARDS 41

TETRACHLOROETHENE 44

107 44

NOT APPLICABLE 44

10.0 EMERGENCY PROCEDURES 45

10.1 GENERAL 45
10.2 EMERGENCY RESPONSE 45
10.2.1 Fire 45
10.2.2 Contaminant Release 45
10.3 MEDICAL EMERGENCY 45
10.3.1 Emergency Care Steps 46
10.4 FIRST AID - GENERAL 46
10.4.1 First Aid - Inhalation 46
10.4.2 First Aid - Ingestion 46
10.4.3 First Aid - Skin Contact 46
10.4.4 First Aid - Eye Contact 47
10.5 REPORTING INJURIES, ILLNESSES, AND SAFETY INCIDENTS 47

10.6 EMERGENCY INFORMATION 47
10.6.1 Directions to Hospital 47
11.0 LOGS, REPORTS, AND RECORD KEEPING 49
11.1 HASP FIELD CHANGE REQUEST 49
11.2 MEDICAL AND TRAINING RECORDS 49
11.3 EXPOSURE RECORDS 49
11.4 ACCIDENT/INCIDENT REPORT 49
11.5 OSHA FORM 200 49
11.6 ON-SITE HEALTH AND SAFETY FIELD LOGBOOKS 49
11.7 MATERIAL SAFETY DATA SHEETS 50
12.0 COVID-19 RESPONSE ACTION PLAN 50

LIST OF FIGURES

Figure No.	Title
Fig-1	Directions to Saint Joseph's Medical Center from 32 Main Street.

LIST OF EMBEDDED TABLES

Table	Title	Page
1.	Key Safety Personnel	7
2.	PPE Selection Matrix	11
3.	Airborne Contaminant Action Levels	12
4.	Work/Rest Schedule	21
5.	Wind Chill Temperature Chart	22
6	List of Primary Contaminants	42
7	Emergency Contacts	46

LIST OF ATTACHMENTS

Attachment 1	Air Monitoring Log
Attachment 2	OSHA Poster
Attachment 3	HASP Field Change Request Form
Attachment 4	Accident/Incident Report
Attachment 5	Signatory Page
Attachment 6	Material Safety Data Sheets

LIST OF ACRONYMS AND ABBREVIATIONS

ACGIH	American Conference of Governmental Industrial Hygienists
COC	Constituent(s) of Concern
CRZ	Contamination Reduction Zone
EZ	Exclusion Zone
FS	Field Supervisor
GFCI	Ground Fault Circuit Interrupter
HASP	Health and Safety Plan
HSM	Health and Safety Manager
LEL	Lower Explosive Limit
MSDS	Material Safety Data Sheet
OSHA	Occupational Safety and Health Administration
PCB	Polychlorinated Biphenyls
PEL	Permissible Exposure Limit
PID	Photoionization Detector
PM	Project Manager
PO	Project Officer
PPE	Personal Protective Equipment
SESI	SESI Consulting Engineers
SSO	Site Safety Officer
SVOC	Semi-Volatile Organic Compound
SZ	Support Zone
TLV	Threshold Limit Value
USCG	United States Coast Guard
USEPA	United States Environmental Protection Agency
VOC	Volatile Organic Compound

HEALTH AND SAFETY PLAN SUMMARY

The chemical hazards associated with site operations are related to inhalation, ingestion, and skin exposure to site Chemicals of Concern (COCs). COCs at the site include VOCs, SVOCs, metals, pesticides, and PFOA and PFOS. Concentrations of airborne COCs during site tasks may be measurable and will require air monitoring during certain operations.

The potential for inhalation of site COCs is low. The potential for dermal contact with soils containing site COCs during remedial operations is moderate.

The following table summarizes airborne contaminant action levels that will be used to determine the procedures and protective equipment necessary based on conditions as measured at the site.

Parameter	Reading	Action
Dust	0 to .5 mg/m3	Normal operations
	0.5 to 1 mg/m3	Begin soil wetting procedure (Level C protection would be needed beyond this point)
	> 1 mg/m3	Stop work, fully implement dust control plan
Oxygen	≤ 19.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
	> 19.5% to < 23.5%	Normal operations
	≥ 23.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Carbon Monoxide	0 ppm to ≤ 20 ppm	Normal operations
	> 20 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area

The level of personal protection selected will be based on air monitoring of the work environment and an assessment by the Field Supervisor and Site Safety Officer. The following table presents a selection matrix to determine appropriate Personal Protective Equipment.

Task	Anticipated Level of Protection
Mobilization	Level D
Subsurface Intrusive Activities (Mass Excavation, Drilling, Soil Grouting)	Modified Level D/Level C
Earthwork/Grading	Level D
Additional Chemical Sampling / Delineation	Modified Level D/Level C
Decontamination	Modified Level D
Demobilization	Level D

1.0 INTRODUCTION

1.1 Objective

The objective of this Health and Safety Plan (HASP) is to provide a mechanism for establishing safe working conditions during remedial action activities. The safety organization, procedures, and protective equipment have been established based on an analysis of potential physical, chemical, and biological hazards. Specific hazard control methodologies have been evaluated and selected to minimize the potential of injury, illness, or other hazardous incident.

The HASP was written to meet the requirements of all applicable Federal, State, and local health and safety regulations, including 29 CFR 1910.120. The HASP is based on current knowledge regarding the specific chemical and physical hazards that are known or anticipated at the Site. This HASP is a dynamic document, for which changes and/or revisions may be realized as changes in scope and/or site conditions are encountered. Should revised documents be produced, said revised documents will refer to the specific changes and why they were made.

1.2 Site and Facility Description

This document presents the HASP for the Remedial Action Workplan (RAWP) for the property known located at 34, 36, and 38 Main Street, Westchester County, Yonkers, New York. The Site is approximately 0.214 acres and consists of three (3) parcels identified on the Westchester County tax records as tax parcels 38 Main Street (1.-501-18), 36 Main Street (1.-501-19), and 34 Main Street (1.-501-20). The Site does not contain any buildings or permanent structures; however, the eastern portion of the Site is improved by concrete walkways, brick walls and landscaping elements. The Site is bound to the north by Main Street, to the west by a one-story commercial building, to the south by commercial buildings and to the east by Riverdale Avenue.

Based on the review of Sanborn Maps, several businesses and storefronts were listed onsite from 1886. Most notably, a hotel was listed on the Site from 1942. Hotels are historically known to have had in-house dry-cleaning services, which have the potential for impacting the sub-surface. Two underground ovens are identified on the Site from 1898 to 1956. No additional details regarding the ovens' uses were identified. Paint-Dressmaking was listed on-Site from 1971 to 1973.

1.3 Policy Statement

The policy of SESI Consulting Engineers (SESI) is to provide a safe and healthful work environment. No aspect of operations is of greater importance than injury and illness prevention. A fundamental principle of safety management is that all injuries, illnesses, and incidents are preventable. SESI will take every reasonable step to eliminate or control hazards in order to minimize the possibility of injury, illness, or incident.

This HASP prescribes the procedures that must be followed by SESI personnel during activities at the site. Operational changes that could affect the health and safety of personnel, the community, or the environment will not be made without the prior approval of the Project Manager (PM) and the Health and Safety Manager (HSM). This document will be reviewed periodically by the HSM to ensure that it is current and technically correct. Any changes in site conditions and/or the scope of work will require a review and modification to

this HASP. Such changes will be completed in the form of an addendum or a revision to the plan.

The provisions of this plan are mandatory for all SESI personnel and are advisory for all contractors, and subcontractors assigned to the project. ***Subcontractors will be responsible for preparing their own site-specific HASPs that meet the basic requirements outlined in this HASP.*** All visitors to SESI work areas at the site must abide by the requirements of this plan.

1.4 References

This HASP complies with applicable Occupational Safety and Health Administration (OSHA) regulations, United States Environmental Protection Agency (USEPA) regulations, and SESI health and safety policies and procedures. This plan follows the guidelines established in the following:

- *Standard Operating Safety Guides*, USEPA (Publication 9285.1-03, June 1992).
- *Occupational Safety and Health Guidance Manual for Hazardous Waste Site Activities*, NIOSH, OSHA, USCG, USEPA (86116, October 1985).
- *Title 29 of the Code of Federal Regulations* (CFR), Part 1910.
- *Title 29 of the Code of Federal Regulations* (CFR), Part 1926.
- *Pocket Guide to Chemical Hazards*, DHHS, PHS, CDC, NIOSH (2004).
- *Threshold Limit Values*, ACGIH (2005).
- *Guide to Occupational Exposure Values*, ACGIH (2005).
- *Quick Selection Guide to Chemical Protective Clothing*, Forsberg, K. and S.Z. Mansdorf, 2nd Ed. (1993).

1.5 Definitions

The following definitions (listed alphabetically) are applicable to this HASP:

- *Contamination Reduction Zone (CRZ)* - Area between the exclusion zone and support zone that provides a transition between contaminated and clean areas. Decontamination stations are located in this zone.
- *Exclusion Zone (EZ)* - Any portions of the site where hazardous substances are, or are reasonably suspected to be present, and pose an exposure hazard to on-site personnel.
- *Incident* - All losses, including first aid cases, injuries, illnesses, spills/leaks, equipment and property damage, motor vehicle accidents, regulatory violations, fires, and business interruptions.
- *On-Site Personnel* - All SESI and subcontractors involved with the project.
- *Project* - All on-site work performed under the scope of work.
- *Site* - The area described in Section 1.2, Site and Facility Description, where the work is to be performed by SESI personnel and subcontractors.
- *Support Zone (SZ)* - All areas of the site except the EZ and CRZ. The SZ surrounds the CRZ and EZ. Support equipment and break areas are located in this zone.
- *Subcontractor* - Includes contractor personnel hired by SESI.
- *Visitor* - All other personnel, except the on-site personnel.
- *Work Area* - The portion of the site where work activities are actively being performed. This area may change daily as work progresses and includes the SZ, CRZ, and EZ. If the work area is located in an area on the site that is not

contaminated, or suspected of being contaminated, the entire work area may be a SZ.

2.0 PROJECT SCOPE OF WORK

This HASP contains information for the following tasks that SESI is anticipated to conduct at the Site. Should additional and/or different tasks be identified, amendments to this HASP will be required to address these changed items.

- Mobilization/Sample location stakeout;
- Soil Borings and Monitoring Well Installation;
- Excavation of contaminated soil "hot spots";
- Earthwork and grading;
- Chemical sampling of soil and groundwater; and
- Decontamination and demobilization/site restoration.

3.0 ROLES AND RESPONSIBILITIES

3.1 All Personnel

All SESI project personnel must adhere to the procedures outlined in this HASP during the performance of their work. Each person is responsible for completing tasks safely and reporting any unsafe acts or conditions to their supervisor. No person may work in a manner that conflicts with these procedures. After due warnings, the PM will dismiss from the site any SESI employee or subcontractor who violates safety procedures.

All SESI project personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. In addition, all SESI personnel will attend an initial hazard briefing prior to beginning work at the site.

The roles of key safety personnel and subcontractors are outlined in the following sections. Key project personnel and contacts are summarized in **Table 1** on page 7.

3.2 Key Safety Personnel

3.2.1 Project Officer (PO)

The PO is responsible for providing resources to assure project activities are completed in accordance with this HASP, and for meeting all regulatory and contractual requirements.

3.2.2 Project Manager (PM)

The PM is responsible for verifying that project activities are completed in accordance with the requirements of this HASP. The PM is responsible for confirming that the Field Supervisor (FS) has the equipment, materials, and qualified personnel to fully implement the safety requirements of this HASP, and/or that subcontractors assigned to this project meet the requirements established by SESI. It is also the responsibility of the PM to:

- Consult with the HSM on site health and safety issues;
- Verify that subcontractors meet health and safety requirements prior to commencing work;

- Verify that all incidents are thoroughly investigated;
- Approve, in writing, addenda or modifications of this HASP; and
- Suspend work or modify work practices, as necessary, for personal safety, protection of property, and regulatory compliance.

3.2.3 Health and Safety Manager (HSM)

The HSM or his designee, the health and safety manager (HSM), has overall responsibility for the technical health and safety aspects of the project, including review and approval of this HASP. Inquiries regarding health and safety procedures, project procedures, and other technical or regulatory issues should be addressed to this individual. The HSM or his designee must approve changes or addenda to this HASP.

3.2.4 Site Safety Officer (SSO)

The SSO is responsible for field health and safety issues, including the execution of this HASP. Questions in the field regarding health and safety procedures, project procedures, and other technical or regulatory issues should be addressed to this individual. The SSO will advise the PM on health and safety issues and will establish and coordinate the project air-monitoring program if one is deemed necessary (see Section 5.1, Air Monitoring). The SSO is the primary site contact on health and safety matters. It is the responsibility of the SSO to:

- Provide on-site technical assistance, if necessary;
- Participate in all accident/incident reports and ensure that they are reported to the HSM, client, and PM within 24 hours;
- Coordinate site and personal air monitoring as required, including equipment maintenance and calibration;
- Conduct site safety orientation training and safety meetings;
- Verify that project personnel have received the required physical examinations and medical certifications;
- Review site activities with respect to compliance with this HASP;
- Maintain required health and safety documents and records; and
- Assist the FS in instructing field personnel on project hazards and protective procedures.

3.2.5 Field Supervisor (FS)

The FS is responsible for implementing this HASP, including communicating requirements to on-site personnel and subcontractors. The FS will be responsible for informing the PM of changes in the work plan, procedures, or site conditions so that those changes may be addressed in this HASP. Other responsibilities are to:

- Consult with the SSO on site health and safety issues;
- Stop work, as necessary, for personal safety, protection of property, and regulatory compliance;
- Obtain a site map and determine and post routes to medical facilities and emergency telephone numbers;
- Notify local public emergency representatives (as appropriate) of the nature of the site operations, and post their telephone numbers (i.e., local fire department personnel who would respond for a confined space rescue);
- Observe on-site project personnel for signs of ill health effects;

- Investigate and report any incidents to the SSO;
- Verify that all on-site personnel have had applicable training;
- Verify that on-site personnel are informed of the physical, chemical, and biological hazards associated with the site activities, and the procedures and protective equipment necessary to control the hazards; and
- Issue/obtain any required work permits (hot work, confined space, etc.).

3.2.6 Field Personnel (FP)

All SESI field personnel are responsible for following the Health and Safety procedures specified in this HASP and work practices specified in applicable operation procedures. Some specific responsibilities include, but are not limited to:

- Reading and understanding the HASP;
- Reporting all accidents, incidents, injuries, or illnesses to the FS;
- Complying with the requests of the SSO;
- Immediately communicating newly identified hazards or noncompliance issues to the FS or SSO; and
- Stopping work in cases of immediate danger.

3.3 Subcontractors

Subcontractors and their personnel must understand and comply with applicable regulations and site requirements established in this HASP. Subcontractors will prepare their own site-specific HASP that must be consistent with the requirements of this HASP.

All subcontractor personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. All subcontractor personnel will attend an initial hazard briefing prior to beginning work at the site. Additionally, on-site subcontractor personnel must conduct daily site safety meetings.

Subcontractors must designate individuals to function as the PM, HSM, SSO, and FS. In some firms the HSM to be carried out by the PM. This is acceptable provided the PM has the required knowledge, training, and experience to properly address all hazards associated with the work, and to prepare, approve, and oversee the execution of the site-specific HASP. A subcontractor may designate the same person to perform the duties of both the SSO and the FS. However, depending on the level of complexity of a contractor's scope of work, it may be infeasible for one person to perform both functions satisfactorily.

3.4 Stop Work Authority

Every SESI employee and subcontractor is empowered, expected, and has the responsibility to stop the work of another co-worker if the working conditions or behaviors are considered unsafe.

3.5 All On-Site Personnel

All on-site SESI personnel (including SESI subcontractors) must read and acknowledge their understanding of their respective HASPs before commencing work and abide by the requirements of the plans. All on-site SESI personnel shall sign their HASP Acknowledgement Form following their review of their HASP.

All SESI project personnel will receive training in accordance with applicable regulations and be familiar with the requirements and procedures contained in this HASP prior to initiating site activities. In addition, all on-site personnel will attend an initial hazard briefing provided by the SSO prior to beginning work at the site and conduct daily safety meetings thereafter.

On-site personnel will immediately report the following to the FS or SSO:

- Personal injuries and illnesses no matter how minor;
- Unexpected or uncontrolled release of chemical substances;
- Symptoms of chemical exposure;
- Unsafe or hazardous situations;
- Unsafe or malfunctioning equipment;
- Changes in site conditions that may affect the health and safety of project personnel;
- Damage to equipment or property; and
- Situations or activities for which they are not properly trained.

3.6 Visitors

All SESI personnel and subcontractors visiting the Site must check in with the FS. Visitors will be cautioned to avoid skin contact with surfaces, soils, groundwater, or other materials that may impacted or be suspected to be impacted by constituents of concern (COCs).

Visitors requesting to observe work at the site must don appropriate personal protective equipment (PPE) prior to entry to the work area and must have the appropriate training and medical clearances to do so. If respiratory protective devices are necessary, visitors who wish to enter the work area must have been respirator-trained and fit tested for a respirator within the past 12 months.

Table 1 – Key Safety Personnel

SESI Personnel		
Role	**Name**	**Address/Telephone No.**
Project Officer (PO)	Fuad Dahan	Pine Brook, NJ/973.747.9567
Project Manager (PM)	Steven Gustems	Pine Brook, NJ/973.518.8547
Senior Project Engineer (SPE)	Fuad Dahan	Pine Brook, NJ/973.747.9567
Health and Safety Manager (HSM)	Joe Scardino	Pine Brook, NJ/973.809.0835
Site Safety Officer (SSO)	Joe Scardino	Pine Brook, NJ/973.809.0835
Field Supervisor (FS)	Jon Stuart	Pine Brook, NJ/973.518.8979
Field Personnel	Jeffery Lamborn	Pine Brook, NJ/973.809.2079
Subcontractors		
Company/Role	**Name**	**Address/Telephone No.**
AARCO/Drilling Contractor	Tara Boggs	Lindenhurst, NY/631.586.59020
Alpha Analytical/ Analytical Lab	Paul Simms	Westborough, MA/580.898.9220

4.0 PERSONAL PROTECTIVE EQUIPMENT

4.1 Levels of Protection

PPE is required to safeguard site personnel from various hazards. Varying levels of protection may be required depending on the levels of COCs and the degree of physical

hazard. This section presents the various levels of protection and defines the conditions of use for each level. A summary of the levels is presented in **Table 2** on page 11.

4.1.1 Level D Protection

The minimum level of protection that will be required of project personnel at the site will be Level D, which will be worn when site conditions or air monitoring indicates no inhalation hazard exists. The following equipment will be used:

- Work clothing as prescribed by weather;
- Steel toe work boots, meeting American National Standards Institute (ANSI) Z41;
- Safety glasses or goggles, meeting ANSI Z87;
- Leather work gloves and/or nitrile surgical gloves;
- Hard hat, meeting ANSI Z89, when falling object hazards are present;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used); and
- PFD if working on or near the water.

4.1.2 Modified Level D Protection

Modified Level D will be used when airborne contaminants are not present at levels of concern, but site activities present an increased potential for skin contact with contaminated materials. Modified Level D consists of:

- Nitrile gloves worn over nitrile surgical gloves;
- Latex/polyvinyl chloride (PVC) overboots when contact with COC-impacted media is anticipated;
- Steel toe work boots, meeting ANSI Z41;
- Safety glasses or goggles, meeting ANSI Z87;
- Face shield in addition to safety glasses or goggles when projectiles or splash hazards exist (e.g. during Power Washing activities);
- Hard hat, meeting ANSI Z89, when falling object hazards are present;
- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used);
- Tyvek® suit (polyethylene coated Tyvek® suits for handling liquids) when body contact with COC-impacted media is anticipated; and
- PFD if working on or near the water.

4.1.3 Level C Protection

Level C protection will be required when the airborne concentration of COC reaches one-half of the OSHA Permissible Exposure Limit or ACGIH TLV. The following equipment will be used for Level C protection:

- Full-face, air-purifying respirator with combination organic vapor/HEPA cartridges;
- Polyethylene-coated Tyvek® suit, with ankles and cuffs taped to boots and gloves;
- Nitrile gloves worn over nitrile surgical gloves;
- Steel toe work boots, meeting ANSI Z41;
- Chemical-resistant boots with steel toes or latex/PVC overboots over steel toe boots;
- Hard hat, meeting ANSI Z89;

- Hearing protection (if noise levels exceed 85 dBA, then hearing protection with a USEPA NRR of at least 20 dBA must be used); and
- PFD if working on or near the water.

4.2 Selection of PPE

Equipment for personal protection will be selected based on the potential for contact, site conditions, ambient air quality, and the judgment of supervising site personnel and health and safety professionals. The PPE used will be chosen to be effective against the COCs present on the site.

4.3 Site Respiratory Protection Program

Respiratory protection is an integral part of employee health and safety at the site due to potentially hazardous concentrations of airborne COCs. The site respiratory protection program will consist of the following (as a minimum):

- All on-site personnel who may use respiratory protection will have an assigned respirator.
- All on-site personnel who may use respiratory protection will have been fit tested and trained in the use of a full-face air-purifying respirator within the past 12 months. Documentation of the fit test must be provided to the SSO prior to commencement of work.
- All on-site personnel who may use respiratory protection must within the past year have been medically certified as being capable of wearing a respirator. Documentation of the medical certification must be provided to the SSO, prior to commencement of site work.
- Only cleaned, maintained, NIOSH-approved respirators will be used.
- If respirators are used, the respirator cartridge is to be properly disposed of at the end of each work shift, or when load-up or breakthrough occurs.
- Contact lenses are not to be worn when a respirator is worn.
- All on-site personnel who may use respiratory protection must be clean-shaven. Mustaches and sideburns are permitted, but they must not touch the sealing surface of the respirator.
- Respirators will be inspected, and a negative pressure test performed prior to each use.
- After each use, the respirator will be wiped with a disinfectant, cleansing wipe. When used, the respirator will be thoroughly cleaned at the end of the work shift. The respirator will be stored in a clean plastic bag, away from direct sunlight in a clean, dry location, in a manner that will not distort the face piece.

4.4 Using PPE

Depending upon the level of protection selected, specific donning and doffing procedures may be required. The procedures presented in this section are mandatory if Modified Level D or Level C PPE is used. All personnel entering the EZ must put on the required PPE in accordance with the requirements of this HASP. When leaving the EZ, PPE will be removed in accordance with the procedures listed, to minimize the spread of COCs.

4.4.1 Donning Procedures

These procedures are mandatory only if Modified Level D or Level C PPE is used on the site:

- Remove bulky outerwear. Remove street clothes and store in clean location;
- Put on work clothes or coveralls;
- Put on the required chemical protective coveralls;
- Put on the required chemical protective boots or boot covers;
- Tape the legs of the coveralls to the boots with duct tape;
- Put on the required chemical protective gloves;
- Tape the wrists of the protective coveralls to the gloves;
- Don the required respirator and perform appropriate fit check (Level C);
- Put hood or head covering over-head and respirator straps and tape hood to facepiece (Level C); and
- Don remaining PPE, such as safety glasses or goggles and hard hat.

When these procedures are instituted, one person must remain outside the work area to ensure that each person entering has the proper protective equipment.

4.4.2 Doffing Procedures

The following procedures are only mandatory if Modified Level D or Level C PPE is required for the site. Whenever a person leaves the work area, the following decontamination sequence will be followed:

- Upon entering the CRZ, rinse contaminated materials from the boots or remove contaminated boot covers;
- Clean reusable protective equipment;
- Remove protective garments, equipment, and respirator (Level C). All disposable clothing should be placed in plastic bags, which are labeled with contaminated waste labels;
- Wash hands, face, and neck (or shower if necessary);
- Proceed to clean area and dress in clean clothing; and
- Clean and disinfect respirator for next use.

All disposable equipment, garments, and PPE must be bagged in plastic bags, labeled for disposal. See Section 7, Decontamination, for detailed information on decontamination stations.

4.5 Selection Matrix

The level of personal protection selected will be based on air monitoring of the work environment and an assessment by the FS and SSO of the potential for skin contact with COCs. The PPE selection matrix is presented in **Table 2** below. This matrix is based on information available at the time this plan was written. The Airborne Contaminant Action Levels in **Table 3** on page 12, Airborne Contaminant Action Levels, should be used to verify that the PPE prescribed in these matrices is appropriate.

Table 2 – PPE Selection Matrix

Task	Anticipated Level of Protection
Mobilization	Level D
Subsurface Intrusive Activities (Excavation, Drilling)	Modified Level D/Level C
Earthwork/Grading	Level D
Chemical Sampling / Delineation	Modified Level D/Level C
Decontamination	Modified Level D
Demobilization	Level D

5.0 AIR AND NOISE MONITORING

5.1 Air Monitoring

Air monitoring, sampling, and testing will be conducted to determine employee exposure to airborne constituents. The monitoring results will dictate work procedures and the selection of PPE. The SESI SSO will be responsible for defining appropriate air monitoring procedures and for utilizing the air monitoring results to determine appropriate procedures and PPE for project personnel. Air monitoring results should be recorded in field notebooks or on an air monitoring log (see Attachment 1 for a copy of the Air Monitoring Log). Any deviations from the procedures listed here should be documented and explained in the Air Monitoring Log.

The monitoring devices to be used are a PDR1000 particulate monitor (or equivalent) and a Rae Systems MultiRAE detector (PID with a 11.7 eV lamp/oxygen/LEL/hydrogen sulfide sensors). Colorimetric detector tubes may be utilized to estimate airborne concentrations of benzene and should be onsite during any activities that may result in elevated PID readings including drilling, excavating, and groundwater sampling.

Air monitoring will be conducted continuously with the LEL/Oxygen meter during drilling in areas where flammable vapors or gases are suspect. All work activity must stop where tests indicate the concentration of flammable vapors exceeds 10% of the LEL at a location with a potential ignition source. Such an area must be ventilated to reduce the concentration to an acceptable level.

5.2 Noise Monitoring

Noise monitoring may be conducted as required. Hearing protection is mandatory for all employees in noise hazardous areas, such as around heavy equipment. As a general rule, sound levels that cause speech interference at normal conversation distance should require the use of hearing protection.

5.3 Monitoring Equipment Maintenance and Calibration

All direct-reading instrumentation calibrations should be conducted under the approximate environmental conditions the instrument will be used. Instruments must be calibrated before and after use, noting the reading(s) and any adjustments that are necessary. All air monitoring equipment calibrations, including the standard used for calibration, must be documented on a calibration log or in the field notebook. All completed health and safety documentation/forms must be reviewed by the SSO and maintained by the FS.

All air monitoring equipment will be maintained and calibrated in accordance with the specific manufacturer's procedures. Preventive maintenance and repairs will be conducted in accordance with the respective manufacturer's procedures. When applicable, only manufacturer-trained and/or authorized personnel will be allowed to perform instrument repairs or preventive maintenance.

If an instrument is found to be inoperative or suspected of giving erroneous readings, the SSO must be responsible for immediately removing the instrument from service and obtaining a replacement unit. If the instrument is essential for safe operation during a specific activity, that activity must cease until an appropriate replacement unit is obtained. The SSO will be responsible for ensuring a replacement unit is obtained and/or repairs are initiated on the defective equipment.

5.4 Action Levels

Table 3 below presents airborne contaminant action levels that will be used to determine the procedures and protective equipment necessary based on conditions as measured at the site.

Table 3 – Airborne Contaminant Action Levels

Parameter	Reading	Action
Total Hydrocarbons	0 ppm to ≤ 1 ppm	Normal operations; continue hourly breathing zone monitoring
	> 1 ppm to 5 ppm	Increase monitoring frequency to every 15 minutes and use benzene detector tube to screen for the presence of benzene
	≥ 5 ppm to ≤ 50 ppm	Upgrade to Level C PPE; continue screening for benzene
	> 50 ppm	Stop work; investigate cause of reading
	At any reading > 5 ppm	Monitor perimeter per CAMP
Benzene	≥ 1 ppm to 5 ppm	Upgrade to Level C PPE
	> 5 ppm	Stop work; investigate cause of reading
Dust	0 to .05 mg/m3	Normal operations
	0.05 to 0.1 mg/m3	Begin soil wetting procedure (Level C protection would be needed beyond this point)
	> 0.15 mg/m3	Stop work, fully implement dust control plan
Oxygen	≤ 19.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
	> 19.5% to < 23.5%	Normal operations
	≥ 23.5%	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Carbon Monoxide	0 ppm to ≤ 20 ppm	Normal operations
	> 20 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Hydrogen Sulfide	0 ppm to ≤ 5 ppm	Normal operations
	> 5 ppm	Stop work, evacuate confined spaces/work area, investigate cause of reading, and ventilate area
Flammable Vapors (LEL)	< 10% LEL	Normal operations
	≥ 10% LEL	Stop work, ventilate area, investigate source of vapors

6.0 WORK ZONES AND DECONTAMINATION

6.1 Work Zones

6.1.1 Authorization to Enter

Only personnel with the appropriate training and medical certifications (if respirators are required) will be allowed to work at the project site. The FS will maintain a list of authorized persons; only personnel on the authorized persons list will be allowed to enter the site work areas.

6.1.2 Site Orientation and Hazard Briefing

No person will be allowed in the work area during site operations without first being given a site orientation and hazard briefing. This orientation will be presented by the FS or SSO and will consist of a review of this HASP. This review must cover the chemical, physical, and biological hazards, protective equipment, safe work procedures, and emergency procedures for the project. Following this initial meeting, daily safety meetings will be held each day before work begins.

All people entering the site work areas, including visitors, must document their attendance at this briefing, as well as the daily safety meetings on the forms included with this plan.

6.1.3 Certification Documents

A training and medical file may be established for the project and kept on site during all site operations. Specialty training, such as first aid/cardiopulmonary resuscitation (CPR) certificates, as well as current medical clearances for all project field personnel required to wear respirators, will be maintained within that file. All project personnel must provide their training and medical documentation to the SSO prior to starting work.

6.1.4 Entry Log

A log-in/log-out sheet will be maintained at the site by the FS. Personnel must sign in and out on a log sheet as they enter and leave the work area, and the FS may document entry and exit in the field notebook.

6.1.5 Entry Requirements

In addition to the authorization, hazard briefing, and certification requirements listed above, no person will be allowed in any SESI work area unless they are wearing the minimum PPE as described in Section 4.0.

6.1.6 Emergency Entry and Exit

People who must enter the work area on an emergency basis will be briefed of the hazards by the FS or SSO. All activities will cease in the event of an emergency. People exiting the work area because of an emergency will gather in a designated safe area for a head count. The FS is responsible for ensuring that all people who entered the work area have exited in the event of an emergency.

6.1.7 Contamination Control Zones

Contamination control zones are maintained to prevent the spread of contamination and to prevent unauthorized people from entering hazardous areas.

6.1.8 Exclusion Zone (EZ)

An EZ may consist of a specific work area or may be the entire area of potential contamination. All employees entering an EZ must use the required PPE and must have the appropriate training and medical clearance for hazardous waste work. The EZ is the defined area where there is a possible respiratory and/or contact health hazard. Cones, caution tape, or a posted site diagram will identify the location of each EZ.

6.1.9 Contamination Reduction Zone

The CRZ or transition area will be established, if necessary, to perform decontamination of personnel and equipment. All personnel entering or leaving the EZ will pass through this area to prevent any cross-contamination. Tools, equipment, and machinery will be decontaminated in a specific location. The decontamination of all personnel will be performed on site adjacent to the EZ. Personal protective outer garments and respiratory protection will be removed in the CRZ and prepared for cleaning or disposal. This zone is the only appropriate corridor between the EZ and the support zone (SZ) discussed below.

6.1.10 Support Zone (SZ)

The SZ is a clean area outside the CRZ located to prevent employee exposure to hazardous substances. Eating and drinking will be permitted in the support area only after proper decontamination. Smoking may be permitted in the SZ, subject to site requirements.

6.1.11 Posting

Work areas will be prominently marked and delineated using cones, caution tape, or a posted site diagram.

6.1.12 Site Inspections

The FS will conduct a daily inspection of site activities, equipment, and procedures to verify that the required elements are in place.

6.2 Decontamination

6.2.1 Personnel Decontamination

All personnel wearing Modified Level D or Level C protective equipment in the EZ must undergo personal decontamination prior to entering the SZ. The personnel decontamination area will consist of the following stations at a minimum:

- *Station 1*: Personnel leaving the contaminated zone will remove the gross contamination from their outer clothing and boots.
- *Station 2*: Personnel will remove their outer garment and gloves and dispose of it in properly labeled containers. Personnel will then decontaminate their hard hats, and boots with an aqueous solution of detergent or other appropriate cleaning solution. These items are then hand carried to the next station.
- *Station 3*: Personnel will thoroughly wash their hands and face before leaving the CRZ. Respirators will be sanitized and then placed in a clean plastic bag.

6.2.2 Equipment Decontamination

All vehicles that have entered the EZ will be decontaminated at the decontamination pad prior to leaving the zone. If the level of vehicle contamination is low, decontamination may be limited to rinsing of tires and wheel wells with water. If the vehicle is significantly

contaminated, steam cleaning or pressure washing of vehicles and equipment may be required.

6.2.3 Personal Protective Equipment Decontamination

Where and whenever possible, single-use, external protective clothing must be used for work within the EZ or CRZ. This protective clothing must be disposed of in properly labeled containers. Reusable protective clothing will be rinsed at the site with detergent and water. The rinsate will be collected for disposal.

When removed from the CRZ, the respirator will be thoroughly cleaned with soap and water. The respirator face piece, straps, valves, and covers must be thoroughly cleaned at the end of each work shift, and ready for use prior to the next shift. Respirator parts may be disinfected with a solution of bleach and water (mixed at 2% bleach by volume), or by using a spray disinfectant

7.0 TRAINING AND MEDICAL SURVEILLANCE

7.1 Training

7.1.1 General

All on-site project personnel who work in areas where they may be exposed to site contaminants must be trained as required by OSHA Regulation 29 CFR 1910.120 (HAZWOPER). Field employees also must receive a minimum of three days of actual field experience under the direct supervision of a trained, experienced supervisor. Personnel who completed their initial training more than 12 months prior to the start of the project must have completed an eight-hour refresher course within the past 12 months. The FS must have completed an additional eight hours of supervisory training and must have a current first-aid/CPR certificate (See Attachment 2).

7.1.2 Basic 40-Hour Course

The following is a list of the topics typically covered in a 40-hour HAZWOPER training course:

- General safety procedures;
- Physical hazards (fall protection, noise, heat stress, cold stress);
- Names and job descriptions of key personnel responsible for site health and safety;
- Safety, health, and other hazards typically present at hazardous waste sites;
- Use, application, and limitations of PPE;
- Work practices by which employees can minimize risks from hazards;
- Safe use of engineering controls and equipment on site;
- Medical surveillance requirements;
- Recognition of symptoms and signs which might indicate overexposure to hazards;
- Worker right-to-know (Hazard Communication OSHA 1910.1200);
- Routes of exposure to contaminants;
- Engineering controls and safe work practices;
- Components of a health and safety program and a site-specific HASP;
- Decontamination practices for personnel and equipment;
- Confined-space entry procedures; and
- General emergency response procedures.

7.1.3 Supervisor Course

Management and supervisors must receive an additional eight hours of training, which typically includes:

- General site safety and health procedures;
- PPE programs; and
- Air monitoring techniques.

7.1.4 Site-Specific Training

Site-specific training will be accomplished by on-site personnel reading this HASP, and through a thorough site briefing by the PM, FS, or SSO on the contents of this HASP before work begins. The review must include a discussion of the chemical, physical, and biological hazards; the protective equipment and safety procedures; and emergency procedures.

7.1.5 Daily Safety Meetings

Daily safety meetings will be held to cover the work to be accomplished, the hazards anticipated, the PPE and procedures required to minimize site hazards, and emergency procedures. The FS or SSO should present these meetings prior to beginning the day's fieldwork. No work will be performed in an EZ before a daily safety meeting has been held. An additional safety meeting must also be held prior to new tasks, or if new hazards are encountered. The daily safety meetings will be logged in the field notebook.

7.1.6 First Aid and CPR

At least one employee current in first aid/CPR will be assigned to the work crew and will be on the site during operations. Site records will document the presence of this individual. Refresher training in first aid (triennially) and CPR (annually) is required to keep the certificate current. These individuals must also receive training regarding the precautions and protective equipment necessary to protect against exposure to blood-borne pathogens.

7.2 Medical Surveillance

7.2.1 Medical Examination

All personnel who are potentially exposed to site contaminants must participate in a medical surveillance program as defined by OSHA at 29 CFR 1910.120 (f).

7.2.2 Pre-placement Medical Examination

All potentially exposed personnel must have completed a comprehensive medical examination prior to assignment, and periodically thereafter as defined by applicable regulations. The pre-placement and periodic medical examinations typically include the following elements:

- Medical and occupational history questionnaire;
- Physical examination;
- Complete blood count, with differential;
- Liver enzyme profile;
- Chest X-ray, at a frequency determined by the physician;
- Pulmonary function test;
- Audiogram;

- Electrocardiogram for persons older than 45 years of age, or if indicated during the physical examination;
- Drug and alcohol screening, as required by job assignment;
- Visual acuity; and
- Follow-up examinations, at the discretion of the examining physician or the corporate medical director.

The examining physician provides the employee with a letter summarizing his findings and recommendations, confirming the worker's fitness for work and ability to wear a respirator. Documentation of medical clearance will be available for each employee during all project site work.

Subcontractors will certify that all their employees have successfully completed a physical examination by a qualified physician. The physical examinations must meet the requirements of 29 CFR 1910.120 and 29 CFR 1910.134. Subcontractors will supply copies of the medical examination certificate for each on-site employee.

7.2.3 Other Medical Examinations

In addition to pre-employment, annual, and exit physicals, personnel may be examined:

- At employee request after known or suspected exposure to toxic or hazardous materials; and
- At the discretion of the SSO, HSM, or occupational physician in anticipation of, or after known or suspected exposure to toxic or hazardous materials.

7.2.4 Periodic Exam

Following the placement examination, all employees must undergo a periodic examination, similar in scope to the placement examination. For employees potentially exposed over 30 days per year, the frequency of periodic examinations will be annual. For employees potentially exposed less than 30 days per year, the frequency for periodic examinations will be 24 months.

7.2.5 Medical Restriction

When the examining physician identifies a need to restrict work activity, the employee's supervisor must communicate the restriction to the employee and the SSO. The terms of the restriction will be discussed with the employee and the supervisor.

8.0 GENERAL SAFETY PRACTICES

8.1 General Safety Rules

General safety rules for site activities include, but are not limited to, the following:

- At least one copy of this HASP must be in a location at the site that is readily available to personnel, and all project personnel shall review the plan prior to starting work.
- Consume or use food, beverages, chewing gum, and tobacco products only in the SZ or other designated area outside the EZ and CRZ. Cosmetics shall not be applied in the EZ or CRZ.

- Wash hands before eating, drinking, smoking, or using toilet facilities.
- Wear all PPE as required and stop work and replace damaged PPE immediately.
- Secure disposable coveralls, boots, and gloves at the wrists and legs and ensure closure of the suit around the neck.
- Upon skin contact with materials that may be impacted by COCs, remove contaminated clothing and wash the affected area immediately. Contaminated clothing must be changed. Any skin contact with materials potentially impacted by COCs must be reported to the FS or SSO immediately. If needed, medical attention should be sought.
- Practice contamination avoidance. Avoid contact with surfaces either suspected or known to be impacted by COCs, such as standing water, mud, or discolored soil. Equipment must be stored on elevated or protected surfaces to reduce the potential for incidental contamination.
- Remove PPE as required in the CRZ to limit the spread of COC-containing materials.
- At the end of each shift or as required, dispose of all single-use coveralls, soiled gloves, and respirator cartridges in designated receptacles designated for this purpose.
- Removing soil containing site COCs from protective clothing or equipment with compressed air, shaking, or any other means that disperses contaminants into the air is prohibited.
- Inspect all non-disposable PPE for contamination in the CRZ. Any PPE found to be contaminated must be decontaminated or disposed of appropriately.
- Recognize emergency signals used for evacuation, injury, fire, etc.
- Report all injuries, illnesses, and unsafe conditions or work practices to the FS or SSO.
- Use the “buddy system” during all operations requiring Level C PPE, and when appropriate, during Modified Level D operations.
- Obey all warning signs, tags, and barriers. Do not remove any warnings unless authorized to do so.
- Use, adjust, alter, and repair equipment only if trained and authorized to do so, and in accordance with the manufacturer’s directions.
- Personnel are to perform only tasks for which they have been properly trained and will advise their supervisor if they have been assigned a task for which they are not trained.
- The presence or consumption of alcoholic beverages or illicit drugs during the workday, including breaks, is strictly prohibited. Notify your supervisor if you must take prescription or over-the-counter drugs that indicate they may cause drowsiness or, that you should not operate heavy equipment.
- Remain upwind during site activities whenever possible.

8.2 Buddy System

On-site personnel must use the buddy system as required by operations. Use of the “buddy system” is required during all operations requiring Level C to Level A PPE, and when appropriate, during Level D operations. Crewmembers must observe each other for signs of chemical exposure, and heat or cold stress. Indications of adverse effects include, but are not limited to:

- Changes in complexion and skin coloration;

- Changes in coordination;
- Changes in demeanor;
- Excessive salivation and pupillary response; and
- Changes in speech pattern.

Crewmembers must also be aware of the potential exposure to possible safety hazards, unsafe acts, or non-compliance with safety procedures.

Field personnel must inform their partners or fellow crewmembers of non-visible effects of exposure to toxic materials that they may be experiencing. The symptoms of such exposure may include, but are not limited to:

- Headaches;
- Dizziness;
- Nausea;
- Blurred vision;
- Cramps; and
- Irritation of eyes, skin, or respiratory tract.

If protective equipment or noise levels impair communications, prearranged hand signals must be used for communication. Personnel must stay within line of sight of another team member.

8.3 Heat Stress

Heat stress is caused by a number of interacting factors, including environmental conditions, clothing, workload, etc., as well as the physical and conditioning characteristics of the individual. Since heat stress is one of the most common illnesses associated with heavy outdoor work conducted with direct solar load and, in particular, because wearing PPE can increase the risk of developing heat stress, workers must be capable of recognizing the signs and symptoms of heat-related illnesses. Personnel must be aware of the types and causes of heat-related illnesses and be able to recognize the signs and symptoms of these illnesses in both themselves and their co-workers.

Heat rashes are one of the most common problems in hot work environments. Commonly known as prickly heat, a heat rash is manifested as red papules and usually appears in areas where the clothing is restrictive. As sweating increases, these papules give rise to a prickling sensation. Prickly heat occurs in skin that is persistently wetted by unevaporated sweat, and heat rash papules may become infected if they are not treated. In most cases, heat rashes will disappear when the affected individual returns to a cool environment.

Heat cramps are usually caused by performing hard physical labor in a hot environment. These cramps have been attributed to an electrolyte imbalance caused by sweating. It is important to understand that cramps can be caused both by too much or too little salt.

Cramps appear to be caused by the lack of water replenishment. Because sweat is a hypotonic solution (plus or minus 0.3% NaCl), excess salt can build up in the body if the water lost through sweating is not replaced. Thirst cannot be relied on as a guide to the need for water; instead, water must be taken every 15 to 20 minutes in hot environments.

Under extreme conditions, such as working for 6 to 8 hours in heavy protective gear, a loss of sodium may occur. Drinking commercially available carbohydrate electrolyte replacement liquids is effective in minimizing physiological disturbances during recovery.

Heat exhaustion occurs from increased stress on various body organs due to inadequate blood circulation, cardiovascular insufficiency, or dehydration. Signs and symptoms include pale, cool, moist skin; heavy sweating; dizziness; nausea; headache, vertigo, weakness, thirst, and giddiness. Fortunately, this condition responds readily to prompt treatment.

Heat exhaustion should not be dismissed lightly, however, for several reasons. One is that the fainting associated with heat exhaustion can be dangerous because the victim may be operating machinery or controlling an operation that should not be left unattended; moreover, the victim may be injured when he or she faints. Also, the signs and symptoms seen in heat exhaustion are similar to those of heat stroke, which is a medical emergency.

Workers suffering from heat exhaustion should be removed from the hot environment, be given fluid replacement, and be encouraged to get adequate rest.

Heat stroke is the most serious form of heat stress. Heat stroke occurs when the body's system of temperature regulation fails and the body's temperature rises to critical levels. This condition is caused by a combination of highly variable factors, and its occurrence is difficult to predict. Heat stroke is a medical emergency. The primary signs and symptoms of heat stroke are confusion; irrational behavior; loss of consciousness; convulsions; a lack of sweating (usually); hot, dry skin; and an abnormally high body temperature, e.g., a rectal temperature of 41°C (105.8°F). If body temperature is too high, it causes death. The elevated metabolic temperatures caused by a combination of workload and environmental heat load, both of which contribute to heat stroke, are also highly variable and difficult to predict.

If a worker shows signs of possible heat stroke, professional medical treatment should be obtained immediately. The worker should be placed in a shady area and the outer clothing should be removed. The worker's skin should be wetted and air movement around the worker should be increased to improve evaporative cooling until professional methods of cooling are initiated and the seriousness of the condition can be assessed. Fluids should be replaced as soon as possible. The medical outcome of an episode of heat stroke depends on the victim's physical fitness and the timing and effectiveness of first aid treatment.

Regardless of the worker's protestations, no employee suspected of being ill from heat stroke should be sent home or left unattended unless a physician has specifically approved such an order.

Proper training and preventive measures will help avert serious illness and loss of work productivity. Preventing heat stress is particularly important because once someone suffers from heat stroke or exhaustion, that person may be predisposed to additional heat injuries.

8.4 Heat Stress Safety Precautions

Heat stress monitoring and work rest cycle implementation should commence when the ambient adjusted temperature exceeds 72°F. A minimum work rest regimen and procedures for calculating ambient adjusted temperature are described in **Table 4** below.

Table 4 – Work/Rest Schedule

Adjusted Temperature[b]	Work/Rest Regimen Normal Work Ensemble[c]	Work/Rest Regimen Impermeable Ensemble
90ºF (32.2ºC) or above	After each 45 minutes of work	After each 15 minutes of work
87.5º - 90ºF (30.8º-32.2ºC)	After each 60 minutes of work	After each 30 minutes of work
82.5º - 87.5ºF (28.1º - 30.8ºC)	After each 90 minutes of work	After each 60 minutes of work
77.5º - 82.5ºF (25.3º - 28.1ºC)	After each 120 minutes of work	After each 90 minutes of work
72.5º - 77.5ºF (30.8º - 32.2ºC)	After each 150 minutes of work	After each 120 minutes of work

a. For work levels of 250 kilocalories/hour (Light-Moderate Type of Work)
b. Calculate the adjusted air temperature (ta adj) by using this equation: ta adj °F = ta °F + (13 x % sunshine). Measure air temperature (ta) with a standard mercury-in-glass thermometer, with the bulb shielded from radiant heat. Estimate percent sunshine by judging what percent time the sun is not covered by clouds that are thick enough to produce a shadow. (100 percent sunshine = no cloud cover and a sharp, distinct shadow; 0 percent sunshine = no shadows.)
c. A normal work ensemble consists of cotton coveralls or other cotton clothing with long sleeves and pants.
d. The information presented above was generated using the information provided in the American Conference of Governmental Industrial Hygienists (ACGIH) Threshold Limit Values (TLV) Handbook.

In order to determine if the work rest cycles are adequate for the personnel and specific site conditions, additional monitoring of individual heart rates will be conducted during the rest cycle. To check the heart rate, count the radial pulse for 30 seconds at the beginning of the rest period. If the heart rate exceeds 110 beats per minute, shorten the next work period by one third and maintain the same rest period.

Additionally, one or more of the following control measures can be used to help control heat stress and are mandatory if any site worker has a heart rate (measure immediately prior to rest period) exceeding 115 beats per minute:

- Site workers will be encouraged to drink plenty of water and electrolyte replacement fluids throughout the day.
- On-site drinking water will be kept cool (50 to 60°F).
- A work regimen that will provide adequate rest periods for cooling down will be established, as required.
- All personnel will be advised of the dangers and symptoms of heat stroke, heat exhaustion, and heat cramps.
- Cooling devices, such as vortex tubes or cooling vests, should be used when personnel must wear impermeable clothing in conditions of extreme heat.
- Employees should be instructed to monitor themselves and co-workers for signs of heat stress and to take additional breaks as necessary.
- A shaded rest area must be provided. All breaks should take place in the shaded rest area.
- Employees must not be assigned to other tasks during breaks.
- Employees must remove impermeable garments during rest periods. This includes white Tyvek-type garments.

All employees must be informed of the importance of adequate rest, acclimation, and proper diet in the prevention of heat stress disorders.

8.5 Cold Stress

Cold stress normally occurs in temperatures at or below freezing, or under certain circumstances, in temperatures of 40°F. Extreme cold for a short time may cause severe injury to exposed body surfaces or result in profound generalized cooling, causing death.

Areas of the body that have high surface area-to-volume ratio, such as fingers, toes, and ears, are the most susceptible. Two factors influence the development of a cold weather injury: ambient temperature and the velocity of the wind. For instance, 10°F with a wind of 15 miles per hour (mph) is equivalent in chilling effect to still air at 18°F. An equivalent chill temperature chart relating the actual dry bulb temperature and wind velocity is presented in **Table 5** below.

Table 5 – Wind Chill Temperature Chart

Estimated Wind Speed (in mph)	**Actual Temperature Reading (ºF)**											
	50	**40**	**30**	**20**	**10**	**0**	**-10**	**-20**	**-30**	**-40**	**-50**	**-60**
	Equivalent Chill Temperature (ºF)											
Calm	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60
5	48	37	27	16	6	-5	-15	-26	-36	-47	-57	-68
10	40	28	16	4	-9	-24	-33	-46	-58	-70	-83	-95
15	36	22	9	-5	-18	-32	-45	-58	-72	-85	-99	-112
20	32	18	4	-10	-25	-39	-53	-67	-82	-96	-110	-121
25	30	16	0	-15	-29	-44	-59	-74	-88	-104	-118	-133
30	28	13	-2	-18	-33	-48	-63	-79	-94	-109	-125	-140
35	27	11	-4	-20	-35	-51	-67	-82	-98	-113	-129	-145
40	26	10	-6	-21	-37	-53	-69	-85	-100	-116	-132	-148
(Wind speeds greater than 40 mph have little additional effect.)	**LITTLE DANGER Maximum danger of false sense of security.**				**INCREASING DANGER Danger from freezing of exposed flesh within one minute.**			**GREAT DANGER Flesh may freeze within 30 seconds.**				
	Trench foot and immersion foot may occur at any point on this chart.											

[This chart was developed by the U.S. Army Research Institute of Environmental Medicine, Natick, MA (Source: ACGIH Threshold Limit Values for Chemical Substances and Physical Agents)].

Local injury resulting from cold is included in the generic term frostbite. There are several degrees of tissue damage associated with frostbite. Frostbite of the extremities can be categorized into:

- *Frost Nip or Incipient Frostbite* - characterized by sudden blanching or whitening of skin.
- *Superficial Frostbite* - skin has a waxy or white appearance and is firm to the touch, but tissue beneath is resilient.
- *Deep Frostbite* - tissues are cold, pale, and solid; extremely serious injury.

Systemic hypothermia is caused by exposure to freezing or rapidly dropping temperature. It can be fatal. Its symptoms are usually exhibited in five stages: 1) shivering; 2) apathy, listlessness, sleepiness, and (sometimes) rapid cooling of the body to less than 95°F; 3) unconsciousness, glassy stare, slow pulse, and slow respiratory rate; 4) freezing of the extremities; and 5) death. Trauma sustained in freezing or sub-zero conditions requires special attention because an injured worker is predisposed to secondary cold injury. Special provisions must be made to prevent hypothermia and secondary freezing of damaged tissues in addition to providing for first aid treatment. To avoid cold stress, site personnel must wear protective clothing appropriate for the level of cold and physical activity. In addition to protective clothing, preventive safe work practices, additional training, and warming regimens may be utilized to prevent cold stress.

8.6 Safety Precautions for Cold Stress Prevention

For air temperature of 0°F or less, mittens should be used to protect the hands. For exposed skin, continuous exposure should not be permitted when air speed and temperature results in a wind chill temperature of -25°F.

At air temperatures of 36°F or less, field personnel who become immersed in water or whose clothing becomes wet must be immediately provided with a change of clothing and be treated for hypothermia.

If work is done at normal temperature or in a hot environment before entering the cold, the field personnel must ensure that their clothing is not wet as a consequence of sweating. Wet field personnel must change into dry clothes prior to entering the cold area.

If the available clothing does not give adequate protection to prevent hypothermia or frostbite, work must be modified or suspended until adequate clothing is made available or until weather conditions improve.

Field personnel handling evaporative liquid (e.g., gasoline, alcohol, or cleaning fluids) at air temperatures below 40°F must take special precaution to avoid soaking of clothing or gloves with the liquids because of the added danger of cold injury due to evaporative cooling.

8.7 Safe Work Practices

Direct contact between bare skin and cold surfaces (< 20°F) should be avoided. Metal tool handles and/or equipment controls should be covered by thermal insulating material.

For work performed in a wind chill temperature at or below 10°F, workers should be under constant protective observation (buddy system). The work rate should be established to prevent heavy sweating that will result in wet clothing. For heavy work, rest periods must be taken in heated shelters and workers should be provided with an opportunity to change into dry clothing if needed.

Field personnel should be provided the opportunity to become accustomed to cold-weather working conditions and required protective clothing. Work should be arranged in such a way that sitting or standing still for long periods is minimized.

During the warming regimen (rest period), field personnel should be encouraged to remove outer clothing to permit sweat evaporation or to change into dry work clothing. Dehydration, or loss of body fluids, occurs insidiously in the cold environment and may increase susceptibility to cold injury due to a significant change in blood flow to the extremities. Fluid replacement with warm, sweet drinks and soups is recommended. The intake of coffee should be limited because of diuretic and circulatory effects.

8.8 Biological Hazards

Biological hazards may include poison ivy, snakes, thorny bushes and trees, ticks, mosquitoes, spiders, and other pests.

8.8.1 Tick Borne Diseases

Lyme Disease - The disease commonly occurs in summer and is transmitted by the bite of infected ticks. "Hot spots" in the United States include New York, New Jersey, Pennsylvania, Massachusetts, Connecticut, Rhode Island, Minnesota, and Wisconsin.

Erlichiosis - The disease also commonly occurs in summer and is transmitted by the bite of infected ticks. "Hot spots" in the United States include New York, Massachusetts, Connecticut, Rhode Island, Minnesota, and Wisconsin.

These diseases are transmitted primarily by the deer tick, which is smaller and redder than the common wood tick. The disease may be transmitted by immature ticks, which are small and hard to see. The tick may be as small as a period on this page.

Symptoms of Lyme disease include a rash or a peculiar red spot, like a bull's eye, which expands outward in a circular manner. The victim may have headache, weakness, fever, a stiff neck, and swelling and pain in the joints, and eventually, arthritis. Symptoms of erlichiosis include muscle and joint aches, flu-like symptoms, but there is typically no skin rash.

Rocky Mountain Spotted Fever (RMSF) - This disease is transmitted via the bite of an infected tick. The tick must be attached 4 to 6 hours before the disease-causing organism (Rickettsia rickettsii) becomes reactivated and can infect humans. The primary symptom of RMSF is the sudden appearance of a moderate-to-high fever. The fever may persist for two to three weeks. The victim may also have a headache, deep muscle pain, and chills. A rash appears on the hands and feet on about the third day and eventually spreads to all parts of the body. For this reason, RMSF may be confused with measles or meningitis. The disease may cause death, if untreated, but if identified and treated promptly, death is uncommon.

Control - Tick repellant containing diethyltoluamide (DEET) should be used when working in tick-infested areas, and pant legs should be tucked into boots. In addition, workers should search the entire body every three or four hours for attached ticks. Ticks should be removed promptly and carefully without crushing, since crushing can squeeze the disease-causing organism into the skin. A gentle and steady pulling action should be used to avoid leaving the head or mouth parts in the skin. Hands should be protected with surgical gloves when removing ticks.

8.8.2 Poisonous Plants

Poisonous plants may be present in the work area. Personnel should be alerted to its presence and instructed on methods to prevent exposure.

Control - The main control is to avoid contact with the plant, cover arms and hands, and frequently wash potentially exposed skin. Particular attention must be given to avoiding skin contact with objects or protective clothing that have touched the plants. Treat every surface that may have touched the plant as contaminated, and practice contamination avoidance. If skin contact is made, the area should be washed immediately with soap and water and observed for signs of reddening.

8.8.3 Snakes

The possibility of encountering snakes exists, specifically for personnel working in wooded/vegetated areas. Snake venoms are complex and include proteins, some of which have enzymatic activity. The effects produced by venoms include neurotoxic effects with sensory, motor, cardiac, and respiratory difficulties; cytotoxic effects on red blood cells, blood vessels, heart muscle, kidneys, and lungs; defects in coagulation; and effects from local release of substances by enzymatic actions. Other noticeable effects of venomous snakebites include swelling, edema, and pain around the bite, and the development of ecchymosis (the escape of blood into tissues from ruptured blood vessels).

Control - To minimize the threat of snakebites, all personnel walking through vegetated areas must be aware of the potential for encountering snakes, and the need to avoid actions potentiating encounters, such as turning over logs, etc. If a snakebite occurs, an attempt should be made to safely identify the snake via size and markings. The victim must be transported to the nearest hospital within 30 minutes; first aid consists of applying a constriction band and washing the area around the wound to remove any unabsorbed venom.

8.8.4 Spiders

Personnel may encounter spiders during work activities.

Two spiders are of concern, the black widow and the brown recluse. Both prefer dark sheltered areas such as basements, equipment sheds and enclosures, and around woodpiles or other scattered debris. The black widow is shiny black, approximately one inch long, and found throughout the United States. There is a distinctive red hourglass marking on the underside of the black widow's body. The bite of a black widow is seldom fatal to healthy adults, but effects include respiratory distress, nausea, vomiting, and muscle spasms. The brown recluse is smaller than the black widow and gets its name from its brown coloring and behavior. The brown recluse is more prevalent in the southern United States. The brown recluse has a distinctive violin shape on the top of its body. The bite of the brown recluse is painful and the bite site ulcerates and takes many weeks to heal completely.

Control - To minimize the threat of spider bites, all personnel walking through vegetated areas must be aware of the potential for encountering these arachnids. Personnel need to avoid actions that may result in encounters, such as turning over logs, and placing hands in dark places such as behind equipment or in corners of equipment sheds or enclosures. If a spider bite occurs, the victim must be transported to the nearest hospital as soon as possible; first aid consists of applying ice packs and washing the area around the wound to remove any unabsorbed venom.

8.9 Noise

Exposure to noise over the OSHA action level can cause temporary impairment of hearing; prolonged and repeated exposure can cause permanent damage to hearing. The risk and severity of hearing loss increases with the intensity and duration of exposure to noise. In addition to damaging hearing, noise can impair voice communication, thereby increasing the risk of accidents on site.

Control - All personnel must wear hearing protection, with a Noise Reduction Rating (NRR) of at least 20, when noise levels exceed 85 dBA. When it is difficult to hear a co-worker at

normal conversation distance, the noise level is approaching or exceeding 85 dBA, and hearing protection is necessary. All site personnel who may be exposed to noise must also receive baseline and annual audiograms and training as to the causes and prevention of hearing loss. Noise monitoring is discussed in Section 5.2, Noise Monitoring.

Whenever possible, equipment that does not generate excessive noise levels will be selected for this project. If the use of noisy equipment is unavoidable, barriers or increased distance will be used to minimize worker exposure to noise, if feasible.

8.10 Spill Control

All personnel must take every precaution to minimize the potential for spills during site operations. All on-site personnel shall immediately report any discharge, no matter how small, to the FS.

Spill control equipment and materials will be located on the site at locations that present the potential for discharge. All sorbent materials used for the cleanup of spills will be containerized and labeled appropriately. In the event of a spill, the FS will follow the provisions in Section 10.0, Emergency Procedures, to contain and control released materials and to prevent their spread to off-site areas.

8.11 Sanitation

Site sanitation will be maintained according to OSHA requirements.

8.11.1 Break Area

Breaks must be taken in the SZ, away from the active work area after site personnel go through decontamination procedures. There will be no smoking, eating, drinking, or chewing gum or tobacco in any area other than the SZ.

8.11.2 Potable Water

The following rules apply to all field operations:

- An adequate supply of potable water will be provided at each project site. Potable water must be kept away from hazardous materials or media, and contaminated clothing or equipment.
- Portable containers used to dispense drinking water must be capable of being tightly closed and must be equipped with a tap dispenser. Water must not be consumed directly from the container (drinking from the tap is prohibited) nor may it be removed from the container by dipping.
- Containers used for drinking water must be clearly marked and shall not be used for any other purpose.
- Disposable drinking cups must be provided. A sanitary container for dispensing cups and a receptacle for disposing of used cups is required.

8.11.3 Sanitary Facilities

Access to facilities for washing before eating, drinking, or smoking, or alternate methods such as waterless hand-cleaner and paper towels will be provided.

8.11.4 Lavatory

If permanent toilet facilities are not available, an appropriate number of portable chemical toilets will be provided. This requirement does not apply to mobile crews or to normally unattended site locations so long as employees at these locations have transportation immediately available to nearby toilet facilities.

8.12 Emergency Equipment

Adequate emergency equipment for the activities being conducted on site and as required by applicable sections of 29 CFR 1910 and 29 CFR 1926 will be on site prior to the commencement of project activities. Personnel will be provided with access to emergency equipment, including, but not limited to, the following:

- Fire extinguishers of adequate size, class, number, and location as required by applicable sections of 29 CFR 1910 and 1926;
- Industrial first aid kits of adequate size for the number of personnel on site; and
- Emergency eyewash and/or shower if required by operations being conducted on site.

8.13 Lockout/Tagout Procedures

Only fully qualified and trained personnel will perform maintenance procedures. Before maintenance begins, lockout/tagout procedures per OSHA 29 CFR 1910.147 will be followed.

Lockout is the placement of a device that uses a positive means, such as lock, to hold an energy or material-isolating device such that the equipment cannot be operated until the lockout device is removed. If a device cannot be locked out, a tagout system shall be used. Tagout is the placement of a warning tag on an energy or material isolating device indicating that the equipment controls may not be operated until the personnel who attached the tag remove the tag.

8.14 Electrical Safety

Electricity may pose a particular hazard to site workers due to the use of portable electrical equipment. If wiring or other electrical work is needed, a qualified electrician must perform it.

General electrical safety requirements include:

- All electrical wiring and equipment must be a type listed by Underwriters Laboratories (UL), Factory Mutual Engineering Corporation (FM), or other recognized testing or listing agency.
- All installations must comply with the National Electrical Safety Code (NESC), the National Electrical Code (NEC), or USCG regulations.
- Portable and semi-portable tools and equipment must be grounded by a multi-conductor cord having an identified grounding conductor and a multi-contact polarized plug-in receptacle.
- Tools protected by an approved system of double insulation, or its equivalent, need not be grounded. Double insulated tools must be distinctly marked and listed by UL or FM.

- Live parts of wiring or equipment must be guarded to prevent persons or objects from touching them.
- Electric wire or flexible cord passing through work areas must be covered or elevated to protect it from damage by foot traffic, vehicles, sharp corners, projections, or pinching.
- All circuits must be protected from overload.
- Temporary power lines, switchboxes, receptacle boxes, metal cabinets, and enclosures around equipment must be marked to indicate the maximum operating voltage.
- Plugs and receptacles must be kept out of water unless of an approved submersible construction.
- All extension cord outlets must be equipped with ground fault circuit interrupters (GFCI).
- Attachment plugs or other connectors must be equipped with a cord grip and be constructed to endure rough treatment.
- Extension cords or cables must be inspected prior to each use and replaced if worn or damaged. Cords and cables must not be fastened with staples, hung from nails, or suspended by bare wire.
- Flexible cords must be used only in continuous lengths without splice, with the exception of molded or vulcanized splices made by a qualified electrician.

8.15 Lifting Safety

Using proper lifting techniques may prevent back strain or injury. The fundamentals of proper lifting include:

- Consider the size, shape, and weight of the object to be lifted. A mechanical lifting device or additional persons must be used to lift an object if it cannot be lifted safely alone.
- The hands and the object should be free of dirt or grease that could prevent a firm grip.
- Gloves must be used, and the object inspected for metal slivers, jagged edges, burrs, or rough or slippery surfaces.
- Fingers must be kept away from points that could crush or pinch them, especially when putting an object down.
- Feet must be placed far enough apart for balance. The footing should be solid and the intended pathway should be clear.
- The load should be kept as low as possible, close to the body with the knees bent.
- To lift the load, grip firmly and lift with the legs, keeping the back as straight as possible.
- A worker should not carry a load that he or she cannot see around or over.
- When putting an object down, the stance and position are identical to that for lifting; the legs are bent at the knees, and the back is straight as the object is lowered.

8.16 Ladder Safety

When portable ladders are used for access to an upper landing surface, the ladder side rails shall extend at least 3 feet (9 m) above the upper landing surface to which the ladder is used to gain access; or, when such an extension is not possible because of the ladder's length, then the ladder shall be secured at its top to a rigid support that will not deflect, and a grasping device, such as a grabrail, shall be provided to assist employees in mounting

and dismounting the ladder. In no case shall the extension be such that ladder deflection under a load would, by itself, cause the ladder to slip off its support.

- Ladders shall be maintained free of oil, grease, and other slipping hazards.
- Ladders shall not be loaded beyond the maximum intended load for which they were built, or beyond their manufacturer's rated capacity.
- Ladders shall be used only for the purpose for which they were designed.
- Non-self-supporting ladders shall be used at an angle such that the horizontal distance from the top support to the foot of the ladder is approximately one-quarter of the working length of the ladder (the distance along the ladder between the foot and the top support).
- Wood job-made ladders with spliced side rails shall be used at an angle such that the horizontal distance is one-eighth the working length of the ladder.
- Fixed ladders shall be used at a pitch no greater than 90 degrees from the horizontal, as measured to the back side of the ladder.
- Ladders shall be used only on stable and level surfaces unless secured to prevent accidental displacement.
- Ladders shall not be used on slippery surfaces unless secured or provided with slip-resistant feet to prevent accidental displacement. Slip-resistant feet shall not be used as a substitute for care in placing, lashing, or holding a ladder that is used upon slippery surfaces, including, but not limited to, flat metal or concrete surfaces that are constructed so they cannot be prevented from becoming slippery.
- Ladders placed in any location where they can be displaced by workplace activities or traffic, such as in passageways, doorways, or driveways, shall be secured to prevent accidental displacement, or a barricade shall be used to keep the activities or traffic away from the ladder.
- The area around the top and bottom of ladders shall be kept clear.
- The top of a non-self-supporting ladder shall be placed with the two rails supported equally unless it is equipped with a single support attachment.
- Ladders shall not be moved, shifted, or extended while occupied.
- Ladders shall have non-conductive side rails if they are used where the employee or the ladder could contact exposed energized electrical equipment.
- The top, top step, or the step labeled that it or any step above it should not be used as a step.
- Cross-bracing on the rear section of stepladders shall not be used for climbing unless the ladders are designed and provided with steps for climbing on both front and rear sections.
- Ladders shall be inspected by the HSM for visible defects on a daily basis and after any occurrence that could affect their safe use.
- Portable ladders with structural defects, such as, but not limited to, broken or missing rungs, cleats, or steps; broken or split rails; corroded components; or other faulty or defective components shall either be immediately marked in a manner that readily identifies them as defective or be tagged with "Do Not Use" or similar language and shall be withdrawn from service.
- Fixed ladders with structural defects, such as, but not limited to, broken or missing rungs, cleats, or steps; broken or split rails; or corroded components; shall be withdrawn from service.
- Ladder repairs shall restore the ladder to a condition meeting its original design criteria, before the ladder is returned to use.
- Single-rail ladders shall not be used.

- When ascending or descending a ladder, the user shall face the ladder.
- Each employee shall use at least one hand to grasp the ladder when progressing up and/or down the ladder.
- An employee shall not carry any object or load that could cause the employee to lose balance and fall.

8.17 Traffic Safety

The project site may be located adjacent to a public roadway where exposure to vehicular traffic is likely. Traffic may also be encountered as vehicles enter and exit the area. To minimize the likelihood of project personnel and activities being affected by traffic, the following procedures will be implemented.

Cones must be placed along the shoulder of the roadway starting 100 feet from the work area to alert passing motorists to the presence of personnel and equipment. A "Slow" or "Men Working" sign must be placed at the first cone. Barricades with flashing lights should be placed between the roadway and the work area.

During activities along a roadway, equipment will be aligned parallel to the roadway to the extent feasible, facing into the oncoming traffic so as to place a barrier between the work crew and the oncoming traffic. All crewmembers must remain behind the equipment and the traffic barrier.

All site personnel who are potentially exposed to vehicular traffic must wear an outer layer of orange warning garments, such as vests, jackets, or shirts. If work is performed in hours of dusk or darkness, workers will be outfitted with reflective garments either orange, white (including silver-coated reflective coatings or elements that reflect white light), yellow, fluorescent red-orange, or fluorescent yellow-orange.

The flow of traffic into and out of the adjacent business must be assessed, and precautions taken to warn motorists of the presence of workers and equipment. Where possible, vehicles should be aligned to provide physical protection of people and equipment.

9.0 SITE-SPECIFIC HAZARDS AND CONTROL MEASURES

9.1 Evaluation of Hazards

The evaluation of hazards is provided as a quick reference as to the known conditions for the Site, wherein the level of detail for each of the subsections is identified.

9.1.1 Hazard Characteristics

Existing information for Site:
__X__ Detailed _____ Preliminary _____ None

Hazardous/Contaminated Material Form(s):
__X__ Solid __X__ Liquid _____ Sludge ____ Gas X Vapor

Containment Type(s):
__X__ Drum _____ Tank _____ Pit _____ Debris
_____ Pond _____ Lagoon Other:

Hazardous Material Characteristics:

X Volatile	____ Corrosive	____ Reactive	____ Radioactive
____ Ignitable	X Toxic	____ Unknown	

Routes of Exposure:

X Oral	X Dermal	X Eye	X Respiratory

9.1.2 Potential Health and Safety Hazards

X Heat	____ Congested areas
X Cold	X General Construction
____ Confined space entry	X Physical injury
____ Oxygen depletion	X Electrical hazards
____ Asphyxiation	X Handling and product transfer
X Excavation	X Fire
X Cave-ins	X Explosion
X Falls, slippage	X Biological Hazards
	X Plants – Poison Ivy, Poison Oak
	X Insects – Ticks
	X Insects – Mosquitoes
	X Insects – Bees and Wasps
	X Rats and Mice
X Heavy equipment	____ Non-ionizing Radiation (i.e. UV, IR, etc.)
____ Other: Potential Ignition Hazard.	

9.2 Field Activities, Hazards, and Control Procedures

The following task-specific safety analyses identify potential health, safety, and environmental hazards associated with each type of field activity. Because of the complex and changing nature of field projects, supervisors must continually inspect the site to identify hazards that may affect on-site personnel, the community, or the environment. The FS must be aware of these changing conditions and discuss them with the PM whenever these changes impact employee health, safety, the environment, or performance of the project. The FS will keep on-site personnel informed of the changing conditions, and the PM will write and/or approve addenda or revisions to this HASP as necessary.

9.2.1 Mobilization/Construction Stakeout

Description of Tasks

Site mobilization will include establishing excavation locations, determining the location of utilities and other installations, and establishing work areas. Mobilization will also include setting up equipment and establishing a temporary site office. A break area will be set up outside of regulated work areas. Mobilization may involve clearing areas for the SZ and CRZ. During this initial phase, project personnel will walk the site to confirm the existence of anticipated hazards and identify safety and health issues that may have arisen since the writing of this plan.

Hazard Identification

The hazards of this phase of activity are associated with heavy equipment operation, manual materials handling, installation of temporary on-site facilities, and manual site preparation.

Manual materials handling and manual site preparation may cause blisters, sore muscles, and joint and skeletal injuries; and may present eye, contusion, and laceration hazards. Installation of temporary field office and support facilities may expose personnel to electrical hazards, underground and overhead utilities, and physical injury due to the manual lifting and moving of materials. The work area presents slip, trip, and fall hazards from scattered debris and irregular walking surfaces. Rainy weather may cause wet, muddy, slick walking surfaces, and unstable soil. Freezing weather hazards include frozen, slick, and irregular walking surfaces.

Environmental hazards include plants, such as poison ivy and poison oak; aggressive fauna, such as ticks, fleas, mosquitoes, wasps, spiders, and snakes; weather, such as sunburn, lightning, rain, and heat- or cold-related illnesses; and pathogens, such as rabies, Lyme disease, and blood-borne pathogens.

Controls
Control procedures for these hazards are discussed in Section 8.0, General Safety Practices.

9.2.2 Demolition/Site Clearing

Description of Tasks
Site clearance will involve manual or mechanical removal of objects impeding access to the construction footprint. These obstructions are both natural and man-made items and will include, but not be limited to, fabricated metal and concrete structures, trees, vegetation, rubble, and miscellaneous trash/debris.

Hazard Identification
Hazards associated with demolition and site clearance include personnel working in and around potentially unstable structures, or locations of potential contact with hazardous chemicals, utilities, and/or falling objects. This task will involve manual, as well as mechanical demolition/clearance efforts so exertion and equipment hazards exist.

Controls
PPE – Personnel shall be protected from hazards of irritant and toxic plants and suitably instructed in the first aid treatment available.

Preparatory Operations – Prior to permitting employees to start demolition operations, an engineering survey shall be made, by a licensed Professional Engineer, of the structure to determine the stability of the structure. Any adjacent structure shall where personnel may be exposed shall also be similarly checked. The PO shall have in writing evidence that such a survey has been performed. All structural instabilities shall be shored or braced, under the supervision of a licensed Professional Engineer, prior to access by an FP.

Utilities – All electric, gas, water, steam, sewer, and other service lines shall be shut off, caped, or otherwise controlled, outside the building line before demolition work is started. In each case, any utility company that is involved shall be notified in advance. If it is necessary to maintain any power, water or other utilities during demolition, such lines shall be temporarily relocated, as necessary.

Hazardous Substances – It shall also be determined if any type of hazardous chemicals, gases, explosives, flammable materials, or similarly dangerous substances have been used

in any pipes, tanks, or other equipment on the property. When the presence of any such substances is apparent or suspected, testing and purging shall be performed and the hazard eliminated before demolition is started.

Falling Debris/Objects – No material shall be dropped to any point lying outside the exterior walls of the structure unless the area is effective protected. Access to the area where falling objects/debris may be encountered must be gated and controlled.

Structural Collapse – Structural or load supporting members on any floor shall not be cut or removed until all stories above such a floor have been demolished and removed. Walls, which are to serve as retaining walls against which debris will be piled, shall not be so used unless capable of safely supporting the imposed load. Mechanical equipment shall not be used on floors or working surfaces unless such floors or surfaces are not of sufficient strength to support the imposed load.

Rollover Guards – All equipment used in site clearing operations shall be equipped with rollover guards meeting the applicable requirements. In addition, rider-operated equipment shall be equipped with an overhead and rear canopy guard meeting the applicable requirements.

Inspections – During demolition, continuing inspections by a licensed Professional Engineer shall be made as the work progresses to detect hazards resulting from weakened or deteriorated floors, walls, or loosened material. No FP shall be permitted to work where such hazards exist until they are corrected by shoring, bracing, or other effective means.

9.2.3 Excavation and Cut/Fill Operations

9.2.3.1 Excavation/Trenching

Description of Tasks

This task includes the excavation of contaminated soils and superficial debris. Excavation depths vary across the site.

Hazard Identification

The hazards of this activity are associated with heavy equipment operation, subsurface intrusion, manual materials handling, stockpiling, and disposal. Subsurface intrusion presents hazards associated with negotiating buried utilities, cave-ins of the excavated areas, and regress methods for personnel working inside the excavated areas. Disruption of contaminated soil also presents a health hazard.

Controls

Underground Utilities – The estimated locations of utility installations, such as sewer, telephone, fuel, electric, water lines, or any other underground installations that reasonably may be expected to be encountered during the excavation work, shall be determined prior to opening an excavation. Utility companies or owners shall be contacted (“Call Before You Dig”) within established or customary local response times, advised of the proposed work, and asked to establish the location of the utility underground installations prior to the start of actual excavation.

When excavation operations approach the estimated location of underground installations, the exact location of the installations shall be determined by save and acceptable means.

While the excavation is open, underground installations shall be protected, supported, or removed, as necessary, to safeguard site personnel.

Cave-Ins – Project personnel in an excavation shall be protected from cave-ins by an adequate protective system, except when:

- Excavations are made entirely in stable rock or excavations are less than five feet in depth and examination of the ground by the SSO provides no indication of a potential cave-in.
- Protective systems shall have the capacity to resist, without failure, all loads that are intended or could reasonably be expected to be applied or transmitted to the system.

Project personnel shall be protected from excavated or other materials or equipment that could pose a hazard by falling or rolling into excavations. Protection shall be provided by placing and keeping such materials or equipment at least two feet from the edge of excavations, or by the use of retaining devices that are sufficient to prevent materials or equipment from falling or rolling into excavations, or by a combination of both if necessary.

Daily inspections of excavations, the adjacent areas, and protective systems shall be made by the SSO for evidence of a situation that could result in possible cave-ins, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions. An inspection shall be conducted by the SSO prior to the start of work and as needed throughout operations. Inspections shall also be made after every rainstorm or other hazard-increasing occurrence. These inspections are only required when project personnel exposure can be reasonably anticipated.

Where the SSO finds evidence of a situation that could result in a possible cave-in, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions, exposed personnel shall be removed from the hazardous area until the necessary precautions have been taken to ensure their safety.

Excavation Egress – A stairway, ladder, ramp, or other safe means of egress shall be located in trench excavations that are four feet or more in depth so as to require no more than 25 feet or lateral travel for project personnel.

9.2.3.2 Heavy Equipment Operation

Description of Tasks

Heavy equipment to be used for this task include, but are not limited to, excavators, dozers, dump trucks, and water sprayers (if required).

Hazard Identification

The most common type of accident that occurs in material handling operations is the “caught between” situation when a load is being handled and an object gets caught between two moving parts of the equipment. Operation of the heavy construction equipment may produce harmful noise.

Controls

Equipment Inspection – All vehicles in use shall be checked prior to operation to ensure that all parts, equipment, and accessories that affect safe operations are in proper

operating condition and free from defects. All defects shall be corrected before the vehicle is placed in service.

Ground Guides – No personnel shall use any motor vehicle, earthmoving, or compacting equipment having an obstructed view to the rear, unless:

- The vehicle has a reverse signal alarm distinguishable from the surrounding noise level; or
- The vehicle is backed up only when an observer signals that it is safe to do so.

Blocking – Heavy machinery, equipment, or parts thereof that are suspended or held aloft shall be substantially blocked to prevent falling or shifting before employees are permitted to work under or between them.

Noise – Control measures for noise are addressed in Section 4.9.

Traffic – Control measures for traffic are addressed in Section 8.17.

9.2.3.3 Disturbance/Handling of Contaminated Material

Description of Tasks

After the contaminated soil is excavated from below the Site's surface, the material will be stockpiled, dried, and either transported offsite or relocated and backfilled on site.

Hazard Identification

The hazards associated with materials handling include contact of the contaminated material with project personnel, or cross contamination with other site soil.

Controls

Cross Contamination – Following excavation, contaminated soil stockpiles will be placed on a structure constructed to separate the material from the site soil and collect any groundwater leachate. The material shall be covered to prevent storm water erosion or migration of contaminants through storm water.

Air Monitoring – Air and particulate monitoring will be conducted during soil excavation activities to assess the potential for exposure to airborne COCs. If the results of air monitoring indicate the presence of organic vapors or particulates in a concentration causing concern, personnel will upgrade to Level C protection. Refer to Section 5.1, Air Monitoring, for a description of air monitoring requirements and action levels. A description of each level of personal protection is included in Section 4.0, Personal Protective Equipment.

Traffic – Control measures for traffic are addressed in Section 8.17.

9.2.4 Drilling/Subsurface Intrusion Activities

Description of Tasks

Site mobilization will include establishing excavation locations, determining the location of utilities and other installations, and establishing work areas. Mobilization will also include setting up equipment and establishing a temporary site office. A break area will be set up outside of regulated work areas. Mobilization may involve clearing areas for the SZ and

CRZ. During this initial phase, project personnel will walk the site to confirm the existence of anticipated hazards and identify safety and health issues that may have arisen since the writing of this plan.

Hazard Identification

The primary physical hazards for this activity are associated with the use of soil boring and grouting equipment. The equipment is hydraulically powered and uses static force and dynamic percussion force to advance sampling and penetrating tubes.

Accidents can occur as a result of improperly placing the equipment on uneven or unstable terrain or failing to adequately secure the equipment prior to the start of operations. Overhead utility lines can create hazardous conditions if contacted by the equipment. Underground installations such as electrical lines, conduit, and product lines pose a significant hazard if contacted.

Controls

Geoprobe and Drill Rig Safety Procedures - The operator of the equipment must possess required state or local licenses to perform such work. All members of the crew shall receive site-specific training prior to beginning work.

The operator is responsible for the safe operation of the rig, as well as the crew's adherence to the requirements of this HASP. The operator must ensure that all safety equipment is in proper condition and is properly used. The members of the crew must follow all instructions of the operator, wear all personal protective equipment, and be aware of all hazards and control procedures. The operator and crew must participate in the Daily Safety Meetings and be aware of all emergency procedures.

Equipment Inspection - Each day, prior to the start of work, the rig and associated equipment must be inspected by the operator. The following items must be inspected:

- Vehicle condition;
- Proper storage of equipment;
- Condition of all hydraulic lines;
- Fire extinguisher; and
- First aid kit.

Equipment Set Up - The drill rig must be properly blocked and leveled prior to raising the derrick. The wheels which remain on the ground must be chocked. The leveling jacks shall not be raised until the derrick is lowered. The rig shall be moved only after the derrick has been lowered.

All well sites will be inspected by the driller prior to the location of the rig to verify a stable surface exists. This is especially important in areas where soft, unstable terrain is common.

The drill rig must be properly blocked and leveled prior to raising the derrick. Blocking provides a more stable drilling structure by evenly distributing the weight of the rig. Proper blocking ensures that differential settling of the rig does not occur.

When the ground surface is soft or otherwise unstable, wooden blocks, at least 24" by 24" and 4" to 8" thick shall be placed between the jack swivels and the ground. The emergency brake shall be engaged, and the wheels that are on the ground shall be chocked.

Rules for Intrusive Activity - Before beginning any intrusive activity, the existence and location of underground pipe, conduit, electrical equipment, and other installations will be determined. This will be done, if possible, by contacting the appropriate client representative to mark the location of the lines. "Call Before You Dig" will verify the potential for encountering subsurface utilities. If the client's knowledge of the area is incomplete, an appropriate device, such as a magnetometer, will be used to locate the line.

Combustible gas readings of the general work area will be made regularly in areas where and/or during operations when the presence of flammable vapors or gases is suspected, such as during intrusive activities (see Section 5.1). Operations must be suspended and corrective action taken if the airborne flammable concentration reaches 10% of the LEL in the immediate area (a one-foot radius) of the point of drilling, or near any other ignition sources.

Overhead Electrical Clearances - If equipment is operated in the vicinity of overhead power lines, the power to the lines must be shut off or the equipment must be positioned and blocked such that no part, including cables, can come within the minimum clearances as follows:

Nominal System Voltage	**Minimum Required Clearance**
0-50kV	10 feet
51-100kV	12 feet
101-200kV	15 feet
201-300kV	20 feet
301-500kV	25 feet
501-750kV	35 feet
751-1,000kV	45 feet

When the drill rig is in transit, with the boom lowered and no load, the equipment clearance must be at least 4 feet for voltages less than 50kV, 10 feet for voltages of 50 kV to 345 kV, and 16 feet for voltages above 345 kV.

Hoisting Operations - Drillers should never engage the rotary clutch without watching the rotary table, and ensuring it is clear of personnel and equipment.

Unless the drawworks is equipped with an automatic feed control, the brake should not be left unattended without first being tied down.

Drill pipe, auger strings or casing should be picked up slowly. Drill pipe should not be hoisted until the driller is sure that the pipe is latched in the elevator, or the derrickman has signaled that he may safely hoist the pipe.

During instances of unusual loading of the derrick or mast, such as when making an unusually hard pull, only the driller should be on the rig floor; no one else should be on the rig or derrick.

The brakes on the drawworks of the drill rig should be tested by the driller each day. The brakes should be thoroughly inspected by a competent individual each week.

A hoisting line with a load imposed should not be permitted to be in direct contact with any derrick member or stationary equipment, unless it has been specifically designed for line contact.

Workers should never stand near the borehole whenever any wire line device is being run.

Hoisting control stations should be kept clean and controls labeled as to their functions.

Catline Operations - Only experienced workers will be allowed to operate the cathead controls. The kill switch must be clearly labeled and operational prior to operation of the catline. The cathead area must be kept free of obstructions and entanglements.

The operator should not use more wraps than necessary to pick up the load. More than one layer of wrapping is not permitted.

Personnel should not stand near, step over, or go under a cable or catline which is under tension.

Employees rigging loads on catlines shall:

- Keep out from under the load;
- Keep fingers and feet where they will not be crushed;
- Be sure to signal clearly when the load is being picked;
- Use standard visual signals only and not depend on shouting to coworkers; and
- Make sure the load is properly rigged, since a sudden jerk in the catline will shift or drop the load.

Wire Rope - When two wires are broken or rust or corrosion is found adjacent to a socket or end fitting, the wire rope shall be removed from service or re-socketed. Special attention shall be given to the inspection of end fittings on boom support, pendants, and guy ropes.

Wire rope removed from service due to defects shall be cut up or plainly marked as being unfit for further use as rigging.

Wire rope clips attached with U-bolts shall have the U-bolts on the dead or short end of the rope; the clip nuts shall be re-tightened immediately after initial load carrying use and at frequent intervals thereafter.

When a wedge socket fastening is used, the dead or short end of the wire rope shall have a clip attached to it or looped back and secured to itself by a clip; the clip shall not be attached directly to the live end.

Protruding ends of strands in splices on slings and bridles shall be covered or blunted.

Except for eye splices in the ends of wires and for endless wire rope slings, wire rope used in hoisting, lowering, or pulling loads, shall consist of one continuous piece without knot or splice.

An eye splice made in any wire rope shall have not less that five full tucks.

Wire rope shall not be secured by knots. Wire rope clips shall not be used to splice rope.

Eyes in wire rope bridles, slings, or bull wires shall not be formed by wire clips or knots.

Pipe/Auger Handling - Pipe and auger sections shall be transported by cart or carried by two persons. Individuals should not carry auger or pipe sections without assistance.

Workers should not be permitted on top of the load during loading, unloading, or transferring of pipe or rolling stock.

Employees should be instructed never to try to stop rolling pipe or casing; they should be instructed to stand clear of rolling pipe.

Slip handles should be used to lift and move slips. Employees are not permitted to kick slips into position.

When pipe is being hoisted, personnel should not stand where the bottom end of the pipe could whip and strike them.

Pipe and augers stored in racks, catwalks or on flatbed trucks should be secured to prevent rolling.

9.2.5 Subsurface Chemical Sample Collection/Analysis

Description of Tasks

This sub-task consists of the collection of soil samples for subsequent field and laboratory analysis. The physical hazards of soil sampling are primarily associated with the sample collection methods, procedures utilized, and the environment itself.

Hazard Identification

Incidental contact with COCs is the primary hazard associated with sampling the stabilized material. This contact may occur through the manipulation of sample media and equipment, manual transfer of media into sample containers, and proximity of operations to the breathing zone. The primary hazards associated with these sampling procedures are not potentially serious; however, other operations in the area, or the conditions under which samples must be collected, may present chemical and physical hazards. The hazards directly associated with sampling procedures are generally limited to strains/sprains and potential eye hazards. Potential chemical hazards may include contact with media containing site COCs and potential contact with chemicals used for equipment decontamination.

Controls

PPE – To control dermal exposure during sampling activities, a minimum of Level D protection will be worn. If necessary, based on field observations and site conditions, air monitoring may be conducted during sediment sampling activities. If the results of air

monitoring indicate the presence of airborne contaminants in a concentration causing concern, personnel will upgrade to Level C protection. Refer to Section 5.1, Air Monitoring, for a description of air monitoring requirements and action levels. A description of each level of personal protection is included in Section 4.0, Personal Protective Equipment.

9.2.6 UST Closure

9.2.6.1 Working in Confined Spaces

Description of Tasks
The project may involve the closure of USTs.

Hazard Identification
Closure activities may require the entrance into confined spaces to facilitate cleaning and removal of the USTs.

Controls
All personnel required to enter into confined or enclosed spaces must be instructed as to the nature of the hazards involved, the necessary precautions to be taken, and in the use of required protective and emergency equipment. The PO shall comply with all specific regulations that apply to work in dangerous or potentially dangerous areas.

9.2.6.2 Working with Compressed Air

Description of Tasks
The proposed method of purging the USTs includes the injection of compressed gas into the tank and attached piping network.

Hazard Identification
Uncontrolled release of the highly pressured air can cause injury to FP during this task. Cylinders must also be properly managed to ensure they are not compromised during storage and/or use.

Controls
Pressure Regulation – Compressed air used for cleaning purposes shall be reduced to less than 30 pounds per square inch and then only with effective chip guarding and personal protective equipment.

Cylinder Storage – Valve protection caps shall be in place and secured when compressed gas cylinders are transported, moved, or stored. Cylinder valves shall be closed when work is finished and when cylinders are empty or are moved. Compressed gas cylinders shall be secured in an upright position at all times, except if necessary for short periods of time when cylinders are actually being hoisted or carried. Cylinders shall be placed in a location where they cannot become part of an electrical circuit.

9.2.7 Decontamination

All equipment will be decontaminated before leaving the site. Personnel involved in decontamination activities may be inadvertently exposed to skin contact with contaminated materials and chemicals brought from the EZ. Personnel involved in decontamination activities must wear PPE that is, at a minimum, one level below the level worn by personnel working in the EZ.

9.2.8 Demobilization

Demobilization involves the removal of all tools, equipment, supplies, and vehicles brought to the site. The hazards of this phase of activity are associated with heavy equipment operation and manual materials handling.

Manual materials handling may cause blisters, sore muscles, and joint and skeletal injuries; and may present eye, contusion, and laceration hazards. Heavy equipment operation presents noise and vibration hazards, and hot surfaces, to operators. Personnel in the vicinity of heavy equipment operation may be exposed to physical hazards resulting in fractures, contusions, and lacerations and may be exposed to high noise levels. The work area presents slip, trip, and fall hazards from scattered debris and irregular walking surfaces. Rainy weather may cause wet, muddy, slick walking surfaces, and unstable soil. Freezing weather hazards include frozen, slick, and irregular walking surfaces.

Environmental hazards include plants, such as poison ivy and poison oak; aggressive fauna, such as ticks, fleas, mosquitoes, wasps, spiders, and snakes; weather, such as sunburn, lightning, rain, and heat-or cold-related illnesses; and pathogens, such as rabies, Lyme disease, and blood-borne pathogens.

Control procedures for these hazards are discussed in Section 8.0, General Safety Practices.

9.3 Chemical Hazards

The chemical hazards associated with site operations are related to inhalation, ingestion, and skin exposure to site COCs. Concentrations of airborne COCs during site tasks may be measurable and will require air monitoring during certain operations. Air monitoring requirements for site tasks are outlined in Section 5.1. COCs at the site include VOCs, SVOCs, metals, pesticides, PFOA and PFOS.

The potential for inhalation of site COCs is low. The potential for dermal contact with soils containing site COCs during remedial operations is moderate. Table 6 lists the primary contaminants that have been identified at the Site and the media in which they are present.

Table 6 – List of Primary Contaminants

Media: Soil		
SVOCs	**Maximum Concentration (mg/kg)**	**Applicable Monitoring Instrument**
Benzo(a)anthracene	11	Not Applicable
Benzo(a)pyrene	8.5	Not Applicable
Benzo(b)fluoranthene	11	Not Applicable
Benzo(k)fluoranthene	3.8	Not Applicable
Chrysene	9.1	Not Applicable
Dibenzo(a,h)anthracene	1.5	Not Applicable
Indeno(1,2,3-cd)pyrene	6.2	Not Applicable
Metals	**Maximum Concentration**	**Applicable Monitoring**

	(mg/kg)	Instrument
Barium	413	Not Applicable
Chromium	35.7	Not Applicable
Copper	161	Not Applicable
Lead	558	Not Applicable
Mercury	1.2	Not Applicable
Zinc	597	Not Applicable
Pesticides	**Maximum Concentration (mg/kg)**	**Applicable Monitoring Instrument**
Alpha-chlordane	0.316	Not Applicable
Dieldrin	0.0102	Not Applicable
4,4-DDD	0.0074	Not Applicable
4,4,-DDE	0.00431	Not Applicable
4,4-DDT	0.0173	Not Applicable
Emerging Contaminants	**Maximum Concentration (ug/kg)**	**Applicable Monitoring Instrument**
PFOS	2.8	Not Applicable

Media: Groundwater		
VOCs	**Maximum Concentration (ug/L)**	**Applicable Monitoring Instrument**
Chloroform	28.7	Not Applicable
Tetrachloroethene	33	Not Applicable
Toluene	15	Not Applicable
SVOCs	**Maximum Concentration (ug/L)**	**Applicable Monitoring Instrument**
Benzo(a)anthracene	8.97	Not Applicable
Benzo(a)pyrene	7.19	Not Applicable
Benzo(b)fluoranthene	6.28	Not Applicable
Benzo(k)fluoranthene	6.77	Not Applicable
Chrysene	7	Not Applicable
Indeno(1,2,3-cd)pyrene	3.75	Not Applicable
PFOA	58	Not Applicable
PFOS	78	Not Applicable
Metals/Pesticides	**Maximum Concentration (ug/L)**	**Applicable Monitoring Instrument**
Arsenic	84.31	Not Applicable
Barium	51980	Not Applicable
Beryllium	41.74	Not Applicable
Cadmium	13.7	Not Applicable
Chromium	3310	Not Applicable
Iron	1460000	Not Applicable
Lead	1323	Not Applicable
Magnesium	796000	Not Applicable
Manganese	73680	Not Applicable
Mercury	3.69	Not Applicable
Nickel	3312	Not Applicable
Selenium	17.6	Not Applicable
Sodium	424000	Not Applicable
Thallium	17.36	Not Applicable
Zinc	4850	Not Applicable

Media: Soil Gas		
VOCs	**Maximum Concentration** (ug/m3)	**Applicable Monitoring Instrument**
Cis-1,2-Dichloroethylene	11	Not Applicable
Tetrachloroethylene	633	Not Applicable
Tricloroethylene	12	Not Applicable

10.0 EMERGENCY PROCEDURES

10.1 General

Prior to the start of operations, the work area will be evaluated for the potential for fire, contaminant release, or other catastrophic event. Unusual conditions or events, activities, chemicals, and conditions will be reported to the FS/SSO immediately.

The FS/SSO will establish evacuation routes and assembly areas for the site. All personnel entering the site will be informed of this route and the assembly area.

10.2 Emergency Response

If an incident occurs, the following steps will be taken:

- The FS/SSO will evaluate the incident and assess the need for assistance and/or evacuation;
- The FS/SSO will call for outside assistance as needed;
- The FS/SSO will ensure the PM is notified promptly of the incident; and
- The FS/SSO will take appropriate measures to stabilize the incident scene.

10.2.1 Fire

In the case of a fire at the site, the FS/SSO will assess the situation and direct fire-fighting activities. The FS/SSO will ensure that the PM is immediately notified of any fires. Site personnel will attempt to extinguish the fire with available extinguishers, if safe to do so. In the event of a fire that site personnel are unable to safely extinguish with one fire extinguisher, the local fire department will be summoned.

10.2.2 Contaminant Release

In the event of a contaminant release, the following steps will be taken:

- Notify FS/SSO immediately;
- Evacuate immediate area of release;
- Conduct air monitoring to determine needed level of PPE; and
- Don required level of PPE and prepare to implement control procedures.

The FS/SSO has the authority to commit resources as needed to contain and control released material and to prevent its spread to off-site areas.

10.3 Medical Emergency

All employee injuries must be promptly reported to the SSO/FS, who will:

- Ensure that the injured employee receives prompt first aid and medical attention;
- In emergency situations, the worker is to be transported by appropriate means to the nearest urgent care facility (normally a hospital emergency room); and
- If the injured person is a SESI employee, notify SESI at 973-808-9050.

10.3.1 Emergency Care Steps

Survey the scene. Determine if it is safe to proceed. Try to determine if the conditions that caused the incident are still a threat. Protect yourself from exposure before attempting to rescue the victim.

- Do a primary survey of the victim. Check for airway obstruction, breathing, and pulse. Assess likely routes of chemical exposure by examining the eyes, mouth, nose, and skin of the victim for symptoms.
- Phone Emergency Medical Services (EMS). Give the location, telephone number used, caller's name, what happened, number of victims, victim's condition, and help being given.
- Maintain airway and perform rescue breathing as necessary.
- Perform CPR as necessary.
- Do a secondary survey of the victim. Check vital signs and do a head-to-toe exam.

Treat other conditions as necessary. If the victim can be moved, take him/her to a location away from the work area where EMS can gain access.

10.4 First Aid - General

All persons must report any injury or illness to their immediate supervisor or the FS. Trained personnel will provide first aid. Injuries and illnesses requiring medical treatment must be documented. The FS and SSO must fill out an accident/incident report as soon as emergency conditions no longer exist and first aid and/or medical treatment has been ensured. The report must be completed and submitted to the PM within 24 hours after the incident.

If first-aid treatment is required, first aid kits are kept at the CRZ. If treatment beyond first aid is required, the injured person(s) should be transported to the medical facility. If the injured person is not ambulatory or shows any sign of not being in a comfortable and stable condition for transport, then an ambulance/paramedics should be summoned. If there is any doubt as to the injured worker's condition, it is best to let the local paramedic or ambulance service examine and transport the worker.

10.4.1 First Aid - Inhalation

Any employee complaining of symptoms of chemical overexposure as described in Section 4, General Site Safety Procedures, will be removed from the work area and transported to the designated medical facility for examination and treatment.

10.4.2 First Aid - Ingestion

Call EMS and consult a poison control center for advice. If available, refer to the MSDS for treatment information. If the victim is unconscious, keep them on their side and clear the airway if vomiting occurs.

10.4.3 First Aid - Skin Contact

Project personnel who have had skin contact with contaminants will, unless the contact is severe, proceed through the CRZ, to the wash area. Personnel will remove any contaminated clothing, and then flush the affected area with water for at least 15 minutes. The worker should be transported to the medical facility if he/she shows any sign of skin reddening, irritation, or if he/she requests a medical examination.

10.4.4 First Aid - Eye Contact

Project personnel who have had contaminants splashed in their eyes or who have experienced eye irritation while in the EZ, must immediately proceed to the eyewash station in the CRZ. Do not decontaminate prior to using the eyewash. Remove whatever protective clothing is necessary to use the eyewash. Flush the eye with clean running water for at least 15 minutes. Arrange prompt transport to the designated medical facility.

10.5 Reporting Injuries, Illnesses, and Safety Incidents

Injuries and illnesses, however minor, will be reported to the FS immediately. The FS will complete an injury report and submit it to the HSM, and the PM by end of shift.

10.6 Emergency Information

The means to summon local public response agencies such as police, fire, and ambulance will be reviewed in the daily safety meeting. These agencies are identified in **Table 7** below.


Table 7 – Emergency Contacts

Local Emergency Contacts	**Telephone No.**
EMERGENCY	911
Saint Joseph's Medical Center	(914) 378-7000
Police Emergency	911
Fire Emergency	911
Rescue Squad	911
Ambulance	911
Miscellaneous Contacts	**Telephone No.**
N.Y. Poison Control Center	(800) 222-1222
National Response Center and Terrorist Hotline	(800) 424-8802
Center for Disease Control	(800) 311-3435
Utility Mark-Out	(800) 962-7962


10.6.1 Directions to Hospital

Saint Joseph's Medical Center
127 S Broadway,
Yonkers, NY 10701
1 (914) 378-7000

Fig-1: Direction to Saint Joseph's Medical Center from 32 Main St

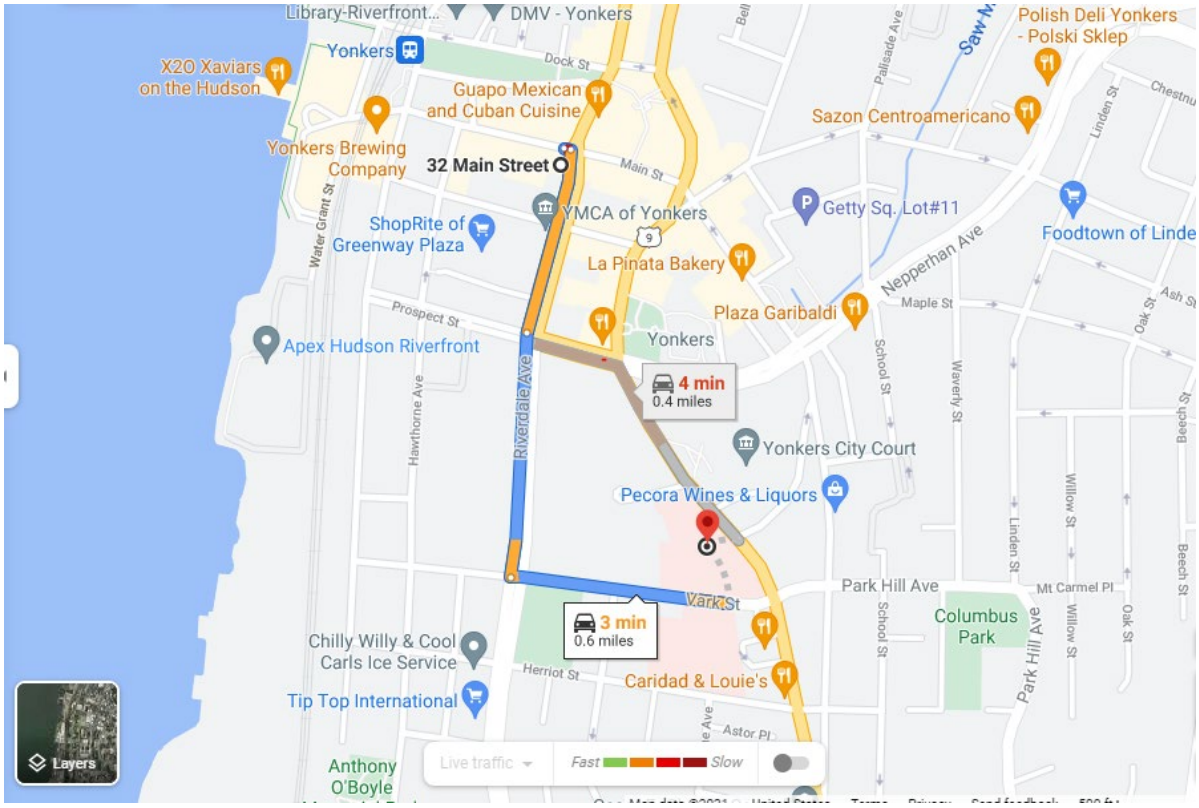

Directions from 32 Main St. from Saint Joseph's Medical Center:

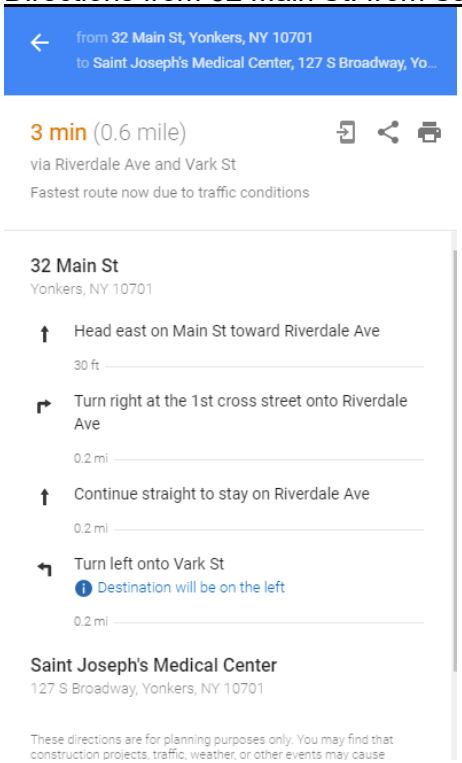

11.0 LOGS, REPORTS, AND RECORD KEEPING

The following is a summary of required health and safety logs, reports, and record keeping for the operations at the subject site.

11.1 HASP Field Change Request

To be completed for initiating a change to the HASP. PM approval is required. The original will be kept in the project file (See Attachment 3).

11.2 Medical and Training Records

The HSM must obtain and keep a log of personnel meeting appropriate training and medical qualifications for the site work. The log will be kept in the project file. Each company's Human Resources Department will maintain medical records, in accordance with 29 CFR 1910.1020.

11.3 Exposure Records

Any personnel monitoring results, laboratory reports, calculations, and air sampling data sheets are part of an employee exposure record. These records will be kept in accordance with 29 CFR 1910.1020. For SESI employees, the originals will be sent to the Human Resources Manager. For subcontractor employees, the original file will be sent to the subcontractor employer with a copy maintained in the SESI project file.

11.4 Accident/Incident Report

Any accident/incident reports must be completed following procedures given in Section 10.5 of this HASP. The originals will be sent to the HSM for maintenance. A copy of the forms will be kept in the project file. (See Attachment 4)

11.5 OSHA Form 200

An OSHA Form 200 (Log of Occupational Injuries and Illnesses) will be kept at the project site. All recordable injuries or illnesses will be recorded on this form. At the end of the project, the original will be sent to the Human Resources Manager for maintenance. Subcontractor employees must also meet the requirements of maintaining an OSHA 200 Form. The accident/incident report meets the requirements of the OSHA Form 101 (Supplemental Record), which must be maintained with the OSHA Form 200 for all recordable injuries or illnesses.

11.6 On-Site Health and Safety Field Logbooks

The HSM or designee will maintain an on-site health and safety log book in which daily Site conditions, activities, personnel, and significant events will be recorded. Calibration records and personnel monitoring results, if available, will also be recorded in the field logbook. The original logbook will be kept in the project file.

Whenever any personnel monitoring is conducted onsite, the monitoring results will be noted in the filed logbook. These will become part of the exposure records file and will be maintained by the HSM.

A signatory page is included (See Attachment 5) and is to be signed by those working on and/or visiting the site.

11.7 Material Safety Data Sheets

Material Safety Data Sheets (MSDS) will be obtained and kept on file at the project site for each hazardous chemical brought to, use, or stored at the Site (See Attachment 6).

12.0 COVID-19 RESPONSE ACTION PLAN

SESI is concerned with the safety and well-being of its employees, vendors, subcontractors, and others with access to its offices and job sites, with particular emphasis on the unique challenges posed by COVID-19.

SESI has established the following protocols in keeping with the recommendations of the CDC and other sources including State Governor Executive Orders for work taking place on construction sites.

We request that all SESI employees, vendors, and subcontractors help with our prevention efforts while at work.

In order to minimize the spread of COVID-19, we must all cooperate in doing the following:

- Frequently wash your hands with soap and water for at least 20 seconds. When soap and running water are unavailable, use an alcohol-based hand rub with at least 60% alcohol. Always wash hands that are visibly soiled.
- Cover your mouth and nose with a tissue when you cough or sneeze or use the inside of your elbow.
- Discourage handshaking, avoid touching your eyes, nose, or mouth with unwashed hands.
- Limit the sharing of tools, machinery, equipment, phones, desks, and computers.
- Wear cloth face coverings on all construction sites.
- Avoid close contact with people who are sick.
- Employees who have symptoms (i.e., fever, cough, or shortness of breath) should notify their supervisor and stay home—DO NOT GO TO WORK.
- Sick employees should follow CDC-recommended steps. Employees should not return to work until the criteria to discontinue home isolation are met, in consultation with healthcare providers and state and local health departments.

The following are the specific jobsite protocols and response actions to be taken in the event someone on site has been in contact with, or has themselves, the COVID-19 virus:

OFFICE/JOBSITE PROTOCOL

- If an employee/worker exhibits COVID-19 symptoms, the employee/worker must remain at home until he or she is symptom free for 72 hours (3 full days) without the use of fever-reducing or other symptom-altering medicines (e.g. acetaminophen, cough suppressants). SESI will similarly require an employee or worker that reports to work with symptoms to return home until they are symptom free for 72 hours (3 full days).
- Limit person to person contact, and when unavoidable, maintain CDC distancing guidelines.
- Avoid eating lunch in groups.
- Avoid in-person meetings if possible. If an in-person meeting is necessary, conduct it in a well-ventilated area with enough space for attendees to distance themselves

from one another. Field jobsite meetings should be conducted in smaller group meetings (no more than 5 persons when possible) versus one large meeting.
- Only workers necessary to the execution of the work should be at the jobsites. No non-essential visitors should be permitted at the worksite.

RESPONSE ACTION TRIGGER EVENTS:

- an employee/worker at work has tested positive for COVID-19
- an employee/worker at work has suspected, but unconfirmed, case of COVID-19
- an employee/worker self-reported that they came in contact with someone who had a presumptive positive case of COVID-19
- an employee/worker has been exposed to the virus but only found out after they have interacted with others

RESPONSE ACTIONS:

- Upon occurrence of any of the Trigger Events above, employees/subcontractors shall notify SESI Management about the suspected employee/worker infected with, or exposed to, COVID-19.
- SESI Management will investigate the incident to confirm the report is valid.
- Employees/Subcontractors shall investigate their respective infected employee(s) and report the following to SESI Management and HR:
    - Identify all individuals who worked in proximity (six feet) of the infected employee/worker,
    - Employee(s)/Worker(s) infected with the COVID-19 virus, and employee(s)/worker(s) that came in contact with the infected employee/worker shall be sent home for a period of 14 days,
    - Do not identify the infected employee/worker by name to avoid violation of privacy/confidentiality laws, and,
    - Keep SESI Management informed of progress and updates.

- If an infected person was in the office, SESI will clean and disinfect common areas and surfaces, in accordance with CDC recommendations.
- SESI Management will notify affected employees/workers of the Trigger Event and instruct them to take the response actions above.

- SESI Management policy requires written documentation from a health care professional, that confirmed infected employees can return to work.

Except for circumstances in which SESI is legally required to report workplace occurrences of communicable disease, the confidentiality of all medical conditions will be maintained in accordance with applicable law and to the extent practical under the circumstances. When required, the number of persons who will be informed of an employee's/worker's condition will be kept at the minimum needed to appropriately notify other potentially affected employees/workers of Trigger Events and to attempt to minimize the potential for transmission of the virus.

ATTACHMENT 1

AIR MONITOR LOG

Air Monitoring: Sample Collection and Analysis

Date & Time of Monitoring	Task / Operation Being	Substance(s)/ Hazard(s) Being	Monitoring Location	Type/Method of Monitoring (separate lines for	Monitoring Results	Exposure Limits	Required Action

ATTACHMENT 2


OSHA POSTER

Job Safety and Health


It's the law!


OSHA®


Occupational Safety and Health Administration
U.S. Department of Labor





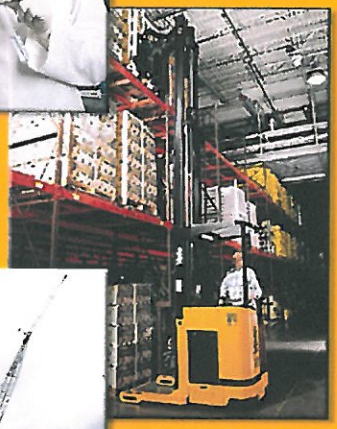

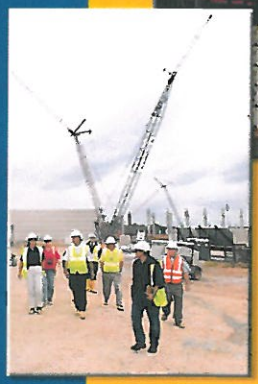



EMPLOYEES:

- You have the right to notify your employer or OSHA about workplace hazards. You may ask OSHA to keep your name confidential.
- You have the right to request an OSHA inspection if you believe that there are unsafe and unhealthful conditions in your workplace. You or your representative may participate in that inspection.
- You can file a complaint with OSHA within 30 days of retaliation or discrimination by your employer for making safety and health complaints or for exercising your rights under the *OSH Act*.
- You have the right to see OSHA citations issued to your employer. Your employer must post the citations at or near the place of the alleged violations.
- Your employer must correct workplace hazards by the date indicated on the citation and must certify that these hazards have been reduced or eliminated.
- You have the right to copies of your medical records and records of your exposures to toxic and harmful substances or conditions.
- Your employer must post this notice in your workplace.
- You must comply with all occupational safety and health standards issued under the *OSH Act* that apply to your own actions and conduct on the job.

EMPLOYERS:

- You must furnish your employees a place of employment free from recognized hazards.
- You must comply with the occupational safety and health standards issued under the *OSH Act*.

This free poster available from OSHA –
The Best Resource for Safety and Health

Free assistance in identifying and correcting hazards or complying with standards is available to employers, without citation or penalty, through OSHA-supported consultation programs in each state.

1-800-321-OSHA (6742)
www.osha.gov

OSHA 3165-02 2012R

ATTACHMENT 3

FILED CHANGE REQUEST FORM

HEALTH & SAFETY PLAN
CHANGE NOTICE

Pages _____ of _____

Project: H&S-CN

1) HASP VERSION: _____ SECTION: _____ PAGE (s): _____

RE: --- Change to existing HASP Anticipated Revision Date: _____
--- Addition to existing HASP
--- Other: _____
_____CONT._____

2) PROPOSED CHANGE: _____
_____
_____
_____

3) REASON FOR PROPOSED CHANGE(s):
--- Required by SPEC or Change Order --- Other: _____
--- Disposition of Deficiency _____CONT._____
--- Change in Regulatory or Other Requirements
--- Operational Experience

4) EXHIBITS ATTACHED ____ NO ____ YES (If YES, describe) _____
_____CONT._____

5) PMK APPROVALS PROJECT MANAGER: _____ Date: _____
SITE MANAGER: _____ Date: _____
H&S MANAGER: _____ Date: _____

Client Approval Required: ____ NO ____ YES (If YES, date submitted) _____

6) CLIENT APPROVAL _____ APPROVED _____ REMANDED _____ REJECTED

Comments: _____
_____
_____ CONT._____

Client Representative: _____Date: _____

7) DISTRIBUTION AFTER APPROVAL

X HASP UPDATE LIST --- OTHER: _____
X CLIENT _____
X PROJECT FILES _____

8) PREPARED BY: _____Date: _____
Title: _____

ATTACHMENT 4

INJURY REPORT FORM

OSHA's Form 301
Injury and Illness Incident Report

Attention: This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.

U.S. Department of Labor
Occupational Safety and Health Administration

Form approved OMB no. 1218-0176

This *Injury and Illness Incident Report* is one of the first forms you must fill out when a recordable work-related injury or illness has occurred. Together with the *Log of Work-Related Injuries and Illnesses* and the accompanying *Summary,* these forms help the employer and OSHA develop a picture of the extent and severity of work-related incidents.

Within 7 calendar days after you receive information that a recordable work-related injury or illness has occurred, you must fill out this form or an equivalent. Some state workers' compensation, insurance, or other reports may be acceptable substitutes. To be considered an equivalent form, any substitute must contain all the information asked for on this form.

According to Public Law 91-596 and 29 CFR 1904, OSHA's recordkeeping rule, you must keep this form on file for 5 years following the year to which it pertains.

If you need additional copies of this form, you may photocopy and use as many as you need.

Completed by _____

Title _____

Phone (_____)_____-_____ Date ___/___/___

Information about the employee

1) Full name _____

2) Street _____

City _____ State _____ ZIP _____

3) Date of birth ___/___/___

4) Date hired ___/___/___

5) ☐ Male
☐ Female

Information about the physician or other health care professional

6) Name of physician or other health care professional _____

_____

7) If treatment was given away from the worksite, where was it given?

Facility _____

Street _____

City _____ State _____ ZIP _____

8) Was employee treated in an emergency room?
☐ Yes
☐ No

9) Was employee hospitalized overnight as an in-patient?
☐ Yes
☐ No

Information about the case

10) Case number from the *Log* _____ *(Transfer the case number from the Log after you record the case.)*

11) Date of injury or illness ___/___/___

12) Time employee began work _____ AM / PM

13) Time of event _____ AM / PM ☐ Check if time cannot be determined

14) ***What was the employee doing just before the incident occurred?*** Describe the activity, as well as the tools, equipment, or material the employee was using. Be specific. *Examples:* "climbing a ladder while carrying roofing materials"; "spraying chlorine from hand sprayer"; "daily computer key-entry."

15) ***What happened?*** Tell us how the injury occurred. *Examples:* "When ladder slipped on wet floor, worker fell 20 feet"; "Worker was sprayed with chlorine when gasket broke during replacement"; "Worker developed soreness in wrist over time."

16) ***What was the injury or illness?*** Tell us the part of the body that was affected and how it was affected; be more specific than "hurt," "pain," or sore." *Examples:* "strained back"; "chemical burn, hand"; "carpal tunnel syndrome."

17) ***What object or substance directly harmed the employee?*** *Examples:* "concrete floor"; "chlorine"; "radial arm saw." *If this question does not apply to the incident, leave it blank.*

18) ***If the employee died, when did death occur?*** Date of death ___/___/___

Public reporting burden for this collection of information is estimated to average 22 minutes per response, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Persons are not required to respond to the collection of information unless it displays a current valid OMB control number. If you have any comments about this estimate or any other aspects of this data collection, including suggestions for reducing this burden, contact: US Department of Labor, OSHA Office of Statistical Analysis, Room N-3644, 200 Constitution Avenue, NW, Washington, DC 20210. Do not send the completed forms to this office.

OSHA's Form 300 (Rev. 01/2004)

Log of Work-Related Injuries and Illnesses

Attention: This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.

Year 20__ __

U.S. Department of Labor
Occupational Safety and Health Administration

Form approved OMB no. 1218-0176

You must record information about every work-related death and about every work-related injury or illness that involves loss of consciousness, restricted work activity or job transfer, days away from work, or medical treatment beyond first aid. You must also record significant work-related injuries and illnesses that are diagnosed by a physician or licensed health care professional. You must also record work-related injuries and illnesses that meet any of the specific recording criteria listed in 29 CFR Part 1904.8 through 1904.12. Feel free to use two lines for a single case if you need to. You must complete an Injury and Illness Incident Report (OSHA Form 301) or equivalent form for each injury or illness recorded on this form. If you're not sure whether a case is recordable, call your local OSHA office for help.

Establishment name _____

City _____ State _____

Identify the person			Describe the case			Classify the case (CHECK ONLY ONE box for each case based on the most serious outcome for that case:)				Enter the number of days the injured or ill worker was:		Check the "Injury" column or choose one type of illness:					
								Remained at Work				(M)					
(A) Case no.	(B) Employee's name	(C) Job title (*e.g., Welder*)	(D) Date of injury or onset of illness	(E) Where the event occurred (*e.g., Loading dock north end*)	(F) Describe injury or illness, parts of body affected, and object/substance that directly injured or made person ill (*e.g., Second degree burns on right forearm from acetylene torch*)	Death (G)	Days away from work (H)	Job transfer or restriction (I)	Other recordable cases (J)	Away from work (K)	On job transfer or restriction (L)	Injury (1)	Skin disorder (2)	Respiratory condition (3)	Poisoning (4)	Hearing loss (5)	All other illnesses (6)
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
____			__/__ month/day			☐	☐	☐	☐	____ days	____ days	☐	☐	☐	☐	☐	☐
Page totals ➤						____	____	____	____	____	____	____	____	____	____	____	____

Be sure to transfer these totals to the Summary page (Form 300A) before you post it.

Public reporting burden for this collection of information is estimated to average 14 minutes per response, including time to review the instructions, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any other aspects of this data collection, contact: US Department of Labor, OSHA Office of Statistical Analysis, Room N-3644, 200 Constitution Avenue, NW, Washington, DC 20210. Do not send the completed forms to this office.

Injury (1) | Skin disorder (2) | Respiratory condition (3) | Poisoning (4) | Hearing loss (5) | All other illnesses (6)

OSHA's Form 300A (Rev. 01/2004)

Summary of Work-Related Injuries and Illnesses

Year 20__ __

U.S. Department of Labor
Occupational Safety and Health Administration

Form approved OMB no. 1218-0176

All establishments covered by Part 1904 must complete this Summary page, even if no work-related injuries or illnesses occurred during the year. Remember to review the Log to verify that the entries are complete and accurate before completing this summary.

Using the Log, count the individual entries you made for each category. Then write the totals below, making sure you've added the entries from every page of the Log. If you had no cases, write "0."

Employees, former employees, and their representatives have the right to review the OSHA Form 300 in its entirety. They also have limited access to the OSHA Form 301 or its equivalent. See 29 CFR Part 1904.35, in OSHA's recordkeeping rule, for further details on the access provisions for these forms.

Number of Cases

Total number of deaths	Total number of cases with days away from work	Total number of cases with job transfer or restriction	Total number of other recordable cases
_____	_____	_____	_____
(G)	(H)	(I)	(J)

Number of Days

Total number of days away from work	Total number of days of job transfer or restriction
_____	_____
(K)	(L)

Injury and Illness Types

Total number of . . .	(M)		
(1) Injuries	_____	(4) Poisonings	_____
		(5) Hearing loss	_____
(2) Skin disorders	_____	(6) All other illnesses	_____
(3) Respiratory conditions	_____		

Post this Summary page from February 1 to April 30 of the year following the year covered by the form.

Public reporting burden for this collection of information is estimated to average 58 minutes per response, including time to review the instructions, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any other aspects of this data collection, contact: US Department of Labor, OSHA Office of Statistical Analysis, Room N-3644, 200 Constitution Avenue, NW, Washington, DC 20210. Do not send the completed forms to this office.

Establishment information

Your establishment name _____

Street _____

City _____ State _____ ZIP _____

Industry description (*e.g., Manufacture of motor truck trailers*)

_____

Standard Industrial Classification (SIC), if known (*e.g., 3715*)

__ __ __ __

OR

North American Industrial Classification (NAICS), if known (e.g., 336212)

__ __ __ __ __ __

Employment information *(If you don't have these figures, see the Worksheet on the back of this page to estimate.)*

Annual average number of employees _____

Total hours worked by all employees last year _____

Sign here

Knowingly falsifying this document may result in a fine.

I certify that I have examined this document and that to the best of my knowledge the entries are true, accurate, and complete.

_____ _____
Company executive Title

( ) - / /
Phone Date

ATTACHMENT 5

SIGNATORY PAGE

Attachment 4 – Site-Specific Health and Safety Orientation Signatory Page
HEALTH AND SAFETY PLAN

Title	Name	Signature
Project Manager:	Steven Gustems	
Health and Safety Manager:	Joe Scardino	

I have read the attached Health and Safety Plan (HASP) and have received site-specific information and orientation regarding the identified physical, chemical, and biological hazards anticipated at this site. My signature certifies that I understand the procedures, equipment, and restrictions applicable to this project site and agree to abide by them.

Signature	Printed Name	Company	Date

Attachment 4 – Health and Safety Orientation Signatory Page (continued)

Signature	Printed Name	Company	Date

Attachment 6 - SDS

SAFETY DATA SHEET

Version 3.18
Revision Date 08/14/2018
Print Date 06/22/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Chloroform

Product Number : C2432
Brand : Sigma-Aldrich
Index-No. : 602-006-00-4

CAS-No. : 67-66-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 4), H302
Acute toxicity, Inhalation (Category 3), H331
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Carcinogenicity (Category 2), H351
Reproductive toxicity (Category 2), H361d
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336
Specific target organ toxicity - repeated exposure (Category 1), Liver, Kidney, H372
Acute aquatic toxicity (Category 3), H402

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H302 Harmful if swallowed.
H315 Causes skin irritation.
H319 Causes serious eye irritation.
H331 Toxic if inhaled.
H336 May cause drowsiness or dizziness.
H351 Suspected of causing cancer.

H361d	Suspected of damaging the unborn child.
H372	Causes damage to organs (Liver, Kidney) through prolonged or repeated exposure.
H402	Harmful to aquatic life.

Precautionary statement(s)

P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P311	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	Trichloromethane Methylidyne trichloride
Formula	:	$CHCl_3$
Molecular weight	:	119.38 g/mol
CAS-No.	:	67-66-3
EC-No.	:	200-663-8
Index-No.	:	602-006-00-4

Hazardous components

Component	Classification	Concentration
Chloroform		
	Acute Tox. 4; Acute Tox. 3; Skin Irrit. 2; Eye Irrit. 2A; Carc. 2; Repr. 2; STOT SE 3; STOT RE 1; Aquatic Acute 3; H302, H315, H319, H331, H336, H351, H361d, H372, H402	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Move out of dangerous area.Consult a physician. Show this safety data sheet to the doctor in attendance.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Chloroform	67-66-3	TWA	10 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Liver damage Embryo/fetal damage Confirmed animal carcinogen with unknown relevance to humans		
		ST	2 ppm 9.78 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		C	50 ppm 240 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate. Ceiling limit is to be determined from breathing-zone air samples.		
		PEL	2 ppm 9.78 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Fluorinated rubber
Minimum layer thickness: 0.7 mm
Break through time: 480 min
Material tested:Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact
Material: Fluorinated rubber
Minimum layer thickness: 0.7 mm
Break through time: 480 min
Material tested:Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: liquid, clear Colour: colourless
b)	Odour	sweet
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: -63 °C (-81 °F)
f)	Initial boiling point and boiling range	60.5 - 61.5 °C (140.9 - 142.7 °F)
g)	Flash point	- DIN 51755 Part 1does not flash
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	210 hPa (158 mmHg) at 20 °C (68 °F)
l)	Vapour density	4.12 - (Air = 1.0)
m)	Relative density	1.492 g/mL at 25 °C (77 °F)
n)	Water solubility	8.7 g/l at 23 °C (73 °F) - OECD Test Guideline 105
o)	Partition coefficient: n-octanol/water	log Pow: 1.97 at 25 °C (77 °F) - (ECHA), Bioaccumulation is not expected.
p)	Auto-ignition temperature	> 600 °C (> 1,112 °F) at 1,013 hPa (760 mmHg) - DIN 51794
q)	Decomposition temperature	Distillable in an undecomposed state at normal pressure.
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information

Solubility in other solvents	organic solvent at 20 °C (68 °F) - miscible
Surface tension	27.1 mN/m at 20.0 °C (68.0 °F)
Relative vapour density	4.12 - (Air = 1.0)

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.
Contains the following stabiliser(s):
2-Methyl-2-butene (>=0.001 - <=0.015 %)

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
various plastics, Rubber

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
LD50 Oral - Rat - male - 908 mg/kg
(OECD Test Guideline 401)
Remarks: Behavioral:Change in motor activity (specific assay). Behavioral:Ataxia. Lungs, Thorax, or Respiration:Respiratory stimulation.

LOEC Inhalation - Rat - male - 6 h - 500 ppm
Remarks: Classified according to Regulation (EU) 1272/2008, Annex VI (Table 3.1/3.2)

LD50 Dermal - Rabbit - > 20,000 mg/kg
Remarks: (RTECS)

No data available

Skin corrosion/irritation
Skin - Rabbit
Result: Irritating to skin. - 24 h
Remarks: (ECHA)

Serious eye damage/eye irritation
Eyes - Rabbit
Result: Irritating to eyes.
Remarks: (ECHA)

Respiratory or skin sensitisation
Sensitisation test: - Guinea pig
Result: negative
(Maximisation Test)
Remarks: (ECHA)

Germ cell mutagenicity
Ames test
Salmonella typhimurium
Result: negative

reverse mutation assay
Escherichia coli
Result: negative
(ECHA)

OECD Test Guideline 474
Rat - male and female - Bone marrow
Result: negative

OECD Test Guideline 486
Rat - male - Other cell types
Result: negative

Carcinogenicity

Carcinogenicity - Rat - Oral
Tumorigenic:Carcinogenic by RTECS criteria. Leukaemia

Suspected of causing cancer.

IARC:	2B - Group 2B: Possibly carcinogenic to humans (Chloroform)
NTP:	RAHC - Reasonably anticipated to be a human carcinogen (Chloroform)
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
Suspected of damaging the unborn child.

Specific target organ toxicity - single exposure
May cause drowsiness or dizziness.

Specific target organ toxicity - repeated exposure
Causes damage to organs through prolonged or repeated exposure. - Liver, Kidney

Aspiration hazard
No data available

Additional Information
RTECS: FS9100000

Vomiting, Cough, irritant effects, Shortness of breath, respiratory arrest, narcosis, Dizziness, Nausea, agitation, spasms, inebriation, Headache, Stomach/intestinal disorders, ataxia (impaired locomotor coordination), cardiovascular disorders Drying-out effect resulting in rough and chapped skin.

Stomach - Irregularities - Based on Human Evidence
Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	flow-through test LC50 - Danio rerio (zebra fish) - 121 mg/l - 48 h (OECD Test Guideline 203)
	static test LC50 - Pimephales promelas (fathead minnow) - 103 - 171 mg/l - 96 h Remarks: (ECHA)
	flow-through test LC50 - Oncorhynchus mykiss (rainbow trout) - 18.2 mg/l - 96 h Remarks: (ECHA)
	flow-through test LC50 - Micropterus dolomieui - 51 mg/l - 96 h Remarks: (ECHA)
Toxicity to daphnia and other aquatic invertebrates	static test EC50 - Daphnia magna (Water flea) - 79 mg/l - 48 h Remarks: (ECHA)
Toxicity to algae	static test ErC50 - Chlamydomonas reinhardtii (green algae) - 13.3 mg/l - 72 h Remarks: (ECHA)

12.2 Persistence and degradability

Biodegradability	aerobic - Exposure time 14 d

Result: 0 % - Not readily biodegradable.
(OECD Test Guideline 301C)

12.3 Bioaccumulative potential

Bioaccumulation: Cyprinus carpio (Carp) - 42 d
at 25 °C - 0.1 mg/l

Bioconcentration factor (BCF): 4.1 - 13
(OECD Test Guideline 305)

Cyprinus carpio (Carp) - 42 d
at 25 °C - 1 mg/l

Bioconcentration factor (BCF): 1.4 - 4.7
(OECD Test Guideline 305)

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1888 Class: 6.1 Packing group: III
Proper shipping name: Chloroform
Reportable Quantity (RQ): 10 lbsReportable Quantity (RQ): 10 lbs
Poison Inhalation Hazard: No

IMDG

UN number: 1888 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: CHLOROFORM

IATA

UN number: 1888 Class: 6.1 Packing group: III
Proper shipping name: Chloroform

15. REGULATORY INFORMATION

SARA 302 Components

	CAS-No.	Revision Date
Chloroform	67-66-3	2008-11-03

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Chloroform	67-66-3	2008-11-03

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Reportable Quantity : D022 lbs

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Chloroform	67-66-3	2008-11-03

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Chloroform	67-66-3	2008-11-03

California Prop. 65 Components

	CAS-No.	Revision Date
, which is/are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov. Chloroform	67-66-3	2011-09-01

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H302	Harmful if swallowed.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H331	Toxic if inhaled.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H361d	Suspected of damaging the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H402	Harmful to aquatic life.
Repr.	Reproductive toxicity
Skin Irrit.	Skin irritation
STOT RE	Specific target organ toxicity - repeated exposure
STOT SE	Specific target organ toxicity - single exposure

Further information
Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information
Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.18 Revision Date: 08/14/2018 Print Date: 06/22/2019

SAFETY DATA SHEET

Version 4.4
Revision Date 12/01/2015
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : cis-Dichloroethylene

Product Number : 48597
Brand : Supelco
Index-No. : 602-026-00-3

CAS-No. : 156-59-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Flammable liquids (Category 2), H225
Acute toxicity, Inhalation (Category 4), H332
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H225 Highly flammable liquid and vapour.
H332 Harmful if inhaled.
H412 Harmful to aquatic life with long lasting effects.

Precautionary statement(s)
P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233 Keep container tightly closed.
P240 Ground/bond container and receiving equipment.
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242 Use only non-sparking tools.

P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P312	Call a POISON CENTER or doctor/ physician if you feel unwell.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	C2H2Cl2
Molecular weight	:	96.94 g/mol
CAS-No.	:	156-59-2
EC-No.	:	205-859-7
Index-No.	:	602-026-00-3

Hazardous components

Component	Classification	Concentration
cis-Dichloroethylene		
	Flam. Liq. 2; Acute Tox. 4; Aquatic Acute 3; Aquatic Chronic 3; H225, H332, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
Use explosion-proof equipment.Keep away from sources of ignition - No smoking.Take measures to prevent the build up of electrostatic charge.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

Handle and store under inert gas. Air and moisture sensitive. Light sensitive.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
cis-Dichloroethylene	156-59-2	TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Eye irritation		

8.2 Exposure controls

Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection
Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: liquid Colour: light yellow
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	-80.0 °C (-112.0 °F)
f)	Initial boiling point and boiling range	60.0 - 61.0 °C (140.0 - 141.8 °F)
g)	Flash point	6.0 °C (42.8 °F) - closed cup
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	1.28 g/cm3
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available

p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
Vapours may form explosive mixture with air.

10.4 Conditions to avoid
Heat, flames and sparks. Extremes of temperature and direct sunlight.

10.5 Incompatible materials
Oxidizing agents

10.6 Hazardous decomposition products
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
LC50 Inhalation - Rat - 13700 ppm
Remarks: Behavioral:Somnolence (general depressed activity). Liver:Fatty liver degeneration.

Dermal: No data available

No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity

IARC:	No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
NTP:	No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
OSHA:	No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
No data available

No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: KV9420000

narcosis, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity
No data available

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 1150 Class: 3 Packing group: II
Proper shipping name: 1,2-Dichloroethylene

Poison Inhalation Hazard: No

IMDG
UN number: 1150 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: 1,2-DICHLOROETHYLENE

IATA
UN number: 1150 Class: 3 Packing group: II
Proper shipping name: 1,2-Dichloroethylene

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Fire Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
cis-Dichloroethylene	156-59-2	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
cis-Dichloroethylene	156-59-2	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
cis-Dichloroethylene	156-59-2	1993-04-24

California Prop. 65 Components
This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H332	Harmful if inhaled.
H402	Harmful to aquatic life.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	1

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information
Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information
Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.4 Revision Date: 12/01/2015 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 4.11
Revision Date 06/28/2017
Print Date 06/22/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Tetrachloroethylene

Product Number : 371696
Brand : Sigma-Aldrich
Index-No. : 602-028-00-4

CAS-No. : 127-18-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Skin sensitisation (Category 1), H317
Carcinogenicity (Category 2), H351
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Warning

Hazard statement(s)

H315	Causes skin irritation.
H317	May cause an allergic skin reaction.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H411	Toxic to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P272	Contaminated work clothing should not be allowed out of the workplace.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	Perchloroethylene PCE
Formula	:	C_2Cl_4
Molecular weight	:	165.83 g/mol
CAS-No.	:	127-18-4
EC-No.	:	204-825-9
Index-No.	:	602-028-00-4

Hazardous components

Component	Classification	Concentration
Tetrachloroethylene		
	Skin Irrit. 2; Eye Irrit. 2A; Skin Sens. 1; Carc. 2; STOT SE 3; Aquatic Acute 2; Aquatic Chronic 2; H315, H317, H319, H336, H351, H411	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Tetrachloroethylene	127-18-4	TWA	25.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed animal carcinogen with unknown relevance to humans		
		STEL	100.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed animal carcinogen with unknown relevance to humans		
		Potential Occupational Carcinogen Minimize workplace exposure concentrations. See Appendix A		
		See Table Z-2		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Peak	300.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	25 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed animal carcinogen with unknown relevance to humans		
		STEL	100 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed animal carcinogen with unknown relevance to humans		
		Potential Occupational Carcinogen Minimize workplace exposure concentrations. See Appendix A		
		See Table Z-2		

		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Peak	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	25 ppm 170 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		STEL	100 ppm 685 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	25 ppm 170 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Tetrachloroethylene	127-18-4	Tetrachloroethylene	3ppm	In end-exhaled air	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Prior to shift (16 hours after exposure ceases)			
		Tetrachloroethylene	0.5000 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		Prior to shift (16 hours after exposure ceases)			
		Tetrachloroethylene	3ppm	In end-exhaled air	ACGIH - Biological Exposure Indices (BEI)
		Prior to shift (16 hours after exposure ceases)			
		Tetrachloroethylene	0.5 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		Prior to shift (16 hours after exposure ceases)			

8.2 Exposure controls

Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Fluorinated rubber
Minimum layer thickness: 0.7 mm
Break through time: 480 min
Material tested:Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.2 mm

Break through time: 49 min
Material tested:Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: liquid, clear Colour: colourless
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: -22 °C (-8 °F) - lit.
f)	Initial boiling point and boiling range	121 °C (250 °F) - lit.
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	25.3 hPa (19.0 mmHg) at 25.0 °C (77.0 °F) 17.3 hPa (13.0 mmHg) at 20.0 °C (68.0 °F)
l)	Vapour density	No data available
m)	Relative density	1.623 g/cm3 at 25 °C (77 °F)
n)	Water solubility	0.15 g/l at 25 °C (77 °F)
o)	Partition coefficient: n-octanol/water	log Pow: 2.53 at 23 °C (73 °F)
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available

t) Oxidizing properties No data available

9.2 Other safety information

Surface tension 32.1 mN/m at 20 °C (68 °F)

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong oxidizing agents, Strong bases

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
LD50 Oral - Rat - female - 3,385 mg/kg
(OECD Test Guideline 401)

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation
Skin - Rabbit
Result: Skin irritation - 4 h
(OECD Test Guideline 404)

Serious eye damage/eye irritation
Eyes - Rabbit
Result: Mild eye irritation - 24 h

Respiratory or skin sensitisation
- Mouse
Result: May cause sensitisation by skin contact.
(OECD Test Guideline 429)

Germ cell mutagenicity
Hamster
ovary
Result: negative

OECD Test Guideline 474
Mouse - male
Result: negative

Carcinogenicity

Limited evidence of carcinogenicity in animal studies

IARC: 2A - Group 2A: Probably carcinogenic to humans (Tetrachloroethylene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Tetrachloroethylene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
No data available

No data available

Specific target organ toxicity - single exposure
May cause drowsiness or dizziness.

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information

Repeated dose toxicity	Mouse - female - Oral - LOAEL : 390 mg/kg

RTECS: KX3850000

narcosis, Liver injury may occur., Kidney injury may occur.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	flow-through test LC50 - Oncorhynchus mykiss (rainbow trout) - 5 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 7.50 mg/l - 48 h
Toxicity to algae	static test EC50 - Skeletonema costatum - > 16 mg/l - 7 h

12.2 Persistence and degradability

Biodegradability	aerobic - Exposure time 28 d Result: 11 % - Not readily biodegradable. (OECD Test Guideline 301C)

12.3 Bioaccumulative potential

Bioaccumulation	Lepomis macrochirus (Bluegill) - 21 d - 0.00343 mg/l Bioconcentration factor (BCF): 49

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 1897 Class: 6.1 Packing group: III
Proper shipping name: Tetrachloroethylene
Reportable Quantity (RQ): 100 lbsReportable Quantity (RQ): 100 lbs
Poison Inhalation Hazard: No

IMDG
UN number: 1897 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TETRACHLOROETHYLENE
Marine pollutant: yes

IATA
UN number: 1897 Class: 6.1 Packing group: III
Proper shipping name: Tetrachloroethylene

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Tetrachloroethylene	127-18-4	2007-07-01

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Reportable Quantity D039 lbs

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Tetrachloroethylene	127-18-4	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Tetrachloroethylene	127-18-4	2007-07-01

	CAS-No.	Revision Date
Tetrachloroethylene	127-18-4	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Tetrachloroethylene	127-18-4	2007-07-01

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Tetrachloroethylene	127-18-4	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity

Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H317	May cause an allergic skin reaction.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.11 Revision Date: 06/28/2017 Print Date: 06/22/2019

SAFETY DATA SHEET

Version 4.10
Revision Date 01/04/2018
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Trichloroethylene

Product Number : 251402
Brand : Sigma-Aldrich
Index-No. : 602-027-00-9

CAS-No. : 79-01-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Germ cell mutagenicity (Category 2), H341
Carcinogenicity (Category 1B), H350
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)

H315	Causes skin irritation.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H412	Harmful to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P281	Use personal protective equipment as required.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	TCE Trichloroethene
Formula	:	C_2HCl_3
Molecular weight	:	131.39 g/mol
CAS-No.	:	79-01-6
EC-No.	:	201-167-4
Index-No.	:	602-027-00-9

Hazardous components

Component	Classification	Concentration
Trichloroethylene		
	Skin Irrit. 2; Eye Irrit. 2A; Muta. 2; Carc. 1B; STOT SE 3; Aquatic Acute 3; Aquatic Chronic 3; H315, H319, H336, H341, H350, H412	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Light sensitive. Handle and store under inert gas.
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Trichloroethylene	79-01-6	TWA	10.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		STEL	25.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		Potential Occupational Carcinogen See Appendix C See Appendix A		
		See Table Z-2		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		Peak	300.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		Peak	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		

		STEL	100 ppm 537 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	25 ppm 135 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Trichloroacetic acid	15.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		Trichloroethanol	0.5000 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In end-exhaled air	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Fluorinated rubber
Minimum layer thickness: 0.7 mm
Break through time: 480 min
Material tested:Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact
Material: Fluorinated rubber
Minimum layer thickness: 0.7 mm
Break through time: 480 min
Material tested:Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: liquid, clear Colour: colourless
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: -84.8 °C (-120.6 °F) - lit.
f)	Initial boiling point and boiling range	86.7 °C (188.1 °F) - lit.
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	Upper explosion limit: 10.5 %(V) Lower explosion limit: 8 %(V)
k)	Vapour pressure	81.3 hPa (61.0 mmHg) at 20.0 °C (68.0 °F)
l)	Vapour density	No data available
m)	Relative density	1.463 g/mL at 25 °C (77 °F)
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	log Pow: 2.29log Pow: 5
p)	Auto-ignition temperature	410.0 °C (770.0 °F)
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Oxidizing agents, Strong bases, Magnesium

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
LD50 Oral - Rat - 4,920 mg/kg

LC50 Inhalation - Mouse - 4 h - 8450 ppm

LD50 Dermal - Rabbit - > 20,000 mg/kg

No data available

Skin corrosion/irritation
Skin - Rabbit
Result: Severe skin irritation - 24 h

Serious eye damage/eye irritation
Eyes - Rabbit
Result: Eye irritation - 24 h

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
Laboratory experiments have shown mutagenic effects.
In vitro tests showed mutagenic effects

Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC:	1 - Group 1: Carcinogenic to humans (Trichloroethylene)
NTP:	RAHC - Reasonably anticipated to be a human carcinogen (Trichloroethylene)
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
No data available

No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: KX4550000

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, Exposure to and/or consumption of alcohol may increase toxic effects., Gastrointestinal disturbance, Kidney injury may occur., narcosis
To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - 41 mg/l - 96.0 h
	LOEC - other fish - 11 mg/l - 10.0 d
	NOEC - Oryzias latipes - 40 mg/l - 10.0 d
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 18.00 mg/l - 48 h
Toxicity to algae	IC50 - Pseudokirchneriella subcapitata (green algae) - 175.00 mg/l - 96 h

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
Does not bioaccumulate.

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 1710 Class: 6.1 Packing group: III
Proper shipping name: Trichloroethylene
Reportable Quantity (RQ): 100 lbs
Poison Inhalation Hazard: No

IMDG
UN number: 1710 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TRICHLOROETHYLENE

IATA
UN number: 1710 Class: 6.1 Packing group: III

Proper shipping name: Trichloroethylene

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Trichloroethylene	79-01-6	2011-09-01
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. Trichloroethylene	79-01-6	2011-09-01

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H402	Harmful to aquatic life.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.10 Revision Date: 01/04/2018 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 6.3
Revision Date 03/06/2019
Print Date 06/22/2019

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : Toluene

Product Number : 244511
Brand : Sigma-Aldrich
Index-No. : 601-021-00-3
CAS-No. : 108-88-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 Spruce Street
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225
Skin irritation (Category 2), H315
Reproductive toxicity (Category 2), H361
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336
Specific target organ toxicity - repeated exposure (Category 2), H373
Aspiration hazard (Category 1), H304
Short-term (acute) aquatic hazard (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

Hazard statement(s)

H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H361	Suspected of damaging fertility or the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure.
H401	Toxic to aquatic life.

Precautionary statement(s)

P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Formula	:	C_7H_8
Molecular weight	:	92.14 g/mol
CAS-No.	:	108-88-3
EC-No.	:	203-625-9

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

Index-No. : 601-021-00-3

Component	Classification	Concentration
Toluene		
	Flam. Liq. 2; Skin Irrit. 2; Repr. 2; STOT SE 3; STOT RE 2; Asp. Tox. 1; Aquatic Acute 2; H225, H315, H361d, H336, H373, H304, H401 Concentration limits: 20 %: STOT SE 3, H336;	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
Carbon oxides

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

5.4 Further information
Use water spray to cool unopened containers.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections
For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
Use explosion-proof equipment.Keep away from sources of ignition - No smoking.Take measures to prevent the build up of electrostatic charge.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Handle and store under inert gas.
Storage class (TRGS 510): 3: Flammable liquids

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Components with workplace control parameters

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

Component	CAS-No.	Value	Control parameters	Basis
Toluene	108-88-3	TWA	100 ppm 375 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		STEL	150 ppm 560 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
	Remarks	Z37.12-1967		
		CEIL	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.12-1967		
		Peak	500 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.12-1967		
		TWA	20 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Visual impairment Female reproductive Pregnancy loss 2018 Adoption Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	100 ppm 375 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	150 ppm 560 mg/m3	USA. NIOSH Recommended Exposure Limits

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Toluene	108-88-3	Toluene	0.02 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Prior to last shift of workweek			
		Toluene	0.03 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		o-Cresol	0.3mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

Predicted No Effect Concentration (PNEC)

Compartment	Value
Soil	2.89 mg/kg

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

Marine water	0.68 mg/l
Fresh water	0.68 mg/l
Marine sediment	16.39 mg/kg
Fresh water sediment	16.39 mg/kg
Sewage treatment plant	13.61 mg/l
Aquatic intermittent release	0.68 mg/l

8.2 Exposure controls

Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Fluorinated rubber
Minimum layer thickness: 0.7 mm
Break through time: 480 min
Material tested:Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact
Material: Fluorinated rubber
Minimum layer thickness: 0.7 mm
Break through time: 480 min
Material tested:Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: liquid Colour: colourless
b)	Odour	aromatic
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: -93 °C (-135 °F)
f)	Initial boiling point and boiling range	110 - 111 °C 230 - 232 °F
g)	Flash point	4.0 °C (39.2 °F) - closed cup
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	Upper explosion limit: 7 %(V) Lower explosion limit: 1.2 %(V)
k)	Vapour pressure	29.1 hPa at 20.0 °C (68.0 °F)
l)	Vapour density	No data available
m)	Relative density	0.865 g/mL at 25 °C (77 °F)
n)	Water solubility	0.5 g/l at 15 °C (59 °F)
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	535.0 °C (995.0 °F)
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

SECTION 10: Stability and reactivity

10.1 Reactivity
No data available

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
Vapours may form explosive mixture with air.

10.4 Conditions to avoid
Heat, flames and sparks.

10.5 Incompatible materials
Strong oxidizing agents

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides
Other decomposition products - No data available
In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity
LD50 Oral - Rat - male - 5,580 mg/kg
(Tested according to Directive 92/69/EEC.)
LC50 Inhalation - Rat - male and female - 4 h - 25.7 mg/l
(OECD Test Guideline 403)
LD50 Dermal - Rabbit - 12,124 mg/kg
Remarks: (ECHA)
No data available

Skin corrosion/irritation
Skin - Rabbit
Result: Irritating to skin. - 4 h
Remarks: (ECHA)

Serious eye damage/eye irritation
Eyes - Rabbit
Result: No eye irritation
(OECD Test Guideline 405)

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
In vitro mammalian cell gene mutation test
Mouse lymphoma test
Result: negative
Ames test
S. typhimurium
Result: negative

Rat - Bone marrow
Result: negative
(ECHA)

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
Suspected of damaging the unborn child.

Specific target organ toxicity - single exposure
May cause drowsiness or dizziness. - Central nervous system

Specific target organ toxicity - repeated exposure
May cause damage to organs through prolonged or repeated exposure. - Central nervous system

Aspiration hazard
Aspiration hazard, Aspiration may cause pulmonary oedema and pneumonitis.

Additional Information
RTECS: XS5250000

Drowsiness, irritant effects, Dizziness, Convulsions, Headache, Nausea, Vomiting, Circulatory collapse, somnolence, inebriation, Unconsciousness, respiratory arrest, CNS disorders, respiratory paralysis, death
To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence
Stomach - Irregularities - Based on Human Evidence

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish	LC50 - Oncorhynchus mykiss (rainbow trout) - 5.8 mg/l - 96 h Remarks: (ECOTOX Database)
	NOEC - Pimephales promelas (fathead minnow) - 5.44 mg/l - 7 d
Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - Daphnia magna (Water flea) - 6 mg/l - 48 h Remarks: (ECOTOX Database)
Toxicity to algae	EC50 - Chlorella vulgaris (Fresh water algae) - 245.00 mg/l - 24 h Remarks: (ECOTOX Database)
	EC50 - Pseudokirchneriella subcapitata (green algae) - 10.00 mg/l - 24 h Remarks: (ECOTOX Database)

12.2 Persistence and degradability

Biodegradability	aerobic - Exposure time 20 d Result: 86 % - Readily biodegradable. Remarks: (IUCLID)

12.3 Bioaccumulative potential

Bioaccumulation	Leuciscus idus (Golden orfe) - 3 d - 0.05 mg/l(Toluene)

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

Bioconcentration factor (BCF): 90

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life.
No data available

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product
Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging
Dispose of as unused product.

SECTION 14: Transport information

DOT (US)
UN number: 1294 Class: 3 Packing group: II
Proper shipping name: Toluene
Reportable Quantity (RQ): 1000 lbs
Poison Inhalation Hazard: No

IMDG
UN number: 1294 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: TOLUENE

IATA
UN number: 1294 Class: 3 Packing group: II
Proper shipping name: Toluene

SECTION 15: Regulatory information

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
The following components are subject to reporting levels established by SARA Title III, Section 313:

CAS-No. Revision Date

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

Toluene	108-88-3	2007-07-01

SARA 311/312 Hazards
Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Toluene	108-88-3	2007-07-01

California Prop. 65 Components

, which is/are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.Toluene	CAS-No. 108-88-3	Revision Date 2009-02-01

SECTION 16: Other information

Further information
Copyright 2018 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.3 Revision Date: 03/06/2019 Print Date: 06/22/2019

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

SAFETY DATA SHEET

Version 6.1
Revision Date 07/17/2018
Print Date 01/21/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name	:	Benz[*a*]anthracene
Product Number	:	48563
Brand	:	Supelco
Index-No.	:	601-033-00-9
CAS-No.	:	56-55-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses	:	Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company	:	Sigma-Aldrich Inc. 3050 Spruce Street ST. LOUIS MO 63103 UNITED STATES
Telephone	:	+1 314 771-5765
Fax	:	+1 800 325-5052

1.4 Emergency telephone number

Emergency Phone #	:	(314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)

H350	May cause cancer.
H410	Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	1,2-Benzanthracene Tetraphene
Formula	:	C<SB>18</>H<SB>12</>
Molecular weight	:	228.29 g/mol
CAS-No.	:	56-55-3
EC-No.	:	200-280-6
Index-No.	:	601-033-00-9

Hazardous components

Component	Classification	Concentration
Benz[a]anthracene		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
Carbon oxides

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters
Components with workplace control parameters
Contains no substances with occupational exposure limit values.

8.2 Exposure controls
Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.
Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).
Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: solid
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 157 - 159 °C (315 - 318 °F)
f)	Initial boiling point and boiling range	437.6 °C (819.7 °F)
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	No data available

n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong oxidizing agents

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available
Inhalation: No data available
Dermal: No data available
LD50 Intravenous - Rat - > 200 mg/kg

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity
This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.
Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[a]anthracene)

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benz[a]anthracene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[a]anthracene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benz[a]anthracene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
No data available
No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity
No data available

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available(Benz[a]anthracene)

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
Not dangerous goods
IMDG
UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benz[a]anthracene)
Marine pollutant : yes

IATA
UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benz[a]anthracene)

Further information
EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Benz[a]anthracene	56-55-3	1993-04-24

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer. Benz[a]anthracene	CAS-No. 56-55-3	Revision Date 2007-09-28
WARNING! This product contains a chemical known to the State of California to cause cancer. Benz[a]anthracene	CAS-No. 56-55-3	Revision Date 2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H350	May cause cancer.
H400	Very toxic to aquatic life.

H410 Very toxic to aquatic life with long lasting effects.

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956
Version: 6.1 Revision Date: 07/17/2018 Print Date: 01/21/2019

SAFETY DATA SHEET

Version 5.8
Revision Date 02/02/2018
Print Date 10/19/2018

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Benzo[*a*]pyrene

Product Number : 48564
Brand : Supelco
Index-No. : 601-032-00-3

CAS-No. : 50-32-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Skin sensitisation (Category 1), H317
Germ cell mutagenicity (Category 1B), H340
Carcinogenicity (Category 1B), H350
Reproductive toxicity (Category 1B), H360
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H317 May cause an allergic skin reaction.
H340 May cause genetic defects.
H350 May cause cancer.
H360 May damage fertility or the unborn child.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)
P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and

understood.

P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P272	Contaminated work clothing should not be allowed out of the workplace.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 3,4-Benzpyrene
3,4-Benzopyrene
Benzo[def]chrysene
benzo[pqr]tetraphene

Formula : $C_{20}H_{12}$
Molecular weight : 252.31 g/mol
CAS-No. : 50-32-8
EC-No. : 200-028-5
Index-No. : 601-032-00-3

Hazardous components

Component	Classification	Concentration
Benzo[a]pyrene		
	Skin Sens. 1; Muta. 1B; Carc. 1B; Repr. 1B; Aquatic Acute 1; Aquatic Chronic 1; H317, H340, H350, H360, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low		

		as possible. Suspected human carcinogen		
		Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		
Benzo[a]pyrene	50-32-8	TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		TWA	0.2 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.1 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		
		TWA	0.2 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		PEL	0.2 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	0.2 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological	Basis

				specimen	
	-	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance — Form: solid

b) Odour — No data available

c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 177 - 180 °C (351 - 356 °F)
f)	Initial boiling point and boiling range	495 °C (923 °F)
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	1.35 g/cm3
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	log Pow: 5.97
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong oxidizing agents

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available

Inhalation: No data available

Dermal: No data available

LD50 Subcutaneous - Rat - 50 mg/kg

Skin corrosion/irritation
Skin - Mouse
Result: Mild skin irritation

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
Chronic exposure may cause dermatitis.

Germ cell mutagenicity
May alter genetic material.
In vivo tests showed mutagenic effects

Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC:	1 - Group 1: Carcinogenic to humans (Benzo[a]pyrene)
NTP:	RAHC - Reasonably anticipated to be a human carcinogen (Benzo[a]pyrene)
OSHA:	OSHA specifically regulated carcinogen (Benzo[a]pyrene)

Reproductive toxicity
May cause congenital malformation in the fetus.
Presumed human reproductive toxicant

May cause reproductive disorders.

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: Not available

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 0.25 mg/l - 48 h
Toxicity to algae	EC50 - Pseudokirchneriella subcapitata (green algae) - 0.02 mg/l - 72 h

12.2 Persistence and degradability

12.3 Bioaccumulative potential

Bioaccumulation	Lepomis macrochirus (Bluegill) - 48 h - 0.0005 mg/l
	Bioconcentration factor (BCF): 3,208

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Benzo[a]pyrene)
Reportable Quantity (RQ): 1 lbs
Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benzo[a]pyrene)
Marine pollutant:yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[a]pyrene)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	2007-03-01

New Jersey Right To Know Components

	CAS-No.	Revision Date

Benzo[a]pyrene	50-32-8	2007-03-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.	CAS-No.	Revision Date
Benzo[a]pyrene	50-32-8	1990-01-01

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H317	May cause an allergic skin reaction.
H340	May cause genetic defects.
H350	May cause cancer.
H360	May damage fertility or the unborn child.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Muta.	Germ cell mutagenicity

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.8 Revision Date: 02/02/2018 Print Date: 10/19/2018

SAFETY DATA SHEET

Version 6.1
Revision Date 07/17/2018
Print Date 01/21/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name	:	Benzo[<I>b</>]fluoranthene
Product Number	:	48490
Brand	:	Supelco
Index-No.	:	601-034-00-4
CAS-No.	:	205-99-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses	:	Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company	:	Sigma-Aldrich Inc. 3050 Spruce Street ST. LOUIS MO 63103 UNITED STATES
Telephone	:	+1 314 771-5765
Fax	:	+1 800 325-5052

1.4 Emergency telephone number

Emergency Phone #	:	(314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)

H350	May cause cancer.
H410	Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	3,4-Benzofluoranthene
Formula	:	C<SB>20</>H<SB>12</>
Molecular weight	:	252.31 g/mol
CAS-No.	:	205-99-2
EC-No.	:	205-911-9
Index-No.	:	601-034-00-4

Hazardous components

Component	Classification	Concentration
Benz[e]acephenanthrylene		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
Carbon oxides

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Benz[e]acephenanthrylene	205-99-2	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: solid
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 163 - 165 °C (325 - 329 °F) - lit.
f)	Initial boiling point and boiling range	No data available
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available

j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	No data available
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong oxidizing agents

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
TDLo Oral - Mouse - 7.57 mg/kg
Remarks: Liver:Changes in liver weight. Endocrine:Changes in thymus weight.
Inhalation: No data available
Dermal: No data available
No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity
This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.
Possible human carcinogen

IARC:	2B - Group 2B: Possibly carcinogenic to humans (Benz[e]acephenanthrylene)
NTP:	RAHC - Reasonably anticipated to be a human carcinogen (Benz[e]acephenanthrylene)
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
No data available
No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - Daphnia magna (Water flea) - > 1.024 mg/l - 24 h(Benz[e]acephenanthrylene)

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available(Benz[e]acephenanthrylene)

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
Not dangerous goods

IMDG
UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benz[e]acephenanthrylene)
Marine pollutant : yes

IATA
UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benz[e]acephenanthrylene)

Further information
EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

SARA 311/312 Hazards
Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benz[e]acephenanthrylene	205-99-2	2007-03-01

California Prop. 65 Components

, which is/are known to the State of California to cause cancer.	CAS-No.	Revision Date
For more information go to www.P65Warnings.ca.gov.	205-99-2	2007-09-28
Benz[e]acephenanthrylene		

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H350 May cause cancer.

H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956
Version: 6.1 Revision Date: 07/17/2018 Print Date: 01/21/2019

SAFETY DATA SHEET

Version 6.1
Revision Date 07/16/2018
Print Date 01/21/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name	:	Benzo[<I>k</>]fluoranthene
Product Number	:	48492
Brand	:	Supelco
Index-No.	:	601-036-00-5
CAS-No.	:	207-08-9

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses	:	Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company	:	Sigma-Aldrich Inc. 3050 Spruce Street ST. LOUIS MO 63103 UNITED STATES
Telephone	:	+1 314 771-5765
Fax	:	+1 800 325-5052

1.4 Emergency telephone number

Emergency Phone #	:	(314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Carcinogenicity (Category 1B), H350

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)

H350	May cause cancer.
H410	Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	C<SB>20</>H<SB>12</>
Molecular weight	:	252.31 g/mol
CAS-No.	:	207-08-9
EC-No.	:	205-916-6
Index-No.	:	601-036-00-5

Hazardous components

Component	Classification	Concentration
Benzo[k]fluoranthene		
	Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
Carbon oxides

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters
Components with workplace control parameters
Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Benzo[k]fluoranthene	207-08-9	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

8.2 Exposure controls
Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.
Personal protective equipment
Eye/face protection
Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.
Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).
Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: crystalline Colour: yellow
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 215 - 217 °C (419 - 423 °F) - lit.
f)	Initial boiling point and boiling range	No data available
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available

m)	Relative density	No data available
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong oxidizing agents

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available
Inhalation: No data available
Dermal: No data available
No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity
Carcinogenicity- Rat- Implant

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.
Possible human carcinogen

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Benzo[k]fluoranthene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Benzo[k]fluoranthene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
No data available
No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: DF6350000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity
No data available

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available(Benzo[k]fluoranthene)

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[k]fluoranthene)

Reportable Quantity (RQ) : 5000 lbs

no
Poison Inhalation Hazard: No

IMDG
UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Benzo[k]fluoranthene)
Marine pollutant : yes

IATA
UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Benzo[k]fluoranthene)

Further information
EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benzo[k]fluoranthene	207-08-9	1994-04-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benzo[k]fluoranthene	207-08-9	1994-04-01

California Prop. 65 Components

, which is/are known to the State of California to cause cancer.	CAS-No.	Revision Date
For more information go to www.P65Warnings.ca.gov.	207-08-9	2007-09-28
Benzo[k]fluoranthene		

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

Further information
Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956
Version: 6.1 Revision Date: 07/16/2018 Print Date: 01/21/2019

SAFETY DATA SHEET

Version 5.10
Revision Date 01/10/2018
Print Date 06/22/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : CHRYSENE, 98%

Product Number : 245186
Brand : Aldrich

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Germ cell mutagenicity (Category 2), H341
Carcinogenicity (Category 1B), H350
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)

H341	Suspected of causing genetic defects.
H350	May cause cancer.
H410	Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.

P501 Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : $C_{18}H_{12}$

Molecular weight : 228.29 g/mol

Hazardous components

Component	Classification	Concentration
Chrysene		
	Muta. 2; Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H341, H350, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	Cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section), see BEI® for Polycyclic Aromatic Hydrocarbons (PAHs) Exposure by all routes should be carefully controlled to levels as low as possible. Confirmed animal carcinogen with unknown relevance to humans		
Chrysene	218-01-9	TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		
		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C		

		See Appendix A		
		PEL	0.2 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance Form: solid

		Colour: white, light yellow
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	253.0 °C (487.4 °F)
f)	Initial boiling point and boiling range	448.0 °C (838.4 °F)
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	No data available
n)	Water solubility	insoluble
o)	Partition coefficient: n-octanol/water	log Pow: 5.73
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong oxidizing agents

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available

Inhalation: No data available

Dermal: No data available

LD50 Intraperitoneal - Mouse - > 320 mg/kg

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
Laboratory experiments have shown mutagenic effects.
In vitro tests showed mutagenic effects

Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC:	2B - Group 2B: Possibly carcinogenic to humans (Chrysene)
NTP:	No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
OSHA:	OSHA specifically regulated carcinogen (Chrysene)

Reproductive toxicity
No data available

No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 1.90 mg/l - 2 h

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Chrysene)
Reportable Quantity (RQ): 100 lbs
Poison Inhalation Hazard: No

IMDG
UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Chrysene)
Marine pollutant:yes

IATA
UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Chrysene)

Further information
EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Chrysene	218-01-9	1994-04-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.	CAS-No.	Revision Date
Chrysene	218-01-9	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.10 Revision Date: 01/10/2018 Print Date: 06/22/2019

MATERIAL SAFETY DATA SHEET

Date Printed: 20.10.2018
Date Updated: 07.05.2009
Version 1.4

Section 1 - Product and Company Information

Product Name	1,2:5,6-DIBENZANTHRACENE, 97% (NO BULK ORDERS ALLOWED)
Product Number	D31400
Brand	ALDRICH
Company	Sigma-Aldrich
Address	3050 Spruce Street SAINT LOUIS MO 63103 US
Technical Phone:	800-325-5832
Fax:	800-325-5052
Emergency Phone:	314-776-6555

Section 2 - Composition/Information on Ingredient

Substance Name	CAS #	SARA 313
1,2:5,6-DIBENZANTHRACENE	53-70-3	Yes

Formula	C22H14
Synonyms	1,2:5,6-Benzanthracene * DB(a,h)A * 1,2,5,6-Dba * 1,2,5,6-Dibenzanthraceen (Dutch) * 1,2:5,6-Dibenzanthracene * 1,2:5,6-Dibenz(a)anthracene * Dibenzo(a,h)anthracene * 1,2:5,6-Dibenzoanthracene * RCRA waste number U063
RTECS Number:	HN2625000

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Toxic. Dangerous for the environment.
May cause cancer. Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.
Target organ(s): Lungs. Liver. Calif. Prop. 65 carcinogen.

HMIS RATING

HEALTH: 2*
FLAMMABILITY: 0
REACTIVITY: 0

NFPA RATING

HEALTH: 2
FLAMMABILITY: 0
REACTIVITY: 0

*additional chronic hazards present.

For additional information on toxicity, please refer to Section 11.

Section 4 - First Aid Measures

ORAL EXPOSURE
If swallowed, wash out mouth with water provided person is conscious. Call a physician.

INHALATION EXPOSURE
If inhaled, remove to fresh air. If breathing becomes difficult, call a physician.

DERMAL EXPOSURE
In case of contact, immediately wash skin with soap and copious amounts of water.

EYE EXPOSURE
In case of contact with eyes, flush with copious amounts of water for at least 15 minutes. Assure adequate flushing by separating the eyelids with fingers. Call a physician.

Section 5 - Fire Fighting Measures

FLASH POINT
N/A

AUTOIGNITION TEMP
N/A

FLAMMABILITY
N/A

EXTINGUISHING MEDIA
Suitable: Carbon dioxide, dry chemical powder, or appropriate foam.

FIREFIGHTING
Protective Equipment: Wear self-contained breathing apparatus and protective clothing to prevent contact with skin and eyes.
Specific Hazard(s): Emits toxic fumes under fire conditions.

Section 6 - Accidental Release Measures

PROCEDURE TO BE FOLLOWED IN CASE OF LEAK OR SPILL
Evacuate area.

PROCEDURE(S) OF PERSONAL PRECAUTION(S)
Wear self-contained breathing apparatus, rubber boots, and heavy rubber gloves. Wear disposable coveralls and discard them after use.

METHODS FOR CLEANING UP
Sweep up, place in a bag and hold for waste disposal. Avoid raising dust. Ventilate area and wash spill site after material pickup is complete.

Section 7 - Handling and Storage

HANDLING
User Exposure: Do not breathe dust. Do not get in eyes, on skin, on clothing. Avoid prolonged or repeated exposure.

STORAGE

Suitable: Keep tightly closed.

Section 8 - Exposure Controls / PPE

ENGINEERING CONTROLS

Use only in a chemical fume hood. Safety shower and eye bath.

PERSONAL PROTECTIVE EQUIPMENT

Respiratory: Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU). Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator.
Hand: Compatible chemical-resistant gloves.
Eye: Chemical safety goggles.

GENERAL HYGIENE MEASURES

Wash contaminated clothing before reuse. Wash thoroughly after handling.

EXPOSURE LIMITS

Country	Source	Type	Value
Poland		NDS	0.004 MG/M3
Poland		NDSCh	-
Poland		NDSP	-

Section 9 - Physical/Chemical Properties

Appearance: Physical State: Solid

Property	Value	At Temperature or Pressure
Molecular Weight	278,3500 AMU	
pH	N/A	
BP/BP Range	524,000 °C	760,000 mmHg
MP/MP Range	262,000 °C	
Freezing Point	N/A	
Vapor Pressure	N/A	
Vapor Density	N/A	
Saturated Vapor Conc.	N/A	
Bulk Density	N/A	
Odor Threshold	N/A	
Volatile%	N/A	
VOC Content	N/A	
Water Content	N/A	
Solvent Content	N/A	
Evaporation Rate	N/A	
Viscosity	N/A	
Surface Tension	N/A	
Partition Coefficient	N/A	
Decomposition Temp.	N/A	
Flash Point	N/A	
Explosion Limits	N/A	
Flammability	N/A	
Autoignition Temp	N/A	
Refractive Index	N/A	
Optical Rotation	N/A	
Miscellaneous Data	N/A	

Solubility N/A

N/A = not available

Section 10 - Stability and Reactivity

STABILITY
Stable: Stable.
Materials to Avoid: Strong oxidizing agents.

HAZARDOUS DECOMPOSITION PRODUCTS
Hazardous Decomposition Products: Carbon monoxide, Carbon dioxide.

HAZARDOUS POLYMERIZATION
Hazardous Polymerization: Will not occur

Section 11 - Toxicological Information

ROUTE OF EXPOSURE
Skin Contact: May cause skin irritation.
Skin Absorption: May be harmful if absorbed through the skin.
Eye Contact: May cause eye irritation.
Inhalation: Material may be irritating to mucous membranes and upper respiratory tract. May be harmful if inhaled.
Ingestion: May be harmful if swallowed.

TARGET ORGAN(S) OR SYSTEM(S)
Lungs. Liver.

SIGNS AND SYMPTOMS OF EXPOSURE
To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

CHRONIC EXPOSURE - CARCINOGEN
Result: This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Species: Rat
Route of Application: Intratracheal
Dose: 100 MG/KG
Result: Tumorigenic:Carcinogenic by RTECS criteria. Lungs, Thorax, or Respiration:Tumors.

Species: Mouse
Route of Application: Oral
Dose: 4160 MG/KG
Exposure Time: 26W
Frequency: I
Result: Lungs, Thorax, or Respiration:Tumors. Tumorigenic:Carcinogenic by RTECS criteria.

Species: Mouse
Route of Application: Skin
Dose: 1200 MG/KG
Exposure Time: 50W
Frequency: I
Result: Tumorigenic:Tumors at site or application. Tumorigenic:Carcinogenic by RTECS criteria. Skin and Appendages: Other: Tumors.

Species: Mouse
Route of Application: Subcutaneous
Dose: 445 UG/KG
Result: Skin and Appendages: Other: Tumors.
Tumorigenic:Carcinogenic by RTECS criteria. Tumorigenic:Tumors
at site or application.

Species: Mouse
Route of Application: Intravenous
Dose: 40 MG/KG
Result: Tumorigenic:Neoplastic by RTECS criteria. Lungs, Thorax,
or Respiration:Tumors. Liver:Tumors.

Species: Mouse
Route of Application: Implant
Dose: 80 MG/KG
Result: Kidney, Ureter, Bladder:Tumors. Tumorigenic:Carcinogenic
by RTECS criteria.

Species: Mouse
Route of Application: Multiple
Dose: 40 MG/KG
Exposure Time: 12D
Frequency: I
Result: Tumorigenic:Tumors at site or application. Lungs,
Thorax, or Respiration:Tumors. Tumorigenic:Equivocal tumorigenic
agent by RTECS criteria.

Species: Guinea pig
Route of Application: Subcutaneous
Dose: 250 MG/KG
Exposure Time: 24D
Frequency: I
Result: Tumorigenic:Equivocal tumorigenic agent by RTECS
criteria. Tumorigenic:Tumors at site or application. Lungs,
Thorax, or Respiration:Tumors.

Species: Guinea pig
Route of Application: Intravenous
Dose: 30 MG/KG
Result: Tumorigenic:Tumors at site or application. Lungs,
Thorax, or Respiration:Tumors. Tumorigenic:Equivocal tumorigenic
agent by RTECS criteria.

Species: Pigeon
Route of Application: Intramuscular
Dose: 6 MG/KG
Result: Tumorigenic:Carcinogenic by RTECS criteria.
Liver:Tumors. Tumorigenic:Tumors at site or application.

Species: Frog
Route of Application: Intrarenal
Dose: 12 MG/KG
Result: Kidney, Ureter, Bladder:Kidney tumors. Lungs, Thorax, or
Respiration:Tumors. Tumorigenic:Neoplastic by RTECS criteria.

Species: Mouse
Route of Application: Implant
Dose: 14 MG/KG

Result: Tumorigenic:Neoplastic by RTECS criteria.
Tumorigenic:Tumors at site or application.

Species: Mouse
Route of Application: Subcutaneous
Dose: 78 UG/KG
Result: Tumorigenic:Neoplastic by RTECS criteria.
Tumorigenic:Tumors at site or application.

Species: Mouse
Route of Application: Oral
Dose: 4520 MG/KG
Exposure Time: 36W
Frequency: C
Result: Tumorigenic:Carcinogenic by RTECS criteria. Lungs, Thorax, or Respiration:Tumors. Gastrointestinal:Tumors.

Species: Mouse
Route of Application: Implant
Dose: 200 MG/KG
Result: Tumorigenic:Neoplastic by RTECS criteria. Lungs, Thorax, or Respiration:Bronchiogenic carcinoma. Tumorigenic:Tumors at site or application.

Species: Mouse
Route of Application: Skin
Dose: 6 UG/KG
Result: Tumorigenic:Neoplastic by RTECS criteria. Skin and Appendages: Other: Tumors.

Species: Mouse
Route of Application: Subcutaneous
Dose: 6 MG/KG
Result: Tumorigenic:Equivocal tumorigenic agent by RTECS criteria. Tumorigenic:Tumors at site or application.

Species: Mouse
Route of Application: Skin
Dose: 400 MG/KG
Exposure Time: 40W
Frequency: I
Result: Tumorigenic:Neoplastic by RTECS criteria. Skin and Appendages: Other: Tumors.

Species: Mouse
Route of Application: Implant
Dose: 100 MG/KG
Result: Tumorigenic:Carcinogenic by RTECS criteria. Kidney, Ureter, Bladder:Tumors. Tumorigenic:Tumors at site or application.

Species: Rat
Route of Application: Subcutaneous
Dose: 135 MG/KG
Exposure Time: 9W
Frequency: I
Result: Tumorigenic:Neoplastic by RTECS criteria. Lungs, Thorax, or Respiration:Tumors. Tumorigenic:Tumors at site or application.

Species: Mouse

Route of Application: Subcutaneous
Dose: 400 MG/KG
Exposure Time: 10W
Frequency: I
Result: Tumorigenic:Neoplastic by RTECS criteria.
Tumorigenic:Tumors at site or application.

IARC CARCINOGEN LIST

Rating: Group 2A

NTP CARCINOGEN LIST

Rating: Anticipated to be a carcinogen.

CHRONIC EXPOSURE - MUTAGEN
Result: Laboratory experiments have shown mutagenic effects.

Species: Human
Dose: 360 NMOL/L
Cell Type: Embryo
Mutation test: DNA

Species: Human
Dose: 100 UMOL/L
Cell Type: fibroblast
Mutation test: Unscheduled DNA synthesis

Species: Human
Dose: 10 MG/L
Cell Type: Other cell types
Mutation test: Unscheduled DNA synthesis

Species: Human
Dose: 100 NMOL/L
Cell Type: HeLa cell
Mutation test: Unscheduled DNA synthesis

Species: Human
Dose: 54 UG/L
Cell Type: lymphocyte
Mutation test: Mutation in mammalian somatic cells.

Species: Rat
Route: Intratracheal
Dose: 25500 UG/KG
Exposure Time: 16H
Mutation test: Micronucleus test

Species: Rat
Route: Oral
Dose: 200 MG/KG
Mutation test: Morphological transformation.

Species: Rat
Dose: 100 UG/L
Cell Type: Embryo
Mutation test: Morphological transformation.

Species: Rat

Route: Intratracheal
Dose: 25560 UG/KG
Mutation test: DNA

Species: Rat
Route: Intratracheal
Dose: 51150 UG/KG
Mutation test: Sister chromatid exchange

Species: Mouse
Route: Intraperitoneal
Dose: 500 MG/KG
Mutation test: Micronucleus test

Species: Mouse
Dose: 4250 UG/L (+S9)
Cell Type: lymphocyte
Mutation test: Mutation in microorganisms

Species: Mouse
Dose: 500 UG/L
Cell Type: fibroblast
Mutation test: Morphological transformation.

Species: Mouse
Dose: 100 UG/L
Cell Type: Embryo
Mutation test: Morphological transformation.

Species: Mouse
Dose: 6 UMOL/L
Cell Type: liver
Mutation test: DNA

Species: Mouse
Route: Skin
Dose: 40 UMOL/KG
Mutation test: DNA

Species: Mouse
Dose: 1 MG/L
Cell Type: Other cell types
Mutation test: DNA

Species: Mouse
Dose: 1 MG/L
Cell Type: Other cell types
Mutation test: Other mutation test systems

Species: Mouse
Dose: 510 NMOL/L
Cell Type: Embryo
Mutation test: DNA

Species: Mouse
Dose: 510 NMOL/L
Cell Type: Embryo
Mutation test: Other mutation test systems

Species: Hamster

Dose: 56400 NMOL/L (+S9)
Cell Type: lung
Mutation test: Mutation in microorganisms

Species: Hamster
Dose: 2500 UG/L
Cell Type: Embryo
Mutation test: Morphological transformation.

Species: Hamster
Dose: 25 UG/L
Cell Type: kidney
Mutation test: Morphological transformation.

Species: Hamster
Dose: 5 MG/L
Exposure Time: 24H
Cell Type: fibroblast
Mutation test: DNA damage

Species: Hamster
Dose: 360 NMOL/L
Cell Type: Embryo
Mutation test: DNA

Species: Hamster
Dose: 5 MG/L
Cell Type: kidney
Mutation test: DNA damage

Species: Hamster
Dose: 1 MG/L
Cell Type: lung
Mutation test: DNA

Species: Hamster
Dose: 1 MG/L
Cell Type: lung
Mutation test: Other mutation test systems

Species: Hamster
Dose: 1 MMOL/L
Cell Type: fibroblast
Mutation test: Cytogenetic analysis

Species: Hamster
Route: Intraperitoneal
Dose: 900 MG/KG
Exposure Time: 24H
Mutation test: Sister chromatid exchange

Species: Hamster
Dose: 500 UG/L
Cell Type: lung
Mutation test: Mutation in mammalian somatic cells.

Species: Mammal
Dose: 2 NMOL/L
Cell Type: lymphocyte
Mutation test: DNA damage

Section 12 - Ecological Information

No data available.

Section 13 - Disposal Considerations

APPROPRIATE METHOD OF DISPOSAL OF SUBSTANCE OR PREPARATION
Contact a licensed professional waste disposal service to dispose of this material. Observe all federal, state, and local environmental regulations. (DN)Requires special label: "Contains a substance which is regulated by Dannish work environmental law due to the risk of carcinogenic properties."

Section 14 - Transport Information

DOT
Proper Shipping Name: Environmentally hazardous substances, solid, n.o.s.
UN#: 3077
Class: 9
Packing Group: Packing Group III
Hazard Label: Class 9
PIH: Not PIH

IATA
Proper Shipping Name: Environmentally hazardous substance, solid, n.o.s
IATA UN Number: 3077
Hazard Class: 9
Packing Group: III

Section 15 - Regulatory Information

EU DIRECTIVES CLASSIFICATION
Symbol of Danger: T-N
Indication of Danger: Toxic. Dangerous for the environment.
R: 45-50/53
Risk Statements: May cause cancer. Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.
S: 53-45-60-61
Safety Statements: Restricted to professional users. Attention - Avoid exposure - obtain special instructions before use. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). This material and its container must be disposed of as hazardous waste. Avoid release to the environment. Refer to special instructions/safety data sheets.

US CLASSIFICATION AND LABEL TEXT
Indication of Danger: Toxic. Dangerous for the environment.
Risk Statements: May cause cancer. Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.
Safety Statements: Restricted to professional users. Attention - Avoid exposure - obtain special instructions before use. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). Wear suitable protective clothing, gloves, and eye/face protection. This

material and its container must be disposed of as hazardous waste. Avoid release to the environment. Refer to special instructions/safety data sheets.
US Statements: Target organ(s): Lungs. Liver. Calif. Prop. 65 carcinogen.

UNITED STATES REGULATORY INFORMATION
SARA LISTED: Yes
NOTES: This product is subject to SARA section 313 reporting requirements.
TSCA INVENTORY ITEM: Yes

UNITED STATES - STATE REGULATORY INFORMATION

CALIFORNIA PROP - 65
California Prop - 65: This product is or contains chemical(s) known to the state of California to cause cancer. This product is or contains chemical(s) known to the state of California to cause cancer.

CANADA REGULATORY INFORMATION
WHMIS Classification: This product has been classified in accordance with the hazard criteria of the CPR, and the MSDS contains all the information required by the CPR.
DSL: No
NDSL: Yes

Section 16 - Other Information

DISCLAIMER
For R&D use only. Not for drug, household or other uses.

WARRANTY
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Inc., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.
Copyright 2010 Sigma-Aldrich Co. License granted to make unlimitedpaper copies for internal use only.

SAFETY DATA SHEET

Version 6.1
Revision Date 07/17/2018
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Indeno[1,2,3-<l>cd</>]pyrene

Product Number : 48499
Brand : Supelco

CAS-No. : 193-39-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 Spruce Street
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Carcinogenicity (Category 2), H351

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Warning

Hazard statement(s)
H351 Suspected of causing cancer.

Precautionary statement(s)
P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.
P281 Use personal protective equipment as required.
P308 + P313 IF exposed or concerned: Get medical advice/ attention.
P405 Store locked up.

P501 Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : $C_{22}H_{12}$
Molecular weight : 276.33 g/mol
CAS-No. : 193-39-5
EC-No. : 205-893-2

Hazardous components

Component	Classification	Concentration
Indeno[1,2,3-cd]pyrene		
	Carc. 2; H351	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
Carbon oxides

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Store at room temperature.
Storage class (TRGS 510): 13: Non Combustible Solids

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters
Components with workplace control parameters
Contains no substances with occupational exposure limit values.
Hazardous components without workplace control parameters
Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Indeno[1,2,3-cd]pyrene	193-39-5	1-Hydroxypyrene		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

8.2 Exposure controls
Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.
Personal protective equipment

Eye/face protection
Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection
Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: solid
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	163.6 °C (326.5 °F)
f)	Initial boiling point and boiling range	536.0 °C (996.8 °F)
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	No data available
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available
Inhalation: No data available
Dermal: No data available
No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity
This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.
Limited evidence of carcinogenicity in animal studies

IARC:	2B - Group 2B: Possibly carcinogenic to humans (Indeno[1,2,3-cd]pyrene)
NTP:	RAHC - Reasonably anticipated to be a human carcinogen (Indeno[1,2,3-cd]pyrene)
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
No data available
No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available(Indeno[1,2,3-cd]pyrene)

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
Not dangerous goods
IMDG
Not dangerous goods

IATA
Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Indeno[1,2,3-cd]pyrene	193-39-5	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Indeno[1,2,3-cd]pyrene	193-39-5	1993-04-24

	CAS-No.	Revision Date
Indeno[1,2,3-cd]pyrene	193-39-5	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Indeno[1,2,3-cd]pyrene	193-39-5	1993-04-24

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer. Indeno[1,2,3-cd]pyrene	CAS-No. 193-39-5	Revision Date 2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H351 Suspected of causing cancer.

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956
Version: 6.1 Revision Date: 07/17/2018 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 4.13
Revision Date 09/12/2018
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Arsenic

Product Number : 202657
Brand : Aldrich
Index-No. : 033-001-00-X

CAS-No. : 7440-38-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 4), H302
Acute toxicity, Inhalation (Category 3), H331
Carcinogenicity (Category 1B), H350
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H302 Harmful if swallowed.
H331 Toxic if inhaled.
H350 May cause cancer.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)
P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.
P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P304 + P340 + P311	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	As
Molecular weight	:	74.92 g/mol
CAS-No.	:	7440-38-2
EC-No.	:	231-148-6
Index-No.	:	033-001-00-X

Hazardous components

Component	Classification	Concentration
Arsenic		
	Acute Tox. 4; Acute Tox. 3; Carc. 1B; Aquatic Acute 1; Aquatic Chronic 1; H302, H331, H350, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.
Storage class (TRGS 510): 6.1B: Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Arsenic	7440-38-2	TWA	0.01 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Lung cancer Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed human carcinogen		

		C	0.0020 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A 15 minute ceiling value		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	inorganic arsenic plus methylated metabolites	35µg As/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of the workweek (After four or five consecutive working days with exposure)			

8.2 Exposure controls

Appropriate engineering controls
Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: powder Colour: light grey, black
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 817 °C (1,503 °F) - lit.
f)	Initial boiling point and boiling range	613 °C (1,135 °F) - lit.
g)	Flash point	Not applicable
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	5.727 g/mL at 25 °C (77 °F)
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
Heat Exposure to air may affect product quality.

10.5 Incompatible materials
Strong oxidizing agents

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Arsenic oxides
Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 763 mg/kg
Remarks: Behavioral:Ataxia. Diarrhoea

LD50 Oral - Mouse - 145 mg/kg
Remarks: Behavioral:Ataxia. Diarrhoea

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity

Carcinogenicity

No data available

IARC:	1 - Group 1: Carcinogenic to humans (Arsenic)
NTP:	Known - Known to be human carcinogen (Arsenic)
OSHA:	OSHA specifically regulated carcinogen (Arsenic)

Reproductive toxicity

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: CG0525000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence
Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - 9.9 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 3.8 mg/l - 48 h

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 1558 Class: 6.1 Packing group: II
Proper shipping name: Arsenic
Reportable Quantity (RQ): 1 lbsReportable Quantity (RQ): 1 lbs
Poison Inhalation Hazard: No

IMDG
UN number: 1558 Class: 6.1 Packing group: II EMS-No: F-A, S-A
Proper shipping name: ARSENIC
Marine pollutant:yes

IATA
UN number: 1558 Class: 6.1 Packing group: II
Proper shipping name: Arsenic

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Arsenic	7440-38-2	2015-11-23

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Reportable Quantity D004 lbs

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Arsenic	7440-38-2	2015-11-23

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Arsenic	7440-38-2	2015-11-23

	CAS-No.	Revision Date
Arsenic	7440-38-2	2015-11-23

New Jersey Right To Know Components

	CAS-No.	Revision Date
Arsenic	7440-38-2	2015-11-23

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.	CAS-No.	Revision Date
Arsenic	7440-38-2	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H302	Harmful if swallowed.
H331	Toxic if inhaled.
H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.13 Revision Date: 09/12/2018 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 6.1
Revision Date 05/28/2017
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Barium

Product Number : 474711
Brand : Aldrich

CAS-No. : 7440-39-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 Spruce Street
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Substances and mixtures, which in contact with water, emit flammable gases (Category 2), H261

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H261 In contact with water releases flammable gases.

Precautionary statement(s)
P223 Do not allow contact with water.
P231 + P232 Handle under inert gas. Protect from moisture.
P280 Wear protective gloves/ eye protection/ face protection.
P335 + P334 Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.
P370 + P378 In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

P402 + P404	Store in a dry place. Store in a closed container.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Ba
Molecular weight	:	137.33 g/mol
CAS-No.	:	7440-39-3
EC-No.	:	231-149-1

Hazardous components

Component	Classification	Concentration
Barium		
	Water-react. 2; H261	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Dry powder

5.2 Special hazards arising from the substance or mixture
Barium oxide

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up
Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Further processing of solid materials may result in the formation of combu formation should be taken into consideration before additional processing
Provide appropriate exhaust ventilation at places where dust is formed.Keep away from sources of ignition - No smoking.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.
Never allow product to get in contact with water during storage.

Store under inert gas.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters
Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Barium	7440-39-3	TWA	0.500000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Eye, skin, & Gastrointestinal irritation Muscular stimulation Not classifiable as a human carcinogen		
		TWA	0.500000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.500000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Eye irritation Muscular stimulation Skin irritation Gastrointestinal irritation Not classifiable as a human carcinogen		
		TWA	0.500000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	0.5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.5 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Eye irritation Muscular stimulation Skin irritation Gastrointestinal irritation Not classifiable as a human carcinogen		

		TWA	0.5 mg/m3	USA. NIOSH Recommended Exposure Limits

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industria situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Flame retardant protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use (EN 143) respirator cartridges as a backup to engineering controls. If th full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: Pieces Colour: grey
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 725 °C (1337 °F) - lit.
f)	Initial boiling point and boiling range	1,640 °C (2,984 °F) - lit.
g)	Flash point	()Not applicable
h)	Evaporation rate	No data available

i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	3.6 g/cm3 at 25 °C (77 °F)
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
Reacts violently with water.

10.4 Conditions to avoid
Exposure to moisture

10.5 Incompatible materials
Oxidizing agents, Water, acids, Oxygen, Chlorinated solvents, Carbon dioxide (CO2), Halogens, Halogenated hydrocarbon, Alcohols, Sulphur compounds, Hydrogen sulfide gas

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Barium oxide
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data availableBarium
Inhalation: No data available(Barium)
Dermal: No data available(Barium)
No data available(Barium)

Skin corrosion/irritation
No data available(Barium)

Serious eye damage/eye irritation
No data available(Barium)

Respiratory or skin sensitisation
No data available(Barium)

Germ cell mutagenicity

No data available(Barium)

Carcinogenicity
This product is or contains a component that is not classifiable as to its classification.(Barium)
(Barium)
(Barium)

Reproductive toxicity
No data available(Barium)

No data available(Barium)

Specific target organ toxicity - single exposure
No data available(Barium)

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available(Barium)

Additional Information
RTECS: CQ8370000

Stomach/intestinal disorders, Nausea, Vomiting, Drowsiness, Dizziness, Gastrointestinal disturbance, Weakness, Tremors, Seizures.(Barium)
To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.(Barium)

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	mortality NOEC - Cyprinodon variegatus (sheepshead minnow) - 500 mg/l - 96 h(Barium)
	LC50 - Cyprinodon variegatus (sheepshead minnow) - > 500 mg/l - 96 h(Barium)

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available(Barium)

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Burn in a chemical incinerator equipped with an afterburner and scrubber b highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 1400 Class: 4.3 Packing group: II
Proper shipping name: Barium
Reportable Quantity (RQ) : 1000 lbs

Poison Inhalation Hazard: No

IMDG
UN number: 1400 Class: 4.3 Packing group: II EMS-No: F-G, S-O
Proper shipping name: BARIUM

IATA
UN number: 1400 Class: 4.3 Packing group: II
Proper shipping name: Barium

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Barium	7440-39-3	2007-07-01

SARA 311/312 Hazards
Reactivity Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Barium	7440-39-3	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Barium	7440-39-3	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Barium	7440-39-3	2007-07-01

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H261 In contact with water releases flammable gases.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	3
Physical Hazard	1

NFPA Rating

Health hazard:	0
Fire Hazard:	3
Reactivity Hazard:	1
Special hazard.I:	W

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956
Version: 6.1 Revision Date: 05/28/2017 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 4.8
Revision Date 01/11/2018
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Beryllium

Product Number : 378135
Brand : Aldrich

CAS-No. : 7440-41-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 3), H301
Acute toxicity, Inhalation (Category 2), H330
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Skin sensitisation (Category 1), H317
Carcinogenicity (Category 1B), H350
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Specific target organ toxicity - repeated exposure (Category 1), H372

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)

H301	Toxic if swallowed.
H315	Causes skin irritation.
H317	May cause an allergic skin reaction.
H319	Causes serious eye irritation.
H330	Fatal if inhaled.
H335	May cause respiratory irritation.
H350	May cause cancer.
H372	Causes damage to organs through prolonged or repeated exposure.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P272	Contaminated work clothing should not be allowed out of the workplace.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P284	Wear respiratory protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/doctor. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/doctor.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Be
Molecular weight	:	9.01 g/mol
CAS-No.	:	7440-41-7
EC-No.	:	231-150-7

Hazardous components

Component	Classification	Concentration
Berylium foil		
	Acute Tox. 3; Acute Tox. 2; Skin Irrit. 2; Eye Irrit. 2A; Skin Sens. 1; Carc. 1B; STOT SE 3; STOT RE 1; H301, H315, H317, H319, H330, H335, H350, H372	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.
Storage class (TRGS 510): 4.1B: Flammable solid hazardous materials

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Berylium foil	7440-41-7	TWA	2.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		CEIL	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Peak	25.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	2.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
	Remarks	Z27.29-1970		
		CEIL	5.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	0.000050 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Beryllium sensitization Chronic beryllium disease (berylliosis) Confirmed human carcinogen Danger of cutaneous absorption Sensitizer		
		C	0.000500 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		See Table Z-2		
		TWA	2.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	2.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	0.000050 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Beryllium sensitization Chronic beryllium disease (berylliosis)		

		Adopted values or notations enclosed are those for which changes are proposed in the NIC See Notice of Intended Changes (NIC) Confirmed human carcinogen Danger of cutaneous absorption Sensitizer		
		C	0.000500 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		See Table Z-2		
		TWA	2microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		C	0.0005 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		PEL	0.0002 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	0.025 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

8.2 Exposure controls

Appropriate engineering controls
Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an

industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: powder Colour: grey
b)	Odour	odourless
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 1,278 °C (2,332 °F) - lit.
f)	Initial boiling point and boiling range	2,970 °C (5,378 °F) - lit.
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	1.85 g/cm3 at 25 °C (77 °F)
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Alkali metals

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Beryllium oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available

Inhalation: No data available

Dermal: No data available

LD50 Intravenous - Rat - 0.496 mg/kg
Remarks: Liver:Hepatitis (hepatocellular necrosis), zonal.

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
Hamster
Lungs
Result: negative

Carcinogenicity

Carcinogenicity - Rat - Intratracheal
Tumorigenic:Neoplastic by RTECS criteria. Lungs, Thorax, or Respiration:Tumors. Lungs, Thorax, or Respiration:Bronchiogenic carcinoma.

Carcinogenicity - Rabbit - Intravenous
Tumorigenic:Equivocal tumorigenic agent by RTECS criteria. Musculoskeletal:Tumors.

Possible human carcinogen

IARC:	1 - Group 1: Carcinogenic to humans (Berylium foil)
NTP:	Known - Known to be human carcinogen (Berylium foil)
	Known - Known to be human carcinogenThe reference note has been added by TD based on the background information of the NTP. (Berylium foil)
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
No data available

No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: DS1750000

12. ECOLOGICAL INFORMATION

12.1 Toxicity
No data available

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 1567 Class: 6.1 (4.1) Packing group: II
Proper shipping name: Beryllium, powder
Reportable Quantity (RQ): 10 lbs
Poison Inhalation Hazard: No

IMDG
UN number: 1567 Class: 6.1 (4.1) Packing group: II EMS-No: F-G, S-G
Proper shipping name: BERYLLIUM POWDER

IATA
UN number: 1567 Class: 6.1 (4.1) Packing group: II
Proper shipping name: Beryllium powder

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Berylium foil	7440-41-7	1993-04-24

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Berylium foil	7440-41-7	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Berylium foil	7440-41-7	1993-04-24

	CAS-No.	Revision Date
Berylium foil	7440-41-7	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Berylium foil	7440-41-7	1993-04-24

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Berylium foil	7440-41-7	2008-10-10

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H301	Toxic if swallowed.
H315	Causes skin irritation.
H317	May cause an allergic skin reaction.
H319	Causes serious eye irritation.
H330	Fatal if inhaled.
H335	May cause respiratory irritation.
H350	May cause cancer.
H372	Causes damage to organs through prolonged or repeated exposure.
Skin Irrit.	Skin irritation
Skin Sens.	Skin sensitisation

HMIS Rating

Health hazard:	4
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	4
Fire Hazard:	3
Reactivity Hazard:	3

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information
Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.8 Revision Date: 01/11/2018 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 4.8
Revision Date 01/11/2018
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Beryllium

Product Number : 378135
Brand : Aldrich

CAS-No. : 7440-41-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 3), H301
Acute toxicity, Inhalation (Category 2), H330
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Skin sensitisation (Category 1), H317
Carcinogenicity (Category 1B), H350
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Specific target organ toxicity - repeated exposure (Category 1), H372

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)

H301	Toxic if swallowed.
H315	Causes skin irritation.
H317	May cause an allergic skin reaction.
H319	Causes serious eye irritation.
H330	Fatal if inhaled.
H335	May cause respiratory irritation.
H350	May cause cancer.
H372	Causes damage to organs through prolonged or repeated exposure.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P272	Contaminated work clothing should not be allowed out of the workplace.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P284	Wear respiratory protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/doctor. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/doctor.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Be
Molecular weight	:	9.01 g/mol
CAS-No.	:	7440-41-7
EC-No.	:	231-150-7

Hazardous components

Component	Classification	Concentration
Berylium foil		
	Acute Tox. 3; Acute Tox. 2; Skin Irrit. 2; Eye Irrit. 2A; Skin Sens. 1; Carc. 1B; STOT SE 3; STOT RE 1; H301, H315, H317, H319, H330, H335, H350, H372	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.
Storage class (TRGS 510): 4.1B: Flammable solid hazardous materials

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Berylium foil	7440-41-7	TWA	2.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		CEIL	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Peak	25.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	2.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
	Remarks	Z27.29-1970		
		CEIL	5.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	0.000050 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Beryllium sensitization Chronic beryllium disease (berylliosis) Confirmed human carcinogen Danger of cutaneous absorption Sensitizer		
		C	0.000500 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		See Table Z-2		
		TWA	2.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	2.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	0.000050 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Beryllium sensitization Chronic beryllium disease (berylliosis)		

		Adopted values or notations enclosed are those for which changes are proposed in the NIC See Notice of Intended Changes (NIC) Confirmed human carcinogen Danger of cutaneous absorption Sensitizer		
		C	0.000500 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		See Table Z-2		
		TWA	2microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		C	0.0005 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		PEL	0.0002 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	0.025 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

8.2 Exposure controls

Appropriate engineering controls
Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an

industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: powder Colour: grey
b)	Odour	odourless
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 1,278 °C (2,332 °F) - lit.
f)	Initial boiling point and boiling range	2,970 °C (5,378 °F) - lit.
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	1.85 g/cm3 at 25 °C (77 °F)
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Alkali metals

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Beryllium oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available

Inhalation: No data available

Dermal: No data available

LD50 Intravenous - Rat - 0.496 mg/kg
Remarks: Liver:Hepatitis (hepatocellular necrosis), zonal.

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
Hamster
Lungs
Result: negative

Carcinogenicity

Carcinogenicity - Rat - Intratracheal
Tumorigenic:Neoplastic by RTECS criteria. Lungs, Thorax, or Respiration:Tumors. Lungs, Thorax, or Respiration:Bronchiogenic carcinoma.

Carcinogenicity - Rabbit - Intravenous
Tumorigenic:Equivocal tumorigenic agent by RTECS criteria. Musculoskeletal:Tumors.

Possible human carcinogen

IARC:	1 - Group 1: Carcinogenic to humans (Berylium foil)
NTP:	Known - Known to be human carcinogen (Berylium foil)
	Known - Known to be human carcinogenThe reference note has been added by TD based on the background information of the NTP. (Berylium foil)
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
No data available

No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: DS1750000

12. ECOLOGICAL INFORMATION

12.1 Toxicity
No data available

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 1567 Class: 6.1 (4.1) Packing group: II
Proper shipping name: Beryllium, powder
Reportable Quantity (RQ): 10 lbs
Poison Inhalation Hazard: No

IMDG
UN number: 1567 Class: 6.1 (4.1) Packing group: II EMS-No: F-G, S-G
Proper shipping name: BERYLLIUM POWDER

IATA
UN number: 1567 Class: 6.1 (4.1) Packing group: II
Proper shipping name: Beryllium powder

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Berylium foil	7440-41-7	1993-04-24

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Berylium foil	7440-41-7	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Berylium foil	7440-41-7	1993-04-24

	CAS-No.	Revision Date
Berylium foil	7440-41-7	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Berylium foil	7440-41-7	1993-04-24

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Berylium foil	7440-41-7	2008-10-10

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H301	Toxic if swallowed.
H315	Causes skin irritation.
H317	May cause an allergic skin reaction.
H319	Causes serious eye irritation.
H330	Fatal if inhaled.
H335	May cause respiratory irritation.
H350	May cause cancer.
H372	Causes damage to organs through prolonged or repeated exposure.
Skin Irrit.	Skin irritation
Skin Sens.	Skin sensitisation

HMIS Rating

Health hazard:	4
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	4
Fire Hazard:	3
Reactivity Hazard:	3

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information
Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.8 Revision Date: 01/11/2018 Print Date: 06/28/2019

Fisher Scientific

Part of Thermo Fisher Scientific

SAFETY DATA SHEET

Creation Date 13-Sep-2013 **Revision Date** 21-Jul-2015 **Revision Number** 2

1. Identification

Product Name **Chromium**

Cat No. : **C318-500**

Synonyms Chrome

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Emergency Telephone Number
CHEMTREC®, Inside the USA: 800-424-9300
CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Specific target organ toxicity (single exposure) Target Organs - Respiratory system.	Category 3

Label Elements

Signal Word
Warning

Hazard Statements
May cause respiratory irritation



Precautionary Statements
Prevention
Avoid breathing dust/fume/gas/mist/vapors/spray
Use only outdoors or in a well-ventilated area

Inhalation
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
Call a POISON CENTER or doctor/physician if you feel unwell
Storage
Store in a well-ventilated place. Keep container tightly closed
Store locked up
Disposal
Dispose of contents/container to an approved waste disposal plant
Hazards not otherwise classified (HNOC)
Very toxic to aquatic life

3. Composition / information on ingredients

Component	CAS-No	Weight %
Chromium	7440-47-3	>95

4. First-aid measures

General Advice If symptoms persist, call a physician.

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.

Skin Contact Wash off immediately with plenty of water for at least 15 minutes. Obtain medical attention.

Inhalation Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.

Ingestion Do not induce vomiting. Obtain medical attention.

Most important symptoms/effects None reasonably foreseeable.
Notes to Physician Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media Carbon dioxide (CO2)

Flash Point Not applicable
Method - No information available

Autoignition Temperature Not applicable
Explosion Limits
Upper No data available
Lower No data available
Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical
Dust can form an explosive mixture in air. Do not allow run-off from fire fighting to enter drains or water courses.

Hazardous Combustion Products
Chromium oxide
Protective Equipment and Precautions for Firefighters
As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
2	1	1	N/A

6. Accidental release measures

Personal Precautions Ensure adequate ventilation. Use personal protective equipment. Avoid dust formation.

Environmental Precautions Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up Avoid dust formation. Sweep up or vacuum up spillage and collect in suitable container for disposal. Keep in suitable, closed containers for disposal.

7. Handling and storage

Handling Avoid dust formation. Wear personal protective equipment. Ensure adequate ventilation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place. Store under an inert atmosphere.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Chromium	TWA: 0.5 mg/m³	(Vacated) TWA: 1 mg/m³ TWA: 1 mg/m³	IDLH: 250 mg/m³ TWA: 0.5 mg/m³

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Chromium	TWA: 0.5 mg/m³	TWA: 0.5 mg/m³	TWA: 0.5 mg/m³

Legend

ACGIH - American Conference of Governmental Industrial Hygienists
OSHA - Occupational Safety and Health Administration
NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder
Appearance	Silver
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	1857.2 °C / 3375 °F

Boiling Point/Range	2640 °C / 4784 °F
Flash Point	Not applicable
Evaporation Rate	Not applicable
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	No information available
Vapor Density	Not applicable
Relative Density	7.2
Solubility	Insoluble in water
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	Not applicable
Decomposition Temperature	No information available
Viscosity	Not applicable
Molecular Formula	Cr
Molecular Weight	51.996

10. Stability and reactivity

Reactive Hazard None known, based on information available

Stability Sensitive to air.

Conditions to Avoid Incompatible products. Excess heat. Avoid dust formation.

Incompatible Materials Strong oxidizing agents, Strong acids

Hazardous Decomposition Products Chromium oxide

Hazardous Polymerization Hazardous polymerization does not occur.

Hazardous Reactions None under normal processing.

11. Toxicological information

Acute Toxicity

Component Information

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation May cause irritation of respiratory tract

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Chromium	7440-47-3	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects,both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

The product contains following substances which are hazardous for the environment. Very toxic to aquatic organisms.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Chromium	Not listed	LC50: 14.3 mg/l/96 H (Pimephales promelas)	Not listed	EC50: 0.07 mg/l/48 H

Persistence and Degradability Insoluble in water

Bioaccumulation/ Accumulation No information available.

Mobility Is not likely mobile in the environment due its low water solubility.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

- **UN-No** UN3077
- **Proper Shipping Name** ENVIRONMENTALLY HAZARDOUS SUBSTANCES, SOLID, N.O.S.
- **Proper technical name** Chromium
- **Hazard Class** 9
- **Packing Group** III

TDG Not regulated

- **UN-No** UN3077
- **Proper Shipping Name** ENVIRONMENTALLY HAZARDOUS SUBSTANCES, SOLID, N.O.S.
- **Hazard Class** 9
- **Packing Group** III

IATA

- **UN-No** UN3077
- **Proper Shipping Name** Environmentally hazardous substance, solid, n.o.s
- **Hazard Class** 9
- **Packing Group** III

IMDG/IMO

- **UN-No** UN3077
- **Proper Shipping Name** Environmentally hazardous substance, solid, n.o.s
- **Hazard Class** 9
- **Packing Group** III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Chromium	X	X	-	231-157-5	-		X	-	X	X	X

Legend:
X - Listed
E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.
N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.
P - Indicates a commenced PMN substance
R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.
S - Indicates a substance that is identified in a proposed or final Significant New Use Rule
T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.
XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B).
Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.
Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Chromium	7440-47-3	>95	1.0

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Chromium	-	-	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Chromium	X		-

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA
Not applicable

Component	Hazardous Substances RQs	CERCLA EHS RQs
Chromium	5000 lb 10 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Chromium	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security
This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada
This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D2B Toxic materials



16. Other information

Prepared By
Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date 13-Sep-2013
Revision Date 21-Jul-2015
Print Date 21-Jul-2015
Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer
The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

SAFETY DATA SHEET

Version 4.8
Revision Date 09/03/2017
Print Date 11/10/2018

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Copper

Product Number : 31284
Brand : Aldrich

CAS-No. : 7440-50-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

Not a hazardous substance or mixture.

2.2 GHS Label elements, including precautionary statements

Not a hazardous substance or mixture.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : Cu
Molecular weight : 63.55 g/mol
CAS-No. : 7440-50-8
EC-No. : 231-159-6

Hazardous components

Component	Classification	Concentration
Copper		
		90 - 100 %

4. FIRST AID MEASURES

4.1 Description of first aid measures

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration.

In case of skin contact
Wash off with soap and plenty of water.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Avoid dust formation. Avoid breathing vapours, mist or gas.
For personal protection see section 8.

6.2 Environmental precautions
No special environmental precautions required.

6.3 Methods and materials for containment and cleaning up
Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Store under inert gas. Air sensitive.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Copper	7440-50-8	TWA	1.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Irritation Gastrointestinal metal fume fever		
		TWA	0.200000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Irritation Gastrointestinal metal fume fever		
		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.100000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	1 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Irritation Gastrointestinal metal fume fever		
		TWA	0.2 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Irritation Gastrointestinal metal fume fever		
		TWA	1 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.1 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		PEL	0.1 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

8.2 Exposure controls

Appropriate engineering controls
General industrial hygiene practice.

Personal protective equipment

Eye/face protection
Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
No special environmental precautions required.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: Wire Colour: light red
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 1,083.4 °C (1,982.1 °F)
f)	Initial boiling point and boiling range	2,567 °C (4,653 °F)
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available

k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	8.940 g/cm3
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong acids, Strong oxidizing agents, Acid chlorides, Halogens

10.6 Hazardous decomposition products
Other decomposition products - No data available
Hazardous decomposition products formed under fire conditions. - Copper oxides
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available

Inhalation: No data available

Dermal: No data available

LD50 Intraperitoneal - Mouse - 3.5 mg/kg

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
No data available

No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: GL5325000

Symptoms of systemic copper poisoning may include: capillary damage, headache, cold sweat, weak pulse, and kidney and liver damage, central nervous system excitation followed by depression, jaundice, convulsions, paralysis, and coma. Death may occur from shock or renal failure. Chronic copper poisoning is typified by hepatic cirrhosis, brain damage and demyelination, kidney defects, and copper deposition in the cornea as exemplified by humans with Wilson's disease. It has also been reported that copper poisoning has lead to hemolytic anemia and accelerates arteriosclerosis.

12. ECOLOGICAL INFORMATION

12.1 Toxicity
No data available

12.2 Persistence and degradability

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
Not dangerous goods

IMDG
Not dangerous goods

IATA
Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
No SARA Hazards

Massachusetts Right To Know Components
No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Copper	7440-50-8	1989-08-11

	CAS-No.	Revision Date
Copper	7440-50-8	1989-08-11

New Jersey Right To Know Components

	CAS-No.	Revision Date
Copper	7440-50-8	1989-08-11

California Prop. 65 Components
This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

Further information
Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information
Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.8 Revision Date: 09/03/2017 Print Date: 11/10/2018

SAFETY DATA SHEET

according to Regulation (EC) No. 1907/2006
Version 6.0 Revision Date 10.11.2016
Print Date 17.07.2019
GENERIC EU MSDS - NO COUNTRY SPECIFIC DATA - NO OEL DATA

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : Iron Metal Clinical

Product Number : NIST937
Brand : Sigma-Aldrich
REACH No. : A registration number is not available for this substance as the substance or its uses are exempted from registration, the annual tonnage does not require a registration or the registration is envisaged for a later registration deadline.

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 Spruce Street
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

2.2 Label elements

2.3 Other hazards - none

SECTION 3: Composition/information on ingredients

SECTION 4: First aid measures

4.1 Description of first aid measures

No data available

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media
No data available

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
No data available

5.4 Further information
No data available

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures
For personal protection see section 8.

6.2 Environmental precautions
No data available

6.3 Methods and materials for containment and cleaning up
No data available

6.4 Reference to other sections
For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
No data available

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

8.2 Exposure controls
No data available

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a)	Appearance	No data available
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	No data available
f)	Initial boiling point and boiling range	No data available
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available

j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	No data available
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

SECTION 10: Stability and reactivity

10.1 Reactivity
No data available

10.2 Chemical stability
No data available

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
No data available

10.6 Hazardous decomposition products
In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

Skin corrosion/irritation

Serious eye damage/eye irritation

Respiratory or skin sensitisation

Germ cell mutagenicity

Carcinogenicity

Reproductive toxicity

Specific target organ toxicity - single exposure

Specific target organ toxicity - repeated exposure

Aspiration hazard

Additional Information
RTECS: Not available

SECTION 12: Ecological information

12.1 Toxicity

12.2 Persistence and degradability

12.3 Bioaccumulative potential

12.4 Mobility in soil

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

SECTION 13: Disposal considerations

13.1 Waste treatment methods
No data available

SECTION 14: Transport information

14.1 UN number

ADR/RID: -	IMDG: -	IATA: -

14.2 UN proper shipping name

ADR/RID:	Not dangerous goods
IMDG:	Not dangerous goods
IATA:	Not dangerous goods

14.3 Transport hazard class(es)

ADR/RID: -	IMDG: -	IATA: -

14.4 Packaging group

ADR/RID: -	IMDG: -	IATA: -

14.5 Environmental hazards

ADR/RID: no	IMDG Marine pollutant: no	IATA: no

14.6 Special precautions for user
No data available

SECTION 15: Regulatory information

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture
This safety datasheet complies with the requirements of Regulation (EC) No. 1907/2006.

15.2 Chemical safety assessment
For this product a chemical safety assessment was not carried out

SECTION 16: Other information

SAFETY DATA SHEET

Version 4.11
Revision Date 10/12/2018
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Lead

Product Number : 391352
Brand : Aldrich

CAS-No. : 7439-92-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 4), H302
Carcinogenicity (Category 2), H351
Reproductive toxicity (Category 2), H361
Specific target organ toxicity - repeated exposure (Category 2), H373
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Warning

Hazard statement(s)

H302	Harmful if swallowed.
H351	Suspected of causing cancer.
H361	Suspected of damaging fertility or the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure.
H410	Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Pb
Molecular weight	:	207.20 g/mol
CAS-No.	:	7439-92-1
EC-No.	:	231-100-4

Hazardous components

Component	Classification	Concentration
Lead		
	Acute Tox. 4; Carc. 2; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H302, H351, H372, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	See 1910.1025		
Lead	7439-92-1	TWA	0.05 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Confirmed animal carcinogen with unknown relevance to humans		
		TWA	0.05 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Hematologic effects Peripheral Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed animal carcinogen with unknown relevance to humans		

		TWA	0.05 mg/m3	USA. NIOSH Recommended Exposure Limits
		See Appendix C		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
	-	Lead	200 µg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Not critical			

8.2 Exposure controls

Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance — Form: powder

b) Odour — No data available

c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 327.4 °C (621.3 °F) - lit.
f)	Initial boiling point and boiling range	1,740 °C (3,164 °F) - lit.
g)	Flash point	Not applicable
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	No data available
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong acids

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Lead oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity

Rat
Cytogenetic analysis

Carcinogenicity

Limited evidence of carcinogenicity in animal studies

IARC:	2B - Group 2B: Possibly carcinogenic to humans (Lead)
NTP:	RAHC - Reasonably anticipated to be a human carcinogenThe reference note has been added by TD based on the background information of the NTP. (Lead)
OSHA:	OSHA specifically regulated carcinogen (Lead)

Reproductive toxicity

Reproductive toxicity - Rat - Inhalation
Effects on Newborn: Biochemical and metabolic.

Reproductive toxicity - Rat - Oral
Effects on Newborn: Behavioral.

Reproductive toxicity - Mouse - Oral
Effects on Fertility: Female fertility index (e.g., # females pregnant per females mated). Effects on Fertility: Pre-implantation mortality (e.g., reduction in numbe corpora lutea).

May damage fertility. May damage the unborn child.

Developmental Toxicity - Rat - Inhalation
Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Specific Developmental Abnormalities: Blood and lymphatic system (including spleen and marrow).

Developmental Toxicity - Rat - Oral
Specific Developmental Abnormalities: Blood and lymphatic system (including spleen and marrow). Effects on Newborn: Growth statistics (e.g., reduced weight gain).

Developmental Toxicity - Rat - Oral
Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Effects on Embryo or Fetus: Fetal death.

Developmental Toxicity - Mouse - Oral
Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Effects on Embryo or Fetus: Fetal death.

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard
No data available

Additional Information
RTECS: OF7525000

anemia

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	mortality LOEC - Oncorhynchus mykiss (rainbow trout) - 1.19 mg/l - 96.0 h
	LC50 - Micropterus dolomieui - 2.2 mg/l - 96.0 h
	mortality NOEC - Salvelinus fontinalis - 1.7 mg/l - 10.0 d
Toxicity to daphnia and other aquatic invertebrates	mortality LOEC - Daphnia (water flea) - 0.17 mg/l - 24 h
	mortality NOEC - Daphnia (water flea) - 0.099 mg/l - 24 h
Toxicity to algae	mortality EC50 - Skeletonema costatum - 7.94 mg/l - 10 d

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential

Bioaccumulation	Oncorhynchus kisutch - 2 Weeks - 150 µg/l
	Bioconcentration factor (BCF): 12

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Lead)
Reportable Quantity (RQ): 10 lbs
Poison Inhalation Hazard: No

IMDG
UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Lead)
Marine pollutant:yes

IATA
UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Lead)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Lead	7439-92-1	2015-11-23

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Lead	7439-92-1	2015-11-23

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Lead	7439-92-1	2015-11-23

	CAS-No.	Revision Date
Lead	7439-92-1	2015-11-23

New Jersey Right To Know Components

	CAS-No.	Revision Date
Lead	7439-92-1	2015-11-23

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Lead	7439-92-1	2009-02-01
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. Lead	7439-92-1	2009-02-01

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H302	Harmful if swallowed.
H351	Suspected of causing cancer.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H373	May cause damage to organs through prolonged or repeated exposure.

Further information
Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information
Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.11 Revision Date: 10/12/2018 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 6.0
Revision Date 01/31/2017
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Magnesium

Product Number : 200905
Brand : Sigma-Aldrich
Index-No. : 012-002-00-9

CAS-No. : 7439-95-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 Spruce Street
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Flammable solids (Category 1), H228
Self-heating substances and mixtures (Category 1), H251
Substances and mixtures, which in contact with water, emit flammable gases (Category 2), H261

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H228 Flammable solid.
H251 Self-heating: may catch fire.
H261 In contact with water releases flammable gases.

Precautionary statement(s)
P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P223 Keep away from any possible contact with water, because of violent

	reaction and possible flash fire.
P231 + P232	Handle under inert gas. Protect from moisture.
P235 + P410	Keep cool. Protect from sunlight.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P280	Wear protective gloves/ eye protection/ face protection.
P335 + P334	Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P402 + P404	Store in a dry place. Store in a closed container.
P407	Maintain air gap between stacks/ pallets.
P413	Store bulk masses greater than .? kg/ .? lbs at temperatures not exceeding .? °C/ .? °F.
P420	Store away from other materials.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Combustible dust

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Mg
Molecular weight	:	24.31 g/mol
CAS-No.	:	7439-95-4
EC-No.	:	231-104-6
Index-No.	:	012-002-00-9

Hazardous components

Component	Classification	Concentration
Magnesium (non pyrophoric)		
	Flam. Sol. 1; Self-heat. 1; Water-react. 2; H228, H251, H261	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Move out of dangerous area.Consult a physician. Show this safety data sheet to the doctor in attendance.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Dry powder

5.2 Special hazards arising from the substance or mixture
Magnesium oxide

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up
Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water. Keep in suitable, closed containers for disposal. Contain spillage, pick up with an electrically protected vacuum cleaner or by wet-brushing and transfer to a container for disposal according to local regulations (see section 13).

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combu formation should be taken into consideration before additional processing
Provide appropriate exhaust ventilation at places where dust is formed.Keep away from sources of ignition - No smoking.Take measures to prevent the build up of electrostatic charge.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.
Never allow product to get in contact with water during storage.

Store under inert gas. Air and moisture sensitive.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters
Components with workplace control parameters
Contains no substances with occupational exposure limit values.

8.2 Exposure controls
Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industria situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.
Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use (EN 143) respirator cartridges as a backup to engineering controls. If th full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).
Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: Turnings
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 648 °C (1198 °F) - lit.
f)	Initial boiling point and boiling range	1,090 °C (1,994 °F) - lit.
g)	Flash point	()No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	May form combustible dust concentrations in air.
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	1 hPa at 621 °C (1150 °F)
l)	Vapour density	No data available
m)	Relative density	1.74 g/mL at 25 °C (77 °F)
n)	Water solubility	No data available

o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	The substance or mixture is classified as self heating with the category 1.
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
Reacts violently with water.

10.4 Conditions to avoid
Heat, flames and sparks. Exposure to moisture

10.5 Incompatible materials
Acids, Strong oxidizing agents, Acid chlorides, Halogens

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Magnesium oxide
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data availableMagnesium (non pyrophoric)
Inhalation: No data available(Magnesium (non pyrophoric))
Dermal: No data available(Magnesium (non pyrophoric))
No data available(Magnesium (non pyrophoric))

Skin corrosion/irritation
No data available(Magnesium (non pyrophoric))

Serious eye damage/eye irritation
No data available(Magnesium (non pyrophoric))

Respiratory or skin sensitisation
No data available(Magnesium (non pyrophoric))

Germ cell mutagenicity

No data available(Magnesium (non pyrophoric))

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
No data available(Magnesium (non pyrophoric))

No data available(Magnesium (non pyrophoric))

Specific target organ toxicity - single exposure
No data available(Magnesium (non pyrophoric))

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available(Magnesium (non pyrophoric))

Additional Information
RTECS: Not available

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, chills, Fever, fatigue, muscle pain, joint pain, rash, Anorexia.(Magnesium (non pyrophoric))
To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.(Magnesium (non pyrophoric))

Liver - Irregularities - Based on Human Evidence
Liver - Irregularities - Based on Human Evidence(Magnesium (non pyrophoric))

12. ECOLOGICAL INFORMATION

12.1 Toxicity
No data available

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available(Magnesium (non pyrophoric))

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Contact a licensed professional waste disposal service to dispose of this material. Burn in a chemical incinerator equipped with an afterburner and scrubber b highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 1869 Class: 4.1 Packing group: III
Proper shipping name: Magnesium
Poison Inhalation Hazard: No

IMDG
UN number: 1869 Class: 4.1 Packing group: III EMS-No: F-G, S-G
Proper shipping name: MAGNESIUM

IATA
UN number: 1869 Class: 4.1 Packing group: III
Proper shipping name: Magnesium

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Fire Hazard, Reactivity Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Magnesium (non pyrophoric)	7439-95-4	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Magnesium (non pyrophoric)	7439-95-4	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Magnesium (non pyrophoric)	7439-95-4	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.
This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H228	Flammable solid.
H251	Self-heating: may catch fire.
H261	In contact with water releases flammable gases.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	2

NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	2

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956
Version: 6.0 Revision Date: 01/31/2017 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 6.1
Revision Date 05/28/2017
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Manganese

Product Number : 463728
Brand : Aldrich

CAS-No. : 7439-96-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 Spruce Street
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Substances and mixtures, which in contact with water, emit flammable gases (Category 1), H260
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H260 In contact with water releases flammable gases which may ignite spontaneously.
H412 Harmful to aquatic life with long lasting effects.

Precautionary statement(s)
P223 Keep away from any possible contact with water, because of violent reaction and possible flash fire.
P231 + P232 Handle under inert gas. Protect from moisture.

P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P335 + P334	Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P402 + P404	Store in a dry place. Store in a closed container.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Mn
Molecular weight	:	54.94 g/mol
CAS-No.	:	7439-96-5
EC-No.	:	231-105-1

Hazardous components

Component	Classification	Concentration
Manganese		
	Water-react. 1; Aquatic Acute 3; Aquatic Chronic 3; H260, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Dry powder Carbon dioxide (CO2)

Unsuitable extinguishing media
Water

5.2 Special hazards arising from the substance or mixture
Manganese/manganese oxides

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.
Provide appropriate exhaust ventilation at places where dust is formed.Keep away from sources of ignition - No smoking.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.
Never allow product to get in contact with water during storage.

Moisture sensitive. Keep in a dry place.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters
Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Manganese	7439-96-5	TWA	0.200000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Adopted values or notations enclosed are those for which changes are proposed in the NIC See Notice of Intended Changes (NIC)		
		C	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Ceiling limit is to be determined from breathing-zone air samples.		
		C	5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Ceiling limit is to be determined from breathing-zone air samples.		

		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		C	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Ceiling limit is to be determined from breathing-zone air samples.		
		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	0.200000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Adopted values or notations enclosed are those for which changes are proposed in the NIC See Notice of Intended Changes (NIC) varies		
		TWA	0.100000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment 2015 Adoption varies		
		TWA	0.020000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment 2015 Adoption varies		
		TWA	1 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	0.1 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Not classifiable as a human carcinogen varies		
		TWA	0.02 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Not classifiable as a human carcinogen varies		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection
Impervious clothing, Flame retardant protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.
Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use (EN 143) respirator cartridges as a backup to engineering controls. If th full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).
Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: powder Colour: grey
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 1,244 °C (2,271 °F) - lit.
f)	Initial boiling point and boiling range	1,962 °C (3,564 °F) - lit.
g)	Flash point	()Not applicable
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	7.3 g/mL at 25 °C (77 °F)
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
Reacts violently with water.

10.4 Conditions to avoid
Exposure to moisture

10.5 Incompatible materials
acids, Halogens, Bases, Phosphorus, Sulphur oxides, Peroxides

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Manganese/manganese oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
LD50 Oral - Rat - 9,000 mg/kg(Manganese)
Inhalation: No data available(Manganese)
Dermal: No data available(Manganese)
No data available(Manganese)

Skin corrosion/irritation
Skin - Rabbit(Manganese)
Result: Mild skin irritation - 24 h

Serious eye damage/eye irritation
Eyes - Rabbit(Manganese)
Result: Mild eye irritation - 24 h

Respiratory or skin sensitisation
No data available(Manganese)

Germ cell mutagenicity

No data available(Manganese)

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
No data available(Manganese)

May cause reproductive disorders.(Manganese)

Specific target organ toxicity - single exposure
No data available(Manganese)

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available(Manganese)

Additional Information
RTECS: OO9275000

Men exposed to manganese dusts showed a decrease in fertility. Chronic man system. Early symptoms include languor, sleepiness and weakness in the le disturbances such as uncontrollable laughter and a spastic gait with tend cases. High incidence of pneumonia has been found in workers exposed to t(Manganese)

Stomach - Irregularities - Based on Human Evidence
Stomach - Irregularities - Based on Human Evidence(Manganese)

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 40 mg/l - 48 h(Manganese)

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available(Manganese)

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Burn in a chemical incinerator equipped with an afterburner and scrubber b highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 3208 Class: 4.3 Packing group: I
Proper shipping name: Metallic substance, water-reactive, n.o.s. (Manganese)
Poison Inhalation Hazard: No

IMDG
UN number: 3208 Class: 4.3 Packing group: I EMS-No: F-G, S-N
Proper shipping name: METALLIC SUBSTANCE, WATER-REACTIVE, N.O.S. (Manganese)

IATA
UN number: 3208 Class: 4.3 Packing group: I
Proper shipping name: Metallic substance, water-reactive, n.o.s. (Manganese)
IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

	CAS-No.	Revision Date
Manganese	7439-96-5	2007-07-01

SARA 311/312 Hazards
Reactivity Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Manganese	7439-96-5	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Manganese	7439-96-5	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Manganese	7439-96-5	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.
This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H260	In contact with water releases flammable gases which may ignite spontaneously.
H402	Harmful to aquatic life.
H412	Harmful to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	2

NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	2
Special hazard.I:	W

Further information
Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling

or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956
Version: 6.1 Revision Date: 05/28/2017 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 3.15
Revision Date 03/05/2018
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Mercury

Product Number : 215457
Brand : Sigma-Aldrich
Index-No. : 080-001-00-0

CAS-No. : 7439-97-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Inhalation (Category 2), H330
Reproductive toxicity (Category 1B), H360
Specific target organ toxicity - repeated exposure (Category 1), H372
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H330 Fatal if inhaled.
H360 May damage fertility or the unborn child.
H372 Causes damage to organs through prolonged or repeated exposure.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)
P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.
P260 Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.

P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P284	Wear respiratory protection.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/doctor.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Hg
Molecular weight	:	200.59 g/mol
CAS-No.	:	7439-97-6
EC-No.	:	231-106-7
Index-No.	:	080-001-00-0

Hazardous components

Component	Classification	Concentration
Mercury		
	Acute Tox. 2; Repr. 1B; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H330, H360, H372, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal. In some instances, a mercury spill kit may be used. Please consult with your site EHS representative to determine the most appropriate clean up method.Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.
Storage class (TRGS 510): 6.1B: Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Mercury	7439-97-6	C	0.1 mg/m3	USA. NIOSH Recommended Exposure Limits
	Remarks	Potential for dermal absorption		
		CEIL	1.0mg/10m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	0.05 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		

		TWA	0.025 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Kidney damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	0.05 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		

8.2 Exposure controls

Appropriate engineering controls
Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: liquid Colour: silver, white

b)	Odour	odourless
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: -38.87 °C (-37.97 °F) - lit.
f)	Initial boiling point and boiling range	356.6 °C (673.9 °F) - lit.
g)	Flash point	Not applicable
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	< 0.01 hPa (< 0.01 mmHg) at 20 °C (68 °F) 1 hPa (1 mmHg) at 126 °C (259 °F)
l)	Vapour density	6.93 - (Air = 1.0)
m)	Relative density	13.55 g/cm3 at 25 °C (77 °F)
n)	Water solubility	0.00006 g/l at 25 °C (77 °F)
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information

Relative vapour density	6.93 - (Air = 1.0)

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong oxidizing agents, Ammonia, Azides, Nitrates, Chlorates, Copper

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Mercury/mercury oxides.
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available

LC50 Inhalation - Rat - male - 2 h - < 27 mg/m3

Dermal: No data available

No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC:	No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
NTP:	No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
Presumed human reproductive toxicant

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard
No data available

Additional Information
RTECS: OV4550000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence
Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	mortality LC50 - Cyprinus carpio (Carp) - 0.160 mg/l - 96 h

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential

Bioaccumulation	Carassius auratus (goldfish) - 1,789 d - 0.25 µg/l

Bioconcentration factor (BCF): 155,986

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 2809 Class: 8 (6.1) Packing group: III
Proper shipping name: A. W. Mercury
Reportable Quantity (RQ): 1 lbs
Poison Inhalation Hazard: No

IMDG

IATA
UN number: 2809 Class: 8 (6.1) Packing group: III
Proper shipping name: Mercury

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2015-11-23

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2015-11-23

	CAS-No.	Revision Date
Mercury	7439-97-6	2015-11-23

New Jersey Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2015-11-23

California Prop. 65 Components

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. Mercury	CAS-No. 7439-97-6	Revision Date 2013-12-20

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H330	Fatal if inhaled.
H360	May damage fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Repr.	Reproductive toxicity

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.15 Revision Date: 03/05/2018 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 3.15
Revision Date 03/05/2018
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Mercury

Product Number : 215457
Brand : Sigma-Aldrich
Index-No. : 080-001-00-0

CAS-No. : 7439-97-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Inhalation (Category 2), H330
Reproductive toxicity (Category 1B), H360
Specific target organ toxicity - repeated exposure (Category 1), H372
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H330 Fatal if inhaled.
H360 May damage fertility or the unborn child.
H372 Causes damage to organs through prolonged or repeated exposure.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)
P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.
P260 Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.

P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P284	Wear respiratory protection.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/doctor.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Hg
Molecular weight	:	200.59 g/mol
CAS-No.	:	7439-97-6
EC-No.	:	231-106-7
Index-No.	:	080-001-00-0

Hazardous components

Component	Classification	Concentration
Mercury		
	Acute Tox. 2; Repr. 1B; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H330, H360, H372, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal. In some instances, a mercury spill kit may be used. Please consult with your site EHS representative to determine the most appropriate clean up method.Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Store under inert gas.
Storage class (TRGS 510): 6.1B: Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Mercury	7439-97-6	C	0.1 mg/m3	USA. NIOSH Recommended Exposure Limits
	Remarks	Potential for dermal absorption		
		CEIL	1.0mg/10m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	0.05 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		

		TWA	0.025 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Kidney damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	0.05 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		

8.2 Exposure controls

Appropriate engineering controls
Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: liquid Colour: silver, white

b)	Odour	odourless
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: -38.87 °C (-37.97 °F) - lit.
f)	Initial boiling point and boiling range	356.6 °C (673.9 °F) - lit.
g)	Flash point	Not applicable
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	< 0.01 hPa (< 0.01 mmHg) at 20 °C (68 °F) 1 hPa (1 mmHg) at 126 °C (259 °F)
l)	Vapour density	6.93 - (Air = 1.0)
m)	Relative density	13.55 g/cm3 at 25 °C (77 °F)
n)	Water solubility	0.00006 g/l at 25 °C (77 °F)
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information

Relative vapour density	6.93 - (Air = 1.0)

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong oxidizing agents, Ammonia, Azides, Nitrates, Chlorates, Copper

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Mercury/mercury oxides.
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available

LC50 Inhalation - Rat - male - 2 h - < 27 mg/m3

Dermal: No data available

No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC:	No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
NTP:	No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
Presumed human reproductive toxicant

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard
No data available

Additional Information
RTECS: OV4550000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence
Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	mortality LC50 - Cyprinus carpio (Carp) - 0.160 mg/l - 96 h

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential

Bioaccumulation	Carassius auratus (goldfish) - 1,789 d - 0.25 µg/l

Bioconcentration factor (BCF): 155,986

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 2809 Class: 8 (6.1) Packing group: III
Proper shipping name: A. W. Mercury
Reportable Quantity (RQ): 1 lbs
Poison Inhalation Hazard: No

IMDG

IATA
UN number: 2809 Class: 8 (6.1) Packing group: III
Proper shipping name: Mercury

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2015-11-23

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2015-11-23

	CAS-No.	Revision Date
Mercury	7439-97-6	2015-11-23

New Jersey Right To Know Components

	CAS-No.	Revision Date
Mercury	7439-97-6	2015-11-23

California Prop. 65 Components

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. Mercury	CAS-No. 7439-97-6	Revision Date 2013-12-20

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H330	Fatal if inhaled.
H360	May damage fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Repr.	Reproductive toxicity

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.15 Revision Date: 03/05/2018 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 4.10
Revision Date 09/23/2016
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Selenium

Product Number : 229865
Brand : Aldrich
Index-No. : 034-001-00-2

CAS-No. : 7782-49-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 3), H301
Acute toxicity, Inhalation (Category 3), H331
Specific target organ toxicity - repeated exposure (Category 2), H373
Chronic aquatic toxicity (Category 4), H413

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H301 + H331 Toxic if swallowed or if inhaled
H373 May cause damage to organs through prolonged or repeated exposure.
H413 May cause long lasting harmful effects to aquatic life.

Precautionary statement(s)
P260 Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264 Wash skin thoroughly after handling.
P270 Do not eat, drink or smoke when using this product.
P271 Use only outdoors or in a well-ventilated area.
P273 Avoid release to the environment.

P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/doctor. Rinse mouth.
P304 + P340 + P311	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor.
P314	Get medical advice/ attention if you feel unwell.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Se
Molecular weight	:	78.96 g/mol
CAS-No.	:	7782-49-2
EC-No.	:	231-957-4
Index-No.	:	034-001-00-2

Hazardous components

Component	Classification	Concentration
Selenium		
	Acute Tox. 3; STOT RE 2; Aquatic Chronic 4; H301 + H331, H373, H413	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

Store under inert gas. Keep in a dry place.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Selenium	7782-49-2	TWA	0.2 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Eye & Upper Respiratory Tract irritation		
		TWA	0.200000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Eye & Upper Respiratory Tract irritation		
		TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.200000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	0.2 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	0.2 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.2 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Eye irritation		

		PEL	0.2 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

8.2 Exposure controls

Appropriate engineering controls
Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N99 (US) or type P2 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: powder Colour: light grey
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 217 °C (423 °F) - lit.
f)	Initial boiling point and	684.9 °C (1,264.8 °F) - lit.

	boiling range	
g)	Flash point	Not applicable
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	4.81 g/cm3 at 25 °C (77 °F)
n)	Water solubility	insoluble
o)	Partition coefficient: n-octanol/water	log Pow: 5
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Strong oxidizing agents, Do not store near acids., Amides, Carbides, Metals, Nickel, Nitric acid, Nitrogen trichloride, Oxygen, Potassium, Zinc

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Selenium/selenium oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
LD50 Oral - Rat - 6,700 mg/kg
Remarks: Behavioral:Somnolence (general depressed activity). Lungs, Thorax, or Respiration:Dyspnea. Nutritional and Gross Metabolic:Changes in:Other changes.

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity

Carcinogenicity - Mouse - Oral
Tumorigenic:Equivocal tumorigenic agent by RTECS criteria. Skin and Appendages: Other: Tumors.

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC:	No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
NTP:	No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
OSHA:	No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
No data available

No data available

Developmental Toxicity - Mouse - Oral
Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Effects on Embryo or Fetus: Fetal death.

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
May cause damage to organs through prolonged or repeated exposure.

Aspiration hazard
No data available

Additional Information
RTECS: VS7700000

anemia, Vomiting, Diarrhoea, Cough, Difficulty in breathing, Acute selenium poisoning produces central nervous system effects, which include nervousness, convulsions, and drowsiness. Other signs of intoxication can include skin eruptions, lassitude, gastrointestinal distress, teeth that are discolored or decayed, odorous ("garlic") breath, and partial loss of hair and nails. Chronic exposure by inhalation can produce symptoms that include pallor, coating of the tongue, anemia, irritation of the mucosa, lumbar pain, liver and spleen damage, as well as any of the other previously mentioned symptoms. Chronic contact with selenium compounds may cause garlic odor of breath and sweat, dermatitis, and moderate emotional instability., Dermatitis, garlic-like breath odor, pallor, nervousness, depression

Stomach - Irregularities - Based on Human Evidence
Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	mortality NOEC - Cyprinodon variegatus (sheepshead minnow) - 2 mg/l - 96.0 h

	mortality LOEC - Oncorhynchus mykiss (rainbow trout) - 7.8 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates	LC50 - Daphnia magna (Water flea) - 0.43 mg/l - 48 h
Toxicity to algae	EC50 - Pseudokirchneriella subcapitata - 99 mg/l - 72 h

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential

Bioaccumulation	Lepomis macrochirus - 60 d - 640 µg/l
	Bioconcentration factor (BCF): 7.7

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 3288 Class: 6.1 Packing group: III
Proper shipping name: Toxic solid, inorganic, n.o.s. (Selenium)
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG
UN number: 3288 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, INORGANIC, N.O.S. (Selenium)
Marine pollutant:yes

IATA
UN number: 3288 Class: 6.1 Packing group: III
Proper shipping name: Toxic solid, inorganic, n.o.s. (Selenium)

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Selenium	7782-49-2	2007-07-01

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Selenium	7782-49-2	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Selenium	7782-49-2	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Selenium	7782-49-2	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Chronic	Chronic aquatic toxicity
H301	Toxic if swallowed.
H301 + H331	Toxic if swallowed or if inhaled
H331	Toxic if inhaled.
H373	May cause damage to organs through prolonged or repeated exposure.
H413	May cause long lasting harmful effects to aquatic life.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.10 Revision Date: 09/23/2016 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 6.2
Revision Date 05/28/2017
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Sodium

Product Number : 483745
Brand : Aldrich

CAS-No. : 7440-23-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 Spruce Street
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Substances and mixtures, which in contact with water, emit flammable gases (Category 1), H260
Skin corrosion (Category 1B), H314
Serious eye damage (Category 1), H318
Carcinogenicity (Category 1A), H350

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H260 In contact with water releases flammable gases which may ignite spontaneously.
H314 Causes severe skin burns and eye damage.
H318 Causes serious eye damage.
H350 May cause cancer.

Precautionary statement(s)

P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P223	Keep away from any possible contact with water, because of violent reaction and possible flash fire.
P231 + P232	Handle under inert gas. Protect from moisture.
P260	Do not breathe dust or mist.
P264	Wash skin thoroughly after handling.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P281	Use personal protective equipment as required.
P301 + P330 + P331	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P310	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P305 + P351 + P338 + P310	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P335 + P334	Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.
P363	Wash contaminated clothing before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P402 + P404	Store in a dry place. Store in a closed container.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Reacts violently with water.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.2 Mixtures

Formula : Na
Molecular weight : 22.99 g/mol

Hazardous components

Component		Classification	Concentration
Sodium			
CAS-No. EC-No. Index-No.	7440-23-5 231-132-9 011-001-00-0	Water-react. 1; Skin Corr. 1B; Eye Dam. 1; H260, H314	>= 90 - <= 100 %
Paraffin oils			
CAS-No. EC-No.	8012-95-1 232-384-2	Asp. Tox. 1; H304, H304	>= 90 - <= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Take off contaminated clothing and shoes immediately. Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.Continue rinsing eyes during transport to hospital.

If swallowed
Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Dry powder

5.2 Special hazards arising from the substance or mixture
Carbon oxides, Sodium oxides

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up
Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combu formation should be taken into consideration before additional processing
Provide appropriate exhaust ventilation at places where dust is formed.Keep away from sources of ignition - No smoking.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.
Never allow product to get in contact with water during storage.

Handle and store under inert gas. Air sensitive.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Paraffin oils	8012-95-1	STEL	10.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Upper Respiratory Tract irritation 2015 Adoption Not classifiable as a human carcinogen		
		Upper Respiratory Tract irritation 2015 Adoption Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Upper Respiratory Tract irritation Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		
		TWA	5.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Not classifiable as a human carcinogen		
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Upper Respiratory Tract irritation Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		

		TWA	5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Not classifiable as a human carcinogen		
		TWA	5 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	5 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10 mg/m3	USA. NIOSH Recommended Exposure Limits

Hazardous components without workplace control parameters

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industria situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use (EN 143) respirator cartridges as a backup to engineering controls. If th full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance Form: Pieces

b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 97.8 °C (208.0 °F) - lit.
f)	Initial boiling point and boiling range	883 °C (1621 °F) - lit.
g)	Flash point	82 °C (180 °F)
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	0.97 g/cm3
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
Reacts violently with water.

10.4 Conditions to avoid
Air Do not allow water to enter container.
Exposure to moisture

10.5 Incompatible materials
Oxidizing agents

10.6 Hazardous decomposition products
Other decomposition products - No data available
Hazardous decomposition products formed under fire conditions. - Carbon oxides, Sodium oxides
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
No data available
No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available

Additional Information
RTECS: Not available

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., Aspiration may lead to:, lipid pneumonia, Effects due to ingestion may include:, laxative effect, Gastrointestinal disturbance, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity
No data available

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Burn in a chemical incinerator equipped with an afterburner and scrubber b highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chem scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 1428 Class: 4.3 Packing group: I
Proper shipping name: Sodium
Reportable Quantity (RQ) : 10 lbs

Poison Inhalation Hazard: No

IMDG
UN number: 1428 Class: 4.3 Packing group: I EMS-No: F-G, S-N
Proper shipping name: SODIUM

IATA
UN number: 1428 Class: 4.3 Packing group: I
Proper shipping name: Sodium
IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Reactivity Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Sodium	7440-23-5	1993-04-24
Paraffin oils	8012-95-1	2007-03-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Sodium	7440-23-5	1993-04-24
Paraffin oils	8012-95-1	2007-03-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Sodium	7440-23-5	1993-04-24
Paraffin oils	8012-95-1	2007-03-01

California Prop. 65 Components
This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Asp. Tox.	Aspiration hazard
Eye Dam.	Serious eye damage
H260	In contact with water releases flammable gases which may ignite spontaneously.
H304	May be fatal if swallowed and enters airways.
H314	Causes severe skin burns and eye damage.
H318	Causes serious eye damage.
H350	May cause cancer.
Skin Corr.	Skin corrosion
Water-react.	Substances and mixtures, which in contact with water, emit flammable gases

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	4
Physical Hazard	2

NFPA Rating

Health hazard:	3
Fire Hazard:	4
Reactivity Hazard:	2
Special hazard.I:	W

Further information
Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information
Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956
Version: 6.2 Revision Date: 05/28/2017 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 6.1
Revision Date 05/28/2017
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name	:	Thallium
Product Number	:	277932
Brand	:	Aldrich
Index-No.	:	081-001-00-3
CAS-No.	:	7440-28-0

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses	:	Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company	:	Sigma-Aldrich Inc. 3050 Spruce Street ST. LOUIS MO 63103 UNITED STATES
Telephone	:	+1 314 771-5765
Fax	:	+1 800 325-5052

1.4 Emergency telephone number

Emergency Phone #	:	+1-703-527-3887

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 2), H300
Acute toxicity, Inhalation (Category 2), H330
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word — Danger

Hazard statement(s)

H300 + H330	Fatal if swallowed or if inhaled
H412	Harmful to aquatic life with long lasting effects.

Precautionary statement(s)

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.

P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P284	Wear respiratory protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/doctor. Rinse mouth.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/doctor.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Tl
Molecular weight	:	204.38 g/mol
CAS-No.	:	7440-28-0
EC-No.	:	231-138-1
Index-No.	:	081-001-00-3

Hazardous components

Component	Classification	Concentration
Thallium		
	Acute Tox. 2; Aquatic Acute 3; Aquatic Chronic 3; H300 + H330, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
thallium oxides

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combu formation should be taken into consideration before additional processing
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters
Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Thallium	7440-28-0	TWA	0.100000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Alopecia Adopted values or notations enclosed are those for which changes are proposed in the NIC 2010 Revision or addition to the notice of intended changes See Notice of Intended Changes (NIC) Danger of cutaneous absorption		
		TWA	0.020000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Peripheral neuropathy Gastrointestinal damage 2015 Adoption Danger of cutaneous absorption		
		TWA	0.020000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Peripheral neuropathy Gastrointestinal damage		

		Danger of cutaneous absorption varies		
		TWA	0.1 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation		
		TWA	0.02 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Peripheral neuropathy Gastrointestinal damage Danger of cutaneous absorption varies		
		TWA	0.1 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industria situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use (EN 143) respirator cartridges as a backup to engineering controls. If th full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance Form: granular

		Colour: light grey
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 303 °C (577 °F) - lit.
f)	Initial boiling point and boiling range	1,457 °C (2,655 °F) - lit.
g)	Flash point	()Not applicable
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	No data available
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
Air sensitive.

10.5 Incompatible materials
Strong acids, Strong oxidizing agents

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - thallium oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data availableThallium
Dermal: No data available(Thallium)
No data available(Thallium)

Skin corrosion/irritation
No data available(Thallium)

Serious eye damage/eye irritation
No data available(Thallium)

Respiratory or skin sensitisation
No data available(Thallium)

Germ cell mutagenicity

No data available(Thallium)

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
Possible risk of congenital malformation in the fetus.(Thallium)

No data available(Thallium)

Specific target organ toxicity - single exposure
No data available(Thallium)

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available(Thallium)

Additional Information
RTECS: XG3425000

The most characteristic symptom of thallium exposure is alopecia (loss of impairment of nail growth often resulting in the appearance of crescent-s Other symptoms in acute poisoning relate chiefly to the gastrointestinal system. Acute poisoning results in swelling of the feet and legs, arthral the hands and feet, mental confusion, polyneuritis with severe pain in th angina-like pains, nephritis, wasting and weakness, and lymphocytosis and peripheral nervous system abnormalities may persist including ataxia, tre disorders, memory loss, and psychoses may develop., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.(Thallium)

Stomach - Irregularities - Based on Human Evidence
Stomach - Irregularities - Based on Human Evidence(Thallium)

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Cyprinodon variegatus (sheepshead minnow) - 21.0 mg/l - 96.0 h(Thallium)
	mortality NOEC - Cyprinodon variegatus (sheepshead minnow) - 14.0 mg/l - 96.0 h(Thallium)

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available(Thallium)

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chem scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 3288 Class: 6.1 Packing group: II
Proper shipping name: Toxic solid, inorganic, n.o.s. (Thallium)
Reportable Quantity (RQ) : 1000 lbs

Poison Inhalation Hazard: No

IMDG
UN number: 3288 Class: 6.1 Packing group: II EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, INORGANIC, N.O.S. (Thallium)

IATA
UN number: 3288 Class: 6.1 Packing group: II
Proper shipping name: Toxic solid, inorganic, n.o.s. (Thallium)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Thallium	7440-28-0	2007-07-01

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Thallium	7440-28-0	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Thallium	7440-28-0	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Thallium	7440-28-0	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.
This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H300	Fatal if swallowed.
H300 + H330	Fatal if swallowed or if inhaled
H330	Fatal if inhaled.
H402	Harmful to aquatic life.
H412	Harmful to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	4
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	4
Fire Hazard:	0
Reactivity Hazard:	0

Further information
Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information
Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956
Version: 6.1 Revision Date: 05/28/2017 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 6.0
Revision Date 05/28/2017
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Zinc

Product Number : 324930
Brand : Aldrich
Index-No. : 030-001-00-1

CAS-No. : 7440-66-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 Spruce Street
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Pyrophoric solids (Category 1), H250
Self-heating substances and mixtures (Category 1), H251
Substances and mixtures, which in contact with water, emit flammable gases (Category 1), H260
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H250 Catches fire spontaneously if exposed to air.
H251 Self-heating: may catch fire.
H260 In contact with water releases flammable gases which may ignite spontaneously.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P222	Do not allow contact with air.
P223	Do not allow contact with water.
P231 + P232	Handle under inert gas. Protect from moisture.
P235 + P410	Keep cool. Protect from sunlight.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P335 + P334	Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P402 + P404	Store in a dry place. Store in a closed container.
P407	Maintain air gap between stacks/ pallets.
P413	Store bulk masses greater than .? kg/ .? lbs at temperatures not exceeding .? °C/ .? °F.
P420	Store away from other materials.
P422	Store contents under inert gas.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Combustible dust

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	:	Zn
Molecular weight	:	65.39 g/mol
CAS-No.	:	7440-66-6
EC-No.	:	231-175-3
Index-No.	:	030-001-00-1

Hazardous components

Component	Classification	Concentration
Zinc powder (pyrophoric)		
	Pyr. Sol. 1; Self-heat. 1; Water-react. 1; Aquatic Acute 1; Aquatic Chronic 1; H250, H251, H260, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Dry powder

5.2 Special hazards arising from the substance or mixture
Zinc/zinc oxides

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water. Keep in suitable, closed containers for disposal. Contain spillage, pick up with an electrically protected vacuum cleaner or by wet-brushing and transfer to a container for disposal according to local regulations (see section 13).

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Further processing of solid materials may result in the formation of combu formation should be taken into consideration before additional processing
Provide appropriate exhaust ventilation at places where dust is formed.Keep away from sources of ignition - No smoking.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.
Never allow product to get in contact with water during storage.

Keep in a dry place.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters
Components with workplace control parameters
Contains no substances with occupational exposure limit values.
Hazardous components without workplace control parameters

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Protective gloves against thermal risks

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industria situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Flame retardant protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use (EN 143) respirator cartridges as a backup to engineering controls. If th full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: powder Colour: grey
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 420 °C (788 °F) - lit.
f)	Initial boiling point and boiling range	907 °C (1665 °F) - lit.
g)	Flash point	()No data available
h)	Evaporation rate	No data available

i)	Flammability (solid, gas)	May form combustible dust concentrations in air.
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	1 hPa at 487 °C (909 °F)
l)	Vapour density	No data available
m)	Relative density	7.133 g/mL at 25 °C (77 °F)
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	log Pow: 5
p)	Auto-ignition temperature	The substance or mixture is classified as self heating with the category 1., The substance or mixture is pyrophoric with the category 1.
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
Reacts violently with water.

10.4 Conditions to avoid
Exposure to moisture

10.5 Incompatible materials
Strong acids and oxidizing agents

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Zinc/zinc oxides
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
No data availableZinc powder (pyrophoric)
Inhalation: No data available(Zinc powder (pyrophoric))
Dermal: No data available(Zinc powder (pyrophoric))
No data available(Zinc powder (pyrophoric))

Skin corrosion/irritation
No data available(Zinc powder (pyrophoric))

Serious eye damage/eye irritation
No data available(Zinc powder (pyrophoric))

Respiratory or skin sensitisation
Did not cause sensitisation on laboratory animals.(Zinc powder (pyrophoric))

Germ cell mutagenicity

No data available(Zinc powder (pyrophoric))

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
No data available(Zinc powder (pyrophoric))

No data available(Zinc powder (pyrophoric))

Specific target organ toxicity - single exposure
No data available(Zinc powder (pyrophoric))

Specific target organ toxicity - repeated exposure
No data available

Aspiration hazard
No data available(Zinc powder (pyrophoric))

Additional Information
RTECS: ZG8600000

chills, dry throat, sweet taste, Fever, Cough, Nausea, Vomiting, Weakness(Zinc powder (pyrophoric))
To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.(Zinc powder (pyrophoric))

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Cyprinus carpio (Carp) - 450.0 µg/l - 96.0 h(Zinc powder (pyrophoric))
Toxicity to daphnia and other aquatic invertebrates	LC50 - Daphnia magna (Water flea) - 0.068 mg/l - 48 h(Zinc powder (pyrophoric))
	mortality NOEC - Daphnia (water flea) - 0.101 - 0.14 mg/l - 7 d(Zinc powder (pyrophoric))

12.2 Persistence and degradability

12.3 Bioaccumulative potential

Bioaccumulation	Algae - 7 d at 16 °C - 5 µg/l(Zinc powder (pyrophoric))
	Bioconcentration factor (BCF): 466

12.4 Mobility in soil
No data available(Zinc powder (pyrophoric))

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber b highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1436 Class: 4.3 (4.2) Packing group: II
Proper shipping name: Zinc powder
Reportable Quantity (RQ) : 1000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1436 Class: 4.3 (4.2) Packing group: II EMS-No: F-G, S-O
Proper shipping name: ZINC POWDER
Marine pollutant : yes

IATA

UN number: 1436 Class: 4.3 (4.2) Packing group: II
Proper shipping name: Zinc powder

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

SARA 311/312 Hazards

Reactivity Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H250	Catches fire spontaneously if exposed to air.
H251	Self-heating: may catch fire.
H260	In contact with water releases flammable gases which may ignite spontaneously.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	3
Physical Hazard	1

NFPA Rating

Health hazard:	0
Fire Hazard:	3
Reactivity Hazard:	1
Special hazard.I:	W

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956
Version: 6.0 Revision Date: 05/28/2017 Print Date: 06/28/2019

SAFETY DATA SHEET

1. PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME	:	Chlordane
NAME OF MANUFACTURER	:	GL Sciences Inc.
ADDRESS	:	22-1 Nishishinjuku 6-chome Shinjuku-ku Tokyo 163-1130, Japan
CHARGE SECTION	:	International Sales Section
TELEPHONE No.	:	+81-3-5323-6620
FACSIMILE No.	:	+81-3-5323-6621
PRODUCT No.	:	1021-34060
SDS No.	:	1021-34060

Research use only.

2. HAZARDS IDENTIFICATION

GHS CLASSIFICATION :

Acute toxicity - oral	: Category 4
Acute toxicity – dermal	: Category 3
Skin corrosion/irritation	: Category 2
Serious eye damage/eye irritation	: Category 2
Germ cell mutagenicity	: Category 2
Carcinogenicity	: Category 2
Reproductive toxicity-effects on or via lactation	: Category 2
Reproductive toxicity-effects on or via lactation	: effects on or via lactation
Specific target organ toxicity (single exposure)	: Category 1 <nervous system>
Specific target organ toxicity (repeated exposure)	: Category 1 <nervous system, liver, blood>
Hazardous to the aquatic environment –acute hazard	: Category 1
Hazardous to the aquatic environment –chronic hazard	: Category 1

HAZARDS SYMBOL :



SIGNAL WORD : Danger

HAZARD STATEMENT :

H302	Harmful if swallowed
H311	Toxic in contact with skin
H315	Causes skin irritation
H319	Causes serious eye irritation
H341	Suspected of causing genetic defects
H351	Suspected of causing cancer
H361	Suspected of damaging fertility or the unborn child
H362	May cause harm to breast-fed children
H370	Causes damage to organs<nervous system>
H372	Causes damage to organs throug h prolonged or repeated exposure < nervous system, liver, blood>
H400	Very toxic to aquatic life
H410	Very toxic to aquatic life with long lasting effects

PRECAUTIONARY STATEMENTS :

P202	Do not handle until all safety precautions have been read and understood.
P264	Wash hands thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.

P280	Wear protective gloves/eye protection.
P260	Do not breathing gas/mist/vapours.
P263	Avoid contact during pregnancy and while nursing.
P273	Avoid release to the environment.
P301+P312	IF SWALLOWED: Call a POISON CENTER or doctor if you feel unwell.
P330	Rinse mouth.
P302+P352	IF ON SKIN: Wash with plenty of water.
P312	Call a POISON CENTER or doctor if you feel unwell.
P361+P364	Take off immediately all contaminated clothing and wash it before reuse.
P332+P313	IF skin irritation occurs: Get medical advice/attention.
P305+P351+P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337+P313	IF eye irritation persists: Get medical advice/attention.
P308+P313	IF exposed or concerned: Get medical advice/attention.
P314	Get medical attention if you feel unwell.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/container in accordance with all applicable regulations.

3. COMPOSITION/INFORMATION ON INGREDIENTS

CHEMICAL IDENTITY	:	Chlordane
SYNONYMS	:	1,2,4,5,6,7,8,8-Octachlor-2,3,3a,4,7,7a-hexahydro-4,7-metha-1H-indene
CHEMICAL FOMULA	:	$C_{10}H_6Cl_8$
CONTENT	:	> 98 %
CAS No.	:	57-74-9
TSCA INVENTRY	:	Listed
EINECS No.	:	200-349-0
EC INDEX No.	:	602-047-00-8

4. FIRST AID MEASURES

GENERAL ADVICE	:	Wash off immediately with soap and plenty of water. In the case of respirable dust and/or fumes, use self-contained breathing apparatus and dust impervious protective suit. Use personal protective equipment.
INHALATION	:	Move victim to fresh air. If breathing is difficult, give oxygen. If irritation persists, consult a physician.
SKIN CONTACT	:	Remove contaminated clothes and shoes, rinse skin with plenty of water or shower. Use soap to help assure removal. If irritation persists, consult a physician.
EYE CONTACT	:	Remove any contact lenses at once. Flush eyes well with flooding large amounts of running water for at least 15 minutes. Assure adequate flushing by separating the eyelids with sterile fingers. If irritation persists, consult a physician.
INGESTION	:	Rinse mouth. Never give anything by mouth to an unconscious person. Consult a physician immediately.

5. FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA	:	Carbon dioxide, dry chemical powder, foam, water spray
FIRE & EXPLOSION HAZARDS	:	Toxic, irritating dust, fumes or smoke may be emitted.
SPECIAL PROTECTIVE EQUIPMENT FOR FIRE FIGHTERS		
	:	Fireman should wear normal protective equipment(full bunker gear) and positive-pressure self-contained breathing apparatus.

6. ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS	:	Remove ignition sources and ventilate the area. In case of insufficient ventilation, wear suitable respiratory equipment. Avoid raising dust and avoid contact with skin and eyes.
ENVIROMENTAL PRECATIONS	:	Prevent spills from entering sewers, watercourses or low areas.
METHODS FOR CLEAN UP	:	Do not touch spilled material without suitable protection. After material is completely picked up, wash the spill site with soap and water and ventilate the area. Pull all wastes in a plastic bag for disposal and seal it tightly. Remove, clean, or dispose contaminated clothing.

7. HANDLING AND STORAGE

HANDLING	:	Avoid contact with eyes, skin, and clothing. Avoid prolonged or repeated exposure. Handle material with suitable protection. After this product, dispose of contents/container in accordance with all applicable regulations and appropriate ways.
STORAGE	:	Store away from sunlight in well-ventilated place at 2 – 10℃. Keep container tightly closed.
INCOMOPATIBLE PRODUCTS	:	Bases

8. EXPOSURE CONTROL/PERSONAL PROTECTION

ENGINEERING MEASURES	:	Use exhaust ventilation to keep airborne concentrations below exposure limits. Use only with adequate ventilation.
VENTILATION	:	Local Exhaust ; Necessary, Mechanical(General) ; Recommended
PERSONAL PROTECTION		
RESPIRATORY PROTECTION	:	Use respirators approved under appropriate government standards and follow all regulations.
HAND PROTECTION	:	Chemical resistant gloves
EYE PROTECTION	:	Safety glasses(goggles)
SKIN PROTECTION	:	Protective clothing
CONTROL PARAMETERS		
OSHA	:	0.5mg/m3(skin)
NIOSH REL	:	0.5mg/m3(skin)
ACGIH	:	0.5mg/m3(skin)

9. PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE	:	White
SHAPE	:	Solid
ODOR	:	Irritating odor
pH	:	No data available
BOILING POINT	:	175℃(1mmHg)
MELTING POINT	:	106℃
FLASH POINT	:	56℃(CC)
FLAMMABILITY	:	lower:0.7% upper:5%
AUTOIGNITION TEMPERATURE	:	No data available
VAPOR PRESSURE	:	No data available
VAPOR DENCITY	:	14(Air=1)
DENCITY	:	1.60g/cm3(25℃)
SOLUBILITY IN		
WATER	:	slightly insoluble
Organic solvent	:	very soluble
DECOMPOSITION TEMPERATURE		
	:	No data available

10. STABILITY AND REACTIVITY

REACTIVITY	:	Stable under recommended storage conditions.
CHEMICAL STABILITY	:	Very toxic and corrosive gases are emitted by heating. Reacts with oxidizers, acids, bases.
CONDITION TO AVOID	:	Heat, contact with incompatible materials.
INCOMPATIBILE MATERIALS	:	Bases
HAZARDOUS DECOMPOSITION PRODUCTS		
	:	CO, CO_2, Hydrogen chloride, Chlorine, Phosgene

11. TOXICOLOGICAL INFORMATION

ACUTE TOXICITY (oral)	:	Rat LD50= 83 ～ 590 mg/kg (ATSDR(1994),EHC 34(1984),IARC vol.79 (2001),JMPR 180(1970),ACGIH(2001))
ACUTE TOXICITY (dermal)	:	Rat LD50= 205～590-840mg/kg Rabbit LD50= 205～1100-1200 mg/kg (EHC 34(1984), ACGIH(2001))
SKIN CORROSION/IRRITATION	:	Human: contact with skin may cause skin irritation.(ASTDR(1994), EHC 34(1984))
EYE DAMAGE/EYE IRRITATION	:	Human: Industry worker, eye, skin, mucosa irritation.(ATSDR(1994), EHC 34(1984))

GERM CELL MUTAGENICITY	:	Mouse: Positive (EHC 34(1984),IARC 79(2001),ATSDR(1994))
CARCINOGENICITY	:	Classified at, IARC: 2B(2001), ACGIH: A3(1996)
REPRODUCTIVE TOXICITY	:	Rat: increasing the loss rate of baby, neurobehavioral consequences.(EHC 34(1984),ATSDR (1994)),IRIS(2002))
SPECIFIC TARGET ORGAN TOXICITY-single exposure		
	:	Human: appear nervous symptoms after inhalation.(IARC79(2001), EHC 34 (1984),PIMs(2000))
SPECIFIC TARGET ORGAN TOXICITY-repeated exposure		
	:	Rat, mouse, human: appear nervous symptoms, liver damage, hematological damage. (IARC 79(2001),EHC 34(1984)),IRIS(1997))
ASPIRATION TOXICITY	:	No data available

12. ECOLOGICAL INFORMATION

ECOTOXICITY	:	Crustacea (shrimp pink): LC50=0.4μg/L/96hr (EHC 34,1984)
BIODEGRADABILITY	:	BOD: 0%, BCF=13,900-27,900(3μg/L), 13,000-26,100(0.3μg/L)
BIOACCUMULATION POTENTIAL	:	log Pow=6.16
MOBILITY IN SOIL	:	No data available
OTHER ADVERSE EFFECTS	:	Not listed in Montreal Protocol list.

13. DISPOSAL INFORMATION

Dispose in a hazardous-waste site in accordance with all applicable regulations. Any disposal practice must be in compliance with country, local, state, and federal laws and regulations (contact country, local or state environment agency for specific rules).

14. TRANSPORT INFORMATION

IATA

UN NUMBER	:	UN 2761
UN PROPER SHIPPING NAME	:	Organochlorine pesticides, solid, toxic. (Chlordane)
CLASS or DIVISION	:	Toxic (Class 6.1)
PACKING GROUP	:	Ⅲ

DOT

IDENTIFICATION NUMBER	:	UN 2761
PROPER SHIPPING NAME	:	Organochlorine pesticides, solid, toxic. (Chlordane)
HAZARD CLASS	:	Toxic (Class 6.1)
MARINE POLLUTANT	:	Yes

15. REGULATORY INFORMATION

US REGULATIONS	:	Labeling according to US regulations; See section 2
EU REGURATIONS	:	Labeling according to EC Directives; See section 2

16. OTHER INFORMATION

NOTICE:

The information contained in the SDS description is applicable exclusively to the chemical substance identified herein and for its intended use as an analytical reference standard or reagent and to the unit quantity intended for that purpose. The information does not relate to, and may not be appropriate for, any application or larger quantity of the substance described. Our products are intended for the use by individuals possessing sufficient technical skill and qualification on use the material potential hazardous chemical. Accordingly, no representation or warranty, express or implied, with respect to merchantability and fitness for a particular purpose is made with respect to the information contained herein.

Attention:

This product in terms of chemical identity and the unit amount provide is intended for use in chemical analysis and not for human consumption, nor any other purpose.

SAFETY DATA SHEET

Version 5.6
Revision Date 05/07/2018
Print Date 06/22/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : 4,4′-DDT

Product Number : 386340
Brand : Aldrich
Index-No. : 602-045-00-7

CAS-No. : 50-29-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 3), H301
Acute toxicity, Dermal (Category 3), H311
Carcinogenicity (Category 2), H351
Specific target organ toxicity - repeated exposure, Oral (Category 1), H372
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H301 + H311 Toxic if swallowed or in contact with skin.
H351 Suspected of causing cancer.
H372 Causes damage to organs through prolonged or repeated exposure if swallowed.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)
P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and

	understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing.
P281	Use personal protective equipment as required.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/doctor. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of soap and water. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane 1,1-Bis(4-chlorophenyl)-2,2,2-trichloroethane
Formula	:	$C_{14}H_9Cl_5$
Molecular weight	:	354.49 g/mol
CAS-No.	:	50-29-3
EC-No.	:	200-024-3
Index-No.	:	602-045-00-7

Hazardous components

Component	Classification	Concentration
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane		
	Acute Tox. 3; Carc. 2; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H301 + H311, H351, H372, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	TWA	1 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Liver damage Confirmed animal carcinogen with unknown relevance to humans		

		TWA	0.5 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		TWA	1 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation		
		PEL	1 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

8.2 Exposure controls

Appropriate engineering controls
Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance Form: solid

b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 107 - 110 °C (225 - 230 °F) - lit.
f)	Initial boiling point and boiling range	260.0 °C (500.0 °F)
g)	Flash point	72.0 - 77.0 °C (161.6 - 170.6 °F)
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	0.0000021 hPa (0.0000016 mmHg) at 20.0 °C (68.0 °F)
l)	Vapour density	No data available
m)	Relative density	0.99 g/cm3
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	log Pow: 6.91
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Oxidizing agents, Iron and iron salts.

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 87.0 mg/kg

Inhalation: No data available

LD50 Dermal - Rabbit - 300.0 mg/kg
Remarks: Behavioral:Tremor. Behavioral:Muscle weakness. Behavioral:Ataxia.

No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity

Limited evidence of carcinogenicity in animal studies

IARC:	2A - Group 2A: Probably carcinogenic to humans (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
IARC:	2A - Group 2A: Probably carcinogenic to humans (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
NTP:	RAHC - Reasonably anticipated to be a human carcinogen (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
NTP:	RAHC - Reasonably anticipated to be a human carcinogen (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.
	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
No data available

No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
Ingestion - Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard
No data available

Additional Information
RTECS: KJ3325000

CNS stimulation.

Pancreas. -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - 0.01 mg/l - 96.0 h
	LC50 - Lepomis macrochirus (Bluegill) - 0.01 mg/l - 96.0 h
	LC50 - Oncorhynchus mykiss (rainbow trout) - 0.003400 mg/l - 96.0 h
	LOEC - Oncorhynchus mykiss (rainbow trout) - 150 mg/l - 3.0 d
	NOEC - Oncorhynchus mykiss (rainbow trout) - 113 mg/l - 3.0 d
Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - Daphnia magna (Water flea) - 0.00108 mg/l - 48 h
Toxicity to algae	LC100 - Scenedesmus quadricauda (Green algae) - > 20 mg/l - 7 d

12.2 Persistence and degradability

12.3 Bioaccumulative potential

Bioaccumulation	Oncorhynchus mykiss (rainbow trout) - 20 d - 0.001 mg/l
	Bioconcentration factor (BCF): 46,670

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solids, organic, n.o.s. (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
Reportable Quantity (RQ): 1 lbsMarine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
Marine pollutant:yes

IATA

UN number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solid, organic, n.o.s. (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	2008-06-17
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	2008-06-17
WARNING! This product contains a chemical known to the State of California to cause cancer. 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	2008-06-17
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	2008-06-17

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H301	Toxic if swallowed.
H301 + H311	Toxic if swallowed or in contact with skin.
H311	Toxic in contact with skin.
H351	Suspected of causing cancer.
H372	Causes damage to organs through prolonged or repeated exposure if swallowed.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.6 Revision Date: 05/07/2018 Print Date: 06/22/2019

SAFETY DATA SHEET

Version 5.5
Revision Date 06/13/2014
Print Date 10/19/2018

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : 4,4′-DDD

Product Number : 49009
Brand : Supelco

CAS-No. : 72-54-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 3), H301
Acute toxicity, Dermal (Category 4), H312
Carcinogenicity (Category 2), H351
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H301 Toxic if swallowed.
H312 Harmful in contact with skin.
H351 Suspected of causing cancer.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)
P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.
P264 Wash skin thoroughly after handling.
P270 Do not eat, drink or smoke when using this product.

P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P322	Specific measures (see supplemental first aid instructions on this label).
P330	Rinse mouth.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 1,1-Dichloro-2,2-bis(4-chlorophenyl)ethane

Formula : $C_{14}H_{10}Cl_4$

Molecular Weight : 320.04 g/mol

CAS-No. : 72-54-8

EC-No. : 200-783-0

Hazardous components

Component	Classification	Concentration
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane		
	Acute Tox. 3; Acute Tox. 4; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H301, H312, H351, H410	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
no data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
Carbon oxides, Hydrogen chloride gas
Nature of decomposition products not known.

5.3 Advice for firefighters
Wear self contained breathing apparatus for fire fighting if necessary.

5.4 Further information
no data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.
Provide appropriate exhaust ventilation at places where dust is formed.Normal measures for preventive fire protection.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters
Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls
Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: solid
b)	Odour	no data available
c)	Odour Threshold	no data available
d)	pH	no data available
e)	Melting point/freezing point	94.0 - 96.0 °C (201.2 - 204.8 °F)
f)	Initial boiling point and boiling range	193.0 °C (379.4 °F) at 1.3 hPa (1.0 mmHg)
g)	Flash point	no data available
h)	Evapouration rate	no data available
i)	Flammability (solid, gas)	no data available
j)	Upper/lower flammability or explosive limits	no data available
k)	Vapour pressure	< 0.00001 hPa (< 0.00001 mmHg) at 25.0 °C (77.0 °F)
l)	Vapour density	no data available
m)	Relative density	1.38 g/cm3
n)	Water solubility	no data available
o)	Partition coefficient: n-octanol/water	log Pow: 6.02
p)	Auto-ignition temperature	no data available
q)	Decomposition temperature	no data available
r)	Viscosity	no data available
s)	Explosive properties	no data available
t)	Oxidizing properties	no data available

9.2 Other safety information
no data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
no data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
no data available

10.4 Conditions to avoid
no data available

10.5 Incompatible materials
Strong oxidizing agents

10.6 Hazardous decomposition products
Other decomposition products - no data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
LD50 Oral - Hamster - > 5,000 mg/kg

TDLo Oral - Human - 428.5 mg/kg
Remarks: Endocrine:Adrenal cortex hypoplasia.

TDLo Oral - rat - 6,000 mg/kg
Remarks: Cardiac:Other changes. Gastrointestinal:Other changes. Kidney, Ureter, Bladder:Changes in both tubules and glomeruli.

TDLo Oral - rat - 14 mg/kg
Remarks: Liver:Changes in liver weight. Endocrine:Estrogenic. Musculoskeletal:Other changes.

TDLo Oral - rat - 2,100 mg/kg
Remarks: Behavioral:Altered sleep time (including change in righting reflex).

Inhalation: no data available

LD50 Dermal - rabbit - 1,200 mg/kg
Remarks: Behavioral:Excitement. Behavioral:Convulsions or effect on seizure threshold. Skin irritation

no data available

Skin corrosion/irritation
no data available

Serious eye damage/eye irritation
no data available

Respiratory or skin sensitisation
no data available

no data available

Germ cell mutagenicity
no data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC:	No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
ACGIH:	No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.
NTP:	No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
OSHA:	No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
no data available

no data available

Specific target organ toxicity - single exposure
no data available

Specific target organ toxicity - repeated exposure
no data available

Aspiration hazard
no data available

Additional Information
RTECS: KI0700000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - other fish - 1.18 - 9 mg/l - 96.0 h
	LC50 - Lepomis macrochirus (Bluegill) - 0.04 - 0.05 mg/l - 96.0 h
	LC50 - Oncorhynchus mykiss (rainbow trout) - 0.06 - 0.09 mg/l - 96.0 h
	LC50 - Pimephales promelas (fathead minnow) - 3.47 - 5.58 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia pulex (Water flea) - 0.01 mg/l - 48 h

12.2 Persistence and degradability
no data available

12.3 Bioaccumulative potential
Indication of bioaccumulation.

12.4 Mobility in soil
no data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solids, organic, n.o.s. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)
Marine pollutant: No

Poison Inhalation Hazard: No

IMDG
UN number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)
Marine pollutant: No

IATA
UN number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solid, organic, n.o.s. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)

15. REGULATORY INFORMATION

SARA 302 Components
SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Acute Health Hazard

Massachusetts Right To Know Components
No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	72-54-8	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	72-54-8	1993-04-24

California Prop. 65 Components
This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H301	Toxic if swallowed.
H312	Harmful in contact with skin.
H351	Suspected of causing cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.5 Revision Date: 06/13/2014 Print Date: 10/19/2018

SAFETY DATA SHEET

Version 5.6
Revision Date 05/07/2018
Print Date 06/22/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : 4,4′-DDT

Product Number : 386340
Brand : Aldrich
Index-No. : 602-045-00-7

CAS-No. : 50-29-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 3), H301
Acute toxicity, Dermal (Category 3), H311
Carcinogenicity (Category 2), H351
Specific target organ toxicity - repeated exposure, Oral (Category 1), H372
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H301 + H311 Toxic if swallowed or in contact with skin.
H351 Suspected of causing cancer.
H372 Causes damage to organs through prolonged or repeated exposure if swallowed.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)
P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and

	understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing.
P281	Use personal protective equipment as required.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER/doctor. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of soap and water. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	:	1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane 1,1-Bis(4-chlorophenyl)-2,2,2-trichloroethane
Formula	:	$C_{14}H_9Cl_5$
Molecular weight	:	354.49 g/mol
CAS-No.	:	50-29-3
EC-No.	:	200-024-3
Index-No.	:	602-045-00-7

Hazardous components

Component	Classification	Concentration
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane		
	Acute Tox. 3; Carc. 2; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H301 + H311, H351, H372, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice
Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Flush eyes with water as a precaution.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
No data available

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place.
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	TWA	1 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Liver damage Confirmed animal carcinogen with unknown relevance to humans		

		TWA	0.5 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		TWA	1 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation		
		PEL	1 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

8.2 Exposure controls

Appropriate engineering controls
Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance Form: solid

b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	No data available
e)	Melting point/freezing point	Melting point/range: 107 - 110 °C (225 - 230 °F) - lit.
f)	Initial boiling point and boiling range	260.0 °C (500.0 °F)
g)	Flash point	72.0 - 77.0 °C (161.6 - 170.6 °F)
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	0.0000021 hPa (0.0000016 mmHg) at 20.0 °C (68.0 °F)
l)	Vapour density	No data available
m)	Relative density	0.99 g/cm3
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	log Pow: 6.91
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Oxidizing agents, Iron and iron salts.

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas
Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 87.0 mg/kg

Inhalation: No data available

LD50 Dermal - Rabbit - 300.0 mg/kg
Remarks: Behavioral:Tremor. Behavioral:Muscle weakness. Behavioral:Ataxia.

No data available

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity
No data available

Carcinogenicity

Limited evidence of carcinogenicity in animal studies

IARC:	2A - Group 2A: Probably carcinogenic to humans (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
IARC:	2A - Group 2A: Probably carcinogenic to humans (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
NTP:	RAHC - Reasonably anticipated to be a human carcinogen (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
NTP:	RAHC - Reasonably anticipated to be a human carcinogen (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.
	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
No data available

No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
Ingestion - Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard
No data available

Additional Information
RTECS: KJ3325000

CNS stimulation.

Pancreas. -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - 0.01 mg/l - 96.0 h
	LC50 - Lepomis macrochirus (Bluegill) - 0.01 mg/l - 96.0 h
	LC50 - Oncorhynchus mykiss (rainbow trout) - 0.003400 mg/l - 96.0 h
	LOEC - Oncorhynchus mykiss (rainbow trout) - 150 mg/l - 3.0 d
	NOEC - Oncorhynchus mykiss (rainbow trout) - 113 mg/l - 3.0 d
Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - Daphnia magna (Water flea) - 0.00108 mg/l - 48 h
Toxicity to algae	LC100 - Scenedesmus quadricauda (Green algae) - > 20 mg/l - 7 d

12.2 Persistence and degradability

12.3 Bioaccumulative potential

Bioaccumulation	Oncorhynchus mykiss (rainbow trout) - 20 d - 0.001 mg/l
	Bioconcentration factor (BCF): 46,670

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solids, organic, n.o.s. (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
Reportable Quantity (RQ): 1 lbsMarine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)
Marine pollutant:yes

IATA

UN number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solid, organic, n.o.s. (1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane)

15. REGULATORY INFORMATION

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

	CAS-No.	Revision Date
1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	1993-02-16

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	2008-06-17
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	2008-06-17
WARNING! This product contains a chemical known to the State of California to cause cancer. 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	2008-06-17
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. 1,1,1-Trichloro-2,2-bis(4-chlorophenyl)ethane	50-29-3	2008-06-17

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H301	Toxic if swallowed.
H301 + H311	Toxic if swallowed or in contact with skin.
H311	Toxic in contact with skin.
H351	Suspected of causing cancer.
H372	Causes damage to organs through prolonged or repeated exposure if swallowed.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.6 Revision Date: 05/07/2018 Print Date: 06/22/2019

SAFETY DATA SHEET

Version 3.4
Revision Date 06/27/2014
Print Date 06/28/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Heptadecafluorooctanesulfonic acid solution

Product Number : 77283
Brand : Aldrich

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
Acute toxicity, Oral (Category 4), H302
Acute toxicity, Inhalation (Category 3), H331
Skin corrosion (Category 1B), H314
Serious eye damage (Category 1), H318
Carcinogenicity (Category 2), H351
Reproductive toxicity (Category 1B), H360
Effects on or via lactation, H362
Specific target organ toxicity - repeated exposure (Category 1), H372
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)
H302 Harmful if swallowed.
H314 Causes severe skin burns and eye damage.
H331 Toxic if inhaled.
H351 Suspected of causing cancer.
H360 May damage fertility or the unborn child.
H362 May cause harm to breast-fed children.
H372 Causes damage to organs through prolonged or repeated exposure.

H411	Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P263	Avoid contact during pregnancy/ while nursing.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P330 + P331	IF SWALLOWED: rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P310	Immediately call a POISON CENTER or doctor/ physician.
P321	Specific treatment (see supplemental first aid instructions on this label).
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.2 Mixtures

Formula : $C_8HF_{17}O_3S$

Molecular Weight : 500.13 g/mol

Hazardous components

Component		Classification	Concentration
Heptadecafluorooctane-1-sulphonic acid			
CAS-No. EC-No. Index-No.	1763-23-1 217-179-8 607-624-00-8	Acute Tox. 4; Skin Corr. 1B; Eye Dam. 1; Carc. 2; Repr. 1B; Lact. ; STOT RE 1; Aquatic Acute 2; Aquatic Chronic 2; H302 + H332, H314, H351, H360, H362, H372, H411	30 - 60 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance.Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Take off contaminated clothing and shoes immediately. Wash off with soap and plenty of water. Consult a physician.

In case of eye contact
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.Continue rinsing eyes during transport to hospital.

If swallowed
Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
no data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
Carbon oxides, Sulphur oxides, Hydrogen fluoride

5.3 Advice for firefighters
Wear self contained breathing apparatus for fire fighting if necessary.

5.4 Further information
no data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures
Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.
For personal protection see section 8.

6.2 Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up
Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections
For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)
Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters
Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Tightly fitting safety goggles. Faceshield (8-inch minimum). Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: clear, liquid Colour: light red
b)	Odour	no data available
c)	Odour Threshold	no data available
d)	pH	no data available
e)	Melting point/freezing point	no data available
f)	Initial boiling point and boiling range	no data available
g)	Flash point	no data available
h)	Evapouration rate	no data available
i)	Flammability (solid, gas)	no data available
j)	Upper/lower flammability or explosive limits	no data available
k)	Vapour pressure	no data available
l)	Vapour density	no data available
m)	Relative density	1.250 g/cm3
n)	Water solubility	no data available
o)	Partition coefficient: n-octanol/water	no data available
p)	Auto-ignition temperature	no data available

q)	Decomposition temperature	no data available
r)	Viscosity	no data available
s)	Explosive properties	no data available
t)	Oxidizing properties	no data available

9.2 Other safety information
no data available

10. STABILITY AND REACTIVITY

10.1 Reactivity
no data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
no data available

10.4 Conditions to avoid
no data available

10.5 Incompatible materials
Strong oxidizing agents

10.6 Hazardous decomposition products
Other decomposition products - no data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity
no data available

Inhalation: no data available

Dermal: no data available

no data available

Skin corrosion/irritation
no data available

Serious eye damage/eye irritation
no data available

Respiratory or skin sensitisation
no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a

carcinogen or potential carcinogen by OSHA.

Reproductive toxicity
no data available
no data available

Specific target organ toxicity - single exposure
no data available

Specific target organ toxicity - repeated exposure
no data available

Aspiration hazard
no data available

Additional Information
RTECS: Not available

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin.

12. ECOLOGICAL INFORMATION

12.1 Toxicity
no data available

12.2 Persistence and degradability
no data available

12.3 Bioaccumulative potential
no data available

12.4 Mobility in soil
no data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)
UN number: 3265 Class: 8 Packing group: II
Proper shipping name: Corrosive liquid, acidic, organic, n.o.s. (Heptadecafluorooctane-1-sulphonic acid)
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG
UN number: 3265 Class: 8 Packing group: II EMS-No: F-A, S-B
Proper shipping name: CORROSIVE LIQUID, ACIDIC, ORGANIC, N.O.S. (Heptadecafluorooctane-1-sulphonic acid)
Marine pollutant: No

IATA
UN number: 3265 Class: 8 Packing group: II
Proper shipping name: Corrosive liquid, acidic, organic, n.o.s. (Heptadecafluorooctane-1-sulphonic acid)

15. REGULATORY INFORMATION

SARA 302 Components
SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Acute Health Hazard

Massachusetts Right To Know Components
No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Water	7732-18-5	
Heptadecafluorooctane-1-sulphonic acid	1763-23-1	2009-07-17

New Jersey Right To Know Components

	CAS-No.	Revision Date
Water	7732-18-5	
Heptadecafluorooctane-1-sulphonic acid	1763-23-1	2009-07-17

California Prop. 65 Components
This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Dam.	Serious eye damage
H302	Harmful if swallowed.
H302 + H332	Harmful if swallowed or if inhaled
H314	Causes severe skin burns and eye damage.
H318	Causes serious eye damage.
H331	Toxic if inhaled.
H351	Suspected of causing cancer.
H360	May damage fertility or the unborn child.
H362	May cause harm to breast-fed children.
H372	Causes damage to organs through prolonged or repeated exposure.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.
Lact.	Effects on or via lactation

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	0

Reactivity Hazard: 0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.4 Revision Date: 06/27/2014 Print Date: 06/28/2019

SAFETY DATA SHEET

Version 6.1
Revision Date 03/12/2019
Print Date 06/28/2019

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : Perfluorooctanoic acid

Product Number : 171468
Brand : Aldrich
CAS-No. : 335-67-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 Spruce Street
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 4), H302
Acute toxicity, Inhalation (Category 4), H332
Serious eye damage (Category 1), H318
Carcinogenicity (Category 2), H351
Reproductive toxicity (Category 1B), H360
Effects on or via lactation, H362
Specific target organ toxicity - repeated exposure (Category 1), Liver, H372

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

Hazard statement(s)	
H302 + H332	Harmful if swallowed or if inhaled.
H318	Causes serious eye damage.
H351	Suspected of causing cancer.
H360	May damage fertility or the unborn child.
H362	May cause harm to breast-fed children.
H372	Causes damage to organs (Liver) through prolonged or repeated exposure.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P263	Avoid contact during pregnancy/ while nursing.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338 + P310	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER/doctor.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms	:	Pentadecafluorooctanoic acid Perfluorocaprylic acid Perfluorooctanoic acid
Formula	:	$C_8HF_{15}O_2$
Molecular weight	:	414.07 g/mol
CAS-No.	:	335-67-1
EC-No.	:	206-397-9

Component	Classification	Concentration
Pentadecafluorooctanoic acid		
	Acute Tox. 4; Eye Dam. 1; Carc. 2; Repr. 1B; Lact. ; STOT RE 1; H302, H332, H318, H351, H360, H362, H372	<= 100 %

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first aid measures

General advice
Move out of dangerous area.Consult a physician. Show this safety data sheet to the doctor in attendance.

If inhaled
If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact
Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact
Continue rinsing eyes during transport to hospital.Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed
Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed
The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed
No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture
Carbon oxides, Hydrogen fluoride

5.3 Advice for firefighters
Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information
No data available

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.
Storage class (TRGS 510): 6.1D: Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Components with workplace control parameters
Contains no substances with occupational exposure limit values.
Hazardous components without workplace control parameters

8.2 Exposure controls

Appropriate engineering controls
Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection
Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

Skin protection
Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: > 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact
Material: Nitrile rubber
Minimum layer thickness: 0.11 mm
Break through time: > 480 min
Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374
If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection
Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection
Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a)	Appearance	Form: flakes Colour: colourless
b)	Odour	No data available
c)	Odour Threshold	No data available
d)	pH	2.6 at 1 g/l
e)	Melting point/freezing point	Melting point/range: 55 - 56 °C (131 - 133 °F) - lit.
f)	Initial boiling point and boiling range	189 °C 372 °F at 981 hPa - lit.

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

g)	Flash point	()No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	0.69 hPa at 25 °C (77 °F)
l)	Vapour density	No data available
m)	Relative density	0.900 g/cm3
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information
No data available

SECTION 10: Stability and reactivity

10.1 Reactivity
No data available

10.2 Chemical stability
Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions
No data available

10.4 Conditions to avoid
No data available

10.5 Incompatible materials
Bases, Oxidizing agents, Reducing agents

10.6 Hazardous decomposition products
Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen fluoride
Other decomposition products - No data available
In the event of fire: see section 5

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity
Inhalation: No data available
Dermal: No data available
LD50 Intraperitoneal - Rat - 189 mg/kg

Skin corrosion/irritation
No data available

Serious eye damage/eye irritation
No data available

Respiratory or skin sensitisation
No data available

Germ cell mutagenicity

Rat
DNA damage

Rat
DNA damage

Carcinogenicity
Suspected human carcinogens

IARC:	2B - Group 2B: Possibly carcinogenic to humans (Pentadecafluorooctanoic acid)
NTP:	No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
OSHA:	No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity
Effects on or via lactation
Presumed human reproductive toxicant
No data available

Specific target organ toxicity - single exposure
No data available

Specific target organ toxicity - repeated exposure
Causes damage to organs through prolonged or repeated exposure. - Liver

Aspiration hazard
No data available

Additional Information
RTECS: RH0781000

Cough, Shortness of breath, Headache, Nausea, Vomiting

Stomach - Irregularities - Based on Human Evidence
Stomach - Irregularities - Based on Human Evidence

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

SECTION 12: Ecological information

12.1 Toxicity
No data available

12.2 Persistence and degradability
No data available

12.3 Bioaccumulative potential
No data available

12.4 Mobility in soil
No data available

12.5 Results of PBT and vPvB assessment
PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects
No data available

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product
Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

SECTION 14: Transport information

DOT (US)
UN number: 3261 Class: 8 Packing group: III
Proper shipping name: Corrosive solid, acidic, organic, n.o.s. (Pentadecafluorooctanoic acid)
Reportable Quantity (RQ):
Poison Inhalation Hazard: No

IMDG
UN number: 3261 Class: 8 Packing group: III EMS-No: F-A, S-B
Proper shipping name: CORROSIVE SOLID, ACIDIC, ORGANIC, N.O.S. (Pentadecafluorooctanoic acid)

IATA
UN number: 3261 Class: 8 Packing group: III
Proper shipping name: Corrosive solid, acidic, organic, n.o.s. (Pentadecafluorooctanoic acid)

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

SECTION 15: Regulatory information

SARA 302 Components
No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components
This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards
Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components
No components are subject to the Massachusetts Right to Know Act.

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

Pentadecafluorooctanoic acid	CAS-No. 335-67-1	Revision Date

Pentadecafluorooctanoic acid	CAS-No. 335-67-1	Revision Date

New Jersey Right To Know Components

Pentadecafluorooctanoic acid	CAS-No. 335-67-1	Revision Date

California Prop. 65 Components
This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

SECTION 16: Other information

Further information
Copyright 2018 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

The life science business of Merck KGaA, Darmstadt, Germany
operates as MilliporeSigma in the US and Canada

Appendix B:

Quality Assurance Project Plan

SESI
CONSULTING ENGINEERS

QUALITY ASSURANCE PROJECT PLAN

FOR

St. Clair Hotel Dry Cleaners Site
34, 36, and 38 Main Street
Yonkers, Westchester County, New York 10701
BCP# 360220

Prepared For:

St. Clair Development, LLC,
c/o MacQuesten Companies
438 Fifth Avenue, Suite 100
Pelham, New York 10803

Prepared By:

SESI CONSULTING ENGINEERS
959 Route 46E, Floor 3, Suite 300
Parsippany, New Jersey 07054

Project No. 11846
February 2023

Table of Contents

LIST OF ACRONYMS ..... **i**

1.0 PROJECT DESCRIPTION **1**

2.1 PROJECT PRINCIPAL 1

2.2 PRINCIPAL ENGINEER 1

2.3 PROJECT MANAGER 2

2.4 REMEDIAL ACTION PROGRAM MANAGER 2

2.5 FIELD TEAM LEADER 2

2.6 QUALITY ASSURANCE OFFICER 2

3.0 QA/QC OBJECTIVES FOR MEASUREMENT OF DATA **3**

3.1 COMPLETENESS 3

3.2 REPRESENTATIVENESS 3

3.3 COMPARABILITY 4

3.4 PRECISION AND ACCURACY 4

4.0 SAMPLING PROCEDURES **5**

4.1 SAMPLING PROGRAM 5

4.1.1 DRILLING/SAMPLING PROCEDURES 5

4.1.2 MONITORING WELL COMPLETION 6

4.1.3 WELL DEVELOPMENT 7

4.1.4 DECONTAMINATION 7

4.2 GROUNDWATER SAMPLING PROGRAM 8

4.2.1 WELL EVACUATION 8

4.2.2 SAMPLING PROCEDURE 8

4.3 SOIL VAPOR SAMPLING 8

4.4 SAMPLE PRESERVATION AND SHIPMENT 9

5.0 SAMPLE CUSTODY **10**

5.1 FIELD SAMPLE CUSTODY 10

5.2 LABORATORY SAMPLE CUSTODY 10

5.3 FINAL EVIDENCE FILES 11

6.0 CALIBRATION PROCEDURES **11**

7.0 ANALYTICAL PROCEDURES **12**

7.1 VOLATILE ORGANICS (VOA) 12

7.2 SEMI-VOLATILE ORGANIC COMPOUNDS 12

7.3 PESTICIDE AND PCB COMPOUNDS....12
7.4 METALS....13
7.5 PER- AND POLYFLUOROALKYL SUBSTANCES....13
7.6 SITE SPECIFICITY OF ANALYSES....14

TABLES

TABLE 4.1 SAMPLE CONTAINERIZATION
TABLE 4.2 SAMPLING PROCEDURE FOR MONITORING WELLS USING VOLUME AVERAGED PURGING
TABLE 4.3 SAMPLING PROCEDURE FOR MONITORING WELLS USING LOW-STESS (LOW-FLOW) METHODS
TABLE 7.1 CONTRACT-REQUIRED QUANTITATION LEVELS AND ANALYTICAL METHODS FOR ASP INORGANICS, ASP VOLATILES, ASP SEMI-VOLATILES, ASP PESTICIDES, AND PCBs

LIST OF ACRONYMS

Acronym	Definition
AAS	Absorption Spectroscopy
ASP	Analytical Service Protocol
BCP	Brownfield Cleanup Program
DUSR	Data Usability Summary Report
ELAP	Environmental Laboratory Accreditation Program
GC/MS	Gas Chromatography/Mass Spectrometry
HAS	Hollow-stem Auger
HDPE	High-Density Polyethylene
LDPE	Low-density Polyethylene
LFPS	Low Flow Purging Sampling
MDL	Method Detection Limit
NYSDEC	New York State Department of Environmental Conservation
NYSDOH	New York State Department of Health
PCB	Polychlorinated Biphenyls
PFAS	Per- and polyfluoroalkyl substances
PFOA	Perfluorooctanoic Acid
PFOS	Perfluorooctanesulfonic Acid
PPE	Personal Protective Equipment
PTFE	Polytetrafluoroethylene
QAPP	Quality Assurance Project Plan
QA/QC	Quality Assurance/Quality Control
RAWP	Remedial Action Work Plan
SESI	SESI Consulting Engineers, Inc.
TIC	Tentatively Identified Compound
TCL	Target Compound List
VOC	Volatile Organic Compound
USEPA	United States Environmental Protection Agency

1.0 PROJECT DESCRIPTION

This document presents the quality assurance project plan (QAPP) for the Remedial Action Workplan (RAWP) of the property located at 34, 36 and 38 Main Street, Yonkers, Westchester County, New York (the Site). The Site is approximately 0.214 acres and consists of three (3) parcels identified on the Westchester County tax records as tax parcels 38 Main Street (1.-501-18), 36 Main Street (1.-501-19), and 34 Main Street (1.-501-20). The Site is bound to the north by Main Street, to the west by a one-story commercial building, to the south by commercial buildings and to the east by Riverdale Avenue.

Based on the review of Sanborn Maps, several businesses and storefronts were listed onsite from 1886. Most notably, a hotel was listed on the Site from 1942. Hotels are historically known to have had in-house dry-cleaning services, which have the potential for impacting the sub-surface. Two (2) underground ovens are identified on the Site from 1898 to 1956. No additional details regarding the ovens' uses were identified. Paint-Dressmaking was listed on-Site from 1971 to 1973.

2.0 PROJECT ORGANIZATION

The RAWP will be conducted by Soils Engineering Services, Inc. (SESI), on behalf of MacQuesten Development, LLC and St. Clair Development, LLC. The organization of SESI's key project management and field staff, and respective areas of responsibility, is presented below.

2.1 PROJECT PRINCIPAL

Fuad Dahan PhD, P.E.

Provide technical and administrative oversight and guidance throughout the project, assist in securing company resources, participate in technical review of deliverables, and attend key meetings as needed.

2.2 PRINCIPAL ENGINEER

Fuad Dahan, PhD, P.E.

Provide technical guidance and review of reports, analytical data. Will have key involvement in screening and development of remedial alternatives.

2.3 PROJECT MANAGER

Steven Gustems, PG

Responsible for maintaining the day-to-day schedule for completing the fieldwork and deliverables according to BCP program requirements and client expectations.

2.4 REMEDIAL ACTION PROGRAM MANAGER

Jon Stuart

Responsible for coordinating and directing field efforts of SESI staff and subcontractors, and for maintaining that work is done according to QAPP specifications.

2.5 FIELD TEAM LEADER

Jeff Lamborn

Responsible for overseeing field work during the RI, including observing subcontractors, maintaining field notes, and collecting samples of various environmental media, in accordance with the NYSDEC-approved Work Plan.

2.6 QUALITY ASSURANCE OFFICER

Jon Stuart

Responsible for reviewing sampling procedures and certify that the data was collected and analyzed using the appropriate procedures.

3.0 QA/QC OBJECTIVES FOR MEASUREMENT OF DATA

In cases where NYSDOH ELAP Certification exists for a specific group or category of parameters, the laboratories performing analysis in connection with this project will have appropriate NYSDOH ELAP Certification. Analytical Service Protocol (ASP, June 2000) Category B deliverables are required for all samples.

Detection limits set by NYSDEC-ASP (June 2000) will be used for all sample analyses unless otherwise noted. If NYSDEC-ASP-dictated detection limits prove insufficient to assess project goals (i.e., comparison to drinking water standards or attainment of ARARs), then ASP Special Analytical Services (SAS) or other appropriate methods will be utilized.

The quality assurance/quality control objectives for all measurement data include completeness, representativeness, comparability, precision and accuracy.

3.1 COMPLETENESS

The analyses performed must be appropriate and inclusive. The parameters selected for analysis are chosen to meet the objectives of the study.

Completeness of the analyses will be assessed by comparing the number of parameters intended to be analyzed with the number of parameters successfully determined and validated. Data must meet QC acceptance criteria for 100 percent or more of requested determinations.

3.2 REPRESENTATIVENESS

Samples must be taken of the population and, where appropriate, the population will be characterized statistically to express the degree to which the data accurately and precisely represent a characteristic of a population, parameter variations at a sampling point, a process, or environmental condition.

Non-dedicated sampling devices will be cleaned between sampling points by washing and rinsing with pesticide-grade methanol, followed by a thorough rinse with distilled water. Specific cleaning techniques are described in the Field Sampling Procedure. Two types of blank samples will accompany each sample set where Target Compound List (TCL) volatiles are to be analyzed (water matrix only). A trip blank, consisting of a 40 ml VOA vial of organic-free water prepared by the laboratory, will accompany each set of

sample bottles from the laboratory to the field and back. This bottle will remain sealed throughout the shipment and sampling process. This blank will be analyzed for TCL volatile organic compounds along with the groundwater samples to ensure that contamination with TCL volatile compounds has not occurred during the bottle preparation, shipment and sampling phase of the project. In order to check for contaminant carryover when non-dedicated sampling equipment is used, a rinsate blank will be submitted to the laboratory. This blank will also be analyzed for TCL volatile organic compounds. The TCL compounds are identified in the United States Environmental Protection Agency (USEPA) Contract Laboratory Program dated October 2016.

The analysis results obtained from the determination of identical parameters in field duplicate samples can be used to further assess the representativeness of the sample data.

3.3 COMPARABILITY

Consistency in the acquisition, preparation, handling and analysis of samples is necessary in order for the results to be compared where appropriate. Additionally, the results obtained from analyses of the samples will be compared with the results obtained in previous studies, if available.

To ensure the comparability of analytical results with those obtained in previous or future testing, all samples will be analyzed by NYSDEC-approved methods. The NYSDEC-ASP mandated holding times for various analyses will be strictly adhered to.

3.4 PRECISION AND ACCURACY

The validity of the data produced will be assessed for precision and accuracy. Analytical methods which will be used include gas chromatography/mass spectrometry (GC/MS), gas chromatography (GC), colorimetry, atomic spectroscopy, gravimetric and titrametric techniques. The following outlines the procedures for evaluating precision and accuracy, routine monitoring procedures, and corrective actions to maintain analytical quality control. All data evaluations will be consistent with NYSDEC-ASP procedures (June 2000). Data will be 100 percent compliant with NYSDEC-ASP requirements.

The number of duplicate, spiked and blank samples analyzed will a minimum of 1 duplicate for every 20 samples per each medium of groundwater and soil. The inclusion

and frequency of analysis of field blanks will be on the order of one per every 20 samples (soil) but not more than one per day. For the aqueous matrix field blanks will be collected at a frequency of one per day. Samples to be analyzed for volatile organic compounds will be accompanied by a trip blank for each shipment and field blanks (water matrix) or field blanks (soil).

Quality assurance audit samples will be prepared and submitted by the laboratory QA manager for each analytical procedure used. The degree of accuracy and the recovery of analyte to be expected for the analysis of QA samples and spiked samples is dependent upon the matrix, method of analysis, and compound or element being determined. The concentration of the analyte relative to the detection limit is also a major factor in determining the accuracy of the measurement. The lower end of the analytical range for most analyses is generally accepted to be five times the detection limit. At or above this level, the determination and spike recoveries for metals in water samples will be expected to range from 75 to 125 percent. The recovery of organic surrogate compounds and matrix spiking compounds determined by GC/MS will be compared to the guidelines for recovery of individual compounds as established by the United States Environmental Protection Agency Contract Laboratory Program dated 7/85 or as periodically updated.

The quality of results obtained for inorganic ion and demand parameters will be assessed by comparison of QC data with laboratory control charts for each test.

4.0 SAMPLING PROCEDURES

4.1 SAMPLING PROGRAM

The sampling program for this project will include soil, groundwater and soil vapor. Soil samples will be collected from split spoon sampling or macrocore devices retrieved from soil borings. Groundwater samples will be collected from groundwater monitoring wells using low flow purging techniques. Soil vapor samples will be collected from vapor points screened in the vadose zone using Summa Canisters.

4.1.1 DRILLING/SAMPLING PROCEDURES

Soil and groundwater samples will be collected by means of a soil boring program. Soil borings shall be completed using the hollow stem auger drilling methods, direct push methods, or rotary drilling methods, whichever methods are determined to be best suited to site conditions by the SESI project manager and SESI field team leader.

Soil samples will be collected from soil borings and analyzed in accordance with the NYSDEC-approved Work Plan. Monitoring wells for groundwater sample collection will be installed in select completed soil borings. Either hollow stem auger (HSA) or direct push drilling methods may be utilized for monitoring well completion.

Samples of the encountered overburden materials shall be collected continuously during drilling so that a complete soil profile is examined and described by the SESI field geologist. The sampling method employed shall be ASTM D-1586/Split Barrel Sampling using a standard 2-foot long, 2-inch outside diameter split- spoon sampler with a 140-pound hammer, in cases where HSA methods are used. Upon retrieval of the sampling barrel, the collected sample shall be placed in glass jars and labeled, stored on site (on ice in a cooler if necessary), and transmitted to the appropriate testing laboratory or storage facility. Chain-of-custody procedures will be practiced following Section 15, EPA-600/4-82-029, Handbook for Sampling and Sample Preservation of Water and Waste Waters.

A geologist or engineer will be on site during the drilling operations to fully describe each soil sample, following the New York State Soil Description Procedure, and to retain representative portions of each sample.

The drilling contractor will be responsible for obtaining accurate and representative samples, informing the geologist of changes in drilling pressure, keeping a separate general log of soils encountered including blow counts [i.e., the number of blows from a soil sampling drive weight (140 pounds)] required to drive the split-spoon sampler in 6-inch increments and installing monitoring wells to levels directed by the supervising geologist following specifications further outlined in this protocol.

4.1.2 MONITORING WELL COMPLETION

Monitoring wells will be constructed of 0.010-inch slot size PVC well screen and riser casing. Other materials utilized for completion will be washed silica sand (Q-Rock No. 4 or approved equivalent) bentonite grout, Portland cement, and a protective steel locking well casing and cap with locks. The depth of the wells will be determined based on the depth to water, type of contaminant and field conditions encountered.

The monitoring well installation method for overburden and bedrock wells installed within unconsolidated sediments shall be to place the screen and riser assembly into the casing once the screen interval has been selected. At that time, a washed silica sand

pack will be placed around the well screen if required to prevent screen plugging. If a sand pack is not warranted, the auger string will be pulled back to allow the native aquifer material to collapse 2 to 3 feet above the top of the screen. Bentonite pellets will then be added to the annulus between the casing and the inside auger to insure proper sealing. Cement/bentonite grout will continue to be added during the extraction of the augers until the entire aquifer thickness has been sufficiently sealed off from horizontal and/or vertical flow above the screened interval. During placement of sand and bentonite pellets, frequent measurements will be made to check the height of the sand pack and thickness of bentonite layers by a weighted drop tape measure.

A bolt-down protective curb box will be installed, flush with the ground, or steel “stick-up” protective casing and secured by a Portland cement seal. The cement seal shall extend laterally at least 1 foot in all directions from the protective casing and shall slope gently away to drain water away from the well.

4.1.3 WELL DEVELOPMENT

All monitoring wells will be developed or cleared of all fine-grained materials and sediments that have settled in or around the well during installation so that the screen is transmitting representative portions of the groundwater. The development will be by one of two methods, pumping or bailing groundwater from the well until it yields relatively sediment-free water.

A decontaminated pump or bailer will be used and subsequently decontaminated after each use following procedures outlined in the Decontamination Protocol. Pumping or bailing will cease when the turbidity falls below 50 NTUs or until specific conductivity, pH, and temperature are stable (i.e., consecutive readings are within 10 percent with no overall upward or downward trends in measurements). Well development water will be contained in drums and properly disposed off-site.

4.1.4 DECONTAMINATION

All drilling equipment and associated tools including augers, drill rods, sampling equipment, wrenches and any other equipment or tools that have come in contact with contaminated materials will be decontaminated before any drilling on site begins, between each well, and prior to removing any equipment from the site. The preferred decontamination procedure will be to scrape the equipment from any residual soils and then rinse with water and Alconox®. Every effort will be made to minimize the

generation of contaminated water, which will be drummed, to extent possible, for disposal.

4.2 GROUNDWATER SAMPLING PROGRAM.

4.2.1 WELL EVACUATION

Prior to sampling a monitoring well, the static water level will be recorded. All well data will be recorded on a field sampling record. The wells will be sampled in accordance with the USEPA guidelines for the Low Flow Purging Sampling (LFPS). The purpose of LFPS is to collect groundwater samples from monitoring wells that are representative of ambient groundwater conditions in the aquifer. The LFPS method reduces turbidity which is needed particularly when sampling for metals.

4.2.2 SAMPLING PROCEDURE

The wells will be sampled using the LFPS technique. A flow rate of 100 ml to 250 ml per minute is used to purge the wells. Drawdown should not exceed 0.3 feet. QED bladder pumps or peristaltic pumps are used for this method. The pump intake is lowered to the mid-point of the water column or as subsurface features such as bedrock fractures or more permeable zones warrant. At the initiation of low flow purging a water level is recorded as well as field parameters. Field parameters are then monitored every five minutes during low flow purging using a flow through cell. When three consecutive measurements of pH differ by 0.1 units or less, with ORP within 10 mv or less, turbidity varies 10 percent or less, conductivity differs by 3 percent or less and dissolved oxygen by 10 percent or less, sampling may begin. Flow through cells are used so continuous real time readings are made. When the parameters stabilize the flow through cell is disconnected and sample bottles are filled directly from the tubing.

4.3 SOIL VAPOR SAMPLING

Soil vapor sampling will be conducted in accordance with NYSDOH Guidance for Evaluating Soil Vapor Intrusion in New York State (October 2006). Soil vapor samples will be collected in the vadose zone from shallow (5 feet) well points. Each vapor point will be installed in a shallow boring drilled either by hand-operated equipment (e.g. hand auger or percussion hammer drill), or by a small truck-mounted drill rig. Drilling equipment used shall be based on soil conditions, and the method that provides the most practical approach.

Each vapor point will consist of an inert sampling tube (polyethylene, stainless steel, or Teflon®) with a 6-inch screened section at the bottom through which soil vapors can be

sampled. The screen slot size will be 0.0075 inches. A sampling zone will be created around the screened section by backfilling with 1 to 2 feet of porous coarse sand or glass beads, and at least three feet of bentonite will be placed above the porous sampling zone to form a seal from the surface. Native clean soil will be packed around the remaining annulus to the ground surface.

Each designated soil vapor sampling location will be purged of a minimum of three volumes using a low volume pump, and then attached to a regulator, and secured with a clamp. The regulator will then be attached to a 1-liter summa canister.

The regulator will be set to collect a soil vapor sample at a flow rate of less than 0.2 liters per minute. After the summa canister is filled, the valve will be closed.

Each canister will be listed according to a specific sample I.D. on a chain of custody form. Sample canisters will be delivered to the laboratory within 24 hours and analyzed for VOCs by method TO-15. The detection limit for VOCs will be 1 $\mu g/m^3$ or less. The soil vapor sampling effort will include the use of inert helium tracer gas to verify that the soil vapor samples are not diluted by ambient air. The atmosphere around the sampling tube will be enriched with the tracer gas, and the soil vapor sample will be collected in the presence of the enriched tracer atmosphere. This will be accomplished by placing an inverted plastic pail over the sampling point and filling the pail with the tracer gas via a small tube penetrating the site of the pail. Refer to NYSDOH Guidance for Evaluating Soil Vapor Intrusion in New York State (October 2006).

Weather conditions in the 48 hours prior to the test, and during the test, will be noted, including average wind speed, precipitation, temperature, and barometric pressure.

4.4 SAMPLE PRESERVATION AND SHIPMENT

Since all bottles will contain the necessary preservatives as shown in Table 4.1, they need only be filled. The 40 ml VOA vials must be filled brim full with no air bubbles. The other bottles should be filled to within about 1 inch from the top.

The bottles will be sent from the laboratory in coolers which will be organized on a per site basis. Following sample collection, the bottles should be placed on ice in the shipping cooler. The samples will be cooled to 4°C, but not frozen.

Final packing and shipment of coolers will be performed in accordance with guidelines outlined in the ASP.

5.0 SAMPLE CUSTODY

The program for sample custody and sample transfer is in compliance with the NYSDEC-ASP, as periodically updated. If samples may be needed for legal purposes, chain-of-custody procedures, as defined by NEIC Policies and Procedures (USEPA-330/9-78-001-R, Revised June 1988) will be used. Sample chain-of-custody is initiated by the laboratory with selection and preparation of the sample containers. To reduce the chance for error, the number of personnel handling the samples should be minimized.

5.1 FIELD SAMPLE CUSTODY

A chain-of-custody record accompanies the samples from initial sample container selection and preparation at the laboratory, shipment to the field for sample containment and preservation, and return to the laboratory. Two copies of this record follow the samples to the laboratory. The laboratory maintains one file copy and the completed original is returned to the site inspection team. Individual sample containers provided by the laboratory are used for shipping samples. The shipping containers are insulated and ice is used to maintain samples at approximately 4°C until samples are returned and in the custody of the laboratory. All sample bottles within each shipping container are individually labeled and controlled. Samples are to be shipped to the laboratory within 24-48 hours of the day of collection depending on parameter holding times.

Each sample shipping container is assigned a unique identification number by the laboratory. This number is recorded on the chain-of-custody record and is marked with indelible ink on the outside of the shipping container. The field sampler will indicate the sample designation/location number in the space provided on the appropriate chain-of-custody form for each sample collected. The shipping container is closed and a seal provided by the laboratory is affixed to the latch. This seal must be broken to open the container, and this indicates possible tampering if the seal is broken before receipt at the laboratory. The laboratory will contact the site investigation team leader and the sample will not be analyzed if tampering is apparent.

5.2 LABORATORY SAMPLE CUSTODY

The site investigation team leader or Project Quality Assurance Officer notifies the laboratory of upcoming field sampling activities and the subsequent transfer of samples to the laboratory. This notification will include information concerning the number and type of samples to be shipped as well as the anticipated date of arrival.

The laboratory sample program meets the following criteria:

- The laboratory has designated a sample custodian who is responsible for maintaining custody of the samples and for maintaining all associated records documenting that custody.

- Upon receipt of the samples, the custodian will check the original chain-of-custody documents and compare them with the labeled contents of each sample container for correctness and traceability. The sample custodian signs the chain-of-custody record and records the date and time received.
- Care is exercised to annotate any labeling or descriptive errors. In the event of discrepant documentation, the laboratory will immediately contact the site investigation team leader as part of the corrective action process. A qualitative assessment of each sample container is performed to note any anomalies, such as broken or leaking bottles. This assessment is recorded as part of the incoming chain-of-custody procedure.
- The samples are stored in a secured area at a temperature of approximately 4°C until analyses are to commence.
- A laboratory chain-of-custody record accompanies the sample or sample fraction through final analysis for control.
- A copy of the chain-of-custody form will accompany the laboratory report and will become a permanent part of the project records.

5.3 FINAL EVIDENCE FILES

Final evidence files include all originals of laboratory reports and are maintained under documented control in a secure area.

A sample or an evidence file is under custody if:

- It is in your possession; it is in your view, after being in your possession.
- It was in your possession and you placed it in a secure area.
- It is in a designated secure area.

6.0 CALIBRATION PROCEDURES

Instruments and equipment used to gather, generate or measure environmental data will be calibrated with sufficient frequency and in such a manner that accuracy and reproducibility of results are consistent with the appropriate manufacturer's specifications or project specific requirements. The procedures for instrument calibration, calibration verification, and the frequency of calibrations are described in the ASP. The calibration of instruments used for the determination of metals will be as described in the appropriate CLP standard operating procedures.

Calibration of other instruments required for measurements associated with these analyses will be in accordance with the manufacturer's recommendations and the standard operating procedures of the laboratory.

7.0 ANALYTICAL PROCEDURES

Analytical procedures shall conform to the most recent revision of the NYSDEC-ASP (June 2005) and are summarized on Table 7.1. In the absence of USEPA or NYSDEC guidelines, appropriate procedures shall be submitted for approval by NYSDEC prior to use.

The procedures for the sample preparation and analysis for organic compounds are as specified in the NYSDEC-ASP. Analytical cleanups are mandatory where matrix interferences are noted. No sample shall be diluted any more than 1 to 5 times. The sample shall be either re-extracted, re-sonicated, re-stream distilled, etc. or be subjected to any one analytical cleanup noted in SW846 or a combination thereof. The analytical laboratory shall expend such effort and discretion to demonstrate good laboratory practice and demonstrate an attempt to best achieve the method detection limit.

7.1 VOLATILE ORGANICS (VOA)

For the analysis of water samples for Target Compound List (TCL), volatile organic compounds (VOCs), no sample preparation is required. The analytical procedure for volatiles is detailed in NYSDEC-ASP (Volume I, Section D-I). A measured portion of the sample is placed in the purge and trap apparatus and the sample analysis is performed by gas chromatography/mass spectrometry for the first round. USEPA Method 8260C will be used, plus tentatively identified compounds (TICs). USEPA Methods 8010 or 8020 (gas chromatography with different detectors) will be used if subsequent rounds with lower limits of detection are warranted.

7.2 SEMI-VOLATILE ORGANIC COMPOUNDS

The extraction and analytical procedures used for preparation of water, soil and sediment samples for the analysis of the TCL semi-volatile organic compounds are described in NYSDEC-ASP Volume I, Section D-III. USEPA Method 8270D will be used, plus tentatively identified compounds (TICs).

Instrument calibration, compound identification, and quantitation are performed as described in Section 6 of this document and in the NYSDEC-ASP.

7.3 PESTICIDE AND PCB COMPOUNDS

The sample preservation procedures for gas chromatography for pesticides and PCB's will be as described in the NYSDEC-ASP methods (Section D-IV). The analysis of standard mixes, blanks and spiked samples will be performed at the prescribed frequency with adherence to the 72-hour requirement described in the method.

7.4 METALS

Water, soil and waste samples will be analyzed for the metals listed in Table 7.1. The detection limits for these metals are as specified in the NYSDEC-ASP, Section D-V. The instrument detection limits will be determined using calibration standards and procedures specified in the NYSDEC-ASP. The detection limits for individual samples may be higher due to the sample matrix. The procedures for these analyses will be as described in the NYSDEC-ASP.

The analyses for metals will be performed by atomic absorption spectroscopy (AAS) or inductively-coupled plasma emission spectroscopy (ICPES), as specified in the ASP with regard to AAS flame analysis.

7.5 PER- AND POLYFLUOROALKYL SUBSTANCES

The NYSDEC has developed a list of 21 PFAS Analytes List on Table 7.1 for remedial programs. These are:

- Perfluorobutanesulfonic acid
- Perfluorohexanesulfonic acid
- Perfluoroheptanesulfonic acid
- Perfluorooctanesulfonic acid
- Perfluorodecanesulfonic acid
- Perfluorobutanoic acid
- Perfluoropentanoic acid
- Perfluorohexanoic acid
- Perfluoroheptanoic acid
- Perfluorooctanoic acid
- Perfluorononanoic acid
- Perfluorodecanoic acid
- Perfluoroundecanoic acid
- Perfluorododecanoic acid
- Perfluorotridecanoic acid
- Perfluorotetradecanoic acid
- 6:2 Fluorotelomer sulfonate
- 8:2 Fluorotelomer sulfonate
- Perfluroroctanesulfonamide
- N-methyl perfluorooctanesulfonamidoacetic acid
- N-ethyl perfluorooctanesulfonamidoacetic acid

Currently, ELAP does not offer certification for PFAS compounds in matrices other than finished drinking water. Per the NYSDEC June 2019 memo on emergent contaminant sampling, the analytical procedure for soil and groundwater sampling of PFAS is

Modified EPA Method 537. The reporting limit for PFAS in soil samples is 0.5 ug/kg. Reporting limits for perfluorooctanoic acid (PFOA) and perfluorooctanesulfonic acid (PFOS) in groundwater should not exceed 2 ng/L.

7.6 SITE SPECIFICITY OF ANALYSES

Work plans prepared for remedial investigation waste sites contain recommendations for the chemical parameters to be determined for each site. Thus, some or all of the referenced methods will apply to the analysis of samples collected at the individual waste sites. Analyses of Target Compound List (TCL) analytes will be performed on all samples.

TABLE 4.1 – SAMPLE CONTAINERIZATION

PARAMETER & ANALYTICAL METHOD	NO.	BOTTLE TYPE	PRESERVATIVE[1]	HOLDING TIME
Aqueous Samples				
VOCs – USEPA 8260C	3	40 mL, glass vial with septum cap	Hydrochloric Acid to pH <2 Ice to 4°C	14 days
SVOCs (BNAs) and 1,4-Dioxane – USEPA 8270 SIM	2	1-liter amber glass bottle	Ice to 4°C	7 days (until extraction) 40 days (extracted)
Pesticides – USEPA 8081B	2	1-liter amber glass bottle	Ice to 4°C	7 days (until extraction) 40 days (extracted)
PCBs – USEPA 8082A	2	1-liter amber glass bottle	Ice to 4°C	7 days (until extraction) 40 days (extracted)
Metals[2]	1	1-liter, plastic bottle	Nitric acid to pH <2 NaOH for cyanide Ice to 4°C	180 days Cyanide: 14 days Mercury: 28 days
Cyanide – USEPA 9010C/9012B	1	1-liter, plastic	Sodium Hydroxide to pH >12 Ice to 4°C	14 days
PFAS Compounds – USEPA Modified Method 537	2	500 ml HDPE or Polypropylene with non-Teflon lid	None	14 days
Soil, Sediment, Solid Waste Samples:				
VOCs – USEPA 8260C	3	5-gram EnCore samplers	Chilled to 0 - 6°C	14 days
SVOCs (BNAs) and 1,4-Dioxane – USEPA 8270D SIM if RL cannot be reached	1	4-oz. glass jar with Teflon lid	Chilled to 0 - 6°C	14 days (until extraction, 40 days extracted)
Pesticides – USEPA 8081B	1	4-oz. glass jar with Teflon lid	Chilled to 0 - 6°C	14 days (until extraction) 40 days (extracted)
PCBs – USEPA 8082A	1	4-oz. glass jar with Teflon lid	Chilled to 0 - 6°C	None
Metals[3]	1	4-oz. glass jar with Teflon lid	Chilled to 0 - 6°C	180 days Cyanide: 14 days

PARAMETER & ANALYTICAL METHOD	NO.	BOTTLE TYPE	PRESERVATIVE(1)	HOLDING TIME
				Mercury: 28 days
PFAS Compounds – USEPA Modified Method 537	2	500 ml HDPE or Polypropylene with non-Teflon lid	None	28 days
Soil Vapor / Indoor Air Samples:				
VOCs – USEPA TO-15	1	Summa Canister	None	30 days

(1) All samples will be preserved with ice during collection and shipment.
(2) Metals refers to the 24 metals and cyanide in the Target Compound List (NYSDEC-CLP 11/87). Metals will be analyzed by Method 6020B, 7470A for mercury, and 9010C/9012B for cyanide
(3) Metals refers to the 24 metals and cyanide in the Target Compound List (NYSDEC-CLP 11/87). Metals will be analyzed by Method 6010D, 7471B for mercury, and 9010C/9012B for cyanide
(4) A complete list of compounds is provided on Table 7.1.

(1) All samples will be preserved with ice during collection and shipment to 0-6 degrees C.
(2) From verified time of sample receipt by the analytical laboratory (within 24 to 48 hours of collection).
(3) A complete list of compounds is provided on Table 7.1.

TABLE 4.2 – SAMPLING PROCEDURE FOR MONITORING WELLS USING VOLUME AVERAGED PURGING

1. Initial static water level recorded with an electric contact probe accurate to the nearest 0.1 foot.

2. Sampling device and electric contact probe decontaminated.
    a. Sampling device and probe are rinsed with pesticide-grade methanol and distilled water.
    b. Methanol is collected into a large funnel which empties into a five- gallon container.

3. Sampling device lowered into well.
    a. Bailer lowered by dedicated PVC or polypropylene line.

4. Sample taken.
    a. Sample is poured slowly from the open end of the bailer with the sample bottle tilted so that aeration and turbulence are minimized.
    b. Duplicate sample is collected when appropriate.

5. Samples are capped, labeled and placed in laboratory coolers with ice packs or bagged ice.

6. All equipment is cleaned with successive rinses of pesticide-grade methanol and distilled water.
    a. Dedicated line is disposed of or left at well site.

7. Equipment/wash blanks are collected when non-dedicated sampling equipment is used.

8. Chain-of-custody forms are completed in triplicate.
    a. The original and one carbon copy are put into a zip-lock bag and placed into the cooler.

9. The original will be returned following sample analysis.
    a. A second carbon copy is kept on file.

10. Cooler is sealed with strapping tape and chain-of-custody seals to assure integrity and to prevent tampering of sample.

TABLE 4.3 – SAMPLING PROCEDURE FOR MONITORING WELLS USING LOW-STESS (LOW-FLOW) METHODS

1. Initial static water level recorded with an electric contact probe accurate to the nearest 0.1 foot.

2. Sampling device is lowered into well. Slowly lower the pump, safety cable, tubing and electrical lines into the well to the depth specified for that well. Pump intake must be no less than 2 feet from the bottom of the well to prevent disturbance and resuspension of sediments which may be at the bottom of the well.

3. Measure water level again: Before starting the pump, measure the water level again with the pump in the well. Leave the water level measuring device in the well.

4. Purge Well: Start pumping the well at 200 to 500 milliliters per minute (ml/min). The water level should be monitored approximately every five minutes. Ideally, a steady flow rate should be maintained that results in a stabilized water level (drawdown of 0.3 ft or less). Pumping rates should, if needed, be reduced to the minimum capabilities of the pump to ensure stabilization of the water level. As noted above, care should be taken to maintain pump suction and to avoid entrainment of air in the tubing. Record each adjustment made to the pumping rate and the water level measured immediately after each adjustment.

5. Monitor Indicator Parameters: During purging of the well, monitor and record the field indicator parameters (turbidity, temperature, specific conductance, pH, Eh, and DO) approximately every five minutes. The well is considered stabilized and ready for sample collection when the indicator parameters have stabilized for three consecutive readings as follows (Puls and Barcelona, 1996):

    a. 0.1 for pH
    b. 3% for specific conductance (conductivity)
    c. 10 mv for redox potential
    d. 10% for DO and turbidity

6. Dissolved oxygen and turbidity usually require the longest time to achieve stabilization. The pump must not be removed from the well between purging and sampling.

7. Collect Samples: Collect samples at a flow rate between 100 and 250 ml/min and such that drawdown of the water level within the well does not exceed the maximum allowable drawdown of 0.3 ft. VOC samples must be collected first and directly into sample containers. All sample containers should be filled with minimal turbulence by allowing the ground water to flow from the tubing gently down the inside of the container.

8. Ground water samples to be analyzed for volatile organic compounds (VOCs) require pH adjustment. The appropriate EPA Program Guidance should be consulted to determine whether pH adjustment is necessary. If pH adjustment is necessary for VOC sample preservation, the amount of acid to be added to each

sample vial prior to sampling should be determined, drop by drop, on a separate and equal volume of water (e.g., 40 ml). Groundwater purged from the well prior to sampling can be used for this purpose.

9. Remove Pump and Tubing: After collection of the samples, the tubing, unless permanently installed, must be properly discarded or dedicated to the well for resampling by hanging the tubing inside the well.

10. Measure and record well depth.

11. Close and lock the well.

12. Samples are capped, labeled and placed in laboratory coolers with ice packs or bagged ice.

13. All equipment is cleaned with successive rinses of pesticide-grade methanol and distilled water.

    a. Dedicated line is disposed of or left at well site.

14. Equipment/wash blanks are collected when non-dedicated sampling equipment is used.

15. Chain-of-custody forms are completed in triplicate.

    a. The original and one carbon copy are put into a zip-lock bag and placed into the cooler. The original will be returned following sample analysis.
    b. A second carbon copy is kept on file.

16. Cooler is sealed with strapping tape and chain-of-custody seals to assure integrity and to prevent tampering of sample.

TABLE 7-1 – CONTRACT-REQUIRED QUANTITATION LEVELS AND ANALYTICAL METHODS FOR ASP INORGANICS, ASP VOLATILES, ASP SEMI-VOLATILES, ASP PESTICIDES, AND PCBS

Target Compound List (TCL) and Contract-Required Quantitation Limit

SECTION 1 - ASP INORGANICS Method: NYSDEC-ASP-91-4					
	PARAMETER	**CONTRACT-REQUIRED DETECTION LEVEL* (µg/L)**		**PARAMETER**	**CONTRACT-REQUIRED DETECTION LEVEL* (µg/L)**
1.	Aluminum	200	13.	Magnesium	5,000
2.	Antimony	60	14.	Manganese	15
3.	Arsenic	15	15.	Mercury	0.2
4.	Barium	200	16.	Nickel	40
5.	Beryllium	5	17.	Potassium	5,000
6.	Cadmium	5	18.	Selenium	35
7.	Calcium	5,000	19.	Silver	10
8.	Chromium	10	20.	Sodium	5,000
9.	Cobalt	50	21.	Thallium	25
10.	Copper	25	22.	Vanadium	50
11.	Iron	100	23.	Zinc	60
12.	Lead	10	24.	Cyanide	10

SECTION 2 – ASP ORGANICS (VOLATILES) Method: NYSDEC-ASP-91-1					
	VOLATILE	**CONTRACT-REQUIRED QUANTITATION LIMIT** (µg/L)**		**VOLATILE**	**CONTRACT-REQUIRED QUANTITATION LIMIT** (µg/L)**
1.	Chloromethane	5.0	18.	1,2-Dichloropropane	5.0
2.	Bromomethane	5.0	19.	cis-1,3-Dichloropropene	5.0
3.	Vinyl Chloride	5.0	20.	Trichloroethene	5.0
4.	Chloroethane	5.0	21.	Dibromochloromethane	5.0
5.	Methylene Chloride	5.0	22.	1,1,2-Trichloroethane	5.0
6.	Acetone	10.0	23.	Benzene	5.0
7.	Carbon Disulfide	5.0	24.	Trans-1.3-Dichloropropene	5.0
8.	1,1-Dichloroethylene	5.0	25.	Bromoform	5.0
9.	1,1-Dichloroethane	5.0	26.	2-Hexanone	10.0
10.	1,2-Dichloroethylene (total)	5.0	27.	4-Methyl, 1,2-Pentanone	10.0
11.	Chloroform	5.0	28.	Tetrachloroethylene	5.0
12.	1,2-Dichloroethane	5.0	29.	Toluene	5.0
13.	2-Butanone	10.0	30.	Chlorobenzene	5.0
14.	1,1,1-Trichloroethane	5.0	31.	Ethylbenzene	5.0
15.	Carbon Tetrachloride	5.0	32.	Styrene	5.0
16.	Bromodichloromethane	5.0	33.	Total Xylenes	5.0
17.	1,1,2,2-Tetrachloroethane	5.0			

SECTION 3 - ASP ORGANICS (SEMI-VOLATILES) Method: NYSDEC-ASP-91-2					
	SEMI-VOLATILE	**CONTRACT-REQUIRED QUANTITATION LIMIT (µg/l)**		**SEMI-VOLATILE**	**CONTRACT-REQUIRED QUANTITATION LIMIT (µg/l)**
1.	Phenol	5.0	33.	Acenaphthene	5.0
2.	Bis(2-chloroethyl)ether	5.0	34.	2,4-Dinitrophenol	10.0
3.	2-Chlorophenol	5.0	35.	4-Nitrophenol	10.0
4.	1,3-Dichlorobenzene	5.0	36.	Dibenzofuran	5.0
5.	1,4-Dichlorobenzene	5.0	37.	Dinitrotoluene	5.0
6.	1,2-Dichlorobenzene	5.0	38.	Diethylphthalate	5.0
7.	2-Methylphenol	5.0	39.	4-Chlorophenyl phenyl ether	5.0
8.	2,2'oxybis(1-Chloropropane)	5.0	40.	Fluorene	5.0
9.	4-Methylphenol	5.0	41.	4-Nitroanile	10.0
10.	N-Nitroso-dipropylamine	5.0	42.	4,6-Dinitro-2-methylphenol	10.0
11.	Hexachloroethane	5.0	43.	N-nitrosodiphenyl amine	5.0
12.	Nitrobenzene	5.0	44.	4-Bromophenyl phenyl ether	5.0
13.	Isophorone	5.0	45.	Hexachlorobenzene	5.0
14.	2-Nitrophenol	5.0	46.	Pentachlorophenol	10.0
15.	2,4-Dimethylphenol	5.0	47.	Phenanthrene	5.0
16.	Bis(2-Chloroethoxy) methane	5.0	48.	Anthracene	5.0
17.	2,4-Dichlorophenol	5.0	49.	Carbazole	5.0
18.	1,2,4-Trichlorobenzene	5.0	50.	Di-n-butyl phthalate	5.0
19.	Naphthalene	5.0	51.	Fluoranthene	5.0
20.	4-Chloroaniline	5.0	52.	Pyrene	5.0
21.	Hexachlorobutadiene	5.0	53.	Butyl benzyl phthalate	5.0
22.	4-Chloro-3-methylphenol	5.0	54.	3,3'-Dichloro benzidine	5.0
23.	2-Methylnaphthalene	5.0	55.	Benz(a)anthracene	5.0
24.	Hexachlorocyclopentadiene	5.0	56.	Chrysene	5.0
25.	2,4,6-Trichlorophenol	5.0	57.	Bis(2-ethylhexyl) phthalate	5.0
26.	2,4,5-Trichlorophenol	10.0	58.	Di-n-octyl phthalate	5.0
27.	2-Chloronapthalene	5.0	59.	Benzo(b)fluoranthene	5.0
28.	2-Nitroananiline	10.0	60.	Benzo(k)fluoranthene	5.0
29.	Dimethyl phthalate	5.0	61.	Benzo(a)pyrene	5.0
30.	Acenaphthylene	5.0	62.	Indeno(1,2,3-cd) pyrene	5.0
31.	2,6-Dinitrotoluene	5.0	63.	Dibenz(a,h) anthracene	5.0
32.	3-Nitroaniline	10.0	64.	Benzo(g,h,i)perylene	5.0

SECTION 3 - ASP ORGANICS (PESTICIDES/PCBS) Method: NYSDEC-ASP-91-3					
	PESTICIDE/PCB	**CONTRACT-REQUIRED QUANTITATION LIMIT (µg/l)**		**PESTICIDE/PCB**	**CONTRACT-REQUIRED QUANTITATION LIMIT (µg/l)**
1.	Alpha-BHC	0.05	15.	4,4'-DDT	0.10
2.	Beta-BHC	0.05	16.	Methoxychlor	0.5
3.	Delta-BHC	0.05	17.	Endrin ketone	0.10
4.	Gamma-BHC (lindane)	0.05	18.	Endrin aldehyde	0.10
5.	Heptachlor	0.05	19.	Alpha-Chlordane	0.05
6.	Aldrin	0.05	20.	Gamma-Chlordane	0.05
7.	Heptachlor epoxide	0.05	21.	Toxaphene	5.0
8.	Endosulfan I	0.05	22.	AROCHLOR-1016	1.0
9.	Dieldrin	0.10	23.	AROCHLOR-1221	1.0
10.	4,4'-DDE	0.10	24.	AROCHLOR-1232	1.0
11.	Endrin	0.10	25.	AROCHLOR-1242	1.0
12.	Endosulfan II	0.10	26.	AROCHLOR-1248	1.0
13.	4,4'-DDD	0.10	27.	AROCHLOR-1254	1.0
14.	Endosulfan sulfate	0.10	28.	AROCHLOR-1260	1.0

*Matrix: groundwater. For soil matrix, multiply CRDL by 100.
**Quantitation limit for medium-level soil is 1,200 µg/kg (wet weight basis).

Method: EPA Modified 537 Perfluorinated Alkyl Acids by Isotope Dilution			
		Reporting Limit—Groundwater (ng/l)	**Method Detection Limit—Groundwater (ng/l)**
1	Perfluorobutanoic Acid (PFBA)	2.00	0.408
2	Perfluoropentanoic Acid (PFPeA)	2.00	0.396
3	Perfluorobutanesulfonic Acid (PFBS)	2.00	0.238
4	Perfluorohexanoic Acid (PFHxA)	2.00	0.328
5	Perfluoroheptanoic Acid (PFHpA)	2.00	0.225
6	Perfluorohexanesulfonic Acid (PFHxS)	2.00	0.376
7	Perfluorooctanoic Acid (PFOA)	2.00	0.236
8	1H,1H,2H,2H-Perfluorooctanesulfonic Acid (6:2 FTS)	2.00	1.33
9	Perfluoroheptanesulfonic Acid (PFHpS)	2.00	0.688
10	Perfluorononanoic Acid (PFNA)	2.00	0.312
11	Perfluorooctanesulfonic Acid (PFOS)	2.00	0.504
12	Perfluorodecanoic Acid (PFDA)	2.00	0.304
13	1H,1H,2H,2H-Perfluorodecanesulfonic Acid (8:2FTS)	2.00	1.21
14	N-Methyl Perfluorooctanesulfonamidoacetic Acid (NMeFOSAA)	2.00	0.648
15	Perfluoroundecanoic Acid (PFUnA)	2.00	0.260
16	Perfluorodecanesulfonic Acid (PFDS)	2.00	0.980
17	Perfluorooctanesulfonamide (FOSA)	2.00	0.580
18	N-Ethyl Perfluorooctanesulfonamidoacetic Acid (NEtFOSAA)	2.00	0.804
19	Perfluorododecanoic Acid (PFDoA)	2.00	0.372

Method: EPA Modified 537 Perfluorinated Alkyl Acids by Isotope Dilution			
20	Perfluorotridecanoic Acid (PFTrDA)	2.00	0.327
21	Perfluorotetradecanoic Acid (PFTA)	2.00	0.248

Method: EPA Modified 537 Perfluorinated Alkyl Acids by Isotope Dilution		
	Reporting Limit— Soil (ng/g)	**Method Detection Limit— Soil (ng/g)**
Perfluorobutanoic Acid (PFBA)	0.500	0.023
Perfluoropentanoic Acid (PFPeA)	0.500	0.046
Perfluorobutanesulfonic Acid (PFBS)	0.250	0.039
Perfluorohexanoic Acid (PFHxA)	0.500	0.053
Perfluoroheptanoic Acid (PFHpA)	0.250	0.045
Perfluorohexanesulfonic Acid (PFHxS)	0.250	0.061
Perfluorooctanoic Acid (PFOA)	0.250	0.042
1H,1H,2H,2H-Perfluorooctanesulfonic Acid (6:2 FTS)	0.500	0.180
Perfluoroheptanesulfonic Acid (PFHpS)	0.500	0.137
Perfluorononanoic Acid (PFNA)	0.250	0.075
Perfluorooctanesulfonic Acid (PFOS)	0.250	0.130
Perfluorodecanoic Acid (PFDA)	0.250	0.067
1H,1H,2H,2H-Perfluorodecanesulfonic Acid (8:2FTS)	0.500	0.287
N-Methyl Perfluorooctanesulfonamidoacetic Acid (NMeFOSAA)	0.500	0.202
Perfluoroundecanoic Acid (PFUnA)	0.500	0.047
Perfluorodecanesulfonic Acid (PFDS)	0.500	0.153
Perfluorooctanesulfonamide (FOSA)	0.500	0.098
N-Ethyl Perfluorooctanesulfonamidoacetic Acid (NEtFOSAA)	0.500	0.085
Perfluorododecanoic Acid (PFDoA)	0.500	0.070
Perfluorotridecanoic Acid (PFTrDA)	0.500	0.205
Perfluorotetradecanoic Acid (PFTA)	0.500	0.054

Appendix C:

Community Air Monitoring Plan

SESI
CONSULTING ENGINEERS

COMMUNITY AIR MONITORING PLAN

FOR

St. Clair Hotel Dry Cleaners Site
34, 36, and 38 Main Street
Yonkers, Westchester County, New York 10701
BCP# 360220

Prepared For:

St. Clair Development, LLC,
c/o MacQuesten Companies
438 Fifth Avenue, Suite 100
Pelham, New York 10803

Prepared By:

SESI CONSULTING ENGINEERS

959 Route 46E, Floor 3, Suite 300
Parsippany, New Jersey 07054

Project No. 11846
February 2023/Revised May 2023

Table of Contents

LIST OF ACRONYMS ..... **i**

1.0 INTRODUCTION **1**

2.0 OBJECTIVES **1**

3.0 METHODS **1**

3.1 CONTINUOUS MONITORNG 2

3.2 PERIODIC MONITORING 2

4.0 VOC MONITORING, RESPONSE LEVELS, AND ACTIONS **3**

5.0 PARTICULATE MONITORING, RESPONSE LEVELS, AND ACTIONS **4**

6.0 SPECIAL REQUIREMENTS FOR WORK WITHIN 20 FEET OF POTENTIALLY EXPOSED INDIVIDUAL STRUCTURES **5**

LIST OF ACRONYMS

Acronym	Definition
CAMP	Community Air Monitoring Plan
IRM	Interim Remedial Measure
mcg/m^3	micrograms per cubic meter
NYSDEC	New York State Department of Environmental Conservation
NYSDOH	New York State Department of Health
PID	Photoionization Detector
PM-10	Less than 10 micrometers
ppm	Parts Per Million
RI	Remedial Investigation
RIWP	Remedial Investigation Work Plan
VOC	Volatile Organic Compound

1.0 INTRODUCTION

This document presents a Community Air Monitoring Plan (CAMP) for the Remedial Action Workplan (RAWP) of the property located at 34, 36 and 38 Main Street (the Site). The Site is approximately 0.214 acres and consists of three (3) parcels identified on the Westchester County tax records as tax parcels 38 Main Street (1.-501-18), 36 Main Street (1.-501-19), and 34 Main Street (1.-501-20). The Site is bound to the north by Main Street, to the west by a one-story commercial building, to the south by commercial buildings and to the east by Riverdale Avenue.

Based on the review of Sanborn Maps, several businesses and storefronts were listed onsite from 1886. Most notably, a hotel was listed on the Site from 1942. Hotels are historically known to have had in-house dry-cleaning services, which have the potential for impacting the sub-surface. Two underground ovens are identified on the Site from 1898 to 1956. No additional details regarding the ovens' uses were identified. Paint-Dressmaking was listed on-Site from 1971 to 1973.

2.0 OBJECTIVES

The objective of the CAMP is to provide a measure of protection for the downwind community from potential airborne contaminant releases that may arise during all ground intrusive activities, and potentially contaminated soil and material handling and staging. In addition, the CAMP is intended to ensure that dust and contaminants are not leaving the work zone. The CAMP is not intended for use in establishing action levels for worker respiratory protection.

3.0 METHODS

The CAMP will include continuous monitoring for particulate matter (e.g., airborne "dust") and volatile organic compounds (VOCs) during the planned remedial investigation activities. Any CAMP exceedances will be reported to the NYSDEC and New York State Department of Health (NYSDOH) on the same business day or next business day if after hours. Notification of the exceedance will be sent via email along with the reason for the exceedance, the measure(s) taken to address the exceedance, and if the exceedance was resolved. In addition, the following NYSDEC and NYSDOH personnel will be

provided weekly CAMP data summaries for review. Reliance on the CAMP should not preclude simple, common-sense measures to keep VOCs, dust, and odors at a minimum around the work areas.

Name	Contact Information
NYSDEC Project Manager New York State Department of Environmental Conservation 625 Broadway,12th Floor Albany, NY 12233-7014 Email: rachel.savarie@dec.ny.gov Phone: (518) 402-9717	Rachel Savarie, P.E.
NYSDOH Project Manager Public Health Specialist II Bureau of Environmental Exposures Investigation Empire State Plaza, Corning Tower Albany, NY 12237 Email: Johnathan.robinson@health.ny.gov Phone:518-402-7881	Johnathon Robinson, NYSDOH

3.1 CONTINUOUS MONITORNG

Continues monitoring for particulates and VOCs will be conducted during all ground intrusive activities including soil borings, monitoring well installations, and soil vapor probe installations.

3.2 PERIODIC MONITORING

Periodic monitoring for VOCs will be conducted during non-intrusive activities such as the collection of soil and sediment samples or the collection of groundwater samples from existing monitoring wells. “Periodic” monitoring during sample collection consists of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. In some instances, depending upon the proximity of potentially exposed individuals, continuous monitoring may be required during sampling activities. Examples of such situations include groundwater sampling at wells on the curb of a busy urban street, in the midst of a public park, or adjacent to a school or residence.

4.0 VOC MONITORING, RESPONSE LEVELS, AND ACTIONS

VOC Monitoring, Response Levels, and Actions Volatile organic compounds (VOCs) must be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis or as otherwise specified. Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work will be performed using a photoionization detector (PID) equipped with a 10.6 ev lamp. The equipment will be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment should be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.

All 15-minute readings must be recorded and be available for State (DEC and DOH) personnel to review. Instantaneous readings, if any, used for decision purposes should also be recorded. CAMP readings should be provided on a weekly basis with all exceedances reported to NYSDEC and NYSDOH the same day or next business day if

after hours along with the reason for exceedance, what was done to correct it, and if it was effective.

5.0 PARTICULATE MONITORING, RESPONSE LEVELS, AND ACTIONS

Particulate concentrations should be monitored continuously at the upwind and downwind perimeters of the exclusion zone at temporary particulate monitoring stations. The particulate monitoring should be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment must be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during all work activities.

- If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m3) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques must be employed. Work may continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed 150 mcg/m3 above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than 150 mcg/m3 above the upwind level, work must be stopped and a re-evaluation of activities initiated. Work can resume provided that dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within 150 mcg/m3 of the upwind level and in preventing visible dust migration.

All readings must be recorded and be available for State (NYSDEC and NYSDOH) personnel to review on a weekly basis with all exceedances reported to NYSDEC and NYSDOH the same day or next business day if after hours along with the reason for exceedance, what was done to correct it, and if it was effective.

6.0 SPECIAL REQUIREMENTS FOR WORK WITHIN 20 FEET OF POTENTIALLY EXPOSED INDIVIDUAL STRUCTURES

When work areas are within 20 feet of potentially exposed populations or occupied structures, the continuous monitoring locations for VOCs and particulates must reflect the nearest potentially exposed individuals and the location of ventilation system intakes for nearby structures. The use of engineering controls such as vapor/dust barriers, temporary negative-pressure enclosures, or special ventilation devices should be considered to prevent exposures related to the work activities and to control dust and odors. Consideration should be given to implementing the planned activities when potentially exposed populations are at a minimum, such as during weekends or evening hours in non-residential settings.

- If total VOC concentrations opposite the walls of occupied structures or next to intake vents exceed 1 ppm, monitoring should occur within the occupied structure(s). Depending upon the nature of contamination, chemical-specific colorimetric tubes of sufficient sensitivity may be necessary for comparing the exposure point concentrations with appropriate pre-determined response levels (response actions should also be pre-determined). Background readings in the occupied spaces must be taken prior to commencement of the planned work. Any unusual background readings should be discussed with NYSDOH prior to commencement of the work.
- If total particulate concentrations opposite the walls of occupied structures or next to intake vents exceed 150 mcg/m^3, work activities should be suspended until controls are implemented and are successful in reducing the total particulate concentration to 150 mcg/m3 or less at the monitoring point.
- Depending upon the nature of contamination and remedial activities, other parameters (e.g., explosivity, oxygen, hydrogen sulfide, carbon monoxide) may also need to be monitored. Response levels and actions should be pre-determined, as necessary, for each site.

Appendix D:

NYSDEC Soil Cleanup Objectives

375-6.8 Soil cleanup objective tables.

(a) Unrestricted use soil cleanup objectives.

Table 375-6.8(a):Unrestricted Use Soil Cleanup Objectives

Contaminant	CAS Number	Unrestricted Use
Metals		
Arsenic	7440-38-2	13 [c]
Barium	7440-39-3	350 [c]
Beryllium	7440-41-7	7.2
Cadmium	7440-43-9	2.5 [c]
Chromium, hexavalent [e]	18540-29-9	1[b]
Chromium, trivalent [e]	16065-83-1	30 [c]
Copper	7440-50-8	50
Total Cyanide [e, f]		27
Lead	7439-92-1	63 [c]
Manganese	7439-96-5	1600 [c]
Total Mercury		0.18 [c]
Nickel	7440-02-0	30
Selenium	7782-49-2	3.9[c]
Silver	7440-22-4	2
Zinc	7440-66-6	109 [c]
PCBs/Pesticides		
2,4,5-TP Acid (Silvex) [f]	93-72-1	3.8
4,4'-DDE	72-55-9	0.0033 [b]
4,4'-DDT	50-29-3	0.0033 [b]
4,4'-DDD	72-54-8	0.0033 [b]
Aldrin	309-00-2	0.005 [c]
alpha-BHC	319-84-6	0.02
beta-BHC	319-85-7	0.036
Chlordane (alpha)	5103-71-9	0.094

Table 375-6.8(a):Unrestricted Use Soil Cleanup Objectives

Contaminant	CAS Number	Unrestricted Use
delta-BHC [g]	319-86-8	0.04
Dibenzofuran [f]	132-64-9	7
Dieldrin	60-57-1	0.005 [c]
Endosulfan I [d, f]	959-98-8	2.4
Endosulfan II [d, f]	33213-65-9	2.4
Endosulfan sulfate [d, f]	1031-07-8	2.4
Endrin	72-20-8	0.014
Heptachlor	76-44-8	0.042
Lindane	58-89-9	0.1
Polychlorinated biphenyls	1336-36-3	0.1
Semivolatile organic compounds		
Acenaphthene	83-32-9	20
Acenapthylene [f]	208-96-8	100 [a]
Anthracene [f]	120-12-7	100 [a]
Benz(a)anthracene [f]	56-55-3	1 [c]
Benzo(a)pyrene	50-32-8	1 [c]
Benzo(b)fluoranthene [f]	205-99-2	1 [c]
Benzo(g,h,i)perylene [f]	191-24-2	100
Benzo(k)fluoranthene [f]	207-08-9	0.8 [c]
Chrysene [f]	218-01-9	1 [c]
Dibenz(a,h)anthracene [f]	53-70-3	0.33 [b]
Fluoranthene [f]	206-44-0	100 [a]
Fluorene	86-73-7	30
Indeno(1,2,3-cd)pyrene [f]	193-39-5	0.5 [c]
m-Cresol [f]	108-39-4	0.33 [b]
Naphthalene [f]	91-20-3	12
o-Cresol [f]	95-48-7	0.33 [b]

Table 375-6.8(a):Unrestricted Use Soil Cleanup Objectives

Contaminant	CAS Number	Unrestricted Use
p-Cresol [f]	106-44-5	0.33 [b]
Pentachlorophenol	87-86-5	0.8 [b]
Phenanthrene [f]	85-01-8	100
Phenol	108-95-2	0.33 [b]
Pyrene [f]	129-00-0	100
Volatile organic compounds		
1,1,1-Trichloroethane [f]	71-55-6	0.68
1,1-Dichloroethane [f]	75-34-3	0.27
1,1-Dichloroethene [f]	75-35-4	0.33
1,2-Dichlorobenzene [f]	95-50-1	1.1
1,2-Dichloroethane	107-06-2	0.02 [c]
cis -1,2-Dichloroethene [f]	156-59-2	0.25
trans-1,2-Dichloroethene [f]	156-60-5	0.19
1,3-Dichlorobenzene [f]	541-73-1	2.4
1,4-Dichlorobenzene	106-46-7	1.8
1,4-Dioxane	123-91-1	0.1 [b]
Acetone	67-64-1	0.05
Benzene	71-43-2	0.06
n-Butylbenzene [f]	104-51-8	12
Carbon tetrachloride [f]	56-23-5	0.76
Chlorobenzene	108-90-7	1.1
Chloroform	67-66-3	0.37
Ethylbenzene [f]	100-41-4	1
Hexachlorobenzene [f]	118-74-1	0.33[b]
Methyl ethyl ketone	78-93-3	0.12
Methyl tert-butyl ether [f]	1634-04-4	0.93
Methylene chloride	75-09-2	0.05

Table 375-6.8(a):Unrestricted Use Soil Cleanup Objectives

Contaminant	CAS Number	Unrestricted Use
n - Propylbenzene [f]	103-65-1	3.9
sec-Butylbenzene [f]	135-98-8	11
tert-Butylbenzene [f]	98-06-6	5.9
Tetrachloroethene	127-18-4	1.3
Toluene	108-88-3	0.7
Trichloroethene	79-01-6	0.47
1,2,4-Trimethylbenzene [f]	95-63-6	3.6
1,3,5-Trimethylbenzene[f]	108-67-8	8.4
Vinyl chloride[f]	75-01-4	0.02
Xylene (mixed)	1330-20-7	0.26

All soil cleanup objectives (SCOs) are in parts per million (ppm).

Footnotes

[a] The SCOs for unrestricted use were capped at a maximum value of 100 ppm. See Technical Support Document (TSD), section 9.3.

[b] For constituents where the calculated SCO was lower than the contract required quantitation limit (CRQL), the CRQL is used as the Track 1 SCO value.

[c] For constituents where the calculated SCO was lower than the rural soil background concentration, as determined by the Department and Department of Health rural soil survey, the rural soil background concentration is used as the Track 1 SCO value for this use of the site.

[d] SCO is the sum of endosulfan I, endosulfan II and endosulfan sulfate.

[e] The SCO for this specific compound (or family of compounds) is considered to be met if the analysis for the total species of this contaminant is below the specific SCO.

[f] Protection of ecological resources SCOs were not developed for contaminants identified in Table 375-6.8(b) with “NS”. Where such contaminants appear in Table 375-6.8(a), the applicant may be required by the Department to calculate a protection of ecological resources SCO according to the TSD.

(b) Restricted use soil cleanup objectives.

Table 375-6.8(b): Restricted Use Soil Cleanup Objectives

Contaminant	CAS Number	Protection of Public Health				Protection of Ecological Resources	Protection of Ground-water
		Residential	Restricted-Residential	Commercial	Industrial		
Metals							
Arsenic	7440-38-2	16[f]	16[f]	16[f]	16[f]	13[f]	16[f]
Barium	7440-39-3	350[f]	400	400	10,000 [d]	433	820
Beryllium	7440-41-7	14	72	590	2,700	10	47
Cadmium	7440-43-9	2.5[f]	4.3	9.3	60	4	7.5
Chromium, hexavalent [h]	18540-29-9	22	110	400	800	1[e]	19
Chromium, trivalent [h]	16065-83-1	36	180	1,500	6,800	41	NS
Copper	7440-50-8	270	270	270	10,000 [d]	50	1,720
Total Cyanide [h]		27	27	27	10,000 [d]	NS	40
Lead	7439-92-1	400	400	1,000	3,900	63[f]	450
Manganese	7439-96-5	2,000[f]	2,000[f]	10,000 [d]	10,000 [d]	1600[f]	2,000[f]
Total Mercury		0.81[j]	0.81[j]	2.8[j]	5.7[j]	0.18[f]	0.73
Nickel	7440-02-0	140	310	310	10,000 [d]	30	130
Selenium	7782-49-2	36	180	1,500	6,800	3.9[f]	4[f]
Silver	7440-22-4	36	180	1,500	6,800	2	8.3
Zinc	7440-66-6	2200	10,000 [d]	10,000 [d]	10,000 [d]	109[f]	2,480
PCBs/Pesticides							
2,4,5-TP Acid (Silvex)	93-72-1	58	100[a]	500[b]	1,000[c]	NS	3.8
4,4'-DDE	72-55-9	1.8	8.9	62	120	0.0033 [e]	17
4,4'-DDT	50-29-3	1.7	7.9	47	94	0.0033 [e]	136
4,4'- DDD	72-54-8	2.6	13	92	180	0.0033 [e]	14
Aldrin	309-00-2	0.019	0.097	0.68	1.4	0.14	0.19
alpha-BHC	319-84-6	0.097	0.48	3.4	6.8	0.04[g]	0.02
beta-BHC	319-85-7	0.072	0.36	3	14	0.6	0.09
Chlordane (alpha)	5103-71-9	0.91	4.2	24	47	1.3	2.9

Table 375-6.8(b): Restricted Use Soil Cleanup Objectives

Contaminant	CAS Number	Protection of Public Health				Protection of Ecological Resources	Protection of Ground-water
		Residential	Restricted-Residential	Commercial	Industrial		
delta-BHC	319-86-8	100[a]	100[a]	500[b]	1,000[c]	0.04[g]	0.25
Dibenzofuran	132-64-9	14	59	350	1,000[c]	NS	210
Dieldrin	60-57-1	0.039	0.2	1.4	2.8	0.006	0.1
Endosulfan I	959-98-8	4.8[i]	24[i]	200[i]	920[i]	NS	102
Endosulfan II	33213-65-9	4.8[i]	24[i]	200[i]	920[i]	NS	102
Endosulfan sulfate	1031-07-8	4.8[i]	24[i]	200[i]	920[i]	NS	1,000[c]
Endrin	72-20-8	2.2	11	89	410	0.014	0.06
Heptachlor	76-44-8	0.42	2.1	15	29	0.14	0.38
Lindane	58-89-9	0.28	1.3	9.2	23	6	0.1
Polychlorinated biphenyls	1336-36-3	1	1	1	25	1	3.2
Semivolatiles							
Acenaphthene	83-32-9	100[a]	100[a]	500[b]	1,000[c]	20	98
Acenapthylene	208-96-8	100[a]	100[a]	500[b]	1,000[c]	NS	107
Anthracene	120-12-7	100[a]	100[a]	500[b]	1,000[c]	NS	1,000[c]
Benz(a)anthracene	56-55-3	1[f]	1[f]	5.6	11	NS	1[f]
Benzo(a)pyrene	50-32-8	1[f]	1[f]	1[f]	1.1	2.6	22
Benzo(b)fluoranthene	205-99-2	1[f]	1[f]	5.6	11	NS	1.7
Benzo(g,h,i)perylene	191-24-2	100[a]	100[a]	500[b]	1,000[c]	NS	1,000[c]
Benzo(k)fluoranthene	207-08-9	1	3.9	56	110	NS	1.7
Chrysene	218-01-9	1[f]	3.9	56	110	NS	1[f]
Dibenz(a,h)anthracene	53-70-3	0.33[e]	0.33[e]	0.56	1.1	NS	1,000[c]
Fluoranthene	206-44-0	100[a]	100[a]	500[b]	1,000[c]	NS	1,000[c]
Fluorene	86-73-7	100[a]	100[a]	500[b]	1,000[c]	30	386
Indeno(1,2,3-cd)pyrene	193-39-5	0.5[f]	0.5[f]	5.6	11	NS	8.2
m-Cresol	108-39-4	100[a]	100[a]	500[b]	1,000[c]	NS	0.33[e]
Naphthalene	91-20-3	100[a]	100[a]	500[b]	1,000[c]	NS	12

Table 375-6.8(b): Restricted Use Soil Cleanup Objectives

Contaminant	CAS Number	Protection of Public Health				Protection of Ecological Resources	Protection of Ground-water
		Residential	Restricted-Residential	Commercial	Industrial		
o-Cresol	95-48-7	100[a]	100[a]	500[b]	1,000[c]	NS	0.33[e]
p-Cresol	106-44-5	34	100[a]	500[b]	1,000[c]	NS	0.33[e]
Pentachlorophenol	87-86-5	2.4	6.7	6.7	55	0.8[e]	0.8[e]
Phenanthrene	85-01-8	100[a]	100[a]	500[b]	1,000[c]	NS	1,000[c]
Phenol	108-95-2	100[a]	100[a]	500[b]	1,000[c]	30	0.33[e]
Pyrene	129-00-0	100[a]	100[a]	500[b]	1,000[c]	NS	1,000[c]
Volatiles							
1,1,1-Trichloroethane	71-55-6	100[a]	100[a]	500[b]	1,000[c]	NS	0.68
1,1-Dichloroethane	75-34-3	19	26	240	480	NS	0.27
1,1-Dichloroethene	75-35-4	100[a]	100[a]	500[b]	1,000[c]	NS	0.33
1,2-Dichlorobenzene	95-50-1	100[a]	100[a]	500[b]	1,000[c]	NS	1.1
1,2-Dichloroethane	107-06-2	2.3	3.1	30	60	10	0.02[f]
cis-1,2-Dichloroethene	156-59-2	59	100[a]	500[b]	1,000[c]	NS	0.25
trans-1,2-Dichloroethene	156-60-5	100[a]	100[a]	500[b]	1,000[c]	NS	0.19
1,3-Dichlorobenzene	541-73-1	17	49	280	560	NS	2.4
1,4-Dichlorobenzene	106-46-7	9.8	13	130	250	20	1.8
1,4-Dioxane	123-91-1	9.8	13	130	250	0.1[e]	0.1[e]
Acetone	67-64-1	100[a]	100[b]	500[b]	1,000[c]	2.2	0.05
Benzene	71-43-2	2.9	4.8	44	89	70	0.06
Butylbenzene	104-51-8	100[a]	100[a]	500[b]	1,000[c]	NS	12
Carbon tetrachloride	56-23-5	1.4	2.4	22	44	NS	0.76
Chlorobenzene	108-90-7	100[a]	100[a]	500[b]	1,000[c]	40	1.1
Chloroform	67-66-3	10	49	350	700	12	0.37
Ethylbenzene	100-41-4	30	41	390	780	NS	1
Hexachlorobenzene	118-74-1	0.33[e]	1.2	6	12	NS	3.2
Methyl ethyl ketone	78-93-3	100[a]	100[a]	500[b]	1,000[c]	100[a]	0.12

Table 375-6.8(b): Restricted Use Soil Cleanup Objectives

Contaminant	CAS Number	Protection of Public Health				Protection of Ecological Resources	Protection of Ground-water
		Residential	Restricted-Residential	Commercial	Industrial		
Methyl tert-butyl ether	1634-04-4	62	100[a]	500[b]	1,000[c]	NS	0.93
Methylene chloride	75-09-2	51	100[a]	500[b]	1,000[c]	12	0.05
n-Propylbenzene	103-65-1	100[a]	100[a]	500[b]	1,000[c]	NS	3.9
sec-Butylbenzene	135-98-8	100[a]	100[a]	500[b]	1,000[c]	NS	11
tert-Butylbenzene	98-06-6	100[a]	100[a]	500[b]	1,000[c]	NS	5.9
Tetrachloroethene	127-18-4	5.5	19	150	300	2	1.3
Toluene	108-88-3	100[a]	100[a]	500[b]	1,000[c]	36	0.7
Trichloroethene	79-01-6	10	21	200	400	2	0.47
1,2,4-Trimethylbenzene	95-63-6	47	52	190	380	NS	3.6
1,3,5- Trimethylbenzene	108-67-8	47	52	190	380	NS	8.4
Vinyl chloride	75-01-4	0.21	0.9	13	27	NS	0.02
Xylene (mixed)	1330-20-7	100[a]	100[a]	500[b]	1,000[c]	0.26	1.6

All soil cleanup objectives (SCOs) are in parts per million (ppm).
NS=Not specified. See Technical Support Document (TSD).

Footnotes

[a] The SCOs for residential, restricted-residential and ecological resources use were capped at a maximum value of 100 ppm. See TSD section 9.3.

[b] The SCOs for commercial use were capped at a maximum value of 500 ppm. See TSD section 9.3.

[c] The SCOs for industrial use and the protection of groundwater were capped at a maximum value of 1000 ppm. See TSD section 9.3.

[d] The SCOs for metals were capped at a maximum value of 10,000 ppm. See TSD section 9.3.

[e] For constituents where the calculated SCO was lower than the contract required quantitation limit (CRQL), the CRQL is used as the SCO value.

[f] For constituents where the calculated SCO was lower than the rural soil background concentration as determined by the Department and Department of Health rural soil survey, the rural soil background concentration is used as the Track 2 SCO value for this use of the site.

[g] This SCO is derived from data on mixed isomers of BHC.

[h] The SCO for this specific compound (or family of compounds) is considered to be met if the analysis for the total species of this contaminant is below the specific SCO.

[i] This SCO is for the sum of endosulfan I, endosulfan II, and endosulfan sulfate.

[j] This SCO is the lower of the values for mercury (elemental) or mercury (inorganic salts). See TSD Table 5.6-1.