AECOM

Periodic Review Report (April 9, 2021 through April 14, 2022)

Former Scott Aviation Facility, Area 1 BCP
Lancaster, New York

Project reference: NYSDEC Site Code: C915233

June 27, 2022

Delivering a better world

Quality information

Prepared by	Checked by	Verified by	Approved by
Dino Zack. PG, STS	Timothy Renn, PE	James Kaczor, PG	Dino Zack, PG, STS

Prepared for:

Scott Technologies, Inc.
Aka Scott Figgie LLC
Frankford, DE

Prepared by:

AECOM
One John James Audubon Parkway
Amherst, NY 14228

Table of Contents

Figures

Tables

List of Appendices

List of Acronyms

1,1-DCA	1,1-dichloroethane
1,1-DCE	1,1-dichloroethene
1,2-DCA	1,2-dichloroethane
1,1,1-TCA	1,1,1-trichloroethane
1,1,2-TCA	1,1,2-trichloroethane
AAR	Alternatives Analysis Report
ABC®	Anaerobic Biochem
ABC+®	Anaerobic Biochem with Zero Valence Iron
AECOM	AECOM Technical Services, Inc.
AMSL	above mean sea level
AVOX	AVOX Systems Inc
BCP	Brownfield Cleanup Program
bgs	below ground surface
CCR	Construction Completion Report
cis-1,2 DCE	cis-1,2-dichloroethene
cm/sec	centimeters per second
COC	contaminants of concern
COPC	constituents of potential concern
CVOC	chlorinated volatile organic compound
DHC	Dehalococcoides (bacteria)
DPT	Direct Push Technology
ERD	Enhanced Reductive Dechlorination
ESA	Environmental Site Assessment
ft	feet
HPT	hydraulic profiling tool
IC/EC	Institutional Controls/Engineering Controls
IRM	interim remedial measure
K	hydraulic conductivity
Matrix	Matrix Environmental Technologies, Inc.
mg/L	milligrams per liter
MIP	membrane interface probe
MNA	monitored natural attenuation
NYCRR	New York Codes, Rules and Regulations
NYSDEC	New York State Department of Environmental Conservation
NYSDOH	New York State Department of Health
O&M	operation and maintenance
PCB	polychlorinated biphenyl
PCE	Tetrachloroethene (Perchloroethene)
PGA	Preliminary Groundwater Assessment
PID	photoionization detector
PRR	Periodic Review Report
QA/QC	quality assurance / quality control

RAO	remedial action objective
RAWP	Remedial Action Work Plan
RI	remedial investigation
SCO	soil cleanup objective
SMP	Site Management Plan
SRI	Supplemental Remedial Investigation
SVI	soil vapor intrusion
sq	square
SVOC	semi volatile organic compound
TCE	trichloroethene
TOC	total organic carbon
TOGS	Technical and Operational Guidance Series
TVOC	total volatile organic compounds
µg/L	micrograms per liter
USEPA	United States Environmental Protection Agency
UST	underground storage tank
VC	vinyl chloride
VOC	volatile organic compound
wt. %	weight percent
XSD	halogen specific detector
ZVI	zero valence iron

Executive Summary

On September 1, 2004, the former Scott Aviation Facility (three plant facility) was sold by Scott Technologies, Inc. to the current facility owner/operator, AVOX Systems Inc (AVOX). On September 11, 2008, Scott Technologies, Inc. submitted an application for the area located adjacent to the southwest corner of the Plant 1 property (the “Site”, also known as Area 1) to enter the New York State Department of Environmental Conservation (NYSDEC) Brownfield Cleanup Program (BCP), per Title 6 New York Codes, Rules, and Regulations Part 375-3.4 (Applications), effective December 14, 2006. Scott Technologies, Inc. applied for entry into NYSDEC BCP as a participant to investigate and remediate, as appropriate, potential areas of environmental concern associated with the Site. On July 8, 2009, NYSDEC approved the application and Scott Technologies was accepted into the BCP as a participant (NYSDEC Site Code No. C915233). Scott Technologies, a successor to Figgie International, is now known as Scott Figgie LLC. In December 2015, AVOX was added to the Brownfield Cleanup Agreement as a Volunteer.

Soil, groundwater, surface water, and soil vapor impacts at the Site were outlined in reports submitted to the NYSDEC that describe the results of a series of investigations which took place over several years. Impacts identified during these investigations were addressed via interim remedial measures (IRMs) prior to the issuance in December 2015 of a final Decision Document and Certificate of Completion for the Site.

Based on the implementation of the IRMs and a groundwater injection program conducted in March 2019, findings from the investigation of the Site indicate that the Site no longer poses a threat to human health or the environment; therefore, No Further Action is the selected remedy by NYSDEC. The No Further Action remedy currently includes semi-annual groundwater monitoring, and quarterly inspections of the boiler room repairs to the floor cracks and joints and sealing of the annulus around each floor drain to mitigate the potential for subslab volatile organic compound (VOC) vapors to enter the building.

Periodic groundwater monitoring has shown a notable decrease in the concentrations of contaminants of concern (COC) and no off-Site migration of COCs in groundwater. Additionally, microbial analysis of shallow and deep overburden groundwater has indicated that the necessary microbes, such as Dehalococcoides, and degradation enzymes are present in subsurface groundwater.

A continuation of semi-annual groundwater monitoring for VOCs and monitored natural attenuation parameters at select Site wells, quarterly inspections of the boiler room floor, and annual reporting per the NYSDEC-approved Site Management Plan (SMP) is recommended for the next reporting period. No change is recommended to the existing SMP.

1. Introduction

On behalf of Scott Figgie LLC (successor to Scott Technologies, Inc.), and pursuant to the requirements of New York State Department of Environmental Conservation (NYSDEC), Decision Document (NYSDEC, December 2015) and Site Management Plan (SMP) (AECOM, December 2015), AECOM Technical Services, Inc. (AECOM) has prepared this Periodic Review Report (PRR) to summarize the groundwater monitoring activities for the former Scott Aviation facility (the "Site", also known as Area 1), NYSDEC Site Code No. C915233, located within two parcels at 215 and 221 Erie Street, Village of Lancaster, County of Erie, State of New York (**Figure 1**). The reporting period discussed herein encompasses the period from April 9, 2021 through April 14, 2022. During the reporting period, the Site has been owned and operated by AVOX Systems Inc (AVOX).

1.1 Report Organization

The purpose of this PRR is to provide a summary of the controls implemented for the Site as required by Section 7.2 of the SMP and to provide recommendations for future controls at the Site.

This PRR was developed to adhere to NYSDEC site investigation and remediation requirements (NYSDEC DER-10, May 2010). More specifically, this report provides the following information:

- An Executive Summary including a brief summary of the Site, nature and extent of contamination, remedial history, the effectiveness of the remedial program, and recommendations for changes to the SMP;
- A brief summary of the Site and PRR organizational details (**Section 1)**;
- A Site overview, describing the Site location, significant features, surrounding areas, and the extent of environmental impacts prior to Site remediation. A description of the chronology of the main features of the remedial program for the Site, the components of the selected remedy, cleanup goals, site closure criteria, and any significant changes to the selected remedy that have been made since remedy selection (**Section 2**);
- A groundwater monitoring program summary including a description of the requirements of the monitoring, a summary of the groundwater monitoring activities completed during the PRR reporting period, a comparison of the most recent (April 2022) groundwater results to the Remedial Action Objectives (RAOs) of the Site, and conclusions regarding the monitoring completed and the resulting evaluations regarding remedial performance, effectiveness, and protectiveness (**Section 3**);
- A description of the Site inspections, associated operations and maintenance (O&M) tasks completed and recommendations for improvements (**Section 4**);
- A summary of overall conclusions and recommendations regarding compliance with the SMP, performance and effectiveness of the remedy, a description of upcoming Site-related activities, and a proposed monitoring and compliance sampling and reporting schedule (**Section 5**);
- A review of the Institutional Controls/Engineering Controls (IC/EC) for the Site (**Section 6**); and,
- References used in the preparation of this report (**Section 7**).

Supporting information used in the preparation of this PRR is included in five appendices:

- Appendix A provides a summary of VOCs in groundwater;
- Appendix B provides a current and historical summary of the volatile organic compounds (VOCs) detected in the Site monitoring wells sampled in October 2021 and April 2022;
- Appendix C provides the groundwater sampling logs for the Site monitoring wells sampled in October 2021 and April 2022;

- Appendix D provides all October 2021 and April 2022 analytical data packages on compact disc; and
- Appendix E includes the completed IC/EC certification.

2. Site Overview

The following subsections present a description of the Site location, significant features, surrounding areas, and the extent of contamination prior to the Site remediation. A description of the chronology of the main features of the remedial program for the Site, the components of the selected remedy, cleanup goals, site closure criteria, and any significant changes to the selected remedy that have been made since remedy selection are also presented.

2.1 Site Location

The Site is located in Lancaster, Erie County, New York and is identified as Section 104 Block 5 and Lots 8 and 9 on the Erie County Tax Map; refer to **Figure 1** for the Site Location Map. The Site is approximately 1.25 acres in area and is bounded by non-impacted AVOX land and then Erie Street to the north, railroad tracks to the south, AVOX Plant 1 (currently vacant) to the east, and residential zoned property (with a house) to the west; refer to **Figure 2** for the Site Layout Map).

2.2 Physical Setting

2.2.1 Land Use

The Site consists of the following: outbuildings that support Plant 1 (which is not part of the Site), asphalt driveways and parking areas, and lawn and brush-covered areas. Site occupants include only occasional maintenance and shipping/receiving personal, as manufacturing activities have been moved to the two plants located on the north side of Erie Street.

The land adjoining the Site and in the neighborhood surrounding the Site includes both commercial and residential properties. The property immediately south of the Site includes railroad tracks; the properties immediately north of the Site include additional AVOX land and commercial properties; the properties immediately east of the Site include AVOX Plant 1 and its parking lot, and then residential properties (including vacant land); and the properties to the west of the Site include residential parcels.

2.2.2 Site Geology/Hydrogeology

The native soils underlying the Site generally consist of interbedded silts and clays, with discontinuous sporadic fine sand lenses (shallow overburden). A thin coarse-grained layer of weathered shale is located above the bedrock (deep overburden). Overburden thickness ranges from 20 feet (ft) in the southern portion of the Site to 26 ft in the northern portion of the Site.

The average depth to bedrock is approximately 21 feet. Bedrock was observed to consist of black shale of the Marcellus Formation (Hamilton Group).

A transect for a geologic cross section with monitoring well and piezometer locations is shown on **Figure 3**, and the geologic cross-section is shown on **Figure 4**.

Groundwater monitoring wells were installed at three intervals: shallow overburden, deep overburden, and bedrock; the one bedrock well was decommissioned in October 2017. Overburden groundwater is first encountered at the Site in the shallow overburden, and then again just above the bedrock. An observation of the groundwater within the deep overburden, which is present on top of bedrock, indicates a semi-confined state.

Results of the in-situ hydraulic conductivity (K) tests performed in the monitoring wells at the Site during the BCP Remedial Investigation (RI) showed that K values range from 1.49E-03 centimeters per second (cm/sec) to 3.13E-05 cm/sec in the shallow overburden and range from 4.72E-03 cm/sec to 8.96E-05 cm/sec in the deep overburden. Hydraulic conductivity testing was not performed in the bedrock monitoring well.

The natural flow of groundwater at the Site in both the shallow and deep overburden is to the northwest. The flow direction is most pronounced in the deep overburden, as the flow of shallow overburden groundwater within the Site is significantly influenced by seasonal standing water to the southwest, a storm sewer network cutting through the Site, large asphalt areas to the north and east, and Plant 1 to the east. Depth to groundwater across the Site in both the shallow and deep overburden was measured in April 2022 and is discussed in detail in Section 3 of this report.

2.2.3 Site Investigation and Remedial History

The following narrative provides a remedial history timeline and a brief summary of the available project records to document key investigative and remedial milestones for the Site. Full titles for each of the reports referenced below are provided in Section 7.

The general historical operations that existed in the Plant 1 building adjacent to the Site were primarily manufacturing, development, testing, and distribution for aircraft and military supplied-air systems. The oldest portion of Plant 1 dates to the early 1950s. That original building was expanded several times, with most of it in place by 1975 except for a small warehouse addition in 1996. Plant 1 historical activities included the chemical cleaning and repainting of oxygen cylinders, the chemical cleaning (with inorganic acid solutions) and chromium plating (in a non-electrolytic “soak bath”) of metallic components of oxygen supply systems, and the fabrication of oxygen-regulating assemblies. Plant 1 also supported a Class 10,000 clean room and a Class 100,000 clean room. The office area contained management, administrative, engineering, training, and other support activities, and a cafeteria.

Since 2010, Plant 1 has no longer been used for production (i.e., painting and plating activities have terminated). The BCP boundary for the Site is located immediately west/southwest of Plant 1. In general, the pre-remediated areas as described below consisted of low-level metals in the top of the shallow overburden soil immediately south of Plant 1, volatile organic chemicals (VOCs) in shallow overburden soil at the fence gate southwest of Plant 2, and VOCs in shallow and deep overburden groundwater west/southwest of Plant 1. Note: the BCP boundary, or VOC-impacted groundwater plume, does not extend off the AVOX property.

2.2.3.1 Phase I

In 2004, a Phase I Environmental Site Assessment (ESA) was performed at the Site by Earth Tech, Inc. (now AECOM) on behalf of then owner, Scott Technologies, Inc. The entire facility was sold to the current owner, AVOX, in September 2004. Historical aerial photographs included in the Phase I ESA Report indicated an area of potentially disturbed soil on the west side of Plant 1, south of the existing visitor parking area, and just outside the Plant 1 western perimeter fence line on the adjacent vacant parcel (Earth Tech, April 2004). The Phase I ESA also identified two former underground storage tanks (USTs) that had contained gasoline starting in the early 1970s that were removed from the southeastern portion of the Plant 1 Area in November of 1987; however, no records were found to indicate that any post-excavation sampling was done to demonstrate that the soil and groundwater in their vicinity had not been impacted.

Another former UST that had contained gasoline from an unknown date until the early 1970s was reportedly cleaned and closed in place at that time by filling it with sand. It is believed to be located beneath the current hazardous materials storage shed. No records were found to indicate exactly where that tank is located, when closure occurred, or that any post-closure sampling was done to demonstrate that soil and ground water in the vicinity had not been impacted. From the early 1950s to about 1973, used sand from a steel-casting foundry operation, located in the western portion of Plant 1, was disposed behind (south of) Plant 1.

2.2.3.2 Phase II

A Phase II Environmental Site Investigation was completed in 2004 for the entire Scott Aviation facility, to address environmental concerns described in the Phase I ESA Report, including the area of potentially disturbed soil on the west side of Plant I. During the Phase II ESI, seven test pits were excavated. Residual paint sludge of unknown origin was observed in two of the test pits. The paint sludge area was approximately 150 square feet (sq ft) in size and located just west and south of the vehicle gate located in

the western perimeter fence, immediately north of the water tower. Elevated levels of VOCs and semi-volatile organic compounds (SVOCs) present in the soil immediately below the waste indicated that some leaching of the waste had occurred (Earth Tech, June 2004).

2.2.3.3 Interim Remedial Measure - Soil Excavation

On June 28, 2005, Earth Tech, in accordance with a NYSDEC-approved Interim Remedial Measures (IRM) / Supplemental Site Investigation Work Plan, performed an initial excavation of the buried paint sludge material located to the west of Plant 1. A total of 60 cubic yards of soil was excavated to the west of Plant 1, down to the level at which groundwater was encountered - about 6 feet below ground surface (ft bgs). Further excavation was not completed during the IRM, as the scope of work only addressed vadose zone soil.

2.2.3.4 Preliminary Groundwater Assessment

The above investigations identified the general areas of concern at the Site. As a result of the elevated VOC and SVOC soil concentrations detected in the excavation bottom at Area 1 during the 2005 IRM, a Preliminary Groundwater Assessment (PGA) was performed in 2006 and 2007. The purpose of the PGA was to assess the nature and extent of VOCs in groundwater in the vicinity of Area 1. A series of groundwater wells was installed, and samples were collected and analyzed as a part of the PGA (Earth Tech, January 2008). Eighteen temporary piezometers were installed during the PGA to monitor shallow overburden groundwater. Groundwater samples collected from these piezometers contained VOCs, with 18 of these compounds detected at concentrations that exceeded the NYSDEC Technical and Operational Guidance Series (TOGS) 1.1.1 (NYSDEC, June 1998, January 1999 errata sheet, April 2000 addendum, June 2004 addendum) protection for source of drinking water (groundwater) standards (i.e., water class GA); herein referred to as TOGS 1.1.1 groundwater standards. Samples of deep overburden groundwater also contained VOCs but to a lesser degree than the shallow overburden groundwater.

2.2.3.5 Remedial Investigation

The BCP RI began in December 2010 with the completion of soil borings, the installation of monitoring wells, and the collection of soil, groundwater, and vapor samples for chemical analysis. This initial work was completed during the summer of 2010 following the approval of the Remedial Investigation / Alternatives Analysis Work Plan (AECOM, February 2010) and addendum to the Remedial Investigation / Alternatives Analysis Work Plan (AECOM, May 2010). A Supplemental RI (SRI) (Supplemental Remedial Investigation Report, AECOM, April 2012), describing work completed in June 2011, included the installation of additional monitoring wells, groundwater sampling, and an evaluation of a storm sewer system that was located throughout the BCP Site. The RI and SRI were performed to gather the data necessary to complete the characterization of chemical presence in on-site groundwater, soil, and soil vapor, in order to identify and evaluate necessary and appropriate remedial alternatives as presented in the Remedial Investigation Report (AECOM, September 2011). The proposed remedial alternatives were presented in an Alternatives Analysis Report (AAR) (AECOM, September 2015). That AAR was completed in accordance with the NYSDEC DER Draft BCP Guide (NYSDEC, May 2004), 6 New York Codes, Rules and Regulations (NYCRR) Part 375 Environmental Remediation Programs (NYSDEC, December 14, 2006), and NYSDEC DER-10 (NYSDEC, May 3, 2010).

These studies investigated Area 1 for contamination in surface soil, subsurface soil, groundwater, and impacts to on-site storm sewers. Constituents of potential concern (COPCs) were identified for soil by comparison of maximum detected concentrations for VOCs to 6 NYCRR Part 375 Unrestricted Use soil cleanup objectives (SCOs), and for SVOCs, metals, pesticides, and polychlorinated biphenyls (PCBs) by comparison to 6 NYCRR Part 375 Commercial Use SCOs. COPCs were identified for groundwater by comparison of maximum detected concentrations for VOCs, SVOCs, metals, pesticides, and PCBs to TOGS 1.1.1 groundwater standards. The results of this comparison to applicable standards are detailed below:

- Surface Soil - VOC concentrations for surface soil (i.e., 0 to 2 inches bgs) were below the NYSDEC Subpart 375-6 SCOs for Unrestricted Use at the borings sampled. SVOC, metal, PCB, and pesticide concentrations were below the SCOs for Commercial Use, with the exceptions of benzo(a)pyrene

(potentially resulting from asphalt paving and/or the adjacent active rail line) and the metals cadmium and nickel.

- Subsurface Soil - VOC concentrations from subsurface soil samples collected from borings during the RI and SRI were below the SCO for Unrestricted Use, with the exception of acetone and methylene chloride (common laboratory contaminants) at two borings: DPT8 2A and DPT8-2B, both located south of Plant 1. VOC concentrations from one confirmation sample collected from the bottom of the historic IRM (B-1A) had seven compounds exceeding Unrestricted Use SCOs (all seven compounds were below Commercial Use SCOs). SVOC, pesticide and PCB concentrations from subsurface soil samples were all below Unrestricted Use SCOs. Regarding metals, only mercury, copper, and cadmium exceeded SCOs for Commercial Use. These exceedances occurred at two borings: DPT8-1A and DPT8-2A.
- Groundwater - Analytical data for groundwater samples collected from the shallow and deep overburden wells during the RI and SRI identified the presence of VOCs exceeding TOGS 1.1.1 groundwater standards. Refer to **Figure 5** and **Figure 6** for the RI/SRI total VOC (TVOC) contaminant concentration contours for shallow and deep overburden, respectively. There were no exceedances of TOGS 1.1.1 groundwater standards in the bedrock groundwater. The most frequently detected VOCs were trichloroethene (TCE) and its decomposition product cis-1,2-dichloroethene (cis-1,2 DCE). Refer to **Figure 7** and **Figure 8** for the RI/SRI TCE contaminant concentration contours for shallow and deep overburden respectively. The greatest VOC concentrations were detected in the area of the previously-excavated source area during the 2005 IRM. At perimeter wells, VOCs were either not detected or were detected at concentrations below or slightly above TOGS 1.1.1 groundwater standards for TCE. See **Appendix A** for a summary of groundwater VOC data collected during the RI, SRI, and subsequent quarterly and semi-annual monitoring, and **Appendix B** for trend plots illustrating concentrations of contaminants of concern (COCs) over time which include 1,1,1-trichloroethane (1,1,1-TCA), 1,1,2-trichloroethane (1,1,2-TCA), 1,1-dichloroethane (1,1-DCA), 1,1-dichloroethene (1,1-DCE), 1,2-dichlroethane (1,2-DCA), tetrachloroethene (PCE), TCE, cis-1,2-DCE, and vinyl chloride (VC). Per a NYSDEC comment letter dated August 23, 2019, cis-1,2- DCE was added as a Site COC. SVOCs in groundwater were below TOGS 1.1.1 groundwater standards. Three naturally occurring metals (iron, magnesium, and sodium) were detected in groundwater above TOGS 1.1.1 groundwater standards. No PCBs were detected, and only one pesticide was tentatively detected in one groundwater sample at a concentration greater than TOGS 1.1.1 groundwater standards. Refer to the AAR (AECOM, April 2015) for groundwater VOC, SVOC, metal, and PCB/pesticide data.
- Storm Sewer Catch Basins - A storm sewer with several catch basins is present in Area 1; refer to **Figure 3** for the location of the storm sewer system. VOCs were detected within storm sewer catch basins located on the Site and from water within the storm sewer pipe bedding. Groundwater is present above the storm sewer piping; refer to **Appendix A** for a summary of storm sewer VOC data and for temporary piezometer water sample data that was collected from within the storm sewer pipe bedding gravel near catch basin CB-1 at temporary piezometer TP-5 and approximately 130 feet to the north at TP-6.
- Soil Vapor - Based on the evaluation of the data against the decision matrices, a vapor intrusion condition is not present at the Site, and indoor air quality has not been adversely impacted by the presence of the adjacent groundwater plume. However, per a June 1, 2012 letter from the NYSDEC to Scott Figgie LLC, the New York State Department of Health (NYSDOH) considered this Site to be a significant threat due to elevated concentrations of VOCs in sub-slab soil vapor, and the potential for this vapor to impact indoor air. Refer to the AAR (AECOM, September 2015) for air sampling data, for vapor data compared to 2006 NYSDOH guidance values, and for the United States Environmental Protection Agency (USEPA) 2001 Building Assessment and Survey Evaluation database indoor air values, respectively.

2.2.3.6 Soil Vapor Intrusion Evaluation

Based on NYSDEC comments on the draft AAR (AECOM, April 2013), AECOM completed a targeted soil vapor intrusion (SVI) investigation for the Site in July 2013. The purpose of that SVI investigation was to

assess whether soil vapor on the Site in the vicinity of a nearby residence at 205 Erie Street contained chlorinated VOCs (CVOCs), and if so, were they detected at concentrations sufficiently elevated to represent a potential indoor air quality issue for the nearby buildings (AECOM, August 2013). A second investigation and report were completed in September 2013 to follow up on one TCE detection in soil vapor above the method detection limit. Both groundwater and soil samples were collected hydraulically downgradient of Area 1, between the facility and the 205 Erie Street residence, and focused on seven CVOCs that, per NYSDOH guidance values, should be considered as part of an SVI analysis for the residence: 1,1,1-TCA; cis-1,2-DCE; VC; 1,1-DCE; carbon tetrachloride, PCE, and TCE.

No CVOC listed above was reported in any of the soil or groundwater samples. Acetone was reported in one soil sample at 12 micrograms per kilogram (µg/kg). Acetone was also reported in five of the six groundwater samples and in the trip blank. The only other VOC reported was 2 butanone (methyl ethyl ketone) at 4.1 micrograms per liter (µg/L). AECOM reviewed historical soil, groundwater, soil vapor, and stormwater data from the northern portion of the Area 1 Site to assess the potential relationship between the low level TCE concentration reported in SV-1 in July 2013 and the Area 1 contamination. The collective data did not identify a clear relationship between the two that would warrant further SVI sampling at the residential property. Multiple media were evaluated. The property boundary between AVOX (which includes the Site) and 205 Erie Street does not appear to be impacted by the BCP Site (AECOM, October 2013).

2.2.3.7 Interim Remedial Measures – 2014

During a conference call between NYSDEC, Scott Figgie LLC, AECOM, and AVOX representatives on February 28, 2014, the NYSDEC recommended moving forward with the BCP cleanup in advance of an approved Final AAR by completing four IRMs to address soil and selected groundwater impacts at the Site. They included:

- Excavation and off-site disposal of shallow soils impacted by metals (cadmium, copper and nickel);
- Excavation and off-site disposal of subsurface soils impacted by VOCs in some locations;
- Grout sealing on-site storm sewer joints to prevent groundwater infiltration, and installation of impermeable plugs across the pipe bedding to prevent migration of groundwater; and
- Mitigation of SVI concerns at the AVOX boiler room (the only structure within Area 1 that is occasionally occupied).

Those four IRMs were described in an IRM Remedial Action Work Plan (RAWP) dated June 4, 2014 (AECOM). On August 14, 2014, NYSDEC provided approval to begin the described work per the 2014 IRM RAWP.

Soil Excavation and Storm Sewer Interim Remedial Measures

The 2014 IRM activities were initiated on September 8, 2014. The soil excavation and storm sewer IRMs were completed during October 2014. Metals-impacted soil was excavated to 1 ft bgs in the vicinity of MW-41B, with all confirmatory samples passing metal Commercial Use SCOs for the target parameters. Confirmation soil samples were collected from the excavation sidewalls and bottoms. Soil was excavated to 2 ft bgs in the vicinity of DPT8-1 and DPT8-2. Following the initial excavation, an additional 2 ft wide by 2 ft deep excavation occurred on the south side wall of DPT8 1 and on the north side wall of DPT8-2, until sample results were below Commercial Use SCOs. Following receipt of passing sample confirmation data, and with concurrence from the NYSDEC, the excavated areas were backfilled with imported soil that met NYSDEC Unrestricted Use SCOs and restored to pre-excavation conditions. Each excavation remained open until receipt of soil analytical results determined that confirmation soil samples were below respective SCOs, and the NYSDEC issued approval to discontinue excavation.

VOC concentrations from soil confirmation bottom samples collected in 2005 following an IRM soil excavation were found to be in exceedance of the Unrestricted Use SCO. These samples were collected at or below typical shallow overburden groundwater depths. The concentrations of 1,1 DCE, cis-1,2-DCE, ethylbenzene, toluene, 1,1,1-TCA, TCE, and total xylenes exceeded NYSDEC Subpart 375-6 Unrestricted Use SCOs. An initial horizontal excavation limit was established following the same footprint

of the previously excavated area (approximately 14 ft by 18 ft, by 6 ft deep). The 2014 IRM scope was to remove the top 0 to 6 ft of previous clean fill and excavate material from 6 to 8 ft bgs. Elevated Photoionization Detector (PID) headspace readings on side wall and bottom samples were observed following excavation of the 6 to 8 ft bgs interval and reported to NYSDEC. Due to the depth of observed elevated PID readings and below-average shallow groundwater elevations, an additional 2 ft of soil was removed from the side walls (where physical constraints allowed) and from the bottom of the excavation. Characterization samples from the side walls and bottom of the excavation were collected and resulted in VOC detections exceeding Unrestricted Use SCOs. Refer to the 2014 IRM Construction Completion Report (CCR) for characterization sample results and for the location of the VOC IRM. With approval from the NYSDEC, no further excavation of soil took place; impacts were left in place to be addressed as part of the groundwater IRM, since all impacted material was below the water table. Prior to backfilling, and with approval from the NYSDEC, 270 pounds of Klozur® CR engineered calcium peroxide was placed on the bottom of the excavation area and mixed with the small amount of groundwater that had accumulated in the excavation. Fill from the 2005 IRM and imported fill in compliance with NYSDEC DER-10 was used to backfill the excavation areas created for this IRM.

Following the completion of the IRMs in October 2014, AECOM submitted a draft IRM CCR on February 15, 2015 describing those 2014 IRMs. The 2014 IRM CCR was written in compliance with DER-10 Section 5.8, Construction Completion Report and Final Engineering Report, and summarized these IRM activities. The Final 2014 IRM CCR was approved by NYSDEC on March 27, 2015 (AECOM, March 2015).

Sub-slab Soil Vapor Interim Remedial Measure

On November 4, 2014, AECOM and NYSDEC inspected the concrete floor of the boiler room, and AECOM sealed visible floor cracks with concrete caulking. In addition, the annulus between a drain line effluent and the associated floor penetration and foundation perforations were sealed with expanding foam. Two other foundation perforations (drains) were observed and temporarily plugged with modelling clay just prior to a sampling event. The floor drains appeared to discharge to the bedding gravel beneath the concrete floor slab. On December 24, 2014 one sub-slab vapor sample, one indoor vapor sample, one ambient (outdoor) air sample, and an associated quality assurance / quality control (QA/QC) sample were collected from the boiler room building at AVOX Plant 1, to determine if CVOCs were currently at indoor concentrations sufficiently elevated to trigger a need for mitigation activities. The December 2014 indoor air sample did not detect any CVOCs listed in the NYSDOH Guidance document. The 2014 sub-slab vapor sample detected 1,1,1-TCA, cis-1,2-DCE, 1,1-DCE, PCE, and TCE. According to the NYSDOH decision matrices, PCE and TCE concentrations triggered an action of ‘monitor’ only, while the 1,1,1-TCA, cis 1,2-DCE, and 1,1-DCE concentrations were below an action level. Low concentrations of 1,1,1-TCA, cis-1,2-DCE, and TCE were detected in the ambient (outdoor) air sample. The sealing of floor cracks and foundation perforations decreased the concentrations in the indoor air samples and lowered the action level from ‘mitigation’ to ‘monitoring’ (AECOM, January 2015).

Groundwater Interim Remedial Measure

In 2014, an IRM pre-design investigation utilizing a combined membrane interface probe (MIP) and hydraulic profiling tool (HPT) was performed in Area 1; refer to **Figure 9** for MIP locations. That pre-design investigation was performed in accordance with the NYSDEC-approved MIP/HPT and Baseline Sampling Work Plan (AECOM, October 2014).

On November 24-25, 2014, 11 borings were completed throughout the groundwater plume in Area 1 to a depth of 20 ft bgs, with the objective of verifying the distribution of VOC COPCs within that area. The MIP/HPT was used to capture data at continuous depths at each boring.

The 3D Imaging Summary, MIP/HPT Boring Summary, and MIP Data Cross Section figures summarized the field activities and results of the MIP/HPT analysis. Halogen specific detector (XSD) data were used as the prime indicator of CVOC impacts, as they are highly sensitive to CVOCs compared to the other data collection methods. Within the investigated zones, target treatment depths were identified using K data provided by the HPT analysis. The MIP/HPT results were generally consistent with the RI groundwater data collected from June 2010 through June 2011. The data indicated that there were lower

VOC concentrations present in the northern portion of the Site and that, where present, they were limited to the upper 14 ft of the overburden. In the southern portion of the Site, VOC concentrations were greater and also present in significant concentrations throughout the entire depth of the soil borings, with the 5-15 ft bgs region exhibiting the highest XSD response. In addition to MIP-8 located in the center of the groundwater plume, the easternmost and westernmost boring locations, MIP-1 and MIP-11, showed the highest VOC concentrations.

Remedial activities for the groundwater IRM were described in the Final Remedial Action Work Plan - 2015 Interim Remedial Measures - Groundwater Treatment (2015 IRM RAWP) (AECOM, March 25, 2015). On April 10, 2015 the NYSDEC provided approval to begin the described work per the 2015 IRM RAWP; the groundwater injections commenced in April 2015 and were completed in May 2015. In accordance with the AAR and the 2015 IRM RAWP, the remedial approach to address VOCs in Site groundwater was in-situ enhanced reductive dechlorination (ERD) via direct-push injections of Anaerobic Biochem (ABC®) with zero valent iron (ZVI), i.e., ABC+®. Per the 2015 IRM RAWP, the treatment area was divided into two target depths zones: a 12,600 sq ft shallow injection zone and a 20,025 sq ft deep injection zone. In general, the shallow zone was defined as groundwater from 5 to 15 ft bgs, and the deep zone as groundwater from 15 to 25 ft bgs.

A total of 41 of the 47 planned injection point locations were successfully completed in the “shallow only” zone. Six of the 47 planned injection locations were not completed to avoid interference with utilities or as a result of observed breakthrough along the south and west sections of the injection grid. Approximately 23,370 pounds of ABC+® were injected to treat the shallow (only) zone at approximately 570 pounds of ABC+® per point. Mixed at approximately a 15 weight percent (wt. %) solution, this resulted in approximately 16,000 gallons of solution. Each injection point received approximately 390 gallons, divided up among intervals that had the highest permeability.

A total of 79 of the 89 planned injection points were successfully completed in the combined “shallow and deep” zone. Ten of the 89 planned injection locations were not completed to avoid interference with utilities or as a result of observed breakthrough along the south and west sections of the injection grid. Approximately 59,800 pounds of ABC+® was required to treat the shallow and deep zone at 757 pounds of ABC+® per point. Mixed at approximately a 15 wt. % solution, this resulted in approximately 40,300 gallons of solution. Each injection point received approximately 510 gallons, divided up among intervals that had the highest permeability.

Additional injection points were completed adjacent to the storm sewer system to reduce VOCs in the vicinity of the sewer pipe and to apply treatment into the storm sewer pipe bedding. Injection points were performed approximately five to six feet offset (upgradient) from the storm sewer line to establish a biobarrier that groundwater must flow through before entering the storm sewer bedding. Injection locations within the footprint of the TVOC plume that were adjacent to the storm sewer also addressed the storm sewer bedding. Injections associated with the storm sewer bedding were completed between 4 and 6 ft bgs. To protect the existing subsurface utility, injections immediately adjacent to the storm sewer consisted of only ABC® (without ZVI). One location received the planned 390 gallons of injectate; two other locations received only 50 gallons each to limit the volume of injectate breaking through to the ground surface.

The final 2015 IRM CCR describes work completed to remediate VOCs in Site groundwater (AECOM, August 12, 2015). Refer to **Figure 9** for the 2015 IRM injection zone details.

2.2.3.8 Supplemental Groundwater Injection

On May 15, 2019, NYSDEC approved the 2019 Supplemental Injection Work Plan (AECOM, May 10, 2020). Between May 20, 2019 and May 22, 2019, AECOM and subcontractor Matrix Environmental Technologies, Inc. (Matrix) and their teaming partner Redox completed the supplemental groundwater injection event using ABC-Ole® and ZVI.

ABC-Ole® is an emulsified fatty acid product designed to address anaerobic bioremediation sites. It is a modified blend of ABC®, which contains a high fatty acid content ranging from 50-85% ABC®. The addition of ZVI to the ABC-Ole® immediately provides a large drop in oxidative reduction potential in the

surrounding groundwater which is conducive to biotic reductive dechlorination. The ZVI also promotes an abiotic reductive dechlorination process where the degradation of the targeted groundwater VOCs occurs via the β-elimination pathway. This pathway does not create the degradation intermediates cis-1,2-DCE and vinyl chloride which are produced via the biotic reductive dechlorination pathway, and it also does not rely on the presence of Dehalococcoides (DHC) to achieve complete VOC destruction.

The combined ABC-Ole® and ZVI mixture was specifically designed to remediate impacted groundwater in an approximate 6,750 sq ft area within the approximate 1,000 µg/L TVOC shallow overburden zone contour (which also overlies the 1,000 µg/L TVOC deep overburden zone contour). The area of injection encompasses the area around the most TVOC-impacted monitoring wells located on the Site: A1-GP02-S, A1-GP06-S, A1-GP10-S, MW-42S, MW-38D, and MW-40D. **Figure 10** depicts the 2019 supplemental injection area.

The injectate ABC-Ole®, mixed with ZVI, was injected at 30 locations using a DPT drill rig. Each injection point received approximately 240 gallons of injectate. The injectate was distributed at depth intervals 11, 14, 17, and 20 feet bgs, targeting the shallow and deep water bearing units, and was performed from a bottom to top sequence.

Approximately 7,500 pounds of ABC Ole® and 7,500 pounds of ZVI were injected to treat the approximately 10 foot thick zone at approximately 500 pounds of ABC-Ole® and ZVI per point. Mixed at approximately a 20 wt. % solution, this resulted in approximately 7,200 gallons of solution. Each injection point received approximately 240 gallons, divided up among intervals that had the highest permeability.

2.2.3.9 Storm Sewer Pipe Replacement

Per the NYSDEC-approved Storm Sewer Replacement Work Plan dated June 12, 2020, approximately 200 linear feet of storm sewer piping was replaced by Matrix in June of 2020 between CB-4 and CB-E, CB-E and CB-3, and CB-3 and CB-2 (refer to **Figure 3** for the location of catch basins). This work was performed based on the ongoing detections of VOCs in quarterly Site stormwater grab samples collected since the 2014 IRM was completed. This section of storm sewer piping was replaced with a new 12-inch diameter SDR35 solid PVC pipe with watertight joints. It was presumed that over time, shallow groundwater entered the storm sewer pipes through pipe joints that may not have been sealed or through previously sealed pipe joints and at catch basins that were no longer watertight.

The impermeable “plugs” along the sections of pipe that were removed during replacement of the storm sewer pipe were re-installed with a grout slurry prior to backfilling activities, to continue to potentially prevent VOC-impacted groundwater from migrating off-Site through the pipe bedding material. In addition, a non-shrinking concrete/grout was used at four catch basins (CB-2, CB-3, CB E, and CB-4) to seal the connections where the stormwater pipes enter and exit the catch basins.

During excavation activities, soils were scanned with a PID. Soils excavated between CB-E and CB-3 were observed to have elevated PID readings and were segregated and sampled for VOC and metals analysis. Per the analytical data and associated historic soil characterization data from the Site, the impacted soil was characterized as non-hazardous. Approximately 18.76 tons of soil was sent to Waste Management’s landfill in Chaffee, NY for disposal.

During backfilling of the pipe section between CB-E and CB-3 (where the impacted soil was observed), coarse zero valent iron (ZVI; 80 percent between 150 and 600 microns) was scratch mixed using an excavator with the backfill material placed from the bottom of the excavation to approximately 2 ft bgs (i.e., within the saturated groundwater zone). Due to the concentration of VOCs in groundwater in this area and the size of the excavation required to replace the storm water pipe in this section (approximately 4 feet wide by 5 feet deep by 85 feet long), approximately 1,100 pounds or approximately 1.1 percent by weight of ZVI was used. The depth of soil to be treated by ZVI was approximately 3 feet since the top 2 feet of soil was above the water table, and vadose zone soil is not effectively treated by ZVI.

The removed sections of storm sewer pipe were decontaminated (i.e., soil was brushed and/or washed from pipe), cut to size, and placed in a roll-off box for disposal as municipal waste.

Following backfilling activities, the disturbed areas were restored in kind (i.e., crushed stone, asphalt, and grass seed depending on the pre-excavation conditions).

2.2.3.10 Bioaugmentation Injection Program

On September 20 and 21, 2021, AECOM and subcontractor Matrix completed bioaugmentation injections using microbial culture KB-1® Plus and the KB-1® Primer supplied by SiREM. The bioaugmentation solution was injected in to the subsurface via direct push technology injections, targeting either three or four discrete intervals ranging between 5 and 20 ft bgs depending on the location. Each injection point around locations A1-GP10-S/MW-40D received approximately 200 gallons of KB-1® Plus/Primer (i.e., injectate) which was distributed at 5-foot depth intervals (5, 10, 15, and 20 ft bgs), targeting either the shallow or shallow and deep overburden groundwater zones. Each injection point around locations A1-GP06S and MW-42S received approximately 150 gallons of injectate and was distributed at three depth intervals (8, 13, and 18 ft bgs), targeting the shallow overburden groundwater zone. Refer to **Figure 11** for injection locations.

The KB-1® Primer came in pouches suitable for mixing with approximately 250 gallons of potable water. An appropriate amount of the KB-1® Primer was weighed with a scale provided by SiREM and mixed with the amount of water required for each injection location (i.e., 60% of a KB-1® Primer pouch for 150 gallons or 80% of a pouch for 200 gallons). The KB-1® Primer water mix was ready to inject when fully dissolved and upon pH and oxygen reduction potential (ORP) readings meeting the specifications designated by SiREM (i.e., 6 to 8.3 standard units for pH, and < -75 milliVolts for ORP).

Injection flow rates for the injections ranged from approximately 3 to 12.5 gallons per minute. The target volume of injections for each discrete interval regardless of location was 50 gallons (to minimize short circuiting or breakthrough). This is the minimum amount of KB-1® Primer water recommended by SiREM to support the KB-1® Plus. At each interval, approximately half the injection amount of KB-1® Primer water (25 gallons) was injected. A target amount of KB-1® Plus (approximately 0.6 liters) was then injected using nitrogen gas to push the anaerobic microbial injectate into the targeted interval. The remaining half of the primer water was subsequently injected. Injections were conducted using a bottom-up approach, starting at the lowest designated interval, and raising the rods up the next interval following completion of the lower interval injection.

2.3 Remedial Action Objectives

The objectives for the remedial program have been established through the remedy selection process stated in 6 NYCRR Part 375. The goal for the remedial program is to restore the Site to pre-disposal conditions to the extent feasible. At a minimum, the remedy must eliminate or mitigate all significant threats to the public health and the environment presented by the CVOCs and metals identified at the Site through the proper application of scientific and engineering principles.

The RAOs for the Site as listed in the Decision Document (NYSDEC, December 2015) are as follows:

2.3.1 Groundwater

- RAOs for Public Health Protection
  - Prevent ingestion of groundwater with contaminant levels exceeding drinking water standards.
  - Prevent contact with, or inhalation of, VOCs from impacted groundwater.
- RAOs for Environmental Protection
  - Restore the ground water aquifer to pre-disposal/pre-release conditions, to the extent practicable.
  - Prevent the discharge of COCs to surface water.
  - Remove the source of ground or surface water constituents of concern.

2.3.2 Soil

- RAOs for Public Health Protection
  - Prevent ingestion/direct contact with impacted soil.
  - Prevent inhalation of or exposure from contaminants volatilizing from soil.
- RAOs for Environmental Protection
  - Prevent migration of constituents that would result in groundwater or surface water contamination.

2.3.3 Soil Vapor

- RAOs for Public Health Protection
  - Mitigate impacts to public health resulting from existing, or the potential for, SVI into buildings at a site.

2.4 Contaminants of Concern

Eight COCs in groundwater have been determined through sampling associated with the RI and SRI. Per the Decision Document (NYSDEC, December 2015), Section 6.1.2 (NYSDEC, December 2015), a "contaminant of concern" is a contaminant that is sufficiently present in frequency and concentration in the environment to require evaluation for remedial action. Not all constituents identified on the Site are COCs. The groundwater COCs identified at the Site and their associated RAOs (Guidance or Standard Values) from TOGS 1.1.1 groundwater standards are listed below:

- 1,1,1-TCA – 5 µg/L
- 1,1,2-TCA – 5 µg/L
- 1,1-DCA – 5 µg/L
- 1,1-DCE – 5 µg/L
- 1,2-DCA – 0.6 µg/L
- *cis-1,2-DCE - 5 µg/L
- PCE – 5 µg/L
- TCE – 5 µg/L
- VC – 2 µg/L

*Per NYSDEC comment letter dated August 23, 2019, cis-1,2-DCE was added as a Site COC.

3. Groundwater Monitoring Program Summary

The following sections provide a summary of the groundwater monitoring program completed during the reporting period (April 9, 2021 through April 14, 2022); a comparison of the groundwater data collected from the October 2021 and April 2022 monitoring events to the COCs and historical groundwater analytical data; and conclusions regarding the monitoring completed and the resulting evaluations regarding remedial performance, effectiveness, and protectiveness.

3.1 Groundwater Monitoring Activities

In accordance with the SMP and NYSDEC February 28, 2020 approval to change the groundwater monitoring frequency from quarterly to semi-annually, the groundwater monitoring program during the reporting period consisted of two comprehensive semi-annual monitoring events (October 2021 and April 2022). These sampling events, following the IRMs and the supplemental groundwater injections described in Sections 2.2.3.7 through Section 2.2.3.10, were conducted to determine the effectiveness of the groundwater remedy.

Semi-annual sampling was performed at 20 wells, two temporary piezometers screened in the storm sewer pipe bedding, and five on-site storm water catch basins. Refer to **Figure 3** for the location of the sampling points.

Groundwater samples from the monitoring wells were analyzed for VOCs and total organic carbon (TOC). Seven monitoring wells (four shallow overburden and three deep overburden) were also sampled for monitored natural attenuation (MNA) parameters. The two temporary piezometers screened in the storm sewer pipe bedding, and five on-Site storm water catch basin, were analyzed for VOCs only. Groundwater analyses for VOCs, TOC, and MNA were performed by Eurofins Testing Northeast, LLC (Eurofins) located in Amherst, New York. Two monitoring wells (MW-42S and A1-GP10-S) were sampled for volatile fatty acids analysis in December 2021 and April 2022 as part of the post-bioaugmentation injection program. In addition, one monitoring well (MW-42S) was sampled in December 2021 and April 2022 to determine concentrations of dechlorinating bacteria (DHC and DHB) and reductive enzymes. Analysis was performed by SiREM located in Knoxville, Tennessee. The groundwater monitoring program is summarized in **Table 1**.

Monitoring of groundwater conditions at this Site includes both groundwater level measurements and groundwater sampling and analysis. All monitoring and laboratory data, including QA/QC samples, have been uploaded to the NYSDEC EQuIS database. In addition, groundwater purge data, water levels, and VOC, TOC, MNA, and microbial data from these two semi-annual events, as well as groundwater data collected prior to the IRMs, are summarized in **Appendix A**.

Groundwater samples were divided into three different groups based on historical analytical concentrations from individual wells: plume wells, downgradient wells, and upgradient wells (refer to **Table 2** for monitoring well, piezometer, and catch basin specifications). To the extent practical, wells were sampled from lowest to highest historical VOC concentrations. QA/QC samples including field duplicates, rinse blanks, and trip blanks were collected at the recommended rates stated in the SMP.

In accordance with the SMP, standard low-flow sampling procedures were followed. Each well was purged using a peristaltic pump with dedicated/disposable polyethylene and silicone tubing. During purging, field parameters (pH, dissolved oxygen, oxidation-reduction potential, specific conductance, turbidity, and temperature) were measured and recorded. Refer to **Appendix A** for the final field parameter readings that were recorded prior to sample collection from each well and to **Appendix C** for purge logs from the October 2021 and April 2022 monitoring events. Purging continued until field parameters had stabilized and/or between three and five well volumes had been purged. After purging was complete, groundwater samples were collected from the wells, with VOC samples being collected first.

Grab samples were collected from the catch basin and temporary piezometers screened in the storm sewer pipe bedding.

A discussion of the groundwater analytical results for the two semi-annual sampling events as well as a detailed discussion of the most recent monitoring event (April 2022) are presented below.

3.2 April 2022 Groundwater Elevation and Flow Direction

A comprehensive round of groundwater levels was measured from all 20 Site wells and piezometers during the April 2022 sampling event. **Table 3** provides a summary of groundwater elevations measured on April 8, 2022.

Two groundwater surface contour maps for April 2022 are provided. Shallow overburden groundwater surface contour elevations are presented in **Figure 12**, and deep overburden groundwater surface contour elevations are presented in **Figure 13**; note that the groundwater elevation from MW-30 was not included in the groundwater surface contour figures as this well is screened through both the shallow and deep groundwater overburden units. Groundwater elevations measured on April 8, 2022 from the shallow overburden ranged from 685.77 ft above mean sea level (AMSL) at A1-GP06-S to 688.96 ft AMSL at MW-44S. Groundwater elevations measured on April 8, 2022 from the deep overburden ranged from 684.69 ft AMSL at MW-35D to 687.52 ft AMSL at MW-38D. Based on these water level measurements, the groundwater beneath the Site indicates a northwesterly flow direction. This flow direction is most pronounced in the deep overburden, as the shallow overburden groundwater flow within Area 1 is significantly influenced by Site features such as the on-site stormwater system as described in Section 2.2.2.

3.3 October 2021 and April 2022 Groundwater Analytical Data

The October 2021 and April 2022 groundwater sampling event were the eighteenth and nineteenth comprehensive sampling event conducted at the Site since completion of the groundwater injection IRM in May 2015. VOCs detected in groundwater during the October 2021 and April 2022 sampling events are presented in **Table 4** and **Table 5**, respectively. The analytical results are compared to the Site RAOs or groundwater criteria presented in TOGS 1.1.1 groundwater standards. The following table summarizes the VOCs detected, their respective concentration ranges, the number of detections, and the number of those detections that exceeded Site-specific groundwater RAOs or TOGS 1.1.1 groundwater standards from the most recent sampling event (April 2022).

Groundwater Contaminants of Concern Summary of Results, April 2022

VOCs Detected in Groundwater	Concentration Range (µg/L)	Number of Detections	RAO/TOGS 1.1.1 Exceedances
Chloroethane	3.1 – 21,000	5	4
1,1-Dichloroethane*	0.43 – 2,000	4	3
Acetone	3.1 – 6.8	4	0
1,1,2-Trichloro-1,2,2-trifluoroethane	200 – 2,500	2	2
Vinyl chloride*	290 – 1,800	2	2
1,1,1-Trichloroethane*	240 – 290	2	2
cis-1,2-Dichloroethene*	1.5 – 1,700	2	1
2-Butanone (MEK)	4.2 – 9.5	2	0
Toluene	910	1	1
Ethylbenzene	40	1	1
Xylenes, Total	35	1	1
2-Hexanone	33	1	0
Benzene	1.2	1	0

Note: VOCs in the table above followed by an asterisk (*) are Site COCs.

Thirteen VOCs were detected in groundwater from the monitoring wells (not including the five on-Site stormwater catch basins and two temporary piezometers screened in the storm sewer pipe bedding) during the April 2022 sampling event. Nine of the 13 VOCs detected exceeded either the Site-specific RAOs or the TOGS 1.1.1 groundwater standards at one or more wells. Only four of the nine Site COCs were detected, all of which reflect a marked decrease in concentration of the parent VOCs (1,1,1-TCA, PCE, and TCE) following the IRMs. **Figures 14 through 17** illustrate April 2022 contours for individual COCs which were detected in shallow and/or deep overburden groundwater. **Figures 18** and **19** illustrate April 2022 contours for TVOCs in shallow and deep overburden groundwater respectively.

The highest concentrations of VOCs in shallow overburden groundwater were detected at A1-GP-10-S and MW-42S; 1,1,2-Trichloro-1,2,2-trifluoroethane was observed at A1-GP10-S (200 µg/L) and MW-42S (2,500 µg/L). The highest concentrations of VOCs in deep overburden groundwater were detected at MW-40D. With the exception of 1,1,2-Trichloro-1,2,2-trifluoroethane as mentioned above, Chloroethane, 1,1-DCA, VC, and cis-1,2-DCE exhibited the highest overall concentrations in groundwater, all of which are degradation products of 1,1,1-TCA, PCE, and/or TCE.

Historical trend plots for the wells sampled in October 2021 and April 2022 for concentrations of 1,1,1-TCA, 1,1,2-TCA, 1,1-DCA, 1,1-DCE, 1,2-DCA, cis-1,2-DCE, PCE, TCE, and VC are provided in **Appendix B**. As stated above, the VOC concentrations in groundwater continue to show a degradation trend both as a result of naturally occurring reductive dechlorination processes and as a result of the 2015 injection IRM, the 2019 supplemental groundwater injection program, and the 2021 bioaugmentation injection program.

Based on the October 2021 and April 2022 groundwater monitoring well data, there was one detection of TCE which was observed in October 2021 (A1-GP15-S). The concentration at A1-GP15-S (1.1 µg/L) was below the site-specific RAO for groundwater and TOGS 1.1.1 groundwater standards; no TCE was detected in monitoring wells in April 2022. Overall, decreases in TCE concentrations observed since the 2015 injection IRM continue to show reductions of VOC concentrations in overburden groundwater. This is most clearly demonstrated on the TCE trend plots for monitoring wells MW-42S and MW-39D, and piezometers A1-GP02-S, A1-GP06-S and A1-GP10-S (refer to **Appendix B**).

An electronic copy of the analytical laboratory data package for the April 2022 sampling event is provided in **Appendix D** on a compact disc (CD).

3.4 October 2021 and April 2022 Storm Sewer Catch Basin and Storm Sewer Pipe Bedding Analytical Data

VOC data collected from on-site catch basins CB-1, CB-2, CB-3, and CB-4 exhibited a decrease in TVOCs since the June 2020 storm sewer pipe replacement activity as well as the IRMs, the 2019 supplemental groundwater injection program, and the 2021 bioaugmentation injection program. TVOC concentrations have decreased in all locations between April 2020 (pre-bioaugmentation injection) and the most recent April 2022 sampling event. Refer to **Table 6** for a summary of the VOC data collected between April 2020 and April 2022.

Two temporary piezometers screened in the storm sewer pipe bedding (TP-5 and TP-6) were sampled for VOCs. TP-5 is located adjacent to CB-1 and TP-6 is located approximately 110 feet north (down-gradient) of CB-1. Between the October 2021 and April 2022 sampling events, only one COC (cis-1,2-DCE at 5.1 µg/L) was detected above the site-specific RAOs in TP-5; TP-6 was non-detect for VOCs during both events. Refer to **Table 6** for a summary analytical data collected at the two temporary piezometers between April 2020 and April 2022.

3.5 Comparison of April 2022 COCs in Groundwater with Pre-IRM Groundwater Analytical Data

Trend plots illustrating concentrations of COCs (1,1,1-TCA, 1,1,2-TCA, 1,1-DCA, 1,1-DCE, 1,2-DCA, PCE, TCE, and VC) in monitoring wells over time are provided in **Appendix B**. Because concentrations of TCE were historically the highest of the COCs detected at the Site, a discussion of historical and current TCE concentrations in groundwater at Site monitoring wells and piezometers is provided below.

In April 2022, TCE was not detected at any of the monitoring wells. TCE was detected at on-site catch basins CB-1 (9.3 µg/L), CB-2 (15 µg/L), CB-3 (0.71 µg/L) and CB-E (1.1 µg/L), and at temporary piezometer TP-5 (2.0 µg/L). Based on the substantial decreases in concentrations of TCE at locations with historical detections of TCE, the 2015 IRM injection of ABC+®, the 2019 supplemental groundwater injection of ABC-Ole® with ZVI, and the 2021 bioaugmentation injection program appears to be promoting the continual degradation TCE. This decrease is most clearly demonstrated on the trend plots in **Appendix B** for monitoring wells A1 GP02-S (20,000 µg/L to below the detection limit), MW 42S (13,000 µg/L to below the detection limit), and MW-38D (11,000 µg/L to below the detection limit).

3.6 Monitored Natural Attenuation

To monitor the effectiveness of the injections over time, MNA parameters were collected from A1-GP06-S, A1-GP10-S, A1-GP18-S, MW-42S, MW-35D, MW-38D, and MW-40D. Results of the April 2022 MNA samples are summarized in **Table 7**. Per **Table 7**, all source area wells sampled for MNA parameters show strong to adequate evidence for anerobic biodegradation of chlorinated organics to occur; wells outside the contaminant plume show adequate to inadequate evidence for anerobic biodegradation of chlorinated organics. It should be noted that during the April 2022 groundwater sampling event, side-gradient/background well A1-GP18-S had a TVOC concentration of 7.3 µg/L, and downgradient wells MW-35D and MW-38D had TVOC concentrations of 0 µg/L.

The use of the enhanced reductive dechlorination (ERD) amendments ABC+® and ABC-Ole® with ZVI were designed to provide needed nutrients, such as a soluble lactic acid carbon source, a phosphate buffer to control pH for optimum microbial growth, and ZVI which accelerates abiotic dechlorination of chlorinated ethenes and ethanes. In September of 2021, AECOM completed bioaugmentation injections using microbial culture KB-1® Plus and KB-1® Primer. The microbial analyses indicates that the necessary concentrations of bacteria such as DHC species producing the enzymes VC Reductase, BAV1 VC, Reductase and TCE Reductase remain present in the subsurface. Further discussion of these results is presented in Section 3.8.2.

The stimulation of the native bacteria by the injection of ABC+® and extra nutrients in the presence of chlorinated solvents in Site groundwater as well as by bioaugmentation have dramatically reduced the concentrations of the original parent chlorinated VOCs, TCE and 1,1,1-TCA, over time. The initial concentrations of known TCA degradation products (1,1-DCA and chloroethane), as well as of TCE degradation products (1,2-DCE isomers and VC), suggest that reductive dechlorination of the chlorinated organic compounds present in Site groundwater is occurring as a result of the amendment injection events. Induction of reducing conditions by the injection of ABC+® accelerates the reductive dechlorination of parent chlorinated VOCs and increases the relative accumulation of degradation intermediates such as cis-1,2-DCE and VC before complete mineralization occurs. As the naturally more aerobic aquifer conditions return after treatment using ERD, VC oxidizing bacteria should increase and complete the dechlorination process to ethene followed by complete mineralization.

3.7 Total Organic Carbon

Samples were collected for TOC analysis to monitor the concentration of available carbon sources for the optimum microbial growth. Although TOC concentrations have decreased over time in the areas outside of the 2019 supplemental groundwater injection area (refer to **Figure 10**), locations within the 2019 supplemental groundwater injection area continue to exhibit elevated TOC concentrations as compared to background. A TOC concentration of 20 milligrams per liter (mg/L) is commonly considered the minimum concentration of carbon necessary for effective reductive dechlorination to occur. The bioaugmentation

event conducted at the site in September 2021 would not be expected to increase the concentration of TOC in the area targeted by the injections. The TOC detected is the result of natural organic carbon present in site groundwater and also from previous injections of an organic carbon substrate. The most recent organic carbon injection event conducted at the site was performed between 20 and 22 May 2019 as described in Section 2.2.3.8. Refer to **Appendix A** for a summary of TOC concentrations for October 2021 and April 2022. Refer to **Figure 20** and **Figure 21** for shallow and deep overburden groundwater TOC plume figures respectively.

3.8 Dechlorinating Bacteria Analysis

During the April 2022 groundwater sampling event, AECOM collected groundwater samples at MW-42S and A1-GP10-S, and submitted the samples to SiREM in Knoxville, Tennessee for analysis for volatile fatty acids (VFA) (MW-42S and A1-GP10-S) and Gene-Trac® analysis (MW-42S). The following sections summarize the VFA and Gene-Trac® analyses. An electronic copy of the analytical laboratory data package for the April 2022 sampling event is provided in **Appendix D** on CD.

3.8.1 Volatile Fatty Acids

In addition to a TOC concentration greater than 20 mg/L, the quantification of VFAs is useful to assess the form of TOC present and its availability to promote the reductive dechlorination process. VFAs are fermented by a variety of pathways to produce the hydrogen necessary for complete reductive dechlorination to occur. In general, VFAs should be in excess of 10 to 20 mg/L. Pre- and post-injection VFA data is summarized in **Table 8**; the associated laboratory data reports are included in **Appendix D**.

Six VFAs were analyzed for by SiREM during pre-bioaugmentation injection activities conducted in August 2021, and subsequent post-injection bioaugmentation monitoring events have been conducted in December 2021 and April 2022; the following compares the pre-bioaugmentation injection concentrations with the most recent post-bioaugmentation injection sampling event in performed in April 2022.

Lactate is a component of the ABC-Ole' that was previously injected at the Site. Lactate ferments to the VFAs acetate and propionate. Lactate can be used as a measure of the remaining unused reducing potential of the previously injected ABC-Ole'. For monitoring well MW-42S, lactate increased from <0.39 mg/L to <7.8 mg/L between August 2021 and April 2022; however, the sample dilution factor increased from 50 to 1,000 so there likely is little lactate left in the vicinity of this well. For monitoring well A1-GP10-S, lactate increased from <0.39 mg/L to 7.9 mg/L between August 2021 and April 2022, indicating there is a limited quantity of lactate remaining in the vicinity of this well.

Acetate is fermented from lactate, ABC-Ole', and sugars. Dhb can use acetate as a low energy source while Dhc cannot use acetate as an energy source. Dhb is implicated in the biodegradation of chlorinated ethenes such as PCE and TCE to cis-1,2-dichloroethene and in the biodegradation of the chlorinated ethane 1,1,1-trichloroethane to 1,1-dichloroethane and subsequently to chloroethane. As a result, the presence of acetate indicates that partial reductive dechlorination can occur. However, complete reductive dechlorination to ethene and ethane will not occur without the presence of other VFAs and Dhc. Between August 2021 and April 2022, Acetate increased in monitoring well MW-42S (574 mg/L to 813 mg/L) and decreased in monitoring well A1-GP10-S (471 mg/L to 147 mg/L).

Propionate is fermented from lactate, ABC-Ole', and alcohols. Propionate subsequently ferments to produce hydrogen and formate. Hydrogen is the preferred electron acceptor for reductive dechlorination because of the high energy yield. Dhc can only use hydrogen as an energy source. Slow fermentation of propionate results in efficient reductive dechlorination (less methanogenesis) and optimal Dhc growth. Propionate was detected in MW-42S in August 2021 and April 2022 but decreased slightly in concentration from 148 mg/L to 124 mg/L. Propionate was also detected in monitoring well A1-GP10-S but also decreased in concentration from 68 mg/L to 35 mg/L.

Formate is created from the fermentation of propionate. Formate is fermented to produce hydrogen and bicarbonate. Formate increased in monitoring wells MW-42S and A1-GP10-S between August 2021 and April 2022 from <0.22 mg/L to 7.2 mg/L and from <0.22 mg/L to 0.43 mg/L respectively.

Pyruvate is created from the fermentation of sugars. Pyruvate is subsequently fermented to propionate and acetate with some hydrogen production. Pyruvate was detected in monitoring well MW-42S and A1-GP10-S during both August 2021 and April 2022 sampling events but decreased from 26 mg/L to 18 mg/L at MW-42S and decreased from 5.3 mg/L to 4.7 mg/L at A1-GP10-S, respectively.

Butyrate is created from the fermentation of ABC-Ole' and alcohols. Butyrate ferments to produce hydrogen and acetate. Slow fermentation of butyrate results in efficient reductive dechlorination (less methanogenesis) and optimal Dhc growth. Butyrate was detected in monitoring well MW-42S and A1-GP10-S during both August 2021 and April 2022 sampling events but decreased from 108 mg/L to 81 mg/L at MW-42S and decreased from 46 mg/L to 18 mg/L at A1-GP10-S.

Overall, the April 2022 VFA results for monitoring well MW-42S and A1-GP10-S indicate that the remaining TOC (349 mg/L and 111 mg/l, respectively) in the vicinity of these wells is sufficient to promote complete reductive dechlorination. All six VFAs were detected in MW-42S, and five of six VFAs (no lactate) were detected in A1-GP10-S. Most importantly, both propionate and butyrate continue to be detected in both wells. Both of these VFAs produce hydrogen when they are fermented, which is essential for complete reductive dechlorination to occur. These results indicate that complete reductive dechlorination to ethene can occur in the vicinity of both wells if Dhc is present in sufficient quantity. Also, the presence of Dhb in sufficient quantity in the vicinity of both wells may help to promote the degradation of 1,1,1-TCA and 1,1-DCA to chloroethane. A discussion of Dhc, Dhb, and reductase results is provided in the next subsection.

3.8.2 Gene-Trac®

Gene-Trac® Dhc is used to detect Dhc in a groundwater sample. The detection of Dhc is significant as Dhc contain the greatest number of reductive dehalogenase genes of any microbial group. Dhc is capable of the reductive dechlorination of PCE, TCE, cis-1,2-DCE, 1,1-dichloroethene, trans-1,2-dichloroethene, and VC. Pre- and post-injection Gene-Trac® data is summarized in **Table 9**; the associated laboratory data reports are included in **Appendix D**.

Gene-Trac® samples from MW-42S were analyzed by SiREM during the pre-bioaugmentation injection in August 2021 and subsequent post-injection monitoring events in December 2021 and April 2022; the following compares the pre-bioaugmentation injection concentrations with the most recent post-bioaugmentation injection sampling event performed in April 2022.

The post-injection Gene-Trac® Dhc results increased slightly from 5 – 13 % to 5 – 14% Dhc (both were 2 x 10^8 enumerations per liter). Per the technical notes from SiREM regarding interpretation of data, when the density of Dhc gene copies per liter is 1 x 10^8 or higher, this concentration is generally associated with significant rates of dechlorination.

Gene-Trac® vinyl chloride reductases (*vcrA* and *bvcA*) and TCE reductase (*tceA)* quantify genes that code for reductase enzymes that dechlorinate chlorinated ethenes and other compounds. The *vcrA*, *bvcA*, and *tceA* genes play specific roles in reductive dechlorination. Specifically, the Gene-Trac® *vcrA* and *bvcA* test quantifies VC-reductase genes that produce enzymes that convert VC to ethene. The *vcrA* reductase gene is reported to be the most commonly identified VC reductase gene in the environment, whereas *bvcA* is generally less common but can predominate in more oxidizing groundwater and possibly where DCE is dominant. The Gene-Trac® *tceA* test quantifies the TCE reductase gene that produces an enzyme that primarily converts TCE to cis-1,2-DCE and VC.

The *vcrA* reductase gene was detected in monitoring well MW-42S at 3 x 10^8 gene copies per liter in the pre-injection sample and decreased slightly to 2 x 10^8 gene copies per liter in the post-injection sample collected. The *bvcA* reductase gene was detected in monitoring well MW-42S at 2 x 10^5 gene copies per

liter in August 2021 and increased to 4 x 10^5 gene copies per liter in April 2022. The *tceA* reductase gene was detected in monitoring well MW-42S at 2 x 10^7 gene copies per liter in August 2021 and decreased slightly to 1 x 10^7 gene copies per liter in April 2022. Per the technical notes from SiREM, the potential for complete dechlorination is very high when Dhc, *vcrA*, *bvcA*, and *tceA* are present at concentrations greater than or equal to 1 x 10^7. Additionally, VC stall is unlikely when *vcrA* greater than 1 x 10^7 gene copies per liter, and ethene is detectable. At monitoring well MW-42S, ethene was detected at 11,000 µg/L and 43,000 µg/L in April 2021 and April 2022, respectively.

Gene-Trac® Dhb is used to detect Dhb in a groundwater sample. Dhb are implicated in the biodegradation of PCE and TCE to cis-1,2-DCE. The detection of Dhb indicates that dechlorination activities attributed to Dhb may be active. Increasing concentrations of Dhb are indicative of increased potential for degradation. Dhb was detected at 6 x 10^6 gene copies per liter in August 2021 and at 5 x 10^6 gene copies per liter in April 2022.

In summary, Dhc, *vcrA*, *bvcA*, and *tceA* are present at monitoring well MW-42S at concentrations that indicate the significant potential for complete dechlorination to occur. Additional time is needed to evaluate the overall impact of the bioaugmentation event in the vicinity of this well.

3.9 Dechlorinating Chemical Analysis

In addition to the dechlorinating bacteria and degradative enzyme results, the presence and distribution of TCE degradation products (cis-1,2-DCE and VC) and 1,1,1-TCA degradation products (1,1-DCA and chloroethane) provide supportive evidence that the attenuation of TCE and 1,1,1-TCA and their degradation products via reductive dechlorination continues to occur in-situ at the Site. The occurrence and concentrations of these degradation products are directly related to the historic distribution of TCE and 1,1,1-TCA in the subsurface. During the October 2021 and April 2022 sampling events, the degradation products of TCE and 1,1,1-TCA were detected at their highest concentrations within the suspected source area near A1-GP02-S, A1-GP06-S, A1-GP10-S, MW-42S, and MW-40D, with most of these detections in groundwater located at wells A1-GP02-S, A1-GP06-S, A1-GP10-S, MW 42S, and MW-40D; refer to **Table 4** and **Table 5**.

4. Site Inspection

This section describes the Site inspections, O&M tasks completed, and recommendations for improvements.

4.1 Boiler Room

Inspections of the boiler room floor were performed concurrently during the October 2021 and April 2022 semi-annual groundwater sampling events as well as in July 2021 and January 2022. All previous repairs that were completed in November 2014 and November 2017 remain intact, and no additional cracks or perforations were observed. Note, as stated in the SMP, if the boiler room becomes occupied or its usage changes, additional treatment and/or control measures will need to be evaluated.

4.2 Monitoring Wells

As per the SMP, Site monitoring wells were inspected during each of the semi-annual groundwater sampling events; no issues were observed regarding the condition of the wells. No O&M activities at the wells were needed.

5. Conclusions and Recommendations

Based on results of the groundwater analytical data collected during the reporting period, conclusions, upcoming Site-related activities, recommendations, and a proposed monitoring and reporting schedule are presented below.

5.1 Conclusions

1. Groundwater elevations measured on April 8, 2022 from the shallow overburden ranged from 685.77 ft above mean sea level (AMSL) at A1-GP06-S to 688.96 ft AMSL at MW-44S. Groundwater elevations measured on April 8, 2022 from the deep overburden ranged from 684.69 ft AMSL at MW-35D to 687.52 ft AMSL at MW-38D. Based on these water level measurements, the groundwater beneath the Site exhibits a northwesterly flow direction. This flow direction is most pronounced in the deep overburden, as the shallow overburden groundwater is significantly influenced by Site features (e.g., the stormwater sewer system and adjacent paved areas).
2. The groundwater analytical data indicate that the IRMs, the 2019 supplemental groundwater injection, and 2021 bioaugmentation injection were, and continue to be, successful in the continued attenuation of Site-related CVOCs.
3. The groundwater microbial analyses indicate that the necessary microbes, such as DHC, DHB, and degradative enzymes are present in the shallow overburden at sufficient concentrations to promote reductive dechlorination.
4. VOC data collected from the on-site catch basins in April 2022 exhibited low detections of some COCs but continued to show a general decreasing trend in concentration of COCs.
5. Concentrations of VOCs in samples collected in April 2022 from the temporary piezometers screened in the storm sewer bedding exhibited detections above the screening criteria of some COCs at TP-5 (located adjacent to CB-1) but below the Site-specific RAOs or TOGS 1.1.1 groundwater standards. There were no detections of VOCs above the reporting limit at TP-6 (down-gradient of TP-5).
6. Semi-annual monitoring data collected during the reporting period demonstrate that TOC concentrations in the areas targeted for injections remain above pre-injection levels, maintaining conditions that promote microbial growth.
7. The boiler room floor crack caulking and drainpipe annulus seals (i.e., sub-slab mitigation controls) were inspected semi-annually and did not need repair. No additional floor cracks or perforations in the floor were noted during the reporting period.

5.2 Recommendations

Based on information gathered during the current reporting period, the following recommendations are proposed for the Site:

1. Continue quarterly inspections of the boiler room sub-slab mitigation controls.
2. Continue semi-annual inspections of the monitoring well network.
3. Perform semi-annual comprehensive groundwater sampling events (October 2022 and April 2023); refer to **Table 1** for a list of locations to be sampled and associated analyses.
4. Review and update the Site health and safety plan as necessary.

5.3 Proposed Monitoring and Compliance Sampling Schedule

The proposed schedule for groundwater sampling at the Site during the next reporting period includes semi-annual sampling of 20 wells, five on-site catch basins, and two temporary piezometers screened in

the storm sewer pipe bedding; refer to **Table 1** for a list of locations to be sampled and associated analyses.

It is anticipated that the next PRR will be prepared following receipt of laboratory analytical results for the April 2023 comprehensive groundwater sampling event and will include the results from groundwater sampling events scheduled for October 2022 and April 2023.

6. Evaluate Remedy Performance, Effectiveness, and Protectiveness

6.1 Institutional Controls and Engineering Controls Certification

As a component of the PRR requirement, included in **Appendix E** is the completed IC/EC certification form. Note an IC/EC certification form was not distributed by NYSDEC for this reporting period; NYSDEC directed AECOM to update the February 19, 2021 IC/EC certification form for the current reporting period. AECOM verified that the institutional and engineering controls listed below are being implemented and are in compliance with the February 19, 2021 IC/EC certification form.

Institutional controls include:

1. Groundwater Use Restrictions
2. Land Use Restrictions
3. Site Management Plan
4. Soils Monitoring Plan
5. Groundwater Monitoring Plan
6. IC/EC Plan

Engineering controls include:

1. None listed.

7. References

AECOM. August 2021. “Bioaugmentation Injection Work Plan, Former Scott Aviation Facility Area 1 BCP Site”, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. May 2021. “2021 Periodic Review Report, April 17, 2020 through April 9, 2021, Former Scott Aviation Facility Area 1 BCP Site”, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. June 2020. “Storm Sewer Replacement Work Plan - Former Scott Aviation Facility Area 1 BCP Site”, NYSDEC Site Code No. C915233, Lancaster, New York”

AECOM. May 2019. “2019 Supplemental Injection Work Plan - Former Scott Aviation Facility Area 1 BCP Site”, NYSDEC Site Code No. C915233, Lancaster, New York”

AECOM. December 2015. “Site Management Plan”, Former Scott Aviation Facility Area 1 BCP Site, Lancaster, New York, Erie County.

AECOM. December 2015. “Final Alternatives Analysis Report - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. March 2015. “Interim Remedial Measures Construction Completion Report - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. January 2015. “Sub-Slab Vapor Evaluation - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. October 2014. “MIP/HPT and Baseline Sampling Work Plan – Former Scott Aviation Facility Area 1 BCP Site No. C915233, Lancaster, New York”.

AECOM, June 2014. “2014 Interim Remedial Measures Remedial Action Work Plan, Former Scott Aviation Facility Area 1, Lancaster New York”.

AECOM. March 2015. “2014 Interim Remedial Measures Construction Completion Report - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. October 2013. “Soil Vapor Intrusion Evaluation: Supplemental Soil and Groundwater Data Report - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. August 2013. “Soil Vapor Intrusion Evaluation - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. April 2013. “Draft Alternatives Analysis Report - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. April 2012. “Supplemental Remedial Investigation Report - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. September 2011. “Remedial Investigation Report - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. May 2010. “Addendum to the Remedial Investigation / Alternatives Analysis Work Plan - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

AECOM. February 2010. “Remedial Investigation / Alternatives Analysis Work Plan - Former Scott Aviation Facility Area 1 BCP Site, NYSDEC Site Code No. C915233, Lancaster, New York”.

Earth Tech. January 2008. “Preliminary Groundwater Assessment Report”, Former Scott Aviation Facility, Lancaster, New York.

Earth Tech. June 2004. “Phase II Environmental Site Investigation”, Tyco/Scott Aviation Facility, Lancaster, New York.

Earth Tech. April 2004. “Phase I Environmental Site Assessment and Modified Compliance Assessment”, Tyco/Scott Aviation Facility, Lancaster, New York.

Lu, X., J.T. Wilson, and D.H. Kampbell. 2006. “Relationship Between Dehalococcoides DNA in Ground Water and Rates of Reductive Dechlorination at Field Scale”. Water Research 40:3131-3140.

NYSDEC. December 2015. “Decision Document”, Former Scott Aviation Facility (Area 1) Brownfield Cleanup Program, Lancaster, Erie County, Site No. C915233.

NYSDEC. May 2010. Program Policy DER-10, Technical Guidance for Site Investigation and Remediation.

NYSDEC. May 2004. “Draft Brownfield Cleanup Program Guide.”

NYSDEC, 1998. Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations Division of Water Technical and Operational Guidance Series (TOGS) 1.1.1. June 1998 (June 2004 addendum).

NYSDEC, June 1998. “Division of Water Quality New York Codes, Rules and Regulations (NYCRR), Title 6, Parts 702.15(a)(2) and 703.5”.

Figures

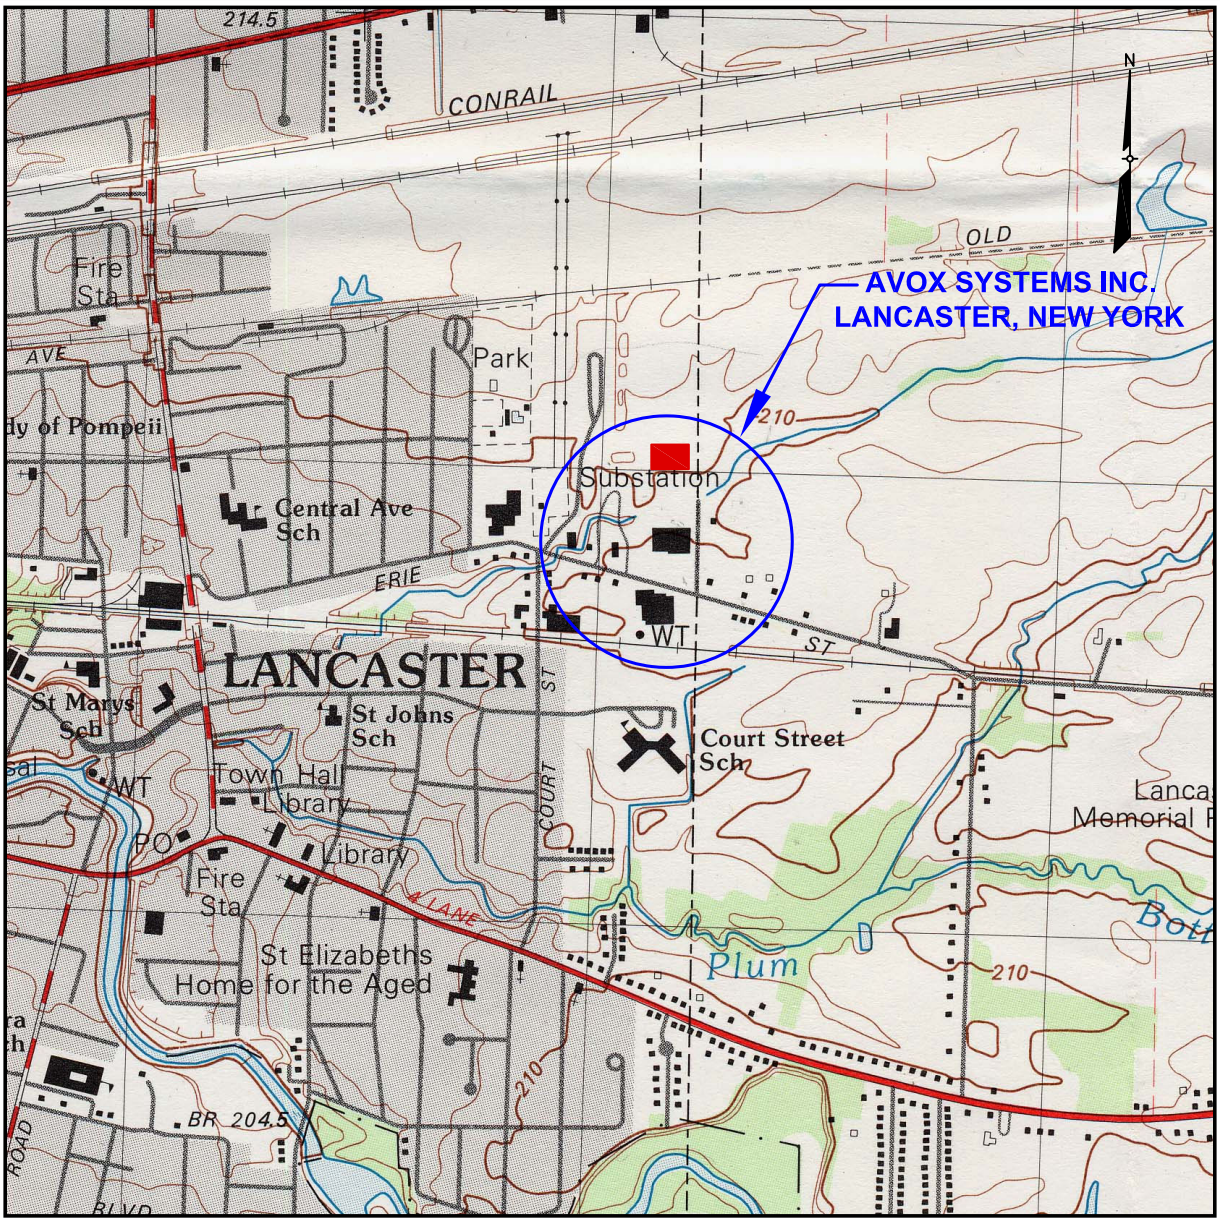

SOURCE:
1982 U.S. GEOLOGIC SURVEY 7.5 X 15 MINUTE TOPOGRAPHIC QUADRANGLE
LANCASTER, NEW YORK

LEGEND

AVOX PLANT 3 ADDED AFTER PUBLICATION OF LANCASTER, NEW YORK TOPOGRAPHIC QUADRANGLE.

0 1000 2000
SCALE IN FEET

AECOM

FIGURE 1
SITE LOCATION MAP

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

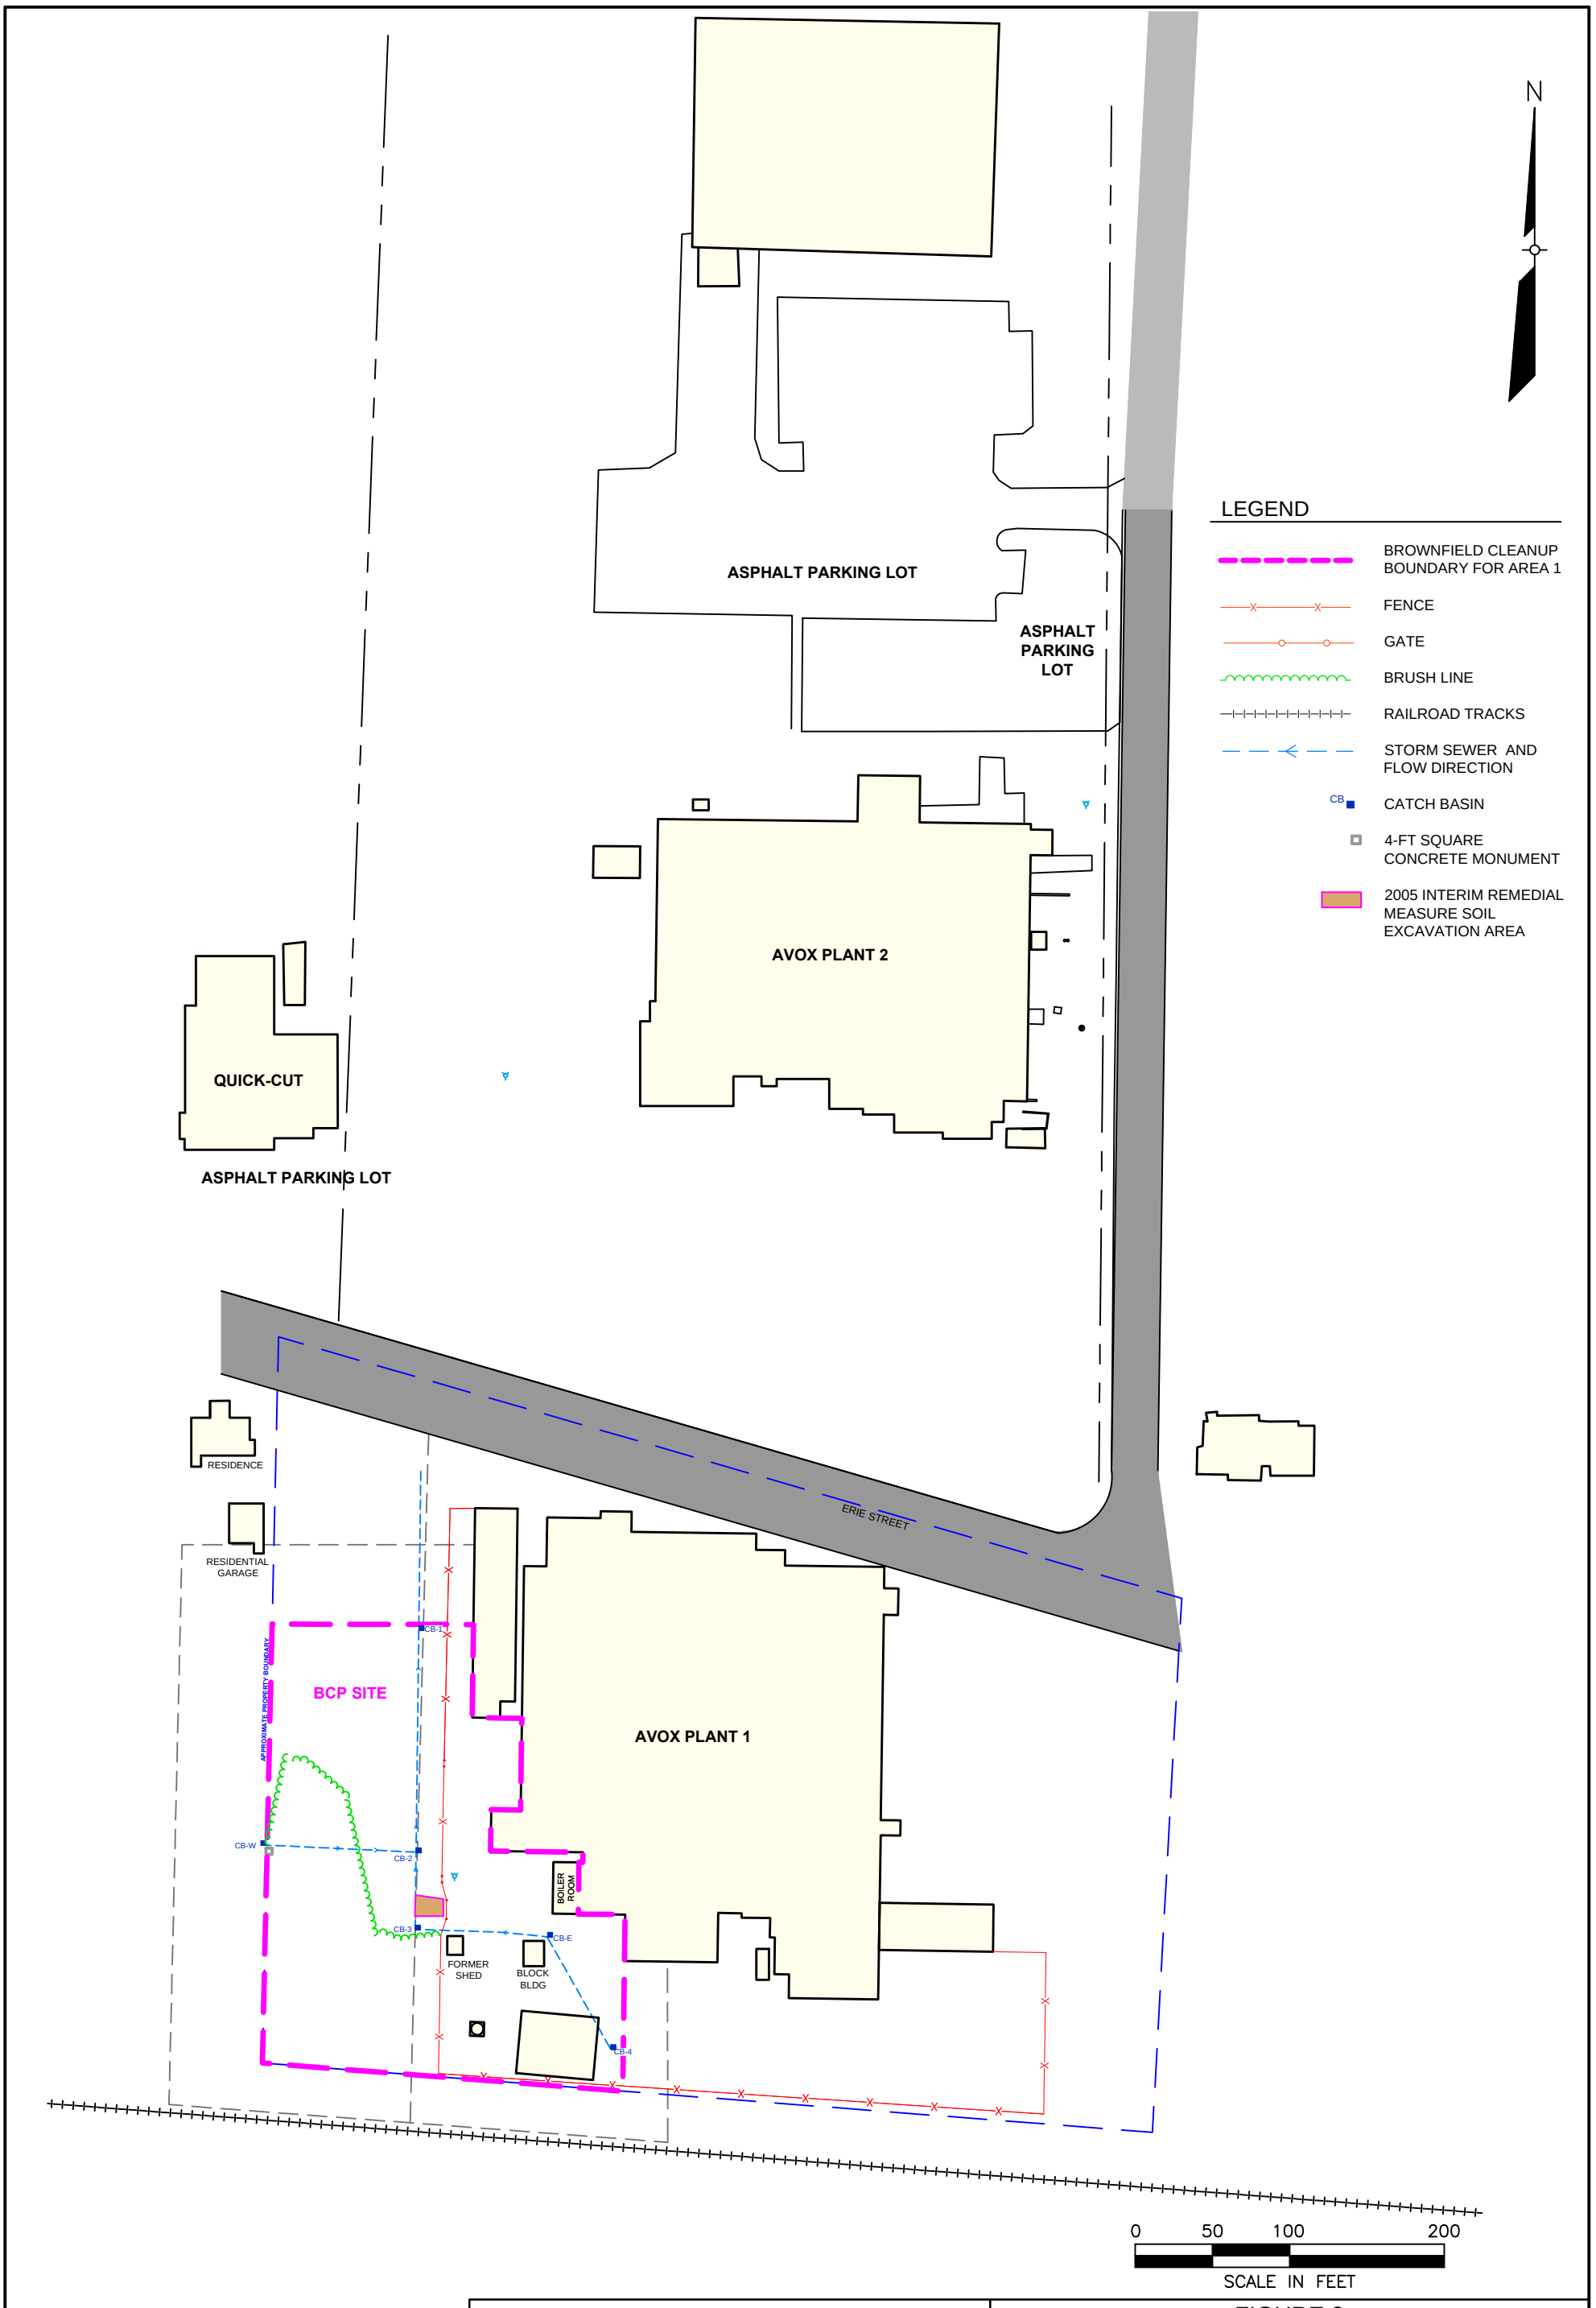

AECOM

FIGURE 2
SITE LAYOUT MAP

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

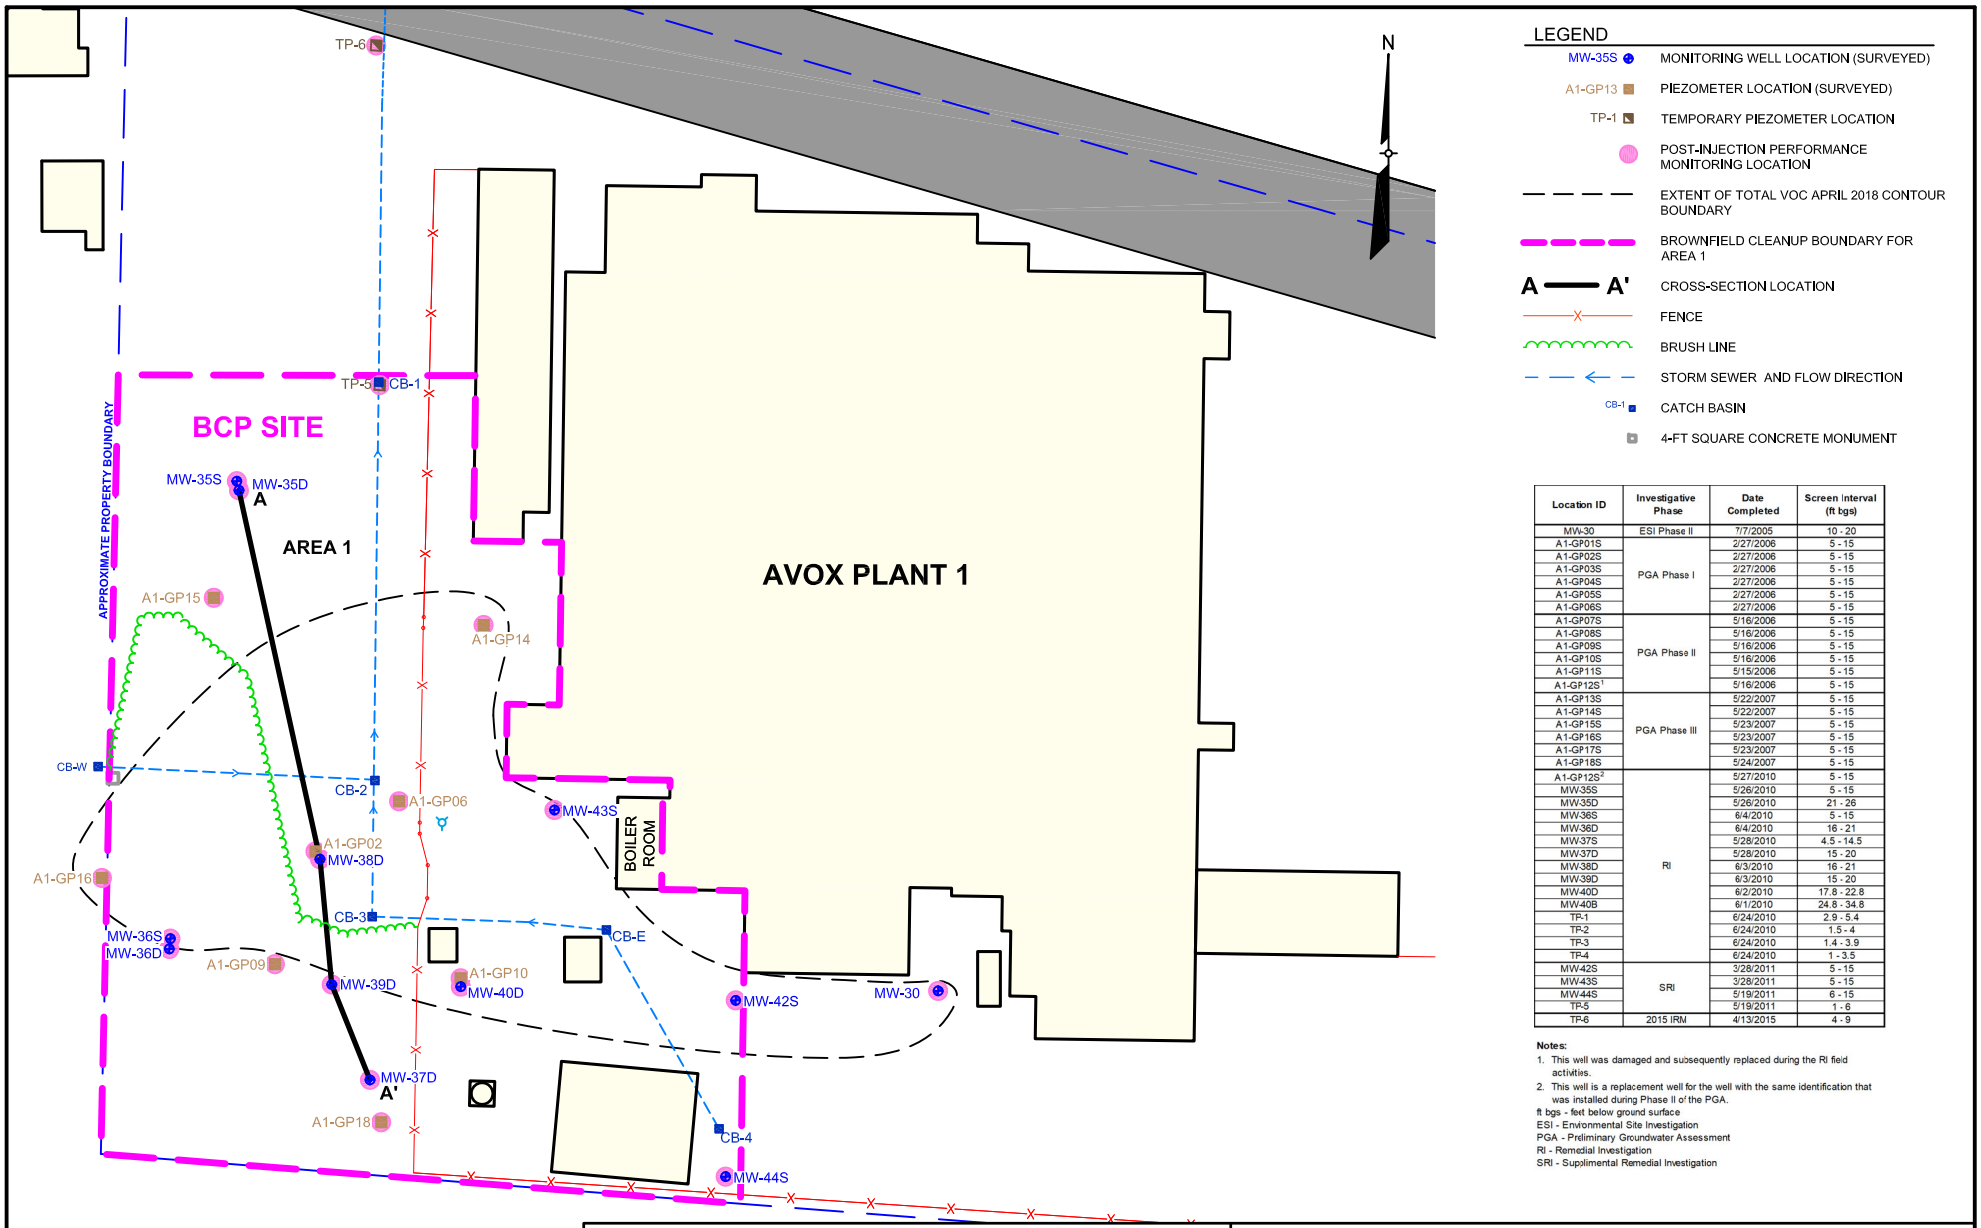

LEGEND

- MW-35S — MONITORING WELL LOCATION (SURVEYED)
- A1-GP13 — PIEZOMETER LOCATION (SURVEYED)
- TP-1 — TEMPORARY PIEZOMETER LOCATION
- POST-INJECTION PERFORMANCE MONITORING LOCATION
- EXTENT OF TOTAL VOC APRIL 2018 CONTOUR BOUNDARY
- BROWNFIELD CLEANUP BOUNDARY FOR AREA 1
- A — A' CROSS-SECTION LOCATION
- FENCE
- BRUSH LINE
- STORM SEWER AND FLOW DIRECTION
- CB-1 CATCH BASIN
- 4-FT SQUARE CONCRETE MONUMENT

Location ID	Investigative Phase	Date Completed	Screen Interval (ft bgs)
MW-30	ESI Phase II	7/7/2005	10 - 20
A1-GP01S	PGA Phase I	2/27/2006	5 - 15
A1-GP02S		2/27/2006	5 - 15
A1-GP03S		2/27/2006	5 - 15
A1-GP04S		2/27/2006	5 - 15
A1-GP05S		2/27/2006	5 - 15
A1-GP06S		2/27/2006	5 - 15
A1-GP07S	PGA Phase II	5/16/2006	5 - 15
A1-GP08S		5/16/2006	5 - 15
A1-GP09S		5/16/2006	5 - 15
A1-GP10S		5/16/2006	5 - 15
A1-GP11S		5/15/2006	5 - 15
A1-GP12S[1]		5/16/2006	5 - 15
A1-GP13S	PGA Phase III	5/22/2007	5 - 15
A1-GP14S		5/22/2007	5 - 15
A1-GP15S		5/23/2007	5 - 15
A1-GP16S		5/23/2007	5 - 15
A1-GP17S		5/23/2007	5 - 15
A1-GP18S		5/24/2007	5 - 15
A1-GP12S[2]	RI	5/27/2010	5 - 15
MW-35S		5/26/2010	5 - 15
MW-35D		5/26/2010	21 - 26
MW-36S		6/4/2010	5 - 15
MW-36D		6/4/2010	16 - 21
MW-37S		5/28/2010	4.5 - 14.5
MW-37D		5/28/2010	15 - 20
MW-38D		6/3/2010	16 - 21
MW-39D		6/3/2010	15 - 20
MW-40D		6/2/2010	17.8 - 22.8
MW-40B		6/1/2010	24.8 - 34.8
TP-1		6/24/2010	2.9 - 5.4
TP-2		6/24/2010	1.5 - 4
TP-3		6/24/2010	1.4 - 3.9
TP-4		6/24/2010	1 - 3.5
MW-42S	SRI	3/28/2011	5 - 15
MW-43S		3/28/2011	5 - 15
MW-44S		5/19/2011	6 - 15
TP-5		5/19/2011	1 - 6
TP-6	2015 IRM	4/13/2015	4 - 9

Notes:
1. This well was damaged and subsequently replaced during the RI field activities.
2. This well is a replacement well for the well with the same identification that was installed during Phase II of the PGA.

ft bgs - feet below ground surface
ESI - Environmental Site Investigation
PGA - Preliminary Groundwater Assessment
RI - Remedial Investigation
SRI - Supplimental Remedial Investigation

AECOM

FIGURE 3
MONITORING WELL, PIEZOMETER AND CATCH BASIN LOCATIONS

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60147012_166 MW PZ and CB Locs_May2018.dwg, 5/25/2022 11:13:16 PM, Splawnm

A
NORTH

A'
SOUTH

137.67'

45.88'

37.47'

MW-35D
EL. 688.9

MW-38D
EL. 687.5'

MW-39D
EL. 687.4'

MW-37D
EL. 687.6'

FILL

SILT

CLAY

SILTY CLAY

SILT AND GRAVEL

0-6" TOPSOIL, brown (moist/dry)
6-9" tan SILT, trace f.sand (dry/moist)
9-20" reddish brown CLAY, trace silt, stiff (moist/dry)
0-15" reddish brown CLAY, trace silt, stiff (moist/dry)
0-20" reddish brown SILTY CLAY with 1mm silt layer (moist)
0-7" reddish brown SILTY CLAY, little SILT, (wet)
7-20" reddish brown CLAYEY SILT, thin silt layers interbedded (dry/moist)
0-24" reddish brown SILTY CLAY, mottled slightly (moist)
0-6" reddish brown SILTY CLAY, trace gravel
6-24" dark reddish/purple brown CLAY, trace silty clay, (moist) *color change
0-24" dark purple brown CLAY, (moist)
0-23" dark purple/brown CLAY, trace silty, trace gravel, slightly mottled, (moist)
0-24" dark purple-reddish brown CLAY, some silty layers, trace gravel, (moist)
0-24" purple/reddish brown CLAY trace silt, trace gravel, (moist)
0-24" purple/reddish brown CLAY trace silt, trace gravel, (moist), soft
0-20" reddish brown CLAY, little silty, trace gravel (moist-wet)
0-2" reddish brown CLAY, little silt, little gravel, (moist)
2-6" medium gray f-c SAND, some gravel, trace silt, (moist-wet), shale fragments in shoe

TD = 26'

0-7" brown thick TOPSOIL (moist)
7-7" reddish brown SILT, little organics, trace clay, (moist)
0-22" reddish brown-tan-grey mottled SILT, little clay, trace f-m gravel (dry-moist)
0-24" reddish brown, tan-grey-olive mottled SILT, little clay (moist), wet silt layers 1" @24" (45ppm)
0-10" olive grey SILT (wet) (45ppm)
10-24" reddish brown - olive mottled SILT, trace clay, trace f. gravel (moist) PID - 0-243, 243@7" bgs
0-9" reddish brown-olive mottled SILT, little clay (moist) max PID = 45.2ppm
9-10" tan-grey f. sand, trace silt (wet), 110 ppm
10-24" reddish brown - purple SILT, some clay, trace gravel (moist-plastic), PID = 45 to 5ppm @ 24"
0-14" reddish brown-purple CLAY, trace silt, trace f-m gravel (moist) plastic
0-24" reddish brown-purple CLAY, trace silt, trace f-m gravel (moist), 4.5ppm @ 6" in silt layer - 0 in remainder of sample
refusal - rock in shoe - auger to 16"
0-24" reddish brown-purple CLAY, trace silt, trace gravel (moist), 3.4ppm @ 17" in thin silt layer (grey, moist) 0.0ppm in rest of core
0-10" reddish brown-purple SILT and CLAY, little f-m gravel (moist)
10-15" dark grey SILT and rock chips (wet)
0-4" dark grey SILT and granite chips (moist) refusal

TD = 21'

0-7" dark brown TOPSOIL, moist
7-10" brown topsoil grading to CLAYEY SILT (moist)
10-12" reddish brown mottled with brown CLAYEY SILT (moist)
0-24" reddish brown SILTY, little clay thin grey silt interbeds increases to bottom (moist)
0-24" reddish brown SILTY CLAY (moist) - more wet @ bottom, (18-20" grey SILT layer (moist-wet)) collect samples @ 5-6"
0-6" reddish brown - tan SILT, some clay (wet)
0-1.1 PID
6-12" reddish brown-tan mottled SILT, some clay, grey silt think interbeds (moist)
0-18" reddish brown CLAY, little silt, trace gravel (moist)
18-24" reddish brown to purple CLAY, some silt (grey interbeds), trace gravel (moist)
0-8" grey SILT (wet)
8-24" reddish brown, slightly purple CLAY, little silt, trace gravel (moist)
0-24" reddish brown to purple CLAY, little trace silt, trace gravel (moist), plastic
0-24" reddish brown - slightly purple CLAY, little grey silt interbeds (moist)
0-20" reddish brown-purple SILT and CLAY, trace grey silt layers (moist)
20-24" grey SILT and f-c GRAVEL, little f.sand (wet-moist)
bouncing spoon - shale

TD = 20'

0-7" TOPSOIL
7-21" tan with reddish brown mottling, SILT, little clay, (moist)
0-19" reddish brown with grey/tan mottling, SILT, little clay, (dry-moist)
0-18" reddish brown with tan mottling, SILT and CLAY, (moist)
0-14" reddish brown with tan mottling SILT and CLAY, (moist)
14-16" tan SILT, trace clay, (wet)
16-21" reddish brown with tan mottling CLAY, some silt, thin grey silt layers, (moist) sample 6-7"
0-24" reddish brown SILT, little clay light grey silt layers interbedded, (dry-moist)
0-24" reddish brown CLAY, little silt, trace f.gravel, (moist)
0-24" purple-reddish brown CLAY, trace silt, trace f.gravel, (moist), very plastic
0-24" purple-reddish brown with grey sile/f.sand layer, CLAY, trace silt, (moist)
0-24" reddish brown CLAY and SILT, f.sand and silt layers interbedded increasing to bottom - color change to grey to bottom, moist - wetter to bottom
0-22" medium grey CLAY and SILT (very moist), soft, trace f-c sand and gravel
22-24" medium grey f-c sand, trace silt, little rock chips (dry)

TD = 20'

690
688
686
684
682
680
678
676
674
672
670
668
666
664
662

GROUND SURFACE ELEVATION (ft. AMSL)

HORIZONTAL SCALE
0 10 20 40
SCALE IN FEET

VERTICAL SCALE
4x EXAGGERATION
0 2.5 5 10
SCALE IN FEET

LEGEND:

- FILL
- SILT
- CLAY
- SILTY CLAY
- SILT AND GRAVEL
- TD = TOTAL DEPTH
- GROUNDWATER ELEVATION (ft AMSL)

AECOM

FIGURE 4
GEOLOGIC CROSS-SECTION

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

5/25/2022 10:40 PM

C:\Users\splawnm\OneDrive - AECOM\Desktop\Projects\Scott Figgie\60147012_127 Geologic Cross-Section.dwg

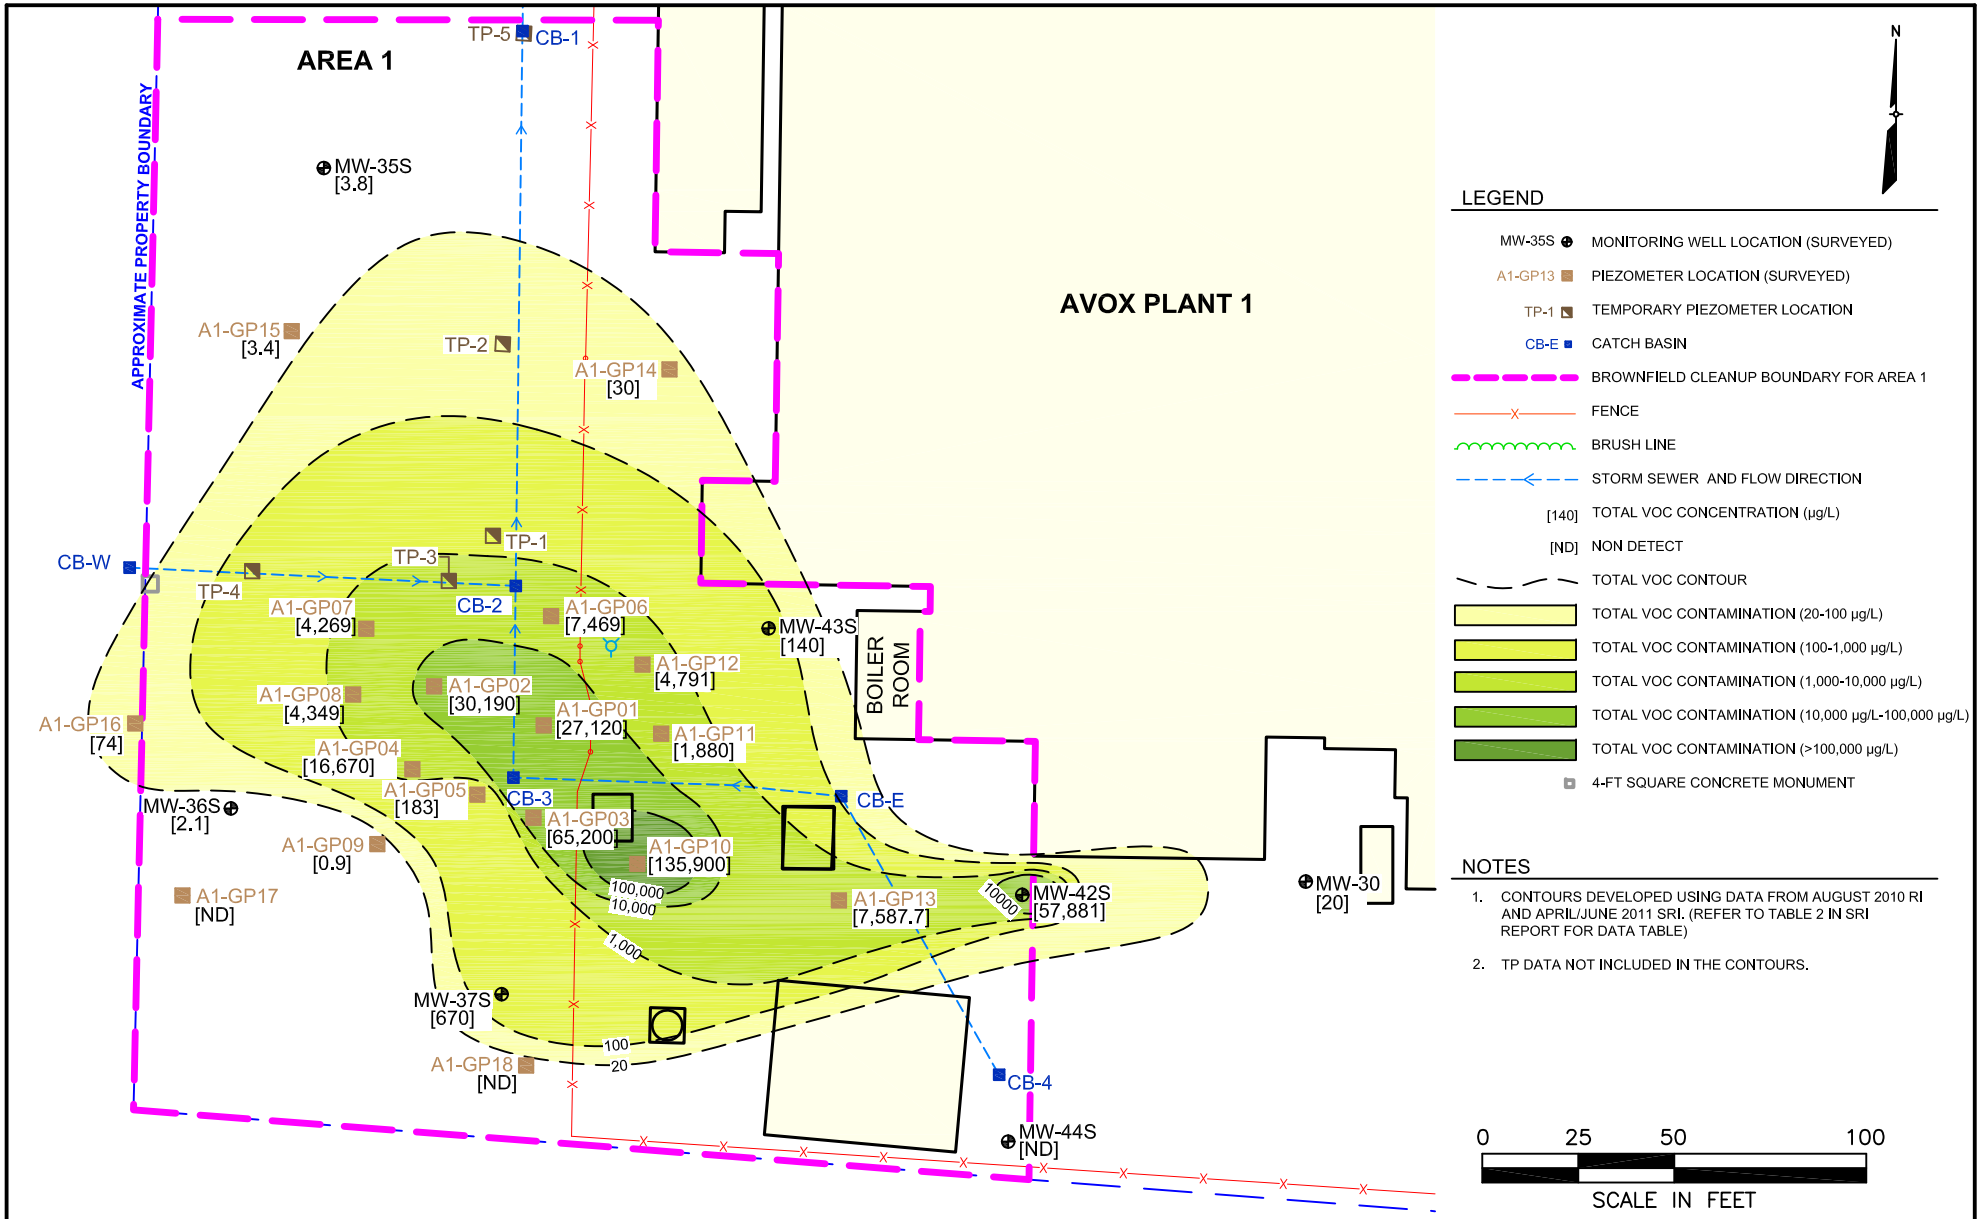

AECOM

FIGURE 5
PRE-INJECTION SHALLOW OVERBURDEN GROUNDWATER TOTAL VOC CONTAMINANT PLUME

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60155991_130 Total VOC Contaminant Plume_Aug2010.dwg, 5/26/2022 12:12:05 AM, Splawnm

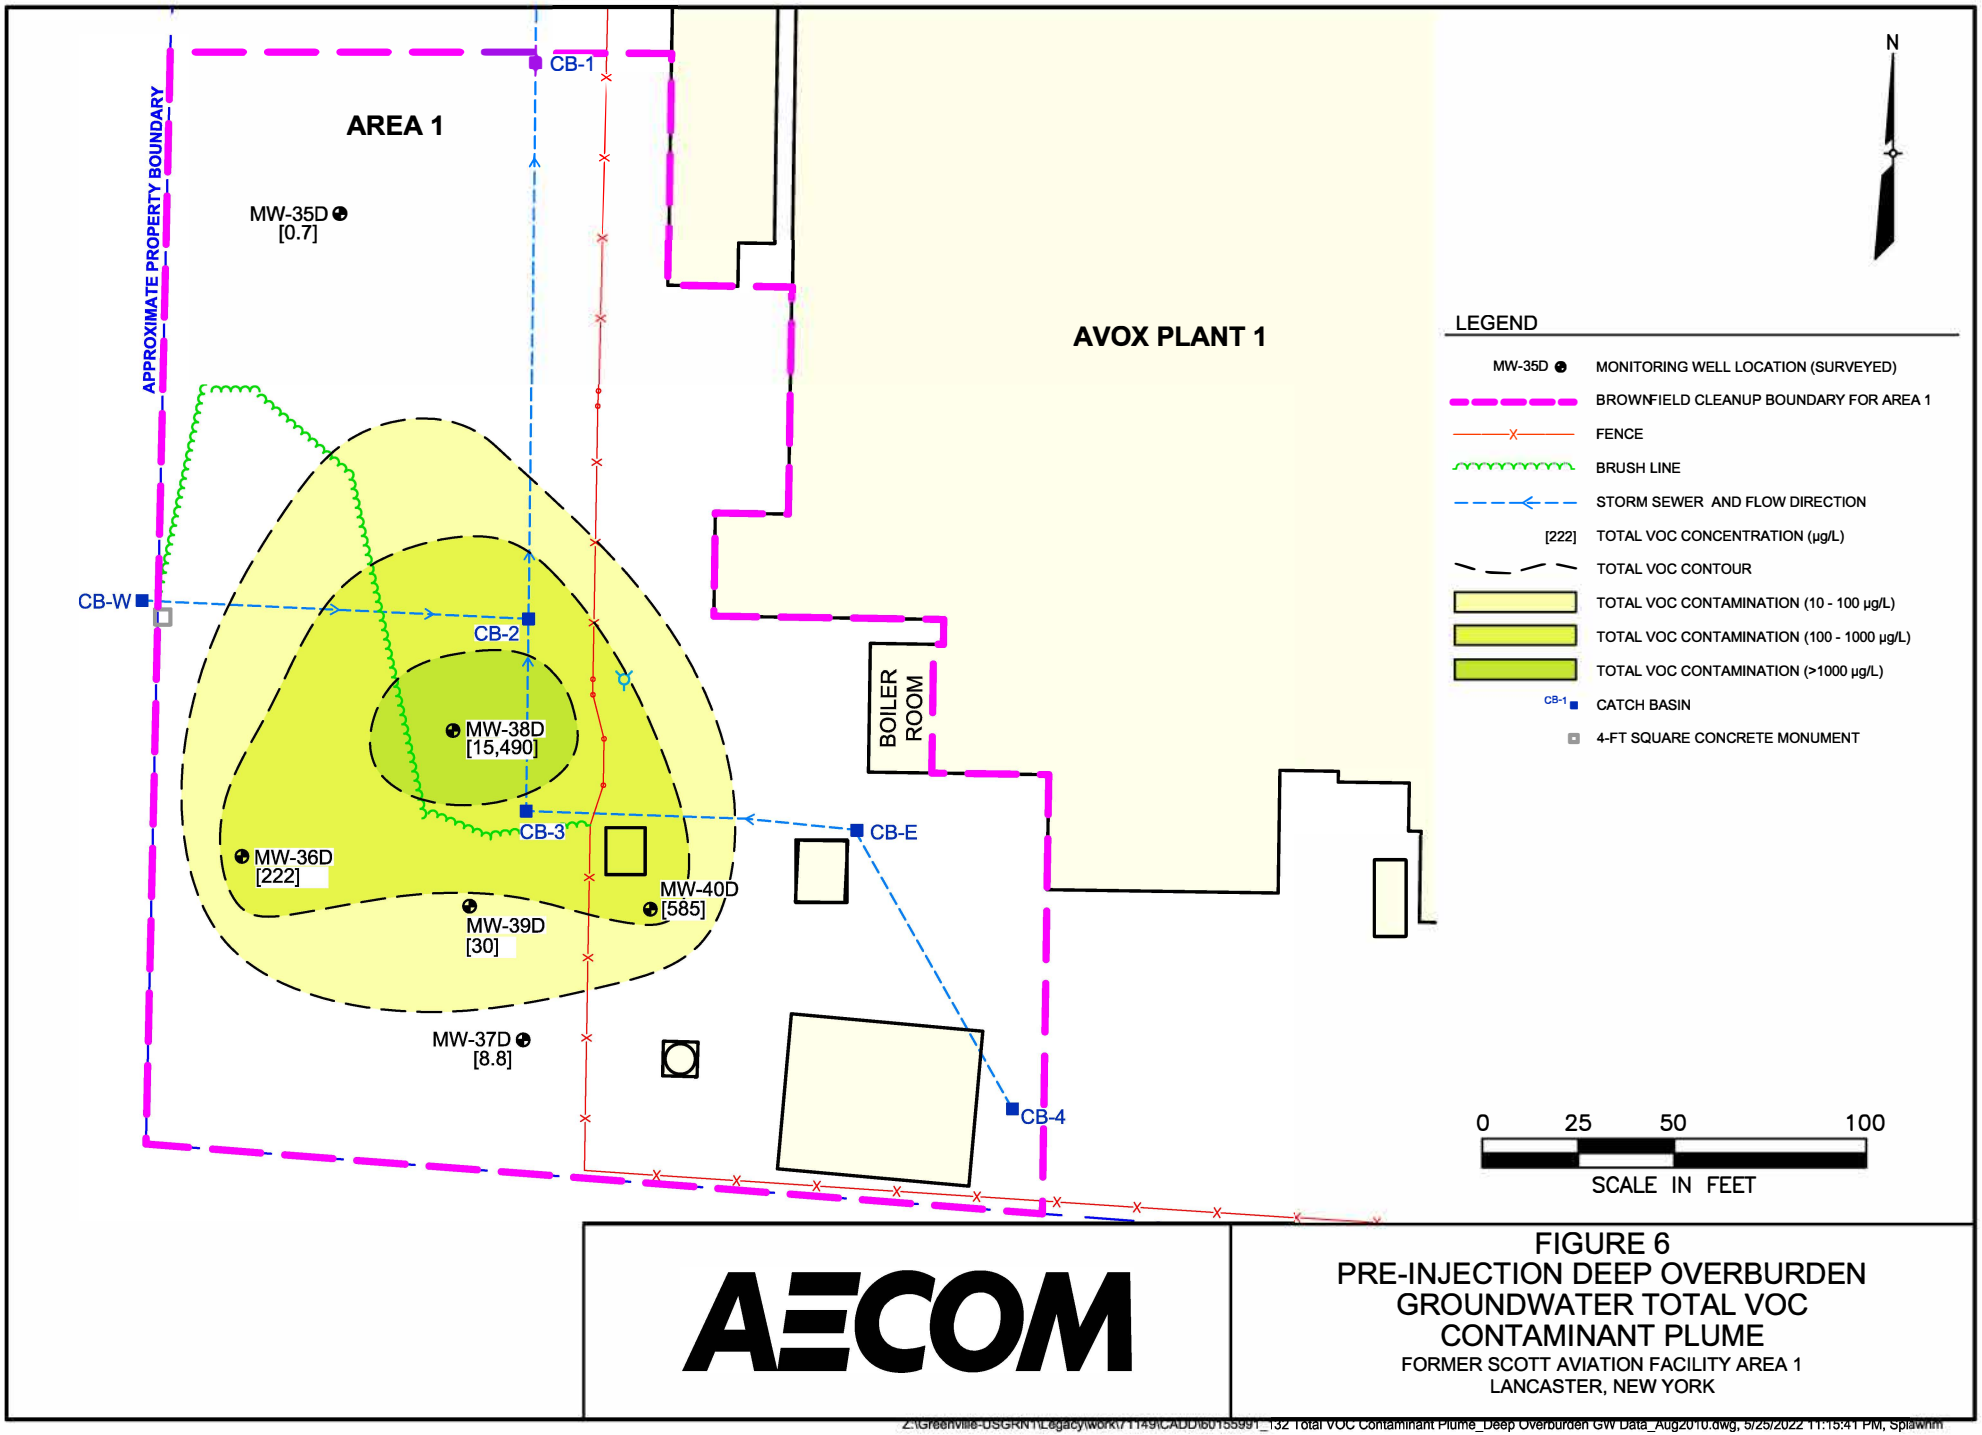

AECOM

FIGURE 6
PRE-INJECTION DEEP OVERBURDEN GROUNDWATER TOTAL VOC CONTAMINANT PLUME

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-DSGRN1\Legacy\work\71149\CADD\60155991_132 Total VOC Contaminant Plume_Deep Overburden GW Data_Aug2010.dwg, 5/25/2022 11:15:41 PM, Splawnm

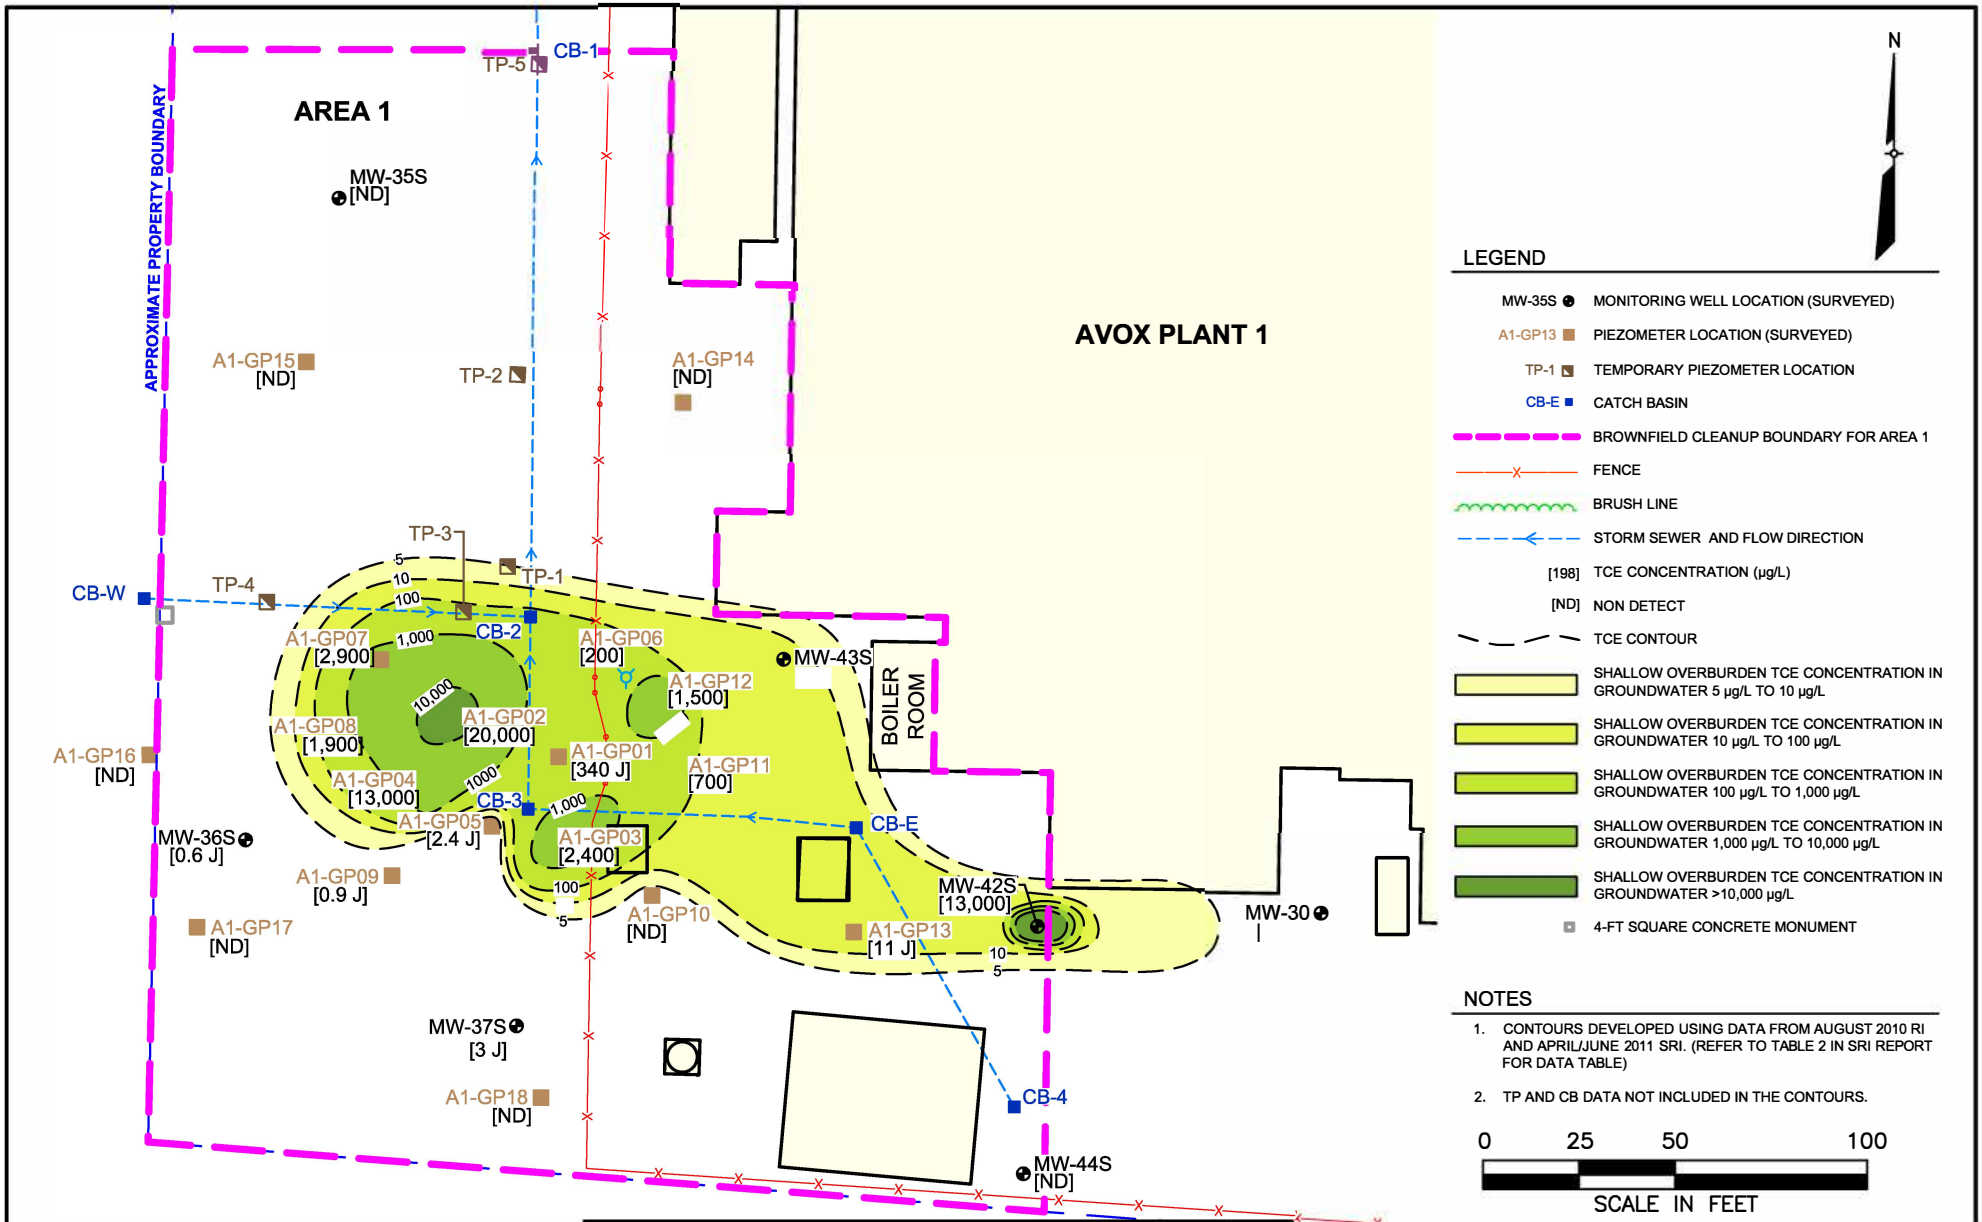

AECOM

FIGURE 7
PRE-INJECTION SHALLOW OVERBURDEN GROUNDWATER TCE CONTAMINANT PLUME

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

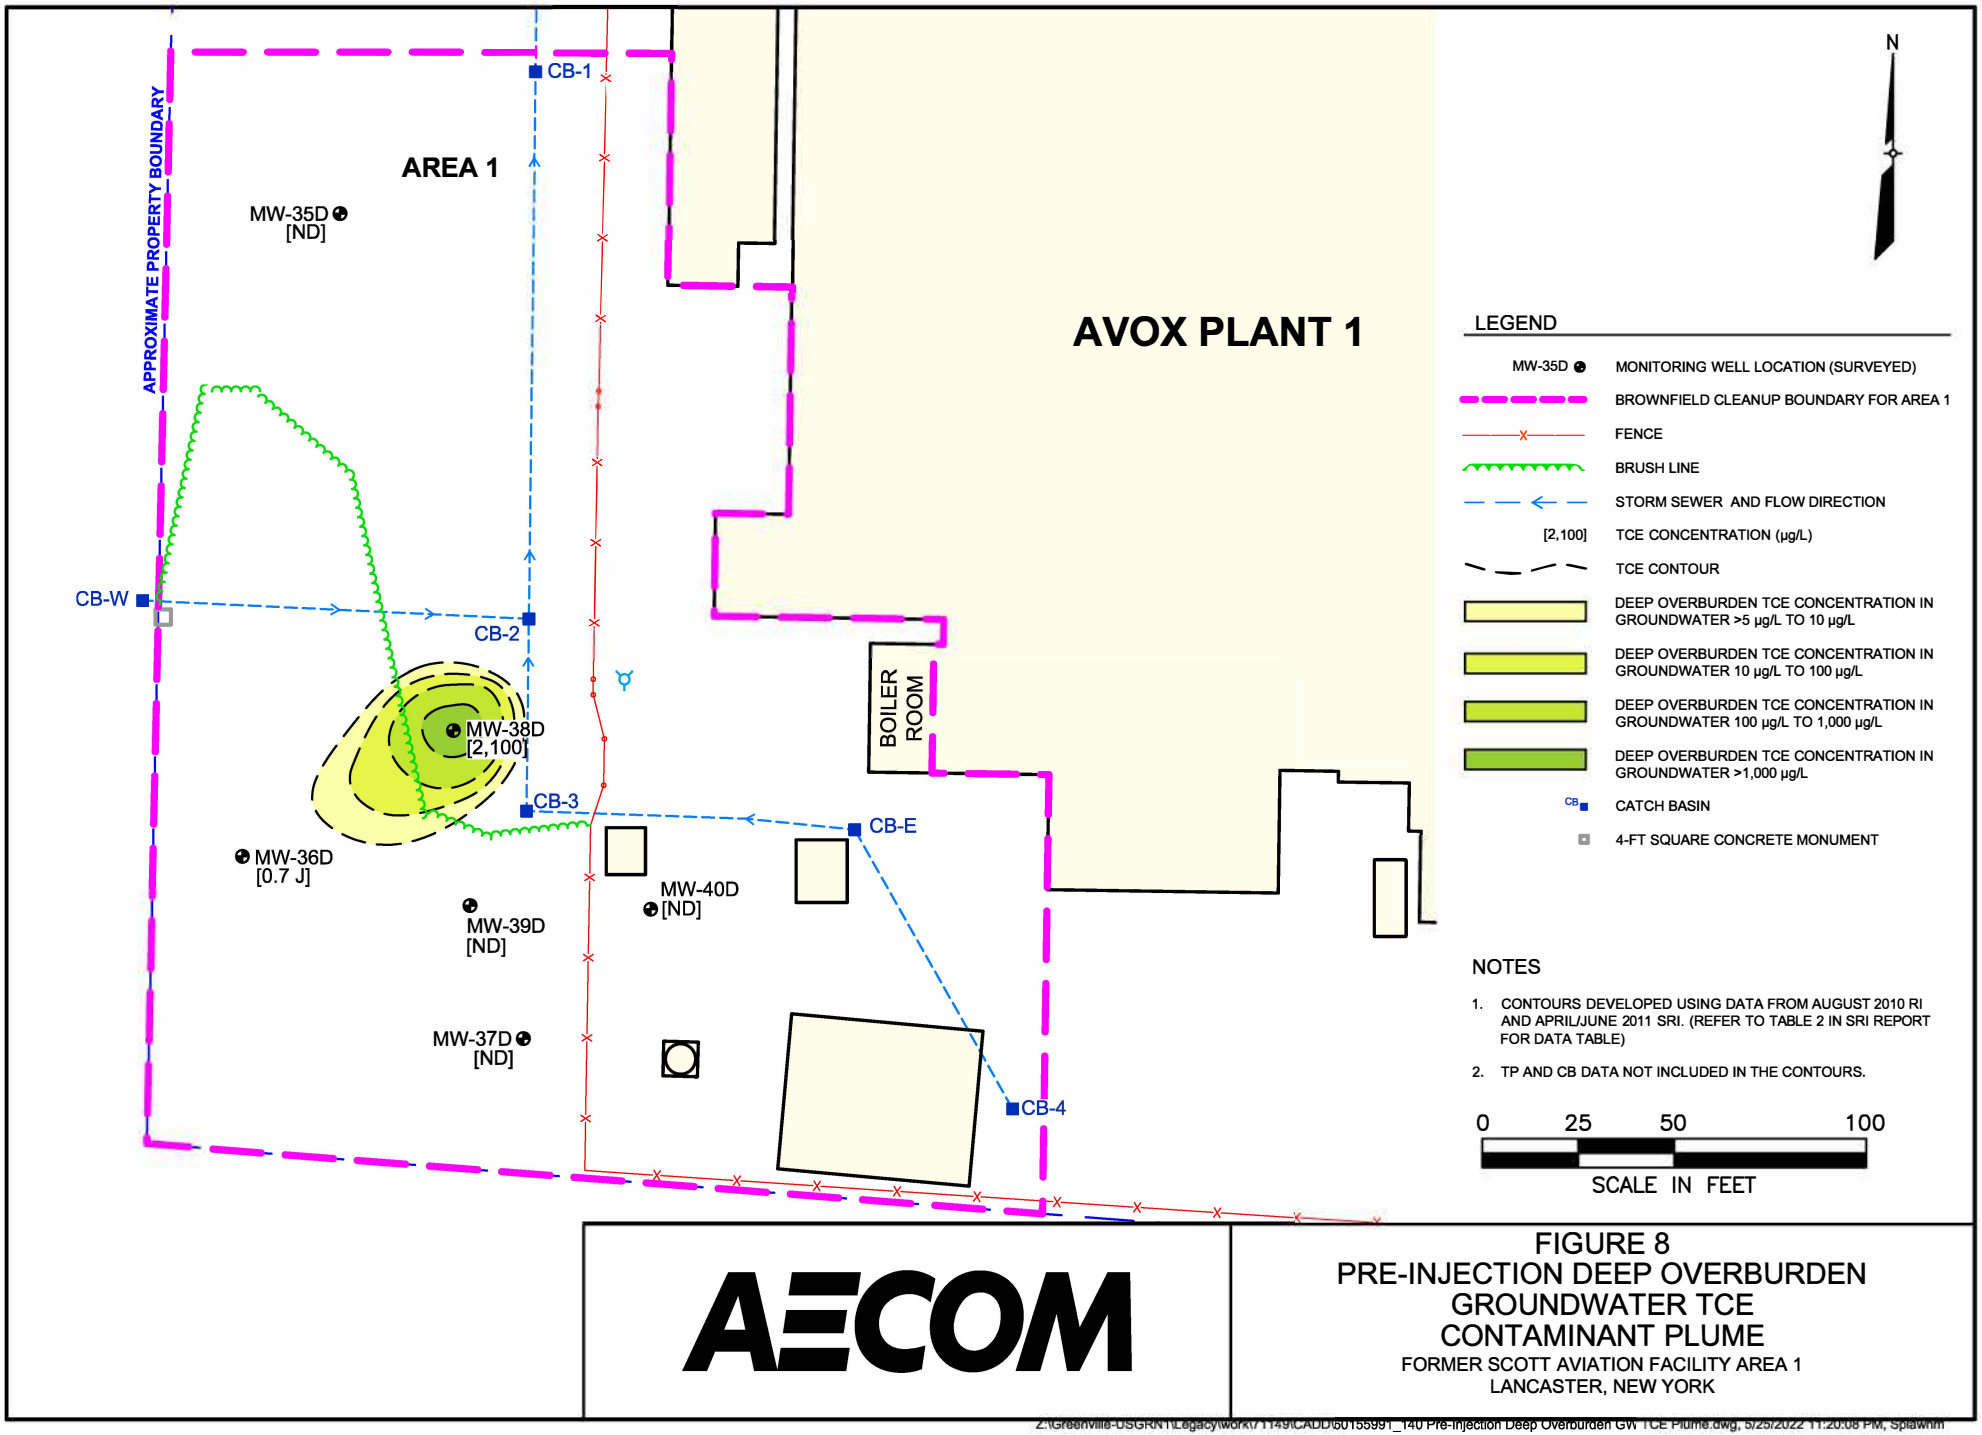

AECOM

FIGURE 8
PRE-INJECTION DEEP OVERBURDEN GROUNDWATER TCE CONTAMINANT PLUME

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60155991_140 Pre-Injection Deep Overburden GW TCE Plume.dwg, 5/25/2022 11:20:08 PM, Splawnm

AREA 1

AVOX PLANT 1

ROOM

BOILER

MIP-1 MIP-2 MIP-3 MIP-4 MIP-5 MIP-6 MIP-7 MIP-8 MIP-9 MIP-10 MIP-11

N

LEGEND

- MIP-11 MIPHPT BORING LOCATION ZONE
- BROWNFIELD CLEANUP BOUNDARY FOR AREA 1
- FENCE
- BRUSH LINE
- STORM SEWER AND FLOW DIRECTION
- SEWER LINE INJECTION: 4, 5, 6 ft.
- MIP-1: 4, 6, 7, 10, 11, 12, 13, 14, 15, 16, 18, 20 ft.
- MIP-2: 7, 8, 11, 12 , 13, 14, 15, 16, 18, 20 ft.
- MIP-2: 7, 8, 11, 12 ft.
- MIP-3: 5, 7, 9, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20 ft.
- MIP-3: 5, 7, 9, 10, 12, 13, 14 ft.
- MIP-4: 4, 6, 8, 11 ft.
- MIP-6: 3, 4, 5, 6, 7, 8, 9, 10, 12, 14 ft.
- MIP-7: 7, 8, 10 ft.
- MIP- 8: 4, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20 ft.
- MIP-9: 3, 5, 8 ft.
- MIP-10: 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20 ft.
- MIP-10: 8, 10, 12, 13, 14 ft.
- MIP-11: 2, 5, 6, 8, 10, 11, 12, 13, 14, 15, 16, 18, 20, 22 ft.
- MIP-11: 2, 5, 6, 8, 10, 11, 12, 13, 14 ft.
- NO INJECTION/INACCESSIBLE

0 20 40 80

SCALE IN FEET

AECOM

FIGURE 9
2015 IRM INJECTION ZONE DETAILS

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

5/25/2022 11:22 PM

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60155991_135 Injection Zone Details.dwg

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60155991_135 Injection Zone Details.dwg, 5/25/2022 11:22:35 PM, Splawnm

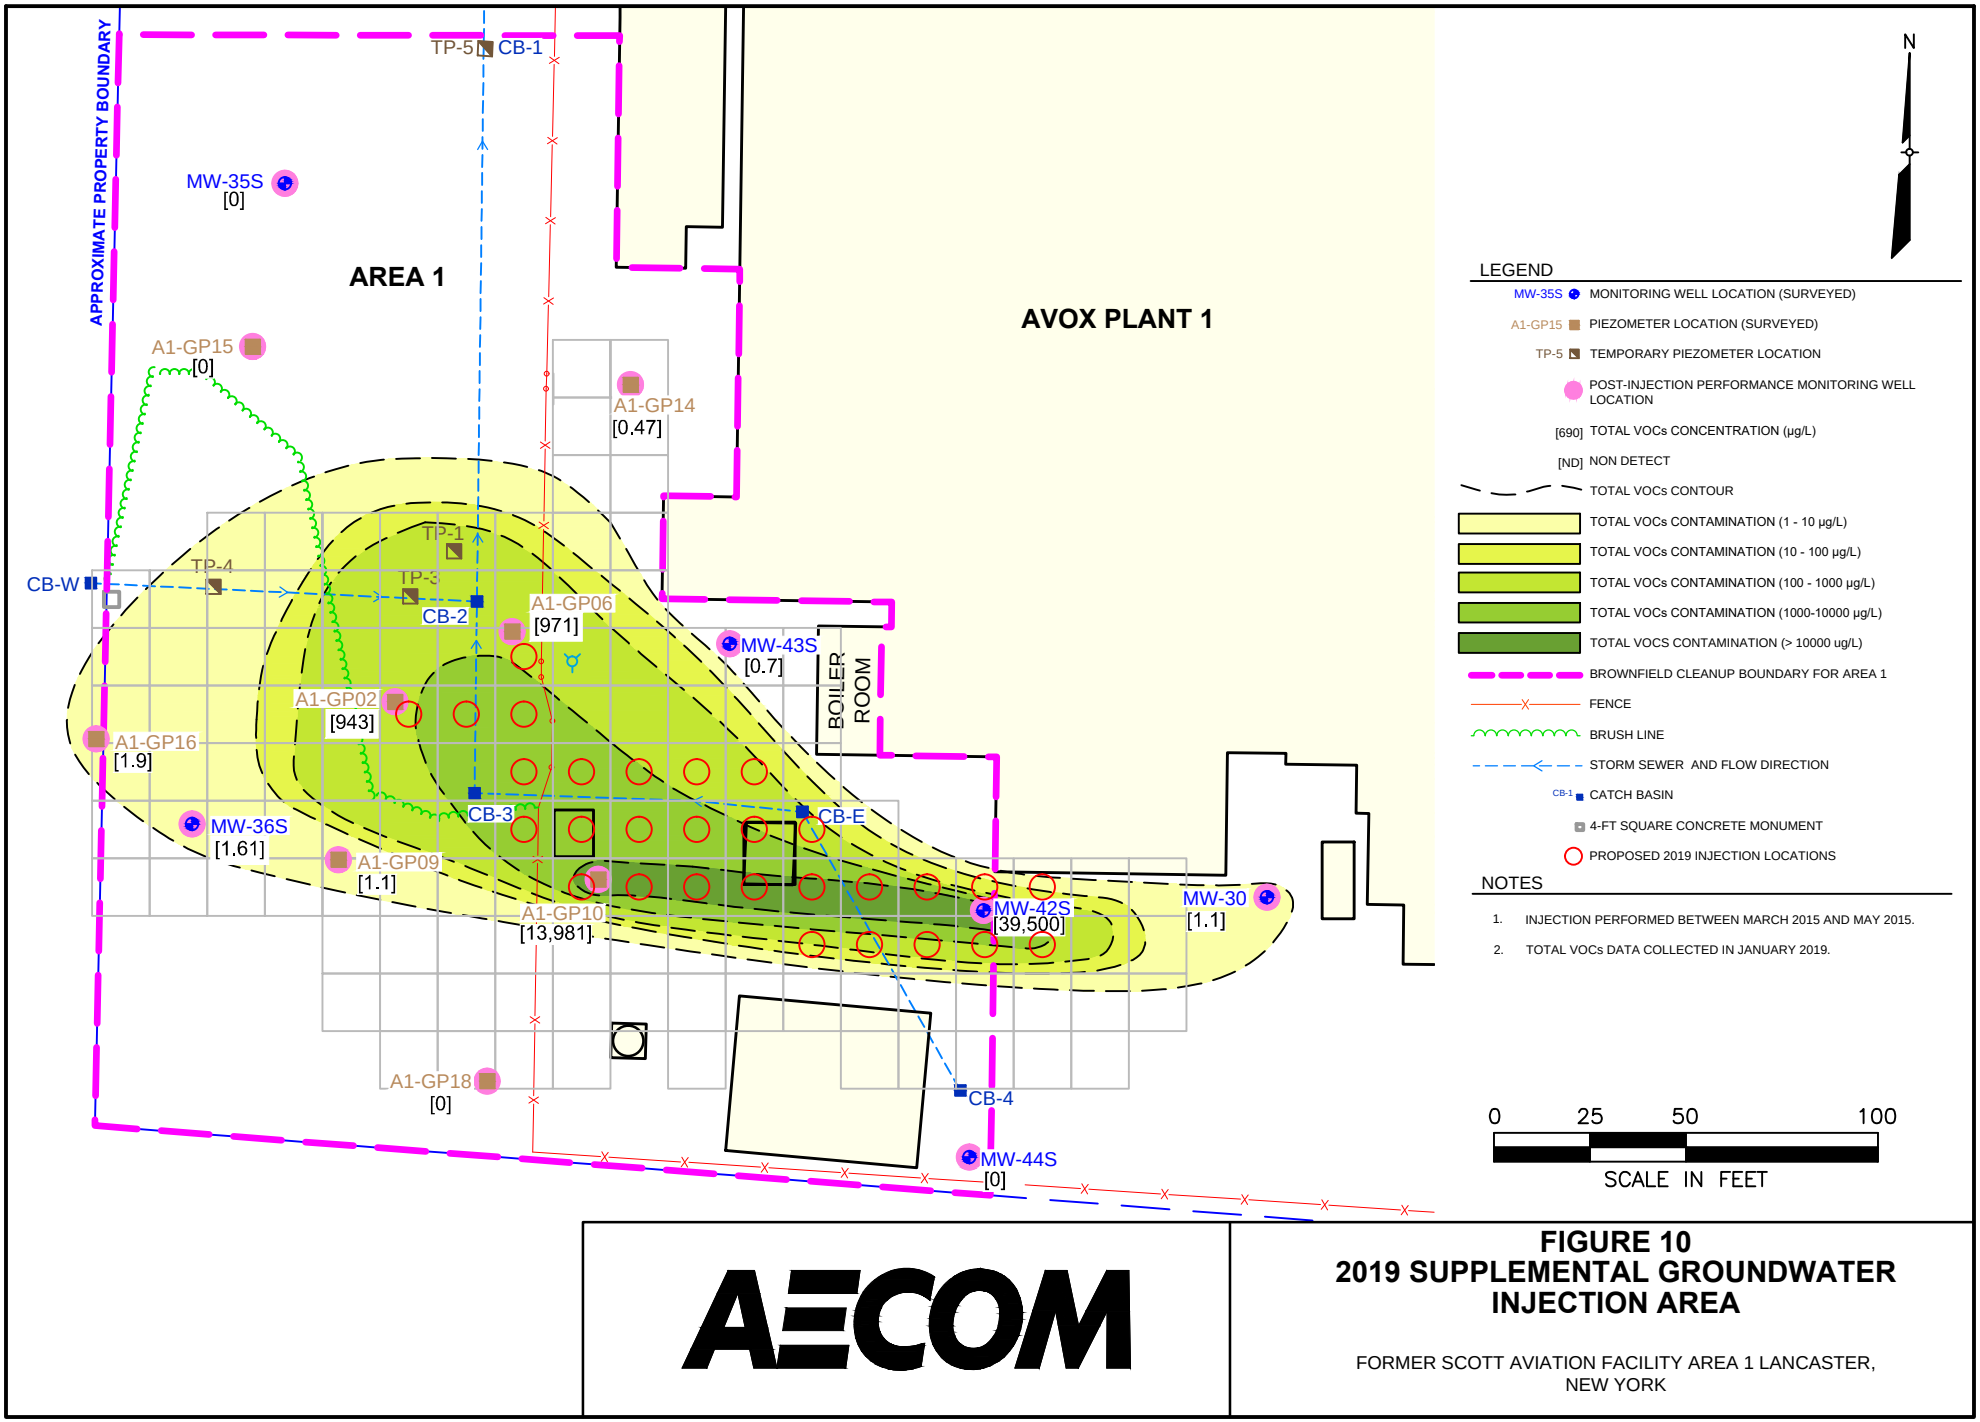

AECOM

FIGURE 10
2019 SUPPLEMENTAL GROUNDWATER INJECTION AREA

FORMER SCOTT AVIATION FACILITY AREA 1 LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60147012_213 Supplemental GW Injection Area.dwg, 5/25/2022 11:25:02 PM, Splawnm

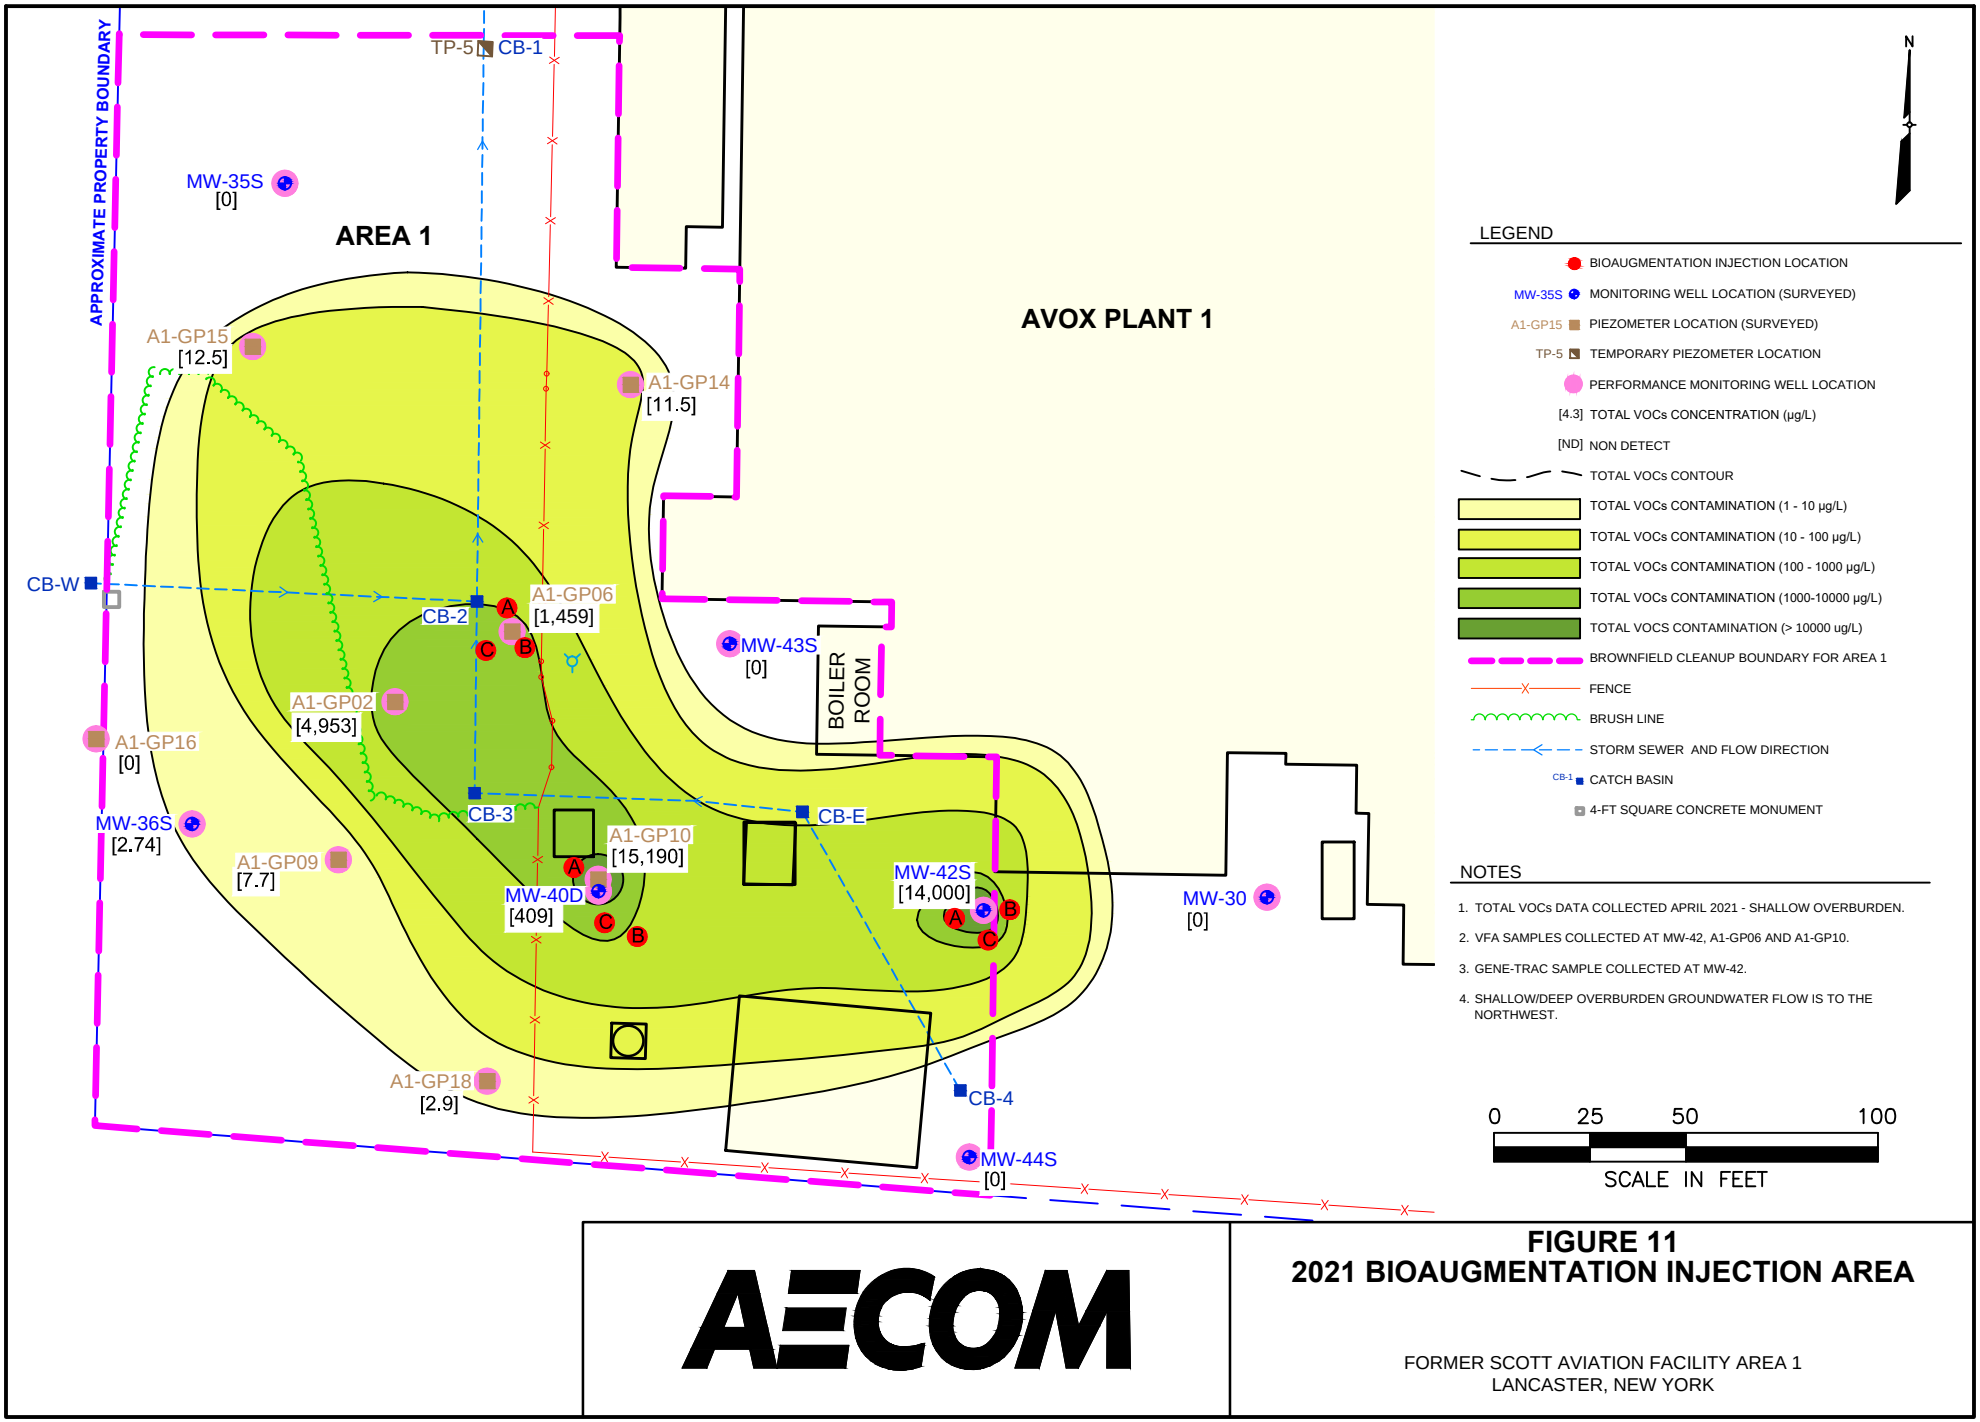

AECOM

FIGURE 11
2021 BIOAUGMENTATION INJECTION AREA

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_240 Bioaugmentation Inject Locs w 2021 survey data.dwg, 5/25/2022 11:27:43 PM, Splawnm

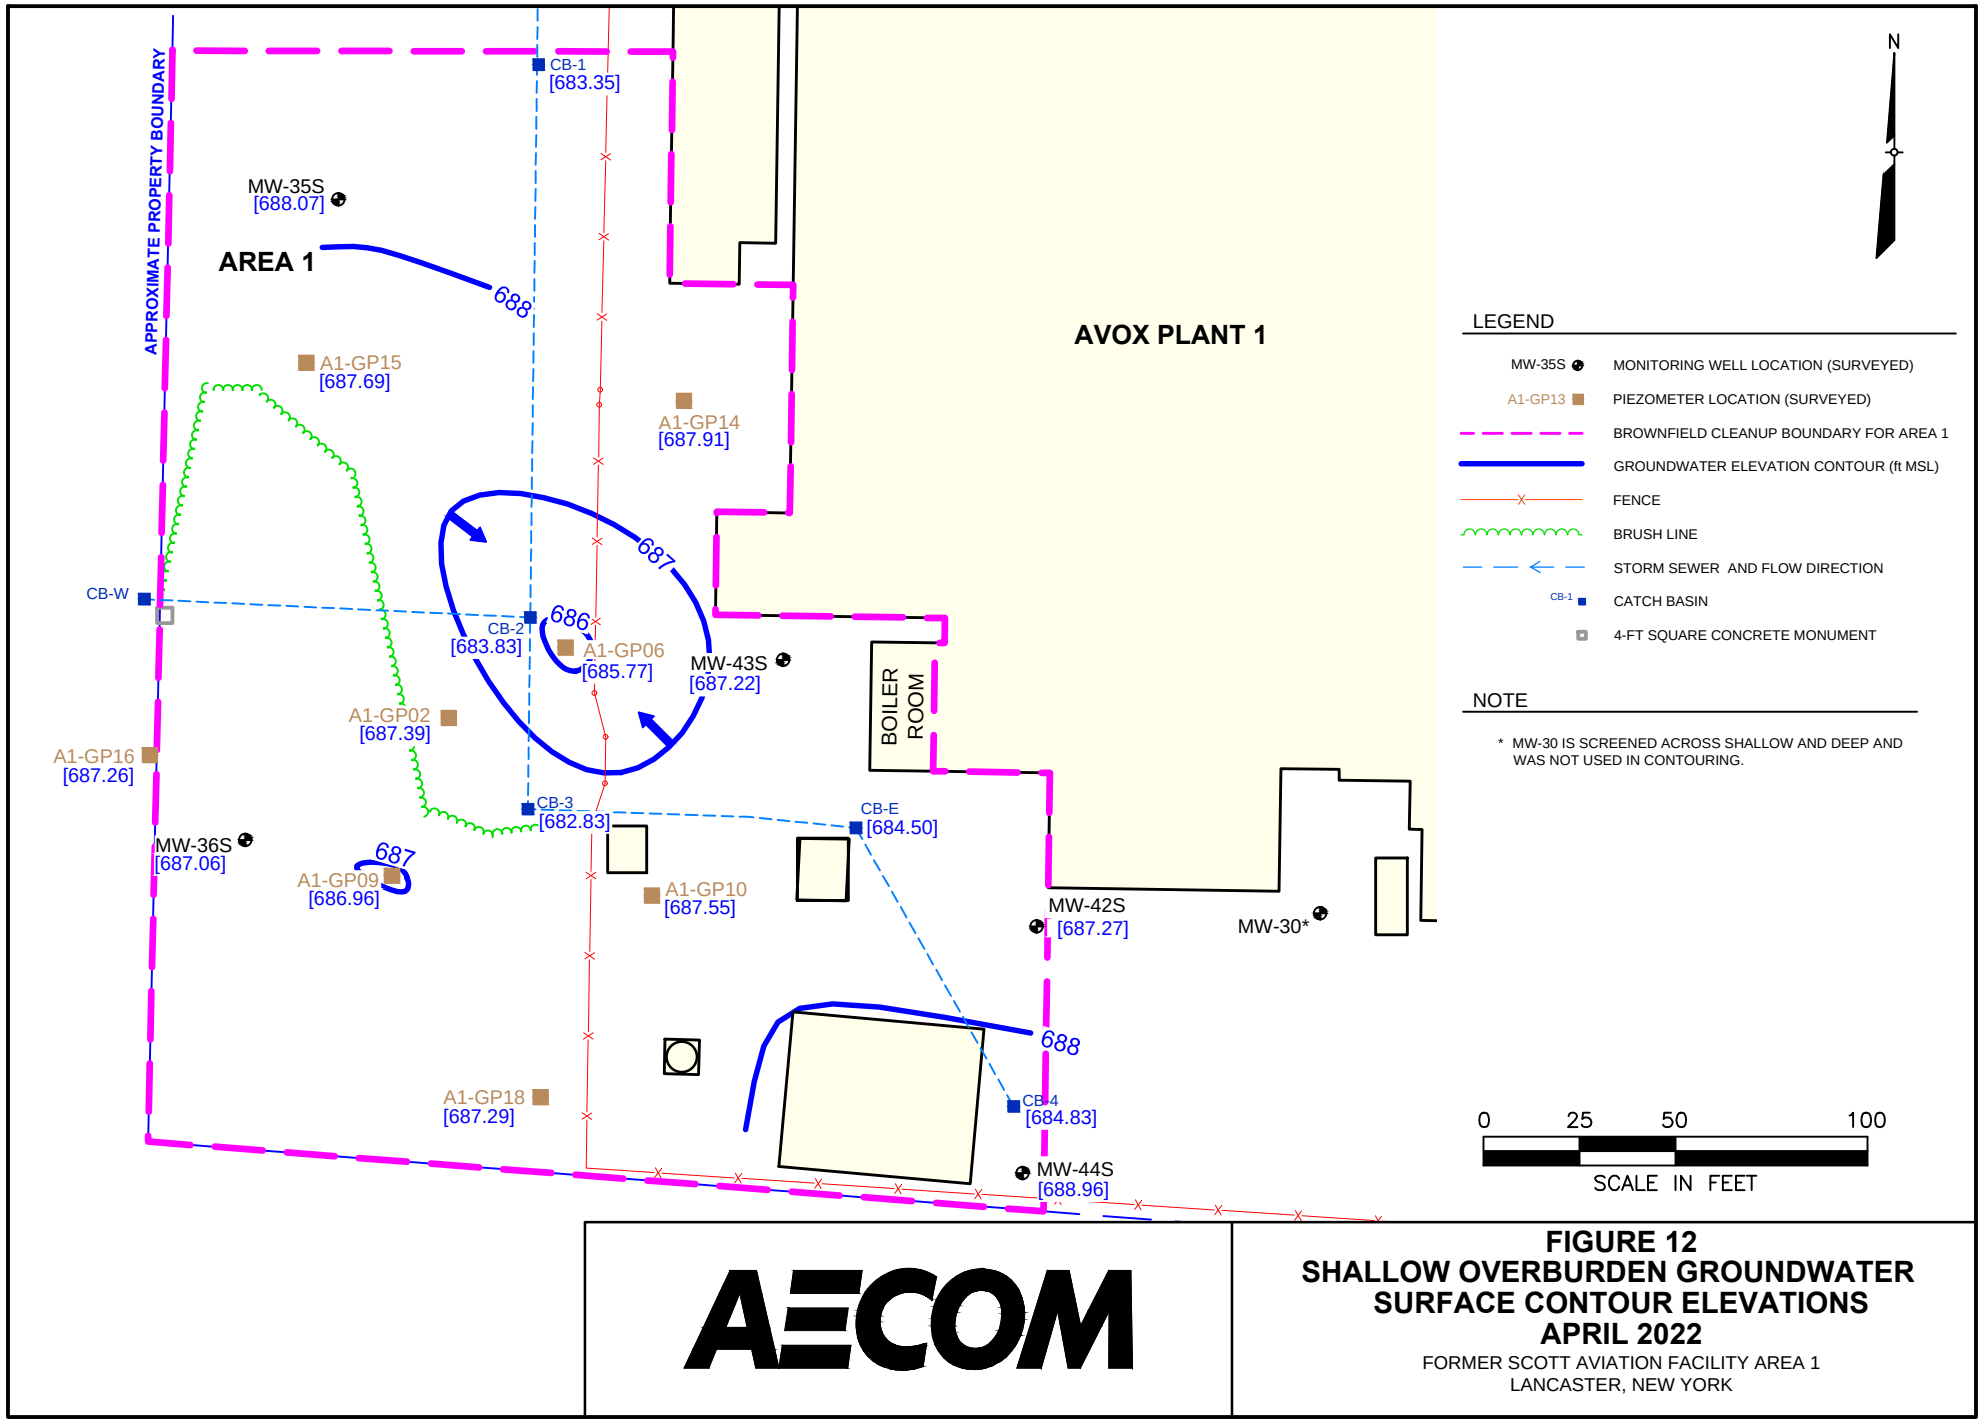

AECOM

FIGURE 12
SHALLOW OVERBURDEN GROUNDWATER SURFACE CONTOUR ELEVATIONS
APRIL 2022

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_241 Shallow Overburden GW Surface Conts_Apr2022.dwg, 5/25/2022 11:41:34 PM, Splawnm

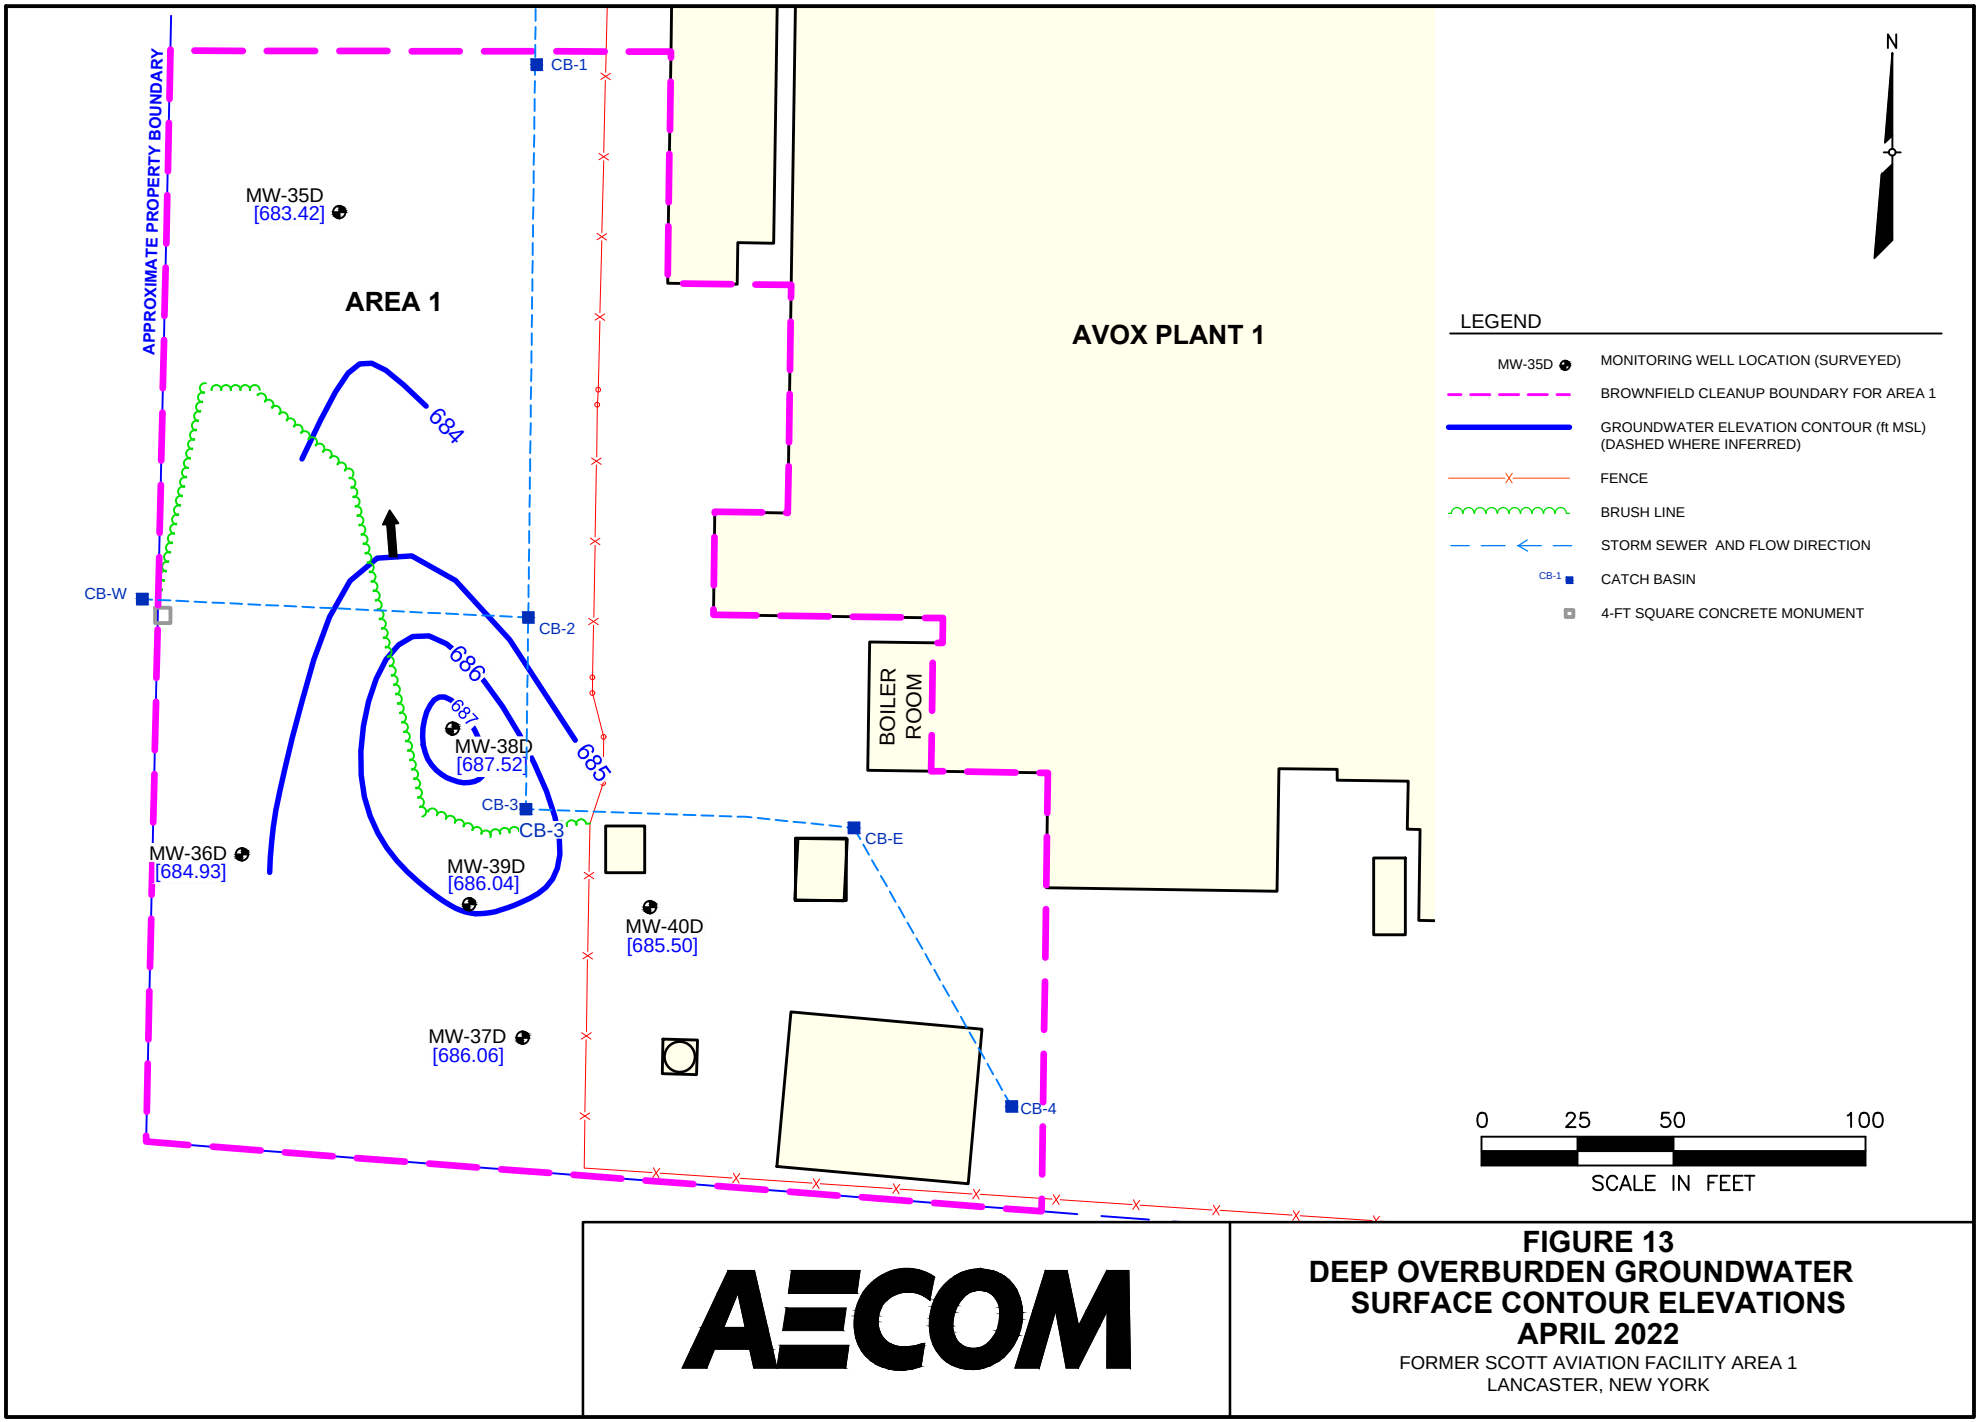

AECOM

FIGURE 13
DEEP OVERBURDEN GROUNDWATER SURFACE CONTOUR ELEVATIONS
APRIL 2022

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_242 Deep Overburden GW Surface Conts_Apr2022.dwg, 5/25/2022 11:39:36 PM, Splawnm

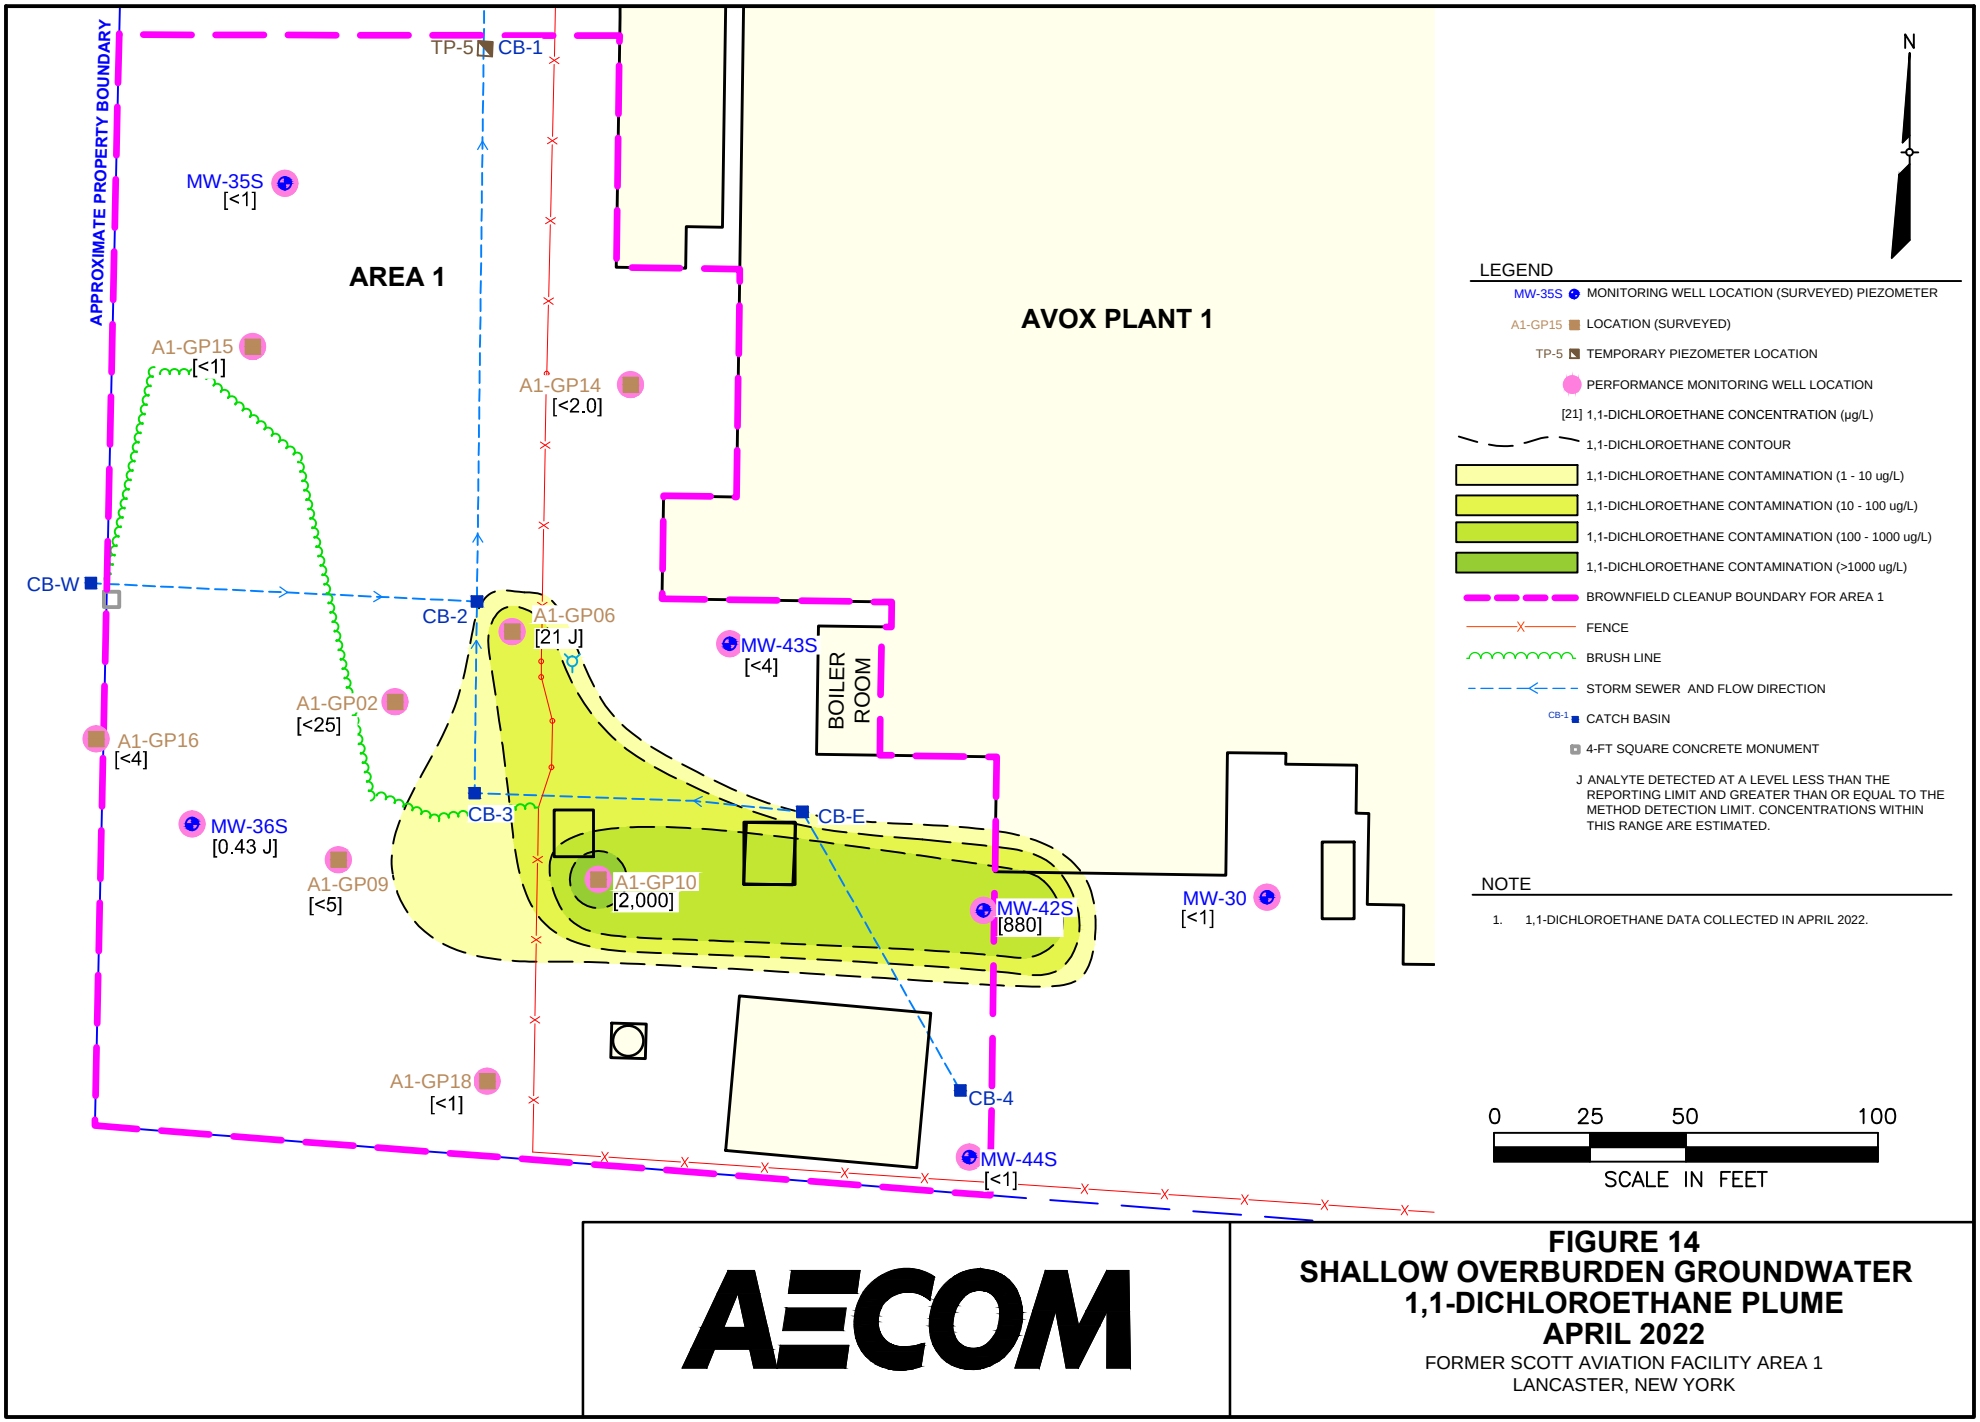

AECOM

FIGURE 14
SHALLOW OVERBURDEN GROUNDWATER 1,1-DICHLOROETHANE PLUME APRIL 2022

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_251 1-2-DCA_Shallow Overburden Post-Inj Performance MW Locs_Apr2022.dwg, 5/26/2022 1:06:35 AM, Splawnm

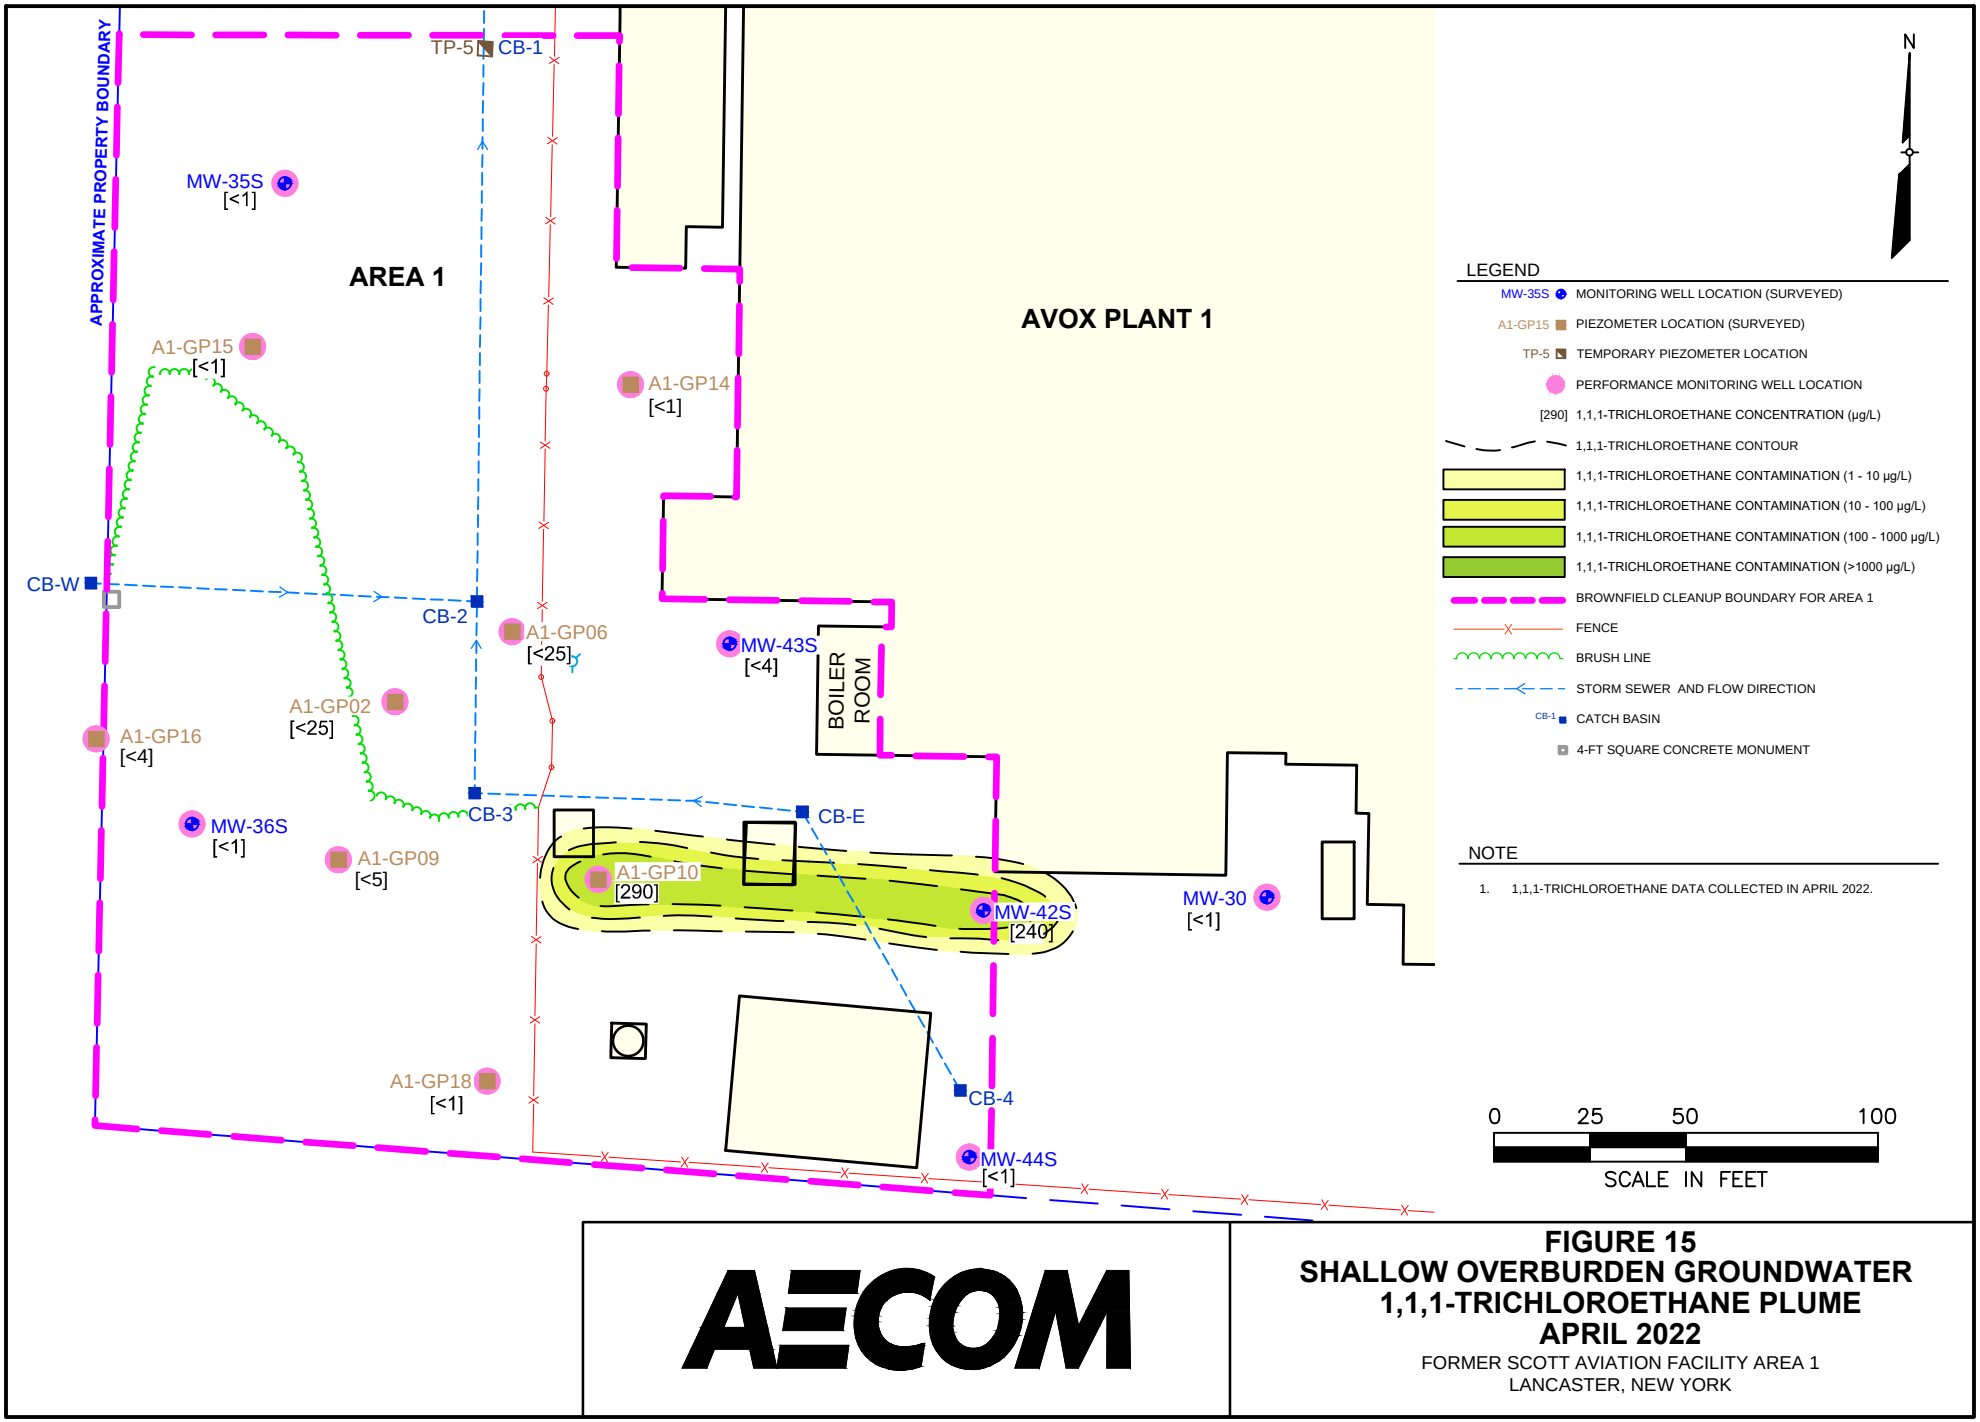

AECOM

FIGURE 15
SHALLOW OVERBURDEN GROUNDWATER 1,1,1-TRICHLOROETHANE PLUME APRIL 2022

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_244 1,1,1-TCA_Shallow Overburden Post-Inj Performance MW Locs_Apr2022.dwg, 5/25/2022 11:58:30 PM, Splawnm

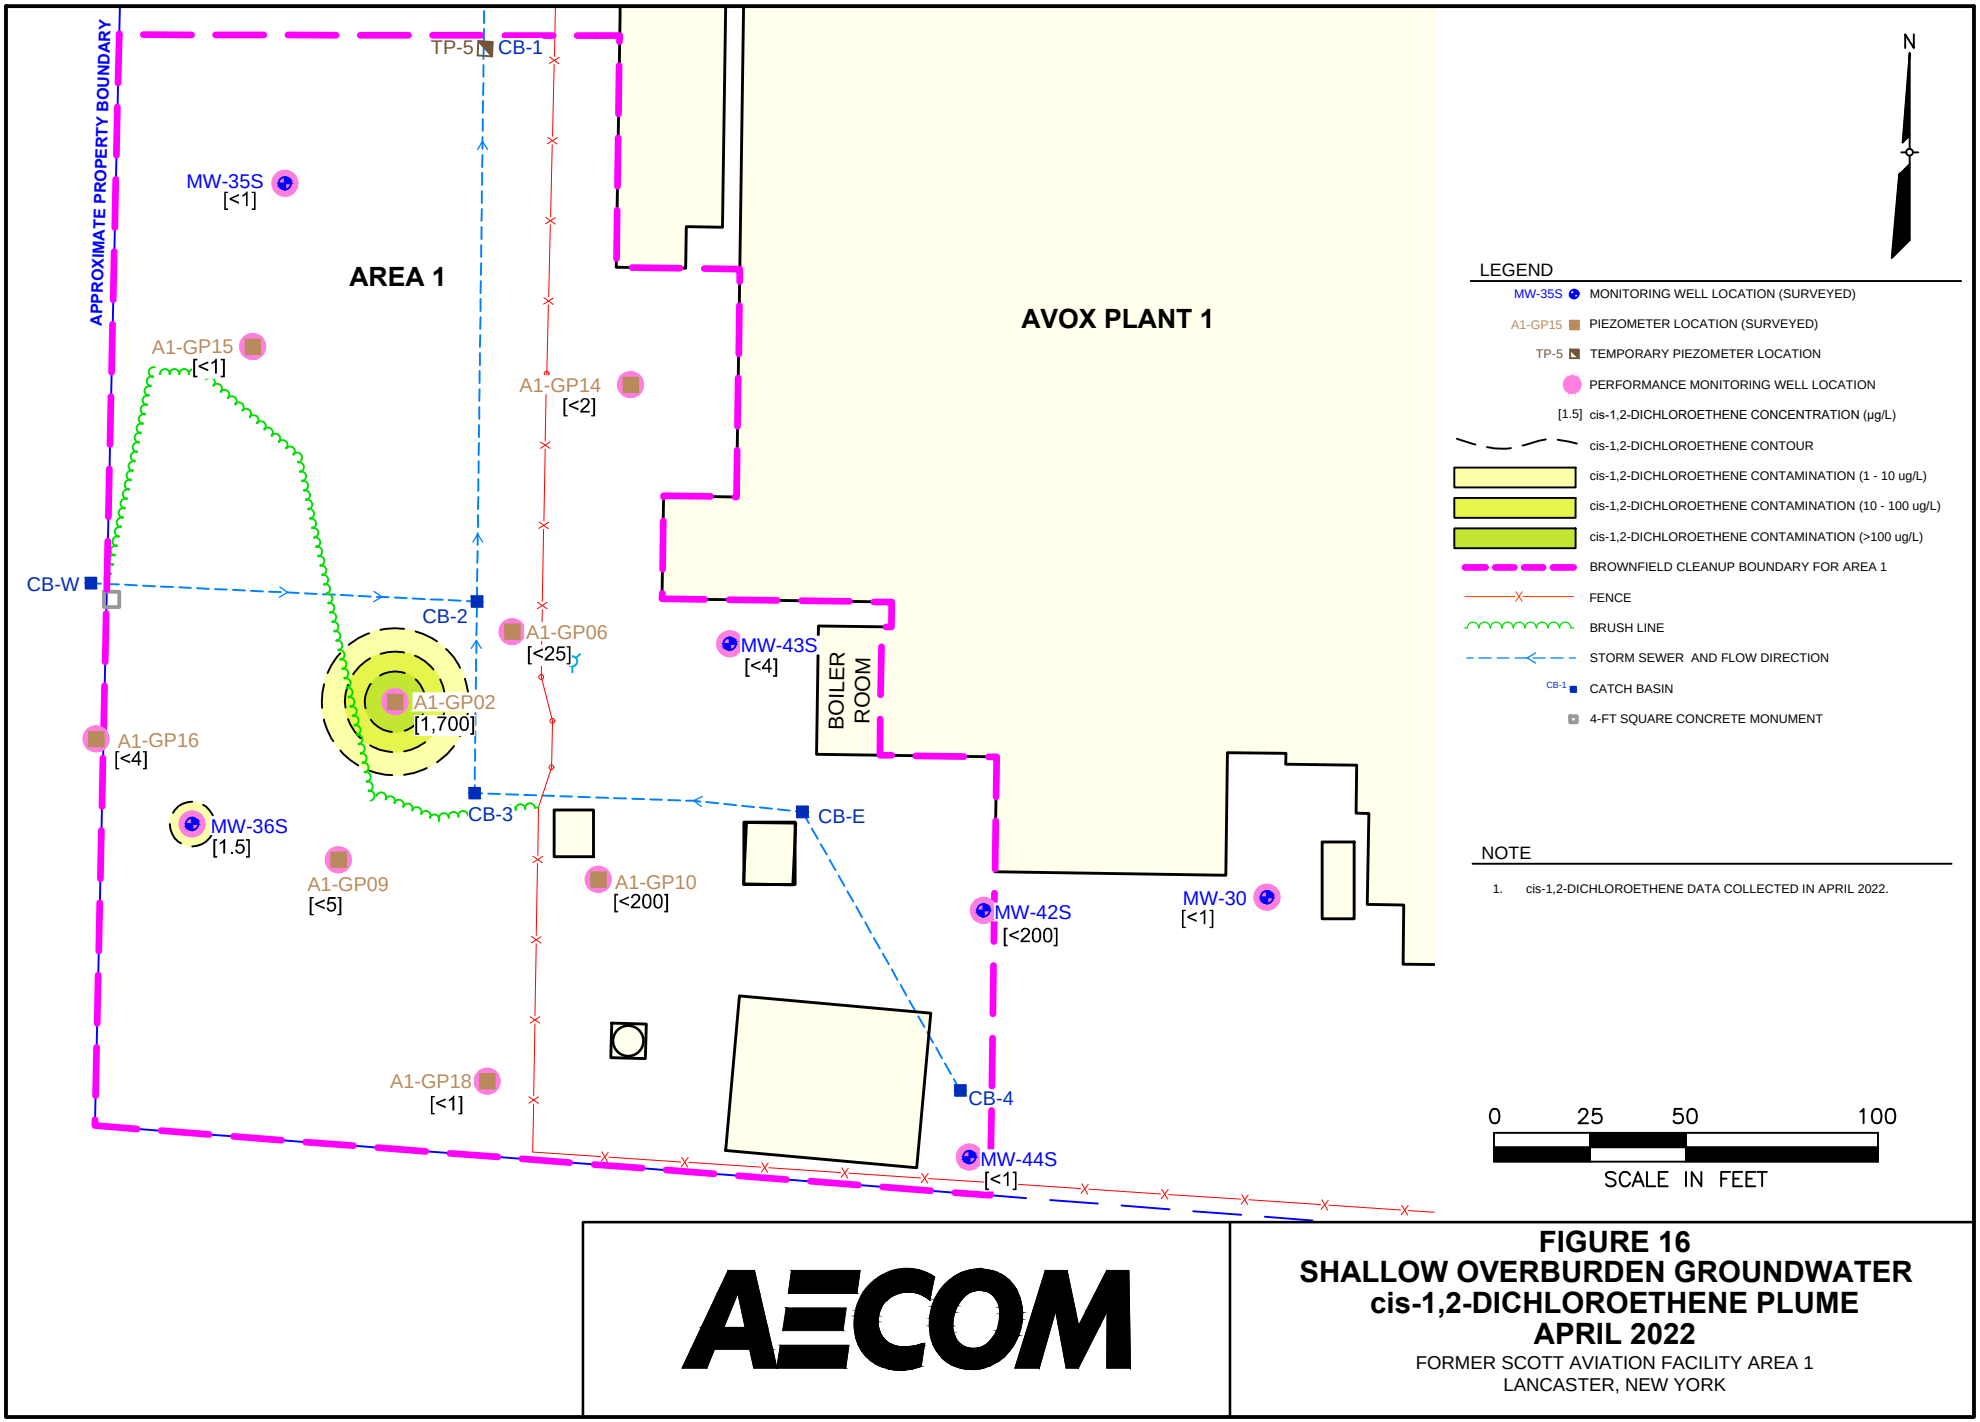

AECOM

FIGURE 16
SHALLOW OVERBURDEN GROUNDWATER cis-1,2-DICHLOROETHENE PLUME APRIL 2022

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_245 cis-1-2-DCE_Shallow Overburden Post-Inj Performance MW Locs_Apr2022.dwg, 5/25/2022 11:55:56 PM, Splawnm

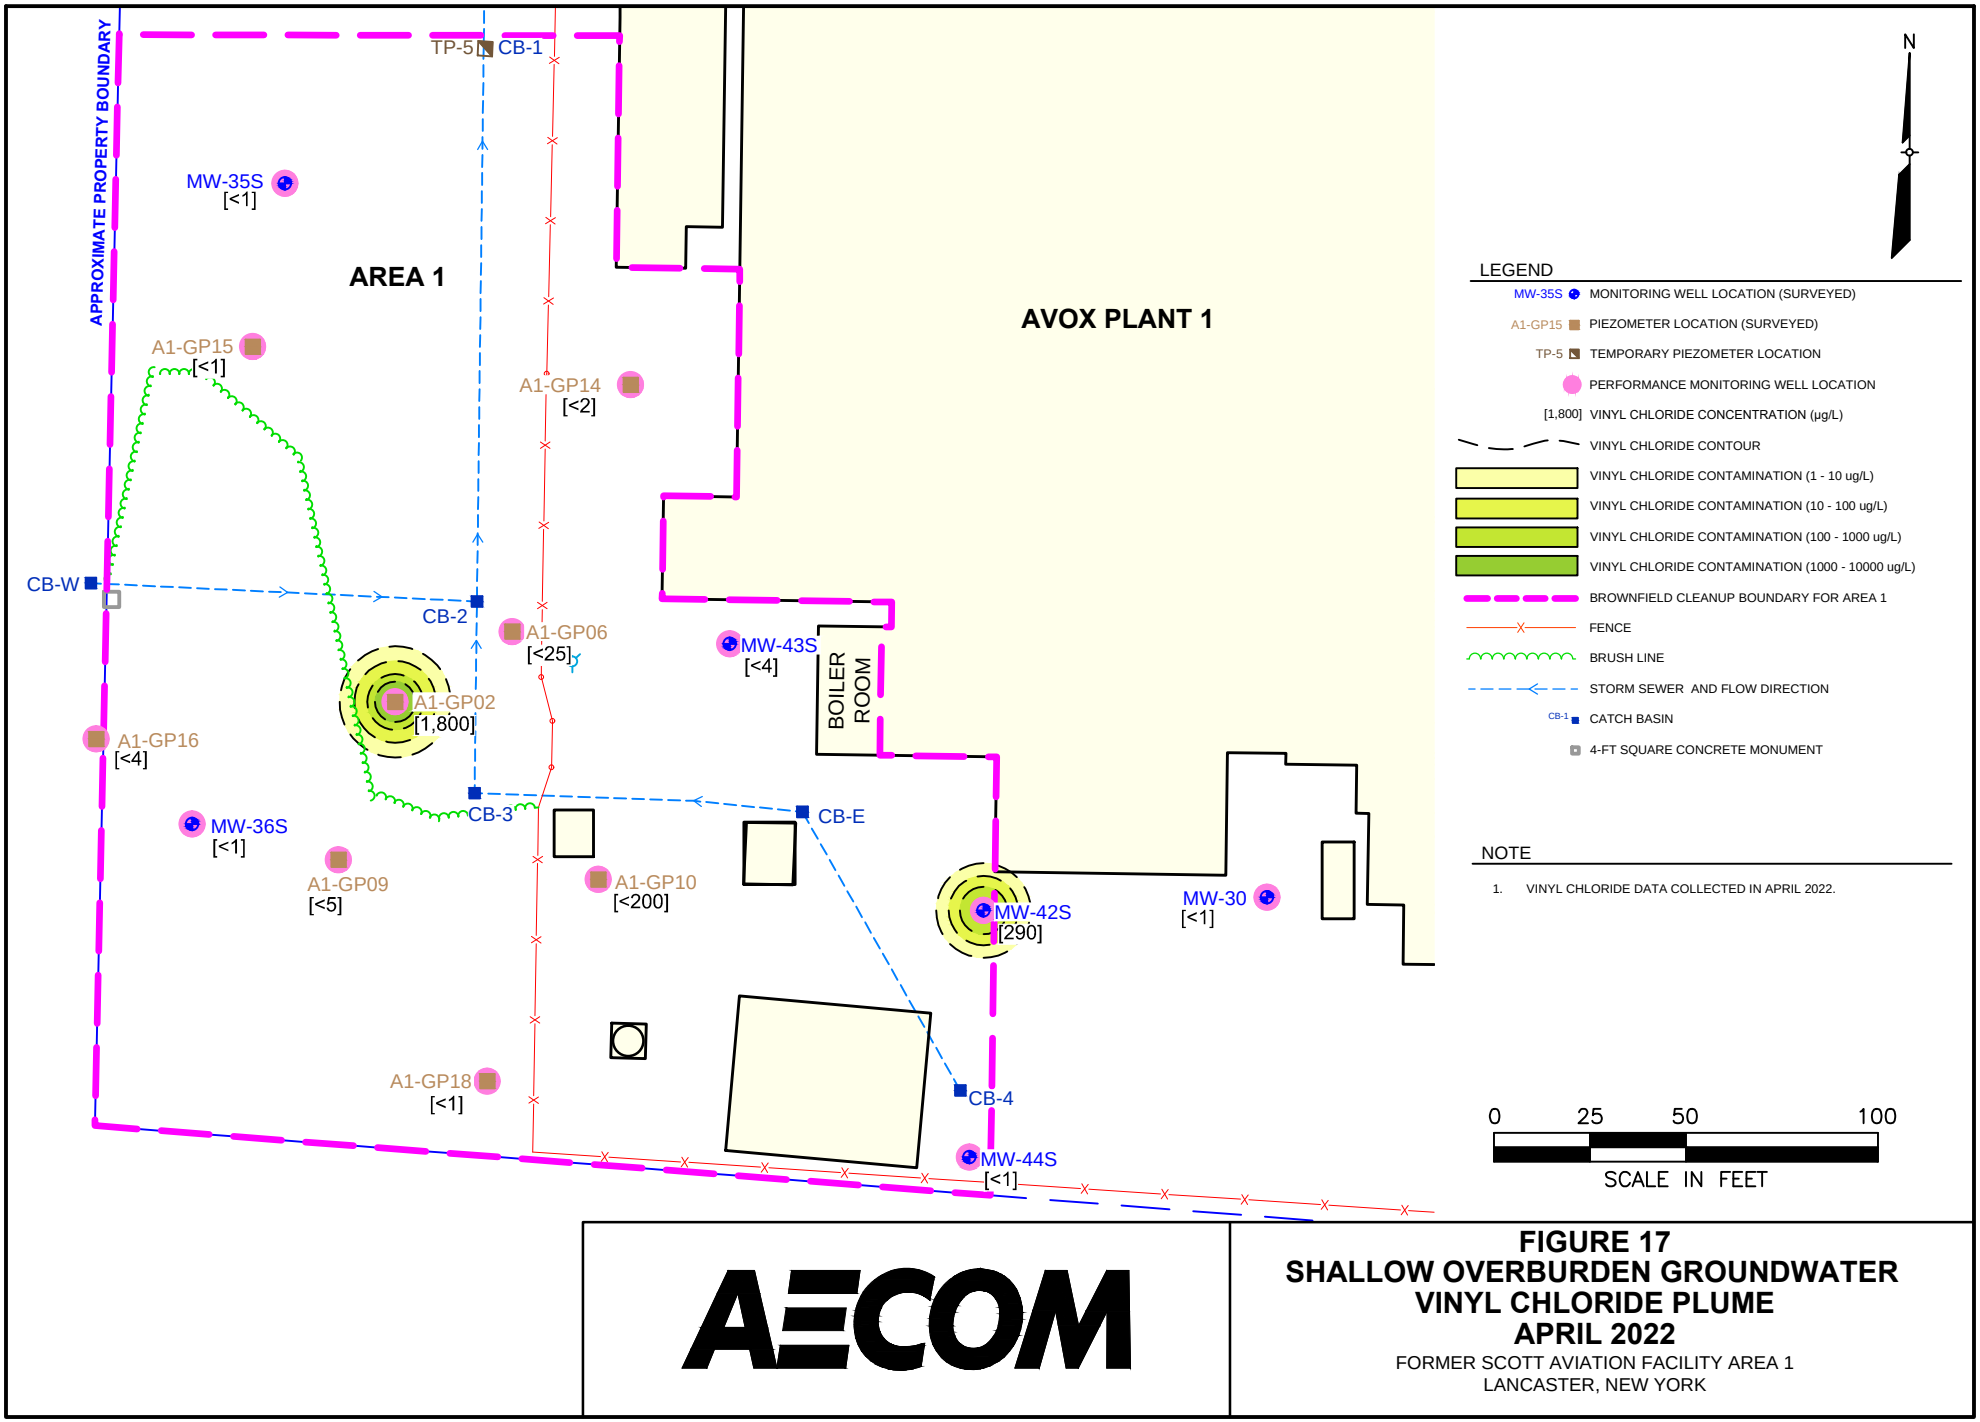

AECOM

FIGURE 17
SHALLOW OVERBURDEN GROUNDWATER VINYL CHLORIDE PLUME APRIL 2022

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_246 VC_Shallow Overburden Post-Inj Performance MW Locs_Apr2022.dwg, 5/26/2022 12:32:06 AM, Splawnm

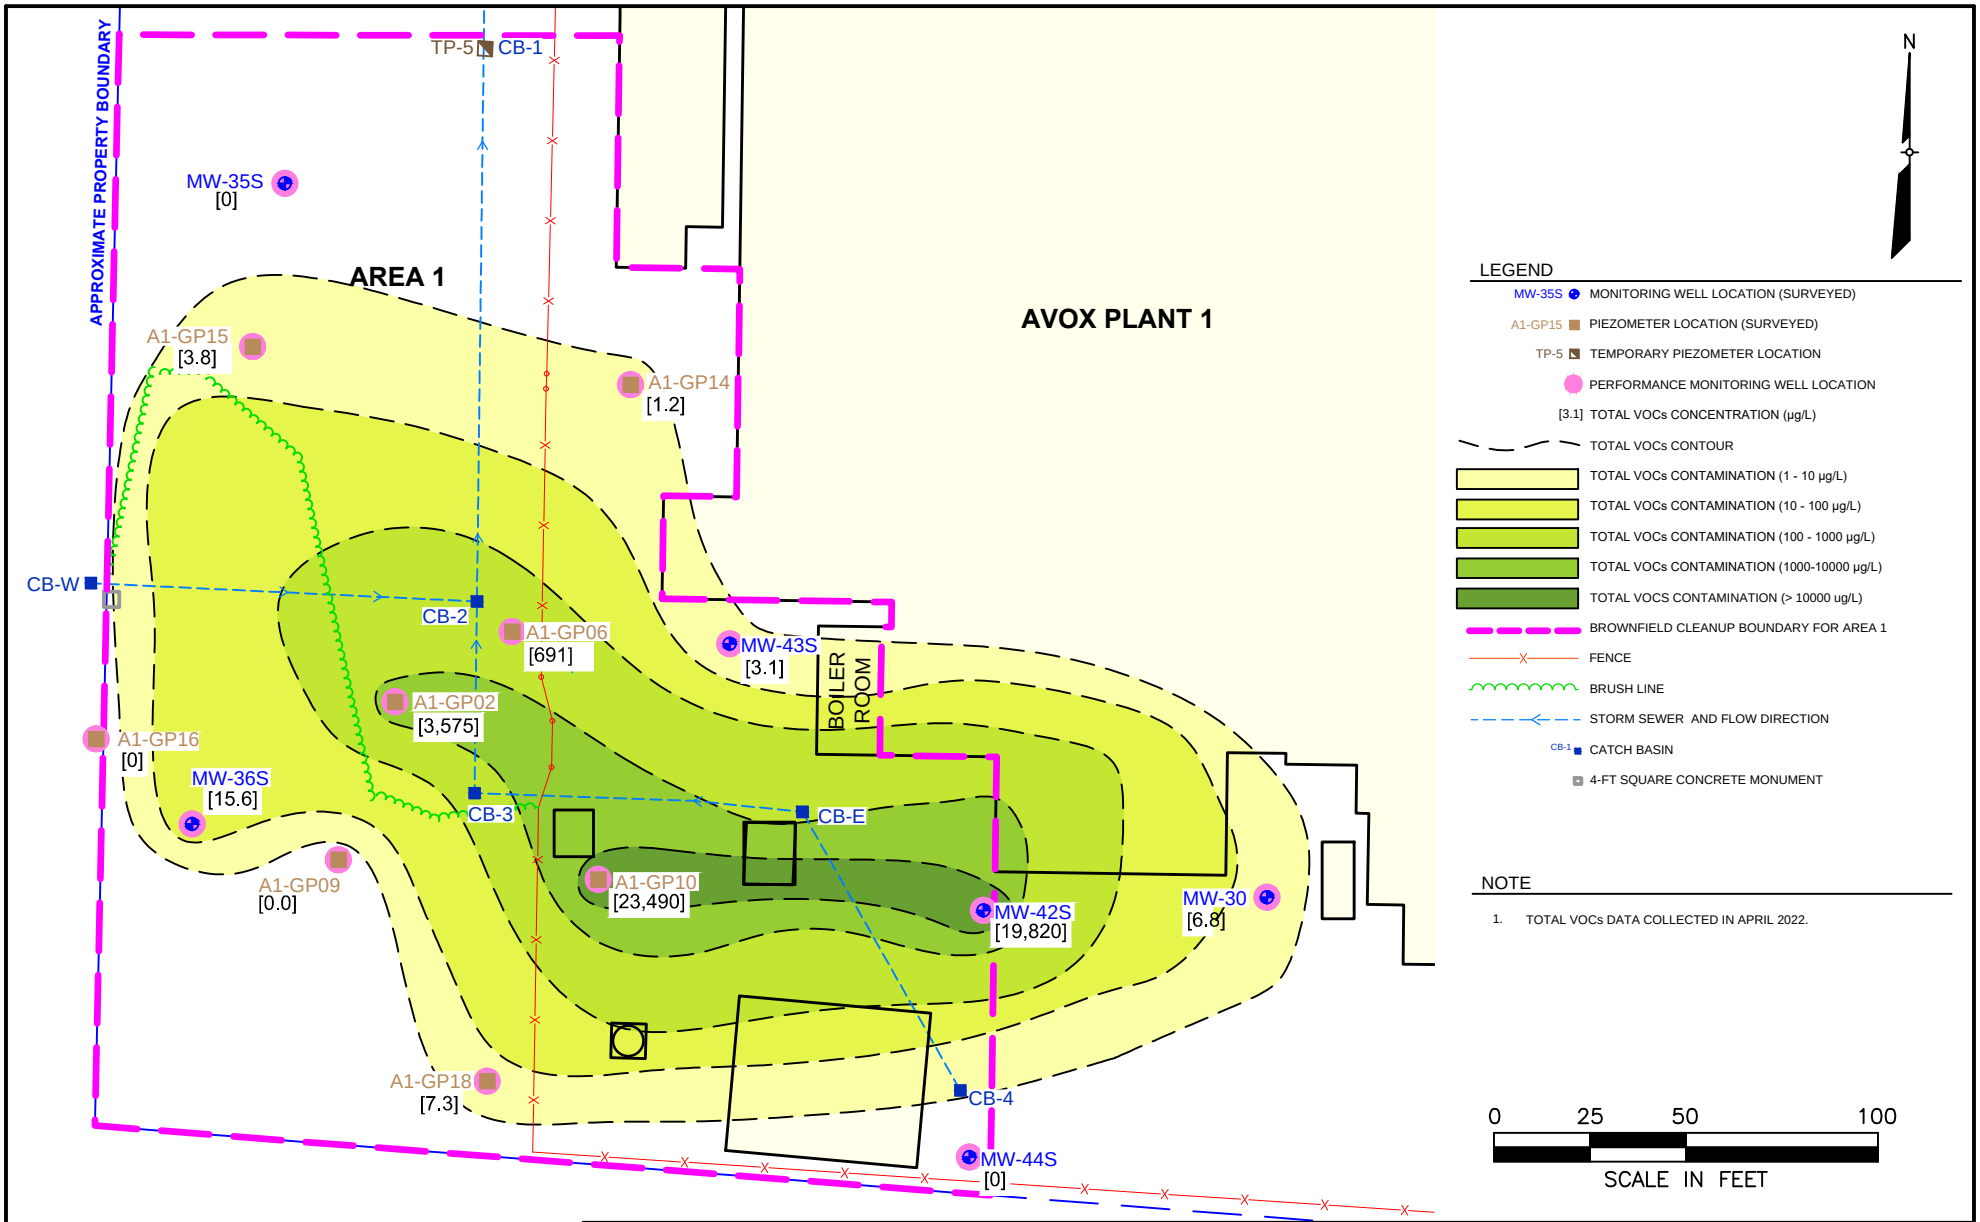

AECOM

FIGURE 18
SHALLOW OVERBURDEN GROUNDWATER TOTAL VOCs PLUME APRIL 2022

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_247 Total VOCs_Shallow Overburden Post-Inj Performance MW Locs_Apr2022.dwg, 5/25/2022 11:53:59 PM, Splawnm

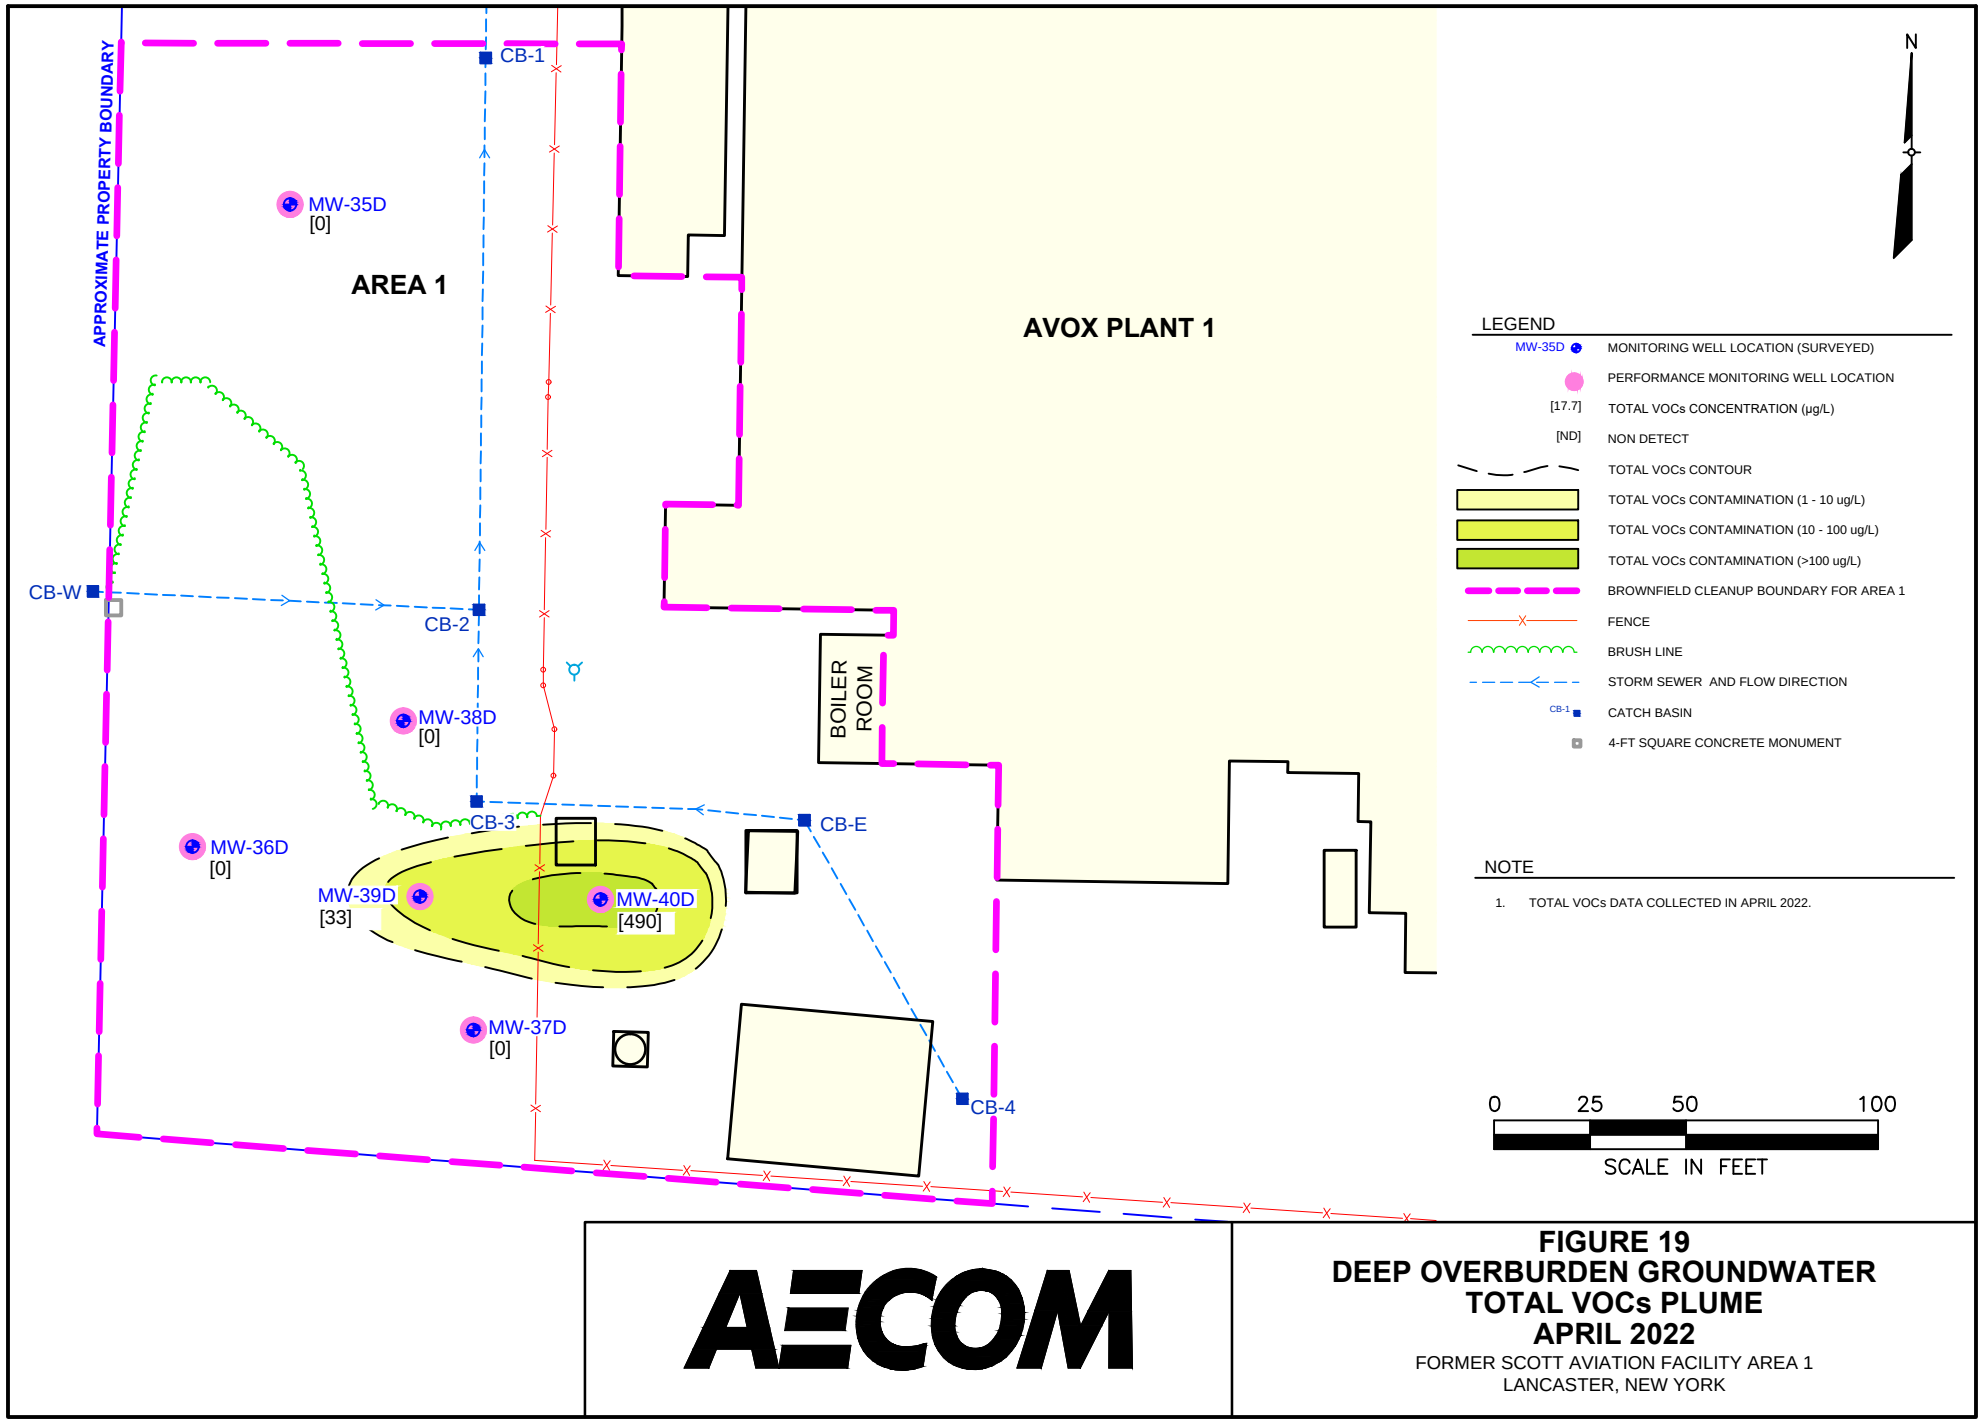

AECOM

FIGURE 19
DEEP OVERBURDEN GROUNDWATER TOTAL VOCs PLUME APRIL 2022

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_248 Total VOCs_Deep Overburden Post-Inj Performance MW Locs_Apr2022.dwg, 5/26/2022 10:52:20 AM, Splawnm

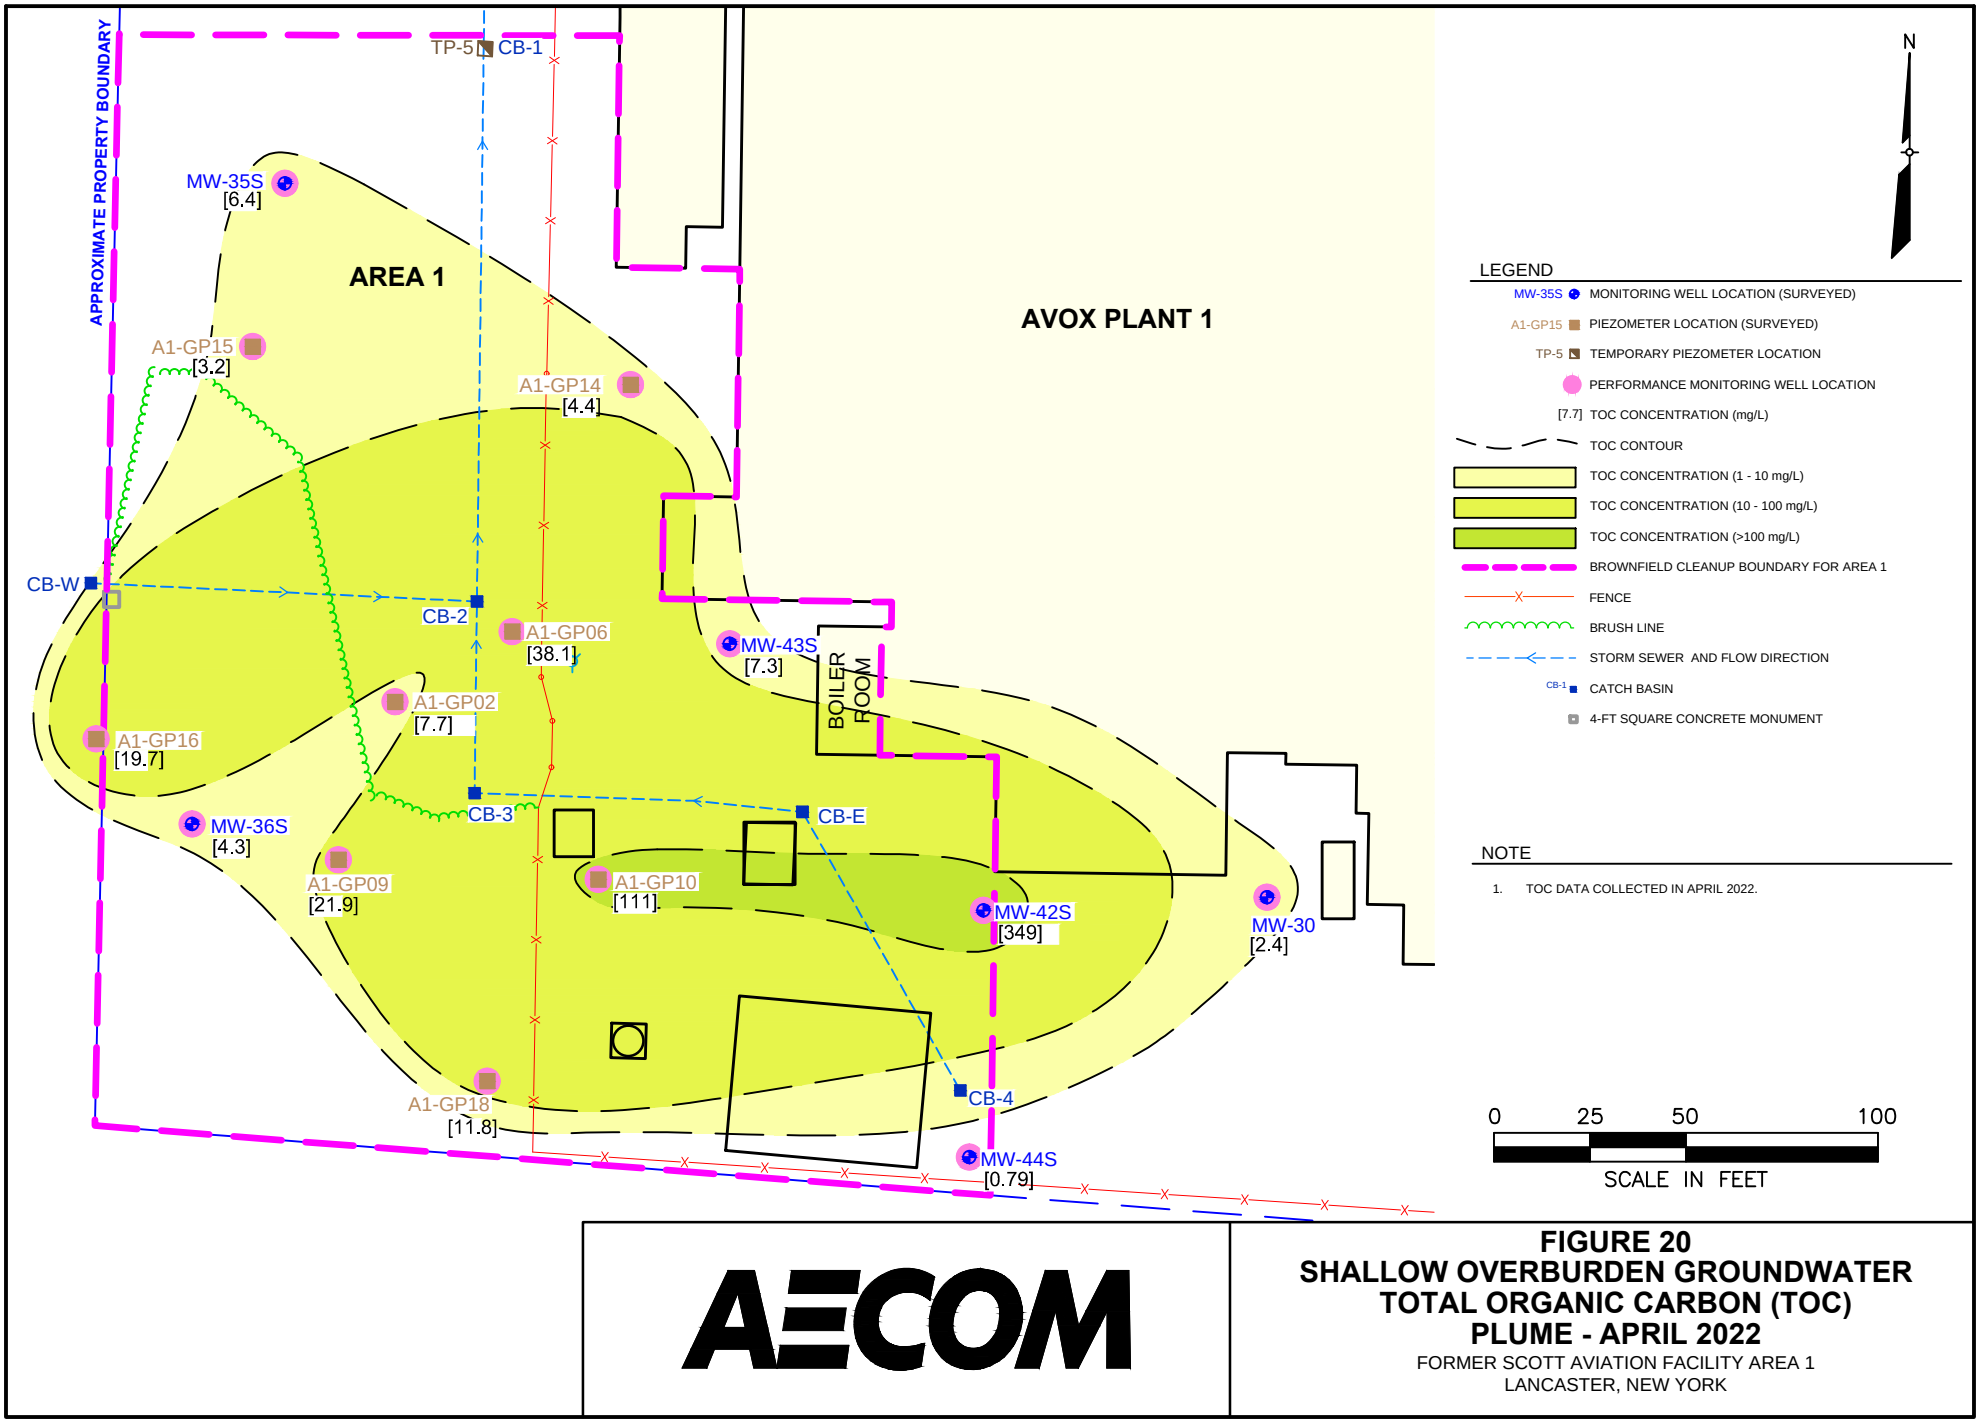

AECOM

FIGURE 20
SHALLOW OVERBURDEN GROUNDWATER TOTAL ORGANIC CARBON (TOC) PLUME - APRIL 2022

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_249 TOC_Shallow Overburden Post-Inj Plume_Apr2022.dwg, 5/25/2022 11:51:45 PM, Splawnm

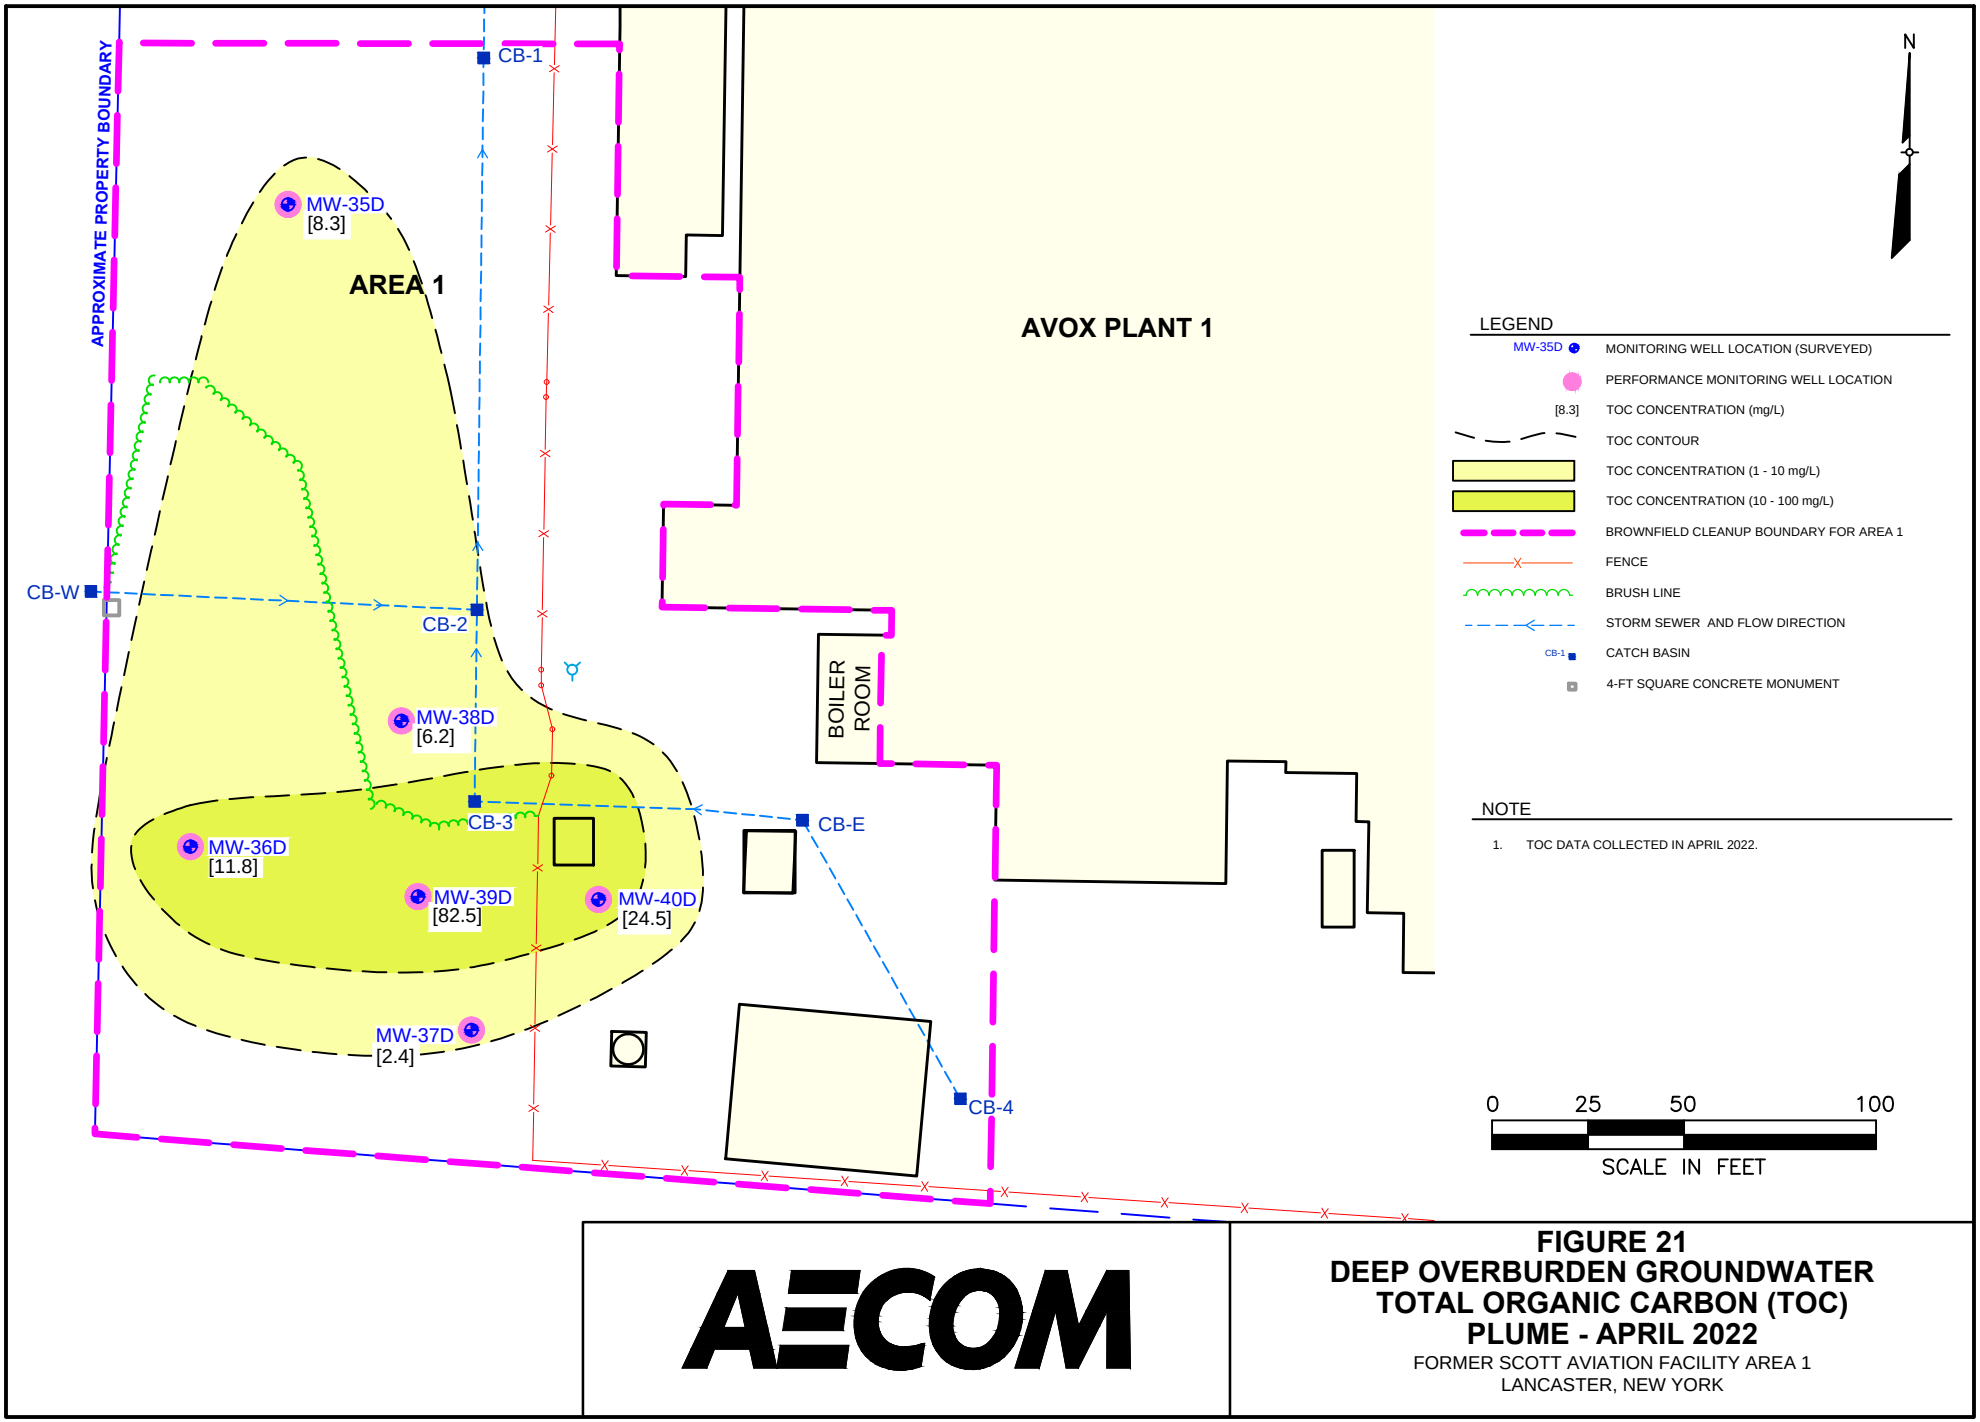

AECOM

FIGURE 21
DEEP OVERBURDEN GROUNDWATER TOTAL ORGANIC CARBON (TOC) PLUME - APRIL 2022

FORMER SCOTT AVIATION FACILITY AREA 1
LANCASTER, NEW YORK

Z:\Greenville-USGRN1\Legacy\work\71149\CADD\60536398_250 TOC_Deep Overburden Post-Inj Plume_Apr2022.dwg, 5/26/2022 12:00:44 AM, Splawnm

Tables

Table 1
Groundwater Monitoring Program
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Location	Field Parameters	VOCs (SW846 8260C)	TOC (SW846 9060A)	Ferrous Iron (SM 3500 FE D)	Ferric Iron (SM 3500)	Nitrite as Nitrogen (MCAWW 353.2)	Nitrate as Nitrogen (EPA 353.2)	Sulfate (MCAWW 300.0)	Sulfide (SM 4500 S2 F)	Total Alkalinity (MCAWW 310.2)	Iron (EPA 200.7 Rev 4.4)	Dissolved Gases (RSK-175)	Gene-Trac	VFA
Monitoring Well and Temporary Piezometer Groundwater Sampling														
MW-30	✓	✓	✓											
MW-35S	✓	✓	✓											
MW-35D	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
MW-36S	✓	✓	✓											
MW-36D	✓	✓	✓											
MW-37D	✓	✓	✓											
MW-38D	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
MW-39D	✓	✓	✓											
MW-40D	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
MW-42S	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MW-43S	✓	✓	✓											
MW-44S	✓	✓	✓											
A1-GP02-S	✓	✓	✓											
A1-GP06-S	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
A1-GP09-S	✓	✓	✓											
A1-GP10-S	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
A1-GP14-S	✓	✓	✓											
A1-GP15-S	✓	✓	✓											
A1-GP16-S	✓	✓	✓											
A1-GP18-S	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Storm Sewer and Pipe Bedding Water Sampling														
CB-1	✓	✓												
CB-2	✓	✓												
CB-3	✓	✓												
CB-4	✓	✓												
CB-E	✓	✓												
TP-5	✓	✓												
TP-6	✓	✓												

Notes:
QA/QC samples to be collected per QAPP.
Field Parameters include pH, temperature, turbidity, oxidation-reduction potential (ORP), dissolved oxygen (DO), and specific conductivity.
VOC - Volatile Organic Compound
TOC - Total Organic Carbon
VFA - Volatile Fatty Acids
Dissolved gases analyzed under RSK-175 included Methane, Ethane, Ethene, and Carbon dioxide.

Table 2
Monitoring Well and Piezometer Specifications
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Well ID	Well Location	Coordinates (longitude/latitude)	Well Diameter (inches)	Elevation (feet above mean sea level)				Feet from Casing
				Casing	Surface	Screen Top	Screen Bottom	Mid-Screen
A1-GP02-S	Plume	42.9047° N, 78.6593° W	0.75	689.82	687.3	682.3	672.3	12.5
A1-GP06-S	Plume	42.9047° N, 78.6592° W	0.75	687.71	687.8	682.8	672.8	9.9
A1-GP09-S	Downgradient	42.9045° N, 78.6594° W	0.75	689.36	686.8	681.8	671.8	12.6
A1-GP10-S	Plume	42.9045° N, 78.6591° W	0.75	689.10	689.2	684.2	674.2	9.9
A1-GP14-S	Downgradient	42.9049° N, 78.6591° W	0.75	689.43	689.7	684.7	674.7	9.7
A1-GP15-S	Downgradient	42.9049° N, 78.6595° W	0.75	687.69	688.0	683.0	673.0	9.7
A1-GP16-S	Downgradient	42.9046° N, 78.6596° W	0.75	689.86	686.6	681.6	671.6	13.3
A1-GP18-S	Upgradient	42.9044° N, 78.6592° W	0.75	690.37	687.5	682.5	672.5	12.9
MW-30	Upgradient	42.9045° N, 78.6585° W	2.0	689.69	689.8	679.8	669.8	14.9
MW-35D	Downgradient	42.9050° N, 78.6594° W	2.0	688.40	688.9	667.9	662.9	23.0
MW-35S	Downgradient	42.9050° N, 78.6594° W	2.0	688.56	689.1	684.1	674.1	9.5
MW-36D	Plume	42.9046° N, 78.6595° W	2.0	689.66	687.1	671.1	666.1	21.1
MW-36S	Upgradient	42.9046° N, 78.6595° W	2.0	689.82	687.1	683.1	672.1	12.2
MW-37D	Upgradient	42.9044° N, 78.6593° W	2.0	690.05	687.6	672.6	667.6	19.9
MW-38D	Plume	42.9047° N, 78.6593° W	2.0	689.66	687.5	671.5	666.5	20.7
MW-39D	Plume	42.9045° N, 78.6593° W	2.0	689.72	687.4	672.4	667.4	19.8
MW-40D	Plume	42.9045° N, 78.6591° W	2.0	689.19	689.5	671.7	666.7	20.0
MW-42S	Plume	42.9045° N, 78.6588° W	2.0	689.08	689.7	684.7	674.7	9.4
MW-43S	Plume	42.9047° N, 78.6590° W	2.0	689.14	689.6	684.6	674.6	9.5
MW-44S	Upgradient	42.9043° N, 78.6588° W	2.0	688.98	689.4	684.4	674.4	9.6
TP-5	Storm Sewer Bedding	42.9051° N, 78.6592° W	0.75	690.53	689.53	685.53	682.53	5.50
TP-6	Storm Sewer Bedding	42.9051° N, 78.6592° W	0.75	690.25	690.45	686.45	681.45	4.30

Table 3
Groundwater Elevation Data
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Monitoring Point Identification	Top of Casing Elevation	April 8, 2022	
		Depth to Groundwater (feet from TOC)	Groundwater Elevation (feet AMSL)
Monitoring Wells			
MW-30[1]	689.69	2.73	686.96
MW-35S	688.56	0.49	688.07
MW-35D	688.40	4.98	683.42
MW-36S	689.82	2.76	687.06
MW-36D	689.66	4.73	684.93
MW-37D	690.05	3.99	686.06
MW-38D	689.66	2.14	687.52
MW-39D	689.72	3.68	686.04
MW-40D	689.19	3.69	685.50
MW-42S	689.08	1.81	687.27
MW-43S	689.13	1.91	687.22
MW-44S	688.96	0.00	688.96
Piezometers			
A1-GP02-S	689.82	2.43	687.39
A1-GP06-S	687.71	1.94	685.77
A1-GP09-S	689.36	2.40	686.96
A1-GP10-S	689.10	1.55	687.55
A1-GP14-S	689.43	1.52	687.91
A1-GP15-S	687.69	0.00	687.69
A1-GP16-S	689.86	2.60	687.26
A1-GP18-S	690.37	3.08	687.29
Storm Sewer			
TP-5	690.53	7.67	682.86
TP-6	690.25	7.40	682.85
CB-1	689.53	6.18	683.35
CB-2	687.40	3.57	683.83
CB-3	687.55	4.72	682.83
CB-4	689.00	4.17	684.83
CB-E	689.35	4.85	684.50

Notes:
1 - Well is screened across both shallow and deep overburden units.
TOC - Top of Casing
AMSL - Above Mean Sea Level
S - well is screened in shallow overburden
D - well is screened in deep overburden

Table 4
Summary of Monitoring Well Analytical Data - October 2021
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Groundwater	A1-GP02-S	A1-GP06-S	A1-GP09-S	A1-GP10-S	A1-GP14-S	A1-GP15-S	A1-GP16-S
Date Collected	RAO/TOGS 1.1.1	10/22/21	10/22/21	10/21/21	10/27/21	10/25/21	10/20/21	10/25/21
Lab Sample ID	Objective	480-191326-4	480-191326-5	480-191261-5	480-191541-1	480-191541-2	480-191186-2	480-191541-3
Volatile Organic Compounds by Method 8260 (µg/L)								
1,1-Dichloroethane*	5	< 40 U	**54**	< 5.0 U	**1,000**	< 2.0 U	< 1.0 U	< 4.0 U
1,1,2-Trichloro-1,2,2-trifluoroethane	5	< 40 U	< 25 U	< 5.0 U	< 200 U	< 2.0 U	< 1.0 U	< 4.0 U
2-Butanone (MIBK)	50	< 400 U	< 130 U	< 50 U	< 1,000 U	< 10 U	< 10 U	< 40 U
2-Hexanone	50	< 200 U	< 130 U	< 25 U	< 1,000 U	< 10 U	< 5.0 U	< 20 U
Acetone	50	< 400 U	< 250 U	**57**	< 2,000 U	< 20 U	< 10 U	< 40 U
Benzene	5	< 40 U	< 25 U	< 5.0 U	< 200 U	**5.1**	< 1.0 U	< 4.0 U
Chloroethane	5	< 40 U	**880 F1**	< 5.0 U	**15,000**	< 2.0 U	< 1.0 U	< 4.0 U
cis-1,2-Dichloroethene*	5	**970**	< 25 U	< 5.0 U	< 200 U	< 2.0 U	< 1.0 U	**4.0**
Ethylbenzene	5	**7**	< 25 U	< 5.0 U	< 200 U	< 2.0 U	< 1.0 U	< 4.0 U
Toluene	5	< 40 U	< 25 U	< 5.0 U	< 200 U	< 2.0 U	< 1.0 U	< 4.0 U
Trichloroethene*	5	< 40 U	< 25 U	< 5.0 U	< 200 U	< 2.0 U	**1.1**	< 4.0 U
Vinyl chloride*	2	**2,800**	< 25 U	< 5.0 U	< 200 U	< 2.0 U	**2.4**	< 4.0 U
Xylenes, Total	5	**42 J**	< 50 U	< 10 U	< 400 U	< 4.0 U	< 2.0 U	< 8.0 U
Total Volatile Organic Compounds	NL	3,819	934	57	16,000	5.1	3.5	4.0
Total Organic Carbon	NL	10.9	84.3	40.4	41.6	7.6	3.0	23.4

Table 4
Summary of Monitoring Well Analytical Data - October 2021
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Groundwater	A1-GP18-S	MW-30	MW-35S	Duplicate	MW-36S	MW-42S	MW-43S
Date Collected	RAO/TOGS 1.1.1	10/21/21	10/25/21	10/20/21	10/20/21	10/22/21	10/27/21	10/25/21
Lab Sample ID	Objective	480-191261-1	480-191541-5	480-191186-1	480-191186-4	480-191326-3	480-191541-7	480-191541-8
Volatile Organic Compounds by Method 8260 (µg/L)								
1,1-Dichloroethane*	5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	**0.40 J**	**550**	< 4.0 U
1,1,2-Trichloro-1,2,2-trifluoroethane	5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	**430**	< 4.0 U
2-Butanone (MIBK)	50	< 10 U	< 10 U	< 10 U	< 10 U	< 10 U	< 2,000 U	< 40 U
2-Hexanone	50	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 5.0 U	< 1,000 U	< 20 U
Acetone	50	< 10 U	**26**	< 10 U	< 10 U	< 10 U	< 2,000 U	< 40 U
Benzene	5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 200 U	< 4.0 U
Chloroethane	5	< 1.0 U	**0.75 J**	< 1.0 U	< 1.0 U	< 1.0 U	**10,000**	< 4.0 U
cis-1,2-Dichloroethene*	5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	**1.5**	< 200 U	< 4.0 U
Ethylbenzene	5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 200 U	< 4.0 U
Toluene	5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	**570**	< 4.0 U
Trichloroethene*	5	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 200 U	< 4.0 U
Vinyl chloride*	2	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 1.0 U	< 200 U	< 4.0 U
Xylenes, Total	5	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 2.0 U	< 400 U	< 8.0 U
Total Volatile Organic Compounds	NL	0	27	0	0	1.9	11,550	0
Total Organic Carbon	NL	10.8	3.3	3.6	NS	5.2	333	11.9

Table 4
Summary of Monitoring Well Analytical Data - October 2021
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Groundwater	MW-44S	MW-35D	MW-36D	MW-37D	MW-38D	MW-39D	MW-40D
Date Collected	RAO/TOGS 1.1.1	10/25/21	10/21/21	10/22/21	10/21/21	10/22/21	10/21/21	10/27/21
Lab Sample ID	Objective	480-191541-9	480-191261-2	480-191326-2	480-191261-3	480-191326-1	480-191261-4	480-191541-6
Volatile Organic Compounds by Method 8260 (µg/L)								
1,1-Dichloroethane*	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 10 U	< 8.0 U	< 8.0 U
1,1,2-Trichloro-1,2,2-trifluoroethane	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 10 U	< 8.0 U	< 8.0 U
2-Butanone (MIBK)	50	< 10 U	< 10 U	< 40 U	< 10 U	< 100 U	**14 J**	< 80 U
2-Hexanone	50	< 5.0 U	< 5.0 U	< 20 U	< 5.0 U	< 50 U	**57**	< 40 U
Acetone	50	< 10 U	< 10 U	< 40 U	< 10 U	< 100 U	< 80 U	< 80 U
Benzene	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 10 U	< 8.0 U	< 8.0 U
Chloroethane	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 10 U	< 8.0 U	**230**
cis-1,2-Dichloroethene*	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 10 U	< 8.0 U	< 8.0 U
Ethylbenzene	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 10 U	< 8.0 U	< 8.0 U
Toluene	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 10 U	< 8.0 U	< 8.0 U
Trichloroethene*	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 10 U	< 8.0 U	< 8.0 U
Vinyl chloride*	2	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 10 U	< 8.0 U	< 8.0 U
Xylenes, Total	5	< 2.0 U	< 2.0 U	< 8.0 U	< 2.0 U	< 20 U	< 16 U	< 16 U
Total Volatile Organic Compounds	NL	0	0	0	0	0	71	230
Total Organic Carbon	NL	1.7	5.3	13.0	2.5	24.8	244	57.4

Notes:

Bold font indicates the analyte was detected.

Bold font and bold outline indicates the screening criteria was exceeded.

* Site-specific Contaminants of Concern per Decision Document (December 2015). Per NYSDEC comment letter dated August 29, 2019, cis-1,2-DCE was added as a Site-specific Contaminants of Concern.

Duplicate collected at MW-35S.

J - Analyte detected at a level less than the reporting limit and greater than or equal to the method detection limit. Concentrations within this range are estimated.

U - Not detected at or above reporting limit.

F1 - MS and/or MSD recovery exceeds control limits.

NL - Not listed

Table 5
Summary of Monitoring Well Analytical Data - April 2022
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Groundwater	A1-GP02-S	A1-GP06-S	A1-GP09-S	A1-GP10-S	A1-GP14-S	A1-GP15-S	A1-GP16-S
Date Collected	RAO/TOGS 1.1.1	04/12/22	04/11/22	04/13/22	04/08/22	04/12/22	04/11/22	04/11/22
Lab Sample ID	Objective	480-196701-3	480-196658-1	480-19676002	480-196617-3	480-196701-4	480-196658-4	480-196658-5
Volatile Organic Compounds by Method 8260 (µg/L)								
1,1,1-Trichloroethane*	5	< 25 U	< 25 U	< 5.0 U	**290**	< 2.0 U	< 1.0 U	< 4.0 U
1,1,2-Trichloro-1,2,2-trifluoroethane	5	< 25 U	< 25 U	< 5.0 U	**200**	< 2.0 U	< 1.0 U	< 4.0 U
1,1-Dichloroethane*	5	< 25 U	**21 J**	< 5.0 U	**2,000**	< 2.0 U	< 1.0 U	< 4.0 U
2-Butanone (MIBK)	50	< 250 U	< 250 U	< 50 U	< 1,000 U	< 20 U	< 10 U	< 40 U
2-Hexanone	50	< 130 U	< 130 U	< 25 U	< 1,000 U	< 10 U	< 5.0 U	< 20 U
Acetone	50	< 250 U	< 250 U	< 50 U	< 2,000 U	< 20 U	**3.8 J**	< 40 U
Benzene	5	< 25 U	< 25 U	< 5.0 U	< 200 U	**1.2 J**	< 1.0 U	< 4.0 U
Chloroethane	5	< 25 U	**670 F1**	< 5.0 U	**21,000**	< 2.0 U	< 1.0 U	< 4.0 U
cis-1,2-Dichloroethene*	5	**1,700 F1**	< 25 U	< 5.0 U	< 200 U	< 2.0 U	< 1.0 U	< 4.0 U
Ethylbenzene	5	**40**	< 25 U	< 5.0 U	< 200 U	< 2.0 U	< 1.0 U	< 4.0 U
Toluene	5	< 25 U	< 25 U	< 5.0 U	< 200 U	< 2.0 U	< 1.0 U	< 4.0 U
Vinyl chloride*	2	**1,800 F1**	< 25 U	< 5.0 U	< 200 U	< 2.0 U	< 1.0 U	< 4.0 U
Xylenes, Total	5	**35 J**	< 50 U	< 10 U	< 400 U	< 4.0 U	< 2.0 U	< 8.0 U
Total Volatile Organic Compounds	NL	3,575	691	0	23,490	1.2	3.8	0
Total Organic Carbon	NL	7.7	38.1	21.9	111	4.4	3.2	19.7

Table 5
Summary of Monitoring Well Analytical Data - April 2022
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Groundwater	A1-GP18-S		MW-30		MW-35S		MW-36S		MW-42S		MW-43S	
Date Collected	RAO/TOGS 1.1.1	04/13/22		04/14/22		04/07/22		04/11/22		04/08/22		04/14/22	
Lab Sample ID	Objective	480-196760-3		480-196801-1		480-196547-1		480-196658-2		480-196617-2		480-196801-1	
Volatile Organic Compounds by Method 8260 (µg/L)													
1,1,1-Trichloroethane*	5	< 1.0	U	< 1.0	U	< 1.0	U	< 1.0	U	**240**		< 4.0	U
1,1,2-Trichloro-1,2,2-trifluoroethane	5	< 1.0	U	< 1.0	U	< 1.0	U	< 1.0	U	**2,500**		< 4.0	U
1,1-Dichloroethane*	5	< 1.0	U	< 1.0	U	< 1.0	U	**0.43**	**J**	**880**		< 4.0	U
2-Butanone (MIBK)	50	**4.2**	**J**	< 10	U	< 10	U	**9.5**	**J**	< 2,000	U	< 40	U
2-Hexanone	50	< 5.0	U	< 5.0	U	< 5.0	U	< 5.0	U	< 1,000	U	< 20	U
Acetone	50	**3.1**	**J**	**6.8**	**J**	< 10	U	**4.2**	**J**	< 2,000	U	< 40	U
Benzene	5	< 1.0	U	< 1.0	U	< 1.0	U	< 1.0	U	< 200	U	< 4.0	U
Chloroethane	5	< 1.0	U	< 1.0	U	< 1.0	U	< 1.0	U	**15,000**		**3.1**	**J**
cis-1,2-Dichloroethene*	5	< 1.0	U	< 1.0	U	< 1.0	U	**1.5**		< 200	U	< 4.0	U
Ethylbenzene	5	< 1.0	U	< 1.0	U	< 1.0	U	< 1.0	U	< 200	U	< 4.0	U
Toluene	5	< 1.0	U	< 1.0	U	< 1.0	U	< 1.0	U	**910**		< 4.0	U
Vinyl chloride*	2	< 1.0	U	< 1.0	U	< 1.0	U	< 1.0	U	**290**		< 4.0	U
Xylenes, Total	5	< 2.0	U	< 2.0	U	< 2.0	U	< 2.0	U	< 400	U	< 8.0	U
Total Volatile Organic Compounds	NL	7.3		6.8		0		15.6		19,820		3.1	
Total Organic Carbon	NL	11.8		2.4		6.4		4.3		349		7.3	

Table 5
Summary of Monitoring Well Analytical Data - April 2022
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Groundwater	MW-44S	MW-35D	MW-36D	MW-37D	MW-38D	MW-39D	MW-40D
Date Collected	RAO/TOGS 1.1.1	04/12/22	04/07/22	04/11/22	04/13/22	04/12/22	04/13/22	04/08/22
Lab Sample ID	Objective	480-196701-2	480-196547-3	480-196658-3	480-196760-4	480-196701-1	480-196760-1	480-196617-1
Volatile Organic Compounds by Method 8260 (µg/L)								
1,1,1-Trichloroethane*	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 2.0 U	< 8.0 U	< 8.0 U
1,1,2-Trichloro-1,2,2-trifluoroethane	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 2.0 U	< 8.0 U	< 8.0 U
1,1-Dichloroethane*	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 2.0 U	< 8.0 U	< 8.0 U
2-Butanone (MIBK)	50	< 10 U	< 10 U	< 40 U	< 10 U	< 20 U	< 80 U	< 80 U
2-Hexanone	50	< 5.0 U	< 5.0 U	< 20 U	< 5.0 U	< 10 U	**33 J**	< 40 U
Acetone	50	< 10 U	< 10 U	< 40 U	< 10 U	< 20 U	< 80 U	< 80 U
Benzene	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 2.0 U	< 8.0 U	< 8.0 U
Chloroethane	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 2.0 U	< 8.0 U	**490**
cis-1,2-Dichloroethene*	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 2.0 U	< 8.0 U	< 8.0 U
Ethylbenzene	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 2.0 U	< 8.0 U	< 8.0 U
Toluene	5	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 2.0 U	< 8.0 U	< 8.0 U
Vinyl chloride*	2	< 1.0 U	< 1.0 U	< 4.0 U	< 1.0 U	< 2.0 U	< 8.0 U	< 8.0 U
Xylenes, Total	5	< 2.0 U	< 2.0 U	< 8.0 U	< 2.0 U	< 4.0 U	< 16 U	< 16 U
Total Volatile Organic Compounds	NL	0	0	0	0	0	33	490
Total Organic Carbon	NL	0.79	8.3	11.8	2.4	6.2	82.5	24.5

Notes:
Bold font indicates the analyte was detected.
Bold font and bold outline indicates the screening criteria was exceeded.
* Site-specific Contaminants of Concern per Decision Document (December 2015). Per NYSDEC comment letter dated August 29, 2019, cis-1,2-DCE was added as a Site-Specific Contaminant of Concern.
J - Analyte detected at a level less than the reporting limit and greater than or equal to the method detection limit. Concentrations within this range are estimated.
U - Not detected at or above reporting limit.
F1- MS and/or MSD recovery exceeds control limits.
NL - Not listed

Table 6
Summary of Catch Basin and Temporary Piezometers Analytical Data - April 2020 through April 2022
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Groundwater	CB-1	CB-1	CB-1	CB-1	CB-1	CB-1	CB-2	CB-2	CB-2	CB-2	CB-2	CB-2
Date Collected	RAO/NYCRR	04/09/20	07/23/20	10/05/20	04/01/21	10/22/21	04/12/22	04/09/20	07/23/20	10/05/20	04/01/20	10/22/21	04/12/22
Lab Sample ID	Objective	480-16849-1	480-172828-1	480-176049-1	480-182787-13	480-191327-1	480-196702-1	480-16849-2	480-172828-2	480-176049-2	480-182787-14	480-191327-2	480-196702-2
Volatile Organic Compounds by Method 8260 (µg/L)													
1,1,1-Trichloroethane*	5	**40**	ND	ND	**2.5**	ND	**2.2**	**35**	ND	ND	**3.2**	ND	**1.2**
1,1,2-Trichloro-1,2,2-trifluoroethane	5	**37**	**4.4**	**7.1**	**27**	**3.7**	**29**	**19**	ND	**1.6**	**7.7**	ND	**8.4**
1,1-Dichloroethane*	5	**15**	**0.94 J**	**1.3**	**5.4**	ND	**5.4**	**13**	**1 J**	**6.7**	**9.1**	ND	**5.8**
1,1-Dichloroethene*	5	**4.2**	ND	ND	**0.64 J**	ND	ND	**3.9**	ND	ND	**0.70 J**	ND	ND
Acetone	50	ND	ND	**3.3 J**	ND	ND	ND	ND	ND	**6.0 J**	ND	ND	ND
Chloroethane	5	**17**	ND	**1.6**	**2.5**	ND	**3.8**	**6.3**	**2.3**	**18**	**6.2**	ND	**5.2**
Chloromethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
cis-1,2-Dichloroethene*	5	**94**	**4.2**	**1.2**	**24**	**1.7 J**	**19**	**90**	ND	**13**	**48**	**1.9 J**	**30**
Ethylbenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Methylcyclohexane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	**0.30 J**	ND	ND
Methylene chloride	5	ND	**0.89 J**	ND	ND	ND	ND	ND	**1.6 J**	ND	ND	ND	ND
Tetrachloroethene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	5	**3.4**	ND	ND	**0.59 J**	ND	ND	**3.8**	ND	ND	**2.0**	ND	ND
trans-1,2-Dichloroethene	5	**2.5**	ND	ND	**1.0**	ND	**1.3**	ND	ND	**1.2**	**2.4**	ND	**1.9**
Trichloroethene*	5	**5.3**	**2.1**	**0.50 J**	**9.9**	ND	**9.3**	**7.6**	ND	**3.8**	**20**	ND	**15**
Vinyl chloride*	2	**12**	ND	ND	**3.1**	ND	**3.1**	**12**	ND	**4.4**	**8.3**	ND	**4.2**
Xylenes, Total	5	**5.6**	ND	ND	**2.0**	ND	ND	**6.6**	**9.3**	ND	**6.0**	ND	**1.0 J**
TVOC	NL	230	13	15	79	5.4	73	197	14	55	114	1.9	73

Table 7
Summary of Catch Basin and Temporary Piezometers Analytical Data - April 2020 through April 2022
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Groundwater	CB-3	CB-3	CB-3	CB-3	CB-3	CB-3	CB-E	CB-E	CB-E	CB-E	CB-E	CB-E
Date Collected	RAO/NYCRR	04/09/20	07/23/20	10/05/20	04/01/21	10/22/21	04/12/22	04/09/20	07/23/20	10/05/20	04/01/21	10/22/21	04/12/22
Lab Sample ID	Objective	480-16849-3	480-172828-3	480-176049-3	480-182787-15	480-191327-3	480-196702-3	480-16849-4	480-172828-5	480-176049-5	480-182787-16	480-191327-5	480-196702-5
Volatile Organic Compounds by Method 8260 (µg/L)													
1,1,1-Trichloroethane*	5	**2,700**	ND	ND	ND	ND	ND	**11**	ND	ND	**1.4**	ND	ND
1,1,2-Trichloro-1,2,2-trifluoroethane	5	**710**	ND	**0.60 J**	**1.8**	ND	**1.5**	**15**	**0.49 J**	ND	**3.7**	ND	**2.3**
1,1-Dichloroethane*	5	**750**	**1.8**	**2.6**	**7.4**	**1.4**	**5.4**	**11**	**3.3**	**2.5**	**17**	**2.4**	**9.1**
1,1-Dichloroethene*	5	**240**	ND	ND	**0.58 J**	ND	ND	**4.1**	ND	ND	**1.5**	ND	**0.50 J**
Acetone	50	ND	**9.0 J**	**6.1 J**	ND	ND	ND	ND	**5.6 J**	**4.3 J**	ND	ND	ND
Chloroethane	5	**250**	**3.6**	**7.8**	**9.4**	**3.3**	**6.0**	**7.0**	**6.2**	**9.8**	**23**	**6.8**	**11**
Chloromethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
cis-1,2-Dichloroethene*	5	**3,500**	ND	ND	**5.0**	ND	**1.9**	**33**	**0.99 J**	ND	**12**	ND	**3.0**
Ethylbenzene	5	**55**	**1.3**	ND	**3.3**	ND	**0.85 J**	**2.6**	**2.6**	**2.1**	**2.1**	**1.5**	**1.9**
Methylcyclohexane	5	ND	ND	ND	**1.7**	**0.31 J**	**0.53 J**	**0.54**	**0.45 J**	**0.27 J**	**3.9**	**0.45 J**	**0.79 J**
Methylene chloride	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Tetrachloroethene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	**0.58 J**	ND	ND
Toluene	5	**260**	**1.7**	ND	**11**	ND	**0.90 J**	**5.8**	**3.4**	**1.4**	**37**	ND	**2.0**
trans-1,2-Dichloroethene	5	**56**	ND	ND	ND	ND	ND	ND	ND	ND	**1.1**	ND	ND
Trichloroethene*	5	**28**	ND	ND	ND	ND	**0.71 J**	ND	ND	ND	**0.99 J**	ND	**1.1**
Vinyl chloride*	2	**600**	ND	ND	**2.7**	ND	**1.2**	**6**	ND	ND	**8.3**	ND	**2.8**
Xylenes, Total	5	**270**	**17**	**3.8**	**35**	**2.1**	**6.0**	**36**	**41**	**30**	**120**	**4.3**	**12**
TVOC	NL	9,419	34	21	78	7.1	25	132	64	50	233	15.5	45

Table 6
Summary of Catch Basin and Temporary Piezometers Analytical Data - April 2020 through April 2022
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Groundwater	CB-4	CB-4	CB-4	CB-4	CB-4	CB-4	TP-5	TP-5	TP-5	TP-5	TP-5	TP-5
Date Collected	RAO/NYCRR	04/09/20	07/23/20	10/05/20	04/01/21	10/22/21	04/12/22	04/09/20	07/23/20	10/05/20	04/01/21	10/22/21	04/12/22
Lab Sample ID	Objective	480-16849-5	480-172828-4	480-176049-4	480-182787-17	480-191327-4	480-196702-5	480-16849-6	480-172828-6	480-176049-6	480-182787-18	480-191327-6	480-196702-6
Volatile Organic Compounds by Method 8260 (µg/L)													
1,1,1-Trichloroethane*	5	**59**	ND	ND	ND	ND	ND	**25**	ND	ND	ND	ND	ND
1,1,2-Trichloro-1,2,2-trifluoroethane	5	**59**	ND	**1.9**	ND	ND	ND	**25**	**2.7**	**3.2**	**2.6**	**1.0**	**4.7**
1,1-Dichloroethane*	5	**53**	ND	**2.6**	ND	ND	ND	**10**	**1.4**	**1.0**	ND	ND	**1.5**
1,1-Dichloroethene*	5	**28**	ND	ND	ND	ND	ND	**2.9**	ND	ND	ND	ND	ND
Acetone	50	ND	**3.7 J**	ND	**3.7 J**	ND	ND	ND	ND	ND	ND	ND	ND
Chloroethane	5	**29**	**0.40 J**	**2.7**	ND	ND	ND	ND	ND	ND	ND	ND	**1.1**
Chloromethane	5	ND	ND	ND	ND	ND	ND	**4.4**	**0.61 J**	ND	ND	ND	ND
cis-1,2-Dichloroethene*	5	**200**	ND	ND	ND	ND	ND	**58**	**3.4**	**1.7**	**1.9**	ND	**5.1**
Ethylbenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Methylcyclohexane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Methylene chloride	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Tetrachloroethene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
trans-1,2-Dichloroethene	5	ND	ND	ND	ND	ND	ND	**1.4**	ND	ND	ND	ND	ND
Trichloroethene*	5	ND	ND	ND	ND	ND	ND	**2.6**	**0.81 J**	**0.88 J**	**0.87 J**	**0.76 J**	**2.0**
Vinyl chloride*	2	**27**	ND	ND	ND	ND	ND	**4.9**	ND	ND	ND	ND	ND
Xylenes, Total	5	ND	ND	0.79 J	ND	ND	ND	ND	ND	ND	ND	ND	ND
TVOC	NL	455	4.1	8.0	3.7	0	0	134	8.9	6.8	5.4	1.8	14.4

Table 6
Summary of Catch Basin and Temporary Piezometers Analytical Data - April 2020 through April 2022
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID Date Collected Lab Sample ID	Groundwater RAO/NYCRR Objective	TP-6 04/09/20 480-16849-7	TP-6 07/23/20 480-172828-7	TP-6 10/05/20 480-176049-7	TP-6 04/01/21 480-182787-19	TP-6 10/22/21 480-191327-7	TP-6 04/12/22 480-196702-7
Volatile Organic Compounds by Method 8260 (µg/L)							
1,1,1-Trichloroethane*	5	ND	ND	ND	ND	ND	ND
1,1,2-Trichloro-1,2,2-trifluoroethane	5	ND	ND	ND	ND	ND	ND
1,1-Dichloroethane*	5	ND	ND	ND	ND	ND	ND
1,1-Dichloroethene*	5	ND	ND	ND	ND	ND	ND
Acetone	50	ND	ND	ND	ND	ND	ND
Chloroethane	5	ND	ND	ND	ND	ND	ND
Chloromethane	5	ND	ND	ND	ND	ND	ND
cis-1,2-Dichloroethene*	5	**1.3**	ND	ND	ND	ND	ND
Ethylbenzene	5	ND	ND	ND	ND	ND	ND
Methylcyclohexane	5	ND	ND	ND	ND	ND	ND
Methylene chloride	5	**0.50**	ND	ND	ND	ND	ND
Tetrachloroethene	5	ND	ND	ND	ND	ND	ND
Toluene	5	ND	ND	ND	ND	ND	ND
trans-1,2-Dichloroethene	5	ND	ND	ND	ND	ND	ND
Trichloroethene*	5	ND	ND	ND	ND	ND	ND
Vinyl chloride*	2	ND	ND	ND	ND	ND	ND
Xylenes, Total	5	ND	ND	ND	ND	ND	ND
TVOC	NL	1.8	0	0	0	0	0

Notes:
Storm sewer piping replaced in June 2020.
Bold font indicates the analyte was detected.
Bold font and bold outline indicates the screening criteria was exceeded.
* Site-specific Contaminants of Concern.
ND - Not detected at or above reporting limit.
J - Result is less than the reporting limit but greater than or equal to the method detection limit; the concentration is an approximate value.
NL - Not listed.

Table 7
Bioattenuation Screening Summary - April 2022
Former Scott Aviation Facility
NYSDEC Site Code No. C915233
Lancaster, New York

Parameter	Units	Criteria		Score Value	Monitoring Well Identification													
					A1-GP18-S (side-gradient/ background)		A1-GP10-S (source area)		MW-42S (source area)		A1-GP06-S (source area)		MW-40D (source area)		MW-38D (downgradient)		MW-35D (far downgradient)	
					4/13/22	Score	4/8/22	Score	4/8/22	Score	4/11/22	Score	4/8/22	Score	4/12/22	Score	4/7/22	Score
Dissolved Oxygen	mg/L	< 0.5 mg/L	Tolerated, suppresses the reductive pathway at higher concentrations	3	0.32	3	3.3	0	0.29	3	0.46	3	0.14	3	0.13	3		
		> 5 mg/L	Not tolerated; however, VC may be oxidized aerobically	-3													7.75	-3
Nitrate	mg/L	< 1 mg/L	At higher concentrations may compete with reductive pathway	2	ND	2	ND	2	0.10	2	0.037J	2	ND	2	0.030J	2	0.17	2
Ferrous Iron	mg/L	> 1 mg/L	Reductive pathway possible	3	ND	0	1.8	3	3.9	3	ND	0	0.81	0	ND	0	1.6	3
Sulfate	mg/L	< 20 mg/L	At higher concentrations may compete with reductive pathway	2	7.2	2	1.9J	2	ND	2	ND	2	ND	2	10.7	2	4.6	2
Sulfide	mg/L	> 1 mg/L	Reductive pathway possible	3	ND	0	1.6	3	ND	0	0.80J	0	ND	0	ND	0	ND	0
Methane	µg/L	< 500 µg/L	VC oxidizes	0													260	0
		> 500 µg/L	Ultimate reductive daughter product, VC accumulates	3	4,400	3	1,300	3	13,000	3	17,000	3	15,000	3	16,000	3		
Ethene	µg/L	> 10 µg/L	Daughter product of VC	2	ND	0	ND	0	4,300	2	ND	0	ND	0	ND	0	ND	0
Ethane	µg/L	> 100 µg/L	Daughter product of Ethene	3	ND	0	ND	0	790	3	ND	0	ND	0	ND	0	ND	0
ORP	mV	< 50 mV	Reductive pathway possible	1	-89.6	1									2.6	1	32.5	1
		< -100 mV	Reductive pathway likely	2			-101.2	2	-108.7	2	-138.8	2	-182.9	2				
pH	s.u.	5 < pH < 9	Optimal range for reductive pathway	0	6.91	0	6.72	0	6.82	0	7.13	0	7.41	0	6.95	0	7.03	0
		5 > pH > 9	Outside optimal range for reductive pathway	-2														
Temperature	°C	> 20°C	At temperature > 20°C, biochemical process is accelerated	1	10.60	0	9.60	0	8.60	0	8.60	0	11.00	0	10.70	0	10.90	0
TOC	mg/L	> 20 mg/L	Carbon and energy source, drives dechlorination (natural or anthropogenic)	2	11.8	0	111	2	349	2	38.1	2	24.5	2	6.2	0	8.3	0
Carbon Dioxide	µg/L	> 2x background	Ultimate oxidative product	1	90,000	0	84,000	0	89,000	0	77,000	0	70,000	0	69,000	0	41,000	0
Alkalinity	mg/L	> 2x background	Results from interaction of between CO_2 and aquifer minerals	1	459	0	659	0	759	0	512	0	432	0	402	0	237	0
PCE[1]	µg/L	----	N/A	0	ND	0	ND	0	ND	0	ND	0	ND	0	ND	0	ND	0
TCE[2]	µg/L	----	Material Released	0	ND	0	ND	0	ND	0	ND	0	ND	0	ND	0	ND	0
DCE[3]	µg/L	----	Daughter product of TCE (score if cis-1,2-DCE is 80% of total DCE)	2	ND	0	ND	0	ND	0	ND	0	ND	0	ND	0	ND	0
VC[4]	µg/L	----	Daughter product of DCE	2	ND	0	ND	0	290	2	ND	0	ND	0	ND	0	ND	0
1,1,1-TCA[5]	µg/L	----	Material Released	0	ND	0	290	0	240	0	ND	0	ND	0	ND	0	ND	0
1,1-DCA[6]	µg/L	----	Daughter product of 1,1,1-TCA under reducing conditions	2	ND	0	2,000	2	880	2	21J	2	ND	0	ND	0	ND	0
CA[7]	µg/L	----	Daughter product of 1,1-DCA or VC under reducing conditions	2	ND	0	21,000	2	15,000	2	670	2	490	2	ND	2	ND	0
			TOTAL SCORE			**11**		**21**		**28**		**18**		**16**		**13**		**5**

Notes:

DCE = dichloroethene
°C = degrees Celsius
µg/L = micrograms per liter
mg/L = milligrams per liter
mV = millivolts
ORP = oxidation-reduction potential
s.u. = standard unit
PCE = tetrachloroethene
TCE = trichloroethene
TOC = total organic carbon
VC = vinyl chloride
1,1,1-TCA = 1,1,1-trichloroethane
1,1-DCA = 1,1-dichloroethane
CA = chloroethane

ND - Non-Detect
NS - Not Sampled
J - Estimated Concentration

* MNA parameters **not** collected so cannot adequately evaluate and score

0 to 5 points: There is inadequate evidence for anaerobic biodegradation of chlorinated organics.
6 to 14 points: There is limited evidence for anaerobic biodegradation of chlorinated organics.
15 to 20 points: There is adequate evidence for anaerobic biodegradation of chlorinated organics.
>20 points: There is strong evidence for anaerobic biodegradation of chlorinated organics.

Monitoring wells outside the contaminant plume.

[1] = Material Released
[2] = Daughter product of PCE
[3] = Daughter product of TCE (score if cis-1,2-DCE is 80% of total DCE)
[4] = Daughter product of DCE
[5] = Material Released
[6] = Daughter product of 1,1,1-TCA under reducing conditions
[7] = Daughter product of 1,1-DCA or VC under reducing conditions

Table 8
Pre- and Post-Bioaugmentation Injection VFA Data Comparison
Former Scott Aviation Facility - Area 1 BCP Site
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Sample Date	Sample Dilution Factor	Lactate	Acetate	Propionate	Formate	Butyrate	Pyruvate
			mg/L	mg/L	mg/L	mg/L	mg/L	mg/L
MW-42S	8/26/2021	50	<0.39	574	148	<0.22	108	26
MW-42S	12/9/2021	50	<0.39	476	118	<0.22	75	18
MW-42S	4/8/2022	1,000	<7.8	813	124	7.2	81	18
A1-GP10-S	8/26/2021	50	<0.39	471	68	<0.22	46	5.3
A1-GP10-S	12/9/2021	50	<0.39	494	151	6.3	55	15
A1-GP10-S	4/8/2022	50	7.9	147	35	0.43	18	4.7

Notes:
VFA - Volatile Fatty Acids
mg/L - milligrams per liter

Table 9
Pre- and Post-Bioaugmentation Injection Gene-Trac Data Comparison
Former Scott Aviation Facility - Area 1 BCP Site
NYSDEC Site Code No. C915233
Lancaster, New York

Sample ID	Sample Date	*Dehalococcoides* (Dhc)		*Dehalobacter* (Dhb)		VC Reductase (*vcrA*)		BAV1 VC Reductase (*bvcA*)		TCE Reductase (*tceA*)	
		Percent Dhc	Enumeration/Liter	Percent Dhb	Gene Copies/Liter	Percent vcrA	Gene Copies/Liter	Percent bvcA	Gene Copies/Liter	Percent tceA	Gene Copies/Liter
MW-42S	8/26/2021	5 - 13 %	2×10^8	0.2 - 0.5 %	6×10^6	8 - 21 %	3×10^8	0.007 - 0.02 %	2×10^5	0.6 - 2 %	2×10^7
MW-42S	12/9/2021	2 - 5 %	2×10^8	0.1 - 0.3 %	1×10^7	2 - 6 %	2×10^8	0.001 - 0.004 %	1×10^5	0.08 - 0.2 %	8×10^6
MW-42S	4/8/2022	5 - 14 %	2×10^8	0.1 - 0.4 %	5×10^6	5 - 15 %	2×10^8	0.01 - 0.03 %	4×10^5	0.3 - 0.8 %	1×10^7

Appendix A Pre-Injection and Post-Injection Groundwater Quality Data

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | Carbon, Total Organic | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | Carbon, Total Organic | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | Carbon, Total Organic | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | Carbon, Total Organic | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | Carbon, Total Organic | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | Carbon, Total Organic | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | Carbon, Total Organic | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | Carbon, Total Organic | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | Carbon, Total Organic | VOCs | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | | VOCs | | | | | |

| Well ID | Event / Description | | Date | Elapsed Time (Days) | Well | | | | Field Parameters | | | | | VOCs | | | | |

Appendix B Current and Historical Summary of VOCs in Groundwater

MONITORING WELL A1-GP02S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/22/2010	ND	ND	ND	ND	ND	6,400	ND	11,000	ND
8/4/2010	ND	ND	ND	ND	ND	10,000	ND	20,000	ND
3/10/2015	ND	ND	ND	ND	ND	3,300	ND	5,400	ND
7/28/2015	ND	ND	ND	34	ND	23,000	ND	8,000	140
1/7/2016	ND	ND	ND	ND	ND	29,000	ND	330	770
4/8/2016	ND	ND	ND	ND	ND	22,000	ND	ND	2,400
7/11/2016	ND	ND	ND	ND	ND	32,000	ND	ND	10,000
10/10/2016	ND	ND	ND	ND	ND	6,400	ND	ND	13,000
1/23/2017	ND	ND	ND	ND	ND	810	ND	ND	1,700
4/11/2017	ND	ND	ND	ND	ND	900	ND	ND	3,700
7/6/2017	ND	ND	ND	ND	ND	790	ND	ND	4,300
10/17/2017	ND	ND	ND	ND	ND	230	ND	ND	1,900
1/5/2018	ND	ND	ND	ND	ND	680	ND	ND	6,700
4/12/2018	ND	ND	ND	ND	ND	730	ND	ND	4,200
7/9/2018	ND	ND	ND	ND	ND	460	ND	ND	6,600
10/18/2018	ND	ND	ND	ND	ND	74	ND	ND	1,300
1/2/2019	ND	ND	ND	ND	ND	150	ND	ND	750
4/18/2019	ND	ND	ND	ND	ND	450	ND	ND	1,300
7/25/2019	ND	ND	ND	ND	ND	46	ND	ND	1,200
10/14/2019	ND	ND	ND	ND	ND	44	ND	ND	390
1/7/2020	ND	ND	ND	ND	ND	64	ND	ND	450
4/13/2020	ND	ND	ND	ND	ND	420	ND	ND	1,500
10/12/2020	ND	ND	ND	ND	ND	390	ND	ND	2,300
4/1/2021	ND	ND	ND	ND	ND	340	ND	ND	4,500
10/22/2021	ND	ND	ND	ND	ND	970	ND	ND	2,800
4/12/2022	ND	ND	ND	ND	ND	1,700	ND	ND	1,800

MONITORING WELL A1-GP02S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

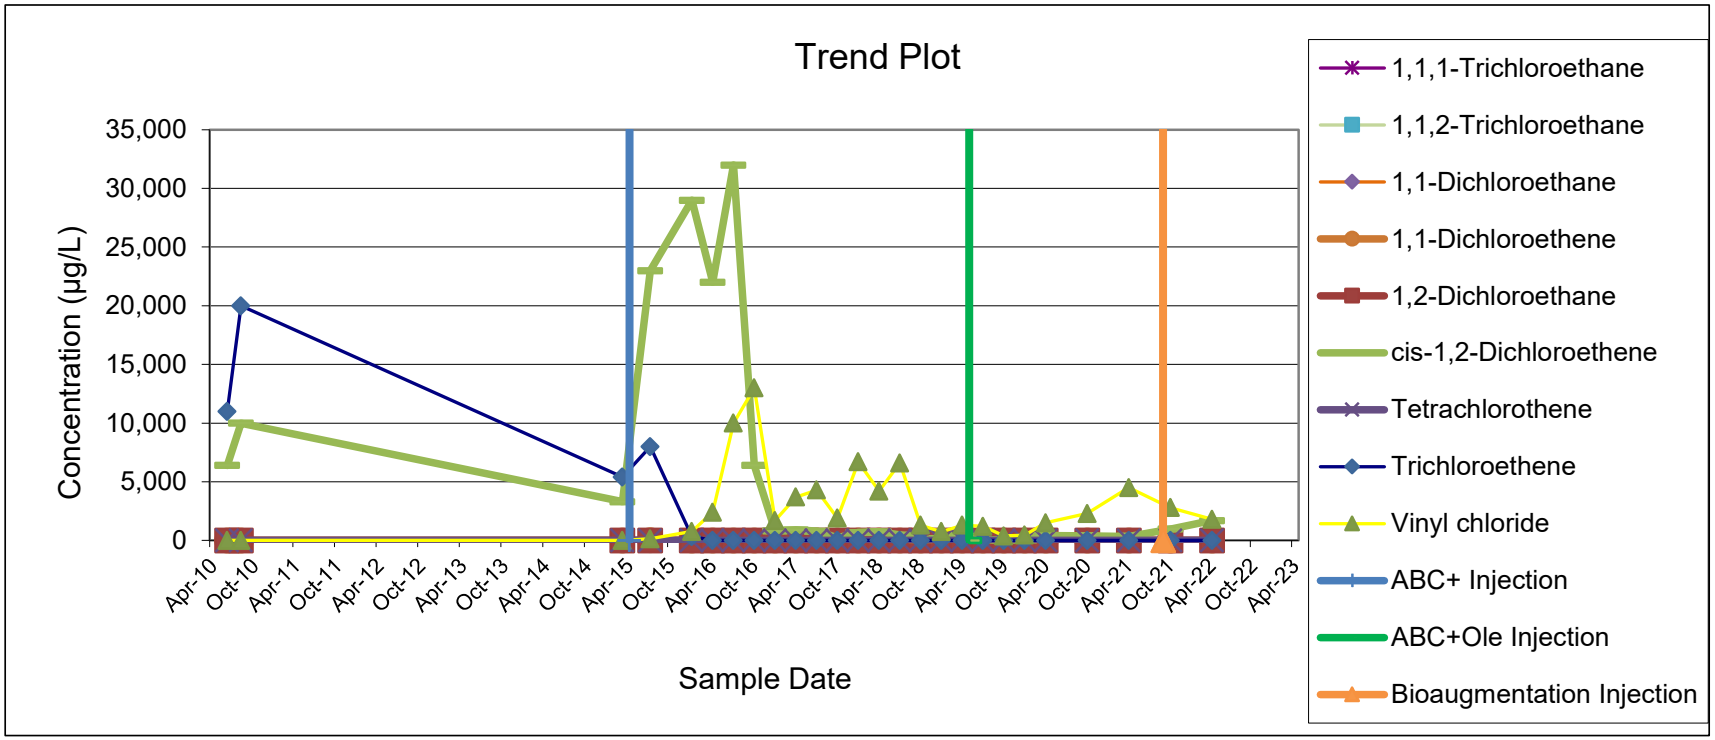

MONITORING WELL A1-GP06S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

	Analytical Results (µg/L)								
Sample Date	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/21/2010	620	ND	890	63	ND	32	ND	46	ND
8/4/2010	1,700	16	3,200	270	ND	130	ND	200	20
3/11/2015	110	ND	21	ND	ND	ND	ND	0.81	ND
7/27/2015	110	4.1	3,300	0.89	3.1	270	ND	18	16
1/7/2016	ND	ND	340	60	ND	25	ND	330	16
4/8/2016	73	ND	450	ND	ND	ND	ND	5.4	33
7/12/2016	35	ND	680	7.8	ND	ND	ND	ND	44
10/10/2016	ND	ND	270	ND	ND	ND	ND	ND	ND
1/24/2017	24	ND	300	ND	ND	ND	ND	ND	29
4/11/2017	34	ND	210	6.2	ND	ND	ND	ND	ND
7/6/2017	63	490	13	ND	ND	16	ND	ND	50
10/18/2017	ND	ND	200	ND	ND	ND	ND	ND	14
1/5/2018	44	84	400	3.7	2.1	ND	ND	ND	ND
4/10/2018	110	ND	360	6.8	ND	8	ND	7.2	11
7/9/2018	18	ND	250	4.1	2.6	ND	ND	ND	20
10/19/2018	15	ND	210	ND	3.3	ND	ND	ND	9.9
1/4/2019	21	ND	170	ND	ND	ND	ND	ND	ND
4/10/2019	23	ND	150	ND	ND	ND	ND	ND	ND
7/22/2019	22	ND	230	ND	ND	ND	ND	ND	ND
10/14/2019	ND	ND	89	ND	ND	ND	ND	ND	ND
1/7/2020	ND	ND	86	ND	ND	ND	ND	ND	ND
4/13/2020	ND	ND	200	ND	ND	ND	ND	ND	ND
10/8/2020	ND	ND	80	ND	ND	ND	ND	ND	ND
4/1/2021	210	ND	200	ND	ND	ND	ND	ND	ND
10/22/2021	ND	ND	54	ND	ND	ND	ND	ND	ND
4/11/2022	ND	ND	21	ND	ND	ND	ND	ND	ND

MONITORING WELL A1-GP06S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

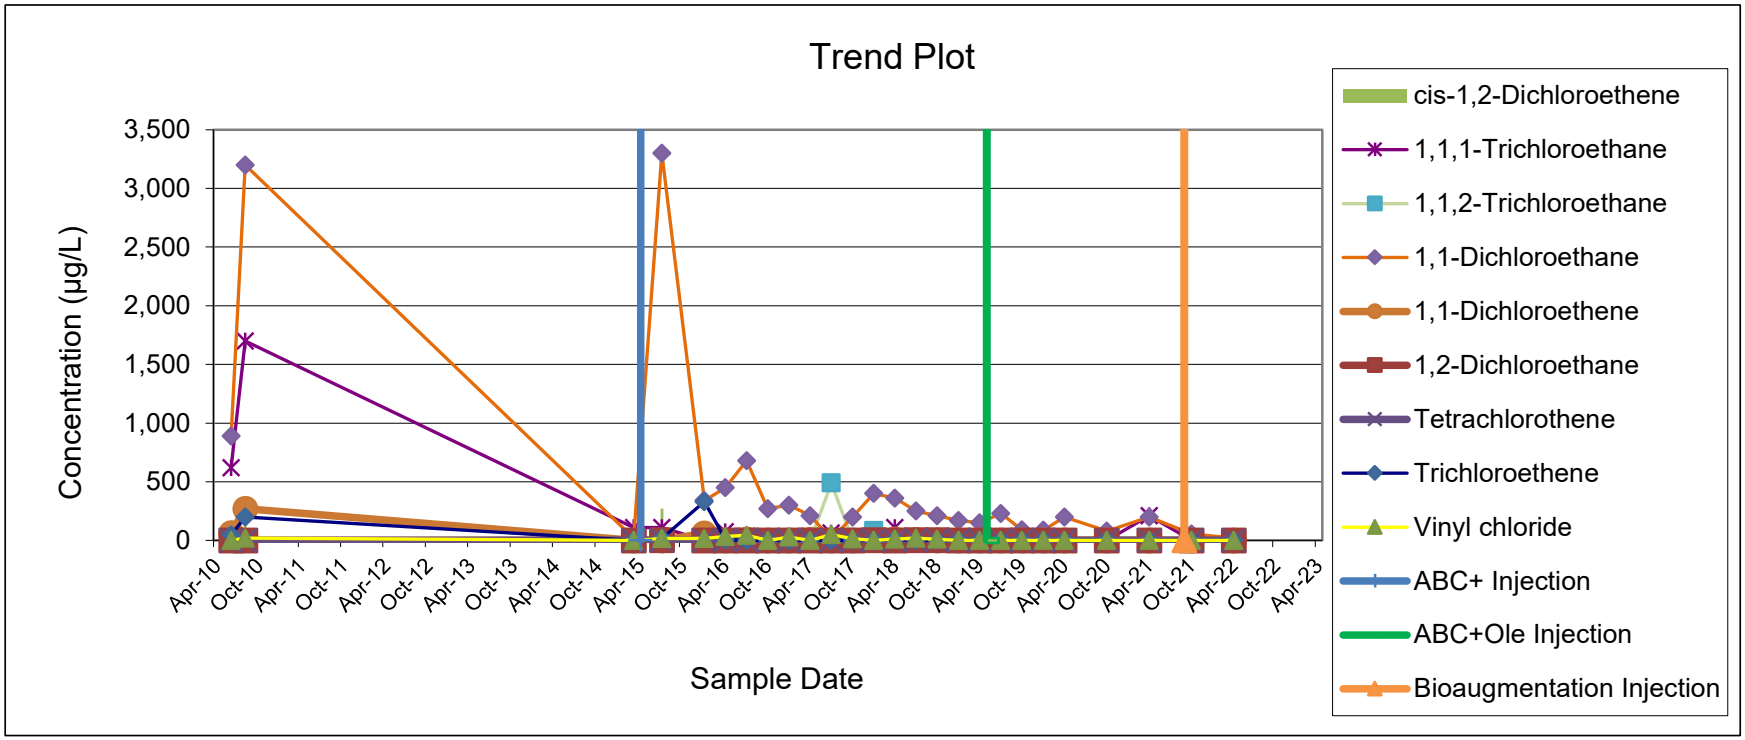

MONITORING WELL A1-GP09S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/22/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
8/3/2010	ND	ND	ND	ND	ND	ND	ND	0.88	ND
10/18/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/12/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/11/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/19/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/3/2019	ND	ND	1.1	ND	ND	ND	ND	ND	ND
4/17/2019	ND	ND	2.0	ND	ND	ND	ND	ND	ND
7/25/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/15/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/7/2020	ND	ND	12	ND	ND	ND	ND	ND	ND
4/13/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/9/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/1/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/21/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/13/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL A1-GP09S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

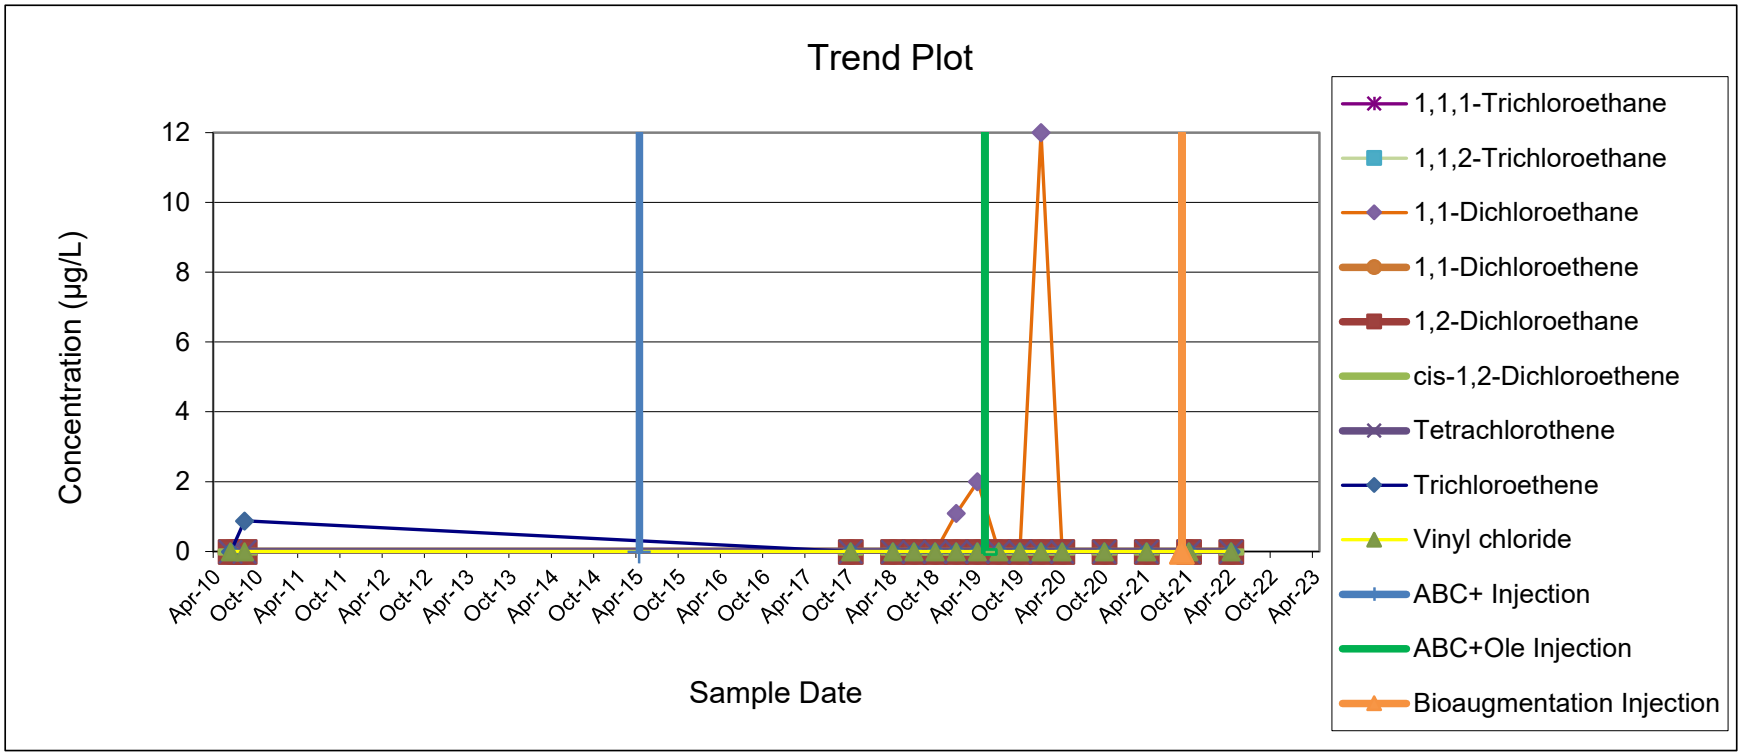

MONITORING WELL A1-GP10S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

	Analytical Results (µg/L)								
Sample Date	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/21/2010	55,000	84	43,000	1,300	77	ND	1.2	92	41
8/3/2010	84,000	ND	48,000	2,000	ND	ND	ND	ND	ND
3/11/2015	1,500	1.2	440	65	1.6	7.4	ND	6.6	ND
6/12/2015	28,000	ND	15,000	1,000	40	190	ND	ND	ND
7/27/2015	12,000	ND	2,900	1,600	9.6	45	ND	36	ND
1/7/2016	4,900	ND	4,300	470	ND	51	ND	ND	ND
4/8/2016	1,700	ND	4,800	220	ND	ND	ND	ND	ND
7/11/2016	6,600	ND	29,000	500	72	270	ND	ND	ND
10/7/2016	360	ND	7,200	190	47	ND	ND	ND	ND
1/23/2017	ND	ND	580	ND	ND	ND	ND	ND	ND
4/10/2017	240	ND	4,100	45	ND	ND	ND	ND	690
7/6/2017	2,400	ND	9,600	380	ND	ND	ND	ND	ND
10/17/2017	23	ND	240	4	1.4	0.5	ND	0.47	45
1/4/2018	44	ND	600	ND	11	ND	ND	ND	85
4/10/2018	140	ND	3,900	19	18	ND	ND	ND	260
7/9/2018	530	ND	8,100	51	77	ND	ND	ND	320
10/19/2018	640	ND	1,200	ND	ND	ND	ND	ND	ND
1/4/2019	200	ND	4,400	91	ND	ND	ND	ND	260
4/15/2019	ND	ND	1,200	ND	ND	ND	ND	ND	ND
7/22/2019	690	ND	14,000	130	78	ND	ND	ND	ND
10/14/2019	780	ND	17,000	310	ND	ND	ND	ND	ND
1/7/2020	730	ND	20,000	480	ND	ND	ND	ND	ND
4/13/2020	5,100	ND	15,000	400	44	ND	ND	ND	ND
10/8/2020	1,300	ND	15,000	270	ND	170	ND	ND	ND
4/1/2021	2,200	ND	3,700	200	ND	ND	ND	ND	ND
10/27/2021	ND	ND	1,000	ND	ND	ND	ND	ND	ND
4/8/2022	290	ND	290	ND	ND	ND	ND	ND	ND

MONITORING WELL A1-GP10S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

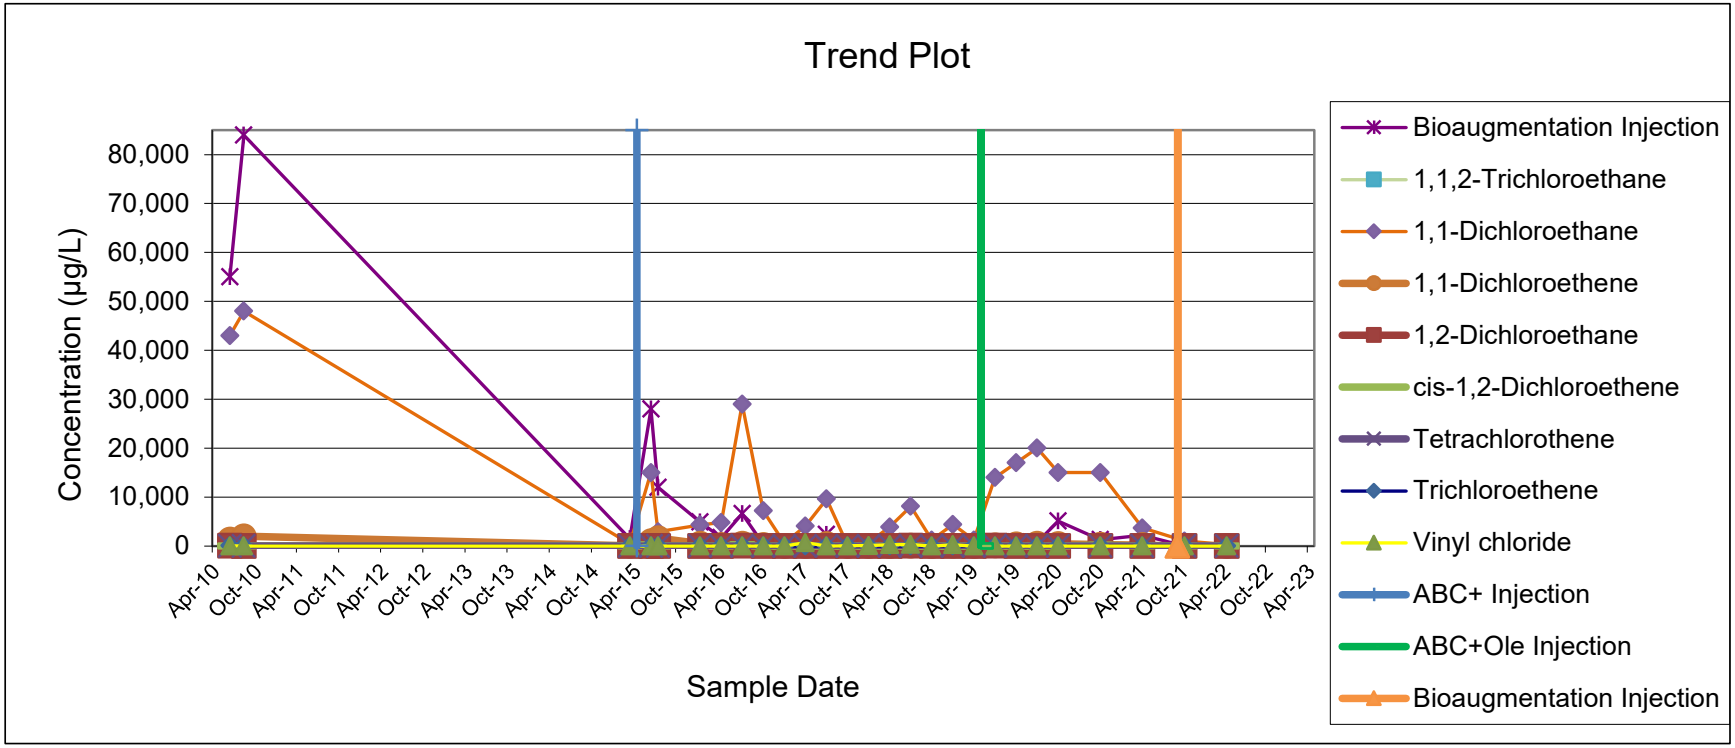

MONITORING WELL A1-GP14S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/21/2010	ND	ND	ND	ND	ND	ND	ND	ND	4.0
8/3/2010	ND	1.0	ND	ND	ND	0.88	ND	ND	11.0
10/17/2017	ND	1.9	ND	ND	ND	0.53	ND	ND	7.9
1/4/2018	ND	ND	ND	ND	ND	ND	ND	ND	4.9
4/10/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/9/2018	ND	0.46	ND	ND	ND	ND	ND	ND	1.3
10/23/2018	ND	0.44	ND	ND	ND	ND	ND	ND	0.9
1/2/2019	ND	0.47	ND	ND	ND	ND	ND	ND	ND
4/15/2019	ND	0.54	ND	ND	ND	ND	ND	ND	1.1
7/23/2019	ND	ND	1.4	ND	ND	ND	ND	ND	6.1
10/15/2019	ND	ND	1.0	ND	ND	ND	ND	ND	3.4
1/7/2020	ND	ND	1.0	ND	ND	ND	ND	ND	5.3
4/13/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	1.8
4/1/2021	ND	ND	ND	ND	ND	ND	ND	2.4	ND
10/25/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/12/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL A1-GP14S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

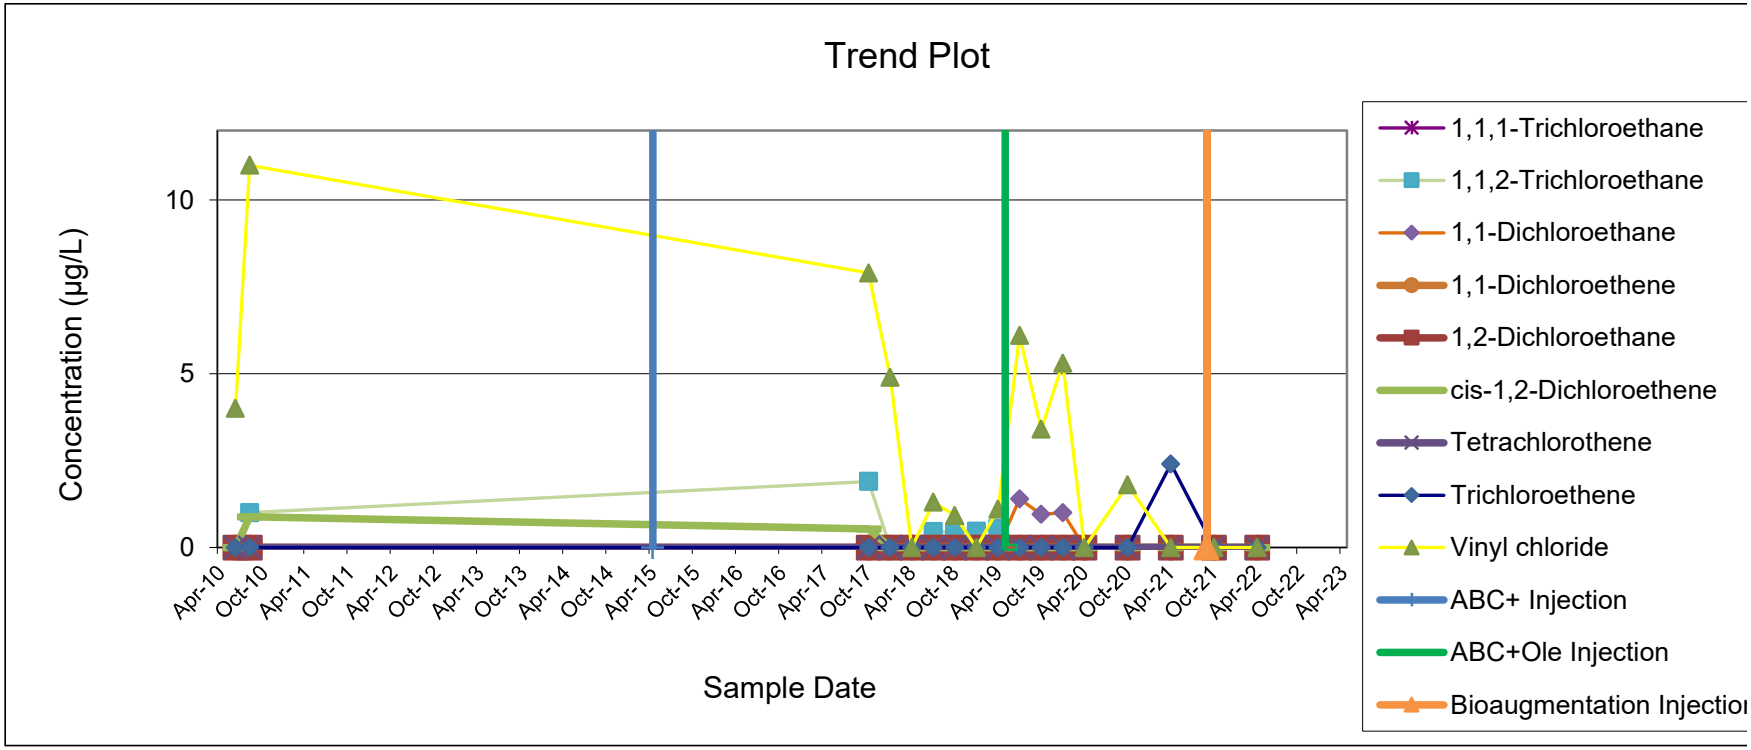

MONITORING WELL A1-GP15S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/17/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
8/2/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
3/11/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/29/2015	3.0	ND	ND	ND	ND	ND	ND	4.0	ND
4/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/11/2016	0.99	4.5	ND	ND	ND	ND	ND	ND	ND
10/7/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/23/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/12/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/6/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/17/2017	ND	ND	ND	ND	ND	0.29	ND	ND	ND
1/2/2018	NS	NS	NS	NS	NS	NS	NS	NS	NS
4/10/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/9/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/22/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/2/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/10/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/25/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/14/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/7/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/13/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/1/2021	ND	ND	0.52	ND	ND	ND	ND	ND	ND
10/20/2021	ND	ND	ND	ND	ND	ND	ND	1.1	2.4
4/1/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL A1-GP15S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

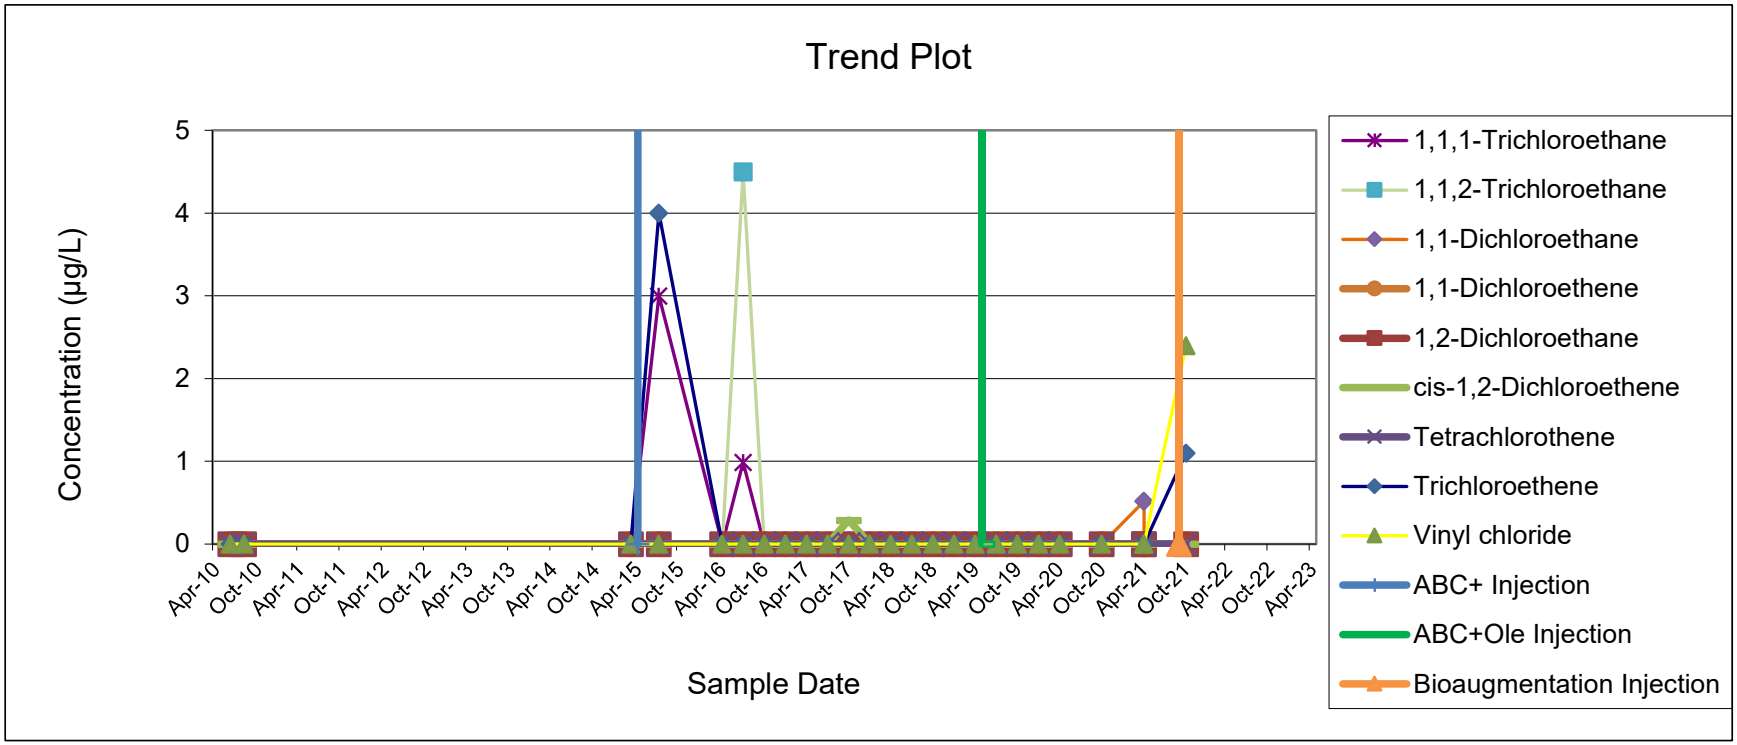

MONITORING WELL A1-GP16S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	Tetrachlorothene	cis-1,2-Dichloroethene	Trichloroethene	Vinyl chloride
6/17/2010	ND	ND	ND	ND	ND	ND	19	ND	ND
8/2/2010	ND	ND	ND	ND	ND	ND	69	ND	5.0
10/17/2017	ND	ND	0.27	ND	ND	ND	10	ND	1.4
4/9/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/10/2018	ND	ND	0.38	ND	ND	ND	13	ND	3.0
10/2/2018	ND	ND	ND	ND	ND	ND	11	ND	ND
1/3/2019	ND	ND	ND	ND	ND	ND	1.9	ND	ND
4/17/2019	ND	ND	ND	ND	ND	ND	1.9	ND	ND
7/26/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/15/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/7/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/15/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/8/2020	ND	ND	ND	ND	ND	ND	15	ND	ND
4/1/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/25/2021	ND	ND	ND	ND	ND	ND	4	ND	ND
4/11/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL A1-GP16S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

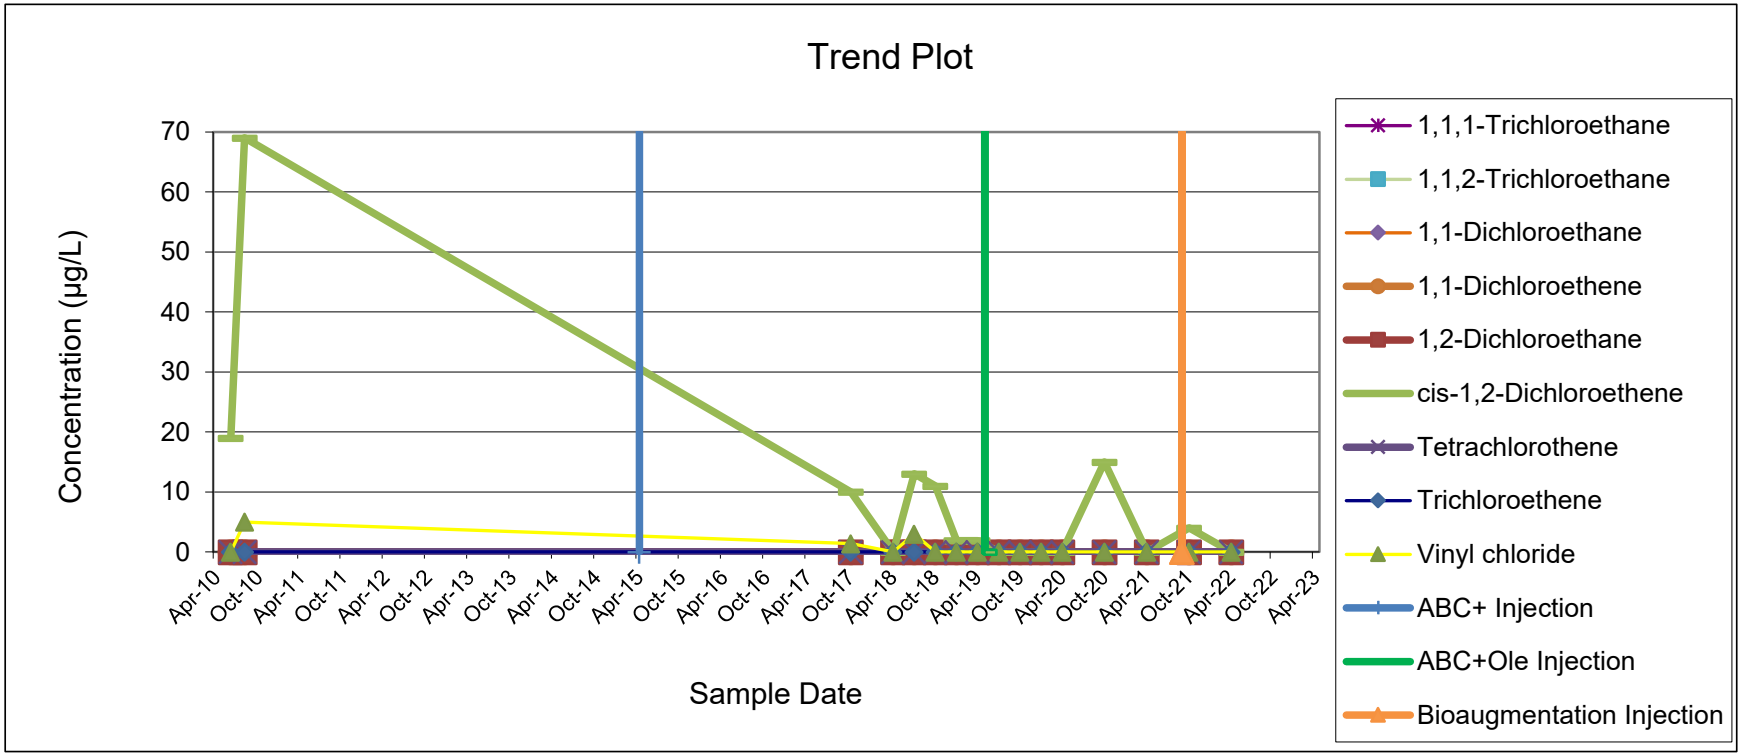

MONITORING WELL A1-GP18S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	Tetrachlorothene	cis-1,2-Dichloroethene	Trichloroethene	Vinyl chloride
6/18/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
8/2/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
3/11/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/27/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/7/2016	ND	ND	ND	ND	ND	ND	3.0	ND	ND
4/8/2016	ND	ND	ND	ND	ND	ND	2.4	ND	ND
7/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/7/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/23/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/10/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/6/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/16/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/5/2018	NA	NA	NA	NA	NA	NA	ND	NA	NA
4/9/2018	ND	ND	ND	ND	ND	ND	8.2	ND	ND
7/9/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/19/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/4/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/9/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/22/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/14/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/7/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/13/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/1/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/21/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/13/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

NA - Not available

MONITORING WELL A1-GP18S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

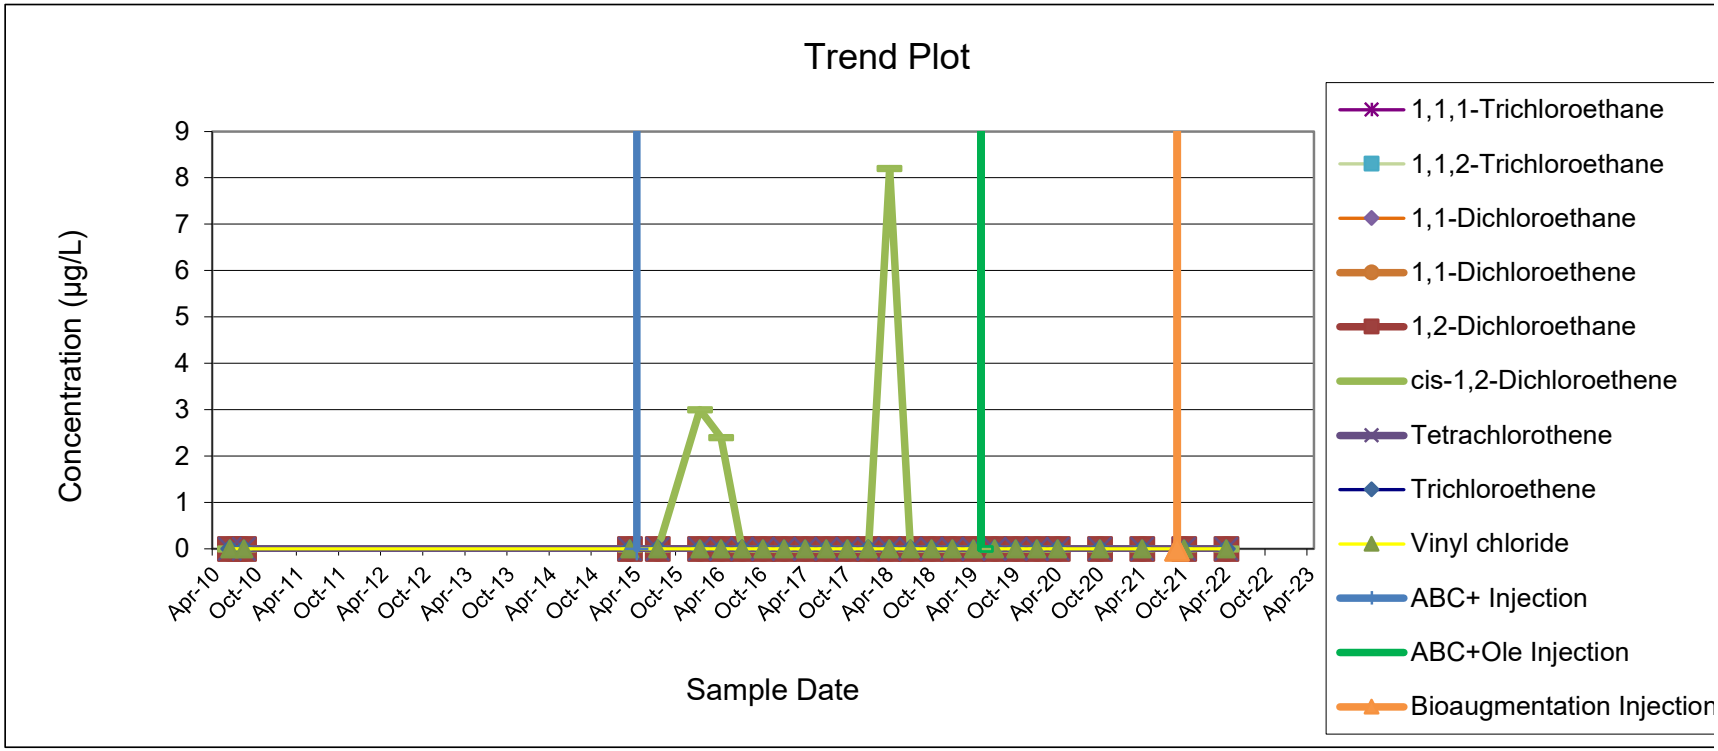

MONITORING WELL MW-30
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

	Analytical Results (µg/L)								
Sample Date	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/18/2010	ND	ND	2.1	ND	ND	6.4	ND	1.4	4.9
8/3/2010	ND	ND	2.4	ND	ND	7.7	ND	1.6	5.9
7/29/2015	ND	ND	1.4	ND	ND	5.2	ND	1.1	1.4
4/8/2016	ND	ND	1.8	ND	ND	7.2	ND	ND	1.8
7/14/2016	ND	ND	3.4	ND	ND	16	ND	2.4	ND
10/11/2016	ND	ND	2.1	ND	ND	11	ND	0.56	1.3
1/25/2017	ND	ND	1.1	ND	ND	3.5	ND	ND	1.8
4/12/2017	ND	ND	1.2	ND	ND	1.8	ND	ND	2.1
7/7/2017	ND	ND	0.54	ND	ND	ND	ND	ND	2.0
10/19/2017	ND	ND	1.2	ND	ND	0.6	ND	ND	2.5
1/2/2018	ND	ND	1.1	ND	ND	ND	ND	ND	1.3
4/11/2018	ND	ND	0.75	ND	ND	ND	ND	ND	0.95
7/11/2018	ND	ND	0.68	ND	ND	ND	ND	ND	ND
10/23/2018	ND	ND	1.20	ND	ND	ND	ND	ND	1.50
1/8/2019	ND	ND	1.10	ND	ND	ND	ND	ND	ND
4/11/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/26/2019	ND	ND	0.42	ND	ND	ND	ND	ND	1.30
10/17/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	1.00
4/15/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/7/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/5/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/25/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/14/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL MW-30
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

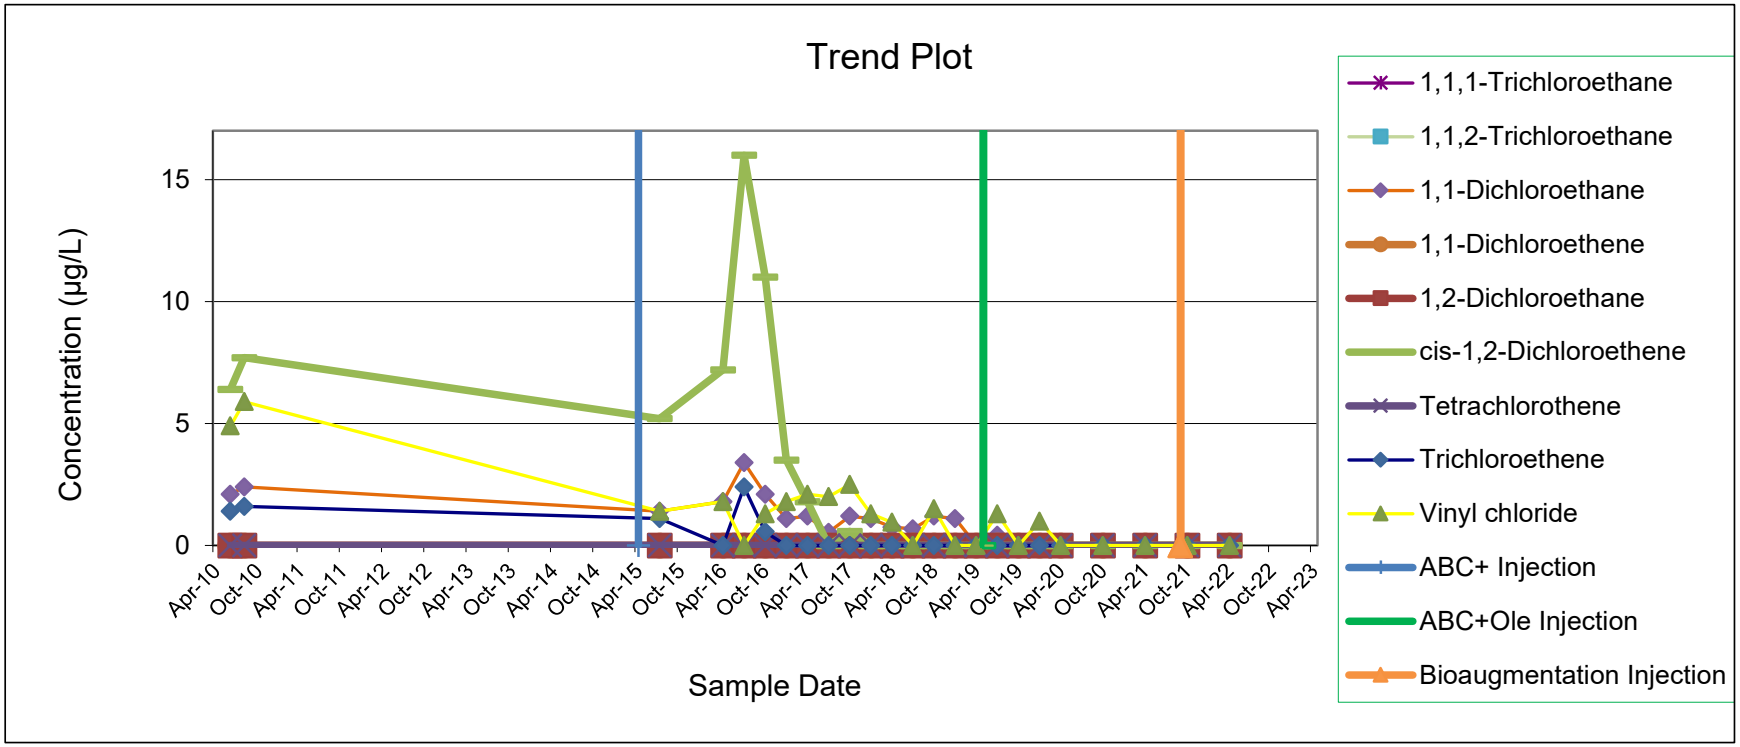

MONITORING WELL MW-35S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	Tetrachlorothene	cis-1,2-Dichloroethene	Trichloroethene	Vinyl chloride
6/17/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
8/2/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
3/11/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/28/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/13/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/11/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/23/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/10/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/7/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/17/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/4/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/9/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/11/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/19/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/7/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/17/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/25/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/17/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/14/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/6/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/5/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/20/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/7/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL MW-35S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

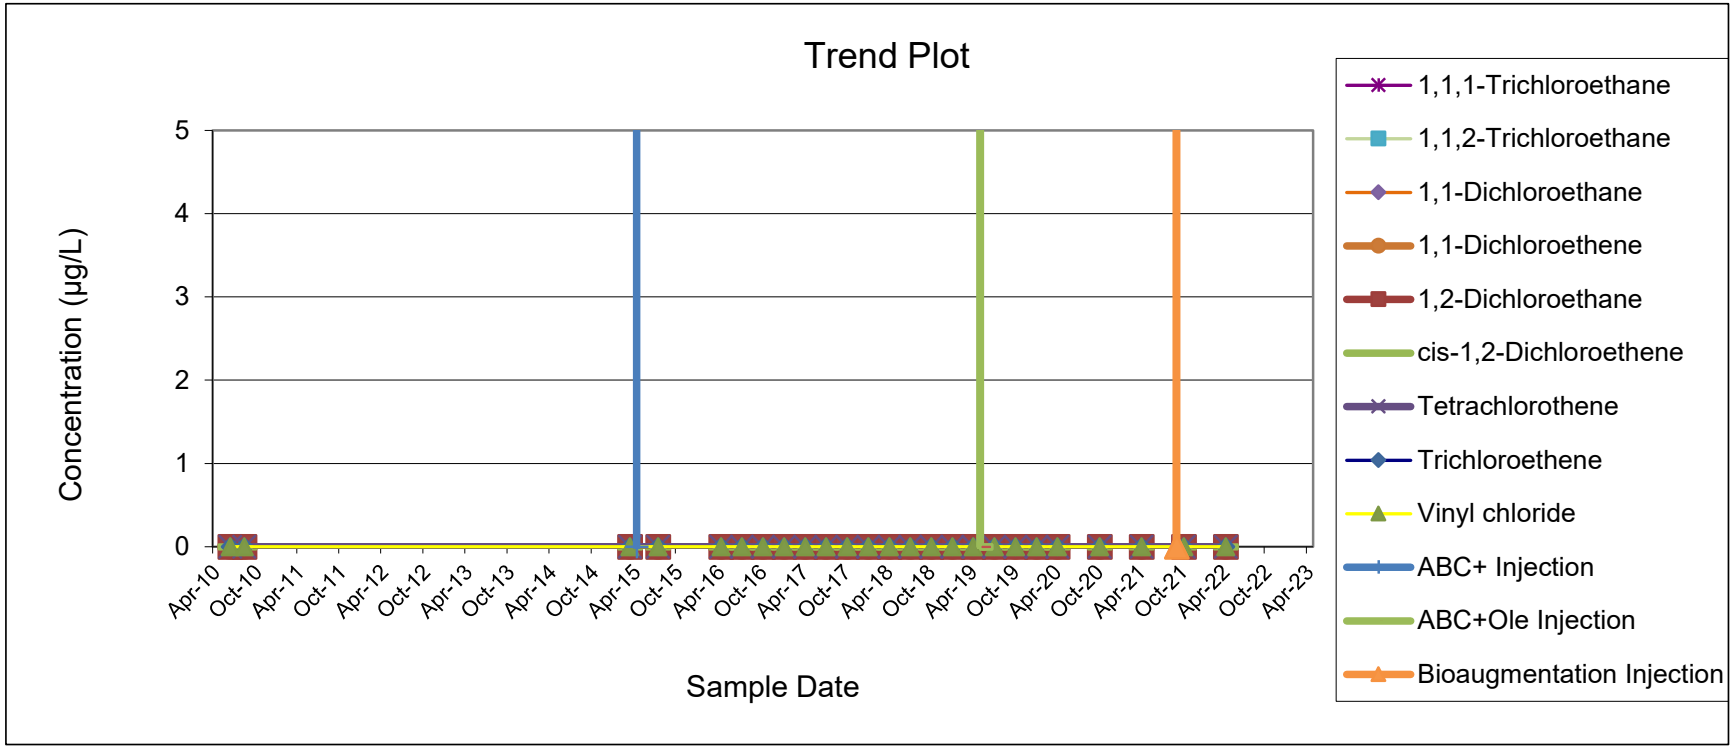

MONITORING WELL MW-36S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

	Analytical Results (µg/L)								
Sample Date	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/17/2010	ND	ND	ND	ND	ND	2.6	ND	7.2	ND
8/3/2010	ND	ND	0.38	ND	ND	1.5	ND	0.58	ND
3/10/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/29/2015	ND	ND	0.52	ND	ND	1.4	ND	ND	ND
4/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/11/2016	ND	ND	ND	ND	ND	1.1	ND	ND	ND
10/12/2016	ND	ND	ND	ND	ND	1.8	ND	ND	ND
1/24/2017	ND	ND	ND	ND	ND	1.6	ND	ND	ND
4/12/2017	ND	ND	ND	ND	ND	1.5	ND	ND	ND
7/6/2017	ND	ND	ND	ND	ND	1.7	ND	ND	ND
10/17/2017	ND	ND	ND	ND	ND	1.5	ND	ND	ND
1/4/2018	ND	ND	ND	ND	ND	1.3	ND	ND	ND
4/9/2018	ND	ND	ND	ND	ND	15	ND	ND	ND
7/10/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/7/2019	ND	ND	0.44	ND	ND	1.2	ND	ND	ND
4/16/2019	ND	ND	0.41	ND	ND	1.5	ND	ND	ND
7/25/2019	ND	ND	ND	ND	ND	1.3	ND	ND	ND
10/18/2019	ND	ND	0.50	ND	ND	2.0	ND	ND	ND
1/8/2020	ND	ND	0.47	ND	ND	1.8	ND	ND	ND
4/16/2020	ND	ND	0.40J	ND	ND	1.4	ND	ND	ND
10/9/2020	ND	ND	0.53	ND	ND	1.6	ND	ND	ND
4/6/2021	ND	ND	0.54	ND	ND	2.2	ND	ND	ND
10/22/2021	ND	ND	0.40	ND	ND	1.5	ND	ND	ND
4/11/2022	ND	ND	0.43	ND	ND	1.5	ND	ND	ND

MONITORING WELL MW-36S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

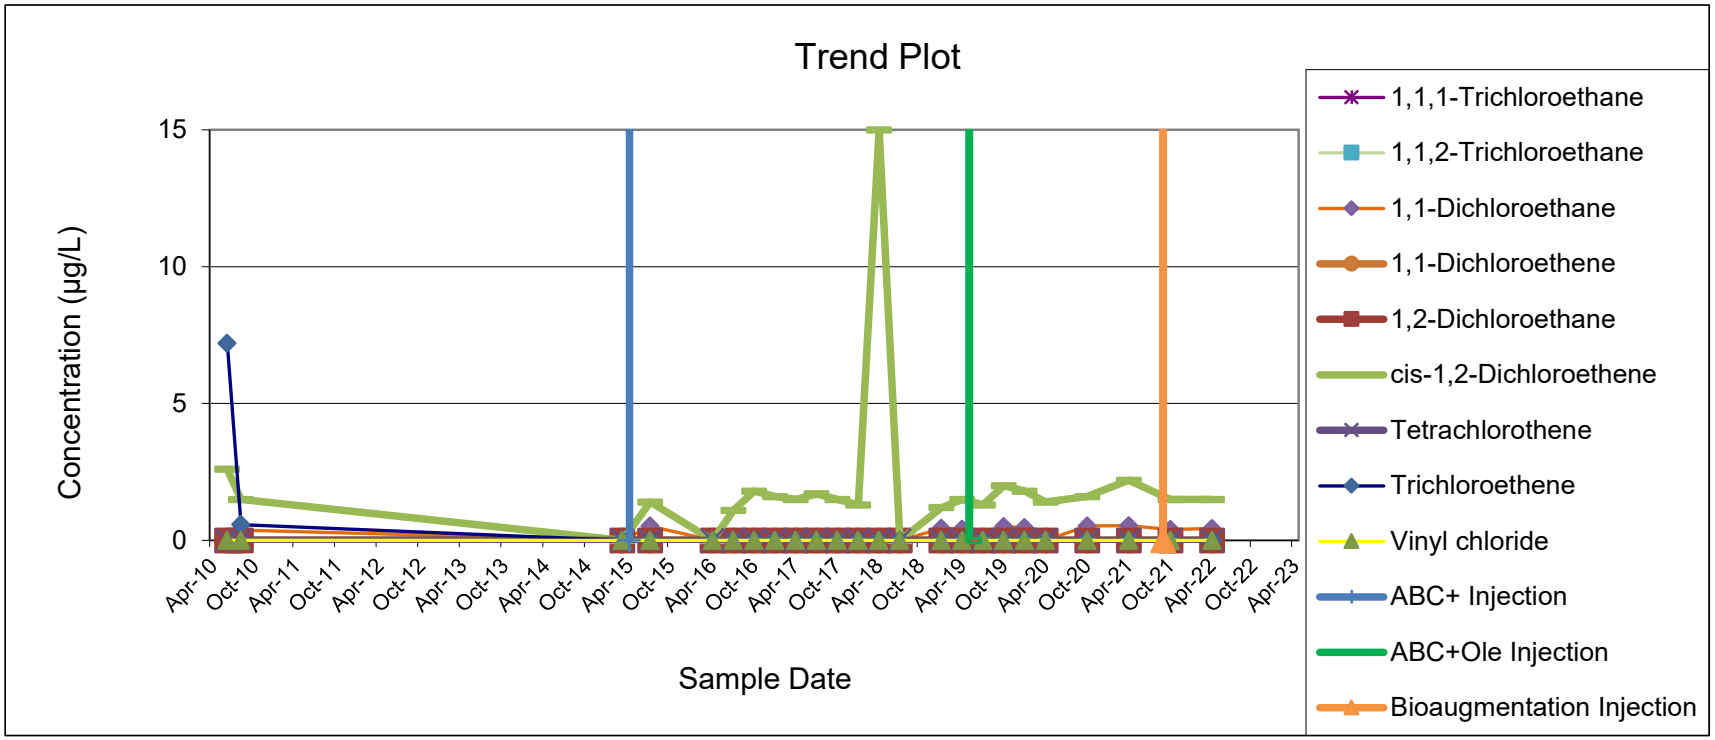

MONITORING WELL MW-42S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
4/7/2011	25,000	240	8,550	6,100	76	1,000	6	13,000	27
3/12/2015	19,000	240	12,000	6,300	ND	5,700	ND	12,000	ND
6/12/2015	3,700	100	7,600	2,300	44	6,400	ND	2,700	ND
7/27/2015	1,700	71	9,700	2,400	44	6,700	ND	280	ND
4/8/2016	3,600	ND	7,100	5,000	ND	13,000	ND	ND	610
7/14/2016	12,000	120	11,000	7,800	110	29,000	ND	100	530
10/13/2016	440	ND	2,000	520	ND	2,700	ND	ND	ND
1/25/2017	1,200	ND	2,900	790	130	3,800	ND	ND	2,400
4/12/2017	230	ND	1,700	220	74	1,100	ND	ND	1,400
7/10/2017	ND	ND	1,800	150	ND	690	ND	ND	3,600
10/19/2017	4,100	48	8,900	1,700	170	28,000	ND	54	12,000
1/2/2018	740	ND	2,500	ND	ND	1,200	ND	ND	4,700
4/11/2018	390	ND	2,000	120	ND	1,100	ND	ND	2,800
7/12/2018	ND	ND	ND	ND	ND	210	ND	ND	1,400
10/23/2018	ND	ND	1,100	130	110	ND	ND	ND	910
1/8/2019	490	ND	2,400	ND	160	850	ND	ND	6,700
4/18/2019	ND	ND	1,600	ND	ND	ND	ND	ND	940
7/26/2019	ND	ND	4,400	140	ND	2,100	ND	ND	1,800
10/18/2019	ND	ND	2,800	190	ND	3,000	ND	ND	6,000
1/10/2020	160	390	1,100	150	43	610	ND	ND	1,200
4/16/2020	200	ND	1,200	130	58J	160	ND	ND	1,100
10/12/2020	160	ND	1,900	99	76	490	ND	ND	2,500
4/1/2021	ND	ND	710	ND	ND	ND	ND	ND	190
10/27/2021	ND	ND	550	ND	ND	ND	ND	ND	ND
4/8/2022	240	ND	880	ND	ND	ND	ND	ND	290

MONITORING WELL MW-42S

SUMMARY OF VOCs IN GROUNDWATER

Former Scott Aviation Site

Lancaster, New York

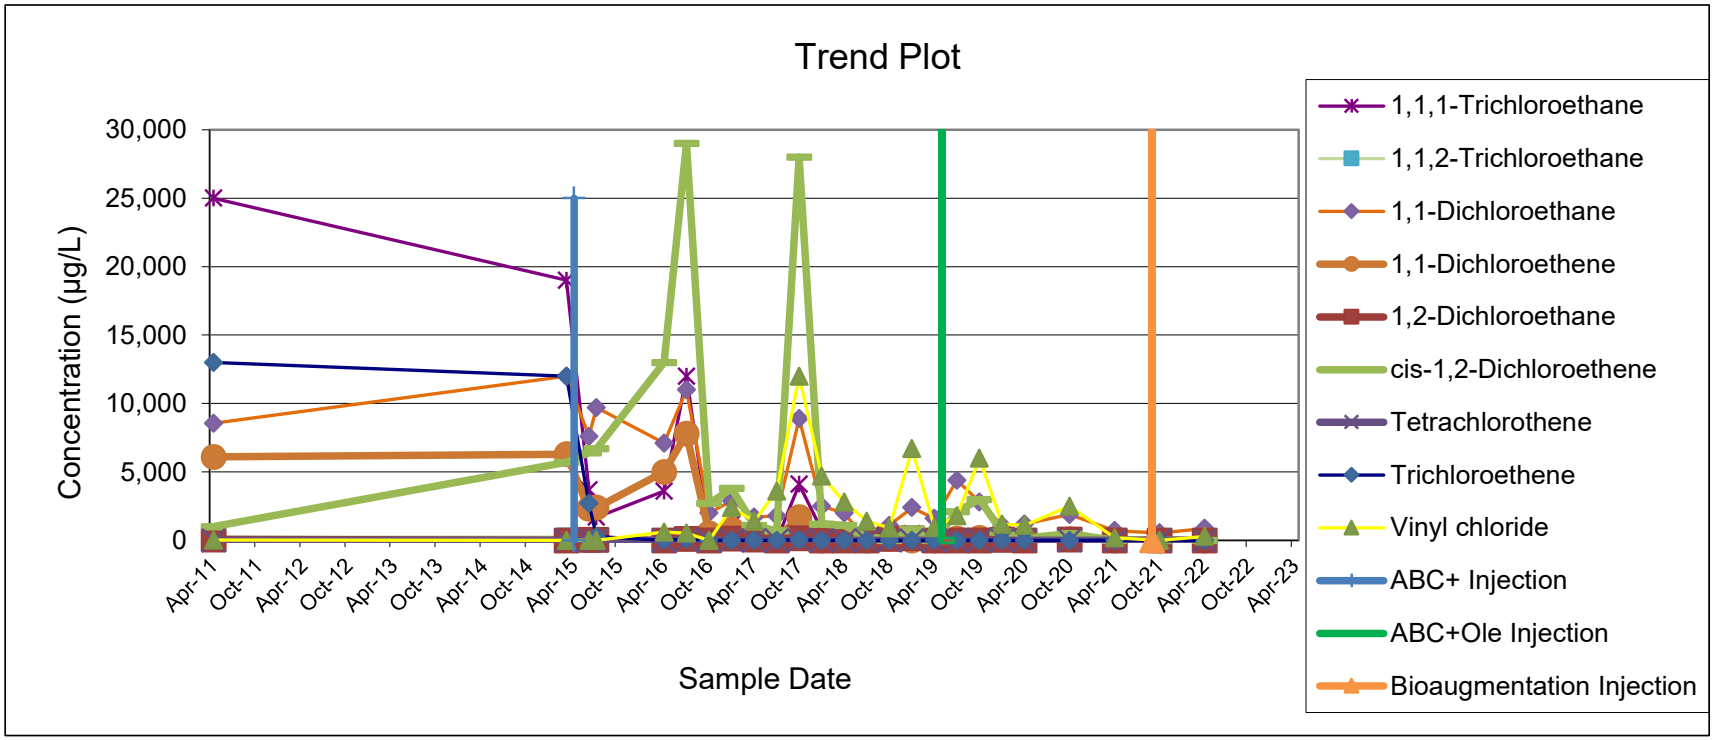

MONITORING WELL MW-43S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

	Analytical Results (µg/L)								
Sample Date	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
4/7/2011	15	ND	13	3.5	ND	34	ND	15	19
3/12/2015	ND	ND	1.8	ND	ND	3.7	ND	ND	1.7
7/29/2015	ND	ND	29	ND	ND	46	ND	0.60	7
4/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/13/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/13/2016	ND	ND	ND	ND	ND	ND	ND	ND	3.8
1/25/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/11/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/10/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/19/2017	ND	ND	0.48	ND	ND	0.6	ND	ND	ND
1/2/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/11/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/12/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/19/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/17/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/26/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/18/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/14/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/7/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/1/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/25/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/14/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL MW-43S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

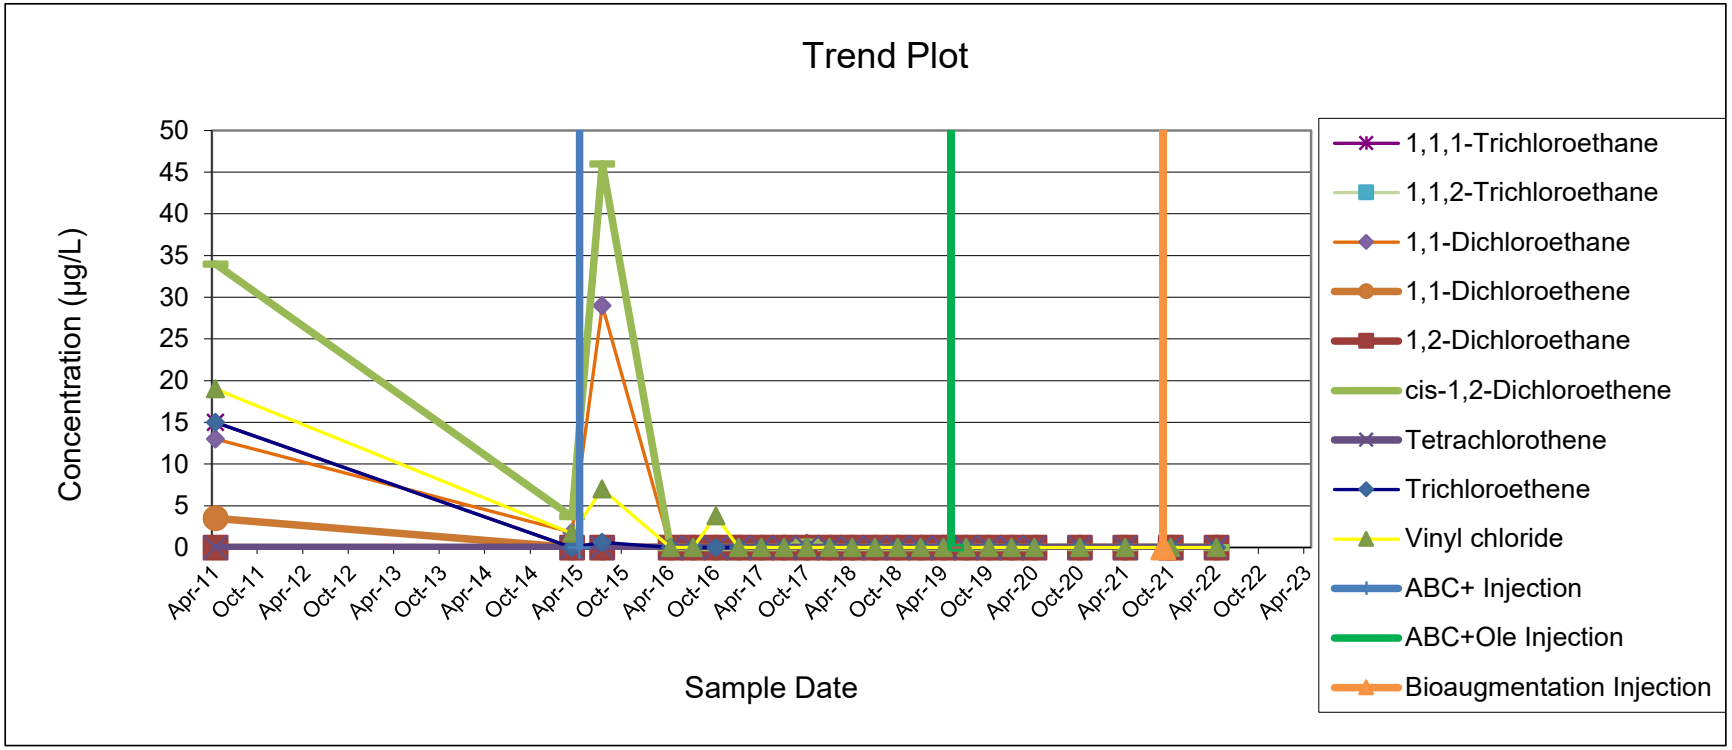

MONITORING WELL MW-44S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/1/2011	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/29/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/14/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/11/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/25/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/7/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/10/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/16/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/2/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/11/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/12/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/23/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/18/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/26/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/17/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/14/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/7/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/1/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/25/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/12/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL MW-44S
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

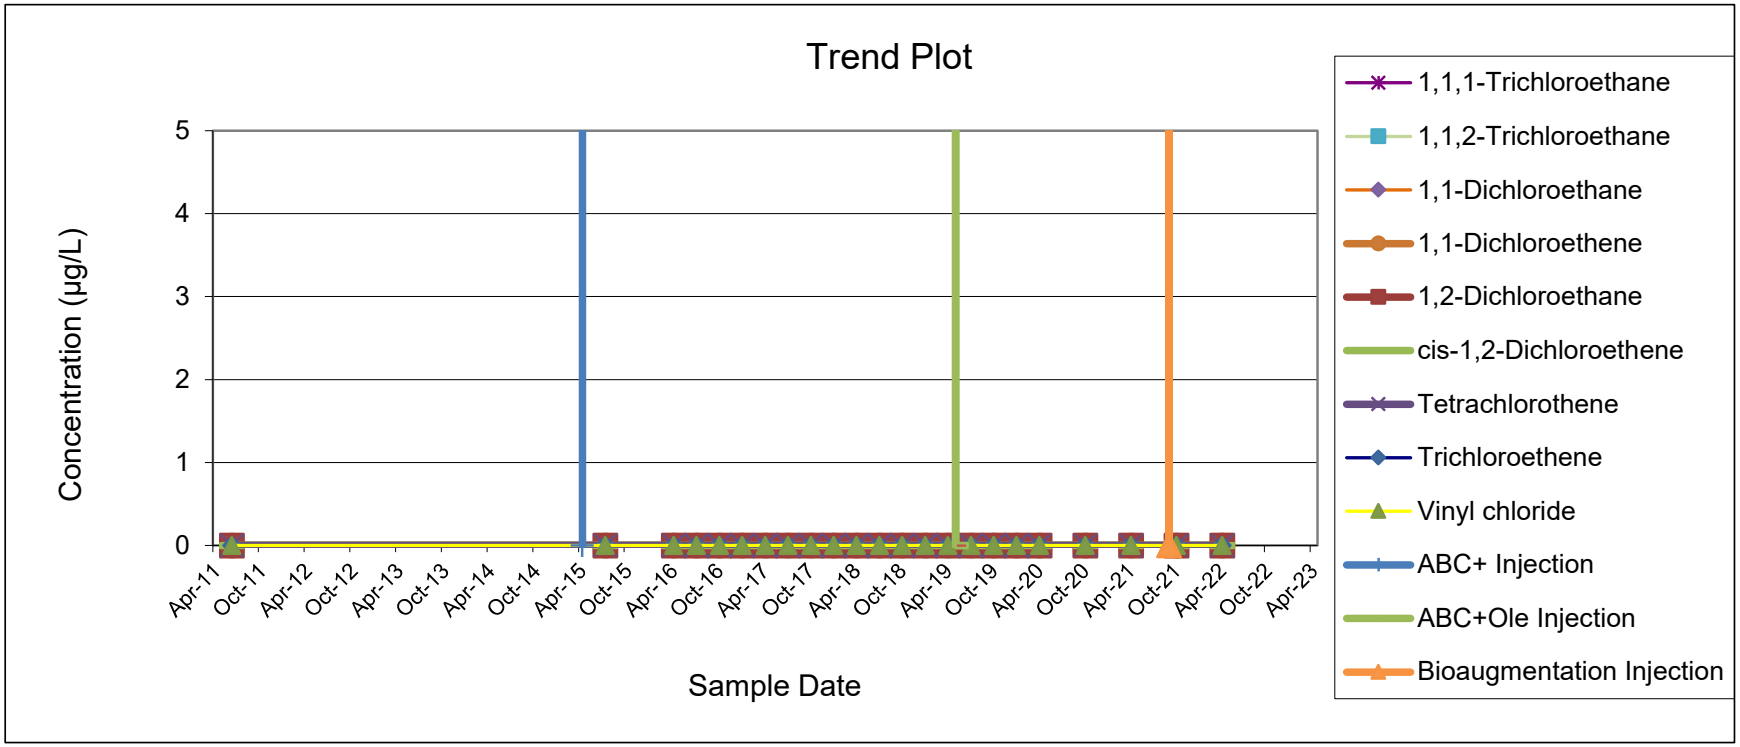

MONITORING WELL MW-35D
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/17/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
8/2/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
3/12/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/28/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/12/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/11/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/24/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/10/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/7/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/17/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/3/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/10/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/9/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/22/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/4/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/18/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/22/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/17/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/14/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/6/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/5/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/21/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/7/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL MW-35D
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

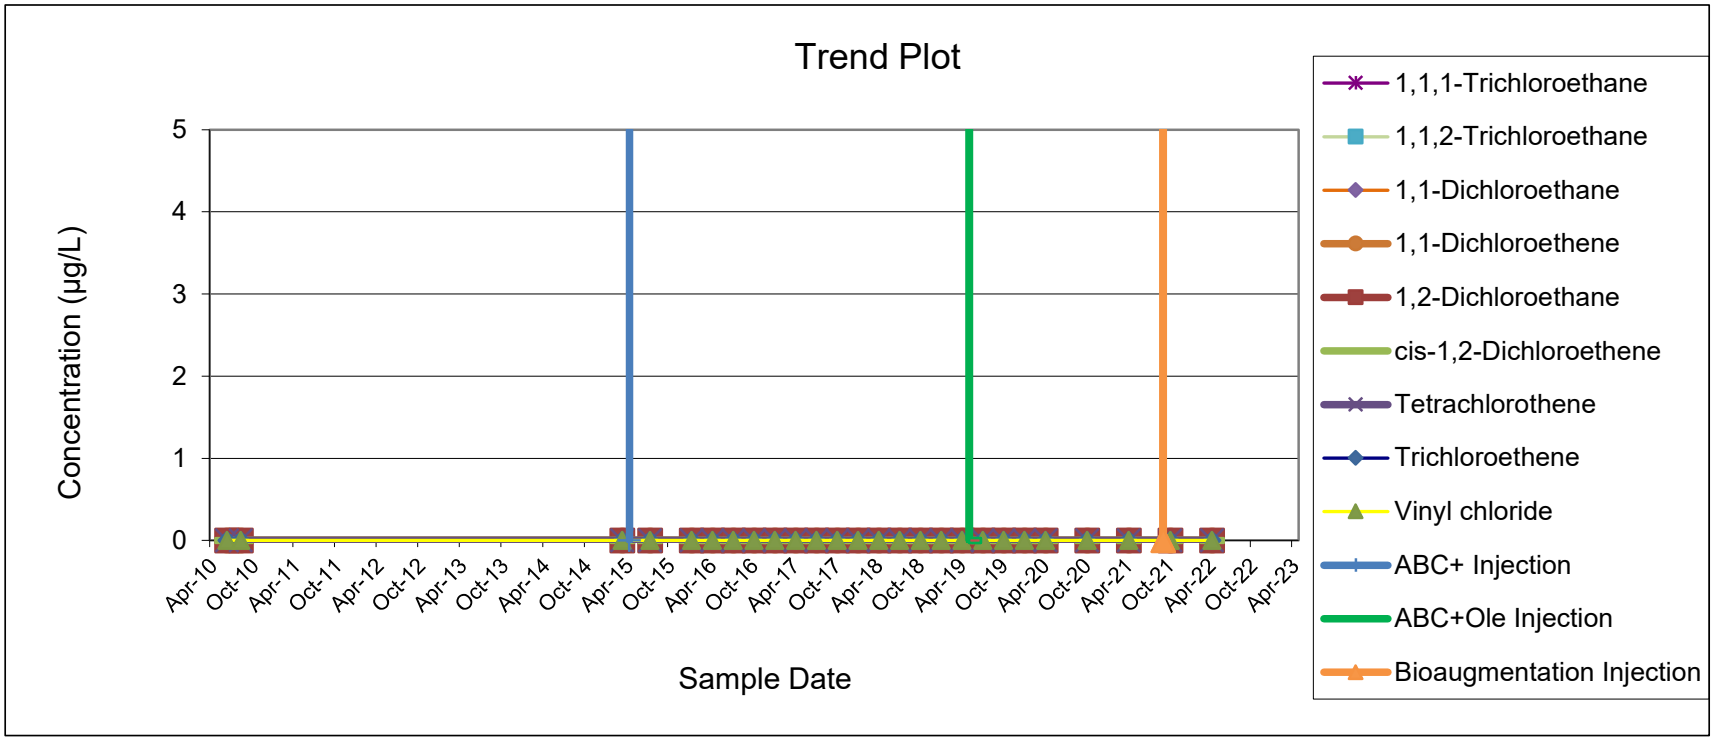

MONITORING WELL MW-36D
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/17/2010	ND	ND	ND	ND	ND	ND	ND	2.1	ND
8/2/2010	ND	ND	ND	ND	ND	ND	ND	0.74	ND
3/10/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/29/2015	ND	ND	0.57	ND	ND	ND	ND	ND	ND
4/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/11/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/12/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/24/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/12/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/6/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/18/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/4/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/9/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/10/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/18/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/16/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/25/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/18/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/15/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/9/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/6/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/22/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/11/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL MW-36D
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

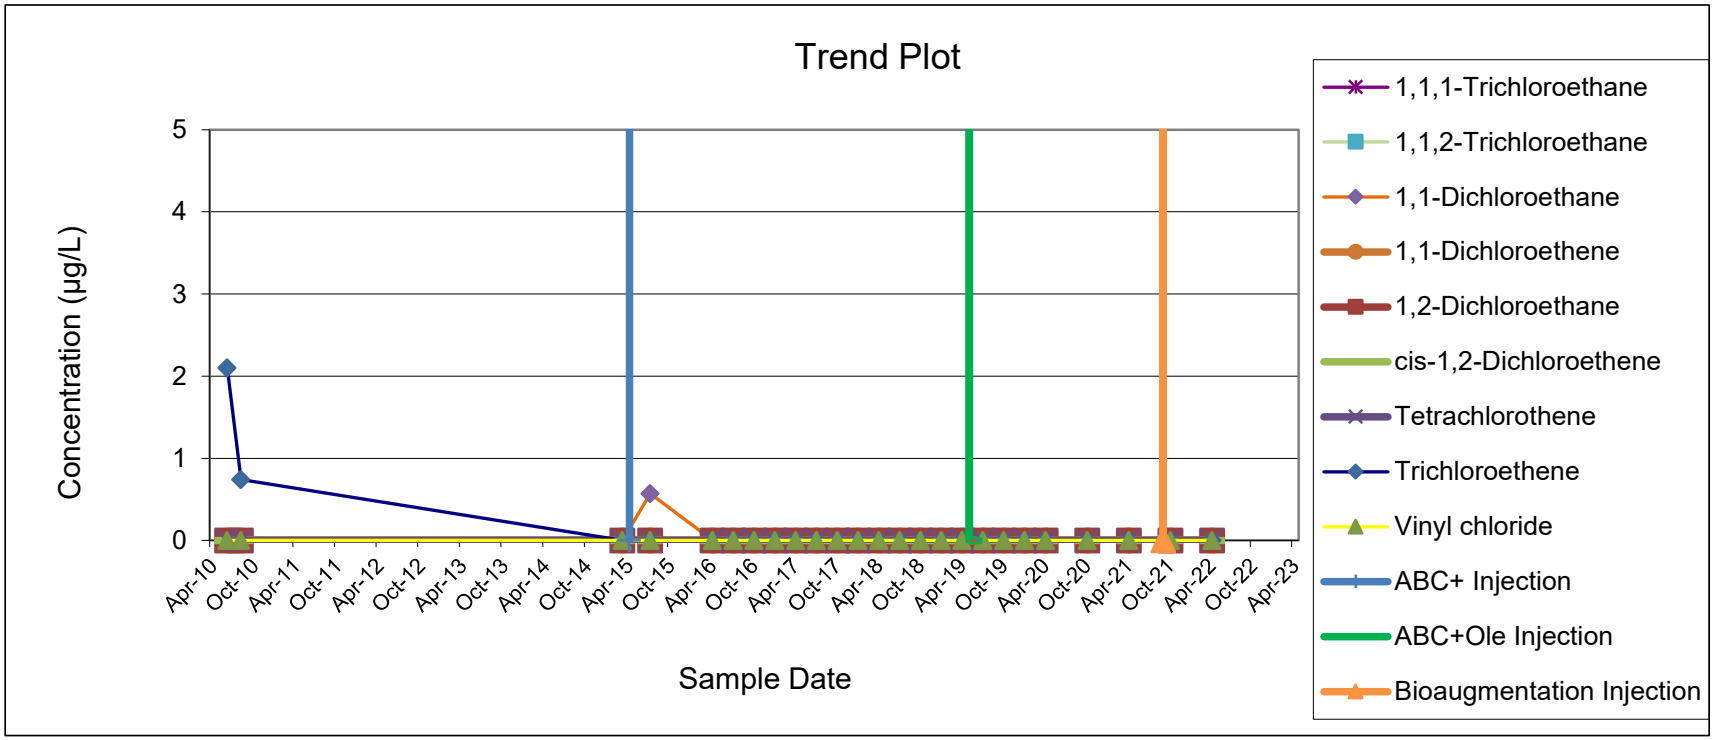

MONITORING WELL MW-37D
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/18/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
8/3/2010	ND	ND	ND	ND	ND	ND	ND	ND	ND
3/10/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/29/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/12/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/12/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/24/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/11/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/10/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/18/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/5/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/11/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/11/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/18/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/19/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/17/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/24/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/18/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/15/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/7/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/5/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/21/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/13/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL MW-37D
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

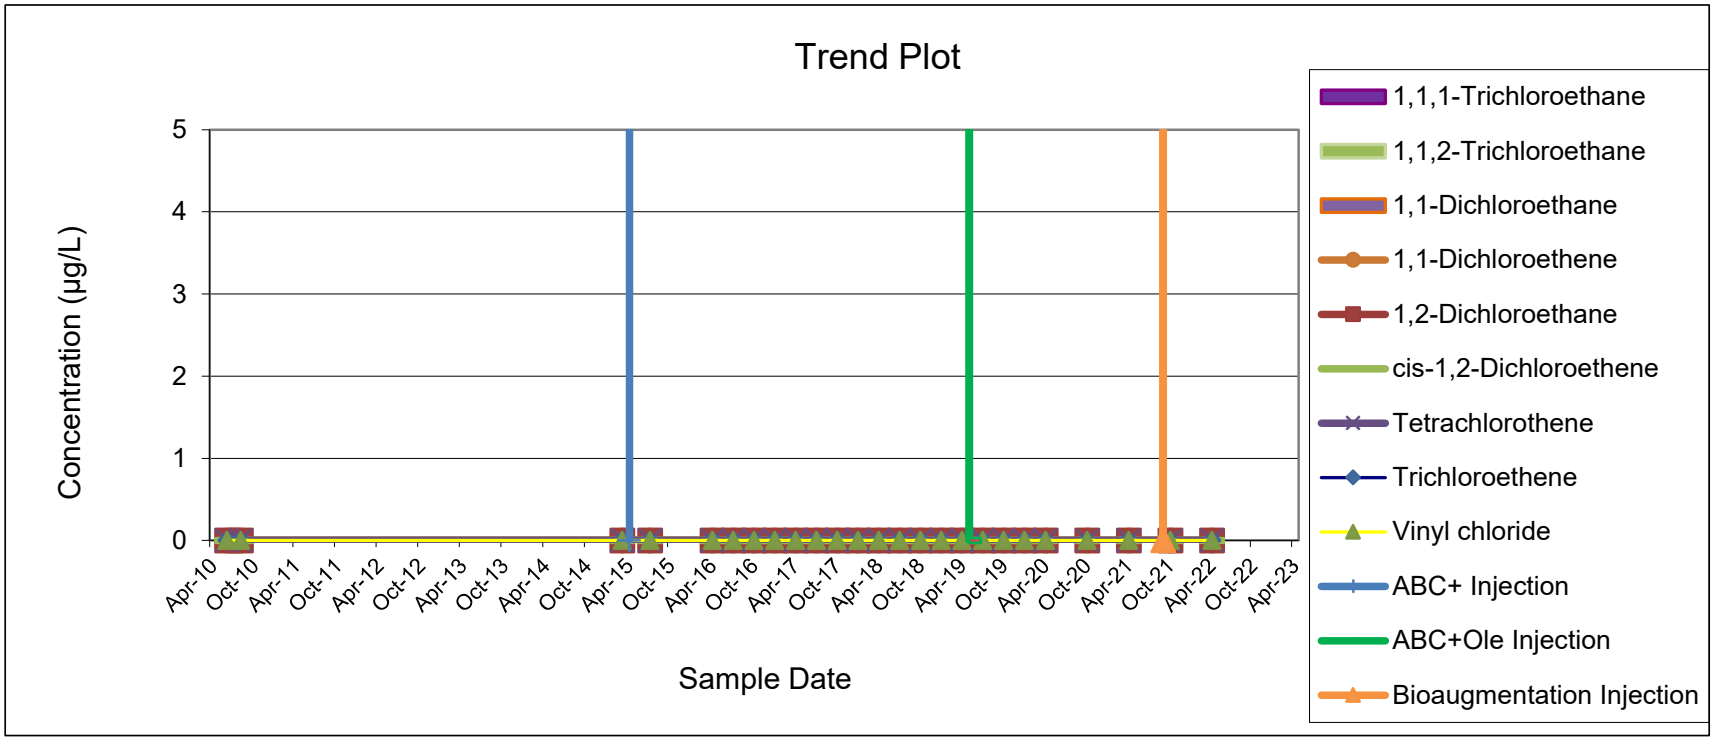

MONITORING WELL MW-38D
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/22/2010	ND	ND	ND	ND	ND	4,400	230	11,000	ND
8/4/2010	ND	ND	ND	ND	ND	13,000	130	2,100	ND
3/10/2015	ND	ND	ND	ND	ND	290	ND	1.9	260
6/12/2015	ND	ND	ND	ND	ND	190	ND	18	50
7/27/2015	ND	ND	ND	ND	ND	390	ND	6.8	60
1/7/2016	ND	ND	ND	ND	ND	560	ND	ND	44
4/8/2016	ND	ND	3.8	1.3	ND	850	ND	ND	240
7/12/2016	ND	ND	ND	ND	ND	80	ND	ND	59
10/12/2016	ND	ND	5.1	ND	ND	ND	ND	ND	58
1/23/2017	ND	ND	ND	ND	ND	ND	ND	ND	14
4/12/2017	ND	ND	2.1	ND	ND	ND	ND	ND	6.7
7/7/2017	ND	ND	ND	ND	ND	ND	ND	ND	5.1
10/18/2017	ND	ND	19	1.1	ND	27	ND	ND	47
1/4/2018	ND	ND	ND	ND	ND	ND	ND	ND	5.1
4/10/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/11/2018	ND	ND	4.3	ND	ND	ND	ND	ND	ND
10/17/2018	ND	ND	20	ND	ND	20	ND	ND	11
1/4/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/10/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/24/2019	ND	ND	ND	ND	ND	4	ND	ND	4.0
10/17/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/7/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/14/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/12/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/5/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/22/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/12/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL MW-38D

SUMMARY OF VOCs IN GROUNDWATER

Former Scott Aviation Site

Lancaster, New York

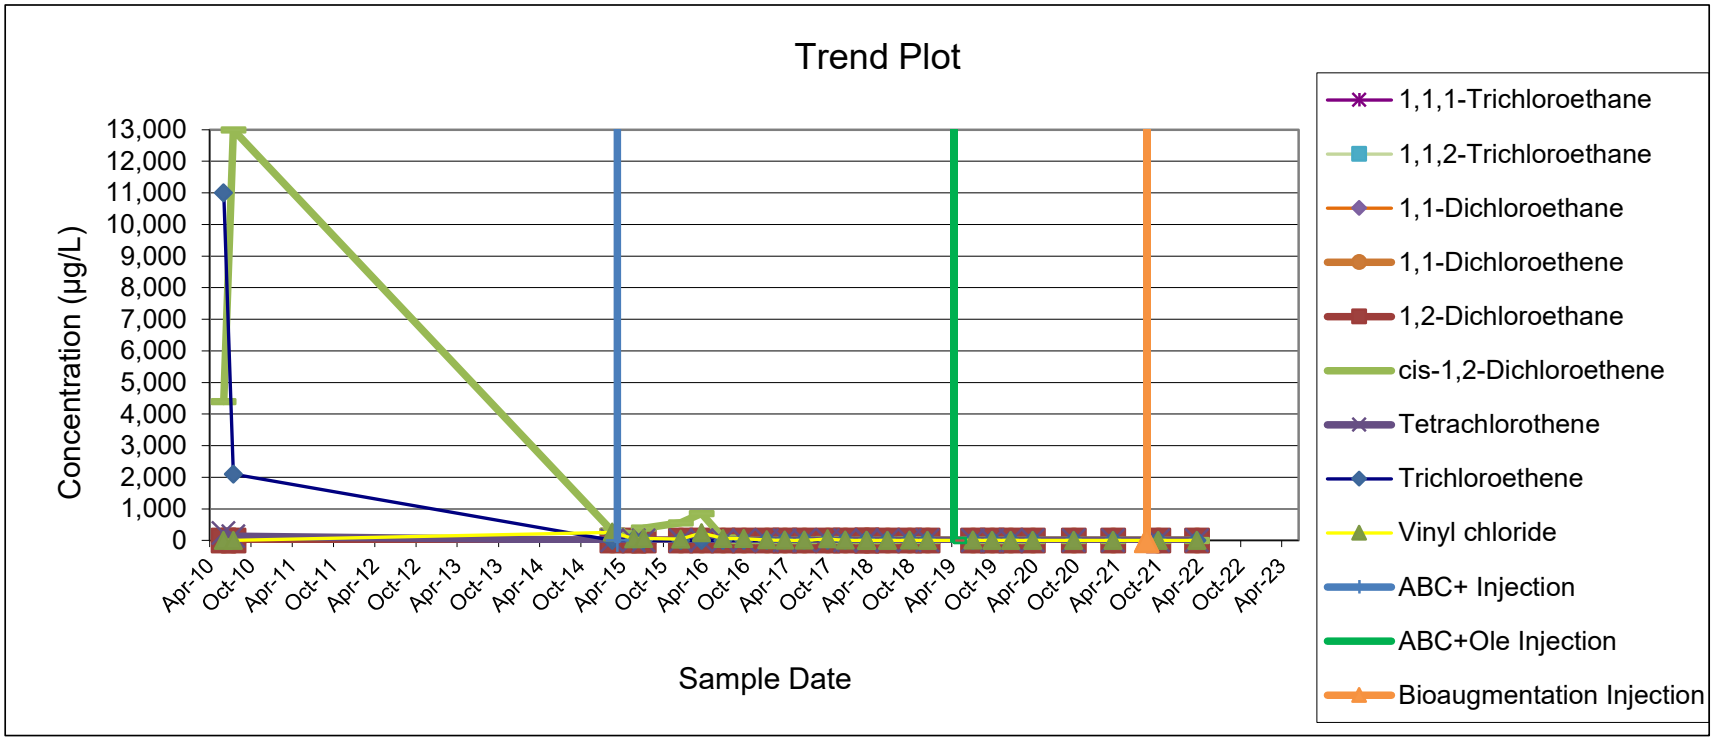

MONITORING WELL MW-39D
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

Sample Date	Analytical Results (µg/L)								
	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/18/2010	17	ND	4.7	2.3	ND	ND	ND	ND	ND
8/3/2010	13	ND	5.8	3.1	ND	ND	ND	ND	ND
3/10/2015	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/29/2015	ND	ND	0.80	ND	ND	ND	ND	ND	ND
4/8/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/12/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/13/2016	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/24/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/11/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/6/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/18/2017	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/9/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/12/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/11/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/17/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/7/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/15/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
7/29/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/18/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/10/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/16/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/9/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/5/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/21/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/13/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL MW-39D
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

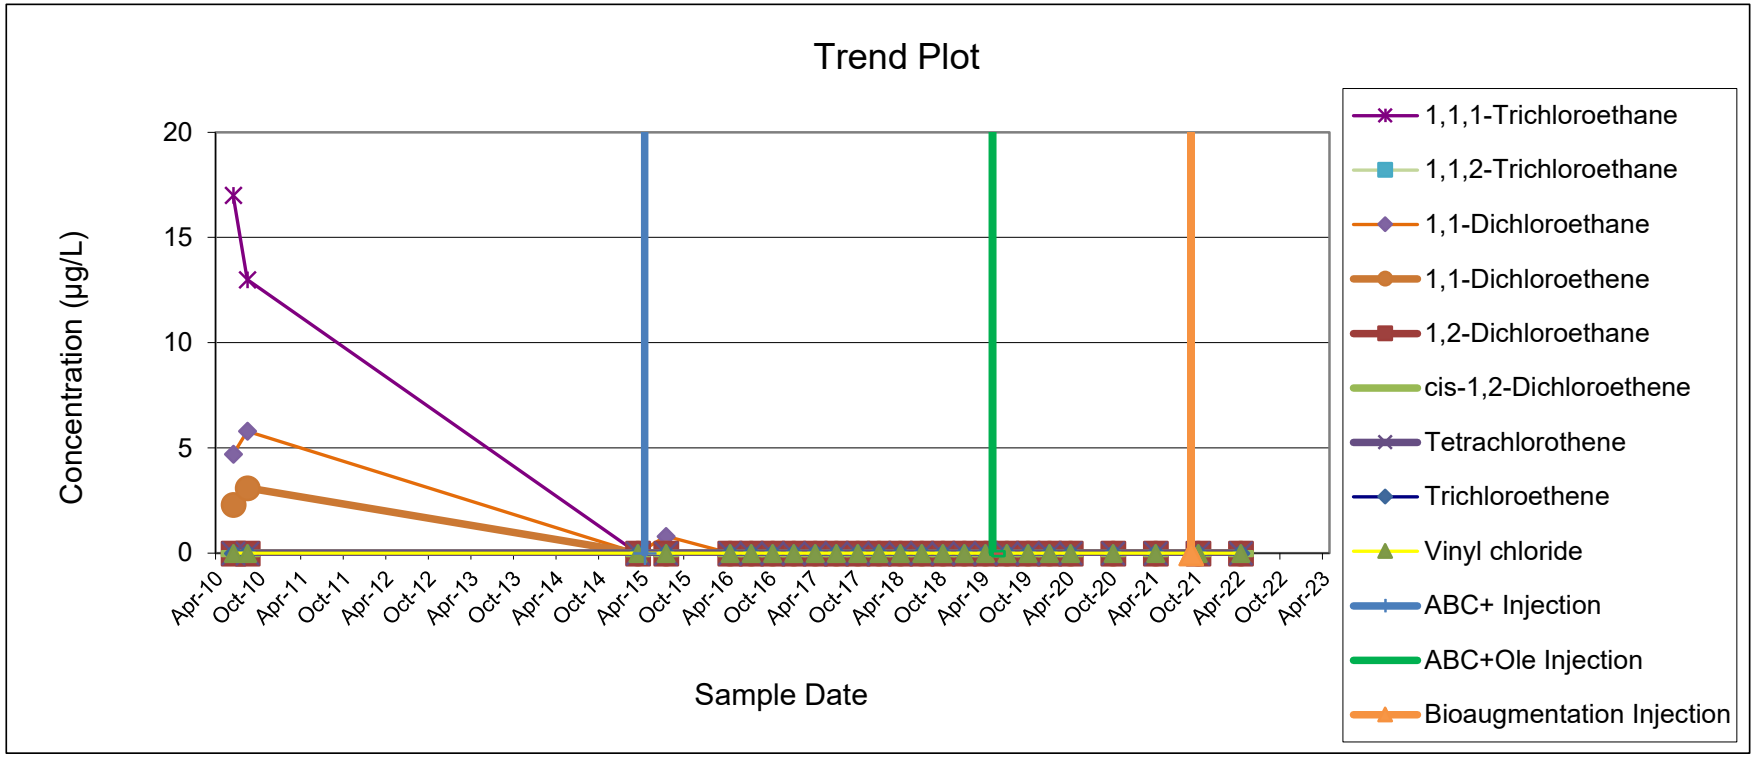

MONITORING WELL MW-40D
SUMMARY OF VOCs IN GROUNDWATER
Former Scott Aviation Site
Lancaster, New York

	Analytical Results (µg/L)								
Sample Date	1,1,1-Trichloroethane	1,1,2-Trichloroethane	1,1-Dichloroethane	1,1-Dichloroethene	1,2-Dichloroethane	cis-1,2-Dichloroethene	Tetrachlorothene	Trichloroethene	Vinyl chloride
6/21/2010	23	ND	260	1.8	ND	1.2	ND	2.8	ND
8/3/2010	25	ND	550	6	ND	ND	ND	ND	ND
3/11/2015	2,800	ND	5,400	200	ND	ND	ND	ND	67
6/12/2015	ND	ND	1,800	ND	ND	ND	ND	ND	ND
7/27/2015	ND	ND	12,000	64	ND	ND	ND	ND	ND
1/7/2016	ND	ND	190	ND	ND	ND	ND	ND	ND
4/8/2016	ND	ND	220	ND	ND	ND	ND	ND	ND
7/11/2016	ND	ND	12	ND	ND	ND	ND	ND	ND
10/11/2016	ND	ND	71	ND	5.2	ND	ND	ND	ND
1/25/2017	ND	ND	180	ND	4.8	ND	ND	ND	ND
4/10/2017	43	ND	ND	ND	ND	ND	ND	ND	ND
7/10/2017	ND	ND	150	ND	ND	ND	ND	ND	ND
10/16/2017	ND	ND	51	ND	1.3	ND	ND	ND	0.9
1/4/2018	ND	ND	32	ND	ND	ND	ND	ND	ND
4/10/2018	20	ND	400	ND	ND	ND	ND	ND	ND
7/10/2018	ND	ND	4.6	ND	ND	ND	ND	ND	ND
10/18/2018	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/7/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/16/2019	20	ND	78	ND	ND	ND	ND	ND	ND
7/29/2019	ND	ND	15	ND	ND	ND	ND	ND	ND
10/18/2019	ND	ND	ND	ND	ND	ND	ND	ND	ND
1/8/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/16/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
10/12/2020	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/1/2021	ND	ND	8.6	ND	ND	ND	ND	ND	ND
10/27/2021	ND	ND	ND	ND	ND	ND	ND	ND	ND
4/8/2022	ND	ND	ND	ND	ND	ND	ND	ND	ND

MONITORING WELL MW-40D

SUMMARY OF VOCs IN GROUNDWATER

Former Scott Aviation Site

Lancaster, New York

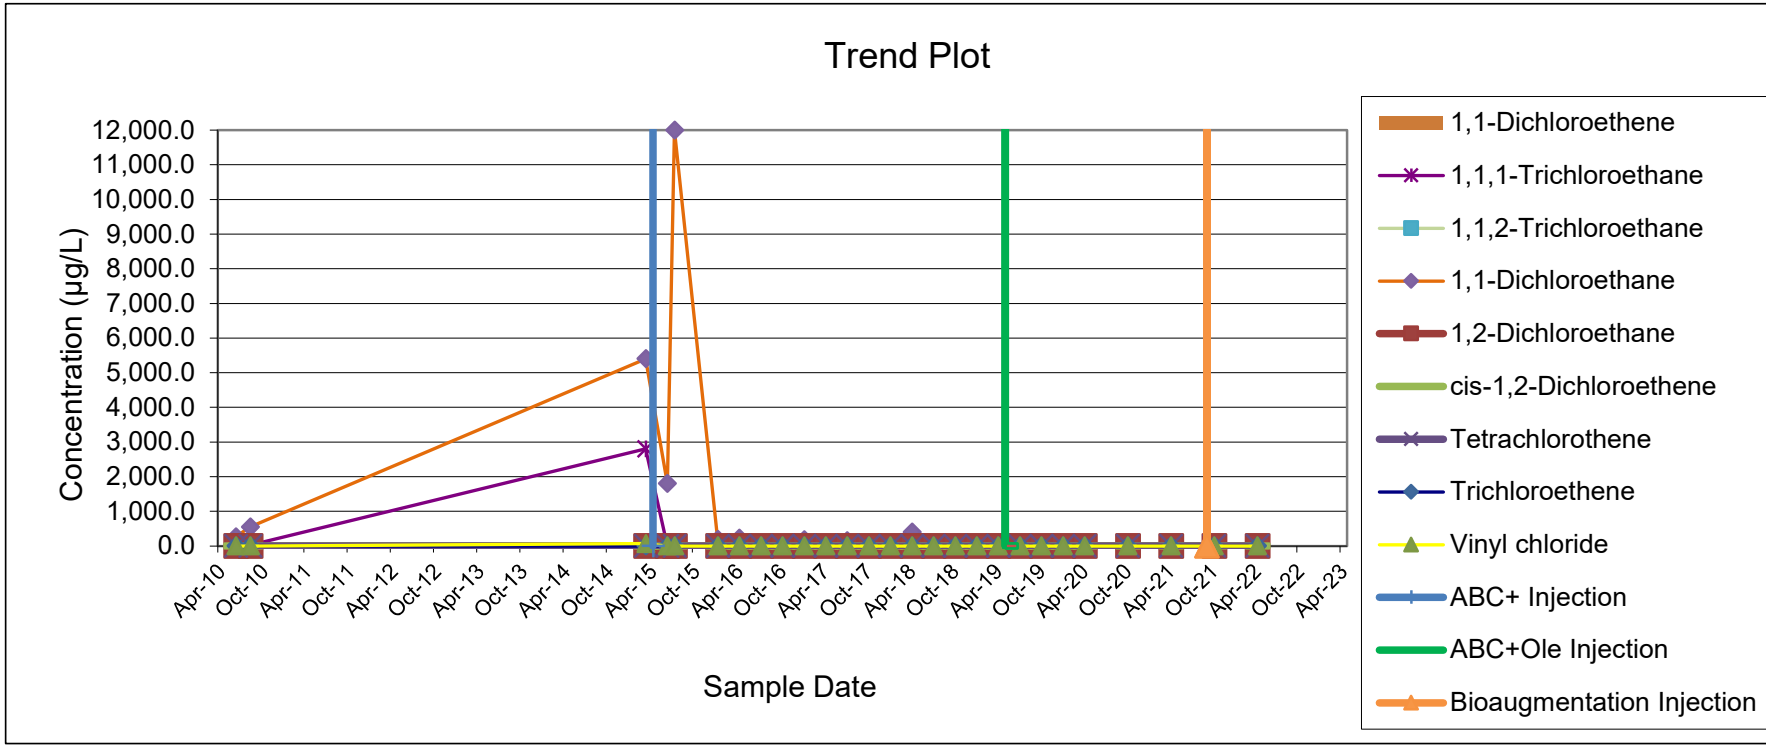

Appendix C Purge Logs (October 2021 and April 2022)

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/22/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: GP-2S
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy
Air Temperature: 46 ° F
Total Depth (TWD) Below Top of Casing: 15 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 2.56 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 12.44 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.51 gal
3 Casing Volumes = 1.52 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 0.39626 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 689.82 1/100 ft
Height of Riser (above land surface): 2.52 1/100 ft
Land Surface Elevation: 687.3 1/100 ft
Screened Interval (below land surfac: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	150	150	150					
Time (Military)	10:20	10:25	10:30					
Depth to Groundwater Below Top of Casing (ft)	2.56	7.52	8.78					
Drawdown (ft)	0.00	4.96	6.22					
pH (S.U.)	7.20	7.23	7.19					
Sp. Cond. (mS/cm)	1.35	1.30	1.02					
Turbidity (NTUs)	46.3	831	950					
Dissolved Oxygen (mg/L)	2.09	0.92	1.29					
Water Temperature (°C)	14.7	15.0	14.9					
ORP (mV)	-83.7	-104.7	-103.9					

Physical appearance at start: Color Clear; Odor None
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 10:50 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/22/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: GP-6S
____ Upgradient ____ Downgradient
Weather Conditions: Cloudy/Windy
Air Temperature: 46
Total Depth (TWD) Below Top of Casing = 15.0 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 2.14 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 12.9 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.52 gal
3 Casing Volumes = 1.57 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec: 0.40 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 687.71 1/100 ft
Height of Riser (above land surface): -0.09 1/100 ft
Land Surface Elevation: 687.8 1/100 ft
Screened Interval (below land surface): 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

Flow Rate (ml/min)	150	150	150					
Time (Military)	9:20	9:25	9:30					
Depth to Groundwater Below Top of Casing (ft)	2.14	10.21	12.34					
Drawdown (ft)	0.00	8.07	10.20					
pH (S.U.)	7.03	7.12	7.26					
Sp. Cond. (mS/cm)	1.19	1.53	1.53					
Turbidity (NTUs)	44.1	38.0	50.0					
Dissolved Oxygen (mg/L)	2.78	0.68	0.38					
Water Temperature (°C)	14.2	14.1	13.3					
ORP (mV)	-97.2	-109.6	-131.8					

Physical appearance at start: Color Clear; Odor Slight
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor Slight
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 09:45 hrs. (start of sampling) Well went dry. Samples were collected as able when well recharged - 3x during day.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/21/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: GP-9S
____ Upgradient ____ Downgradient
Weather Conditions: Cloudy
Air Temperature: 61 ° F
Total Depth (TWD) Below Top of Casing: 17.3 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 2.54 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 14.76 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0 = 0.60 gal
3 Casing Volumes = 1.81 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 0.99065 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: ____ 1/100 ft
Height of Riser (above land surface): ____ 1/100 ft
Land Surface Elevation: ____ 1/100 ft
Screened Interval (below land surfac: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	150	150	150	150				
Time (Military)	10:25	10:40	10:45	10:50				
Depth to Groundwater Below Top of Casing (ft)	2.54	7.86	8.51	10.28				
Drawdown (ft)	0.00	5.32	5.97	7.74				
pH (S.U.)	6.72	6.76	6.71	6.69				
Sp. Cond. (mS/cm)	1.03	0.96	0.94	0.91				
Turbidity (NTUs)	59.0	64.5	39.0	44.4				
Dissolved Oxygen (mg/L)	2.20	2.59	1.88	1.48				
Water Temperature (°C)	14.7	15.0	14.6	14.6				
ORP (mV)	-100.3	-93.1	-87.0	-81.4				

Physical appearance at start: Color Clear; Odor Slight-Swampy
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor Slight-Swampy
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 11:00 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/27/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: GP-10S
____ Upgradient ____ Downgradient
Weather Conditions: Sunny
Air Temperature: 50
Total Depth (TWD) Below Top of Casing = 15 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 0.91 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 14.09 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.57 gal
3 Casing Volumes = 1.72 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec: 0.39626 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 689.10 1/100 ft
Height of Riser (above land surface): -0.10 1/100 ft
Land Surface Elevation: 689.2 1/100 ft
Screened Interval (below land surface: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

						7/10/17 post sample		
Flow Rate (ml/min)	150	150						
Time (Military)	9:40	9:50						
Depth to Groundwater Below Top of Casing (ft)	0.91	10.68						
Drawdown (ft)	0.00	9.77						
pH (S.U.)	6.63	6.85						
Sp. Cond. (mS/cm)	0.002	0.001						
Turbidity (NTUs)	56.0	60.9						
Dissolved Oxygen (mg/L)	6.45	5.00						
Water Temperature (°C)	14.5	14.2						
ORP (mV)	-204.5	-98.1						

Physical appearance at start: Color Muddy; Odor None; Sheen/Free Product None
Physical appearance at sampling: Color Clear; Odor None; Sheen/Free Product None

COMMENTS/OBSERVATIONS: Sample time 13:30 hrs. Went dry after 09:50 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr	10/25/2021	Casing Diameter	1 inches
Field Personnel	Ann Marie Kropovitch/Linsdey Hunka	Casing Material	PVC
Site Name	**Former Scott Aviation Site - Lancaster, NY**	Measuring Point Elevation	687.69 1/100 ft
AECOM Job #	**60536398**	Height of Riser (above land surface)	-1.74 1/100 ft
Well ID #	GP-14S	Land Surface Elevation	689.4 1/100 ft
	Upgradient Downgradient	Screened Interval (below land surfac	5-15 1/100 ft
Weather Conditions	Cloudy		
Air Temperature	48		
Total Depth (TWD) Below Top of Casing	15 1/100 ft		
Depth to Groundwater (DGW) Below Top of Casing	1.7 1/100 ft		
Length of Water Column (LWC) = TWD - DGW =	13.3 1/100 ft		
1 Casing Volume (OCV) = LWC x	0.0408 = 0.54 gal		
3 Casing Volumes =	1.63 gal		
Method of Well Evacuation	Peristaltic Pump		
Method of Sample Collectior	Peristaltic Pump/Poly Tubing		
Total Volume of Water Removec	0.3 gal		

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	250	250						
Time (Military)	9:55	10:00						
Depth to Groundwater Below Top of Casing (ft)	1.70	13.85						
Drawdown (ft)	0.00	12.15						
pH (S.U.)	7.45	7.42						
Sp. Cond. (mS/cm)	0.75	0.79						
Turbidity (NTUs)	27.0	44.0						
Dissolved Oxygen (mg/L)	1.65	6.75						
Water Temperature (°C)	17.2	16.4						
ORP (mV)	-110.0	-114.5						

Physical appearance at start — Color: Clear; Odor: Yes, gas; Sheen/Free Produc: None

Physical appearance at sampling — Color: Clear; Odor: None; Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 11:05 hrs. Well went dry after 10:00 reading.

YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/20/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: GP-15S
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy/Dark Sky/Rain
Air Temperature: 63
Total Depth (TWD) Below Top of Casing: 14.82 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing: 0.98 1/100 ft
Length of Water Column (LWC) = TWD - DGW: 13.84 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.56 gal
3 Casing Volumes = 1.69 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collection: Peristaltic Pump/Poly Tubing
Total Volume of Water Removed: 0.5 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 687.69 1/100 ft
Height of Riser (above land surface): -0.31 1/100 ft
Land Surface Elevation: 688.0 1/100 ft
Screened Interval (below land surface): 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200					
Time (Military)	12:50	12:55	13:00					
Depth to Groundwater Below Top of Casing (ft)	0.98	12.52	12.70					
Drawdown (ft)	0.00	11.54	11.72					
pH (S.U.)	7.15	7.09	7.17					
Sp. Cond. (mS/cm)	0.84	0.84	0.81					
Turbidity (NTUs)	9.42	10.28	9.45					
Dissolved Oxygen (mg/L)	17.0	9.5	2.3					
Water Temperature (°C)	16.1	16.2	15.2					
ORP (mV)	-2.4	10.4	-12.0					

Physical appearance at start: Color Clear; Odor None; Sheen/Free Produc None

Physical appearance at sampling: Color Clear; Odor None; Sheen/Free Product None

COMMENTS/OBSERVATIONS: Sample time 13:15 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/25/2021
Field Personnel: Ann Marie Kropovitch/Lindsey Hunka
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: GP-16S
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy/Rain
Air Temperature: 48
Total Depth (TWD) Below Top of Casing: 17.52 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing: 2.65 1/100 ft
Length of Water Column (LWC) = TWD - DGW: 14.87 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.61 gal
3 Casing Volumes = 1.82 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collection: Peristaltic Pump/Poly Tubing
Total Volume of Water Removed: 0.9 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 687.69 1/100 ft
Height of Riser (above land surface): -0.31 1/100 ft
Land Surface Elevation: 688.0 1/100 ft
Screened Interval (below land surface): 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	325	225	200					
Time (Military)	8:48	8:54	9:00					
Depth to Groundwater Below Top of Casing (ft)	2.65	6.48	6.21					
Drawdown (ft)	0.00	3.83	3.56					
pH (S.U.)	6.88	6.88	6.83					
Sp. Cond. (mS/cm)	1.030	1.070	1.080					
Turbidity (NTUs)	36.70	10.32	3.62					
Dissolved Oxygen (mg/L)	3.48	3.40	2.10					
Water Temperature (°C)	13.4	13.1	13.1					
ORP (mV)	-51.5	-57.5	-50.6					

Physical appearance at start: Color Muddy; Odor None; Sheen/Free Product None

Physical appearance at sampling: Color Clear; Odor None; Sheen/Free Product None

COMMENTS/OBSERVATIONS: Sample time 09:15 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/21/21
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: GP-18S
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy
Air Temperature: 64
Total Depth (TWD) Below Top of Casing: 18 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing: 2.81 1/100 ft
Length of Water Column (LWC) = TWD - DGW: 15.19 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.62 gal
3 Casing Volumes = 1.86 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collection: Peristaltic Pump/Poly Tubing
Total Volume of Water Removed: 0.99065 gal

Casing Diameter: 0.75 inches
Casing Material: PVC
Measuring Point Elevation: 690.37 1/100 ft
Height of Riser (above land surface): 2.87 1/100 ft
Land Surface Elevation: 687.5 1/100 ft
Screened Interval (below land surface): 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

Flow Rate (ml/min)	150	150	150	150	150			
Time (Military)	11:50	11:55	12:00	12:05	12:15			
Depth to Groundwater Below Top of Casing (ft)	2.81	8.41	8.58	9.19	10.52			
Drawdown (ft)	0.00	5.60	5.77	6.38	7.71			
pH (S.U.)	7.07	7.02	6.98	6.99	6.98			
Sp. Cond. (mS/cm)	1.01	0.94	0.91	0.91	0.70			
Turbidity (NTUs)	94.4	1314	82.0	63.8	62.0			
Dissolved Oxygen (mg/L)	1.51	0.38	0.41	0.34	0.32			
Water Temperature (°C)	14.5	14.1	13.9	13.9	13.9			
ORP (mV)	-81.3	-83.1	-82.3	-81.9	-73.9			

Physical appearance at start: Color Clear; Odor None
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 12:30 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/25/2021
Field Personnel: Ann Marie Kropovitch/Linsey Hunka
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-30
___ Upgradient ___ Downgradient
Weather Conditions: Cloudy/Windy
Air Temperature: 52
Total Depth (TWD) Below Top of Casing: 20 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 3.03 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 16.97 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.77 gal
3 Casing Volumes = 8.30 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 1.3869 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 1/100 ft
Height of Riser (above land surface): 0.00 1/100 ft
Land Surface Elevation: 1/100 ft
Screened Interval (below land surfac: 10-20 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	250	250	250	250				
Time (Military)	11:33	11:40	11:48	11:54				
Depth to Groundwater Below Top of Casing (ft)	3.03	6.25	9.50	9.93				
Drawdown (ft)	0.00	3.22	6.47	6.90				
pH (S.U.)	7.51	7.46	7.46	7.46				
Sp. Cond. (mS/cm)	0.72	0.72	0.61	0.61				
Turbidity (NTUs)	6.19	3.64	2.77	3.45				
Dissolved Oxygen (mg/L)	0.61	0.19	0.11	0.11				
Water Temperature (°C)	16.2	16.7	17.1	17.0				
ORP (mV)	-156.4	-139.2	-140.5	-140.7				

Physical appearance at start: Color Clear; Odor None
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 12:05 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/20/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-35S
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy/Windy
Air Temperature: 64 ° F
Total Depth (TWD) Below Top of Casing: 14.01 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing: 1.36 1/100 ft
Length of Water Column (LWC) = TWD - DGW: 12.65 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.06 gal
3 Casing Volumes = 6.19 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collection: Peristaltic Pump/Poly Tubing
Total Volume of Water Removed: 1.05669 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 688.56 1/100 ft
Height of Riser (above land surface): -0.54 1/100 ft
Land Surface Elevation: 689.1 1/100 ft
Screened Interval (below land surface): 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	Dup
VOA 40 mL glass	TOC	2	HCL, 4°C	--

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200			
Time (Military)	14:40	14:05	14:50	14:55	15:00			
Depth to Groundwater Below Top of Casing (ft)	1.36	4.29	4.91	5.53	6.05			
Drawdown (ft)	0.00	2.93	3.55	4.17	4.69			
pH (S.U.)	7.17	7.17	7.12	7.10	7.1			
Sp. Cond. (mS/cm)	0.91	0.91	0.91	0.91	0.90			
Turbidity (NTUs)	11.88	5.72	4.67	5.32	4.47			
Dissolved Oxygen (mg/L)	2.80	2.69	2.69	2.73	2.93			
Water Temperature (°C)	14.8	14.9	15.1	15.4	15.5			
ORP (mV)	69.2	75.9	81.4	88.5	92.6			

Physical appearance at start: Color Clear; Odor None; Sheen/Free Product None
Physical appearance at sampling: Color Clear; Odor None; Sheen/Free Product None

COMMENTS/OBSERVATIONS: Sample time 15:10 hrs. Dup on this well (VOCs)
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/21/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-35D
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy
Air Temperature: 55
Total Depth (TWD) Below Top of Casing: 25.22 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing: 6.58 1/100 ft
Length of Water Column (LWC) = TWD - DGW: 18.64 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 3.04 gal
3 Casing Volumes = 9.11 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collection: Peristaltic Pump/Poly Tubing
Total Volume of Water Removed: 1.58503 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 698.66 1/100 ft
Height of Riser (above land surface): 2.83 1/100 ft
Land Surface Elevation: 687.1 1/100 ft
Screened Interval (below land surface): 21-26 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200	200		
Time (Military)	8:45	8:50	8:55	9:00	9:05	9:15		
Depth to Groundwater Below Top of Casing (ft)	6.58	9.77	10.62	12.00	12.21	12.87		
Drawdown (ft)	0.00	3.19	4.04	5.42	5.63	6.29		
pH (S.U.)	6.78	6.79	6.83	6.86	6.9	6.96		
Sp. Cond. (mS/cm)	0.169	0.170	0.175	0.140	0.186	0.198		
Turbidity (NTUs)	18.2	16.5	12.5	16.7	24.0	25.5		
Dissolved Oxygen (mg/L)	1.22	0.24	0.17	0.18	0.19	0.17		
Water Temperature (°C)	13.0	13.0	13.0	13.2	13.2	13.1		
ORP (mV)	-21.9	-21.0	-26.0	-31.3	-41.7	-54.3		

Physical appearance at start: Color Clear; Odor None; Sheen/Free Product None
Physical appearance at sampling: Color Clear; Odor None; Sheen/Free Product None

COMMENTS/OBSERVATIONS: Sample time 09:20 hrs. The well cover only has 1 bolt (missing one).
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/22/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-36S
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy
Air Temperature: 48
Total Depth (TWD) Below Top of Casing: 17.7 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing: 2.67 1/100 ft
Length of Water Column (LWC) = TWD - DGW: 15.03 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.45 gal
3 Casing Volumes = 7.35 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collection: Peristaltic Pump/Poly Tubing
Total Volume of Water Removed: 1.32086 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.82 1/100 ft
Height of Riser (above land surface): 2.72 1/100 ft
Land Surface Elevation: 687.1 1/100 ft
Screened Interval (below land surface): 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200			
Time (Military)	13:30	13:40	13:45	13:50	13:55			
Depth to Groundwater Below Top of Casing (ft)	2.67	5.56	6.88	7.76	8.35			
Drawdown (ft)	0.00	2.89	4.21	5.09	5.68			
pH (S.U.)	7.62	7.47	7.44	7.42	7.53			
Sp. Cond. (mS/cm)	1.33	1.32	1.32	1.02	1.30			
Turbidity (NTUs)	6.34	2.75	2.83	3.92	9.21			
Dissolved Oxygen (mg/L)	1.88	0.31	0.20	0.17	0.13			
Water Temperature (°C)	14.0	12.8	13.1	13.3	13.4			
ORP (mV)	-91.3	-86.6	-88.7	-90.2	-91.0			

Physical appearance at start: Color Clear; Odor None
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 14:00 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr	10/22/2021	Casing Diameter	2 inches
Field Personnel	Ann Marie Kropovitch	Casing Material	PVC
Site Name	**Former Scott Aviation Site - Lancaster, NY**	Measuring Point Elevation	689.66 1/100 ft
AECOM Job #	**60536398**	Height of Riser (above land surface)	2.56 1/100 ft
Well ID #	MW-36D	Land Surface Elevation	687.1 1/100 ft
	Upgradient / Downgradient	Screened Interval (below land surfac	16-21 1/100 ft
Weather Conditions	Cloudy		
Air Temperature	48		
Total Depth (TWD) Below Top of Casing	23.5 1/100 ft		
Depth to Groundwater (DGW) Below Top of Casing	5.17 1/100 ft		
Length of Water Column (LWC) = TWD - DGW =	18.33 1/100 ft		
1 Casing Volume (OCV) = LWC x 0.163 =	2.99 gal		
3 Casing Volumes =	8.96 gal		
Method of Well Evacuation	Peristaltic Pump		
Method of Sample Collectior	Peristaltic Pump/Poly Tubing		
Total Volume of Water Removec	1.45295 gal		

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	250	250	200	200	200			
Time (Military)	14:20	14:25	14:30	14:35	14:45			
Depth to Groundwater Below Top of Casing (ft)	5.17	10.42	11.76	12.92	14.31			
Drawdown (ft)	0.00	5.25	6.59	7.75	9.14			
pH (S.U.)	7.82	7.86	7.80	7.80	7.76			
Sp. Cond. (mS/cm)	1.54	1.54	1.19	1.55	1.55			
Turbidity (NTUs)	4.81	3.90	5.41	3.80	4.12			
Dissolved Oxygen (mg/L)	2.42	0.21	0.15	0.15	0.11			
Water Temperature (°C)	13.0	12.9	12.8	12.8	12.7			
ORP (mV)	-178.6	-185.1	-179.9	-174.3	-169.3			

Physical appearance at start — Color: Clear; Odor: None; Sheen/Free Produc: None

Physical appearance at sampling — Color: Clear; Odor: None; Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 14:50 hrs.

YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/21/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-37D
Upgradient / Downgradient
Weather Conditions: Cloudy/Dark Sky/Windy
Air Temperature: 64
Total Depth (TWD) Below Top of Casing: 22.5 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing: 4.38 1/100 ft
Length of Water Column (LWC) = TWD - DGW: 18.12 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.95 gal
3 Casing Volumes = 8.86 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collection: Peristaltic Pump/Poly Tubing
Total Volume of Water Removed: 1.6841 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 690.05 1/100 ft
Height of Riser (above land surface): 2.45 1/100 ft
Land Surface Elevation: 687.6 1/100 ft
Screened Interval (below land surface): 15-20 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	275	250	250	250	250			
Time (Military)	13:00	13:05	13:10	13:15	13:25			
Depth to Groundwater Below Top of Casing (ft)	4.38	7.18	7.64	7.22	9.06			
Drawdown (ft)	0.00	2.80	3.26	2.84	4.68			
pH (S.U.)	7.18	7.19	7.08	7.07	7.13			
Sp. Cond. (mS/cm)	1.07	1.04	1.08	1.08	1.02			
Turbidity (NTUs)	3.93	6.47	6.23	6.36	4.08			
Dissolved Oxygen (mg/L)	0.39	0.21	0.18	0.34	0.19			
Water Temperature (°C)	13.4	13.0	13.2	13.2	13.1			
ORP (mV)	-109.7	-106.8	-97.1	-96.5	-100.2			

Physical appearance at start: Color: Clear; Odor: None; Sheen/Free Product: None
Physical appearance at sampling: Color: Clear; Odor: None; Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 13:30 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/22/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-38D
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy
Air Temperature: 46 ° F
Total Depth (TWD) Below Top of Casing: 20.9 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 3.91 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 16.99 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.77 gal
3 Casing Volumes = 8.31 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 1.51899 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.66 1/100 ft
Height of Riser (above land surface): 2.72 1/100 ft
Land Surface Elevation: 687.5 1/100 ft
Screened Interval (below land surfac: 16-21 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

Flow Rate (ml/min)	350	200	200	200	200	200		
Time (Military)	11:05	11:10	11:15	11:20	11:25	11:30		
Depth to Groundwater Below Top of Casing (ft)	3.91	6.76	8.94	10.20	10.95	11.78		
Drawdown (ft)	0.00	2.85	5.03	6.29	7.04	7.87		
pH (S.U.)	7.67	7.67	7.67	7.67	7.67	7.67		
Sp. Cond. (mS/cm)	1.45	1.44	1.44	1.43	1.44	1.44		
Turbidity (NTUs)	96.0	46.0	73.5	50.3	22.3	16.2		
Dissolved Oxygen (mg/L)	0.28	0.27	0.19	0.15	0.15	0.13		
Water Temperature (°C)	13.6	14.0	14.2	14.2	14.3	14.2		
ORP (mV)	-166.8	-170.6	-167.7	-173.4	-177.0	-176.1		

Physical appearance at start: Color Clear; Odor None
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 11:40 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/21/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-39D
Upgradient / Downgradient
Weather Conditions: Cloudy/Slight Wind
Air Temperature: 60
Total Depth (TWD) Below Top of Casing: 22.5 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 4.0 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 18.6 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 3.02 gal
3 Casing Volumes = 9.07 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 1.58503 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.72 1/100 ft
Height of Riser (above land surface): 2.57 1/100 ft
Land Surface Elevation: 687.4 1/100 ft
Screened Interval (below land surfac: 15-20 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200			
Time (Military)	14:00	14:15	14:20	14:25	14:30			
Depth to Groundwater Below Top of Casing (ft)	3.95	8.40	9.28	10.21	11.29			
Drawdown (ft)	0.00	4.45	5.33	6.26	7.34			
pH (S.U.)	6.71	6.64	6.65	6.67	5.67			
Sp. Cond. (mS/cm)	1.24	0.29	0.98	1.25	1.27		.	
Turbidity (NTUs)	44.6	46.6	50.9	51.4	63.9			
Dissolved Oxygen (mg/L)	0.67	0.29	0.45	0.28	0.16			
Water Temperature (°C)	13.7	13.6	13.6	11.6	14.1			
ORP (mV)	-93.9	-94.9	-101.4	-104.7	-106.1			

Physical appearance at start — Color: Clear; Odor: None; Sheen/Free Product: None

Physical appearance at sampling — Color: Clear; Odor: None; Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 14:45 hrs.

YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr	10/27/2021	Casing Diameter	2 inches
Field Personnel	Ann Marie Kropovitch	Casing Material	PVC
Site Name	**Former Scott Aviation Site - Lancaster, NY**	Measuring Point Elevation	689.19 1/100 ft
AECOM Job #	**60536398**	Height of Riser (above land surface)	-0.3 1/100 ft
Well ID #	MW-40D	Land Surface Elevation	689.5 1/100 ft
	Upgradient / Downgradient	Screened Interval (below land surfac	17.8-22.8 1/100 ft
Weather Conditions	Sunny/Some Clouds		
Air Temperature	52		
Total Depth (TWD) Below Top of Casing	22.5 1/100 ft		
Depth to Groundwater (DGW) Below Top of Casing =	18.01 1/100 ft		
Length of Water Column (LWC) = TWD - DGW =	4.49 1/100 ft		
1 Casing Volume (OCV) = LWC x 0.163 =	2.77 gal		
3 Casing Volumes =	8.31 gal		
Method of Well Evacuation	Peristaltic Pump		
Method of Sample Collectio	Peristaltic Pump/Poly Tubing		
Total Volume of Water Remove	1.58503 gal		

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200			
Time (Military)	10:00	10:15	10:20	10:30	10:35			
Depth to Groundwater Below Top of Casing (ft)	18.01	19.53	20.12	20.45	20.87			
Drawdown (ft)	0.00	1.52	2.11	2.44	2.86			
pH (S.U.)	7.29	7.22	7.21	7.21	7.21			
Sp. Cond. (mS/cm)	1.02	1.01	1.01	1.01	1.01			
Turbidity (NTUs)	3685	2565	1779	1583	1455			
Dissolved Oxygen (mg/L)	2.76	1.06	0.91	0.83	0.45			
Water Temperature (°C)	13.2	13.3	13.4	13.3	13.2			
ORP (mV)	-137.7	-144.6	-150.1	-149.6	-152.6			

Physical appearance at start — Color: Cloudy/Gray; Odor: None; Sheen/Free Product: None

Physical appearance at sampling — Color: Cloudy; Odor: None; Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 10:50 hrs. Well ran dry after VOC/TOC. Rest of paramaters collected 13:00 hrs. J-plug popped into air violently - under pressure.

YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/27/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-42S
Upgradient / Downgradient
Weather Conditions: Sun/Partially Cloudy/Slight Wind
Air Temperature: 54
Total Depth (TWD) Below Top of Casing: 14.3 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 0.6 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 13.7 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.23 gal
3 Casing Volumes = 6.70 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 2.24546 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.08 1/100 ft
Height of Riser (above land surface): -0.58 1/100 ft
Land Surface Elevation: 689.66 1/100 ft
Screened Interval (below land surfac: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	350	250	250	250	250	250		
Time (Military)	11:30	11:40	11:45	11:50	11:55	12:00		
Depth to Groundwater Below Top of Casing (ft)	0.60	3.71	4.96	5.72	5.29	5.71		
Drawdown (ft)	0.00	3.11	4.36	5.12	4.69	5.11		
pH (S.U.)	6.76	6.61	6.60	6.59	6.59	6.60		
Sp. Cond. (mS/cm)	2.94	1.82	1.75	1.65	1.56	1.59		
Turbidity (NTUs)	51.60	7.96	6.63	7.66	7.21	7.42		
Dissolved Oxygen (mg/L)	1.39	0.27	0.23	0.16	0.15	0.15		
Water Temperature (°C)	17.3	17.5	17.5	17.5	17.5	17.4		
ORP (mV)	-108.0	-90.8	-91.0	-91.1	-91.7	-93.2		

Physical appearance at start: Color Clear; Odor None
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 12:15 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/25/2021
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-43S
Upgradient ____ Downgradient ____
Weather Conditions: Overcast
Air Temperature: 48
Total Depth (TWD) Below Top of Casing: 14.5 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 2.1 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 12.4 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 0 2.02 gal
3 Casing Volumes = 6.06 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 1.8877 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.14 1/100 ft
Height of Riser (above land surface): -0.46 1/100 ft
Land Surface Elevation: 689.6 1/100 ft
Screened Interval (below land surfac: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	300	300	300	300				
Time (Military)	10:15	10:20	10:25	10:30				
Depth to Groundwater Below Top of Casing (ft)	2.10	4.70	5.10	5.80				
Drawdown (ft)	0.00	2.60	3.00	3.70				
pH (S.U.)	7.08	6.91	6.93	6.80				
Sp. Cond. (mS/cm)	1.140	1.26	1.25	1.00				
Turbidity (NTUs)	8.13	3.15	3.41	6.06				
Dissolved Oxygen (mg/L)	1.40	0.18	0.11	0.11				
Water Temperature (°C)	16.4	17.4	17.8	17.7				
ORP (mV)	-91.0	-105.1	-114.0	-106.1				

Physical appearance at start: Color Clear; Odor Slight
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 10:45 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 10/25/2021
Field Personnel: Ann Marie Kropovitch/Lindsey Hunka
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-44S
___ Upgradient ___ Downgradient
Weather Conditions: Cloudy/Windy
Air Temperature: 54
Total Depth (TWD) Below Top of Casing: 15 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 0.6 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 14.4 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.35 gal
3 Casing Volumes = 7.04 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 1.71712 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 1/100 ft
Height of Riser (above land surface): 0.00 1/100 ft
Land Surface Elevation: 1/100 ft
Screened Interval (below land surfac: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	325	325	325	325				
Time (Military)	12:28	12:33	12:43	12:48				
Depth to Groundwater Below Top of Casing (ft)	0.60	3.68	5.89	6.60				
Drawdown (ft)	0.00	3.08	5.29	6.00				
pH (S.U.)	7.37	7.20	7.19	7.17				
Sp. Cond. (mS/cm)	0.84	1.08	1.06	1.06				
Turbidity (NTUs)	3.55	4.22	7.50	4.30				
Dissolved Oxygen (mg/L)	1.74	0.26	3.10	3.02				
Water Temperature (°C)	13.6	14.2	14.5	14.5				
ORP (mV)	-112.5	-100.7	-55.8	-39.2				

Physical appearance at start: Color Clear; Odor None
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 13:00 hrs.
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/12/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: A1-GP02-S
Upgradient / Downgradient
Weather Conditions: Sunny
Air Temperature: 54 ° F
Total Depth (TWD) Below Top of Casing = 15 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 2.34 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 12.66 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.52 gal
3 Casing Volumes = 1.55 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 1.85 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 689.82 1/100 ft
Height of Riser (above land surface): 2.52 1/100 ft
Land Surface Elevation: 687.3 1/100 ft
Screened Interval (below land surfac: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200	200	200	200
Time (Military)	11:20	11:25	11:30	11:35	11:40	11:45	11:50	11:55
Depth to Groundwater Below Top of Casing (ft)	6.20	7.73	7.48	7.98	7.71	7.5	7.52	7.48
Drawdown (ft)	-3.86	-1.53	0.25	-0.50	0.27	0.21	-0.02	0.04
pH (S.U.)	7.06	7.01	7.06	7.05	7.05	7.03	7.02	7.02
Sp. Cond. (mS/cm)	1.134	1.098	1.139	1.127	1.118	1.106	1.098	1.099
Turbidity (NTUs)	220.40	103.70	100.90	110.70	120.30	87.28	55.25	37.34
Dissolved Oxygen (mg/L)	0.48	0.26	1.34	5.51	6.23	6.97	7.41	7.75
Water Temperature (°C)	9.40	9.10	9.20	10.20	10.40	10.80	10.70	10.70
ORP (mV)	-104.10	-103.40	-100.60	-88.70	-85.00	-80.10	-76.70	-74.80

Physical appearance at start — Color: ear/Slightly clou — Odor: None — Sheen/Free Product: None

Physical appearance at sampling — Color: Clear — Odor: None — Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 12:05 hrs. Purge start 11:05 (Battery died, had to switch batteries)
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/11/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: A1-GP06-S
Upgradient ____ Downgradient ____
Weather Conditions: Clear
Air Temperature: 39
Total Depth (TWD) Below Top of Casing = 15.0 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 1.22 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 13.8 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.56 gal
3 Casing Volumes = 1.69 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collection: Peristaltic Pump/Poly Tubing
Total Volume of Water Removed: 0.50 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 687.71 1/100 ft
Height of Riser (above land surface): -0.09 1/100 ft
Land Surface Elevation: 687.8 1/100 ft
Screened Interval (below land surface): 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

Flow Rate (ml/min)	125	125	125	125				
Time (Military)	9:00	9:05	9:10	9:15				
Depth to Groundwater Below Top of Casing (ft)	6.77	10.87	12.95	14.05				
Drawdown (ft)	-5.55	-4.10	-2.08	-1.10				
pH (S.U.)	6.88	6.91	7.03	7.13				
Sp. Cond. (mS/cm)	1.49	1.49	1.48	1.447				
Turbidity (NTUs)	19.0	30.2	36.3	42.89				
Dissolved Oxygen (mg/L)	2.15	0.88	0.63	0.46				
Water Temperature (°C)	8.2	8.1	8.4	8.60				
ORP (mV)	-116.8	-116.9	-127.2	-138.80				

Physical appearance at start: Color Clear; Odor No; Sheen/Free Product None
Physical appearance at sampling: Color Clear; Odor No; Sheen/Free Product None

COMMENTS/OBSERVATIONS: Sample time 09:45 hrs. (start of sampling) Well went dry after 09:15. Samples were collected as well recharged.
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr: 4/13/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: A1-GP09-S
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy/slight wind
Air Temperature: 72 ° F
Total Depth (TWD) Below Top of Casing = 17.3 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 2.40 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 14.9 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0 = 0.61 gal
3 Casing Volumes = 1.82 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec: 1.85 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: ____ 1/100 ft
Height of Riser (above land surface): ____ 1/100 ft
Land Surface Elevation: ____ 1/100 ft
Screened Interval (below land surfac: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200	200	200	200
Time (Military)	14:15	14:20	14:25	14:30	14:35	14:40	14:45	14:50
Depth to Groundwater Below Top of Casing (ft)	4.11	6.78	7.25	7.02	7.17	7.24	7.33	7.4
Drawdown (ft)	-1.71	-2.67	-0.47	0.23	-0.15	-0.07	-0.09	-0.07
pH (S.U.)	7.00	6.92	6.88	6.80	6.75	6.72	6.71	6.7
Sp. Cond. (mS/cm)	1.166	1.148	1.095	1.116	1.114	1.099	1.086	1.073
Turbidity (NTUs)	56.5	57.5	57.6	39.3	25.54	21.28	19.05	20.67
Dissolved Oxygen (mg/L)	1.49	0.59	0.41	0.35	0.26	0.22	0.21	0.19
Water Temperature (°C)	11.4	11.4	11.3	10.6	10.7	10.6	10.4	10.4
ORP (mV)	-102.3	-102.7	-102.3	-99.4	-98.1	97.2	-96.7	-96.3

Physical appearance at start: Color Clear; Odor None
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 15:00 hrs.
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr: 4/8/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: A1-GP10-S
Upgradient / Downgradient
Weather Conditions: Sun/some clouds/slight wind
Air Temperature: 45
Total Depth (TWD) Below Top of Casing = 15 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 1.55 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 13.45 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.55 gal
3 Casing Volumes = 1.65 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 689.10 1/100 ft
Height of Riser (above land surface): -0.10 1/100 ft
Land Surface Elevation: 689.2 1/100 ft
Screened Interval (below land surface: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES 7/10/17 post sample

Flow Rate (ml/min)	225	225	225	220				
Time (Military)	11:45	11:50	11:55	12:00				
Depth to Groundwater Below Top of Casing (ft)	6.66	13.02	14.52	14.99				
Drawdown (ft)	-5.11	-6.36	-1.50	-0.47				
pH (S.U.)	6.61	6.61	6.72	6.68				
Sp. Cond. (mS/cm)	1.381	1.147	1.905	1.991				
Turbidity (NTUs)	40.3	39.0	50.02	40.20				
Dissolved Oxygen (mg/L)	6.91	4.37	3.30	3.11				
Water Temperature (°C)	8.4	8.5	9.60	9.72				
ORP (mV)	-43.4	-43.2	-60.70	-101.20				

Physical appearance at start — Color: Clear; Odor: None; Sheen/Free Product: None

Physical appearance at sampling — Color: Clear; Odor: None; Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 13:00 hrs. Went dry after 12:00 hrs.
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/12/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: A1-GP14-S
Upgradient ____ Downgradient ____
Weather Conditions: Sunny/Clear
Air Temperature: 48

Total Depth (TWD) Below Top of Casing: 15 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 1.52 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 13.48 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.55 gal
3 Casing Volumes = 1.65 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removed: 2.4 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 687.69 1/100 ft
Height of Riser (above land surface): -1.74 1/100 ft
Land Surface Elevation: 689.4 1/100 ft
Screened Interval (below land surface: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200	200	200	200	200	200
Time (Military)	9:30	9:35	9:40	9:45	9:50	9:55	10:00	10:05	10:10	10:15
Depth to Groundwater Below Top of Casing (ft)	3.11	5.32	6.81	7.58	7.63	7.62	7.63	7.63	7.63	7.63
Drawdown (ft)	-1.59	-2.21	-1.49	-0.77	-0.05	0.01	-0.01	0.00	0.00	6.11
pH (S.U.)	7.43	7.36	7.20	7.15	7.25	7.26	7.32	7.38	7.4	7.43
Sp. Cond. (mS/cm)	0.528	0.448	0.440	0.453	0.472	0.521	0.532	0.528	0.525	0.524
Turbidity (NTUs)	21.55	52.49	64.28	107.20	38.24	87.42	100.50	103.20	103.50	103.90
Dissolved Oxygen (mg/L)	1.18	0.66	1.40	1.34	5.69	4.09	5.66	6.77	7.00	7.05
Water Temperature (°C)	10.3	9.7	9.7	9.7	10.1	10.5	11.0	11.3	11.5	11.8
ORP (mV)	-108.6	-110.2	-93.2	-87.3	-79.6	-82.0	-81.6	-73.7	-68.0	-66.7

Physical appearance at start: Color Clear; Odor None
Sheen/Free Produc: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 10:20 hrs.
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/11/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: A1-GP15-S
___ Upgradient ___ Downgradient
Weather Conditions: Partly Cloudy
Air Temperature: 46

Total Depth (TWD) Below Top of Casing: 14.82 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 0.00 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 14.82 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.60 gal
3 Casing Volumes = 1.81 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec: 1.0 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 687.69 1/100 ft
Height of Riser (above land surface): -0.31 1/100 ft
Land Surface Elevation: 688.0 1/100 ft
Screened Interval (below land surface: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	125	125	125	125	125	125	125	
Time (Military)	10:00	10:05	10:10	10:15	10:20	10:25	10:30	
Depth to Groundwater Below Top of Casing (ft)	2.52	4.59	8.78	10.98	12.58	13.74	14.72	
Drawdown (ft)	-2.52	-2.07	-4.19	-2.20	-1.60	-1.16	-0.98	
pH (S.U.)	7.13	7.11	7.00	7.04	7.15	7.18	7.16	
Sp. Cond. (mS/cm)	0.755	0.752	0.741	0.760	0.743	0.723	0.727	
Turbidity (NTUs)	104.80	65.70	22.10	26.88	22.62	19.26	15.35	
Dissolved Oxygen (mg/L)	1.24	0.95	0.59	0.51	0.45	0.39	0.35	
Water Temperature (°C)	9.0	8.8	8.8	9.0	9.3	9.5	9.5	
ORP (mV)	-23.20	-16.90	3.80	5.40	2.50	2.60	-6.90	

Physical appearance at start: Color Light Gray; Odor None
Sheen/Free Produc: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 10:40 hrs. Well dry after 10:30 reading.
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/11/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: A1-GP16-S
Upgradient ____ Downgradient ____
Weather Conditions: Sun/partly cloudy
Air Temperature: 52

Total Depth (TWD) Below Top of Casing: 17.52 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 2.60 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 14.92 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.61 gal
3 Casing Volumes = 1.83 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec: 1.9 gal

Casing Diameter: 1 inches
Casing Material: PVC
Measuring Point Elevation: 687.69 1/100 ft
Height of Riser (above land surface): -0.31 1/100 ft
Land Surface Elevation: 688.0 1/100 ft
Screened Interval (below land surface: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200	200	200	200
Time (Military)	11:50	11:55	12:00	12:05	12:10	12:15	12:20	12:25
Depth to Groundwater Below Top of Casing (ft)	2.73	3.48	4.64	5.45	5.33	4.91	5.06	4.82
Drawdown (ft)	-0.13	-0.75	-1.16	-0.81	0.12	0.42	-0.15	0.24
pH (S.U.)	7.24	7.15	7.05	6.99	6.95	6.89	6.89	6.9
Sp. Cond. (mS/cm)	1.144	0.938	0.017	1.153	1.144	1.134	1.136	1.130
Turbidity (NTUs)	26.23	50.74	109.50	12.32	14.03	19.52	14.16	17.20
Dissolved Oxygen (mg/L)	1.62	0.89	0.40	1.46	0.49	0.27	0.22	0.18
Water Temperature (°C)	9.3	9.5	9.7	9.0	9.2	9.6	9.6	9.5
ORP (mV)	-98.3	-84.2	-79.5	-60.7	-64.4	-60.2	-61.6	-62.9

Physical appearance at start: Color Clear; Odor None
Sheen/Free Produc: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 12:30 hrs.
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 04/13/22
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: A1GP-18-S
Upgradient / Downgradient
Weather Conditions: Cloudy
Air Temperature: 61
Total Depth (TWD) Below Top of Casing: 18 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 2.91 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 15.09 1/100 ft
1 Casing Volume (OCV) = LWC x 0.0408 = 0.62 gal
3 Casing Volumes = 1.85 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec: 1.39 gal

Casing Diameter: 0.75 inches
Casing Material: PVC
Measuring Point Elevation: 690.37 1/100 ft
Height of Riser (above land surface): 2.87 1/100 ft
Land Surface Elevation: 687.5 1/100 ft
Screened Interval (below land surface): 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

Flow Rate (ml/min)	150	150	150	150	150	150	150	150
Time (Military)	8:50	8:55	9:00	9:05	9:10	9:15	9:20	9:25
Depth to Groundwater Below Top of Casing (ft)	2.91	5.82	6.30	6.82	6.92	7.05	7.14	7.67
Drawdown (ft)	0.00	2.91	3.39	3.91	4.01	4.14	4.23	4.76
pH (S.U.)	7.16	7.00	6.96	6.91	6.9	6.9	6.91	6.91
Sp. Cond. (mS/cm)	0.96	0.94	0.86	0.81	0.80	0.792	0.788	0.789
Turbidity (NTUs)	11.5	10	82.1	50.0	30.5	40	39.85	38.58
Dissolved Oxygen (mg/L)	1.70	0.72	0.47	0.39	0.36	0.34	0.33	0.32
Water Temperature (°C)	9.8	10.6	10.0	10.1	10.0	10.2	10.4	10.6
ORP (mV)	-90.1	-81.3	-84.3	-82.5	-84.0	-86	-88	-89.6

Physical appearance at start — Color: Clear; Odor: None; Sheen/Free Product: None

Physical appearance at sampling — Color: Clear; Odor: None; Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 10:00 hrs.
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/14/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-30
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy/Rain Drops
Air Temperature: 66
Total Depth (TWD) Below Top of Casing: 20 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 2.73 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 17.27 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.82 gal
3 Casing Volumes = 8.45 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 2.31 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: ____ 1/100 ft
Height of Riser (above land surface): 0.00 1/100 ft
Land Surface Elevation: ____ 1/100 ft
Screened Interval (below land surfac: 10-20 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	250	250	250	250	250	250	250	250
Time (Military)	8:50	8:55	9:00	9:05	9:10	9:15	9:20	9:25
Depth to Groundwater Below Top of Casing (ft)	2.50	6.41	7.28	8.29	8.71	9.42	9.74	10.56
Drawdown (ft)	-0.23	-3.91	-0.87	-1.01	-0.42	-0.71	-0.32	-0.82
pH (S.U.)	7.56	7.34	7.33	7.33	7.33	7.33	7.33	7.33
Sp. Cond. (mS/cm)	0.45	0.45	0.45	0.46	0.461	0.467	0.473	0.47
Turbidity (NTUs)	11.46	26.65	17.72	11.80	12.28	13.45	14.93	18.62
Dissolved Oxygen (mg/L)	0.88	0.35	0.30	0.23	0.23	0.24	0.31	0.28
Water Temperature (°C)	12.50	12.30	12.40	12.30	12.40	12.40	12.40	12.50
ORP (mV)	-123.9	-122.5	-123.1	-124.6	-124.5	-124.4	-122.2	-121.4

Physical appearance at start — Color: Clear; Odor: None
Sheen/Free Product: None

Physical appearance at sampling — Color: Clear; Odor: None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 09:30 hrs.
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr	4/7/2022	Casing Diameter	2 inches
Field Personnel	Ann Marie Kropovitch	Casing Material	PVC
Site Name	**Former Scott Aviation Site - Lancaster, NY**	Measuring Point Elevation	688.56 1/100 ft
AECOM Job #	**60536398**	Height of Riser (above land surface)	-0.54 1/100 ft
Well ID #	MW-35S	Land Surface Elevation	689.1 1/100 ft
	Upgradient Downgradient	Screened Interval (below land surface	5-15 1/100 ft
Weather Conditions	Cloudy/Drizzle		
Air Temperature	54 ° F		
Total Depth (TWD) Below Top of Casing	14.01 1/100 ft		
Depth to Groundwater (DGW) Below Top of Casing =	0.49 1/100 ft		
Length of Water Column (LWC) = TWD - DGW =	13.52 1/100 ft		
1 Casing Volume (OCV) = LWC x 0.163 =	2.20 gal		
3 Casing Volumes =	6.61 gal		
Method of Well Evacuation	Peristaltic Pump		
Method of Sample Collectior	Peristaltic Pump/Poly Tubing		
Total Volume of Water Removec	2.31 gal		

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	Dup
VOA 40 mL glass	TOC	2	HCL, 4°C	--

FIELD ANALYSES

Flow Rate (ml/min)	250	250	250	250	250	250	250	250
Time (Military)	14:30	14:35	14:40	14:45	14:50	14:55	15:00	15:05
Depth to Groundwater Below Top of Casing (ft)	2.11	3.11	4.69	4.98	5.41	6.01	6.49	6.75
Drawdown (ft)	-1.62	-1.00	-1.58	-0.29	-0.43	-0.60	-0.48	-0.26
pH (S.U.)	7.03	6.97	6.98	6.99	7	6.99	6.99	6.99
Sp. Cond. (mS/cm)	0.64	0.64	0.64	0.64	0.64	0.653	0.645	0.641
Turbidity (NTUs)	22.43	27.27	31.40	26.52	26.7	15.83	16.29	14.72
Dissolved Oxygen (mg/L)	4.18	3.76	3.82	3.80	3.47	2.88	2.74	2.59
Water Temperature (°C)	8.7	8.0	8.3	8.2	8.3	8.2	8.2	8.2
ORP (mV)	44.9	560.0	57.1	56.3	53.3	54.7	55.6	56.1

Physical appearance at start Color: Clear Odor: None Sheen/Free Produc: None

Physical appearance at sampling Color: Clear Odor: None Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 15:10 hrs. Dup on this well (VOCs)

YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/7/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-35D
Upgradient / Downgradient
Weather Conditions: Cloudy/Drizzle
Air Temperature: 54
Total Depth (TWD) Below Top of Casing: 25.22 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 4.98 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 20.24 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 3.30 gal
3 Casing Volumes = 9.90 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec: 2.31 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 698.66 1/100 ft
Height of Riser (above land surface): 2.83 1/100 ft
Land Surface Elevation: 687.1 1/100 ft
Screened Interval (below land surface): 21-26 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

Flow Rate (ml/min)	250	250	250	250	250	250	250	250
Time (Military)	15:35	15:40	15:45	15:50	15:55	16:00	16:05	16:10
Depth to Groundwater Below Top of Casing (ft)	6.98	8.96	10.37	11.27	12.11	13.57	14.12	14.45
Drawdown (ft)	-2.00	-1.98	-1.41	-0.90	-0.84	-1.46	-0.55	-0.33
pH (S.U.)	7.20	7.06	7.05	7.01	7.01	7.02	7.03	7.03
Sp. Cond. (mS/cm)	0.422	0.418	0.419	0.420	0.421	0.424	0.43	0.432
Turbidity (NTUs)	72.13	65.93	40.92	13.06	76.44	69.63	60.53	50.25
Dissolved Oxygen (mg/L)	7.95	9.04	9.00	8.77	8.57	8.25	7.9	7.75
Water Temperature (°C)	10.6	10.7	10.6	10.7	10.7	10.7	10.8	10.9
ORP (mV)	-57.9	-4.4	9.0	20.7	26.1	28.3	31.7	32.5

Physical appearance at start: Color Cloudy/Gray; Odor None
Sheen/Free Produc: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 16:15 hrs. Purge start 15:30
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/22/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-36S
Upgradient / Downgradient
Weather Conditions: Sunny
Air Temperature: 63
Total Depth (TWD) Below Top of Casing: 17.7 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 4.73 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 12.97 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.11 gal
3 Casing Volumes = 6.34 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec: 2.31 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.82 1/100 ft
Height of Riser (above land surface): 2.72 1/100 ft
Land Surface Elevation: 687.1 1/100 ft
Screened Interval (below land surface: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	250	250	250	250	250	250	250	250
Time (Military)	14:00	14:05	14:10	14:15	14:20	14:25	14:30	14:35
Depth to Groundwater Below Top of Casing (ft)	4.99	5.19	6.74	7.43	8.27	8.30	8.28	8.20
Drawdown (ft)	-0.26	-0.20	-1.55	-0.69	-0.84	-0.03	0.02	0.08
pH (S.U.)	7.30	7.20	7.18	7.17	7.15	7.15	7.14	7.13
Sp. Cond. (mS/cm)	1.27	1.26	1.26	1.27	1.27	1.274	1.274	1.28
Turbidity (NTUs)	9.70	9.76	10.21	9.16	9.98	10.46	8.94	8.34
Dissolved Oxygen (mg/L)	1.72	0.40	0.24	0.18	0.16	0.18	0.19	0.14
Water Temperature (°C)	9.6	9.1	9.0	8.9	8.8	8.9	8.7	8.5
ORP (mV)	-99.4	-105.0	-107.6	-108.7	-109.1	-109.0	-108.1	-106.5

Physical appearance at start — Color: Clear; Odor: None
Sheen/Free Produc: None

Physical appearance at sampling — Color: Clear; Odor: None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 14:45 hrs. Purge start 13:55
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/11/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-36D
___ Upgradient ___ Downgradient
Weather Conditions: Cloudy
Air Temperature: 66
Total Depth (TWD) Below Top of Casing: 23.5 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 4.73 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 18.77 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 3.06 gal
3 Casing Volumes = 9.18 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec: 2.31 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.66 1/100 ft
Height of Riser (above land surface): 2.56 1/100 ft
Land Surface Elevation: 687.1 1/100 ft
Screened Interval (below land surface): 16-21 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	250	250	250	250	250	250	250	250
Time (Military)	15:05	15:10	15:15	15:20	15:25	15:30	15:35	15:40
Depth to Groundwater Below Top of Casing (ft)	4.90	6.52	7.27	8.44	9.25	10.33	11.67	12.43
Drawdown (ft)	-0.17	-1.62	-0.75	-1.17	-0.81	-1.08	-1.34	-0.76
pH (S.U.)	7.60	7.58	7.57	7.53	7.5	7.47	7.43	7.39
Sp. Cond. (mS/cm)	1.446	1.444	1.443	1.444	1.442	1.441	1.445	1.444
Turbidity (NTUs)	12.80	8.06	8.54	9.01	9.72	10.03	9.8	9.8
Dissolved Oxygen (mg/L)	1.66	0.58	0.38	0.27	0.23	0.17	0.15	0.15
Water Temperature (°C)	10.2	10.4	10.9	11.1	11.1	11	11	11.4
ORP (mV)	-142.4	-165.2	-171.5	-171.6	-169.0	-167.2	-162	-158.6

Physical appearance at start: Color Clear; Odor None
Sheen/Free Produc: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 15:50 hrs. Purge start 15:03
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/13/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-37D
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy
Air Temperature: 72
Total Depth (TWD) Below Top of Casing: 22.5 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 3.99 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 18.51 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 3.02 gal
3 Casing Volumes = 9.05 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectior: Peristaltic Pump/Poly Tubing
Total Volume of Water Removec: 2.31 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 690.05 1/100 ft
Height of Riser (above land surface): 2.45 1/100 ft
Land Surface Elevation: 687.6 1/100 ft
Screened Interval (below land surface: 15-20 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	250	250	250	250	250	250	250	250
Time (Military)	11:00	11:05	11:10	11:15	11:20	11:25	11:30	11:35
Depth to Groundwater Below Top of Casing (ft)	6.12	7.12	7.53	8.00	7.98	7.67	7.23	6.94
Drawdown (ft)	-2.13	-1.00	-0.41	-0.47	0.02	0.31	0.44	0.29
pH (S.U.)	8.00	7.34	7.17	7.22	7.23	7.22	7.20	7.21
Sp. Cond. (mS/cm)	0.89	0.95	0.97	0.93	0.90	0.896	0.889	0.878
Turbidity (NTUs)	19.71	11.68	14.30	22.12	16.85	18.32	17.62	21.94
Dissolved Oxygen (mg/L)	1.37	0.22	0.17	0.13	0.12	0.12	0.11	0.11
Water Temperature (°C)	10.60	10.40	10.60	10.60	11.10	11.30	11.50	11.50
ORP (mV)	-5.4	-86.2	-88.0	-97.3	-103.6	-106.5	-107.8	-111.7

Physical appearance at start: Color Clear; Odor None
Sheen/Free Produc: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 11:45 hrs. Purge start 10:54 hrs.
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/12/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-38D
Upgradient / Downgradient
Weather Conditions: Sunny
Air Temperature: 57 ° F
Total Depth (TWD) Below Top of Casing: 20.9 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 2.14 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 18.76 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 3.06 gal
3 Casing Volumes = 9.17 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 2.31 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.66 1/100 ft
Height of Riser (above land surface): 2.72 1/100 ft
Land Surface Elevation: 687.5 1/100 ft
Screened Interval (below land surfac: 16-21 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

Flow Rate (ml/min)	250	250	250	250	250	250	250	250
Time (Military)	12:50	12:55	13:00	13:05	13:10	13:15	13:20	13:25
Depth to Groundwater Below Top of Casing (ft)	4.21	6.32	8.09	9.68	11.31	12.98	14.27	15.75
Drawdown (ft)	-2.07	-2.11	-1.77	-1.59	-1.63	-1.67	-1.29	-1.48
pH (S.U.)	7.06	6.97	6.96	6.95	6.95	6.95	6.95	6.95
Sp. Cond. (mS/cm)	0.680	0.681	0.682	0.680	0.679	0.679	0.676	0.675
Turbidity (NTUs)	30.4	28.7	24.3	32.5	48.6	50.2	37.7	38.82
Dissolved Oxygen (mg/L)	1.05	0.35	0.25	0.20	0.14	0.13	0.12	0.13
Water Temperature (°C)	10.5	10.3	10.1	10.1	10.2	10.3	10.5	10.7
ORP (mV)	-39.0	-28.8	-29.6	-25.8	-21.0	-13.9	-6.4	2.6

Physical appearance at start — Color: Light Brown; Odor: None; Sheen/Free Product: None

Physical appearance at sampling — Color: Clear; Odor: None; Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 13:40 hrs. Purge start 12:45

YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/13/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-39D
Upgradient / Downgradient
Weather Conditions: Dark clouds/Rain
Air Temperature: 73
Total Depth (TWD) Below Top of Casing: 22.5 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 3.68 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 18.8 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 3.07 gal
3 Casing Volumes = 9.20 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 2.31 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.72 1/100 ft
Height of Riser (above land surface): 2.57 1/100 ft
Land Surface Elevation: 687.4 1/100 ft
Screened Interval (below land surfac: 15-20 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	250	250	250	250	250	250	250	250
Time (Military)	12:55	13:00	13:05	13:10	13:15	13:20	13:25	13:30
Depth to Groundwater Below Top of Casing (ft)	4.69	6.34	6.91	8.10	8.82	9.33	9.95	10.90
Drawdown (ft)	-1.01	-1.65	-0.57	-1.19	-0.72	-0.51	-0.62	-0.95
pH (S.U.)	6.90	6.85	6.87	6.90	6.91	6.91	6.91	6.91
Sp. Cond. (mS/cm)	1.474	1.467	1.471	1.474	1.478	1.473	1.471	1.461
Turbidity (NTUs)	59.7	58.3	40.8	41.6	46.8	42.24	45.31	47.83
Dissolved Oxygen (mg/L)	1.62	0.33	0.23	0.15	0.12	0.11	0.08	0.06
Water Temperature (°C)	12.1	13.0	13.2	13.2	13.4	13.6	12.4	12.0
ORP (mV)	-225.3	-150.7	-144.1	-144.1	-145.0	-144.9	-143.9	-142.3

Physical appearance at start — Color: Clear; Odor: None; Sheen/Free Product: None

Physical appearance at sampling — Color: Clear; Odor: None; Sheen/Free Product: None *slight sheen on purge water from this well

COMMENTS/OBSERVATIONS: Sample time 13:40 hrs. Purge start 12:51 hrs.

YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/8/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-40D
Upgradient / Downgradient
Weather Conditions: Sunny/Some Clouds
Air Temperature: 52
Total Depth (TWD) Below Top of Casing = 22.5 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 3.69 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 18.81 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.77 gal
3 Casing Volumes = 8.31 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 1.85 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.19 1/100 ft
Height of Riser (above land surface): -0.3 1/100 ft
Land Surface Elevation: 689.5 1/100 ft
Screened Interval (below land surfac: 17.8-22.8 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	
Various	MNA Analyses	15	Varies	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200	200	200	200
Time (Military)	13:15	13:20	13:25	13:30	13:35	13:40	13:45	13:40
Depth to Groundwater Below Top of Casing (ft)	4.69	6.07	6.91	7.83	8.58	9.52	10.28	12.02
Drawdown (ft)	-1.00	-1.38	-0.84	-0.92	-0.75	-0.94	-0.76	-1.74
pH (S.U.)	7.41	7.41	7.41	7.40	7.39	7.41	7.41	7.41
Sp. Cond. (mS/cm)	1.19	1.19	1.19	1.18	1.187	1.184	1.13	1.182
Turbidity (NTUs)	35	38	40	41	39.54	40.36	38.56	40.7
Dissolved Oxygen (mg/L)	0.82	0.39	0.29	0.23	0.2	0.18	0.16	0.14
Water Temperature (°C)	11.0	11.1	10.4	10.4	10.5	10.3	10.4	11
ORP (mV)	-162.3	-168.3	-170.5	-173.8	-175.5	-177.6	-179.2	-182.9

Physical appearance at start: Color Clear; Odor None
Sheen/Free Product: None

Physical appearance at sampling: Color Clear; Odor None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 14:10 hrs. Purge start 13:10
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/8/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-42S
Upgradient ____ Downgradient ____
Weather Conditions: Cloudy
Air Temperature: 43
Total Depth (TWD) Below Top of Casing: 14.3 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 1.81 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 12.49 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.04 gal
3 Casing Volumes = 6.11 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 2.31 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.08 1/100 ft
Height of Riser (above land surface): -0.58 1/100 ft
Land Surface Elevation: 689.66 1/100 ft
Screened Interval (below land surfac: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
Various	MNAs	2	Various	

FIELD ANALYSES

Flow Rate (ml/min)	350	250	250	250	250	250	250	250
Time (Military)	10:15	10:20	10:25	10:30	10:35	10:40	10:45	10:50
Depth to Groundwater Below Top of Casing (ft)	3.41	4.54	5.55	5.99	6.45	7.04	7.46	7.88
Drawdown (ft)	-1.60	-1.13	-1.01	-0.44	-0.46	-0.59	-0.42	-0.42
pH (S.U.)	6.83	6.83	6.84	6.86	6.87	6.87	6.86	6.82
Sp. Cond. (mS/cm)	2.225	2.210	2.010	1.826	1.771	1.840	1.897	1.990
Turbidity (NTUs)	26.05	23.75	27.12	31.26	31.82	30.4	22.72	20.27
Dissolved Oxygen (mg/L)	0.40	0.31	0.24	0.30	0.45	0.43	0.37	0.29
Water Temperature (°C)	8.9	8.6	8.6	8.4	8.4	8.5	8.4	8.6
ORP (mV)	-116.4	-117.2	-118.6	-117.2	-114.5	-113.4	-112	-108.7

Physical appearance at start — Color: Clear; Odor: None
Sheen/Free Product: None

Physical appearance at sampling — Color: Clear; Odor: None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 11:10 hrs. Purge start 10:10
YSI Pro SS meter (ID# 043167/18G102410) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/14/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-43S
Upgradient / Downgradient
Weather Conditions: Cloudy/Very windy
Air Temperature: 57
Total Depth (TWD) Below Top of Casing = 14.5 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 1.89 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 12.61 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 0 2.06 gal
3 Casing Volumes = 6.17 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 2.31 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 689.14 1/100 ft
Height of Riser (above land surface): -0.46 1/100 ft
Land Surface Elevation: 689.6 1/100 ft
Screened Interval (below land surfac: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	250	250	250	250	250	250	250	250
Time (Military)	10:10	10:15	10:20	10:25	10:30	10:35	10:40	10:45
Depth to Groundwater Below Top of Casing (ft)	1.99	2.35	3.78	4.35	5.12	5.76	6.34	6.91
Drawdown (ft)	-0.10	-0.36	-1.43	-0.57	-0.77	-0.64	-0.58	-0.57
pH (S.U.)	6.98	6.92	6.84	6.84	6.84	6.83	6.83	6.82
Sp. Cond. (mS/cm)	1.045	1.057	1.063	1.068	1.070	1.081	1.100	1.130
Turbidity (NTUs)	7.95	8.01	8.24	9.96	10.94	11.3	10.01	10.33
Dissolved Oxygen (mg/L)	2.33	1.37	0.39	0.19	0.14	0.15	0.15	0.14
Water Temperature (°C)	10.9	9.5	8.2	10.9	10.7	10.5	10.4	10.4
ORP (mV)	-73.1	-75.6	-78.8	-84.3	-87	-89.4	-90.8	-94.7

Physical appearance at start — Color: Clear; Odor: Slight
Sheen/Free Product: None

Physical appearance at sampling — Color: Clear; Odor: None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 10:07 hrs. Purge start 10:07
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

AECOM

GROUNDWATER SAMPLING LOG

Date (mo/day/yr): 4/12/2022
Field Personnel: Ann Marie Kropovitch
Site Name: **Former Scott Aviation Site - Lancaster, NY**
AECOM Job #: **60536398**
Well ID #: MW-44S
Upgradient / Downgradient
Weather Conditions: Sunny/Clear
Air Temperature: 61
Total Depth (TWD) Below Top of Casing: 15 1/100 ft
Depth to Groundwater (DGW) Below Top of Casing = 0.00 1/100 ft
Length of Water Column (LWC) = TWD - DGW = 15 1/100 ft
1 Casing Volume (OCV) = LWC x 0.163 = 2.45 gal
3 Casing Volumes = 7.34 gal
Method of Well Evacuation: Peristaltic Pump
Method of Sample Collectio: Peristaltic Pump/Poly Tubing
Total Volume of Water Remove: 1.85 gal

Casing Diameter: 2 inches
Casing Material: PVC
Measuring Point Elevation: 1/100 ft
Height of Riser (above land surface): 0.00 1/100 ft
Land Surface Elevation: 1/100 ft
Screened Interval (below land surfac: 5-15 1/100 ft

Container	Analysis (Method)	# Bottles	Preservative	Dup - MS/MSD
VOA 40 mL glass	TCL VOCs (8260B)	3	HCL, 4°C	
VOA 40 mL glass	TOC	2	HCL, 4°C	

FIELD ANALYSES

Flow Rate (ml/min)	200	200	200	200	200	200	200	200
Time (Military)	14:25	14:30	14:35	14:40	14:45	14:50	14:55	15:00
Depth to Groundwater Below Top of Casing (ft)	6.85	7.60	8.03	8.29	8.64	9.35	9.67	10.25
Drawdown (ft)	-6.85	-0.75	-0.43	-0.26	-0.35	-0.71	-0.32	-0.58
pH (S.U.)	7.39	7.21	7.19	7.18	7.17	7.15	7.15	7.15
Sp. Cond. (mS/cm)	0.998	0.990	0.990	0.994	0.998	1.005	1.004	1.006
Turbidity (NTUs)	29.22	39.52	77.11	84.10	77.96	52.76	52.41	44.62
Dissolved Oxygen (mg/L)	3.54	1.42	1.24	1.10	0.81	0.44	0.41	0.35
Water Temperature (°C)	10.7	10.1	10.0	9.7	9.80	10.00	9.90	10.00
ORP (mV)	30.1	-31.9	-36.5	-41.9	-53.1	-67.3	-68.5	-71.4

Physical appearance at start — Color: Clear; Odor: None
Sheen/Free Product: None

Physical appearance at sampling — Color: Clear; Odor: None
Sheen/Free Product: None

COMMENTS/OBSERVATIONS: Sample time 15:10 hrs. Purge start 14:20
YSI Pro SS meter (ID# 21D103486) used to collect field parameters.

Appendix D Analytical Laboratory Data Packages (Provided on CD)

Appendix E Institutional Controls and Engineering Controls Certification Form

Enclosure 2
NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION
Site Management Periodic Review Report Notice
Institutional and Engineering Controls Certification Form

Site Details **Box 1**

Site No. C915233

Site Name Former Scott Aviation Facility (Area 1)

Site Address: 215 and 221 Erie Street Zip Code: 14086
City/Town: Lancaster
County: Erie
Site Acreage: 1.250

~~Reporting Period: April 01, 2020 to April 01, 2021~~

Reporting Period: April 09, 2021 to April 14, 2022

	YES	NO
1. Is the information above correct?	☐	X
If NO, include handwritten above or on a separate sheet.		
2. Has some or all of the site property been sold, subdivided, merged, or undergone a tax map amendment during this Reporting Period?	☐	X
3. Has there been any change of use at the site during this Reporting Period (see 6NYCRR 375-1.11(d))?	☐	X
4. Have any federal, state, and/or local permits (e.g., building, discharge) been issued for or at the property during this Reporting Period?	☐	X
If you answered YES to questions 2 thru 4, include documentation or evidence that documentation has been previously submitted with this certification form.		
5. Is the site currently undergoing development?	☐	X

Box 2

	YES	NO
6. Is the current site use consistent with the use(s) listed below? Commercial and Industrial	X	☐
7. Are all ICs in place and functioning as designed?	X	☐

IF THE ANSWER TO EITHER QUESTION 6 OR 7 IS NO, sign and date below and DO NOT COMPLETE THE REST OF THIS FORM. Otherwise continue.

A Corrective Measures Work Plan must be submitted along with this form to address these issues.

Signature of Owner, Remedial Party or Designated Representative Date

Box 2A

	YES	NO
8. Has any new information revealed that assumptions made in the Qualitative Exposure Assessment regarding offsite contamination are no longer valid?	☐	X

If you answered YES to question 8, include documentation or evidence that documentation has been previously submitted with this certification form.

	YES	NO
9. Are the assumptions in the Qualitative Exposure Assessment still valid? (The Qualitative Exposure Assessment must be certified every five years)	X	☐

If you answered NO to question 9, the Periodic Review Report must include an updated Qualitative Exposure Assessment based on the new assumptions.

SITE NO. C915233 **Box 3**

Description of Institutional Controls

Parcel	Owner	Institutional Control
104.16-5-8	AVOX Systems, Inc.	Ground Water Use Restriction Landuse Restriction Site Management Plan Soil Management Plan Monitoring Plan IC/EC Plan

An Environmental Easement was filed with the Erie County Clerk's Office on November 19, 2015. The Controlled Property may be used for commercial and industrial use as long as the following long-term institutional controls are employed: (1) restrict the use of site groundwater as a source of potable or process water without necessary water quality treatment as determined by the NYSDOH or Erie County Department of Health; (2) all future activities on the property that will disturb remaining contaminated material must be conducted in accordance with the Site Management Plan; and (3) monitoring to assess the performance and effectiveness of the remedy must be conducted as defined in the Site management Plan.

104.16-5-9	AVOX Systems, Inc.	Soil Management Plan Monitoring Plan IC/EC Plan Ground Water Use Restriction Landuse Restriction Site Management Plan

An Environmental Easement was filed with the Erie County Clerk's Office on November 19, 2015. The Controlled Property may be used for commercial and industrial use as long as the following long-term institutional controls are employed: (1) restrict the use of site groundwater as a source of potable or process water without necessary water quality treatment as determined by the NYSDOH or Erie County Department of Health; (2) all future activities on the property that will disturb remaining contaminated material must be conducted in accordance with the Site Management Plan; and (3) monitoring to assess the performance and effectiveness of the remedy must be conducted as defined in the Site management Plan.

Box 4

Description of Engineering Controls

None Required

Not Applicable/No EC's

Box 5

Periodic Review Report (PRR) Certification Statements

1. I certify by checking "YES" below that:

   a) the Periodic Review report and all attachments were prepared under the direction of, and reviewed by, the party making the Engineering Control certification;

   b) to the best of my knowledge and belief, the work and conclusions described in this certification are in accordance with the requirements of the site remedial program, and generally accepted engineering practices; and the information presented is accurate and compete.

YES	NO
X	☐

2. For each Engineering control listed in Box 4, I certify by checking "YES" below that all of the following statements are true:

   (a) The Engineering Control(s) employed at this site is unchanged since the date that the Control was put in-place, or was last approved by the Department;

   (b) nothing has occurred that would impair the ability of such Control, to protect public health and the environment;

   (c) access to the site will continue to be provided to the Department, to evaluate the remedy, including access to evaluate the continued maintenance of this Control;

   (d) nothing has occurred that would constitute a violation or failure to comply with the Site Management Plan for this Control; and

   (e) if a financial assurance mechanism is required by the oversight document for the site, the mechanism remains valid and sufficient for its intended purpose established in the document.

YES	NO
X	☐

IF THE ANSWER TO QUESTION 2 IS NO, sign and date below and DO NOT COMPLETE THE REST OF THIS FORM. Otherwise continue.

A Corrective Measures Work Plan must be submitted along with this form to address these issues.

Signature of Owner, Remedial Party or Designated Representative

Date

IC CERTIFICATIONS
SITE NO. C915233

Box 6

SITE OWNER OR DESIGNATED REPRESENTATIVE SIGNATURE

I certify that all information and statements in Boxes 1,2, and 3 are true. I understand that a false statement made herein is punishable as a Class "A" misdemeanor, pursuant to Section 210.45 of the Penal Law.

I Dino Zack, PG, STS at AECOM, One John James Audubon Pkwy, Suite 210, Amherst, NY 14228,
print name print business address
am certifying on behalf of Scott Figgie LLC (Owner or Remedial Party)

for the Site named in the Site Details Section of this form.

on behalf of Scott Figgie LLC

Signature of Owner, Remedial Party, or Designated Representative
Rendering Certification

June 24, 2022

Date