



Health and Safety Plan

Fulton Fish Market 800 Food
Center Drive
Bronx, New York, 10474


Prepared For:

Lenny Guerra
Market Manager, New Fulton Fish Market Corp.
800 Food Center Dr.,
Bronx, NY 10474

Submitted by:

VERDUGOS GC Corp.
608 Liberty Ave.
Brooklyn, NY 11207

January 2019

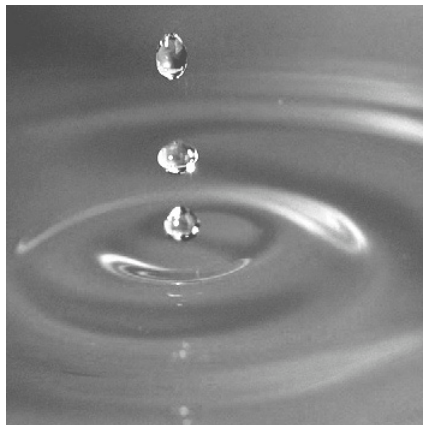

Gaston Verdugos
Project Manager
General Contractors

Table of Contents

1.	Emergency Contact Information	1
2.	Background Information	2
2.1	General	2
2.2	Project Description	2
2.3	Site Description	3
3.	Statement of Safety and Health Policy	4
4.	Hazard/Risk Analysis	5
4.1	Special Site Conditions or Concerns	5
4.2	Activity Hazard Analysis	5
4.2.1	Handling Drums and Containers	11
4.2.2	Utility Hazards	11
4.2.2.1	Underground Utilities	11
4.2.2.2	Overhead Utilities	12
4.2.3	Excavations and Trenches	12
4.2.4	Fire and Explosion	13
4.2.5	Heat Stress	13
4.2.6	Cold Stress	14
4.2.7	Noise	14
4.2.8	Hand and Power Tools	14
4.2.9	Slips, Trips, and Falls	14
4.2.10	Manual Lifting	14
4.2.11	Projectile Objects and Overhead Dangers	15
4.2.12	Cuts and Lacerations	15
4.3	Chemical Hazards	15
4.3.1	Volatile Organic Chemicals	15
4.3.2	Heavy Metals	16
4.3.3	Purifier Waste	16
4.3.3.1	Cyanide	17
4.3.4	Coal Tar and Coal Tar Products	17
4.3.5	Evaluation of Organic Vapor Exposure	18
4.3.6	Evaluation of Skin Contact and Absorption	18
4.4	Biological Hazards	22
4.4.1	Poisonous Plants	22
4.4.2	Ticks	23
4.4.2.1	Lyme Disease	23
4.4.2.2	Rocky Mountain Spotted Fever	23
4.4.2.3	Prevention	24
4.4.3	Mosquito- Borne Disease – West Nile Virus	25

**Health and Safety Plan
Hunts Point Fulton Fish Market 800
Food Center Drive
Bronx, New York
January 2019**

4.4.4	Wasps and Bees	25
4.4.5	Sun Exposure	26
5.	Personal Protective Equipment	27
5.1	OSHA Requirements for PPE	28
6.	Key Project Personnel/Responsibilities and Lines of Authority	29
6.1	VERDUGOS Personnel	29
6.1.1	VERDUGOS Project Manager	29
6.1.2	VERDUGOS Corporate Health and Safety Officer	30
6.1.3	VERDUGOS Site Safety Officer	30
6.1.4	VERDUGOS Field Personnel	31
6.1.5	Lines of Authority will be as follows:	32
6.2	Subcontractors	32
7.	Training Program	33
7.1	HAZWOPER Training	33
7.2	Annual 8-Hour Refresher Training	33
7.3	Supervisor Training	33
7.4	Site-Specific Training	33
7.5	On-Site Safety Briefings	34
7.6	First Aid and CPR	34
8.	Medical Surveillance Program	35
9.	Monitoring	36
9.1	Equipment Use	36
9.1.1	Photoionization Detector	36
9.1.2	Particulate Meter	37
9.1.3	Multi-Gas Meter	37
10.	Site Control Measures	39
10.1	Site Zones	39
10.2	Buddy System	40
10.3	Sanitation for Temporary Work Sites	40
10.4	Illumination	40
10.5	Smoking	40
10.6	Alcohol and Drug Abuse Prevention	40
11.	Accident Reporting	41
11.1	Injury Triage Service	41
12.	Decontamination Procedures	42
12.1	Personnel Decontamination Station	42
12.2	Heavy Equipment Decontamination	43

12.3	Decontamination Equipment Requirements	43
13.	Supplemental Contingency Plan Procedures	44
13.1	Hazard Communication Plan	44
13.2	Fire	44
13.3	Medical Support	44
13.4	Severe Weather	44
13.5	Spills or Material Release	45
14.	Health and Safety Plan Sign-Off	46
15.	Figures	47

Figures

1. Site Location Map

Tables

1. Emergency Contact Information
2. Activity Hazard Analysis
3. Chemical Data
4. Summary of PPE by Level
5. OSHA Standards for PPE
6. Real-Time Work Zone Air Monitoring Action Levels

Appendices

- A. Map to Hospital and Occupational Health Clinic
- B. Safety Data Sheets
- C. Heat and Cold Stress Guidelines
- D. Forms

1. Emergency Contact Information

Table 1. Emergency Information

Important Phone Numbers		Directions to Hospital
Local Police:	911	To Hospital (3.8 mi, ~ 16 min): 1. Head northwest on Food Center Drive towards Halleck St (0.9 mi) 2. Continue onto E Bay Ave (0.5 mi). 3. Turn right onto Tiffany St (0.2 mi). 4. Turn left onto Randall Ave (0.2 mi). 5. Continue onto Leggett Ave (0.3 mi). 6. Turn left onto Bruckner Blvd (249 ft). 7. Slight right onto Timpson Pl (1.0 mi). 8. Turn right onto E 149th St (1.1 mi). 9. Turn left onto Morris Ave (154 ft). 10. Hospital is on the right.
Fire Department:	911	
Ambulance:	911	
State Police or County Sheriff:	911	
Lincoln Medical Center: 234 E 149th St Bronx, NY 10451	(718) 579-5000	
Medcare Urgent Care-Walk In: 1643 Westchester Avenue Bronx, NY 10472	(718) 328-1900	
Project Manager: Gaston Verdugo (Verdugos)	(718) 235-9727 office (347) 623-2536 cell	

2. Background Information

2.1 General

Contractor	VERDUGOS GC Corp. 608 Liberty Avenue, Brooklyn, NY 11207
Project Name	Hunts Point Fulton Fish Market 800 Food Center Drive Bronx, New York 10474

This Health and Safety Plan (HASP) establishes policies and procedures to protect VERDUGOS personnel from the potential hazards posed by the activities at the former Voluntary Cleanup Agreement (VCA) Parcel B located at the Hunts Point Fulton Fish Market at 800 Food Center Drive, Bronx, New York. Verdugos will be working in the Fish Market in part of the completed remediation area. Familiarity with the HASP is required of on-site Verdugos personnel and will be reviewed by Verdugos subcontractors. Subcontractors will prepare their own Site-specific HASP and may use this as a guide. The plan identifies measures to minimize accidents and injuries, which may result from project activities or during adverse weather conditions. A copy of this HASP will be maintained on site for the duration of the work.

Included in Section 1 and Appendix A is a route to the nearest medical facility from the Site with directions and contact information. Safety data sheets (formerly known as Material Safety Data Sheets [MSDS]), specific to chemicals that may be encountered while working at the Site, are in Appendix B. Appendix C details the signs, symptoms, care and procedures to both heat and cold stress. Appendix D includes the Tailgate Safety Briefing form, the Project Safety Briefing form, the Accident/Incident Report Form and the Near Miss Reporting Form.

2.2 Project Description

Historically, the Site was part of the Consolidated Edison Company of New York (Con Ed) Manufactured Gas Plant (MGP) that operated from 1926 until the early 1960s. Gas operations included a coke/oven gas plant, a carbureted water gas plant, a light oil plant, and a liquid petroleum production area. In total, approximately 46 buildings or structures existed

on the former Con Ed MGP facility that were actively involved in gas production. The facility stopped production in the early 1960s and was demolished in early 1968. Portions of the former MGP have been divided into parcels (A through F) for purposes of investigation.

VERDUGOS is responsible for providing construction oversight of excavation, demolition and engineering control installation activities as part of a facility upgrade that will include pavement removal, fence and utility installation and replacement of the engineering control within the Fulton Fish Market facility. A component of the work includes materials management mainly involving close inspection of all excavated material for evidence of residual impacts associated with the former MGP. The Fish Market will conduct the daily implementation of the site-specific Community Air Monitoring Plan (CAMP). If necessary, Verdugos will implement Storm Water Pollution Prevention Plan (SWPPP) for protection of the surrounding community and environment. Completion of this project will ensure that the former VCP Site remains closed and complies with the SMP for the remediated site.

The following tasks are planned and are covered by this Site Safety Plan:

- Soil and waste sampling;
- Construction Inspection;
- Community Air Monitoring;
- Other as applicable.

2.3 Site Description

The Site is located in a commercial and industrial area of the Hunts Point section of the Borough of the Bronx. The Site consists of three lots contained within a portion of a tax lot identified on New York City tax maps as Block 2780, Lot 73. The Site is bounded to the north and northeast by Food Center Drive, to the east by Farragut Street and the former South Bronx Marine Transfer Station, to the south by the Vernon C. Bain Center and the East River, and to the west by Halleck Street and a wastewater treatment plant. The planned redevelopment area includes the northwestern portion of the Fulton Fish Market facility and is currently covered under a New York State Department of Environmental Conservation (NYSDEC) approved Site Management Plan (SMP) and environmental easement. A map showing the Site property boundaries is included as Figure 1. The entirety of the Site is operated by the Fulton Fish Market, is currently zoned M3-1 (Manufacturing) and owned by the New York City Department of Small Business Services (NYC SBS).

3. Statement of Safety and Health Policy

VERDUGOS is committed to providing a safe and healthy work environment for its employees. To maintain a safe work environment, VERDUGOS has established an organizational structure and a Corporate Health and Safety Program to promote the following objectives:

- Reduce the risk of injury, illness, and loss of life to VERDUGOS employees.
- Maintain compliance with federal, state, and other applicable safety regulations; and minimize VERDUGOS employees' work exposure to potential physical, chemical, biological, and radiological hazards.

Safety policy and procedure on any one project cannot be administered, implemented, monitored, and enforced by any one individual. The total objective of a safe, accident free work environment can only be accomplished by a dedicated, concerted effort by every individual involved with the project from management down to all employees.

Each VERDUGOS employee must understand their value to the company; the costs of accidents, both monetary, physical, and emotional; the objective of the safety policy and procedures; the safety rules that apply to the safety policy and procedures; and what their individual role is in administering, implementing, monitoring, and compliance of their safety policy and procedures. This allows for a more personal approach to compliance through planning, training, understanding, and cooperative effort, rather than by strict enforcement. If for any reason an unsafe act persists, strict enforcement will be implemented.

4. Hazard/Risk Analysis

The potential hazards associated with site conditions and activity hazards related to VERDUGOS on-site activities have been identified in this section.

4.1 Special Site Conditions or Concerns

- Chemical/Contaminant Exposure – purifier waste and MGP-related constituents
- Traffic – The majority of traffic on the project site will be construction traffic and vehicular traffic from employees and visitors to the facility. Food Center Drive is an extremely busy roadway, located west of the site.
- Cold Stress/Heat Stress – depends on time of year
- Bio hazards (insect bites, poison ivy, etc.).
- Inclement weather/hazardous winter conditions – Cold stress, slippery surfaces, and icy conditions are possible dangers.
- Utilities – Large utilities along Food Center Drive and throughout the property.

Safety equipment will include: First aid kit, fire extinguisher, eye wash bottles, adequate supply of drinking water and electrolyte fluids, hand cleaner, insect repellent, sunscreen, and cell phone.

4.2 Activity Hazard Analysis

The potential hazards for this project associated with site conditions and activity hazards associated with VERDUGOS on-site activities have been identified in Table 2. General hazards and control measures that are applicable to all site activities are identified in the General Hazards section. The site-specific tasks, potential hazards, and control measures established to reduce the risk of injury or illness are identified in the Activity Hazard section of Table 2.

Table 2. Activity Hazard Analysis

General Hazards These Hazards Apply to All Site Activities	Control Measure
Chemical / Contaminant Exposure – Skin and eye injury/irritation	• Wear protective coveralls (e.g. Tyvek ®) with shoe covers, safety glasses, face shield, Nitrile gloves. • Dispose of gloves after use and wash hands. • Avoid contact with pooled liquids and limit contact with contaminated soils/groundwater.
Cold Stress – Hypothermia, Frostbite	• Take breaks in heated shelters when working in extremely cold temperatures. • Drink warm liquids to reduce the susceptibility to cold stress. • Wear protective clothing (recommended three layers: an outside layer to break the wind, a middle layer to provide insulation, and an inner layer of cotton or synthetic weave to allow ventilation). • Wear a hat and insulated boots. • Keep a change of dry clothing available in case clothes become wet. • Do heavy work during the warmer parts of the day and take breaks from the cold. • If possible shield work areas from drafts of wind and use insulating material on equipment handles when temperatures are below 30°F • Watch for symptoms of cold stress. (see Appendix C in HASP)
Dusty Conditions – Eye and respiratory irritation	• Avoid travel at extreme times • Wear protective gear – dust masks, safety glasses
Heat stress – Fainting, Fatigue, Heat Stroke	• Increase water intake while working. • Increase number of rest breaks and/or rotate workers in shorter work shifts. Rest in cool, dry areas. • Watch for signs and symptoms of heat exhaustion and fatigue. • Plan work for early morning or evening during hot months. • Use ice vests when necessary. • In the event of heat stroke, bring the victim to a cool environment and initiate first aid procedures. • See Appendix C of the HASP
Inclement Weather	• Listen to local forecasts for warnings about specific weather hazards such as tornados, thunder storms, and flash floods. • If the storms produce thunder and/or lightning, leave the work area immediately and move to a safe area. • Discuss an action plan prior to the severe weather. • Wear appropriate PPE for the type of weather that could be encountered. • Stop work until conditions are suitable. Take cover in vehicles or shelter as appropriate.

General Hazards These Hazards Apply to All Site Activities	Control Measure
Insects – Bites, Stings, Allergic Reactions	• Apply insect repellent prior to performing field work and as often as needed throughout the work shift • Wear proper protective clothing (work boots, socks and light colored clothing) • Wear shoes, long pants with bottoms tucked into boots or socks, and a long-sleeved shirt when outdoors for long periods of time, or when many insects are most active (between dawn and dusk). • When walking in wooded areas, avoid contact with bushes, tall grass, or brush as much as possible • Field personnel who may have insect allergies should have bee sting allergy medication on site and should provide this information to the SSO and the CHSO prior to commencing work. • Field personnel should perform a self-check at the end of the day for ticks.
Physical Injury – Slips, Trips and Falls	• Wear PPE that properly fits, is in good condition and appropriate for the activities and hazards. • Maintain good visibility of the work area. • Avoid walking on uneven, steeply sloped or debris ridden ground surfaces. • Plan tasks prior to performing them including an activity hazard analysis. • Keep trafficked areas free from slip/trip/fall hazards. • Maintain weed growth in sampling areas, especially on slopes. • Wear shoes with traction. • Avoid traversing steep areas in slippery conditions. • Do not carry heavy objects to sampling areas, on steeply sloped areas, or where steep areas must be traversed to arrive at sample points.
Utilities – Shock, Electrocution, Fire, Explosion	• A thorough underground utility survey must be conducted prior to intrusive activities. Coordination with utility locating services, property owner(s) or utility companies must be conducted. • Utilities are to be considered live or active until documented otherwise. • For overhead utilities within 50 feet, determine with the utility company the appropriate distance. Minimum distance for clearance is based on voltage of the line. • If exposing a utility, proper support and protection must be provided so that the utility will not be damaged. • If a gas line is contacted, the contractor must notify police, fire, and emergency personnel, and evacuate employees according to the site evacuation procedures. No attempt should be made to tamper with or correct the damaged utilities.

General Hazards These Hazards Apply to All Site Activities	Control Measure
Vehicular Traffic – Struck by injury, crushing	• Increase visibility of the work area to others by using cones, flags, barricades, proper lighting and caution tape to define work area. • Use a "spotter" to locate oncoming vehicles. • Use vehicle to block work area. • Engage police detail for all work conducted in appropriate areas. • Wear high-visibility, reflective vest at all times. • Maintain minimum DOT defined distances to other traffic lanes.

Activity	Potential Hazard	Control Measures
Construction Site Entry	Struck-by, caught-in-between equipment, crushing, pinch points	• Wear hardhat; high visibility reflective safety vest; steel-toed, steel-shank boots or (electrical hazard) EH-rated safety boots with composite toe and shank; safety glasses; nitrile/neoprene gloves; and earplugs. • Identify yourself and your work location to heavy equipment operators, so they may incorporate you into their operations. • Coordinate hand signals with operators. • Stay Alert! Pay attention to equipment backup alarms and swing radii. • Wear a high-visibility, reflective vest when working near equipment or motor vehicle traffic. • Position yourself in a safe location when filling out log talking with the contractor. • Notify the contractor immediately if any problems arise. • Do not stand or sit under suspended loads or near any pressurized equipment lines. • Do not operate cellular telephones in the vicinity of heavy equipment operation.
Dense Non-Aqueous Phase Liquid (DNAPL) Recovery	Contaminant Exposure, Repetition, Slips/Trips/Falls	• Wear proper PPE during sampling including Tyvek or Tyvek apron with sleeves, Nitrile gloves, and face shield/safety glasses. • Take regular breaks and do not work in unusual positions for long periods of time. • Keep trafficked areas free from slip/trip/fall hazards.

Activity	Potential Hazard	Control Measures
Drum Handling	Contaminant Contact Cuts or Abrasions Heavy Lifting , Slips/Trips/Falls	• Wear proper PPE during sampling including nitrile gloves and safety glasses and face shield as appropriate. • Use proper dollies or drum moving tools. • Use applicable tools to open/close drum lids. • Do not handle drums with bulging sides. • Dispose of gloves after use and wash hands. • Wear work gloves over nitrile gloves. • Use proper lifting techniques. • Ask fellow worker for help. • Keep trafficked areas free from slip/trip/fall hazards.
Excavation and Test Pit Oversight	Crushing, entrapment, falls, fire/explosion	• Prior to excavating, determine utility locations and have locations marked by utility companies and the property owner. • Utilities shall be properly supported and barriers should be erected around excavations in remote areas. • Backfill temporary excavations when work is completed. • Personnel must remain 2 feet from the face of the excavation. • Sides, slopes, and faces shall meet OSHA requirements. • Excavation entry will be allowed only with proper sloping or shoring.
Heavy Equipment – Working Near	Struck-by, caught-in-between equipment, crushing, pinch points	• Wear hardhat; high visibility reflective safety vest; steel-toed, steel-shank boots or (electrical hazard) EH-rated safety boots with composite toe and shank; safety glasses; nitrile/neoprene gloves; and earplugs. • Identify yourself and your work location to heavy equipment operators, so they may incorporate you into their operations. • Coordinate hand signals with operators. • Stay Alert! Pay attention to equipment backup alarms and swing radii. • Wear a high-visibility, reflective vest when working near equipment or motor vehicle traffic. • Position yourself in a safe location when filling out logs talking with the contractor. • Notify the contractor immediately if any problems arise. • Do not stand or sit under suspended loads or near any pressurized equipment lines. • Do not operate cellular telephones in the vicinity of heavy equipment operation.

Activity	Potential Hazard	Control Measures
Heavy Lifting	Back injury, knee injury	• Use proper lifting techniques. • Ask fellow worker for help. • Use a mechanical lifting device or a lifting aid where appropriate. • If you must lift, plan the lift before doing it. • Check your route for clearance. • Bend at the knees and use leg muscles when lifting. • Use the buddy system when lifting heavy or awkward objects. • Do not twist your body while lifting.
Managing MGP Purifier Waste	Contaminant exposure	• Purifier waste is a mix of wood shavings and iron oxide used to adsorb sulfur and cyanide compounds. MGP tar may be present in purifier waste. The waste was typically burned to reduce its volume for disposal, so it may have a burnt odor. • Purifier waste contains high concentrations of sulfur and cyanide. It may evolve hydrogen cyanide gas, or turn bright blue due to oxidation of cyanide compounds. • Work in well ventilated spaces and use gloves when handling this waste material. • Monitor for hydrogen cyanide with an appropriate gas meter in the breathing zone when working with purifier waste.
Soil Sampling/Soil Vapor Sampling	Contaminant Exposure, Cuts/Scrapes, Heavy Lifting, Repetition, Slips/Trips/Falls	• Wear hardhat; high visibility reflective safety vest; steel-toed, steel-shank boots or composite toe and shank; safety glasses; Nitrile/neoprene gloves; and earplugs as necessary. • Dispose of gloves after use and wash hands. • Wear work gloves over nitrile gloves. • Excavation entry will be allowed only with proper sloping or shoring. • Take regular breaks and do not work in unusual positions for long periods of time. • Keep trafficked areas free from slip/trip/fall hazards.
Waste Characterization	Contaminant Contact • Wear proper PPE during sampling including nitrile gloves and safety glasses. Cuts or Abrasions, Slips/Trips/Falls	• Wear proper PPE during sampling including nitrile gloves and safety glasses. • Dispose of gloves after use and wash hands. • Wear work gloves over nitrile gloves. • Keep trafficked areas free from slip/trip/fall hazards.

Personal Protective Equipment (PPE) is the initial level of protection based on the activity hazards and Site conditions which have been identified. Upgrades to respiratory protection may be required based on the designated Action Levels found in Section 9. General on-site provisions will include: extra nitrile, leather, and/or Kevlar gloves, extra protective coveralls (e.g. Tyvek®) with boot covers, drinking water and electrolyte fluids, reflective vest, first aid kit, fire extinguisher, hearing protection, and washing facilities.

If Site conditions suggest the existence of a situation more hazardous than anticipated, the Site personnel will evacuate the immediate area. The hazard, the level of precautions, and the PPE will then be reevaluated with the assistance and approval of the CHSO and the Project Manager (PM).

4.2.1 Handling Drums and Containers

Regulations for handling drums and containers are specified by Occupational Safety and Health Administration (OSHA) 29 Code of Federal Regulations (CFR) 1910.120(j). Potential hazards associated with handling drums include vapor generation, fire, explosions, and possible physical injury. Handling of drums/containers during the Site investigation and remediation activities may be necessary. If drum/container handling is necessary, it will be performed in accordance with applicable regulations.

4.2.2 Utility Hazards

The Site may have shallow, buried utilities and also overhead utilities in certain areas. It will be necessary for parties disturbing the existing ground surface and conducting operations with heavy equipment having high clearances to exercise caution in performing project-related work with respect to the presence of utilities. Utility companies with active, buried lines in the Site area will be asked by the Contractor performing intrusive activities to mark their facilities. Employees will use these data to choose work locations.

4.2.2.1 Underground Utilities

The Site still contains a drainage easement leading to a combined sewer overflow (CSO) located on the southern edge of the Hunts Point Peninsula. Other active utilities are likely located on the Site as well. Existing utility maps will be reviewed, the CSO and any other active site utilities will be marked-out by a Surveyor, and proposed borings and monitoring well locations will be pre-cleared prior to implementation of RI activities

No excavating or other intrusive activities will be performed until an underground utility survey, conducted by knowledgeable persons or agencies, has been made. This survey will identify underground and in-workplace utilities such as the following:

- Electrical lines and appliances;

- Telephone lines;
- Cable television lines;
- Gas lines;
- Pipelines;
- Steam lines;
- Water lines;
- Sewer lines; and/or
- Pressurized air lines.

The location of utilities will be discussed with VERDUGOS employees and subcontractors during a Site Safety Briefing. Identified utilities should be marked or access otherwise restricted to avoid chance of accidental contact.

Even when a utility search has been completed excavation should commence with caution until advanced beyond the depth at which such utilities are usually located. Utilities will be considered “live” or active until reliable sources demonstrate otherwise.

4.2.2.2 Overhead Utilities

Overhead transmission and distribution lines will be carried on towers and poles which provide adequate safety clearance over roadways and structures. Clearances will be adequate for the safe movement of vehicles and for the operation of construction equipment.

Overhead or above-ground electric lines should be considered active until a reliable source has documented them to be otherwise. Elevated work platforms, ladders, scaffolding, man-lifts, and drill or vehicle superstructures will be erected a minimum of 20 feet (the actual distance is dependent upon the voltage of the line) from overhead electrical lines until the line is de-energized, grounded, or shielded so arcing cannot occur between the work location or superstructure.

4.2.3 Excavations and Trenches

The safety requirements for excavations and trenches must be determined by a competent person who is capable of identifying existing and predictable hazards and work conditions that are unsanitary, hazardous, or dangerous to VERDUGOS employees. The competent person must also have the authorization to take prompt corrective measures to eliminate unsatisfactory conditions. VERDUGOS employees will not enter trenches.

The following are general requirements for work activities in and around excavations:

- Prior to initiation of excavation activity (or ground intrusive activity, such as drilling), the location of underground installations will be determined. The New York 811 center will be contacted by the Contractor/Subcontractor a minimum of 72 hours prior to excavation activities. It may also be necessary to temporarily support underground utilities during excavation. When excavations approach the estimated location of underground installations, the exact location of the underground installations will be determined by means that are safe for VERDUGOS employees, i.e., hand dig, test pits, etc.
- Excavations should be inspected daily by the excavating company's competent person prior to commencement of work activities. Evidence of cave-ins, slides, sloughing, or surface cracks or excavations will be cause for work to cease until necessary precautions are taken to safeguard employees.
- Excavated and other materials or equipment that could fall or roll into the excavation, and vehicular traffic and heavy equipment will be placed at least 5 feet from the edge of the excavation.
- Excavation operations will cease immediately during hazardous weather conditions such as high winds, heavy rain, lightning, and heavy snow.

Employees will refer to VERDUGOS's Excavation Safety SOP for further information.

4.2.4 *Fire and Explosion*

When conducting excavating activities, the opportunity for encountering fire and explosion hazards exists from contamination in soil and the possibility of free product in underground structures and pipelines. Additionally, the use of diesel-powered excavating equipment could present the possibility of encountering fire and explosion hazards.

4.2.5 *Heat Stress*

Employees may be exposed to the hazards associated with heat stress when ambient temperatures exceed 70°F. Employees should increase water intake while working in conditions of high heat. Enough water should be available so that each employee can consume 1 quart of water per hour. In addition, they should increase number of rest breaks and/or rotate employees in shorter work shifts. Employees should rest in cool, dry, shaded areas for at least 5 minutes. Employees should not wait until they feel sick to cool down. Watch for signs and symptoms of heat exhaustion and fatigue. In the event of heat stroke, bring the victim to a cool environment, call for help, and initiate first aid procedures

The procedures to be followed regarding avoiding heat stress are provided in Appendix C – Heat Stress Guidelines and in VERDUGOS's Heat Stress program.

4.2.6 Cold Stress

Employees may be exposed to the hazards of working in cold environments. Potential hazards in cold environments include frostbite, trench foot or immersion foot, hypothermia, as well as slippery surfaces, brittle equipment, and poor judgment. The procedures to be followed regarding avoiding cold stress are provided in Appendix C – Cold Stress Guidelines and in VERDUGOS’s Cold Stress program.

4.2.7 Noise

Noise is a potential hazard associated with the operation of heavy equipment, power tools, pumps, and generators. Employees who will perform suspected or established high noise tasks and operations for short durations (less than 1-hour) will wear hearing protection. If deemed necessary by the SSO, the CHSO will be consulted on the need for additional hearing protection and the need to monitor sound levels for Site activities. Other employees who do not need to be in proximity of the noise should distance themselves from the equipment generating the noise.

4.2.8 Hand and Power Tools

In order to complete the various tasks for the project, personnel may use hand and power tools. The use of hand and power tools can present a variety of hazards, including physical harm from being struck by flying objects, being cut or struck by the tool, fire, and electrocution. Work gloves, safety glasses, and hard hats will be worn by the operating personnel when using hand and power tools and Ground Fault Circuit Indicator (GFCI)-equipped circuits will be used for power tools.

4.2.9 Slips, Trips, and Falls

Working in and around the Site may pose slip, trip, and fall hazards due to slippery and uneven surfaces. Excavation at the Site may cause uneven footing in trenches and around the soil piles. Steep slope and uneven terrain conditions at the Site are also a primary concern. VERDUGOS employees will wear proper foot gear and will employ good work practice and housekeeping procedures to minimize the potential for slips, trips, and falls.

4.2.10 Manual Lifting

Manual lifting of objects and equipment may be required. Failure to follow proper lifting technique can result in back injuries and strains. Employees should use a buddy system and/or power equipment to lift heavy loads whenever possible and should evaluate loads before trying to lift them (i.e., they should be able to easily tip the load and then return it to its original position). Carrying heavy loads with a buddy and proper lifting techniques

include: 1) make sure footing is solid; 2) make back straight with no curving or slouching; 3) center body over feet; 4) grasp the object firmly and as close to your body as possible; 5) lift with legs; and 6) turn with your feet, don't twist.

4.2.11 *Projectile Objects and Overhead Dangers*

Overhead dangers, including but not limited to falling debris and equipment, can occur while working near heavy machinery. VERDUGOS employees will maintain a minimum distance from large overhead operations and to maintain proper communication with heavy equipment operators and their handlers, should work necessitate their presence beyond the minimum safety distance. Proper PPE will be worn during these types of activities including steel-toed/shank boots, safety vests, and hard hats.

4.2.12 *Cuts and Lacerations*

The core sampling program may require employees to use powered cutting tools (circular saw or shears) or a hooked knife to cut open the sample liner. Safety box cutters will be utilized for routine operations such as opening boxes of supplies or cutting rope or string. When using cutting tools, follow the safety precautions listed below:

- Keep free hand out of the way.
- Secure work if cutting through thick material.
- Use only sharp blades; dull blades require more force that results in less knife control.
- Pull the knife through the object and away from your body; pulling motions are easier to manage.
- Do not put the knife in your pocket.
- Wear leather or Kevlar® gloves when using knives or blades, or when removing sharp objects caught or dangling in sampling gear.

4.3 Chemical Hazards

The characteristics of compounds at the Site are discussed below for information purposes. Adherence to the safety and health guidelines in this HASP should reduce the potential for exposure to the compounds discussed below.

4.3.1 *Volatile Organic Chemicals*

Volatile organic chemicals (VOCs), such as benzene, toluene, ethyl benzene, and xylene (BTEX) are present as soil and groundwater contaminants, and in some cases chemical components in non-aqueous phase liquids (NAPL) such as oil or tar within soils and

abandoned pipelines. These compounds are at environmental concentrations and are not expected to be at concentrations that exposure symptoms would occur. These compounds generally have a depressant effect on the Central Nervous System (CNS), may cause chronic liver and kidney damage, and some are suspected human carcinogens. Benzene is a known human carcinogen. Acute exposure may include headache, dizziness, nausea, and skin and eye irritation. The primary route of exposure to VOCs is through inhalation and therefore respiratory protection is the primary control against exposure to VOCs.

4.3.2 Heavy Metals

Heavy metals such as arsenic, chromium, and mercury have been detected in site samples. Exposure to high concentrations of arsenic can cause dermatitis, gastrointestinal disturbances, peripheral neuropathy, respiratory irritation, and hyper pigmentation of skin. Chronic exposure to arsenic has resulted in lung cancer in humans. Arsenic is regulated by specific OSHA standards. They are 29 CFR 1910.1025/1926.52 and 29 CFR 1910.1018/1926.1118, respectively. These standards include specific requirements for air monitoring, signs and labels, training and medical surveillance.

Exposure to chromium can cause acute symptoms such as irritation of the eyes, nose and throat as well as wheezing and coughing. Chronic effects include nosebleeds, nasal congestion, dermatitis, and loss of sight. Exposure to mercury can cause dizziness, salivation nausea, vomiting, diarrhea, constipation, emotional disturbance, and kidney injury. Chronic exposure to mercury can cause CNS damage.

These metals are at environmental concentrations and are not expected to be at concentrations that exposure symptoms would occur. As with SVOCs, the primary route of exposure is through inhalation of dust particles when soil is disturbed and becomes airborne.

4.3.3 Purifier Waste

There are two typical byproducts which resulted from MGP processes, purifier waste and coal tar. Manufactured gas had to be cooled, purified, and a number of other impurities had to be removed prior to use. Sulfur and cyanide compounds were removed by passing the gas through "purifier beds" made up of either lime or wood chips permeated with iron filings. The beds of purifier material would eventually load up with tar and other materials and become unusable. Purifier waste is typically found as a dark mixture of wood chips with a strong burnt odor. Once exposed at the ground surface, the waste often developed an iridescent blue color known as "Prussian Blue."

4.3.3.1 Cyanide

Cyanide compounds are common by-products of manufactured gas production. Hydrogen cyanide is toxic because it is a chemical asphyxiant. It replaces the oxygen in the blood and thereby suffocates the cells. Ferro cyanides are not considered toxic because the hydrogen cyanide ion is bound too tightly to the iron and cannot therefore replace the oxygen. It takes a great amount of heat and/or acid to release cyanide gas from the ferro cyanide molecule; therefore, hydrogen cyanide is not a concern at this Site. However, VERDUGOS plans to monitor for hydrogen cyanide during earth-disturbing activities at sites where MGP-related contaminants have been found.

4.3.4 Coal Tar and Coal Tar Products

Coal tar products, which are semi-volatile organic compounds (SVOCs) consist of a mixture of acenaphthene, acenaphthylene, anthracene, benz(a)anthracene, benzo(b)fluoranthene, benzo(k)fluorethene, benz(a)pyrene, benzo(e)pyrene, benzo(g,h,i)perylene, chrysene, dibenz(a,h)anthracene, fluoranthene, fluorene, indeno(1,2,3cd)pyrene, 2-methyl naphthalene, naphththalene, phenanthrene, phenols, pyrene.

Some coal tar products and other SVOCs are present at the Site within impacted soil and groundwater and as a dense non-aqueous phase liquid (DNAPL) by-product of gas production within soils, former manufactured gas plant (MGP) structures, and abandoned pipelines.

Coal tar products such as those listed above may cause contact dermatitis. Direct contact can be irritating to the skin and produce itching, burning, swelling, and redness. Direct contact or exposure to the vapors may be irritating to the eyes. Conjunctivitis may result from prolonged exposure. Coal tar is considered to be very toxic, if ingested. High levels of exposure to coal tar, though not anticipated during work activities conducted during this project, may increase the risk of cancer including lung, kidney, and skin cancer. Naphthalene is also an eye and skin irritant and can cause nausea, headache, fever, anemia, liver damage, vomiting, convulsions, and coma. Poisoning may occur by ingestion of large doses, inhalation, or skin absorption.

The major route of entry for the work activities to be conducted at this Site is through direct contact. Exposure is most likely when handling soil and water samples. Inhalation may occur when the soil is disturbed causing respirable and nuisance dust particles to become airborne.

4.3.5 *Evaluation of Organic Vapor Exposure*

Air monitoring reduces the risk of overexposure by indicating when action levels have been exceeded and when PPE must be upgraded or changed. Action Levels for VOCs and associated contingency plans for the work zone are discussed within Section 9 of this HASP.

Exposure to organic vapors will be evaluated and/or controlled by:

- Monitoring air concentrations for organic vapors in the breathing zone with a photoionization detector (PID) or a flame ionization detector (FID).
- When possible, engineering control measures will be utilized to suppress the volatile organic vapors. Engineering methods can include utilizing a fan to promote air circulation, utilizing volatile suppressant foam, providing artificial ground cover, or covering up the impacted material with a tarp to mitigate volatile odors.
- When volatile suppression engineering controls are not effective and organic vapor meters indicate concentrations above the action levels, then appropriate respiratory protection (i.e., air purifying respirator with organic vapor cartridge) will be employed.

4.3.6 *Evaluation of Skin Contact and Absorption*

Skin contact by contaminants may be controlled by use of proper hygiene practices, PPE, and good housekeeping procedures. The proper PPE (e.g., Tyvek®, gloves, safety glasses) as described in Section 5 will be worn for activities where contact with potential contaminated media or materials are expected.

SDSs for decontamination chemicals and laboratory reagents that may be used on Site are included in Appendix B. Specific chemical hazards information from the occupational health sources are summarized in Table 3.

Table 3. Chemical Data

Compound	CAS #	ACGIH TLV	OSHA PEL	Route of Exposure	Symptoms of Exposure	Target Organs	Physical Data
Hydrogen Cyanide	74-90-8	4.7 ppm (5 mg/m ₃) STEL [skin]	10 ppm (11 mg/m ₃) [skin]	Inhalation Ingestion Absorption Skin/Eye Contact	Asphyxia; weakness, headache, confusion; nausea, vomiting; increased rate and depth of respiration or respiration slow and gasping; thyroid, blood changes	CNS, CVS, thyroid, blood	Colorless or pale-blue liquid or gas (above 78°F) with a bitter, almond-like odor. VP: 630 mmHg IP: 13.60 eV
Arsenic	7440-38-2	0.01 mg/m ₃	0.01 mg/m ₃ A.L. .005mg/m ₃	Inhalation Skin Absorption Ingestion Skin Contact	Ulceration of nasal septum, dermatitis, GI disturbances, peripheral neuropathy, respiratory irritation, hyperpigmentation of skin, potential carcinogen	Liver, kidneys, skin, lungs, lymphatic system	Metal: Silver-gray or tin-white, brittle, odorless solid FP: NA IP: NA LEL: NA UEL: NA VP: 0 mm
Benzene	71-43-2	0.5 ppm (Skin)	1 ppm TWA 5 ppm STEL	Inhalation Skin Absorption Ingestion Skin Contact	Irritation of eyes, skin, nose, respiratory system, giddiness, headache, nausea; staggering gait, fatigue, anorexia, weakness, dermatitis, bone marrow depression, potential carcinogen	Eyes, skin, CNS, bone marrow, blood	FP: 12o F IP: 9.24 eve LEL: 1.2% UEL:7.8% VP: 75 mm
Chromium (Chromic Acid and Chromates)	1333-82-0	0.05 mg/m ₃	0.1 mg/m ₃	Inhalation Ingestion Skin Contact	Irritates respiratory system, nasal, septum perforation, liver and kidney damage, leucocytosis (increased blood leucocytes), leukopenis (reduced blood leucocytes), moncytosis (increased monocytes), Eosinophilia, eye injury, conjunctivitis, skin ulcer, sensitivity dermatitis, potential carcinongen	Blood, respiratory system, liver, kidney, eyes, skin, lung cancer	FP:NA IP:NA VP: Very Low LEL: NA UEL: NA
Ethylbenzene	100-41-4	100 ppm	100 ppm	Inhalation Ingestion Skin Contact	Eye, skin, mucous membrane irritation; headache; dermatitis, narcosis; coma	Eyes, skin, respiratory system, CNS	FP: 55o F IP: 8.76 eV LEL: 0.8% UEL:6.7% VP: 7 mm
Lead	7439-92-1	0.050 mg/m ₃	0.05 mg/m ₃ A.L. 0.03 mg/m ₃	Inhalation Ingestion Skin Contact	Weakness, insomnia; facial pallor; pale eye, anorexia, weight loss, malnutrition; constipation, abdominal pain, colic; anemia; gingival lead line; tremor; paralysis of wrist and ankles; irritated eyes, hypotension	Eyes, GI tract, CNS, kidneys, blood, gingival tissue	A heavy, ductile, soft, gray solid. FP: N/A IP: N/A LEL: N/A UEL: N/A VP: 0 mm

Table 3. Chemical Data

Compound	CAS #	ACGIH TLV	OSHA PEL	Route of Exposure	Symptoms of Exposure	Target Organs	Physical Data
Mercury	7439-97-6	0.025 mg/m ₃	0.10 mg/m ₃	Inhalation Skin Absorption Ingestion Skin Contact	Irritated eyes and skin, chest pain, cough, difficulty breathing, bronchitis, pneumonitis, tremor, insomnia, irritability, indecision, headache, fatigue, weakness, stomatitis, salivation, gastrointestinal disturbance, weight loss, proteinuria	Eyes, skin, respiratory tract, CNS	Silver-white, heavy odorless liquid. FP: N/A IP: N/A LEL: N/A UEL: N/A VP: 0.0012 mm
Naphthalene	91-20-3		10 ppm (50 mg/m ₃) TWA	Inhalation Skin Absorption Ingestion Skin and/or Eye Contact	Irritation eyes; headache, confusion, excitement, malaise (vague feeling of discomfort); nausea, vomiting, abdominal pain; irritation bladder; profuse sweating; jaundice; hematuria (blood in the urine), renal shutdown; dermatitis, optical neuritis, corneal damage	Eyes, skin, blood, liver, kidneys, CNS	FP: 174°F IP: 8.12 eV LEL: 0.8% UEL: 6.7% VP: 0.08 mm
PAHs as Coal Tar	65996-93-2	0.2 mg/m ₃		10 ppm (50 mg/m ₃) TWA	Inhalation, ingestion, skin contact	Respiratory system, CNS, liver, kidneys, skin, bladder, carcinogen	Black or dark brown amorphous residue
Portland Cement	65997-15-1	10 µg/m ₃ (total) TWA 5 µg/m ₃ (resp)	TWA 50 mppcf	Inhalation, Ingestion, Skin and/or Eye Contact	Irritation eyes, skin, nose; cough, expectoration; exertional dyspnea (breathing difficulty), wheezing, chronic bronchitis; dermatitis	Eyes, skin, respiratory system	Gray, odorless powder FP: NA IP: NA LEL: NA UEL: NA VP: 0 mmHg
Toluene	108-88-3	50 ppm	200 ppm	Inhalation Skin Absorption Ingestion Skin Contact	Eye, nose irritation; fatigue, weakness, confusion, euphoria, dizziness, headache; dilated pupils, tearing of eyes; nervousness, muscle fatigue, insomnia, tingling in limbs; dermatitis	Eyes, skin, respiratory system, CNS, liver, kidneys	FP: 40o F IP: 8.82 eV LEL: 1.1% UEL: 7.1% VP: 21 mm
VOCs1	NA	0.5 ppm (Skin)	0.5 ppm TWA 2.5 ppm STEL	Inhalation, Skin Absorption, Ingestion, Skin Contact	Irritate eyes and skin; headaches; dizziness; nausea; kidney; liver damage; depress CNS	Skin, eyes, liver, kidney, CNS	Colorless volatile liquid, sometimes with a sweet or solvent odor
Xylene	1330-20-7	100 ppm	100 ppm	Inhalation Skin Absorption Ingestion, Skin Contact	Eye, skin, nose, throat irritation; dizziness, excitement, drowsiness; incoordination, staggering gait; corneal damage; appetite loss, nausea, vomiting, abdominal pain; dermatitis	Eyes, skin, respiratory system, Central Nervous System, GI tract, blood, liver, kidneys	FP: 90o F LEL: 0.9% UEL: 6.7% VP: 9 mm

Table 3. Chemical Data

Compound	CAS #	ACGIH TLV	OSHA PEL	Route of Exposure	Symptoms of Exposure	Target Organs	Physical Data

Abbreviations:

°F = degrees Fahrenheit

ACGIH = American Conference of Industrial Hygienists

A.L. = Action Level

atm = atmosphere

C = ceiling limit, not to be exceeded

CAS # = chemical abstract services number

CNS = Central Nervous System

CTPV = Coal Tar Pitch Volatiles

CVS = Cardiovascular System

eV = electron volt

f/cc = fibers per cubic centimeter

FP = Flash point

GI = Gastro-intestinal

H₂S = Hydrogen Sulfide

HCN = Hydrogen Cyanide

hr = hour

IP = Ionization Potential

LEL = Lower explosive limit

mg/m₃ = micrograms per cubic meter

min = minute

mm = millimeter

mmHg = millimeters of mercury

N/A = not applicable

OSHA = Occupational Safety and Health Administration

PAH = Polycyclic Aromatic Hydrocarbons

PCB = Polychlorinated Biphenyls

PEL = Permissible exposure limit

ppm = parts per million

Skin = significant route of exposure

STEL = Short-term exposure limit (15 minutes)

TWA = Time-weighted average (8 hours)

VP = vapor pressure approximately 68°F in mm Hg

4.4 Biological Hazards

Areas of the Site may be wooded, surrounded with brush, or landscaped. Therefore, employees working on this project should be aware of the potential biological hazards at this Site. Each is discussed in detail below.

4.4.1 *Poisonous Plants*


Persons working on the Site should be aware of the possible presence of poisonous plants and insects. Poison ivy is a climbing plant with leaves that consist of three glossy, greenish leaflets. Poison ivy has conspicuous red foliage in the fall. Small yellowish-white flowers appear in May through July at the lower leaf axils of the plant. White berries appear from August through November. Poison ivy is typically found east of the Rockies. Poison oak is similar to poison ivy but its leaves are oak-like in form. Poison oak occurs mainly in the south and southwest. Poison sumac typically occurs as a small tree or shrub and may be 6 to 20 feet in height. The bark is smooth, dark and speckled with darker spots. Poison sumac is typically found in swampy areas and east of the Mississippi. The leaves have 7 to 13 smooth-edged leaflets and drooping clusters of ivory-white berries that appear in August and last through spring.



Poison Oak



Poison Ivy

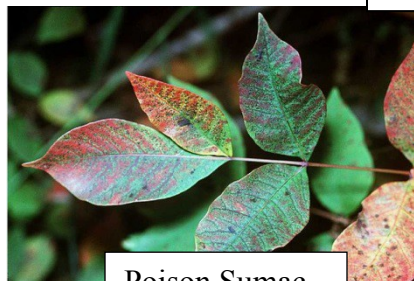

Poison Sumac

The leaves, roots, stems and fruit of these poisonous plants contain urushiol. Contact with the irritating oil causes an intensely itching skin rash and characteristic, blister-like lesions.

The oil can be transmitted on soot particles when burned and may be carried on the fur of animals, equipment, and apparel.

Proper identification of these plants is the key to preventing contact and subsequent dermatitis. Wear long sleeves and pants when working in wooded areas. In areas of known infestation, wear Tyvek® coveralls and gloves. Oils are easily transferred from one surface to another. If you come in contact with these poisonous plants, wash exposed areas immediately with cool water to remove the oils. Some commercial products such as Tecnu's Poison Oak-n-Ivy Cleanser claim to further help with the removal of oils.

4.4.2 Ticks

4.4.2.1 Lyme Disease

Ticks are bloodsuckers, attaching themselves to warm-blooded vertebrates to feed. Deer ticks are associated with the transmission the bacteria that causes Lyme disease. Female deer ticks are about ¼-inch in length and are black and brick red in color. Males are smaller and all black. If a tick is not removed, or if the tick is allowed to remain for days feeding on human blood, a condition known as tick paralysis can develop. This is due to a neurotoxin, which the tick apparently injects while engorging. This neurotoxin acts upon the spinal cord causing incoordination, weakness, and paralysis.

The early stages of Lyme disease, which can develop within a week to a few weeks of the tick bite, are usually marked by one or more of these signs and symptoms:

- Tiredness
- Chills and fever
- Headache
- Muscle and/or joint pain
- Swollen lymph glands
- Characteristic skin rash (i.e. bullseye rash)

4.4.2.2 Rocky Mountain Spotted Fever

Rocky Mountain spotted fever is spread by the American dog tick, the lone-star tick, and the wood tick, all of which like to live in wooded areas and tall, grassy fields. The disease is most common in the spring and summer when these ticks are active, but it can occur anytime during the year when the weather is warm.

Initial signs and symptoms of the disease include sudden onset of fever, headache, and muscle pain, followed by development of a rash. Initial symptoms may include fever, nausea, vomiting, severe headache, muscle pain, and/or lack of appetite.

The rash first appears 2 to 5 days after the onset of fever and is often not present or may be very subtle. Most often it begins as small, flat, pink, non-itchy spots on the wrists, forearms, and ankles. These spots turn pale when pressure is applied and eventually become raised on the skin. Later signs and symptoms include rash, abdominal pain, joint pain, and/or diarrhea.

The characteristic red, spotted rash of Rocky Mountain spotted fever is usually not seen until the 6th day or later after onset of symptoms, and this type of rash occurs in only 35% to 60% of patients with Rocky Mountain spotted fever. The rash involves the palms or soles in as many as 50% to 80% of patients; however, this distribution may not occur until later in the course of the disease.

4.4.2.3 Prevention

Tick season lasts from April through October; peak season is May through July. You can reduce your risk by taking these precautions:

- During outside activities, wear long sleeves and long pants tucked into socks. Wear a hat, and tie hair back.
- Use insecticides to repel or kill ticks. Repellents containing the compound n,n-diethyl-meta-toluamide (DEET) can be used on exposed skin except for the face, but they do not kill ticks and are not 100% effective in discouraging ticks from biting. Products containing permethrin kill ticks, but they cannot be used on the skin -- only on clothing. When using any of these chemicals, follow label directions carefully.
- After outdoor activities, perform a tick check. Check body areas where ticks are commonly found: behind the knees, between the fingers and toes, under the arms, in and behind the ears, and on the neck, hairline, and top of the head. Check places where clothing presses on the skin.
- Remove attached ticks promptly. Removing a tick before it has been attached for more than 24 hours greatly reduces the risk of infection. Use tweezers, and grab as closely to the skin as possible. Do not try to remove ticks by squeezing them, coating them with petroleum jelly, or burning them with a match. Keep ticks in a zip-lock baggie in case testing needs to be performed.
- Report any of the above symptoms and all tick bites to the PM and CHSO for evaluation.

4.4.3 Mosquito- Borne Disease – West Nile Virus

West Nile encephalitis is an infection of the brain caused by the West Nile virus, which is transmitted by infected mosquitoes. Following transmission from an infected mosquito, West Nile virus multiplies in the person's blood system and crosses the blood-brain barrier to reach the brain. The virus interferes with normal CNS functioning and causes inflammation of the brain tissue. However, most infections are mild and symptoms include fever, headache, and body aches. More severe infections may be marked by headache, high fever, neck stiffness, stupor, disorientation, coma, tremors, convulsions, muscle weakness, paralysis, and rarely, death. Persons over the age of 50 have the highest risk of severe disease.

Prevention centers on public health action to control mosquitoes and on individual action to avoid mosquito bites. To avoid being bitten by the mosquitoes that cause the disease, use the following control measures:

If possible, stay inside between dusk and dark. This is when mosquitoes are most active. When outside (between dusk and dark), wear long pants and long-sleeved shirts. Spray exposed skin with an insect repellent, preferably containing DEET.

4.4.4 Wasps and Bees

Wasps (hornets and yellow-jackets) and bees (honeybees and bumblebees) are common insects that may pose a potential hazard to the field team if work is performed during spring, summer, or fall. Bees normally build their nests in the soil. However, they use other natural holes such as abandoned rodent nests or tree hollows. Wasps make a football-shaped, paper-like nest either below or above the ground. Yellow-jackets tend to build their nests in the ground but hornets tend to build their nests in trees and shrubbery. Bees are generally more mild-mannered than wasps and are less likely to sting. Bees can only sting once while wasps sting multiple times because their stinger is barbed. Wasps sting when they feel threatened. By remaining calm and not annoying wasps by swatting, you lessen the chance of being stung.

Wasps and bees inject a venomous fluid under the skin when they sting. The venom causes a painful swelling that may last for several days. If the stinger is still present, carefully remove it with tweezers. Some people may develop an allergic reaction (i.e. anaphylactic shock) to a wasp or bee sting. If such a reaction develops, seek medical attention at once. If a VERDUGOS employee is allergic to bees or wasps notify the SSO and if, needed, the location of the epi pen.

4.4.5 *Sun Exposure*

Employees are encouraged to liberally apply sunscreen, with a minimum sun protection factor (SPF) of 15, when working outdoors to avoid sunburn and potential skin cancer, which is associated with excessive sun exposure to unprotected skin. Additionally, employees should wear safety glasses that offer protection from ultraviolet A and B (UVA/UVB) rays.

5. Personal Protective Equipment

The PPE specified in Table 4 represents PPE selection required by 29 CFR 1910.132, and is based on the Activity Hazard Analysis of Section 4 (Table 2). Specific information on the selection rationale activity can be found in the VERDUGOS Health and Safety Manual.

The PPE program addresses elements, such as PPE selection based on Site hazards, use and limitations, donning and doffing procedures, maintenance and storage, decontamination and disposal, training and proper fitting, inspection procedures prior to / during / and after use, evaluation of the effectiveness of the PPE program, and limitations during temperature extremes, heat stress, and other appropriate medical considerations. A summary of PPE for each level of protection is in Table 4.

Table 4. Site-Specific PPE

Task	PPE Level	Site-Specific Requirements	Respirator
Mobilization/Demobilization			
Reconnaissance	D	Hard hat, safety glasses, steel toe/shank safety boot, reflective vest, leather work gloves, hearing protection as needed	D - None
Mobilization/Demobilization of Equipment and Supplies	D	Hard hat, safety glasses, steel toe/shank safety boot, reflective vest, leather work gloves, hearing protection as needed	D – None
Establishment of Site Security, Work Zones, and Staging Area	D	Hard hat, safety glasses, steel toe/shank safety boot, reflective vest, leather work gloves, hearing protection as needed	D - None
Construction			
Excavation, Test Pit Excavation, Backfilling, Grading Observation, Sampling	D	Hard hat, safety glasses, steel toe/shank safety boot with overboot as needed, reflective vest, leather work gloves as needed, nitrile gloves, hearing protection as needed, Tyvek as needed	Level D initially, Level C-If action levels exceeded (see Section 9 of HASP)
Hazardous Materials Assessment			
Sampling: Groundwater and Soil, and Purifier Waste	D	Hard hat, safety glasses, steel toe/shank safety boot with overboot as needed, reflective vest, leather work gloves as needed, nitrile gloves, hearing protection as needed, Tyvek as needed	D - None
Demolition/Remediation Observation			
Observe Contractor Activities	D	Hard hat, safety glasses, steel toe/shank safety boot with overboot as needed, reflective vest, leather work gloves as needed, nitrile gloves, hearing protection as needed, Tyvek as needed	D - None

Use of Level A or Level B PPE is not anticipated. If conditions indicating the need for Level A or Level B PPE are encountered, personnel will leave the Site and this HASP will be revised with oversight of the CHSO or VERDUGOS personnel will not re-enter the Site until conditions allow.

For most work conducted at the site, Level D PPE will include long pants, hard hats, safety glasses with side shields, and steel toe/shank or EH-rated safety boots. When work is conducted in areas where non-aqueous phase liquid (NAPL), purifier waste, or tar-saturated soil is anticipated, employees will wear, at a minimum, modified Level D PPE, which can include Tyvek® coveralls and safety boots with overboots.

5.1 OSHA Requirements for PPE

Personal protective equipment used during the course of this field investigation must meet the following OSHA standards:

Table 5. OSHA Standards for PPE

Type of Protection	Regulation	Source
Eye and Face	29 CFR 1910.133	ANSI Z87.1 1968
Respiratory	29 CFR 1910.134	ANSI Z88.1 1980
Head	29 CFR 1910.135	ANSI Z89.1 1969
Foot	29 CFR 1910.136	ANSI Z41.1 1999 or ASTM F-2412-2005, and ASTM F-2413-2005

CRF = Code of Federal Regulations

ANSI = American National Standards Institute

ASTM = American Society for Testing and Materials

On-site VERDUGOS personnel who have the potential to don a respirator must have a valid fit test certification and documentation of medical clearance. The CHSO will maintain such information on file for on-site personnel. The PM will obtain such information from the subcontractor's site supervisor prior to the initiation of such work. Both the respirator and cartridges specified for use in Level C protection must be fit-tested prior to use in accordance with OSHA regulations (29 CFR 1910.134). Air purifying respirators cannot be worn under the following conditions:

- Oxygen deficiency (less than 20.7%).
- Imminent Danger to Life and Health (IDLH) concentrations.
- If contaminant levels exceed designated use concentrations.

6. Key Project Personnel/Responsibilities and Lines of Authority

6.1 VERDUGOS Personnel

- | | |
|------------------|-----------------|
| • Gaston Verdugo | Project Manager |
| • Lenny Guerra | Owner |

The implementation of health and safety at this project location will be the shared responsibility of the PM, the CHSO, the SSO, other VERDUGOS personnel implementing the proposed scope of work.

6.1.1 *VERDUGOS Project Manager*

The PM, Gaston Verdugos is responsible for confirming that the requirements of this HASP are implemented. Some of the PM's specific responsibilities include:

- Conducting and documenting the Project Safety Briefing for VERDUGOS project employees and forwarding the signed form (Appendix D) to the Safety Team;
- Verifying that the VERDUGOS staff selected to work on this program are sufficiently trained for Site activities;
- Assuring that personnel to whom this HASP applies, including subcontractor personnel, have received a copy of it;
- Providing the CHSO with updated information regarding conditions at the Site and the scope of Site work;
- Providing adequate authority and resources to the on-site SSO to allow for the successful implementation of necessary safety procedures;
- Supporting the decisions made by the SSO and CHSO;
- Maintaining regular communications with the SSO and, if necessary, the CHSO

6.1.2 *Lines of Authority will be as follows:*

On Site – VERDUGOS will have responsibility for safety of its employees during the work performed at the Site D parcel of the Fulton Fish Market. VERDUGOS's field representative will have a cell phone available to contact the appropriate local authorities, in the event of an emergency. VERDUGOS's field representative will be available for communication with the VERDUGOS PM and with the EDC and GEI representatives.

VERDUGOS employees have the authority to stop work activities if an unanticipated hazard is encountered or a potential unsafe condition is observed. The VERDUGOS employee should contact the Corporate Health and Safety Officer and the Project Manager to discuss the stop work conditions and potential control methods that can be implemented.

7. Training Program

7.1 HAZWOPER Training

In accordance with OSHA Standard 29 CFR 1910.120 “Hazardous Waste Operations and Emergency Response” (HAZWOPER) responders will, at the time of job assignment, have received health and safety training for hazardous waste site operations. At a minimum, the training will have consisted of instruction in the topics outlined in the standard. Personnel who have not met the requirements for initial training will not be allowed to work in any Site activities in which they may be exposed to hazards (chemical or physical).

7.2 On-Site Safety Briefings

Other VERDUGOS personnel will be given health and safety briefings daily by the SSO or field representative to assist VERDUGOS personnel in safely conducting work activities. The briefing will include VERDUGOS subcontractors. The briefings can include information on new operations to be conducted, changes in work practices, or changes in the Site's environmental conditions, as well as periodic reinforcement of previously discussed topics. The briefings will also provide a forum to facilitate conformance with safety requirements and to identify performance deficiencies related to safety during daily activities or as a result of safety inspections. Documentation of these briefings will be recorded in the VERDUGOS field book, if the project duration is less than 5 days. If the project is longer than 5 days, the Tailgate Safety Briefing Form (Appendix D) will be used to document briefings. The meetings will also be an opportunity to periodically update the employees on monitoring results.

7.3 First Aid and CPR

The PM will verify that VERDUGOS field staff has current certifications in first aid and Cardiopulmonary Resuscitation (CPR), so that emergency medical treatment is available during field activities. The training will be consistent with the requirements of the American Red Cross Association. VERDUGOS employees also attend annual Bloodborne Pathogens training in compliance with OSHA regulations.

8. Medical Surveillance Program

VERDUGOS' medical surveillance program that includes a plan designed specifically for field personnel engaged in work at sites where hazardous or toxic materials may be present. VERDUGOS' PM is responsible for the administration and coordination of medical evaluations conducted for VERDUGOS' employees at branch office locations. Comprehensive examinations are given to VERDUGOS field personnel on an annual or biennial basis (as determined to be appropriate by the PM) participating in hazardous waste operations. The medical results of the examinations aid in determining the overall fitness of employees participating in field activities.

Under the PM's supervision, field personnel undergo a complete initial physical examination, including a detailed medical and occupational history before they participate in hazardous waste site investigations. Extensive annual/biennial reexaminations are also performed. Upon completion of these tests, personnel are certified by an occupational health physician as to whether they are fit for field work in general and fit to use respiratory protection.

If a VERDUGOS employee or other project worker shows symptoms of exposure to a hazardous substance and wishes to be rechecked, he/she will be directed to the nearest area hospital or medical facility.

9. Air Monitoring

Air monitoring will be performed to identify and quantify airborne levels of hazardous substances and safety and health hazards in order to determine the appropriate level of worker protection needed on-site in the event that intrusive work is conducted. Work requiring air monitoring for this Site includes all ground-intrusive activities such as excavation, trenching, and demolition of the cover system (concrete slab, asphalt, etc.).

GEI will conduct modified CAMP and work zone monitoring for on-site VERDUGOS employees during intrusive activities. CAMP monitoring will include measurements in the work zone using a PID and combustible gas indicator (CGI) for VOCs, LEL/Oxygen (O₂), hydrogen sulfide (H₂S), hydrogen cyanide (HCN)) and dust monitoring. In the event exceedances are noted (when the meter reads above 5 ppm), the monitoring will then be performed both upwind and downwind at the property boundary to determine if the issue is localized or coming from off site or if there is ongoing work within the Site that is adding to background, this will be documented. An exceedance would be considered greater than 5 ppm above background. Upon completion of the construction activities the CAMP data will be tabulated and presented to NYSDEC. Activities requiring air monitoring will be conducted in accordance with the SMP. GEI will monitor and document daily Site conditions and operations and inform field representatives of results. If Action Levels are exceeded, the SSO will immediately implement Site action(s) according to Table 6 below and notify the PM and CHSO. In the event the CAMP monitoring identifies a problem with material excavated, that CAMP monitoring equipment will be employed to perform initial evaluation. If added monitoring is necessary VERDUGOS will provide the following:

- PID with 10.6 eV lamp or equivalent
- Particulate Meter (PM-10 capable)
- Multi-gas Meter: lower explosive limit (LEL) / oxygen (O₂) / hydrogen sulfide (H₂S) / hydrogen cyanide (HCN) meter

9.1 Equipment Use

CAMP monitoring equipment will be calibrated and maintained in accordance with manufacturer's requirements. Calibrations will be recorded in the project notes daily or on a daily calibration form.

9.1.1 *Photoionization Detector*

Organic vapor concentrations will be measured using a PID during intrusive activities. During intrusive operations, organic vapor concentrations will be measured continuously. Organic vapor concentrations will be measured upwind of the work site(s) to determine

background concentrations at least twice a day, (once in the morning and once in the afternoon). The SSO will interpret monitoring results using professional judgment and according to the alert and Action Limits set forth in the associated Site Work Plan.

9.1.2 *Particulate Meter*

A particulate meter will be used to measure airborne particulate matter during intrusive activities. Monitoring will be continuous and readings will be averaged over a 15-minute period for comparison with the Action Levels. Monitoring personnel will make a best effort to collect particulate monitoring data from downwind of the intrusive activity. If off-site sources are considered to be the source of the measured dust, upwind readings will also be collected.

9.1.3 *Multi-Gas Meter*

A CGI meter will be used to monitor for combustible gases and O₂ content in the work zone during intrusive activities. The CGI will also be equipped with an H₂S sensor and an HCN sensor. H₂S monitoring will be completed every 15 minutes or, if a sulfur odor is present, monitoring will be continuous. HCN monitoring will be completed every 15 minutes or, if an almond odor is detected, monitoring will be continuous.

The CAMP and work zone air monitoring will be conducted during all ground-intrusive and dust generating activities. Table 6 provides a summary of real time air monitoring Action Levels and contingency plans for work zone activities. The below Action Levels are determined by halving the Permissible Exposure Limits (PELs) or Threshold Limit Values (TLVs) as set forth by OSHA and the American Conference of Government Industrial Hygienists (ACGIH). O₂ values are based on the maximum use limits of a full face respirator if oxygen were being displaced by a chemical. Site action will take place by the field SSO if sustained measurements are recorded.

Table 6. Real-Time Work Zone Air Monitoring Action Levels

Air Monitoring Instrument	Monitoring Location	Action Level (above background)	Site Action
PID	Work Zone	< 5.0 ppm	Continue working. No respiratory protection required.
		>5.0 ppm	Stop work activities until organic vapor levels subsided below 5 ppm.
O ₂ Meter	Work Zone	< 20.7%	Stop work, withdraw from work area, ventilate area, notify PM and CHSO.
		> 21.1%	Stop work, withdraw from work area, notify PM and CHSO.
H ₂ S Meter	Work Zone	< 5.0 ppm	No respiratory protection is required.
		> 5.0 ppm	Stop work, cover excavation, withdraw from work area, institute engineering controls, notify PM and CHSO.
HCN Meter	Work Zone	< 1.0 ppm	Continue monitoring with real-time meter. No respiratory protection required.
		> 1.0 ppm	Stop work, and move (with continuous HCN monitoring meter) at least 25 ppm upwind of the excavation until continuous meter reads less than 1 ppm, notify PM and CHSO.
Particulate Matter Meter	Work Zone	<0.1 mg/m ₃	Continue working. No respiratory protection required.
		>0.1 mg/m ₃	Implement work practices to reduce/minimize airborne dust generation, e.g., spray/misting of soil with water.

10. Site Control Measures

10.1 Site Zones

Site zones are intended to control the potential spread of contamination and to assure that only authorized individuals are permitted into potentially hazardous areas. A three-zone approach will be utilized. It will include an Exclusion Zone (EZ), Contamination Reduction Zone (CRZ) and a Support Zone (SZ). Specific zones will be established on the work site by the Contractor when operations begin for each task requiring such delineation. Maps depicting the zones will be available at the Site.

This project is being conducted under the requirements of 29 CFR 1910.120, and any personnel working in an area where the potential for exposure to Site contaminants exists, will only be allowed access after proper training and medical documentation.

The following will be used for guidance in revising these preliminary zone designations, if necessary.

Support Zone – The SZ is an uncontaminated area that will be the field support area for most operations. The SZ provides for field team communications and staging for medical emergency. Appropriate sanitary facilities and safety equipment will be located in this zone. Potentially contaminated personnel/materials are not allowed in this zone.

Contamination Reduction Zone – The CRZ is established between the EZ and the SZ. The CRZ contains the contamination reduction corridor and provides an area for decontamination of personnel and portable hand-held equipment, tools and heavy equipment. A personnel decontamination area will be prepared at each exclusion zone. The CRZ will be used for EZ entry and egress in addition to access for heavy equipment and emergency support services.

Exclusion Zone – Activities which may involve exposure to Site contaminants, hazardous materials, and/or conditions should be considered an EZ. This zone will be clearly delineated by cones, tapes, or other means. The Contractor may establish more than one EZ where different levels of protection may be employed or different hazards exist. The size of the EZ will be determined by the Contractor allowing adequate space for the activity to be completed, field members, and emergency equipment.

The Contractor is responsible for constructing, maintaining, and enforcing the zones.

10.2 Buddy System

VERDUGOS personnel should be in line-of-site or communication contact with another on-site person. The other on-site person should be aware of his or her role as a “buddy” and be able to provide assistance in the event of an emergency. A copy of this plan will be given to any person acting as a VERDUGOS “buddy” for informational purposes.

10.3 Sanitation for Temporary Work Sites

VERDUGOS assumes that temporary sanitary facilities including toilets will be available on-site.

10.4 Illumination

Illumination requirements identified by OSHA are directed to work efforts inside buildings and/or during non-daylight hours. Activities planned for the Site are anticipated to occur outside during daylight hours. However, if work is performed after dark, they will be equipped with illumination that meets or exceeds requirements specified in OSHA Standard 29 CFR 1926.56 “Illumination.” Employees will not work on sites that are not properly lighted.

10.5 Smoking

Smoking is prohibited at or in the vicinity of hazardous operations or materials. Where smoking is permitted, safe receptacles will be provided for smoking materials.

10.6 Alcohol and Drug Abuse Prevention

Alcohol and drugs will not be allowed on the Site. Project personnel under the influence of alcohol or drugs will not be allowed to enter the Site.

11. Accident Reporting

VERDUGOS will report incidents involving VERDUGOS personnel or subcontractor personnel, such as: lost time injuries, injuries requiring medical attention, near miss incidents, fires, fatalities, accidents involving the public, chemical spills, vehicle accidents, and property damage. The following steps must be followed when an incident occurs:

1. In life-threatening situations, immediately call 9-1-1.
2. Stop work activity to address any injury, illness, property damage, spill or other emergency.
3. **Immediately** report any incidents to your Supervisor/Project Manager and Regional Health & Safety Officer.
4. If your injury or illness is not life-threatening, call Medcor Triage at 1-800-775-5866 to speak with a medical professional.
5. Complete an Incident Report Form **immediately** after addressing the incident.

For vehicle accidents involving another vehicle or damage to property, the employee will take pictures of each vehicle or property involved in the incident and obtain a police report. In some municipalities police will not be dispatched to a non-injury accident, but every effort needs to be made to try and obtain the report.

The Incident Report Form and the Near Miss Reporting Form can be found in Appendix D, on the VERDUGOS Health and Safety smartphone app, or on the Safety page of the VERDUGOS Intranet. To report subcontractor injuries or incidents, follow the same verbal reporting procedures and submit an email describing the event to the PM and the Safety Team.

11.1 Injury Triage Service

If a VERDUGOS employee experiences a work-related injury that is not life-threatening, the employee will initiate a call to the corporate medical monitoring advisor. The injured employee will detail any medical symptoms or complaints which will be evaluated by a Registered Nurse (RN) specially trained to perform telephonic triage. The RN will recommend first aid self- treatment or refer the injured employee for an off-site medical evaluation by a health professional at a clinic within VERDUGOS's workers compensation provider network. VERDUGOS employees are still required to follow our Accident Reporting procedures as listed above.

12. Decontamination Procedures

A decontamination pad will be established for personnel decontamination and equipment decontamination during construction activities.

12.1 Personnel Decontamination Station

A personnel decontamination station where employees can drop equipment and remove PPE will be set up at the decontamination pad by the Contractor. It will be equipped with basins for water and detergent, and trash bag(s), or cans for containing disposable PPE and discarded materials. Once personnel have decontaminated at this station and taken off their PPE, they will proceed to a basin/sink where they will wash themselves wherever they have potentially been exposed to any contaminants (e.g., hands, face, etc.)

The following specific decontamination procedure will be used as necessary by VERDUGOS personnel or subcontractor personnel wearing PPE from Level D through Level C.

- **Step 1** – Equipment drop (respirator, tools, monitoring equipment, etc.)
Decontaminate as appropriate (per VERDUGOS’s field representative’s instructions).
- **Step 2** – Boot wash/rinse (wash with non-foaming detergent, rinse with fresh water spray). Remove boots. If inner and outer gloves are worn, wash outer gloves, remove and save for later use, or remove and discard outer gloves and place in trash bag/can provided in the decontamination area.
- **Step 3** – Hard hat removal; wash if visibly contaminated (use same wash as in Step 2).
- **Step 4** – If Tyvek® (or equivalent) suit was worn and is visibly contaminated, remove and place in trash bag/can provided in the decontamination area or decontaminate (wash) and store for reuse. Contaminated washable coveralls should be removed and bagged for washing.
- **Step 5** – Respirator and/or eye protection removal (as applicable). Wash (per Step 2) to remove visible contamination.
- **Step 6** – Remove outer gloves.
- **Step 7** – Wash potentially exposed skin (use water and soap at indoor sink).
- **Step 8** – Disinfect respirator per manufacturer’s recommendations.

Contaminated PPE (gloves, suits, etc.) will be decontaminated and stored for reuse or placed in plastic bags (or other appropriate containers) and disposed of in an approved facility.

Decontamination wastewater and used cleaning fluids will be collected and disposed of in accordance with applicable state and federal regulations.

12.2 Heavy Equipment Decontamination

Heavy equipment decontamination will be performed by the VERDUGOS within the limits of the on-site decontamination pad in accordance with the contract specifications. A steam generator and brushes will be used to clean demolition equipment and other tools. No heavy equipment will be permitted to leave the Site unless it has been thoroughly decontaminated.

12.3 Decontamination Equipment Requirements

The following equipment, if required, should be in sufficient supply to implement decontamination procedures for VERDUGOS's equipment.

- Buckets
- Alconox™ detergent concentrate
- Hand pump sprayers
- Long handled soft bristle brushes
- Large sponges
- Cleaning wipes for respirators
- Bench or stool(s)
- Methanol and/or Nitric Acid
- Liquid detergent and paper towels
- Plastic trash bags

The Contractor performing decontamination procedures is responsible for verifying that the above materials, as required for their operation, are in sufficient supply.

13. Supplemental Contingency Plan Procedures

13.1 Hazard Communication Plan

VERDUGOS personnel have received hazard communication training as part of their annual health and safety training and new employee health and safety orientation training. Hazardous materials used on the Site will be properly labeled, stored, and handled. SDS will be available to potentially exposed employees.

13.2 Fire

In the event of a fire personnel will evacuate the area. VERDUGOS's field representative will contact the local fire department with jurisdiction and report the fire. Notification of evacuation will be made to the PM and the CHSO. The field representative will account for VERDUGOS personnel and subcontractor personnel and report their status to the PM.

13.3 Medical Support

In case of minor injuries, on-site care will be administered with the Site first aid kit. For serious injuries, call 911 and request emergency medical assistance. Seriously injured persons should not be moved, unless they are in immediate danger. Notify the PM and the CHSO of the emergency.

Section 1 and Table 1 of this HASP contain detailed emergency information, including directions to the nearest hospital, and a list of emergency services and their telephone numbers. In addition, Appendix A includes maps to the hospital and/or occupational health clinic. VERDUGOS field personnel will carry a cellular telephone.

13.4 Severe Weather

The contingency plan for severe weather includes reviewing the expected weather to determine if severe weather is in the forecast. Severe weather includes high winds over 30 miles per hour (mph), heavy rains or snow squalls, thunderstorms, tornados, and lightning storms. If severe weather is approaching, the decision to evacuate VERDUGOS personnel and subcontractor personnel from the Site will be the responsibility of VERDUGOS's field representative. Notification of evacuation will be made to the PM and the CHSO. The field representative will account for VERDUGOS personnel and subcontractor personnel and report their status to the PM. If safe, work can resume 30 minutes after the last clap of thunder or flash of lightening.

13.5 Spills or Material Release

If a hazardous waste spill or material release occurs, if safe, the SSO or their representative will immediately assess the magnitude and potential seriousness of the spill or release based on the following:

- SDS for the material spilled or released;
- Source of the release or spillage of hazardous material;
- An estimate of the quantity released and the rate at which it is being released;
- The direction in which the spill or air release is moving;
- Personnel who may be or may have been in contact with the material, or air release, and possible injury or sickness as a result;
- Potential for fire and/or explosion resulting from the situation; and
- Estimates of area under influence of release.

If the spill or release is determined to be within the on-site emergency response capabilities, the SSO will verify implementation of the necessary remedial action. If the release is beyond the capabilities of the Site personnel, personnel will be evacuated from the immediate area and the local fire department will be contacted. The SSO will notify the PM and the CHSO.

14. Health and Safety Plan Sign-Off

VERDUGOS personnel conducting site activities will be familiar with the information in this HASP. After reviewing this plan, please sign the copy in the project files, and bring a copy of the plan with you to the Site. By signing this site-specific HASP you are agreeing that you have read, understand, and will adhere to the provisions described in this plan while working on the Project Site below.

Site Name: Fulton Fish Market

Investigation: Construction Oversight

VERDUGOS Project No: 1803509

Print Name	Signature
Project Manager: Gaston Verdugo	

15. Figures



SOURCE:
1. ESRI WORLD IMAGERY/GEI



SCALE: 1" = 350'

Fulton Fish Market
Bronx, New York

**Verdugos General
Contractors Corp.**

SITE PLAN

NYC Economic Development Corporation New
York, New York

Project

January 2019

Fig. 1

Appendix A

Map to Hospital and Occupational Health Clinic



The New Fulton Fish Market
800 Food Center Dr, Bronx, NY 10474

Continue to Food Center Dr 1 min (0.2 mi)

↑ 1. Head southeast toward Farragut St 0.1 mi

↑ 2. Continue straight onto Farragut St 203 ft

Continue on Food Center Dr. Take E Bay Ave to Timpson Pl

- 

3. Turn right onto Food Center Dr

338 ft
- 

4. Keep left to stay on Food Center Dr

0.9 mi
- 

5. Continue onto E Bay Ave

0.5 mi
- 

6. Turn right onto Tiffany St

0.2 mi
- 

7. Turn left onto Randall Ave

1.2 mi
- 

8. Continue onto Arlington Leon Eastmond, Sr. Way/Leggett Ave

1.3 mi
- 

Continue to follow Leggett Ave

249 ft
- 

9. Turn left onto Bruckner Blvd
- 

10. Slight right onto Timpson Pl

2 min (0.2 mi)
- Follow E 149th St

9 min (1.1 mi)
- 

11. Turn right onto E 149th St

1.1 mi
- 

Pass by McDonald's (on the right in 1.1 mi)

154 ft
- 

12. Turn left onto Morris Ave
- 

13. Turn right

51 s (213 ft)
- 

Destination will be on the right

Lincoln Medical Center
234 E 149th St, Bronx, NY 10451

These directions are for planning purposes only. You may find that construction projects, traffic, weather, or other events may cause conditions to differ from the map results, and you should plan your route accordingly. You must obey all signs or notices regarding your route.

Google Maps The New Fulton Fish Market to MedCarePlus, PLLC Family Medicine, Walk-In Occupational Clinic Route



The New Fulton Fish Market
800 Food Center Dr, Bronx, NY 10474

Continue to Food Center Dr 1 min (0.2 mi)

- 1. Head southeast toward Farragut St 0.1 mi
- 2. Continue straight onto Farragut St 203 ft

Continue on Food Center Dr. Take Halleck St, Edgewater Rd and Bruckner Blvd to Metcalf Ave. Take exit 2W from Bronx River Pkwy

10 min (2.9 mi)

-  3. Turn right onto Food Center Dr 338 ft
-  4. Keep left to stay on Food Center Dr 0.9 mi
-  5. Use the right 2 lanes to turn right onto Halleck St 0.5 mi
-  6. Continue onto Edgewater Rd 0.5 mi
-  7. Turn right onto Bruckner Blvd 0.7 mi
-  8. Slight right onto the Bronx River Pkwy N ramp to White Plains 0.1 mi
-  9. Continue onto Bronx River Pkwy 338 ft
-  10. Take exit 2W toward Metcalf Ave 89 ft
-  11. Keep left, follow signs for Watson Ave and merge onto Metcalf Ave 1.1 mi

Follow Metcalf Ave to Westchester Ave 2 min (0.3 mi)

-  12. Merge onto Metcalf Ave 115 ft
-  13. Turn left onto Metcalf Ave/Sound View Ave 1.2 mi

 Continue to follow Metcalf Ave
-  14. Turn left onto Westchester Ave 33 s (302 ft)

 Destination will be on the right

MedCarePlus, PLLC Family Medicine, Walk-In

1643 Westchester Ave, Bronx, NY 10472

These directions are for planning purposes only. You may find that construction projects, traffic, weather, or other events may cause conditions to differ from the map results, and you should plan your route accordingly. You must obey all signs or notices regarding your route.

Appendix B

Safety Data Sheets

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 03/10/2016**Revision :** 03/10/2016**Trade Name:** Liquinox**I Identification of the substance/mixture and of the supplier****1.1 Product identifier Trade****Name:** Liquinox**Synonyms:****Product number:** Liquinox**1.2 Application of the substance / the mixture :** Cleaning material/Detergent**1.3 Details of the supplier of the Safety Data Sheet**

Manufacturer	Supplier
Alconox, Inc. 30 Glenn Street White Plains, NY 10603 1-914-948-4040	Not Applicable

Emergency telephone number: ChemTel
Inc
North America: 1-800-255-3924
International: 01-813-248-0585

2 Hazards identification**2.1 Classification of the substance or mixture:**

In compliance with EC regulation No. 1272/2008, 29CFR1910/1200 and GHS Rev. 3 and amendments.

Hazard-determining components of labeling:

Alcohol ethoxylate
Sodium alkylbenzene sulfonate
Sodium xylenesulphonate
Lauramine oxide

2.2 Label elements:

Eye irritation, category 2A. Skin
irritation, category 2.

Hazard pictograms:**Signal word:** Warning**Hazard statements:**

H315 Causes skin irritation.
H319 Causes serious eye irritation.

Precautionary statements:

P264 Wash skin thoroughly after handling.
P280 Wear protective gloves/protective clothing/eye protection/face protection.
P302+P352 If on skin: Wash with soap and water.
P305+P351+P338 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing.
P332+P313 If skin irritation occurs: Get medical advice/attention. P501
Dispose of contents and container as instructed in Section 13.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 03/10/2016**Revision :** 03/10/2016**Trade Name:** Liquinox**Additional information:** None.**Hazard description****Hazards Not Otherwise Classified (HNOC):** None**Information concerning particular hazards for humans and environment:**

The product has to be labelled due to the calculation procedure of the "General Classification guideline for preparations of the EU" in the latest valid version.

Classification system:

The classification is according to EC regulation No. 1272/2008, 29CFR1910/1200 and GHS Rev. 3 and amendments, and extended by company and literature data. The classification is in accordance with the latest editions of international substances lists, and is supplemented by information from technical literature and by information provided by the company.

3 Composition/information on ingredients**3.1 Chemical characterization:** None**3.2 Description :** None**3.3 Hazardous components (percentages byweight)**

Identification	Chemical Name	Classification	Wt. %
CAS number. 68081-81-2	Sodium Alkylbenzene Sulfonate	Acute Tox. 4; H303 Skin Irrit. 2; H315 Eye Irrit. 2; H319	10-25
CAS number. 1300-72-7	Sodium Xylenesulphonate	Eye Irrit. 2; H319	2.5-10
CAS number. 84133-50-6	Alcohol Ethoxylate	Skin Irrit. 2; H315 Eye Dam. 1; H318	2.5-10
CAS number. 1643-20-5	Lauramine oxide	Skin Irrit. 2; H315 Eye Dam. 1; H318	1-2

3.4 Additional Information: None.**4.1 Description of first aid measures General****information:** None.**After inhalation:**

Maintain an unobstructed airway.

Loosen clothing as necessary and position individual in a comfortable position.

After skin contact:

Wash affected area with soap and water.

Seek medical attention if symptoms develop or persist.

After eye contact:

Rinse/flush exposed eye(s) gently using water for 15-20 minutes.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 03/10/2016**Revision :** 03/10/2016**I Trade Name:** Liquinox

Remove contact lens(es) if able to do so during rinsing. Seek medical attention if irritation persists or if concerned.

After swallowing:

Rinse mouth thoroughly.

Seek medical attention if irritation, discomfort, or vomiting persists.

4.2 Most important symptoms and effects, both acute and delayed

None

4.3 Indication of any immediate medical attention and special treatment needed:

No additional information.

II Firefighting measures**5.1 Extinguishing media****Suitable extinguishing agents:**

Use appropriate fire suppression agents for adjacent combustible materials or sources of ignition.

For safety reasons unsuitable extinguishing agents : None

5.2 Special hazards arising from the substance or mixture :

Thermal decomposition can lead to release of irritating gases and vapors.

5.3 Advice for firefighters**Protective equipment:**

Wear protective eye wear, gloves and clothing.

Refer to Section 8.

5.4 Additional information

Avoid inhaling gases, fumes, dust, mist, vapor and aerosols. Avoid contact with skin, eyes and clothing.

III Release measures**6.1 Personal precautions, protective equipment and emergency procedures**

Ensure adequate ventilation.

Ensure air handling systems are operational.

6.2 Environmental precautions :

Should not be released into the environment.

Prevent from reaching drains, sewer or waterway.

6.3 Methods and material for containment and cleaning up :

Wear protective eye wear, gloves and clothing.

6.4 Reference to other sections : None**IV Handling and storage****7.1 Precautions for safe handling:**

Avoid breathing mist or vapor.

Do not eat, drink, smoke or use personal products when handling chemical substances.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 03/10/2016**Revision :** 03/10/2016**Trade Name:** Liquinox**7.2 Conditions for safe storage, including any incompatibilities :**

Store in a cool, well-ventilated area.

7.3 Specific end use(s):

No additional information.

8 Exposure controls/personal protection**8.1 Control parameters :**84133-50-6, Alcohol Ethoxylate, AIHA TWA 10 mg/m³.**8.2 Exposure controls****Appropriate engineering controls:**

Emergency eye wash fountains and safety showers should be available in the immediate vicinity of use or handling.

Respiratory protection:

Not needed under normal conditions.

Protection of skin:

Select glove material impermeable and resistant to the substance.

Eye protection:

Safety goggles or glasses, or appropriate eye protection.

General hygienic measures:

Wash hands before breaks and at the end of work.

Avoid contact with skin, eyes and clothing.

19 Physical and chemical properties

Appearance (physical state, color):	Pale yellow liquid	Explosion limit lower: Explosion limit upper:	Not determined or not available. Not determined or not available.
Odor:	Not determined or not available.	Vapor pressure at 20°C:	Not determined or not available.
Odor threshold:	Not determined or not available.	Vapor density:	Not determined or not available.
pH-value:	8.5 as is	Relative density:	Not determined or not available.
Melting/Freezing point:	Not determined or not available.	Solubilities:	Not determined or not available.
Boiling point/Boiling range :	Not determined or not available.	Partition coefficient (n-octanol/water) :	Not determined or not available.
Flash point (closed cup):	Not determined or not available.	Auto/Self-ignition temperature:	Not determined or not available.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 03/10/2016**Revision :** 03/10/2016**Trade Name:** Liquinox

Evaporation rate:	Not determined or not available.	Decomposition temperature:	Not determined or not available.
Flammability (solid, gas or liquid) :	Not determined or not available.	Viscosity:	a. Kinematic: Not determined or not available. b. Dynamic: Not determined or not available.
Density at 20°C:	Not determined or not available.		

10 Stability and reactivity**10.1 Reactivity :** None**10.2 Chemical stability:** None**10.3 Possibility hazardous reactions :** None **10.4****Conditions to avoid :** None**10.5 Incompatible materials:** None**10.6 Hazardous decomposition products :** None**11 Toxicological information****11.1 Information on toxicological effects****Acute Toxicity:****Oral:**

: LD50 >5000 mg per kg Rat, Oral) - product

Chronic Toxicity: No additional information.**Skin corrosion/irritation:**

Alcohol Ethoxylate: May cause mild to moderate skin irritation. Sodium

Alkylbenzene Sulfonate: Causes skin irritation.

Lauramine oxide: Causes skin irritation.

Serious eye damage/irritation:

Sodium Alkylbenzene Sulfonate: Causes serious eye irritation.

Alcohol Ethoxylate: Causes moderate to severe eye irritation and conjunctivitis.

Sodium xylenesulphonate: Rabbit: irritating to eyes.

Lauramine oxide: Causes serious eye damage.

Respiratory or skin sensitization: No additional information.**Carcinogenicity:** No additional information.**IARC (International Agency for Research on Cancer):** None of the ingredients are listed.**NTP (National Toxicology Program):** None of the ingredients are listed.**Germ cell mutagenicity:** No additional information.**Reproductive toxicity:** No additional information.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 03/10/2016**Revision :** 03/10/2016**Trade Name:** Liquinox**STOT-single and repeated exposure:** No additional information.**Additional toxicological information:** No additional information.**12 Ecological information****12.1 Toxicity:**

Sodium Alkylbenzene Sulfonate: Fish, LCS0 1.67 mg/l, 96 hours.

Sodium Alkylbenzene Sulfonate: Aquatic invertebrates, ECS0 Daphnia 2.4 mg/l, 48 hours.

Sodium Alkylbenzene Sulfonate: Aquatic Plants, ECS0 Algae 29 mg/l, 96 hours.

Lauramine oxide: Fish, LCD 24.3 mg/l, 96h [Killifish (Cyprinodontidae)]

Lauramine oxide: Aquatic invertebrates, (LCS0): 3.6mg/l/96 hours [Daphnia (Daphnia)]. Lauramine

oxide: Aquatic plants, ECS0 Algae 0.31 mg/l 72 hours [Algae]

Alcohol Ethoxylate: Aquatic invertebrates, (LCS0): 4.01mg/l 48 hours [Daphnia (daphnia)].

12.2 Persistence and degradability: No additional information.**12.3 Bioaccumulative potential:** No additional information.**12.4 Mobility in soil:** No additional information.**General notes:** No additional information.**12.5 Results of PBT and vPvB assessment:****PBT:** No additional information.**vPvB:** No additional information.**12.6 Other adverse effects:** No additional information.**13 Disposal considerations****13.1 Waste treatment methods (consult local, regional and national authorities for proper disposal) Relevant Information:**

It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities. (US 40CFR262.11).

14 Transport information

14.1 UN Number. ADR, ADN, DOT, IMDG, IATA	None
14.2 UN Proper shipping name: ADR, ADN, DOT, IMDG, IATA	None
14.3 Transport hazard classes: ADR, ADN, DOT, IMDG, IATA	Class: None Label: None LTD.QTY: None
US DOT Limited Quantity Exception:	None

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 03/10/2016**Revision :** 03/10/2016**Trade Name:** Liquinox

Bulk: RQ (if applicable): None Proper shipping Name: None Hazard Class: None Packing Group: None Marine Pollutant (if applicable): No additional information. Comments: None	Non Bulk: RQ (if applicable): None Proper shipping Name: None Hazard Class: None Packing Group: None Marine Pollutant (if applicable): No additional information. Comments: None
14.4 Packing group: ADR, ADN, DOT, IMDG, IATA	None
14.5 Environmental hazards :	None
14.6 Special precautions for user:	None
Danger code (Kemler):	None
EMS number:	None
Segregation groups:	None
14.7 Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code:	Not applicable.
14.8 Transport/Additional information:	
Transport category:	None
Tunnel restriction code:	None
UN "Model Regulation":	None

15 Regulatory information

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture.

North American

SARASection 313 (specific toxic chemical listings): **None of the ingredients are listed.**Section 302 (extremely hazardous substances): **None of the ingredients are listed.**CERCLA (Comprehensive Environmental Response, Clean up and Liability Act) Reportable Spill Quantity: **None of the ingredients are listed.**

TSCA (Toxic Substances Control Act):

Inventory: **All ingredients are listed.**Rules and Orders: **Not applicable.**

Proposition 65 (California):

Chemicals known to cause cancer: **None of the ingredients are listed.**Chemicals known to cause reproductive toxicity for females: **None of the ingredients are listed.**Chemicals known to cause reproductive toxicity for males: **None of the ingredients are listed.**Chemicals known to cause developmental toxicity: **None of the ingredients are listed.**

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 03/10/2016**Revision :** 03/10/2016**Trade Name:** Liquinox**Canadian****Canadian Domestic Substances List (DSL):**

All ingredients are listed.

EU**REACH Article 57 (SVHC):** None of the ingredients are listed.**Germany MAK:** Not classified.**Asia Pacific****Australia****Australian Inventory of Chemical Substances (AICS):** All ingredients are listed.**China****Inventory of Existing Chemical Substances in China (IECSC):** All ingredients are listed.**Japan****Inventory of Existing and New Chemical Substances (ENCS):** All ingredients are listed.**Korea****Existing Chemicals List (ECL):** All ingredients are listed.**New Zealand****New Zealand Inventory of Chemicals (NZOIC):** All ingredients are listed.**Philippines****Philippine Inventory of Chemicals and Chemical Substances (PICCS):** All ingredients are listed.**Taiwan****Taiwan Chemical Substance Inventory (TSCI):** All ingredients are listed.**16 Other information****Abbreviations and Acronyms:** None**Summary of Phrases Hazard****statements:**

H315 Causes skin irritation.

H319 Causes serious eye irritation.

Precautionary statements:

P264 Wash skin thoroughly after handling.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

P302+P352 If on skin: Wash with soap and water.

P30S+P351+P338 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing.

P332+P313 If skin irritation occurs: Get medical advice/attention. P501

Dispose of contents and container as instructed in Section 13.

Manufacturer Statement:

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as guidance for safe handling,

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 03/10/2016**Revision :** 03/10/2016**Trade Name:** Liquinox

use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

NFPA: 1-0-0**HMIS:** 1-0-0

MATERIAL SAFETY DATA SHEET

ALCONOX®

Prepared to U.S. OSHA, CMA, ANSI, Canadian WHMIS, Australian WorkSafe, Japanese Industrial Standard JIS Z 7250:2000, and European Union REACH Regulations



SECTION 1 - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: **ALCONOX®**
CHEMICAL FAMILY NAME: Detergent.
PRODUCT USE: Critical-cleaning detergent for laboratory, healthcare and industrial applications
U.N. NUMBER: Not Applicable
U.N. DANGEROUS GOODS CLASS: Non-Regulated Material
SUPPLIER/MANUFACTURER'S NAME: Alconox, Inc.
ADDRESS: 30 Glenn St., Suite 309, White Plains, NY 10603. USA
EMERGENCY PHONE: **TOLL-FREE in USA/Canada** 800-255-3924
International calls 813-248-0585
BUSINESS PHONE: 914-948-4040
DATE OF PREPARATION: May 2011
DATE OF LAST REVISION: February 2008

SECTION 2 - HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW: This product is a white granular powder with little or no odor. Exposure can be irritating to eyes, respiratory system and skin. It is a non-flammable solid. The Environmental effects of this product have not been investigated.

US DOT SYMBOLS

Non-Regulated

CANADA (WHMIS) SYMBOLS



EUROPEAN and (GHS) Hazard Symbols



Signal Word: **Warning!**

EU LABELING AND CLASSIFICATION:

Classification of the substance or mixture according to Regulation (EC) No1272/2008 Annex 1

EC# 205-633-8 This substance is not classified in the Annex I of Directive 67/548/EEC

EC# 268-356-1 This substance is not classified in the Annex I of Directive 67/548/EEC

EC# 231-838-7 This substance is not classified in the Annex I of Directive 67/548/EEC

EC# 231-767-1 This substance is not classified in the Annex I of Directive 67/548/EEC

EC# 207-638-8 Index# 011-005-00-2

EC# 205-788-1 This substance is not classified in the Annex I of Directive 67/548/EEC

GHS Hazard Classification(s):

Eye Irritant Category 2A

Hazard Statement(s):

H319: Causes serious eye irritation

Precautionary Statement(s):

P260: Do not breath dust/fume/gas/mist/vapors/spray

P264: Wash hands thoroughly after handling

P271: Use only in well ventilated area.

P280: Wear protective gloves/protective clothing/eye protection/face protection/

Hazard Symbol(s):

[Xi] Irritant

MATERIAL SAFETY DATA SHEET

ALCONOX®

Risk Phrases:

R20: Harmful by inhalation
R36/37/38: Irritating to eyes, respiratory system and skin

Safety Phrases:

S8: Keep container dry
S22: Do not breath dust
S24/25: Avoid contact with skin and eyes

HEALTH HAZARDS OR RISKS FROM EXPOSURE:

ACUTE: Exposure to this product may cause irritation of the eyes, respiratory system and skin. Ingestion may cause gastrointestinal irritation including pain, vomiting or diarrhea.

CHRONIC: This product contains an ingredient which may be corrosive.

TARGET ORGANS:

ACUTE: Eye, respiratory System, Skin

CHRONIC: None Known

SECTION 3 - COMPOSITION and INFORMATION ON INGREDIENTS

HAZARDOUS INGREDIENTS:	CAS #	EINECS #	ICSC #	WT %	HAZARD CLASSIFICATION; RISK PHRASES
Sodium Bicarbonate	144-55-8	205-633-8	1044	33 - 43%	HAZARD CLASSIFICATION: None RISK PHRASES: None
Sodium (C10 – C16) Alkylbenzene Sulfonate	68081-81-2	268-356-1	Not Listed	10 – 20%	HAZARD CLASSIFICATION: None RISK PHRASES: None
Sodium Tripolyphosphate	7758-29-4	231-838-7	1469	5 - 15%	HAZARD CLASSIFICATION: None RISK PHRASES: None
Tetrasodium Pyrophosphate	7722-88-5	231-767-1	1140	5 - 15%	HAZARD CLASSIFICATION: None RISK PHRASES: None
Sodium Carbonate	497-19-8	207-638-8	1135	1 - 10%	HAZARD CLASSIFICATION: [Xi] Irritant RISK PHRASES: R36
Sodium Alcohol Sulfate	151-21-3	205-788-1	0502	1 – 5%	HAZARD CLASSIFICATION: None RISK PHRASES: None
Balance of other ingredients are non-hazardous or less than 1% in concentration (or 0.1% for carcinogens, reproductive toxins, or respiratory sensitizers).					

NOTE: ALL WHMIS required information is included in appropriate sections based on the ANSI Z400.1-2004 format. This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR, EU Directives and the Japanese Industrial Standard JIS Z 7250: 2000.

SECTION 4 - FIRST-AID MEASURES

Contaminated individuals of chemical exposure must be taken for medical attention if any adverse effect occurs. Rescuers should be taken for medical attention, if necessary. Take copy of label and MSDS to health professional with contaminated individual.

EYE CONTACT: If product enters the eyes, open eyes while under gentle running water for at least 15 minutes. Seek medical attention if irritation persists.

SKIN CONTACT: Wash skin thoroughly after handling. Seek medical attention if irritation develops and persists. Remove contaminated clothing. Launder before re-use.

INHALATION: If breathing becomes difficult, remove victim to fresh air. If necessary, use artificial respiration to support vital functions. Seek medical attention if breathing difficulty continues.

INGESTION: If product is swallowed, call physician or poison control center for most current information. If professional advice is not available, do not induce vomiting. Never induce vomiting or give diluents (milk or water) to someone who is unconscious, having convulsions, or who cannot swallow. Seek medical advice. Take a copy of the label and/or MSDS with the victim to the health professional.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Pre-existing skin, or eye problems may be aggravated by prolonged contact.

RECOMMENDATIONS TO PHYSICIANS: Treat symptoms and reduce over-exposure.

MATERIAL SAFETY DATA SHEET

ALCONOX®

SECTION 5 - FIRE-FIGHTING MEASURES

FLASH POINT:

AUTOIGNITION TEMPERATURE:

FLAMMABLE LIMITS (in air by volume, %):

FIRE EXTINGUISHING MATERIALS:

UNUSUAL FIRE AND EXPLOSION HAZARDS:

Explosion Sensitivity to Mechanical Impact:

Explosion Sensitivity to Static Discharge:

SPECIAL FIRE-FIGHTING PROCEDURES:

Not Flammable

Not Applicable

Lower (LEL): NA

Upper (UEL): NA

As appropriate for surrounding fire. Carbon dioxide, foam, dry chemical, halon, or water spray.


This product is non-flammable and has no known explosion hazards.

Not Sensitive.

Not Sensitive

Incipient fire responders should wear eye protection. Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment. Isolate materials not yet involved in the fire and protect personnel. Move containers from fire area if this can be done without risk; otherwise, cool with carefully applied water spray. If possible, prevent runoff water from entering storm drains, bodies of water, or other environmentally sensitive areas.

NFPA RATING SYSTEM

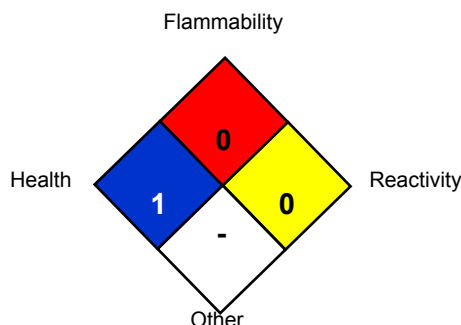

HMIS RATING SYSTEM

HAZARDOUS MATERIAL IDENTIFICATION SYSTEM

HEALTH HAZARD (BLUE)		1	
FLAMMABILITY HAZARD (RED)		0	
PHYSICAL HAZARD (YELLOW)		0	
PROTECTIVE EQUIPMENT			
EYES	RESPIRATORY	HANDS	BODY
	See Sect 8		See Sect 8

For Routine Industrial Use and Handling Applications

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe * = Chronic hazard

SECTION 6 - ACCIDENTAL RELEASE MEASURES

SPILL AND LEAK RESPONSE: Personnel should be trained for spill response operations.

SPILLS: Contain spill if safe to do so. Prevent entry into drains, sewers, and other waterways. Sweep, shovel or vacuum spilled material and place in an appropriate container for re-use or disposal. Avoid dust generation if possible. Dispose of in accordance with applicable Federal, State, and local procedures (see Section 13, Disposal Considerations).

SECTION 7 - HANDLING and STORAGE

WORK PRACTICES AND HYGIENE PRACTICES: As with all chemicals, avoid getting this product ON YOU or IN YOU. Wash thoroughly after handling this product. Do not eat, drink, smoke, or apply cosmetics while handling this product. Avoid breathing dusts generated by this product. Use in a well-ventilated location. Remove contaminated clothing immediately.

STORAGE AND HANDLING PRACTICES: Containers of this product must be properly labeled. Store containers in a cool, dry location. Keep container tightly closed when not in use. Store away from strong acids or oxidizers.

MATERIAL SAFETY DATA SHEET

ALCONOX®

SECTION 8 - EXPOSURE CONTROLS - PERSONAL PROTECTION

EXPOSURE LIMITS/GUIDELINES:

Chemical Name	CAS#	ACGIH TWA	OSHA TWA	SWA
Sodium Bicarbonate	144-55-8	10 mg/m ³ Total Dust	15 mg/m ³ Total Dust	10 mg/m ³ Total Dust
Sodium (C10 – C16) Alkylbenzene Sulfonate	68081-81-2	10 mg/m ³ Total Dust	15 mg/m ³ Total Dust	10 mg/m ³ Total Dust
Sodium Tripolyphosphate	7758-29-4	10 mg/m ³ Total Dust	15 mg/m ³ Total Dust	10 mg/m ³ Total Dust
Tetrasodium Pyrophosphate	7722-88-5	5 mg/m ³	5 mg/m ³	5 mg/m ³
Sodium Carbonate	497-19-8	10 mg/m ³ Total Dust	15 mg/m ³ Total Dust	10 mg/m ³ Total Dust
Sodium Alcohol Sulfate	151-21-3	10 mg/m ³ Total Dust	15 mg/m ³ Total Dust	10 mg/m ³ Total Dust

Currently, International exposure limits are not established for the components of this product. Please check with competent authority in each country for the most recent limits in place.

VENTILATION AND ENGINEERING CONTROLS: Use with adequate ventilation to ensure exposure levels are maintained below the limits provided below. Use local exhaust ventilation to control airborne dust. Ensure eyewash/safety shower stations are available near areas where this product is used.

The following information on appropriate Personal Protective Equipment is provided to assist employers in complying with OSHA regulations found in 29 CFR Subpart I (beginning at 1910.132) or equivalent standard of Canada, or standards of EU member states (including EN 149 for respiratory PPE, and EN 166 for face/eye protection), and those of Japan. Please reference applicable regulations and standards for relevant details.

RESPIRATORY PROTECTION: Based on test data, exposure limits should not be exceeded under normal use conditions when using Alconox Detergent. Maintain airborne contaminant concentrations below guidelines listed above, if applicable. If necessary, use only respiratory protection authorized in the U.S. Federal OSHA Respiratory Protection Standard (29 CFR 1910.134), equivalent U.S. State standards, Canadian CSA Standard Z94.4-93, the European Standard EN149, or EU member states.

EYE PROTECTION: Safety glasses. If necessary, refer to U.S. OSHA 29 CFR 1910.133 or appropriate Canadian Standards.

HAND PROTECTION: Use chemical resistant gloves to prevent skin contact.. If necessary, refer to U.S. OSHA 29 CFR 1910.138 or appropriate Standards of Canada.

BODY PROTECTION: Use body protection appropriate to prevent contact (e.g. lab coat, overalls). If necessary, refer to appropriate Standards of Canada, or appropriate Standards of the EU, Australian Standards, or relevant Japanese Standards.

SECTION 9 - PHYSICAL and CHEMICAL PROPERTIES

PHYSICAL STATE:	Solid
APPEARANCE & ODOR:	White granular powder with little or no odor.
ODOR THRESHOLD (PPM):	Not Available
VAPOR PRESSURE (mmHg):	Not Applicable
VAPOR DENSITY (AIR=1):	Not Applicable.
BY WEIGHT:	Not Available
EVAPORATION RATE (nBuAc = 1):	Not Applicable.
BOILING POINT (C°):	Not Applicable.
FREEZING POINT (C°):	Not Applicable.
pH:	9.5 (1% aqueous solution)
SPECIFIC GRAVITY 20°C: (WATER =1)	0.85 – 1.1
SOLUBILITY IN WATER (%)	>10% w/w
COEFFICIENT OF WATER/OIL DIST.:	Not Available
VOC:	None
CHEMICAL FAMILY:	Detergent

MATERIAL SAFETY DATA SHEET

ALCONOX®

SECTION 10 - STABILITY and REACTIVITY

STABILITY: Product is stable

DECOMPOSITION PRODUCTS: When heated to decomposition this product produces Oxides of carbon (COx)

MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Strong acids and strong oxidizing agents.

HAZARDOUS POLYMERIZATION: Will not occur.

CONDITIONS TO AVOID: Contact with incompatible materials and dust generation.

SECTION 11 - TOXICOLOGICAL INFORMATION

TOXICITY DATA: Toxicity data is available for mixture:

CAS# 497-19-8 LD50 Oral (Rat)	4090 mg/kg
CAS# 497-19-8 LD50 Oral (Mouse)	6600 mg/kg
CAS# 497-19-8 LC50 Inhalation (Rat)	2300 mg/m ³ 2H
CAS# 497-19-8 LC50 Inhalation (Mouse)	1200 mg/m ³ 2H
CAS# 7758-29-4 LD50 Oral (Rat)	3120 mg/kg
CAS# 7758-29-4 LD50 Oral (Mouse)	3100 mg/kg
CAS# 7722-88-5 LD50 Oral (Rat)	4000 mg/kg

SUSPECTED CANCER AGENT: None of the ingredients are found on the following lists: FEDERAL OSHA Z LIST, NTP, CAL/OSHA, IARC and therefore is not considered to be, nor suspected to be a cancer-causing agent by these agencies.

IRRITANCY OF PRODUCT: Contact with this product can be irritating to exposed skin, eyes and respiratory system.

SENSITIZATION OF PRODUCT: This product is not considered a sensitizer.

REPRODUCTIVE TOXICITY INFORMATION: No information concerning the effects of this product and its components on the human reproductive system.

SECTION 12 - ECOLOGICAL INFORMATION

ALL WORK PRACTICES MUST BE AIMED AT ELIMINATING ENVIRONMENTAL CONTAMINATION.

ENVIRONMENTAL STABILITY: No Data available at this time.

EFFECT OF MATERIAL ON PLANTS or ANIMALS: No evidence is currently available on this product's effects on plants or animals.

EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on this product's effects on aquatic life.

SECTION 13 - DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL: Waste disposal must be in accordance with appropriate Federal, State, and local regulations, those of Canada, Australia, EU Member States and Japan.

SECTION 14 - TRANSPORTATION INFORMATION

US DOT; IATA; IMO; ADR:

THIS PRODUCT IS NOT HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

PROPER SHIPPING NAME: Non-Regulated Material

HAZARD CLASS NUMBER and DESCRIPTION: Not Applicable

UN IDENTIFICATION NUMBER: Not Applicable

PACKING GROUP: Not Applicable.

DOT LABEL(S) REQUIRED: Not Applicable

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2004): Not Applicable

MARINE POLLUTANT: None of the ingredients are classified by the DOT as a Marine Pollutant (as defined by 49 CFR 172.101, Appendix B)

U.S. DEPARTMENT OF TRANSPORTATION (DOT) SHIPPING REGULATIONS:

This product is not classified as dangerous goods, per U.S. DOT regulations, under 49 CFR 172.101.

TRANSPORT CANADA, TRANSPORTATION OF DANGEROUS GOODS REGULATIONS:

This product is not classified as Dangerous Goods, per regulations of Transport Canada.

INTERNATIONAL AIR TRANSPORT ASSOCIATION (IATA):

This product is not classified as Dangerous Goods, by rules of IATA:

INTERNATIONAL MARITIME ORGANIZATION (IMO) DESIGNATION:

This product is not classified as Dangerous Goods by the International Maritime Organization.

EUROPEAN AGREEMENT CONCERNING THE INTERNATIONAL CARRIAGE OF DANGEROUS GOODS BY ROAD (ADR):

MATERIAL SAFETY DATA SHEET

ALCONOX®

This product is not classified by the United Nations Economic Commission for Europe to be dangerous goods.

SECTION 15 - REGULATORY INFORMATION

UNITED STATES REGULATIONS

SARA REPORTING REQUIREMENTS: This product is not subject to the reporting requirements of Sections 302, 304 and 313 of Title III of the Superfund Amendments and Reauthorization Act., as follows: None

TSCA: All components in this product are listed on the US Toxic Substances Control Act (TSCA) inventory of chemicals.

SARA 311/312:

Acute Health: Yes Chronic Health: No Fire: No Reactivity: No

U.S. SARA THRESHOLD PLANNING QUANTITY: There are no specific Threshold Planning Quantities for this product. The default Federal MSDS submission and inventory requirement filing threshold of 10,000 lb (4,540 kg) may apply, per 40 CFR 370.20.

U.S. CERCLA REPORTABLE QUANTITY (RQ): None

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): None of the ingredients are on the California Proposition 65 lists.

CANADIAN REGULATIONS:

CANADIAN DSL/NDL INVENTORY STATUS: All of the components of this product are on the DSL Inventory

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA) PRIORITIES SUBSTANCES LISTS: No component of this product is on the CEPA First Priorities Substance Lists.

CANADIAN WHMIS CLASSIFICATION and SYMBOLS: This product is categorized as a Controlled Product, Hazard Class D2B as per the Controlled Product Regulations

EUROPEAN ECONOMIC COMMUNITY INFORMATION:

EU LABELING AND CLASSIFICATION:

Classification of the mixture according to Regulation (EC) No1272/2008. See section 2 for details.

AUSTRALIAN INFORMATION FOR PRODUCT:

AUSTRALIAN INVENTORY OF CHEMICAL SUBSTANCES (AICS) STATUS: All components of this product are listed on the AICS.

STANDARD FOR THE UNIFORM SCHEDULING OF DRUGS AND POISONS: Not applicable.

JAPANESE INFORMATION FOR PRODUCT:

JAPANESE MINISTER OF INTERNATIONAL TRADE AND INDUSTRY (MITI) STATUS: The components of this product are not listed as Class I Specified Chemical Substances, Class II Specified Chemical Substances, or Designated Chemical Substances by the Japanese MITI.

INTERNATIONAL CHEMICAL INVENTORIES:

Listing of the components on individual country Chemical Inventories is as follows:

Asia-Pac:	Listed
Australian Inventory of Chemical Substances (AICS):	Listed
Korean Existing Chemicals List (ECL):	Listed
Japanese Existing National Inventory of Chemical Substances (ENCS):	Listed
Philippines Inventory of Chemicals and Chemical Substances (PICCS):	Listed
Swiss Giftlist List of Toxic Substances:	Listed
U.S. TSCA:	Listed

SECTION 16 - OTHER INFORMATION

PREPARED BY: Paul Eigbrett Global Safety Management, 10006 Cross Creek Blvd. Suite 440, Tampa, FL 33647

MATERIAL SAFETY DATA SHEET

ALCONOX®

Disclaimer: To the best of Alconox, Inc. knowledge, the information contained herein is reliable and accurate as of this date; however, accuracy, suitability or completeness is not guaranteed and no warranties of any type either express or implied are provided. The information contained herein relates only to this specific product.

ANNEX:

IDENTIFIED USES OF ALCONOX® AND DIRECTIONS FOR USE

Used to clean: Healthcare instruments, laboratory ware, vacuum equipment, tissue culture ware, personal protective equipment, sampling apparatus, catheters, tubing, pipes, radioactive contaminated articles, optical parts, electronic components, pharmaceutical apparatus, cosmetics manufacturing equipment, metal castings, forgings and stampings, industrial parts, tanks and reactors. Authorized by USDA for use in federally inspected meat and poultry plants. Passes inhibitory residue test for water analysis. FDA certified.

Used to remove: Soil, grit, grime, buffing compound, slime, grease, oils, blood, tissue, salts, deposits, particulates, solvents, chemicals, radioisotopes, radioactive contaminations, silicon oils, mold release agents.

Surfaces cleaned: Corrosion inhibited formulation recommended for glass, metal, stainless steel, porcelain, ceramic, plastic, rubber and fiberglass. Can be used on soft metals such as copper, aluminum, zinc and magnesium if rinsed promptly. Corrosion testing may be advisable.

Cleaning method: Soak, brush, sponge, cloth, ultrasonic, flow through clean-in-place. Will foam—not for spray or machine use.

Directions: Make a fresh 1% solution (2 1/2 Tbsp. per gal., 1 1/4 oz. per gal. or 10 grams per liter) in cold, warm, or hot water. If available use warm water. Use cold water for blood stains. For difficult soils, raise water temperature and use more detergent. Clean by soak, circulate, wipe, or ultrasonic method. Not for spray machines, will foam. For nonabrasive scouring, make paste. Use 2% solution to soak frozen stopcocks. To remove silver tarnish, soak in 1% solution in aluminum container. RINSE THOROUGHLY—preferably with running water. For critical cleaning, do final or all rinsing in distilled, deionized, or purified water. For food contact surfaces, rinse with potable water. Used on a wide range of glass, ceramic, plastic, and metal surfaces. Corrosion testing may be advisable.

SAFETY DATA SHEET

Isobutylene

Airgas
an Air Liquide company

Section 1. Identification

GHS product identifier	: Isobutylene
Chemical name	: 2-methylpropene
Other means of identification	: 1-Propene, 2-methyl-; Isobutene; Isobutylene; 1-Propene, 2-methyl- (isobutene)
Product use	: Synthetic/Analytical chemistry.
Synonym	: 1-Propene, 2-methyl-; Isobutene; Isobutylene; 1-Propene, 2-methyl- (isobutene)
SDS #	: 001031
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253

24-hour telephone : 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	: FLAMMABLE GASES - Category 1 GASES UNDER PRESSURE - Liquefied gas

GHS label elements

Hazard pictograms



Signal word

: Danger

Hazard statements

: Extremely flammable gas.
May form explosive mixtures with air.
Contains gas under pressure; may explode if heated.
May cause frostbite.
May displace oxygen and cause rapid suffocation.

Precautionary statements

General

: Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use.
Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction. Always keep container in upright position. Approach suspected leak area with caution.

Prevention

: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Response

: Leaking gas fire: Do not extinguish, unless leak can be stopped safely. Eliminate all ignition sources if safe to do so.

Storage

: Protect from sunlight when ambient temperature exceeds 52°C/125°F. Store in a well-ventilated place.

Disposal

: Not applicable.

Hazards not otherwise classified

: In addition to any other important health or physical hazards, this product may displace oxygen and cause rapid suffocation.

Section 3. Composition/information on ingredients

Substance/mixture	: Substance
Chemical name	: 2-methylpropene
Other means of identification	: 1-Propene, 2-methyl-; Isobutene; Isobutylene; 1-Propene, 2-methyl- (isobutene)

CAS number/other identifiers

CAS number	: 115-11-7
Product code	: 001031

Ingredient name	%	CAS number
Isobutylene	100	115-11-7

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact	: Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.
Inhalation	: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
Skin contact	: Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. To avoid the risk of static discharges and gas ignition, soak contaminated clothing thoroughly with water before removing it. Get medical attention if symptoms occur. Wash clothing before reuse. Clean shoes thoroughly before reuse.
Ingestion	: As this product is a gas, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact	: No known significant effects or critical hazards.
Inhalation	: No known significant effects or critical hazards.
Skin contact	: No known significant effects or critical hazards.
Frostbite	: Try to warm up the frozen tissues and seek medical attention.
Ingestion	: As this product is a gas, refer to the inhalation section.

Over-exposure signs/symptoms

Eye contact	: No specific data.
Inhalation	: No specific data.
Skin contact	: No specific data.
Ingestion	: No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician	: Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
Specific treatments	: No specific treatment.

Section 4. First aid measures

- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

- Extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Suitable extinguishing media** : None known.
- Unsuitable extinguishing media,**
- Specific hazards arising from the chemical** : Contains gas under pressure. Extremely flammable gas. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion.
- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool. If involved in fire, shut off flow immediately if it can be done without risk. If this is impossible, withdraw from area and allow fire to burn. Fight fire from protected location or maximum possible distance. Eliminate all ignition sources if safe to do so.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : Accidental releases pose a serious fire or explosion hazard. No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

- Precautions for safe handling**
- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Avoid contact with eyes, skin and clothing. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.
- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Eliminate all ignition sources. Keep container tightly closed and sealed until ready for use. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F).

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Isobutylene	ACGIH TLV (United States, 3/2015). TWA: 250 ppm 8 hours.

- Appropriate engineering controls** : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
- Individual protection measures**
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.
- Skin protection**

Section 8. Exposure controls/personal protection

- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

- Appearance** : Gas. [Liquefied compressed gas.]
- Physical state** : Colorless.
- Color** : 56.12 g/mole
- Molecular weight** : C₄-H₈
- Molecular formula** : -6.9°C (19.6°F)
- Boiling/condensation point** : -140.7°C (-221.3°F)
- Melting/freezing point** : 144.75°C (292.6°F)
- Critical temperature** : Characteristic.
- Odor** : Not available.
- Odor threshold** : Not available.
- pH** : Closed cup: -76.1°C (-105°F)
- Flash point**
- Burning time** : Not applicable.
- Burning rate** : Not applicable.
- Evaporation rate** : Not available.
- Flammability (solid, gas)** : Extremely flammable in the presence of the following materials or conditions: open flames, sparks and static discharge and oxidizing materials.
- Lower and upper explosive (flammable) limits** : Lower: 1.8%
Upper: 9.6%
- Vapor pressure Vapor density**

Isobutylene	
24.3 (PSig)	
1.94 (Air = 1)	
Section 8. Exposure controls/personal protection	
Specific Volume (ft ³ /lb)	6.6845

Gas Density (lb/ft ³)	: 0.1496 (25°C / 77 to °F)
Relative density	: Not applicable.
Solubility	: Not available.
Solubility in water	: 0.263 g/l
Partition coefficient: n-octanol/water	: 2.34
Auto-ignition temperature	: 465°C (869°F)
Decomposition temperature	: Not available.
SADT	: Not available.

Section 9. Physical and chemical properties

Viscosity : Not applicable.

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.

Chemical stability : The product is stable.

Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid : Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

Incompatible materials : Oxidizers

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Hazardous polymerization : Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Isobutylene	LC50 Inhalation Vapor	Rat	550000 mg/m ³	4 hours

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Section 11. Toxicological information

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : No known significant effects or critical hazards.
Inhalation : No known significant effects or critical hazards.
Skin contact : No known significant effects or critical hazards.
Ingestion : As this product is a gas, refer to the inhalation section.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.
Carcinogenicity : No known significant effects or critical hazards.
Mutagenicity : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Isobutylene	2.34	-	low

Section 12. Ecological information

Mobility in soil : Not available.

Soil/water partition coefficient (K_{oc})

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1055	UN1055	UN1055	UN1055	UN1055
UN proper shipping name	ISOBUTYLENE	ISOBUTYLENE	ISOBUTYLENE	ISOBUTYLENE	ISOBUTYLENE
Transport hazard class(es)	2.1 	2.1 	2.1 	2.1 	2.1 
Packing group	-	-	-	-	-
Environment	No.	No.	No.	No.	No.
Additional information	Limited quantity Yes. Packaging instruction Passenger aircraft Quantity limitation: Forbidden. Cargo aircraft Quantity limitation: 150 kg Special provisions 19, T50	Product classified as per the following sections of the Transportation of Dangerous Goods Regulations: 2.13-2.17 (Class 2). Explosive Limit and Limited Quantity Index 0.125 ERAP Index 3000 Passenger Carrying Ship Index Forbidden Passenger Carrying Road or Rail Index Forbidden Special provisions 29	-	-	Passenger and Cargo Aircraft Quantity limitation: 0 Forbidden Cargo Aircraft Only Quantity limitation: 150 kg

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Section 14. Transport information

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
United States inventory (TSCA 8b): This material is listed or exempted.
Clean Air Act (CAA) 112 regulated flammable substances: isobutylene
Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs)
Clean Air Act Section 602 Class I Substances
Clean Air Act Section 602 Class II Substances
DEA List I Chemicals (Precursor Chemicals)
DEA List II Chemicals (Essential Chemicals)
SARA 302/304

Isobutylene
: Not listed

Section 14. Transport information

: Not listed

: Not listed

: Not listed

: Not listed

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Fire hazard
Sudden release of pressure

Composition/information on ingredients

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
Isobutylene	100	Yes.	Yes.	No.	No.	No.

State regulations : This material is listed.

Massachusetts

New York : This material is not listed.

New Jersey : This material is listed.

Pennsylvania : This material is listed.

International regulations

International lists

National inventory

Australia : This material is listed or exempted.

Canada : This material is listed or exempted.

China : This material is listed or exempted.

Europe : This material is listed or exempted.

Japan : This material is listed or exempted.

Malaysia : Not determined.

Section 15. Regulatory information

New Zealand	: This material is listed or exempted.
Philippines	: This material is listed or exempted.
Republic of Korea	: This material is listed or exempted.
Taiwan	: This material is listed or exempted.
Canada	
WHMIS (Canada)	: Class A: Compressed gas. Class B-1: Flammable gas. CEPA Toxic substances : This material is not listed. Canadian ARET : This material is not listed. Canadian NPRI : This material is listed. Alberta Designated Substances : This material is not listed. Ontario Designated Substances : This material is not listed. Quebec Designated Substances : This material is not listed.

Section 16. Other information

Canada Label requirements : Class A: Compressed gas.
Class B-1: Flammable gas.

Hazardous Material Information System (U.S.A.)

Health	1
Flammability	4
Physical hazards	2

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

Procedure used to derive the classification

Classification	Justification
Flam. Gas 1, H220 Press. Gas Liq. Gas, H280	Expert judgment Expert judgment

History	: 7/11/2016
Date of printing	: 7/11/2016
Date of issue/Date of revision	: No previous validation
Date of previous issue	

Section 16. Other information

Version : 0.01

Key to abbreviations : ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
UN = United Nations

References : Not available.

▣ Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Safety Data Sheet

H2S Mix CH4

Section 1: Product and Company Identification

SpecAir Specialty Gases

22 Albiston Way
Auburn, ME 04210
Phone: 207-784-5788
Toll Free: 800-292-6218
Fax: 207-784-5383
<http://www.specair.com/>

Product Code: H2S Mix CH4

Synonyms:

Recommended Use:

Usage Restrictions:

Section 2: Hazards Identification



Warning

Hazard Classification:

Gases Under Pressure

Hazard Statements:

Contains gas under pressure; may explode if heated
Toxic to aquatic life

Precautionary Statements

Storage:

Protect from sunlight.
Store in well-ventilated place.

Section 3: Composition/Information on Ingredients

	CAS #	Concentration
--	-------	---------------

Hydrogen Sulfide	7783-06-4	10 ppm - 100 ppm
Carbon Monoxide	630-08-0	50 ppm - 800 ppm
Methane	74-82-8	1.45% - 2.5%
Oxygen	7782-44-7	12% - 20.9%
Nitrogen	7727-37-9	Balance

	Chemical Substance	Chemical Family	Trade Names
Hydrogen Sulfide	HYDROGEN SULFIDE	inorganic, gas	HYDROGEN SULFIDE (H ₂ S); DIHYDROGEN MONOSULFIDE; DIHYDROGEN SULFIDE; HYDROSULFURIC ACID; SULFUR DIHYDRIDE; SULFURETED HYDROGEN; SULFUR HYDRIDE; STINK DAMP; SEWER GAS; RCRA U135; UN 1053; H ₂ S
Carbon Monoxide	CARBON MONOXIDE	inorganic, gas	CARBON OXIDE; CARBON OXIDE (CO); UN 1016; CO
Methane	METHANE, COMPRESSED GAS	hydrocarbons, gas	FIRE DAMP; MARSH GAS; METHYL HYDRIDE; NATURAL GAS; METHANE; UN 1971; R50; CH ₄
Oxygen	OXYGEN, COMPRESSED GAS	inorganic, gas	OXYGEN; DIOXYGEN; MOLECULAR OXYGEN; OXYGEN MOLECULE; PURE OXYGEN; UN 1072; O ₂
Nitrogen	NITROGEN, COMPRESSED GAS	inorganic, gas	DIATOMIC NITROGEN; DINITROGEN; NITROGEN; NITROGEN-14; NITROGEN GAS; UN 1066; N ₂

Section 4: First Aid Measures

	Skin Contact	Eye Contact	Ingestion	Inhalation	Note to Physicians
Hydrogen Sulfide	Wash skin with soap and water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention, if needed. Thoroughly clean and dry contaminated clothing and shoes before reuse.	Flush eyes with plenty of water for at least 15 minutes. Then get immediate medical attention.	If a large amount is swallowed, get medical attention.	If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. If breathing is difficult, oxygen should be administered by qualified personnel. Get immediate medical attention.	For inhalation, consider oxygen.
Carbon Monoxide	Wash skin with soap and water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention, if needed. Thoroughly clean and dry contaminated clothing and shoes before reuse.	Flush eyes with plenty of water for at least 15 minutes. Then get immediate medical attention.	If a large amount is swallowed, get medical attention.	If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. If breathing is difficult, oxygen should be administered by qualified personnel. Get immediate medical attention.	For inhalation, consider oxygen.
Methane	Wash exposed skin with soap and water.	Flush eyes with plenty of water.	If a large amount is swallowed, get medical attention.	If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. If breathing is difficult, oxygen should be administered by qualified personnel. Get immediate medical attention.	For inhalation, consider oxygen.
Oxygen	None expected	None expected	Not likely route of exposure	If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. Get immediate medical attention.	None
Nitrogen	Wash exposed skin with soap and water.	Flush eyes with plenty of water.	If a large amount is swallowed, get medical attention.	If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. If breathing is difficult, oxygen should be administered by qualified personnel. Get immediate medical attention.	For inhalation, consider oxygen.

Section 5: Fire Fighting Measures

	Suitable Extinguishing Media	Products of Combustion	Protection of Firefighters
--	------------------------------	------------------------	----------------------------

	Suitable Extinguishing Media	Products of Combustion	Protection of Firefighters
Hydrogen Sulfide	Let burn unless leak can be stopped immediately. Large fires: Use regular foam or flood with fine water spray.	Sulfur oxides	- Any self-contained breathing apparatus with a full facepiece. - Protective material types: butyl rubber, polyvinyl chloride (PVC), neoprene
Carbon Monoxide	Carbon dioxide, regular dry chemical Large fires: Use regular foam or flood with fine water spray.	Carbon dioxide	- Any supplied-air respirator with full facepiece and operated in a pressure-demand or other positive-pressure mode in combination with a separate escape supply. - Any supplied-air respirator with full facepiece and operated in a pressure-demand or other positive-pressure mode in combination with a separate escape supply.
Methane	Carbon dioxide, regular dry chemical Large fires: Use regular foam or flood with fine water spray.	Carbon monoxide, carbon dioxide, water	- Respiratory protection may be needed for frequent or heavy exposure. Any self-contained breathing apparatus with a full facepiece. - Respiratory protection may be needed for frequent or heavy exposure. Any self-contained breathing apparatus with a full facepiece.
Oxygen	Non-flammable. Use extinguishing agent appropriate for the material which is burning. Use water in large quantities for fires involving oxygen.	Oxides of burning material	- Respiratory protection may be needed for frequent or heavy exposure. - None
Nitrogen	Non-flammable. Use suitable extinguishing media for surrounding fire. Cylinders may rupture or explode if exposed to heat.	Non-flammable	Respiratory protection may be needed for frequent or heavy exposure.

Section 6: Accidental Release Measures

	Personal Precautions	Environmental Precautions	Methods for Containment
Hydrogen Sulfide	Keep unnecessary people away, isolate hazard area and deny entry. Stay upwind and keep out of low areas. Ventilate closed spaces before entering. Evacuation radius: 150 feet. For tank, rail car or tank truck: 800 meters (1/2 mile). Do not touch spilled material.	Avoid heat, flames, sparks and other sources of ignition.	Stop leak if possible without personal risk. Remove sources of ignition. Reduce vapors with water spray. Do not get water directly on material.
Carbon Monoxide	Keep unnecessary people away, isolate hazard area and deny entry. Ventilate closed spaces before entering.	Avoid heat, flames, sparks and other sources of ignition. Keep out of water supplies and sewers.	Stop leak if possible without personal risk. Reduce vapors with water spray. Remove sources of ignition.
Methane	Keep unnecessary people away, isolate hazard area and deny entry. Ventilate closed spaces before entering.	Avoid heat, flames, sparks and other sources of ignition.	Stop leak if possible without personal risk. Reduce vapors with water spray. Remove sources of ignition.
Oxygen	Keep unnecessary people away, isolate hazard area and deny entry. Ventilate closed spaces before entering.	Avoid contact with combustible materials.	Stop leak if possible without personal risk.
Nitrogen	Keep unnecessary people away, isolate hazard area and deny entry. Stay upwind and keep out of low areas.	No significant effects from contamination expected.	Stop leak if possible without personal risk.

	Methods for Cleanup	Other Information
Hydrogen Sulfide	Collect runoff for disposal as potential hazardous waste. Dike for later disposal. Absorb with sand or other non-combustible material. Add an alkaline material (lime, crushed limestone, sodium bicarbonate, or soda ash).	Notify Local Emergency Planning Committee and State Emergency Response Commission for release greater than or equal to RQ (U.S. SARA Section 304). If release occurs in the U.S. and is reportable under CERCLA Section 103, notify the National Response Center at (800)424-8802 (USA) or (202)426-2675 (USA).
Carbon Monoxide	Stop leak, evacuate area. Wear protective equipment.	Subject to California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65).
Methane	Not available	Not available
Oxygen	Stop leak and ventilate	None
Nitrogen	N/A	N/A

Section 7: Handling and Storage

Handling	Storage
----------	---------

	Handling	Storage
Hydrogen Sulfide	Store and handle in accordance with all current regulations and standards. Protect from physical damage. Store outside or in a detached building. Store in a cool, dry place. Store in a well-ventilated area. Avoid contact with light. Grounding and bonding required. Subject to storage regulations: U.S. OSHA 29 CFR 1910.101. Notify State Emergency Response Commission for storage or use at amounts greater than or equal to the TPQ (U.S. EPA SARA Section 302). SARA Section 303 requires facilities storing a material with a TPQ to participate in local emergency response planning (U.S. EPA 40 CFR 355.30). Keep separated from incompatible substances.	Subject to handling regulations: U.S. OSHA 29 CFR 1910.119.
Carbon Monoxide	Keep separated from incompatible substances.	Store and handle in accordance with all current regulations and standards. Grounding and bonding required. Subject to storage regulations: U.S. OSHA 29 CFR 1910.101.
Methane	Store and handle in accordance with all current regulations and standards. Grounding and bonding required. Subject to storage regulations: U.S. OSHA 29 CFR 1910.101.	Keep separated from incompatible substances.
Oxygen	Store and handle in accordance with all current regulations and standards. Subject to storage regulations: U.S. OSHA 29 CFR 1910.101.	Keep separated from incompatible substances.
Nitrogen	Store and handle in accordance with all current regulations and standards. Subject to storage regulations: U.S. OSHA 29 CFR 1910.101.	Keep separated from incompatible substances.

Section 8: Exposure Controls/Personal Protection

	Exposure Guidelines
Hydrogen Sulfide	HYDROGEN SULFIDE: 20 ppm OSHA ceiling 50 ppm OSHA peak 10 minute(s) (once if no other measurable exposure occurs) 10 ppm (14 mg/m ³) OSHA TWA (vacated by 58 FR 35338, June 30, 1993) 15 ppm (21 mg/m ³) OSHA STEL (vacated by 58 FR 35338, June 30, 1993) 10 ppm ACGIH TWA 15 ppm ACGIH STEL 10 ppm (15 mg/m ³) NIOSH recommended ceiling 10 minute(s) TLV-TWA: 1ppm Upper respiratory irritation (ACGIH)
Carbon Monoxide	CARBON MONOXIDE: 50 ppm (55 mg/m ³) OSHA TWA 35 ppm (40 mg/m ³) OSHA TWA (vacated by 58 FR 35338, June 30, 1993) 200 ppm (229 mg/m ³) OSHA ceiling (vacated by 58 FR 35338, June 30, 1993) 25 ppm ACGIH TWA 35 ppm (40 mg/m ³) NIOSH recommended TWA 10 hour(s) 200 ppm (229 mg/m ³) NIOSH recommended ceiling
Methane	METHANE, COMPRESSED GAS: ALIPHATIC HYDROCARBON GASES ALKANE (C1-C4): 1000 ppm ACGIH TWA METHANE: No occupational exposure limits established. ALIPHATIC HYDROCARBON GASES ALKANE (C1-C4): 1000 ppm ACGIH TWA
Oxygen	OXYGEN, COMPRESSED GAS: No occupational exposure limits established.
Nitrogen	NITROGEN, COMPRESSED GAS: NITROGEN: ACGIH (simple asphyxiant)

Engineering Controls

Handle only in fully enclosed systems.

	Eye Protection	Skin Protection	Respiratory Protection
Hydrogen Sulfide	Wear splash resistant safety goggles with a face shield. Provide an emergency eye wash fountain and quick drench shower in the immediate work area.	Wear appropriate chemical resistant clothing.	Any self-contained breathing apparatus with a full facepiece.
Carbon Monoxide	Eye protection not required, but recommended.	Protective clothing is not required.	Any supplied-air respirator with full facepiece and operated in a pressure-demand or other positive-pressure mode in combination with a separate escape supply.
Methane	Eye protection not required, but recommended.	Protective clothing is not required.	Respiratory protection may be needed for frequent or heavy exposure. Any self-contained breathing apparatus with a full facepiece.
Oxygen	Eye protection not required, but recommended.	Protective clothing is not required.	Respiratory protection may be needed for frequent or heavy exposure.
Nitrogen	Eye protection not required, but recommended.	Protective clothing is not required.	Respiratory protection may be needed for frequent or heavy exposure.

General Hygiene considerations

- Avoid breathing vapor or mist
- Avoid contact with eyes and skin
- Wash thoroughly after handling and before eating or drinking

Section 9: Physical and Chemical Properties

	Physical State	Appearance	Color	Change in Appearance	Physical Form	Odor	Taste
Hydrogen Sulfide	Gas	Colorless	Colorless	N/A	Gas	Rotten egg odor	N/A
Carbon Monoxide	Gas	Colorless	Colorless	N/A	Gas	Odorless	Tasteless
Methane	Gas	Colorless	Colorless	N/A	Gas, liquid	Odorless	Tasteless
Oxygen	Gas	Clear	Colorless	N/A	Gas	Odorless	Tasteless
Nitrogen	Gas	Clear	Colorless	N/A	Gas	Odorless	Tasteless

	Flash Point	Flammability	Partition Coefficient	Autoignition Temperature	Upper Explosive Limits	Lower Explosive Limits
Hydrogen Sulfide	Flammable	Not available	Not available	500 F (260 C)	44-46%	4.0-4.3%
Carbon Monoxide	Flammable	Not available	1479.11 (log = 3.17) (estimated from water solubility)	1128-1202 F (609-650 C)	0.74	12.0-12.5%
Methane	-369 F (-223 C)	Not available	724.44 (log = 2.87) (estimated from water solubility)	999 F (537 C)	15%	5%
Oxygen	Not flammable	Not available	Not available	Nonflammable	Nonflammable	Nonflammable
Nitrogen	Not flammable	Not available	Not available	Nonflammable	Nonflammable	Nonflammable

	Boiling Point	Freezing Point	Vapor Pressure	Vapor Density	Specific Gravity	Water Solubility	pH	Odor Threshold	Evaporation Rate	Viscosity
Hydrogen Sulfide	-78 to -77 F (-61 to -60.3 C)	-123 F (-86 C)	15200 mmHg @ 25 C	1.2 (Air=1)	1.192	2.58-2.9% @ 20 C	4.5-<7 (saturated solution)	0.13 ppm	Not applicable	0.0128 cP @ 25 C
Carbon Monoxide	-312.7 F (-191.5 C)	-326 F (-199 C)	760 mmHg @ -191 C gas; cannot be liquefied at room temperature	0.968 (Air=1)	Not applicable	2.3% @ 20 C	Not applicable	Not available	Not applicable	0.01657 cP @ 0 C
Methane	-260 F (-162 C)	-297 F (-183 C)	760 mmHg @ -161 C	0.555 (Air=1)	Not applicable	3.5% @ 17 C	Not applicable	Not available	Not applicable	0.01118 cP @ 27 C
Oxygen	-297 F (-183 C)	-360 F (-218 C)	760 mmHg @ -183 C	1.1 (Air=1)	Not applicable	3.2% @ 25 C	Not applicable	Not available	Not applicable	0.02075 cP @ 25 C
Nitrogen	-321 F (-196 C)	-346 F (-210 C)	760 mmHg @ -196 C	0.967 (Air=1)	Not applicable	1.6% @ 20 C	Not applicable	Not available	Not applicable	0.01787 cP @ 27 C

	Molecular Weight	Molecular Formula	Density	Weight per Gallon	Volatility by Volume	Volatility	Solvent Solubility
Hydrogen Sulfide	34.08	H2-S	1.539 g/L @ 0 C	Not available	Not available	Not applicable	Soluble: Carbon disulfide, alcohol, ether, glycerol, gasolines, kerosene, crude oil, alkali solutions
Carbon Monoxide	28.01	C-O	1.250 g/L @ 0 C	Not available	100%	Not applicable	Soluble: Alcohol, benzene, acetic acid, ethyl acetate, chloroform, cuprous chloride solutions
Methane	16.04	C-H4	0.717 g/L @ 0 C	Not available	Not applicable	Not applicable	Soluble: Alcohol, ether, benzene, organic solvents
Oxygen	31.9988	O2	1.309 g/L @ 25 C	Not available	Not applicable	Not applicable	Soluble: Alcohol
Nitrogen	28.0134	N2	1.2506 g/L	Not available	100%	1	Soluble: Liquid ammonia

Section 10: Stability and Reactivity

	Stability	Conditions to Avoid	Incompatible Materials
Hydrogen Sulfide	Stable at normal temperatures and pressure.	Stable at normal temperatures and pressure.	Combustible materials, metals, oxidizing materials, halogens, metal oxides, metal salts, bases, rust, oxidants, oxygen, copper powder, acetaldehyde, silver fulminate
Carbon Monoxide	Stable at normal temperatures and pressure.	Stable at normal temperatures and pressure.	Oxidizing materials, halogens, metal oxides, metals, combustible materials, lithium
Methane	Stable at normal temperatures and pressure.	Stable at normal temperatures and pressure.	Halogens, oxidizing materials, combustible materials
Oxygen	Stable at normal temperatures and pressure.	Stable at normal temperatures and pressure.	Combustible materials, halo carbons, metals, bases, reducing agents, amines, metal salts, oxidizing materials, alkaline earth and alkali metals
Nitrogen	Stable at normal temperatures and pressure.	Stable at normal temperatures and pressure.	Metals, oxidizing materials

	Hazardous Decomposition Products	Possibility of Hazardous Reactions
Hydrogen Sulfide	Oxides of sulfur	Will not polymerize.
Carbon Monoxide	Oxides of carbon	Will not polymerize.
Methane	Oxides of carbon	Will not polymerize.
Oxygen	Miscellaneous decomposition products	Will not polymerize.
Nitrogen	Oxides of nitrogen	Will not polymerize.

Section 11: Toxicology Information

Acute Effects

	Oral LD50	Dermal LD50	Inhalation
Hydrogen Sulfide	444 ppm inhalation-rat LC50	Irritation 0.000125 ppm/5 hour(s) eyes-human	Irritation, lack of sense of smell, sensitivity to light, nausea, vomiting, difficulty breathing, headache, drowsiness, dizziness, disorientation, tremors, visual disturbances, suffocation, lung congestion, internal bleeding, heart damage, nerve damage, brain damage, coma, death
Carbon Monoxide	LC50 Inhalation Gas. Rat 1807 ppm 4 hours	Not available	Changes in body temperature, changes in blood pressure, nausea, vomiting, chest pain, difficulty breathing, irregular heartbeat, headache, drowsiness, dizziness, disorientation, hallucinations, pain in extremities, tremors, loss of coordination, hearing loss, visual disturbances, eye damage, suffocation, blood disorders, convulsions, coma
Methane	Not available	Not available	Nausea, vomiting, difficulty breathing, irregular heartbeat, headache, drowsiness, fatigue, dizziness, disorientation, mood swings, tingling sensation, loss of coordination, suffocation, convulsions, unconsciousness, coma
Oxygen	Not established	Not established	Irritation, changes in body temperature, nausea, difficulty breathing, irregular heartbeat, dizziness, disorientation, hallucinations, mood swings, pain in extremities, tremors, lung congestion, convulsions
Nitrogen	Not available	Not available	Nausea, vomiting, difficulty breathing, headache, drowsiness, dizziness, tingling sensation, loss of coordination, convulsions, coma

	Eye Irritation	Skin Irritation	Sensitization
Hydrogen Sulfide	Irritation, sensitivity to light, visual disturbances	Irritation liquid: frostbite	Harmful if inhaled, respiratory tract irritation, skin irritation, eye irritation, blood damage
Carbon Monoxide	No information on significant adverse Effects	No information on significant adverse effects	Blood damage, suffocation
Methane	No information on significant adverse effects	No information on significant adverse effects	Difficulty breathing
Oxygen	No information on significant adverse effects	No information on significant adverse effects	No significant target effects reported.
Nitrogen	Contact with rapidly expanding gas may cause burns or frostbite	No information on significant adverse effects	Difficulty breathing

Chronic Effects

	Carcinogenicity	Mutagenicity	Reproductive Effects	Developmental Effects
Hydrogen Sulfide	Not available	Not available	Available.	No data

	Carcinogenicity	Mutagenicity	Reproductive Effects	Developmental Effects
Carbon Monoxide	Not available	Available.	Available.	No data
Methane	Not available	Not available	Not available	No data
Oxygen	Not known.	Available.	Available.	No data
Nitrogen	Not hazardous	Not available	Not available	No data

Section 12: Ecological Information

Fate and Transport

	Eco toxicity	Persistence / Degradability	Bioaccumulation / Accumulation	Mobility in Environment
Hydrogen Sulfide	Fish toxicity: Acute LC50 7 ug/L Fresh water Fish - Fathead minnow - Pimephales promelas - FRY 96 hours; 14.9 ug/L 96 hour(s) LC50 (Mortality) Fathead minnow (Pimeph Invertebrate toxicity: 9730 ug/L 1.5 hour(s) (Mortality) Mediterranean mussel (Mytilus galloprovincialis) Algal toxicity: Not available Phyto toxicity: Not available Other toxicity: Not available	Highly toxic to aquatic life.	Not available	Not available
Carbon Monoxide	Fish toxicity: 75000 ug/L 1 day(s) LC100 (Mortality) Orangespotted sunfish (Lepomis humilis) Invertebrate toxicity: Not available Algal toxicity: Not available Phyto toxicity: Not available Other toxicity: Not available	Relatively non-persistent in the environment. Highly volatile from water.	Not available	Not expected to leach through the soil or the sediment.
Methane	Fish toxicity: Not available Invertebrate toxicity: Not available Algal toxicity: Not available Phyto toxicity: Not available Other toxicity: Not available	Relatively non-persistent in the environment. Moderately volatile from water.	Accumulates very little in the bodies of living organisms.	Not expected to leach through the soil or the sediment.
Oxygen	Fish toxicity: Not available Invertebrate toxicity: Not available Algal toxicity: Not available Phyto toxicity: Not available Other toxicity: Not available	Not available	Low bioaccumulation	Not available
Nitrogen	Fish toxicity: Not available Invertebrate toxicity: Not available Algal toxicity: Not available Phyto toxicity: Not available Other toxicity: Not available	Not available	Not available	Not available

Section 13: Disposal Considerations

Hydrogen Sulfide	Dispose in accordance with all applicable regulations. Subject to disposal regulations: U.S. EPA 40 CFR 262. Hazardous Waste Number(s): U135.
Carbon Monoxide	Dispose in accordance with all applicable regulations. Subject to disposal regulations: U.S. EPA 40 CFR 262. Hazardous Waste Number(s): D001.
Methane	Dispose in accordance with all applicable regulations. Subject to disposal regulations: U.S. EPA 40 CFR 262. Hazardous Waste Number(s): D001.
Oxygen	Dispose in accordance with all applicable regulations. Subject to disposal regulations: U.S. EPA 40 CFR 262. Hazardous Waste Number(s): D001.
Nitrogen	Dispose in accordance with all applicable regulations.

Section 14: Transportation Information

U.S. DOT 49 CFR 172.101

DOT Information For This Mixture

Shipping Name	Compressed gas, n.o.s. (Nitrogen, Oxygen)
UN Number	UN1956
Hazard Class	2.2
Hazard Information	Non-Flammable Gas

Individual Component Information

	Proper Shipping Name	ID Number	Hazard Class or Division	Packing Group	Labeling Requirements	Passenger Aircraft or Railcar Quantity Limitations	Cargo Aircraft Only Quantity Limitations	Additional Shipping Description
Hydrogen Sulfide	Hydrogen sulfide	UN1053	2.3	Not applicable	2.3; 2.1	Forbidden	Forbidden	Toxic-Inhalation Hazard Zone B
Carbon Monoxide	Carbon monoxide, compressed	UN1016	2.3	Not applicable	2.3; 2.1	Forbidden	25 kg	Toxic-Inhalation Hazard Zone D
Methane	Methane, compressed	UN1971	2.1	Not applicable	2.1	Forbidden	150 kg	N/A
Oxygen	Oxygen, compressed	UN1072	2.2	Not available	2.2; 5.1	75 kg or L	150 kg	N/A
Nitrogen	Nitrogen, compressed	UN1066	2.2	Not applicable	2.2	75 kg or L	150 kg	N/A

Canadian Transportation of Dangerous Goods

	Shipping Name	UN Number	Class	Packing Group / Risk Group
Hydrogen Sulfide	HYDROGEN SULFIDE; or HYDROGEN SULPHIDE	UN1053	2.3; 2.1	Not applicable
Carbon Monoxide	Carbon monoxide, compressed	UN1016	2.3; 2.1	Not applicable
Methane	Methane, compressed	UN1971	2.1	Not applicable
Oxygen	Oxygen, compressed	UN1072	2.2; 5.1	Not applicable
Nitrogen	Nitrogen, compressed	UN1066	2.2	Not applicable

Section 15: Regulatory Information

U.S. Regulations

	CERCLA Sections	SARA 355.30	SARA 355.40
Hydrogen Sulfide	100 LBS RQ	500 LBS TPQ	100 LBS RQ
Carbon Monoxide	Not regulated.	Not regulated.	Not regulated.
Methane	Not regulated.	Not regulated.	Not regulated.
Oxygen	Not regulated.	Not regulated.	Not regulated.
Nitrogen	Not regulated.	Not regulated.	Not regulated.

SARA 370.21

	Acute	Chronic	Fire	Reactive	Sudden Release
Hydrogen Sulfide	Yes	No	Yes	No	Yes
Carbon Monoxide	Yes	No	Yes	No	Yes
Methane	Yes	No	Yes	No	Yes
Oxygen	No	No	Yes	No	Yes
Nitrogen	Yes	No	No	No	Yes

SARA 372.65

Hydrogen Sulfide	HYDROGEN SULFIDE: Administrative stay issued Aug. 22, 1994
Carbon Monoxide	Not regulated.

Methane	Not regulated.
Oxygen	Not regulated.
Nitrogen	Not regulated.

OSHA Process Safety

Hydrogen Sulfide	1500 LBS TQ
Carbon Monoxide	Not regulated.
Methane	Not regulated.
Oxygen	Not regulated.
Nitrogen	Not regulated.

State Regulations

	CA Proposition 65
Hydrogen Sulfide	Not regulated.
Carbon Monoxide	Known to the state of California to cause the following: Carbon monoxide Developmental toxicity (Jul 01, 1989)
Methane	Not regulated.
Oxygen	Not regulated.
Nitrogen	Not regulated.

Canadian Regulations

	WHMIS Classification
Hydrogen Sulfide	A, B1, D1A, D2B.
Carbon Monoxide	A, B1, D1A, D2A.
Methane	A, B1
Oxygen	A,C
Nitrogen	A

National Inventory Status

	US Inventory (TSCA)	TSCA 12b Export Notification	Canada Inventory (DSL/NDSL)
Hydrogen Sulfide	Listed on inventory.	Not listed.	Listed on inventory.
Carbon Monoxide	Listed on inventory.	Not listed.	Listed on inventory.
Methane	Listed on inventory.	Not listed.	Listed on inventory.
Oxygen	Listed on inventory.	Not listed.	Not determined.
Nitrogen	Listed on inventory.	Not listed.	Listed on inventory.

Section 16: Other Information

	NFPA Rating
Hydrogen Sulfide	HEALTH=4 FIRE=4 REACTIVITY=0
Carbon Monoxide	HEALTH=3 FIRE=4 REACTIVITY=0
Methane	HEALTH=1 FIRE=4 REACTIVITY=0
Oxygen	HEALTH=0 FIRE=0 REACTIVITY=0
Nitrogen	HEALTH=1 FIRE=0 REACTIVITY=0

0 = minimal hazard, 1 = slight hazard, 2 = moderate hazard, 3 = severe hazard, 4 = extreme hazard

Appendix C

Heat Stress and Cold Stress Guidelines

Heat Stress Guidelines

Form	Signs & Symptoms	Care	Prevention ³
Heat Rash	Tiny red vesicles in affected skin area. If the area is extensive, sweating can be impaired.	Apply mild lotions and cleanse the affected area.	Cool resting and sleeping areas to permit skin to dry between heat exposures.
Heat Cramps	Spasm, muscular pain (cramps) in stomach area and extremities (arms and legs).	Provide replacement fluids with minerals (salt) such as Gatorade.	Adequate salt intake with meals ¹ . ACCLIMATIZATION ²
Heat Exhaustion	Profuse sweating, cool (clammy) moist skin, dizziness, confusion, pale skin color, faint, rapid shallow breathing, headache, weakness, and/or muscle cramps.	Remove from heat, sit or lie down, rest, replace lost water with electrolyte replacement fluids (water, Gatorade) take frequent sips of liquids in amounts greater than required to satisfy thirst.	ACCLIMATIZATION ² Adequate salt intake with meals ¹ , only during early part of heat season. Ample water intake, frequently during the day.
Heat Stroke	HOT Dry Skin. Sweating has stopped. Mental confusion, dizziness, nausea, chills, severe headache, collapse, delirium, and/or coma.	HEAT STROKE IS A MEDICAL EMERGENCY • Remove from heat. • COOL THE BODY AS RAPIDLY AS POSSIBLE by immersing in cold (or cool) water, or splash with water and fan. • Call for Emergency Assistance. • Observe for signs of shock.	ACCLIMATIZATION ² Initially moderate workload in heat (8 to 14 days). Monitor worker's activities.

Footnotes:

- 1.) American diets are normally high in salt, sufficient to aid acclimatization. However, during the early part of the heat season, (May, June), one extra shake of salt during one to two meals per day may help, so long as this is permitted by your physician. Check with your personal physician.
- 2.) ACCLIMATIZATION - The process of adapting to heat is indicated by worker's ability to perform hot jobs less fluid loss, lower concentrations of salt loss in sweat, and a reduced core (body) temperature and heart rate.
- 3.) Method to Achieve Acclimatization - Moderate work or exercise in hot temperatures during early part of heat season. Adequate salt (mineral) and water intake. Gradually increasing work time in hot temperatures. Avoid alcohol. Normally takes 8 to 14 days to achieve acclimatization. Lost rapidly, if removed from strenuous work (or exercise) in hot temperature for more than approximately 5 days.

Cold Stress Guidelines

Stress	Symptoms	What to do
Mild Hypothermia	• Body Temp 98 to 90°F • Shivering • Lack of coordination, stumbling, fumbling hands • Slurred speech • Memory loss • Pale, cold skin	• Move to warm area • Stay active • Remove wet clothes and replace with dry clothes or blankets • Cover the head • Drink warm (not hot) sugary drink
Moderate Hypothermia	• Body temp 90 to 86°F • Shivering stops • Unable to walk or stand • Confused and/or irrational	• All of the above, plus: ◦ Call 911 ◦ Cover all extremities completely ◦ Place very warm objects, such as hot packs on the victim's head, neck, chest, and groin
Severe Hypothermia	• Body temp 86 to 78°F • Severe muscle stiffness • Very sleepy or unconscious • Ice cold skin • Death	• Call 911 • Treat victim very gently • Do not attempt to re-warm
Frostbite	• Cold, tingling, stinging, or aching feeling in the frostbitten area, followed by numbness • Skin color turns red, then purple, then white or very pale skin • Cold to the touch • Blisters in severe cases	• Call 911 • Do not rub the area • Wrap in soft cloth • If help is delayed, immerse in warm (not hot) water
Trench Foot	• Tingling, itching, or burning sensation • Blisters	• Soak feet in warm water, then wrap with dry cloth bandages • Drink a warm (not hot) sugary drink

Appendix D

Forms

Please complete this form and send it to your Branch Manager, HR and CHSO **within 24 hours** of the incident.

Accident/Incident Report Form

SECTION A				ACCIDENT/INCIDENT DETAILS			
EMPLOYEE INFORMATION:				OTHER INJURED (IF APPLICABLE):			
Name: _____				Name: _____			
Home Address: _____ Street Address _____ City _____ State _____ Zip Code _____				Home Address: _____ Street Address _____ City _____ State _____ Zip Code _____			
Contact Information: () () Primary Secondary				Contact Information: () () Primary Secondary			
Date of Birth: _____				Date of Birth: _____			
Date of Hire: _____				Date of Hire: _____			
Branch: _____				Branch: _____			
Supervisor: _____ Date and Time _____				Supervisor: _____			
Date and Time Accident/Incident		Reported		LOCATION OF INCIDENT/ACCIDENT			
____ / ____ / ____ Month Day Year		____ / ____ / ____ Month Day Year		Project Name: _____			
____ A.M. ____ P.M.		____ A.M. ____ P.M.		Client and Location: _____ or _____			
				Office Location: _____			
INCIDENT TYPE: (Check All That Applies)				WITNESS INFORMATION			
☐ Personal Injury/Illness ☐ Vehicle Accident ☐ Property Damage ☐ Environmental Spill ☐ Other				Name: _____ Contact Number: _____ Company: _____			
WHAT HAPPENED TO THE INJURED PARTY: ☐ First Aid Administered ☐ Refused Treatment/Transport ☐ Transported to Hospital ☐ Returned to Work ☐ Went Home ☐ Went to Physician ☐ Unknown							
Clinic/Hospital or Treating Physician: _____				Phone: _____			
Name		Street Address		City		State Zip Code	
SECTION B				PERSONAL INJURY			
Cause of Injury: _____							
Part of Body Injured: _____ Multiple Injuries: ☐ Y ☐ N							
Was PPE worn when injured? : ☐ Y ☐ N What PPE was worn? _____							

WAS INJURY A RESULT OF THE USE A MOTOR VEHICLE: YES NO (If yes, complete Section C)

Please complete this form and send it to your Branch Manager, HR and CHSO **within 24 hours** of the incident.

Accident/Incident Report Form

SECTION C

AUTO ACCIDENT ONLY

DRIVER/VEHICLE INFORMATION

Name of Insured: _____
Department: _____
Driver's License Number: _____
DOB: ____/____/____ State: _____
Description of Vehicle: License Plate Number: _____
Make: _____ Model: _____ Year: _____ Color: _____
Owner: _____

Name of Other Driver: _____
Driver's License Number: _____
State: _____
Description of Vehicle: License Plate Number: _____
Make: _____ Model: _____ Year: _____ Color: _____
Insurance Carrier: _____
Policy Number: _____ Ph. Number: _____

SECTION D

PROPERTY DAMAGE OR CHEMICAL RELEASE ONLY

Type of Damage(s): _____
Cause of Damage(s): _____
Type of Chemical Released (if known): _____
Quantity of Chemical Released: _____
Spill Measures Employed: _____

SECTION E

NATURE OF ACCIDENT/INCIDENT AND EXTENT OF INJURIES/DAMAGES

(Please give a detailed description of what happened. Attach a sketch or picture if applicable)

I hereby certify that the above information is true and correct to my understanding of this accident/incident.

Employee/Preparer's Name

Date and Time

[illegible]

Please complete this form and send it to your Branch Manager, HR and the Safety Team ***within 24 hours*** of the near miss.

Near Miss Report Form

NEAR MISS DETAILS

Employee Name: _____

Phone Number: _____

Branch: _____

Supervisor: _____

Date and Time Accident/Incident	Date and Time Reported	LOCATION OF NEAR MISS
____/____/____ Month Day Year ____ A.M. ____ P.M.	____/____/____ Month Day Year ____ A.M. ____ P.M.	Project Name: _____ Client and Location: _____ or _____ Office Location: _____

WHAT HAPPENED?

(Please give a detailed description of what happened. Attach photos or a sketch, if applicable.)

Photos were Taken

WHAT WAS DONE?

(Please give a detailed description of what was done to prevent and incident from occurring.)

I have verbally contacted a member of the Safety Team and my Supervisor.

Employee/Preparer’s Name _____ Date and Time _____