

Appendix J

Table of Contents

1.0	INTRODUCTION	1
2.0	SITE MANAGEMENT ACTIVITIES	1
	2.1 Operation Activities	1
	2.2 Maintenance Activities	2
	2.3 Monitoring Activities	3
3.0	SITE MANAGEMENT IMPLEMENTATION	4
	3.1 Inspection	4
	3.2 Reporting	4
4.0	INSTITUTIONAL AND ENGINEERING CONTROLS OVERSIGHT	6
5.0	TERMINATION OF TREATMENT OPERATIONS	6
6.0	SITE CLOSEOUT	6
7.0	CONTINGENCY PLAN	6
8.0	SITE EXPOSURE ASSESSMENT	7
9.0	HEALTH AND SAFETY PLAN	7
10.0	QUALITY ASSURANCE PROJECT PLAN	7
11.0	ENGINEERING CONTROLS DOCUMENTATION	7
12.0	DEED RESTRICTION DOCUMENTAATION	7

APPENDICES

Appendix A:	Site Exposure Assessment
Appendix B:	Health and Safety Plan
Appendix C:	Quality Assurance Project Plan
Appendix D:	Engineering Controls Documentation
Appendix E:	Deed Restriction Documentation

1.0 INTRODUCTION

This Site Management Plan has been developed in accordance with the requirements of Draft DER-10 Technical Guidance for Site Investigation and Remediation (December 2002), Section 6, and includes a description of the Site Management Activities and Implementation; Site Exposure Assessment related to potential chemical hazards (Refer: Appendix A); Site Closeout; and Contingency Plan; Health and Safety Plan (Refer: Appendix B); and Quality Assurance Project Plan (Refer: Appendix C); Institutional and Engineering Controls oversight (Refer Appendix: D & E); and conditions under which treatment operations can be ceased. It has been prepared as a stand-alone manual that can be implemented by individuals unfamiliar with the site.

2.0 SITE MANAGEMENT ACTIVITIES

Site Management activities address the engineering controls for the site. Appendix D contains documentation on the engineering controls.

2.1 Operation Activities

- *Implementation of an off-site in-situ groundwater treatment, using chemical oxidation and bioremediation (Refer: Figure 11 from the Final Engineering Report submitted to NYSDEC, attached herewith)*

Off-site in-situ bioremediation and chemical oxidation treatment of groundwater along 18th Street around locations OSDP-2 to 6 consisted of reagent injections as described in the approved RAWP. Two reagent applications were anticipated. The first application was completed in July 2008. It is assumed that the second round of injection will be required and since, this is not a continuous treatment process, no on-going maintenance is proposed.

The goal of treatment was to achieve the Part 703 groundwater standards. However, if significant contaminant reduction has been achieved with the first round of injection and additional reduction has been attained by a second round of injection, but not down to the groundwater standards, the Department will be petitioned for a variance from the groundwater standards. Significant contaminant reduction would provide more protectiveness than current conditions.

- *Continuation of existing on-site free product recovery from existing monitoring wells containing free product, coinciding with groundwater sampling events.*

The existing free product collection system comprises of a portable air operated diaphragm pump and compressor system to remove free floating products observed (if any) during the groundwater monitoring event. The product/water mixture will be pumped into a plastic container and emptied

manually into a 275-gallon storage tank placed in the basement. Alternatively, PVC disposable bailers may also be used for free product removal. Existing wells M-7, 13, 14, and/or 17 have contained free product and will be inspected at the time of groundwater monitoring, (quarterly during the first year and every 9 months there after, subject to NYSDEC determination of frequency and requirements).

- *Implementation and operation of an on-site sub-slab depressurization system*

The on-site sub-slab depressurization system was installed at the site in July 2008 and is operational since then. Quarterly inspections will be performed to observe operations of the system during the first year (and subsequently it will be increased to every nine months subject to NYSDEC determination of frequency and requirements). In addition, an effluent air sample will be collected and analyzed using EPA method TO-15 parameters, every 9 months.

- *Seal on-site basement floor openings and sump*

The basement floor will be inspected for cracks and openings, especially at walls and penetrations (every quarter during the first year and subsequently to every nine months subject to NYSDEC determination of frequency and requirements). Floor openings will be caulked and sealed and the existing sump, if required, will be closed, to minimize any sub-slab volatile organic compounds from entering into the basement.

2.2 Maintenance Activities

- *Maintain the on-site free product recovery system*

During each groundwater sampling event (every 3 months for the first year and subsequently every 9 months or as determined by NYSDEC), the free product collection system will be inspected and its condition noted, and should the need for maintenance warranted, will be maintained accordingly.

- *Maintain the on-site sub-slab depressurization system*

Periodic inspections of the piping, fans, and vapor phase carbon systems will be performed as mentioned above. Inspection of the vacuum pressure at each of the collection riser locations will be performed to ensure that a negative pressure exists and sub-slab vapor is being collected and should the need for maintenance warranted, will be maintained accordingly.

- *Maintain on-site basement floor opening and sump sealing*

Sealing of the floor openings and sump will be inspected during the periodic inspections as mentioned above, and should the need for maintenance warranted, will be maintained accordingly.

- *Minimize off-site sidewalk openings to soil*

No new openings of the sidewalk for trees or planters will be created, which would increase the potential for sub-soil vapors to enter the atmosphere.

2.3 Monitoring Activities

- *Monitor effectiveness of off-site in-situ groundwater treatment*

This will consist of monitoring of the two groundwater monitoring wells installed to measure remediation progress (every quarter during the first year and every 9 months there after, subject to NYSDEC determination of frequency and requirements). Sampling was commenced after the first round of the chemical application and injection. Samples were and will be analyzed for STARS 8021 volatile compounds and 8270 semi-volatile compounds. The need for additional reagent injection will be determined based on the monitoring results. The same monitoring will be performed after a second reagent injection round, if necessary. The overall contaminant reduction vs. the Part 703 groundwater standards will be considered in deciding the need for additional treatment.

The goal of treatment is to achieve the Part 703 groundwater standards. However, if significant contaminant reduction has been achieved with the first round of injection and additional reduction has been attained by a second round of injection, but not down to the groundwater standards, the Department will be petitioned for a variance from the groundwater standards. Significant contaminant reduction would provide more protectiveness than current conditions.

- *Monitor presence of free product in on-site groundwater monitoring wells*

This will consist of inspecting the passive collection system for the presence of free product during groundwater sampling events (every quarter during the first year and every 9 months there after, subject to NYSDEC determination of frequency and requirements).

- *Monitor on-site groundwater quality*

This will consist of sampling the 11 existing monitoring wells (9 on-site and 2 off-site), for STARS 8021 volatile compounds and 8270 semi-volatile compounds.

- *Monitor performance of the on-site sub-slab depressurization system*

This will consist of:

- An effluent air quality sample will be collected (quarterly for the first year and subsequently, every nine months or as determined by

NYSDEC) using EPA Method TO-15 parameters, to determine if sub-slab ventilation is effective in reducing indoor air contaminants and air quality results will be used in determining the effectiveness of the SSDS.

- Periodic inspection of floor and sump sealing will be performed to minimize sub-slab vapors from entering the basement.

3.0 SITE MANAGEMENT IMPLEMENTATION

Site Management activities described above will be implemented by 1802 LLC. Besides carrying out the Site Management activities, implementation will also include inspection and reporting.

3.1 Inspection

Inspection will include:

- *Condition of the new off-site groundwater monitoring wells*

The condition of the two new wells will be noted during each sampling event, including condition of the flush mounted casing, lock and riser.

- *Condition of the existing on-site free product recovery system*

The condition of the passive free product collection system will be noted during each sampling event.

- *Condition of the existing on-site groundwater monitoring wells*

The condition of remaining on-site wells will be noted during each sampling event.

- *Condition of the sub-slab depressurization system*

The condition of the draft fans, vacuum gauges, and final discharge piping will be noted.

- *Condition of the floor and sump with respect to sealing*

The condition of the floor and sump sealing will be noted during the periodic sub-slab depressurization system inspection.

3.2 Reporting

Reporting to the Department will include:

- *Interim Reports*

Every quarter during the first year and every 9 months there after, subject to NYSDEC determination of frequency and requirements, a report on the amount of free product recovered and results of groundwater monitoring will be submitted within one month after performing the sampling. These reports will also contain inspection and maintenance information related to the monitoring wells and passive free product collection system.

- *Annual Certification Reports*

An annual certification shall be submitted by 1802 LLC to the Department, including certification by a New York State licensed Professional Engineer, that the engineering and institutional controls required for the remedy are still in place, have not been altered, and are still effective. It will certify that the Site Management Plan has been followed, or note any deviations with explanations. In addition, it will contain a compilation of all the monitoring, inspection, and maintenance activities performed during the year, i.e., related to the off-site groundwater, on-site groundwater monitoring and free product recovery, the sub-slab depressurization system, and indoor and outdoor air quality.

The first annual certification report will be submitted by the first day of the month following the start of the anniversary of the implementation of remedial actions. This annual certification will then be submitted annually until 1802 LLC receives notice or approval from the Department that Site Management activities are no longer required at the site.

- *Other Voluntary Cleanup Agreement Reporting*

1802 LLC shall notify the Department immediately upon the discovery of any upset, interruption, or termination of one or more controls without the prior approval of NYSDEC.

Per the Voluntary Cleanup Agreement, reporting to the Department will be to:

Mr. James Quinn
Division of Environmental Remediation
625 Broadway, 12th Floor
Albany, NY 12233-7016
(1 hardcopy and a searchable PDF version)

Mr. Christopher M. Doroski
Bureau of Environmental Exposure Investigation
New York State Department of Health
Flanigan Square
547 River Street Rm 300
Troy, NY 12180-2216
(2 copies)

Ms. Alali M. Tamuno
Office of General Council
New York State Department of Environmental Conservation
200 White Plains Road, 5th Floor
Tarrytown, NY 10591
(1 copy)

4.0 INSTITUTIONAL AND ENGINEERING CONTROLS OVERSIGHT

Institutional controls for the site include a deed restriction for restricting access to on-site groundwater. Appendix E contains documentation on the deed restriction. The annual report described in Section 3.2 will include a certification that the institutional controls are in effect and effective.

5.0 TERMINATION OF TREATMENT OPERATIONS

Termination of treatment activities will be proposed to the Department when monitoring data indicate that treatment has achieved asymptotic removal rates and it would not be technically and/or economically feasible to continue treatment activities.

For off-site in-situ groundwater treatment, the groundwater quality after each round of reagent injection will be assessed to determine if an additional injection round would be beneficial. If the Part 703 groundwater standards are not met with one or two injection rounds, the technical feasibility of achieving additional reductions, and the cost of additional treatment, will be assessed to determine if additional benefit can be achieved.

6.0 SITE CLOSEOUT

Site closeout can be implemented when all remediation has been completed and the Department determines that the engineering and institutional controls are no longer necessary and no longer has any oversight responsibility for the site.

Site closeout consists of conducting a final project evaluation and preparing a final report supporting the decision that engineering and institutional controls are no longer necessary.

7.0 CONTINGENCY PLAN

The major potential emergency conditions resulting from remedial actions were considered as follows:

- Off-site chemical oxidation or bioremediation reagent spill prior to injection (during the second injection)
- On-site spill from free product recovery collection tank
- On-site release of collected sub-slab vapor into the basement from a collection system leak

The Contingency Plan/Emergency Response Plan section of the Health and Safety Plan in Appendix B (Section 9.0) addresses actions in the event of emergency conditions.

8.0 SITE EXPOSURE ASSESSMENT

See Appendix A for the Deed Restrictions Documentation.

9.0 HEALTH AND SAFETY PLAN

See Appendix B for the Health & Safety Plan.

10.0 QUALITY ASSURANCE PROJECT PLAN (QAPP)

See Appendix C for the Quality Assurance Project Plan (QAPP).

11.0 ENGINEERING CONTROLS DOCUMENTATION

See Appendix D for the Engineering Controls Documentation.

12.0 DEED RESTRICTIONS DOCUMENTATION

See Appendix E for the Deed Restrictions Documentation.

Appendix A

Site Exposure Assessment

Table of Contents

1.0	INTRODUCTION	A-1
1.1	Contemplated Use	A-1
1.2	Summary of Known Environmental Conditions	A-1
2.0	RISK OF EXPOSURE DUE TO OFF-SITE REMEDIATION	A-1
3.0	RISK OF EXPOSURE DUE TO ON-SITE REMEDIATION	A-2
4.0	EXPOSURE ASSESSMENT: OBJECTIVES, STRATEGIES, EVALUATION CRITERIA.....	A-3
4.1	Objectives	A-3
4.2	Strategies.....	A-4
4.3	Evaluation Criteria.....	A-5
	4.3.1 Off-site	A-5
	4.3.2 On-site	A-5
5.0	REPORTING	A-6
6.0	FUTURE ACTIONS	A-6
7.0	CONCLUSIONS	A-6

1.0 INTRODUCTION

Exposure assessment is the determination of the magnitude, frequency, duration, and exposure routes to the potential chemicals. The first step in evaluating exposure assessment is the characterization of the site with respect to its human populations and physical characteristics of the environment. The second step is the identification of exposure pathways, and the final step is the quantification of exposure.

The subject site has been characterized as a potential source of volatile organics (BTEX) and is located in an area that is predominantly residential, with the closest residential building located less than 20 feet from the site boundary. BTEX compounds (benzene, toluene, ethylbenzene and xylene are volatile hydrocarbons found typically in petroleum products such as gasoline) are less dense than water and forms sheens on top of water. The depth to contaminated groundwater at the site ranged from 13 to 19 feet below grade. Due to the presence of these VOCs, the groundwater was considered a potential source of vapors in the basement of the buildings.

The major pathway of exposure at the site is through inhalation or breathing of volatile organic vapors. Other minor pathways are through direct/dermal contact with the skin or eyes, and ingestion or swallowing.

1.1 Contemplated Use

The Contemplated Use contained in the Voluntary Cleanup Agreement for the site is restricted commercial (excluding day care, child care, and medical care uses). However, residential apartments have been constructed at the site.

1.2 Summary of Known Environmental Conditions

Previous site investigations for the subject site formed the basis for preparing the Remedial Action Work Plan (RAWP) that was subsequently approved by NYSDEC in February 2008 (refer: Appendix: B). The results of findings were used for evaluating exposure and risk assessments related to the known environmental conditions at the subject site. The following were observed from the RAWP related to the subject site:

2.0 RISKS OF EXPOSURE DUE TO OFF-SITE CONTAMINATION

The Part 375 residential soil cleanup objectives (SCOs) were not exceeded along 18th Street.

The groundwater standards were exceeded at the locations of OSDP-2, 3, 4, 5, and 6.

A comparison of off-site soil vapor concentrations with outdoor background air quality guidance values indicated potential air quality impacts due to soil vapor intrusion and potential need for remediation.

Along 18th Street, lower off-site soil vapor concentrations than on-site concentrations indicated that the site was a source of off-site soil vapor contamination; however, off-site soil vapor chlorinated VOCs that were detected were not attributable to the site and it was concluded that apparently there was another source of soil and/or groundwater contamination off-site.

On the eastern portion of the site, the off-site soil vapor concentrations were higher than the on-site concentrations (specifically for benzene and toluene), indicating that there was apparently another source of soil and/or groundwater contamination off-site.

The one outdoor air quality sample showed elevated levels of 16 substances. However, the soil vapor and outdoor air data indicated the main outdoor air contaminants (toluene, acetone, MEK, and 1,4-dichlorobenzene) were not the same as those present in off-site soil and groundwater. In addition, several chlorinated volatile organic compounds (VOCs) were present in soil vapor, which were not detected on-site or in off-site soil or groundwater, indicating the presence of other off-site contaminants besides those identified on-site.

The presence of relatively impermeable subsurface soils at the site resulted in a limited migration of contamination.

3.0 RISK OF EXPOSURE DUE TO ON-SITE CONTAMINATION

On-site soil contamination was not investigated further as part of the RAWP hence available historical data used was considered for evaluating the selected remedial actions for the site. The comparison with the SCOs indicated that 7 semi-volatile organic compounds (SVOCs) exceeded the Part 375 residential SCOs at two locations.

In the third round of sampling existing monitoring wells advanced through the slab, groundwater standards were exceeded in 12 of 17 wells, 4 of which contained low part-per-billion levels and 3 of which contained free product.

Groundwater migration beneath the slab was not considered significant, based on mapped water level gradients beneath the slab, the presence of native silt and clay soils, and the close proximity of highly contaminated monitoring wells to relatively clean monitoring wells.

Indoor air samples in the basement showed 15 substances at levels above background indoor air quality guidelines by an order of magnitude or more. Indoor air quality samples in the basement and first floor of Building A (to the west of the subject site) showed two substances at levels above background indoor air quality guidelines by an order of magnitude or more.

With the exception of toluene and acetone, the indoor air contaminants were not present in sub-slab groundwater.

The source(s) of the other 7 unaccounted for indoor air contaminants are not known. However, the indoor air quality, with very few exceptions, was same as the 18th St. outdoor air quality, indicating that the source of the unaccounted for the basement air contaminants was probably outdoor air and not sub-slab contamination.

Based on the previous site investigations, appropriate remedial objectives and actions were selected in the RAWP, to mitigate the potential sources of residual contamination that may have been present at the subject site.

4.0 EXPOSURE ASSESSMENT: OBJECTIVES, STRATEGIES, EVALUATION CRITERIA

The remedial actions selected for the subject site considered potential exposure pathways (including drinking of groundwater, breathing or coming in contact with contaminated soils, water or air; from on-site and off-site contamination). The following formed the basis for selecting the appropriate remedial treatment for the site:

4.1 Objectives

- To prevent human ingestion of groundwater containing contaminant concentrations above the applicable standards.
- To prevent human ingestion and dermal contact with contaminants in soil.
- To prevent inhalation of VOCs volatilizing from subsurface soil to indoor air.

The RAWP further identified major Standards, Criteria and Guidance (SCGs) as follows:

- 6 NYCRR Part 375 residential Soil Cleanup Objectives (SCOs)

- 6 NYCRR Part 703 standards for groundwater
- Air Guideline Values and outdoor background air quality for off-site, outdoor air quality, per NYSDOH soil vapor intrusion guidance
- Air Guideline Values and indoor background air quality for on-site, indoor air quality, per NYSDOH soil vapor intrusion guidance
- Air Guide 1 – Guidelines for the Control of Toxic Ambient Air Contaminants (relevant to discharges associated with treatment)
- 6 NYCRR Part 371 – Identification and Listing of Hazardous Waste (relevant to residuals generated during treatment)
- NYSDEC solid and hazardous waste regulations for transportation and disposal of contaminated soils and treatment residuals.
- NYSDEC requirements for Environmental Easements.

4.2 Strategies

- Protection of Public Health and the Environment: The remedy's ability to protect public health and the environment for the contemplated use of the site, and to achieve the remedial action objectives.
- Compliance with Standards, Criteria and Guidance (SCGs): Whether or not a remedy will meet applicable environmental laws, regulations, standards and guidance; for those SCGs that will not be met, the need for waivers and impacts is discussed.
- Long-term Effectiveness and Permanence: Long-term effectiveness of the remedy after implementation, including permanence of the remedy due to treatment; for residual contamination, the magnitude of the remaining risks, adequacy and reliability of engineering and institutional controls are discussed.
- Reduction of Toxicity, Mobility, and Volume: The remedy's ability to reduce toxicity, mobility or volume of site contamination through treatment, including reversibility with time.
- Short-term Effectiveness: Potential short-term adverse impacts and risks of the remedy on the community, workers, and the environment during remedial action, and mitigation measures. The estimated time for remedial action is included.

- Implementability: The technical and administrative feasibility of implementing the remedy.

4.3 Evaluation Criteria

4.3.1 Off-Site

No off-site action for soils was recommended as the contaminant levels were below the Part 375 residential SCGs.

In-situ groundwater treatment by bioremediation using an oxygen release compound at some locations and chemical oxidation in others was recommended as a means of meeting the groundwater standards.

These remedial actions were intended to meet the remedial action objectives and the SCGs identified for the site.

4.3.2 On-Site

Implementing sub-slab depressurization was recommended, along with indoor and outdoor air monitoring. The system (SSDS) would remove those indoor air VOC contaminants whose source was beneath the slab. In addition, existing free product recovery and monitoring of groundwater beneath the building was recommended to be continued.

An environmental easement restricting sub-slab groundwater use and soil contact was recommended. The SSDS would not be taken out of operation without written approval from the NYSDEC. Site maintenance for the sub-slab depressurization system and monitoring activities would be maintained, including annual certification of the operations and activities performed.

It was concluded that the soil and groundwater SCGs would not be met with the selected remedial actions for the subject site; however, the slab and the easement would act to preclude soil and groundwater contact so that the soil and groundwater remedial action objectives could be met. Implementation of the SSDS would meet the Remedial Action Objective related inhalation of VOCs volatilizing from sub-slab soil to indoor air. These remedial actions do not provide a permanent solution, nor do they provide reduce contaminant volume and toxicity through treatment. However, the SSDS would reduce VOC air contaminant mobility. There would be

no short-term adverse environmental impacts to the community as implementation of the SSDS would be indoors. In implementing the SSDS, using the existing sub-slab ventilation lines, workers could mitigate exposure to contaminants in the breathing zone during construction by normal respiratory protection means, if necessary. SSDS is a conventional technology and therefore is readily implementable

It was also estimated that groundwater treatment would provide a long-term, permanent solution, and reduce the volume and toxicity of groundwater contaminants. In addition, short-term adverse environmental impacts to the community due to the reagent injection points were anticipated. However, the selected treatment techniques were conventional technologies; readily usable and posed no adverse impacts while implementing for the project.

5.0 REPORTING

Periodic reporting, in accordance with the VCA, summarizing all actions performed for the subject site during that period; results of findings (if any), and information regarding any delays affecting the remedial progress and all the efforts to mitigate the delays were reported to the NYSDEC as well as circulated as part of a Citizen Participation Plan.

6.0 FUTURE ACTIONS

It is proposed to continue to monitor the progress of remedial treatments implemented for the site. An Institutional control (Deed Restrictions) to restrict the access to on-site groundwater, as required by NYSDEC, will be maintained for the site. In addition, all future monitoring, inspection, and maintenance activities performed i.e., related to the off-site groundwater, on-site groundwater monitoring and free product recovery, the SSDS, and indoor and outdoor air quality will be recorded, maintained and submitted to NYSDEC for the effective implementation of the remedial treatments for the site and meeting the selected objectives and minimizing potential exposures associated with the contamination from the site as mentioned above.

7.0 CONCLUSIONS

The surrounding area of the site is urban and the surface and subsurface environment is highly developed. The primary sources of soil contamination at the site, the former USTs, have been removed, and since known sources of

contamination do not exist, there is no adverse impact associated due to the direct contact with the soils.

Based on the previous site investigations, no ecologically sensitive areas have been located within the general vicinity of the subject site.

There were no drinking water wells located on the subject site or on the adjacent properties as well as down-gradient, and the subject site is served with municipal water.

Currently, there is no indication of human exposure to groundwater contamination from the site and accidental exposure is unlikely due to the contamination at the site is below-ground.

The potential for the failure of engineering and institutional controls should also be considered. It is anticipated that a risk-based assessment of all the existing remedial treatments and operations will need to be re-evaluated within two-years of the approval of the Final Engineering Report by the NYSDEC. This will be required for the quality control purpose and to ensure that the system is working efficiently, and on the contrary can demonstrate an accurate representation of any potential hazards (if any) that will require attention in the future.

Appendix B

Site Health & Safety Plan

SITE HEALTH AND SAFETY PLAN

For

**FORMER WILLOW SERVICE STATION (1802 LLC)
1802 27th AVENUE
ASTORIA, NEW YORK**

Prepared For

1802 LLC

February 2009

Prepared by

ESPL *ENVIRONMENTAL CONSULTANTS CORPORATION*

2 West 32nd Street, 5th Floor – Suite 504
New York, NY 10001
(212) 330-7501

Table of Contents

1.0	INTRODUCTION	B-1
	1.1 Brief Description of Project.....	B-2
	1.2 Site History.....	B-2
	1.3 Known Site Contamination.....	B-3
	1.4 Synopsis of Remedial Actions.....	B-3
	1.5 Site Operations to be Performed.....	B-4
2.0	ORGANIZATIONAL STRUCTURE	B-2
	2.1 Roles and Responsibilities	B-3
3.0	HAZARD ASSESSMENT	B-5
	3.1 Activity-Specific Hazards and Standard Operating Procedures	B-5
	3.2 General Site Hazards.....	B-6
	3.3 Biological Hazards	B-7
4.0	TRAINING REQUIREMENTS.....	B-8
5.0	PERSONAL PROTECTIVE EQUIPMENT	B-20
	5.1 Level A	B-11
	5.2 Level B.....	B-18
	5.3 Level C.....	B-21
	5.4 Level D.....	B-24
6.0	TEMPERATURE EXTREMES	B-25
	6.1 Heat Stress	B-25
	6.2 Cold Stress	B-28
7.0	MEDICAL MONITORING REQUIREMENTS	B-29
	7.1 Fit-Testing Requirements	B-29
8.0	AIR MONITORING	B-30
	8.1 Routine Air Monitoring Requirements	B-30
9.0	SITE CONTROL AND STANDARD OPERATING PROCEDURES	B-32
	9.1 Work Zones.....	B-32
	9.2 General Field Safety and Standard Operating Procedures.....	B-33
10.0	DECONTAMINATION PROCEDURES	B-35
11.0	CONTINGENCY PLAN / EMERGENCY RESPONSE PLAN	B-37
	11.1 Emergency Equipment On-Site/Site Communications	B-38
	11.2 Emergency Telephone Numbers and Hospital Information.....	B-38

11.3 Personnel Responsibilities During an Emergency.....	B-38
11.4 Medical Emergencies	B-39
11.5 Fire or Explosion	B-40
11.6 Evacuation Routes	B-40
11.7 Spill Control Procedures.....	B-41
11.8 Vapor Release Plan	B-41
11.9 Communication Procedures	B-42
12.0 CONFINED SPACE	B-43
12.1 Confined Space Entry Procedure.....	B-45
13.0 DAILY SAFETY MEETINGS	B-46
14.0 WORK PLAN	B-46
14.1 Work Tasks, Objectives and Methods for Implementation	B-46
14.2 Clean up/Decontamination Activities and Procedures.....	B-47
14.3 Informational Programs.....	B-47
14.4 Medical Surveillance Program	B-48
14.5 Personnel Requirements.....	B-48
14.6 Training Implementation.....	B-48
15.0 COMMUNITY AIR MONITORING PLAN (CAMP)	B-48

1.0 INTRODUCTION

This health and safety plan (HASP) describes the health and safety (HAS) guidelines developed for this site to protect on-site personnel, visitors, and the public from physical harm and exposure to hazardous materials or wastes. In accordance with the Occupational Safety and Health Administration (OSHA) at 29 CFR Part 1910.120 Hazardous Waste Operations and Emergency Response Final Rule, this HASP addresses the potential and actual safety and health hazards relating to of each phase of site operations.

This site-specific HASP is based on the best available information to date. The HASP may be revised when new information on site conditions is received or identified.

ESPL and contractor employees may be exposed to risks from hazardous conditions related to activities at this site. ESPL's policy is to minimize the possibility of work-related injury through aware and qualified supervision, health and safety training, medical monitoring, and the use of appropriate personal protective equipment.

This site-specific Health and Safety Plan (HASP) applies to ESPL and contractor personnel where operations involve actual or potential exposure to safety or health hazards. This HASP describes emergency response procedures for actual and potential physical and chemical hazards that have been identified by ESPL. This HASP is also intended to inform and guide all personnel entering an exclusion zone. ESPL's sub-contractors are retained as independent contractors and, are responsible for ensuring the health and safety of their own employees.

ESPL may require that its personnel take certain precautions in accordance with this HASP, and ESPL requests that others protect their personnel in a manner that they deem necessary or sufficient.

1.1 Brief Description of Project

Remedial action at the site consisted of in-situ groundwater treatment outside the 1802 building, but limited to 1802 property (the sidewalk along 18th Street) and included installation of two (2) groundwater monitoring wells and samplings to measure the remediation progress.

In addition, a sub-slab depressurization system was also installed, utilizing the existing sub-slab PVC horizontal piping beneath the slab.

In addition, free product recovery and groundwater sampling will be conducted as in the past, using the existing on-site and off-site wells at the site.

1.2 Known Site Contamination

The site in past was contaminated with gasoline products, however, most of the contamination has been removed and currently, remedial treatments selected in the NYSDEC approved Remedial Action Work Plan (RAWP) are being implemented for the site.

1.3 Synopsis of Remedial Actions

Periodic operation and maintenance required for the operations of existing free product collection, groundwater sampling, and SSDS monitoring within the site will be performed.

2.0 ORGANIZATIONAL STRUCTURE

Principal in Charge: Ray Kahn

Project Supervisor / Overall Project Manager: Margaret Tavares

Site Safety and Health Officer: Margaret Tavares

Additional Site Personnel: Ray Kahn, P. E.

Title	Name
Project Manager	Ray Kahn, P. E.
Field Supervisor	Margaret Tavares, Nikesh Shah
Health and Safety Officer	Margaret Tavares
Administration / Clerical	Sandra Tavares
Chemical Analysis	Phoenix Laboratories, Inc.

2.1 Roles and Responsibilities

The ESPL Project Supervisor is responsible for overall project administration and for supervising implementation of the HASP by ESPL personnel on site. All applicable OSHA health and safety (HAS) standards shall be applied. Each subcontractor (defined as an OSHA employer) is also responsible for the health and safety of its employees. If there is any dispute with regard to HAS or project activities, on-site personnel shall attempt to resolve the issue. If the issue cannot be resolved, in the work zone, then the project superintendent shall be consulted.

The ESPL Site Safety Officer is also responsible for coordinating HAS standards on-site. The Site Safety Officer will have met the emergency response and hazardous materials handling training requirements of OSHA 29 CFR Part 1910.120, completed supervisors training, and have appropriate experience pertinent to the on-site work. The Site Safety Officer is authorized to suspend site work based on safety concerns, and is responsible for:

1. Indoctrinating personnel with regard to all of the information in this

HASP and any other safety requirements to be observed during site operations, including, but not limited to, decontamination procedures, designation of work zones and levels of protection, air monitoring, fit testing, and emergency procedures dealing with fire and medical situations;

2. Coordinating site safety decisions with the Project Supervisor and the Principal in Charge;
3. Maintaining the designation of exclusion, decontamination, and support zones on a daily basis;
4. Monitoring the condition and status of known on-site hazards, and maintenance and implementation of the air quality-monitoring program specified in this HASP;
5. Maintaining the Site Personnel log;
6. Maintaining records of safety problems encountered, corrective actions taken, and documentation of any chemical exposures or physical injuries. The Site Safety Officer will document these conditions in a bound notebook and maintain a copy of this log on-site; and
7. Periodic inspections of the site to determine the effectiveness of the HASP.

Any person who observes safety concerns or potential hazards that have not been addressed in the daily safety meetings should immediately report observations/concerns to the ESPL Site Safety Officer or other appropriate key personnel.

3.0 HAZARD ASSESSMENT

This section identifies the activity-specific hazards associated with site operations and standard operating procedures (SOPs) that should be implemented to reduce the hazards; identifies general physical hazards that can be expected at most sites; and presents a summary of documented or potential chemical hazards at the site. Every effort must be made to reduce or eliminate these hazards. Those that cannot be eliminated must be guarded against by using engineering controls and/or personal protective equipment.

3.1 Activity-Specific Hazards and Standard Operating Procedures

Mechanical System Construction:

Mechanical system construction will include piping and electrical construction that involves the use of standard tools and electrical equipment such as hammers, saws, power cutting tools, drills and other equipment. These types of tools shall be used in accordance with manufactures recommendations for specific hazards posed by each.

System Operation:

The operation of a system in a petroleum-contaminated site may require field visits and well monitoring operations such as depth to water measurements, depth to product measurements, air, soil and groundwater sample collection. The hazard associated with this task is the possible worker exposure to gasoline in liquid and vapor forms.

Required Hazard Controls or SOP:

1. Use tools in accordance with manufactures specifications.
2. Use ground fault circuit interrupters for all electrical work.
3. Avoid wearing loose clothing around rotating machinery associated with well drilling equipment.

4. Use OSHA compliant personal protective equipment.
5. Hand digging and site mark outs shall be performed prior to commencement of drilling operations to avoid underground utilities. Overhead inspections shall be performed prior to raising drill rig derricks and booms.

3.2 General Site Hazards

Applicable OSHA 29 CFR 1910.120(m) standards for illumination shall apply. Generally, all work at this site will be conducted during daylight hours. All electrical power must be connected to a ground fault circuit interrupter. All equipment that will enter excavations must be suitable and approved (i.e. intrinsically safe) for use in potentially explosive environments. Applicable OSHA 29 CFR 1926 Subpart K standards for use of electricity shall apply.

Work in which a worker could fall will be performed using appropriate ladders and/or protection (e.g. body harness and lifeline). All work at this site is expected to be conducted at the ground surface.

When the temperature is above 70°F and personnel are wearing protective clothing, a heat stress-monitoring program shall be implemented. Employees shall be allowed break periods and beverages as necessary. All personnel routinely working on site (including the support zone) shall be familiar with the symptoms, signs, and emergency care associated with heat stress, heat exhaustion, and heat stroke as discussed in Section 6 of this HASP.

Cold stress is a result of cold, wetness, and wind. A worker's susceptibility to cold stress can vary according to his/her physical fitness, degree of acclimatization to cold weather, age, and diet. A cold stress-monitoring program shall be implemented as appropriate. Employees shall have access to break periods, shelter, and beverages as necessary. All personnel

routinely working on-site (including the support zone) shall be familiar with the symptoms, signs, and emergency care associated with cold stress, hypothermia, and frostbite as discussed in Section 6 of this HASP.

In accordance with 29 CFR 1910.151(c), all site related operations involving possible eye injury, (chemical splash, etc.), must have approved eye wash units readily available (in the Site Safety Officer's vehicle and in the job trailer). Protective eyewear shall be donned in Level D, when directed by the site safety officer. (The full-face APR required by Level C and the pressure demand self-contained breathing apparatus mask required by Level B serve as eye protection.)

Operations creating the potential for fire hazards shall be conducted in a manner that minimizes risk. Non-sparking tools and fire extinguishers shall be used or available as directed by the site safety officer when potentially explosive atmospheres may be encountered. Ignition sources shall be removed from work areas. When necessary, explosion-proof instruments and/or bonding and grounding will be used to prevent fire or explosion.

Overhead and underground utilities shall be identified and/or inspected and appropriate safety precautions taken before conducting operations involving potential contact or interference.

3.3 Biological Hazards

Biological hazards can cause infection or disease in people, plants, animals, or microorganisms. These hazards are divided into, viral, bacterial, fungal, and parasitic, categories.

Biological agents may be dispersed by wind or water. Many biological agents require a carrier (e.g. bees, ticks, snakes) to infect a host; therefore,

controlling the agent may require controlling or avoiding the carrier. Contact with some biological agents may be avoided by using personal protective equipment similar to that used for chemical hazards.

4.0 TRAINING REQUIREMENTS

All personnel entering an exclusion zone or decontamination zone must have met training requirements for hazardous waste site operations and emergency response operations in accordance with OSHA 29 CFR 1910.120(e).

Documentation of personnel training is maintained on file, and each employee will have copies of his/her applicable 40-Hour OSHA Training, 8-Hour Refresher Training, and Supervisor Training certificates on-site (located in job trailer files). A summary of personnel training status and HAS training records is shown in Table 1-1. Each subcontractor working on the job must provide the site safety officer with training documentation for its personnel.

TABLE 1-1

HEALTH AND SAFETY TRAINING RECORDS

Personnel	Date of 40 Hours	Last 8-Hour Refresher	Supervising Training	Last Physical	Fit Testing Last
Ray Kahn	2004		2005	2007	
Margaret Tavares			2005	2007	

Notes:

- (1) Physicals will be completed before site work begins.
- (2) An 8-hour refresher course including respirator fit testing will be conducted before site work begins.
- (3) Union employees working in the exclusion zone will have 40-hours training. Additional workers, who meet all requirements specified in this plan, will be supplied by the local unions as needed.

5.0 PERSONAL PROTECTIVE EQUIPMENT

Personal protective equipment (PPE) shall be selected in accordance with the site air monitoring program and hazard assessment, OSHA 29 CFR 1910.120(.c) and (g), and 1910.132. Protective equipment shall be NIOSH-approved and respiratory protection shall conform to OSHA 29 CFR Part 1910.133 and 1910.134 specifications; head protection shall conform to 1910.135; eye and face protection shall conform to 1910.133; and foot protection shall conform to 1910.136.

The level of personnel protection for site activities described in the hazard assessment is as follows:

<u>Location</u>	<u>Job Function</u>	<u>Level of Protection</u>			
Exclusion Zone	D	A	B	C	D
		A	B	C	D
		A	B	C	D
		A	B	C	D
Decontamination Zone	D	A	B	C	D
		A	B	C	D
		A	B	C	D
		A	B	C	D

Specific protective equipment for each level of protection is as follows:

Level A		Level B	
Level C		Level D	Hardhat and safety boots

List type of air-purifying canister to be used if required. _____

Other PPE not listed above:

NO CHANGES TO THE SPECIFIED LEVELS OF PROTECTION SHALL BE MADE WITHOUT THE APPROVAL OF THE SITE SAFETY OFFICER.

A description of typical PPE for each protection level is as follows:

5.1 Level A Protection

1. PPE:

- a. Supplied-air respirator approved by the Mine Safety and health Administration (MSHA) and NIOSH. Respirators may be:
 - Positive-pressure SCBA; or
 - Positive-pressure airline respirator (with escape bottle for immediately Dangerous to Life and Health (IDLH) or potential for IDLH atmosphere).
- b. Fully encapsulating chemical-resistant suit.
- c. Coveralls.
- d. Cotton long underwear*.
- e. Gloves (inner), chemical-resistant.

- f. Boots, chemical-resistant, steel toe and shank. (Depending on suit construction, worn over or under suit boot).
- g. Hard hat (under suit)*.
- h. Disposable gloves and boot covers (worn over fully encapsulating suit).
- i. Cooling unit *.
- j. Two-way radio communications (inherently safe)*.

*Optional

2. Criteria for Selection:

Meeting any of these criteria warrants use of Level A protection:

- a. The chemical substance has been identified and requires the highest level of protection for skin, eyes, and the respiratory system based on:
 - Measures (or potential for) high concentration or atmospheric vapors, gases, or particulate, or
 - Site operations and work functions involve high potential for splash, immersion, or exposure to unexpected vapors, gases, or particles of materials highly toxic to the skin.
- b. Substances with a high degree of hazard to the skin are known or suspected to be present, and skin contact is possible.
- c. Operations must be conducted in confined, poorly ventilated areas until the absences of substances requiring Level A protection is

determined.

- d. Direct readings on field Flame Ionization Detectors (FID) or photoionization Detectors (PID) and similar instruments indicate high levels of unidentified vapors and gases in the air.

3. Guidance on Selection

- a. Fully encapsulating suits are primarily designed to provide gas or vapor-tight barrier between the wearer and atmospheric conditions.

Therefore Level A is generally worn when high concentrations of airborne substances could severely affect the skin. Since Level A required the use of SCBA, the eyes and respiratory system are also more protected.

Until air surveillance data become available to assist in the selection of the appropriate level of protection, the use of Level A may have to be based on indirect evidence of the potential for atmospheric contamination or other means of skin contact with severe skin affecting substances.

Conditions that may require Level A protection include:

- Confined spaces: Enclosed, confined, or poorly ventilated areas are conducive to the build up of toxic vapors, gases, or particles. (Explosive or oxygen-deficient atmospheres are also more probable in confined spaces). Confined-space entry does not automatically warrant wearing Level A protection, but should serve as a cue to carefully consider and to justify a lower level of protection.
- Suspected / known highly toxic substances: Various substances that are highly toxic, especially skin absorption, for example, fuming corrosives, cyanide compounds, concentrated pesticides, Department

of Transportation Poison "A" materials suspected carcinogens, and infectious may be known or suspected to be involved. Field instruments may not be available to detect or quantify air concentrations of these materials. Until these substances are identified and concentrations measured maximum protection may be necessary.

- Visible emissions: Visible air emissions from leaking containers or railroad / vehicular tank cars, as well smoke from chemical fires and others indicate high potential for concentrations or substances that could be extreme respiratory or skin hazards.
- Job functions: Initial site entries are generally walk-through, in which instruments and visual observations are used to make a preliminary evaluation of the hazards.

In initial site entries, Level A should be worn when:

- There is a probability for exposure to high concentrations of vapors, gases, or particulates; and
- Substances are known or suspected of being extremely toxic directly to the skin or by being absorbed.

Subsequent entries are to conduct the many activities needed to reduce the environmental impact of the incident. Levels of protection for later operations are based not only on data obtained from the initial and subsequent environmental monitoring, but also on the probability of contamination and ease of decontamination.

Examples of situations where Level A has been worn are:

- Excavating of soil to sample buried drums suspected of containing high concentrations of dioxin;

- Entering a cloud of chlorine to repair a valve broken in a railroad accident;
- Handling and removing drums known to contain petroleum; and
- Responding to accidents involving cyanide, arsenic, and undiluted pesticides.

The fully encapsulating suit provides the highest degree of protection to skin, eyes, and respiratory system if the suit material resists chemicals during the time the suit is worn. While Level A provides maximum protection, all suit material may be rapidly permeated and degraded by certain chemicals from extremely high air concentrations, splashes, or an immersion of boots or gloves in concentrated liquids or sludge. These limitations should be recognized when specifying the type of fully encapsulating suit. Whenever possible, the suit material should be matched with the substance it is used to protect against.

5.2 Level B Protection

1. PPE:

- a. Positive-pressure SCBA (MSHA\NIOSH approved); or
- b. Positive-pressure air line respirator (with escape bottle for IDLH potential for IDLH atmosphere) MSHA/NIOSH approved;
- c. Chemical resistant clothing (overalls and long-sleeved jacket; coveralls or hooded one-or two-piece chemical splash suit; disposable chemical-resistant, one-piece suits);
- d. Cotton long underwear*;

- e. Coveralls;
- f. Gloves (outer), chemical-resistant;
- g. Gloves (inner), chemical-resistant;
- h. Boots (inner), leather work shoe with steel toe and shank;
- i. Boots (outer), chemical-resistant, (disposable);
- j. Hard hat (face shield*);
- k. 2-way radio communication*; and
- l. Taping between suit and gloves; and suit and boots.

* Optional

2. Criteria for Selection

Any one of the following conditions warrants use of Level B Protection:

- a. The type and atmospheric concentration of toxic substances have been identified and require a high level of respiratory protection, but less skin protection than Level A. These atmospheres would be:
 - Have IDLH concentrations; or
 - Exceed limits of protection afforded by an air-purifying mask; or
 - Contain substances requiring air-supplied equipment, but

substances and/or concentrations do not represent a serious skin hazard.

- b. The atmosphere contains less than 19.5% oxygen.
- c. Site operations make it highly unlikely that the work being done will generate high concentrations of vapors, gases or particulates, or splashes of material that will affect the skin of personnel wearing Level B protection.
- d. Working in confined spaces.
- e. Total atmospheric concentrations, sustained in the breathing zone, of unidentified vapors or gases range from 5 ppm above background to 500 ppm above background as measured by direct reading instruments such as the ID or PID or similar instruments, but vapors and gases are not suspected of containing high levels of chemicals toxic to skin

3. Guidance on Selection Criteria:

Level B equipment provides a reasonable degree of protection against splashes and to lower air concentrations, but a somewhat lower level of protection to skin than Level A. The chemical-resistant clothing required in Level B is available in a wide variety of styles, materials, construction detail, permeability, etc. Taping joints between the gloves, boot and suit, and between the hood and respirator reduces the possibility for splash and vapor or gas penetration. These factors all affect the degree of protection afforded. Therefore the Safety Officer should select the most effective chemical-resistant clothing based on the known or anticipated hazards and/or job function.

Level B does provide a high level of protection to the respiratory tract. Generally, if SCBA is required, Level B clothing rather than a fully encapsulating suit (Level A) is selected based on needing less protection against known or anticipated substances affecting the skin. Level B skin protection is selected by:

- a. Comparing the concentrations of known or identified substances in air with skin toxicity data.
- b. Determining the presence of substances that are destructive to or readily absorbed through the skin by liquid splashes, unexpected high levels of gases, vapor or particulates, or other means of direct contact; and
- c. Assessing the effect of the substance (at its measured air concentrations or splash potential) on the small area of the head and neck left unprotected by chemical-resistant clothing.

For initial site entry at an open site, Level B protection should protect site personnel, providing the conditions described in selecting Level A are known or judged to be absent.

5.3 Level C Protection

1. PPE

- a. Full-face, air purifying, cartridge- or canister-equipped respirator (MSHA/NIOSH approved) with cartridges appropriate for the respiratory hazards;
- b. Chemical-resistant clothing (coveralls, hooded, one- or two-piece chemical splash suit; chemical-resistant hood and apron; disposable chemical-resistant coveralls;

- c. Coveralls;
- d. Cotton long underwear*;
- e. Gloves (outer), chemical resistant;
- f. Gloves (inner), chemical-resistant
- g. Boots (inner), leather work shoes with steel toes and shank;
- h. Boots (outer), chemical-resistant (disposable)*;
- i. Hard hat (face shield)*;
- j. Escape SCBA of at least 5 minute duration;
- k. 2-way radio communications (inherently safe)*; and
- l. Taping between suit and boots, and suit and gloves.

* Optional

2. Criteria for Selection

Meeting all of these criteria permits use of Level C protection:

- a. Measured air concentrations of Identified substances will be reduced by the respirator to, at, or below the substance's Threshold Limit Value (TLV) or appropriate occupational exposure limit and the concentration is within the service limit of the canister.
- b. Atmospheric contaminate concentrations do not exceed IDLH levels.

- c. Atmospheric contaminants, liquid splashes, or other direct contact will not adversely affect the small area of the skin left unprotected by chemical-resistant clothing.
- d. Job functions do not require SCBA;
- e. Total readings register between background and 5 ppm above background as measured by instruments such as the FID or PID.
- f. Oxygen concentration is not less than 19.5% by volume.
- g. Air will be monitored continuously.

3. Guidance on Selection Criteria

Level C protection is distinguished from Level B by the equipment used to protect the respiratory system, assuming the same type of chemical-resistant clothing is used. The main selection criterion for Level C is that conditions permit wearing air-purifying devices. The air-purifying device must be a full-face mask (MSHA/NIOSH approved) equipped with a cartridge suspended from the chin or on a harness. Cartridges must be able to remove the substances encountered.

A full-face air purifying mask can be used only if:

- a. Oxygen content of the atmosphere is at least 19.5% by volume;
- b. Substance(s) is identified and its concentration(s) measured;
- c. Substance(s) has adequate warning properties;

- d. Individual passes a qualitative fit-test for the mask; and
- e. Appropriate cartridge is used, and its service limits concentration is not exceeded.

An air-monitoring program is part of all response operations when atmospheric contamination is known or suspected. It is particularly important that the air be monitored thoroughly when personnel are wearing air-purifying respirators (Level C). Continual surveillance using direct reading instruments and air sampling is needed to detect any changes in air quality necessitating a higher level of respiratory protection. Total unidentified vapor/gas concentrations exceeding 5 ppm above background required Level B.

5.4 Level D Protection

1. PPE

- a. Coveralls, chemical-resistant;
- b. Gloves (outer), chemical resistant;
- c. Gloves (inner), chemical-resistant*;
- d. Boots (inner), leather work shoes with steel toes and shank;
- e. Boots (outer), chemical-resistant (disposable)*;
- f. Hard hat;
- g. Face shield*;

- h. Safety glasses with side shields or chemical splash goggles*; and
- i. Taping between suit and boots, and suit and gloves.

* Optional

2. Criteria for Selection

- a. No atmospheric contamination is present.
- b. Direct reading instruments do not indicate any readings above background.
- c. Job functions have been determined not to require respirator protection.

3. Guidance on Selection Criteria

Level C protection is distinguished from Level D protection in the requirement for respiratory protection. Level D is used for non-intrusive activities or intrusive activities with continuous air monitoring. It can be worn only in areas where there is no possibility of contact with contamination.

6.0 TEMPERATURE EXTREMES

6.1 Heat Stress

Site personnel who wear protective clothing allow body heat to be accumulated with an elevation of the body temperature. Heat cramps, heat exhaustion, and heat stroke can be experienced, which, if not remedied, can threaten life or health. Therefore an American Red Cross Standard First Aid

book or equivalent will be maintained on site at all time so that the SO and site personnel will be able to recognize symptoms of heat emergencies and be capable of controlling the problem. When protective clothing is worn, especially Levels A and B, the suggested guidelines for ambient temperature and maximum wearing time per excursion are:

Ambient Temperature (F)	Max. Wearing Time per Excursion (min)
Above 90	15
85 to 90	30
80 to 85	60
70 to 80	90
60 to 70	120
50 to 60	180

One method of measuring the effectiveness of employees' rest-recovery regime is by monitoring the heart rate. The Brouha guideline is one such method.

- During a three minute period, count the pulse rate for at least 30 seconds of the first minute, the last 30 seconds of the second minute, and the last 30 seconds of the third minute.
- Double the count.

If the recover pulse rate during the last thirty seconds of the first minute is at 110 beats/minute or less and the deceleration between the first, second, and third minutes is at least 10 beats/minute, the work-recovery regime is acceptable. If the employee's rate is above that specified, a longer rest period is required, accompanied by an increased intake of fluids.

In the case of heat cramps or heat exhaustion, "pediolite" or its equivalent is suggested as part of the treatment regime. The reason for this type of liquid refreshment is that such beverages will return much needed electrolytes to the system. Without these electrolytes, body systems cannot function

properly, thereby increasing the represented health hazard. Also in the more extreme instances, inundation with cool water is recommended to lower the body temperature as rapidly as possible.

This liquid refreshment will be stored in a cooler at the edge of the decontamination zone in plastic squeeze bottles. The plastic bottle will be marked with the individual's names. Disposable cups with lids and straws may be used in place of the squeeze bottles. Prior to drinking within the decontamination zone, the project personnel shall follow the following decontamination procedures:

- A. Personnel shall wash and rinse their outer gloves and remove them.
- B. Personnel shall remove their hard hats and respirators and place on table.
- C. Personnel shall remove their inner gloves and place them on table.
- D. Personnel shall wash and rinse their face and hands.
- E. Personnel shall carefully remove their personal bottle or cup from the cooler to ensure that their outer clothes do not touch any bottle, cups, etc.
- F. The used bottle or cups will not be returned to the cooler, but will be placed in a receptacle or container to be cleaned or disposed of.
- G. Personnel shall replace their respirators, hard hats gloves and tape gloves prior to re-entering the hazardous zone.

When personnel are working in situations where the ambient temperatures and humidity are high--and especially in situations where protection Levels A,

B, and C are required the must:

- Assure that all employees drink plenty of fluids ("Pediolite or its equivalent);
- Assure that frequent breaks are scheduled so overheating does not occur; and,
- Revise work schedules, when necessary, to take advantage of the cooler parts of the day (i.e., 5:00 a.m. to 1:00 p.m., and 6:00 p.m. to nightfall).

6.2 Cold Stress

Whole-body protection shall be provided to all site personnel that have prolonged exposure to cold air. The right kind of protective clothing shall be provided to site personnel to prevent cold stress. The following dry clothing shall be provided by the Contractor as deemed necessary by the SO:

- Appropriate underclothing (wool or other);
- Outer coats that repel wind and moisture;
- Face, head, and ear coverings;
- Extra pair of socks;
- Insulated safety boots; and
- Glove liners (wool) or wind-and water repellent gloves.

The SO will use the equivalent chill temperature when determining the combined cooling effect of wind and low temperatures on exposed skin or when determining clothing insulation requirements.

Site personnel working continuously in the cold are required to warm themselves on a regular basis. Warm, sweet drinks will also be provided to

site personnel to prevent dehydration. The SO will follow the work practices and recommendations for cold stress threshold limit values as stated by the 1991-1992 Threshold Limit Values for Chemical Substances and Physical Agents and Biological Exposure Indices by the American Conference of Governmental Industrial Hygienists or equivalent cold stress prevention methods.

7.0 MEDICAL MONITORING REQUIREMENTS

All personnel and visitors entering an exclusion zone or decontamination zone must have completed appropriate medical monitoring requirements required under OSHA 29 CFR 1910.120(f). Medical monitoring enables a physician to monitor each employee's health and physical condition, fitness to wear respiratory protective equipment, and fitness to carry out on-site tasks.

If there are additional medical monitoring requirements for a site, evidence of compliance must be included. Documentation of ESPL personnel medical monitoring is maintained on file and summarized in Table 1-1. Subcontractors working on the job must provide the site safety officer with documentation on their medical monitoring programs.

7.1 Fit-Testing Requirements

All personnel and visitors entering an exclusion zone or decontamination zone using a negative pressure air purifying respirator (APR) must have successfully passed a qualitative respirator fit-test in accordance with OSHA 29 CFR 1910.134 or the American National Standards Institute.

Documenting fit-testing is the responsibility of each subcontractor. Documentation of ESPL personnel fit-testing is maintained on file and summarized in Table 1-1.

8.0 AIR MONITORING

According to 29 CFR 1910.120(h) air shall be monitored to identify and quantify levels of airborne hazardous substances and health hazards, and to determine the appropriate level of worker protection.

Air may be monitored for oxygen content, explosive levels (LEL), quantitative and qualitative toxic gas levels. Portable gas monitors will be used based on the hazard assessment. This section describes the type, purpose and method of air monitoring to be used on site.

8.1 Routine Air Monitoring Requirements

Type of Air Monitor to be Used

MSA Four GAS Meter

Purpose

To monitor oxygen content, explosive levels (LEL), quantitative and qualitative toxic gas levels.

Method (continuous or periodic)

Continuous

Method of Maintenance and Calibration

Annual Calibration by Manufacture

Maintenance and Calibration Log

Date of Last Maintenance

Date of Last Calibration

Air will be monitored when any of the following conditions apply within the

exclusion zone:

- Initial site entry;
- A potential IDLH condition or flammable atmosphere has developed;
- Work begins on another portion of the site;
- Contaminants, other than those previously identified, have been discovered;
- Each time a different task or activity is initiated; or
- During trenching and/or excavation work.

All air monitoring data will be documented in a site log book by the Site Safety Officer. Air monitoring instruments will be calibrated and maintained in accordance with the manufacturer's specifications.

Below are guidelines for actions to be taken based on routine air monitoring within the exclusion zone if the hazard assessment warrants. These are:

Oxygen readings between 19.5% and 25%: continue.

Oxygen readings <19.5%: SCBA required, CGI not reliable.

Oxygen readings >25%: exit.

CGI readings of <10% LEL: continue

CGI readings of 10 to 20% LEL: proceed with caution

CGI readings >20% LEL: exit.

OVA/Microtip readings for VOCs sustained between background and 5 ppm over site specific background in breathing zone:

Continue OVA/Microtip readings for VOCs sustained between 5 and 10 ppm over site-specific background in breathing zone: Level C PPE. (See Note)

OVA/Microtip readings for VOCs >10 ppm over site-specific background in breathing zone: Level B PPE.

Note: To ensure readings are not generated by methane, screen vapors with a PID. If the PID reading is less than 5 ppm continue work (assume vapors are methane). If PID readings are over 5 ppm allow the work zone to vent. If PID and OVA reading continue to persist over 5 ppm screen the area with compound specific detector tubes for vinyl chloride and benzene. If these compounds are not present then level C can be worn.

9.0 SITE CONTROL AND STANDARD OPERATING PROCEDURES

9.1 Work Zones

The primary purpose for site controls is to establish the perimeter of a hazardous area, to reduce migration of contaminants into clean areas, and to prevent access or exposure to hazardous materials by unauthorized persons. The Project Superintendent shall designate an exclusion zone, a decontamination zone, and a support zone. These zones will float (move around the site) depending on the tasks being performed on any given day. The Site Safety Officer will outline these locations during the daily site safety meetings. This information shall be recorded by the Site Safety Officer in the site log.

Tasks requiring the OSHA 40-hour Hazardous Waste Operations and Emergency Response Operations training are carried out in the exclusion zone. The exclusion zone will be defined by the Site Safety Officer but will

typically be a 50-foot area around work activities.

Protective equipment shall be removed within the decontamination zone. Disposable protective equipment shall be stored in receptacles staged in the decontamination zone, and non-disposable equipment will be decontaminated according to the procedures outlined in Section 10.0. All personnel and equipment will exit the exclusion zone through the decontamination zone. If, during certain steps of the work, a decontamination trailer is provided, first aid equipment, an eye wash unit, and drinking water shall be kept in the decontamination trailer.

The support zone will be used for the office trailers, for vehicle parking, daily safety meetings, and supply storage. Eating, drinking, and smoking are permitted only in the support zone. When a decontamination trailer is not provided, the eye wash unit, first aid equipment, and drinking water shall be kept at the command post. Gross decontamination (as determined by the site Health and Safety Officer) will be conducted in the exclusion zone, all other decontamination will be performed in the decontamination trailer. This HASP, HASP attachments, a site map indicating the three work zones, and a telephone will be kept in a designated office trailer. An eyewash and fire extinguisher shall be kept in the decontamination trailer or the command post.

9.2 General Field Safety and Standard Operating Procedures

ESPL's policy is to control hazards for all site areas by limiting entrance to exclusion zones to essential personnel, and by implementing the following:

- Non-essential (as judged by the Site Safety Officer) personnel and unauthorized persons will not enter the exclusion or decontamination zone.
- Before entering the exclusion or decontamination zones, all personnel

must be familiar with emergency response procedures (Section 11.0), site safety locations, first aid and communication equipment, and the locations of the map to the hospital and the list of emergency telephone numbers.

- Before entering the exclusion or decontamination zones, all personnel must be familiar with emergency response procedures (Section 11.0), site safety locations, first aid and communication equipment, and the locations of the map to the hospital and the list of emergency telephone numbers.
- The buddy system will be used at all times by field personnel in the exclusion zone; no one is to perform work within the exclusion zone alone. When in Level D or C, visual contact or radio contact shall be maintained at all times. In Level A or B, visual contact shall be maintained at all times, and radio contact shall be maintained with the decontamination and/or support zone.
- Contact with contaminated and potentially contaminated surfaces should be avoided. Walk around (not through) puddles and discolored surfaces. Do not kneel on the ground or set equipment on the ground. Protect equipment from contamination.
- All personnel exiting the exclusion zone must exercise the decontamination procedures described in Section 11.0 of this HASP.
- Beards or other facial hair that interferes with respirator fit will preclude admission to the exclusion zone. Contact lenses shall not be worn in the exclusion or decontamination zones, or if the worker may be expected to enter these zones under routine or emergency situations.

- Eating, drinking, or smoking is permitted only in designated areas in the support zone.
- Each worker must be supplied with and maintain his/her own personal protective equipment.

Note: These policies will be enforced by the ESPL Site Safety Officer with the delegated power of the Principal in Charge.

10.0 DECONTAMINATION PROCEDURES

The standard level D decontamination protocol shall be used in the decontamination zone.

All equipment and PPE exiting the exclusion zone must be decontaminated or properly discarded upon exit. All personnel must enter and exit the exclusion zone through the decontamination area. Due to the nature of the site work, the exclusion and decontamination zones may change. Plastic bags containing personal protective clothing and equipment will be placed in designated receptacles.

All boots and other potentially contaminated garments that have come in contact with the MSW will be cleaned in wash tubs with detergent/water solution and rinsed with water and must remain on site at all times. The wash water, rinse water, and residues will be collected and properly stored until sampling results are received and the final method of disposal can be determined. Disposable PPE, including spent respirator cartridges and canisters, will be properly bagged and disposed of. All contaminated boots, clothing, and equipment (e.g. leather boots, equipment carrying straps) that cannot be decontaminated will be disposed of with the disposable garments or left on site in the decontamination trailer.

Heavy equipment will be decontaminated on a pad constructed of concrete or plastic sheeting that will allow water and residues to be collected in a trench. The decontamination water and residues will be drummed, sealed, and properly stored on-site to await proper disposal. The pad will serve a dual purpose, for decontamination, and to stop equipment leaving the site from tracking materials off site.

The **minimum** measures for Level B doffing and decontamination are:

- Deposit equipment used on site on plastic drop cloths;
- Scrub outer boots and gloves with a water and detergent solution and rinse off;
- Remove outer boots and outer gloves. Discard disposable outer garments in receptacle provided;
- Remove SCBA and face piece and place on rack provided;
- Remove tyvek/outer garment and place in receptacle provided;
- Remove inner gloves and deposit in receptacle provided; and
- Shower/wash face and hands.

The **minimum** measures for Level C doffing and decontamination are:

- Deposit equipment used on site on plastic drop cloths;
- Scrub outer boots and gloves (if worn) with a water and detergent solution and rinse off;

- Remove outer boots and outer gloves. Discard disposable outer garments in receptacle provided;
- Remove tyvek/outer garment and place in receptacle provided;
- Remove first pair of inner gloves;
- Remove respirator (using "clean" inner gloves) and place on rack provided;
- Remove last pair of inner gloves and deposit in receptacle provided; and,
- Shower/wash face and hands

The second to last item to be removed should be the APR, and the last item to be removed should be the last of several pairs of surgical gloves. Wearing several pairs of inner gloves permits layers to be removed as needed during various stages of the doffing procedure, and if the APR inadvertently becomes contaminated, inner gloves guard against bare hands contacting the APR.

11.0 CONTINGENCY PLAN/EMERGENCY RESPONSE PLAN

Site personnel must be prepared in the event of an emergency. Emergencies can take many forms: illnesses, injuries, chemical exposure, fires, explosions, spills, leaks, releases of harmful contaminants, or sudden changes in the weather.

Emergency telephone numbers and a map to the hospital will be posted in the command post. Site personnel should be familiar with the emergency procedures, and the locations of site safety, first aid, and communication equipment.

11.1 Emergency Equipment On-Site / Site Communications

Type	Location
Private Telephones:	Site personnel
Two-Way Radios:	Site personnel, if required
Emergency Alarms	On-site vehicle horns*
First Aid Kits:	On-site
Fire Extinguisher:	On-site

* Horns: Air horns will be supplied to personnel at the discretion of the Project Superintendent or Site Safety Officer.

11.2 Emergency Telephone Numbers and Hospital Information

Police	(718) 626-9311
Fire and Ambulance	(718) 626-9311
Local Hospital(Mount Sinai)	(718) 932-1000
Local Health Department	(718) 476-7645
NYS Health Department	(518) 458-6309
National Response Center	(800) 424-8802
Poison Control	(800) 282-3171
Chemical Emergency Advice	(800) 424-9300
NYSDEC	(914) 255-5453
ESPL Environmental	(212) 330-7501

11.3 Personnel Responsibilities During an Emergency

The **Project Superintendent** is primarily responsible for responding to and correcting emergency situations. However, in the absence of the Project Superintendent, the **Safety Officer** shall act as the Project Superintendent's on-site designee, and perform the following tasks:

- Take appropriate measures to protect personnel including: withdrawal from the exclusion zone, total evacuation and securing of the site, or upgrading or downgrading the level of protective clothing and respiratory protection;
- Ensure that appropriate federal, state, and local agencies are informed, and emergency response plans are coordinated; In the event of fire or explosion, the local fire department should be summoned immediately. If toxic materials are released to the air, the local authorities should be informed in order to assess the need for evacuation;
- Ensure appropriate decontamination, treatment, or testing for exposed or injured personnel;
- Determine the cause of the incident and make recommendations to prevent recurrence; and,
- Ensure that all required reports have been prepared.

The emergency coordinators for this work are:

Project Superintendent	-	<u>Margaret Tavares</u>
Site Safety Officer	-	<u>Margaret Tavares</u>

11.4 Medical Emergencies

Any person who becomes ill or injured in the exclusion zone must be decontaminated to the maximum extent possible. If the injury or illness is minor, full decontamination should be completed and first aid administered prior to transport. First aid should be administered while awaiting an ambulance or paramedics.

11.5 Fire or Explosion

In the event of a fire or explosion, the local fire department should be summoned immediately. The Project Superintendent or his designated alternate will advise the fire commander of the location, nature and identification of the hazardous materials on-site. If it is safe to do so, site personnel may:

- Use fire fighting equipment available on site; or,
- Remove or isolate flammable or other hazardous materials that may contribute to the fire.

11.6 Evacuation Routes

Evacuation routes established by work area locations for this site will be highlighted on a site map and periodically reviewed during the daily safety meetings. As the work areas change, the evacuation route and map will be altered accordingly, and the new route will be reviewed during the daily safety meetings. A landfill site plan with idealized evacuation routes is shown in Appendix H.

Under extreme emergency conditions, evacuation should be conducted immediately, without regard for equipment. The evacuation signal will be a continuous blast of a vehicle horn, if possible, and/or by verbal/radio communication. When evacuating the site, personnel shall follow these instructions:

- Keep upwind of smoke, vapors, or spill location.
- Exit through the decontamination corridor if possible.

- If evacuation through the decontamination corridor is not possible, site personnel should remove contaminated clothing once they are in a safe location and leave it near the exclusion zone or in a safe place.
- The Project Superintendent or Site Safety Officer will conduct a head count to ensure that all personnel have been evacuated safely. The head count will be correlated to the site and/or exclusion zone entry/exit log.
- If emergency site evacuation is necessary, all personnel are to escape the emergency situation and decontaminate to the maximum extent practical.

11.7 Spill Control Procedures

In the event of a leak or a release, site personnel will:

- Inform their supervisor immediately;
- Locate the source of the spillage and stop the flow if it can be done safely; and,
- Begin containment and recovery of the spilled materials.

Equipment on-site shall be sufficient to handle any spills. Equipment shall be diked and containerized appropriately. Field monitoring equipment and spill control equipment are shown in Table 11-1.

11.8 Vapor Release Plan

The site work will be suspended if air monitoring at the site perimeter shows air contaminants above acceptable concentrations. Off-site readings will be

taken within 20 feet of the nearest residential or commercial property. If efforts to mitigate the emission source are unsuccessful for 30 minutes then the ESPL Site Safety Officer will:

- contact the local police,
- continue to monitor air every 30 minutes, 20 feet from the closest off-site property. If two successive readings are within acceptable levels, off-site air monitoring, would be halted.

All property line and off-site air monitoring locations and results associated with vapor releases shall be recorded in the site safety log book.

11.9 Communication Procedures

Type of communication to be used:
(i.e. cellular phone, Two-way radio, etc.)

Cell phones

The following standard hand signals will be used in case of failure of communication equipment:

Hand gripping throat	Out of air, can't breathe
Grip partners wrist or both hands around waist.....	Leave area immediately
Hand on top of head.....	Need assistance
Thumbs up.....	OK, I am all right, I understand
Thumbs down.....	No, negative

TABLE 11-1

FIELD EQUIPMENT/SPILL CONTROL EQUIPMENT

Equipment	Location/Use

12.0 CONFINED SPACE

On January 14, 1993, OSHA published its Final Rule on permit required confined spaces for General Industry at 29CFR 1910.146 et seq., with an implementation date of April 15, 1993. The rule specifically excludes agriculture, construction, or shipyard employment, but prudence requires that this HASP cover confined space entry and the OSHA rule will be followed. OSHA defines confined space as:

1. is large enough and so configured that an employee can bodily enter and perform assigned work;
2. has limited or restricted areas for entry or exit (for example, tanks, vessels, silos, storage bins, hoppers, vaults, and pits are spaces that may have limited entry); and
3. is not designed for continuous employee occupancy.

OSHA further requires that an "entry supervisor" (the site safety officer) decides at the time of entry whether the space is permit required or non-permit required space. Once designated the site safety officer will monitor the space two hours prior to entry and continuously during work to ensure that the atmosphere is not hazardous. OSHA defines as hazardous atmosphere as:

1. Flammable gas, vapor, or mist in excess of 10 percent of its lower explosive limit (LEL);
2. Airborne combustible dust at a concentration that meets or exceeds its LEL;
NOTE: This concentration may be approximated as a condition in which the dust obscures vision at a distance of 5 feet (1.52 m) or less.
3. Atmospheric oxygen concentration below 19.5 percent or above 23.5 percent;
4. Atmospheric concentration of any substance for which a dose or a permissible exposure limit is published in Subpart G, Occupational Health and Environmental Control, or in Subpart Z. Toxic and Hazardous Substances, of this part and which could result in employee exposure in excess of its dose or permissible exposure limit;

5. Any other atmospheric condition that is immediately dangerous to life or health.

The space is non-permit required if none of the above defined hazardous conditions are present. OSHA requires an attendant (e.g., an individual stationed outside one or more spaces who monitors the entrants and who performs air monitoring of the space(s) be assigned for each space. The attendant is not allowed to perform any rescue duties but simply must communicate with the entrant and call for coordinates rescue procedures if required.

12.1 Confined Space Entry Procedure

Confined space entry that will require a permit may be required during construction at the site. If the Site Safety Officer determines that an excavation meets the definition of a confined space then natural or mechanical ventilation will be employed to ensure that the space meets the requirements of non-permit required confined space. The Site Safety Officer will perform continuous air monitoring one hour before and during entry work to ensure that the space remains non-permit required.

A confined space entry permit must be filled out and signed by the Site Safety Officer. By signing this, the supervisor certifies that the space does not contain a hazardous atmosphere, and that the atmosphere will be monitored.

A confined space entry permit form is located in New York State Department of Labor, Employer Guide and Model (Permit Required Confined Space Entry Plan (29 CFR Part 1910.146) located at the end of this section or at the ESPL office. This permit will be modified by the Site Safety Officer for different confined spaces.

Blowers will be utilized to ventilate the space.

When workers are in the excavation, the space must be continuously

monitored for the hazardous atmosphere parameters using appropriate instrumentation. The Site Safety Officer or delegee must log the meter readings every 30 minutes while the confined space is occupied.

If a hazardous atmosphere is detected, employees must leave confined space until monitoring shows that there is no atmosphere hazard. Engineering controls will be used to dissipate the atmosphere if it does not dissipate naturally.

13.0 DAILY SAFETY MEETINGS

Safety or pre-entry meetings will be held each day before work begins, to ensure that all on-site personnel understand site conditions and operating procedures, and to address safety questions and concerns. The Site Safety Officer or the Project Superintendent will lead the meetings. All personnel trained and prepared to enter exclusion and decontamination zones will attend the meetings.

The site safety officer shall maintain a log of each meeting.

14.0 WORK PLAN

14.1 Work Tasks, Objectives and Methods for Implementation

(Describe specifically who will be working on tasks to be performed and their functions.)

Margaret Tavares, overall site supervisor to coordinate all field activities related to environmental investigations.

Margaret Tavares, site health and safety officer to coordinate and ensure compliance to all site-specific safety plans.

Location of Exclusion, Decontamination and Support Zones. (Include a location drawing if necessary)

14.2 Clean Up / Decontamination Activities and Procedures

(Describe specifically who will be working on tasks to be performed and their functions.)

Field

Supervisor_____

14.3 Informational Programs

To ensure that employees, contractors, and subcontractors (or their representatives) are aware of this plan all persons engaged in operations at this site must sign the Site Personnel Form indicating that they are familiar with this Site Health and Safety Plan prior to commencing operations.

Site Personnel Log

I have reviewed and am familiar with the Site Health and Safety Plan for the following site:

Site: **Former Willow Service Station**
1802 27th Avenue
Astoria, Queens, New York

Name	Company or Affiliation	Date	Remarks

14.4 Medical Surveillance Program

Refer to Section 7.0

14.5 Personnel Requirements

Refer to Section 2.0

14.6 - Training Implementation

Refer to Section 4.0

15.0 COMMUNITY AIR MONITORING PLAN (CAMP)

A Community Air Monitoring Plan will be implemented during the course of this investigation activity. The objective of CAMP is to provide real-time monitoring for volatile organic compounds at the downwind end of the site during soil and groundwater sampling activities. It is also intended to provide a measure of protection to the downwind community from potential air borne contaminants released as a result of on-site investigative activities.

The contaminants at the site are predominantly volatile organics and mainly BTEX / MTBE. A continuous air monitoring will be performed throughout the duration of the investigative activities. MiniRAE-2000 will be used to monitor the volatile organics in the air, and provides 10 hours of continuous monitoring. It has an extended range of 0 – 10,000 ppm and up to 100 feet downwind of the site. Prior to monitoring, the upwind concentrations will be obtained to establish the background conditions. The

following actions will be implemented if:

- the ambient air concentration exceeds 5 ppm, the field activities must be temporarily stopped, and monitoring continued. If the total VOCs decreases below 5 ppm over the background, the field activities will resume with continuous monitoring
- the VOCs at the downwind area persist at levels in excess of 5 ppm but less than 25 ppm, the field activities must be stopped, and the source of vapors identified and corrected. If the VOCs levels decrease below 5 ppm, fieldwork will resume.
- the organic vapor is above 25 ppm at the perimeter of the work area, field activities must be shut down.

The particulate concentrations will be monitored at the upwind and downwind perimeters using Thermo MIE pDR DataRam with a range of measurements from 0.001 – 400 mg/m³. It is equipped with an audible alarm that alerts you in seconds and allows you take immediate corrective action. The following actions will be implemented if:

- the downwind PM-10 particulate level is 100 mcg/m³ greater than the background or if air borne dust is observed in the work area, dust suppression techniques (wetting) must be employed. Provided that the PM-10 particulate levels do not exceed 150 mcg/m³, field activities will continue
- the dust control technique fails, and downwind PM-10 particulate levels are greater than 150mcg/m³, field activities must stop, and a re-evaluation of field activities performed.

All readings will be logged in the field notebook and will be available to the State (DEC and DOH) for review.

Material Safety Data Sheets



NFPA 704 (Section 16)

AMERADA HESS CORPORATION**MATERIAL SAFETY DATA SHEET****Methyl tert-Butyl Ether (MTBE)****MSDS No. 9922****1. CHEMICAL PRODUCT and COMPANY INFORMATION (rev. Apr-98)**

Amerada Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

EMERGENCY TELEPHONE NUMBER (24 hrs):**CHEMTREC (800) 424-9300****COMPANY CONTACT (business hours):****Corporate Safety (732) 750-6000****SYNONYMS:** 2-methoxy-2-methyl propane; Methyl t-butyl ether; MTBE; t-butyl methyl ether

See Section 16 for abbreviations and acronyms.

2. COMPOSITION and INFORMATION ON INGREDIENTS (rev. Sep-94)

INGREDIENT NAME	EXPOSURE LIMITS	CONCENTRATION
		PERCENT BY WEIGHT
Methyl-tertiary butyl ether (MTBE)	OSHA PEL-TWA/STEL: None established	> 97%
CAS NUMBER: 1634-04-4	ACGIH TLV-TWA: 40 ppm, A3	

MTBE (C₅H₁₂O) is used as an octane booster and oxygenate for unleaded gasoline.**3. HAZARDS IDENTIFICATION (rev. Apr-98; Tox-98)****EMERGENCY OVERVIEW
DANGER!****EXTREMELY FLAMMABLE - EYE AND MUCOUS MEMBRANE IRRITANT - EFFECTS CENTRAL
NERVOUS SYSTEM - HARMFUL OR FATAL IF SWALLOWED - ASPIRATION HAZARD**

High fire hazard. Keep away from heat, spark, open flame, and other ignition sources.

Contact may cause eye, skin and mucous membrane irritation. Avoid prolonged breathing of vapors or mists. Inhalation may cause irritation, anesthetic effects (dizziness, nausea, headache, intoxication), and respiratory system effects.

If ingested, do NOT induce vomiting, as this may cause chemical pneumonia (fluid in the lungs).

EYES

Contact with the eye may cause slight to mild irritation.

SKIN

Practically non-toxic if absorbed following acute (single) exposure. May cause skin irritation with prolonged or repeated contact. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are exposed repeatedly.

INGESTION

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting, and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest and death may occur.

INHALATION

Excessive exposure may cause irritation to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Methyl tert-Butyl Ether (MTBE)

MSDS No. 9922

WARNING: the burning of any hydrocarbon as a fuel in an area without adequate ventilation may result in hazardous levels of combustion products, including carbon monoxide, and inadequate oxygen levels, which may cause unconsciousness, suffocation, and death.

CHRONIC EFFECTS and CARCINOGENICITY

This product has produced cancer, developmental and systemic toxicity in laboratory animals following repeated exposure. The significance of these results to human exposures has not been determined – see Section 11, Toxicological Information.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Irritation from skin exposure may aggravate existing open wounds, skin disorders, and dermatitis (rash) conditions. Chronic respiratory disease, or pre-existing central nervous system disorders may be aggravated by exposure.

4. FIRST AID MEASURES (rev. Apr-98; Tox-98)

EYES

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

SKIN

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or waterless hand cleanser. Obtain medical attention if irritation or redness develops.

INGESTION

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

INHALATION

Remove person to fresh air. If person is not breathing, ensure an open airway and provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

5. FIRE FIGHTING MEASURES (rev. Nov-96)

FLAMMABLE PROPERTIES:

FLASH POINT:	-14 °F (-25 °C)
AUTOIGNITION TEMPERATURE:	AP 815 °F (435 °C)
OSHA/NFPA FLAMMABILITY CLASS:	1B (flammable liquid)
LOWER EXPLOSIVE LIMIT (%):	1.6
UPPER EXPLOSIVE LIMIT (%):	8.4

FIRE AND EXPLOSION HAZARDS

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. Flowing product may be ignited by self-generated static electricity. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

This product burns with a blue flame which is often less visible than gasoline or other petroleum hydrocarbons flames.

EXTINGUISHING MEDIA

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO2, water spray, fire fighting foam, or Halon.

LARGE FIRES: Water spray, fog or fire fighting foam suitable for polar solvents. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

AMERAD HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Methyl tert-Butyl Ether (MTBE)

MSDS No. 9922

Firefighting foam suitable for polar solvents is recommended - refer to NFPA 11 "Low Expansion Foam."

FIRE FIGHTING INSTRUCTIONS

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment.

Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing.

Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

See Section 16 for the NFPA 704 Hazard Rating.

6. ACCIDENTAL RELEASE MEASURES (rev. Apr-98)

ACTIVATE FACILITY SPILL CONTINGENCY or EMERGENCY PLAN.

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact.

Carefully contain and stop the source of the spill, if safe to do so. Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection.

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal - caution, flammable vapors may accumulate in closed containers. Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

7. HANDLING and STORAGE (rev. Apr-98)

HANDLING PRECAUTIONS

Handle as a flammable liquid. Keep away from heat, sparks, and open flame! Electrical equipment should be approved for classified area. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when higher flash point material (such as fuel oil) is loaded into tanks previously containing low flash point products (such as this product) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents."

STORAGE PRECAUTIONS

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks".

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Methyl tert-Butyl Ether (MTBE)

MSDS No. 9922

WORK/HYGIENIC PRACTICES

Emergency eye wash capability should be available in the near proximity to operations presenting a potential splash exposure. Use good personal hygiene practices. Avoid repeated and/or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Do not use as a cleaning solvent on the skin. Do not use solvents or harsh abrasive skin cleaners for washing this product from exposed skin areas. Waterless hand cleaners are effective. Promptly remove contaminated clothing and launder before reuse. Use care when laundering to prevent the formation of flammable vapors which could ignite via washer or dryer. Consider the need to discard contaminated leather shoes and gloves.

8. EXPOSURE CONTROLS and PERSONAL PROTECTION (rev. Nov-96)

ENGINEERING CONTROLS

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

EYE/FACE PROTECTION

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

SKIN PROTECTION

Gloves constructed of nitrile or neoprene are recommended. Chemical protective clothing such as of E.I. DuPont Tychem®, Barricade®, or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

RESPIRATORY PROTECTION

A NIOSH/MSHA-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited. Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

Refer to OSHA 29 CFR 1910.134, ANSI Z88.2-1992, NIOSH Respirator Decision Logic, and the manufacturer for additional guidance on respiratory protection selection.

9. PHYSICAL and CHEMICAL PROPERTIES (rev. Sep-94)

APPEARANCE

A clear, water-like liquid

ODOR

A sweet, ether-like odor.

ODOR THRESHOLD

Odor detectable at 0.05 ppm and recognizable at 0.13 ppm. Highly odorous.

BASIC PHYSICAL PROPERTIES

BOILING POINT:	131 °F (55 °C)
VAPOR PRESSURE:	7.8 PSI @ 100 °F (38 °C)
VAPOR DENSITY (air = 1):	3.1
SPECIFIC GRAVITY (H ₂ O = 1):	0.74
EVAPORATION RATE:	ND - probably high
PERCENT VOLATILES:	100 %
SOLUBILITY (H ₂ O):	AP 5% @ 68 °F (20 °C)

10. STABILITY and REACTIVITY (rev. Sep-94)

STABILITY: Stable. Hazardous polymerization will not occur.

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Methyl tert-Butyl Ether (MTBE)

MSDS No. 9922

CONDITIONS TO AVOID

Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources.

INCOMPATIBLE MATERIALS

Keep away from strong oxidizers.

HAZARDOUS DECOMPOSITION PRODUCTS

Carbon monoxide, carbon dioxide, non-combusted hydrocarbons (smoke), irritating aldehydes and ketones, and other toxic vapors.

11. TOXICOLOGICAL PROPERTIES (rev. Apr-98)

ACUTE EFFECTS

Acute Dermal:	LD50 (rabbit): >10 g/kg	Eye Irritation (rabbits): mild to moderate
Acute Inhalation:	LC50 (rat): 35,000 ppm	Dermal irritation (rabbit): slight
Acute Oral:	LD50 (rat): 4.0 ml/kg	Dermal Sensitization: negative

CHRONIC EFFECTS AND CARCINOGENICITY

Carcinogenic: IARC: NO NTP: NO OSHA: NO ACGIH: A3 (animal carcinogen)
MTBE has demonstrated some evidence of developmental toxicity in animal models.

MUTAGENICITY (genetic effects)

MTBE was positive in a single mutagenicity study following activation.

12. ECOLOGICAL INFORMATION (rev. Apr-98)

Keep out of sewers, drainage and waterways. Report spills and releases, as applicable, under Federal and State regulations. If released, MTBE will be expected to exhibit fairly high mobility in soil, and therefore may leach into groundwater. Refer to API Publication 4497, "Cost-Effective, Alternative Treatment Technologies For Reducing the Concentrations of Ethers and Alcohols in Groundwater."

13. DISPOSAL CONSIDERATIONS (rev. Apr-98)

Consult federal, state and local waste regulations to determine appropriate disposal options.

14. TRANSPORTATION INFORMATION (rev. Sep-94)

PROPER SHIPPING NAME:	Methyl tert-butyl ether
HAZARD CLASS AND PACKING GROUP:	3, PG II
DOT IDENTIFICATION NUMBER:	UN 2398
DOT SHIPPING LABEL:	FLAMMABLE LIQUID

15. REGULATORY INFORMATION (rev. Nov-96)

U.S. FEDERAL, STATE, and LOCAL REGULATORY INFORMATION

This product and its constituents listed herein are on the EPA TSCA Inventory. Any spill or uncontrolled release of this product, including any substantial threat of release, may be subject to federal, to state and/or local reporting requirements. This product and/or its constituents may also be subject to other regulations at the federal, state and/or local level. Consult those regulations applicable to your facility / operation. Consult those regulations applicable to your facility/operation.

CLEAN WATER ACT (OIL SPILLS)

Any spill or release of this product to "navigable waters" (essentially any surface water, including certain wetlands) or adjoining shorelines sufficient to cause a visible sheen or deposit of a sludge or emulsion must be reported immediately to the National Response Center (1-800-424-8802) or, if not practical, the U.S. Coast Guard with follow-up to the National Response Center, as required by U.S. Federal Law. Also contact appropriate state and local regulatory agencies as required.

CERCLA SECTION 103 and SARA SECTION 304 (RELEASE TO THE ENVIRONMENT)

MTBE is a CERCLA hazardous substance and as such is subject to CERCLA and SARA federal reporting requirements. Reportable Quantity (pounds): 1000

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Methyl tert-Butyl Ether (MTBE)

MSDS No. 9922

SARA SECTION 311/312 - HAZARD CLASSES

<u>ACUTE HEALTH</u>	<u>CHRONIC HEALTH</u>	<u>FIRE</u>	<u>SUDDEN RELEASE OF PRESSURE</u>	<u>REACTIVE</u>
X	X	X	--	--

SARA SECTION 313 - SUPPLIER NOTIFICATION

This product contains the following toxic chemicals subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372:

INGREDIENT NAME	CONCENTRATION PERCENT BY WEIGHT
Methyl-tertiary butyl ether (MTBE) CAS NUMBER: 1634-04-4	> 97

CANADIAN REGULATORY INFORMATION (WHMIS)

Class B, Division 2 (Flammable Liquid)
Class D, Division 2, Subdivision B (Toxic by other means)

16. OTHER INFORMATION (rev. Nov-96)

NFPA® HAZARD RATING

HEALTH:	1	Slight
FIRE:	3	High
REACTIVITY:	0	Negligible

HMIS® HAZARD RATING

HEALTH:	1*	Slight
FIRE:	3	Serious
REACTIVITY:	0	Negligible
		* Chronic

SUPERSEDES MSDS DATED: 11/21/96

ABBREVIATIONS:

AP = Approximately < = Less than > = Greater than
N/A = Not Applicable N/D = Not Determined ppm = parts per million

ACRONYMS:

<p>ACGIH American Conference of Governmental Industrial Hygienists</p> <p>AIHA American Industrial Hygiene Association</p> <p>ANSI American National Standards Institute (212)642-4900</p> <p>API American Petroleum Institute 202)682-8000</p> <p>CERCLA Comprehensive Emergency Response, Compensation, and Liability Act</p> <p>DOT U.S. Department of Transportation [General Info: (800)467-4922]</p> <p>EPA U.S. Environmental Protection Agency</p> <p>HMIS Hazardous Materials Information System</p> <p>IARC International Agency For Research On Cancer</p> <p>MSHA Mine Safety and Health Administration</p> <p>NFPA National Fire Protection Association (617)770-3000</p> <p>NIOSH National Institute of Occupational Safety and Health</p> <p>NOIC Notice of Intended Change (proposed change to ACGIH TLV)</p>	<p>NTP National Toxicology Program</p> <p>OPA Oil Pollution Act of 1990</p> <p>OSHA U.S. Occupational Safety & Health Administration</p> <p>PEL Permissible Exposure Limit (OSHA)</p> <p>RCRA Resource Conservation and Recovery Act</p> <p>REL Recommended Exposure Limit (NIOSH)</p> <p>SARA Superfund Amendments and Reauthorization Act of 1986 Title III</p> <p>SCBA Self-Contained Breathing Apparatus</p> <p>SPCC Spill Prevention, Control, and Countermeasures</p> <p>STEL Short-Term Exposure Limit (generally 15 minutes)</p> <p>TLV Threshold Limit Value (ACGIH)</p> <p>TSCA Toxic Substances Control Act</p> <p>TWA Time Weighted Average (8 hr.)</p> <p>WEEL Workplace Environmental Exposure Level (AIHA)</p> <p>WHMIS Canadian Workplace Hazardous Materials Information System</p>
---	--

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Methyl tert-Butyl Ether (MTBE)

MSDS No. 9922

DISCLAIMER OF EXPRESSED AND IMPLIED WARRANTIES

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.



MATERIAL SAFETY DATA SHEET

Benzene

MSDS No. 0166

EMERGENCY OVERVIEW

DANGER!

FLAMMABLE - BLOOD TOXIN AND CARCINOGEN - ABSORBED THROUGH THE SKIN - CENTRAL NERVOUS SYSTEM - HARMFUL OR FATAL IF SWALLOWED - ASPIRATION HAZARD



NFPA 704 (Section 16)

High fire hazard. Keep away from heat, spark, open flame, and other ignition sources.

If ingested, do NOT induce vomiting, as this may cause chemical pneumonia (fluid in the lungs). Contact may cause eye, skin and mucous membrane irritation. Harmful if absorbed through the skin. Avoid prolonged breathing of vapors or mists. Inhalation may cause irritation, anesthetic effects (dizziness, nausea, headache, intoxication), and respiratory system effects.

Long-term exposure may cause blood disease, including anemia and leukemia.

1. CHEMICAL PRODUCT AND COMPANY INFORMATION

Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

EMERGENCY TELEPHONE NUMBER:
COMPANY CONTACT (business hours):
MSDS Internet Website:

CHEMTREC (800) 424-9300
Corporate EHS 732-750-6000
www.hess.com

SYNONYMS: Benzol; Coal Naphtha; coal tar naphtha; Cyclohexatriene; Phenyl hydride
See Section 16 for abbreviations and acronyms.

2. COMPOSITION and CHEMICAL INFORMATION ON INGREDIENTS

INGREDIENT NAME (CAS No.)	CONCENTRATION PERCENT BY WEIGHT
Benzene (71-43-2)	100

3. HAZARDS IDENTIFICATION

EYES

Moderate to severe irritant. Contact with liquid or vapor may cause irritation.

SKIN

Moderate to severe irritant. May cause skin irritation with prolonged or repeated contact. Practically non-toxic if absorbed following acute (single) exposure. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are exposed repeatedly.

INGESTION

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.



MATERIAL SAFETY DATA SHEET

Benzene

MSDS No. 0166

INHALATION

Excessive exposure may cause irritation to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

Effects to the blood (including decreased platelet and white blood cell counts), cardiovascular system, nervous system, retina, lungs, gastrointestinal system, spleen, and kidneys have been reported from large, acute (short) and repeated or prolonged exposures.

CHRONIC EFFECTS and CARCINOGENICITY

Benzene is a regulated human carcinogen. Benzene has the potential to cause bone marrow depression, aplastic anemia (low red blood cell count) and other blood diseases, including leukemia, after repeated and prolonged exposure. Benzene can cause liver and kidney toxicity.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Irritation from skin exposure may aggravate existing open wounds, skin disorders, and dermatitis (rash). Pre-existing chronic respiratory disease, liver or kidney dysfunction, or blood, cardiovascular and central nervous system disorders may be aggravated by exposure.

4. FIRST AID MEASURES

EYES

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

SKIN

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or waterless hand cleanser. Obtain medical attention if irritation or redness develops.

INGESTION

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

INHALATION

Remove person to fresh air. If person is not breathing, ensure an open airway and provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

NOTE TO PHYSICIAN

OSHA and US Coast Guard require that a person exposed to benzene in an emergency have a urine sample taken at the end of the shift and have a urine phenol test performed within 72 hours. For results equal to or greater than 75 ml/L of urine, employees must have a complete blood count every month for three months after the emergency exposure. See OSHA 29 CFR 1910.1028 or USCG 49 CFR 193.

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

FLASH POINT:	12 °F (-11°C)
AUTOIGNITION TEMPERATURE:	928 °F (498 °C)
OSHA/NFPA FLAMMABILITY CLASS:	1B (flammable liquid)
LOWER EXPLOSIVE LIMIT (%):	1.3%
UPPER EXPLOSIVE LIMIT (%):	7.9%

FIRE AND EXPLOSION HAZARDS



MATERIAL SAFETY DATA SHEET

Benzene

MSDS No. 0166

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. Flowing product may be ignited by self-generated static electricity. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

EXTINGUISHING MEDIA

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO₂, water spray, fire fighting foam, or Halon.

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

FIRE FIGHTING INSTRUCTIONS

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment.

Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing.

Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

See Section 16 for the NFPA 704 Hazard Rating.

6. ACCIDENTAL RELEASE MEASURES

ACTIVATE FACILITY SPILL CONTINGENCY or EMERGENCY PLAN.

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Product may release substantial amounts of flammable vapors and gases (e.g., methane, ethane, and propane), at or below ambient temperature depending on source and process conditions and pressure.

Carefully contain and stop the source of the spill, if safe to do so. Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection - do not discharge solid water stream patterns into the liquid resulting in splashing.

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal. Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

7. HANDLING and STORAGE

HANDLING and STORAGE PRECAUTIONS

Handle as a flammable liquid. Keep away from heat, sparks, and open flame! Electrical equipment should be approved for classified area. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.



MATERIAL SAFETY DATA SHEET

Benzene

MSDS No. 0166

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when higher flash point material (such as fuel oil) is loaded into tanks previously containing low flash point products (such as this product) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents."

STORAGE PRECAUTIONS

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks in Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks".

WORK/HYGIENIC PRACTICES

Emergency eye wash capability should be available in the near proximity to operations presenting a potential splash exposure. Use good personal hygiene practices. Avoid repeated and/or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Do not use as a cleaning solvent on the skin. Do not use solvents or harsh abrasive skin cleaners for washing this product from exposed skin areas. Waterless hand cleaners are effective. Promptly remove contaminated clothing and launder before reuse. Use care when laundering to prevent the formation of flammable vapors which could ignite via washer or dryer. Consider the need to discard contaminated leather shoes and gloves.

8. EXPOSURE CONTROLS and PERSONAL PROTECTION

EXPOSURE LIMITS

Components (CAS No.)	Source	Exposure Limits	Note
		TWA/STEL	
Benzene (71-43-2)	OSHA	PEL = 1 ppm; STEL = 5 ppm	A1; skin; BEI
	ACGIH	TLV = 0.5 ppm; STEL = 2.5 ppm	

ENGINEERING CONTROLS

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

EYE/FACE PROTECTION

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

SKIN PROTECTION

Gloves constructed of nitrile or neoprene are recommended. Chemical protective clothing such as of E.I. DuPont Tyvek-Saranex 23®, Tychem®, Barricade® or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

RESPIRATORY PROTECTION

A NIOSH -approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited. Refer to OSHA 29 CFR 1910.134, ANSI Z88.2-1992, NIOSH Respirator Decision Logic, and the manufacturer for additional guidance on respiratory protection selection.



MATERIAL SAFETY DATA SHEET

Benzene

MSDS No. 0166

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

9. PHYSICAL and CHEMICAL PROPERTIES

APPEARANCE

A clear, water-like liquid

ODOR

A sweet, aromatic odor.

ODOR THRESHOLD

4.7 ppm

BASIC PHYSICAL PROPERTIES

BOILING RANGE: 176 °F (80 °C)
VAPOR PRESSURE: 74.6 mm Hg @ 68 °F (20 °C)
VAPOR DENSITY (air = 1): 2.8
SPECIFIC GRAVITY (H₂O = 1): 0.87
EVAPORATION RATE: High
PERCENT VOLATILES: 100 %
SOLUBILITY (H₂O): Insoluble to slightly soluble

10. STABILITY and REACTIVITY

STABILITY: Stable. Hazardous polymerization will not occur.

CONDITIONS TO AVOID and INCOMPATIBLE MATERIALS

Material is stable under normal conditions. Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources

HAZARDOUS DECOMPOSITION PRODUCTS

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke). Contact with nitric and sulfuric acids will form nitroresols that can decompose violently.

11. TOXICOLOGICAL PROPERTIES

ACUTE TOXICITY

Acute Dermal LD50 (rabbits): > 9.4 ml/kg
Acute inhalation LC50: 10,000 ppm (rat; 7 hours)
Primary dermal irritation (rabbits): mild to moderate
Acute Oral LD50 (mouse): 4.7 g/kg
Eye irritation (rabbit): mild to moderate

CHRONIC EFFECTS AND CARCINOGENICITY

Carcinogenicity: OSHA: YES IARC: (1) NTP: YES ACGIH: (A1)

Numerous epidemiological (human) and animal studies have reported an increased incidence or a causal relationship between leukemia and benzene exposure.

Mutagenicity: positive

12. ECOLOGICAL INFORMATION

**MATERIAL SAFETY DATA SHEET****Benzene****MSDS No. 0166**

Keep out of sewers, drainage areas, and waterways. Report spills and releases, as applicable, under Federal and State regulations.

13. DISPOSAL CONSIDERATIONS

Consult federal, state and local waste regulations to determine appropriate disposal options.

14. TRANSPORTATION INFORMATION

DOT PROPER SHIPPING NAME: Benzene
DOT HAZARD CLASS and PACKING GROUP: 3, PG II
DOT IDENTIFICATION NUMBER: UN 1114
DOT SHIPPING LABEL: FLAMMABLE LIQUID

PLACARD:

**15. REGULATORY INFORMATION****U.S. FEDERAL, STATE, and LOCAL REGULATORY INFORMATION**

Any spill or uncontrolled release of this product, including any substantial threat of release, may be subject to federal, state and/or local reporting requirements. This product and/or its constituents may also be subject to other regulations at the state and/or local level. Consult those regulations applicable to your facility/operation.

CLEAN WATER ACT (OIL SPILLS)

Any spill or release of this product to "navigable waters" (essentially any surface water, including certain wetlands) or adjoining shorelines sufficient to cause a visible sheen or deposit of a sludge or emulsion must be reported immediately to the National Response Center (1-800-424-8802) as required by U.S. Federal Law. Also contact appropriate state and local regulatory agencies as required.

CERCLA SECTION 103 and SARA SECTION 304 (RELEASE TO THE ENVIRONMENT)

Benzene is a CERCLA Section 103 "hazardous substance" subject to CERCLA and SARA Section 304 reporting requirements.

Reportable Quantity: 10 pounds

SARA SECTION 311/312 - HAZARD CLASSES

<u>ACUTE HEALTH</u>	<u>CHRONIC HEALTH</u>	<u>FIRE</u>	<u>SUDDEN RELEASE OF PRESSURE</u>	<u>REACTIVE</u>
X	X	X	--	--

SARA SECTION 313 - SUPPLIER NOTIFICATION

This product contains the following toxic chemicals subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372:

<u>INGREDIENT NAME</u>	<u>CONCENTRATION PERCENT BY WEIGHT</u>
Benzene	CAS NUMBER: 71-43-2 < 0.1 to 2

CANADIAN REGULATORY INFORMATION (WHMIS)

Class B Division 2 (Flammable Liquid)
Class D Division 2 Subdivision A (Very toxic by other means)
Class D Division 1 Subdivision A (Very toxic acute)
Class D Division 2 Subdivision B (Toxic by other means)

CALIFORNIA PROPOSITION 65 LIST OF CHEMICALS

**MATERIAL SAFETY DATA SHEET****Benzene****MSDS No. 0166**

This product contains the following chemicals that are included on the Proposition 65 "List of Chemicals" required by the California Safe Drinking Water and Toxic Enforcement Act of 1986:

<u>INGREDIENT NAME (CAS NUMBER)</u>	<u>Date Listed</u>
Benzene	2/27/1987

NFPA® HAZARD RATING

HEALTH:	2
FIRE:	3
REACTIVITY:	0

Refer to NJPA 704 "Identification of the Fire Hazards of Materials" for further information

HMIS® HAZARD RATING

HEALTH:	3 *	Slight
FIRE:	3	Moderate
PHYSICAL:	0	Negligible

* Chronic

SUPERSEDES MSDS DATED: 01/14/1999

ABBREVIATIONS:

AP = Approximately < = Less than > = Greater than
N/A = Not Applicable N/D = Not Determined ppm = parts per million

ACRONYMS:

ACGIH	American Conference of Governmental Industrial Hygienists	NTP	National Toxicology Program
AIHA	American Industrial Hygiene Association	OPA	Oil Pollution Act of 1990
ANSI	American National Standards Institute (212) 642-4900	OSHA	U.S. Occupational Safety & Health Administration
API	American Petroleum Institute (202) 682-8000	PEL	Permissible Exposure Limit (OSHA)
CERCLA	Comprehensive Emergency Response, Compensation, and Liability Act	RCRA	Resource Conservation and Recovery Act
DOT	U.S. Department of Transportation [General info: (800) 467-4922]	REL	Recommended Exposure Limit (NIOSH)
EPA	U.S. Environmental Protection Agency	SARA	Superfund Amendments and Reauthorization Act of 1986 Title III
HMIS	Hazardous Materials Information System	SCBA	Self-Contained Breathing Apparatus
IARC	International Agency For Research On Cancer	SPCC	Spill Prevention, Control, and Countermeasures
MSHA	Mine Safety and Health Administration	STEL	Short-Term Exposure Limit (generally 15 minutes)
NFPA	National Fire Protection Association (617) 770-3000	TLV	Threshold Limit Value (ACGIH)
NIOSH	National Institute of Occupational Safety and Health	TSCA	Toxic Substances Control Act
NOIC	Notice of Intended Change (proposed change to ACGIH TLV)	TWA	Time Weighted Average (8 hr.)
		WEEL	Workplace Environmental Exposure Level (AIHA)
		WHMIS	Canadian Workplace Hazardous Materials Information System

DISCLAIMER OF EXPRESSED AND IMPLIED WARRANTIES



MATERIAL SAFETY DATA SHEET

Benzene

MSDS No. 0166

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.



MATERIAL SAFETY DATA SHEET

Toluene

MSDS No. 1813

EMERGENCY OVERVIEW

DANGER!

FLAMMABLE - IRRITANT - ABSORBED THROUGH THE SKIN - CENTRAL NERVOUS SYSTEM - HARMFUL OR FATAL IF SWALLOWED - ASPIRATION HAZARD



NFPA 704 (Section 16)

High fire hazard. Keep away from heat, spark, open flame, and other ignition sources.

If ingested, do NOT induce vomiting, as this may cause chemical pneumonia (fluid in the lungs). Contact may cause eye, skin and mucous membrane irritation. Harmful if absorbed through the skin. Avoid prolonged breathing of vapors or mists. Inhalation may cause irritation, anesthetic effects (dizziness, nausea, headache, intoxication), and respiratory system effects. Excessive exposure may affect the liver and kidneys.

1. CHEMICAL PRODUCT AND COMPANY INFORMATION

Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

EMERGENCY TELEPHONE NUMBER:
COMPANY CONTACT (business hours):
MSDS Internet Website:

CHEMTREC (800) 424-9300
Corporate EHS 732-750-6000
www.hess.com

SYNONYMS: Methyl Benzene
See Section 16 for abbreviations and acronyms.

2. COMPOSITION and CHEMICAL INFORMATION ON INGREDIENTS

INGREDIENT NAME (CAS No.)	CONCENTRATION PERCENT BY WEIGHT
Toluene (108-88-3)	100

3. HAZARDS IDENTIFICATION

EYES

Moderate to severe irritant. Contact with liquid or vapor may cause irritation.

SKIN

Moderate to severe irritant. May cause skin irritation with prolonged or repeated contact. Practically non-toxic if absorbed following acute (single) exposure. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are exposed repeatedly.

INGESTION

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.



MATERIAL SAFETY DATA SHEET

Toluene

MSDS No. 1813

INHALATION

Excessive exposure may cause irritation to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

Effects to the blood (including decreased platelet and white blood cell counts), cardiovascular system, nervous system, retina, lungs, gastrointestinal system, spleen, and kidneys have been reported from large, acute (short) and repeated or prolonged exposures.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Irritation from skin exposure may aggravate existing open wounds, skin disorders, and dermatitis (rash). Pre-existing chronic respiratory disease, liver or kidney dysfunction, or blood, cardiovascular and central nervous system disorders may be aggravated by exposure.

4. FIRST AID MEASURES

EYES

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

SKIN

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or waterless hand cleanser. Obtain medical attention if irritation or redness develops.

INGESTION

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

INHALATION

Remove person to fresh air. If person is not breathing, ensure an open airway and provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

FLASH POINT:	12 °F (-11°C)
AUTOIGNITION TEMPERATURE:	928 °F (498 °C)
OSHA/NFPA FLAMMABILITY CLASS:	1B (flammable liquid)
LOWER EXPLOSIVE LIMIT (%):	1.3%
UPPER EXPLOSIVE LIMIT (%):	7.9%

FIRE AND EXPLOSION HAZARDS

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. Flowing product may be ignited by self-generated static electricity. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

EXTINGUISHING MEDIA

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO₂, water spray, fire fighting foam, or Halon.



MATERIAL SAFETY DATA SHEET

Toluene

MSDS No. 1813

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

FIRE FIGHTING INSTRUCTIONS

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment.

Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing.

Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

See Section 16 for the NFPA 704 Hazard Rating.

6. ACCIDENTAL RELEASE MEASURES

ACTIVATE FACILITY SPILL CONTINGENCY or EMERGENCY PLAN.

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Product may release substantial amounts of flammable vapors and gases (e.g., methane, ethane, and propane), at or below ambient temperature depending on source and process conditions and pressure.

Carefully contain and stop the source of the spill, if safe to do so. Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection - do not discharge solid water stream patterns into the liquid resulting in splashing.

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal. Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

7. HANDLING and STORAGE

HANDLING and STORAGE PRECAUTIONS

Handle as a flammable liquid. Keep away from heat, sparks, and open flame! Electrical equipment should be approved for classified area. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when higher flash point material (such as fuel oil) is loaded into tanks previously containing low flash point products (such as this product) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents.

STORAGE PRECAUTIONS

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.



MATERIAL SAFETY DATA SHEET

Toluene

MSDS No. 1813

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks".

WORK/HYGIENIC PRACTICES

Emergency eye wash capability should be available in the near proximity to operations presenting a potential splash exposure. Use good personal hygiene practices. Avoid repeated and/or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Do not use as a cleaning solvent on the skin. Do not use solvents or harsh abrasive skin cleaners for washing this product from exposed skin areas. Waterless hand cleaners are effective. Promptly remove contaminated clothing and launder before reuse. Use care when laundering to prevent the formation of flammable vapors which could ignite via washer or dryer. Consider the need to discard contaminated leather shoes and gloves.

8. EXPOSURE CONTROLS and PERSONAL PROTECTION

EXPOSURE LIMITS

Components (CAS No.)	Source	Exposure Limits	Note
		TWA/STEL	
Toluene (108-88-3)	OSHA	PEL = 200ppm; C = 300ppm; Peak = 500 ppm	A4; skin:BEI
	ACGIH	TLV = 50 ppm	2006 NOIC: 20 ppm

ENGINEERING CONTROLS

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

EYE/FACE PROTECTION

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

SKIN PROTECTION

Gloves constructed of nitrile or neoprene are recommended. Chemical protective clothing such as of E.I. DuPont Tyvek-Saranex 23 ®, Tychem®, Barricade® or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

RESPIRATORY PROTECTION

A NIOSH -approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited. Refer to OSHA 29 CFR 1910.134, ANSI Z88.2-1992, NIOSH Respirator Decision Logic, and the manufacturer for additional guidance on respiratory protection selection.

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

9. PHYSICAL and CHEMICAL PROPERTIES

APPEARANCE

A clear, water-like liquid



MATERIAL SAFETY DATA SHEET

Toluene

MSDS No. 1813

ODOR

A sweet, aromatic odor.

ODOR THRESHOLD

0.2 - 5 ppm

BASIC PHYSICAL PROPERTIES

BOILING RANGE: 231 °F (111 °C)
VAPOR PRESSURE: 22 mm Hg @ 68 °F (20 °C)
VAPOR DENSITY (air = 1): 3.2
SPECIFIC GRAVITY (H₂O = 1): 0.86
EVAPORATION RATE: High
PERCENT VOLATILES: 100 %
SOLUBILITY (H₂O): Insoluble to slightly soluble

10. STABILITY and REACTIVITY

STABILITY: Stable. Hazardous polymerization will not occur.

CONDITIONS TO AVOID and INCOMPATIBLE MATERIALS

Material is stable under normal conditions. Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources

HAZARDOUS DECOMPOSITION PRODUCTS

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke). Contact with nitric and sulfuric acids will form nitrocresols that can decompose violently.

11. TOXICOLOGICAL PROPERTIES

ACUTE TOXICITY

Acute Oral LD50 (rats): 2.6 to 7.5 g/kg Acute inhalation LC50: 8,000 ppm (rat; 4 hours)
Eye irritation (human): 400 ppm Primary dermal irritation (rabbits): mild to moderate

CHRONIC EFFECTS AND CARCINOGENICITY

Carcinogenicity: OSHA: NO IARC: NO NTP: NO ACGIH: NO

Breathing large amounts of toluene for short periods of time adversely effect the human nervous system, the kidneys, liver, and the heart. Repeatedly breathing large amounts of toluene as when "sniffing glue" or paint can cause permanent brain damage. Human exposure studies and animal studies suggest that exposure to large amounts of toluene during pregnancy can adversely effect the developing fetus.

Mutagenicity: negative

12. ECOLOGICAL INFORMATION

Keep out of sewers, drainage areas, and waterways. Report spills and releases, as applicable, under Federal and State regulations.

13. DISPOSAL CONSIDERATIONS

Consult federal, state and local waste regulations to determine appropriate disposal options.

14. TRANSPORTATION INFORMATION

DOT PROPER SHIPPING NAME: Toluene
DOT HAZARD CLASS and PACKING GROUP: 3, PG II
DOT IDENTIFICATION NUMBER: UN 1294

PLACARD:



**MATERIAL SAFETY DATA SHEET****Toluene****MSDS No. 1813**

DOT SHIPPING LABEL:

FLAMMABLE LIQUID

15. REGULATORY INFORMATION**U.S. FEDERAL, STATE, and LOCAL REGULATORY INFORMATION**

Any spill or uncontrolled release of this product, including any substantial threat of release, may be subject to federal, state and/or local reporting requirements. This product and/or its constituents may also be subject to other regulations at the state and/or local level. Consult those regulations applicable to your facility/operation.

CLEAN WATER ACT (OIL SPILLS)

Any spill or release of this product to "navigable waters" (essentially any surface water, including certain wetlands) or adjoining shorelines sufficient to cause a visible sheen or deposit of a sludge or emulsion must be reported immediately to the National Response Center (1-800-424-8802) as required by U.S. Federal Law. Also contact appropriate state and local regulatory agencies as required.

CERCLA SECTION 103 and SARA SECTION 304 (RELEASE TO THE ENVIRONMENT)

Toluene is a CERCLA Section 103 "hazardous substance" subject to CERCLA and SARA Section 304 reporting requirements.

Reportable Quantity: 1000 pounds

SARA SECTION 311/312 - HAZARD CLASSES

<u>ACUTE HEALTH</u>	<u>CHRONIC HEALTH</u>	<u>FIRE</u>	<u>SUDDEN RELEASE OF PRESSURE</u>	<u>REACTIVE</u>
X	X	X	--	--

SARA SECTION 313 - SUPPLIER NOTIFICATION

This product contains the following toxic chemicals subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372:

<u>INGREDIENT NAME (CAS NUMBER)</u>	<u>CONCENTRATION WT. PERCENT</u>
Toluene (108-88-3)	100

CANADIAN REGULATORY INFORMATION (WHMIS)

Class B, Division 2 (Flammable Liquid)
Class D, Division 2B (Toxic by other means)

CALIFORNIA PROPOSITION 65 LIST OF CHEMICALS

This product contains the following chemicals that are included on the Proposition 65 "List of Chemicals" required by the California Safe Drinking Water and Toxic Enforcement Act of 1986:

<u>INGREDIENT NAME (CAS NUMBER)</u>	<u>Date Listed</u>
Toluene	1/1/1991

<u>NFPA® HAZARD RATING</u>	HEALTH:	2
	FIRE:	3
	REACTIVITY:	0

Refer to NJPA 704 "Identification of the Fire Hazards of Materials" for further information



MATERIAL SAFETY DATA SHEET

Toluene

MSDS No. 1813

HMIS® HAZARD RATING

HEALTH:	3 *	Slight
FIRE:	3	Moderate
PHYSICAL:	0	Negligible
		* Chronic

SUPERSEDES MSDS DATED: 01/29/1999

ABBREVIATIONS:

AP = Approximately < = Less than > = Greater than
N/A = Not Applicable N/D = Not Determined ppm = parts per million

ACRONYMS:

ACGIH	American Conference of Governmental Industrial Hygienists	NTP	National Toxicology Program
AIHA	American Industrial Hygiene Association	OPA	Oil Pollution Act of 1990
ANSI	American National Standards Institute (212) 642-4900	OSHA	U.S. Occupational Safety & Health Administration
API	American Petroleum Institute (202) 682-8000	PEL	Permissible Exposure Limit (OSHA)
CERCLA	Comprehensive Emergency Response, Compensation, and Liability Act	RCRA	Resource Conservation and Recovery Act
DOT	U.S. Department of Transportation [General info: (800) 467-4922]	REL	Recommended Exposure Limit (NIOSH)
EPA	U.S. Environmental Protection Agency	SARA	Superfund Amendments and Reauthorization Act of 1986 Title III
HMIS	Hazardous Materials Information System	SCBA	Self-Contained Breathing Apparatus
IARC	International Agency For Research On Cancer	SPCC	Spill Prevention, Control, and Countermeasures
MSHA	Mine Safety and Health Administration	STEL	Short-Term Exposure Limit (generally 15 minutes)
NFPA	National Fire Protection Association (617)770-3000	TLV	Threshold Limit Value (ACGIH)
NIOSH	National Institute of Occupational Safety and Health	TSCA	Toxic Substances Control Act
NOIC	Notice of Intended Change (proposed change to ACGIH TLV)	TWA	Time Weighted Average (8 hr.)
		WEEL	Workplace Environmental Exposure Level (AIHA)
		WHMIS	Canadian Workplace Hazardous Materials Information System

DISCLAIMER OF EXPRESSED AND IMPLIED WARRANTIES

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.

Material Safety Data SheetMaterial Name: **Ethylbenzene**

MSDS ID: NOVA-0083

Section 1 - Product and Company Identification

Synonyms: Ethylbenzol; EB; Phenyl ethane; Ethyl Benzene

Chemical Name: Ethylbenzene

Chemical Family: Petrochemical

Material Use: Solvent, used in production of styrene

Chemical Formula: C_8H_{10}

NOVA Chemicals

P.O. Box 2518, Station M

Calgary, Alberta, Canada T2P 5C6

Product Information: 1-412-490-4063

EMERGENCY Telephone Numbers:**North America (Canada and US):**

1-800-561-6682, 1-403-314-8767 (NOVA Chemicals) (24 hours)

1-800-424-9300 (CHEMTREC-USA) (24 hours)

1-613-996-6666 (Canutec-Canada) (24 hours)

Mexico and South America: +44 208 762 8322 (NCEC) (24 hours)**Section 2 - Composition / Information on Ingredients**

CAS #	Component	Percent by Wt.
100-41-4	Ethylbenzene	100

Additional Information

This product is considered to be hazardous under 29 CFR 1910.1200 (Hazard Communication).

This material is a controlled product under Canadian WHMIS regulations.

This product is regulated as a hazardous material / dangerous goods for transportation (See Section 14).

See Section 8 for applicable exposure limits. See Section 11 for applicable toxicity data.

Section 3 - Hazards Identification

HMIS Ratings: Health: 2* Fire: 3 Physical Hazard: 0

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe * = Chronic hazard

NFPA Ratings: Health: 2 Fire: 3 Reactivity: 0

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe

Emergency Overview

WARNING FLAMMABLE! Product is a colorless liquid with a distinctive aromatic odor. Flammable liquid and vapor can accumulate static charge. Vapors are heavier than air and may travel along ground and flashback along vapor trail. Liquid will float and may reignite on surface of water. Vapor may cause headache, nausea, dizziness, drowsiness, confusion, unconsciousness and possibly death. Aspiration hazard - swallowing or vomiting of liquid may cause aspiration into the lungs. **POTENTIAL CARCINOGEN.**

Potential Health Effects: Eyes

Vapors from this product are irritating to the eyes.

Potential Health Effects: Skin

This product is rapidly absorbed through the skin and is irritating to skin. Prolonged and/or repeated skin contact with this product may cause drying, defatting, and irritation.

Potential Health Effects: Ingestion

Ingestion can cause gastrointestinal irritation, nausea, vomiting and diarrhea. Ingestion of this product may result in adverse central nervous system effects including headache, sleepiness, dizziness, slurred speech and blurred vision.

Potential Health Effects: Inhalation

This product is irritating to the respiratory system. Repeated inhalation of vapors may be harmful; lung irritation and serious central nervous system disorders may result.

Section 4 - First Aid Measures**First Aid: Eyes**

Remove contact lenses, if it can be done safely. Immediately flush eyes with water for at least 15 minutes, while holding eyelids open. Seek medical attention if symptoms develop or persist.

Material Safety Data Sheet

Material Name: **Ethylbenzene**

MSDS ID: NOVA-0083

First Aid: Skin

Remove contaminated clothing and shoes. Wash immediately with soap and water. Seek medical attention if symptoms develop or persist.

First Aid: Inhalation

Move affected individual to non-contaminated air. Loosen tight clothing such as a collar, tie, belt or waistband. Assist breathing if necessary. Seek immediate medical attention. **WARNING:** Contact through mouth-to-mouth resuscitation may pose a secondary exposure risk to the rescuer. Avoid mouth-to-mouth contact by using mouth shield or guard to perform artificial respiration.

First Aid: Ingestion

DO NOT INDUCE VOMITING. If vomiting occurs naturally, lean affected individual forward to reduce risk of aspiration. Loosen tight clothing such as a collar, tie, belt or waistband. Seek immediate medical attention.

First Aid: Notes to Physician

An Emergency Medical Response Protocol is available for this product. These are available to first responders and medical personnel. 1-800-561-6682, 1-403-314-8767 (24 hours NOVA Chemicals Emergency Response) Aspiration of this product during induced emesis can result in lung injury. If induced emesis is considered to be necessary, protect the airway and use the method least likely to cause aspiration, such as gastric lavage.

Section 5 - Fire Fighting Measures

See Section 9: Physical Properties for flammability limits, flash point and autoignition information.

General Fire Hazards

Highly flammable in presence of open flame, sparks, and heat. Flammable liquid and vapor can accumulate static charge. Vapors are heavier than air and may travel along ground and flashback along vapor trail. Liquid will float and may reignite on surface of water. If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

Explosion Hazards

Vapors may form explosive mixture with air. Vapors are heavier than air and may travel along the ground to some distant source of ignition and flash back. Keep containers away from source of heat or fire. Containers may explode when involved in a fire.

Hazardous Combustion Products

Upon decomposition, this product emits carbon monoxide, carbon dioxide, and/or low molecular weight hydrocarbons.

Extinguishing Media

Dry chemical, foam, carbon dioxide, or water fog or spray.

Fire Fighting Equipment/Instructions

Evacuate the area promptly. Keep unnecessary personnel away. Stay upwind of spilled material and isolate exposure. Fire fighters should wear full-face, self-contained breathing apparatus and thermal protective clothing. Move containers from fire area if you can do so without risk. Fight fire from maximum distance or use unmanned hose holders or monitor nozzles. Cool containers with flooding quantities of water until well after the fire is out. Immediately withdraw in case of fire and tank venting or heat discoloration of tank. **ALWAYS** stay away from tanks engulfed in fire. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn. Use of water spray when fighting fire may be inefficient. Avoid inhaling any smoke and combustion products. Remove and clean or destroy any contaminated clothing. Control runoff waters to prevent entry into sewers, drains, underground or confined spaces and waterways.

Section 6 - Accidental Release Measures

Evacuation Procedures

Isolate area. Keep unnecessary personnel away. Alert stand-by emergency and fire fighting personnel. Evacuate the area promptly.

Small Spills

Isolate spill or leak area immediately for at least 50 to 100 meters (160 to 330 feet) in all directions. Restrict access of unprotected personnel. SCBA and protective clothing must be worn during cleanup. Stay upwind of spilled material. Stop source of leak if possible and eliminate ignition sources. Ventilate closed spaces before entering. Use water to disperse flammable vapors. Clean up spills using appropriate techniques such as inert sorbent materials. Use appropriate, non-sparking tools/shovel to put the spilled material in an appropriate waste disposal container. Prevent material from entering sewer, drains, or waterways.

Material Safety Data Sheet

Material Name: **Ethylbenzene**

MSDS ID: NOVA-0083

Large Spills

As above, but consider initial downwind evacuation for at least 300 meters (1000 feet). Monitor surrounding area for build-up of flammable air concentrations. Consider use of foam to suppress flammable vapors.

Special Procedures

Contact local police/emergency services and appropriate emergency telephone numbers provided in Section 1. Ensure that statutory and regulatory reporting requirements in the applicable jurisdiction are met. Wear appropriate protective equipment and clothing during clean-up. Individuals without appropriate protective equipment should be excluded from area of spill until cleanup has been completed.

See Section 8 for recommended Personal Protective Equipment and see Section 13 for waste disposal considerations.

Section 7 - Handling and Storage

Handling Procedures

Wear appropriate personal protective equipment when working with this product. Keep away from heat, ignition sources and incompatible materials. Use in minimal quantities in a well-ventilated area separate from the storage area. Use non-sparking, grounded ventilation systems separate from other exhaust systems. Ground all equipment that contains this material. Dissipate static electricity during transfer by grounding and bonding containers and equipment. Use spark-resistant tools. Flammable liquid and vapor from this product can accumulate static charge. Vapors are heavier than air and may travel along the ground and flashback along vapor trail. Liquid will float and may reignite on water surface.

See Section 8: Exposure Controls/Personal Protection for appropriate Personal Protective Equipment.

Storage Procedures

Store according to applicable regulations for flammable materials for storage tanks, containers, buildings, rooms, cabinets, and allowable quantities and minimum storage distances. Store in a cool, dry, well-ventilated area away from incompatible materials such as strong oxidizing agents. Store and use away from heat, sparks, open flame, or any other ignition source. Storage area should be clearly identified, well-illuminated, and clear of obstruction. Store away from process and production areas, elevators, and building and room exits. Store in labeled containers in areas appropriate for storing flammable liquids - bond and ground metal containers. Equip storage tank vents with a flame arrestor. Consider leak detection and alarm equipment for storage area. Keep absorbents for leaks and spills readily available. Maintain appropriate extinguishing capability in storage area (e.g., sprinkler system, portable fire extinguishers). Provide adequate security so that unauthorized personnel do not have access to product.

See Section 10: Stability & Reactivity for information on incompatible materials.

Section 8 - Exposure Controls / Personal Protection

Exposure Guidelines

A: General Product Information

Refer to published exposure limits - utilize effective control measures and PPE to maintain worker exposure to concentrations that are below these limits. Ensure that eyewash stations and safety showers are proximal to work locations.

B: Component Exposure Limits

ACGIH, OSHA, NIOSH, EPA, Alberta, and Ontario exposure limit lists have been checked for major components listed with CAS registry numbers. Other exposure limits may apply, check with proper authorities.

Ethylbenzene (100-41-4)

ACGIH:	100 ppm TWA; 125 ppm STEL
OSHA:	100 ppm TWA; 435 mg/m3 TWA 125 ppm STEL; 545 mg/m3 STEL
NIOSH:	100 ppm TWA; 435 mg/m3 TWA 125 ppm STEL; 545 mg/m3 STEL
	800 ppm IDLH
Alberta:	100 ppm TWA; 434 mg/m3 TWA 125 ppm STEL; 543 mg/m3 STEL
Ontario:	100 ppm TWAEV; 435 mg/m3 TWAEV 125 ppm STEV; 540 mg/m3 STEV

Material Safety Data Sheet

Material Name: **Ethylbenzene**

MSDS ID: NOVA-0083

ENGINEERING CONTROLS

Maintain worker exposure below recommended exposure limits by providing adequate local exhaust ventilation. Use non-sparking, grounded ventilation systems separate from other exhaust systems. Ensure that eyewash stations and safety showers are proximal to the workstation location.

PERSONAL PROTECTIVE EQUIPMENT

Personal Protective Equipment: Eyes/Face

Wear safety glasses; chemical goggles are recommended if splashing is possible, or to prevent eye irritation from vapors.

Personal Protective Equipment: Skin/Hands/Feet

Use impervious gloves. Wear chemical-resistant safety footwear with good traction to prevent slipping. Work clothing sufficient to prevent all skin contact should be worn, such as coveralls and long sleeves. Fire resistant (i.e., NOMEX) or natural fiber clothing (i.e., cotton or wool) is recommended. Synthetic clothing can generate static electricity and is not recommended where flammable vapors release may occur.

Personal Protective Equipment: Respiratory

If engineering controls and ventilation is not sufficient to prevent buildup of aerosols, vapors or dusts, appropriate NIOSH/MSHA approved air-purifying respirators or self-contained breathing apparatus (SCBA) appropriate for exposure potential should be used. Air supplied breathing apparatus must be used when oxygen concentrations are low or if airborne concentrations exceed the limits of the air-purifying respirators.

Personal Protective Equipment: General

Personal protective equipment (PPE) should not be considered a long-term solution to exposure control. Employer programs to properly select, fit, maintain, and train employees to use equipment must accompany PPE. Consult a competent industrial hygiene resource, the PPE manufacturer's recommendation, and/or applicable regulations to determine hazard potential and ensure adequate protection.

Section 9 - Physical & Chemical Properties

Physical State and Appearance:	Clear, colorless liquid	Color:	Clear, colorless
Odor:	Aromatic	Odor Threshold:	0.02 to 0.1 ppm
pH:	Not available	Vapor Pressure:	7 mmHg (at 20°C)
Vapor Density @ 0°C (Air=1):	3.66	Boiling Point:	136.2°C (277.2°F)
Melting Point:	-95°C (-139°F)	Solubility (H2O):	Very slightly
Specific Gravity (Water=1):	0.867	Dispersion Properties:	Dispersed in water, methanol, diethyl ether, n-octanol, acetone
Octanol/H2O Coeff.:	3.15	Flash Point:	12.8°C (55°F)
Flash Point Method:	Pensky-Martens Closed Cup	Upper Flammable Limit (UFL):	6.7%
Lower Flammable Limit (LFL):	0.8%	Flammability Classification:	Flammable
Auto Ignition:	432.22°C (810°F)		

Section 10 - Stability & Reactivity Information

Chemical Stability

This is a product is stable under normal use conditions for shock, vibration, pressure, or temperature.

Instability

No additional information available.

Chemical Stability: Conditions to Avoid

Avoid strong oxidizing agents.

Incompatibility

Highly reactive with oxidizing agents.

Hazardous Polymerization

Will not occur.

Hazardous Decomposition

Upon decomposition, this product emits carbon monoxide, carbon dioxide and/or low molecular weight hydrocarbons

Material Safety Data Sheet

Material Name: **Ethylbenzene**

MSDS ID: NOVA-0083

Section 11 - Toxicological Information

A: Acute Toxicity - General Material Information

Ethylbenzene causes severe eye and nose irritation. It causes CNS depression at high concentrations and can be fatal. It can be absorbed through the skin. Aspiration of the liquid into the lungs may cause chemical pneumonitis.

B: Acute Toxicity - LD50/LC50

Ethylbenzene (100-41-4)

Oral LD50 Rat: 3500 mg/kg; Dermal LD50 Rabbit: 17800 µL/kg

C: Chronic Toxicity - General Material Information

Prolonged exposure to **ethylbenzene** may result in CNS, upper respiratory tract, and liver disorders.

Ethylbenzene has been classified in group 2B, "possibly carcinogenic to humans" by IARC based on the National Toxicology Program's two year study of very high exposure levels on rats and mice (NTP, 1999). Rats and mice were exposed to concentrations of 0, 75, 250 or 750 ppm ethylbenzene for 6 hours a day, 5 days a week, for 104 and 103 weeks, respectively. Significant, dose-related increases in kidney tumors in male and female rats at 750 ppm were noted compared to control rats.

There were also statistically significant increases in the incidence of lung tumors in male mice and liver tumors in female mice exposed to 750 ppm of **ethylbenzene**. The relevance of these data to human exposure is presently being evaluated.

D: Chronic Toxicity - Carcinogenic Effects

ACGIH, EPA, IARC, OSHA, and NTP carcinogen lists have been checked for selected similar materials or those components with CAS registry numbers.

Ethylbenzene (100-41-4)

ACGIH: A3 - Confirmed animal carcinogen with unknown relevance to humans

EPA: Classification: not classifiable as to human carcinogenicity; basis: nonclassifiable due to lack of animal bioassays and human studies.

IARC: Monograph 77, 2000 (Group 2B (possibly carcinogenic to humans))

Section 12 - Ecological Information

Ecotoxicity

A: General Product Information

Toxic to aquatic life.

B: Component Analysis - Ecotoxicity - Aquatic/Terrestrial Toxicity

Ethylbenzene (100-41-4)

Freshwater

fish 96-h LC50: 4.7 mg/L (predicted); fish (guppy) 96-h LC50: 9.9 mg/l (measured); fish (rainbow trout) 96-h LC50: 4.2 mg/l (measured); fish (fathead minnow) 96-h LC50: 12.1 mg/l (measured); daphnid 48-h LC-50: 5.5 mg/l (predicted); daphnid 48-h LC-50: 3.2 mg/l (modeling); daphnid 48-h LC-50: >1.81 mg/L (measured); green algal 96-h EC-50 (Biomass as cell/ml) = 3.7 mg/L (predicted); green algal 96-h EC-50 (growth rate): 3.7 mg/l fish Chronic value (ChV): 0.750 mg/L (predicted); fish (fathead minnow) ChV > 0.440 mg/L (measured) daphnid 21-d ChV - 0.500 mg/l (predicted); daphnid 7-day ChV - 1.3 mg/L (measured); algal ChV - 0.790 mg/L (predicted); algal ChV - 3.4 mg/L (measured)

Saltwater

fish 96-h LC50: 2.0 mg/L (predicted); fish (atlantic silverside) 96-h LC50: 5.4 mg/L (measured) mysid 96-h LC50: 0.540 mg/L (predicted); mysid 96-h LC-50: 2.6 mg/L (measured); bay shrimp 96-h LC50: 0.490 mg/l (measured); crab LC-50: 13.0 mg/L (measured); green algal 96-h EC-50 (growth rate): 7.7 mg/l (measured); fish ChV - 0.200 mg/L acute to chronic ratio is 10 mysid ChV - 0.050 mg/L (predicted, acute to chronic ratio is 10); bay shrimp ChV - 0.050 mg/L (predicted; acute to chronic ratio is 10); algal ChV - 4.5 mg/L (measured).

Environmental Fate/Mobility

This product has not been tested.

Persistence/Degradability

Relatively non-persistent in the environment.

Bioaccumulation/Accumulation

Not expected to bioaccumulate significantly.

Material Safety Data Sheet

Material Name: **Ethylbenzene**

MSDS ID: NOVA-0083

Section 13 - Disposal Considerations

U.S./Canadian Waste Number & Descriptions

A: General Product Information

This product is known to be a hazardous waste according to US and Canadian regulations. The use, mixing or processing of this material may alter this product. Contact federal, provincial/state and local authorities in order to generate or ship a waste material associated with this product to ensure materials are handled appropriately and meet all criteria for disposal of hazardous waste. Vent to a burning flame at an approved facility. **DO NOT ATTEMPT TO DISPOSE OF BY UNCONTROLLED IGNITION.** Since emptied containers retain product residue, follow safe handling/label warnings even after container is emptied.

See Section 7: Handling and Storage and Section 8: Exposure Controls/Personal Protection for additional handling information that may be applicable for safe handling and the protection of employees.

Waste generator is advised to carefully consider hazardous properties and control measures needed for other materials that may be found in the waste.

B: Component Waste Numbers

No EPA Waste Numbers are applicable for this product's components.

Waste Disposal

If discarded, this product is considered a US RCRA ignitable waste, D001.

Section 14 - Transportation Information

US DOT Information

Shipping Name: Ethylbenzene

UN# 1175 Hazard Class: 3 Packing Group: II

Required Label(s): FLAMMABLE LIQUID

Additional Info.: NOTE: The Reportable quantity for ethylbenzene is 1000 lbs (454kg). For shipments, in a single container, exceeding the RQ for ethylbenzene the letters RQ must appear in the proper shipping name. North American E.R.G. # 130

Canadian TDG Information

Shipping Name: Ethylbenzene

UN# 1175 Hazard Class: 3 Packing Group: II

Required Label(s): FLAMMABLE LIQUID

Additional Info.: North American E.R.G. # 130

International Air Transport Association (IATA) and ICAO Regulations

Shipping Name: Ethylbenzene

UN# 1175 Hazard Class: 3 Packing Group: II

Required Label(s): FLAMMABLE LIQUID

International Maritime Dangerous Goods (IMDG) Regulations

Shipping Name: Ethylbenzene

UN# 1175 Hazard Class: 3 Packing Group: II

Required Label(s): FLAMMABLE LIQUID

Additional Info.: EmS No.: F-E, S-D

Section 15 - Regulatory Information

A: International Regulations

Components of this product have been checked against the following Chemical Control Inventories.

Component Analysis - International Inventory Status

Component	CAS #	US - TSCA	CANADA - DSL	EU - EINECS
Ethylbenzene	100-41-4	Yes	Yes	Yes

B: USA Federal & State Regulations

Ongoing occupational hygiene, medical surveillance programs, or site emission or spill reporting may be required by Federal or State regulations. Check for applicable regulations.

Material Safety Data Sheet

Material Name: **Ethylbenzene**

MSDS ID: NOVA-0083

USA OSHA Hazard Communication Class

This product is considered to be hazardous under 29 CFR 1910.1200 (Hazard Communication).

HCS Class: Irritating substance.

HCS Class: Target organ effects.

HCS Class: Flammable liquid with a flash point lower than 37.8°C (100°F).

HCS Class: MAY CAUSE CANCER.

USA Right-to-Know - Federal

This material contains one or more of the following chemicals required to be identified under SARA Section 302 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65) and/or CERCLA (40 CFR 302.4).

Ethylbenzene (100-41-4)

SARA 313: 0.1 % de minimis concentration

CERCLA: 1000 lb final RQ; 454 kg final RQ

USA Right-to-Know - State

The following components appear on one or more of the following state hazardous substances lists. Some components (including those present only in trace quantities, and therefore not listed in this document) may be included on the Right To Know lists of other U.S. states. The reader is therefore cautioned to contact his or her NOVA Chemicals representative or NOVA Chemicals' Product Integrity group for further U.S. State Right To Know information.

Component	CAS	NJ	PA
Ethylbenzene	100-41-4	Yes	Yes

The following statement(s) are provided under the California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65):

WARNING! This product contains a chemical known to the state of California to cause cancer.

C: Canadian Regulations - Federal and Provincial

Canadian Environmental Protection Act (CEPA): All components of this product are on the Domestic Substances List (DSL), and are acceptable for use under the provisions of CEPA.

WHMIS Ingredient Disclosure List (IDL)

The following components are identified under the Canadian Hazardous Products Act Ingredient Disclosure List (IDL):

Component	CAS #	Minimum Concentration
Ethylbenzene	100-41-4	0.1 % (English Item 697, French Item 854)

WHMIS Classification

This material is a controlled product under Canadian WHMIS regulations.

Workplace Hazardous Materials Information Systems (WHMIS): This product has been classified in accordance with Canadian Controlled Product Regulations (CPR) hazard criteria and this MSDS contains complete CPR-required information.

WHMIS Class B2: Flammable Liquid

WHMIS Class D2A: Carcinogen, very toxic

WHMIS Class D2B: Skin irritation

Provincial Regulations

Ongoing occupational hygiene, medical surveillance programs, or site emission or spill reporting may be required by Federal or Provincial regulations. Check for applicable regulations.

Section 16 - Other Information

Label Information

PRECAUTIONS:

WARNING FLAMMABLE! Product is a colorless liquid with a distinctive aromatic odor. Flammable liquid and vapor can accumulate static charge. Vapors are heavier than air and may travel along ground and flashback along vapor trail. Liquid will float and may reignite on surface of water. Vapor may cause headache, nausea, dizziness, drowsiness, confusion, unconsciousness and possibly death. Aspiration hazard - swallowing or vomiting of liquid may cause aspiration into the lungs.

POTENTIAL CARCINOGEN.

FIRST AID:

SKIN: Remove contaminated clothing and shoes. Wash immediately with soap and water. Seek medical attention if symptoms develop or persist.

Material Safety Data Sheet

Material Name: **Ethylbenzene**

MSDS ID: NOVA-0083

EYES: Remove contact lenses, if it can be done safely. Immediately flush eyes with water for at least 15 minutes, while holding eyelids open. Seek medical attention if symptoms develop or persist.

INHALATION: Move affected individual to non-contaminated air. Loosen tight clothing such as a collar, tie, belt or waistband. Assist breathing if necessary. Seek immediate medical attention. **WARNING:** Contact through mouth-to-mouth resuscitation may pose a secondary exposure risk to the rescuer. Avoid mouth-to-mouth contact by using mouth shield or guard to perform artificial respiration.

INGESTION: DO NOT INDUCE VOMITING. If vomiting occurs naturally, lean affected individual forward to reduce risk of aspiration. Loosen tight clothing such as a collar, tie, belt or waistband. Seek immediate medical attention.

IN CASE OF A LARGE SPILL: Consider initial downwind evacuation for at least 300 meters (1000 feet). Monitor surrounding area for build-up of flammable air concentrations. Consider use of foam to suppress flammable vapors. Restrict access of unprotected personnel. SCBA and protective clothing must be worn during cleanup. Stay upwind of spilled material. Stop source of leak if possible and eliminate ignition sources. Ventilate closed spaces before entering. Use water to disperse flammable vapors. Clean up spills using appropriate techniques such as inert sorbent materials. Use appropriate, non-sparking tools/shovel to put the spilled material in an appropriate waste disposal container. Prevent material from entering sewer, drains, or waterways.

References

Available on request.

Key/Legend

ACGIH = American Conference of Governmental Industrial Hygienists; BLEVE = Boiling Liquid Expanding Vapor Explosion; BOD = Biochemical Oxygen Demand; CAS = Chemical Abstracts Service; CERCLA = Comprehensive Environmental Response, Compensation, and Liability Act; CPR = Controlled Products Regulations; DOT = Department of Transportation; DSL = Domestic Substances List; EINECS = European Inventory of Existing Commercial Substances; EPA = Environmental Protection Agency; EU = European Union; FDA = Food and Drug Administration; IARC = International Agency for Research on Cancer; IDL = Ingredient Disclosure List; Kow = Octanol/water partition coefficient; LEL = Lower Explosive Limit; NIOSH = National Institute for Occupational Safety and Health; NJTSR = New Jersey Trade Secret Registry; NTP = National Toxicology Program; OSHA = Occupational Safety and Health Administration; RCRA = Resource Conservation and Recovery Act; SARA = Superfund Amendments and Reauthorization Act; TDG = Transportation of Dangerous Goods; TSCA = Toxic Substances Control Act.

MSDS Prepared by: NOVA Chemicals

MSDS Information Phone Number: 1-412-490-4063

Other Information

Notice to Reader

ALTHOUGH THE INFORMATION CONTAINED IN THIS DOCUMENT IS PRESENTED IN GOOD FAITH, BASED ON AVAILABLE INFORMATION BELIEVED TO BE RELIABLE AT THE TIME OF PREPARATION OF THIS DOCUMENT, NOVA CHEMICALS MAKES NO WARRANTIES OR REPRESENTATIONS WITH RESPECT TO THE INFORMATION OR THE PRODUCTS DESCRIBED HEREIN, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES AND CONDITIONS (INCLUDING ALL WARRANTIES AND CONDITIONS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE). NO FREEDOM FROM INFRINGEMENT OF ANY PATENT OWNED BY NOVA CHEMICALS OR OTHERS IS TO BE INFERRED. THIS INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE. PLEASE CONTACT NOVA CHEMICALS FOR THE MOST CURRENT VERSION OF THIS MSDS. NOVA CHEMICALS DOES NOT ASSUME RESPONSIBILITY FOR MSDS OBTAINED FROM THIRD PARTY SOURCES.

RESPONSIBILITY FOR USE, STORAGE, HANDLING AND DISPOSAL OF THE PRODUCTS DESCRIBED HEREIN, WHETHER ALONE OR IN COMBINATION WITH ANY OTHER SUBSTANCE, IS THAT OF THE PURCHASER AND/OR END USER.



NOVA Chemicals is a Registered Trademark of NOVA Brands Ltd.; authorized use/utilisation autorisée.

This is the end of MSDS # NOVA-0083.



MATERIAL SAFETY DATA SHEET

Xylene, Mixed

MSDS No. 1812

EMERGENCY OVERVIEW

DANGER!

FLAMMABLE - IRRITANT - ABSORBED THROUGH THE SKIN - CENTRAL NERVOUS SYSTEM - HARMFUL OR FATAL IF SWALLOWED - ASPIRATION HAZARD



NFPA 704 (Section 16)

High fire hazard. Keep away from heat, spark, open flame, and other ignition sources.

If ingested, do NOT induce vomiting, as this may cause chemical pneumonia (fluid in the lungs). Contact may cause eye, skin and mucous membrane irritation. Harmful if absorbed through the skin. Avoid prolonged breathing of vapors or mists. Inhalation may cause irritation, anesthetic effects (dizziness, nausea, headache, intoxication), and respiratory system effects. Excessive exposure may affect the liver and kidneys.

1. CHEMICAL PRODUCT AND COMPANY INFORMATION

Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

EMERGENCY TELEPHONE NUMBER:
COMPANY CONTACT (business hours):
MSDS Internet Website:

CHEMTREC (800) 424-9300
Corporate EHS 732-750-6000
www.hess.com

SYNONYMS: Dimethyl benzene; Mixed xylenes; M (meta) - xylene; O (ortho) - xylene; P (para) - xylene; Xylol

See Section 16 for abbreviations and acronyms.

2. COMPOSITION and CHEMICAL INFORMATION ON INGREDIENTS

INGREDIENT NAME (CAS No.)	CONCENTRATION PERCENT BY WEIGHT
Xylene, Mixed Isomers (1330-20-7)	100

3. HAZARDS IDENTIFICATION

EYES

Moderate to severe irritant. Contact with liquid or vapor may cause irritation.

SKIN

Moderate to severe irritant. May cause skin irritation with prolonged or repeated contact. Practically non-toxic if absorbed following acute (single) exposure. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are exposed repeatedly.

INGESTION

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.



MATERIAL SAFETY DATA SHEET

Xylene, Mixed

MSDS No. 1812

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.

INHALATION

Excessive exposure may cause irritation to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

Effects to the blood (including decreased platelet and white blood cell counts), cardiovascular system, nervous system, retina, lungs, gastrointestinal system, spleen, and kidneys have been reported from large, acute (short) and repeated or prolonged exposures.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Irritation from skin exposure may aggravate existing open wounds, skin disorders, and dermatitis (rash). Pre-existing chronic respiratory disease, liver or kidney dysfunction, or central nervous system disorders may be aggravated by exposure.

4. FIRST AID MEASURES

EYES

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

SKIN

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or waterless hand cleanser. Obtain medical attention if irritation or redness develops.

INGESTION

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

INHALATION

Remove person to fresh air. If person is not breathing, ensure an open airway and provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

FLASH POINT:	81 °F (27°C)
AUTOIGNITION TEMPERATURE:	867 °F (463 °C)
OSHA/NFPA FLAMMABILITY CLASS:	1C (flammable liquid)
LOWER EXPLOSIVE LIMIT (%):	0.9%
UPPER EXPLOSIVE LIMIT (%):	7.0%

FIRE AND EXPLOSION HAZARDS

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. Flowing product may be ignited by self-generated static electricity. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

EXTINGUISHING MEDIA



MATERIAL SAFETY DATA SHEET

Xylene, Mixed

MSDS No. 1812

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO₂, water spray, fire fighting foam, or Halon.

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

FIRE FIGHTING INSTRUCTIONS

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment.

Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing.

Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

See Section 16 for the NFPA 704 Hazard Rating.

6. ACCIDENTAL RELEASE MEASURES

ACTIVATE FACILITY SPILL CONTINGENCY or EMERGENCY PLAN.

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Product may release substantial amounts of flammable vapors and gases (e.g., methane, ethane, and propane), at or below ambient temperature depending on source and process conditions and pressure.

Carefully contain and stop the source of the spill, if safe to do so. Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection - do not discharge solid water stream patterns into the liquid resulting in splashing.

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal. Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

7. HANDLING and STORAGE

HANDLING and STORAGE PRECAUTIONS

Handle as a flammable liquid. Keep away from heat, sparks, and open flame! Electrical equipment should be approved for classified area. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when higher flash point material (such as fuel oil) is loaded into tanks previously containing low flash point products (such as this product) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents."

STORAGE PRECAUTIONS



MATERIAL SAFETY DATA SHEET

Xylene, Mixed

MSDS No. 1812

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks in Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks".

WORK/HYGIENIC PRACTICES

Emergency eye wash capability should be available in the near proximity to operations presenting a potential splash exposure. Use good personal hygiene practices. Avoid repeated and/or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Do not use as a cleaning solvent on the skin. Do not use solvents or harsh abrasive skin cleaners for washing this product from exposed skin areas. Waterless hand cleaners are effective. Promptly remove contaminated clothing and launder before reuse. Use care when laundering to prevent the formation of flammable vapors which could ignite via washer or dryer. Consider the need to discard contaminated leather shoes and gloves.

8. EXPOSURE CONTROLS and PERSONAL PROTECTION

EXPOSURE LIMITS

Components (CAS No.)	Source	Exposure Limits	Note
		TWA/STEL	
Xylene, Mixed Isomers (1330-20-7)	OSHA ACGIH	PEL = 100ppm TLV = 100 ppm; STEL = 150 ppm	A4; BEI

ENGINEERING CONTROLS

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

EYE/FACE PROTECTION

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

SKIN PROTECTION

Gloves constructed of nitrile or neoprene are recommended. Chemical protective clothing such as of E.I. DuPont Tyvek-Saranex 23®, Tychem®, Barricade® or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

RESPIRATORY PROTECTION

A NIOSH -approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited. Refer to OSHA 29 CFR 1910.134, ANSI Z88.2-1992, NIOSH Respirator Decision Logic, and the manufacturer for additional guidance on respiratory protection selection.

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

9. PHYSICAL and CHEMICAL PROPERTIES



MATERIAL SAFETY DATA SHEET

Xylene, Mixed

MSDS No. 1812

APPEARANCE

A clear, water-like liquid

ODOR

A sweet, aromatic odor.

ODOR THRESHOLD

0.2 - 5 ppm

BASIC PHYSICAL PROPERTIES

BOILING RANGE: AP 279 °F (137 °C)
VAPOR PRESSURE: 6.7 mm Hg @ 70 °F (21 °C)
VAPOR DENSITY (air = 1): AP 3.6
SPECIFIC GRAVITY (H₂O = 1): 0.86
EVAPORATION RATE: High
PERCENT VOLATILES: 100 %
SOLUBILITY (H₂O): Insoluble to slightly soluble

10. STABILITY and REACTIVITY

STABILITY: Stable. Hazardous polymerization will not occur.

CONDITIONS TO AVOID and INCOMPATIBLE MATERIALS

Material is stable under normal conditions. Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources

HAZARDOUS DECOMPOSITION PRODUCTS

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke). Contact with nitric and sulfuric acids will form nitrocresols that can decompose violently.

11. TOXICOLOGICAL PROPERTIES

ACUTE TOXICITY

Acute Oral LD50 (rats): 3.5 to 8.6 g/kg Acute inhalation LC50: 6,700 ppm (rat; 4 hours)
Eye irritation (human): 200 ppm Acute dermal LD50 (rabbits): > 5 ml/kg

In humans, the inhalation of xylene for short periods of time may cause decreased respiratory rate, altered liver and kidney function, hearing loss, and central nervous system depression. Animals exposed to high concentrations of xylene exhibited impaired eye function.

CARCINOGENICITY

Carcinogenicity: OSHA: NO IARC: (3) NTP: NO ACGIH: A4

Mutagenicity: negative

12. ECOLOGICAL INFORMATION

Keep out of sewers, drainage areas, and waterways. Report spills and releases, as applicable, under Federal and State regulations.

13. DISPOSAL CONSIDERATIONS

Consult federal, state and local waste regulations to determine appropriate disposal options.

14. TRANSPORTATION INFORMATION

PLACARD:



Appendix C

Quality Assurance Project Plan (QAPP)

Table of Contents

1.0	INTRODUCTION	C-1
2.0	DATA QUALITY CONTROL SAMPLES	C-3
3.0	DECONTAMINATION OF SAMPLING EQUIPMENT	C-4

1.0 INTRODUCTION

The objective of this Quality Assurance Project Plan (QAPP) is to provide a mechanism of control over all sample collection and handling procedures in order to ensure sample integrity and usability.

The QAPP sampling program will consist of groundwater sampling at various locations and depths to determine the progress of groundwater remediation.

The following steps will be implemented prior to initiating any field activities to ensure that the sampling is in accordance with the sampling plan.

- The field supervisor will notify the contract laboratory of the upcoming sampling events so that the laboratory can prepare the appropriate types and numbers of sample containers. The anticipated number of sampling locations, the list of sampling parameters to be analyzed for each location and the number of extra bottles needed for quality control testing will be specified to the laboratory manager.
- All field equipment intended to be used during sampling will be inspected
- All forms to be used in the field, including the field logbook, chain of custody forms and sample analyses request forms will be assembled.
- If appropriate, sample bottles will be pre-labeled during sampling activities. Pertinent information such as well and soil identification numbers, sample location, sample type, preservatives and type of parameters will be identified on the label with permanent ink during pre-sampling activities. The labels will be covered with transparent tape to protect them from getting wet in the ice packs.
- The sampling personnel will review proper sampling protocols. The project health and safety plan will be reviewed frequently to minimize the risk of injuries during the sampling activities.

For groundwater sampling, all on-site wells will be allowed to stabilize before sampling. Groundwater sampling will proceed from the assumed cleaner wells

and progress to those with highest suspected contamination. The static water level will be obtained using an electronic water level indicator.

Each well will be purged of three to five standing volumes of water using a centrifugal or submersible pump with dedicated polyethylene tubing. No headspace or air bubble in the VO sample bottles will be allowed. Samples will be collected in the following order at each monitor well location.

Volatile Organic Compounds, and Semi-Volatile Organics

Samples will be collected and containerized in appropriate pre-cleaned sample containers. The table below presents the requirements for sample containers, volumes to be collected, preservatives and holding times by parameter and matrix:

TABLE 1

Sample Containers, Volumes to be Collected,
Preservatives and Holding Times by Parameter and Matrix

Aqueous Samples

Parameter	Container	Volume to be Collected	Preservative	Holding Times
Volatile Organic Compounds (VOCs)	Glass	3 x 40 ml VOA vials	Cool (4°C)	7 days
Semi-Volatile Organic Compounds (SVOCs)	Glass	2 x 1 liter	Cool (4°C)	7 days until extraction, then 40 days for analysis

2.0 DATA QUALITY CONTROL SAMPLES

As part of data quality assurance program, several quality control samples will be required to provide control over the collection and subsequent review, interpretation and validation of the generated data. Three QA / QC samples will be prepared or collected namely, trip (travel) blanks, field (equipment rinse) blanks, and duplicate (laboratory performance) samples.

Trip blanks consist of a set of sample bottles filled with the laboratory demonstrated analyte free water. Trip blanks accompany the sample bottles that are prepared in the laboratory to the field and back to the laboratory, along with samples collected for analyses. Trip blanks will not be opened in the field and will be shipped back to the laboratory with the same set of bottles they accompanied to the field. The primary purpose of trip blanks is to detect additional sources of contamination that could potentially influence contaminant values reported in actual samples, both qualitatively and quantitatively. Trip blanks serve as a mechanism of control on sample bottle preparation, blank water quality and sampling handling.

Field blanks are to provide an additional check on possible sources of contamination beyond those intended for trip blanks. Field blanks are primarily used to indicate potential contamination from ambient air and from sampling instruments used to collect and transfer samples from point of collection into sample containers. Field blanks are collected in the field by passing analyte free water through clean sampling equipment. Field blanks must be returned to the laboratory with the same set of sample bottles they accompanied to the field.

Duplicate samples provide an opportunity to evaluate a laboratory's performance by comparing analytical results of two samples taken from the same location. A total of four duplicate samples will be collected and analyzed for volatile and semi-volatile organics. Aqueous matrix duplicate samples will be obtained by filling sample containers from the same sampling device for each parameter to be analyzed. Soil field duplicates to be analyzed for parameters other than volatile organics will be obtained by

first homogenizing the sample aliquots prior to filling sample containers. Filling a clean stainless steel tray and mixing it with a clean stainless steel trowel until consistent physical appearance is accomplished will achieve homogenization. The sample is then divided into two halves and sample containers filled by scooping sample material alternately from each half. Soil duplicates to be analyzed for volatile organics will be collected as grab samples, composting or mixing will result in loss of volatile constituents. The duplicate samples will be assigned fictitious sample numbers, which will be recorded in the field notebook.

3.0 DECONTAMINATION OF SAMPLING EQUIPMENT

During mobilization phase and prior to sampling activities, all sampling equipment will be decontaminated according to the procedures described below. These procedures are designed to prevent cross-contamination between different sampling locations, spread of contamination from one location to another by sampling equipment, and minimize contact time between sampling crews with contaminated media.

All sampling and other equipments that make direct contact with samples, such as split spoons and trowels must be decontaminated after each use. Equipment will be washed thoroughly with tap water and detergent. The equipment will be rinsed with deionized water and allowed to air dry for about 24 hours. To prevent contamination during transport, decontaminated equipment intended to be used during sampling will be wrapped in new aluminum foil. These procedures will be repeated at each sampling location.

a. DOCUMENTATION

Detailed documentation of all site activities is important for tracking the acquisition and handling of samples from the time of collection, through shipment to the laboratory for analysis, to ultimate disposition of the samples. Documentation is also important in support of potential enforcement actions that may arise in relation to the remedial investigation at the site. The

following will be used as forms of documentation at the site; Field notebook, monitor well logs and photo-documentation.

b. PROJECT PROGRESS REPORT

The project manager will maintain a project file containing complete project documentation. This file will include project plans and specifications, field notebooks, data records, photographs, maps and drawings, sample identification documents, chain of custody records, entire analytical data package. The project file will also contain lithologic logs of soil borings and monitor wells, regulatory and other reference materials, and other pertinent information. The above file will be stored and maintained at ESPL office at 2 West 32nd Street, 5th Floor, Suite 504 New York, NY 10001. The information contained in the files will be used to generate monthly progress reports for submittal to the NYSDEC.

The quarterly progress report will include analytical data for soil and groundwater samples, documentation and water table contour maps. A final report will be prepared to discuss the implementation of site findings.

A copy of the approved Site Health and Safety Plan (SHSP) will be kept at the site throughout the duration of field activities.

Appendix D

Engineering Controls Documentation

Table of Contents

1.0	OPERATION AND MAINTENANCE ACTIVITIES	D-1
1.1	On-site Groundwater Monitoring	D-1
1.0	Off-site Groundwater Monitoring	D-2
2.0	MONITORING ACTIVITIES	D-2

ENGINEERING CONTROLS DOCUMENTATION

1.0 OPERATION AND MAINTENANCE ACTIVITIES

The following activities will require an on-going operation and monitoring at the site.

1.1 On-site Groundwater Monitoring

- (a) *Continue existing on-site free product recovery from existing monitoring wells containing free product, coinciding with groundwater sampling events*

Existing wells MW 13, 14, and/or 17 have been observe to contain free product and will be inspected at the time of groundwater monitoring event (every quarterly during the first year and every 9 months there after, subject to NYSDEC determination of frequency and requirements), the free product collection system as described below will be inspected and its condition noted. Maintenance required for it to function properly will be performed.

The existing free product collection system comprises of a portable air operated diaphragm pump and compressor system to remove free floating products observed (if any) during the groundwater monitoring event. The product/water mixture will be pumped into a plastic container and emptied manually into a 275-gallon storage tank placed in the basement. Alternatively, PVC disposable bailers may also be used for free product removal.

- (b) *Implement and operate an on-site SSDS*

Monthly inspections will be performed to observe operations. Vapor samples on the influent and effluent air will be analyzed every 9 months.

- (c) *Seal the basement floor openings and existing sump and maintenance of the on-site SSDS*

The basement floor will be inspected for cracks and openings, especially at walls and penetrations. Floor openings (if any observed) will be caulked and sealed and the existing sump, if required, will be closed, to minimize any sub-slab volatile organic compounds from entering into the basement.

Periodic inspections of the piping, fans, etc. and vacuum pressure at each of the collection riser locations will be performed to ensure that a negative pressure exists and sub-slab vapor is being collected. Maintenance required for the system to function properly will be performed.

Sealing of the floor openings, cracks, and sump will be inspected during the periodic SSDS inspection, and maintained accordingly.

1.2 Off-Site Groundwater Monitoring

- (a) *Implement off-site in-situ groundwater treatment, using chemical oxidation and bioremediation and continue existing groundwater monitoring:*

The goal of treatment was to achieve the Part 703 groundwater standards. However, if significant contaminant reduction has been achieved with the first round of injection and additional reduction has been attained by a second round of injection, but not down to the groundwater standards, a request will be made to the Department for a variance from the groundwater standards.

2.0 Monitoring Activities

- (a) *Monitor presence of free product in on-site groundwater monitoring wells*

This will consist of inspecting the passive collection system for the presence of free product during groundwater sampling events (every quarterly during the first year and every 9 months thereafter, subject to NYSDEC determination of frequency and requirements).

- (b) *Monitor on-site groundwater quality*

This will consist of sampling the nine (9) existing monitoring wells for STARS 8021 volatile compounds and 8270 semi-volatile compounds.

- (c) *Monitor performance of the on-site SSDS*

This will consist of:

An effluent air quality sample will be collected (every nine months) using EPA Method TO-15 parameters. Monitoring of outdoor air quality will determine if sub-slab ventilation is effective in reducing indoor air contaminants and air quality results will be used in determining the effectiveness of the SSDS.

Monthly inspection of basement floor sealing will be performed to minimize sub-slab vapors from entering the basement.

(d) *Monitor effectiveness of off-site in-situ groundwater treatment*


This will consist of monitoring of the two groundwater monitoring wells installed to measure remediation progress (every quarterly during the first year and every 9 months there after, subject to NYSDEC determination of frequency and requirements). Samples will be analyzed for STARS 8021 volatile compounds and 8270 semi-volatile compounds. The need for additional reagent injection will be determined based on the monitoring results. The overall contaminant reduction vs. the Part 703 groundwater standards will be considered in deciding the need for additional treatment. Significant contaminant reduction would provide more protectiveness than current conditions.

Appendix E

Deed Restrictions Documentation

**NYC DEPARTMENT OF FINANCE
OFFICE OF THE CITY REGISTER**

This page is part of the instrument. The City Register will rely on the information provided by you on this page for purposes of indexing this instrument. The information on this page will control for indexing purposes in the event of any conflict with the rest of the document.

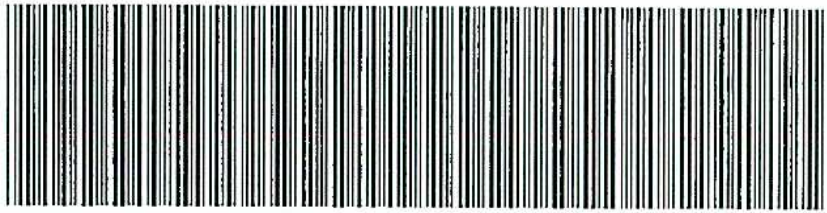

2009081700997001003E0869

RECORDING AND ENDORSEMENT COVER PAGE

PAGE 1 OF 8

Document ID: 2009081700997001

Document Date: 07-15-2009

Preparation Date: 09-15-2009

Document Type: SUNDRY AGREEMENT

Document Page Count: 7

PRESENTER:

ABSTRACTS INCORPORATED - PICK UP BY USTA
AGENT # 08-36-0150-6091 # 2009-597 CHICAGO TITLE
585 STEWART AVENUE P.O. BOX 28
GARDEN CITY, NY 11530
516-683-1000
kpersaud@abstractsinc.com

RETURN TO:

PICK UP BY USTA
AGENT # 08-36-0150-6091 # 2009-597 CHICAGO TITLE
585 STEWART AVENUE P.O. BOX 28
GARDEN CITY, NY 11530
516-683-1000
kpersaud@abstractsinc.com

PROPERTY DATA

Borough	Block	Lot	Unit	Address
QUEENS	541	1001	Entire Lot	COM 18-10 27TH AVENUE
Property Type: COMMERCIAL REAL ESTATE				
Borough	Block	Lot	Unit	Address
QUEENS	541	1002	Entire Lot	RES 18-10 27TH AVENUE
Property Type: COMMERCIAL CONDO UNIT(S)				

CROSS REFERENCE DATA

CRFN: 2004000698667

PARTIES

PARTY 1:

18-10 LLC
3-06 26TH AVENUE
LONG ISLAND CITY, NY 11102

FEES AND TAXES

Mortgage	Filing Fee:
Mortgage Amount: \$ 0.00	\$ 0.00
Taxable Mortgage Amount: \$ 0.00	NYC Real Property Transfer Tax:
Exemption:	\$ 0.00
TAXES: County (Basic): \$ 0.00	NYS Real Estate Transfer Tax:
City (Additional): \$ 0.00	\$ 0.00
Spec (Additional): \$ 0.00	
TASF: \$ 0.00	
MTA: \$ 0.00	
NYCTA: \$ 0.00	
Additional MRT: \$ 0.00	
TOTAL: \$ 0.00	
Recording Fee: \$ 75.00	
Affidavit Fee: \$ 0.00	

**RECORDED OR FILED IN THE OFFICE
OF THE CITY REGISTER OF THE
CITY OF NEW YORK**

Recorded/Filed 09-24-2009 12:35
City Register File No.(CRFN):
2009000309417



Annette McMill

City Register Official Signature

(6P)

DECLARATION of COVENANTS and RESTRICTIONS

THIS DECLARATION OF COVENANTS AND RESTRICTIONS is made as of the 15th day of July 2009, by 18-10 LLC, a limited liability company organized and existing under the laws of the State of New York and having an office for the transaction of business at 3-02 26th Avenue Long Island City, NY 11102 (hereinafter referred to as "18-10 LLC").

WHEREAS, Willow Service Station Site is the subject of a Voluntary Cleanup Agreement executed by 18-02 LLC, and R&R General Supply Company, Inc. as part of the New York State Department of Environmental Conservation's (the "Department") Voluntary Cleanup Program, namely that parcel of real property located on 18-02 27th Avenue in Long Island City, the Borough of Queens, County of Queens, State of New York, (hereinafter referred to as the "Property") which is part of lands conveyed by Frederick T. Assante to 18-02 LLC by deed dated 8/22/02 and recorded in Queens County Register's Office on 10/09/02 in Reel 603 of Deeds at page 148, as corrected in a correction deed by Frank T. Assante to 18-02 LLC dated 8/28/02 and recorded in the Queens County Register's Office on 11/29/04 under CRFN No. 2004000698667 and being more particularly described in Appendix "A," attached to this declaration and made a part hereof and hereinafter referred to as "the Property"; and,

WHEREAS, 18-02 LLC transferred title to the Property to 18-10 LLC by deed dated 9/10/04 and recorded 11/12/04 under CRFN No. 2004000698667; and,

WHEREAS, the Department approved a remedy to eliminate or mitigate all significant threats to the environment presented by the contamination disposed at the Property and such remedy requires that the Property be subject to restrictive covenants.

NOW, THEREFORE, 18-10 LLC for itself and its successors and/or assigns, covenants that:

Block
541

Lot
1001
1002

First, the Property subject to this Declaration of Covenants and Restrictions, is as shown on a map attached to this declaration as Appendix "B" and made a part hereof, and is fully described and delineated by the metes and bounds description set forth in Appendix "A" attached hereto.

Second, unless prior written approval by the Department or, if the Department shall no longer exist, any New York State agency or agencies subsequently created to protect the environment of the State and the health of the State's citizens,

hereinafter referred to as "the Relevant Agency," is first obtained, no person shall engage in any activity that will, or that reasonably is anticipated to, prevent or interfere significantly with any proposed, ongoing or completed program at the Site or that will, or is reasonably foreseeable to, expose the public health or the environment to a significantly increased threat of harm or damage.

Third, unless prior written approval by the Relevant Agency is first obtained, there shall be no construction, use or occupancy of the Property that results in the disturbance or excavation of the Property, which threatens or results in contact with, or exposure to on-Site soils.

Fourth, the owner of the Property shall prohibit the use of the groundwater underlying the Property without treatment rendering it safe for drinking water or industrial purposes, as appropriate, unless the user first obtains permission to do so from the Relevant Agency.


Fifth, the owner of the Property shall continue in full force and effect any institutional and engineering controls required under the Agreement and maintain such controls and comply with all elements of the Department-approved Site Management Plan, including the continued operation of a soil vapor mitigation system consisting of a sub-slab depressurization system, unless the owner first obtains permission to discontinue such controls from the Relevant Agency.

Sixth, this Declaration is and shall be deemed a covenant that shall run with the land and shall be binding upon all future owners of the Property, and shall provide that the owner, and its successors and assigns, consents to enforcement by the Relevant Agency of the prohibitions and restrictions that Paragraph X of the Agreement requires to be recorded, and hereby covenants not to contest the authority of the Relevant Agency to seek enforcement.

Seventh, any deed of conveyance of the Property, or any portion thereof, shall recite, unless the Relevant Agency has consented to the termination of such covenants and restrictions, that said conveyance is subject to this Declaration of Covenants and Restrictions.

IN WITNESS WHEREOF, the undersigned has executed this instrument the day written below.

Dated: July 15, 2009

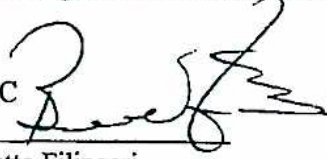18-10 LLC
By: 
Benedetto Filingeri,
Managing Member

STATE OF NEW YORK)

Massachusetts) ss:
COUNTY OF ~~SUFFOLK~~)

On the 15 day of July in the year 2009, before me, the undersigned, personally appeared Benedetto Filingeri, personally known to me or proved to me on the basis of satisfactory evidence to be the individual whose name is subscribed to the within instrument and acknowledged to me that he executed the same in his capacity as Managing Member of 18-10 LLC and that by his signature on the instrument executed the instrument.

Signature and Office of individual
taking acknowledgment



HERBERT W. SOLOMON
Notary Public, State of New York
No. 02509103587
Qualified in Suffolk County
Commission Expires July 31, 2010

SEAL

APPENDIX A

Legal Description

OVERALL DESCRIPTION:

All that certain plot, piece or parcel of land, situate, lying and being at Long Island City, in the Borough and county of Queens, City and State of New York, bounded and described as follows:

BEGINNING at a point formed by the intersection of the southwesterly side of 27th Avenue with the easterly side of 18th Street;

RUNNING THENCE southeasterly along the southwesterly side of 27th Avenue at an interior angle of 63 degrees 20 minutes 20 seconds with the easterly side of 18th Street, 159.58 feet (Tax Map), 160.83 feet (Actual) to a point;

THENCE southwesterly on a course forming an exterior angle of 68 degrees 55 minutes 8 seconds with the southwesterly side of 27th Avenue, a distance of 23.7 feet (Tax Map), 23.99 feet (Actual);

THENCE westerly on a course forming an interior angle with the last course of 99 degrees 2 minutes 48 seconds being parallel with Astoria Boulevard, a distance of 11 feet;

THENCE southerly on a course forming an exterior angle with Astoria Boulevard of 90 degrees 34 minutes 00 seconds, a distance of 39.86 feet to the northerly side of Astoria Boulevard;

THENCE westerly along the northerly side of Astoria Boulevard, 108.43 (Deed), 108.47 (Actual);

THENCE northerly on a course forming an interior angle with Astoria Boulevard of 86 degrees 32 minutes 00 seconds, a distance of 60 feet;

THENCE westerly on a course forming an exterior angle of 90 degrees 21 minutes 00 seconds with the last course, a distance of 24.98 feet to the easterly side of 18th Street;

THENCE northerly along the easterly side of 18th Street, a distance of 82.52 feet to the point or place of BEGINNING

Said premises now know as lot 1001 and 1002 more particularly described attached.

CHICAGO TITLE INSURANCE COMPANY

SCHEDULE A (Description)

TITLE #: 09-36-0150-8157

All that certain plot, piece or parcel of land, situate, lying and being at Long Island City, in the Borough and County of Queens, City and State of New York, bounded and described as follows:

The Condominium Unit (hereinafter referred to as the "Unit") known as Commercial Unit No. 1001 in the building (hereinafter referred to as the "Building") known as Astoria Square Condominium, located at 18-02 27th Avenue, Long Island City, in the Borough and County of Queens, City and State of New York, said unit being designated and described as Commercial Unit 1001 in a certain declaration dated January 10, 2007 made by Grantor Pursuant to Article 9-B of the Real Property Law of the State of New York (hereinafter referred to as the "Condominium Act"), establishing a Plan for Condominium ownership of the Building and the land (hereinafter referred to as the "land") upon which the Building is situate, which declaration recorded in the Office of the Register of the County of Queens on April 27, 2007 in CRFN No. 2007000219943 (which declaration and amendment thereto are hereinafter collectively referred to as the "Declaration"). This Unit is also designated as Tax Lot 1001 in Block 541 of Section 4 on the Tax Map of the Real Property Assessment Department of the City of New York, as Condominium Plan No. 490.

* aka
COM

TOGETHER with an undivided 50% interest in the Common Interest (as such terms is defined in the Declaration);

TOGETHER with, and subject to, the rights, obligations, easements, restrictions and other provisions set forth in the Declaration and the By-Laws of the Condominium, as the same may be amended from time to time (hereinafter referred to as the By-Laws), all of which shall constitute covenants running with the Land and shall bind any person having at any time any interest or estate in the Unit, as though recited and stipulated at length herein.

CHICAGO TITLE INSURANCE COMPANY

SCHEDULE A (Description)

TITLE #: 09-36-0150-8157

All that certain plot, piece or parcel of land, situate, lying and being in the County of Queens, City and State of New York, bounded and described as follows:

The Condominium Unit (hereinafter referred to as the "Unit") known as Residential Unit No. 1002 in the building (hereinafter referred to as the "Building") known by the Astoria Square Condominium, 18-10 27th Avenue, Long Island City, New York, said unit being designated and described as Residential Unit 1002 in a certain declaration undated, made by Grantor Pursuant to Article 9-B of the Real Property Law of the State of New York (hereinafter referred to as the "Condominium Act"), establishing a Plan for Condominium ownership of the Building and the land (hereinafter referred to as the "Land") upon which the Building is situate, which declaration recorded in the Office of the Register of the County of Queens on 4/27/07 in CRFN No. 2007000219943 (which declaration and amendment thereto are hereinafter collectively referred to as the "Declaration"). This Unit is also designated as Tax Lot 1002 in Block 541 on the Tax Map of the Real Property Assessment Department of the City of New York, as Condominium Plan No. 490.

* aka
RES

TOGETHER with an undivided 50% interest in the Common Elements (as such terms is defined in the Declaration);

TOGETHER with, and subject to, the rights, obligations, easements, restrictions and other provisions set forth in the Declaration and the By-Laws of the Condominium, as the same may be amended from time to time (hereinafter referred to as the "By-Laws"), all of which shall constitute covenants running with the Land and shall bind any person having at any time any interest or estate in the Unit, as though recited and stipulated at length herein.

Together with, and subject to the rights, obligations, easements, restrictions and other provisions set forth in the Declaration and the By-Laws of the Condominium as though recited and stipulated at length herein.

APPENDIX "B"

