

**Distributed Runoff Control Methodology
Pond Outlet Structure Design Example**

The following design example illustrates a step-by-step methodology for the design of a weir for the control of in-stream erosion potential using a Stormwater Management (SWM) wet pond design based on the Distributed Runoff Control (DRC) approach. The DRC approach incorporates boundary material composition and its sensitivity to erosion (entrainment and transport) into the design protocol. The boundary materials are characterized at the point of maximum boundary shear stress on the bed and the point of secondary maximum boundary shear stress on the bank. By examining the channel at selected sites downstream of the SWM facility the DRC protocol provides a pseudo 3-dimensional assessment of the impact of development and the SWM facility on the receiving channel.

This design example involves 5 Steps as listed in Table J.1.

- | |
|--|
| <ol style="list-style-type: none"> 1) Determine the “stability” and “mode-of-adjustment” of the receiving channel 2) Complete a Diagnostic Geomorphic Survey of the receiving channel 3) Determine channel sensitivity to an alteration in the sediment-flow regime 4) Approximate the elevation-discharge curve for the pond. 5) Size the DRC weir |
|--|

Step 1. Determine Channel “Stability” and “Mode-of-Adjustment”

Channel stability is determined using a Rapid Geomorphic Assessment (RGA) of the channel downstream of the outlet of the proposed Stormwater Management (SWM) pond. The RGA protocol involves the identification of the presence of in-stream features resulting from a variety of geomorphic processes to provide a semi-quantitative assessment of a stream's stability and mode-of-adjustment. The processes are represented by four Factors: aggradation (AF), widening (WF), downcutting (DF), and planimetric form adjustment (PF)). Each Factor is composed of 7 to 10 indices for which a “present” or “absent” response is required. The total number of “present” or “yes” responses is summed and divided by the total number of responses (both “yes” and “no”) to derive a value for each Factor. An index that is not relevant is not assigned a response. An example of an RGA Form is provided in Table J.2.

A Stability Index (SI) value is determined from the Factor values using the following equation:

$$SI = \frac{\{AF + DF + WF + PF\}}{m}, \dots\dots\dots [J.1]$$

where ‘m’ is the number of Factors (typically 4 for alluvial streams).

FORM/ PROCESS	GEOMORPHIC INDICATOR		PRESENT		FACTOR VALUE
	No.	Description	No	Yes	
Evidence of Aggradation (AI)	1	Lobate bar	1		1/7=0.143
	2	Coarse material in riffles embedded		1	
	3	Siltation in pools	1		
	4	Medial bars	1		
	5	Accretion on point bars	1		
	6	Poor longitudinal sorting of bed materials	1		
	7	Deposition in the overbank zone	1		
Evidence of Degradation (DI)	1	Exposed bridge footing(s)	-	-	2/6=0.333
	2	Exposed sanitary/storm sewer/pipeline/etc.	-	-	
	3	Elevated stormsewer outfall(s)	-	-	
	4	Undermined gabion baskets/concrete aprons/etc.	-	-	
	5	Scour pools d/s of culverts/stormsewer outlets	1		
	6	Cut face on bar forms	1		
	7	Head cutting due to knick point migration	1		
	8	Terrace cut through older bar material		1	
	9	Suspended armor layer visible in bank		1	
	10	Channel worn into undisturbed overburden/bedrock	1		
Evidence of Widening (WI)	1	Fallen/leaning trees/fence posts/etc.		1	3/10=0.30
	2	Occurrence of Large Organic Debris		1	
	3	Exposed tree roots		1	
	4	Basal scour on inside meander bends	1		
	5	Basal scour on both sides of channel through riffle	1		
	6	Gabion baskets/concrete walls/armor stone/etc. out flanked	1		
	7	Length of basal scour >50% through subject reach	1		
	8	Exposed length of previously buried pipe/cable/etc.	1		
	9	Fracture lines along top of bank	1		
	10	Exposed building foundation	1		
Evidence of Planimetric Form Adjustment (PI)	1	Formation of cutes(s)	1		0/7=0
	2	Evolution of single thread channel to multiple channel	1		
	3	Evolution of pool-riffle form to low bed relief form	1		
	4	Cutoff channel(s)	1		
	5	Formation of island(s)	1		
	6	Thalweg alignment out of phase with meander geometry	1		
	7	Bar forms poorly formed/reworked/removed	1		
STABILITY INDEX (SI) = (AI+DI+WI+PI)/m				SI=	0.19

The Stability Index (SI) provides an indication of the stability of the creek channel at a given time based on the guidelines provided in Table J.3. The SI Value, however, does not differentiate between current and past disturbances.

Stability Index Value	Stability Class	Description
0.0<SI<0.25	Stable	Metrics describing channel form are within the expected range of variance (typically accepted as one standard deviation from the mean) for stable channels of similar type
0.25<SI<0.4	Transitional	Metrics are within the expected range of variance as defined above but with evidence of stress
0.4<SI<1.0	In Adjustment	Metrics are outside of the expected range of variance for channels of similar type.

The guidelines presented in Table J.3 for the interpretation of the SI Value will vary with the field experience and the bias of the observer. The SI Values however, have been shown to be consistent between observers indicating that the protocol, once calibrated to the observer provides a reliable means of screening the channel for stability and mode-of-adjustment.

The RGA protocol is applied to channel segments of two meanders in length or the equivalent of 20 bankfull channel widths (the width of the channel at the geomorphically dominant discharge, recurrence interval of between 1 and 2 years or 1.5 years on average).

The segment chosen for application of the RGA assessment is selected to be representative of the morphology of the channel for some distance up and downstream of the surveyed segment. That is, the parameters defining channel cross-section and plan form (e.g. width, depth, meander wavelength, etc.) are within a consensual level of variance for this reach of channel. An acceptable level of variance is typically defined as within one standard deviation of the mean. These reaches are referred to as being of “like” morphology. Since the morphology of the channel will vary in the longitudinal direction with changes in flow, slope, physiography, etc., it will be necessary to re-apply the RGA protocol where the parameters characterizing the morphology of the channel have changed beyond the consensual level of variance from the previous survey reach. In this manner the channel is divided into a series of reaches of “like” morphology.

Having determined the length of the survey reach, the longitudinal profile can be plotted from topographic mapping as illustrated in Figure J.1 (Topo). Examination of Figure J.1 (topographic map data) suggests that the channel can be differentiated into three distinct reaches. In the first reach (length L=146 ft, the channel has an average slope of S=0.00385 ft/ft and a meander-pool-riffle morphology. In the middle reach (L≈356 ft; S≈0.0142 ft/ft) the channel has cascade morphology. The third reach (L≈258 ft; S≈0.00794 ft/ft) returns to the meander-pool-riffle form.

Land use through the study reach is homogeneous (forest) and there are no other features (e.g. bridges, dams, weirs, instream works, etc.) that would affect the hydraulic characteristics of the active channel. Consequently, a preliminary definition of “like” reaches includes the three morphologies described above.

A synoptic geomorphic survey was conducted through the subject reach with an RGA assessment completed for each of the three reaches of “like” morphology. The results of the RGA assessment for the first reach (Reach 1) are reported in Tables J.2 and J.4. Referring to Table J.2, the Stability Index (SI) value was found to be SI=0.19, which is less than 0.25, therefore the channel is considered to be “stable” (Table J.3).

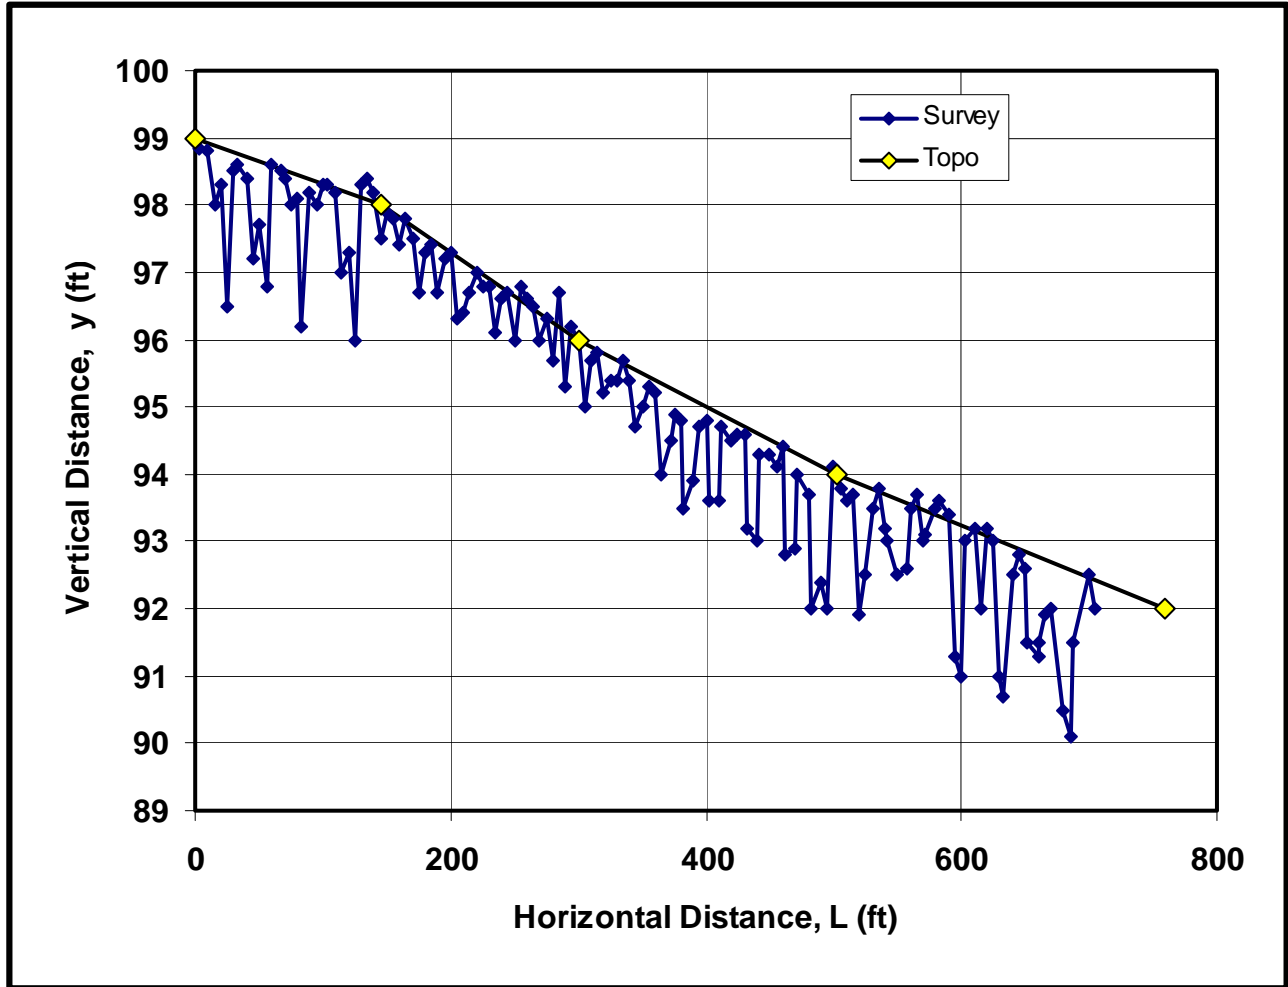


Figure J.1 Longitudinal Profile from Topographic Mapping and Field Survey of Channel Thalweg

Parameter	Reach 1	Reach 2	Reach 3
Longitudinal Gradient, S (ft/ft)	0.00385	0.0142	0.00794
Riffle Length, LRIF (ft)	16	34	27
Pool Length, LPOL (ft)	37	10	18
Total Pool-Riffle Length, LTOT (ft)	53	44	45

Step 2. Diagnostic Geomorphic Survey

Following completion of the identification of reaches of “like” morphology and the synoptic survey to finalize the delineation of the “like” reaches, a diagnostic geomorphic survey is undertaken to characterize the morphological attributes of the channel. This information has two primary functions.

1. The optimization of the erosion control benefit of the pond; and,
2. The provision for establishing a baseline condition from which it is possible to assess the performance of the SWM measures.

A detailed diagnostic survey includes a collection of a comprehensive set of parameters to assess and evaluate stream geomorphic conditions. A complete survey is typically required when:

- a) A post-construction monitoring program is mandated; and,
- b) Data are required for the design and construction of instream works.

Only a partial diagnostic survey is needed where the above issues are not relevant to the project. The following lists those parameters required for the partial diagnostic survey:

1. In the absence of flow measurements, a field estimate of Manning’s ‘n’ value is obtained for comparison with sediment computed estimates.
2. Detailed survey of the channel cross-section, including the floodplain, to determine hydraulic geometry metrics at a so called “Master cross-section” and the relative location of bank material strata.
3. The longitudinal profile of the bed along the channel thalweg and the water surface at the time of survey over a distance of one meander wavelength or 10 bankfull widths. These data are used to determine the longitudinal gradient of the channel from riffle crest to riffle crest and to determine the dimensions of the pool-riffle complex.
4. At least one estimate of bankfull depth (the depth of flow at the dominate discharge) at the Master cross-section and all ancillary cross-sections (3 alternative methods are described in this example for illustrative purposes).
5. Bed material characteristics based on pebble counts of the bed material at a riffle crossover. These data are collected to help assess roughness coefficients, bed material resistance, and provide an alternate method for the estimation of bankfull depth.
6. Soil pits in the banks to map bank stratigraphy and to determine bank material composition using soil consistency tests (stickiness, plasticity and firmness) or particle size analysis (percent silt clay) with Atterberg Limits (Plasticity Index) for each stratigraphic unit. These data are required to help assess historic degradation or aggradation patterns and determine bank material resistance.
7. Map riparian vegetation and root zone characteristics in the soil pits for assessment of the affect of root binding on bank material resistance.

The cross-section data and bank material characterization is completed at a Master cross-section within the representative segment of each “like” reach. The Master cross-section is typically located at a riffle crossover on a straight reach between meander bends. Ancillary cross-sections are located in the lower one third of the meander bends and riffle crossover points up and downstream of the Master cross-section. Data collected at the ancillary cross-sections includes a cross-section profile (typically 7 to 9 ordinates) and estimates of bankfull stage. The longitudinal profile is collected throughout the survey segment along with characterization of plan form geometry.

Design Case: Diagnostic Geomorphic Survey

The longitudinal survey of the channel along the thalweg is presented in Figure J.1 (“Survey” data points). This profile more clearly demonstrates the differences between the three reaches as represented by slope and pool-riffle dimensions (Table J.4). Other parameter values derived from the geomorphic survey are summarized in Table J.5. These data are combined with the cross-section, soils and sediment data to generate values for key parameters as described in the following series of calculations.

The following calculations are required to determine the 3 different estimates of the dominant discharge.

Estimate of Geomorphic Referenced Dominant Discharge

1. The longitudinal data are plotted to generate estimates of the channel gradient in order of priority as follows:
 - (1) Water surface profile based on estimates of bankfull stage from the Master and ancillary cross-sections.
 - (2) Bed slope (riffle crest to riffle crest), and
 - (3) Water surface profile (dry weather flow at the time of the survey).
2. The pebble count data (length, width and breadth) are transformed into an equivalent diameter and used to generate a mass curve wherein cumulative percent finer by mass is plotted as a function of particle diameter;
3. The ₅₀ and ₈₄ particle size values (the particle diameter below which 50 and 84% of the particles are finer by mass, respectively) are determined from the mass curve;
4. Manning’s roughness coefficient is estimated at bankfull stage using:
 - (1) Standard field guides, and
 - (2) Empirical relations such as: the Strickler (1923) and Limerinos (1970) equations.
5. The cross-section ordinates collected at the Master cross-section are plotted to produce a cross-section profile and a stage-area curve;
6. The stage-area curve is combined with the longitudinal gradient (S) and the estimate of Manning’s roughness coefficient (n) to generate the stage-discharge curve for the cross-section using Manning’s equation,

$$Q = \frac{1.49}{n} AR^{(\frac{2}{3})} S^{\frac{1}{2}}, \dots \dots \dots [J.2]$$

in which Q represents the flow rate (cfs) at depth ‘y’ above the thalweg, ‘A’ is the cross-section area of the channel at depth ‘y’, ‘R’ represents the hydraulic radius at depth ‘y’ and ‘S’ is the longitudinal gradient of the channel (ft/ft). An example of a stage-discharge curve is provided in Figure J.2;

Reach No.	Rosgen Stream Type	Parameter									
		2 Year Flow Q_{2YR} (cfs)	W/d Ratio	Width W_{BFL} (ft)	Depth d_{BFL} (ft)	Flow Q_{BFL} (cfs)	Base B (ft)	Wetted Perimeter P (ft)			
1	C3	8.9	3.00	3.00	1.00	4.76	2.00	4.24			
2	B3	9.54	3.23	2.75	0.85	5.10	1.90	3.80			
3	C3	10.1	2.87	2.83	0.99	5.40	1.85	4.06			
Reach No.	Parameter										
	Bed Material Mean Particle Size		Area	Hydraulic Radius	Slope	Velocity	Riparian Vegetation Type				
	⁵⁰ (in)	⁸⁴ (in)	A_{BFL} (ft ²)	R (ft)	S (ft/ft)	v (fps)					
1	2.8	3.3	2.50	0.590	.00385	1.90	Woody				
2	5.1	7.5	1.99	0.521	.0142	2.57	Woody				
3	3.7	5.2	2.32	0.570	.00794	2.35	Woody				
Reach No.	Parameter										
	Bank Material Composition						Critical Shear Stress		Depth of Stratigraphic Unit h (ft)	Excess Boundary Shear Stress τ_{CRT} (lbs/ft ²)	
	Soil Class		Soil Consistence Test				Bank (*) τ_{CRT} (lbs/ft ²)	Bed τ_{CRT} (lbs/ft ²)		Bank	Bed
	Class	Unit No.	X1	X2	X3	SCOR E					
1	SiLm	1	1	2	1	4	0.120	0.548	0.36<h≤1.00	0.057	-0.334
	SiSa	2	0	0	1	1			0.10<h≤0.36		
	CoGr	3	N/a	N/a	N/a	N/a			0.0<h≤0.10		
2	CoBo	1	N/a	N/a	N/a	N/a	0.573	1.206	0.39<h≤0.85	-0.016	-0.526
	GrCo	2	N/a	N/a	N/a	N/a			0.0<h≤0.39		
3	SiLm	1	2	1	3	6	0.329	0.878	0.32<h≤0.99	0.03	-0.446
	SiCl	2	2	2	2	6			0.12<h≤0.32		
	SiCl	3	2	3	2	7			0.0<h≤0.12		

(*) Least resistant lower bank stratigraphic unit corresponding to the zone of secondary maximum boundary shear stress.

- The dominant discharge (Q_{GEO}) is determined from the stage-discharge curve and field estimate of bankfull stage (d_{BFL}). For Reach 1 in this example, $d_{BFL}=1.0$ ft, consequently $Q_{GEO}=4.76$ cfs (Figure J.2). This procedure is repeated for each cross-section within the reach and the flow rate most common to all cross-sections is adopted as the geomorphic referenced estimate of the dominant discharge. If a wide disparity exists between estimates of (Q_{GEO}) than the determination of slope, Manning’s ‘n’ value and the geomorphic indicators of bankfull stage are revisited to determine if a miss-interpretation of the data or an error in calculations has occurred.

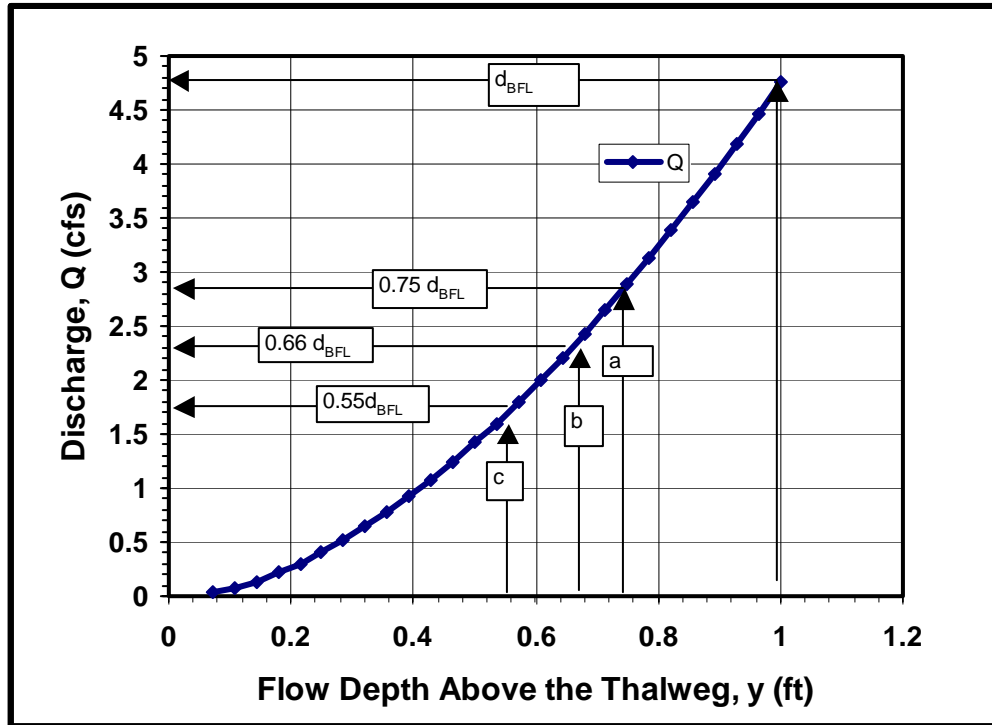


Figure J.2 Stage-Discharge Curve for Reach 1 Downstream of the Proposed Development

Estimate of Bed Material Critical Shear Stress

8. Critical shear stress is estimated for the ϕ_{84} particle size value of the bed material using procedures such as:
 - (1) The modified Shield’s equation (Vanoni, 1977), or
 - (2) Various empirical relations (from the literature) that express critical shear stress as a function of particle size, one such is Eqn J.3 proposed by Lane (1955)

$$(\tau_{CRT})_{BED} = 0.164\phi_{84}, \dots \dots \dots [J.3]$$

in which ϕ_{84} is the particle size for which 84% of the materials are finer (inches) and τ_{CRT} represents the critical shear stress (lbs/ft²). Applying Eqn, [J.3] :

$$(\tau_{CRT})_{BED} = 0.164N_{84} = 0.164 (3.34 \text{ in}) = 0.548 \text{ lbs/ft}^2$$

at the Master cross-section (Reach 1);

Estimate of Instantaneous Bed Shear Stress

9. A stage-shear stress curve is generated for the Master cross-section using DuBoy’s relation for average shear stress and a channel shape adjustment factor proposed by Lane (1955) as follows:

$$\tau_o = k_b \rho g (d - d_p) S, \dots \dots \dots [J.4]$$

and,

$$k_b = 0.000547\left(\frac{B}{d}\right)^3 - 0.0121\left(\frac{B}{d}\right)^2 + 0.092\left(\frac{B}{d}\right) + 0.75, \dots \dots \dots [J.5]$$

in which J_0 represents the instantaneous boundary shear stress at point ‘P’ on the bed (lbs/ft s²), k_b is a channel shape adjustment factor (dimensionless; Fig. J.3), D is the density of the sediment-water mixture being conveyed by the channel (62.4 lbs/ft³), ‘g’ is acceleration due to gravity (32.2 ft/s²), ‘d’ is the depth of the flow above the thalweg (ft), d_p is the depth of flow above the thalweg at point ‘P’ (ft), ‘S’ represents the longitudinal gradient of the flow at depth ‘d’ and ‘B’ is the bottom width of the channel (assuming a trapezoidal configuration). In this design case, a mapping of the isovels through the Master cross-section indicates that the point of maximum boundary shear stress occurs at the thalweg. Since the thalweg is the deepest part of the channel, the term $d_p=0$ in Eqn. J.4. A stage-shear stress curve for Reach 1 is illustrated in Figure J.4. Note that the units for J_0 are reported in lbs/ft² to be consistent with the estimate of critical shear stress reported in Task 8. To obtain units of lbs/ft² remove ‘g’ from Eqn. J.4.

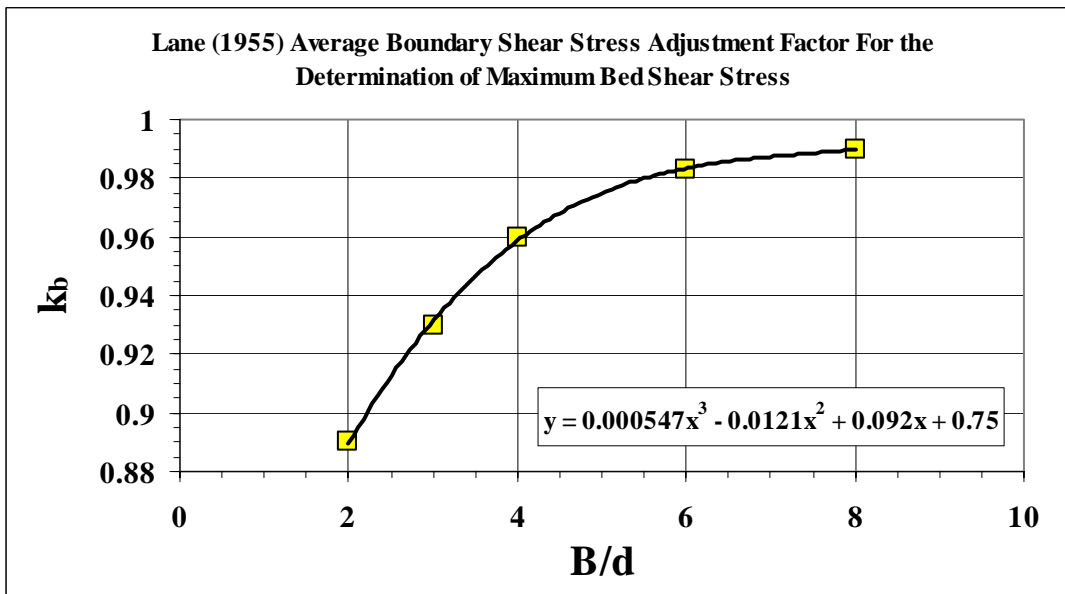


Figure J.3 Determination of k_B for the Adjustment of Average Boundary Shear Stress For Variations in Channel Shape Assuming A Trapezoidal Channel Cross-Section Configuration

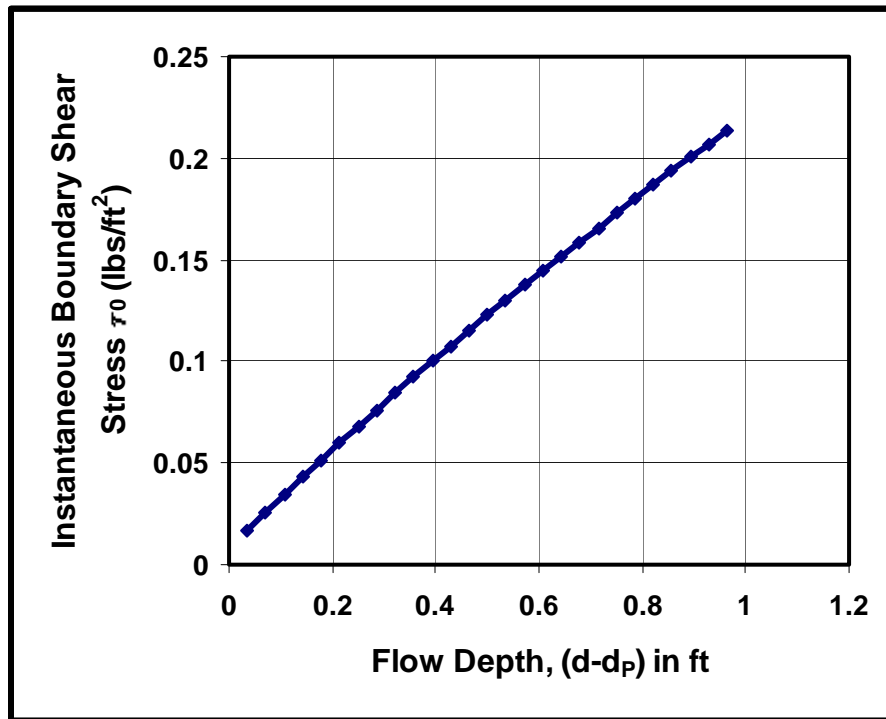


Figure J.4. Stage-Shear Stress Curve for Reach 1 (Master Cross-section): Bed Station.

Estimate the Sediment Referenced Dominant Discharge

10. The stage-shear stress curve is used to determine the depth of flow at which the boundary shear stress on the bed is equal to the critical shear stress of the N_{84} particle size fraction. This depth is transformed into an estimate of flow rate from the stage-discharge curve (Task 5 above), providing a second, independent estimate of the dominant discharge (Q_{SED}). This calculation also provides a basis for determination of the sensitivity of the bed material to an alteration in the sediment-flow regime. This assessment is described in Task 21 below;

Estimate The Flow Recurrence Interval of the Referenced Dominant Discharge

11. A flow time series is generated using:
 - (1) Flow gauge data if available, or
 - (2) A continuous hydrologic model to generate a synthetic flow time series of 6 to 13 years in length.
12. The flow time series is used to derive a flood frequency curve from which a third independent estimate of the dominant discharge (Q_{RI}) is determined as the flow having a recurrence interval between 1 and 2 years (average $RI=1.5$ years);

Finalize the Estimate of Dominant Discharge

- 13. The three estimates of dominant discharge are compared for consistency. If consistent (e.g. the range is equal to or less than 20% of the mean), then the mean value of the dominant discharge can be accepted with a higher degree of confidence

Step 3. Determine the Sensitivity of the Boundary Materials

A) Sensitivity of the Bed Material

- 14. Using the stage-shear stress relationship developed in Task 9 and the estimate of flow depth (d_{BFL} , Task 10) from the dominant discharge (Task 13), determine the boundary shear stress $(J_0)_{BED}$ being applied to the bed at point ‘P’ at the dominant discharge. Point ‘P’ is located on the bed within the zone of maximum boundary shear stress. In this example the value of maximum instantaneous boundary shear stress at a depth of $d_{BFL} = 1.0$ ft was found to be $(J_0)_{BED} = 0.214$ lbs/ft² at the Master cross-section in Reach 1 (Figure J.4). Similarly, for Reaches 2 and 3 the maximum value of instantaneous boundary shear stress was found to be $(J_0)_{BED} = 0.680$ and 0.432 lbs/ft² respectively.
- 15. Compute the value of $(J_e)_{BED}$ for the Master cross-section knowing $(J_0)_{BED}$ and $(J_{CRT})_{BED}$ as,

$$(\tau_e)_{BED} = (\tau_0 - \tau_{CRT})_{BED}, \dots \dots \dots [J.6]$$

in which $(\tau_e)_{BED}$ represents the effective boundary shears stress, τ_0 is the instantaneous boundary shear stress at the dominant discharge and τ_{CRT} is the critical shear stress of the bed material at point ‘P’.

- 16. Repeat the bed shear stress analysis for all Master cross-sections in all reaches of “like” morphology.
- 17. Compare the value of $(J_e)_{BED}$ for all Master cross-sections through the study reach and select the Master cross-section for which the value of $(J_e)_{BED}$ is greatest. The reach represented by the Master cross-section having the highest value of $(J_e)_{BED}$ is referred to as the “Control Reach”.

In this example, effective boundary shear stress on the bed was found to range from between -0.526 and -0.334 (Table J.5). The negative values infer that the channel bed is armored and the bed material is mobile under flood flow events in excess of the dominant discharge. However, of the three Master cross-sections the value of $(J_e)_{BED}$ was greatest for Reach 1, consequently, Reach 1 was identified as the “Control Reach”.

B) Sensitivity of the Bank Material

- 18. The bank material for the “Control Reach” is classified according to soil type for each stratigraphic unit using:
 - (1) Soil consistency tests; or
 - (2) Particle size analysis and Atterberg Limits.

In this example the bank materials were mapped and differentiated into stratigraphic units as summarized for the three reaches in Table J.5. The soil consistency test results determined using standard soil classification guidelines (as quantified by MacRae, 1991), are summarized below and reported in Table J.5.

 - i) Assign a value for the stickiness of the material, e.g. not sticky, (X1=0) to extremely sticky (X1=4),
 - ii) Assign a value for the plasticity of the material, e.g. not plastic (X2=0) to extremely plastic (X2=4),
 - iii) Assign a value for the firmness of the material, e.g. loose, no structure (X3=0) to

stiff (X4=4).

- (3) Sum the consistency test values,

$$SCORE = \sum_{i=1}^3 x_i , \dots \dots \dots [J.7]$$

in which SCORE represents the sum of the values assigned for stickiness, plasticity and firmness.

19. Construct stage-shear stress curves for selected bank stations approximated by 0.25d_{BFL}, 0.33d_{BFL}, 0.4d_{BFL}. More than one bank station may be required in a stratigraphic unit depending upon the thickness of the unit. The curves may be approximated as follows:

$$\tau_0 = k_s (\rho g (d - d_p) S) , \dots \dots \dots [J.8]$$

in which k_s is a correction factor for points on the channel bank determined as a function of channel shape (see Eqn. J.9, Figure J.5), 'd' is the depth of flow (ft), D is the density of water (62.4 lbs/ft³), 'g' is acceleration due to gravity (32.2 ft/s²) and d_p is the depth of flow at the elevation of the boundary station (ft).

$$k_s = 0.7236 \left(\frac{B}{d} \right)^{0.0241} , \dots \dots \dots [J.9]$$

in which B is the channel bottom (ft) width and 'd' is the depth of flow (ft). Note, to obtain units of lbs/ft² remove the constant 'g' from Eqn. J.8.

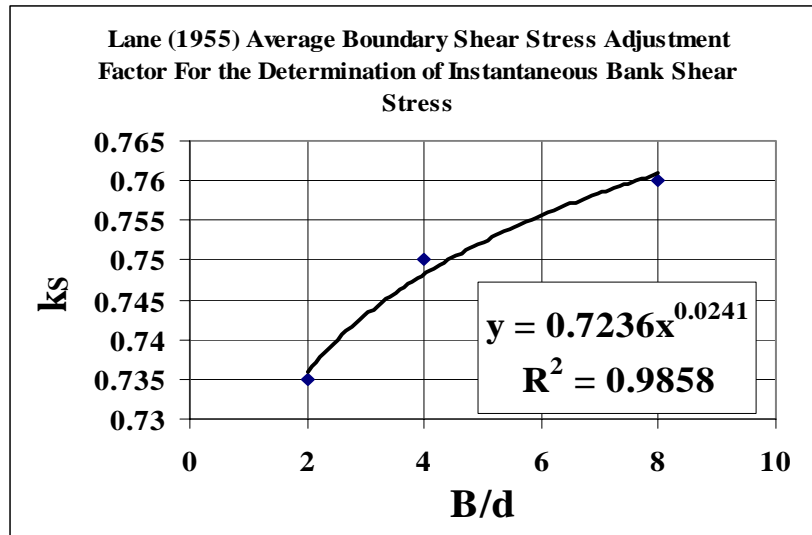


Figure J.5 Adjustment Factor k_s for Bank Shear Stress For Channels Approximating a Trapezoidal Shape

20. Estimate the critical shear stress (J_{CRT}) within each stratigraphic unit using available empirical relationships. These relations are typically based on percent silt and clay content, degree of compaction, particle size (Vanoni, 1977) or the SCORE value (MacRae, 1991);
21. Compute the excess boundary shear stress for each bank station at a flow depth of between 0.6 and 0.75 feet by reading the boundary shear stress off the stage-shear stress curve for each boundary station and subtracting the critical shear stress as described in DuBoy's relation,

$$(\tau_e)_{BNK} = (\tau_0 - \tau_{CRT})_{BNK} \dots\dots\dots[J.10]$$

in which $(\tau_e)_{BNK}$ represents the excess boundary shear stress (lbs/ft²) at the selected boundary station (P), τ_0 is the instantaneous boundary shear stress (lbs/ft²) at any specified depth of flow at point P and τ_{CRT} represent the critical shear stress (lbs/ft²) of the boundary material at point P.

22. Compare the estimates of excess boundary shear stress $(J_e)_{BNK}$ at each bank station and select that station having the highest value of $(J_e)_{BNK}$ as the bank station controlling bank response (controlling stratigraphic unit) to a change in the flow regime. Using the guidelines presented in Table J.6 determine channel sensitivity to an alteration in the sediment-flow regime and the corresponding Over Control (OC) curve and Inflection Point

[REDACTED]							
BANK SENSITIVITY		BED SENSITIVITY			DRC PARAMETERS		
Excess Shear Stress $(J_e)_{BED}$	Sensitivity Class	Excess Shear Stress $(J_e)_{BNK}$	Bank Resistance		Sensitivity Class	Over Control Multiplier R_{OC}	Inflection Point
			Soil Class	SCORE			
	L	<0	Very Stiff	N/a	L	1.0 - 0.9	a
		≈0	Stiff	10-12	ML	0.9 - 0.7	a
			Firm	7-9	M	0.7 - 0.5	b
			Soft	≤6	H	0.5 - 0.2	c
							c
≈0	ML	<0	N/a			0.9 - 0.7	a
		≈0	Stiff	10-12	ML	0.9 - 0.7	a
			Firm	7-9	M	0.7 - 0.5	b
			Soft	≤6	H	0.5 - 0.2	c
	>0	N/a			0.5 - 0.2	c	
	M	<0	N/a			0.7 - 0.5	b
		≈0	Stiff	N/a		0.7 - 0.5	b
			Firm	7-9	M	0.7 - 0.5	b
			Soft	≤6	H	0.5 - 0.2	c
	>0	N/a			0.5 - 0.2	c	
H	N/a			0.5 - 0.2	c		
>0	H	N/a			0.5 - 0.2	c	

The multiplier (R_{OC}) in Table J.6 is used in the following manner:

- a) The 2 year peak flow attenuation technique is used to derive the stage-discharge curve for the erosion control component of the SWM pond.
- b) A multiplier of unity is equivalent to the traditional 2-year peak flow attenuation approach.
- c) The multiplier is used to adjust the 2-year stage-discharge curve to account for differences in the erodability of the boundary materials. The adjustment is performed by multiplying each ordinate of the stage-discharge curve by R_{OC} . For stiff materials, the multiplier approaches unity ($R_{OC} \rightarrow 1.0$). For very sensitive materials, the multiplier is between 0.2 and 0.3, which is equivalent to 80%OC to 70%OC respectively.

Bank materials may be grouped according to the SCORE value if the soil consistency tests apply (i.e. fine-grained material with few stones). For coarse-grained materials, resistance can be determined from observation of bank erosion following a high flow event. As an alternative the resistance of the coarse-grained stratigraphic unit can be inferred from bank form and shear stress distribution through comparison with adjoining strata of fine-grained material.

Finally, relations expressing critical shear stress as a function of particle size are available in the literature. Many of these relations were derived from flume experiments using disturbed material that has been re-compacted. These relations tend to underestimate the resistance of the material as it is observed in the field. Consequently, these relations should be employed with caution or corrected to account for root binding, imbrication, compaction and structurization.

Step 4. Approximate the Elevation-Discharge Curve For the DRC Pond.

The DRC outflow control structure can be constructed as set of pipes or nested weirs. This design example is for a nested, sharp crested weir.

Determine the stage-discharge curve for the flow rate having a recurrence interval of 2 years for the baseline land use condition. For this example, the baseline condition is the reforested land use scenario. The flow having a recurrence interval 2 years was determined previously as between 8.9 and 10.1 cfs for Reaches 1 through 3 respectively (Table J.5).

Construct the 2 year stage-discharge curve using an equation for sharp crested weirs with end contractions:

$$Q = C_e L_e h_e^{\left(\frac{3}{2}\right)}, \dots \dots \dots [J.11]$$

in which, ‘Q’ represents the rate of flow (cfs), ‘C_e’ is the effective weir coefficient (C=3.19, Brater and King, 1982), L_e is the effective length of the weir (ft) and ‘h_e’ is the effective depth of flow above the weir crest (ft). Set the invert of the weir at 628.0 ft. The terms L_e, C_e and h_e are adjusted to account for losses due to end contractions (Brater and King, 1982). In this illustration it is assumed that the stage-volume curve has already been derived and that the approximate head at Q_{BFL}=8.9 cfs is h=2.25 ft.

Re-arranging Eqn. J.11 and solving for ‘L_e’ at Q=(Q_{2YR})_{PRE}=8.9 cfs yields,

$$L_e = \frac{Q}{C_e h_e^{\left(\frac{3}{2}\right)}} = \frac{8.9}{3.19(2.25)^{\left(\frac{3}{2}\right)}} = 0.83\text{ft} \dots \dots \dots [J.12]$$

Compute the stage-discharge curve for the 2-year weir using Eqn. J.11 as illustrated in Figure J.6 (Q_{2YR}, curve AB. This stage-discharge curve represents the rating curve for the 2-year post- to pre-development peak flow attenuation approach.

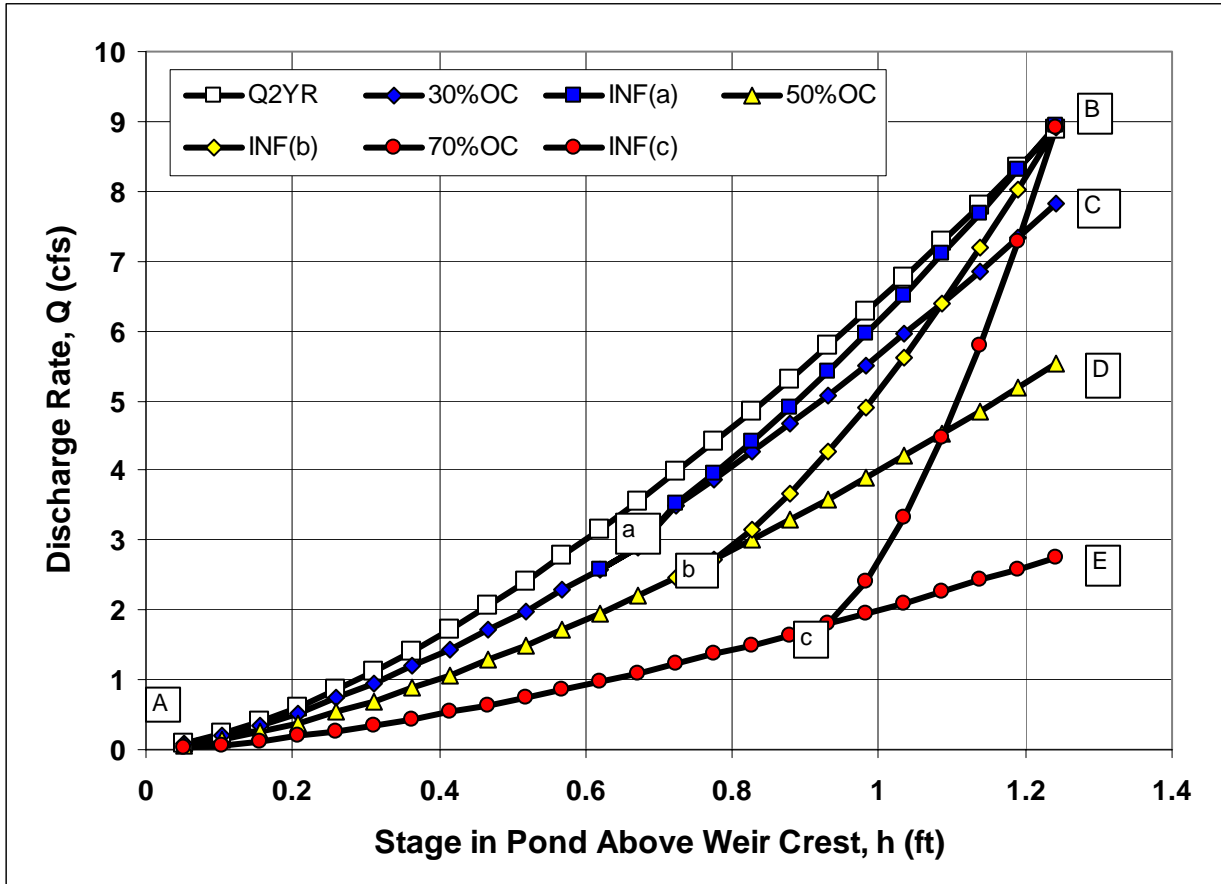


Figure J.6. The 2 Year Peak Flow Attenuation and DRC Rating Curves for 30%OC, 50%OC and 70%OC

Construct the DRC stage-discharge curve as follows:

- Determine the level of OC control and the inflection point from Table J.6.
 - Since $(J_e)_{BED} < 0$ (Table J.5) then the bed is classified as “Low” sensitivity (shaded boxes in the first two columns of Table J.6);
 - The value of $(J_e)_{BNK} > 0$ consequently, Row 3 of Column 3 (shaded box in Table J.6) was selected;
 - The bank material was classified as soft (SCORE=1), consequently, the 4th Row of Column 4 was chosen providing a range of R_{OC} between 0.5 and 0.2 with an inflection point at “c”. In this case $R_{OC}=0.3$ was selected in accordance with the guidelines in Table J.6. Note: 70%OC means that the multiplier for the 2 year curve is $R_{OC}=0.3$
 - The 70%OC curve (designated as curve AE in Figure J.6) is created by multiplying the ordinance of the 2 year stage-discharge curve (Q_{2YR} in Figure J.6) by the multiplier $R_{OC}=0.3$.
 - The inflection point (c) is determined using the guidelines provided in Table J.7.

Inflection Point	Ratio of Inflection Point Depth to Bankfull Depth d_i/d_{BFL} (dim)	Bankfull Depth d_{BFL} (ft)	Inflection Point Depth d_i (ft)	Dominant Discharge Q_{BFL} (cfs)	Flow Rate at Inflection Point Q_i (cfs)
a	.75	1.0	.75	4.76	2.88
b	.67		.67		2.30
c	.55		.55		1.74

The point $d_c=0.55$ ft, $d_{BFL}=1.0$ ft, characterize the Control Reach, consequently the ratio,

$$\frac{d_c}{d_{BFL}} = \frac{0.55 \text{ ft}}{1.0 \text{ ft}} = 0.55, \dots \dots \dots [J.12]$$

- The flow rate at $d_c/d_{BFL}=0.55$ was estimated from Figure J.6 to be $Q_c=1.74$ cfs.
 - Point (c) can be located on curve AE at a flow corresponding to $Q_c=1.74$ cfs.
- The DRC stage-discharge curve follows the curve A(c)B in Figure J.6. For the purpose of illustration, the stage-discharge curves for 30%OC (inflection point (a)) and 50%OC (inflection point (b)) are also provided in Figure J.6.

Step 5. Sizing the DRC Weir

After establishing the DRC stage-discharge curve the next step is to size the DRC weir. This is done using a nested weir configuration as illustrated in Figure J.7. The equation for the nested weir can be approximated from Eqn. J.14 for sharp crested weirs as,

$$Q = \left(C_e L_e h_e^{\left(\frac{3}{2}\right)} \right)_{INSET} + \left(C_e (L_e^* - L_e) (h_e^* - h_e)^{\left(\frac{3}{2}\right)} \right), \dots \dots \dots [J.14]$$

in which Q represents the discharge from the nested weir, 'C_e' is a coefficient (3.19) adjusted to account for end contractions, L_e is the length of the inset weir, h_e represents the height of the inset weir where $0 \leq h_e \leq h_2$ (h₂ represents the total height of the nested weir) and h_e^{*} is the depth of flow through the nested weir above the inset weir ($h_e \leq h_e^* \leq h_2$).

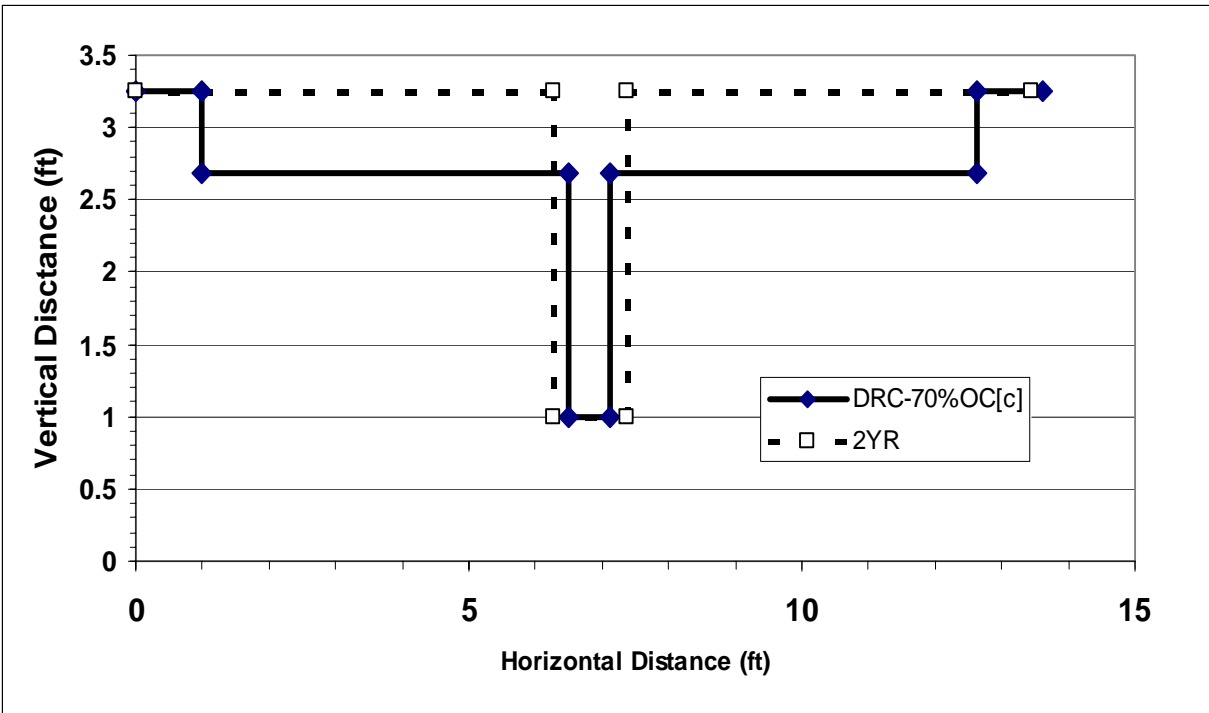


Figure J.7 Comparison of the 70% OC DRC Weir with Inflection Point at [c] and the Traditional 2-year Peak Flow Attenuation Weir

Solving Eqn. D.14 for results in the dimensions and flow values reported in Table J.8.

Parameter	DRC Weir			2 Year Weir
	Inflection Point (a)	Inflection Point (b)	Inflection Point (c)	
L_e (ft)	1.77	1.00	0.62	N/A
h_e (ft)	0.67	0.78	0.93	
Q_i at h_e (cfs)	2.89	2.21	1.74	
L_e^* (ft)	0.80	4.32	11.0	0.83
h_2 (ft)	2.25			
Q at h_2 (cfs)	8.94			

Parameters in Table J.8 are defined in the preceding text.

Note: the weir dimensions for DRC stage discharge curves 30%OC (inflection point ‘a’) and 50%OC (inflection point ‘b’) are provided for comparison with the selected option (inflection point ‘c’).

This page is left intentionally blank

Appendix K

This page is left intentionally blank