



State Pollutant Discharge Elimination System (SPDES) DISCHARGE PERMIT

SIC Code:	7542	NAICS Code:	811192	SPDES Number:	NY0227111
Discharge Class (CL):	01	DEC Number:	1-4736-04677		
Toxic Class (TX):	T	Effective Date (EDP):	EDP		
Major-Sub Drainage Basin:	17 - 01	Expiration Date (ExDP):	ExDP		
Water Index Number:	Groundwater	Item No.:	-	Modification Dates (EDPM):	-
Compact Area:	-				

This SPDES permit is issued in compliance with Title 8 of Article 17 of the Environmental Conservation Law of New York State and in compliance with the Clean Water Act, as amended, (33 U.S.C. '1251 et.seq.)

PERMITTEE NAME AND ADDRESS					
Name:	Joejr sbh LLC	Attention:	John Trocchio, Manager		
Street:	404 County Road 39A				
City:	Southampton	State:	NY	Zip Code:	11968
Email:	JohnTrocchio@gmail.com	Phone:	(631) 708-6227		

is authorized to discharge from the facility described below:

FACILITY NAME, ADDRESS, AND PRIMARY OUTFALL																				
Name:		Southampton Car Wash and Detail Center																		
Address / Location:		404 County Road 39A								County:		Suffolk								
City:		Southampton						State:	NY		Zip Code:		11968							
Facility Location:		Latitude:	40	°	53	'	59	" N	& Longitude:		72	°	23	'	2	" W				
Primary Outfall No.:		001	Latitude:	40	°	53	'	59	" N	& Longitude:		72	°	23	'	2	" W			
Wastewater Description:		Car Wash Wastewater		Receiving Water:		Groundwater			NAICS:		811192		Class:		GA		Standard:		GA	

and the additional outfalls listed in this permit, in accordance with: effluent limitations; monitoring and reporting requirements; other provisions and conditions set forth in this permit; and 6 NYCRR Part 750-1 and 750-2.

This permit and the authorization to discharge shall expire on midnight of the expiration date shown above and the permittee shall not discharge after the expiration date unless this permit has been renewed or extended pursuant to law. To be authorized to discharge beyond the expiration date, the permittee shall apply for permit renewal not less than 180 days prior to the expiration date shown above.

DISTRIBUTION:

BWP Permit Coordinator (permit.coordinator@dec.ny.gov)

Permit Writer

RWE

RPA

SCDHS

Permit Administrator:	
Address:	50 Circle Road, Stony Brook, NY 11790
Signature	Date

Contents

SUMMARY OF ADDITIONAL OUTFALLS.....	3
DEFINITIONS.....	4
PERMIT LIMITS, LEVELS AND MONITORING.....	5
STORMWATER POLLUTION PREVENTION REQUIREMENTS	10
BEST MANAGEMENT PRACTICES (BMPs) FOR INDUSTRIAL FACILITIES	11
SCHEDULE OF COMPLIANCE.....	13
MONITORING LOCATIONS.....	15
GENERAL REQUIREMENTS.....	16
RECORDING, REPORTING AND ADDITIONAL MONITORING REQUIREMENTS.....	17
D. Schedule of Additional Submittals:.....	17

SUMMARY OF ADDITIONAL OUTFALLS

Outfall	Wastewater Description	NAICS Code	Outfall Latitude			Outfall Longitude		
002	Treated Sanitary	7542	40 °	53 '	59 " N	72 °	23 '	5 " W
Receiving Water: Groundwater		Design Flow:	160			Class:	GA	

No Monitoring Required for Outfall 002

DRAFT

DEFINITIONS

TERM	DEFINITION
7-Day Geo Mean	The highest allowable geometric mean of daily discharges over a calendar week.
7-Day Average	The average of all daily discharges for each 7-days in the monitoring period. The sample measurement is the highest of the 7-day averages calculated for the monitoring period.
12-Month Rolling Average (12 MRA)	The current monthly value of a parameter, plus the sum of the monthly values over the previous 11 months for that parameter, divided by the number of months for which samples were collected in the 12-month period.
30-Day Geometric Mean	The highest allowable geometric mean of daily discharges over a calendar month, calculated as the antilog of: the sum of the log of each of the daily discharges measured during a calendar month divided by the number of daily discharges measured during that month.
Action Level	Action level means a monitoring requirement characterized by a numerical value that, when exceeded, triggers additional permittee actions and department review to determine if numerical effluent limitations should be imposed.
Compliance Level / Minimum Level	A compliance level is an effluent limitation. A compliance level is given when the water quality evaluation specifies a Water Quality Based Effluent Limit (WQBEL) below the Minimum Level. The compliance level shall be set at the Minimum Level (ML) for the most sensitive analytical method as given in 40 CFR Part 136, or otherwise accepted by the DEC.
Daily Discharge	The discharge of a pollutant measured during a calendar day or any 24-hour period that reasonably represents the calendar day for the purposes of sampling. For pollutants expressed in units of mass, the 'daily discharge' is calculated as the total mass of the pollutant discharged over the day. For pollutants with limitations expressed in other units of measurement, the 'daily discharge' is calculated as the average measurement of the pollutant over the day.
Daily Maximum	The highest allowable Daily Discharge.
Daily Minimum	The lowest allowable Daily Discharge.
Effective Date of Permit (EDP or EDPM)	The date this permit is in effect.
Effluent Limitations	Effluent limitation means any restriction on quantities, quality, rates and concentrations of chemical, physical, biological, and other constituents of effluents that are discharged into waters of the state.
Expiration Date of Permit (ExDP)	The date this permit is no longer in effect.
Instantaneous Maximum	The maximum level that may not be exceeded at any instant in time.
Instantaneous Minimum	The minimum level that must be maintained at all instants in time.
Monthly Average	The highest allowable average of daily discharges over a calendar month, calculated as the sum of each of the daily discharges measured during a calendar month divided by the number of daily discharges measured during that month.
Outfall	The terminus of a sewer system, or the point of emergence of any waterborne sewage, industrial waste or other wastes or the effluent therefrom, into the waters of the State.
Range	The minimum and maximum instantaneous measurements for the reporting period must remain between the two values shown.
Receiving Water	The classified waters of the state to which the listed outfall discharges.
Sample Frequency / Sample Type / Units	See DEC's "DMR Manual for Completing the Discharge Monitoring Report for the SPDES" for information on sample frequency, type and units.

PERMIT LIMITS, LEVELS AND MONITORING

OUTFALL	DESCRIPTION	RECEIVING WATER	EFFECTIVE	EXPIRING
001	Treated Car Wash Wastewater	Groundwater	EDP	ExDP

PARAMETER	EFFLUENT LIMITATION					MONITORING REQUIREMENTS				FN
	Type	Limit	Units	Limit	Units	Sample Frequency	Sample Type	Location		
								Inf.	Eff.	
Flow	Daily Maximum	6,000	gpd	-	-	Continuous	Meter	-	X	
pH	Daily Minimum	6.5	SU	-	-	1/Month	Grab	-	X	
	Daily Maximum	8.5	SU	-	-					
Chloride	Daily Maximum	500	mg/L	-	-	1/Month	Grab	-	X	
Oil & Grease	Daily Maximum	15	mg/L	-	-	1/Month	Grab	-	X	
Surfactants	Daily Maximum	1	mg/L	-	-	1/Month	Grab	-	X	
Total Dissolved Solids (TDS)	Daily Maximum	1,000	mg/L	-	-	1/Month	Grab	-	X	
Total Suspended Solids (TSS)	Daily Maximum	30	mg/L	-	-	1/Month	Grab	-	X	
Aluminum	Daily Maximum	2,000	µg/L	-	-	1/Month	Grab	-	X	
Antimony	Daily Maximum	6	µg/L	-	-	1/Month	Grab	-	X	
Arsenic	Daily Maximum	50	µg/L	-	-	1/Month	Grab	-	X	
Beryllium	Daily Maximum	3	µg/L	-	-	1/Month	Grab	-	X	
Cadmium	Daily Maximum	10	µg/L	-	-	1/Month	Grab	-	X	
Chromium	Daily Maximum	100	µg/L	-	-	1/Month	Grab	-	X	
Copper	Daily Maximum	400	µg/L	-	-	1/Month	Grab	-	X	1
Iron	Daily Maximum	600	µg/L	-	-	1/Month	Grab	-	X	1
Lead	Daily Maximum	50	µg/L	-	-	1/Month	Grab	-	X	
Nickel	Daily Maximum	200	µg/L	-	-	1/Month	Grab	-	X	
Silver	Daily Maximum	100	µg/L	-	-	1/Month	Grab	-	X	
Thallium	Daily Maximum	0.5	µg/L	-	-	1/Month	Grab	-	X	1
Zinc	Daily Maximum	5,000	µg/L	-	-	1/Month	Grab	-	X	
Acetone	Daily Maximum	50	µg/L	-	-	1/Month	Grab	-	X	
Benzene	Daily Maximum	1	µg/L	-	-	1/Month	Grab	-	X	
Chloroform	Daily Maximum	7	µg/L	-	-	1/Month	Grab	-	X	
Di [2-ethylhexyl] phthalate	Daily Maximum	6.4	µg/L	-	-	1/Month	Grab	-	X	2
Diethylphthalate	Daily Maximum	50	µg/L	-	-	1/Month	Grab	-	X	
Ethylbenzene	Daily Maximum	5	µg/L	-	-	1/Month	Grab	-	X	
Methylene Chloride	Daily Maximum	5	µg/L	-	-	1/Month	Grab	-	X	
Napthalene	Daily Maximum	10	µg/L	-	-	1/Month	Grab	-	X	
Phenol, Total	Daily Maximum	6.4	µg/L	-	-	1/Month	Grab	-	X	3

Page 6 of 10 V.

PARAMETER	EFFLUENT LIMITATION					MONITORING REQUIREMENTS				FN
	Type	Limit	Units	Limit	Units	Sample Frequency	Sample Type	Location		
								Inf.	Eff.	
Tetrachloroethene	Daily Maximum	5	µg/L	-	-	1/Month	Grab	-	X	
Toluene	Daily Maximum	5	µg/L	-	-	1/Month	Grab	-	X	
Trichloroethene	Daily Maximum	5	µg/L	-	-	1/Month	Grab	-	X	
Xylene (ortho)	Daily Maximum	5	µg/L	-	-	1/Month	Grab	-	X	
Xylene (meta + para)	Daily Maximum	10	µg/L	-	-	1/Month	Grab	-	X	

See Footnotes on Page 9

EMERGING CONTAMINANTS		Limit	Units	Action Level	Units	Sample Frequency	Sample Type	Inf.	Eff.	FN
OUTFALL 001										
Perfluorobutanoic Acid (PFBA) CAS No. 375-22-4 DMR Code: 51522	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluoropentanoic Acid (PFPeA) CAS No. 2706-90-3 DMR Code: 51623	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorohexanoic Acid (PFHxA) CAS No. 307-24-4 DMR Code: 51624	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluoroheptanoic Acid (PFHpA) CAS No. 375-85-9 DMR Code: 51625	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorooctanoic Acid (PFOA) CAS No. 335-67-1 DMR Code: 51521	Daily Maximum	6.7	ng/l	-	-	1/quarter	Grab	-	X	1,5,6
Perfluorononanoic Acid (PFNA) CAS No. 375-95-1 DMR Code: 51626	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorodecanoic Acid (PFDA) CAS No. 335-76-2 DMR Code: 51627	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluoroundecanoic Acid (PFUnA) CAS No. 2058-94-8 DMR Code: 51628	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorododecanoic Acid (PFDoA) CAS No. 307-55-1 DMR Code: 51629	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorotridecanoic Acid (PFTriA) CAS No. 72629-94-8 DMR Code: 51630	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorotetradecanoic Acid (PFTeA) CAS No. 376-06-7 DMR Code: 51631	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorobutanesulfonic Acid (PFBS) CAS No. 375-73-5 DMR Code: 52602	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6

EMERGING CONTAMINANTS		Limit	Units	Action Level	Units	Sample Frequency	Sample Type	Inf.	Eff.	FN
OUTFALL 001										
Perfluoropentanesulfonic Acid (PFPeS) CAS No. 2706-91-4 DMR Code: 52610	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorohexanesulfonic Acid (PFHxS) CAS No. 355-46-4 DMR Code: 52605	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluoroheptanesulfonic Acid (PFHpS) CAS No. 375-92-8 DMR Code: 52604	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorooctanesulfonic Acid (PFOS) CAS No. 1763-23-1 DMR Code: 52606	Daily Maximum	2.7	ng/L	-	-	1/quarter	Grab	-	X	1,5,6
Perfluorononanesulfonic Acid (PFNS) CAS No. 68259-12-1 DMR Code: 52611	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorodecanesulfonic Acid (PFDS) CAS No. 335-77-3 DMR Code: 52603	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorododecanesulfonic Acid (PFDoS) CAS No. 79780-39-5 DMR Code: 52632	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluorooctanesulfonamide (FOSA) CAS No. 754-91-6 DMR Code: 51525	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
N-Methyl Perfluorooctanesulfonamidoacetic Acid (NMeFOSAA) CAS No. 2355-31-9 DMR Code: 51644	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
N-Ethyl Perfluorooctanesulfonamidoacetic Acid (NEtFOSAA) CAS No. 2991-50-6 DMR Code: 51643	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
1H,1H,2H,2H-Fluorotelomer Sulfonic Acid (4:2 FTS) CAS No. 757124-72-4 DMR Code: 52607	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
1H,1H,2H,2H- Fluorotelomer Sulfonic Acid (6:2 FTS) CAS No. 27619-97-2 DMR Code: 52608	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
1H,1H,2H,2H- Fluorotelomer Sulfonic Acid (8:2 FTS) CAS No. 39108-34-4 DMR Code: 52609	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
N-ethyl Perfluorooctanesulfonamide (NEtFOSA) CAS No. 4151-50-2 DMR Code: 52642	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
N-Methyl Perfluorooctane Sulfonamide (NMeFOSA) CAS No. 31506-32-8 DMR Code: 52641	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
N-Methyl Perfluorooctanesulfonamido Ethanol (NMeFOSE) CAS No. 24448-09-7 DMR Code: 51642	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6

EMERGING CONTAMINANTS		Limit	Units	Action Level	Units	Sample Frequency	Sample Type	Inf.	Eff.	FN
OUTFALL 001										
N-Ethyl Perfluorooctanesulfonamido Ethanol (NETFOSE) CAS No. 1691-99-2 DMR Code: 51641	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
9-Chlorohexadecafluoro-3- Oxanone-1-Sulfonic Acid (9Cl- PF3ONS) CAS No. 756426-58-1 DMR Code: PF003	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Hexafluoropropylene Oxide Dimer Acid (HFPO-DA or GenX) CAS No. 13252-13-6 DMR Code: 52612	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
11-Chloroeicosafluoro-3- Oxaundecane-1-Sulfonic Acid (11Cl-PF3OUdS) CAS No. 763051-92-9 DMR Code: PF004	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
4,8-Dioxo-3h- Perfluorononanoic Acid (ADONA) CAS No. 919005-14-4 DMR Code: 52636	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
3-Perfluoropropyl Propanoic Acid (3:3FTCA) CAS No. 356-02-5 DMR Code: PF001	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
2H,2H,3H,3H- Perfluorooctanoic Acid (5:3FTCA) CAS No. 914637-49-3 DMR Code: PF007	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
3-Perfluoroheptyl Propanoic Acid (7:3FTCA) CAS No. 812-70-4 DMR Code: PF005	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Nonafluoro-3,6- dioxahheptanoic Acid (NFDHA) CAS No. 151772-58-6 DMR Code: 52626	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluoro-4-Methoxybutanoic Acid (PFMBA) CAS No. 863090-89-5 DMR Code: PF006	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluoro-3-Methoxypropanoic Acid (PFMPA) CAS No. 377-73-1 DMR Code: PF002	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6
Perfluoro(2- Ethoxyethane)Sulfonic Acid (PFEEESA) CAS No. 113507-82-7 DMR Code: 52629	Daily Maximum	Monitor	ng/L	-	-	1/quarter	Grab	-	X	5,6

See Footnotes on Next Page

FOOTNOTES:

1. This is a final effluent limitation. See Schedule of Compliance for any applicable interim effluent limitations.
2. This is a Compliance Level. The calculated WQBEL is 5.
3. This is a Compliance Level. The calculated WQBEL is 2.
4. Total phenols shall be determined by colorimetric or spectrophotometric analysis using the most sufficiently sensitive method approved under 40 CFR Part 136 for total recoverable phenols.
5. Quarterly samples shall be collected in calendar quarters (Q1 – January 1st to March 31st; Q2 – April 1st to June 30th; Q3 – July 1st to September 30th; Q4 – October 1st to December 31st).
6. All PFAS compound sampling shall use EPA Method 1633/1633A. Note that "DMR code" corresponds to the 5-digit code displayed in the top left of each parameter line on the DMR page within NetDMR.

STORMWATER POLLUTION PREVENTION REQUIREMENTS

NO EXPOSURE CERTIFICATION

The permittee submitted a Conditional Exclusion for No Exposure Form on 12/11/2025, certifying that all industrial activities and materials are completely sheltered from exposure to rain, snow, snowmelt, and stormwater runoff except as allowed under 40 CFR 122.26(g)(2). The permittee must maintain a condition of no exposure for the exclusion to remain applicable. If conditions change resulting in the exposure of materials and activities to stormwater, the permittee must notify the Regional Water Engineer. The permittee must recertify a condition of no exposure every five years by completing the "No Exposure Certification Form" found on the DEC website.

DRAFT

BEST MANAGEMENT PRACTICES (BMPs) FOR INDUSTRIAL FACILITIES

Note that for some facilities, especially those with few employees or limited industrial activities, some of the below BMPs may not be applicable. It is acceptable in these cases to indicate "Not Applicable" for the portion(s) of the BMP Plan that do not apply to your facility, along with an explanation.

1. **General** - The permittee shall develop, maintain, and implement a Best Management Practices (BMP) plan to prevent releases of significant amounts of pollutants to the waters of the State through plant site runoff; spillage and leaks; sludge or waste disposal; and stormwater discharges including, but not limited to, drainage from raw material storage. The BMP plan shall be documented in narrative form and shall include the 13 minimum BMPs and any necessary plot plans, drawings, or maps. Other documents already prepared for the facility such as a Safety Manual or a Spill Prevention, Control and Countermeasure (SPCC) plan may be used as part of the plan and may be incorporated by reference. A copy of the current BMP plan shall be submitted to the DEC as required in item (2.) below and a copy must be maintained at the facility and shall be available to authorized DEC representatives upon request.
2. **Compliance Deadlines** – The initial BMP plan was received by the Department on 05/20/2015. Annually, the permittee **shall review** and modify the BMP plan whenever (a) changes at the facility materially increase the potential for releases of pollutants; (b) actual releases indicate the plan is inadequate, or (c) a letter from the DEC identifies inadequacies in the plan. The permittee shall certify that the annual review has been completed in accordance with the Schedule of Submittals. Subsequent modifications to or renewal of this permit does not reset or revise these deadlines unless a new deadline is set explicitly by such permit modification or renewal.
3. **Facility Review** - The permittee shall review all facility components or systems (including but not limited to material storage areas; in-plant transfer, process, and material handling areas; loading and unloading operations; storm water, erosion, and sediment control measures; process emergency control systems; and sludge and waste disposal areas) where materials or pollutants are used, manufactured, stored or handled to evaluate the potential for the release of pollutants to the waters of the State. In performing such an evaluation, the permittee shall consider such factors as the probability of equipment failure or improper operation, cross-contamination of storm water by process materials, settlement of facility air emissions, the effects of natural phenomena such as freezing temperatures and precipitation, fires, and the facility's history of spills and leaks. The permittee shall consider relative toxicity of the pollutant in determining the significance of potential releases. The review shall address all substances present at the facility that are identified in the SPDES application Form NY-2C (available at [SPDES Application Procedures and Forms - NYSDEC](#)) or that are required to be monitored for by the SPDES permit.
4. **13 Minimum BMPs:** Whenever the potential for a release of pollutants to State waters is determined to be present, the permittee shall identify BMPs that have been established to prevent or minimize such potential releases. Where BMPs are inadequate or absent, appropriate BMPs shall be established. In selecting appropriate BMPs, the permittee shall consider good industry practices and, where appropriate, structural measures such as secondary containment and erosion/sediment control devices and practices. USEPA guidance for development of stormwater elements of the BMP is available in *Developing Your Stormwater Pollution Prevention Plan A Guide for Industrial Operators*, February 2009, EPA 833-B-09-002. As a minimum, the plan shall include the following BMPs:

- | | | |
|-------------------------------------|---|---------------------------------|
| 1. BMP Pollution Prevention Team | 6. Security | 10. Spill Prevention & Response |
| 2. Reporting of BMP Incidents | 7. Preventive Maintenance | 11. Erosion & Sediment Control |
| 3. Risk Identification & Assessment | 8. Good Housekeeping | 12. Management of Runoff |
| 4. Employee Training | 9. Materials/Waste Handling, Storage, & Compatibility | 13. Street Sweeping |
| 5. Inspections and Records | | |

BMPs FOR INDUSTRIAL FACILITIES (continued)

5. **Stormwater Discharges from Construction Activity to Surface Waters** – Pursuant to Section 402 of the Clean Water Act (CWA), and 40 CFR 122.26(b)(14)(x), (15)(i), and (15)(ii), stormwater discharges from certain construction activities (including discharges through a municipal separate storm sewer system) are unlawful unless they are authorized by a SPDES permit. Prior to initiating such construction associated with this facility, the permittee must obtain coverage under the current version of the SPDES General Permit for Stormwater Discharges from Construction Activity (CGP) or a separate individual stormwater construction SPDES permit, if not eligible for the CGP.
6. **Required Sampling For “Hot Spot” Identification** – The permittee’s development of the BMP plan shall include sampling of waste stream segments for the purpose of pollutant “hot spot” identification. The economic achievability of effluent limits will not be considered until plant site “hot spot” sources have been identified, contained, removed or minimized through the imposition of site specific BMPs or application of internal facility treatment technology. For the purposes of this permit condition a “hot spot” is a segment of an industrial facility (including but not limited to soil, equipment, material storage areas, sewer lines etc.) which contributes elevated levels of problem pollutants to the wastewater or stormwater collection system of that facility. For the purposes of this definition, problem pollutants are substances for which treatment to meet a water quality or technology requirement may, considering the results of waste stream segment sampling, be deemed unreasonable. For the purposes of this definition, an elevated level is a concentration or mass loading of the pollutant in question which is sufficiently higher than the concentration of that same pollutant at the compliance monitoring location so as to allow for an economically justifiable removal, isolation, or B.A.T. treatment of wastewaters emanating from the segment.

SCHEDULE OF COMPLIANCE

a) The permittee shall comply with the following schedule:

Outfall(s)	Compliance Action	Compliance Date ¹
001	<u>INTERIM PROGRESS REPORT²</u> The permittee shall provide a status update on the Basis of Design Report.	EDP + 9 Months and every 9 Months thereafter until Start-up
001	<u>REPORT, PLANS, SPECIFICATIONS, AND CONSTRUCTION SCHEDULE</u> The permittee shall submit a Basis of Design Report, plans, specifications, and a construction schedule, for Department review and approval, for treatment system improvements needed to comply with all final effluent limitations. The documents must be prepared and stamped by a Professional Engineer licensed to practice in New York State. If treatment system improvements are not needed for compliance with final effluent limitations, submit a certification of compliance in lieu of the report, plans, specifications, and construction schedule.	Prior to Start-up
001	<u>CONSTRUCTION COMPLETION</u> The permittee shall provide a Construction Completion Certification ³ to the DEC (send to the Regional Water Engineer and NetDMR@dec.ny.gov) that the treatment system has been fully completed in accordance with the approved Design Documents.	EDP + 54 Months
001	<u>NOTIFICATION OF START DATE ("START-UP")</u> The permittee shall provide the Department with the proposed start date for the treatment system. This date will be used to establish the start of compliance reporting. Notice shall be provided via email to NetDMR@dec.ny.gov .	30 Days Prior to Start-up
Unless noted otherwise, the above actions are one-time requirements.		
See next page for Interim Effluent Limits.		

¹ 6 NYCRR 750-1.14 (a)

² 6 NYCRR 750-1.14 (b)

³ 6 NYCRR 750-2.10 (c)

SCHEDULE OF COMPLIANCE – Interim Effluent Limits

OUTFALL	EXPIRING
001	See Note 1

PARAMETER	INTERIM EFFLUENT LIMIT					MONITORING REQUIREMENTS				Notes
	Type	Limit	Units	Limit	Units	Sample Frequency	Sample Type	Location		
								Inf.	Eff.	
Copper	Daily Max	1,000	µg/L	-	-	1/Month	Grab	-	X	1
Iron	Daily Max	Monitor	µg/L	-	-	1/Month	Grab	-	X	1
Thallium	Daily Max	4	µg/L	-	-	1/Month	Grab	-	X	1
Perfluorooctanoic Acid (PFOA) CAS No. 335-67-1 DMR Code: 51521	Daily Max	Monitor	ng/l	-	-	1/quarter	Grab	-	X	1
Perfluorooctanesulfonic Acid (PFOS) CAS No. 1763-23-1 DMR Code: 52606	Daily Max	Monitor	ng/l	-	-	1/quarter	Grab	-	X	1


Notes:

1. Interim effluent limits expire upon successful startup of an updated treatment system or upon receipt of a certification that the existing system is capable of meeting the final effluent limits as described on the previous page of this Permit.

- The permittee shall submit a [Report of Non-compliance Event](#) form with each of the above schedule dates no later than 14 days following each elapsed date, unless conditions require more immediate notice as prescribed in 6 NYCRR Part 750-1.2(a) and 750-2. All notifications shall be sent to the locations listed under the section of this permit entitled RECORDING, REPORTING AND ADDITIONAL MONITORING REQUIREMENTS. Each notice of non-compliance shall include the following information:
 - A short description of the non-compliance;
 - A description of any actions taken or proposed by the permittee to comply with the elapsed schedule requirements without further delay and to limit environmental impact associated with the non-compliance;
 - Any details which tend to explain or mitigate an instance of non-compliance; and
 - An estimate of the date the permittee will comply with the elapsed schedule requirement and an assessment of the probability that the permittee will meet the next scheduled requirement on time.
- The permittee shall submit copies of any document required by the above schedule of compliance to the DEC Regional Water Engineer and to the Bureau of Water Permits.

MONITORING LOCATIONS

The permittee shall take samples and measurements, to comply with the monitoring requirements specified in this permit, at the location(s) specified below:

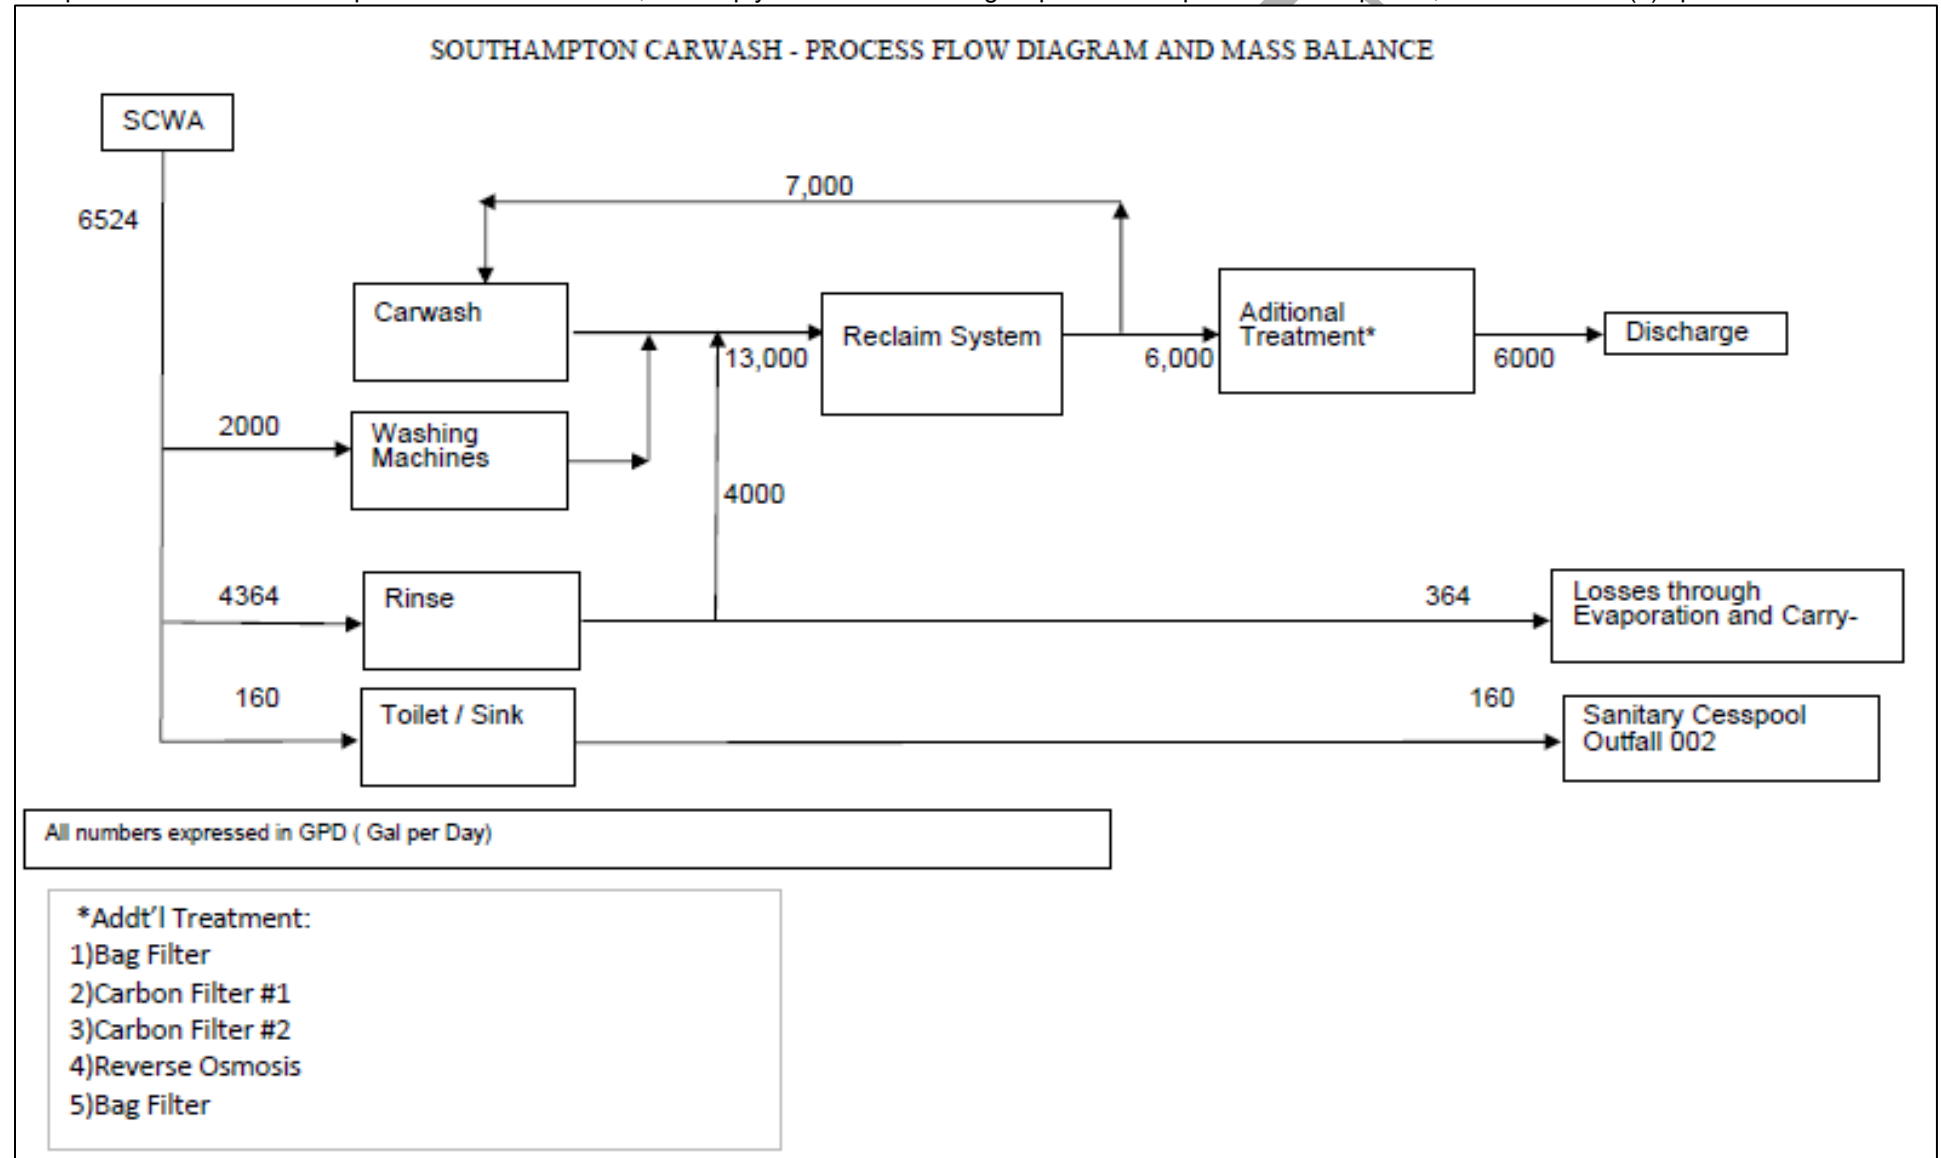

GENERAL REQUIREMENTS

- A. The regulations in 6 NYCRR Part 750 are hereby incorporated by reference and the conditions are enforceable requirements under this permit. The permittee shall comply with all requirements set forth in this permit and with all the applicable requirements of 6 NYCRR Part 750 incorporated into this permit by reference, including but not limited to the regulations in paragraphs B through H as follows:
- B. General Conditions
- | | |
|--|---|
| 1. Duty to comply | 6 NYCRR 750-2.1(e) & 2.4 |
| 2. Duty to reapply | 6 NYCRR 750-1.16(a) |
| 3. Need to halt or reduce activity not a defense | 6 NYCRR 750-2.1(g) |
| 4. Duty to mitigate | 6 NYCRR 750-2.7(f) |
| 5. Permit actions | 6 NYCRR 750-1.1(c), 1.18, 1.20 & 2.1(h) |
| 6. Property rights | 6 NYCRR 750-2.2(b) |
| 7. Duty to provide information | 6 NYCRR 750-2.1(i) |
| 8. Inspection and entry | 6 NYCRR 750-2.1(a) & 2.3 |
- C. Operation and Maintenance
- | | |
|-----------------------------------|--------------------------------------|
| 1. Proper Operation & Maintenance | 6 NYCRR 750-2.8 |
| 2. Bypass | 6 NYCRR 750-1.2(a)(17), 2.8(b) & 2.7 |
| 3. Upset | 6 NYCRR 750-1.2(a)(98) & 2.8(c) |
- D. Monitoring and Records
- | | |
|---------------------------|--|
| 1. Monitoring and records | 6 NYCRR 750-2.5(a)(2), 2.5(a)(6), 2.5(c)(1), 2.5(c)(2), & 2.5(d) |
| 2. Signatory requirements | 6 NYCRR 750-1.8 & 2.5(b) |
- E. Reporting Requirements
- | | |
|---|-----------------------------------|
| 1. Reporting requirements for non-POTWs | 6 NYCRR 750-2.5, 2.6, 2.7, & 1.17 |
| 2. Anticipated noncompliance | 6 NYCRR 750-2.7(a) |
| 3. Transfers | 6 NYCRR 750-1.17 |
| 4. Monitoring reports | 6 NYCRR 750-2.5(e) |
| 5. Compliance schedules | 6 NYCRR 750-1.14(d) |
| 6. 24-hour reporting | 6 NYCRR 750-2.7(c) & (d) |
| 7. Other noncompliance | 6 NYCRR 750-2.7(e) |
| 8. Other information | 6 NYCRR 750-2.1(f) |
- F. Sludge Management
- The permittee shall comply with all applicable requirements of 6 NYCRR Part 360 series.
- G. SPDES Permit Program Fee
- The permittee shall pay to the DEC an annual SPDES permit program fee within 30 days of the date of the first invoice, unless otherwise directed by the DEC, and shall comply with all applicable requirements of ECL 72-0602 and 6 NYCRR Parts 480, 481 and 485. Note that if there is inconsistency between the fees specified in ECL 72-0602 and 6 NYCRR Part 485, the ECL 72-0602 fees govern.
- H. Water Treatment Chemicals (WTCs)
- New or increased use and discharge of a WTC requires prior DEC review and authorization. At a minimum, the permittee must notify the DEC in writing of its intent to change WTC use by submitting a completed *WTC Notification Form* for each proposed WTC. The DEC will review that submittal and determine if a SPDES permit modification is necessary or whether WTC review and authorization may proceed under the current permit. The use and discharge of a WTC shall not proceed without prior authorization from the DEC. Examples of WTCs include biocides, coagulants, conditioners, corrosion inhibitors, defoamers, deposit control agents, flocculants, scale inhibitors, sequestrants, and settling aids.
- | |
|--|
| 1. WTC use shall not exceed the rate explicitly authorized by this permit or otherwise authorized by the DEC. |
| 2. The permittee shall maintain a logbook of all WTC use, noting for each WTC the date, time, exact location, and amount of each dosage, and, the name of the individual applying or measuring the chemical. The logbook must also document that adequate process controls are in place to ensure excessive levels of WTCs are not used. |
| 3. The permittee shall submit a completed WTC Annual Report Form each year that they use and discharge WTCs. This form shall be submitted in electronic format and attached to either the December DMR or the annual monitoring report required below. The <i>WTC Notification Form</i> and <i>WTC Annual Report Form</i> are available from the DEC's website at: SPDES Permitting of Water Treatment Chemicals . |

RECORDING, REPORTING AND ADDITIONAL MONITORING REQUIREMENTS

- A. The permittee shall retain the monitoring information required by this permit for a period of at least five years from the date of the sampling.
- B. Discharge Monitoring Reports (DMRs): The permittee shall submit completed DMR forms for each 1 month reporting period in accordance with the DMR Manual available on DEC's website.

The permittee must submit DMRs electronically using the electronic reporting tool (NetDMR) specified by DEC. Instructions on the use of NetDMR can be found at: [How To Complete And Submit Discharge Monitoring Reports \(DMRs\) - NYSDEC](#). **Hardcopy paper DMRs will only be accepted if a waiver from the electronic submittal requirements has been granted by DEC to the facility.**

The first monitoring period begins on the effective date of this permit, and, unless otherwise required, the reports are due no later than the 28th day of the month following the end of each monitoring period.

- C. Additional information required to be submitted by this permit shall be summarized and reported to the Regional Water Engineer and Bureau of Water Permits at the following addresses:

Department of Environmental Conservation
Division of Water, Bureau of Water Permits
625 Broadway, Albany, New York 12233-3505

Phone: (518) 402-8111

Department of Environmental Conservation
Regional Water Engineer, Region 1
50 Circle Road, Stony Brook, New York, 11790-3409

Phone: (631) 444-0405

- D. Schedule of Additional Submittals:

The permittee shall submit the following information to the Regional Water Engineer and to the Bureau of Water Permits, unless otherwise instructed:

Outfall(s)	SCHEDULE OF ADDITIONAL SUBMITTALS - Required Action	Due Date
001	<u>ANNUAL BMP PLAN REVIEW</u> The permittee shall annually review the BMP plan submitted to this DEC on 06/27/2013. The BMP plan shall be modified consistent with BMPs FOR INDUSTRIAL FACILITIES above. All BMP plan revisions must be submitted to the Regional Water Engineer within 30 days. The permittee shall certify in writing, as an attachment to the December Discharge Monitoring Report (DMR), that the annual review has been completed.	Annually on January 28 th
001	<u>WATER TREATMENT CHEMICAL (WTC) ANNUAL REPORT FORM</u> The permittee shall submit a completed WTC Annual Report Form each year that Water Treatment Chemicals are used. The form shall be attached to the December DMR.	Annually on January 28 th

Unless noted otherwise, the above actions are one-time requirements.

- E. Monitoring and analysis shall be conducted using sufficiently sensitive test procedures approved under 40 CFR Part 136, unless other test procedures have been specified in this permit.
- F. More frequent monitoring of the discharge(s), monitoring point(s), or waters of the State than required by the permit, where analysis is performed by a certified laboratory or where such analysis is not required to be performed by a certified laboratory, shall be included in the calculations and recording of the data on the corresponding DMRs.
- G. Calculations which require averaging of measurements shall utilize an arithmetic mean unless otherwise specified in this permit.

- H. Unless otherwise specified, all information recorded on the DMRs shall be based upon measurements and sampling carried out during the most recently completed reporting period.
- I. Any laboratory test or sample analysis required by this permit for which the State Commissioner of Health issues certificates of approval pursuant to section 502 of the Public Health Law shall be conducted by a laboratory which has been issued a certificate of approval. Inquiries regarding laboratory certification should be directed to the New York State Department of Health, Environmental Laboratory Accreditation Program.

DRAFT

Permittee: Joejr sbh LLC
Facility: Southampton Car Wash and Detail Center
SPDES Number: NY0227111
USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
Permit Writer: Ryan O'Mara
Water Quality Reviewer: -
Full Technical Review

SPDES Permit Fact Sheet

Joejr sbh LLC

Southampton Car Wash and Detail Center

NY0227111



Contents

Summary of Permit Changes	3
Administrative History	3
Facility Information.....	4
Site Overview	4
Enforcement History	5
Existing Effluent Quality.....	5
Receiving Water Information	5
Critical Receiving Water Data	6
Permit Requirements	6
Anti-backsliding	6
Antidegradation	6
Best Management Practices (BMPs) for Industrial Facilities	6
Schedule of Compliance.....	6
Emerging Contaminant Monitoring	6
Schedule of Additional Submittals	7
OUTFALL AND RECEIVING WATER SUMMARY TABLE	8
POLLUTANT SUMMARY TABLE.....	8
Outfall 001	8
Outfall 001 EMERGING CONTAMINANTS.....	13
Appendix: Regulatory and Technical Basis of Permit Authorizations.....	18
Regulatory References.....	18
Outfall and Receiving Water Information	18
Existing Effluent Quality.....	18
Permit Requirements.....	19

Summary of Permit Changes

A State Pollutant Discharge Elimination System (SPDES) EBPS permit renewal has been drafted for the Southampton Car Wash and Detail Center. The changes to the permit are summarized below:

- Updated permit format, definitions, and general conditions
- The effluent limit for Copper was modified from 1,000-mg/l to a daily maximum of 400-mg/l in accordance with the maximum allowable effluent concentrations for groundwater discharges outlined in 6 NYCRR Part 703.6
- The effluent limit for Iron was modified from No Net Gain to a daily maximum of 600-mg/l in accordance with the maximum allowable effluent concentrations for groundwater discharges outlined in 6 NYCRR Part 703.6
- The effluent limit for Thallium was modified from 4-mg/l to a daily maximum of 0.5-mg/l in accordance with the maximum allowable effluent concentrations for groundwater discharges outlined in 6 NYCRR Part 703.6
- The effluent limit for Di [2-ethylhexyl] phthalate was modified from 5-mg/l to a daily maximum of 6.4-mg/l to represent the method limit of the most sensitive test method outlined in 40 CFR Part 136
- The effluent limit for Phenols, Total was modified from 2-mg/l to a daily maximum of 6.4-mg/l to represent the method limit of the most sensitive test method outlined in 40 CFR Part 136
- New Effluent Limits for PFOS & PFOA have been added and monitoring, without numerical effluent limits, for 38 additional PFAS compounds has been included
- A schedule of compliance has been added to allow for time to consider design improvements and time to construct the chosen improvements while continuing to operate and work toward meeting final effluent limits

This fact sheet summarizes the information used to determine the effluent limitations (limits) and other conditions contained in the permit. General background information including the regulatory basis for the effluent limitations and other conditions are in the [Appendix](#) linked throughout this fact sheet.

Administrative History

6/1/2013 The last full technical review was performed and the SPDES permit became effective with a new ten-year term and expiration date of 5/31/2023. The 2013 permit, along with all subsequent modifications, has formed the basis of this permit.

The permit was administratively renewed in 2023. The current permit administrative renewal was effective until 10/31/2033.

6/24/2025 New York State Department of Environmental Conservation (DEC) issued a Request for Information (RFI) to modify and renew the SPDES permit due to the facility's EBPS score¹. At the time of the RFI, the facility had an EBPS score of 356.

12/12/2025 The Joejr sbh LLC submitted a NY-2C permit application.

The Notice of Complete Application, published in the [Environmental Notice Bulletin](#) and newspapers, contains information on the public notice process.

¹ Pursuant to 6 NYCRR 750-1.18 and NYS Environmental Benefit Permit Strategy (EBPS)

Facility Information

This is an industrial facility (SIC code(s) 7542) that washes vehicles using various soaps and wax compounds. Effluent consists of treated car wash wastewater. The current treatment system includes the following treatment units:

- Two (2) carbon filters
- Reverse Osmosis
- Two (2) bag filters

Sludge and accumulated sediment is pumped out and hauled offsite by a licensed hauler. The outfall is discharges to groundwater through leaching pits on the facility's property.

Site Overview

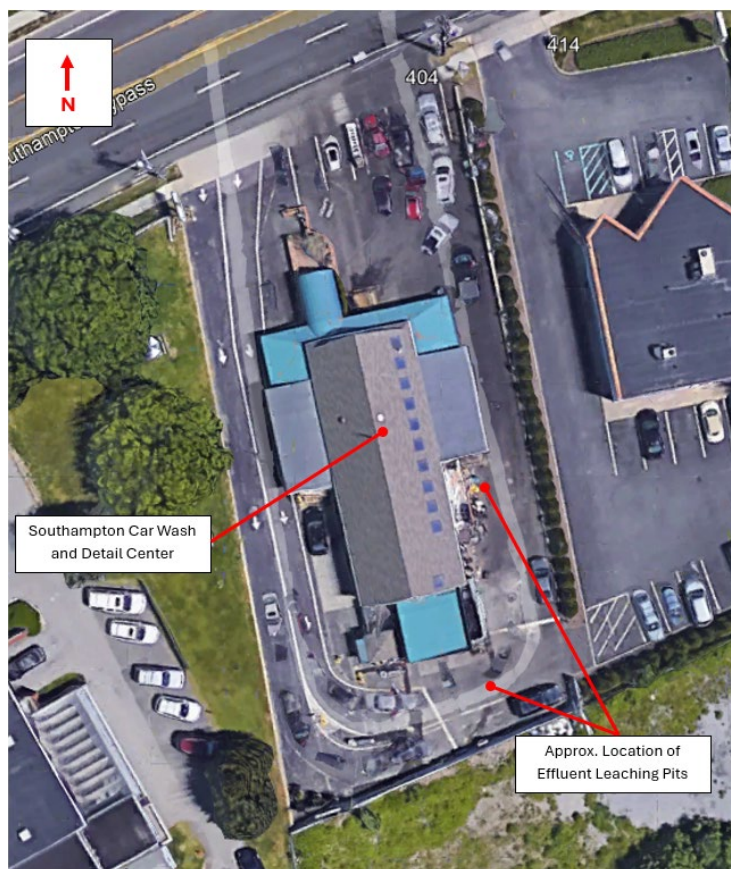


Figure 1: Southampton Car Wash Location

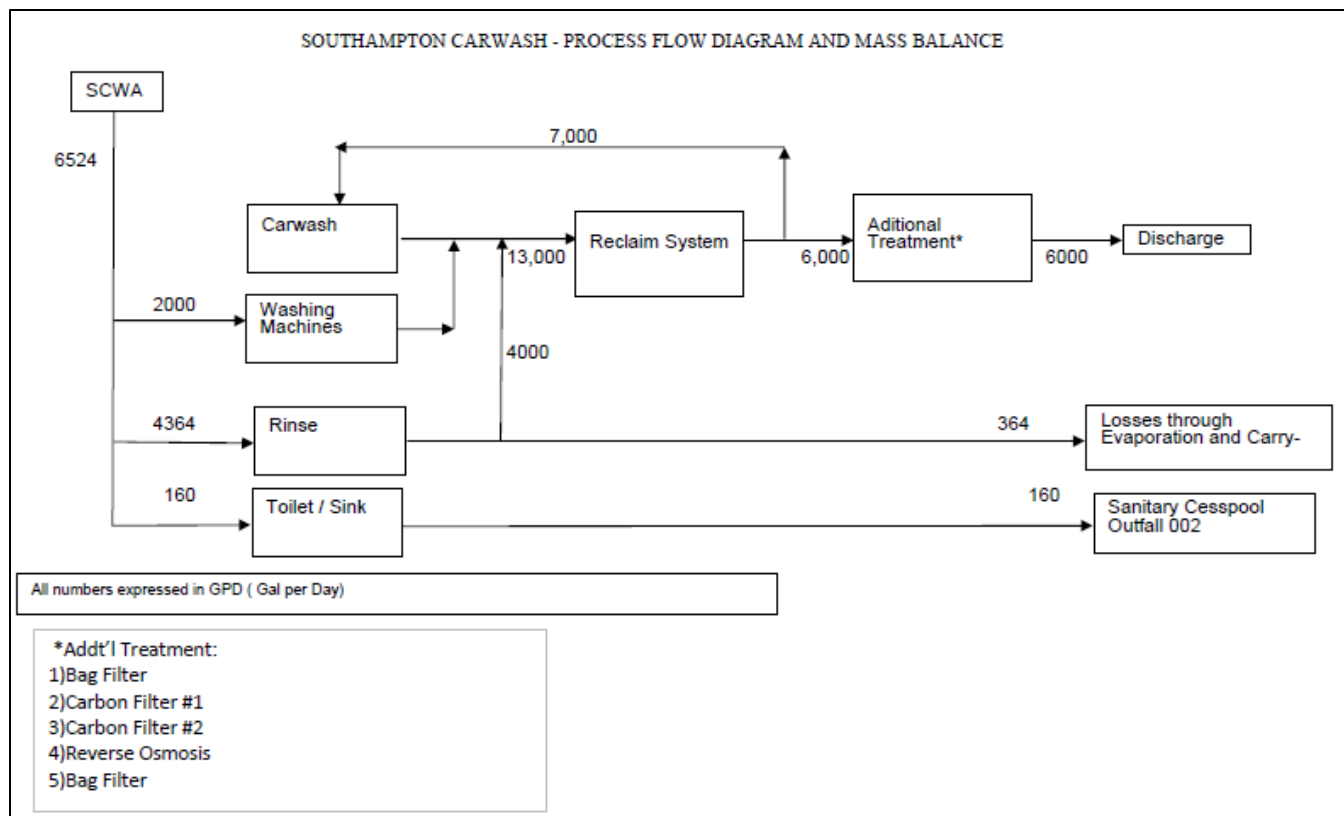


Figure 2: Process Flow Diagram

Enforcement History

Compliance and enforcement information can be found on the EPA's [Enforcement and Compliance History Online \(ECHO\)](#) website.

Existing Effluent Quality

The [Pollutant Summary Table](#) presents the existing effluent quality and effluent limitations. The existing effluent quality was determined from Discharge Monitoring Reports and the application submitted by the permittee for the period 1/1/2021 to 1/1/2026. [Appendix Link](#)

Receiving Water Information

The facility discharges via the following outfalls:

Outfall No.	SIC Code	Wastewater Type	Receiving Water
001	7542	Treated Car Wash Wastewater	Groundwater, Class GA
002	7542	Sanitary Wastewater	Groundwater, Class GA

See the [Outfall and Receiving Water Summary Table](#) and [Appendix](#) for additional information.

Critical Receiving Water Data

The facility discharges to groundwater, Class GA, via onsite leaching pits. The effluent limitations for Outfall 001 were developed with no dilution, based on groundwater quality standards found in 6 NYCRR 703.5 and TOGS 1.1.1 (Part I) and groundwater effluent limitations contained in 6 NYCRR 703.6 and TOGS 1.1.1 (Part II).

Critical receiving water data are listed in the [Pollutant Summary Table](#) at the end of this fact sheet. [Appendix Link](#)

Permit Requirements

The technology based effluent limitations ([TBELs](#)), water quality-based effluent limitations ([WQBELs](#)), [Existing Effluent Quality](#) and a discussion of the selected effluent limitation for each pollutant present in the discharge are provided in the [Pollutant Summary Table](#).

None of the seven criteria that are indicative of potential toxicity are applicable to this facility; therefore, WET testing has not been included in the permit. [Appendix Link](#)

Anti-backsliding

The limitations contained in the permit are at least as stringent as the previous permit limits and there are no instances of backsliding.

[Appendix Link](#)

Antidegradation

The permit contains effluent limitations which ensure that the best usages of the receiving waters will be maintained. The Notice of Complete Application published in the Environmental Notice Bulletin contains information on the State Environmental Quality Review (SEQR)² determination.

[Appendix Link](#)

Best Management Practices (BMPs) for Industrial Facilities

In accordance with 6 NYCRR 750-1.14(f) and 40 CFR 122.44(k), the permittee is required to develop and implement a BMP plan that prevents, or minimizes the potential for, the release of toxic or hazardous pollutants to state waters. The BMP plan requires annual review by the permittee. [Appendix Link](#)

Schedule of Compliance

A Schedule of Compliance has been included³ for the following items ([Appendix Link](#)):

- Due to changes in effluent limits and addition of new parameters to the permit, a compliance timeframe has been added to allow to the permittee time to design and construct any necessary upgrades that are needed to treat to the new permit limits.

Emerging Contaminant Monitoring

Based on the available data, water quality-based effluent limitations for perfluorooctanoic acid (PFOA) and perfluorooctanesulfonic acid (PFOS) have been specified with monitoring required for the remaining 38 per- and polyfluoroalkyl substances (PFAS) compounds pursuant to 6 NYCRR 750-1.13(b). Monitoring requirements are also consistent with guidance released in EPA memos dated April 28, 2022, and December 5, 2022. Please see the [Pollutant Summary Table](#)

² As prescribed by 6 NYCRR Part 617

³ Pursuant to 6 NYCRR 750-1.14

Permittee: Joejr sbh LLC
Facility: Southampton Car Wash and Detail Center
SPDES Number: NY0227111
USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
Permit Writer: Ryan O'Mara
Water Quality Reviewer: -
Full Technical Review

below for more information. An associated compliance schedule item has been included for achieving the WQBELs. As specified in the Schedule of Compliance, in accordance with 6 NYCRR 750-1.14(b), the permittee is required to submit interim progress reports every nine (9) months until the compliance deadline.

[Appendix Link](#)

Schedule of Additional Submittals

Updated BMP Plan

Please see [BMPs for Industrial Facilities](#) above.

Stormwater No Exposure Certification

In accordance with 40 CFR 122.26(g)(iii) and 6 NYCRR 750-1.25(c), the permittee must submit the [form](#), signed in accordance with 6 NYCRR 750-1.18, every five years certifying that the facility is eligible for the no exposure certification. Please see [Stormwater Pollution Prevention Requirements](#) above.

Permittee: Joejr sbh LLC
 Facility: Southampton Car Wash and Detail Center
 SPDES Number: NY0227111
 USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
 Permit Writer: Ryan O'Mara
 Water Quality Reviewer: -
 Full Technical Review

OUTFALL AND RECEIVING WATER SUMMARY TABLE

Outfall	Latitude	Longitude	Receiving Water Name	Water Class	Water Index No. / Priority Waterbody Listing (PWL) No.	Major / Sub Basin	Hardness (mg/L)	1Q10 (MGD)	7Q10 (MGD)	30Q10 (MGD)	Critical Effluent Flow (gpd)	Dilution Ratio		
												A(A)	A(C)	HEW
001	40° 53' 59" N	72° 23' 2" W	Groundwater	GA	Groundwater PWL: GA	17/01	-	-	-	-	6,000-gpd	-	-	-
002	40° 53' 59" N	72° 23' 5" W	Groundwater	GA	Groundwater PWL: GA	17/01	-	-	-	-	160-gpd	-	-	-

POLLUTANT SUMMARY TABLE

Outfall 001

Outfall #	001	Description of Wastewater: Treated Car Wash Wastewater													
		Type of Treatment: Filter Bag, Dual Carbon Filters, Reverse Osmosis, Filter Bag, Discharge to Groundwater													
Effluent Parameter	Units	Averaging Period	Existing Discharge Data			TBELs		Water Quality Data & WQBELs						ML	Basis for Permit Requirement
			Permit Limit	Existing Effluent Quality ⁴	# of Data Points Detects / Non-Detects	Limit	Basis	Ambient Bkgd. Conc.	Projected Instream Conc.	WQ Std. or GV	WQ Type	Calc. WQBEL	Basis		
General Notes: This is a proposed facility without a current discharge; therefore, existing sample data was not provided. All applicable water quality standards were reviewed for development of the WQBELs. The standard and WQBEL shown below represent the most stringent. The technology based effluent limitations (TBELs) were developed from TOGS 1.2.1 Att.C, for category J (miscellaneous) treatment systems.															
Flow Rate	GPD	Daily Max	6,000	3,005 Actual Max	61/0	6,000	Design Flow	No alterations that will impair the waters for their best usages.				703.2	-	TBEL	
	The flow limit has been set at the design flow of the wastewater treatment facility.														
pH	SU	Minimum	6.5	5.9 Actual Min	60/0	6.0	40 CFR 133.102	-	-	6.5 – 8.5	Range	6.5 - 8.5	703.3	-	WQBEL
		Maximum	8.5	8.3 Actual Max	60/0	9.0									
	Consistent with TOGS 1.2.1, TBELs reflect the available treatment technology listed in Attachment C. Given the available dilution, an effluent limitation equal to the WQS is appropriate.														
Chloride	mg/L	Daily Max	500	140	45/15	500	Existing Permit Limit	-	-	500	-	500	703.6	-	WQBEL
	Due to the industry type, Chloride is being added to this permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														

⁴ Existing Effluent Quality: Unless otherwise stated, Daily Max = 99% lognormal; Monthly Avg = 95% lognormal (for datasets with ≤3 nondetects); Daily Max = 99% delta-lognormal; Monthly Avg = 95% delta-lognormal (for datasets with >3 nondetects)

Permittee: Joejr sbh LLC
 Facility: Southampton Car Wash and Detail Center
 SPDES Number: NY0227111
 USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
 Permit Writer: Ryan O'Mara
 Water Quality Reviewer: -
 Full Technical Review

Outfall #	001	Description of Wastewater: Treated Car Wash Wastewater													
		Type of Treatment: Filter Bag, Dual Carbon Filters, Reverse Osmosis, Filter Bag, Discharge to Groundwater													
Effluent Parameter	Units	Averaging Period	Existing Discharge Data			TBELs		Water Quality Data & WQBELs						ML	Basis for Permit Requirement
			Permit Limit	Existing Effluent Quality ⁴	# of Data Points Detects / Non-Detects	Limit	Basis	Ambient Bkgd. Conc.	Projected Instream Conc.	WQ Std. or GV	WQ Type	Calc. WQBEL	Basis		
Oil & Grease	mg/L	Daily Max	15	50.1	9/51	15	Existing Permit Limit	-	-	15	-	15	703.6		WQBEL
	Due to the industry type, Oil & Grease is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater effluent limitation.														
Surfactants	mg/L	Daily Max	1	0.45	9/51	1	Existing Permit Limit	-	-	1	-	1			WQBEL
	Due to the industry type, Surfactants is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater effluent limitation.														
Total Dissolved Solids (TDS)	mg/L	Daily Max	1,000	653	59/1	1,000	Existing Permit Limit	-	-	1,000	-	1,000	703.6	-	WQBEL
	Total Dissolved Solids is added to the permit due to industry type and regional demands. With the absence of dilution to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Total Settleable Solids (TSS)	mg/L	Daily Max	30	9.1	2/58	30	Existing Permit Limit	-	None from sewage, industrial wastes or other wastes that will cause deposition or impair the waters for their best usages.			703.2	-	TBEL	
	Consistent with TOGS 1.2.1, TBELs reflect the available treatment technology listed in Attachment C.														
Aluminum	µg/L	Daily Max	2,000	229.3	2/52	2,000	Existing Permit Limit	-	-	2,000	-	2,000	703.6	-	WQBEL
	Due to the industry type, Aluminum is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater effluent limitation.														
Antimony	µg/L	Daily Max	6	15.2	1/59	6	Existing Permit Limit	-	-	6	-	6	703.6	-	WQBEL
	Due to the industry type, Antimony is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Arsenic	µg/L	Daily Max	50	1.3	1/59	50	Existing Permit Limit	-	-	50	-	50	703.6	-	WQBEL
	Due to the industry type, Arsenic is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Beryllium	µg/L	Daily Max	3	ND	0/60	3	Existing Permit Limit	-	-	3	-	3	TOGS 1.1.1	-	WQBEL
	Due to the industry type, Beryllium is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														

Permittee: Joejr sbh LLC
 Facility: Southampton Car Wash and Detail Center
 SPDES Number: NY0227111
 USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
 Permit Writer: Ryan O'Mara
 Water Quality Reviewer: -
 Full Technical Review

Outfall #	001	Description of Wastewater: Treated Car Wash Wastewater													
		Type of Treatment: Filter Bag, Dual Carbon Filters, Reverse Osmosis, Filter Bag, Discharge to Groundwater													
Effluent Parameter	Units	Averaging Period	Existing Discharge Data			TBELs		Water Quality Data & WQBELs						ML	Basis for Permit Requirement
			Permit Limit	Existing Effluent Quality ⁴	# of Data Points Detects / Non-Detects	Limit	Basis	Ambient Bkgd. Conc.	Projected Instream Conc.	WQ Std. or GV	WQ Type	Calc. WQBEL	Basis		
Cadmium	µg/L	Daily Max	10	0.002	1/59	10	Existing Permit Limit	-	-	10	-	10	703.6	-	WQBEL
	Due to the industry type, Cadmium is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Chromium	µg/L	Daily Max	100	ND	0/59	100	Existing Permit Limit	-	-	100	-	100	703.6	-	WQBEL
	Due to the industry type, Chromium is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Copper	µg/L	Daily Max	1,000	21.9	2/58	1,000	Existing Permit Limit	-	-	400	-	400	703.6	0.01	WQBEL
	Due to the industry type, Copper is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Iron	µg/L	Daily Max	600	390	1/59	600	Existing Permit Limit	-	-	600	-	600	703.6	-	WQBEL
	Due to industry type. Iron is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Lead	µg/L	Daily Max	50	50	2/58	50	Existing Permit Limit	-	-	50	-	50	703.6	-	WQBEL
	Due to the industry type, Lead is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Nickel	µg/L	Daily Max	200	0.81	5/55	200	Existing Permit Limit	-	-	200	-	200	703.6	-	WQBEL
	Due to the industry type, Nickel is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Silver	µg/L	Daily Max	100	ND	0/60	100	Existing Permit Limit	-	-	100	-	100	703.6	-	WQBEL
	Due to the industry type, Silver is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Thallium	µg/L	Daily Max	4	4.8	2/58	4	Existing Permit Limit	-	-	0.5	-	0.5	TOGS 1.1.1	0.1	WQBEL
	Due to the industry type, Thallium is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Zinc	µg/L	Daily Max	5,000	50	1/59	-	-	-	-	5,000	-	5,000	703.6	-	WQBEL
	Due to the industry type, Zinc is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														

Permittee: Joejr sbh LLC
 Facility: Southampton Car Wash and Detail Center
 SPDES Number: NY0227111
 USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
 Permit Writer: Ryan O'Mara
 Water Quality Reviewer: -
 Full Technical Review

Outfall #	001	Description of Wastewater: Treated Car Wash Wastewater													
		Type of Treatment: Filter Bag, Dual Carbon Filters, Reverse Osmosis, Filter Bag, Discharge to Groundwater													
Effluent Parameter	Units	Averaging Period	Existing Discharge Data			TBELs		Water Quality Data & WQBELs						ML	Basis for Permit Requirement
			Permit Limit	Existing Effluent Quality ⁴	# of Data Points Detects / Non-Detects	Limit	Basis	Ambient Bkgd. Conc.	Projected Instream Conc.	WQ Std. or GV	WQ Type	Calc. WQBEL	Basis		
Acetone	µg/L	Daily Max	50	134.5	8/52	50	Existing Permit Limit	-	-	50	-	50	TOGS 1.1.1	-	WQBEL
	Due to the industry type, Acetone is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Benzene	µg/L	Daily Max	1	ND	0/61	1	Existing Permit Limit	-	-	1	-	1	703.6	-	WQBEL
	Due to the industry type, Benzene is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Chloroform	µg/L	Daily Max	7	1	1/60	1	Existing Permit Limit	-	-	7	-	7	703.6	-	WQBEL
	Due to the industry type, Chloroform is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Di [2-ethylhexyl] phthalate	µg/L	Daily Max	5	209	3/48	5	Existing Permit Limit	-	-	5	-	5	TOGS 1.1.1	6.4	ML
	Due to the industry type, Di [2-ethylhexyl] phthalate is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Diethyl phthalate	µg/L	Daily Max	50	ND	0/50	50	Existing Permit Limit	-	-	50	-	50	TOGS 1.1.1	-	WQBEL
	Due to the industry type, Diethyl phthalate is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Ethylbenzene	µg/L	Daily Max	5	ND	0/61	5	Existing Permit Limit-	-	-	5	-	5	TOGS 1.1.1	-	WQBEL
	Due to the industry type, Ethylbenzene is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Phenol, Total	µg/L	Daily Max	5	6.99	4/47	5	Existing Permit Limits	-	-	2	-	2	703.6	6.4	ML
	Due to the industry type, Phenol, Total is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Methylene Chloride	µg/L	Daily Max	5	ND	0/61	5	Existing Permit Limit	-	-	5	-	5	703.6	-	WQBEL
	Due to the industry type, Methylene Chloride is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Naphthalene	µg/L	Daily Max	10	ND	0/55	10	Existing Permit Limit	-	-	10	-	10	TOGS 1.1.1	-	WQBEL
	Due to the industry type, Naphthalene is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														

Permittee: Joejr sbh LLC
 Facility: Southampton Car Wash and Detail Center
 SPDES Number: NY0227111
 USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
 Permit Writer: Ryan O'Mara
 Water Quality Reviewer: -
 Full Technical Review

Outfall #	001	Description of Wastewater: Treated Car Wash Wastewater													
		Type of Treatment: Filter Bag, Dual Carbon Filters, Reverse Osmosis, Filter Bag, Discharge to Groundwater													
Effluent Parameter	Units	Averaging Period	Existing Discharge Data			TBELs		Water Quality Data & WQBELs						ML	Basis for Permit Requirement
			Permit Limit	Existing Effluent Quality ⁴	# of Data Points Detects / Non-Detects	Limit	Basis	Ambient Bkgd. Conc.	Projected Instream Conc.	WQ Std. or GV	WQ Type	Calc. WQBEL	Basis		
Tetrachloroethene	µg/L	Daily Max	5	5.75	1/59	5	Existing Permit Limit	-	-	5	-	5	TOGS 1.1.1	-	WQBEL
	Due to the industry type, Tetrachloroethene is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Toluene	µg/L	Daily Max	5	ND	0/61	5	Existing Permit Limit	-	-	5	-	5	TOGS 1.1.1	-	WQBEL
	Due to the industry type, Toluene is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Trichloroethene	µg/L	Daily Max	5	ND	0/52	5	Existing Permit Limits	-	-	5	-	5	703.6	-	WQBEL
	Due to the industry type, Trichloroethene is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Xylene-Ortho	µg/L	Daily Max	5	ND	0/60	5	Existing Permit Limit	-	-	5	-	5	TOGS 1.1.1	-	WQBEL
	Due to the industry type, Xylene-Ortho is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Xylene-Para+Meta	µg/L	Daily Max	10	ND	0/61	10	Existing Permit Limit	-	-	10	-	10	TOGS 1.1.1	-	WQBEL
	Due to the industry type, Xylene - Para + Meta is being added to the permit. With the absence of dilution due to discharge to groundwater, the calculated WQBEL is equal to the groundwater maximum allowable concentration.														
Di-n-octyl phthalate	µg/L	Daily Max	-	6.12	1/0	-	-	-	-	50	-	50	TOGS 1.1.1	-	No Limitation
	Di-n-octyl phthalate was detected in the effluent as reported in the NY-2C application. Based on the sample results, no reasonable potential to exceed water quality standards exists; therefore no limitation is proposed.														
Sulfate, total [as SO ₄]	mg/L	Daily Max	-	21	1/0	-	-	-	-	500	-	500	TOGS 1.1.1	-	No Limitation
	Sulfate, total [as SO ₄] was detected in the effluent as reported in the NY-2C application. Based on the sample results, no reasonable potential to exceed water quality standards exists; therefore no limitation is proposed														
Magnesium, total [as Mg]	mg/L	Daily Max	-	7.12	1/0	-	-	-	-	35	-	35	TOGS 1.1.1	-	No Limitation
	Magnesium, total [as Mg] was detected in the effluent as reported in the NY-2C application. Based on the sample results, no reasonable potential to exceed water quality standards exists; therefore no limitation is proposed														

Permittee: Joejr sbh LLC
 Facility: Southampton Car Wash and Detail Center
 SPDES Number: NY0227111
 USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
 Permit Writer: Ryan O'Mara
 Water Quality Reviewer: -
 Full Technical Review

Outfall 001 EMERGING CONTAMINANTS

Emerging Contaminants: Outfall # 001															
Effluent Parameter	Units	Averaging Period	Existing Discharge Data			TBELs		Water Quality Data & WQBELs						ML	Basis for Permit Requirement
			Permit Limit	Existing Effluent Quality ⁵	# of Data Points Detects / Non-Detects	Limit	Basis	Ambient Bkgd. Conc.	Projected Instream Conc.	WQ Std. or GV	WQ Type	Calc. WQBEL	Basis		
Notes: See Emerging Contaminant Monitoring section above. Effluent samples were analyzed for the 40 PFAS compounds and 1,4-Dioxane.															
Perfluoro-butanoic Acid (PFBA)	ng/L	Daily Max	-	35.6	1/2	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-pentanoic Acid (PFPeA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-hexanoic Acid (PFHxA)	ng/L	Daily Max	-	17.8	2/1	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-heptanoic Acid (PFHpA)	ng/L	Daily Max	-	8.4	1/2	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-octanoic Acid (PFOA)	ng/L	Daily Max	-	25.8 Actual Max	1/2	-	-	-	-	6.7	H(WS)	6.7	TOGS 1.1.1	-	WQBEL
	Perfluorooctanoic acid (PFOA) was detected as reported in the industrial emerging contaminant survey provided by the permittee. The maximum influent concentration identified was 25.8 ng/L. Given the lack of dilution for discharges to groundwater, an effluent limit equal to the WQS is appropriate and has been added to the permit.														
Perfluoro-nonanoic Acid (PFNA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-decanoic Acid (PFDA)	ng/L	Daily Max	-	5.6	1/2	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-undecanoic Acid (PFUnA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
	ng/L	Daily Max	-	3.4	1/2	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)

⁵ Existing Effluent Quality: Unless otherwise stated, Daily Max = 99% lognormal; Monthly Avg = 95% lognormal (for datasets with ≤3 nondetects); Daily Max = 99% delta-lognormal; Monthly Avg = 95% delta-lognormal (for datasets with >3 nondetects)

Permittee: Joejr sbh LLC
 Facility: Southampton Car Wash and Detail Center
 SPDES Number: NY0227111
 USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
 Permit Writer: Ryan O'Mara
 Water Quality Reviewer: -
 Full Technical Review

Emerging Contaminants: Outfall # 001															
Effluent Parameter	Units	Averaging Period	Existing Discharge Data			TBELs		Water Quality Data & WQBELs						ML	Basis for Permit Requirement
			Permit Limit	Existing Effluent Quality ⁵	# of Data Points Detects / Non-Detects	Limit	Basis	Ambient Bkgd. Conc.	Projected Instream Conc.	WQ Std. or GV	WQ Type	Calc. WQBEL	Basis		
Perfluoro-dodecanoic Acid (PFDoA)	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-tridecanoic Acid (PFTriA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-tetradecanoic Acid (PFTeA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-butanesulfonic Acid (PFBS)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-pentanesulfonic Acid (PFPeS)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-hexanesulfonic Acid (PFHxS)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-heptanesulfonic Acid (PFHpS)	ng/L	Daily Max	-	5.7	1/2	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-octanesulfonic Acid (PFOS)	ng/L	Daily Max	-	ND Actual Max	0/3	-	-	-	-	2.7	H(WS)	2.7	TOGS 1.1.1	-	WQBEL
	Perfluorooctanesulfonic acid (PFOS) was not detected as reported in the industrial emerging contaminant survey provided by the permittee; however, car washes are identified as a potential primary source of PFOS in wastewater in the TOGS 1.3.13. Given the lack of dilution for discharges to groundwater, an effluent limit equal to the WQS is appropriate and has been added to the permit.														
Perfluoro-nonanesulfonic Acid (PFNS)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-decanesulfonic Acid (PFDS)	ng/L	Daily Max	-	4.6	1/2	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-dodecane-	ng/L	Daily Max	-	10.8	1/2	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)

Permittee: Joejr sbh LLC
 Facility: Southampton Car Wash and Detail Center
 SPDES Number: NY0227111
 USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
 Permit Writer: Ryan O'Mara
 Water Quality Reviewer: -
 Full Technical Review

Emerging Contaminants: Outfall # 001															
Effluent Parameter	Units	Averaging Period	Existing Discharge Data			TBELs		Water Quality Data & WQBELs						ML	Basis for Permit Requirement
			Permit Limit	Existing Effluent Quality ⁵	# of Data Points Detects / Non-Detects	Limit	Basis	Ambient Bkgd. Conc.	Projected Instream Conc.	WQ Std. or GV	WQ Type	Calc. WQBEL	Basis		
sulfonic Acid (PFDoS)	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-octane-sulfonamide (FOSA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
N-methyl Perfluoro-octanesulfon-amidoacetic Acid (NMeFOSAA)	ng/L	Daily Max	-	19.4	1/2	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
N-ethyl Perfluoro-octanesulfon-amidoacetic Acid (NEtFOSAA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
4:2 Fluorotelomer Sulfonic Acid (FTS)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
6:2 Fluorotelomer Sulfonic Acid (FTS)	ng/L	Daily Max	-	12.2	1/2	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
8:2 Fluorotelomer Sulfonic Acid (FTS)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
N-ethyl Perfluoro-octanesulfon-amide (NEtFOSA)	ng/L	Daily Max	-	5.4	1/2	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														

Permittee: Joejr sbh LLC
 Facility: Southampton Car Wash and Detail Center
 SPDES Number: NY0227111
 USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
 Permit Writer: Ryan O'Mara
 Water Quality Reviewer: -
 Full Technical Review

Emerging Contaminants: Outfall # 001															
Effluent Parameter	Units	Averaging Period	Existing Discharge Data			TBELs		Water Quality Data & WQBELs						ML	Basis for Permit Requirement
			Permit Limit	Existing Effluent Quality ⁵	# of Data Points Detects / Non-Detects	Limit	Basis	Ambient Bkgd. Conc.	Projected Instream Conc.	WQ Std. or GV	WQ Type	Calc. WQBEL	Basis		
N-methyl Perfluoro-octanesulfonamide (NMeFOSA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
N-methyl Perfluoro-octanesulfonamidoethanol (NMeFOSE)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
N-ethyl Perfluoro-octanesulfonamidoethanol (NEtFOSE)	ng/L	Daily Max	-	520.6	2/1	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
9-Chlorohexadeca-fluoro-3-oxanonane-1-sulfonic Acid (9Cl-PF3ONS)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Hexafluoro-propylene Oxide Dimer Acid (HFPO-DA or GenX)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
11-Chloroeicosafluoro-3-oxaundecane-1-sulfonic Acid (11Cl-PF3OUdS)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
4,8-Dioxa-3H-perfluorononanoic Acid (ADONA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
3-Perfluoropropyl	ng/L	Daily Max	-	61.6	2/1	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)

Permittee: Joejr sbh LLC
 Facility: Southampton Car Wash and Detail Center
 SPDES Number: NY0227111
 USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
 Permit Writer: Ryan O'Mara
 Water Quality Reviewer: -
 Full Technical Review

Emerging Contaminants: Outfall # 001															
Effluent Parameter	Units	Averaging Period	Existing Discharge Data			TBELs		Water Quality Data & WQBELs						ML	Basis for Permit Requirement
			Permit Limit	Existing Effluent Quality ⁵	# of Data Points Detects / Non-Detects	Limit	Basis	Ambient Bkgd. Conc.	Projected Instream Conc.	WQ Std. or GV	WQ Type	Calc. WQBEL	Basis		
Propanoic Acid (3:3 FTCA)	Monitoring has been added to support establishment of future standards or TBELs.														
2H,2H,3H,3H-Perfluoro-octanoic Acid (5:3 FTCA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
3-Perfluoroheptyl Propanoic Acid (7:3 FTCA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Nonafluoro-3,6-dioxaheptanoic Acid (NFDHA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-4-methoxy-butanoic Acid (PFMBA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro-3-methoxy-propanoic Acid (PFMPA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
Perfluoro(2-ethoxyethane)sulfonic Acid (PFEEESA)	ng/L	Daily Max	-	ND	0/3	-	-	-	-	-	-	-	-	-	Monitor 750-1.13(b)
	Monitoring has been added to support establishment of future standards or TBELs.														
1,4-Dioxane	µg/L	Daily Max	-	0.074	1/2	-	-	-	-	0.35	H(WS)	0.35	TOGS 1.1.1	-	No Limitation
	1,4-Dioxane was detected as reported in the industrial emerging contaminant survey provided by the permittee; however, the sample result indicates no reasonable potential to exceed the WQS for this parameter. Therefore no limitation is proposed and additional data will be collected during future SPDES Permit Application submissions.														

Appendix: Regulatory and Technical Basis of Permit Authorizations

The Appendix is meant to supplement the fact sheet for multiple types of SPDES permits. Portions of this Appendix may not be applicable to this specific permit.

Regulatory References

The provisions of the permit are based largely upon 40 CFR 122 subpart C and 6 NYCRR Part 750 and include monitoring, recording, reporting, and compliance requirements, as well as general conditions applicable to all SPDES permits. Below are the most common citations for the requirements included in SPDES permits:

- Clean Water Act (CWA) 33 section USC 1251 to 1387
- Environmental Conservation Law (ECL) Articles 17 and 70
- Federal Regulations
 - 40 CFR, Chapter I, subchapters D, N, and O
- State environmental regulations
 - 6 NYCRR Part 621
 - 6 NYCRR Part 750
 - 6 NYCRR Parts 700 - 704 – Best use and other requirements applicable to water classes
 - 6 NYCRR Parts 800 – 941 - Classification of individual surface waters
- NYSDEC water program policy, referred to as Technical and Operational Guidance Series (TOGS)
- USEPA Office of Water Technical Support Document for Water Quality-based Toxics Control, March 1991, Appendix E

The following is a quick guide to the references used within the fact sheet:

SPDES Permit Requirements	Regulatory Reference
Anti-backsliding	6 NYCRR 750-1.10(c) and 750-1.10(d), CWA sections 402(o), 303(d)(4), ECL 17-0809, 40 CFR 122.44(l)
Best Management Practices (BMPs) for CSOs	6 NYCRR 750-2.8(a)(2)
Environmental Benefits Permit Strategy (EBPS)	6 NYCRR 750-1.18, NYS ECL 17-0817(4), TOGS 1.2.2 (revised January 25, 2012)
Exceptions for Type I SSO Outfalls (bypass)	6 NYCRR 750-2.8(b)(2), 40 CFR 122.41
Mercury Multiple Discharge Variance	Division of Water Program Policy 1.3.10 (DOW 1.3.10)
Mixing Zone and Critical Water Information	TOGS 1.3.1 & Amendments
PCB Minimization Program	40 CFR Part 132 Appendix F Procedure 8, 6 NYCRR 750-1.13(a) and 750-1.14(f), and TOGS 1.2.1
Pollutant Minimization Program (PMP)	6 NYCRR 750-1.13(a), 750-1.14(f), TOGS 1.2.1
Schedules of Compliance	6 NYCRR 750-1.14
Sewage Pollution Right to Know (SPRTK)	NYS ECL 17-0826-a, 6 NYCRR 750-2.7
State Administrative Procedure Act (SAPA)	State Administrative Procedure Act Section 401(2), 6 NYCRR 621.11(l)
State Environmental Quality Review (SEQR)	6 NYCRR Part 617
USEPA Effluent Limitation Guidelines (ELGs)	40 CFR Parts 405-471
USEPA National CSO Policy	33 USC Section 1342(q)
Whole Effluent Toxicity (WET) Testing	TOGS 1.3.2
General Provisions of a SPDES Permit Department Request for Additional Information	NYCRR 750-2.1(i)

Outfall and Receiving Water Information

Existing Effluent Quality

The existing effluent quality is determined from a statistical evaluation of effluent data in accordance with TOGS 1.2.1 and the USEPA Office of Water, Technical Support Document for Water Quality-based Toxics Control, March 1991, Appendix E (TSD). The existing effluent quality is equal to the 95th (monthly average) and 99th (daily maximum) percentiles of the lognormal distribution of existing effluent data. When there are greater than three non-detects, a delta-lognormal distribution is assumed, and delta-lognormal calculations are used to determine the monthly average and daily maximum pollutant concentrations. Statistical calculations are not performed for parameters where there are less than ten data points. If additional data is needed, a monitoring requirement may

be specified either through routine monitoring or a short-term high intensity monitoring program. The [Pollutant Summary Table](#) identifies the number of sample data points available.

Permit Requirements

Basis for Effluent Limitations

Sections 101, 301, 304, 308, 401, 402, and 405 of the CWA and Titles 5, 7, and 8 of Article 17 ECL, as well as their implementing federal and state regulations, and related guidance, provide the basis for the effluent limitations and other conditions in the permit.

When conducting a full technical review of an existing permit, the previous effluent limitations form the basis for the next permit. Existing effluent quality is evaluated against the existing effluent limitations to determine if these should be continued, revised, or deleted. Generally, existing limitations are continued unless there are changed conditions at the facility, the facility demonstrates an ability to meet more stringent limitations, or in response to updated regulatory requirements. Pollutant monitoring data is also reviewed to determine the presence of additional contaminants that should be included in the permit based on a reasonable potential analysis to cause or contribute to a water quality standards violation.

Anti-backsliding

Anti-backsliding requirements are specified in the CWA sections 402(o) and 303(d)(4), ECL 17-0809, and regulations at 40 CFR 122.44(l) and 6 NYCRR 750-1.10(c) and (d). Generally, the relaxation of effluent limitations in permits is prohibited unless one of the specified exceptions applies, which will be cited on a case-by-case basis in this fact sheet. Consistent with current case law⁶ and USEPA interpretation⁷ anti-backsliding requirements do not apply should a revision to the final effluent limitation take effect before the scheduled date of compliance for that final effluent limitation.

Antidegradation Policy

New York State implements the antidegradation portion of the CWA based upon two documents: (1) Organization and Delegation Memorandum #85-40, "Water Quality Antidegradation Policy" (September 9, 1985); and, (2) TOGS 1.3.9, "Implementation of the NYSDEC Antidegradation Policy – Great Lakes Basin (Supplement to Antidegradation Policy dated September 9, 1985) (undated)." The permit for the facility contains effluent limitations which ensure that the existing best usage of the receiving waters will be maintained. To further support the antidegradation policy, SPDES applications have been reviewed in accordance with the State Environmental Quality Review Act (SEQR) as prescribed by 6 NYCRR Part 617.

Effluent Limitations

In developing a permit, the DEC determines the technology-based effluent limitations (TBELs) and then evaluates the water quality expected to result from technology controls to determine if any exceedances of water quality criteria in the receiving water might result. If there is a reasonable potential for exceedances of water quality criteria to occur, water quality-based effluent limitations (WQBELs) are developed. A WQBEL is designed to ensure that the water quality standards of receiving waters are met. In general, the CWA requires that the effluent limitations for a particular pollutant are the more stringent of either the TBEL or WQBEL.

Technology-based Effluent Limitations (TBELs) for Industrial Facilities

A TBEL requires a minimum level of treatment for industrial point sources based on currently available treatment technologies or Best Management Practices (BMPs). CWA sections 301(b) and 402, ECL sections 17-0509, 17-0809 and 17-0811, and 6 NYCRR 750-1.11 require technology-based controls on effluents. TBELs are set based upon an evaluation of New Source Performance Standards (NSPS), Best Available Technology Economically Achievable (BAT), Best Conventional Pollutant Control Technology (BCT), Best Practicable Technology Currently Available (BPT), and Best Professional Judgment (BPJ).

⁶ American Iron and Steel Institute v. Environmental Protection Agency, 115 F.3d 979, 993 n.6 (D.C. Cir. 1997)

⁷ U.S. EPA, Water Quality Standards; Establishment of Numeric Criteria for Priority Toxic Pollutants for the State of California; 65 Fed. Reg. 31682, 31704 (May 18, 2000); Proposed Water Quality Guidance for the Great Lakes System, 58 Fed. Reg. 20802, 20837 & 20981 (April 16, 1993)

USEPA Effluent Limitation Guidelines (ELGs) Applicable to Facility

In many cases, BPT, BCT, BAT and NSPS limitations are based on effluent guidelines developed by USEPA for specific industries, as promulgated under 40 CFR Parts 405-471. Applicable guidelines, pollutants regulated by these guidelines, and the effluent limitation derivation for facilities subject to these guidelines is in the [USEPA Effluent Limitation Guideline Calculations Table](#).

Best Professional Judgement (BPJ)

For substances that are not explicitly limited by regulations, the permit writer is authorized to use BPJ in developing TBELs. Consistent with section 402(a)(1) of the CWA, and NYS ECL section 17-0811, the DEC is authorized to issue a permit containing "any further limitations necessary to ensure compliance with water quality standards adopted pursuant to state law". BPJ limitations may be set on a case-by-case basis using any reasonable method that takes into consideration the criteria set forth in 40 CFR 125.3. Applicable state regulations include 6 NYCRR 750-1.11. The BPJ limitation considers the existing technology present at the facility, the statistically calculated existing effluent quality for that parameter, and any unique or site-specific factors relating to the facility. Technology limitations generally achievable for various treatment technologies are included in TOGS 1.2.1, Attachment C. These limitations may be used for the listed parameters when the technology employed at the facility is listed.

Technology-based Effluent Limitations (TBELs) for Industrial Facilities to Groundwater

TBELs aim to prevent pollution by requiring a minimum level of effluent quality that is attainable using demonstrated technologies for reducing discharges of pollutants or pollution into the waters of the United States. Requirements for discharges from industrial facilities to groundwater are summarized in TOGS 1.2.1. In accordance with TOGS 1.2.1, for facilities discharging to groundwater:

- Discharges will typically be limited to the more stringent of the groundwater effluent standards in 6 NYCRR 703.6 or the applicable treatment technology listed in TOGS 1.2.1 Attachment (C).
- Discharges from industrial facilities which contain nitrogen or nitrogen compounds include effluent limitations for Nitrate of 20 mg/L (as N). Groundwater discharges in Nassau and Suffolk Counties are required to achieve an effluent standard for Total Nitrogen of 10 mg/L (as N).
- Disinfection will typically not be required for discharges to groundwater unless local public health concerns exist due to exposure or contact with effluent.

Water Quality-Based Effluent Limitations (WQBELs) for Discharges to Groundwater

The procedure for developing WQBELs includes identifying the pollutants present in the discharge(s), identifying water quality criteria applicable to these pollutants, determining if WQBELs are necessary (reasonable potential), and calculating the WQBELs. For groundwater discharges, if the expected concentration of the pollutant of concern in the receiving water may exceed the ambient groundwater quality standard or guidance value, then there is reasonable potential that the discharge may cause or contribute to a violation of the water quality, and a WQBEL for the pollutant is required.

WQBELs for groundwater discharges are based on the groundwater effluent limits set forth in 6 NYCRR Part 703 (Surface Water and Groundwater Quality Standards and Groundwater Effluent Limitations) except as noted in 6 NYCRR 702.21. TOGS 1.1.1 provides a listing of groundwater effluent limitations for substances having an ambient water quality standard or guidance value. Groundwater effluent limitations are applied at the point of discharge to the groundwater distribution system.

For land treatment systems with no accessible final sampling points, such as constructed wetland treatment systems or buried sand filters, permit limitations for groundwater discharges are typically based on ambient groundwater quality standards or guidance values applied at representative down gradient monitoring well(s). Limitations at the downgradient sampling point are set at the Class GA ambient groundwater standards, rather than at the groundwater effluent limits promulgated under 6 NYCRR 703.6, as compliance is determined based upon the concentrations present in the downgradient groundwater monitoring well at the groundwater interface.

Class GA standards are established for the protection of sources of drinking water designated as Health (Water Source) or H(WS) in TOGS 1.1.1. As such, effluent limitations based on aquatic life criteria and WET testing requirements are not applicable to groundwater discharges.

Minimum Level of Detection

Pursuant to 40 CFR 122.44(i)(1)(iv) and 6 NYCRR 750-2.5(d), SPDES permits must contain monitoring requirements using sufficiently sensitive test procedures approved under 40 CFR Part 136. A method is "sufficiently sensitive" when the method's minimum level (ML) is at or below the level of the effluent limitation established in the permit for the measured pollutant parameter; or the lowest ML of the analytical methods approved under 40 CFR Part 136. The ML represents the lowest level that can be measured within specified limitations of precision and accuracy during routine laboratory operations on most effluent matrices. When establishing effluent limitations for a specific parameter (based on technology or water quality requirements), it is possible that the calculated limitation will fall below the ML established by the approved analytical method(s). In these instances, the calculated limitation is included in the permit with a compliance level set equal to the ML of the most sensitive method.

Monitoring Requirements

CWA section 308, 40 CFR 122.44(i), 6 NYCRR 750-1.13, and 750-2.5 require that monitoring be included in permits to determine compliance with effluent limitations. Additional effluent monitoring may also be required to gather data to determine if effluent limitations may be required. The permittee is responsible for conducting the monitoring and reporting results on Discharge Monitoring Reports (DMRs). The permit contains the monitoring requirements for the facility. Monitoring frequency is based on the minimum sampling necessary to adequately monitor the facility's performance and characterize the nature of the discharge of the monitored flow or pollutant. Variable effluent flows and pollutant levels may be required to be monitored at more frequent intervals than relatively constant effluent flow and pollutant levels (6 NYCRR 750-1.13). For industrial facilities, sampling frequency is based on guidance provided in TOGS 1.2.1. For municipal facilities, sampling frequency is based on guidance provided in TOGS 1.3.3.

For groundwater discharges, monitoring of downstream wells may be included to demonstrate compliance with ambient groundwater quality standards. Additional effluent monitoring may also be required to gather data to determine if effluent limitations may be required.

Action Levels

As defined in 6 NYCRR 750-1.2(a)(2), when used in a SPDES permit, an Action Level means a monitoring requirement characterized by a numerical value that, when exceeded, triggers additional permittee monitoring and DEC review to determine if numerical effluent limitations should be imposed.

The application of an Action Level is provided in TOGS 1.2.1. If the Action Level is exceeded, the permittee is required to conduct confirmatory monitoring. If Action Levels are routinely or excessively exceeded, they will be reconsidered and adjusted or replaced by limits in accordance with the Environmental Benefit Permit Strategy (EBPS). An Action Level is not a limit, and an exceedance does not constitute a permit violation unless the confirmatory sampling is not performed in accordance with the permit requirements.

Other Conditions

Schedules of Compliance

Schedules of compliance are included in accordance with 40 CFR Part 132 Attachment F, Procedure 9, 40 CFR 122.47 and 6 NYCRR 750-1.14. Schedules of compliance are intended to, in the shortest reasonable time, achieve compliance with applicable effluent standards and limitations, water quality standards, and other applicable requirements. Where the time for compliance is more than nine months, the schedule of compliance must include interim requirements and dates for their achievement. If the time necessary to complete the interim milestones is more than nine months, and not readily divisible into stages for completion, progress reports must be required.

Permittee: Joejr sbh LLC
Facility: Southampton Car Wash and Detail Center
SPDES Number: NY0227111
USEPA Non-Major/Class 01 Industrial

Date: August 5, 2026 v.1.40
Permit Writer: Ryan O'Mara
Water Quality Reviewer: -
Full Technical Review

Emerging Contaminants

Emerging Contaminants, such as Perfluorooctanoic acid (PFOA), Perfluorooctanesulfonic acid (PFOS), and 1,4-Dioxane (1,4-D), have been used in a wide variety of consumer and industrial products as well as in manufacturing processes for decades. Based on available research, water quality assessments for 1,4-D will follow existing WQBEL development. PFOA and PFOS do not break down easily; therefore, their presence in wastewater can remain a concern for years following their discontinued use. As the science surrounding these contaminants is still evolving, additional monitoring is needed to better understand potential sources and background levels. For more information on emerging contaminants, please see the DEC Division of Water web page: [Emerging Contaminants In NY's Waters - NYSDEC](#).

Schedule(s) of Additional Submittals

Schedules of Additional Submittals are used to summarize the deliverables required by the permit not identified in a separate Schedule of Compliance.

Best Management Practices (BMP) for Industrial Facilities

BMP plans are authorized for inclusion in NPDES permits pursuant to Sections 304(e) and 402 (a)(1) of the Clean Water Act, and 6 NYCRR 750-1.14(f). The regulations pertaining to BMPs are promulgated under 40 CFR Part 125, Subpart K. These regulations specifically address surface water discharges.