




APPENDIX C


Historical Groundwater/Product Elevation Tables, Contour Maps

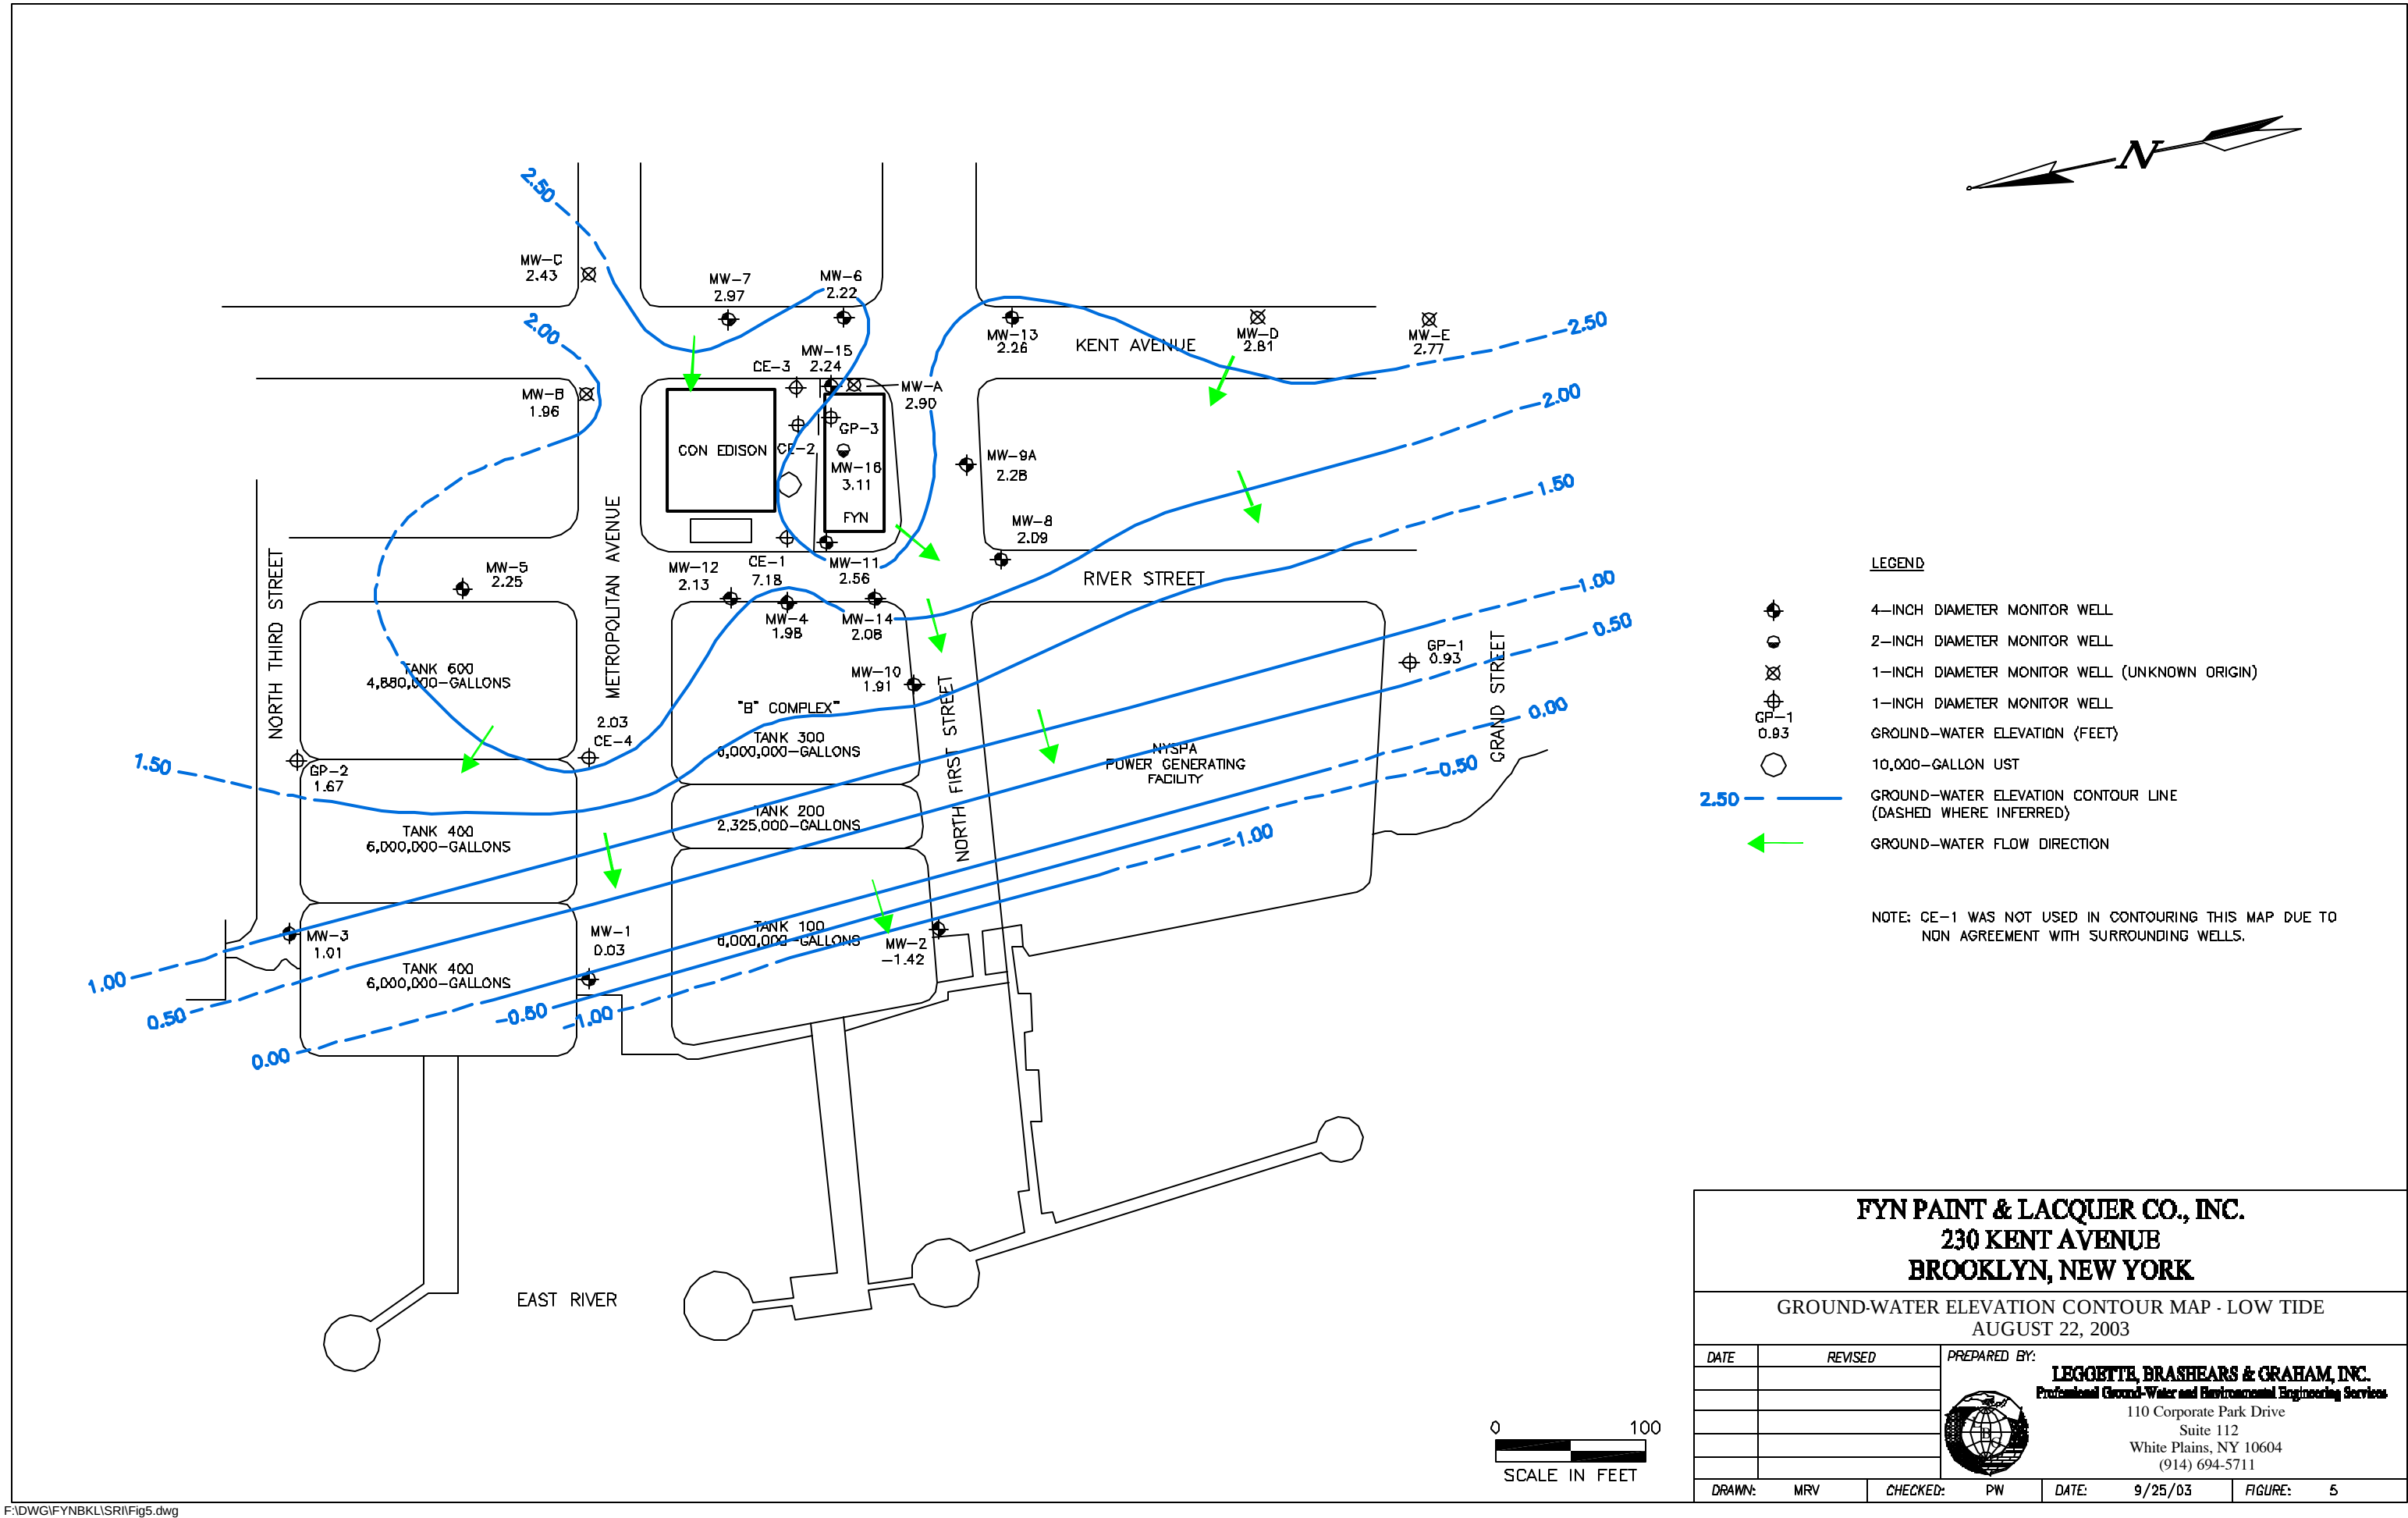


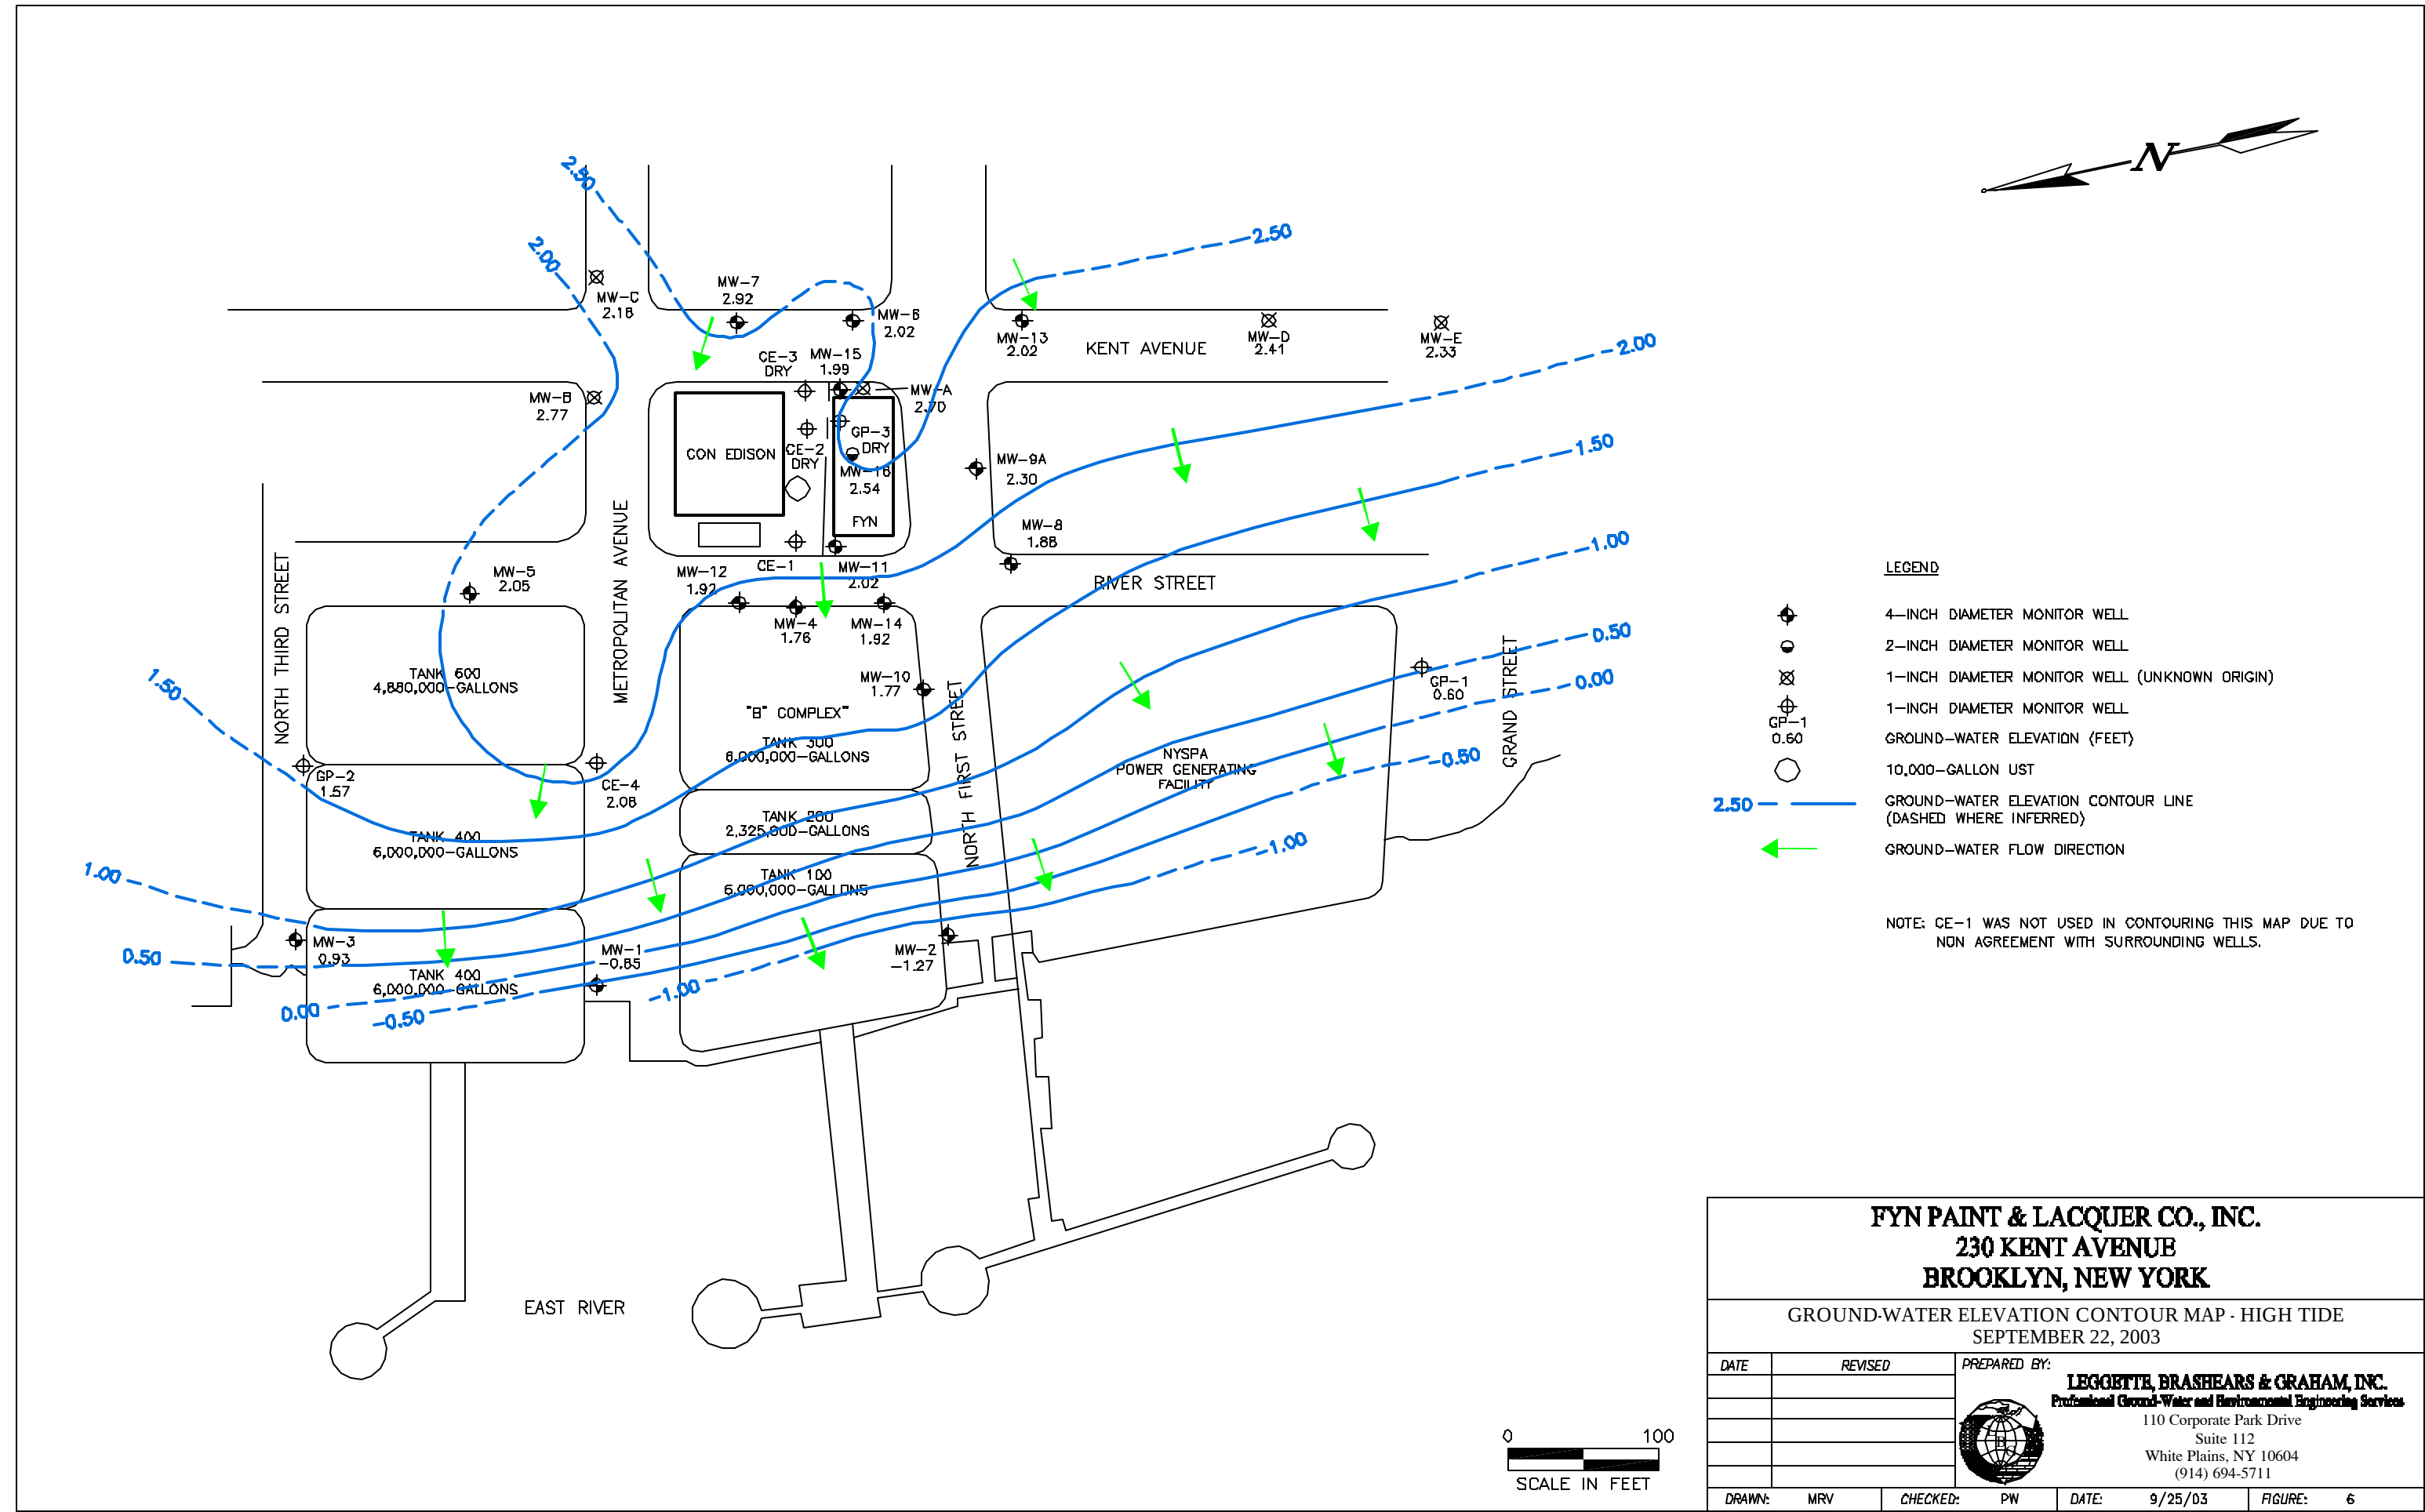



FYN PAINT & LACQUER CO., INC. 230 KENT AVENUE BROOKLYN, NEW YORK				
GROUND-WATER ELEVATION CONTOUR MAP - HIGH TIDE SEPTEMBER 22, 2003				
DATE	REVISED	PREPARED BY:		
		LEGOETTE, BRASHEARS & GRAHAM, INC. Professional Ground-Water and Environmental Engineering Services		
		110 Corporate Park Drive Suite 112 White Plains, NY 10604 (914) 694-5711		
DRAWN:	MRV	CHECKED:	PW	DATE: 9/25/03
				FIGURE: 6

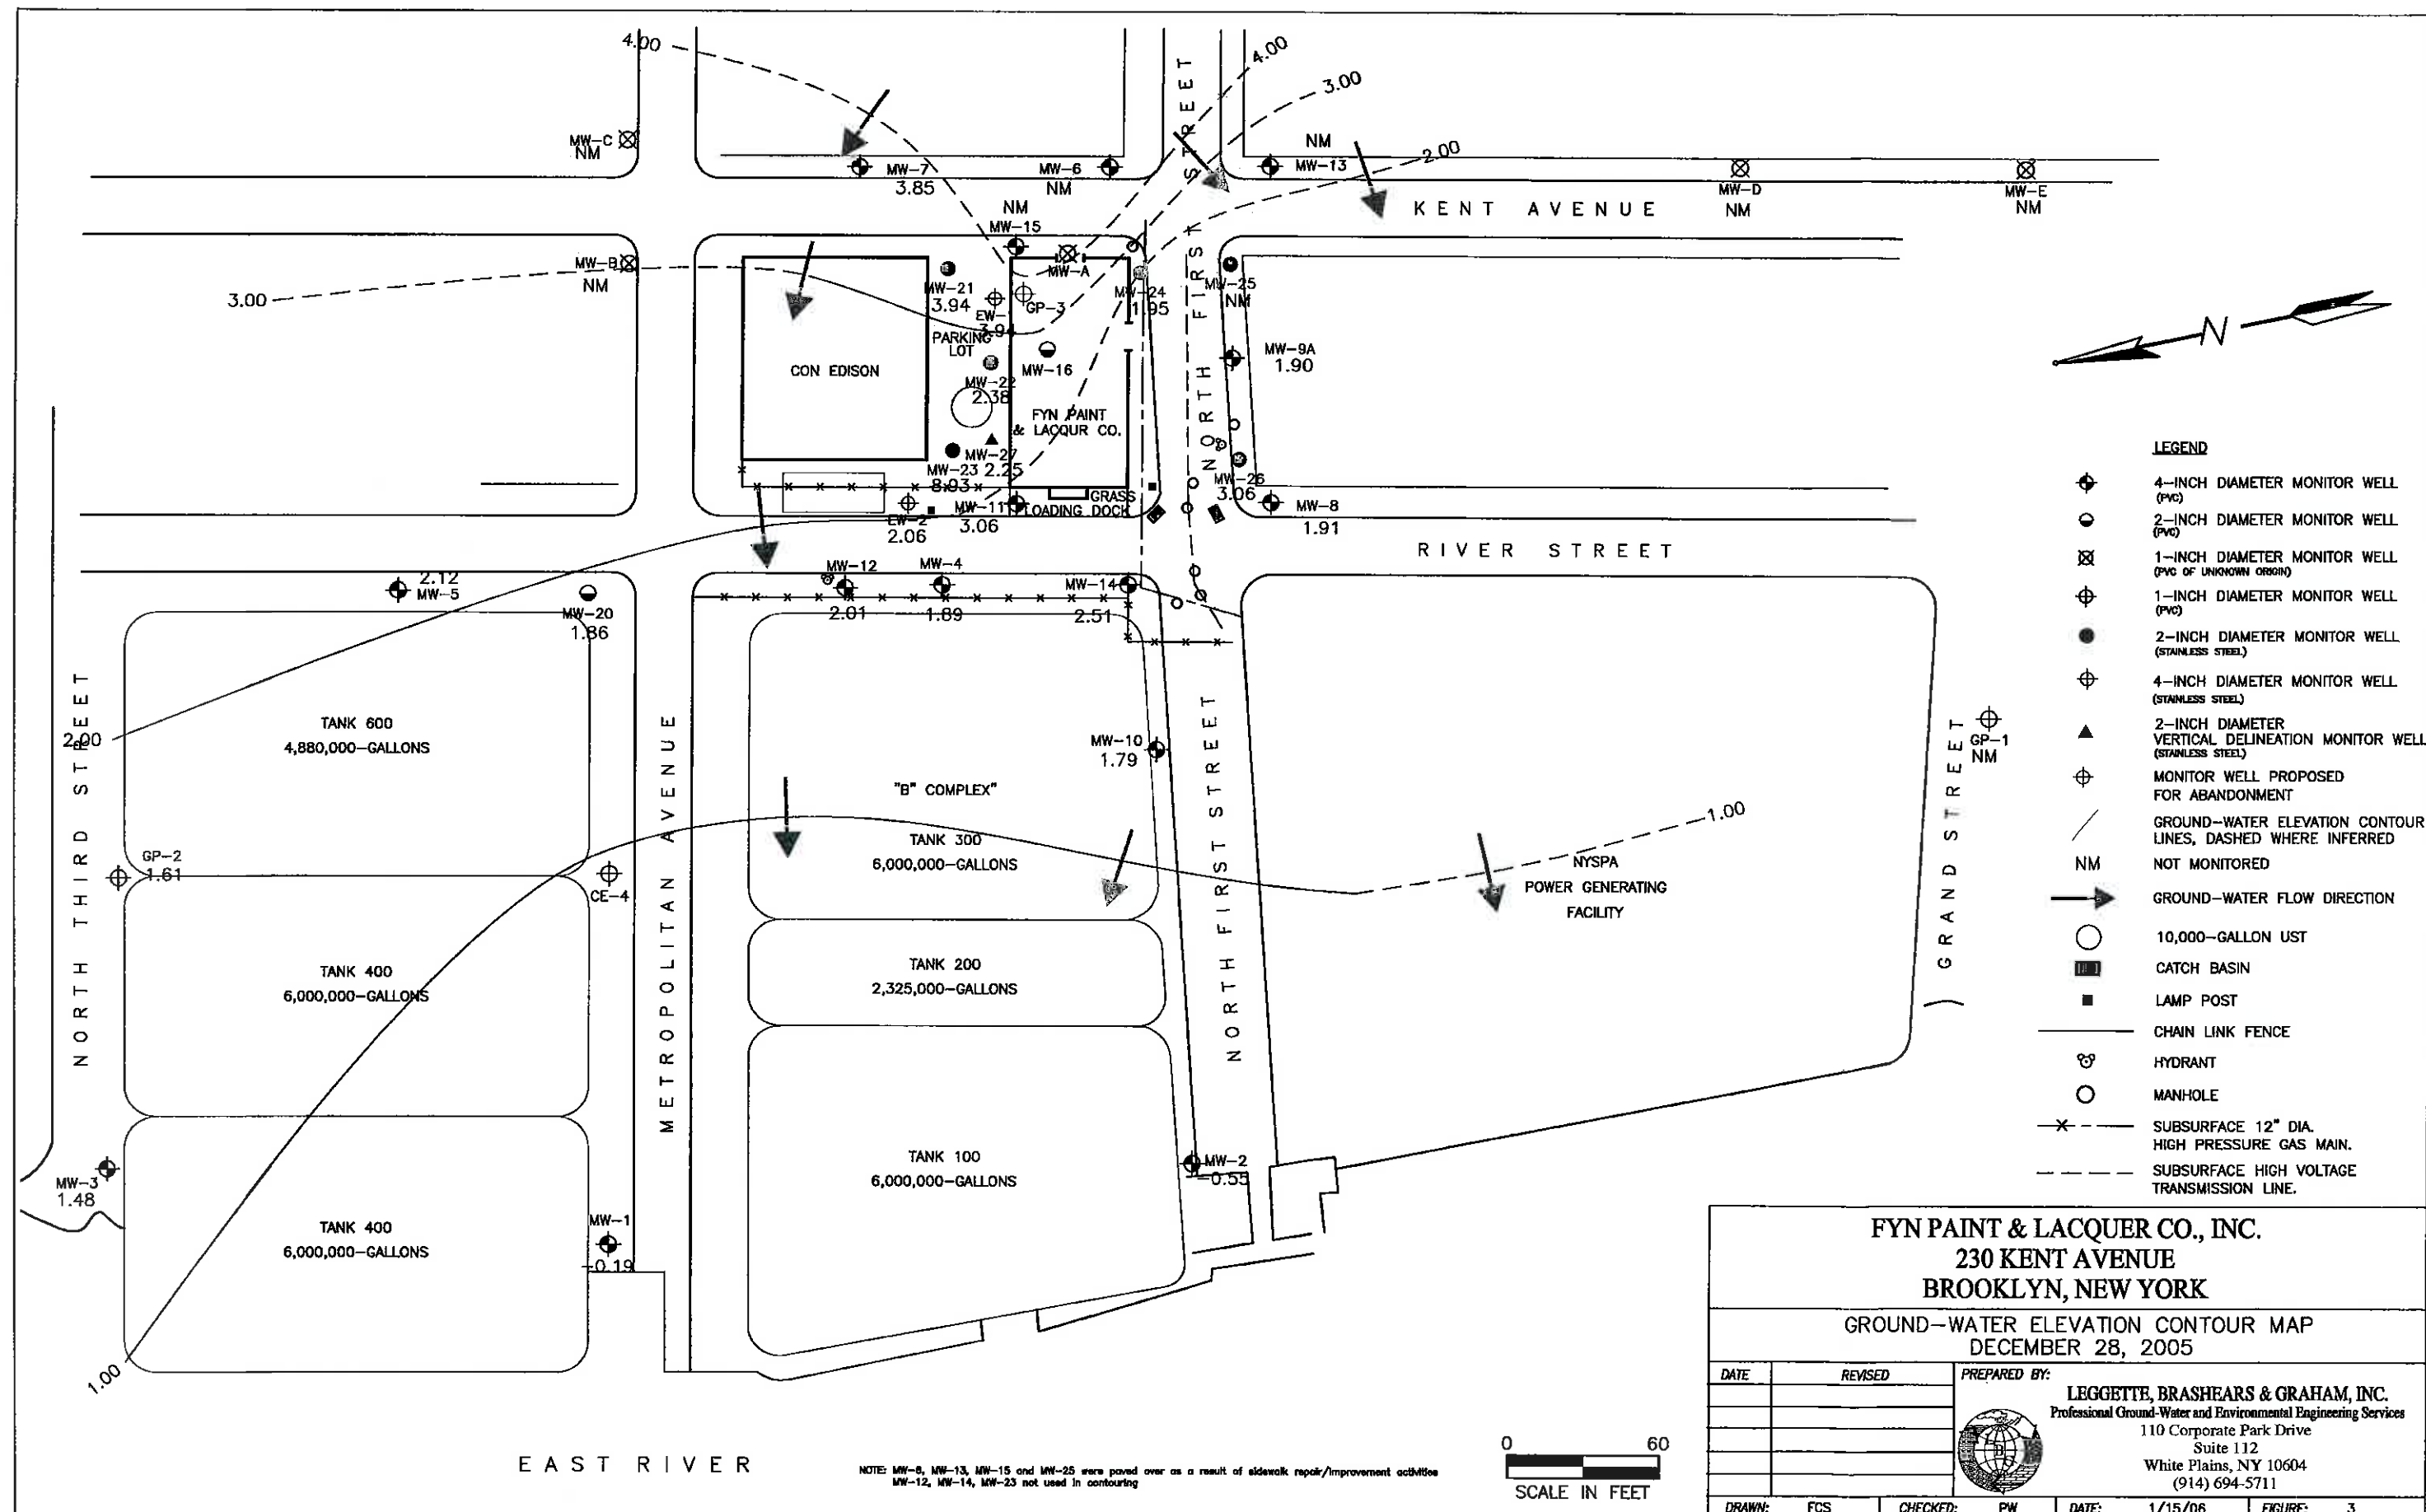

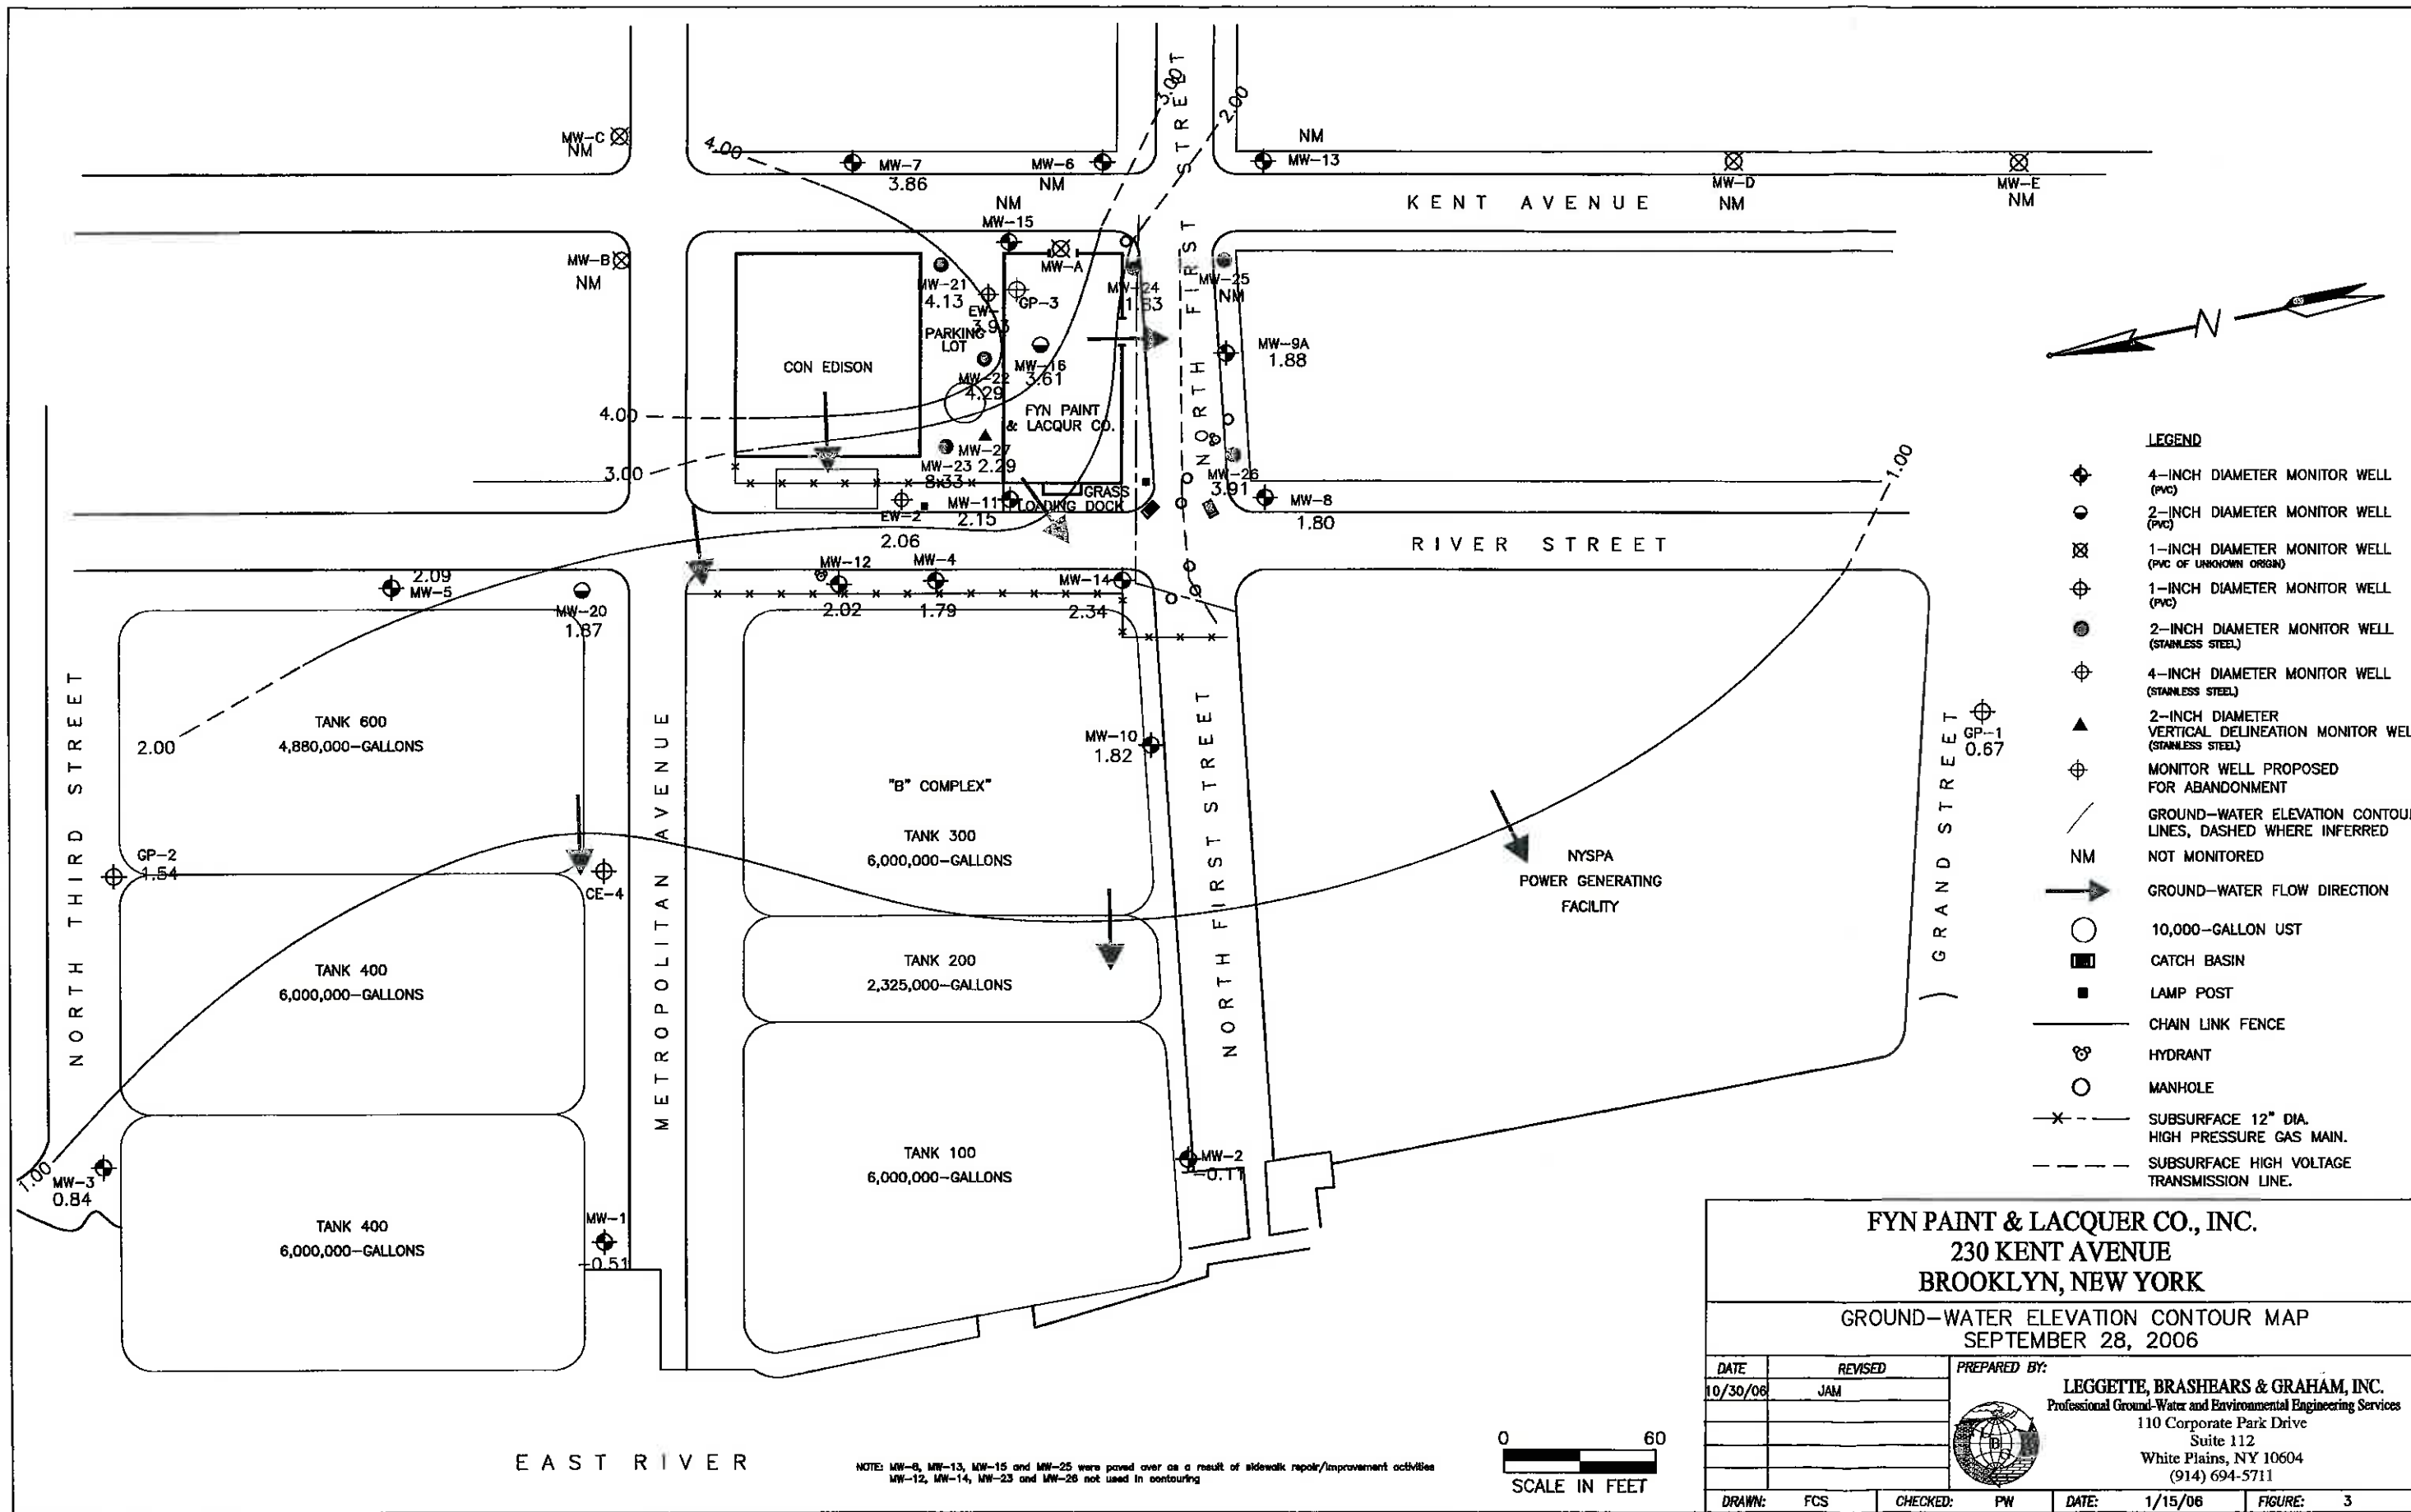

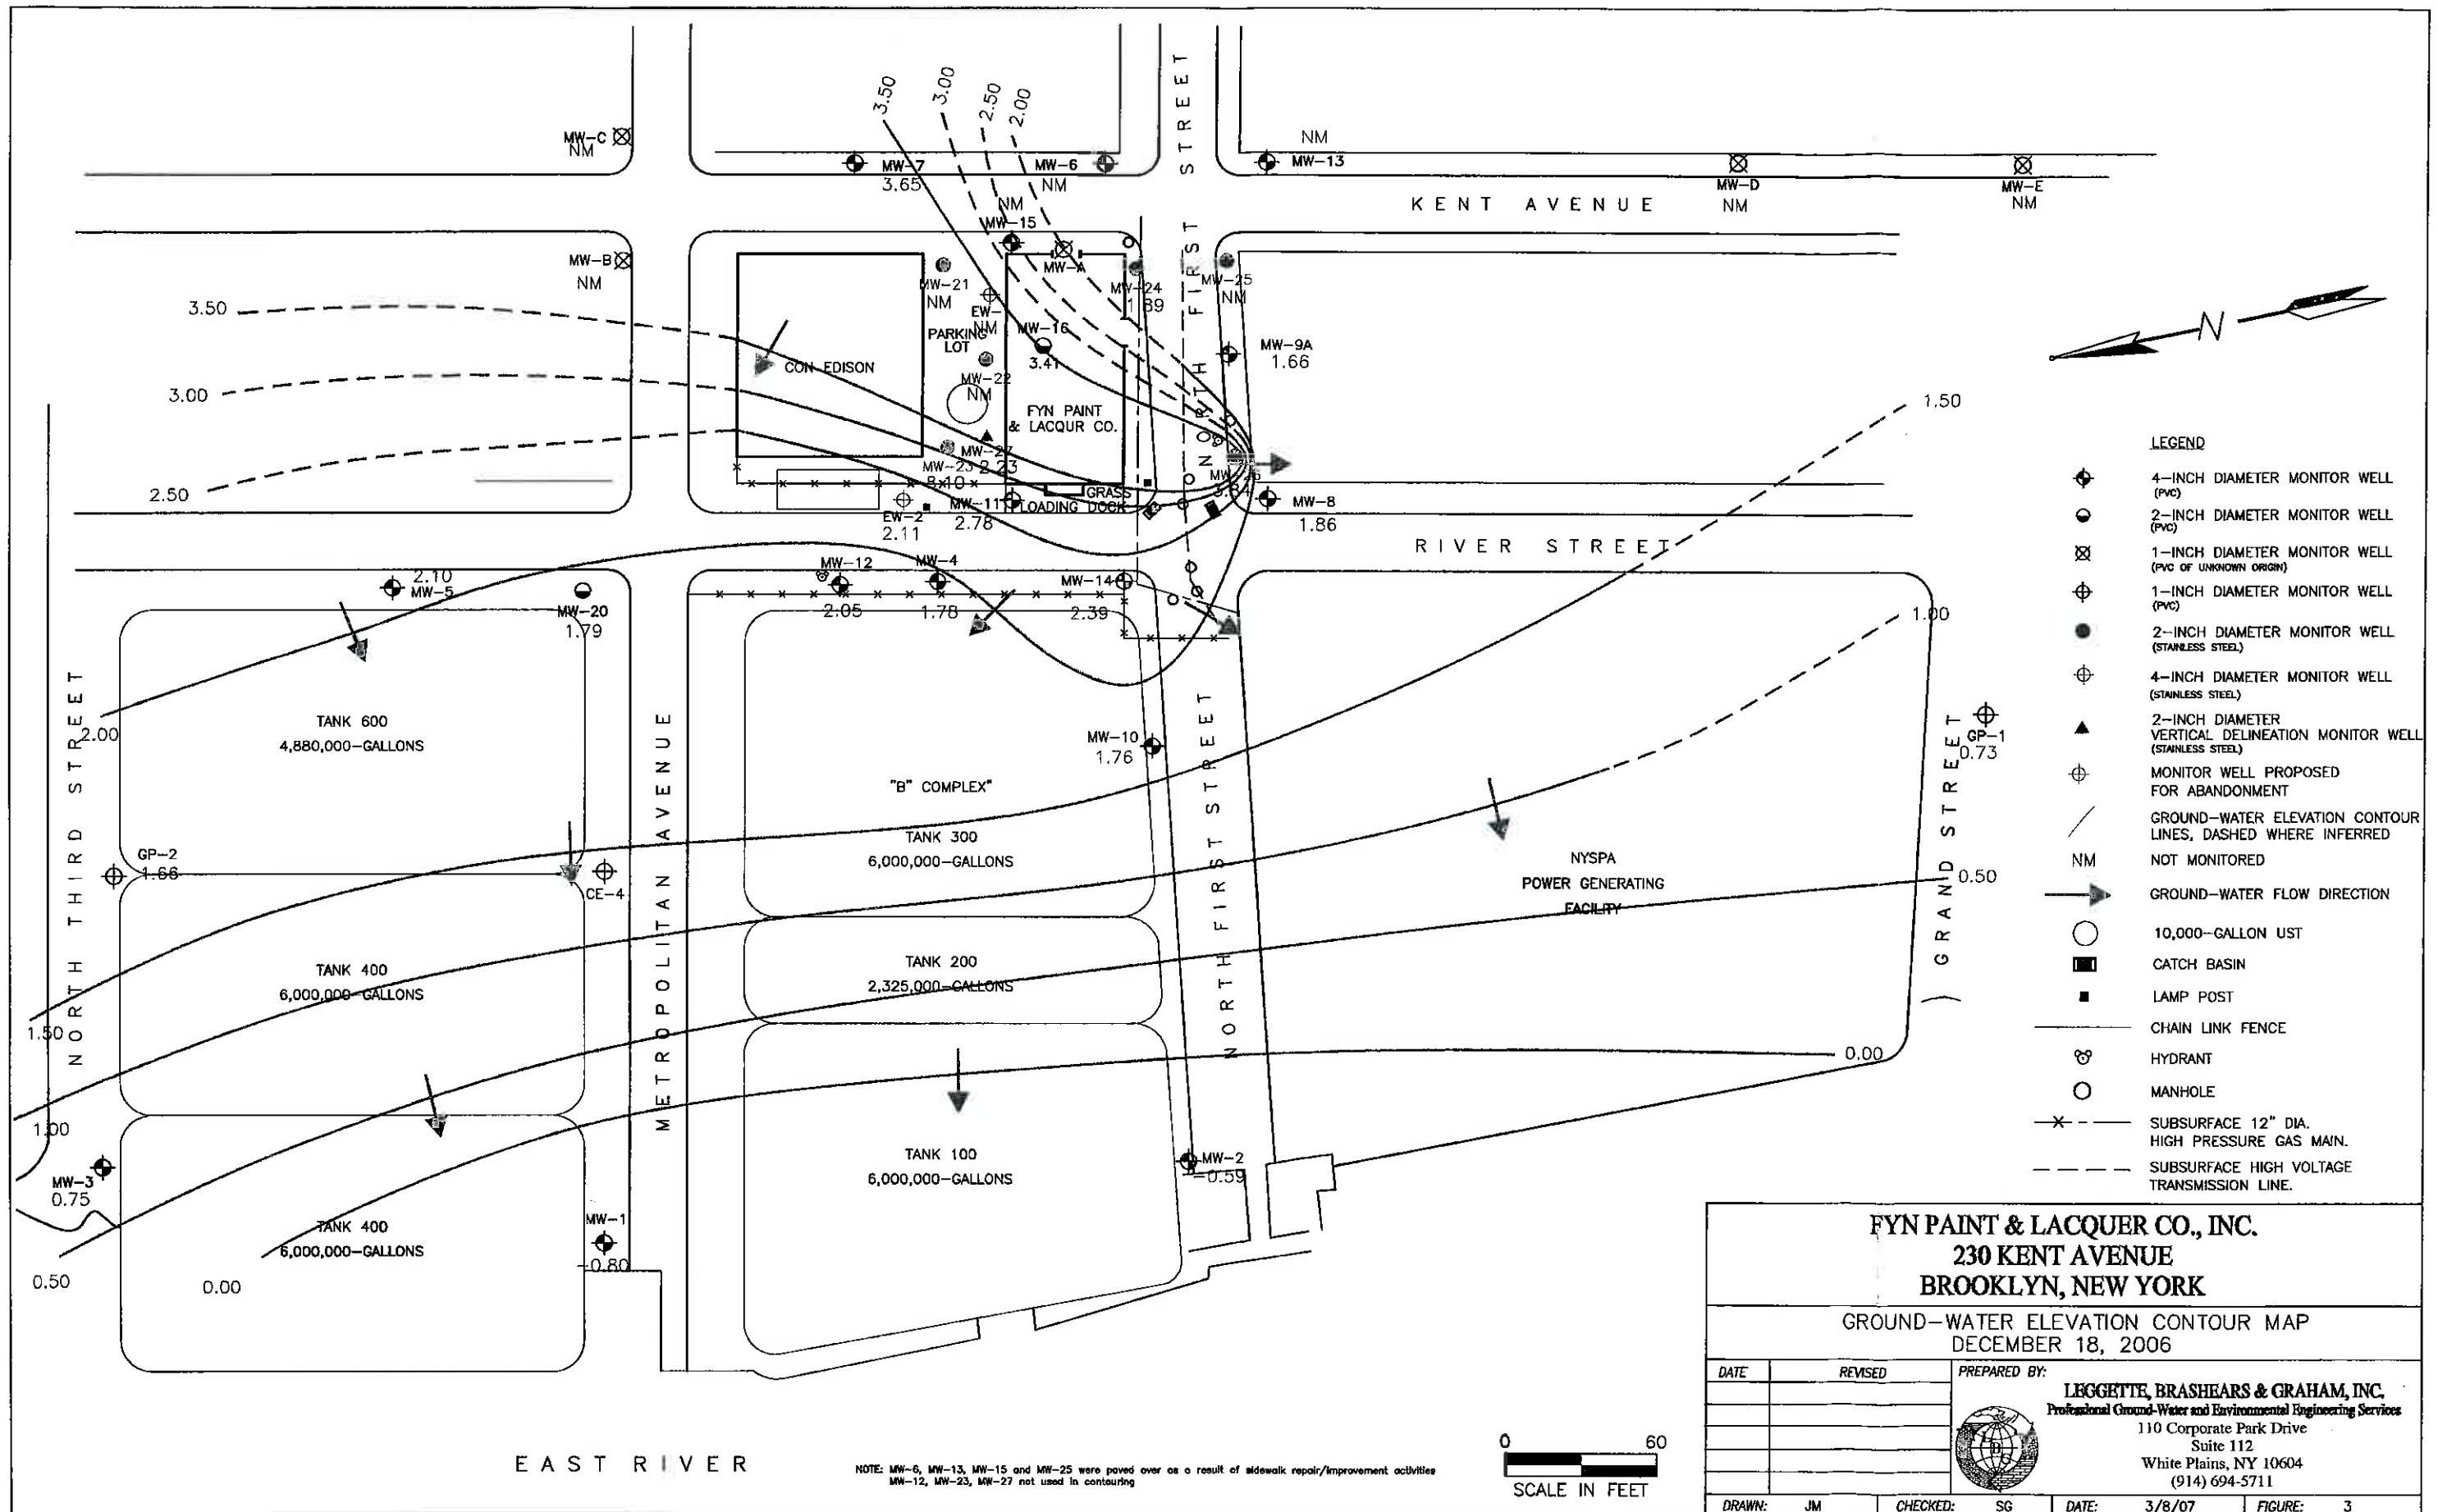

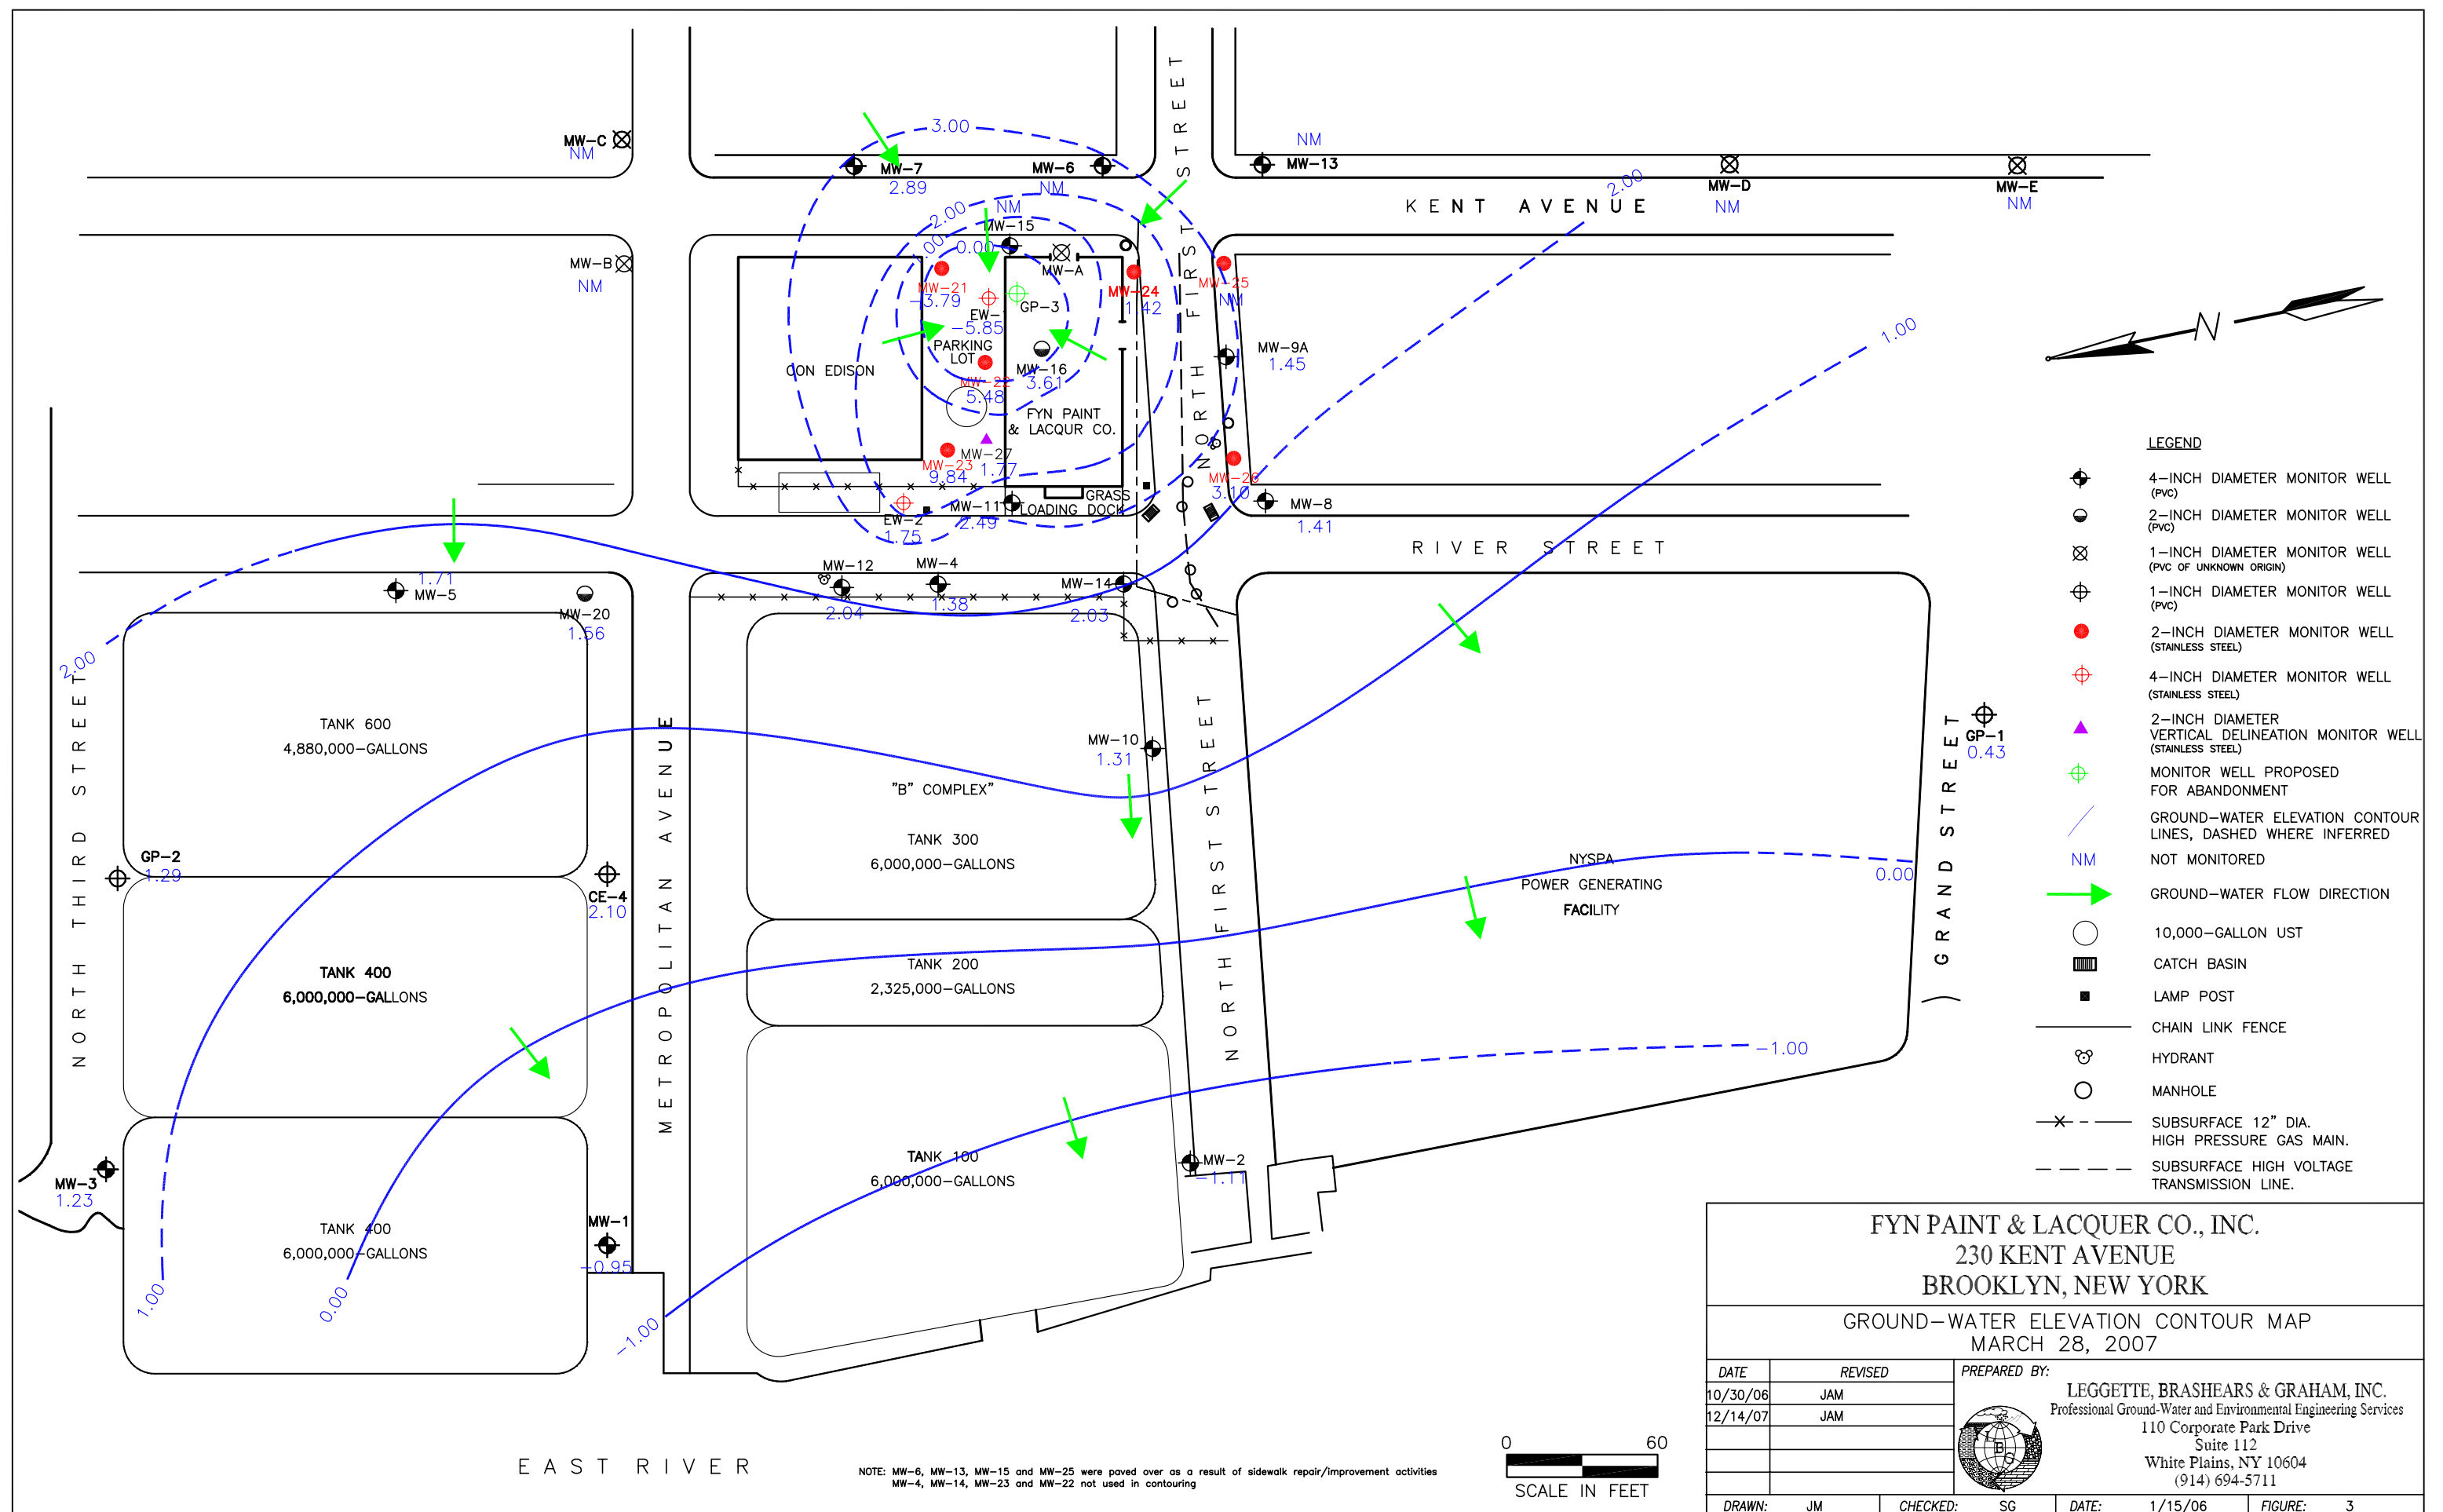

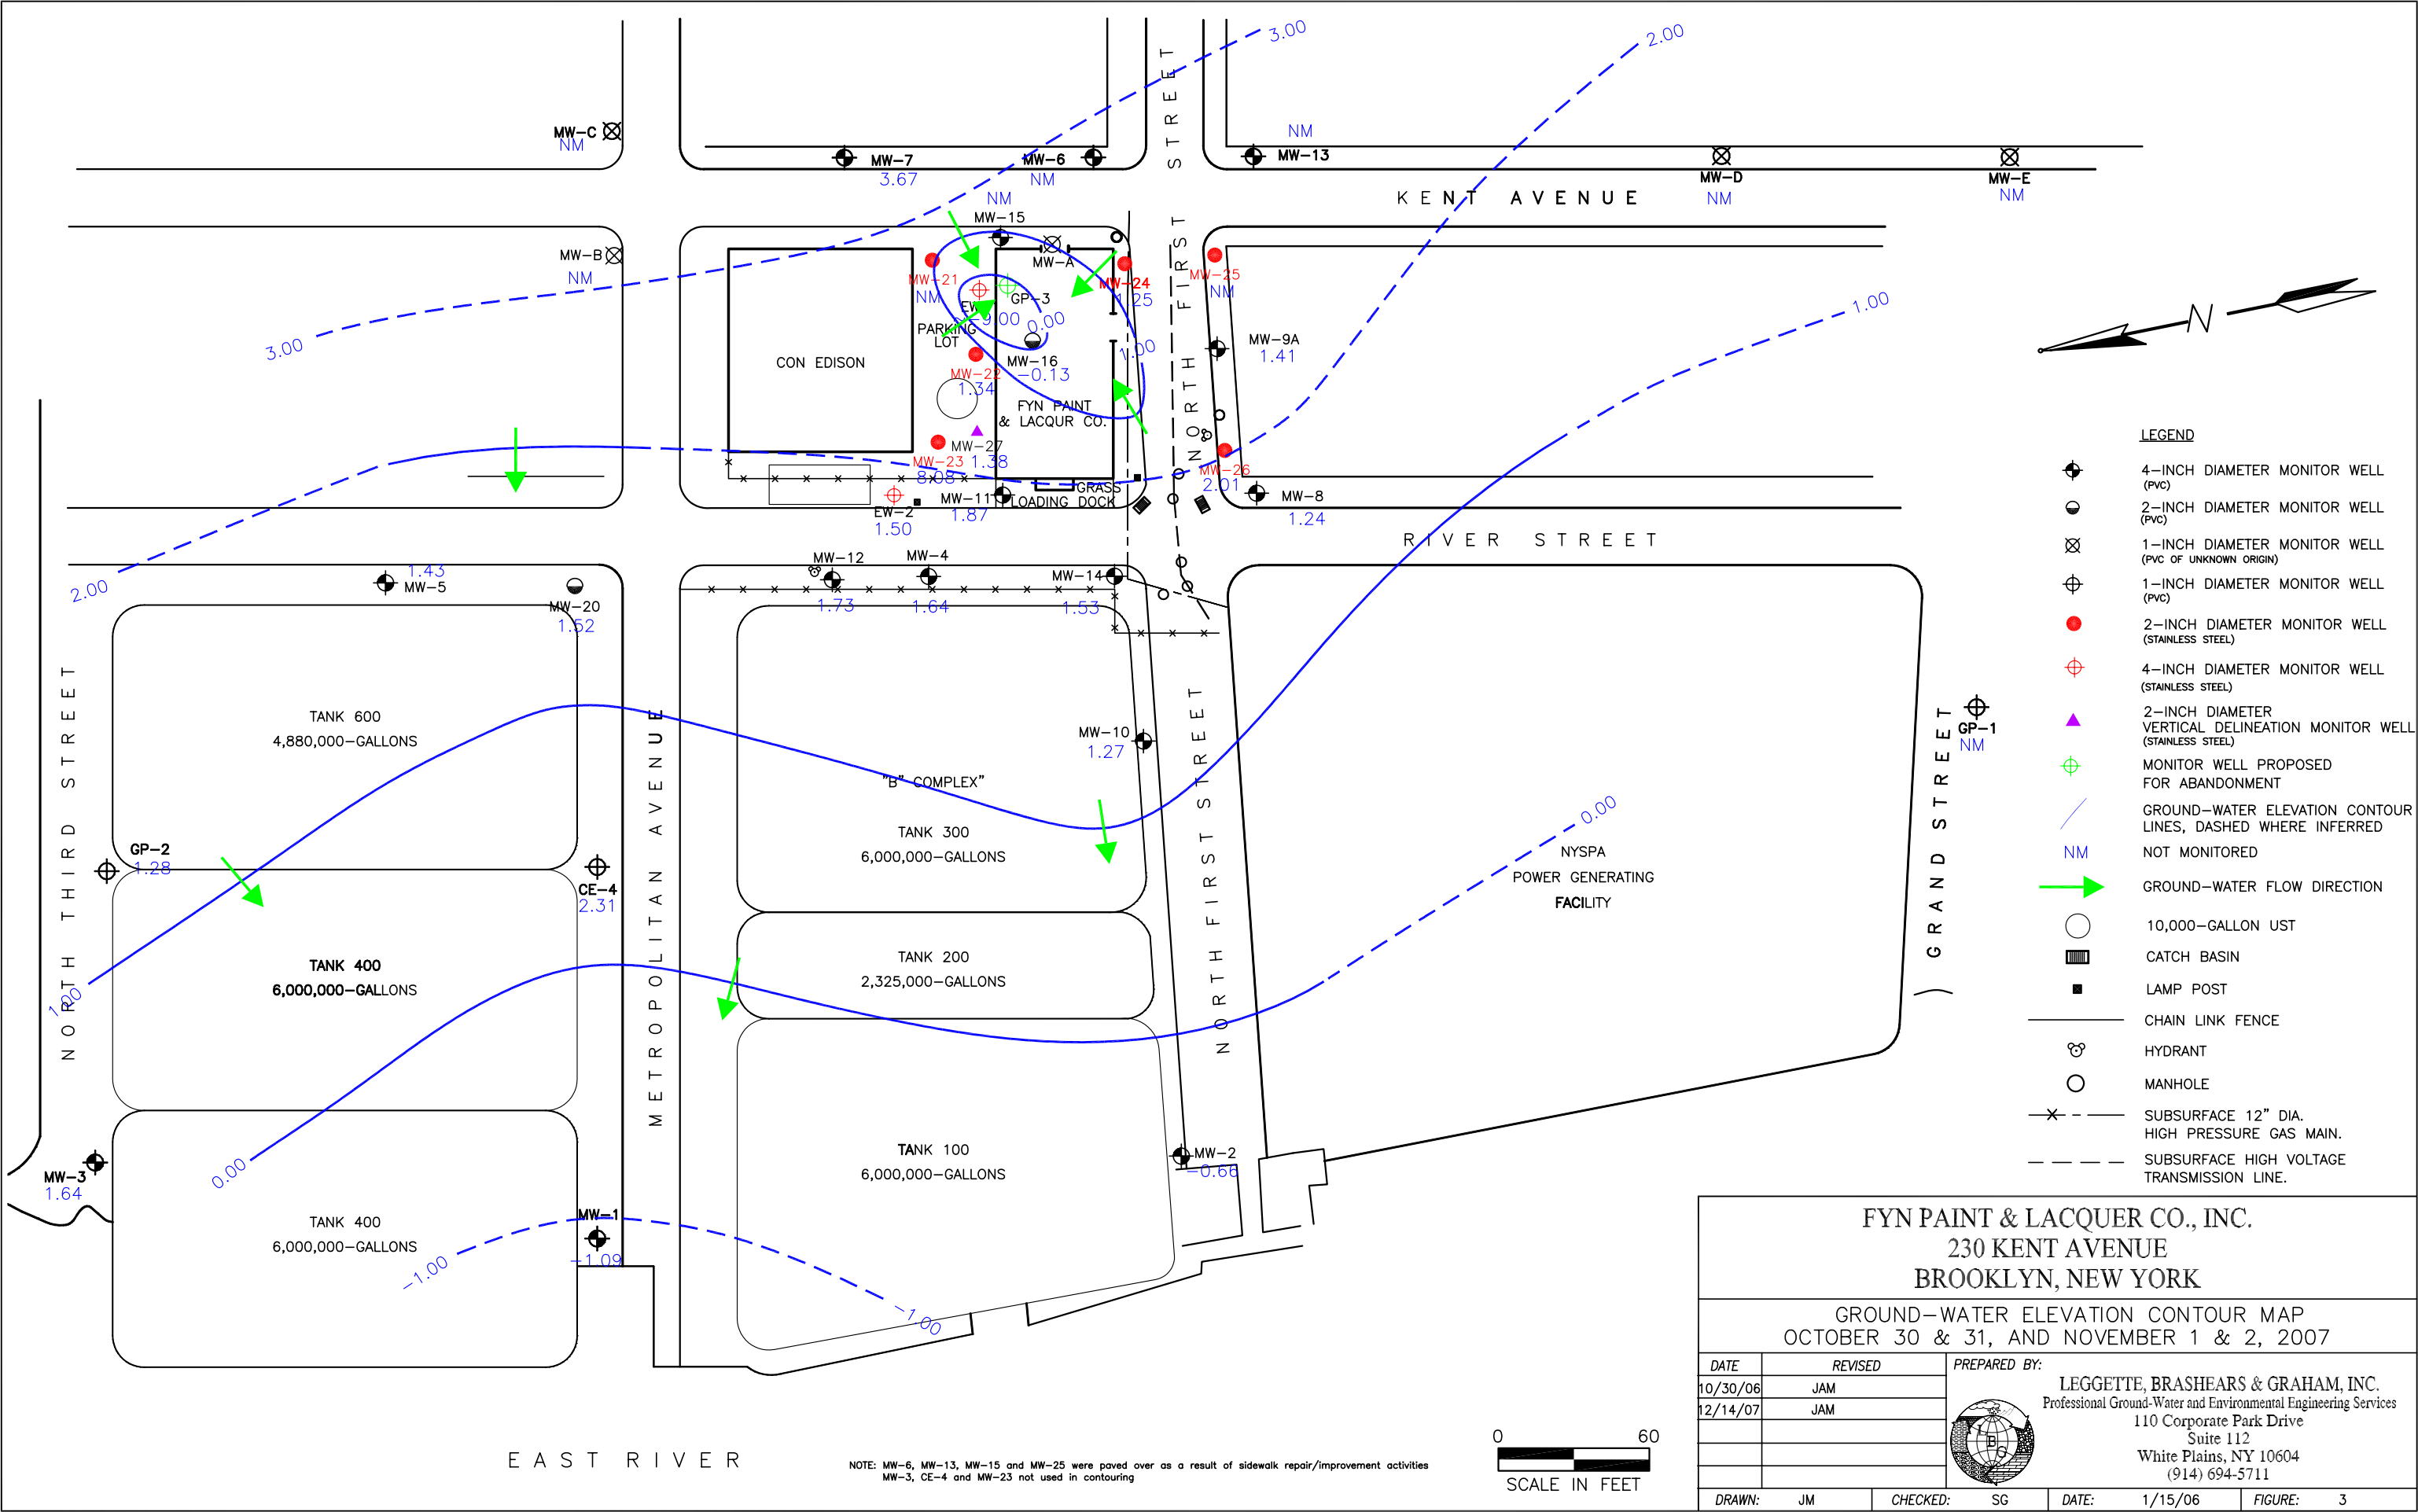



FYN PAINT & LACQUER CO., INC.
230 KENT AVENUE
BROOKLYN, NEW YORK


GROUND-WATER ELEVATION CONTOUR MAP
OCTOBER 30 & 31, AND NOVEMBER 1 & 2, 2007

DATE	REVISED	PREPARED BY:		
10/30/06	JAM	LEGGETTE, BRASHEARS & GRAHAM, INC. Professional Ground-Water and Environmental Engineering Services 110 Corporate Park Drive Suite 112 White Plains, NY 10604 (914) 694-5711		
12/14/07	JAM			
DRAWN: JM		CHECKED: SG	DATE: 1/15/06	FIGURE: 3

LEGGETTE, BRASHEARS & GRAHAM, INC.
Professional Ground-Water and Environmental Engineering Services
110 Corporate Park Drive
Suite 112
White Plains, NY 10604
(914) 694-5711

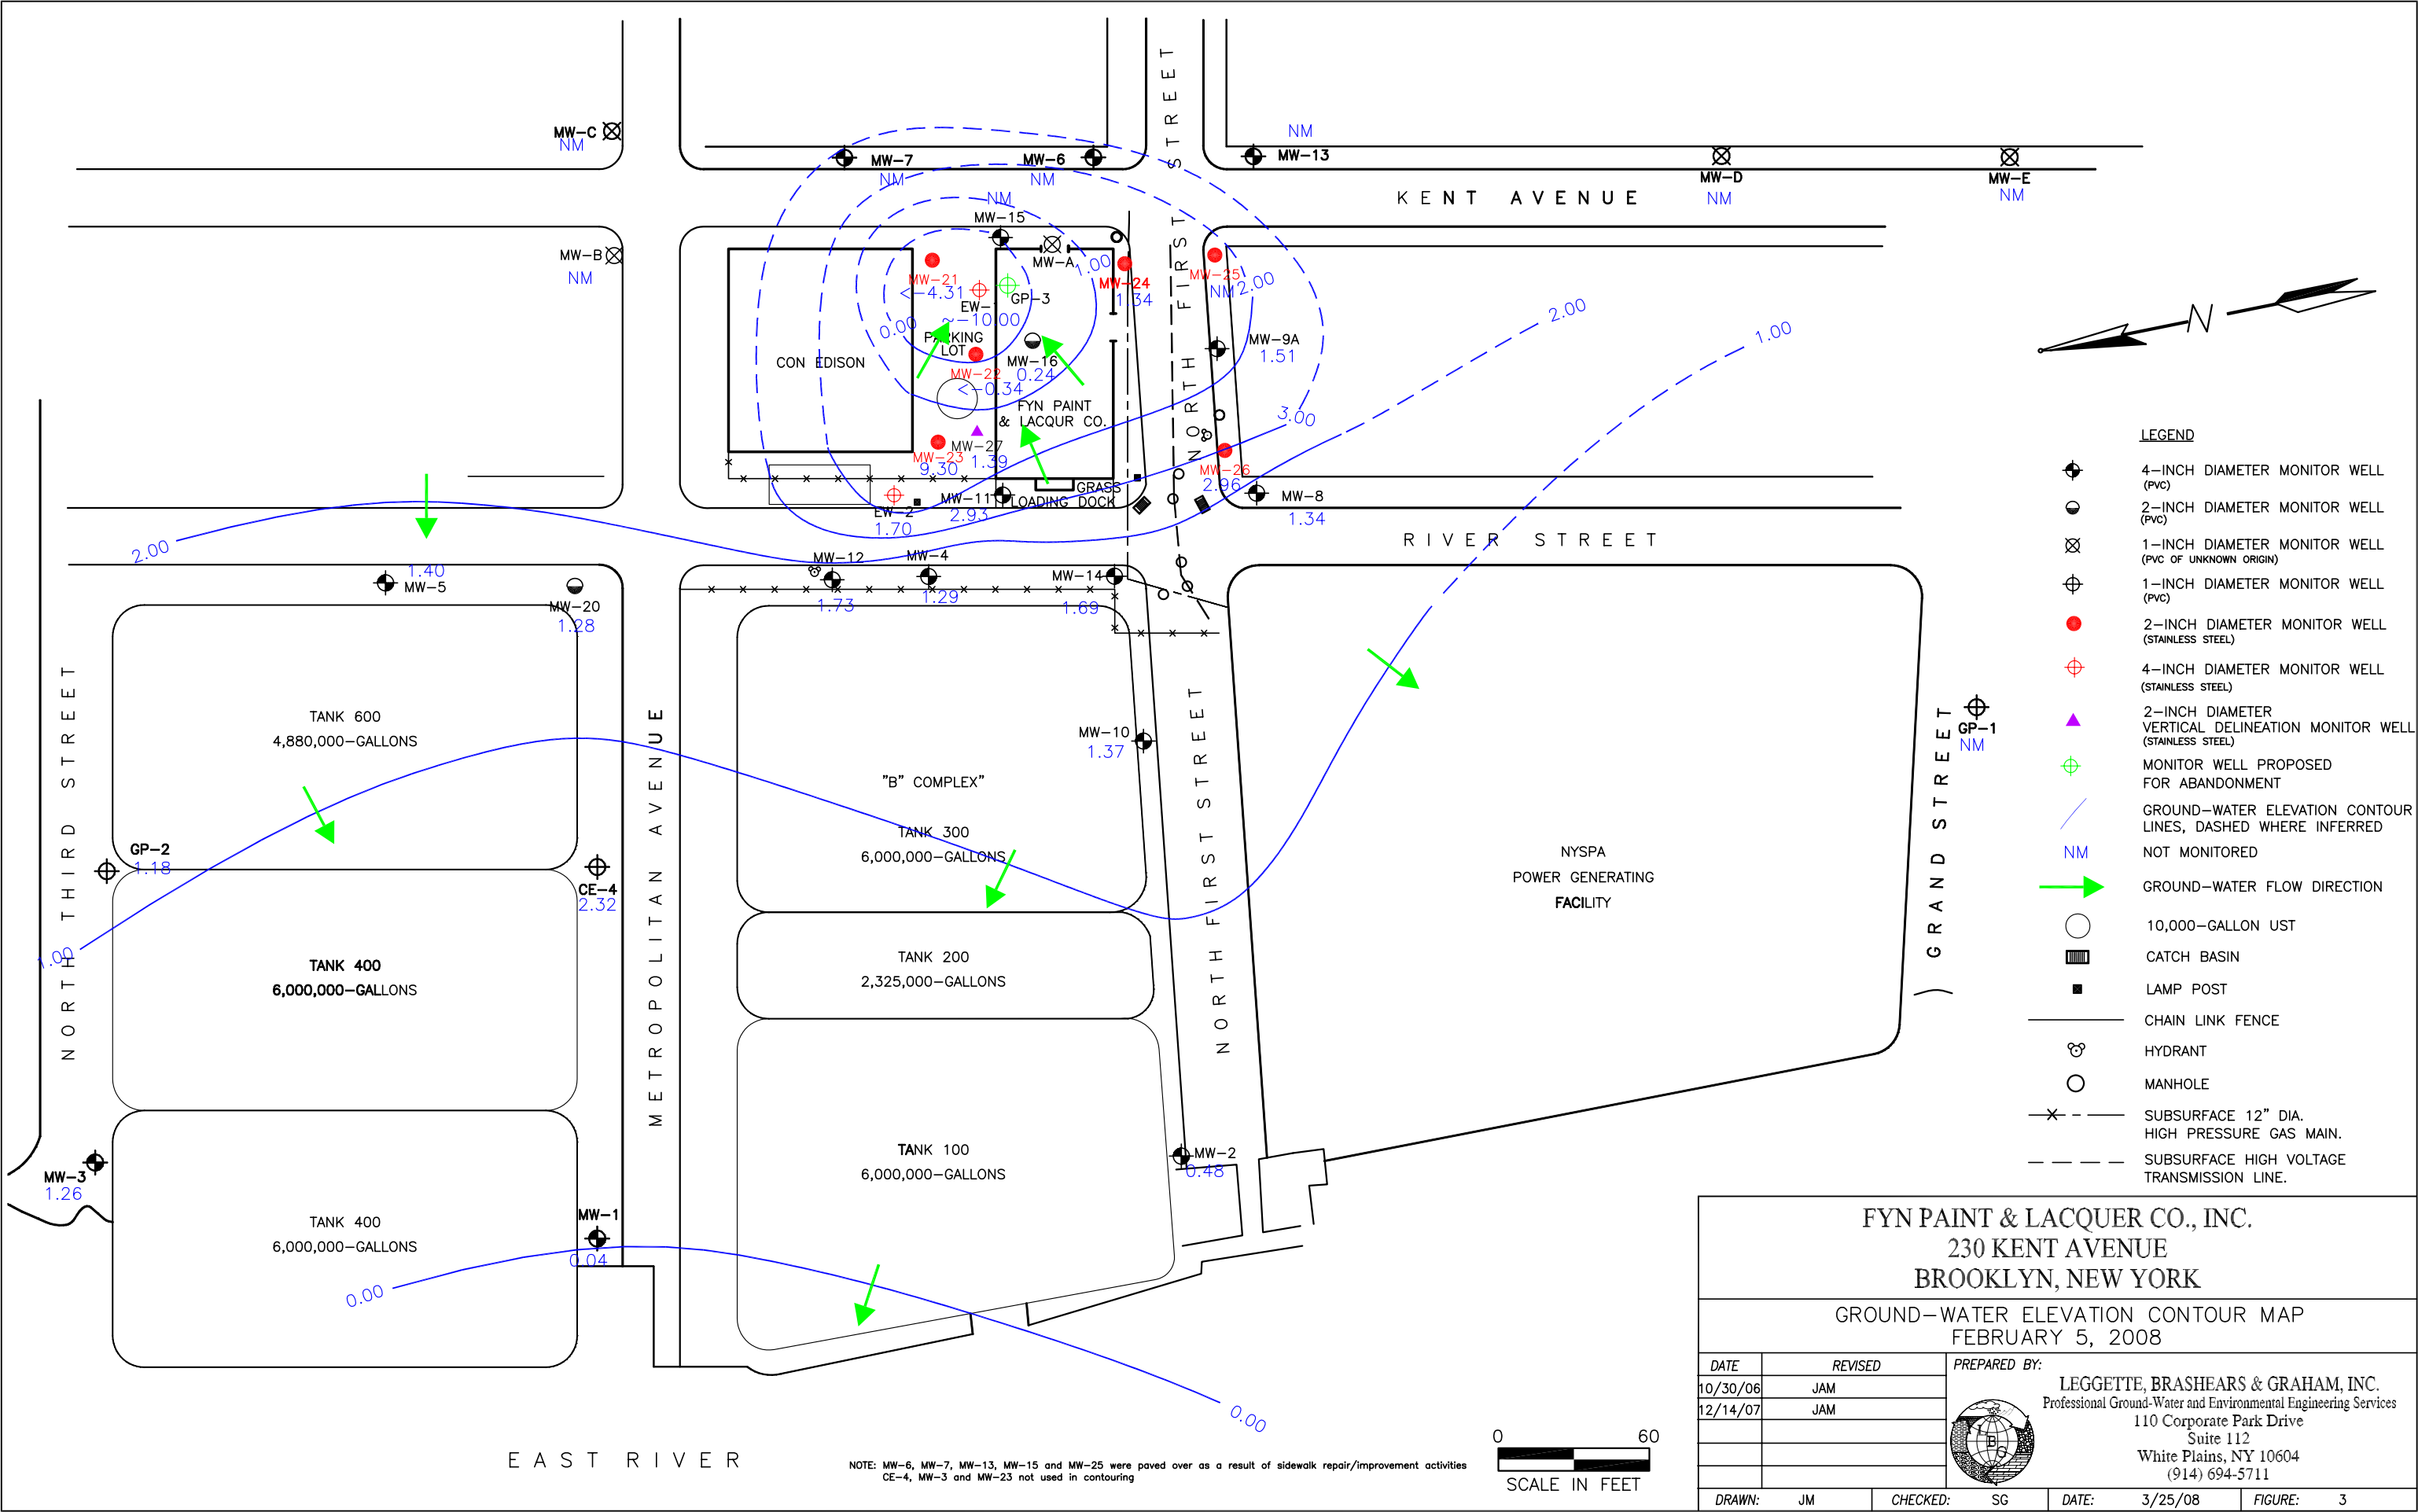

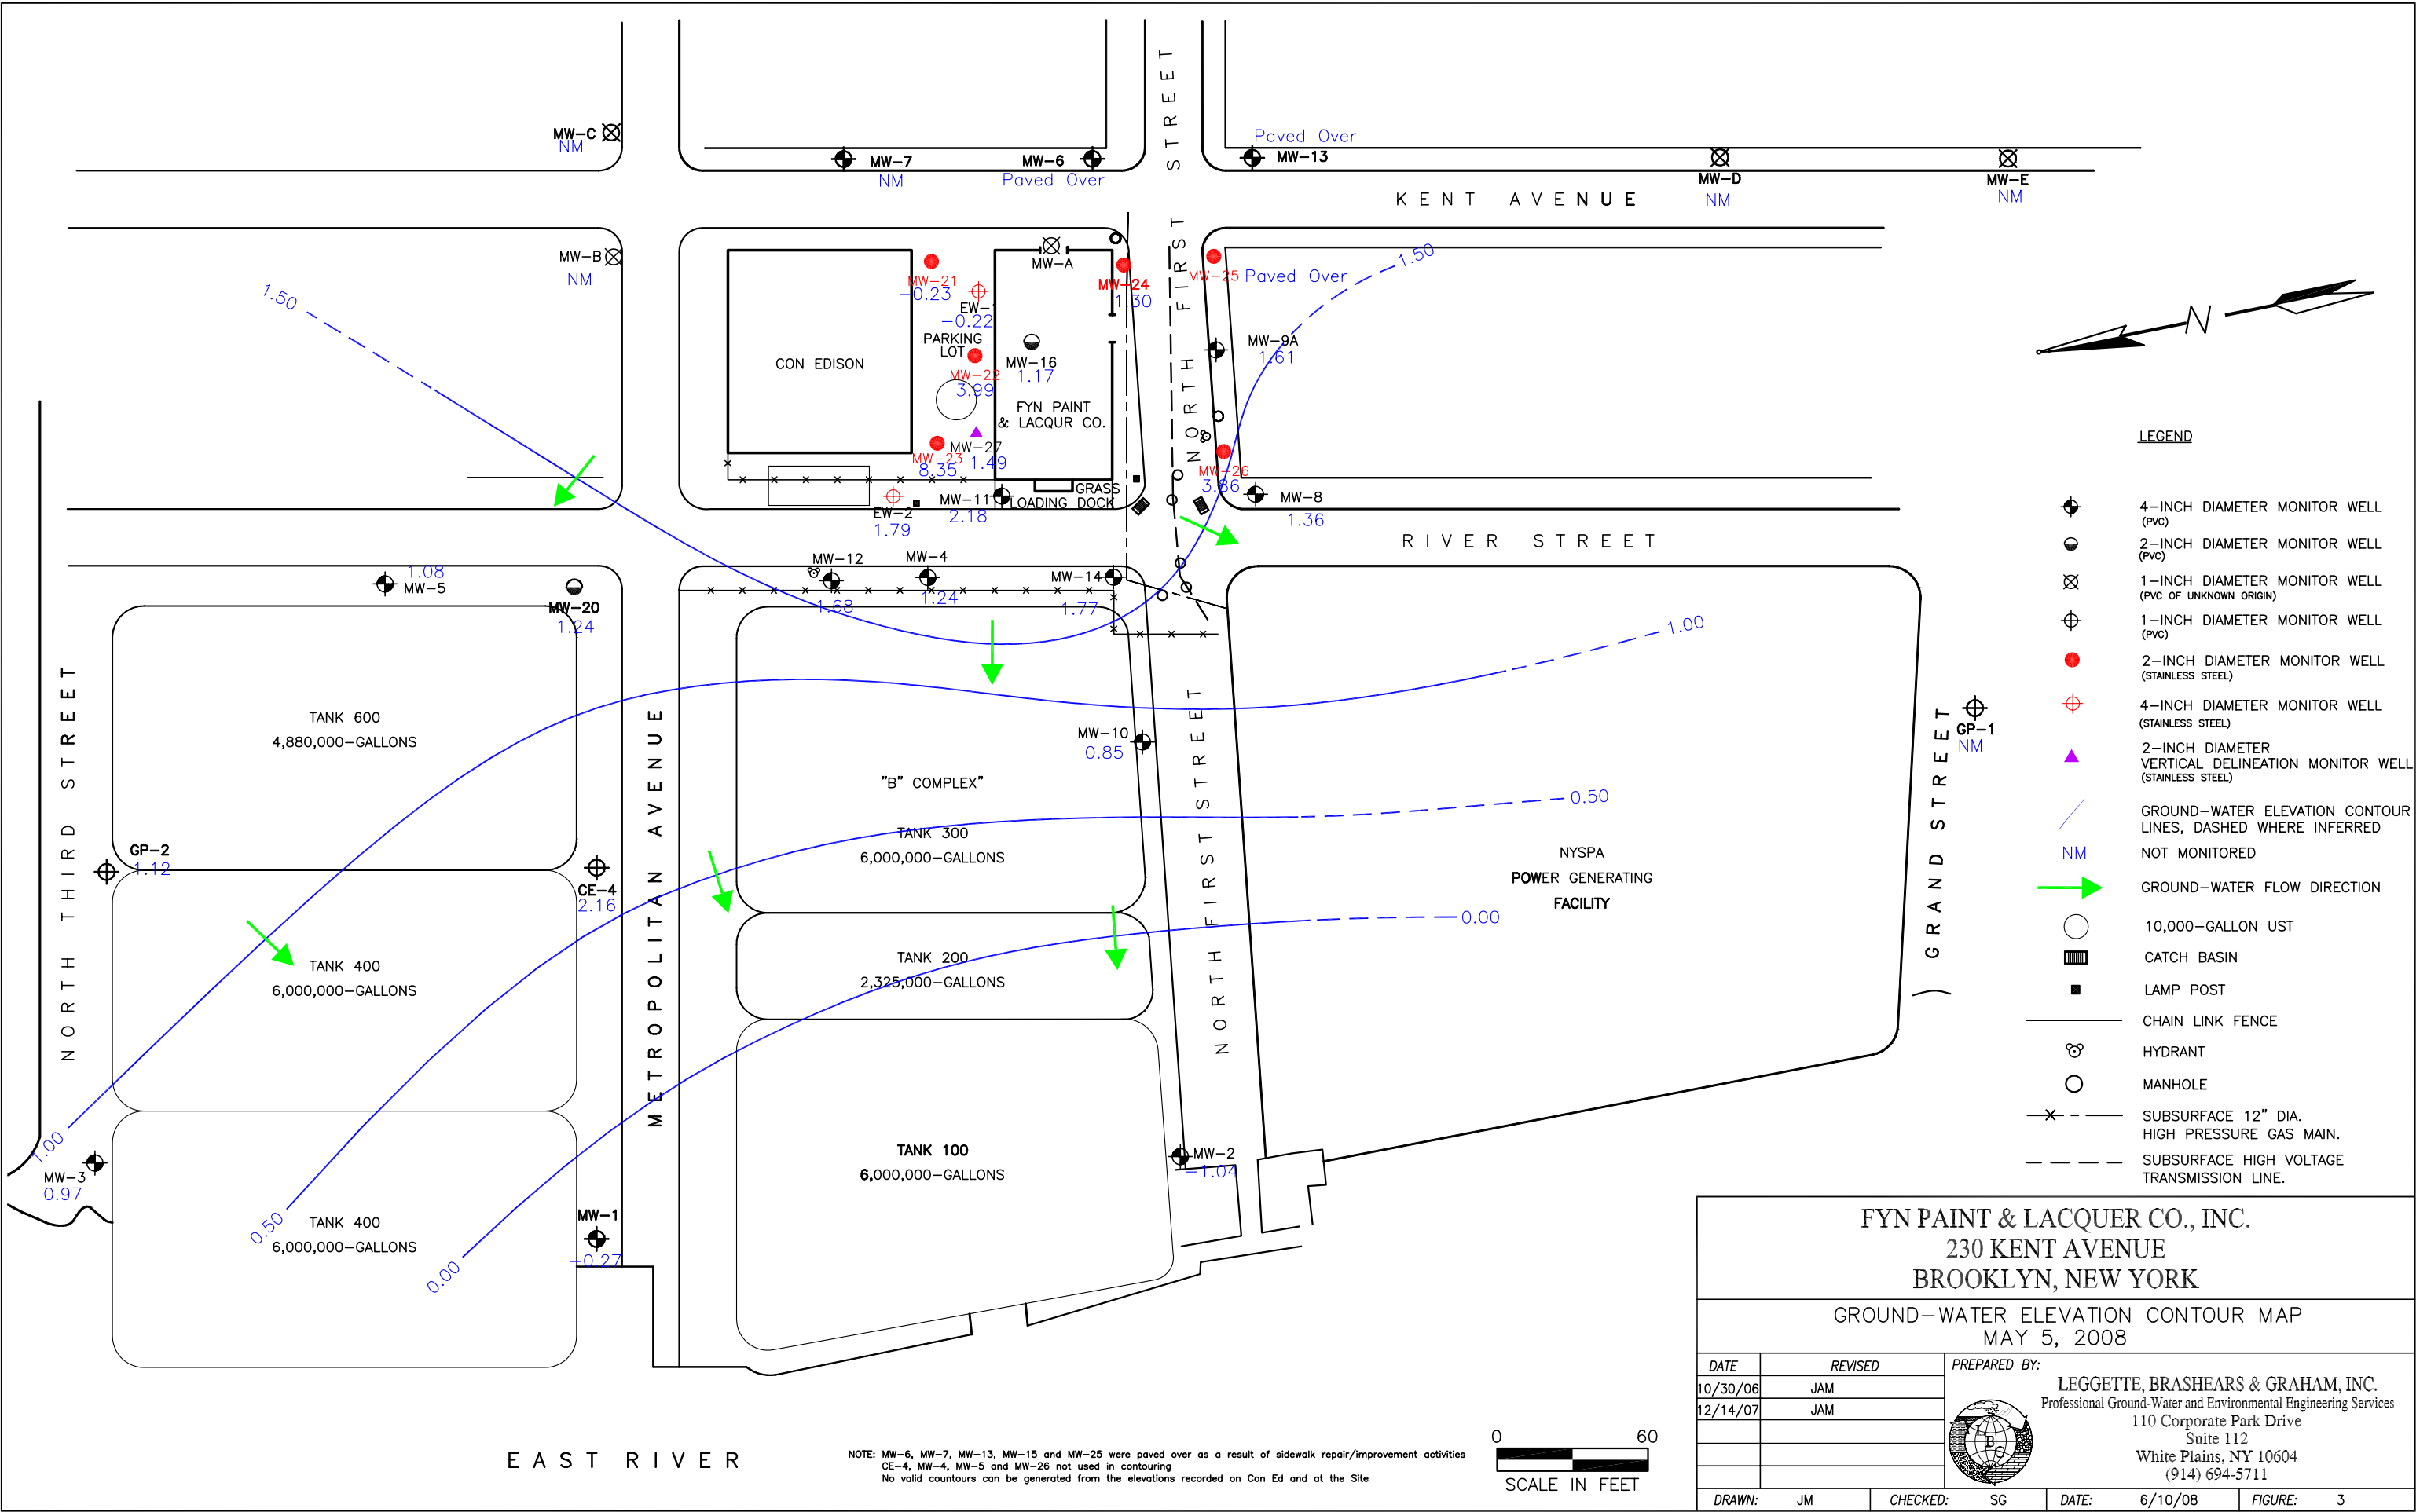

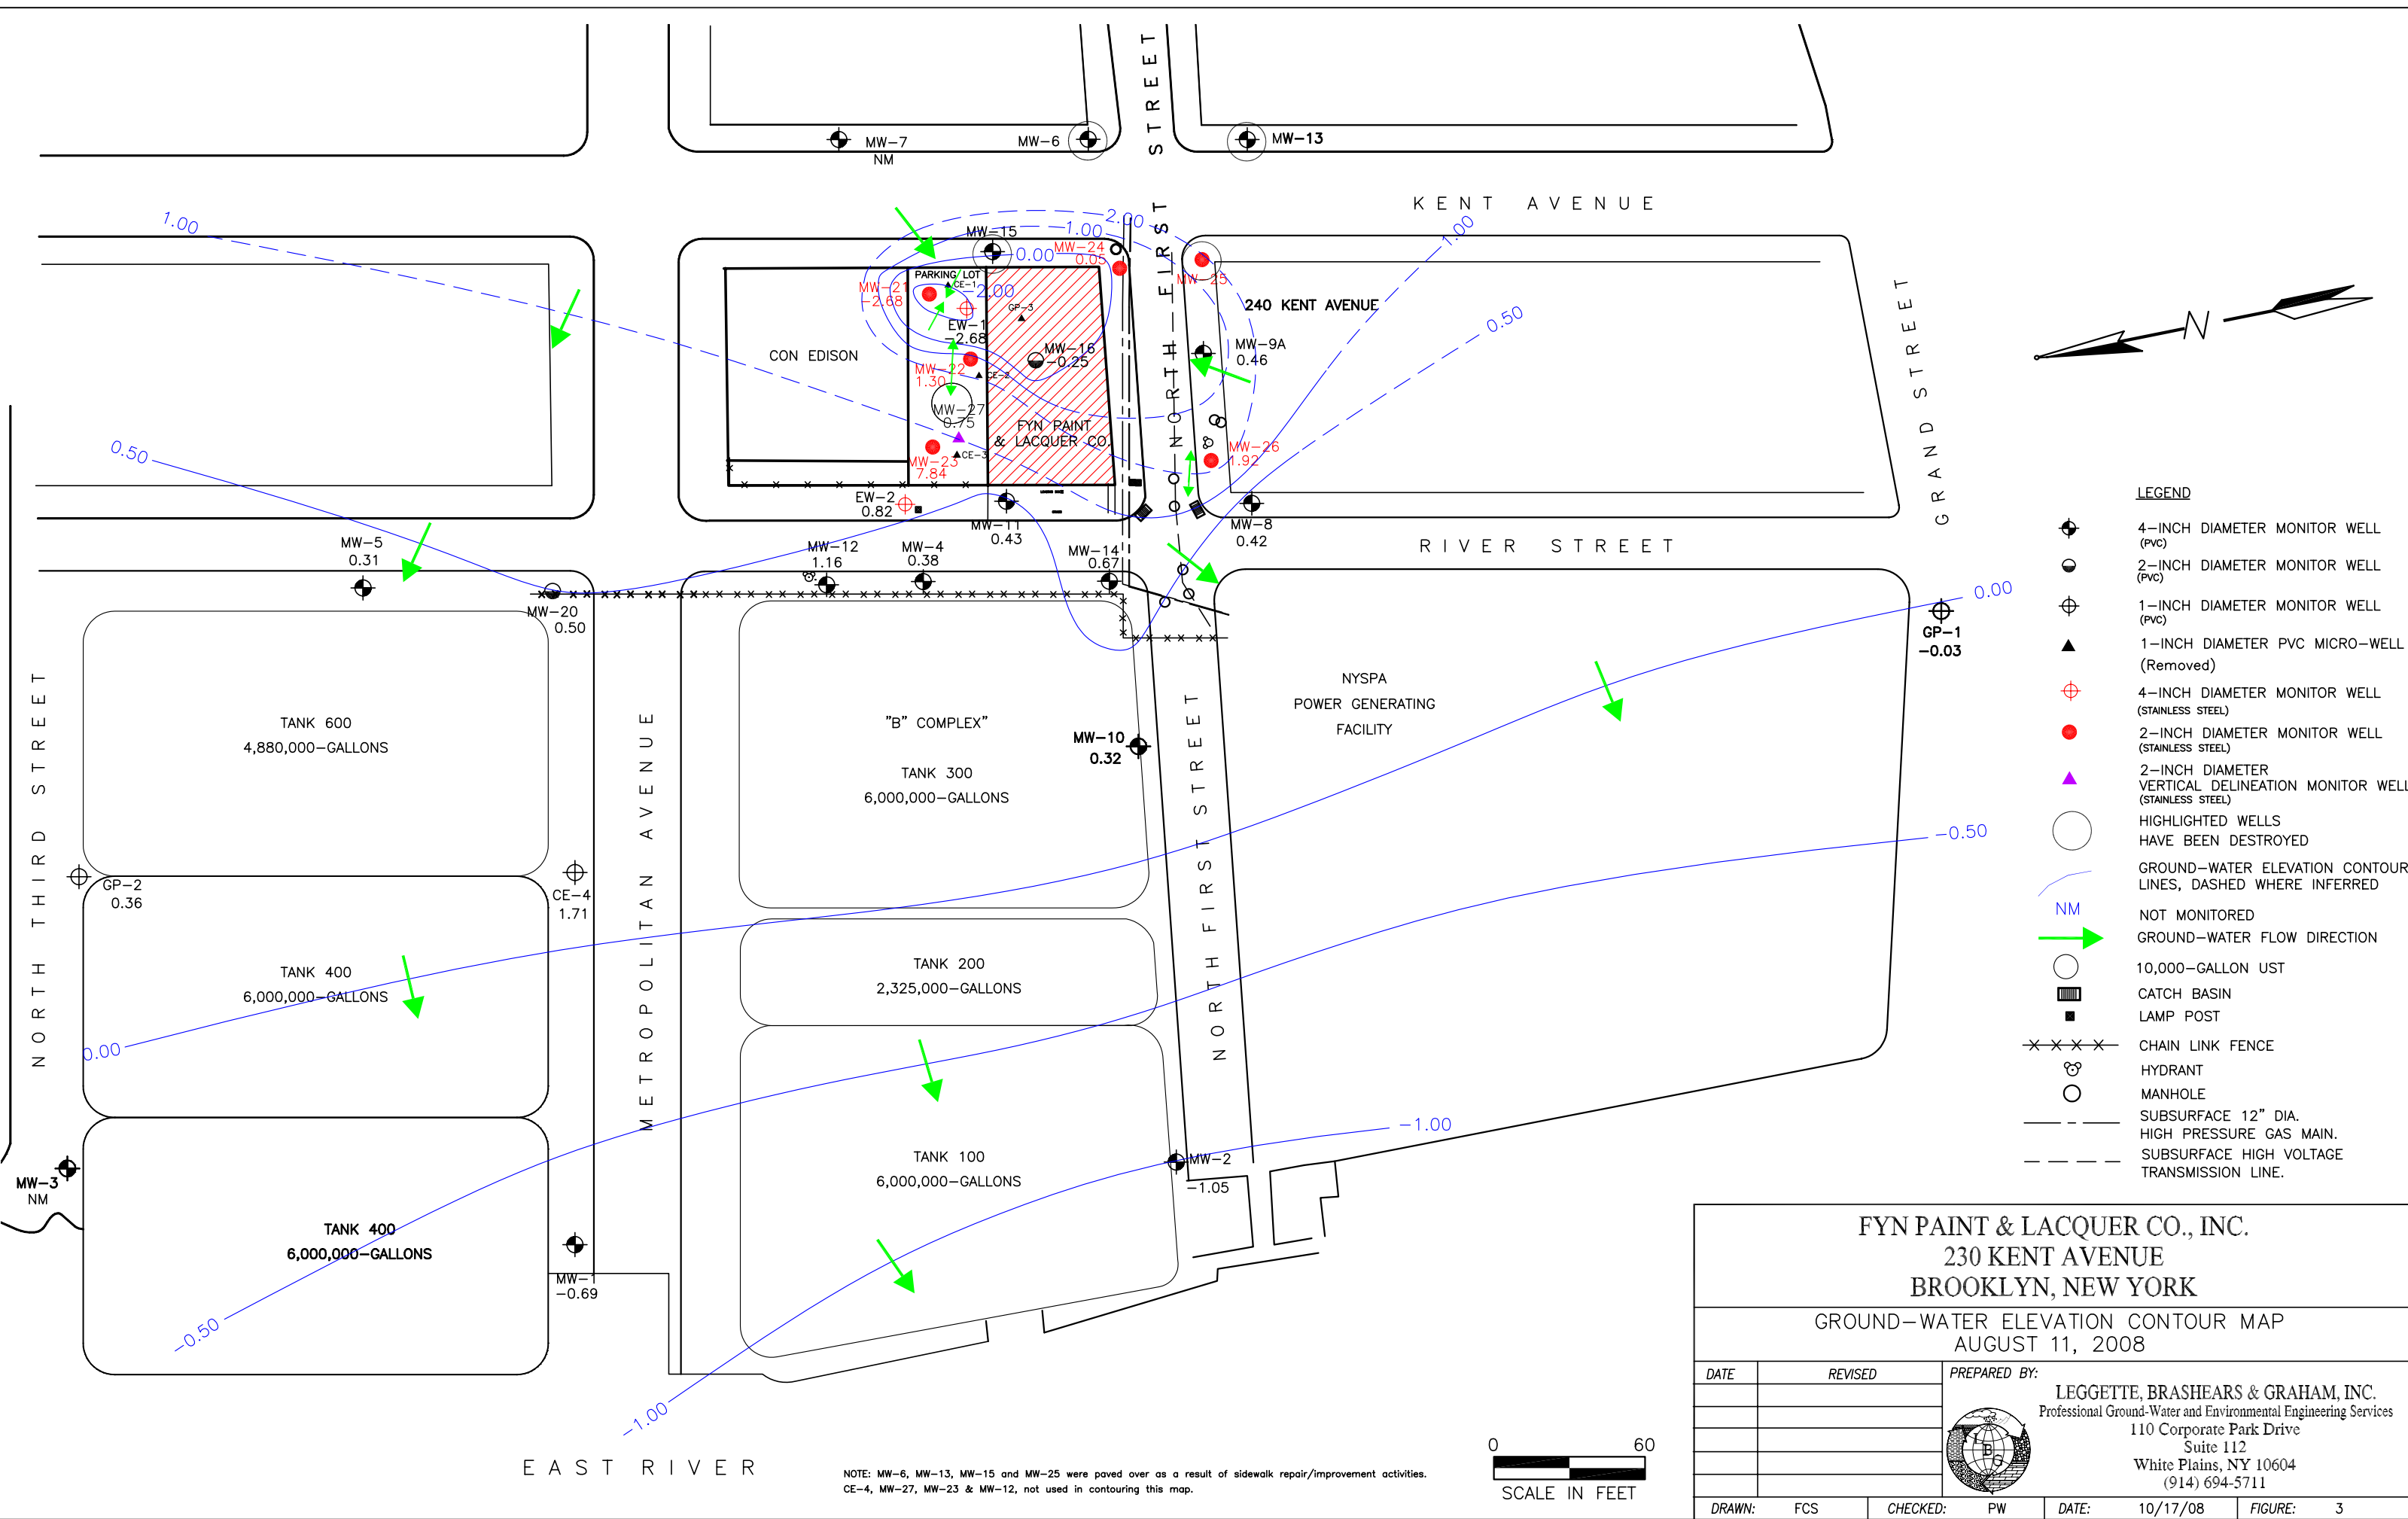


NOTE: MW-6, MW-13, MW-15 and MW-25 were paved over as a result of sidewalk repair/improvement activities.
CE-4, MW-27, MW-23 & MW-12, not used in contouring this map.



FYN PAINT & LACQUER CO., INC.
230 KENT AVENUE
BROOKLYN, NEW YORK

GROUND-WATER ELEVATION CONTOUR MAP
AUGUST 11, 2008

DATE		REVISED		PREPARED BY:	
				LEGGETTE, BRASHEARS & GRAHAM, INC.	
				Professional Ground-Water and Environmental Engineering Services	
				110 Corporate Park Drive	
				Suite 112	
				White Plains, NY 10604	
				(914) 694-5711	
DRAWN:		FCS	CHECKED:	PW	DATE: 10/17/08
					FIGURE: 3

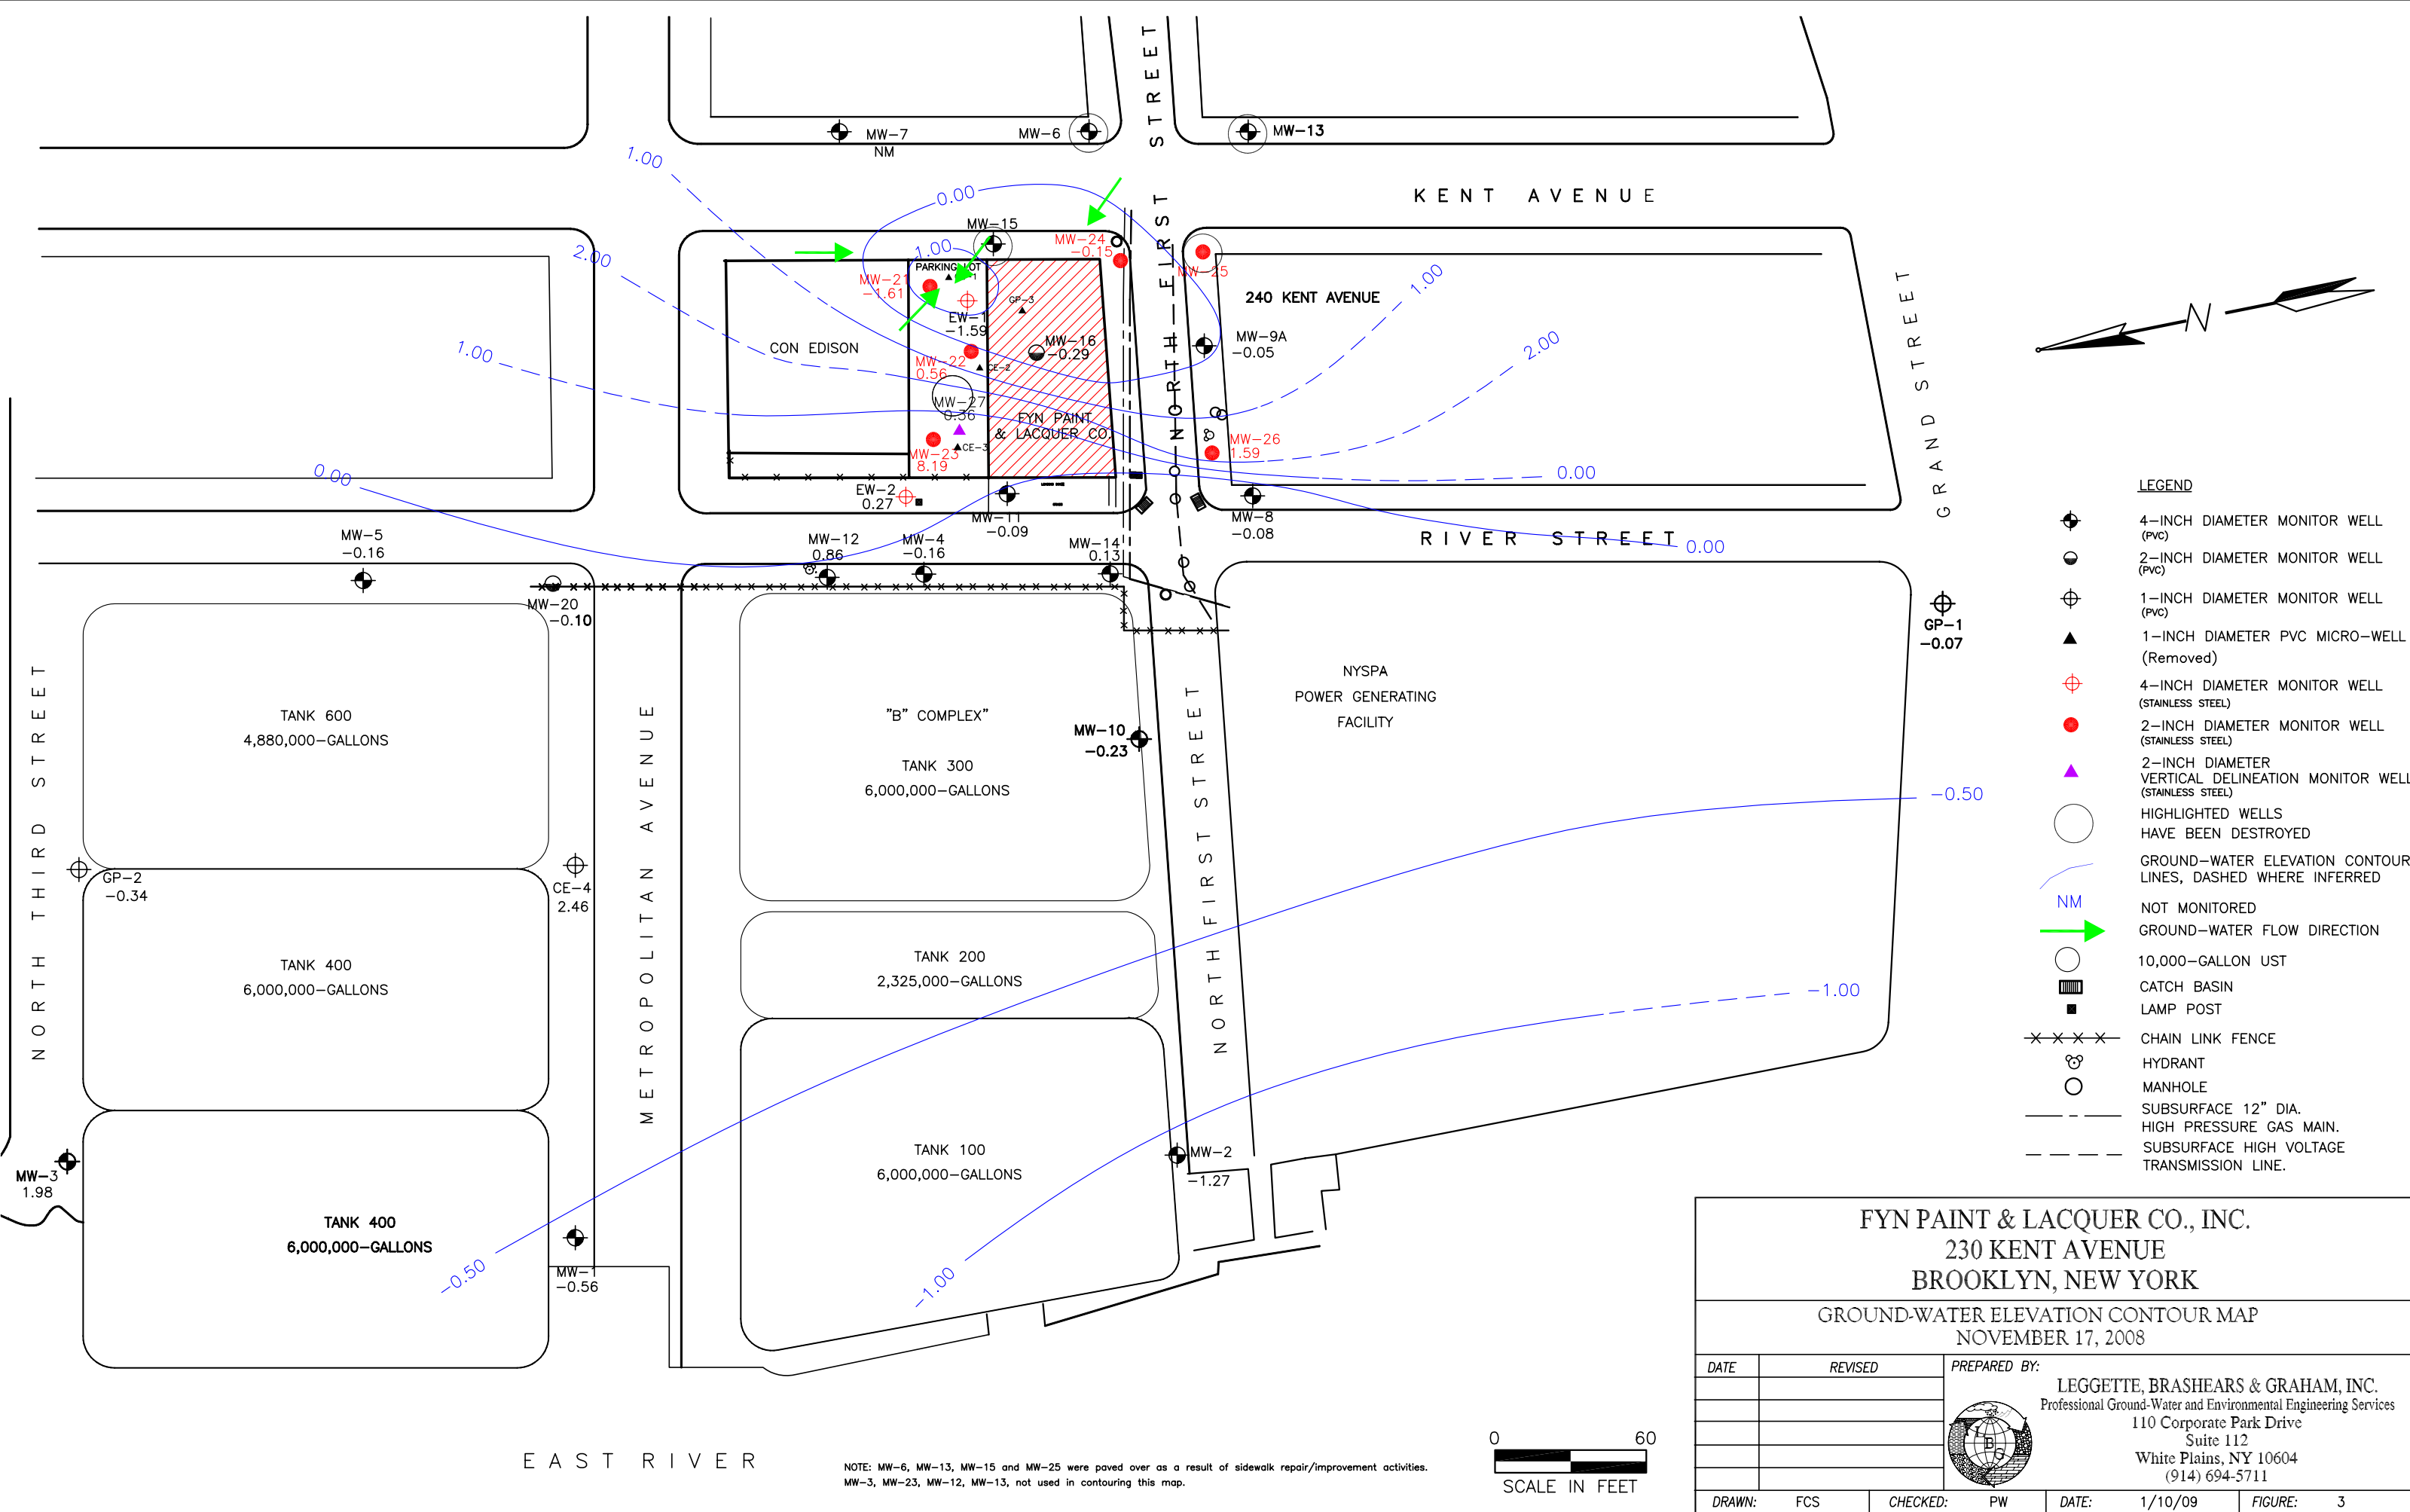

NOTE: MW-6, MW-13, MW-15 and MW-25 were paved over as a result of sidewalk repair/improvement activities.
MW-3, MW-23, MW-12, MW-13, not used in contouring this map.



FYN PAINT & LACQUER CO., INC.


230 KENT AVENUE


BROOKLYN, NEW YORK

GROUND-WATER ELEVATION CONTOUR MAP

NOVEMBER 17, 2008

DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Ground-Water and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711
DRAWN:	FCS	CHECKED: PW
DATE:	1/10/09	FIGURE: 3

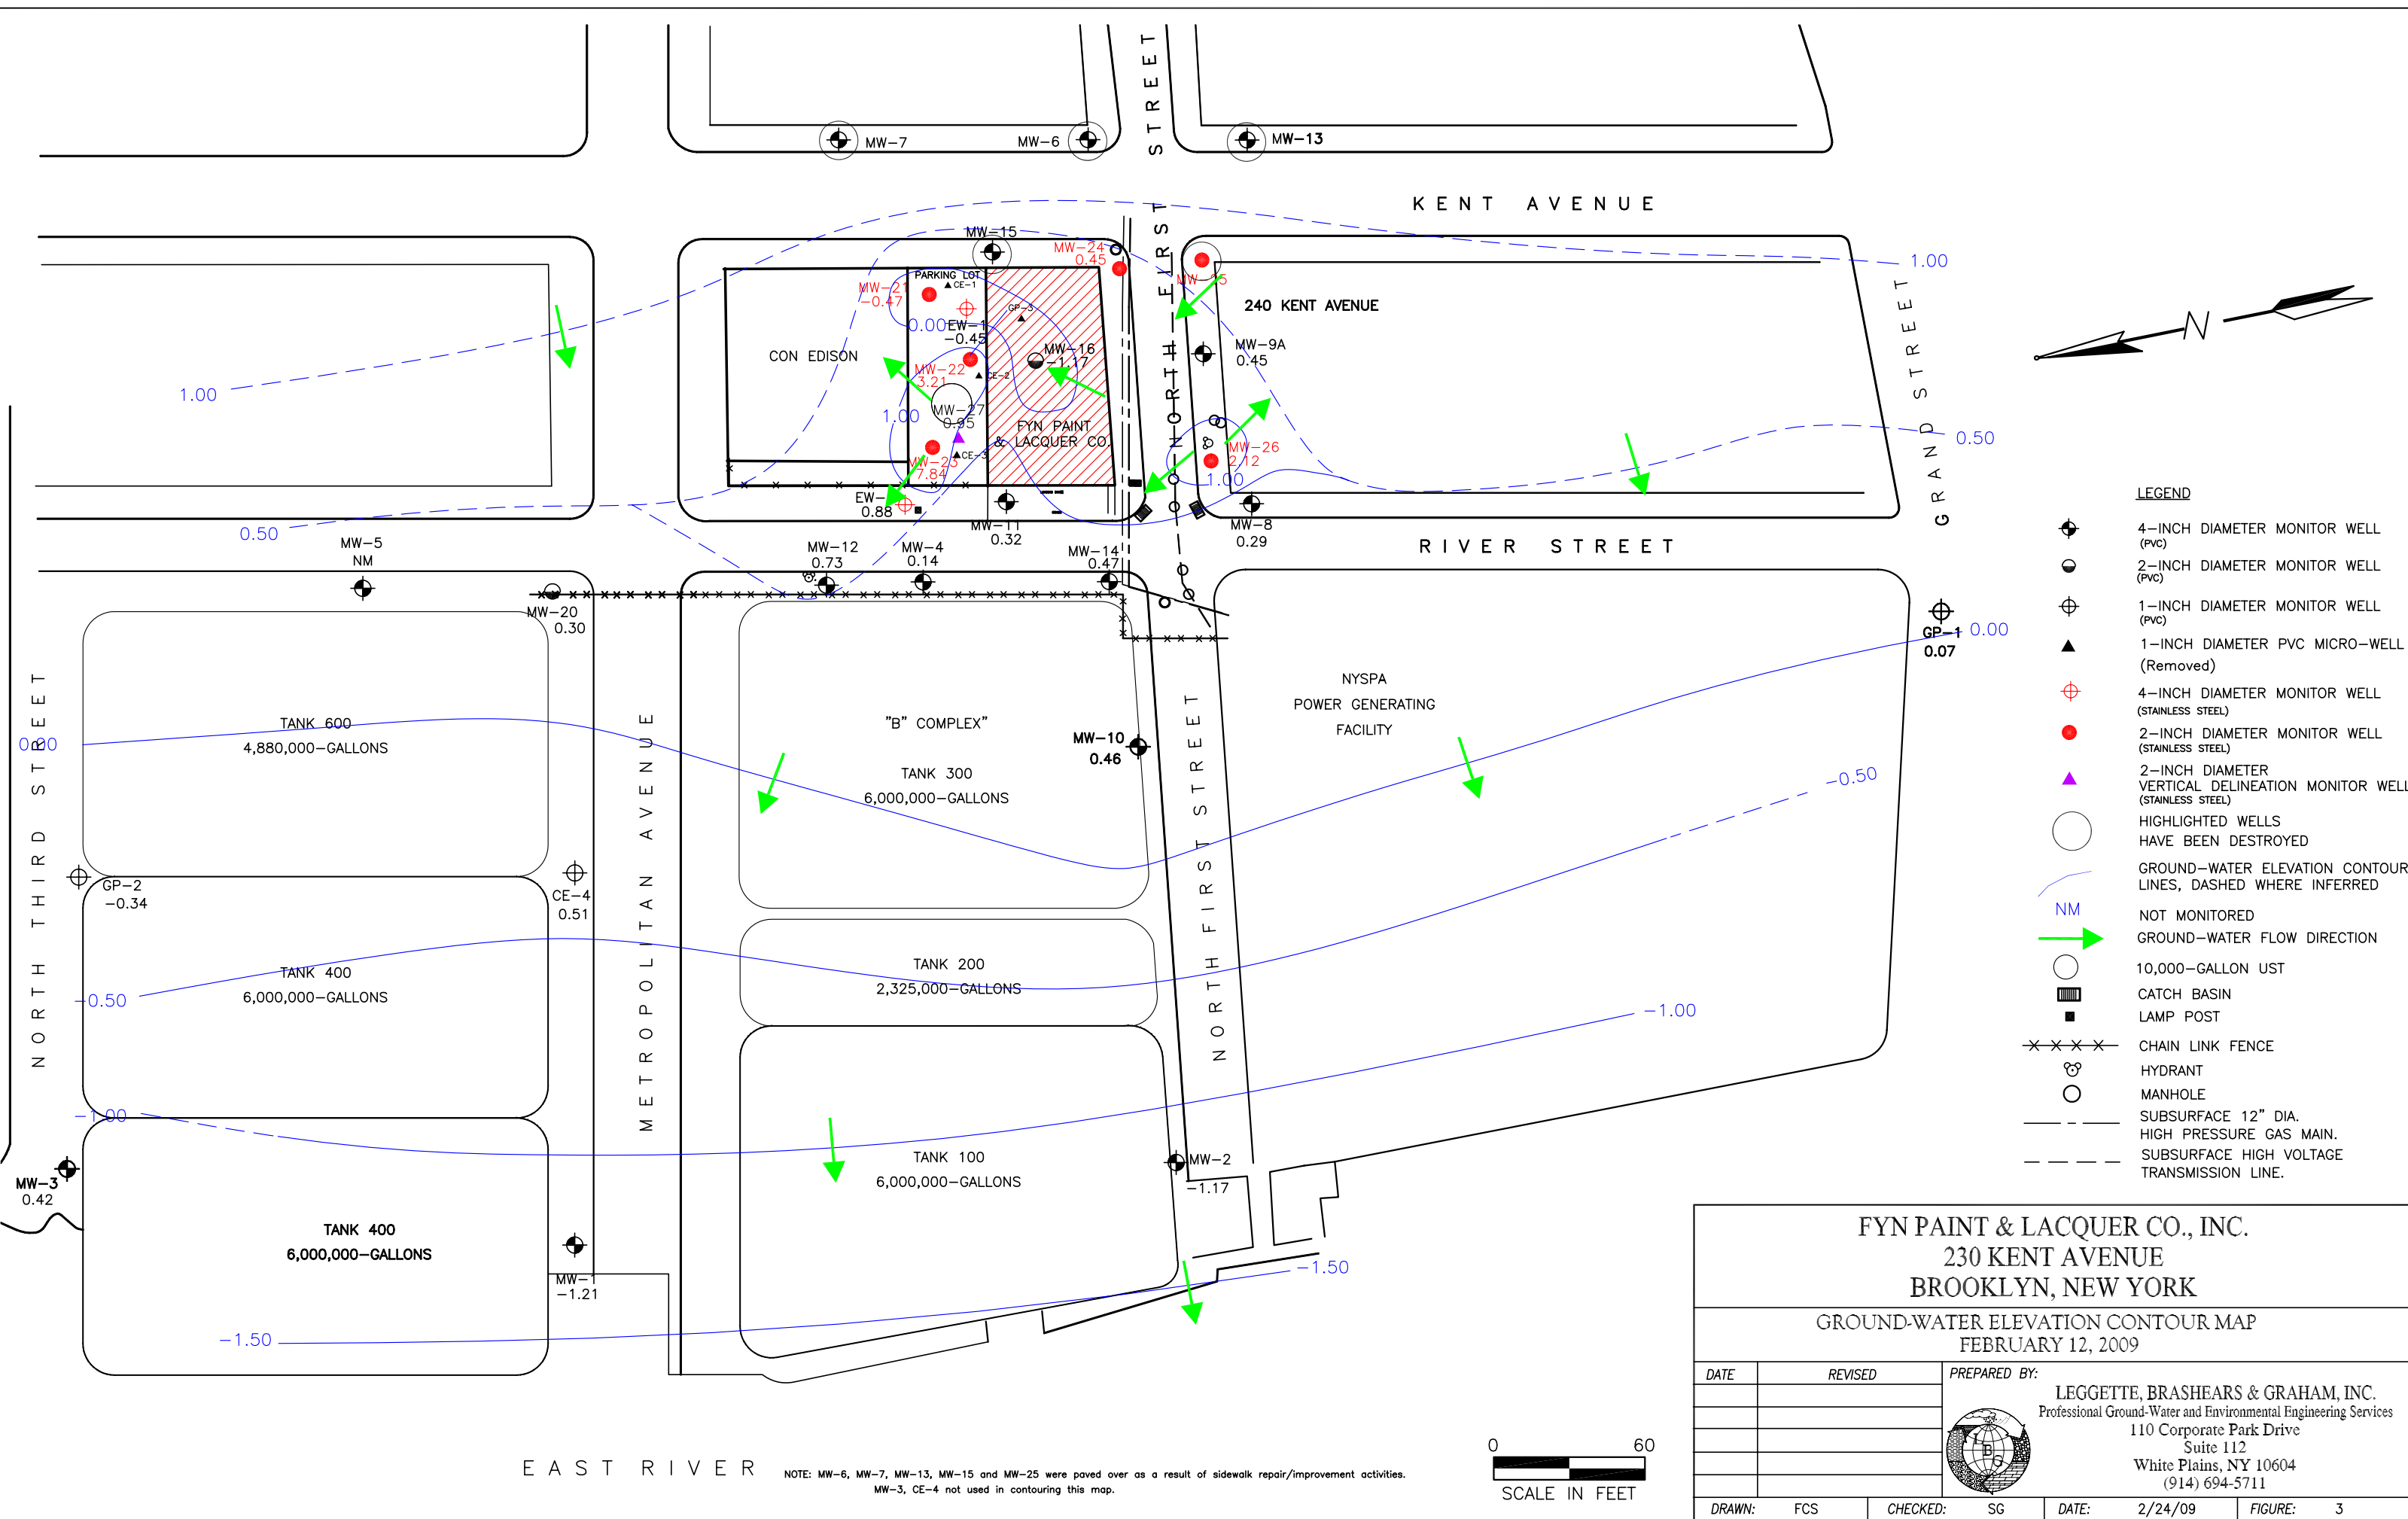

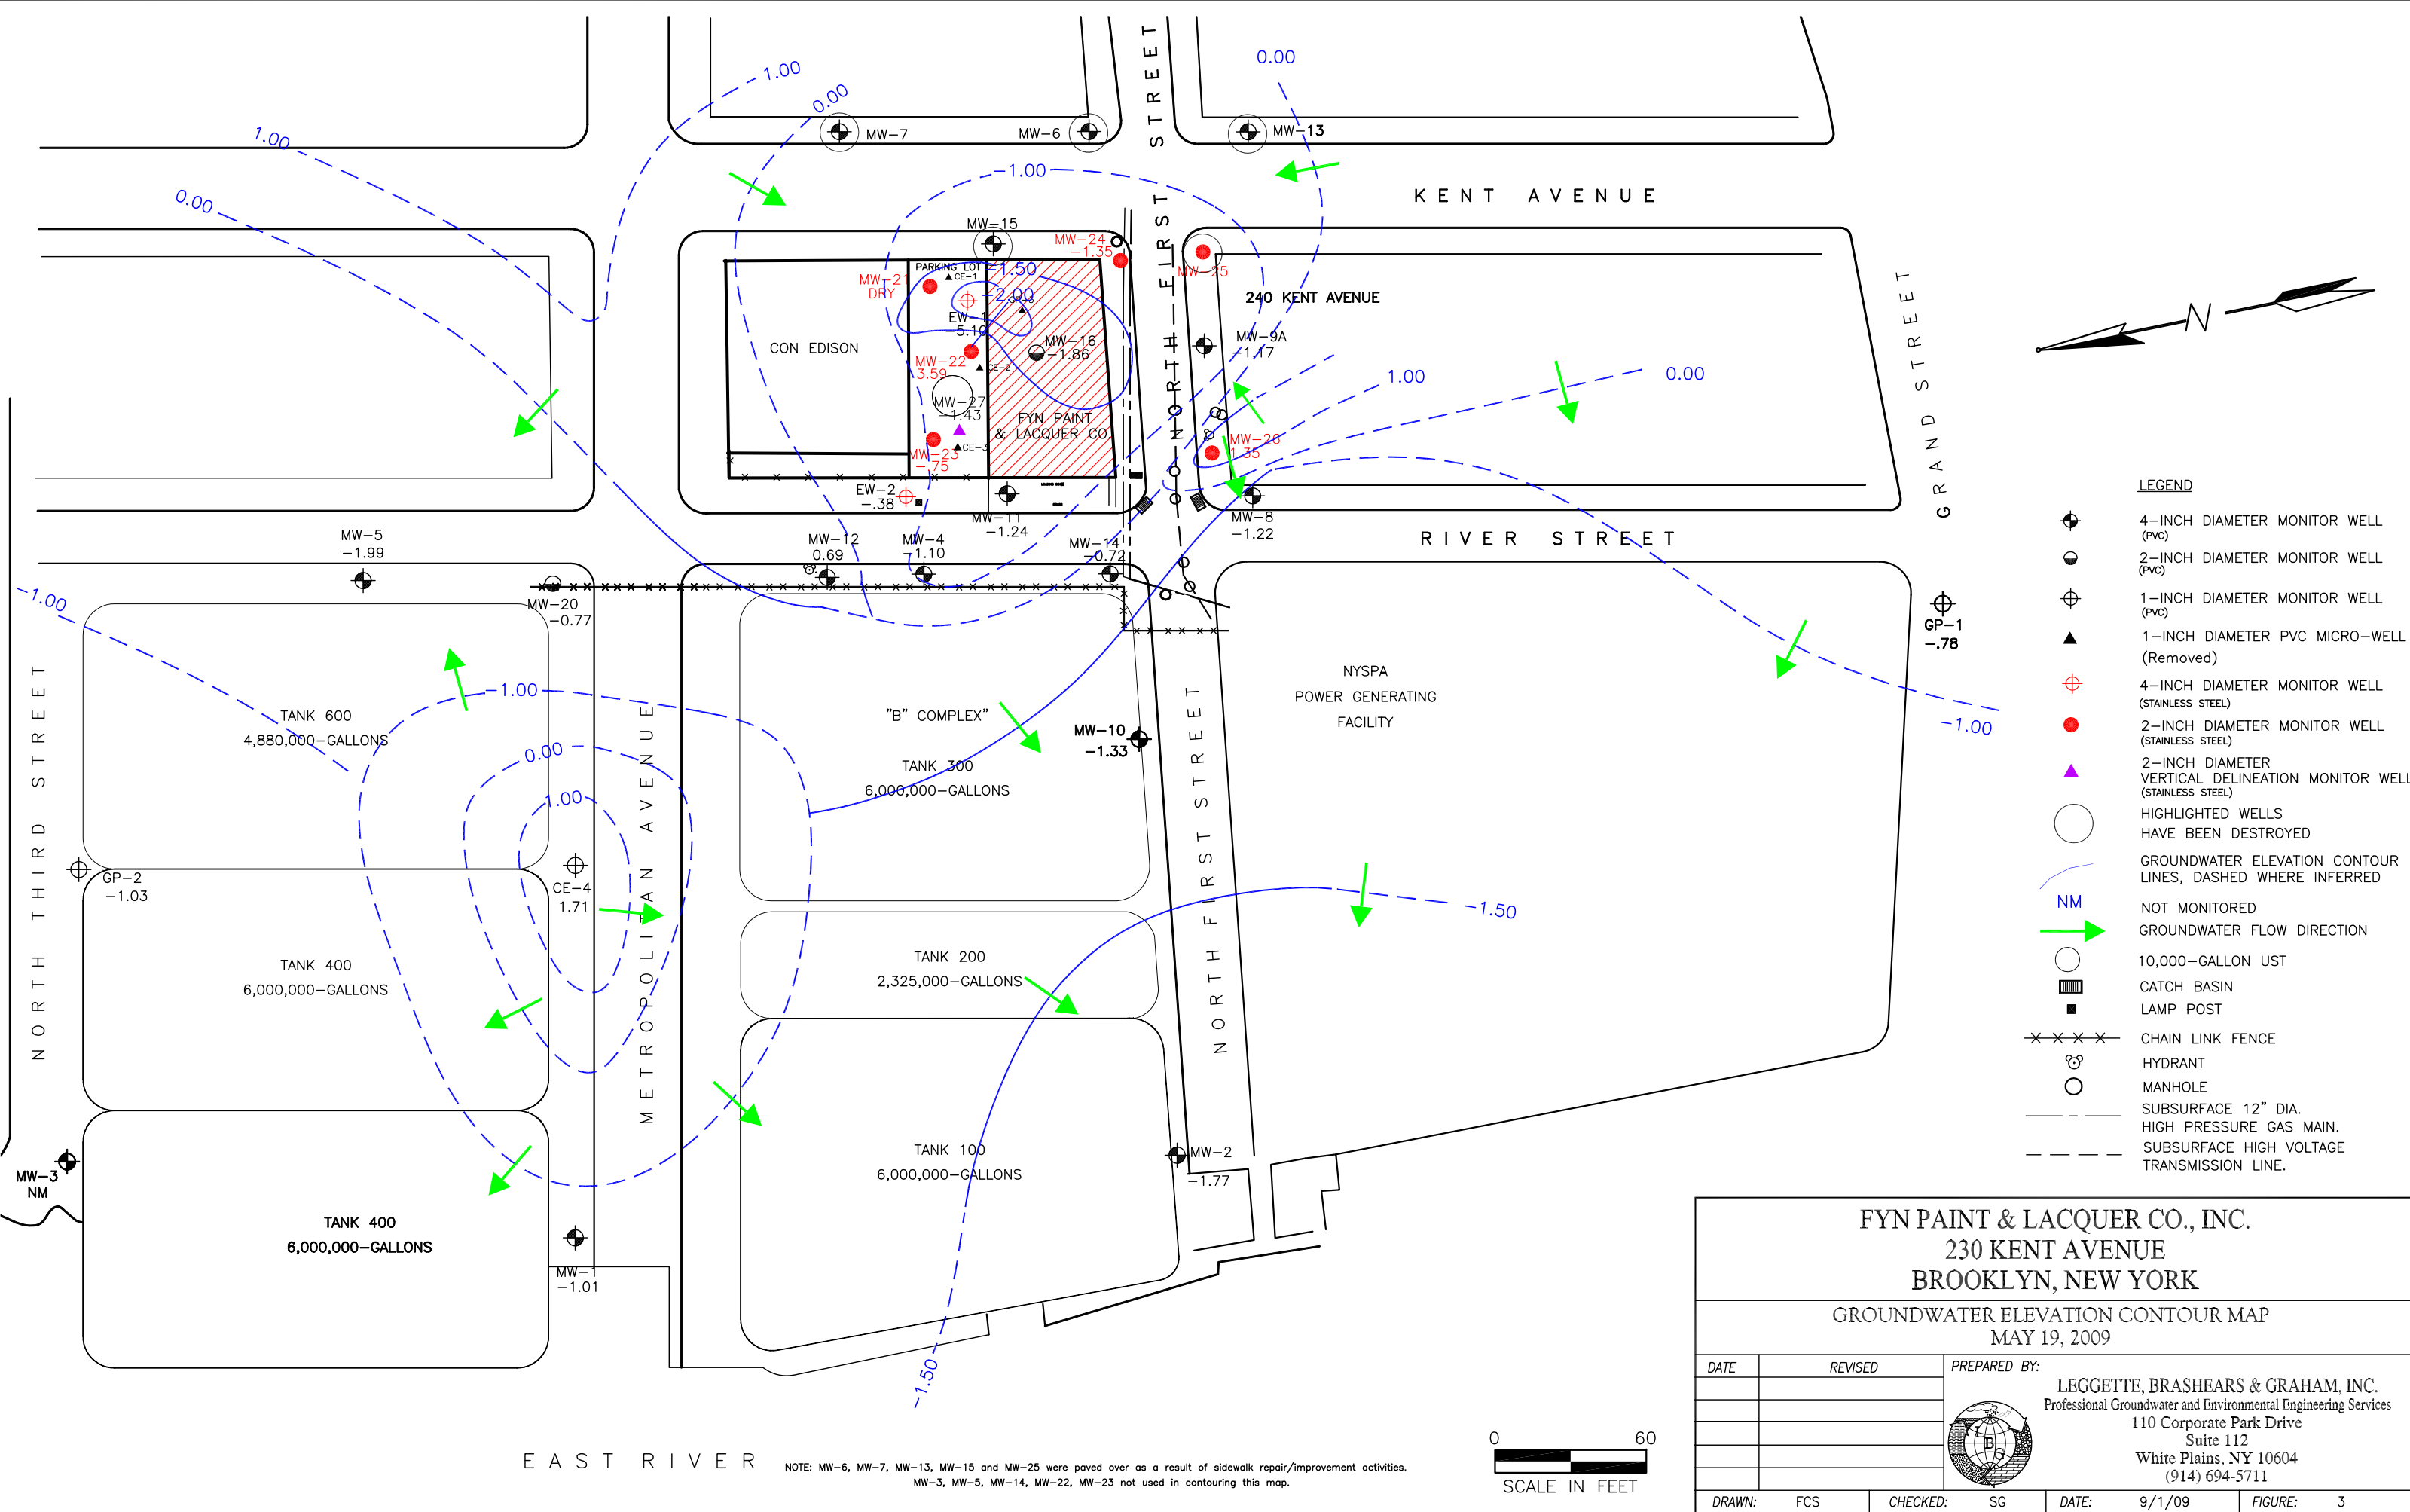

NOTE: MW-6, MW-7, MW-13, MW-15 and MW-25 were paved over as a result of sidewalk repair/improvement activities.
MW-3, MW-5, MW-14, MW-22, MW-23 not used in contouring this map.



FYN PAINT & LACQUER CO., INC.


230 KENT AVENUE

BROOKLYN, NEW YORK

GROUNDWATER ELEVATION CONTOUR MAP

MAY 19, 2009

DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Groundwater and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711
DRAWN:	FCS	CHECKED: SG
DATE:	9/1/09	FIGURE: 3

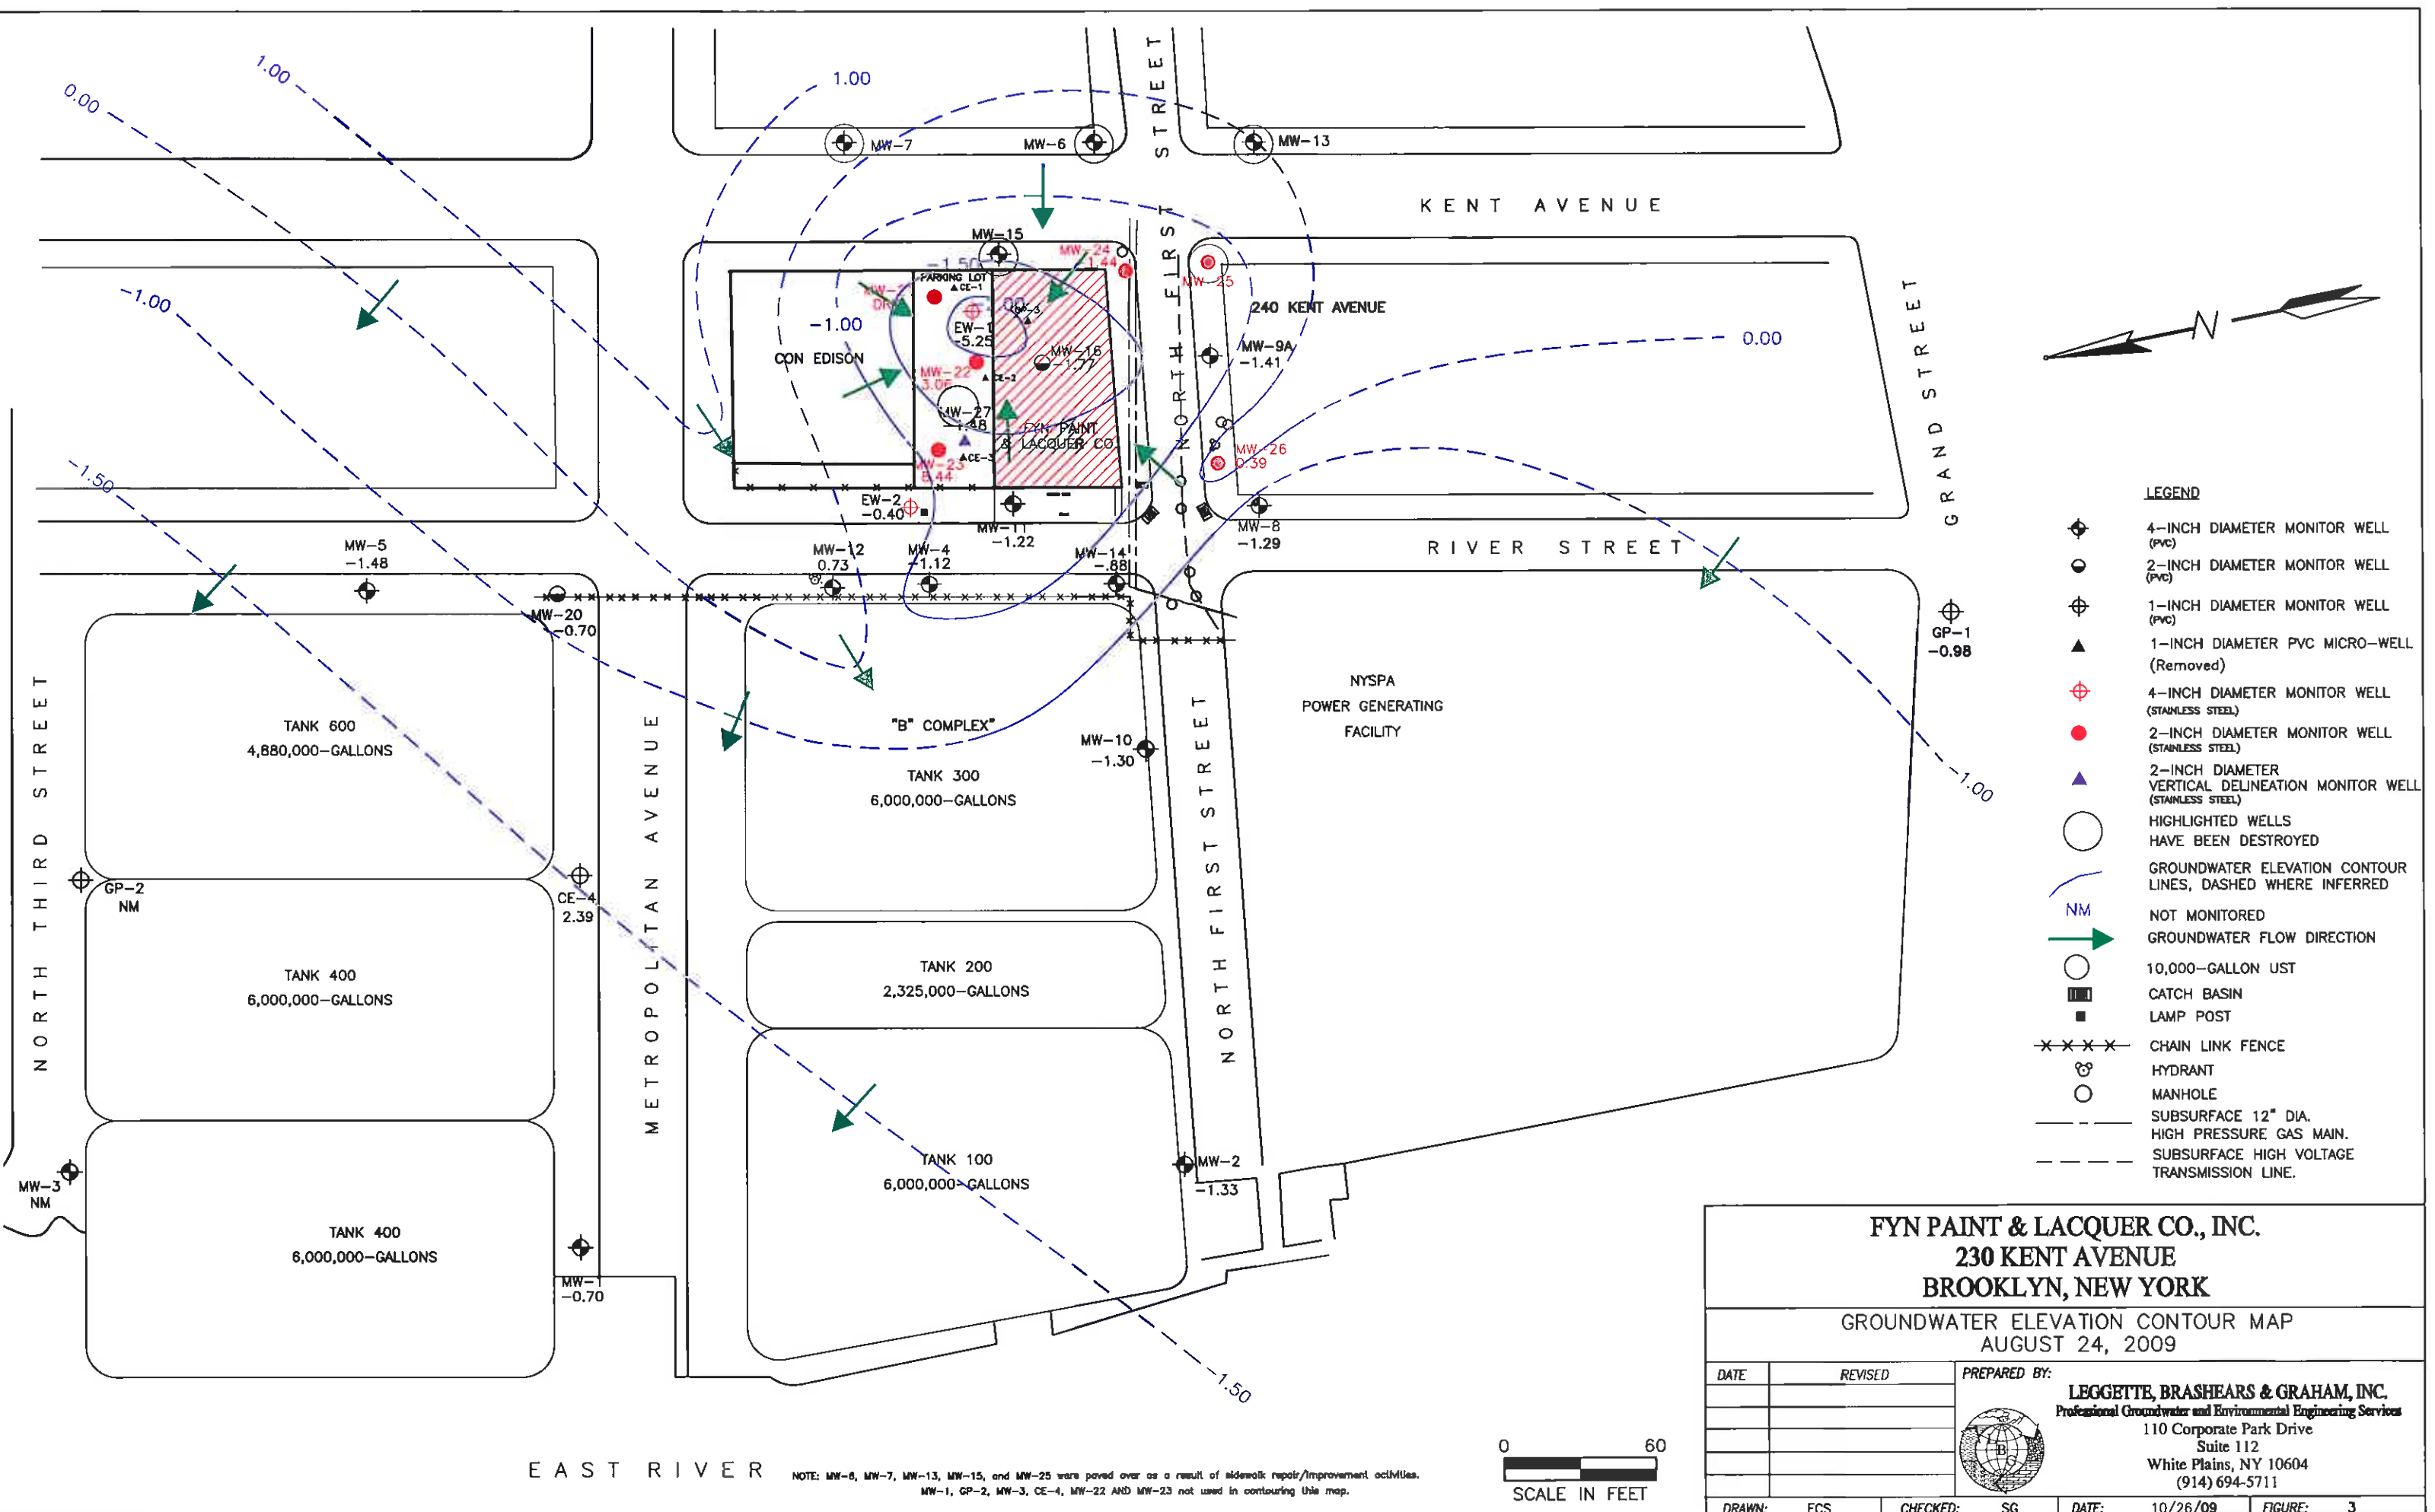

EAST RIVER


NOTE: MW-6, MW-7, MW-13, MW-15, and MW-25 were paved over as a result of sidewalk repair/improvement activities. MW-1, GP-2, MW-3, CE-4, MW-22 AND MW-23 not used in contouring this map.

0 60
SCALE IN FEET

FYN PAINT & LACQUER CO., INC.
230 KENT AVENUE
BROOKLYN, NEW YORK

GROUNDWATER ELEVATION CONTOUR MAP
AUGUST 24, 2009

DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Groundwater and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711
DRAWN:	FCS	CHECKED: SG
		DATE: 10/26/09
		FIGURE: 3

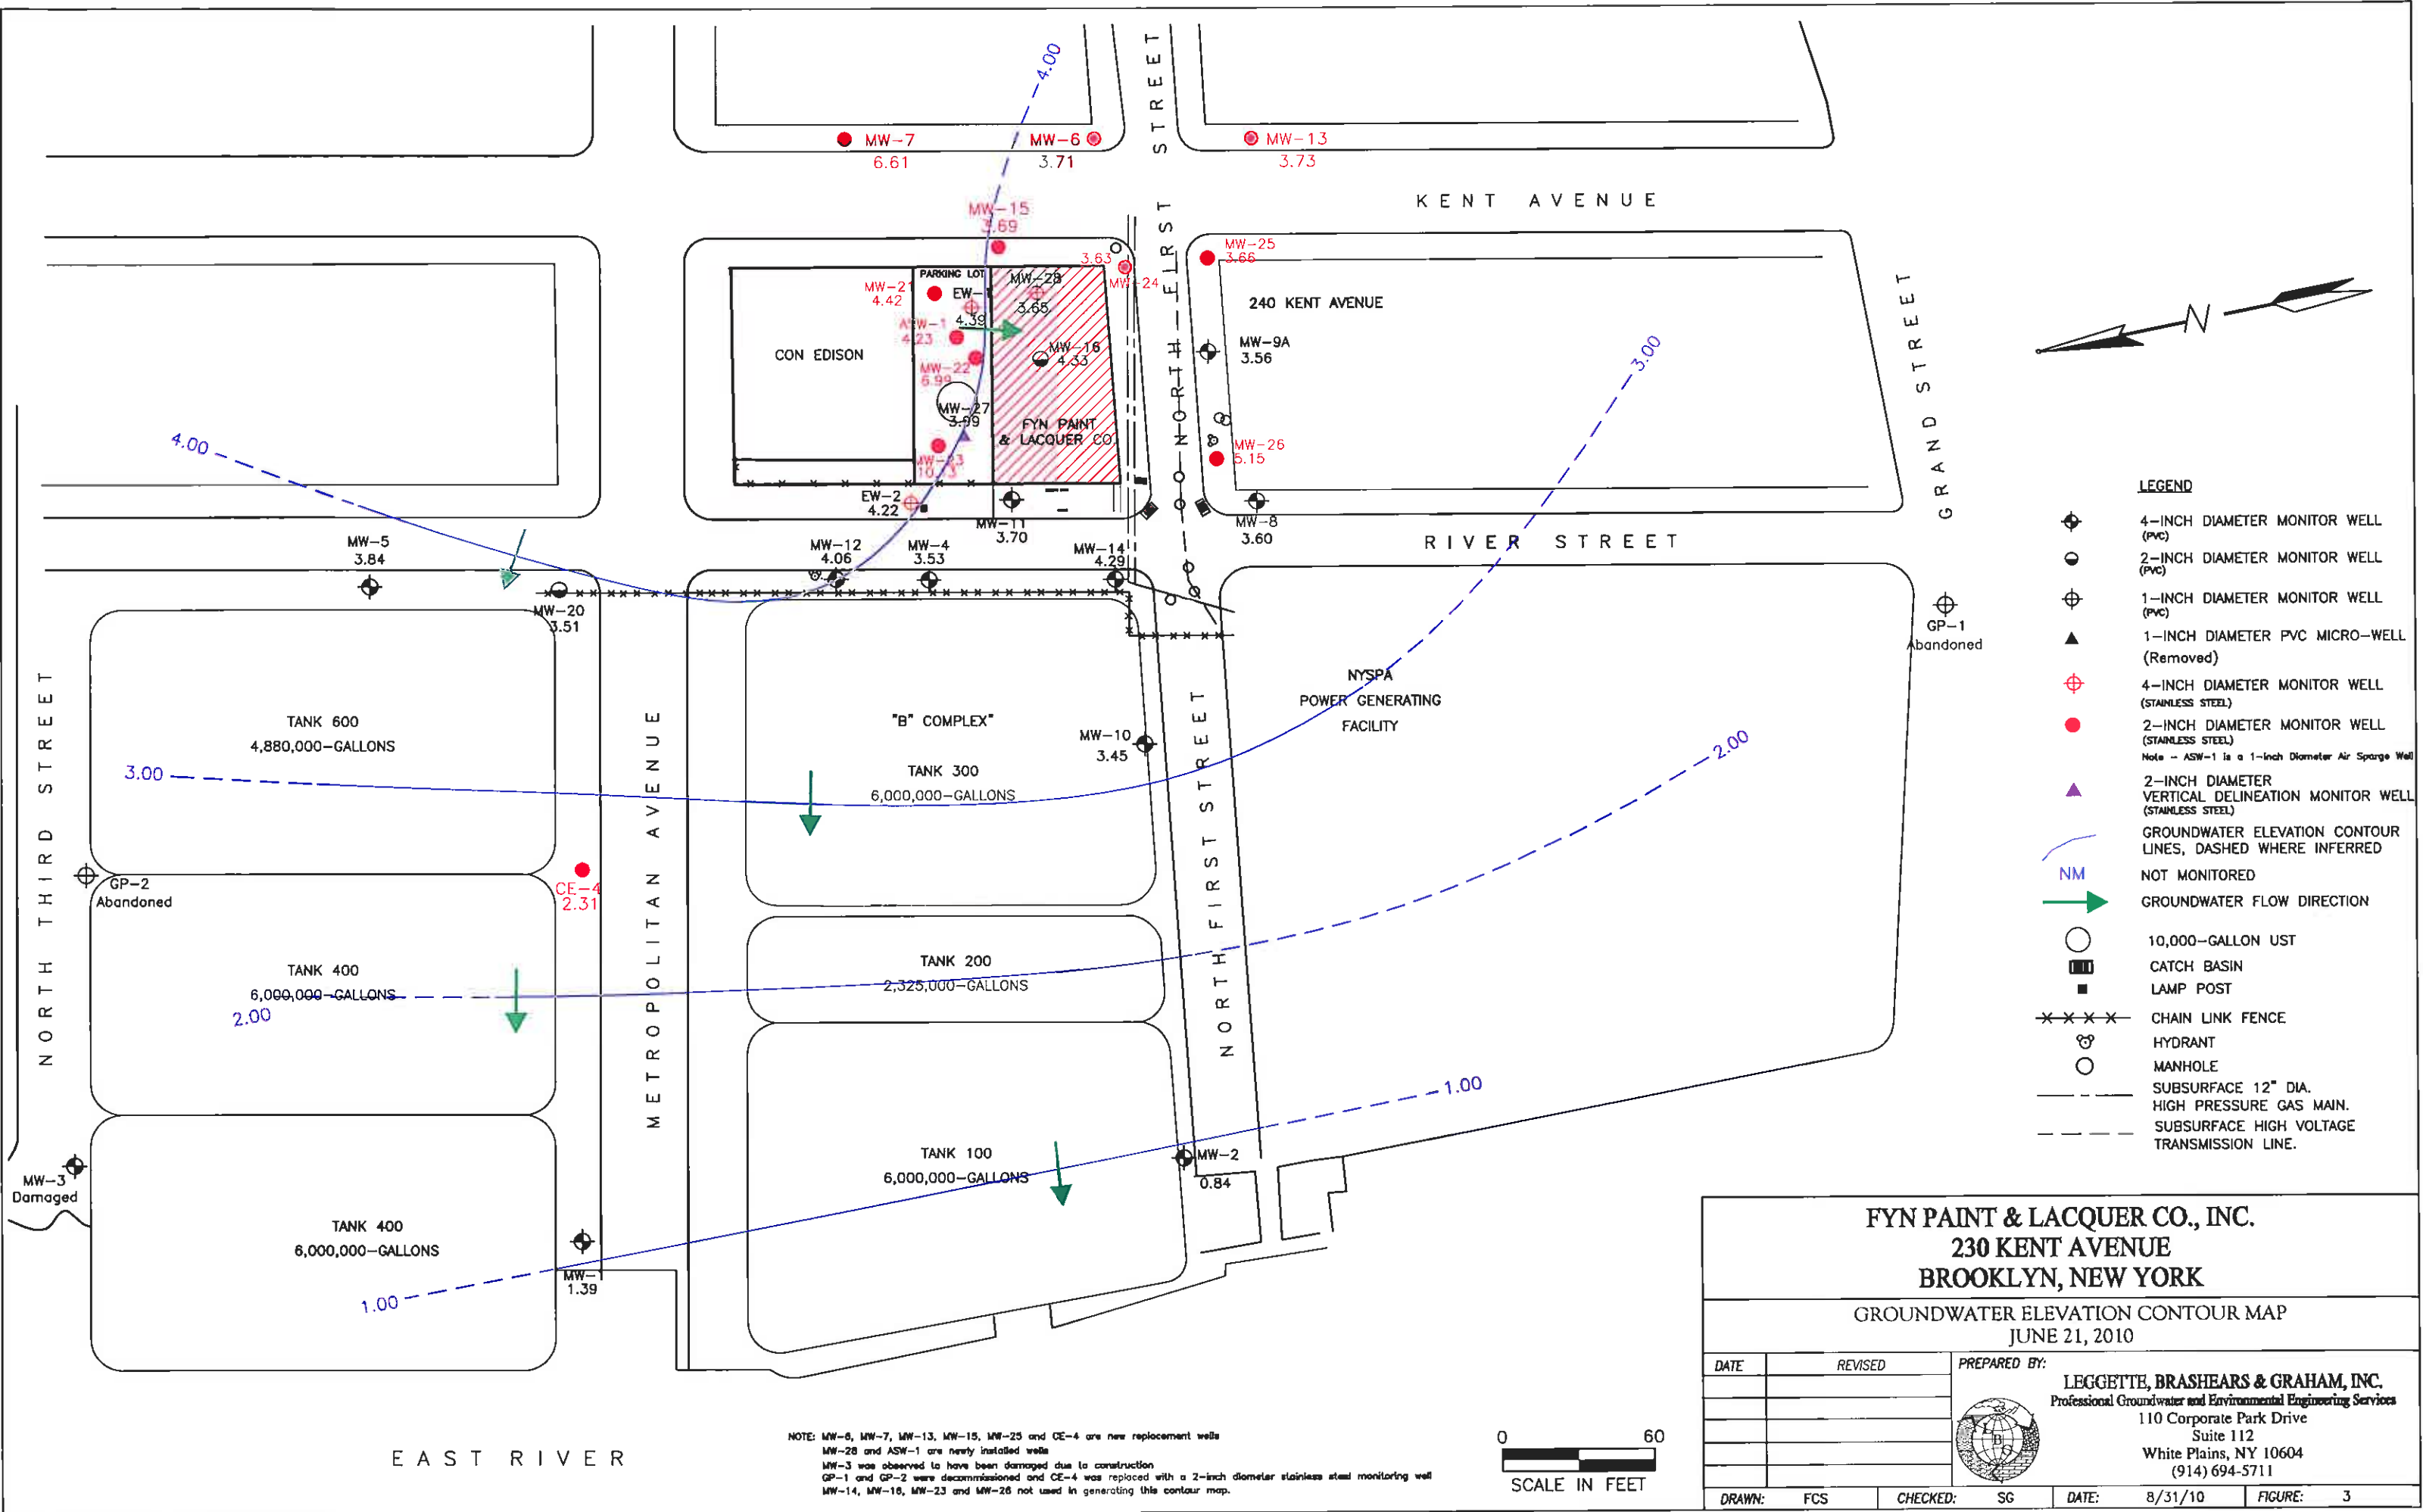

NOTE: MW-6, MW-7, MW-13, MW-15, MW-25 and CE-4 are new replacement wells
MW-28 and ASW-1 are newly installed wells
MW-3 was observed to have been damaged due to construction
GP-1 and GP-2 were decommissioned and CE-4 was replaced with a 2-inch diameter stainless steel monitoring well
MW-14, MW-16, MW-23 and MW-26 not used in generating this contour map.

FYN PAINT & LACQUER CO., INC.
230 KENT AVENUE
BROOKLYN, NEW YORK

GROUNDWATER ELEVATION CONTOUR MAP
JUNE 21, 2010

DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Groundwater and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711

DRAWN: FCS

CHECKED: SG

DATE: 8/31/10


FIGURE: 3




0

60

SCALE IN FEET

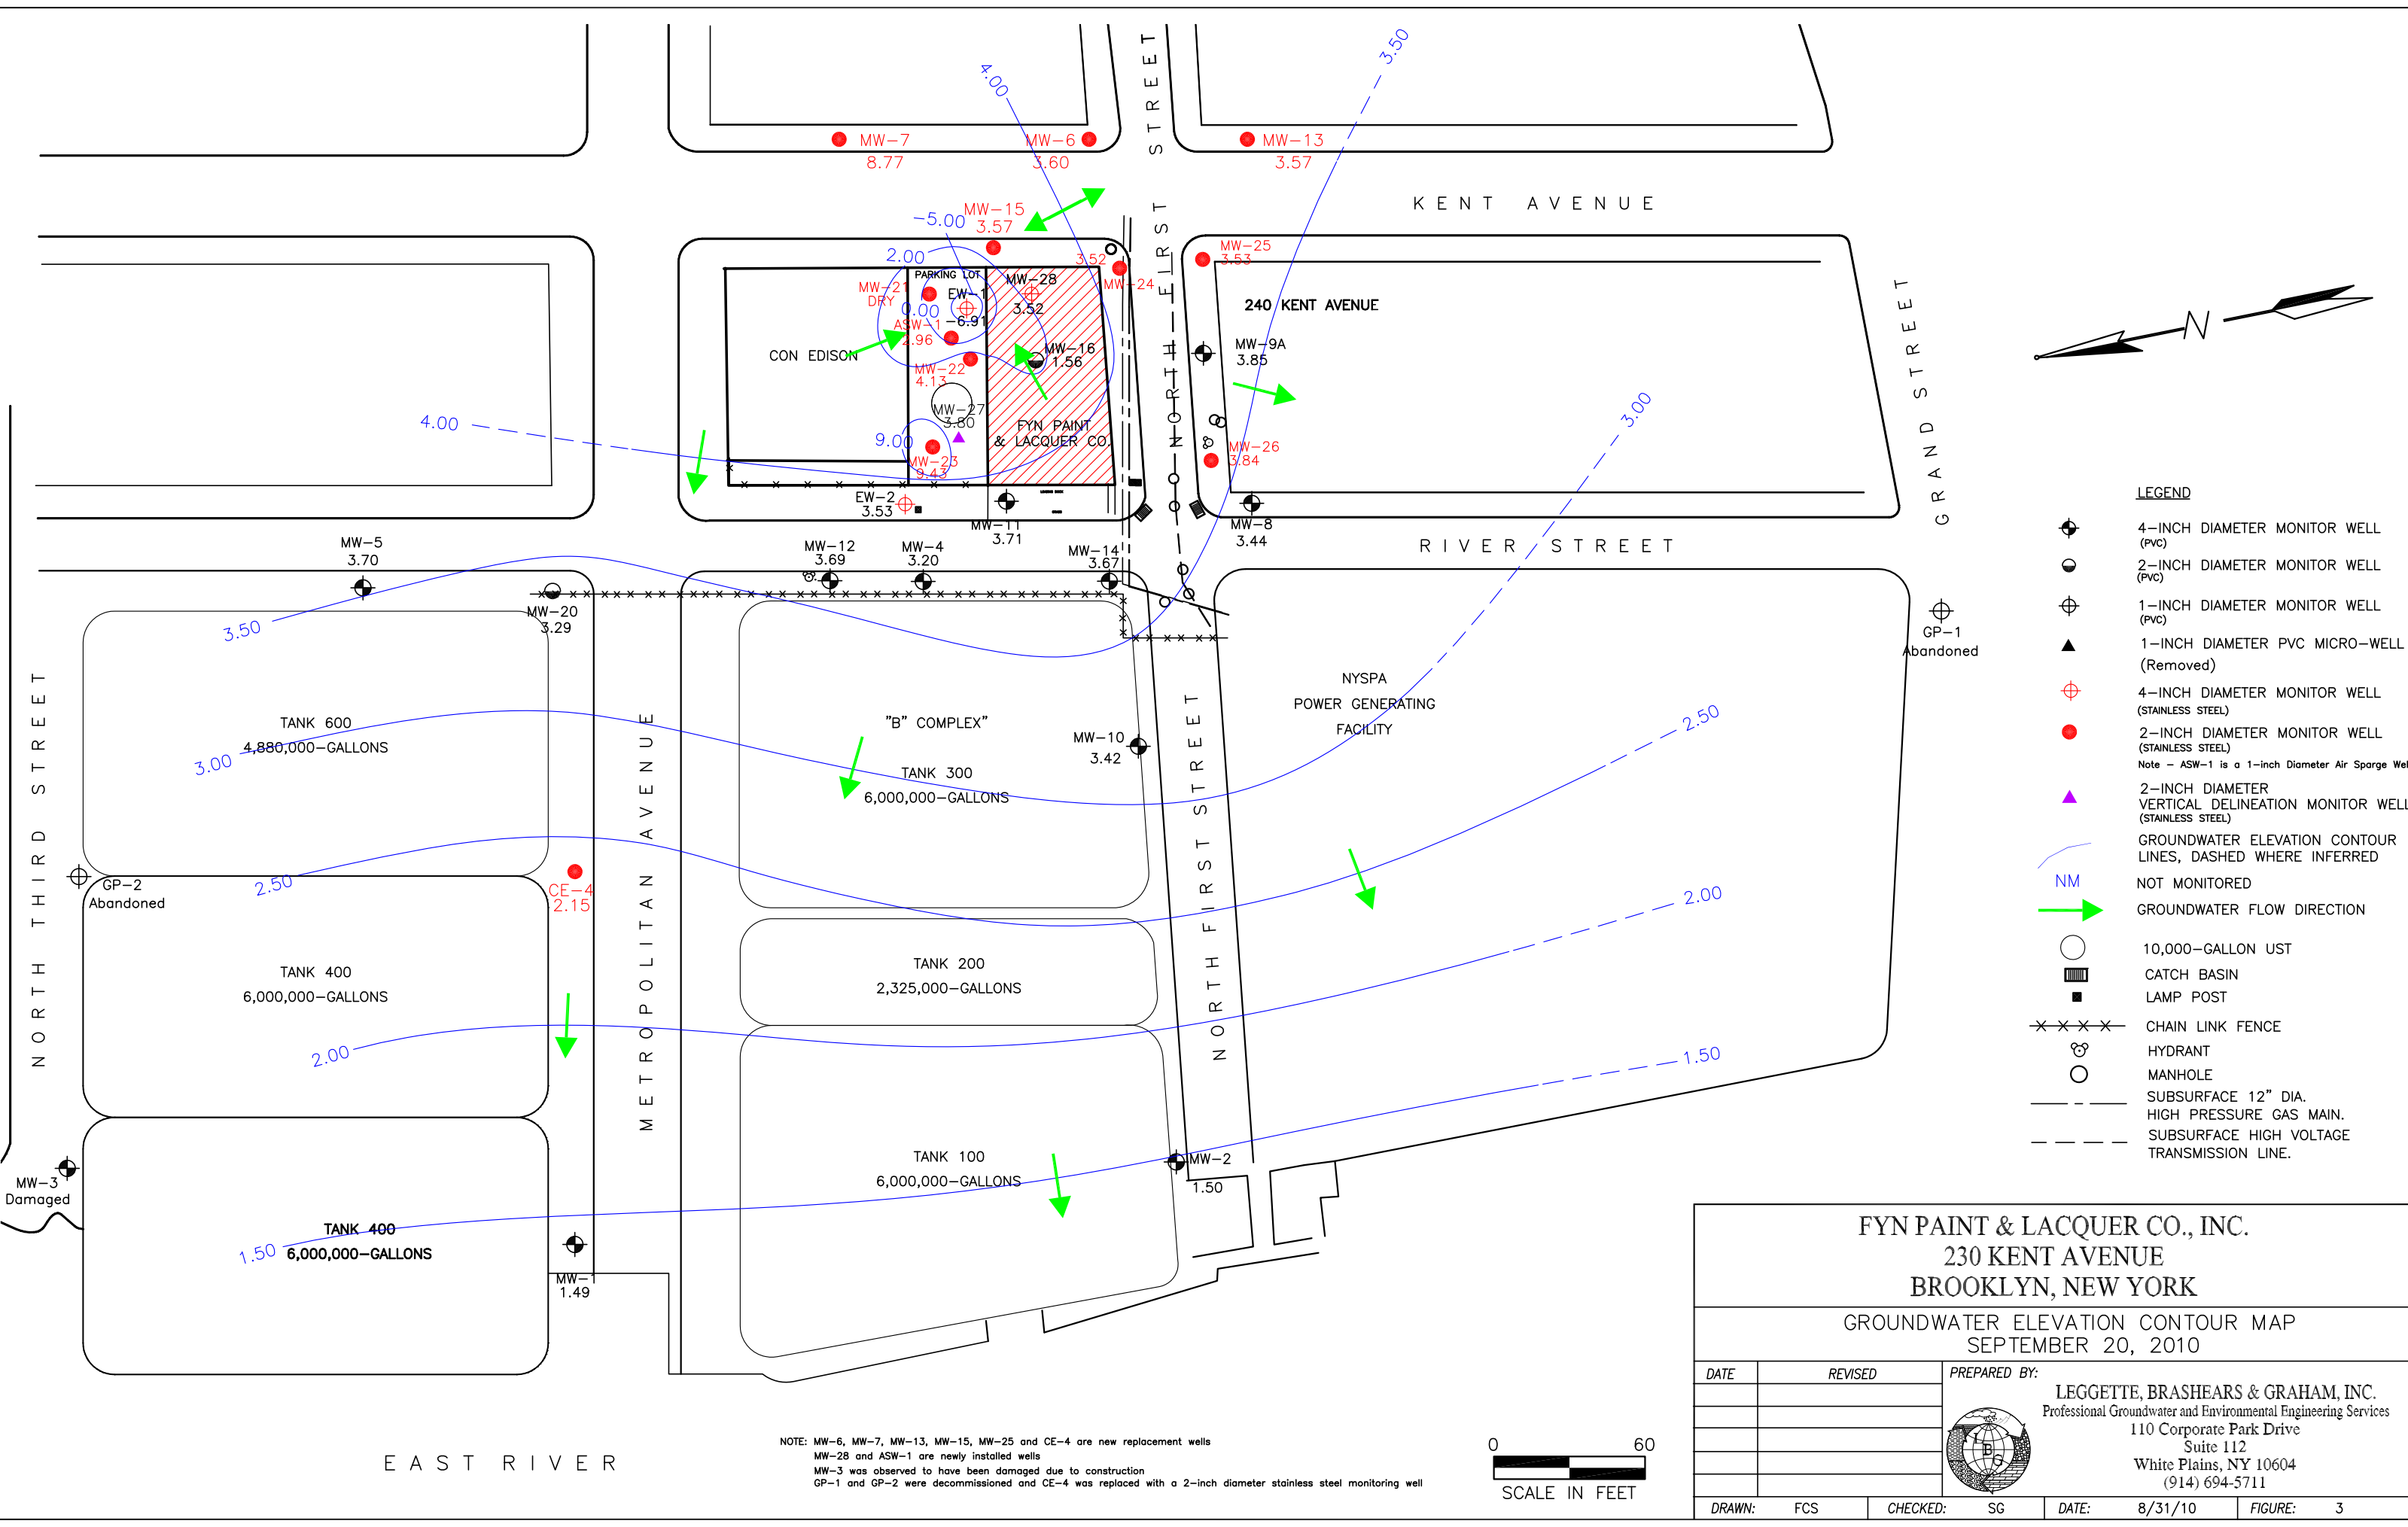

NOTE: MW-6, MW-7, MW-13, MW-15, MW-25 and CE-4 are new replacement wells
MW-28 and ASW-1 are newly installed wells
MW-3 was observed to have been damaged due to construction
GP-1 and GP-2 were decommissioned and CE-4 was replaced with a 2-inch diameter stainless steel monitoring well





FYN PAINT & LACQUER CO., INC.
230 KENT AVENUE
BROOKLYN, NEW YORK


GROUNDWATER ELEVATION CONTOUR MAP
SEPTEMBER 20, 2010

DATE		REVISED	PREPARED BY:	
			LEGGETTE, BRASHEARS & GRAHAM, INC.	
			Professional Groundwater and Environmental Engineering Services	
			110 Corporate Park Drive	
			Suite 112	
			White Plains, NY 10604	
			(914) 694-5711	
DRAWN:		FCS	CHECKED:	SG
			DATE:	8/31/10
			FIGURE:	3



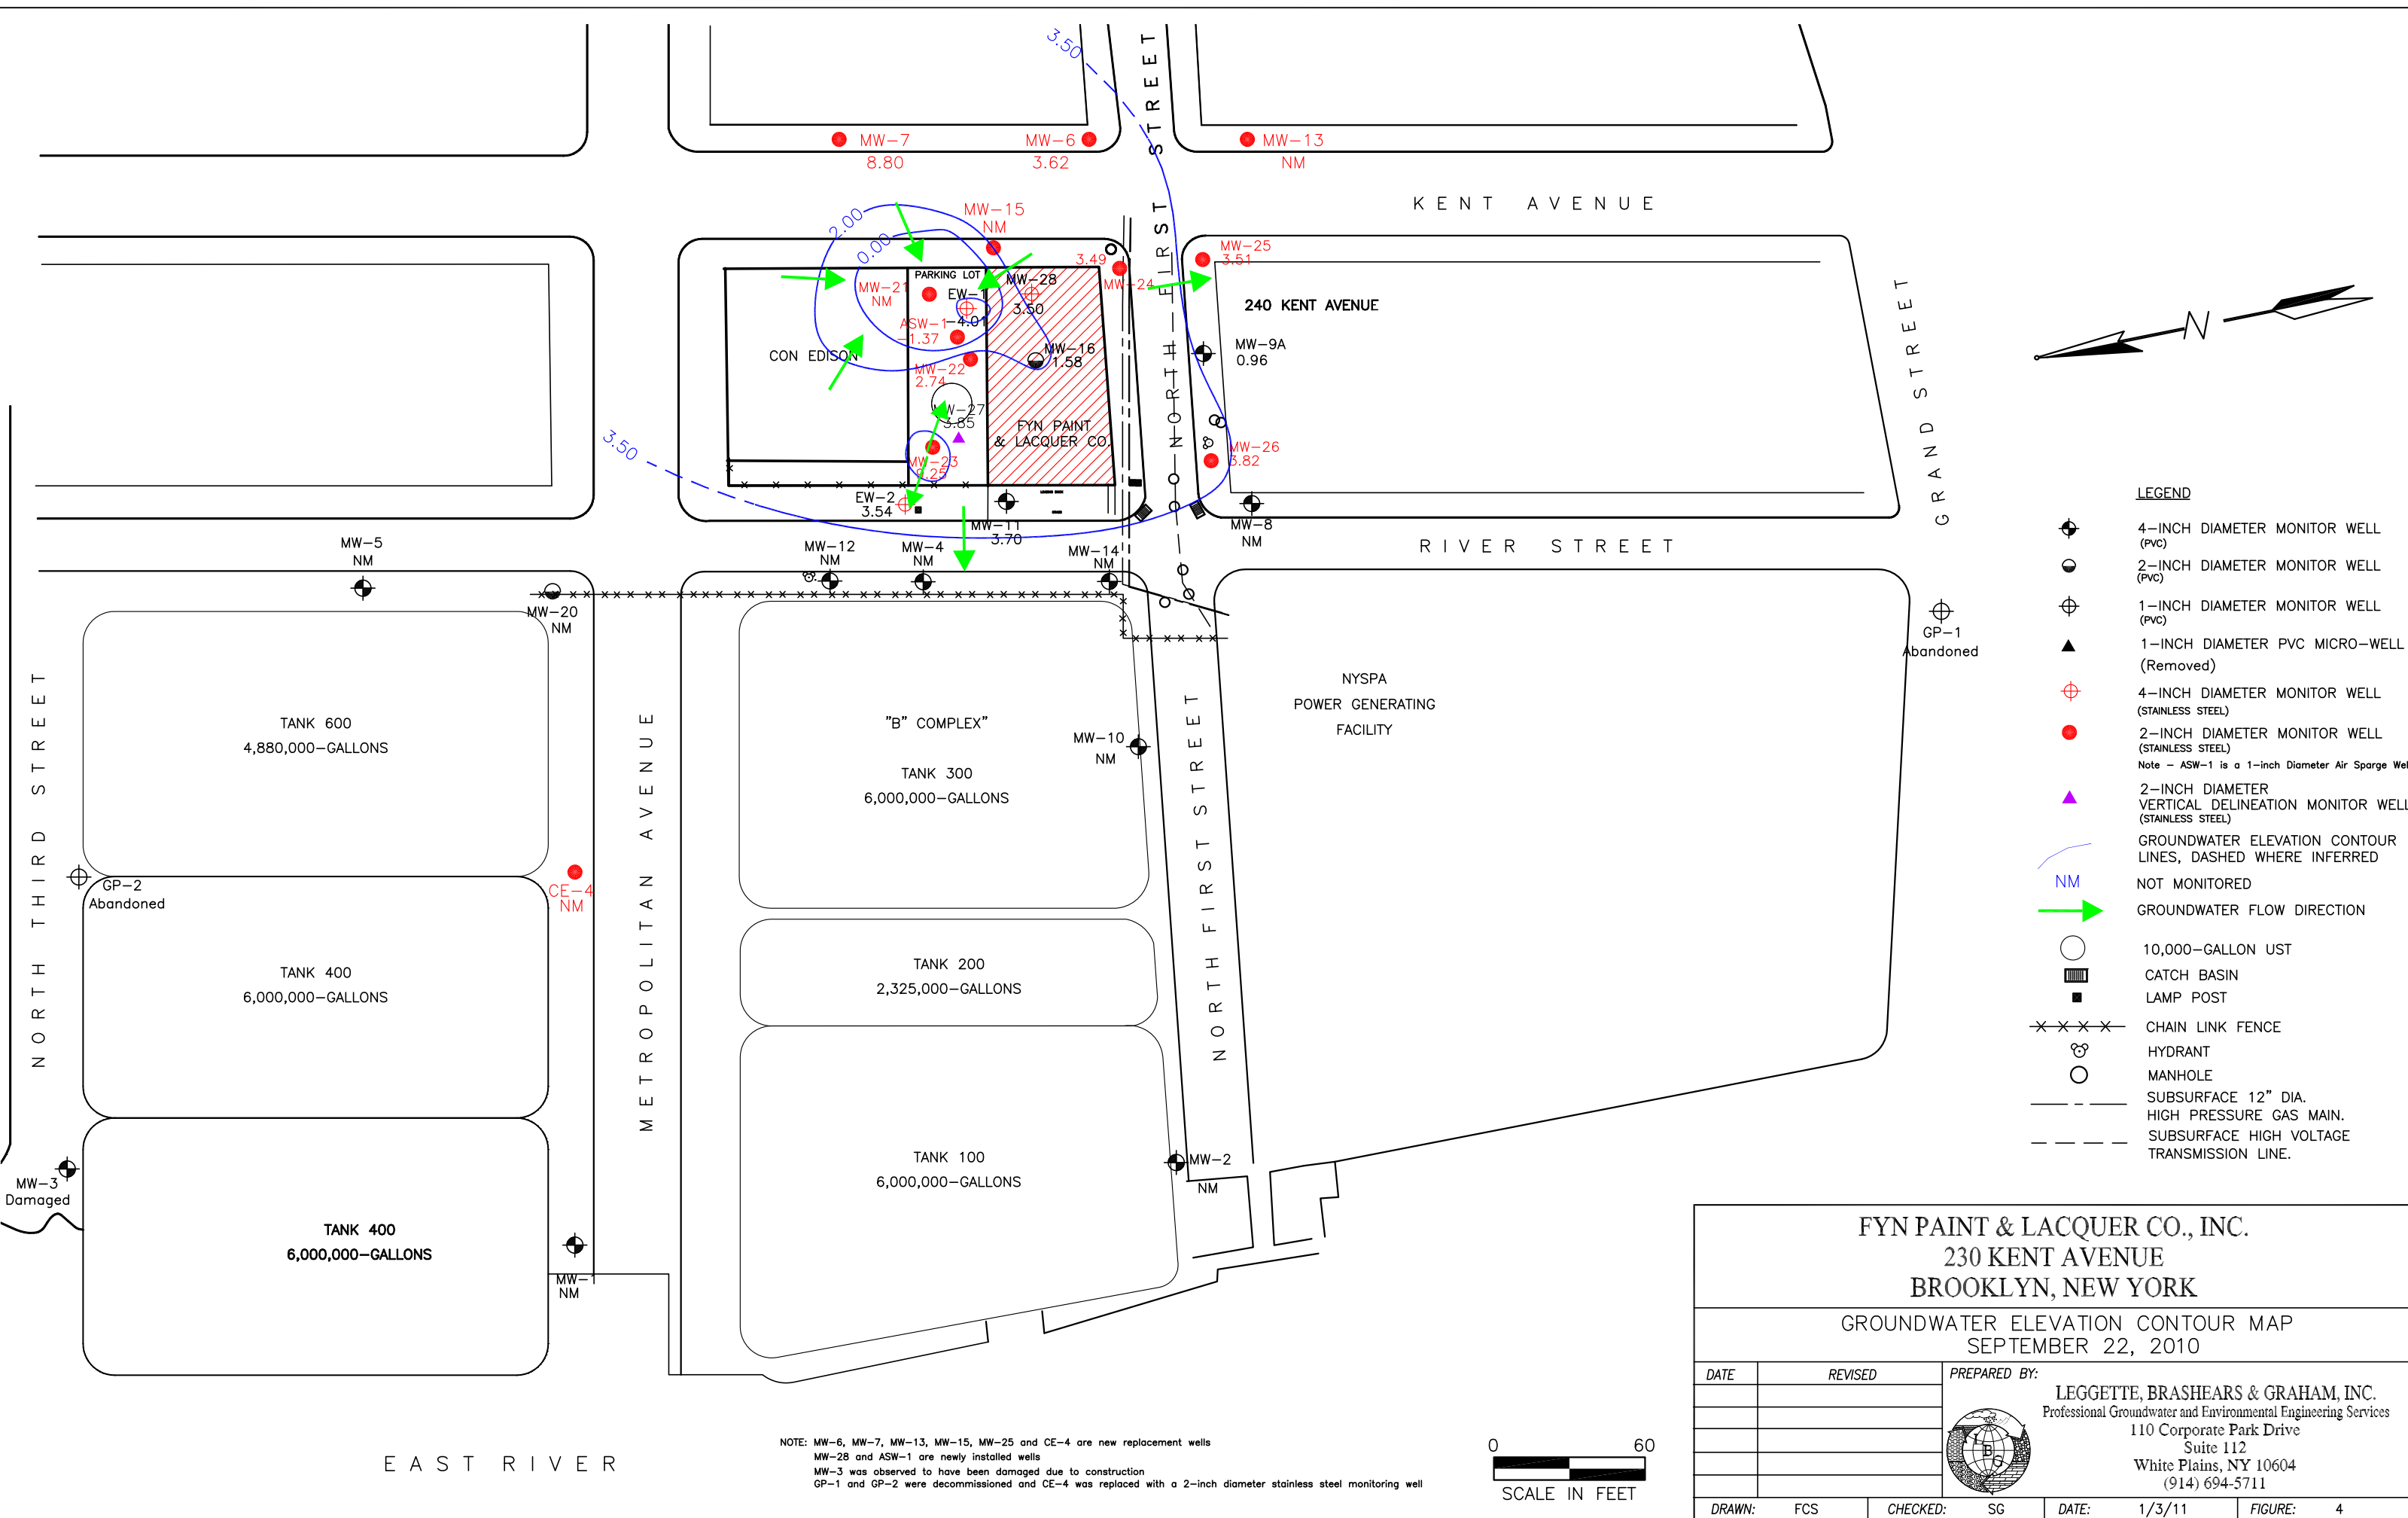

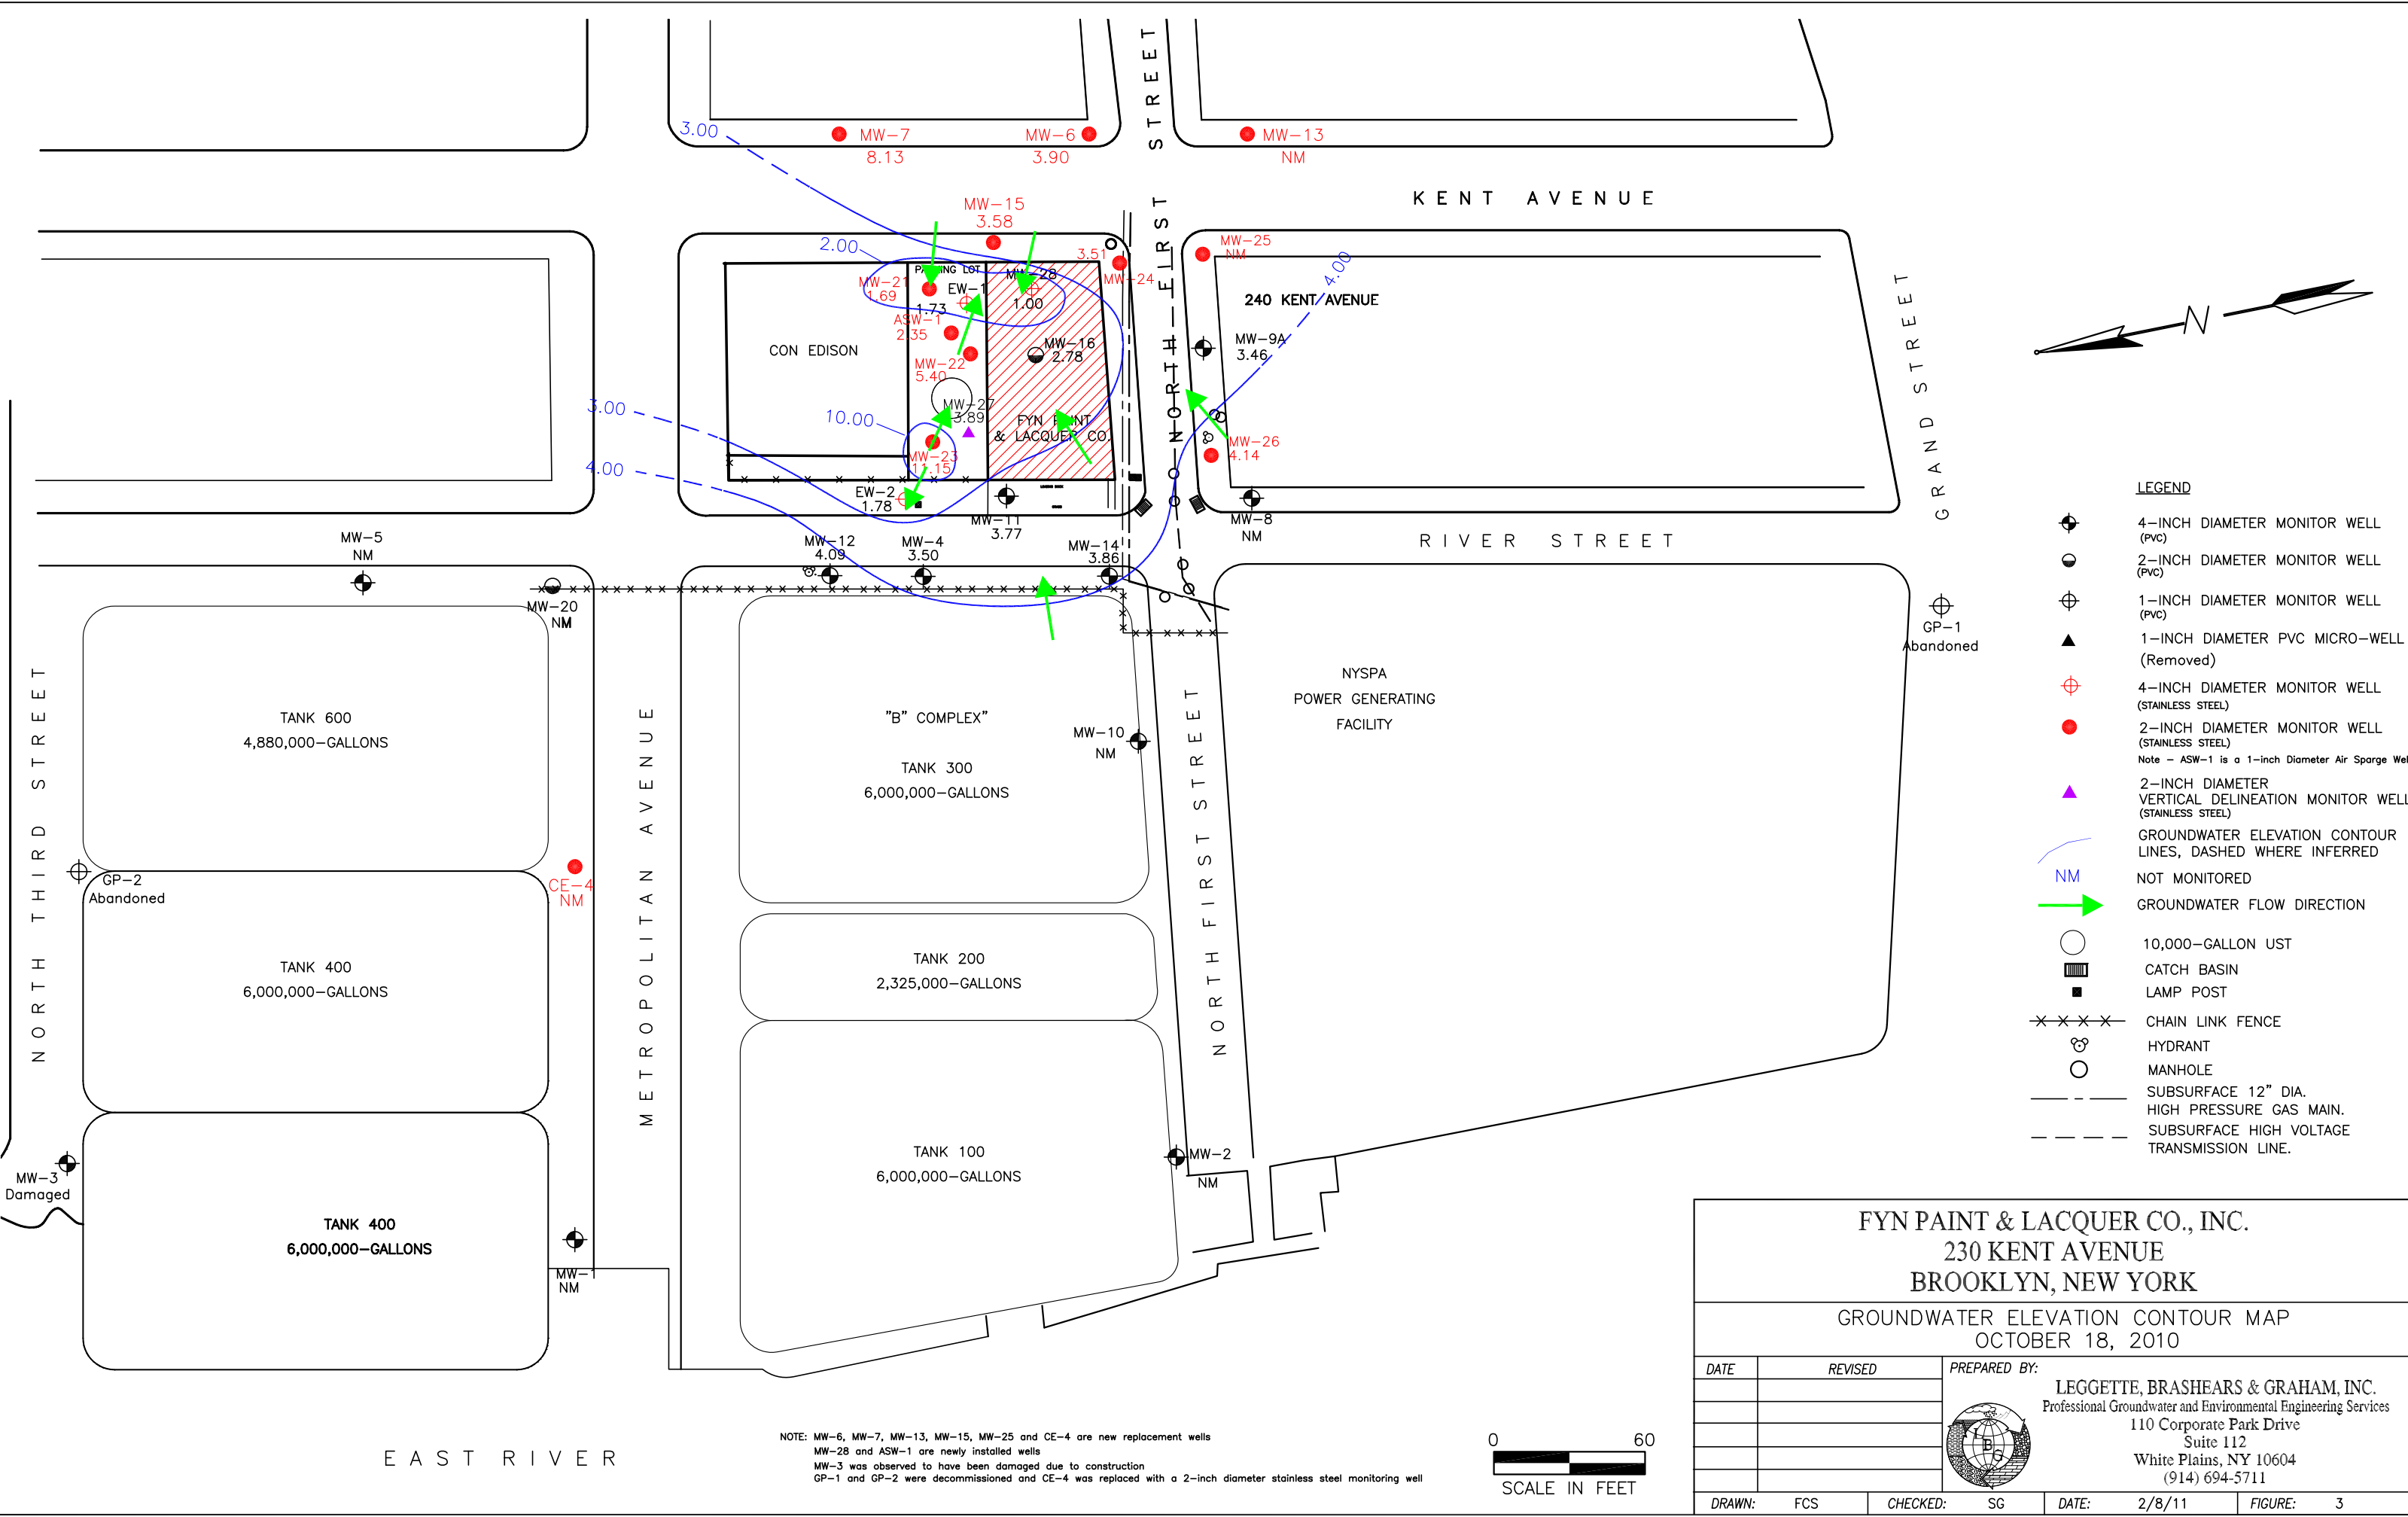

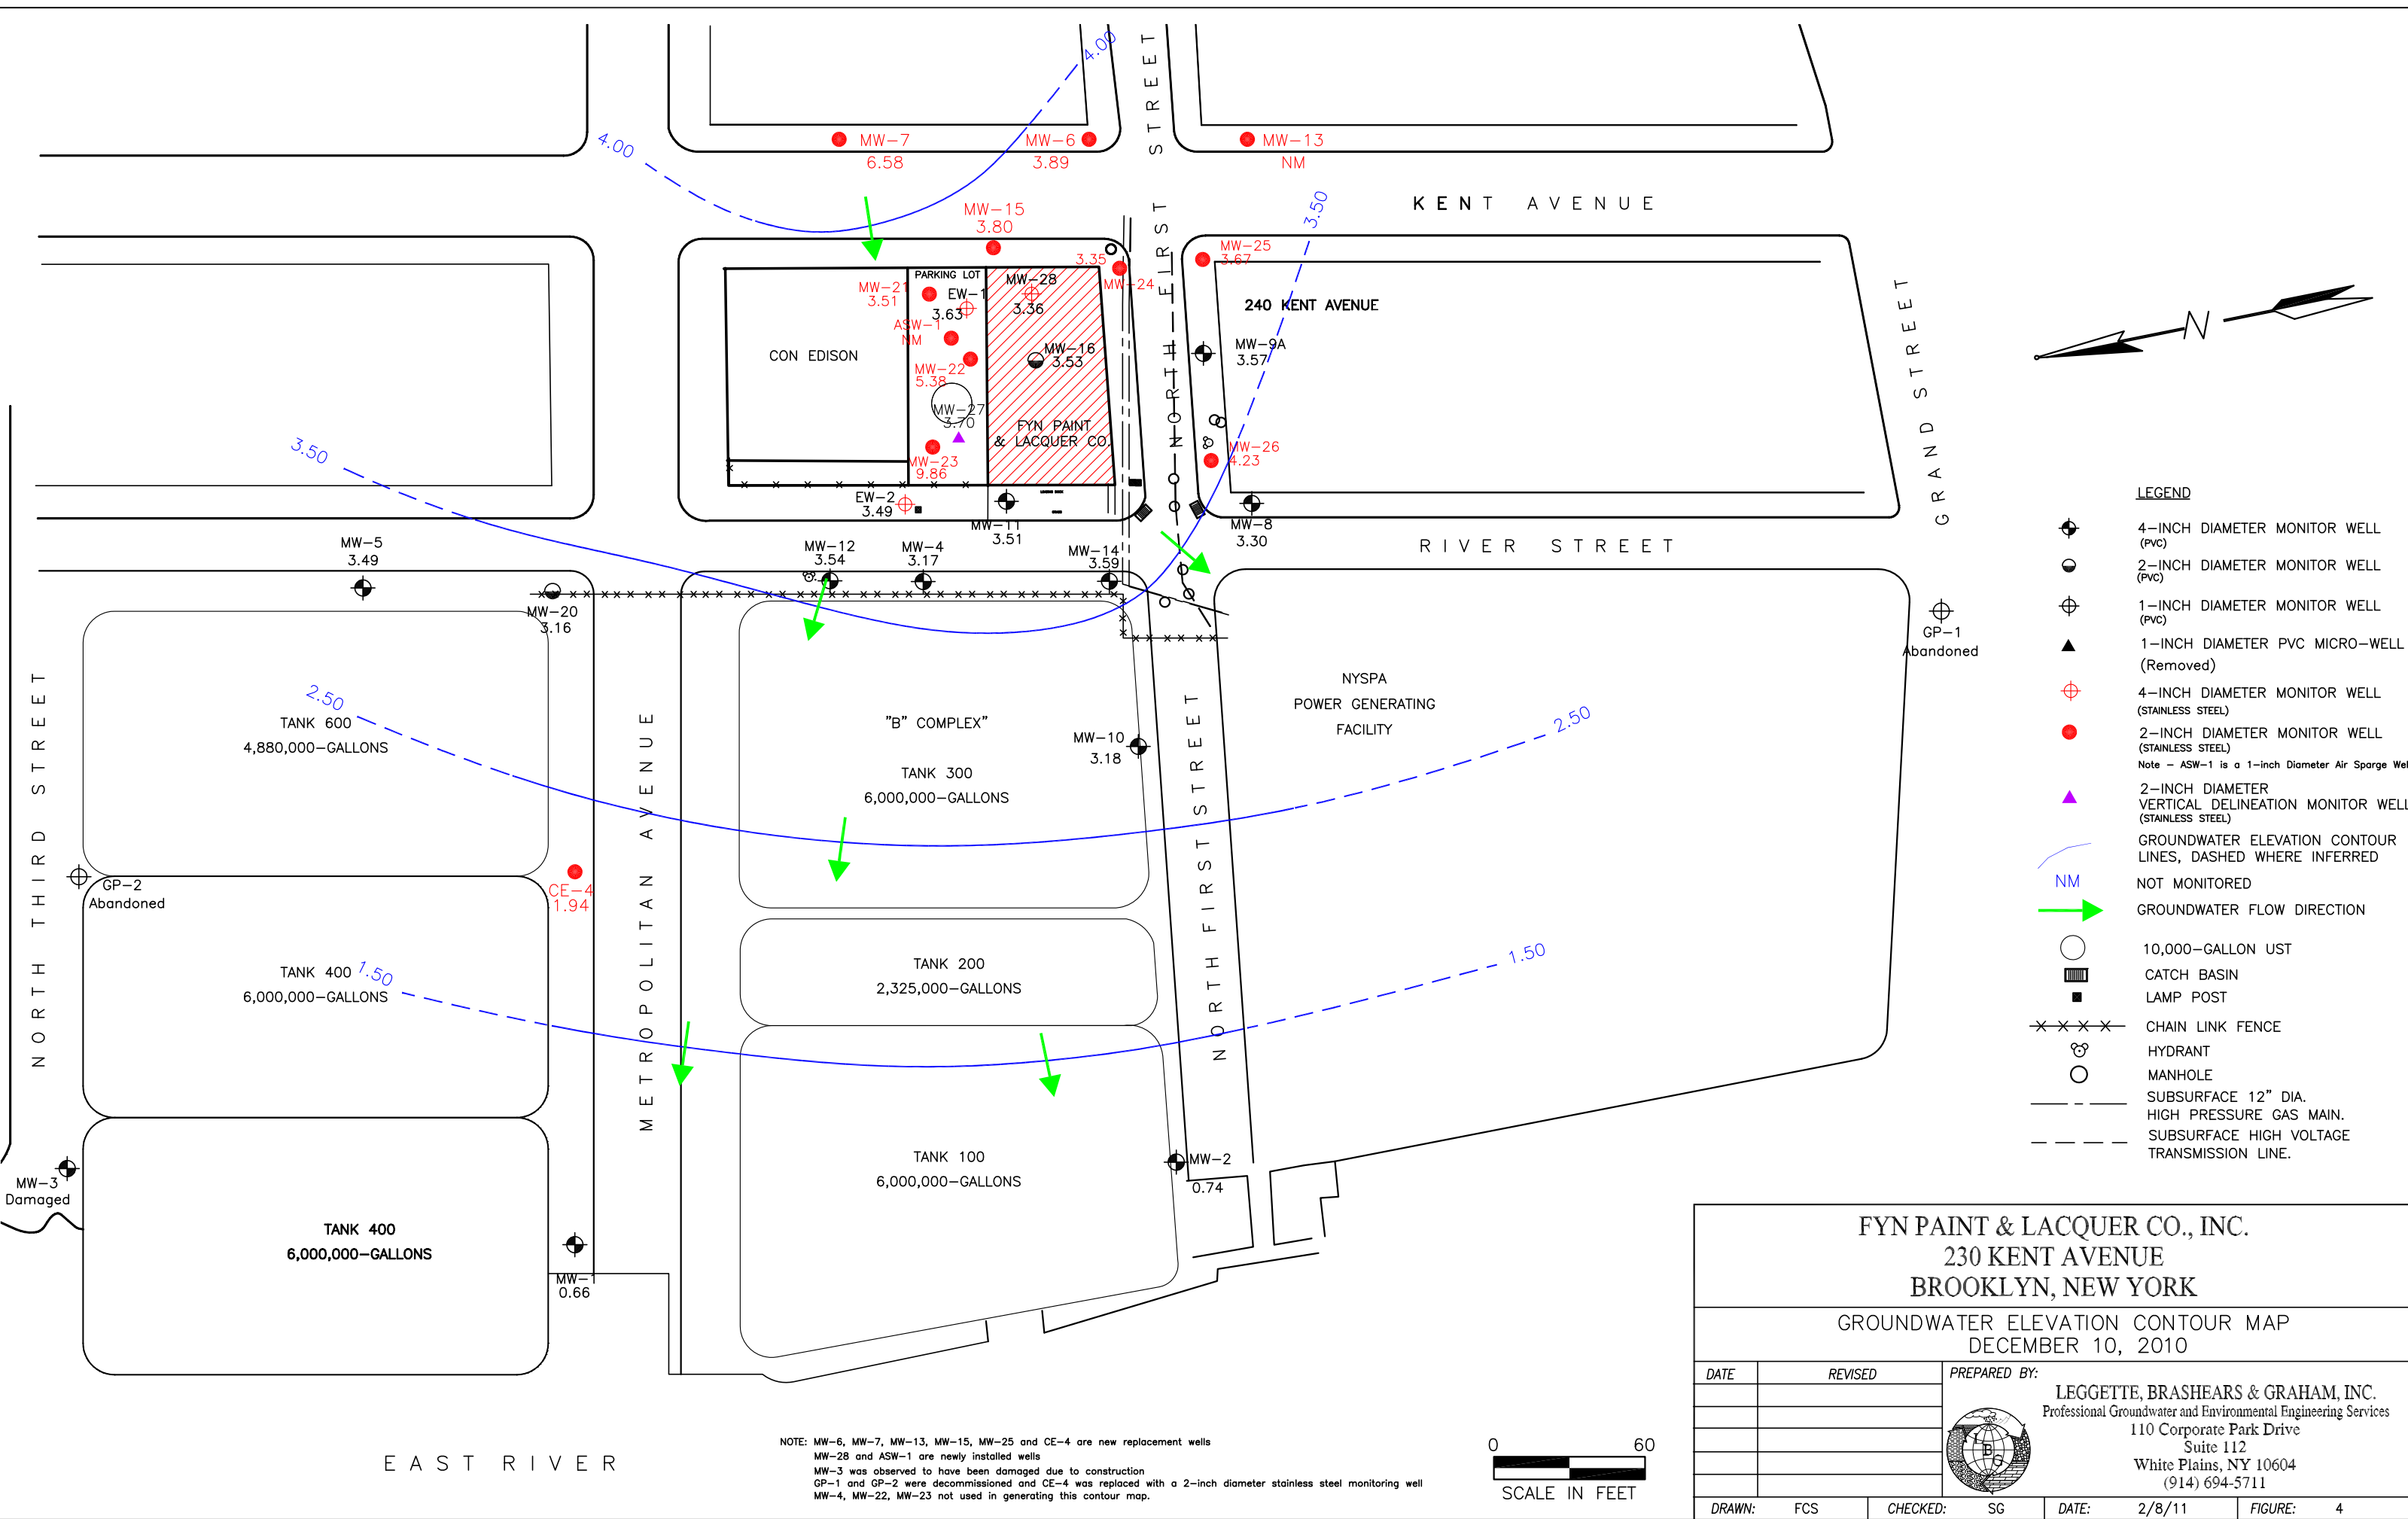

LEGEND


- 4-INCH DIAMETER MONITOR WELL (PVC)
- 2-INCH DIAMETER MONITOR WELL (PVC)
- 1-INCH DIAMETER MONITOR WELL (PVC)
- 1-INCH DIAMETER PVC MICRO-WELL (Removed)
- 4-INCH DIAMETER MONITOR WELL (STAINLESS STEEL)
- 2-INCH DIAMETER MONITOR WELL (STAINLESS STEEL)
- Note - ASW-1 is a 1-inch Diameter Air Sparge Well
- 2-INCH DIAMETER VERTICAL DELINEATION MONITOR WELL (STAINLESS STEEL)
- GROUNDWATER ELEVATION CONTOUR LINES, DASHED WHERE INFERRED
- NM NOT MONITORED
- GROUNDWATER FLOW DIRECTION
- 10,000-GALLON UST
- CATCH BASIN
- LAMP POST
- CHAIN LINK FENCE
- HYDRANT
- MANHOLE
- SUBSURFACE 12" DIA. HIGH PRESSURE GAS MAIN.
- SUBSURFACE HIGH VOLTAGE TRANSMISSION LINE.

FYN PAINT & LACQUER CO., INC.
230 KENT AVENUE
BROOKLYN, NEW YORK

GROUNDWATER ELEVATION CONTOUR MAP
DECEMBER 10, 2010

DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Groundwater and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711
DRAWN:	FCS	CHECKED: SG
DATE:	2/8/11	FIGURE: 4

NOTE: MW-6, MW-7, MW-13, MW-15, MW-25 and CE-4 are new replacement wells
MW-28 and ASW-1 are newly installed wells
MW-3 was observed to have been damaged due to construction
GP-1 and GP-2 were decommissioned and CE-4 was replaced with a 2-inch diameter stainless steel monitoring well
MW-4, MW-22, MW-23 not used in generating this contour map.

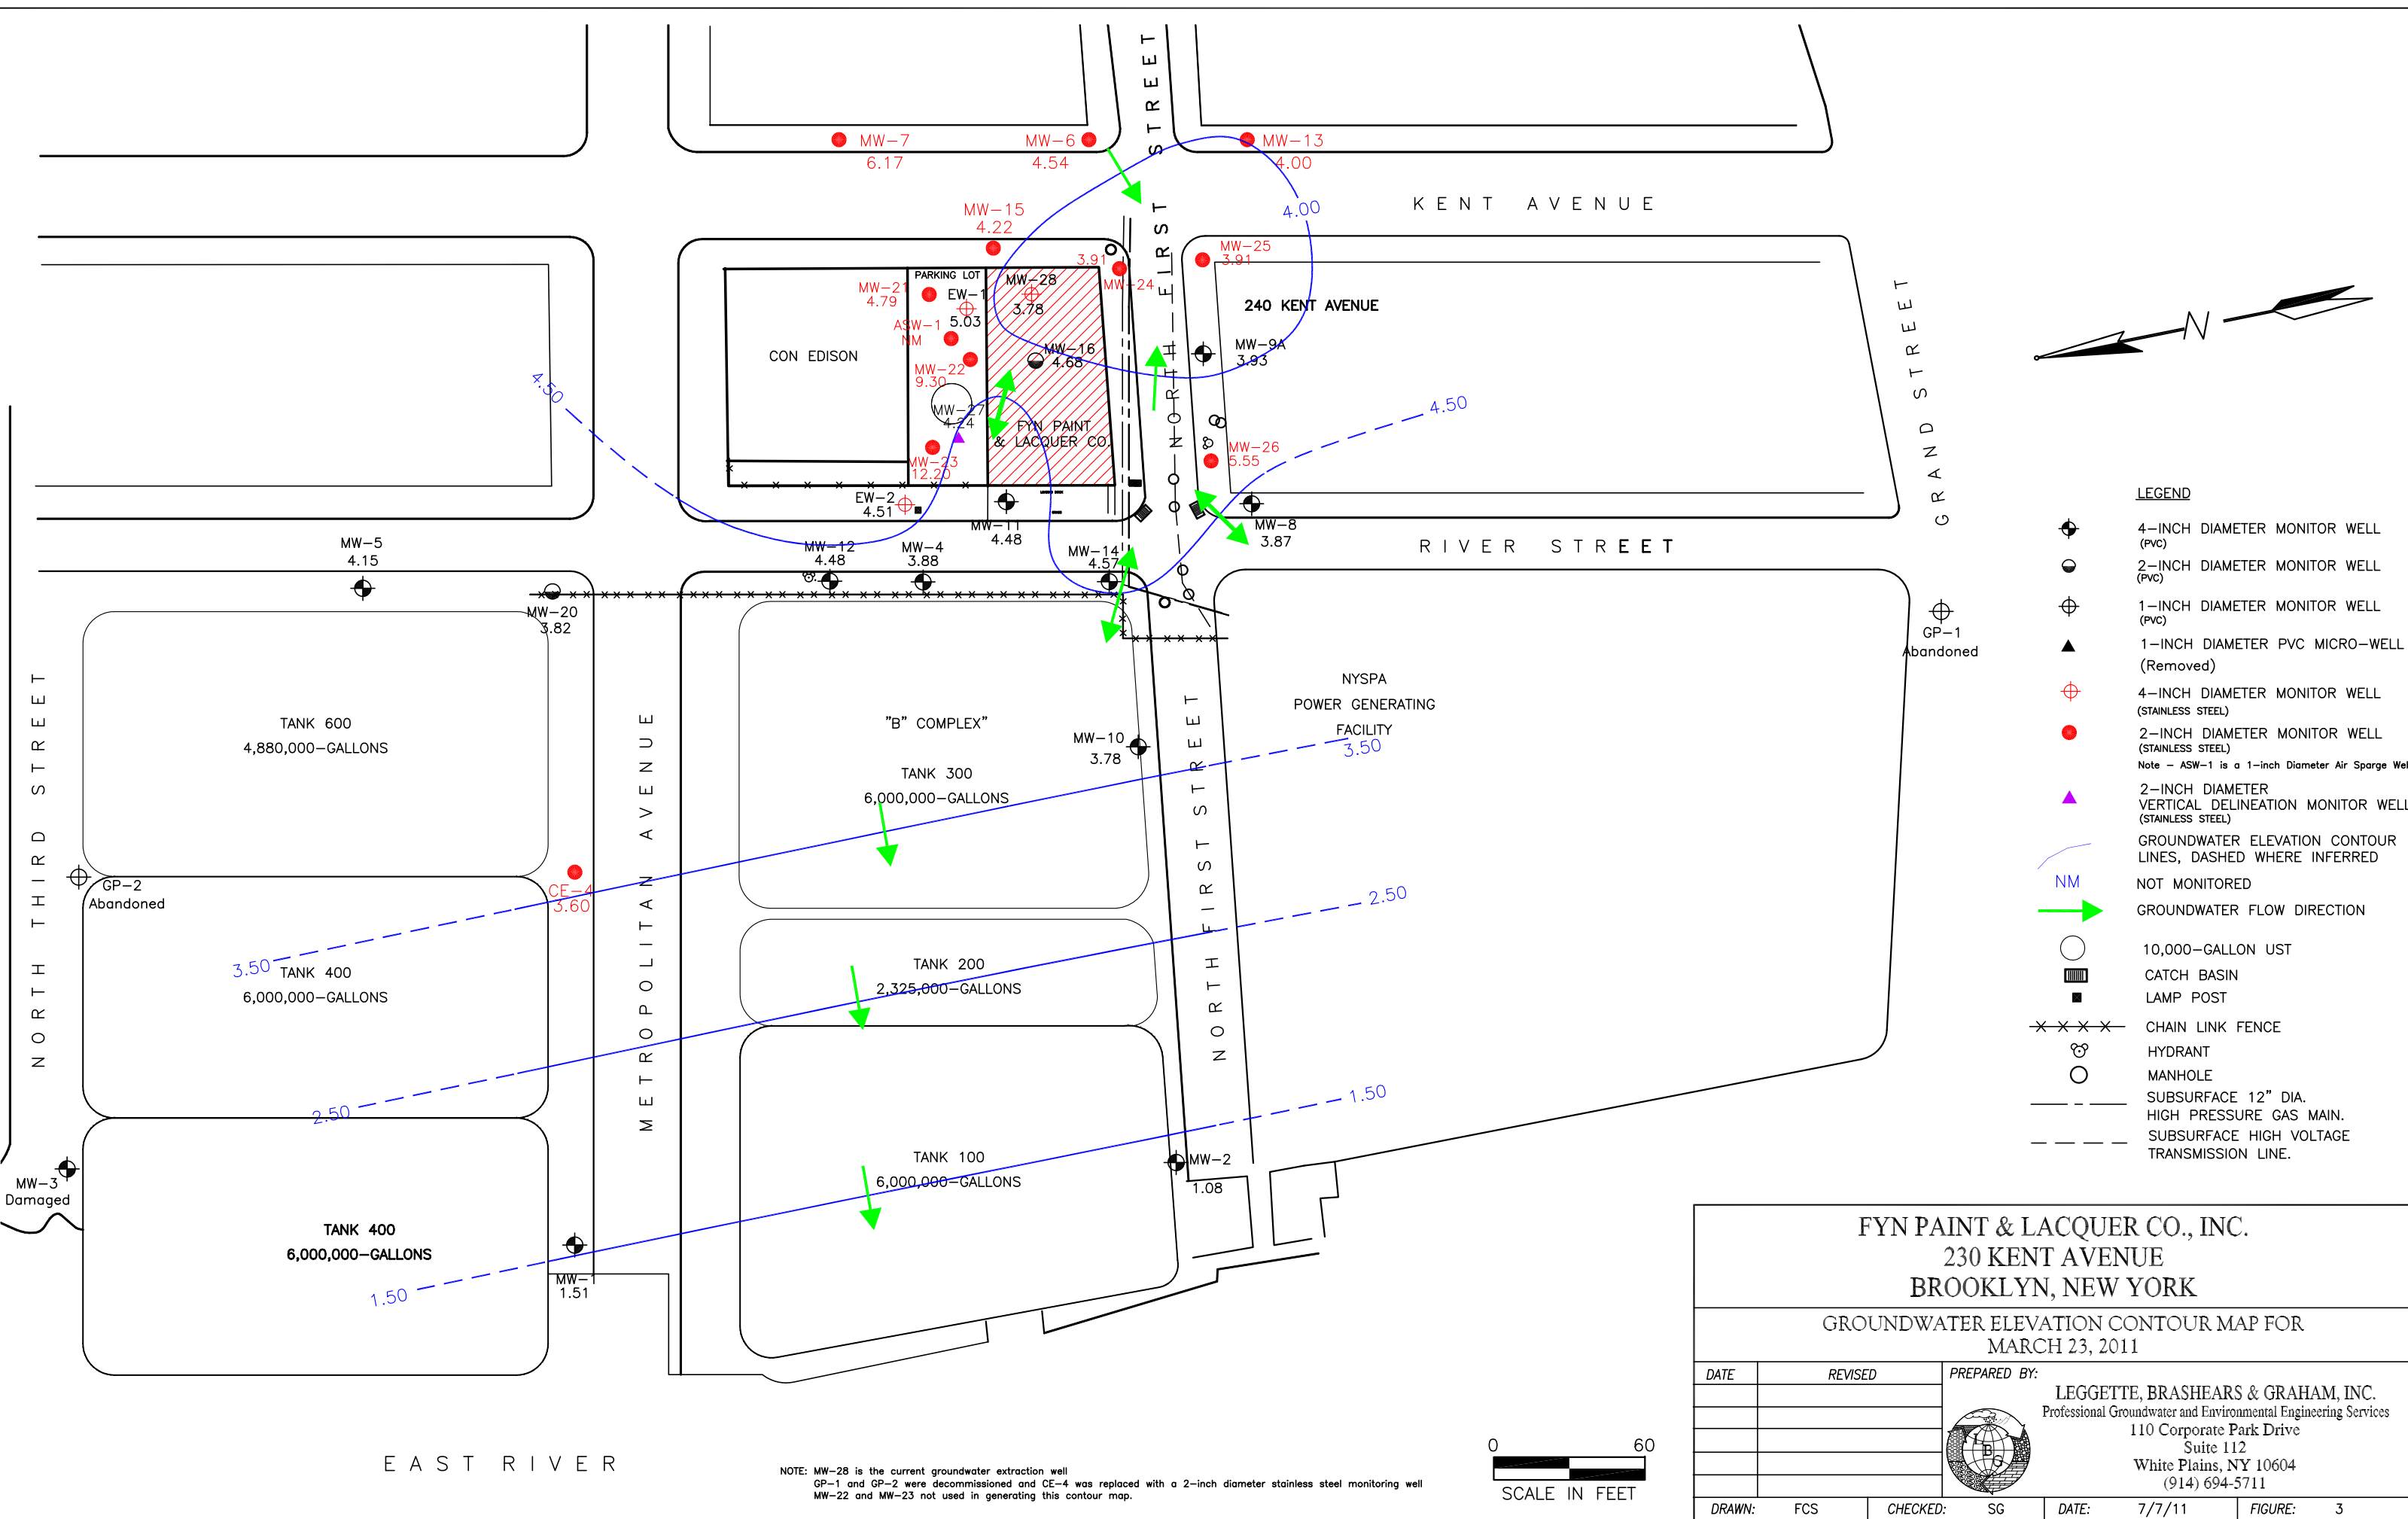


NOTE: MW-28 is the current groundwater extraction well
GP-1 and GP-2 were decommissioned and CE-4 was replaced with a 2-inch diameter stainless steel monitoring well
MW-22 and MW-23 not used in generating this contour map.

- LEGEND**
- 4-INCH DIAMETER MONITOR WELL (PVC)
 - 2-INCH DIAMETER MONITOR WELL (PVC)
 - 1-INCH DIAMETER MONITOR WELL (PVC)
 - 1-INCH DIAMETER PVC MICRO-WELL (Removed)
 - 4-INCH DIAMETER MONITOR WELL (STAINLESS STEEL)
 - 2-INCH DIAMETER MONITOR WELL (STAINLESS STEEL)
 - Note - ASW-1 is a 1-inch Diameter Air Sparge Well
 - 2-INCH DIAMETER VERTICAL DELINEATION MONITOR WELL (STAINLESS STEEL)
 - GROUNDWATER ELEVATION CONTOUR LINES, DASHED WHERE INFERRED
 - NM NOT MONITORED
 - GROUNDWATER FLOW DIRECTION
 - 10,000-GALLON UST
 - CATCH BASIN
 - LAMP POST
 - CHAIN LINK FENCE
 - HYDRANT
 - MANHOLE
 - SUBSURFACE 12" DIA. HIGH PRESSURE GAS MAIN.
 - SUBSURFACE HIGH VOLTAGE TRANSMISSION LINE.


FYN PAINT & LACQUER CO., INC.
230 KENT AVENUE
BROOKLYN, NEW YORK

GROUNDWATER ELEVATION CONTOUR MAP FOR
MARCH 23, 2011

DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Groundwater and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711
DRAWN:	FCS	CHECKED: SG
		DATE: 7/7/11
		FIGURE: 3

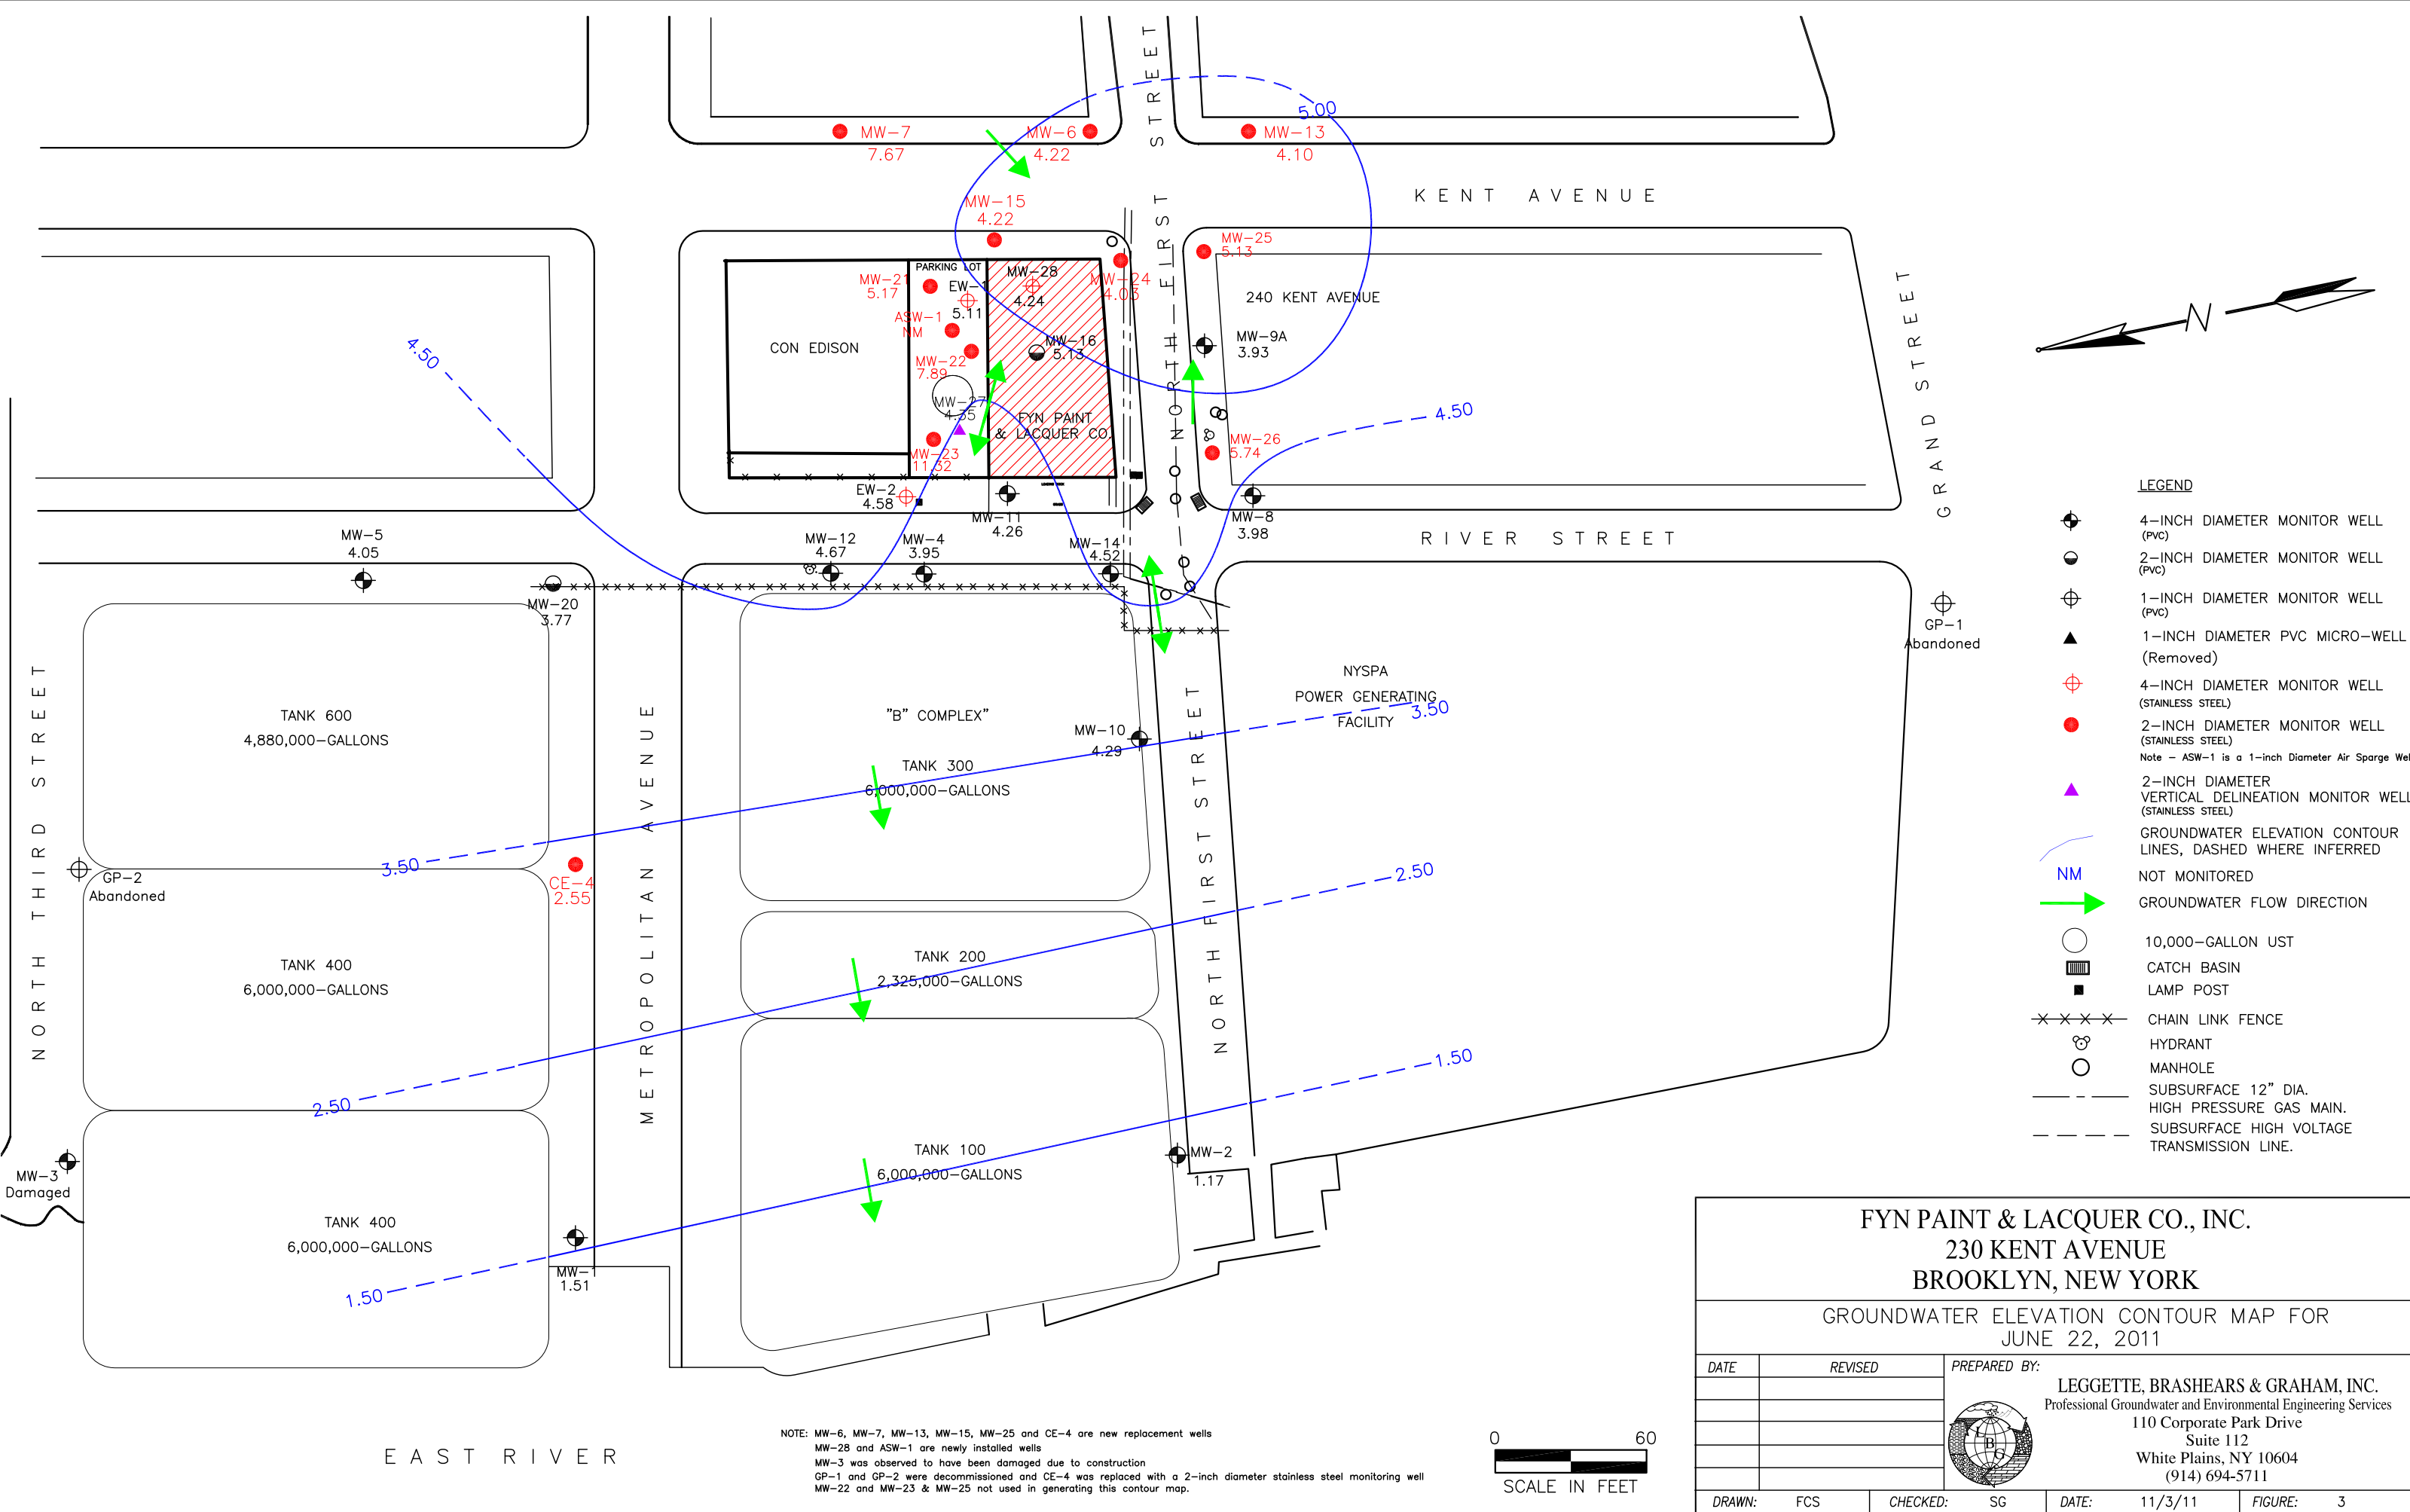

NOTE: MW-6, MW-7, MW-13, MW-15, MW-25 and CE-4 are new replacement wells
MW-28 and ASW-1 are newly installed wells
MW-3 was observed to have been damaged due to construction
GP-1 and GP-2 were decommissioned and CE-4 was replaced with a 2-inch diameter stainless steel monitoring well
MW-22 and MW-23 & MW-25 not used in generating this contour map.




FYN PAINT & LACQUER CO., INC.

230 KENT AVENUE

BROOKLYN, NEW YORK

GROUNDWATER ELEVATION CONTOUR MAP FOR
JUNE 22, 2011

DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Groundwater and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711
DRAWN:	FCS	CHECKED: SG
DATE:	11/3/11	FIGURE: 3

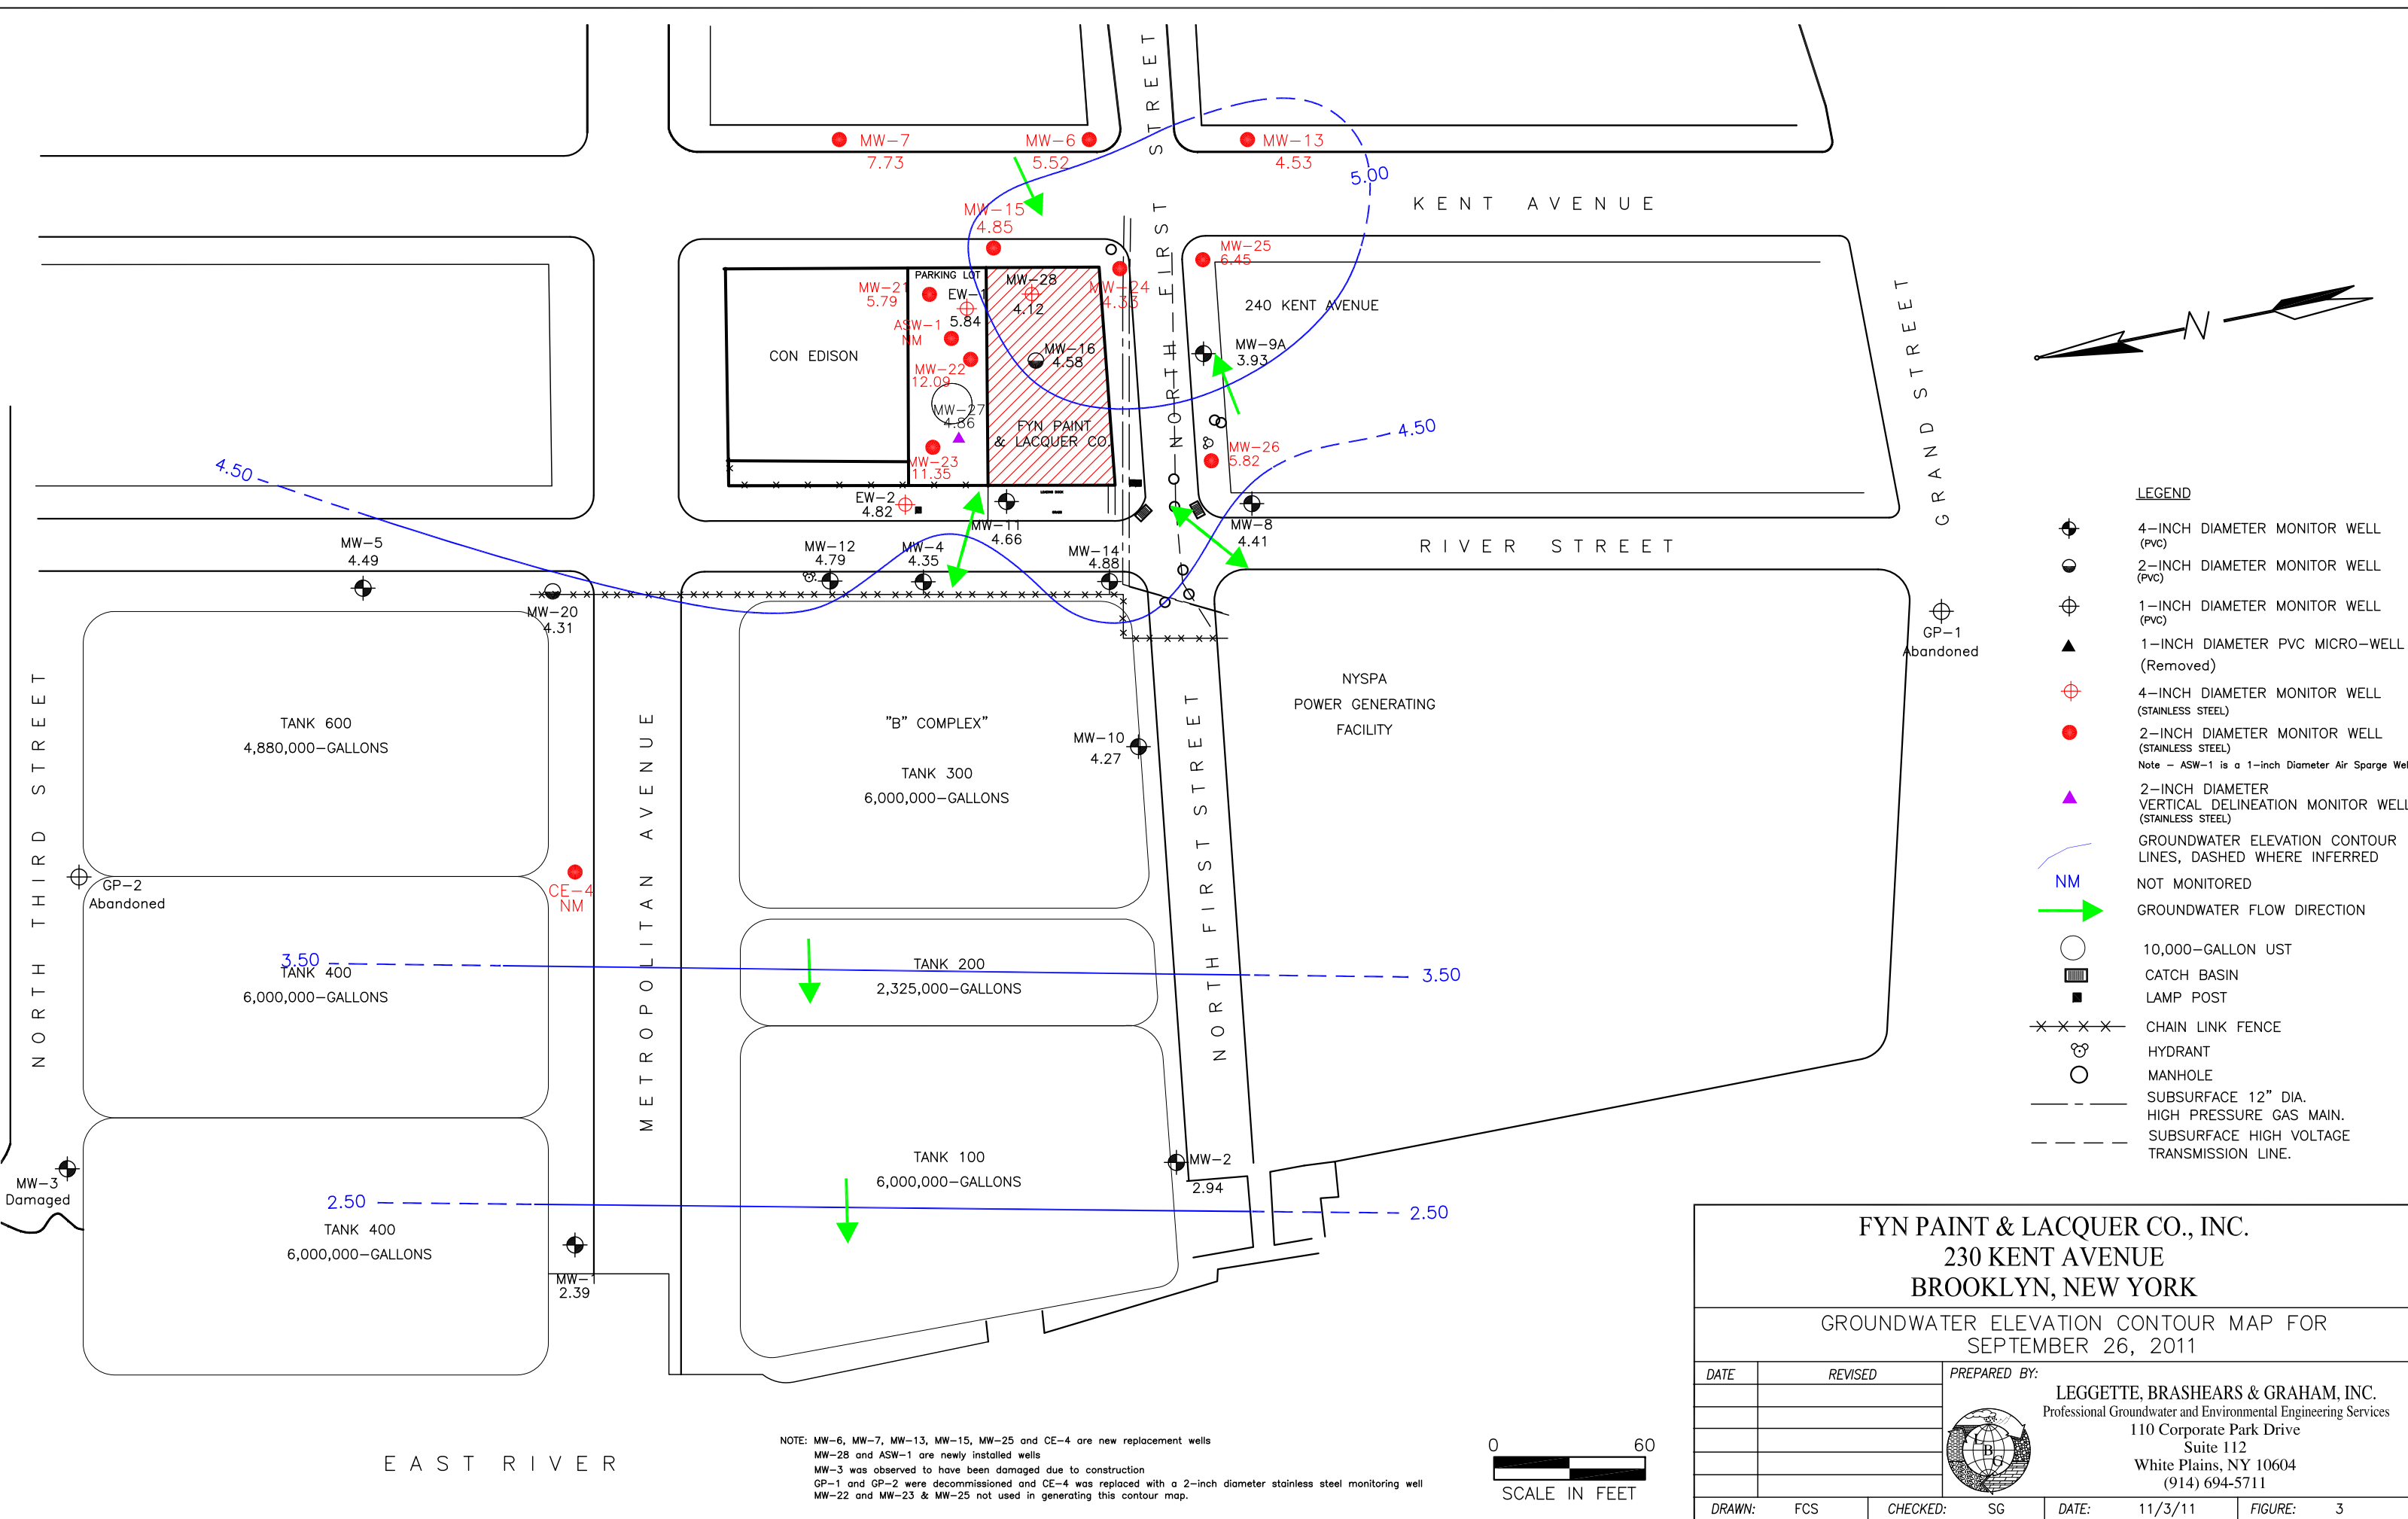

NOTE: MW-6, MW-7, MW-13, MW-15, MW-25 and CE-4 are new replacement wells
MW-28 and ASW-1 are newly installed wells
MW-3 was observed to have been damaged due to construction
GP-1 and GP-2 were decommissioned and CE-4 was replaced with a 2-inch diameter stainless steel monitoring well
MW-22 and MW-23 & MW-25 not used in generating this contour map.




FYN PAINT & LACQUER CO., INC.


230 KENT AVENUE

BROOKLYN, NEW YORK

GROUNDWATER ELEVATION CONTOUR MAP FOR
SEPTEMBER 26, 2011

DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Groundwater and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711
DRAWN:	FCS	CHECKED: SG
DATE:	11/3/11	FIGURE: 3

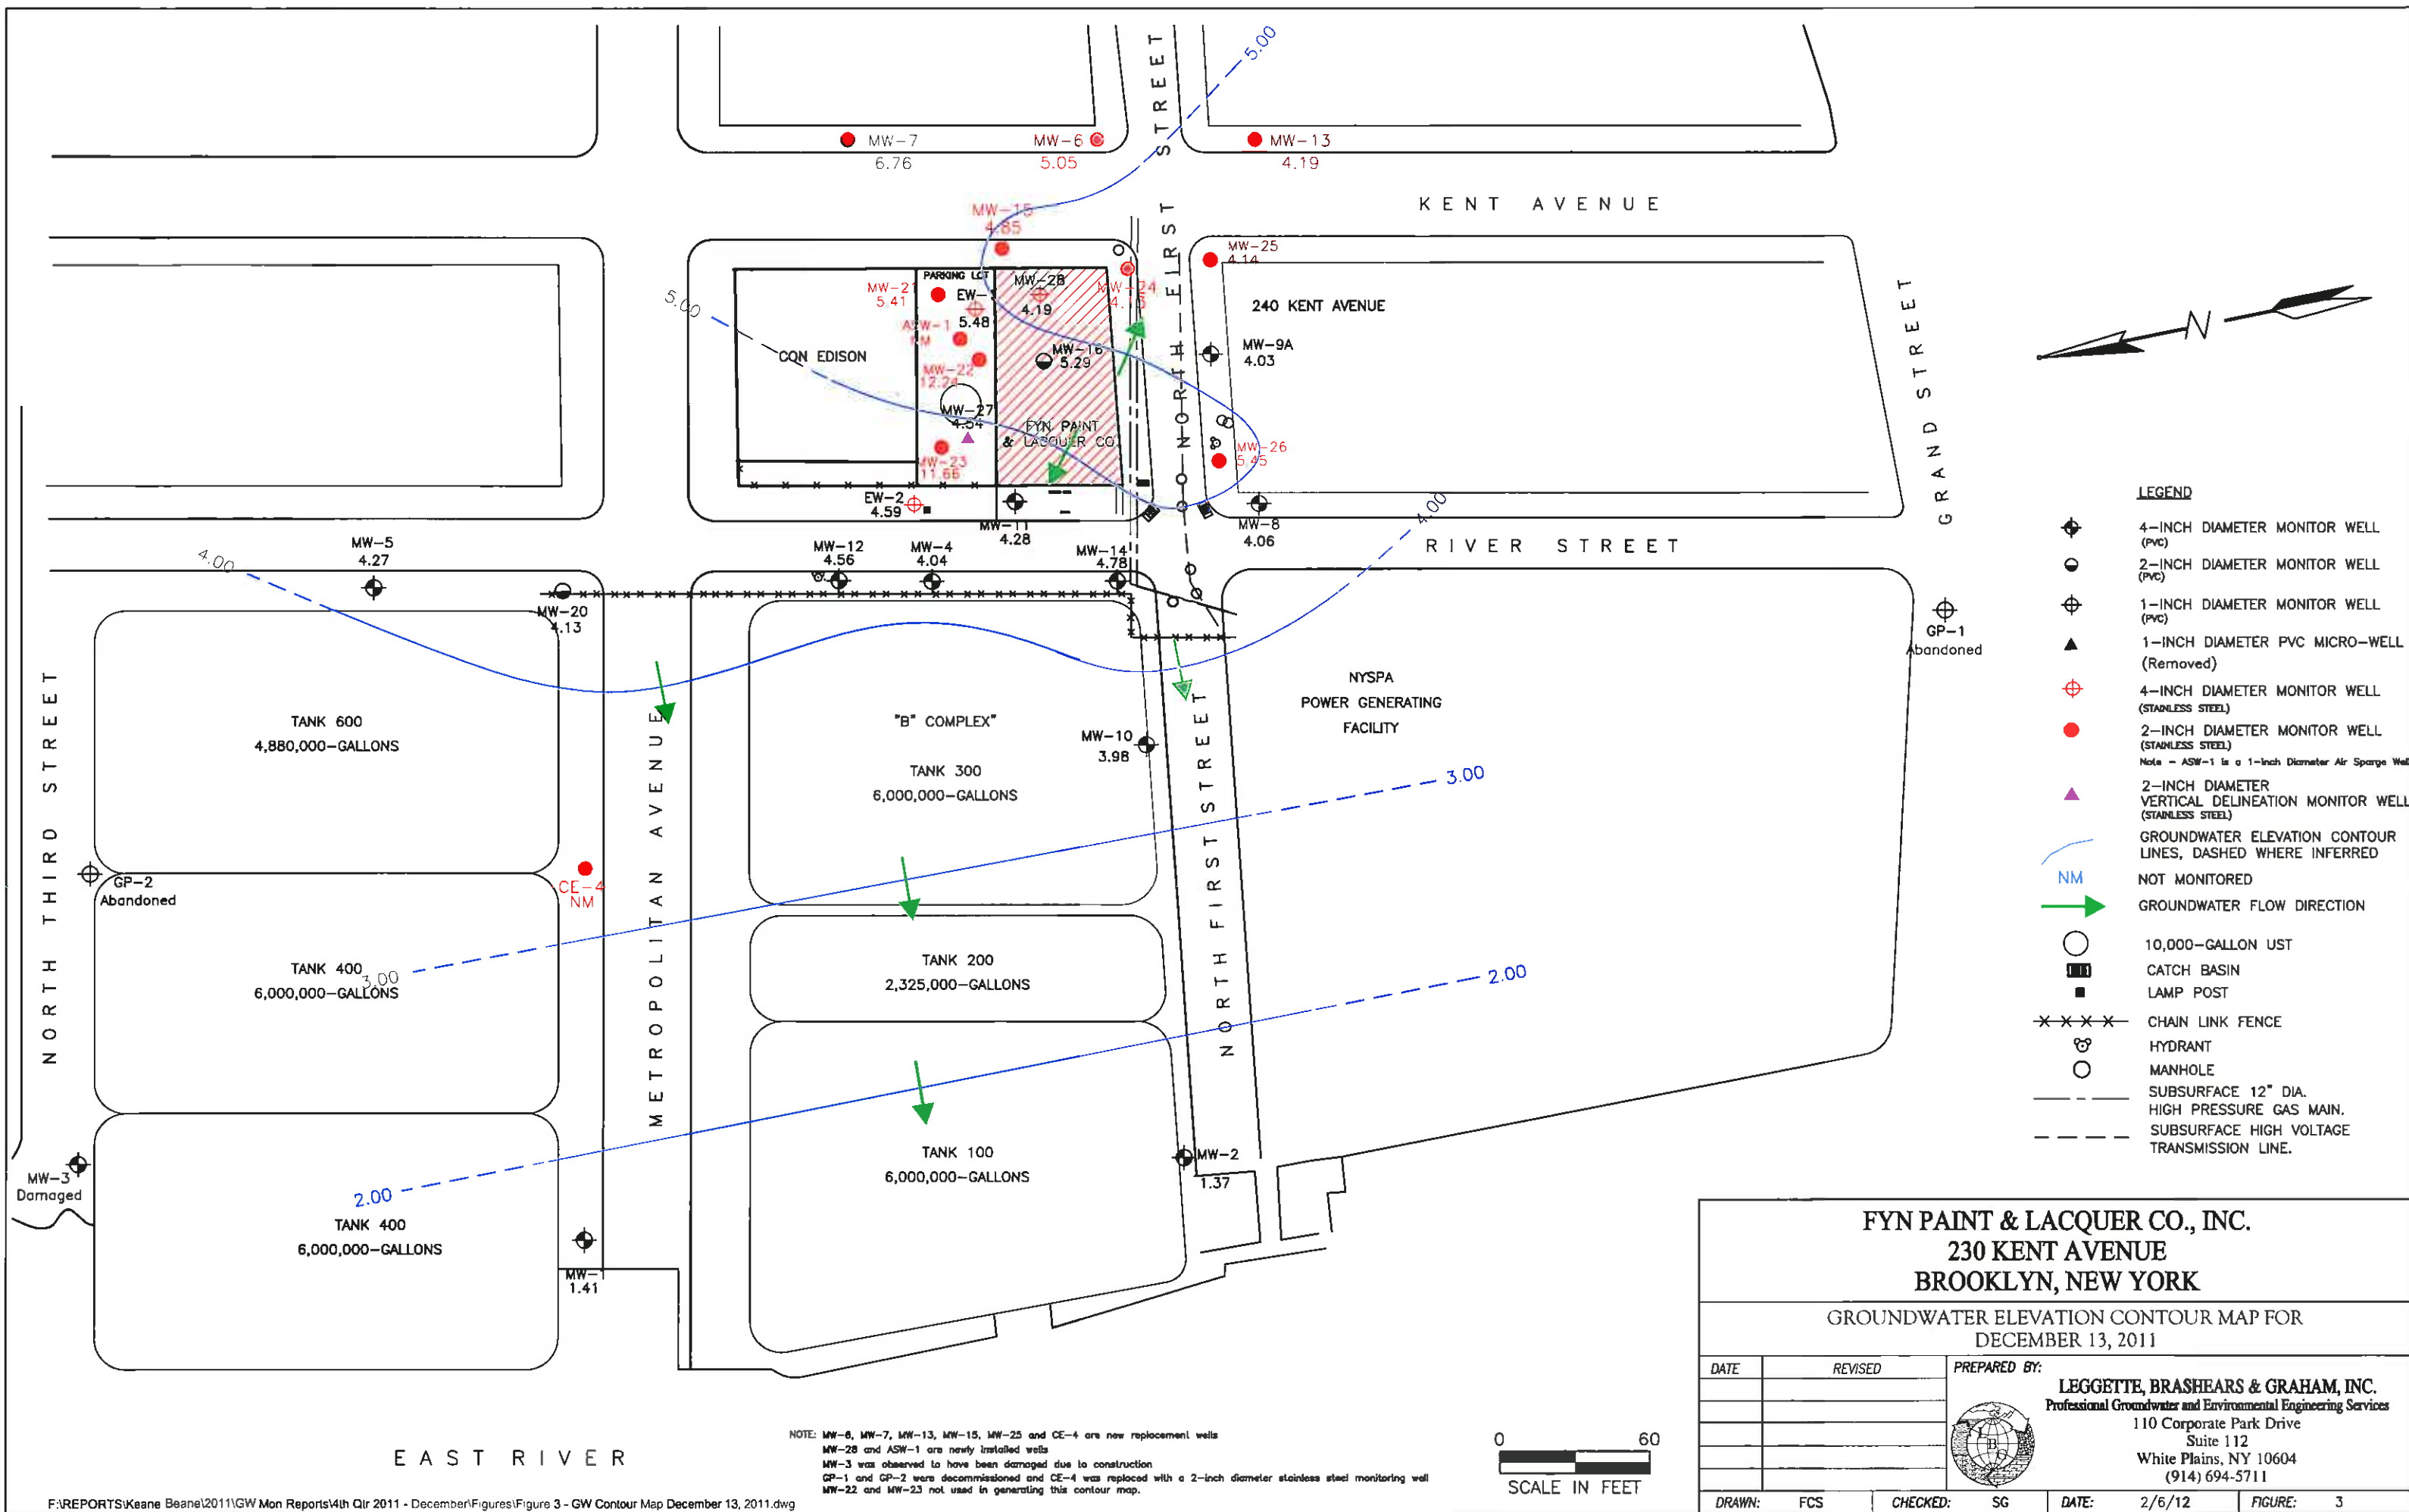

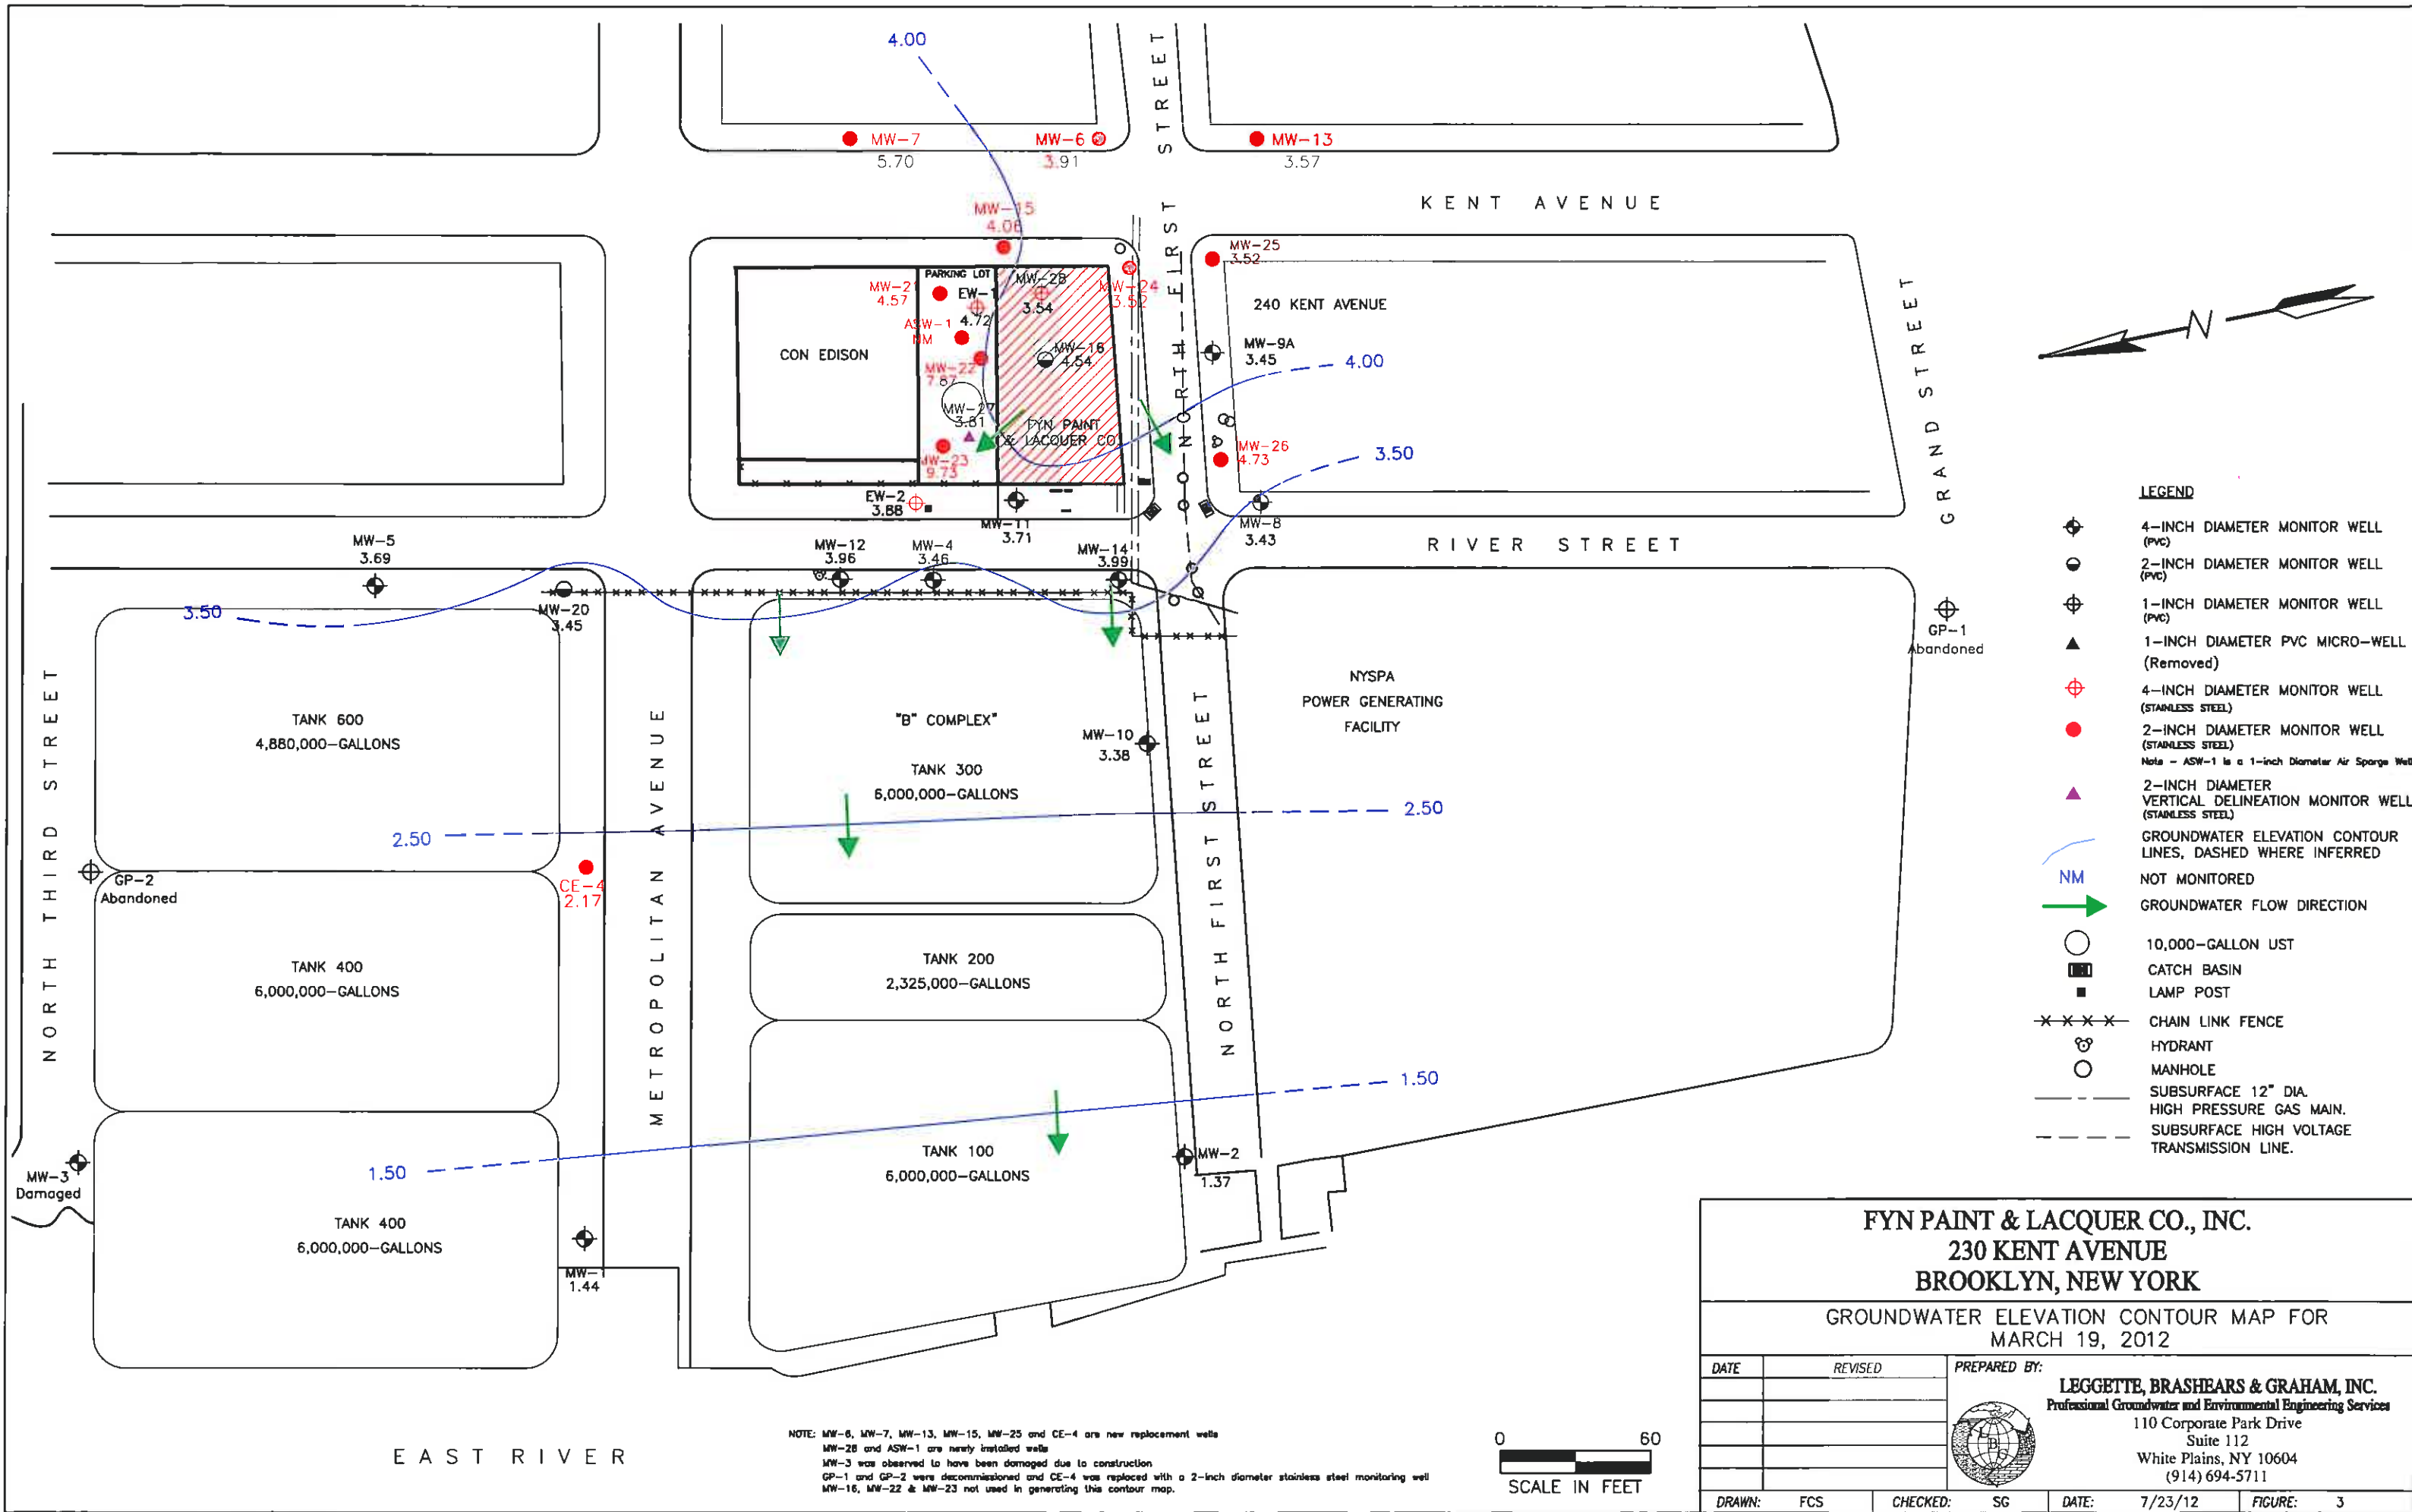

LEGEND

- 4-INCH DIAMETER MONITOR WELL (PVC)
- 2-INCH DIAMETER MONITOR WELL (PVC)
- 1-INCH DIAMETER MONITOR WELL (PVC)
- 1-INCH DIAMETER PVC MICRO-WELL (Removed)
- 4-INCH DIAMETER MONITOR WELL (STAINLESS STEEL)
- 2-INCH DIAMETER MONITOR WELL (STAINLESS STEEL)
- Note - ASW-1 is a 1-inch Diameter Air Sparge Well
- 2-INCH DIAMETER VERTICAL DELINEATION MONITOR WELL (STAINLESS STEEL)
- GROUNDWATER ELEVATION CONTOUR LINES, DASHED WHERE INFERRED
- NOT MONITORED
- GROUNDWATER FLOW DIRECTION
- 10,000-GALLON UST
- CATCH BASIN
- LAMP POST
- CHAIN LINK FENCE
- HYDRANT
- MANHOLE
- SUBSURFACE 12" DIA. HIGH PRESSURE GAS MAIN.
- SUBSURFACE HIGH VOLTAGE TRANSMISSION LINE.


FYN PAINT & LACQUER CO., INC.
230 KENT AVENUE
BROOKLYN, NEW YORK

GROUNDWATER ELEVATION CONTOUR MAP FOR
MARCH 19, 2012

DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Groundwater and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711
DRAWN:	FCS	CHECKED: SG
DATE:	7/23/12	FIGURE: 3

NOTE: MW-6, MW-7, MW-13, MW-15, MW-25 and CE-4 are new replacement wells
MW-28 and ASW-1 are newly installed wells
MW-3 was observed to have been damaged due to construction
GP-1 and GP-2 were decommissioned and CE-4 was replaced with a 2-inch diameter stainless steel monitoring well
MW-16, MW-22 & MW-23 not used in generating this contour map.


0 60
SCALE IN FEET

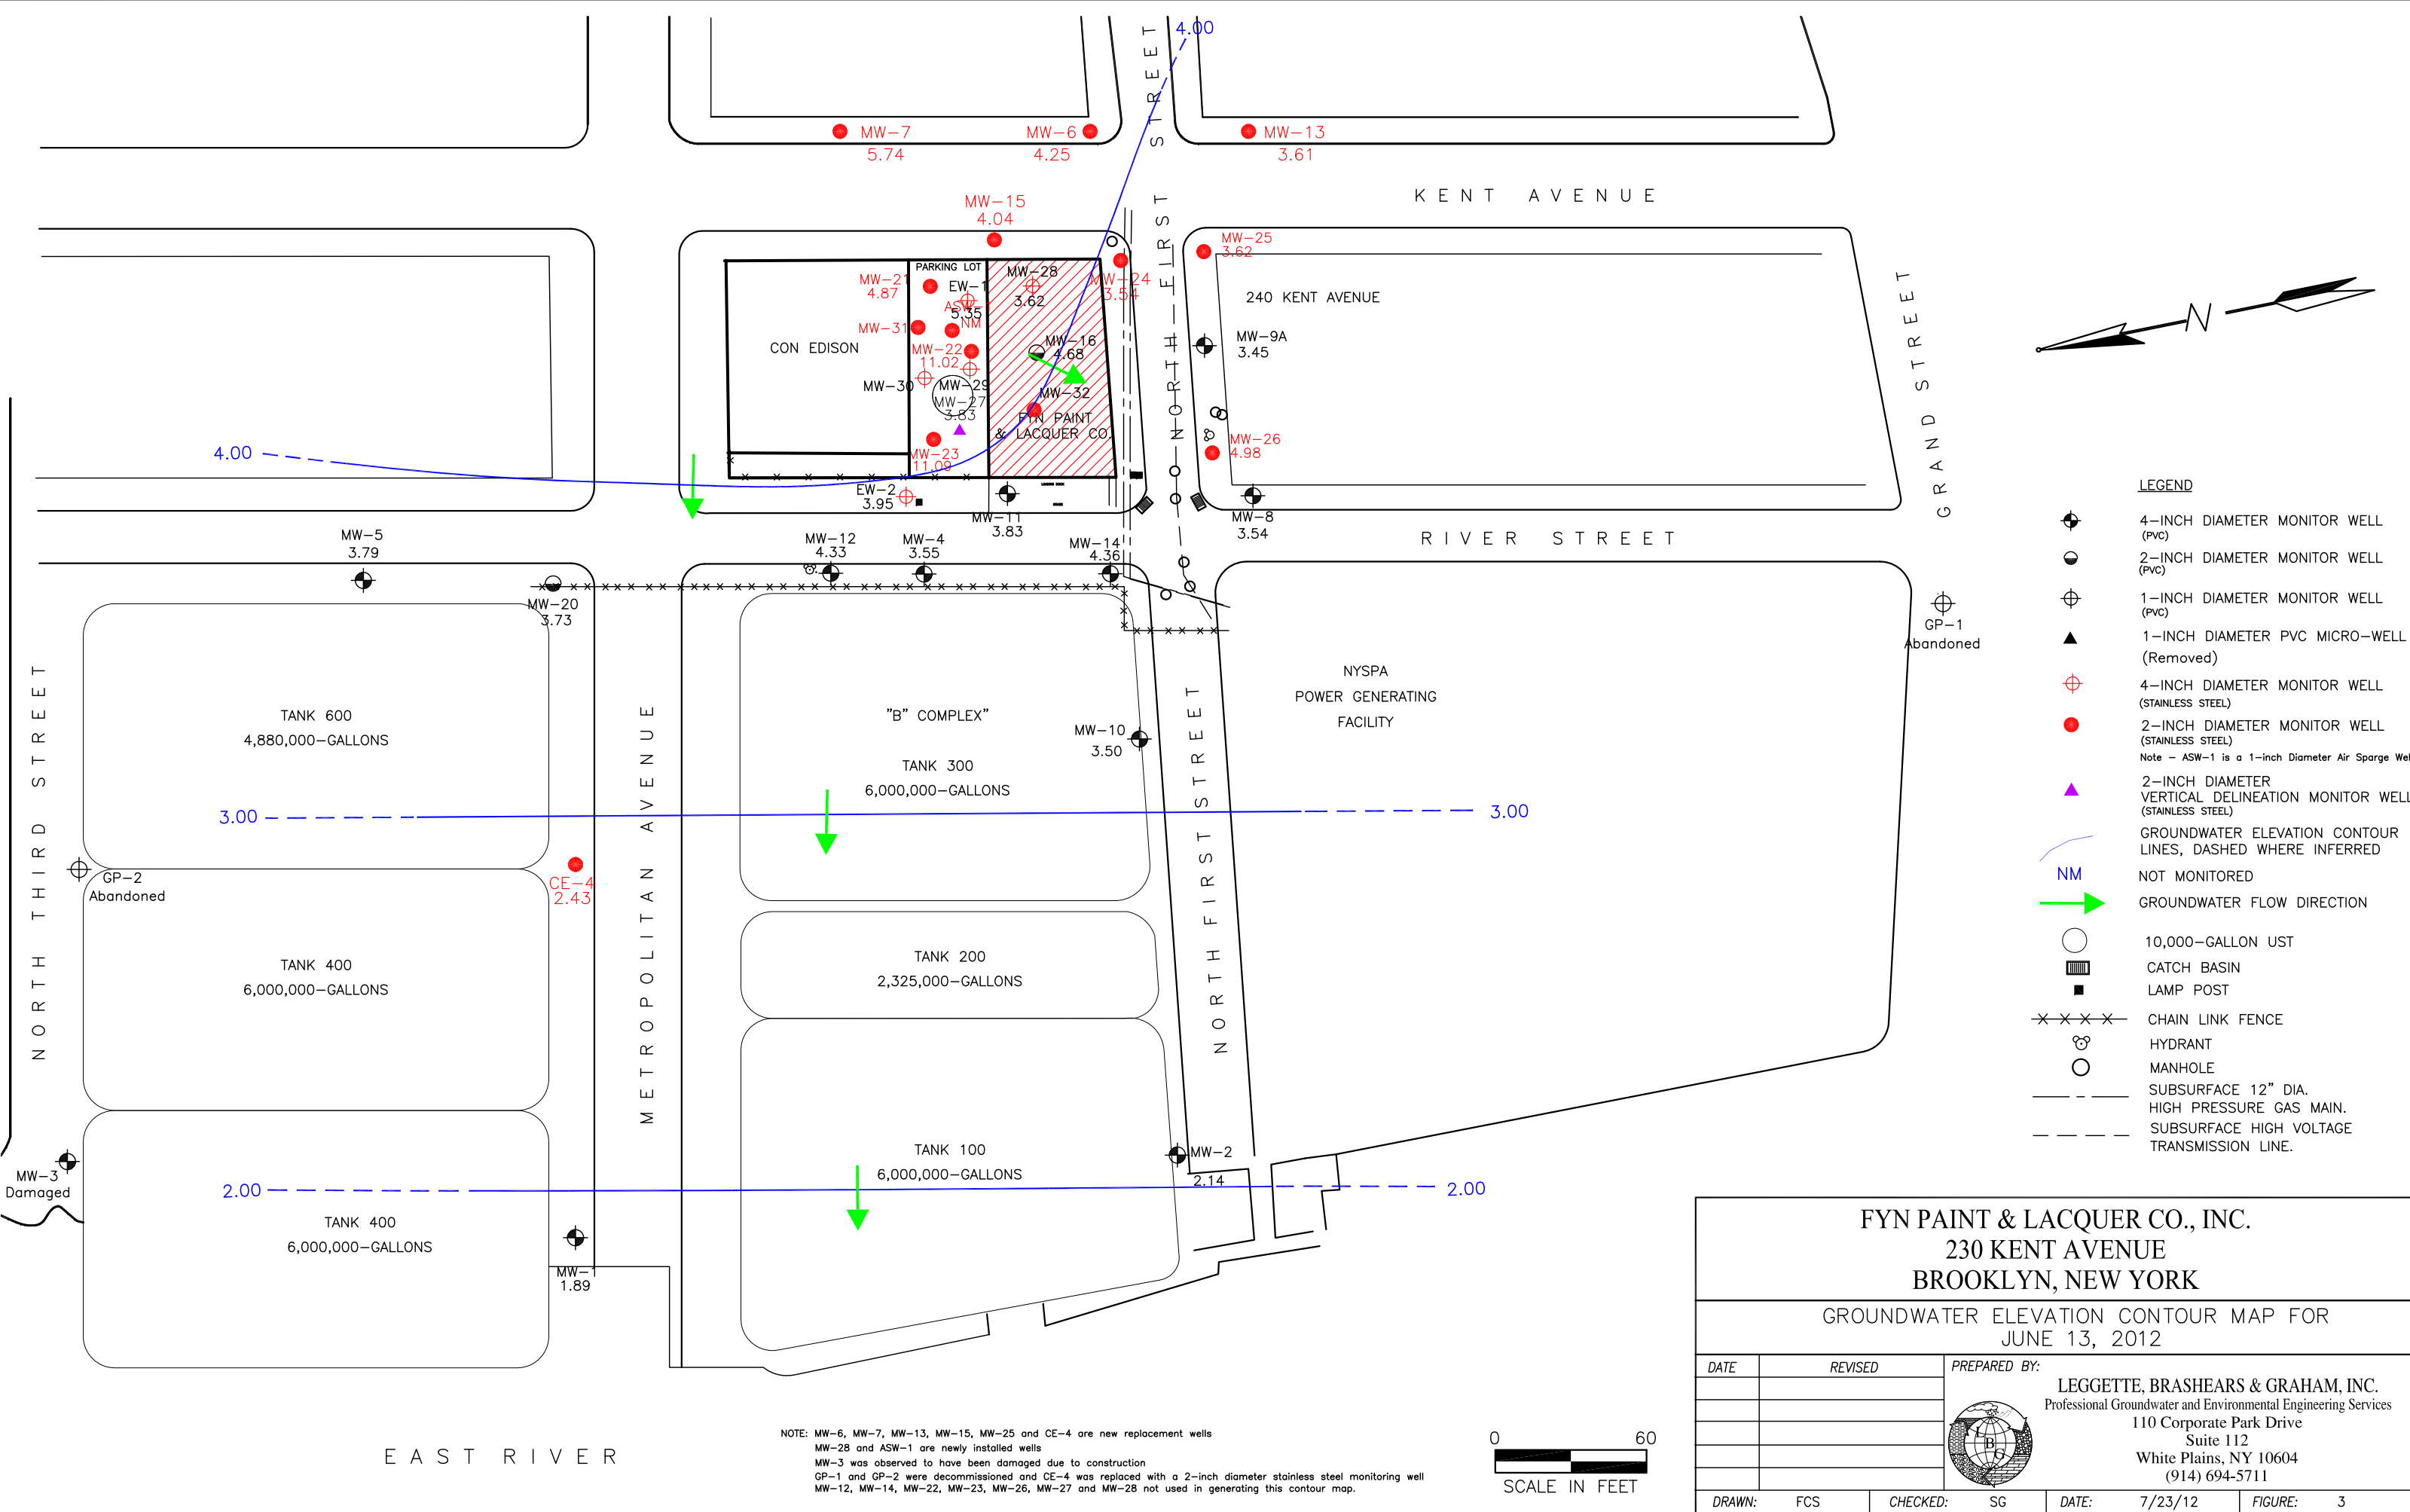


FYN PAINT & LACQUER CO., INC.
230 KENT AVENUE
BROOKLYN, NEW YORK

GROUNDWATER ELEVATION CONTOUR MAP FOR
JUNE 13, 2012

DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Groundwater and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711
DRAWN:	FCS	CHECKED: SG
DATE:	7/23/12	FIGURE: 3

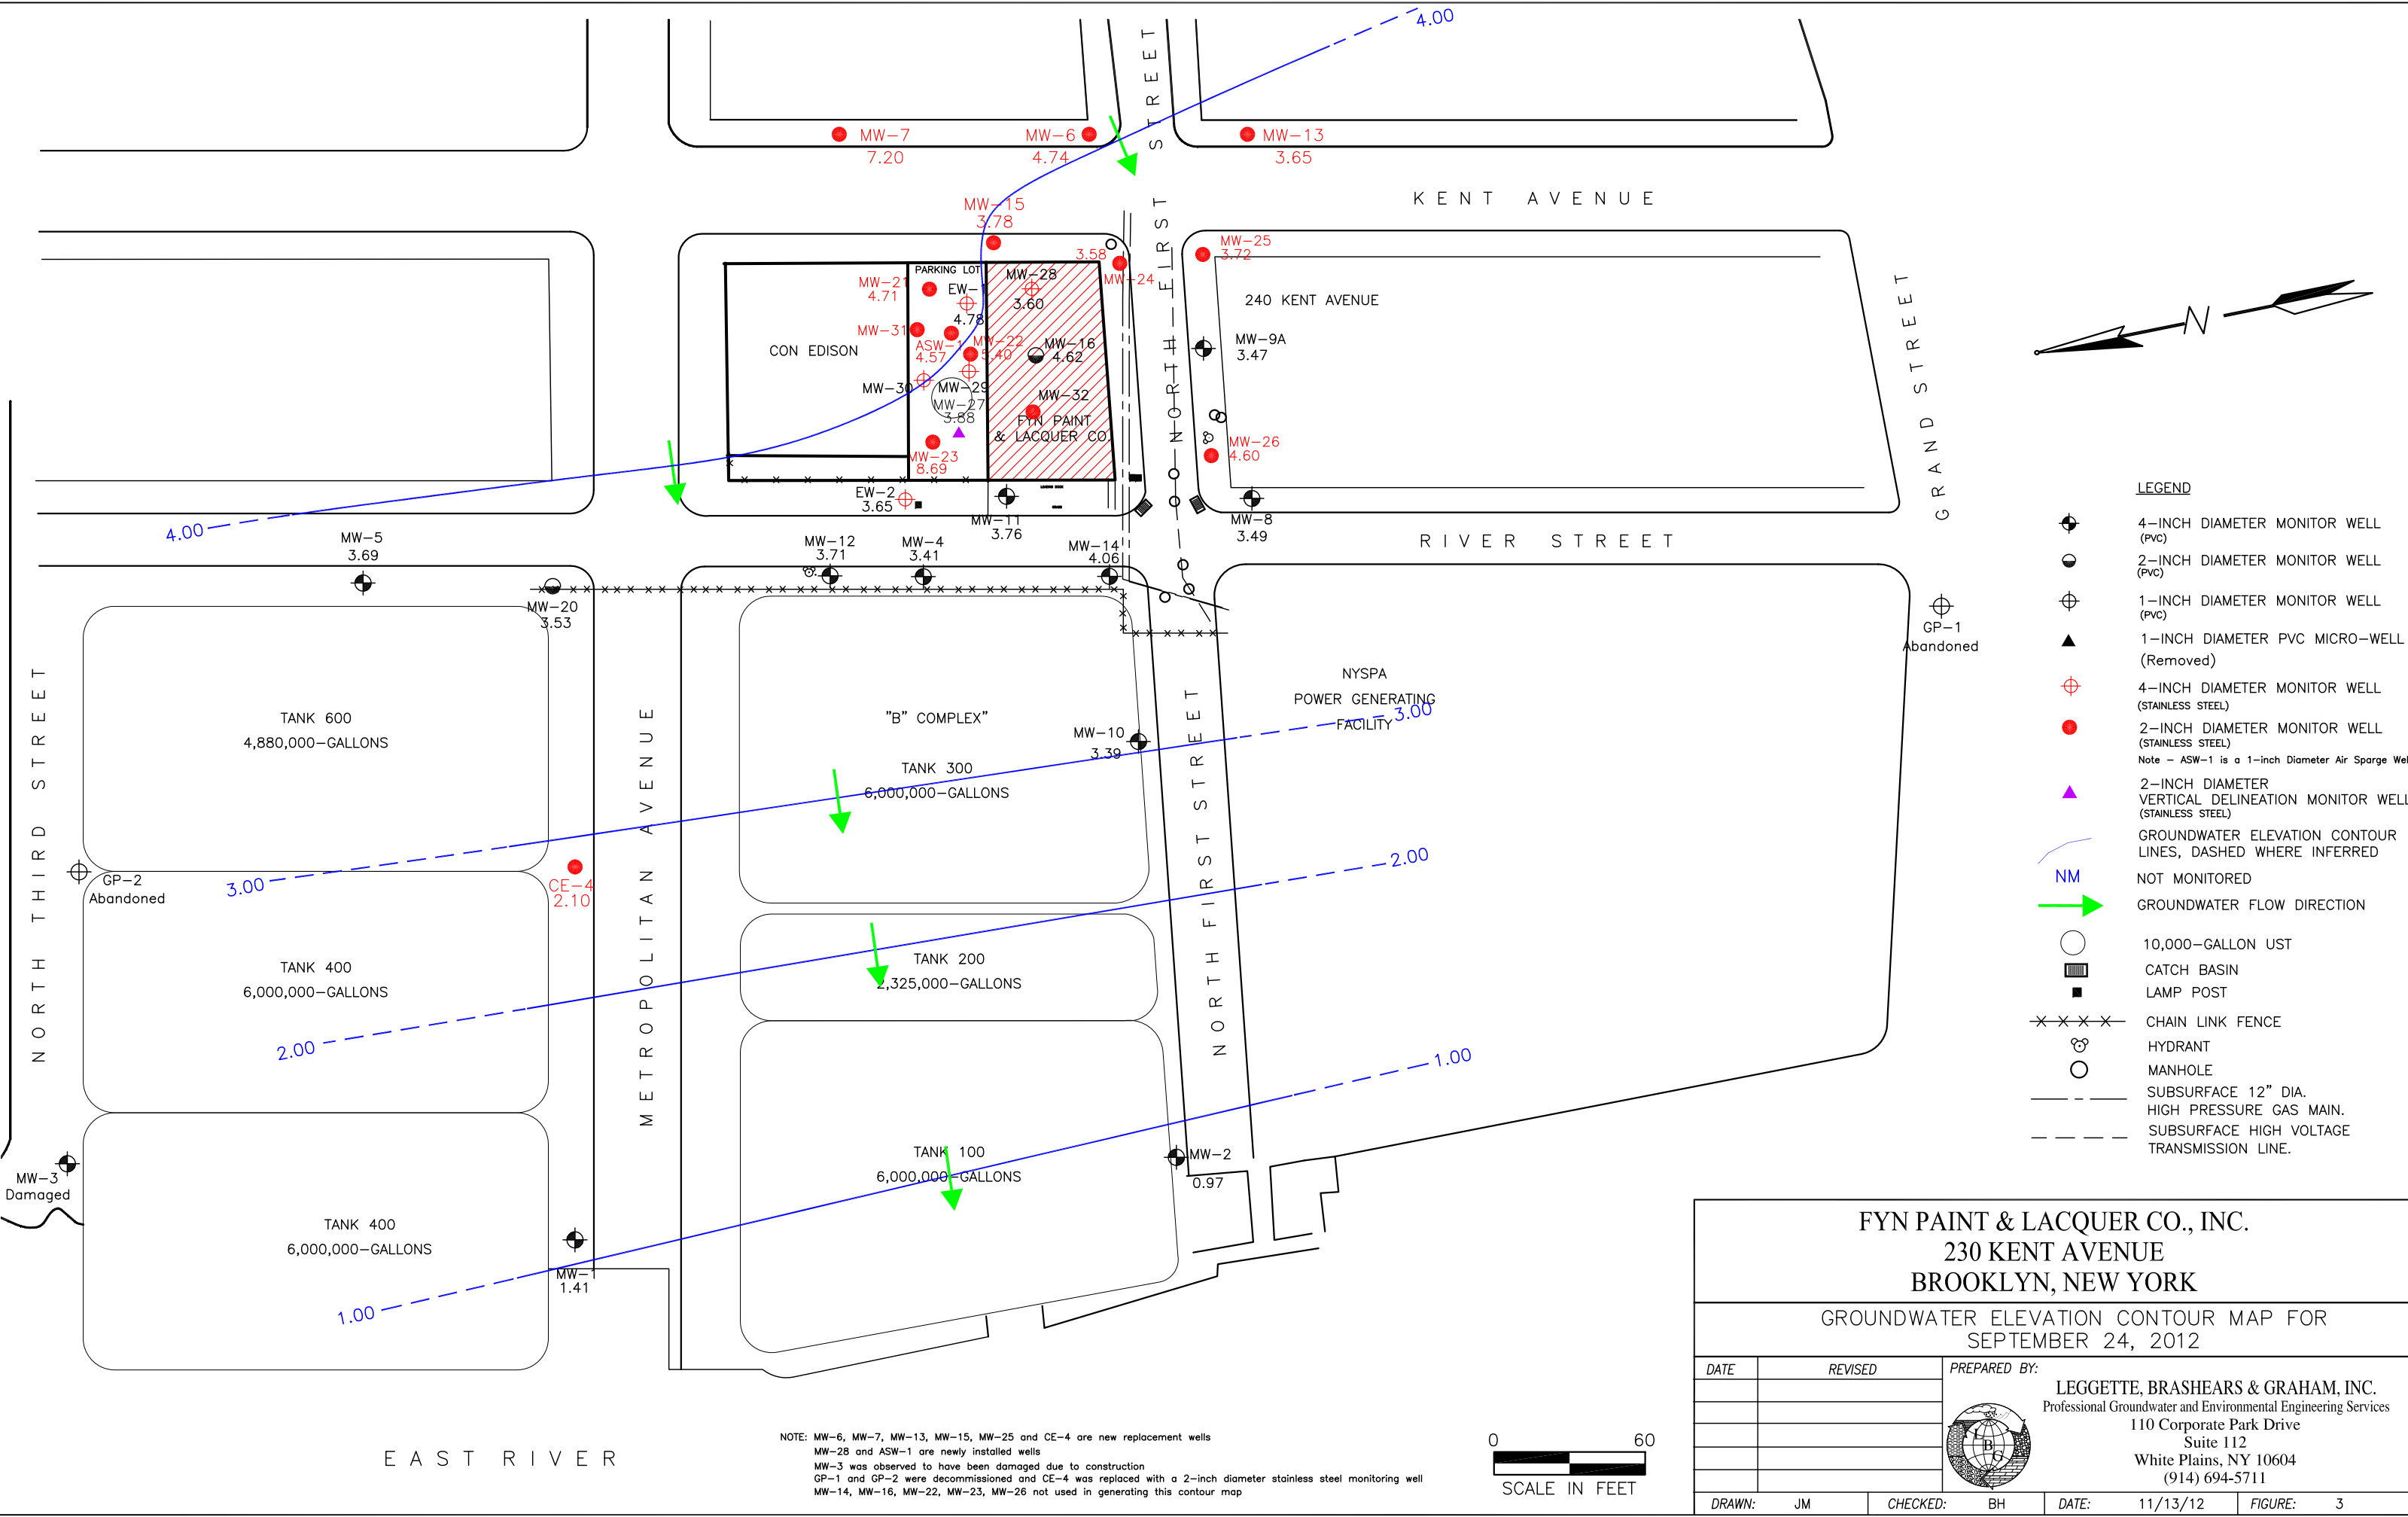

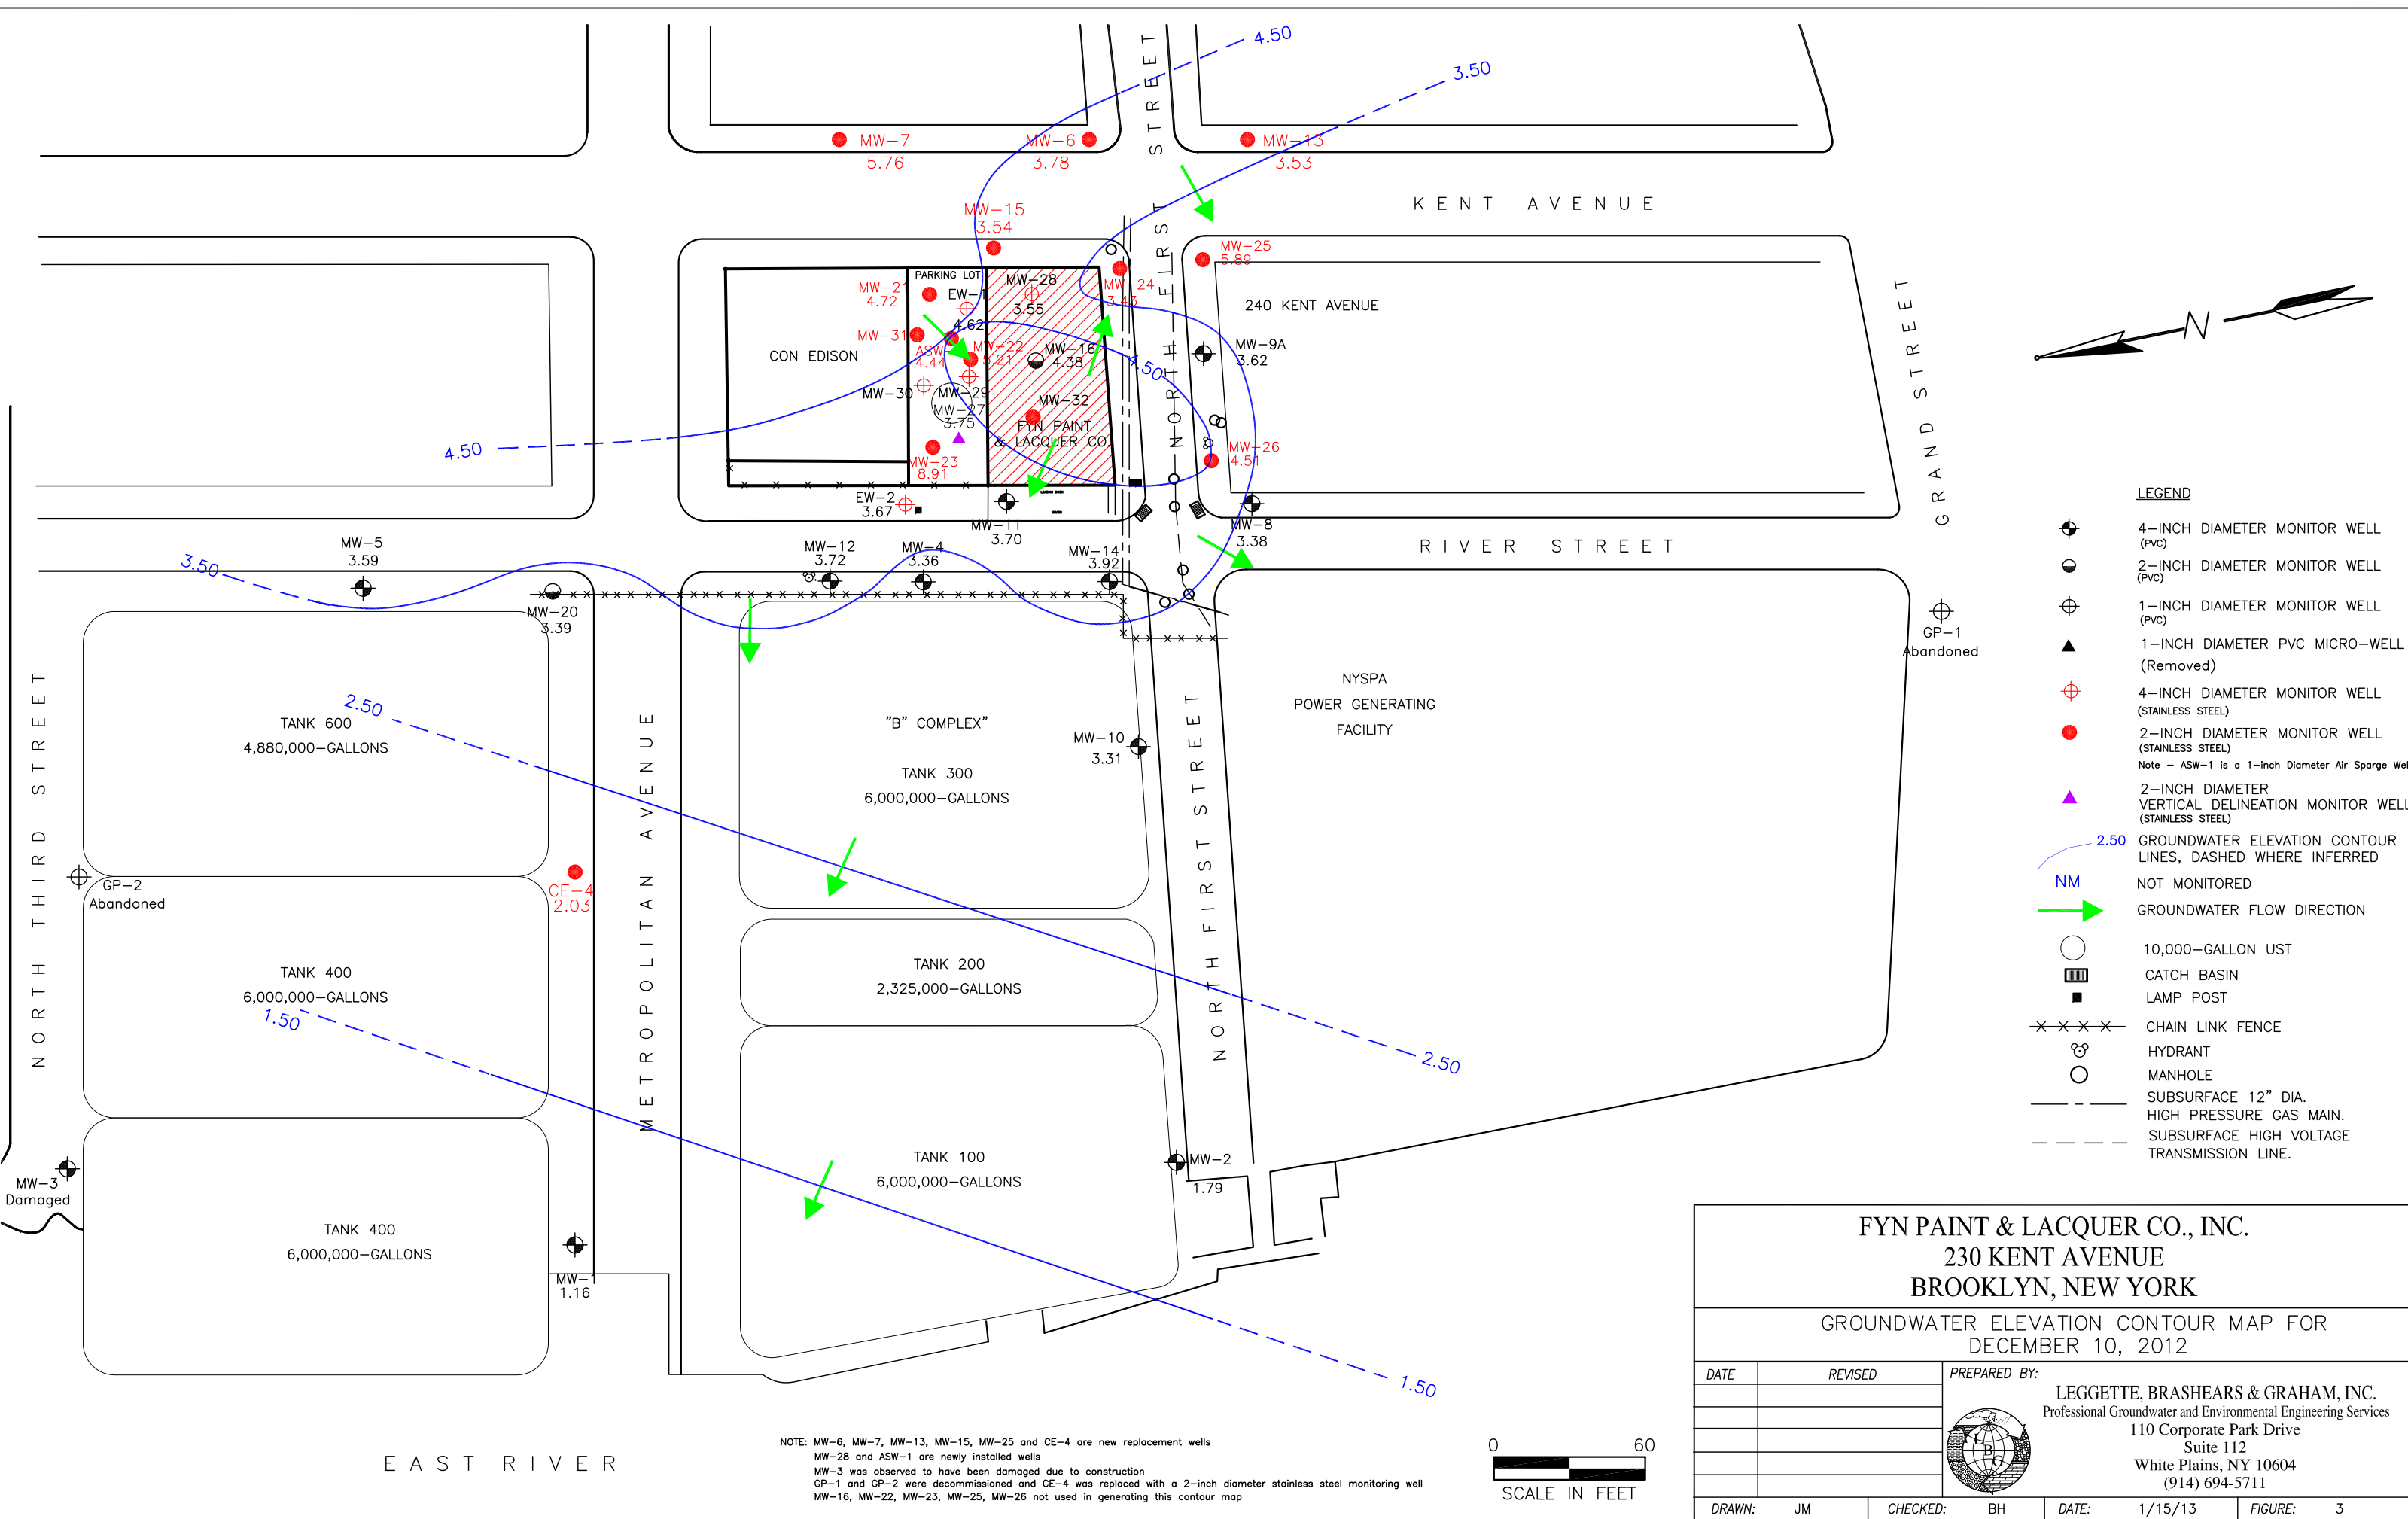

NOTE: MW-6, MW-7, MW-13, MW-15, MW-25 and CE-4 are new replacement wells
MW-28 and ASW-1 are newly installed wells
MW-3 was observed to have been damaged due to construction
GP-1 and GP-2 were decommissioned and CE-4 was replaced with a 2-inch diameter stainless steel monitoring well
MW-16, MW-22, MW-23, MW-25, MW-26 not used in generating this contour map



FYN PAINT & LACQUER CO., INC.


230 KENT AVENUE


BROOKLYN, NEW YORK

GROUNDWATER ELEVATION CONTOUR MAP FOR


DECEMBER 10, 2012


DATE	REVISED	PREPARED BY:
		LEGGETTE, BRASHEARS & GRAHAM, INC.
		Professional Groundwater and Environmental Engineering Services
		110 Corporate Park Drive
		Suite 112
		White Plains, NY 10604
		(914) 694-5711
DRAWN:	JM	CHECKED: BH
DATE:	1/15/13	FIGURE: 3

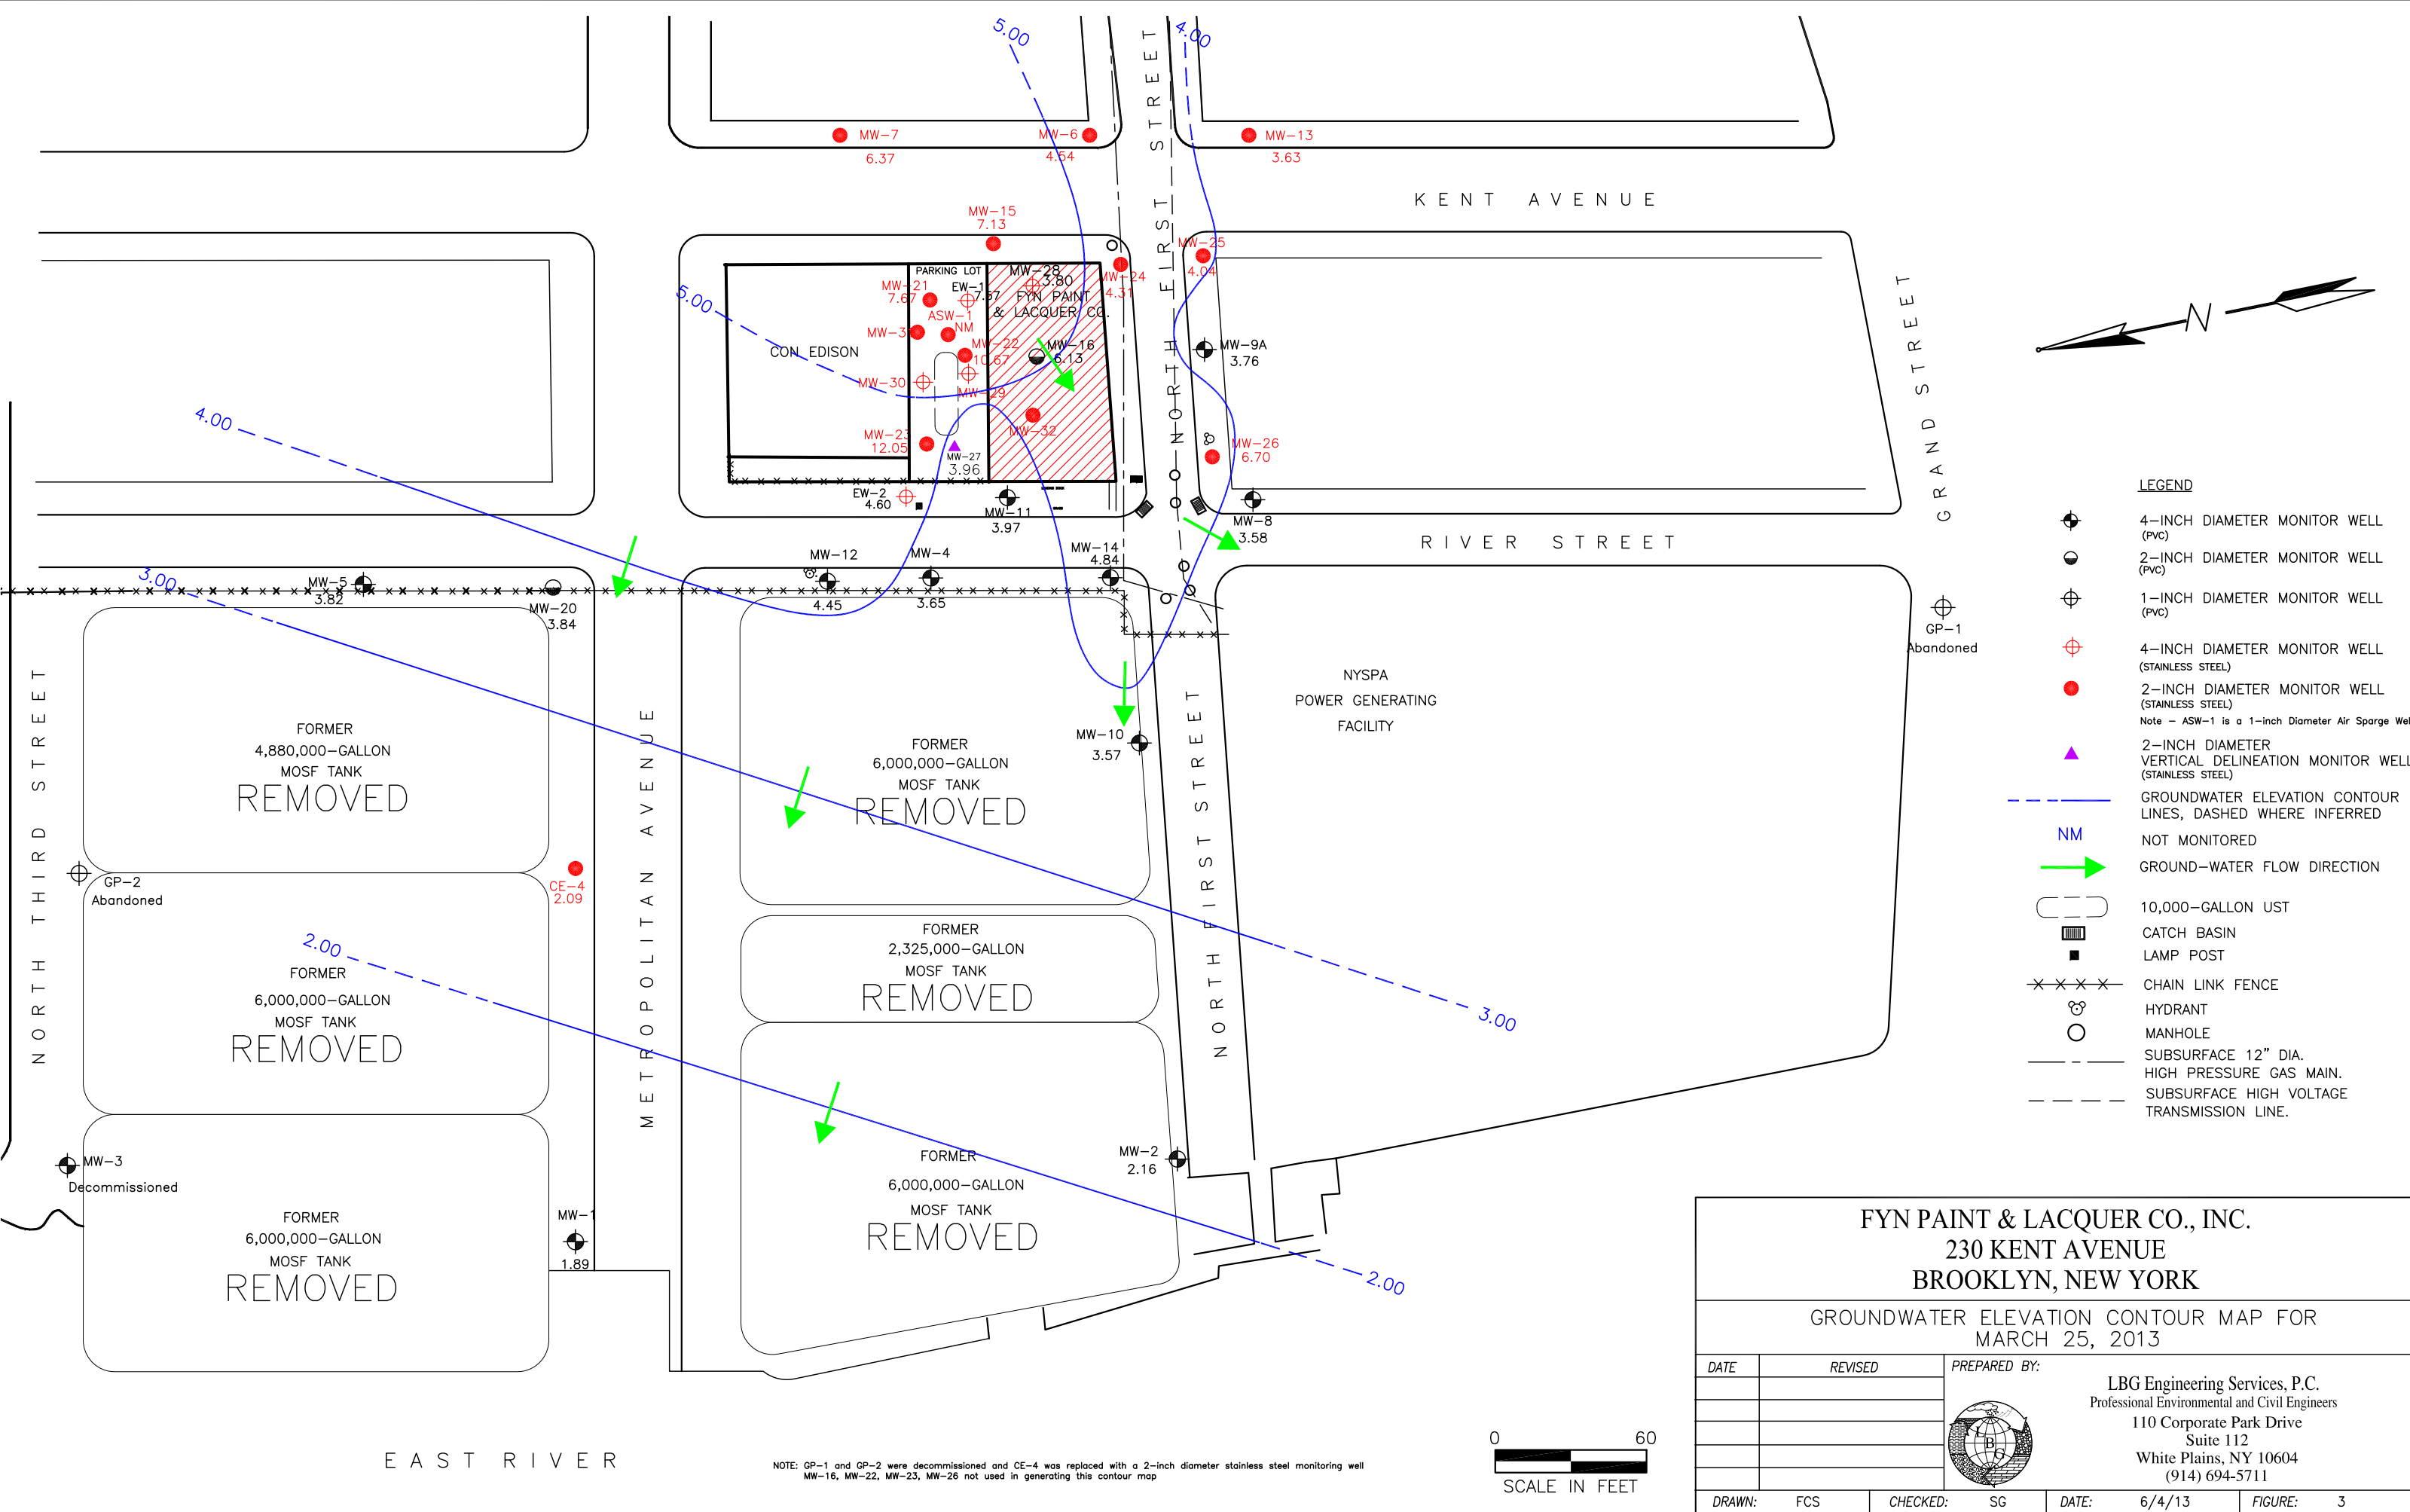


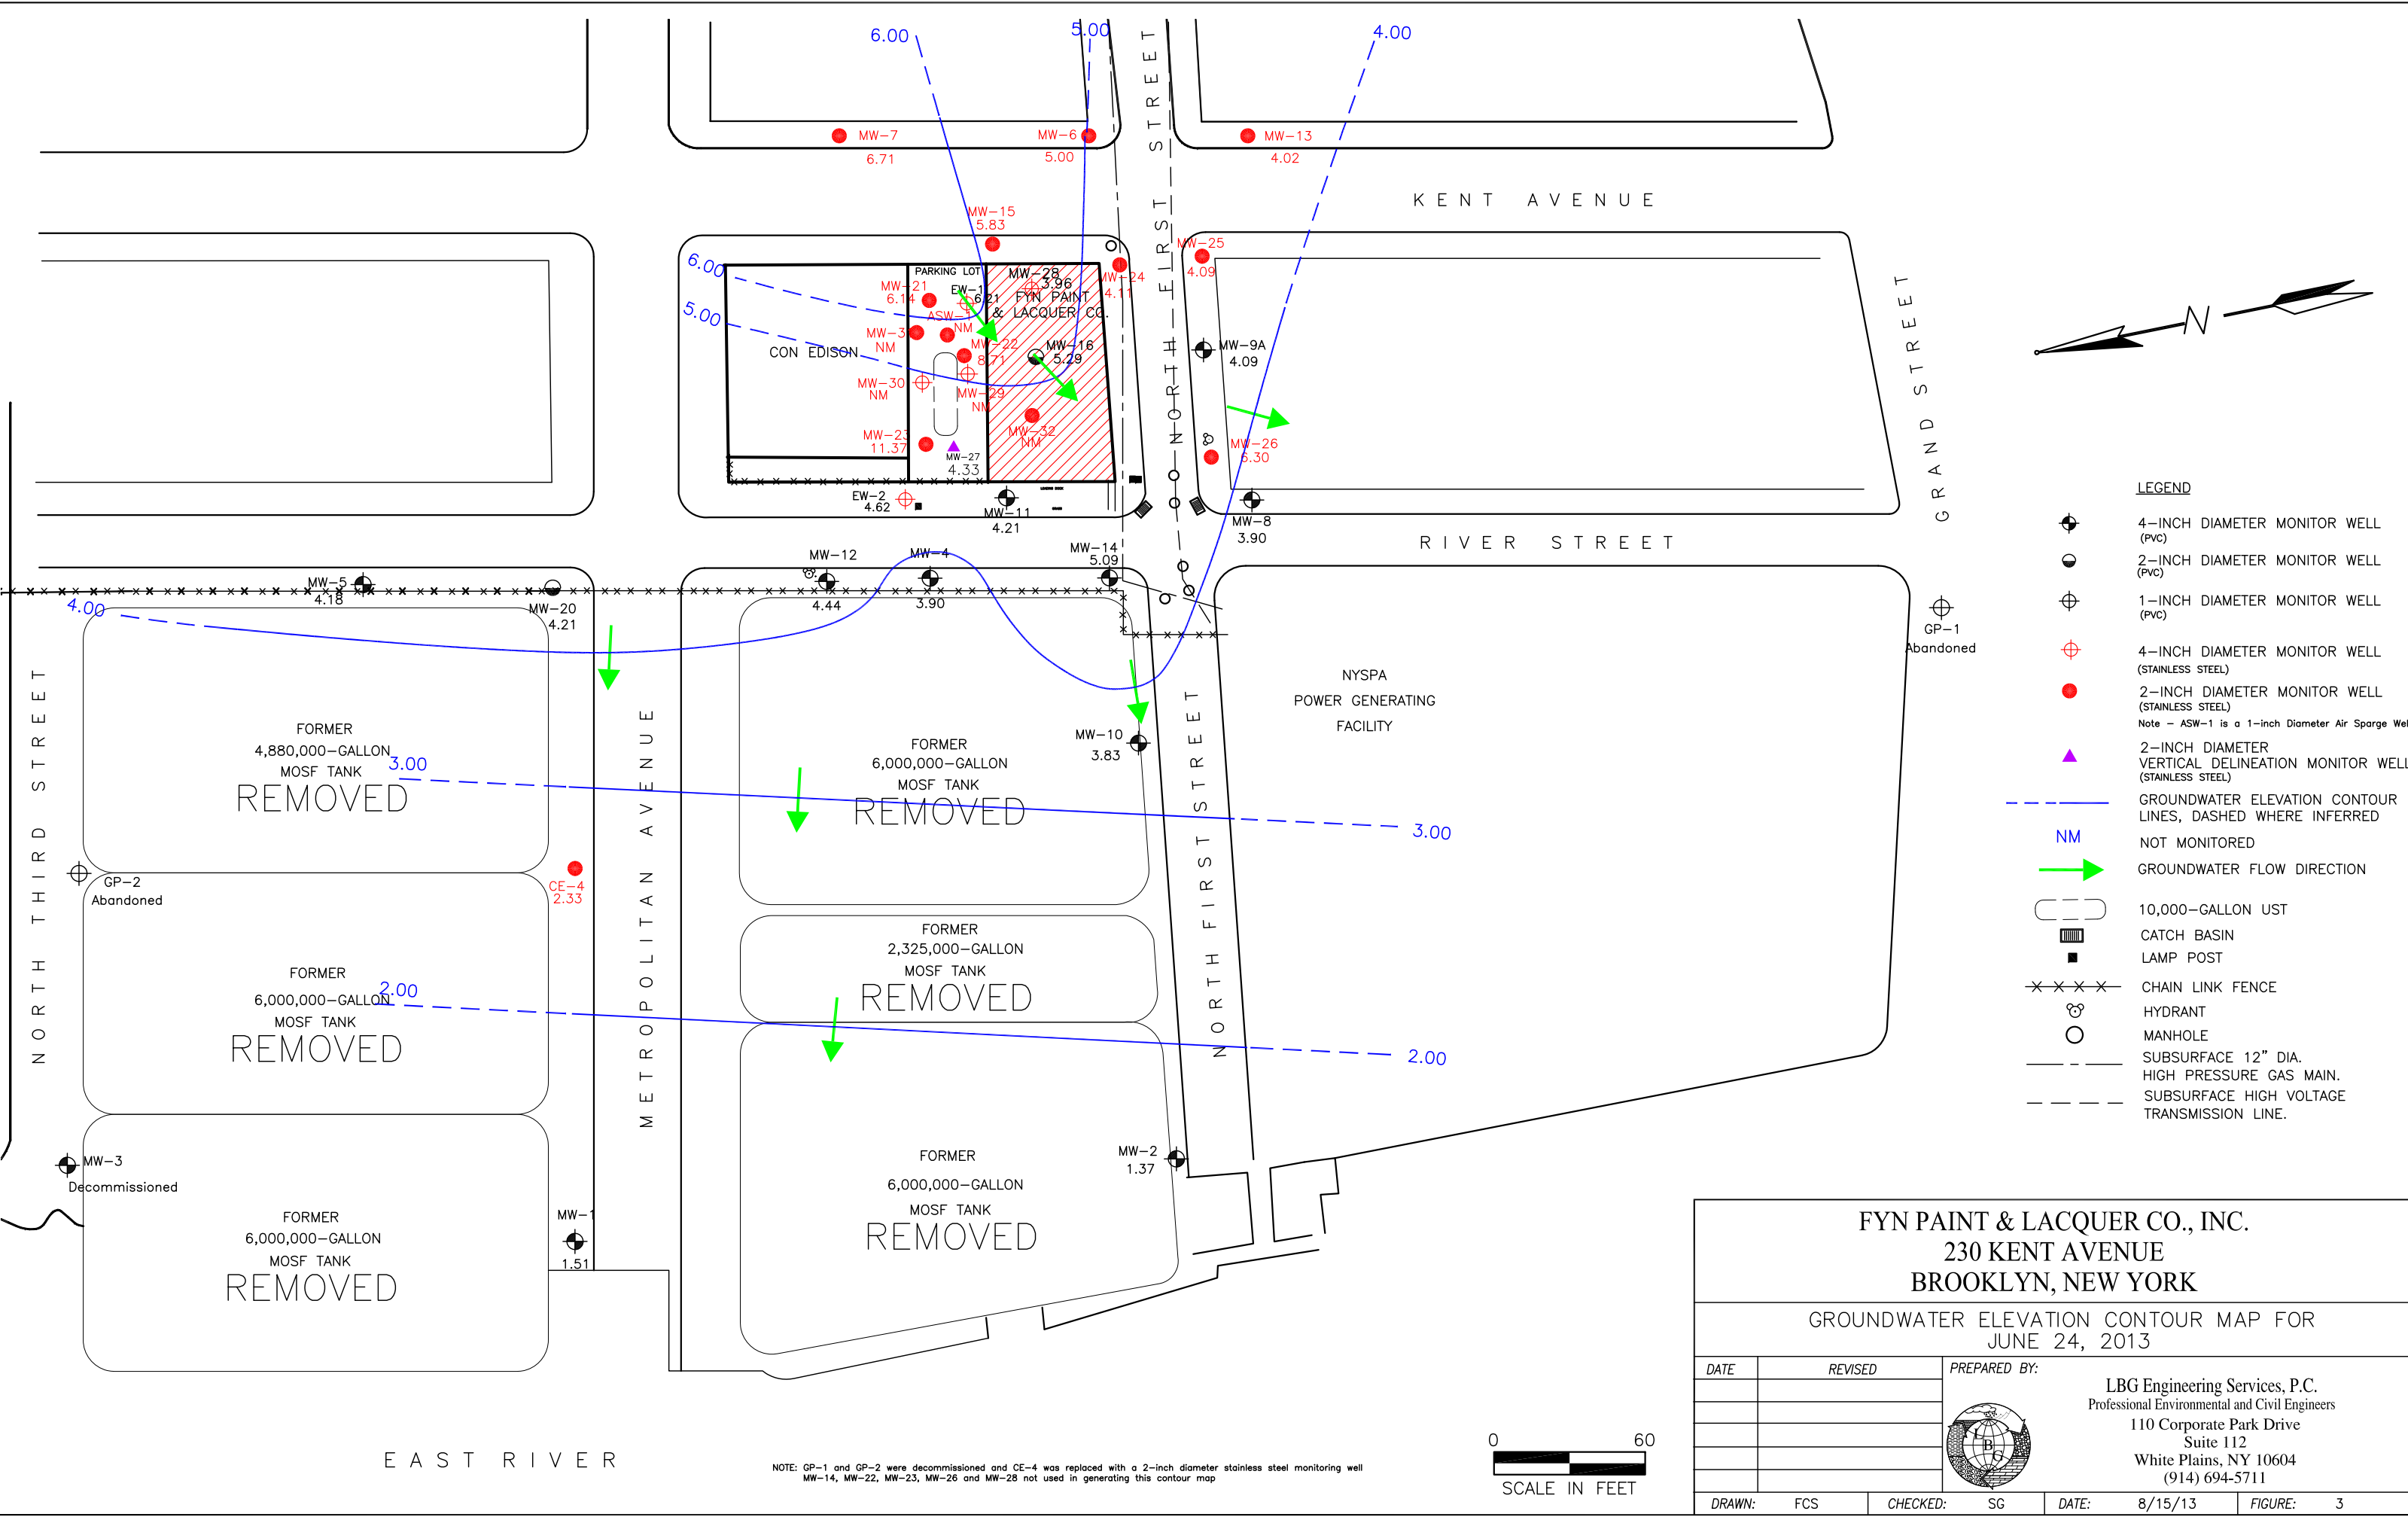

O:\DWG\FYN Paint\2014\F3SEPT2013.dwg, Layout1, 1/28/2014 11:06:28 AM, AcroPlot.pc3

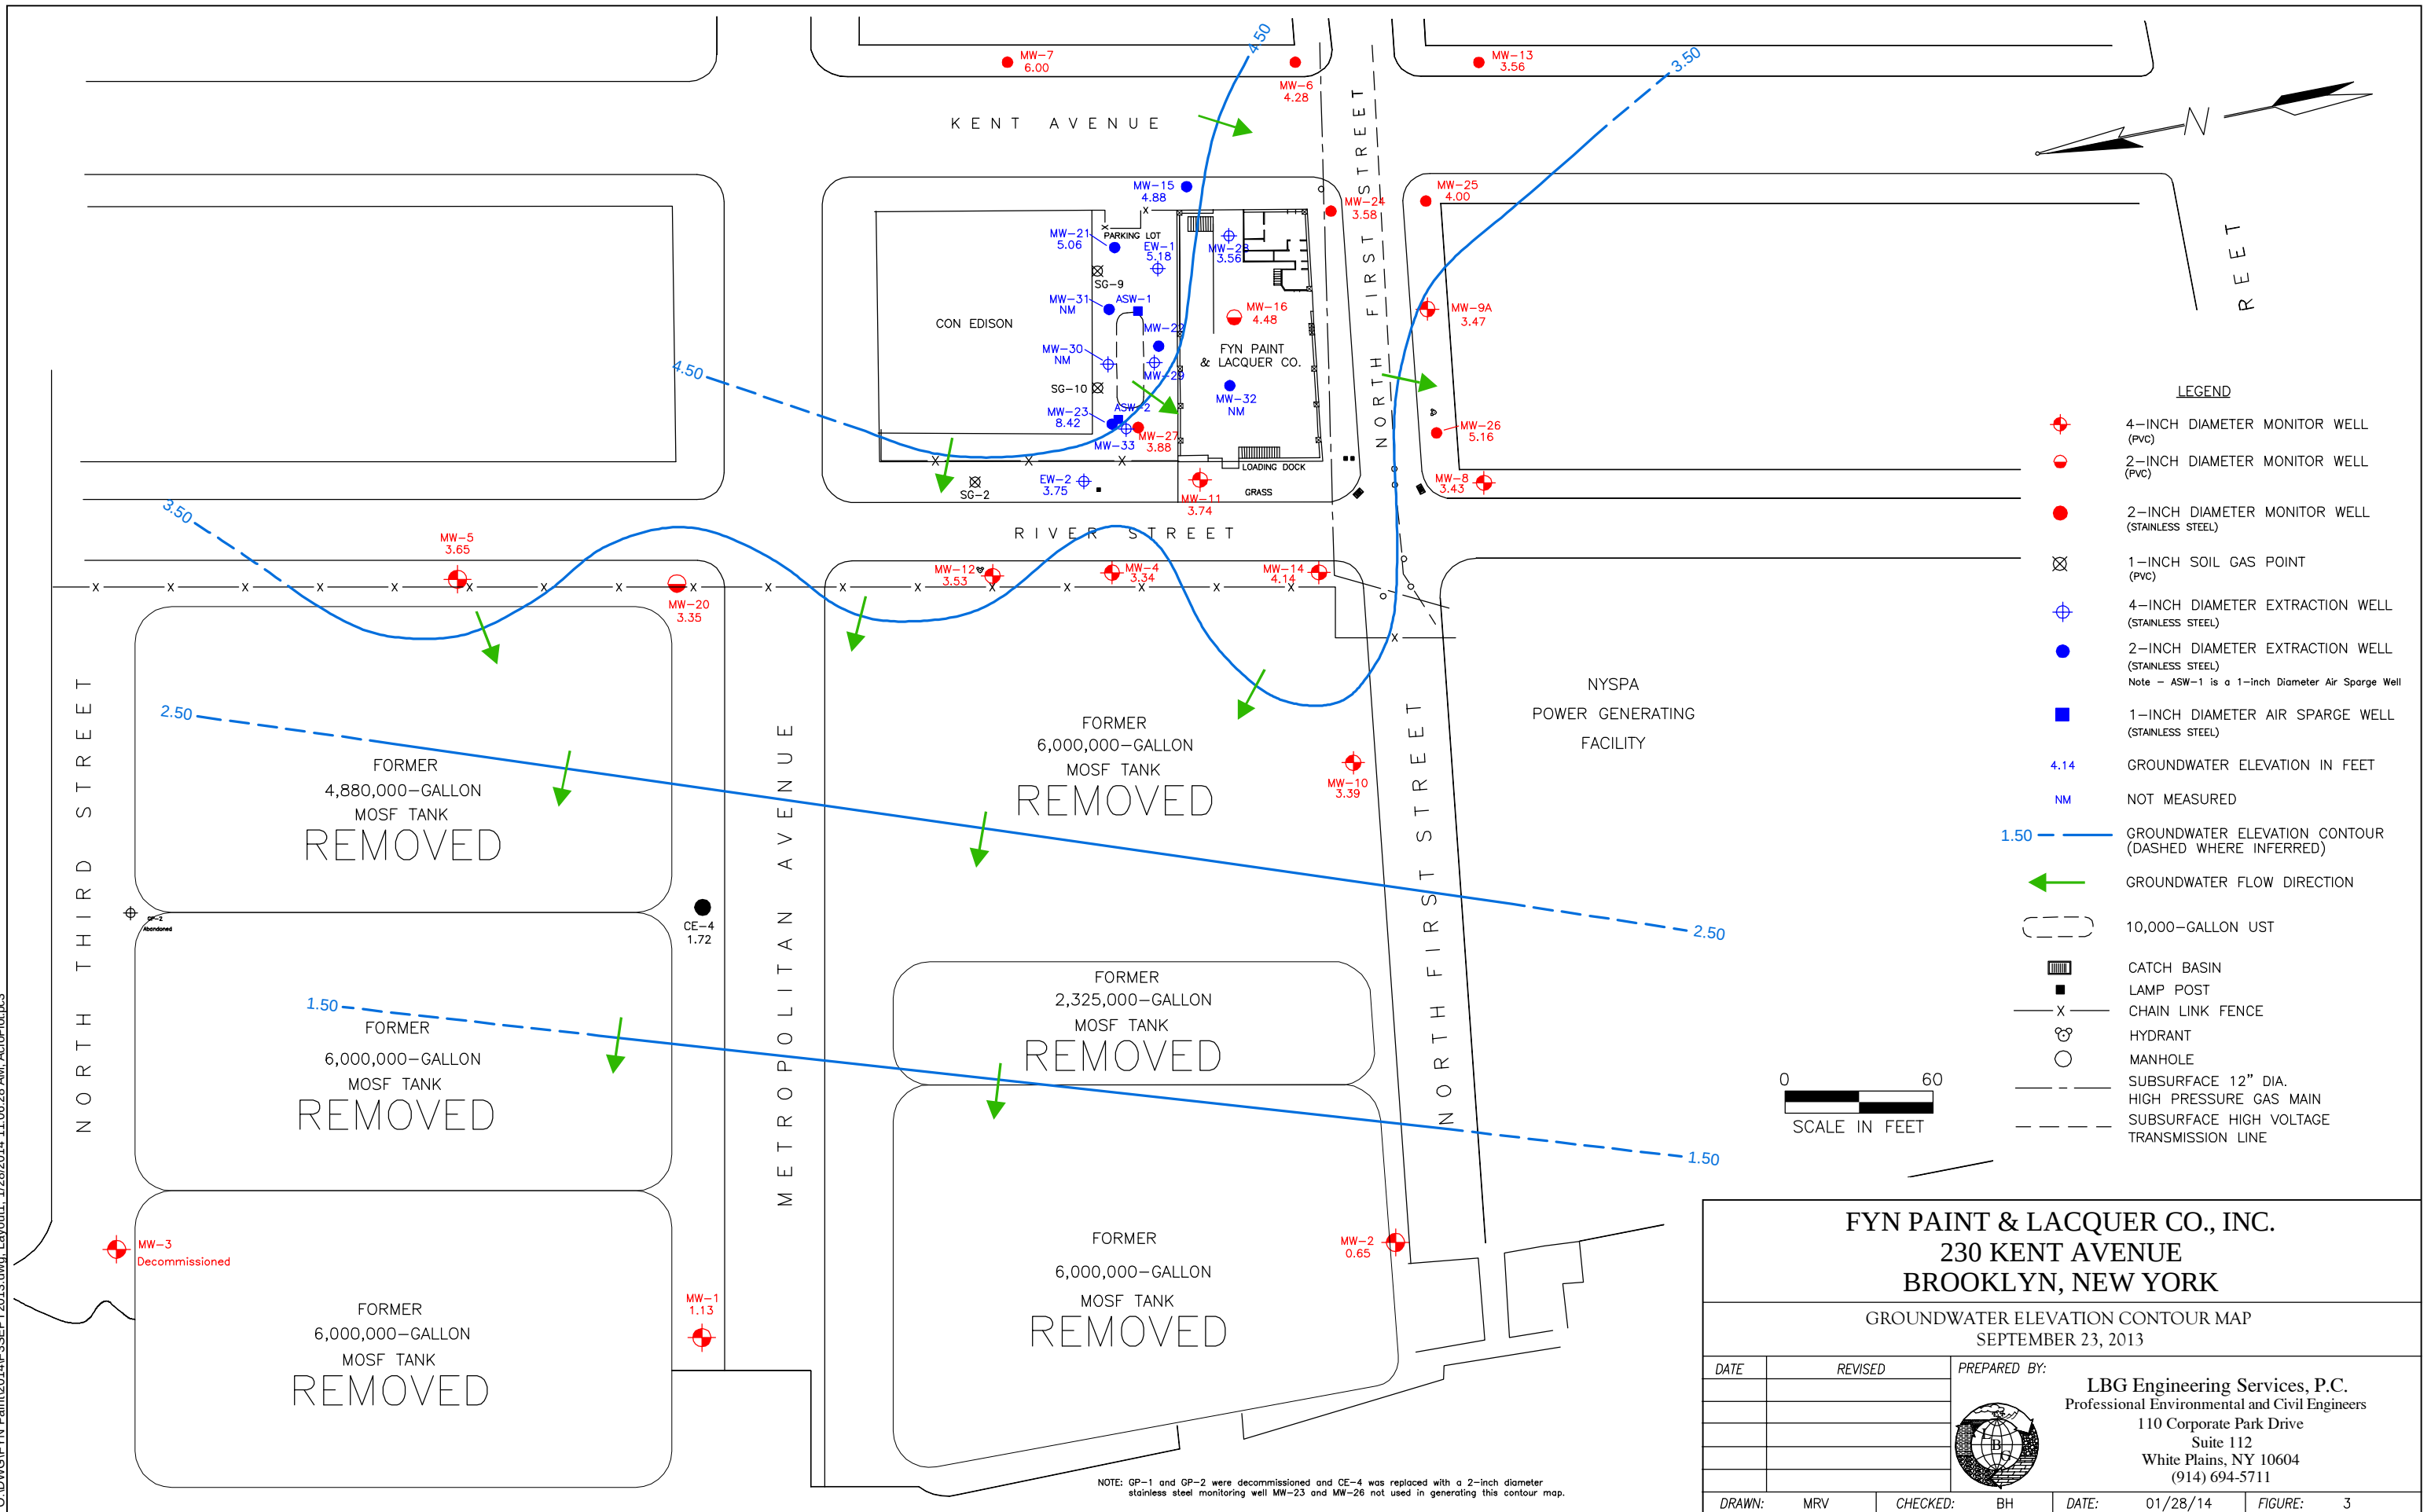

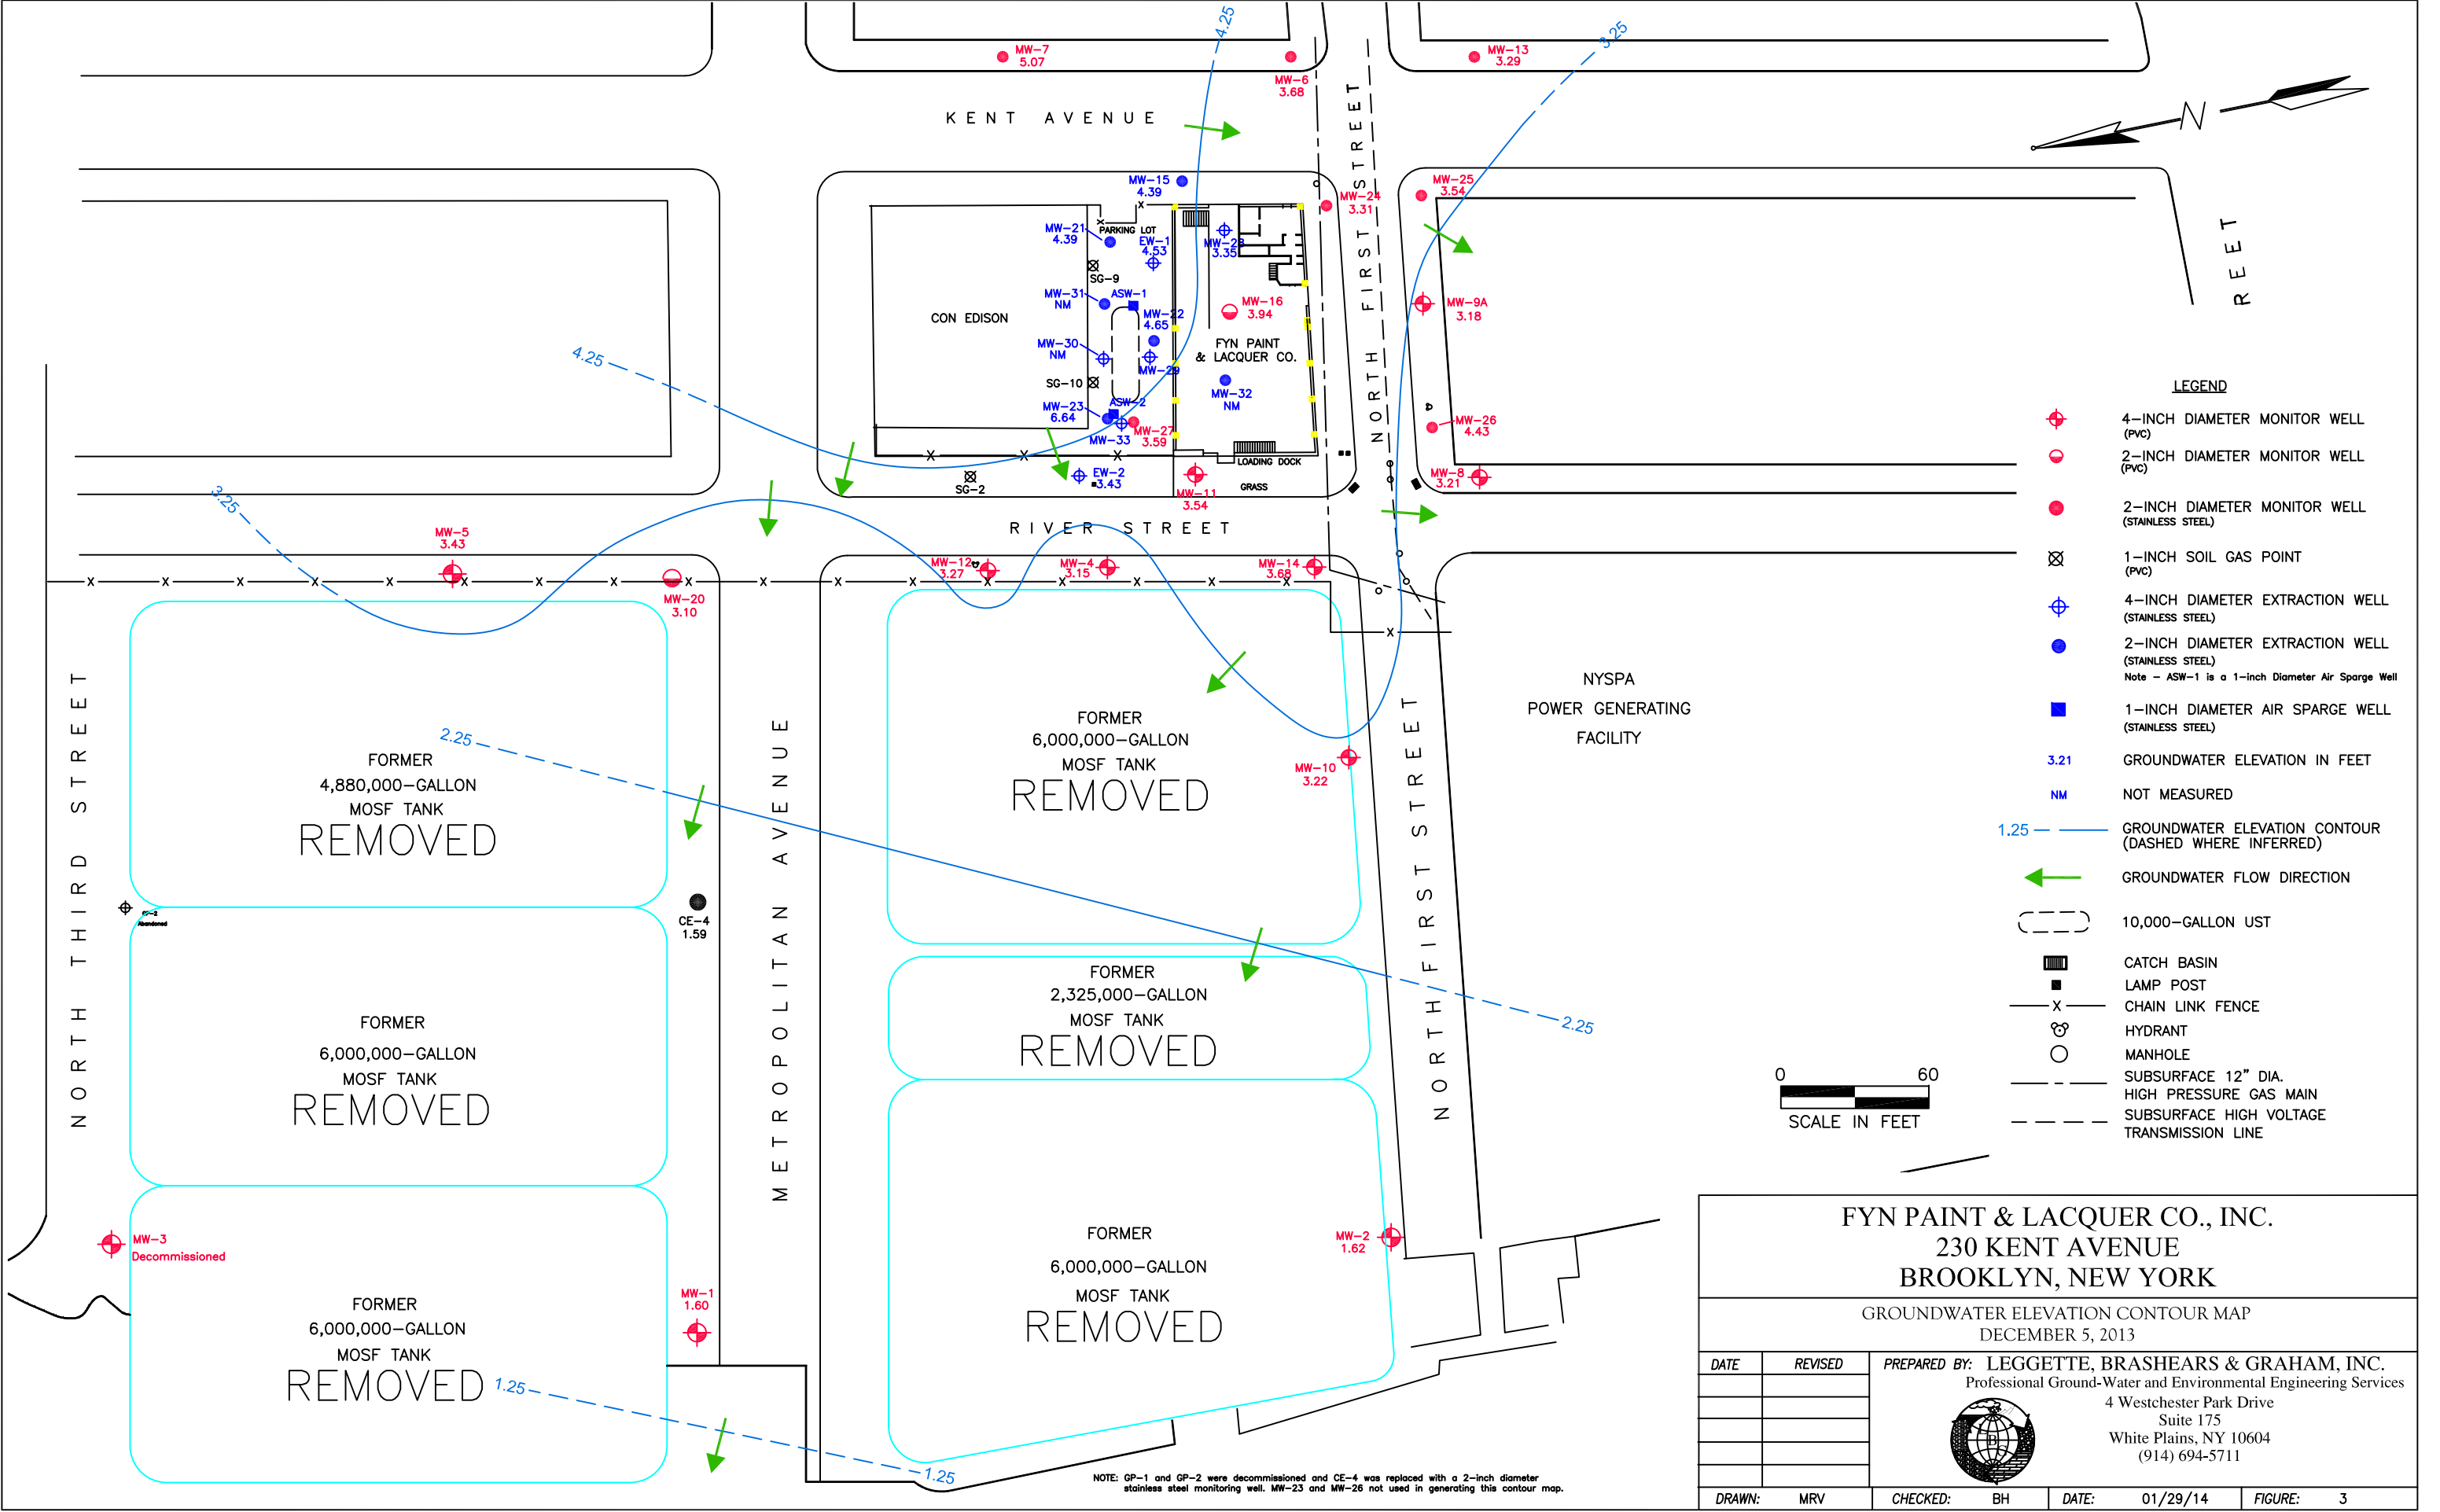

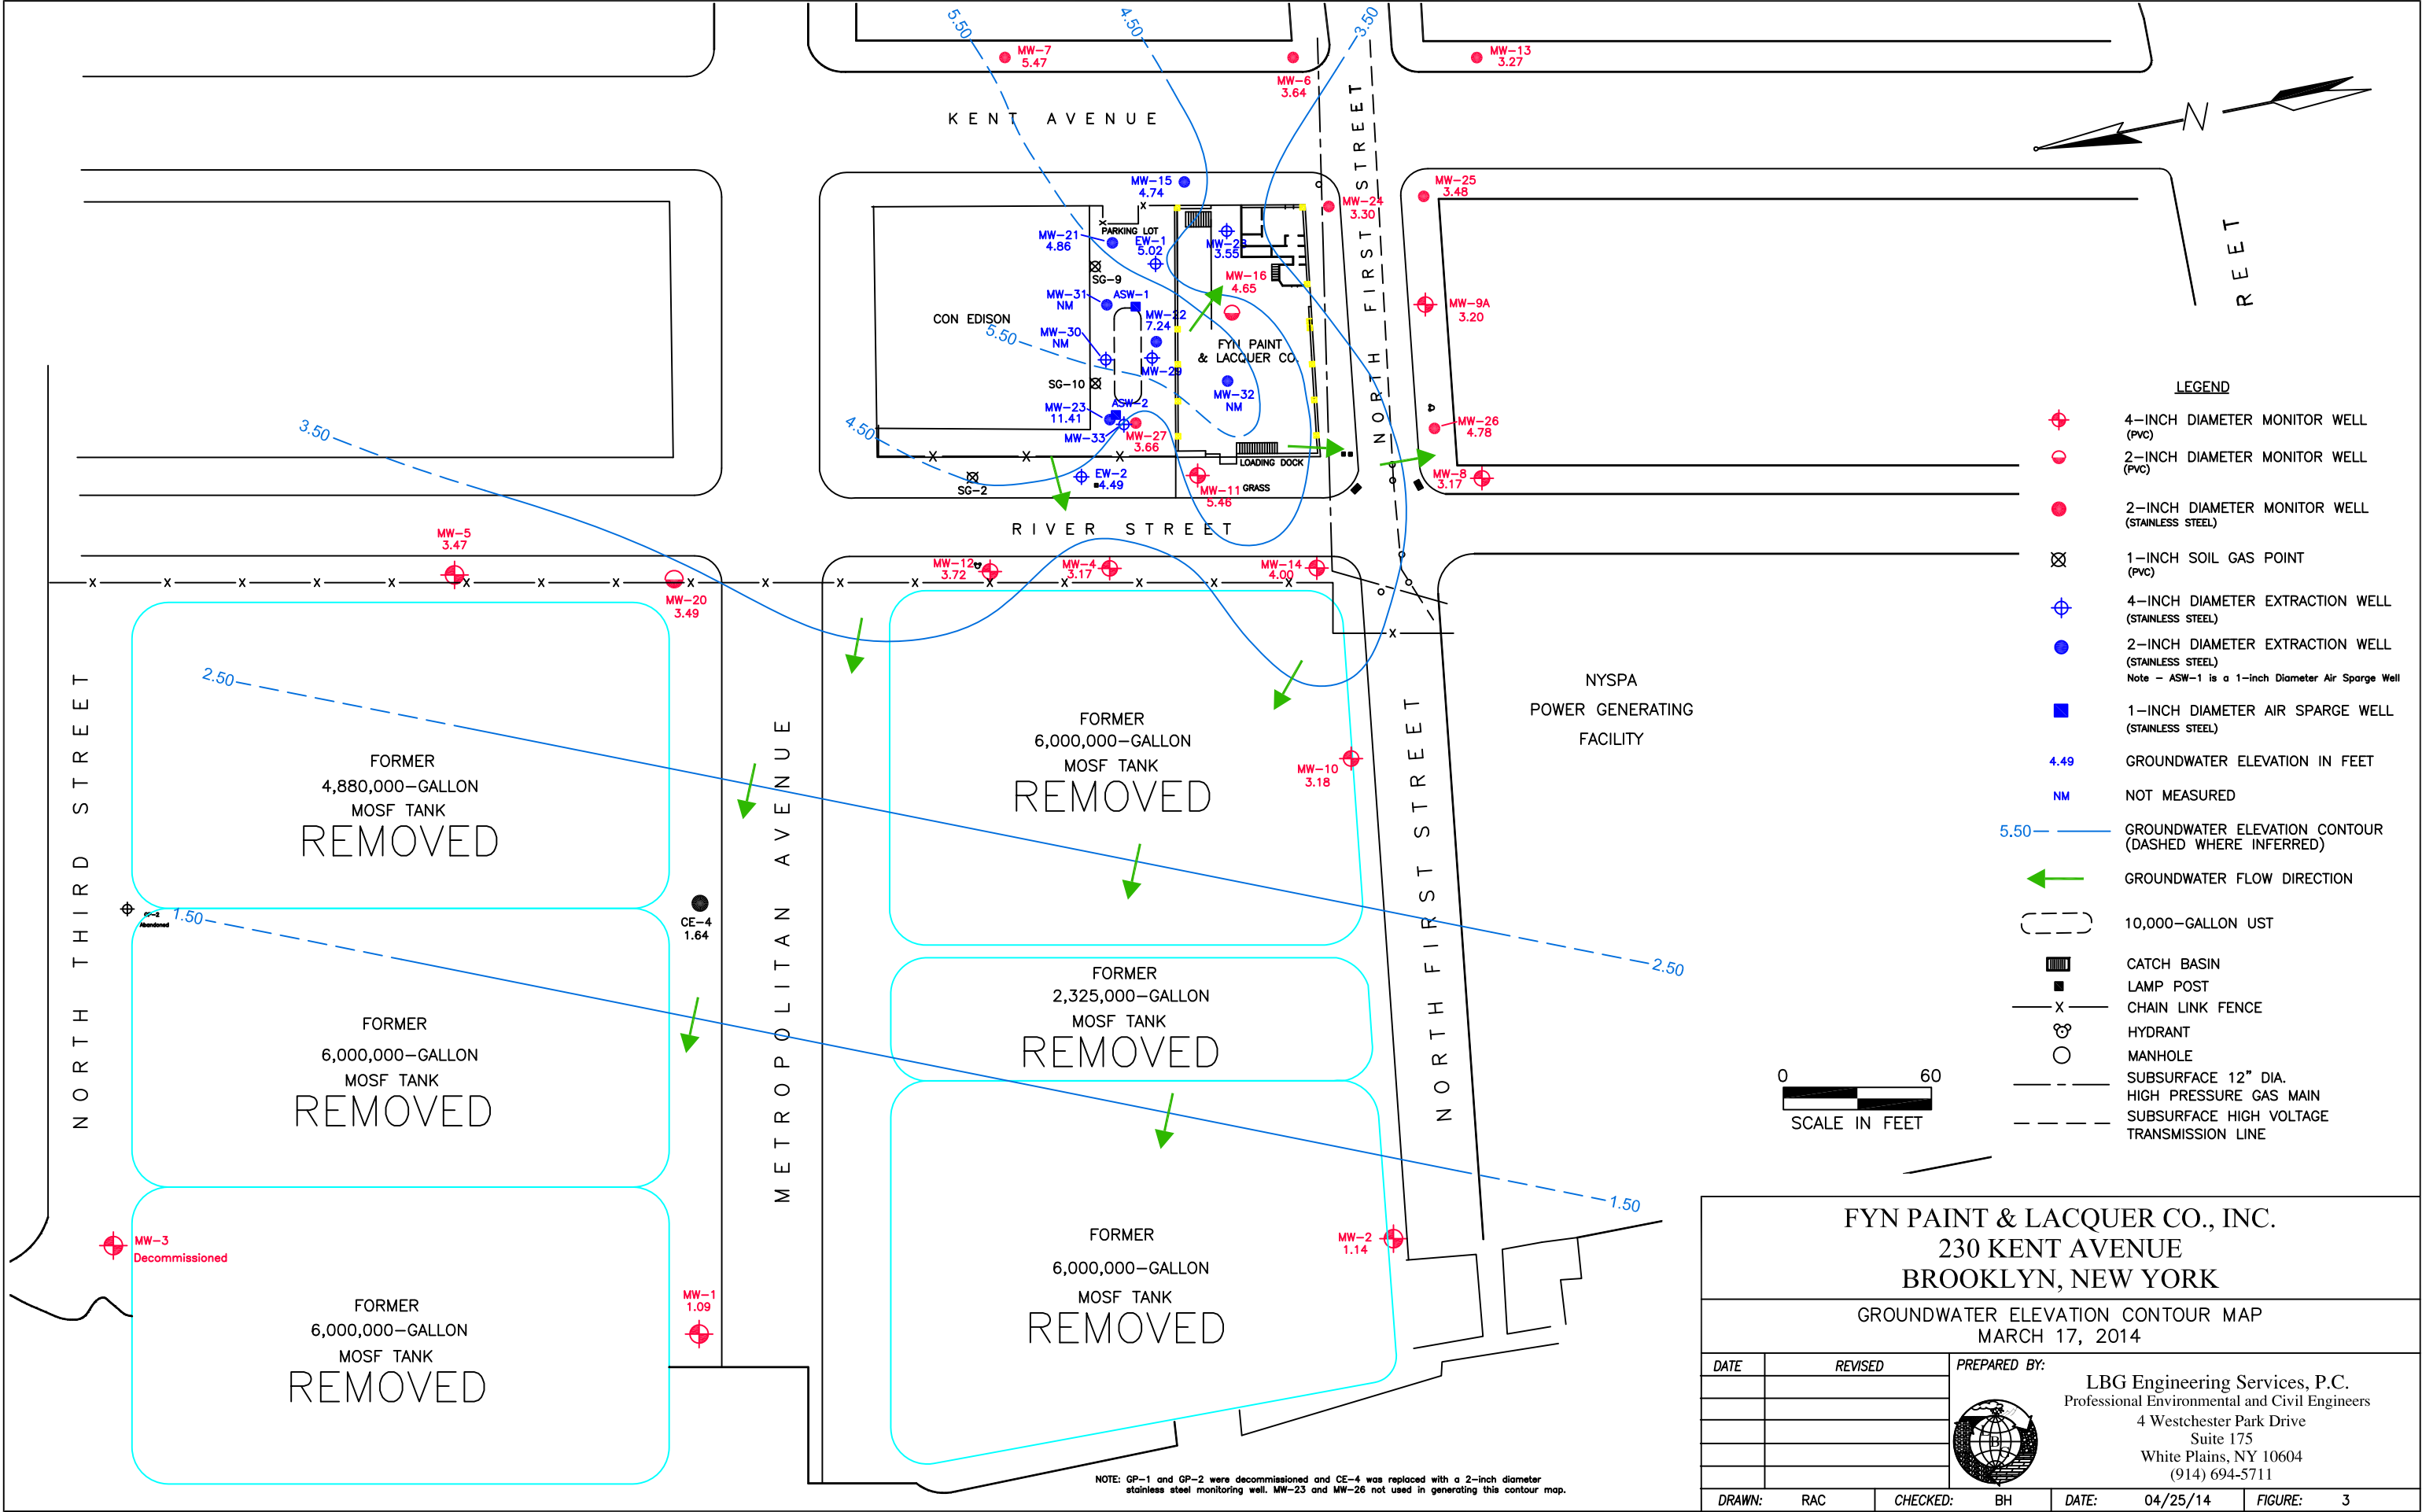

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
BROOKLYN, NEW YORK

Fluid-Level Summary

June 6, 2001

Well Identification	Top of Casing Elevation (feet)	Depth To Product (ft btoc)	Depth To Water (ft btoc)	Product Thickness (ft btoc)	Corrected Ground-Water Elevation (ft btoc)
MW-1	7.99	---	8.86	---	-0.87
MW-2	8.08	---	8.7	---	-0.62
MW-3	3.99	---	2.8	---	1.19
MW-4	12.89		11.12	---	1.77
MW-5	10.71	---	8.72	---	1.99
MW-6	19.99	---	18.05	---	1.94
MW-7	18.77	---	15.82	---	2.95
MW-8	15.14	---	12.92	---	2.22
CE-1	18.54	10.46	11.3	0.84	7.87
CE-2	19.08	15.26	15.28	0.02	3.82
CE-3	18.53	---	DRY	---	---
CE-4	7.96	---	5.38	---	2.58
GP-1	7.87	---	7.07	---	0.8
GP-2	7.08	---	5.51	---	1.57
GP-3	18.4	---	DRY	---	---

ft btoc = Feet below top of casing

NM = Not measured

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
GREENPOINT, BROOKLYN, NEW YORK

Water Level Measurements
February 18, 2004

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.20	4.00	5.00 to 23.00*	7.99	-----	-----	8.37	-0.38
MW-2	19.41	4.00	5.00 to 20.00*	8.08	NM	NM	NM	NM
MW-3	14.50	4.00	10.00 to 30.00*	3.99	-----	-----	3.51	0.48
MW-4	26.55	4.00	1.00 to 16.00*	12.89	-----	-----	11.16	1.73
MW-5	18.80	4.00	10.00 to 20.00	10.71	-----	-----	8.57	2.14
MW-6	28.80	4.00	20.00 to 30.00	19.99	-----	-----	18.10	1.89
MW-7	29.35	4.00	20.00 to 30.00	18.77	-----	-----	16.08	2.69
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	13.32	1.82
MW-9A	28.90	4.00	11.00 to 31.00	17.01	14.88	2.70	17.58	1.59
MW-10	28.55	4.00	9.00 to 29.00	11.57	NM	NM	NM	NM
MW-11	26.60	4.00	9.00 to 29.00	15.22	-----	-----	12.94	2.28
MW-12	23.78	4.00	9.00 to 24.00	12.38	-----	-----	10.32	2.06
MW-13	30.00	4.00	12.00 to 32.00	20.16	-----	-----	18.26	1.90
MW-14	27.81	4.00	8.00 to 28.00	13.48	-----	-----	11.46	2.02
MW-15	33.00	4.00	13.00 to 33.00	18.64	15.72	6.94	22.66	1.53
MW-16	32.45	2.00	13.00 to 33.00	18.36	-----	-----	15.01	3.35
GP-1	10.20	1.00	NA	7.87	-----	-----	7.43	0.44
GP-2	8.94	1.00	NA	7.08	-----	-----	5.68	1.40
GP-3	10.10	1.00	NA	18.40	-----	-----	DRY	DRY
CE-1	14.25	1.00	10.00 to 15.00	18.54			9.40	9.14
CE-2	11.60	1.00	10.00 to 15.00	19.08	-----	-----	DRY	DRY
CE-3	15.36	1.00	10.00 to 15.00	18.53	-----	-----	DRY	DRY
CE-4	8.64	1.00	5.00 to 10.00	7.96	-----	-----	6.42	1.54

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NR - Not Recorded

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Note: TOC elevations for new wells were extrapolated from previously surveyed intact wells
Assumed product density of 80% water

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
GREENPOINT, BROOKLYN, NEW YORK

Water Level Measurements
December 28, 2005

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	'-----	8.18	-0.19
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	8.63	-0.55
MW-3	14.50	4.00	10.00 to 30.00*	3.99	-----	-----	2.51	1.48
MW-4	26.55	4.00	1.00 to 16.00*	12.89	-----	-----	11.08	1.81
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	8.59	2.12
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	-----	-----	14.92	3.85
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	13.23	1.91
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	15.11	1.90
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	9.78	1.79
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	12.16	3.06
MW-12	23.09	4.00	9.00 to 24.00	12.38	-----	-----	10.37	2.01
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.35	4.00	8.00 to 28.00	13.48	-----	-----	10.97	2.51
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	Well Not Sampled - No Access into Fyn Paint Building							
MW-20	13.41	2.00	10.16 to 22.16**	11.12	-----	-----	9.26	1.86
MW-21	NR	2.00	20.00 to 25.00**	18.37	Film	Film	14.43	3.94
MW-22	NR	2.00	10.00 to 20.25**	18.66	14.72	1.56	16.28	2.38
MW-23	17.98	2.00	5.00 to 15.00**	18.44	-----	-----	9.51	8.93
MW-24	23.57	2.00	9.76 to 19.76**	18.65	-----	-----	16.70	1.95
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	5.00 to 15.00**	15.67	-----	-----	12.61	3.06
MW-27	65.28	2.00	9.76 to 19.76**	18.50	-----	-----	16.25	2.25
EW-1	31.39	4.00	9.76 to 19.76**	18.35	-----	-----	14.41	3.94
EW-2	24.64	4.00	5.00 to 15.00**	13.24	-----	-----	11.18	2.06
GP-1	Well Not Sampled							
GP-2	9.10	1.00	5.00 to 10.00	7.08	-----	-----	5.47	1.61
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	Micro-Well Destroyed							

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NR - Not Recorded

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Note: TOC elevations for new wells were extrapolated from previously surveyed intact wells

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
GREENPOINT, BROOKLYN, NEW YORK

Water Level Measurements
May 17, 2006

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	NS (No Access)	NS (No Access)
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	NS (No Access)	NS (No Access)
MW-3	14.50	4.00	1.00 to 16.00*	3.99	-----	-----	1.69	2.30
MW-4	26.55	4.00	10.00 to 30.00*	12.89	-----	-----	11.31	1.58
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	8.73	1.98
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	-----	-----	15.29	3.48
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	13.60	1.54
MW-9A	28.44	4.00	11.00 to 31.00	17.01	15.46	0.19	15.65	1.36
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	10.05	1.52
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	10.84	4.38
MW-12	23.09	4.00	9.00 to 24.00	12.38	-----	-----	10.22	2.16
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.35	4.00	8.00 to 28.00	13.48	-----	-----	11.21	2.27
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	NR	18.36	-----	-----	15.29	3.07
MW-20	13.41	2.00	5.00 to 15.00**	11.12	-----	-----	9.20	1.92
MW-21	NR	2.00	12.00 to 22.00**	18.37	15.06	0.07	15.13	3.24
MW-22	NR	2.00	9.00 to 19.00**	18.66	14.66	1.64	16.30	2.36
MW-23	17.98	2.00	7.50 to 17.50**	18.44	-----	-----	10.20	8.24
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	17.05	1.60
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	12.45	3.22
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	16.50	2.00
EW-1	31.39	4.00	12.00 to 32.00**	18.35	-----	-----	15.06	3.29
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	11.40	1.84
GP-1	11.51	1.00	NR	7.87	-----	-----	7.14	0.73
GP-2	9.10	1.00	5.00 to 10.00	7.08	-----	-----	5.41	1.67
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	7.96	-----	-----	5.29	2.67

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NR - Not Recorded

NS - Not Sampled

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Note: TOC elevations for new wells were extrapolated from previously surveyed intact wells

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water Level Measurements
September 28, 2006

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	8.50	-0.51
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	8.19	-0.11
MW-3	14.50	4.00	1.00 to 16.00*	3.99	-----	-----	3.15	0.84
MW-4	26.55	4.00	10.00 to 30.00*	12.89	-----	-----	11.10	1.79
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	8.62	2.09
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	-----	-----	14.91	3.86
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	13.34	1.80
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	15.13	1.88
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	9.75	1.82
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	13.07	2.15
MW-12	23.09	4.00	9.00 to 24.00	12.38	-----	-----	10.36	2.02
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.35	4.00	8.00 to 28.00	13.48	-----	-----	11.14	2.34
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	14.75	3.61
MW-20	13.41	2.00	5.00 to 15.00**	11.12	-----	-----	9.25	1.87
MW-21	NR	2.00	12.00 to 22.00**	18.37	Film	Film	14.24	4.13
MW-22	NR	2.00	9.00 to 19.00**	18.66	-----	-----	14.37	4.29
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	10.11	8.33
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	16.82	1.83
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	11.76	3.91
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	16.21	2.29
EW-1	31.39	4.00	12.00 to 32.00**	18.35	-----	-----	14.42	3.93
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	11.18	2.06
GP-1	11.51	1.00	5.00 to 10.00	7.87	-----	-----	7.20	0.67
GP-2	9.10	1.00	5.00 to 10.00	7.08	-----	-----	5.54	1.54
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	NA	-----	-----	6.15	NA

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NR - Not Recorded

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells

MW-21 & MW-22 drew product during pumping (film in MW-21 and 0.27 feet in MW-22)

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water Level Measurements
December 18, 2006

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	8.79	-0.80
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	8.67	-0.59
MW-3	14.50	4.00	1.00 to 16.00*	3.99	-----	-----	3.24	0.75
MW-4	26.55	4.00	10.00 to 30.00*	12.89	-----	-----	11.11	1.78
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	8.61	2.10
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	-----	-----	15.12	3.65
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	13.28	1.86
MW-9A	28.44	4.00	11.00 to 31.00	17.01	15.18	0.17	15.35	1.66
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	9.81	1.76
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	12.44	2.78
MW-12	23.09	4.00	9.00 to 24.00	12.38	-----	-----	10.33	2.05
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.35	4.00	8.00 to 28.00	13.48	-----	-----	11.09	2.39
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	14.95	3.41
MW-20	13.41	2.00	5.00 to 15.00**	11.12	-----	-----	9.33	1.79
MW-21	NR	2.00	12.00 to 22.00**	18.37	NR	NR	NR	NR
MW-22	NR	2.00	9.00 to 19.00**	18.66	NR	NR	NR	NR
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	10.34	8.10
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	16.76	1.89
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	11.83	3.84
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	16.27	2.23
EW-1	31.39	4.00	12.00 to 32.00**	18.35	NR	NR	NR	NR
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	11.13	2.11
GP-1	11.51	1.00	5.00 to 10.00	7.87	-----	-----	7.14	0.73
GP-2	9.10	1.00	5.00 to 10.00	7.08	-----	-----	5.42	1.66
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	NA	-----	-----	6.30	NA

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NR - Not Recorded

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells

EW-1, MW-21 & MW-22 were not measured/sampled because pumps were set inside the wells

MW-16 was measured/sampled on December 15, 2006

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water Level Measurements
March 28, 2007

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	8.94	-0.95
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	9.19	-1.11
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	2.76	1.23
MW-4	26.58	4.00	10.00 to 30.00*	12.89	-----	-----	11.51	1.38
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	9.00	1.71
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	-----	-----	15.88	2.89
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	13.73	1.41
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	15.56	1.45
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	10.26	1.31
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	12.73	2.49
MW-12	23.03	4.00	9.00 to 24.00	12.38	-----	-----	10.34	2.04
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.28	4.00	8.00 to 28.00	13.48	-----	-----	11.45	2.03
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	NR	NR	NR	NR
MW-20	13.33	2.00	5.00 to 15.00**	11.12	-----	-----	9.56	1.56
MW-21	22.68	2.00	12.00 to 22.00**	18.37	22.15	0.01	22.16	-3.79
MW-22	NR	2.00	9.00 to 19.00**	18.66	13.18	FILM	13.18	5.48
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	8.60	9.84
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	17.23	1.42
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	12.57	3.10
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	16.73	1.77
EW-1	31.39	4.00	12.00 to 32.00**	18.35	-----	-----	24.20	-5.85
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	11.49	1.75
GP-1	11.60	1.00	5.00 to 10.00	7.87	-----	-----	7.44	0.43
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	5.79	1.29
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	7.96	-----	-----	5.86	2.10

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NR - Not Recorded

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells

MW-16 was measured/sampled on March 30, 2007

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water Level Measurements
October 30 & 31 and November 1 & 2, 2007

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	9.08	-1.09
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	8.74	-0.66
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	2.35	1.64
MW-4	26.58	4.00	10.00 to 30.00*	12.89	-----	-----	11.25	1.64
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	9.28	1.43
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	-----	-----	15.1	3.67
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	13.90	1.24
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	15.60	1.41
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	10.30	1.27
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	13.35	1.87
MW-12	23.03	4.00	9.00 to 24.00	12.38	-----	-----	10.65	1.73
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.28	4.00	8.00 to 28.00	13.48	-----	-----	11.95	1.53
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.23	-----	-----	18.36	-0.13
MW-20	13.33	2.00	5.00 to 15.00**	11.12	-----	-----	9.60	1.52
MW-21	22.68	2.00	12.00 to 22.00**	18.37	NM	NM	NM	NM
MW-22	NR	2.00	9.00 to 19.00**	18.66	17.31	0.07	17.38	1.34
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	10.36	8.08
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	17.40	1.25
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	13.66	2.01
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	17.12	1.38
EW-1	31.39	4.00	12.00 to 32.00**	18.35	NM	NM	NM	~ -9.00
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	11.74	1.50
GP-1	11.60	1.00	5.00 to 10.00	7.87	NM	NM	NM	NM
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	5.80	1.28
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	7.96	-----	-----	5.65	2.31

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NR - Not Recorded

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells

Approximate EW-1 groundwater elevation based on pump intake level (due to pump cycling at maximum pump rate)

MW-16 top of casing was cut down 0.13 ft to allow installation of a churney cap within the manhole (new TOC elevation = 18.23 ft msl)

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water Level Measurements
February 5, 2008

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	7.95	0.04
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	7.60	0.48
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	2.73	1.26
MW-4	26.58	4.00	10.00 to 30.00*	12.89	-----	-----	11.60	1.29
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	9.31	1.40
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	NM	NM	NM	NM
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	13.80	1.34
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	15.50	1.51
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	10.20	1.37
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	12.29	2.93
MW-12	23.03	4.00	9.00 to 24.00	12.38	-----	-----	10.65	1.73
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.28	4.00	8.00 to 28.00	13.48	-----	-----	11.79	1.69
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	18.12	0.24
MW-20	13.33	2.00	5.00 to 15.00**	11.12	-----	-----	9.84	1.28
MW-21	22.68	2.00	12.00 to 22.00**	18.37	Dry	Dry	Dry	Dry
MW-22	NR	2.00	9.00 to 19.00**	18.66	Dry	Dry	Dry	Dry
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	9.14	9.30
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	17.31	1.34
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	12.71	2.96
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	17.11	1.39
EW-1	31.39	4.00	12.00 to 32.00**	18.35	NM	NM	NM	NM
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	11.54	1.70
GP-1	11.60	1.00	5.00 to 10.00	7.87	NM	NM	NM	NM
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	5.90	1.18
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	7.96	-----	-----	5.64	2.32

1) - Feet below grade
2) - Top of Casing
3) - Feet above mean sea level
4) - Feet below top of casing
NM - Not Measured (Well Not Accessible or Pump set in Well)
* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.
** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water Level Measurements
May 5, 2008

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	8.26	-0.27
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	9.12	-1.04
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	3.02	0.97
MW-4	26.58	4.00	10.00 to 30.00*	12.89	-----	-----	11.65	1.24
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	9.63	1.08
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	Not Accessible at time of Sampling (construction)			
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	13.78	1.36
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	15.40	1.61
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	10.72	0.85
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	13.04	2.18
MW-12	23.03	4.00	9.00 to 24.00	12.38	-----	-----	10.70	1.68
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.28	4.00	8.00 to 28.00	13.48	-----	-----	11.71	1.77
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	17.19	1.17
MW-20	13.33	2.00	5.00 to 15.00**	11.12	-----	-----	9.88	1.24
MW-21	22.68	2.00	12.00 to 22.00**	18.37	-----	-----	18.60	-0.23
MW-22	NR	2.00	9.00 to 19.00**	18.66	14.62	0.38	15.00	3.99
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	10.09	8.35
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	17.35	1.30
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	11.81	3.86
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	17.01	1.49
EW-1	31.39	4.00	12.00 to 32.00**	18.35	-----	-----	18.57	-0.22
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	11.45	1.79
GP-1	11.60	1.00	5.00 to 10.00	7.87	-----	-----	NM	NM
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	5.96	1.12
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	7.96	-----	-----	5.80	2.16

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured (Well Not Accessible or Pump set in Well)

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells

Corrected groundwater elevations derived using an assumed product density of 0.87

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
August 11, 2008

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	8.68	-0.69
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	9.13	-1.05
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	NM	NM
MW-4	26.58	4.00	10.00 to 30.00*	12.89	-----	-----	12.51	0.38
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	10.40	0.31
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	Not Accessible at time of Sampling (construction)			
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	14.72	0.42
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	16.55	0.46
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	11.25	0.32
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	14.79	0.43
MW-12	23.03	4.00	9.00 to 24.00	12.38	-----	-----	11.22	1.16
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.28	4.00	8.00 to 28.00	13.48	-----	-----	12.81	0.67
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	18.61	-0.25
MW-20	13.33	2.00	5.00 to 15.00**	11.12	-----	-----	10.62	0.50
MW-21	22.68	2.00	12.00 to 22.00**	18.37	-----	-----	21.05	-2.68
MW-22	NR	2.00	9.00 to 19.00**	18.66	17.36	0.02	17.38	1.30
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	10.60	7.84
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	18.60	0.05
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	13.75	1.92
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	17.75	0.75
EW-1	31.39	4.00	12.00 to 32.00**	18.35	-----	-----	21.03	-2.68
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	12.42	0.82
GP-1	11.60	1.00	5.00 to 10.00	7.87	-----	-----	7.90	-0.03
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	6.72	0.36
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	7.96	-----	-----	6.25	1.71

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells

Corrected groundwater elevations derived using an assumed product density of 0.87

LEGGETTE, BRASHEARS & GRAHAM, INC.

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
November 17, 2008

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	8.55	-0.56
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	9.35	-1.27
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	2.01	1.98
MW-4	26.58	4.00	10.00 to 30.00*	12.89	-----	-----	13.05	-0.16
MW-5	18.90	4.00	10.00 to 20.00	10.71	Not Accessible at time of Sampling (Car parked over well all 4 days)			
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	Not Accessible at time of Sampling (possibly destroyed by construction)			
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	15.22	-0.08
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	17.06	-0.05
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	11.80	-0.23
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	15.31	-0.09
MW-12	23.03	4.00	9.00 to 24.00	12.38	-----	-----	11.52	0.86
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.28	4.00	8.00 to 28.00	13.48	-----	-----	13.35	0.13
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	18.65	-0.29
MW-20	13.33	2.00	5.00 to 15.00**	11.12	-----	-----	11.22	-0.10
MW-21	22.68	2.00	12.00 to 22.00**	18.37	-----	-----	19.98	-1.61
MW-22	NR	2.00	9.00 to 19.00**	18.66	18.11	-0.10	18.01	0.56
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	10.25	8.19
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	18.80	-0.15
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	14.08	1.59
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	18.14	0.36
EW-1	31.39	4.00	12.00 to 32.00**	18.35	-----	-----	19.94	-1.59
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	12.97	0.27
GP-1	11.60	1.00	5.00 to 10.00	7.87	-----	-----	7.94	-0.07
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	7.42	-0.34
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	7.96	-----	-----	5.50	2.46

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells
Corrected groundwater elevations derived using an assumed product density of 0.87

FYN PAINT & LACQUER COMPANY
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
February 12, 2009

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	9.20	-1.21
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	9.25	-1.17
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	3.57	0.42
MW-4	26.58	4.00	10.00 to 30.00*	12.89	-----	-----	12.75	0.14
MW-5	18.90	4.00	10.00 to 20.00	10.71	Not Accessible at time of Sampling (Car parked over well all 4 days)			
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	Destroyed by Construction Activities (construction of residential building)			
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	14.85	0.29
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	16.56	0.45
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	11.11	0.46
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	14.90	0.32
MW-12	23.03	4.00	9.00 to 24.00	12.38	-----	-----	11.65	0.73
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.28	4.00	8.00 to 28.00	13.48	-----	-----	13.01	0.47
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	19.53	-1.17
MW-20	13.33	2.00	5.00 to 15.00**	11.12	-----	-----	10.82	0.30
MW-21	22.68	2.00	12.00 to 22.00**	18.37	18.84	0.01	18.85	-0.47
MW-22	NR	2.00	9.00 to 19.00**	18.66	15.45	0.01	15.46	3.21
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	10.60	7.84
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	18.20	0.45
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	13.55	2.12
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	17.55	0.95
EW-1	31.39	4.00	12.00 to 32.00**	18.35	18.80	0.01	18.81	-0.45
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	12.36	0.88
GP-1	11.60	1.00	5.00 to 10.00	7.87	-----	-----	7.80	0.07
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	7.42	-0.34
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	7.96	-----	-----	7.45	0.51

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells
Corrected groundwater elevations derived using an assumed product density of 0.87

LEGGETTE, BRASHEARS & GRAHAM, INC.

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
May 19, 2009

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	9.00	-1.01
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	9.85	-1.77
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	NM	-----
MW-4	26.58	4.00	10.00 to 30.00*	12.89	-----	-----	13.99	-1.10
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	12.70	-1.99
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	Destroyed by Construction Activities (construction of residential building)			
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	16.36	-1.22
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	18.18	-1.17
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	12.90	-1.33
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	16.46	-1.24
MW-12	23.03	4.00	9.00 to 24.00	12.38	-----	-----	11.69	0.69
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.28	4.00	8.00 to 28.00	13.48	-----	-----	14.20	-0.72
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	20.22	-1.86
MW-20	13.33	2.00	5.00 to 15.00**	11.12	-----	-----	11.89	-0.77
MW-21	22.68	2.00	12.00 to 22.00**	18.37	-----	-----	DRY	-----
MW-22	NR	2.00	9.00 to 19.00**	18.66	15.07	0.02	15.09	3.59
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	19.19	-0.75
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	20.00	-1.35
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	14.32	1.35
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	19.93	-1.43
EW-1	31.39	4.00	12.00 to 32.00**	18.35	-----	-----	23.45	-5.10
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	13.62	-0.38
GP-1	11.60	1.00	5.00 to 10.00	7.87	-----	-----	8.65	-0.78
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	8.11	-1.03
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	8.35	1.00	5.00 to 10.00	7.96	-----	-----	6.25	1.71

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells
Corrected groundwater elevations derived using an assumed product density of 0.87

LEGGETTE, BRASHEARS & GRAHAM, INC.

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
August 24, 2009

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	8.78	-0.79
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	9.41	-1.33
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	NM	-----
MW-4	26.55	4.00	10.00 to 30.00*	12.89	-----	-----	14.01	-1.12
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	12.19	-1.48
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	Destroyed by Construction Activities (construction of residential building)			
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	16.43	-1.29
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	18.42	-1.41
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	12.87	-1.30
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	16.44	-1.22
MW-12	23.09	4.00	9.00 to 24.00	12.38	-----	-----	11.65	0.73
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.35	4.00	8.00 to 28.00	13.48	-----	-----	14.36	-0.88
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	20.13	-1.77
MW-20	13.41	2.00	5.00 to 15.00**	11.12	-----	-----	11.82	-0.70
MW-21	22.68	2.00	12.00 to 22.00**	18.37	-----	-----	DRY	-----
MW-22	NR	2.00	9.00 to 19.00**	18.66	film	film	15.60	3.06
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	10.00	8.44
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	20.09	-1.44
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	15.28	0.39
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	19.98	-1.48
EW-1	31.39	4.00	12.00 to 32.00**	18.35	-----	-----	23.60	-5.25
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	13.64	-0.40
GP-1	11.60	1.00	5.00 to 10.00	7.87	-----	-----	8.85	-0.98
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	NM	-----
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	10.30	1.00	5.00 to 10.00	7.96	-----	-----	5.57	2.39

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells
Corrected groundwater elevations derived using an assumed product density of 0.87

LEGGETTE, BRASHEARS & GRAHAM, INC.

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
November 16, 2009

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	7.75	0.24
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	7.57	0.51
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	NM	-----
MW-4	26.55	4.00	10.00 to 30.00*	12.89	-----	-----	13.25	-0.36
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	11.11	-0.40
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	Destroyed by Construction Activities (construction of residential building)			
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	15.59	-0.45
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	17.51	-0.50
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	11.90	-0.33
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	15.55	-0.33
MW-12	23.09	4.00	9.00 to 24.00	12.38	-----	-----	11.60	0.78
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.35	4.00	8.00 to 28.00	13.48	-----	-----	13.35	0.13
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	19.50	-1.14
MW-20	13.41	2.00	5.00 to 15.00**	11.12	-----	-----	11.27	-0.15
MW-21	22.68	2.00	12.00 to 22.00**	18.37	-----	-----	21.06	-2.69
MW-22	NR	2.00	9.00 to 19.00**	18.66	-----	-----	15.89	2.77
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	10.26	8.18
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	19.18	-0.53
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	15.12	0.55
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	18.86	-0.36
EW-1	31.39	4.00	12.00 to 32.00**	18.35	-----	-----	21.02	-2.67
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	13.04	0.20
GP-1	11.60	1.00	5.00 to 10.00	7.87	-----	-----	8.30	-0.43
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	NM	-----
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	10.30	1.00	5.00 to 10.00	7.96	-----	-----	5.71	2.25

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells
Corrected groundwater elevations derived using an assumed product density of 0.87

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
March 4, 2010

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	7.99	-----	-----	7.78	0.21
MW-2	19.42	4.00	5.00 to 20.00*	8.08	-----	-----	8.21	-0.13
MW-3	14.56	4.00	1.00 to 16.00*	3.99	-----	-----	1.76	2.23
MW-4	26.55	4.00	10.00 to 30.00*	12.89	-----	-----	12.01	0.88
MW-5	18.90	4.00	10.00 to 20.00	10.71	-----	-----	9.80	0.91
MW-6	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-7	29.35	4.00	20.00 to 30.00	18.77	Destroyed by Construction Activities (construction of residential building)			
MW-8	23.71	4.00	15.00 to 25.00	15.14	-----	-----	14.46	0.68
MW-9A	28.44	4.00	11.00 to 31.00	17.01	-----	-----	16.35	0.66
MW-10	28.50	4.00	9.00 to 29.00	11.57	-----	-----	10.80	0.77
MW-11	26.27	4.00	9.00 to 29.00	15.22	-----	-----	14.31	0.91
MW-12	23.09	4.00	9.00 to 24.00	12.38	-----	-----	10.65	1.73
MW-13	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-14	27.35	4.00	8.00 to 28.00	13.48	-----	-----	10.99	2.49
MW-15	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-16	33.07	2.00	-----	18.36	-----	-----	NM	-----
MW-20	13.41	2.00	5.00 to 15.00**	11.12	-----	-----	9.90	1.22
MW-21	22.68	2.00	12.00 to 22.00**	18.37	-----	-----	17.73	0.64
MW-22	NR	2.00	9.00 to 19.00**	18.66	10.45	0.95	11.40	7.26
MW-23	17.98	2.00	7.00 to 17.00**	18.44	-----	-----	16.99	1.45
MW-24	23.57	2.00	13.50 to 23.50**	18.65	-----	-----	17.94	0.71
MW-25	Manhole Covered Over During Sidewalk Replacement/Repair Activities							
MW-26	20.31	2.00	10.00 to 20.00**	15.67	-----	-----	13.39	2.28
MW-27	65.28	2.00	55.00 to 65.00**	18.50	-----	-----	17.54	0.96
EW-1	31.39	4.00	12.00 to 32.00**	18.35	-----	-----	17.70	0.65
EW-2	24.64	4.00	5.00 to 25.00**	13.24	-----	-----	11.45	1.79
GP-1	11.60	1.00	5.00 to 10.00	7.87	-----	-----	7.34	0.53
GP-2	9.15	1.00	5.00 to 10.00	7.08	-----	-----	NM	-----
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	10.30	1.00	5.00 to 10.00	7.96	-----	-----	5.28	2.68

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells
Corrected groundwater elevations derived using an assumed product density of 0.87

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
June 21, 2010

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.30	4.00	5.00 to 23.00*	9.91	-----	-----	8.52	1.39
MW-2	19.42	4.00	5.00 to 20.00*	9.99	-----	-----	9.15	0.84
MW-3	13.22	4.00	1.00 to 16.00*	Monitoring Well damaged during construction activities				
MW-4	26.55	4.00	10.00 to 30.00*	14.78	-----	-----	11.25	3.53
MW-5	18.90	4.00	10.00 to 20.00	12.60	-----	-----	8.76	3.84
MW-6	28.90	2.00	10.00 to 30.00	22.20	-----	-----	18.49	3.71
MW-7	28.25	2.00	10.00 to 30.00	20.42	-----	-----	13.81	6.61
MW-8	23.71	4.00	15.00 to 25.00	17.03	-----	-----	13.43	3.60
MW-9A	28.25	4.00	11.00 to 31.00	18.65	-----	-----	15.09	3.56
MW-10	28.50	4.00	9.00 to 29.00	13.44	-----	-----	9.99	3.45
MW-11	26.27	4.00	9.00 to 29.00	17.06	-----	-----	13.36	3.70
MW-12	23.09	4.00	9.00 to 24.00	14.29	-----	-----	10.23	4.06
MW-13	29.60	2.00	10.00 to 30.00	22.05	-----	-----	18.32	3.73
MW-14	27.35	4.00	8.00 to 28.00	15.37	-----	-----	11.08	4.29
MW-15	29.02	4.00	10.00 to 30.00	20.08	-----	-----	16.39	3.69
MW-16	33.07	2.00	-----	20.08	-----	-----	15.75	4.33
MW-20	13.41	2.00	5.00 to 15.00**	12.99	-----	-----	9.48	3.51
MW-21	22.68	2.00	12.00 to 22.00**	20.22	-----	-----	15.80	4.42
MW-22	NM	2.00	9.00 to 19.00**	20.54	13.24	2.36	15.60	6.99
MW-23	17.98	2.00	7.00 to 17.00**	20.35	-----	-----	10.22	10.13
MW-24	23.57	2.00	13.50 to 23.50**	20.53	-----	-----	16.90	3.63
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.85	1.15	18.00	3.66
MW-26	20.31	2.00	10.00 to 20.00**	17.55	-----	-----	12.40	5.15
MW-27	65.28	2.00	55.00 to 65.00**	20.41	-----	-----	16.42	3.99
MW-28	32.35	4.00	18.00 to 38.00	20.65	-----	-----	17.00	3.65
EW-1	31.39	4.00	12.00 to 32.00**	20.23	-----	-----	15.84	4.39
EW-2	24.64	4.00	5.00 to 25.00**	15.11	-----	-----	10.89	4.22
ASW-1	39.22	1.00	40.00 to 42.00	20.54	-----	-----	16.31	4.23
GP-1	Monitor Well Decomissioned							
GP-2	Monitor Well Decomissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.19	2.00	5.00 to 20.00	10.05	-----	-----	7.74	2.31

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

** - Notes: TOC elevations for new wells were extrapolated from previously surveyed intact wells

Corrected groundwater elevations derived using an assumed product density of 0.87

LEGGETTE, BRASHEARS & GRAHAM, INC.

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
September 20, 2010

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground- Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.42	1.49
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	8.49	1.50
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	5.34	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.58	3.20
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.90	3.70
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	18.60	3.60
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	11.65	8.77
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.59	3.44
MW-9A	27.99	4.00	11.00 to 31.00	18.65	-----	-----	14.80	3.85
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	10.02	3.42
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.35	3.71
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	10.60	3.69
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.48	3.57
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	11.70	3.67
MW-15	29.06	4.00	10.00 to 30.00	20.08	-----	-----	16.51	3.57
MW-16	32.94	2.00	-----	20.08	-----	-----	18.52	1.56
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.70	3.29
MW-21	22.35	2.00	12.00 to 22.00	20.22	-----	-----	DRY	< 22.35
MW-22	18.42	2.00	9.00 to 19.00	20.54	-----	-----	16.41	4.13
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	10.92	9.43
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	17.01	3.52
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.86	2.07	18.93	3.53
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	13.71	3.84
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.61	3.80
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	17.13	3.52
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	27.14	-6.91
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	11.58	3.53
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	23.50	-2.96
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	7.90	2.15

1) Feet below grade

2) Top of casing

3) Feet above mean sea level

4) Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Product was measured in MW-9A on 9/22/10 after submersible pump shutdown

Groundwater Extraction Well EW-1 was active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
September 22, 2010

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground- Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	NM	----
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	NM	----
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	----
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	NM	----
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	NM	----
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	18.58	3.62
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	11.62	8.80
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	NM	----
MW-9A	27.99	4.00	11.00 to 31.00	18.65	14.83	2.86	17.69	0.96
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	NM	----
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.36	3.70
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	NM	----
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	NM	----
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	NM	----
MW-15	29.06	4.00	10.00 to 30.00	20.08	-----	-----	NM	----
MW-16	32.94	2.00	-----	20.08	-----	-----	18.50	1.58
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	NM	----
MW-21	22.35	2.00	12.00 to 22.00	20.22	-----	-----	NM	----
MW-22	18.42	2.00	9.00 to 19.00	20.54	16.42	1.38	17.80	2.74
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	11.10	9.25
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	17.04	3.49
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.88	2.07	18.95	3.51
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	13.73	3.82
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.56	3.85
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	17.15	3.50
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	24.24	-4.01
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	11.57	3.54
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	21.91	-1.37
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	NM	----

1) Feet below grade

2) Top of casing

3) Feet above mean sea level

4) Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Product was measured in MW-9A on 9/22/10 after submersible pump shutdown

Groundwater Extraction Well EW-1 was active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
October 18, 2010

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	NM	NM
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	NM	NM
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NM
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.28	3.50
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	NM	NM
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	18.30	3.90
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	12.29	8.13
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	NM	NM
MW-9A	27.99	4.00	11.00 to 31.00	18.65	15.18	0.04	15.22	3.46
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	NM	NM
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.29	3.77
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	10.20	4.09
MW-13	29.35	2.00	10.00 to 30.00	22.05	No Access - Covered by Scaffolding			
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	11.51	3.86
MW-15	29.06	4.00	10.00 to 30.00	20.08	16.46	0.30	16.76	3.58
MW-16	32.94	2.00	-----	20.08	-----	-----	17.30	2.78
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	NM	NM
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	18.53	1.69
MW-22	18.42	2.00	9.00 to 19.00	20.54	15.14	0.02	15.16	5.40
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	9.20	11.15
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	17.02	3.51
MW-25	28.00	4.00	10.00 to 30.00	20.66	-----	-----	NM	NM
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	13.41	4.14
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.52	3.89
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	19.65	1.00
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	18.50	1.73
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	13.33	1.78
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	18.19	2.35
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	NM	NM

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well MW-28 was active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
December 10, 2010

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	9.25	0.66
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	9.25	0.74
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	5.86	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.61	3.17
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	9.11	3.49
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	18.31	3.89
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	13.84	6.58
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.73	3.30
MW-9A	27.99	4.00	11.00 to 31.00	18.65	15.07	0.04	15.11	3.57
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	10.26	3.18
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.55	3.51
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	10.75	3.54
MW-13	29.35	2.00	10.00 to 30.00	22.05	No Access - Covered by Scaffolding			
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	11.78	3.59
MW-15	29.06	4.00	10.00 to 30.00	20.08	15.60	5.25	20.85	3.80
MW-16	32.94	2.00	-----	20.08	-----	-----	16.55	3.53
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.83	3.16
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	16.71	3.51
MW-22	18.42	2.00	9.00 to 19.00	20.54	15.10	0.45	15.55	5.38
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	10.49	9.86
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	17.18	3.35
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.75	1.87	18.62	3.67
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	13.32	4.23
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.71	3.70
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	17.29	3.36
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	16.60	3.63
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	11.62	3.49
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NM
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	8.11	1.94

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
March 23, 2011

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.40	1.51
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	8.91	1.08
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	5.00	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	10.90	3.88
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.45	4.15
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	17.66	4.54
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	14.25	6.17
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.16	3.87
MW-9A	27.99	4.00	11.00 to 31.00	18.65	-----	-----	14.72	3.93
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	9.66	3.78
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	12.58	4.48
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	9.81	4.48
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.05	4.00
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	10.80	4.57
MW-15	29.06	4.00	10.00 to 30.00	20.08	-----	-----	15.86	4.22
MW-16	32.94	2.00	-----	20.08	-----	-----	15.40	4.68
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.17	3.82
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	15.43	4.79
MW-22	18.42	2.00	9.00 to 19.00	20.54	10.96	2.15	13.11	9.30
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	8.15	12.20
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	16.62	3.91
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.49	2.01	18.50	3.91
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	12.00	5.55
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.17	4.24
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	16.87	3.78
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	15.20	5.03
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	10.60	4.51
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NM
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	6.45	3.60

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
June 22, 2011

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.40	1.51
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	8.82	1.17
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	6.42	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	10.83	3.95
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.55	4.05
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	17.98	4.22
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	12.75	7.67
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.05	3.98
MW-9A	27.99	4.00	11.00 to 31.00	18.65	-----	-----	14.78	3.93
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	9.15	4.29
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	12.80	4.26
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	9.62	4.67
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	17.95	4.10
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	10.85	4.52
MW-15	29.06	4.00	10.00 to 30.00	20.08	-----	-----	15.90	4.22
MW-16	32.94	2.00	-----	20.08	-----	-----	14.95	5.13
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.22	3.77
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	15.05	5.17
MW-22	18.42	2.00	9.00 to 19.00	20.54	12.65	0.02	12.67	7.89
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	9.03	11.32
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	16.50	4.03
MW-25	28.00	4.00	10.00 to 30.00	20.66	15.25	2.14	17.39	5.13
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	11.81	5.74
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.06	4.35
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	16.41	4.24
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	15.12	5.11
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	10.53	4.58
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NM
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	7.50	2.55

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
September 26, 2011

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	7.52	2.39
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	7.05	2.94
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	5.47	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	10.43	4.35
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.11	4.49
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	16.68	5.52
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	12.69	7.73
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	12.62	4.41
MW-9A	27.99	4.00	11.00 to 31.00	18.65	-----	-----	14.12	3.93
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	9.17	4.27
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	12.40	4.66
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	9.50	4.79
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	17.52	4.53
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	10.49	4.88
MW-15	29.06	4.00	10.00 to 30.00	20.08	15.20	0.25	15.45	4.85
MW-16	32.94	2.00	-----	20.08	-----	-----	15.50	4.58
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	8.68	4.31
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	14.43	5.79
MW-22	18.42	2.00	9.00 to 19.00	20.54	-----	-----	8.45	12.09
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	9.00	11.35
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	16.20	4.33
MW-25	28.00	4.00	10.00 to 30.00	20.66	13.95	2.00	15.95	6.45
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	11.73	5.82
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	15.55	4.86
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	16.53	4.12
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	14.39	5.84
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	10.29	4.82
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NM
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	NM	NM

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
December 13, 2011

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.50	1.41
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	8.62	1.37
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	10.74	4.04
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.33	4.27
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	17.15	5.05
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	13.66	6.76
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	12.97	4.06
MW-9A	27.99	4.00	11.00 to 31.00	18.65	-----	-----	14.62	4.03
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	9.46	3.98
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	12.78	4.28
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	9.73	4.56
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	17.86	4.19
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	10.59	4.78
MW-15	29.06	4.00	10.00 to 30.00	20.08	15.78	0.22	16.00	4.85
MW-16	32.94	2.00	-----	20.08	-----	-----	14.79	5.29
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	8.86	4.13
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	14.81	5.41
MW-22	18.42	2.00	9.00 to 19.00	20.54	-----	-----	8.30	12.24
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	8.69	11.66
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	16.40	4.13
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.27	1.93	18.20	4.14
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	12.10	5.45
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	15.87	4.54
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	16.46	4.19
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	14.75	5.48
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	10.52	4.59
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NM
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	NM	NM

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
March 19, 2012

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.47	1.44
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	8.62	1.37
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.32	3.46
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.91	3.69
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	18.29	3.91
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	14.72	5.70
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.60	3.43
MW-9A	27.99	4.00	11.00 to 31.00	18.65	15.08	0.95	16.03	3.45
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	10.06	3.38
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.35	3.71
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	10.33	3.96
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.48	3.57
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	11.38	3.99
MW-15	29.06	4.00	10.00 to 30.00	20.08	15.99	0.20	16.19	4.06
MW-16	32.94	2.00	-----	20.08	-----	-----	15.54	4.54
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.54	3.45
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	15.65	4.57
MW-22	18.42	2.00	9.00 to 19.00	20.54	12.66	0.10	12.76	7.87
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	10.62	9.73
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	17.01	3.52
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.88	2.02	18.90	3.52
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	12.82	4.73
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.60	3.81
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	17.11	3.54
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	15.51	4.72
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	11.23	3.88
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NM
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	7.88	2.17

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
June 13, 2012

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.02	1.89
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	7.85	2.14
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.23	3.55
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.81	3.79
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	17.95	4.25
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	14.68	5.74
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.49	3.54
MW-9A	27.99	4.00	11.00 to 31.00	18.65	15.09	0.14	15.23	3.54
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	9.94	3.50
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.23	3.83
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	9.96	4.33
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.44	3.61
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	11.01	4.36
MW-15	29.06	4.00	10.00 to 30.00	20.08	-----	-----	16.04	4.04
MW-16	32.94	2.00	-----	20.08	-----	-----	15.40	4.68
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.26	3.73
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	15.35	4.87
MW-22	18.42	2.00	9.00 to 19.00	20.54	-----	-----	9.52	11.02
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	9.26	11.09
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	16.99	3.54
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.82	1.72	18.54	3.62
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	12.57	4.98
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.58	3.83
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	17.03	3.62
MW-29	30.30	4.00	5.00 to 30.00	NM	15.74	0.01	15.75	NM
MW-30	29.79	4.00	5.00 to 30.00	NM	-----	-----	15.02	NM
MW-31	30.28	2.00	5.00 to 25.00	NM	-----	-----	15.62	NM
MW-32	29.50	2.00	5.00 to 30.00	NM	-----	-----	15.25	NM
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	14.88	5.35
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	11.16	3.95
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NM
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	7.62	2.43

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

LEGGETTE, BRASHEARS & GRAHAM, INC.

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
September 24, 2012

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.50	1.41
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	9.02	0.97
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.37	3.41
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.91	3.69
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	17.46	4.74
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	13.22	7.20
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.54	3.49
MW-9A	27.99	4.00	11.00 to 31.00	18.65	15.12	0.47	15.59	3.47
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	10.05	3.39
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.30	3.76
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	10.58	3.71
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.40	3.65
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	11.31	4.06
MW-15	29.06	4.00	10.00 to 30.00	20.08	-----	-----	16.30	3.78
MW-16	32.94	2.00	-----	20.08	-----	-----	15.46	4.62
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.46	3.53
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	15.51	4.71
MW-22	18.42	2.00	9.00 to 19.00	20.54	15.11	0.25	15.36	5.40
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	11.66	8.69
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	16.95	3.58
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.78	1.20	17.98	3.72
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	12.95	4.60
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.53	3.88
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	17.05	3.60
MW-29	30.30	4.00	5.00 to 30.00	NM	15.85	1.06	16.91	NM
MW-30	29.79	4.00	5.00 to 30.00	NM	15.95	0.10	16.05	NM
MW-31	30.28	2.00	5.00 to 25.00	NM	15.78	0.02	15.80	NM
MW-32	29.50	2.00	5.00 to 30.00	NM	-----	-----	15.31	NM
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	15.45	4.78
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	11.46	3.65
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	15.97	4.57
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	7.95	2.10

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
December 10, 2012

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.75	1.16
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	8.20	1.79
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.42	3.36
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	9.01	3.59
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	18.42	3.78
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	14.66	5.76
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.65	3.38
MW-9A	27.99	4.00	11.00 to 31.00	18.65	15.00	0.23	15.23	3.62
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	10.13	3.31
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.36	3.70
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	10.57	3.72
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.52	3.53
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	11.45	3.92
MW-15	29.06	4.00	10.00 to 30.00	20.08	-----	-----	16.54	3.54
MW-16	32.94	2.00	-----	20.08	-----	-----	15.70	4.38
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.60	3.39
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	15.50	4.72
MW-22	18.42	2.00	9.00 to 19.00	20.54	15.33	0.03	15.36	5.21
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	11.44	8.91
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	17.10	3.43
MW-25	28.00	4.00	10.00 to 30.00	20.66	14.45	2.50	16.95	5.89
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	13.04	4.51
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.66	3.75
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	17.10	3.55
MW-29	30.30	4.00	5.00 to 30.00	NM	14.98	1.00	15.98	NM
MW-30	29.79	4.00	5.00 to 30.00	NM	15.45	0.10	15.55	NM
MW-31	30.28	2.00	5.00 to 25.00	NM	15.80	0.14	15.94	NM
MW-32	29.50	2.00	5.00 to 30.00	NM	-----	-----	15.44	NM
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	15.61	4.62
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	11.44	3.67
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	16.10	4.44
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	8.02	2.03

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
March 25, 2013

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.02	1.89
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	7.83	2.16
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.13	3.65
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.78	3.82
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	17.66	4.54
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	14.05	6.37
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.45	3.58
MW-9A	27.99	4.00	11.00 to 31.00	18.65	-----	-----	14.89	3.76
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	9.87	3.57
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.09	3.97
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	9.84	4.45
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.42	3.63
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	10.53	4.84
MW-15	29.06	4.00	10.00 to 30.00	20.08	-----	-----	12.95	7.13
MW-16	32.94	2.00	-----	20.08	-----	-----	13.95	6.13
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.15	3.84
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	12.55	7.67
MW-22	18.42	2.00	9.00 to 19.00	20.54	-----	-----	9.87	10.67
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	8.30	12.05
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	16.22	4.31
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.61	0.10	16.71	4.04
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	10.85	6.70
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.45	3.96
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	16.85	3.80
MW-29	30.30	4.00	5.00 to 30.00	NM	13.20	0.26	13.46	NM
MW-30	29.79	4.00	5.00 to 30.00	NM	12.71	0.09	12.80	NM
MW-31	30.28	2.00	5.00 to 25.00	NM	-----	-----	12.83	NM
MW-32	29.50	2.00	5.00 to 30.00	NM	-----	-----	13.25	NM
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	12.56	7.67
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	10.51	4.60
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NA
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	7.96	2.09

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
June 24, 2013

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.40	1.51
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	8.62	1.37
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	10.88	3.90
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.42	4.18
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	17.20	5.00
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	13.71	6.71
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.13	3.90
MW-9A	27.99	4.00	11.00 to 31.00	18.65	-----	-----	14.56	4.09
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	9.61	3.83
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	12.85	4.21
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	9.85	4.44
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.03	4.02
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	10.28	5.09
MW-15	29.06	4.00	10.00 to 30.00	20.08	-----	-----	14.25	5.83
MW-16	32.94	2.00	-----	20.08	-----	-----	14.79	5.29
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	8.78	4.21
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	14.08	6.14
MW-22	18.42	2.00	9.00 to 19.00	20.54	-----	-----	11.83	8.71
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	8.98	11.37
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	16.42	4.11
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.50	0.55	17.05	4.09
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	11.25	6.30
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.08	4.33
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	16.69	3.96
MW-29	30.30	4.00	5.00 to 30.00	NM	14.39	0.23	14.62	NM
MW-30	29.79	4.00	5.00 to 30.00	NM	14.18	0.02	14.20	NM
MW-31	30.28	2.00	5.00 to 25.00	NM	-----	-----	14.30	NM
MW-32	29.50	2.00	5.00 to 30.00	NM	-----	-----	13.89	NM
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	14.02	6.21
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	10.49	4.62
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NA
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	7.72	2.33

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
September 23, 2013

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.78	1.13
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	9.34	0.65
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.44	3.34
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	8.95	3.65
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	17.92	4.28
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	14.42	6.00
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.60	3.43
MW-9A	27.99	4.00	11.00 to 31.00	18.65	15.10	0.60	15.70	3.47
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	10.05	3.39
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.32	3.74
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	10.76	3.53
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.49	3.56
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	11.23	4.14
MW-15	29.06	4.00	10.00 to 30.00	20.08	15.18	0.18	15.36	4.88
MW-16	32.94	2.00	-----	20.08	-----	-----	15.60	4.48
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.64	3.35
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	15.16	5.06
MW-22	18.42	2.00	9.00 to 19.00	20.54	-----	-----	15.04	5.50
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	11.93	8.42
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	16.95	3.58
MW-25	28.00	4.00	10.00 to 30.00	20.66	16.61	0.42	17.03	4.00
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	12.39	5.16
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.53	3.88
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	17.09	3.56
MW-29	30.30	4.00	5.00 to 30.00	NM	15.61	0.44	16.05	NM
MW-30	29.79	4.00	5.00 to 30.00	NM	15.43	0.12	15.55	NM
MW-31	30.28	2.00	5.00 to 25.00	NM	-----	-----	15.40	NM
MW-32	29.50	2.00	5.00 to 30.00	NM	-----	-----	14.96	NM
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	15.05	5.18
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	11.36	3.75
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NA
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	8.33	1.72

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

LEGGETTE, BRASHEARS & GRAHAM, INC.

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
December 5, 2013

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.31	1.60
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	8.37	1.62
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.63	3.15
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	9.17	3.43
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	18.52	3.68
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	15.35	5.07
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.82	3.21
MW-9A	27.99	4.00	11.00 to 31.00	18.65	15.35	0.90	16.25	3.18
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	10.22	3.22
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	13.52	3.54
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	11.02	3.27
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.76	3.29
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	11.69	3.68
MW-15	29.06	4.00	10.00 to 30.00	20.08	15.66	0.24	15.90	4.39
MW-16	32.94	2.00	-----	20.08	-----	-----	16.14	3.94
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.89	3.10
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	15.83	4.39
MW-22	18.42	2.00	9.00 to 19.00	20.54	15.85	0.32	16.17	4.65
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	13.71	6.64
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	17.22	3.31
MW-25	28.00	4.00	10.00 to 30.00	20.66	17.10	0.17	17.27	3.54
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	13.12	4.43
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.82	3.59
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	17.30	3.35
MW-29	30.30	4.00	5.00 to 30.00	NM	16.18	0.60	16.78	NM
MW-30	29.79	4.00	5.00 to 30.00	NM	16.10	0.03	16.13	NM
MW-31	30.28	2.00	5.00 to 25.00	NM	-----	-----	16.06	NM
MW-32	29.50	2.00	5.00 to 30.00	NM	-----	-----	15.48	NM
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	15.70	4.53
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	11.68	3.43
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NA
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	8.46	1.59

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
March 17, 2014

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	23.18	4.00	5.00 to 23.00*	9.91	-----	-----	8.82	1.09
MW-2	18.98	4.00	5.00 to 20.00*	9.99	-----	-----	8.85	1.14
MW-3	13.30	4.00	1.00 to 16.00*	NM	-----	-----	NM	NA
MW-4	26.40	4.00	10.00 to 30.00*	14.78	-----	-----	11.61	3.17
MW-5	18.78	4.00	10.00 to 20.00	12.60	-----	-----	9.13	3.47
MW-6	28.93	2.00	10.00 to 30.00	22.20	-----	-----	18.56	3.64
MW-7	28.15	2.00	10.00 to 30.00	20.42	-----	-----	14.95	5.47
MW-8	23.65	4.00	15.00 to 25.00	17.03	-----	-----	13.86	3.17
MW-9A	27.99	4.00	11.00 to 31.00	18.65	15.34	0.86	16.20	3.20
MW-10	28.32	4.00	9.00 to 29.00	13.44	-----	-----	10.26	3.18
MW-11	26.05	4.00	9.00 to 29.00	17.06	-----	-----	11.60	5.46
MW-12	22.90	4.00	9.00 to 24.00	14.29	-----	-----	10.57	3.72
MW-13	29.35	2.00	10.00 to 30.00	22.05	-----	-----	18.78	3.27
MW-14	27.05	4.00	8.00 to 28.00	15.37	-----	-----	11.37	4.00
MW-15	29.06	4.00	10.00 to 30.00	20.08	15.33	0.08	15.41	4.74
MW-16	32.94	2.00	-----	20.08	-----	-----	15.43	4.65
MW-20	13.30	2.00	5.00 to 15.00	12.99	-----	-----	9.50	3.49
MW-21	22.40	2.00	12.00 to 22.00	20.22	-----	-----	15.36	4.86
MW-22	18.42	2.00	9.00 to 19.00	20.54	-----	-----	13.30	7.24
MW-23	17.72	2.00	7.00 to 17.00	20.35	-----	-----	8.94	11.41
MW-24	23.32	2.00	13.50 to 23.50	20.53	-----	-----	17.23	3.30
MW-25	28.00	4.00	10.00 to 30.00	20.66	17.16	0.17	17.33	3.48
MW-26	21.10	2.00	10.00 to 20.00	17.55	-----	-----	12.77	4.78
MW-27	65.22	2.00	55.00 to 65.00	20.41	-----	-----	16.75	3.66
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	17.10	3.55
MW-29	30.30	4.00	5.00 to 30.00	NM	14.90	0.53	15.43	NM
MW-30	29.79	4.00	5.00 to 30.00	NM	14.30	0.35	14.65	NM
MW-31	30.28	2.00	5.00 to 25.00	NM	-----	-----	14.72	NM
MW-32	29.50	2.00	5.00 to 30.00	NM	-----	-----	13.96	NM
MW-33	31.00	4.00	6.00 to 31.00	NM	-----	-----	10.62	NM
EW-1	31.39	4.00	12.00 to 32.00	20.23	-----	-----	15.21	5.02
EW-2	25.36	4.00	5.00 to 25.00	15.11	-----	-----	10.62	4.49
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	15.61	NA
ASW-2	45.00	1.00	43.00 to 45.00	NM	-----	-----	16.21	NA
GP-1	Monitor Well Decommissioned							
GP-2	Monitor Well Decommissioned							
CE-1	Micro-Well Abandoned							
CE-2	Micro-Well Abandoned							
CE-3	Micro-Well Abandoned							
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	8.41	1.64

1) - Feet below grade
2) - Top of Casing
3) - Feet above mean sea level
4) - Feet below top of casing
NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.
Notes: TOC elevations acquired by survey from Bunney Associates
Corrected groundwater elevations derived using an assumed product density of 0.87
Groundwater Extraction Well not active at the time of gauging

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
June 30, 2014

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾					
MW-1	21.91	4.00	5.00 to 23.00*	9.91	-----	-----	8.90	1.01
MW-2	18.82	4.00	5.00 to 20.00*	9.99	-----	-----	9.69	0.30
MW-4	26.51	4.00	10.00 to 30.00*	14.78	-----	-----	14.25	0.53
MW-5	18.73	4.00	10.00 to 20.00	12.60	-----	-----	12.47	0.13
MW-6	23.26	2.00	10.00 to 30.00	22.20	-----	-----	22.01	0.19
MW-7	28.13	2.00	10.00 to 30.00	20.42	-----	-----	15.78	4.64
MW-8	23.70	4.00	15.00 to 25.00	17.03	-----	-----	16.84	0.19
MW-9A	27.99	4.00	11.00 to 31.00	18.65	18.42	1.01	19.43	0.10
MW-10	28.22	4.00	9.00 to 29.00	13.44	-----	-----	13.18	0.26
MW-11	24.45	4.00	9.00 to 29.00	16.08	-----	-----	15.20	0.88
MW-12	22.87	4.00	9.00 to 24.00	14.29	-----	-----	12.13	2.16
MW-13	29.35	2.00	10.00 to 30.00	22.05	21.59	2.54	24.13	0.13
MW-14	27.00	4.00	8.00 to 28.00	15.37	-----	-----	14.11	1.26
MW-15	30.14	4.00	10.00 to 30.00	20.08	16.75	0.01	16.76	3.33
MW-16	32.62	2.00	-----	20.08	-----	-----	16.97	3.11
MW-20	13.24	2.00	5.00 to 15.00	12.99	-----	-----	11.80	1.19
MW-21	22.01	2.00	12.00 to 22.00	20.22	-----	-----	16.01	4.21
MW-22	18.42	2.00	9.00 to 19.00	20.54	13.74	0.06	13.80	6.79
MW-23	17.22	2.00	7.00 to 17.00	20.35	-----	-----	9.70	10.65
MW-24	23.27	2.00	13.50 to 23.50	20.53	-----	-----	20.40	0.13
MW-25	28.00	4.00	10.00 to 30.00	20.66	20.11	3.05	23.16	0.15
MW-26	19.78	2.00	10.00 to 20.00	17.55	-----	-----	15.26	2.29
MW-27	64.90	2.00	55.00 to 65.00	20.41	-----	-----	20.50	-0.09
MW-28	33.90	4.00	18.00 to 38.00	20.65	-----	-----	20.46	0.19
MW-29	30.30	4.00	5.00 to 30.00	20.03	16.12	0.44	16.56	3.85
MW-30	29.79	4.00	5.00 to 30.00	19.87	15.52	0.78	16.30	4.25
MW-31	29.31	2.00	5.00 to 25.00	19.79	-----	-----	15.55	4.24
MW-32	28.35	2.00	5.00 to 30.00	18.95	-----	-----	15.88	3.07
MW-33	26.02	4.00	6.00 to 31.00	19.96	-----	-----	12.81	7.15
EW-1	31.97	4.00	12.00 to 32.00	20.23	-----	-----	16.06	4.17
EW-2	24.60	4.00	5.00 to 25.00	15.11	-----	-----	12.97	2.14
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	NM
ASW-2	45.00	1.00	43.00 to 45.00	19.51	-----	-----	NM	NM
CE-4	11.26	2.00	5.00 to 20.00	10.05	-----	-----	9.02	1.03

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

* - Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Notes: TOC elevations acquired by survey from Bunney Associates

Corrected groundwater elevations derived using an assumed product density of 0.87

Groundwater Extraction Well not active at the time of gauging

TOCs for MW-29, MW-30, MW-31, MW-32, MW-33, ASW-2 and MW-11 based on Bunney Associates survey data

FYN PAINT & LACQUER COMPANY, INC.
230 KENT AVENUE
WILLIAMSBURG, BROOKLYN, NEW YORK

Water-Level Measurements
September 24, 2014

Well ID	Total Depth (feet)	Screen		TOC ²⁾ Elevation (ft msl) ³⁾	Depth to Product (ft btoc) ⁴⁾	Product Thickness (feet)	Depth to Water (ft btoc)	Active DPE Well	Corrected Ground Water Elevation (ft msl)
		Diameter (inch)	Setting (ft bg) ¹⁾						
MW-1	22.35	4.00	5.00 to 23.00*	9.91	-----	-----	9.55	----	0.36
MW-2	18.92	4.00	5.00 to 20.00*	9.99	-----	-----	9.54	----	0.45
MW-4	26.60	4.00	10.00 to 30.00*	14.78	-----	-----	14.90	----	-0.12
MW-5	18.85	4.00	10.00 to 20.00	12.60	-----	-----	13.06	----	-0.46
MW-6	23.80	2.00	10.00 to 30.00	22.20	-----	-----	22.60	----	-0.40
MW-7	28.19	2.00	10.00 to 30.00	20.42	-----	-----	16.98	----	3.44
MW-8	23.75	4.00	15.00 to 25.00	17.03	-----	-----	17.40	----	-0.37
MW-9A	28.00	4.00	11.00 to 31.00	18.65	-----	-----	19.05	----	-0.40
MW-10	28.40	4.00	9.00 to 29.00	13.44	-----	-----	13.72	----	-0.28
MW-11 *	21.41	4.00	9.00 to 29.00	16.08	-----	-----	15.30	----	0.78
MW-12	23.10	4.00	9.00 to 24.00	14.29	-----	-----	13.50	----	0.79
MW-13	29.40	2.00	10.00 to 30.00	22.05	-----	Approx. 3.00	22.11	----	-0.06
MW-14	27.07	4.00	8.00 to 28.00	15.37	-----	-----	15.00	----	0.37
MW-15	20.50	4.00	10.00 to 30.00	20.08	-----	-----	19.08	Yes	1.00
MW-16	32.68	2.00	-----	20.08	-----	-----	21.36	----	-1.28
MW-20	13.33	2.00	5.00 to 15.00	12.99	-----	-----	12.90	----	0.09
MW-21	23.03	2.00	12.00 to 22.00	20.22	-----	-----	Dry	----	Dry
MW-22	18.30	2.00	9.00 to 19.00	20.54	-----	-----	Dry	----	Dry
MW-23	17.50	2.00	7.00 to 17.00	20.35	-----	-----	15.58	Yes	4.77
MW-24	23.40	2.00	13.50 to 23.50	20.53	-----	-----	20.95	----	-0.42
MW-25	28.00	4.00	10.00 to 30.00	20.66	23.72	3.56	27.28	----	-3.52
MW-26	19.90	2.00	10.00 to 20.00	17.55	-----	-----	17.90	----	-0.35
MW-27	65.17	2.00	55.00 to 65.00	20.41	-----	-----	21.05	----	-0.64
MW-28	32.05	4.00	18.00 to 38.00	20.65	-----	-----	21.05	----	-0.40
MW-29	30.30	4.00	5.00 to 30.00	20.03	-----	-----	Dry	Yes	Dry
MW-30	29.79	4.00	5.00 to 30.00	19.87	-----	-----	26.08	Yes	-6.21
MW-31	29.45	2.00	5.00 to 25.00	19.79	-----	-----	25.70	Yes	-5.91
MW-32	28.90	2.00	5.00 to 30.00	18.95	-----	-----	18.33	----	0.62
MW-33	30.10	4.00	6.00 to 31.00	19.96	-----	-----	19.04	Yes	0.92
EW-1	33.00	4.00	12.00 to 32.00	20.23	-----	-----	25.30	Yes	-5.07
EW-2	24.70	4.00	5.00 to 25.00	15.11	-----	-----	14.71	Yes	0.40
ASW-1	39.53	1.00	40.00 to 42.00	20.54	-----	-----	NM	----	NM
ASW-2	45.00	1.00	43.00 to 45.00	19.51	-----	-----	NM	----	NM
CE-4	19.15	2.00	5.00 to 20.00	10.05	-----	-----	9.98	----	0.07

1) - Feet below grade

2) - Top of Casing

3) - Feet above mean sea level

4) - Feet below top of casing

NM - Not Measured

Notes:

TOC elevations acquired by survey from Bunney Associates

Monitor Wells MW-1 to MW-4 were installed by Miller Environmental Group, Inc.

Corrected groundwater elevations derived using an assumed product density of 0.87

MW-11 fluid level elevation derived from measurement collected on 9/22/14

TOCs for MW-29, MW-30, MW-31, MW-32, MW-33, ASW-2 and MW-11 extrapolated from Bunney Associates survey data

MW-13 NAPL thickness estimated by bailer recovery (interface probe not reading NAPL)