

**1840 PARK AVENUE
BCP SITE NO. C231140
1840-1856 PARK AVENUE
NEW YORK, NEW YORK 10035
Block 1751, p/o Lot No. 33**

REMEDIAL ACTION WORK PLAN

February 2021

Prepared for:

126th Street Equities LLC
316 West 118th Street
New York, New York 10026



AMC Engineering, PLLC
18-36 42nd Street,
Astoria, NY 11105
(516) 545-0474

CERTIFICATIONS

I A.Czemerinski certify that I am currently a NYS registered professional engineer and that this Remedial Action Work Plan was prepared in accordance with all applicable statutes and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10).

I certify that all information and statements in this certification are true. I understand that a false statement made herein is punishable as Class "A" misdemeanor, pursuant to Section 210.45 of the Penal Law.

076508

NYS Professional Engineer #

2/2/2021

Date



It is a violation of Article 145 of New York State Education Law for any person to alter this document in any way without the express written verification of adoption by any New York State licensed engineer in accordance with Section 7209(2), Article 145, New York State Education Law.

TABLE OF CONTENTS
REMEDIAL ACTION WORK PLAN
1840 PARK AVENUE SITE

EXECUTIVE SUMMARY	1
1.0 INTRODUCTION.....	1
1.1 SITE LOCATION AND DESCRIPTION.....	1
1.2 CONTEMPLATED REDEVELOPMENT PLAN	2
1.3 DESCRIPTION OF SURROUNDING PROPERTY	3
2.0 DESCRIPTION OF REMEDIAL INVESTIGATION FINDINGS	4
2.1 SUMMARY OF REMEDIAL INVESTIGATIONS PERFORMED	4
2.1.1 Soil Borings	4
2.1.2 Monitoring Wells	5
2.1.3 Samples Collected.....	5
2.1.4 Chemical Analytical Work Performed.....	6
2.1.5 Documentation	7
2.2 SIGNIFICANT THREAT.....	8
2.3 SITE HISTORY	9
2.3.1 Past Uses and Ownership.....	9
2.3.2 Summary of Previous Reports	11
2.4 GEOLOGICAL CONDITIONS	12
2.5 CONTAMINATION CONDITIONS	13
2.5.1 Conceptual Model of Site Contamination.....	13
2.5.2 Description of Areas of Concern	13
2.5.3 Soil/Fill Contamination.....	14
2.5.4 On-Site and Off-Site Groundwater Contamination	14
2.5.5 On-Site and Off-Site Soil Vapor Contamination	14
2.5.6 Environmental and Public Health Assessments.....	14
2.6 REMEDIAL ACTION OBJECTIVES	16
2.6.1 Groundwater	17
2.6.2 Soil	17
3.0 DESCRIPTION OF REMEDIAL ACTION PLAN	19
3.1 EVALUATION OF REMEDIAL ALTERNATIVES.....	19
3.2 STANDARDS, CRITERIA AND GUIDANCE (SCG)	19
3.3 ALTERNATIVES ANALYSIS	21
3.4 REMEDIAL ALTERNATIVE 1	23
3.4.1 Overall Protection of Human Health and the Environment.....	23
3.4.2 Compliance with Remedial Goals, SCGs and RAOs	24
3.4.3 Long-Term Effectiveness and Permanence	24
3.4.4 Reduction in Toxicity, Mobility or Volume through Treatment	24
3.4.5 Short-Term Effectiveness	24
3.4.6 Implementability	25
3.4.7 Cost	25

3.4.8	Compatibility with Land Use.....	26
3.4.9	Community Acceptance.....	26

TABLE OF CONTENTS

REMEDIAL ACTION WORK PLAN

1840 PARK AVENUE SITE

3.5	REMEDIAL ALTERNATIVE 2	26
3.5.1	Overall Protection of Human Health and the Environment.....	26
3.5.2	Compliance with Remedial Goals, SCGs and RAOs	27
3.5.3	Long-term Effectiveness and Permanence.....	27
3.5.4	Reduction in Toxicity, Mobility or Volume through Treatment	27
3.5.5	Short-term Effectiveness.....	27
3.5.6	Implementability	28
3.5.7	Cost	28
3.5.8	Compatibility with Land Use.....	29
3.5.9	Community Acceptance.....	29
3.6	REMEDIAL ALTERNATIVE 3	29
3.6.1	Overall Protection of Human Health and the Environment.....	29
3.6.2	Compliance with Remedial Goals, SCGs and RAOs	30
3.6.3	Long-term Effectiveness and Permanence.....	30
3.6.4	Reduction in Toxicity, Mobility or Volume through Treatment	30
3.6.5	Short-term Effectiveness.....	30
3.6.6	Implementability	31
3.6.7	Cost	31
3.6.8	Compatibility with Land Use.....	32
3.6.9	Community Acceptance.....	32
3.7	SELECTION OF THE PREFERRED REMEDY	32
3.7.1	Preferred Remedy Land Use Factor Evaluation	32
3.8	SUMMARY OF SELECTED REMEDIAL ACTIONS.....	37
4.0	REMEDIAL ACTION PROGRAM	40
4.1	GOVERNING DOCUMENTS.....	40
4.1.1	Health & Safety Plan (HASP).....	40
4.1.2	Quality Assurance Project Plan (QAPP).....	41
4.1.3	Construction Quality Assurance Plan (CQAP).....	42
4.1.4	Soil/Materials Management Plan (SoMP)	42
4.1.5	Erosion and Sediment Control Plan (ESCP).....	42
4.1.6	Community Air Monitoring Plan (CAMP).....	43
4.1.7	Contractors Site Operations Plan (SOP)	43
4.1.8	Citizen Participation Plan (CPP).....	43
4.2	GENERAL REMEDIAL ACTION INFORMATION	44
4.2.1	Project Organization	44
4.2.2	Remedial Engineer.....	45
4.2.3	Remedial Action Schedule.....	45
4.2.4	Work Hours.....	45
4.2.5	Site Security	46
4.2.6	Traffic Control	46

TABLE OF CONTENTS
REMEDIAL ACTION WORK PLAN
1840 PARK AVENUE SITE

4.2.7	Worker Training and Monitoring.....	46
4.2.8	Agency Approvals	48
4.2.9	Pre-Construction Meeting with NYSDEC.....	48
4.2.10	Emergency Contact Information.....	48
4.2.11	Remedial Action Costs	48
4.3	SITE PREPARATION.....	49
4.3.1	Mobilization.....	49
4.3.2	Erosion and Sedimentation Controls	49
4.3.3	Stabilized Construction Entrance(s)	49
4.3.4	Utility Marker and Easements Layout.....	49
4.3.5	Sheeting and Shoring.....	50
4.3.6	Equipment and Material Staging	50
4.3.7	Decontamination Area	50
4.3.8	Site Fencing	51
4.3.9	Demobilization.....	51
4.4	REPORTING	51
4.4.1	Daily Reports	51
4.4.2	Monthly Reports	52
4.4.3	Other Reporting	52
4.4.4	Complaint Management Plan.....	53
4.4.5	Deviations from the Remedial Action Work Plan.....	53
5.0	REMEDIAL ACTION: MATERIAL REMOVAL FROM SITE.....	54
5.1	CONTINGENCY.....	54
5.1.1	UST Removal Methods.....	54
5.2	SOIL CLEANUP OBJECTIVES.....	55
5.3	REMEDIAL PERFORMANCE EVALUATION	56
	(POST EXCAVATION END-POINT SAMPLING).....	56
5.3.1	End-Point Sampling Frequency	56
5.3.2	Methodology.....	56
5.3.3	Reporting of Results	56
5.3.4	QA/QC	57
5.3.5	DUSR.....	57
5.3.6	Reporting of End-Point Data in FER.....	58
5.4	ESTIMATED MATERIAL REMOVAL QUANTITIES.....	58
5.5	SOIL/MATERIALS MANAGEMENT PLAN	58
5.5.1	Excavation of Historic Fill Soil	60
5.5.2	Excavation of Native Soils.....	61
5.5.3	Soil Screening Methods	60
5.5.4	Stockpile Methods	61
5.5.5	Materials Excavation and Load Out	62

TABLE OF CONTENTS
REMEDIAL ACTION WORK PLAN
1840 PARK AVENUE SITE

5.5.6	Materials Transport Off-Site.....	63
5.5.7	Materials Disposal Off-Site	64
5.5.8	Materials Reuse On-Site	69
5.5.9	Fluids Management.....	70
5.5.10	Backfill from Off-Site Sources	70
5.5.11	Stormwater Pollution Prevention	71
5.5.12	Contingency Plan	72
5.5.13	Community Air Monitoring Plan.....	72
5.5.14	Odor, Dust and Nuisance Control Plan.....	73
6.0	RESIDUAL CONTAMINATION TO REMAIN ON-SITE	75
7.0	ENGINEERING CONTROLS	76
8.0	INSTITUTIONAL CONTROLS	77
8.1	ENVIRONMENTAL EASEMENT.....	77
8.2	SITE MANAGEMENT PLAN.....	78
9.0	FINAL ENGINEERING REPORT	80
9.1	CERTIFICATIONS	81
10.0	SCHEDULE.....	83

LIST OF TABLES

Table 1	Soil Cleanup Objectives
Table 2	Summary of RI Sampling - Soil, Groundwater and Soil Gas Samples
Table 3	Laboratory Results – Soil Samples, Volatile Organic Compounds
Table 4	Laboratory Results – Soil Samples, Semi-Volatile Organic Compounds
Table 5	Laboratory Results – Soil Samples, Pesticides/PCBs
Table 6	Laboratory Results – Soil Samples, TAL Metals
Table 7	Laboratory Results – Soil Samples 1,4-dioxane and PFAS Compounds
Table 8	Parameters Detected Above Track 1 Soil Cleanup Objectives
Table 9	Laboratory Results – Groundwater Samples, Volatile Organic Compounds
Table 10	Laboratory Results – Groundwater Samples, Semi-Volatile Organic Compounds
Table 11	Laboratory Results – Groundwater Samples, Pesticides/PCBs
Table 12	Laboratory Results – Groundwater Samples, Total Metals
Table 13	Laboratory Results – Groundwater Samples, Dissolved Metals
Table 14	Laboratory Results – Groundwater Samples, PFAS Compounds and 1,4-Dioxane
Table 15	Parameters Detected Above Ambient Groundwater Standards
Table 16	Laboratory Results – Soil Gas Samples, Volatile Organic Compounds

Table 17 Permits

TABLE OF CONTENTS
REMEDIAL ACTION WORK PLAN
1840 PARK AVENUE SITE

Table 18 Emergency Contact Numbers

LIST OF FIGURES

Figure 1	Site Location Map
Figure 2	Site Plan
Figure 3	Surrounding Property
Figure 4	Soil Boring Locations
Figure 5	Groundwater and Soil Vapor Sampling Locations
Figure 6	Groundwater Elevation Map
Figure 7	Soil Results above Unrestricted / Restricted SCOs
Figure 8	Groundwater Results above AWQS
Figure 9	Soil Vapor Results
Figure 10	Truck Routes
Figure 11	Excavation Plan
Figure 12	Endpoint Sampling Plan
Figure 13	Alpha-Numeric Grid Map

ATTACHMENTS

Attachment A	Metes and Bounds Description of Property
Attachment B	Construction Health & Safety Plan (CHASP)
Attachment C	Quality Assurance Project Plan (QAPP)
Attachment D	Community Air Monitoring Plan (CAMP)
Attachment E	Citizen Participation Plan (CPP)
Attachment F	Resumes
Attachment G	Estimated Remedial Costs

LIST OF ACRONYMS

Acronym	Definition
AMC	AMC Engineering
AWQS	Ambient Water Quality Standards
BCA	Brownfield Cleanup Agreement
BCP	Brownfield Cleanup Program
BTEX	Benzene, Toluene, Ethylbenzene and Xylene
CQMP	Construction Quality Management Plan
DUSR	Data Usability Statement Report
EBC	Environmental Business Consultants
FER	Final Engineering Report
HDPE	High Density Polyethylene
IRM	Interim Remedial Measure
NYC	New York City
NYCDEP	New York City Department of Environmental Protection
NYSDEC	New York State Department of Environmental Conservation
NYSDOH	New York State Department of Health
PS	Public School
PVC	Polyvinyl Chloride
RAO	Remedial Action Objectives
RAWP	Remedial Action Work Plan
RI	Remedial Investigation
RSCOs	Recommended Site Cleanup Objectives
SCG	Standards, Criteria, and Guidelines
SMMP	Soil/Materials Management Plan
SMP	Site Management Plan
SSDS	Sub-slab Depressurization System
SWPPP	Stormwater Pollution Prevention Plan
SVOCs	Semi-Volatile Organic Compounds
USEPA	United States Environmental Protection Agency
UST	Underground Storage Tank
VOCs	Volatile Organic Compounds

EXECUTIVE SUMMARY

Site Description/Physical Setting/Site History

This Remedial Action Work Plan (RAWP) was prepared on behalf of 126th Street Equities, LLC for the property located at 1840-1856 Park Avenue in the Harlem section of New York, New York 10035 (hereafter referred to as the Site). 126th Street Equities, LLC has applied to the New York State Brownfield Cleanup Program (BCP) as a Participant. An unrestricted use cleanup is proposed for the property. When completed, the Site will be redeveloped with a new 18-story mixed-use commercial/ residential building. The proposed development is compatible with the existing M1-6 / R9 zoning. Refer to the Brownfield Cleanup Program (BCP) application for additional details.

The street address for the Site is 1840-1856 Park Avenue, New York, NY 10035 (**Figure 1**). The Site is located in the Harlem neighborhood of New York (Manhattan) and is comprised of portion of a single tax parcel (Block: 1751, P/O Lot No. 33, formerly Lot Nos. 33, 35, 36, 37, 38, 40, 132, and 137) totaling 9,458 square feet (0.22 acres). The far southern portion of Lot No. 33 having an area of 2,452 ft² is to be excluded from the development project and the scope of this investigation.

The property is currently developed with an asphalt-paved parking lot. No buildings or other structures are present, although chain-link and/or corrugated metal fencing are present along the northern, southern and eastern property boundaries, with access gates leading from East 126th (south) and East 127th Streets (north). Historically the property was developed with multiple low-rise commercial/retail and residential buildings, including several auto repair shops and equipment storage yard.

Summary of the Remedial Investigation

A Remedial Investigation was completed at the Site from March 12, 2019 through June 7, 2019, with a supplemental investigation for emerging contaminants completed in June and July 2020. The results of the investigations are documented in a Remedial Investigation Report dated September 2020. The goals of the Remedial Investigation were to define the nature and extent of

contamination in soil, groundwater and any other impacted media; to identify the source(s) of the contamination; to assess the impact of the contamination on public health and/or the environment; and to provide information to support the development of a Remedial Work Plan to address the contamination.

Activities completed under the RI:

- Installed twenty-one (21) soil borings and collected forty-five (45) soil samples for laboratory analysis of volatile organic compounds (VOCs), semi-volatile organic compounds (SVOCs), herbicides, pesticides, organophosphate pesticides, PCBs, metals, 1,4-dioxane and PFAS compounds;
- Installed seven groundwater monitoring wells (MW1 through MW3 and MW2001 through MW2004) and collected eight groundwater samples (7 from temporary wells and one from a previously existing well [MW4]) for laboratory analysis of VOCs, SVOCs, pesticides, PCBs, metals (total and dissolved), 1,4-dioxane, and PFAS compounds;
- Installed six soil gas implants and collected six soil gas samples for laboratory analysis of VOCs.

The results of sampling performed during this RI identified an area of petroleum-related VOCs at the northwestern portion of the Site, with the highest concentrations in the vicinity of soil boring SB5. This area represents the location of several historic auto repair shops, as well as a potential UST identified during the geophysical survey. This impacted area is estimated to be approximately 40 square feet (SF). Total petroleum VOCs in SB5 reached a maximum of 291,000 µg/Kg at the 0-2 ft interval, and decreased to non-detectable levels at the water table at 16-18 ft. A small area of petroleum contamination was also identified at boring F3 (5-7') Total VOCs in sample F3 (6-8') were 2,331 µg/Kg and are likely attributable to the presence of heterogeneous fill material.

Historic fill materials have been identified across the Site to depths 6 to 10 feet below grade. Depending on location, the historic fill material contains SVOCs, pesticides, PCBs, and one or more metals including arsenic, barium, beryllium, cadmium, chromium, copper, lead, mercury, nickel, and zinc above unrestricted and/or restricted use SCOs. Most notably were pesticide

impacts in samples SB5 (0-2'), F1 (5-7') and F3 (5-7') and metals impacts in samples SB1 (0-2'), F3 (0-2'), F3 (6-8') and F4 (0-2').

Low levels of PFAS compounds were detected in six of the 12 soil samples analyzed, with concentrations ranging from non-detect to 2.2 ug/kg.

The chlorinated VOC tetrachloroethene (PCE) was detected above its NYSDEC AWQ in each of the samples collected across the Site. However, as PCE was not detected in site soils, with the exception of one shallow sample, the presence of PCE appears attributable to an off-site source of generally degraded regional water quality.

The pesticide dieldrin was detected in each of the four groundwater samples collected/analyzed, with concentrations exceeding the AWQ in three samples. This compound was detected in shallow to intermediate soil samples but was not identified in any of the deep soil samples.

Moderate levels of PFAS compounds were detected in each of the five groundwater samples collected from the site. The combined PFOA and PFOS concentration measured in these samples ranged from 89.3 ng/L (MW4) to 186 ng/L (MW2003) which are above the USEPA Health Advisory Level of 70 ng/L and the NYSDEC emerging contaminant screening level of 10 ng/L.

Qualitative Human Health Exposure Assessment

The qualitative exposure assessment identified potential completed routes of exposure to construction workers and remediation workers through inhalation, ingestion and dermal contact of petroleum related VOCs, pesticides, SVOCs, heavy metals and PFAS compounds during excavation activities. The Health and Safety Plan prepared for the Site identifies such exposures and provides instructions for on-Site workers to minimize potential exposure.

No on or off-site potential for vapor impacts were identified.

Potential environmental impacts through the groundwater to surface water discharge were considered unlikely based on the concentrations of VOCs in groundwater.

Summary of the Remedy

The remedy recommended for the Site is a Track 1 alternative (Alternative 1) which consists of the removal of all on-Site soil which exceeds Unrestricted Use SCOs and the removal of impacted groundwater. It is expected that a Track 1 alternative will require excavation to a minimum depth of 10 feet across the Site, with additional excavation as needed to remove soil/fill with contaminants above Unrestricted Use SCOs. The remedy will include the following items:

1. Removal and disposal of the asphalt cap to allow removal of the soil beneath;
2. Excavation of soil/fill exceeding Track 1 Unrestricted Use SCOs as listed in **Table 1** to a minimum depth of 10 feet across the Site, with additional excavation as needed to meet Track 1 Unrestricted Use SCOs;
3. Shoring and support of excavation work as required or as necessary to facilitate the excavation;
4. Screening for indications of contamination (by visual means, odor, and monitoring with PID) of all excavated soil during any intrusive Site work;
5. Collection and analysis of end-point samples to evaluate the performance of the remedy with respect to attainment of Track 1 Unrestricted Use SCOs;
6. Appropriate off-Site disposal of all material removed from the Site in accordance with all Federal, State and local rules and regulations for handling, transport, and disposal;
7. Import of materials to be used for backfill and cover in compliance with: (1) chemical limits and other specifications included in **Table 1**, (2) all Federal, State and local rules and regulations for handling and transport of material;
8. As part of the Track 1 remedy, a post-construction soil vapor intrusion evaluation will be completed. The evaluation will include a provision for implementing actions recommended to address exposures related to soil vapor intrusion within the new building;
9. If Track 1 Unrestricted Use SCOs are not achieved, a composite cover system consisting of the concrete building slab will be constructed;
10. If Track 1 cleanup is not achieved, implementation of a Site Management Plan (SMP) for long term maintenance of the Engineering Controls.

11. If Track 1 cleanup is not achieved, an Environmental Easement will be filed against the Site to ensure implementation of the SMP.

The intent of the remedy is to achieve Track 1 Unrestricted Use therefore, no Environmental Easement (EE) or site management is anticipated. If the soil vapor intrusion (SVI) evaluation is not completed prior to completion of the Final Engineering Report (FER), then a Site Management Plan (SMP) and EE will be required to address the SVI evaluation and implement action as needed; if a mitigation or monitoring action is needed, a Track 1 cleanup can only be achieved if the mitigation system or other required action is no longer needed within 5 years of the date of the Certificate of Completion (COC).

Although the goal of the remedy will be to remove all soil exceeding the Track 1 Unrestricted Use SCOs, if Track 1 Unrestricted Use SCOs cannot be achieved including achievement of groundwater and soil vapor remedial objectives, then a Track 2 or Track 4 remedy may result as described above.

REMEDIAL ACTION WORK PLAN

1.0 INTRODUCTION

This Remedial Action Work Plan (RAWP) was prepared on behalf of 126th Street Equities, LLC for the property located at 1840-1856 Park Avenue in the Harlem section of New York, New York 10035 (hereafter referred to as the Site). 126th Street Equities, LLC has applied to the New York State Brownfield Cleanup Program (BCP) as a Participant. An unrestricted use is proposed for the property. When completed, the Site will be redeveloped with a new 18-story mixed-use commercial/ residential building. The proposed development is compatible with the existing M1-6 / R9 zoning. Refer to the Brownfield Cleanup Program (BCP) application for additional details.

This RAWP summarizes the nature and extent of contamination as determined from data gathered during the Remedial Investigation (RI), performed in March-June 2019, and a Supplemental Remedial Investigation performed in June and July 2020. It provides an evaluation of a Track 1 cleanup and other applicable Remedial Action alternatives, their associated costs, and the recommended and preferred remedy. The remedy described in this document is consistent with the procedures defined in DER-10 and complies with all applicable standards, criteria and guidance. The remedy described in this document also complies with all applicable Federal, State and local laws, regulations and requirements. The NYSDEC and New York State Department of Health (NYSDOH) have determined that this Site does not pose a significant threat to human health and the environment. The RI for this Site did not identify fish and wildlife resources.

A formal Remedial Design document will not be prepared.

1.1 SITE LOCATION AND DESCRIPTION

The street address for the Site is 1840-1856 Park Avenue, New York, NY 10035 (**Figure 1**). The Site is located in the Harlem neighborhood of New York (Manhattan) and is comprised of portion of a single tax parcel (Block: 1751, P/O Lot No. 33, formerly Lot Nos. 33, 35, 36, 37, 38, 40, 132, and 137) totaling 9,458 square feet (0.22 acres). The far southern portion of Lot No. 33 having an area of 2,452 ft² is to be excluded from the development project and the scope of this investigation. The Site has approximately 149.92 feet of street frontage along Park Avenue, 75

feet of street frontage along East 127th Street, and 90 feet of Street frontage along East 126th Street (**Figure 2**). The property is currently developed with an asphalt-paved parking lot. No buildings or other structures are present, although chain-link and/or corrugated metal fencing are present along the northern, southern and eastern property boundaries, with access gates leading from East 126th (south) and East 127th Streets (north). Historically the property developed with multiple low-rise commercial/retail and residential buildings, including several auto repair shops and equipment storage yard.

The elevation of the Site is approximately 21 feet above the National Geodetic Vertical Datum (NGVD). The topographic gradient of the surrounding area slopes gently downward to the east. The depth to groundwater beneath the Site is approximately 16-18 feet below grade. Based on measurements made on Site, groundwater flows generally to the east toward Park Avenue.

1.2 CONTEMPLATED REDEVELOPMENT PLAN

The proposed redevelopment project consists of constructing an 18-story mixed-use (commercial/residential) building, with a single basement level. The building will occupy the majority of site footprint, with a paved yard area at the southeastern portion. The cellar level will consist of 7,245 SF of commercial space, utility/mechanical rooms, a bicycle room, restrooms, elevators and stairways. The 1st floor will include 8,917 SF of commercial space, the residential entrance lobby, restrooms, elevators and stairways. The 2nd floor will contain 5,348 SF of commercial space, a bicycle room, utility space, elevators and stairways. The 3rd floor will consist of utility and mechanical space, a tenant laundry, a fitness center, and lounges, including an outdoor recreation area atop the 2nd floor roof. Floors 4 through 18 will consist of 65-studio, 29 1-bedroom and 58 2-bedroom residential apartments, elevators and stairways. The 18th floor will also include a 961 SF indoor recreational space and a 670 SF outdoor recreation area. Rooftop mechanical and stair penthouses will be located atop the 18th floor level, including a 3,687 SF outdoor recreation area. The proposed building will have a base height (18th floor rooftop) of 204' 8", with a small set back at (8th floor rooftop) 102' 8", and a total height (top of mechanical penthouse bulkhead) of 228 feet. The depth of the basement floor level will be 10 feet below the existing grade, with an additional 5 feet of soil excavated to accommodate the elevator pit. The proposed building will have a footprint of 10,899 SF.

1.3 DESCRIPTION OF SURROUNDING PROPERTY

The property is currently zoned as a paired M1-6 / R9 special purpose district. The Special Mixed Use District was established to encourage investment in, and enhance the vitality of, existing neighborhoods with mixed residential and industrial uses in close proximity and create expanded opportunities for new mixed use communities. New residential and non-residential uses (commercial, community facility and light industrial) can be developed as-of-right and be located side-by-side or within the same building. Pairing an M1 district with an R3 through R10 district (e.g. M1-2/R6) ensures a balanced variety of uses.

According to the NYC DCP, M1 districts are often buffers between M2 or M3 districts and adjacent residential or commercial districts. M1 districts typically include light industrial uses, such as woodworking shops, repair shops, and wholesale service and storage facilities.

Surrounding land use (**Figure 3**) consists primarily of residential and mixed-use (commercial/retail and residential) properties. East 127th Street is to the north, followed by the Promise Academy Charter School (80 East 128th Street) with East 128th Street beyond. East 126th Street is to the south, followed by a public parking lot (1824 Park Avenue), with a commercial office building beyond. Park Avenue and elevated Metro-North railroad tracks are to the east, followed by the Association to Benefit Children, a parking lot and a commercial building. Residential apartment buildings are to the west (59 East 126th Street and 78 East 127th Street), followed by additional apartment buildings. There are three schools located within one-quarter mile of the project Site

2.0 DESCRIPTION OF REMEDIAL INVESTIGATION FINDINGS

The field work portion of the Remedial Investigation was conducted by EBC from March 12, 2019 through June 7, 2019, with the Supplemental Investigation field work conducted on June 30 and July 1, 2020. The investigation is summarized in the sections below. Further details are provided in the Remedial Investigation Report (EBC, September 2020).

2.1 SUMMARY OF REMEDIAL INVESTIGATIONS PERFORMED

2.1.1 Soil Sampling

Soil sampling was performed at a total of 21 locations between March 12, 2019 and July 1, 2020, to identify source areas and to obtain general soil quality information present at the Site.

Soil borings were collected in continuous five-foot intervals to terminal depths of 10 to 20 feet below grade. For the borings completed in March 2019, two samples were retained for analysis: one from the 0 to 2 foot interval and one from the 16 to 18 foot interval, with the deeper sample representing the zone immediately below the proposed basement level. For the borings completed on June 7, 2019, two samples were also collected from each boring: one from the 0 to 2 foot interval and one from either the 5 to 7 foot or 6 to 8 foot interval for the petroleum delineation area or the 8 to 10 foot interval for the fill delineation area. For the borings completed on June 30, 2020, two samples were retained from each boring for analysis: one from the 0 to 2 foot interval and one from the 15 to 17 foot interval, with the deeper sample representing the zone immediately above the water table.

Soil recovered from each soil boring was field screened by an environmental professional for the presence of volatile organic compounds (VOCs) with a photo-ionization detector (PID) and visually inspected for evidence of contamination.

Forty-five (45) soil samples were retained for analysis from the 21 soil boring locations, including two duplicate samples. Samples were collected in pre-cleaned, laboratory supplied glassware, stored in a cooler with ice and submitted for analysis to Phoenix Environmental Laboratories (Phoenix) of 587 East Middle Turnpike, Manchester, CT 06040, a New York State

ELAP certified environmental laboratory (ELAP Certification No. 11301). Samples were analyzed for one or more of the following analyses depending on boring location and depth: VOCs (USEPA Method 8260), SVOCs (USEPA Method 8270), TAL metals (USEPA Methods 6010/7471), and pesticides and polychlorinated biphenyls (PCBs) (USEPA Method 8081/8082). The eight (8) samples collected for supplemental petroleum-impact delineation were analyzed for VOCs and SVOCs only. Soil sample analytical results were compared to NYSDEC Part 375.6 Unrestricted Use and Residential Restricted SCOs. Samples collected during the June-July 2020 supplemental investigation were analyzed for 1,4-dioxane (USEPA Method 8270 SIM) and PFAS compounds (USEPA Method 537). Soil boring locations are shown in **Figure 4**.

2.1.2 Monitoring Wells

Three temporary monitoring wells (MW1 through MW3) were installed at the Site in March 2018. Four additional temporary monitoring wells (MW2001 through MW2004) were installed at the Site in June 2020. Each of the seven temporary monitoring wells were installed at a depth of approximately 25 feet below grade with 10 feet of 0.010 PVC well screen set to intersect the water table. In addition, one previously existing monitoring well (MW4) was also sampled in March 2018.

A No.00 morie filter-pack sand filled the annulus surrounding the screen within two feet above the top of the screen. A one-foot hydrated bentonite seal was then placed on top of the filter sand and the remainder of the borehole was backfilled to grade. Following installation, each of the wells were surveyed to determine relative casing elevation to the nearest 0.01 ft and horizontal position to the nearest 0.1 ft. Monitoring well locations are identified in **Figure 5**.

Prior to sampling events in March 2018 and July 2020, synoptic rounds of depth-to-groundwater (DTW) measurements were obtained from the monitoring wells to determine the water table elevation and to calculate the volume of standing water in the well. The depth to groundwater ranged from 15.07 to 17.23 feet below grade.

2.1.3 Samples Collected

A summary of the sampling performed during the RI is provided in **Table 2**.

Soil Samples

A total of 45 soil samples were collected from twenty-one (21) soil sampling locations for laboratory analysis. Samples were analyzed for one or more of the following analyses depending on boring location and depth: VOCs (USEPA Method 8260), SVOCs (USEPA Method 8270), TAL metals (USEPA Methods 6010/7471), and pesticides and polychlorinated biphenyls (PCBs) (USEPA Method 8081/8082). The eight (8) samples collected for supplemental petroleum-impact delineation were analyzed for VOCs and SVOCs only. Samples collected during the June-July 2020 supplemental investigation were analyzed for 1,4-dioxane (USEPA Method 8270 SIM) and PFAS compounds (USEPA Method 537).

Groundwater Samples

Groundwater samples were obtained from all seven temporary and one previously existing monitoring well. Groundwater samples collected from the wells in March 2018 were analyzed for VOCs / SVOCs (EPA Method 8260/8270), pesticides / PCBs (EPA Method 8081 / 8082), both total and dissolved TAL metals, with one sample also analyzed for PFAS compounds and 1,4-dioxane. Samples collected from the wells in July 2020 were analyzed for 1,4-dioxane (USEPA Method 8270 SIM) and PFAS compounds (USEPA Method 537).

Soil Gas Samples

To assess the presence of VOCs in soil gas beneath the Site, six soil vapor implants were installed at the Site from March 20, 2019. The soil vapor implants (Geoprobe™ Model AT86 series), were constructed of a 6-inch length of double woven stainless-steel wire and installed to a depth of 12 ft below grade using Geoprobe™ equipment. All soil vapor samples were collected over a 2 hr. sampling period. Soil vapor samples were collected in accordance with the procedures as described in section 2.4 of the approved RIR and the *Guidance for Evaluating Soil Vapor Intrusion in the State of New York (NYSDOH 10/06)*. Soil vapor sampling locations are shown on **Figure 5**.

2.1.4 Chemical Analytical Work Performed

Each soil and groundwater sample was placed in pre-cleaned laboratory supplied glassware, and placed in a cooler packed with ice for transport to the laboratory. Laboratory services for soil and

groundwater sample analysis were provided by Phoenix Environmental Laboratories, Inc. of Manchester, Connecticut and Alpha Analytical of Mansfield, Massachusetts, New York State ELAP certified environmental laboratories (ELAP Certification Nos. 11301 and 11148).

Retained soil samples were submitted for laboratory analysis of one or more of the following analyses: VOCs by USEPA Method 8260, SVOCs by USEPA Method 8270, TAL Metals by USEPA Method 6010/7471, pesticides and PCBs by USEPA Method 8081/8082, 1,4-dioxane by USEPA Method 8270 and PFAS compounds by USEPA Method 537.

Groundwater samples from the monitoring wells were analyzed for VOCs / SVOCs by USEPA Method 8260/8270, TAL metals by USEPA Method 6010/7471, pesticides/PCBs by USEPA Method 8081/8082, 1,4-dioxane by USEPA Method 8270 SIM and PFAS compounds by USEPA Method 537. Soil gas samples were analyzed for VOCs by USEPA Method TO-15.

2.1.5 Documentation

A map showing the locations of the soil borings is provided in **Figure 4**. The locations of the monitoring wells and soil gas sample collection points are provided in **Figure 5**. The results of soil, groundwater and soil gas samples collected during the RI are summarized in **Tables 3 through 16**. Below is a summary of the RI findings.

The results of sampling performed during this RI identified an area of petroleum-related VOCs at the northwestern portion of the Site, with the highest concentrations in the vicinity of soil boring SB5. This area represents the location of several historic auto repair shops, as well as a potential UST identified during the geophysical survey. This impacted area is estimated to be approximately 40 SF. Total petroleum VOCs in SB5 reached a maximum of 291,000 µg/Kg at the 0-2 ft interval, and decreased to non-detectable levels at the water table at 16-18 ft. A small area of petroleum contamination was also identified at boring F3 (6-8') Total VOCs in sample F3 (6-8') were 2,331 µg/Kg, and are likely attributable to the presence of heterogeneous fill material.

Historic fill materials have been identified across the Site to depths 6 to 10 feet below grade. Depending on location, the historic fill material contains SVOCs, pesticides, PCBs, and one or more metals including arsenic, barium, beryllium, cadmium, chromium, copper, lead, mercury, nickel, and zinc above unrestricted and/or restricted use SCOs. Most notably were pesticide impacts in samples SB5 (0-2'), F1 (5-7') and F3 (6-8') and metals impacts in samples SB1 (0-2'), F3 (0-2'), F3 (6-8') and F4 (0-2').

Low levels of PFAS compounds were detected in six of the 12 soil samples analyzed, with concentrations ranging from non-detect to 2.2 ug/kg.

The chlorinated VOC tetrachloroethene (PCE) was detected above its NYSDEC AWQ in each of the samples collected across the Site. However, as PCE was not detected in site soils, with the exception of one shallow sample, the presence of PCE appears attributable to an off-site source of generally degraded regional water quality.

The pesticide dieldrin was detected in each of the four groundwater samples collected/analyzed, with concentrations exceeding the AWQ in three samples. This compound was detected in shallow to intermediate soil samples, but was not identified in any of the deep soil samples.

Moderate levels of PFAS compounds were detected in each of the five groundwater samples collected from the site. The combined PFOA and PFOS concentration measured in these samples ranged from 89.3 ng/L (MW4) to 186 ng/L (MW2003) which are above the USEPA Health Advisory Level of 70 ng/L.

2.2 SIGNIFICANT THREAT

Based upon a review of the RI Report, the NYSDEC and NYSDOH have determined that the Site does not pose a significant threat to human health and the environment. Notice of that determination will be included in the upcoming remedial action start fact sheet.

2.3 SITE HISTORY

2.3.1 Past Uses and Ownership

The Site is currently owned by 126th Street Equities, LLC. The Site is currently undeveloped and surrounded with an 8-ft high construction fence.

The Site was comprised of ten small tax parcels, nine of which fronted east along Park Avenue, with the tenth fronting south, along E. 126th Street, by 1896. Each of the parcels was developed with a single 4-story building occupying the majority of the parcel footprint, with a small rear yard area. The use of the buildings was not identified in 1896, although each was noted to be mixed-use (retail/residential) by 1911, including a Chinese laundry. By 1939, a small 1-story auto repair shop was present at the northwestern corner of the property (former Lot No. 40). The auto repair facility was demolished by 1951. The two southernmost parcels (one along Park Avenue [former Lot No. 33] and the other along E. 126th Street [former Lot No. 132]) were undeveloped by 1968. Between 1979 and 1980, the building at 1846 Park Avenue (former Lot No. 36) was demolished. The 1854 and 1856 Park Avenue buildings (former Lot No. 40) were demolished by 1986. Between 1991 and 1992, the northwestern corner (former Lot No. 40) was developed with a small 1-story auto repair shop. The remaining commercial/retail and residential buildings were demolished between 1996 and 2001, with the auto repair shop demolished circa 2008. Central portions of the property appear to have been utilized as an equipment storage yard through the mid-2010s (former Lot Nos. 35-37), when the property was converted to the existing parking lot facility. A listing of previous owners for the property is as follows:

Previous Owners (Lots 33, 34, 35 and 132)

Dates	Name	Comments	Contact Info
From sometime prior to 8/17/1971	Josell Jacknatt Realty Co	Deed	12 Dongan Place, New York, NY
From 8/17/1971 to 4/25/1977	1844 Park Avenue Associates	Deed	Unknown
From 4/25/1977 to 2/25/1980	NYC Department of Finance	Deed (foreclosure)	Room 500, Municipal Building New York, NY
From 2/25/1980 to 7/25/2002	Stephan Friedman	Deed	33 W. Camelback Rd, Phoenix, AZ 85013
From 7/25/2002 to 7/1/2004	Carlton Electric LLC	Deed	210 E. 86 th Street, No. 404, New York, NY 10028
From 7/1/2004 to 8/15/2012	1840-1854 Park Avenue LLC	Deed	1536 Third Avenue, 3 rd Floor, New York, NY 10028
From 8/15/2012 to Present	126 th Street Equities LLC	Deed	316 West 118 th Street, New York, NY 10026

Previous Owners (Lot 36)

Dates	Name	Comments	Contact Info
From sometime prior to 11/22/1966	Kavanagh, C Murray 1846 Park Ave Corp	Deed	Unknown
From 11/26/1966 to 1/20/1976	Maurice Fried	Deed	2515 Davidson Avenue, Bronx, NY
From 1/20/1976 to 5/25/1978	Robert Johnson	Deed	24 West 125 th Street, New York, NY 10027
From 5/25/1978 to 2/25/1980	NYC Department of Finance	Deed (foreclosure)	Room 500, Municipal Building New York, NY
From 2/25/1980 to 10/31/1989	Stephan Friedman	Deed	33 W. Camelback Rd, Phoenix, AZ 85013
From 10/31/1989 to 6/12/2000	Rudolf Gilbert	Deed	One East Camelback Rd, Suite 1100, Phoenix, AZ 85012
From 6/12/2000 to 7/1/2004	Carlton Electric LLC	Deed	210 E. 86 th Street, No. 404, New York, NY 10028
From 7/1/2004 to 8/15/2012	1840-1854 Park Avenue LLC	Deed	1536 Third Avenue, 3 rd Floor, New York, NY 10028
From 8/15/2012 to Present	126 th Street Equities LLC	Deed	316 West 118 th Street, New York, NY 10026

Previous Owners (Lot 37)

Dates	Name	Comments	Contact Info
From sometime prior to 1/15/1972 to 7/9/1974	NYC Department of Finance	Deed (foreclosure)	Room 500, Municipal Building New York, NY
From 7/9/1974 to 11/4/1992	George Rios	Deed	2045 2 nd Avenue, New York, NY 10029
From 11/4/1992 to 12/8/2008	Erling Rohde	Deed	300 W. 108 th Street, New York, NY 10025
From 12/8/2008 to 2/16/2011	Robert Cowan	Deed	53 E. Merrick Road, Freeport, NY 11510
From 2/16/2011 to 8/13/2013	Estate of Erling Rohde	Deed	C/O Michael Singer Esq. 100 Lafayette Street No. 401 New York, NY 10013
From 8/13/2013 to 1/27/2017	191 Equities LLC	Deed	316 West 118 th Street, New York, NY 10026
From 1/27/2017 to Present	126 th Street Equities LLC	Deed	316 West 118 th Street, New York, NY 10026

Previous Owners (Lots 38 and 137)

Dates	Name	Comments	Contact Info
From sometime prior to 1/22/1973	1850-52 Park Ave Realty	Deed	1 Edsam Rd, Valley Cottage, NY
From 1/22/1973 to 6/19/1990	George Rios	Deed	2045 2 nd Avenue, New York, NY 10029
From 6/19/1990 to 12/8/2008	Erling Rohde	Deed	300 W. 108 th Street, New York, NY 10025
From 12/8/2008 to 2/16/2011	Robert Cowan	Deed	53 E. Merrick Road, Freeport, NY 11510
From 2/16/2011 to 8/13/2013	Estate of Erling Rohde	Deed	C/O Michael Singer Esq. 100 Lafayette Street No. 401 New York, NY 10013
From 8/13/2013 to 1/27/2017	191 Equities LLC	Deed	316 West 118 th Street, New York, NY 10026
From 1/27/2017 to Present	126 th Street Equities LLC	Deed	316 West 118 th Street, New York, NY 10026

Previous Owners (Lot 40)

Dates	Name	Comments	Contact Info
From sometime prior to 3/24/1972	1854 Park Avenue Corp.	Deed	2061 Broadway, New York, NY
From 3/24/1972 to 2/1/2000	Alex Flowers	Deed	112-16 21 st Street, Queens Village, NY
From 2/1/2000 to 7/1/2004	Carlton Electric LLC	Deed	210 E. 86 th Street, No. 404, New York, NY 10028
From 7/1/2004 to 8/15/2012	1840-1854 Park Avenue LLC	Deed	1536 Third Avenue, 3 rd Floor, New York, NY 10028
From 8/15/2012 to Present	126 th Street Equities LLC	Deed	316 West 118 th Street, New York, NY 10026

2.3.2 Summary of Previous Reports

Environmental investigations performed at the Site include the following:

- Phase I Environmental Site Assessment, EBC, January 3, 2019.

January 2019 – Phase I Environmental Site Assessment (EBC)

A Phase I Environmental Site Assessment Report was prepared for the Site by EBC in January 2019. The Phase I indicated the Site was originally comprised of ten small tax parcels, nine of which fronted east along Park Avenue, with the tenth fronting south, along E. 126th Street, by 1896. Each of the parcels was developed with a single 4-story building occupying the majority of the parcel footprint, with a small rear yard area. The use of the buildings was not identified in 1896, although each was noted to be mixed-use (retail/residential) by 1911, including a Chinese laundry. By 1939, a small 1-story auto repair shop was present at the northwestern corner of the property. The auto repair facility was demolished by 1951. The two southernmost parcels (one along Park Avenue and the other along E. 126th Street) were undeveloped by 1968. Between 1979 and 1980, the building at 1846 Park Avenue was demolished. The 1854 and 1856 Park Avenue buildings were demolished by 1986. Between 1991 and 1992, the northwestern corner was developed with a small 1-story auto repair shop. The remaining commercial/retail and residential buildings were demolished between 1996 and 2001, with the auto repair shop demolished circa 2008. Central portions of the property appear to have been utilized as an equipment storage yard through the mid-2010s, when the property was converted to the existing parking lot facility.

The Phase I Report revealed the following recognized environmental condition (REC) in connection with the Site:

- Information obtained from multiple historic sources indicates that the northwestern portion of the property was utilized for auto repairs. Although, the subject property was not cross-referenced on any regulatory database indicative of hazardous waste generation, petroleum storage or spills, there is a potential for historic auto repair operations to have impacted the subsurface. As such, the historic use of the property is considered a REC.

2.4 GEOLOGICAL CONDITIONS

According to the USGS Ground Water Atlas of the United States, New York region (1995), the site is located within the New England Physiographic Province, which is underlain by metamorphic and sedimentary rocks of the Cambrian and Ordovician period. The bedrock that underlies much of the island of Manhattan is known as the Manhattan schist, which is a formation of mica schist rock that is well suited for the foundations of tall buildings, and in fact, the two large concentrations of skyscrapers on the island occur where the formation is close to the surface.

Subsurface soils at the Site consists of dark brown silty sand, mixed with fill material (brick and wood fragments) from the surface to approximately 6 and 10 feet below grade, underlain by brown fine to medium-grained sand with mixtures of silt and coarse sand to a depth of at least 20 feet below grade.

Groundwater at the Site is present under water table conditions at a depth of 15 to 17 feet below grade. Based upon on-site measurements, groundwater flow is generally to the east towards Park Avenue (**Figure 6**).

Considering the poor quality of groundwater in the area, including high levels of iron, sodium and magnesium associated with saltwater intrusion and impacts from petroleum and industrial solvents related to the former commercial / industrial use of the area, there is no anticipated future groundwater use.

2.5 CONTAMINATION CONDITIONS

2.5.1 Conceptual Model of Site Contamination

VOC contamination at the Site consists of high concentrations of petroleum-related VOCs in soil at the northwestern portion of the property (surrounding boring SB5). This area is with the location of historic auto repair facilities and a potential UST. This area appears limited in horizontal extent as evidenced by samples collected from borings P1 through P4. As such, it appears likely that these impacts are related to surface spills which have occurred over time and/or a release from the potential UST.

The SVOCs, pesticides and metals, as well as limited VOCs and PCBs reported in soil across the Site are related to the presence of documented fill materials, which was mostly likely placed onsite during to backfilling of former building foundations/basements previously demolished at the Site.

Groundwater impacted with low-levels of chlorinated VOCs, specifically PCE, appear attributable to an off-site source and/or degraded regional groundwater quality given the absence of this compound in Site soils.

The compounds documented to be present in Site soils were not detected in groundwater, with the exception of the pesticide dieldrin. As such, it is possible that the presence of this compound in groundwater is related to it migrating through Site soils; however, it was not identified in any of the deep soil samples collected/analyzed.

2.5.2 Description of Areas of Concern

Historic fill material has been identified across the Site to depths as great as ten (10) feet below grade. Depending on location, the historic fill material contains one or more VOCs, metals, pesticides and polycyclic aromatic hydrocarbons (PAHs) above Unrestricted Use and/or Restricted Residential SCOs. These include acetone, n-butyl benzene, toluene, benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene, dibenzo(a,h)anthracene, indeno(1,2,3-cd)pyrene, 4,4-DDD, 4,4-DDE, 4,4-DDT, a-chlordane,

dieldrin, PCB Alchor-1245, barium, beryllium, cadmium, chromium, copper, lead, mercury, nickel, and zinc.

2.5.3 Soil/Fill Contamination

Summary of Soil/Fill Data

Soil sample results from the RI are summarized in **Tables 3-7**. Further information on soil sample collection, handling and analysis can be found in the RI Report (EBC, September 2020).

Comparison of Soil/Fill with SCGs

Table 8 shows sample results above Track 1 Unrestricted SCOs for all overburden soil at the Site. **Figure 7** is a spider map which shows soil sampling locations and summarizes shallow and deep sample results above Track 1 Unrestricted SCOs for all overburden soil.

2.5.4 On-Site and Off-Site Groundwater Contamination

Summary of Groundwater Data

The results of groundwater samples collected during the RI are summarized in **Tables 9-14**. Further information on groundwater sample collection, handling and analysis can be found in the RI Report (EBC, September 2020).

Comparison of Groundwater with SCGs

Sample results above groundwater standards in monitoring wells prior to the remedy are shown in **Table 15**. Spider maps which show groundwater sampling locations and summarize results above GA groundwater standards prior to the remedy are shown in **Figure 8**.

2.5.5 On-Site and Off-Site Soil Vapor Contamination

Summary of Soil Vapor Data

A table of soil vapor data collected prior to the remedy is shown in **Table 16**. Further information on soil gas sample collection, handling and analysis can be found in the RI Report (EBC, September 2020). Soil vapor results are posted on **Figure 9**.

2.5.6 Environmental and Public Health Assessments

Qualitative Human Health Exposure Assessment

The objective of the qualitative exposure assessment under the Brownfields Cleanup Program (BCP) is to identify potential receptors to the contaminants of concern (COC) that are present at, or migrating from, the Site. The identification of exposure pathways describes the route that the COC takes to travel from the source to the receptor. An identified pathway indicates that the potential for exposure exists; it does not imply that exposures actually occur. An exposure pathway has five elements; a contaminant source, release and transport mechanisms, point of exposure, route of exposure and a receptor population.

The potential exposure pathways identified below, represent both current and future exposure scenarios.

Contaminant Source

Source areas of the Site include petroleum-related VOCs in soil at the northwestern portions of the Site, in the vicinity of boring SB-5. The impact in this area, appears limited, as it did not extend to the deep soil sample (16-18') at this location, nor were impacts identified in samples from boring P1 through P4.

Elevated levels of SVOCs, pesticides, metals, and PCBs are also present in fill materials throughout the Site, extending to depths of approximately 8 to 10 feet.

Contaminant Release and Transport Mechanism

Petroleum contamination is present in soil at the northwestern portion of the Site. However, these impacts appear limited to a small area of shallow to intermediate soils, with no direct contact to groundwater. No petroleum impacts to groundwater were identified.

Groundwater impacts are relatively low and limited one chlorinated VOC, detected at relatively equal concentrations across the Site. This limited migration of impacted water across the Site, which is attributable to an offsite source or degraded regional groundwater quality. There does

not appear to be any migration of petroleum or chlorinated VOCs in soil vapor either on the property or migrating from the property.

Point of Exposure, Route of Exposure and Potentially Exposed Populations

Potential On-Site Exposures: Remediation workers and construction workers engaged in the excavation of impacted and non-impacted soil/fill material at the site may be exposed to petroleum VOCs, SVOCs, PCBs, pesticides and heavy metals through several routes. Workers excavating impacted soil may be exposed through inhalation, ingestion and dermal contact. In addition, should deeper excavation, be conducted, then workers may also be exposed to impacted groundwater. A site-specific Health and Safety Plan has been developed to identify and minimize the potential hazards to on-site workers. Site trespassers could also be exposed to impacted soil during excavation; however, security measures including an 8 ft. high construction fence and 24 hr. security will minimize potential exposure through this route. Potential vapor intrusion does not appear to be a significant concern for residents of the planned construction. In addition, remediation of the source areas is expected to further reduce or eliminate this potential.

Potential Off-Site Exposures: Off-Site residents could also be exposed to dust or vapors during the excavation of impacted soil/fill material. A site-specific Community Air Monitoring Plan has been developed to identify and minimize the potential for off-site exposure to residents through continuous air monitoring during excavation activity.

The entire area is serviced by the New York City Water System which distributes water from the Croton Reservoir system. Since there are no public or private potable supply wells in the area, exposure from contact with tap water is not a concern. Further, the use of groundwater underlying the Site is prohibited under NYC Health Department regulations as potable wells cannot be installed in areas where municipally supplied water is available. Off-site exposure is therefore limited to vapor intrusion from light end petroleum VOCs. This potential will be further reduced following the removal of the source are under the planned redevelopment of the Site.

Soil vapor samples and collected/analyzed as part of this investigation did not contain elevated concentrations of petroleum or chlorinated VOCs. As such, no impacts related to the offsite migration of vapors is expected.

Potential Off-Site Environmental Impacts: Since VOCs in groundwater may be migrating beneath the Site at low concentrations in a generally eastern direction, the groundwater to surface water discharge pathway was evaluated. The Harlem River is located approximately one-quarter mile to the northeast at its closest point. Based upon the concentrations of contaminants currently in groundwater beneath the Site and the documented flow direction to the east, there are no expected impacts to surface water environments from contaminants migrating from the Site.

2.6 REMEDIAL ACTION OBJECTIVES

Based on the results of the Remedial Investigation, the following Remedial Action Objectives (RAOs) have been identified for this Site.

2.6.1 Groundwater

RAOs for Public Health Protection

- Prevent ingestion of groundwater containing contaminant levels exceeding drinking water standards.
- Prevent contact with, or inhalation of, volatiles from contaminants in groundwater.

2.6.2 Soil

RAOs for Public Health Protection

- Prevent ingestion/direct contact with contaminated soil.
- Prevent inhalation of, or exposure to, contaminants volatilizing from contaminants in soil.

RAOs for Environmental Protection

- Prevent migration of contaminants that would result in groundwater or surface water contamination.

2.6.3 Soil Vapor

- Mitigate potential impacts to public health resulting from existing, or the potential for, soil vapor intrusion into the proposed building at a site.

3.0 DESCRIPTION OF REMEDIAL ACTION PLAN

3.1 EVALUATION OF REMEDIAL ALTERNATIVES

The goal of the remedy selection process under the BCP is to select a remedy that is protective of human health and the environment taking into consideration the current, intended and reasonably anticipated future use of the property. The remedy selection process begins by establishing RAOs for media in which chemical constituents were found in exceedance of NYSDEC standards, criteria and guidance values (SCGs). A remedy is then developed based on the following nine criteria:

- Protection of human health and the environment;
- Compliance with SCGs;
- Short-term effectiveness and impacts;
- Long-term effectiveness and permanence;
- Reduction of toxicity, mobility, or volume of contaminated material;
- Implementability;
- Cost effectiveness;
- Community Acceptance; and
- Land use.

The first two criteria are threshold criteria and must be satisfied in order for an alternative to be considered for selection. The remaining seven criteria are balancing criteria which are used to compare the positive and negative aspects of each of the remedial alternatives, provided the alternative satisfies the threshold criteria.

3.2 STANDARDS, CRITERIA AND GUIDANCE (SCG)

A criterion for remedy selection is evaluation for conformance with SCGs that are applicable, relevant and appropriate. Principal SCGs that are applicable, relevant and appropriate for evaluating the alternatives for remediation of this BCP site include the following:

- 29 CFR Part 1910.120 - Hazardous Waste Operations and Emergency Response
- 10 NYCRR Part 67 – Lead
- 6 NYCRR Part 371 - Identification and Listing of Hazardous Wastes April 2020)

- 6 NYCRR Part 372 - Hazardous Waste Manifest System and Related Standards for Generators, Transporters and Facilities (April 2020)
- 6 NYCRR Subpart 374-1 - Standards for the Management of Specific Hazardous Wastes and Specific Types of Hazardous Waste Management Facilities (April 2020)
- 6 NYCRR Part 375 - 6 NYCRR Part 375 Environmental Remediation Programs Subparts 375-1, 375-3 and 375-6 (December 2006)
- 6 NYCRR Part 376 - Land Disposal Restrictions
- 6 NYCRR Part 608 - Use and Protection of Waters
- 6 NYCRR Parts 700-706 - Water Quality Standards (June 1998)
- 6 NYCRR Part 750 through 758 - Implementation of NPDES Program in NYS (“SPDES Regulations”)
- 6 NYCRR Part 375-6 Soil Cleanup Objectives
- NYSDEC Ambient Water Quality Standards and Guidance Values – TOGS 1.1.1;
- NYSDEC DER-10 Technical Guidance for Site Investigation and Remediation - May 2010;
- NYSDEC Draft Brownfield Cleanup Program Guide – May 2004;
- New York State Department of Health (NYSDOH) Generic Community Air Monitoring Plan
- NYS Waste Transporter Permits – 6 NYCRR Part 364;
- NYS Solid Waste Management Requirements – 6 NYCRR Part 360.
- TAGM 3028 - "Contained In" Criteria for Environmental Media: Soil Action Levels (August 1997)
- DER-23 / Citizen Participation Handbook for Remedial Programs, January 2010
- OSWER Directive 9200.4-17 - Use of Monitored Natural Attenuation at Superfund, RCRA Corrective Action, and Underground Storage Tank Sites (November 1997)

Additional regulations and guidance are applicable, relevant, and appropriate to the remedial alternatives and will be complied in connection with implementation of the remedial program; however, the list above is intended to represent the principal SCGs which should be considered in evaluating the remedial alternatives for the BCP site.

Conformance with the appropriate standards for remediation of contaminated soil is an important criterion in evaluating the remedial alternatives for the BCP site. Presently, in New York State 6 NYCRR Part 375 establishes the primary SCGs associated with remediation of contaminated soil at sites which are in the BCP. If proposing remediation pursuant to a Track other than Track 1 (Unrestricted Use), 6 NYCRR Part 375 requires evaluation of at least one remedial alternative pursuant to Track I (Unrestricted Use) and one other alternative developed by the applicant for the proposed use of the BCP site. The remedial alternatives presented in Section 3.3 of this work plan have been prepared in conformance with this requirement.

3.3 ALTERNATIVES ANALYSIS

The goal of the remedy selection process under the BCP is to select a remedy that is protective of human health and the environment taking into consideration the current, intended and reasonably anticipated future use of the property. The remedy selection process begins by establishing RAOs for media in which chemical constituents were found in exceedance of NYSDEC standards, criteria and guidance values (SCGs). A remedy is then developed based on the following nine criteria:

- Protection of human health and the environment;
- Compliance with SCGs;
- Short-term effectiveness and impacts;
- Long-term effectiveness and permanence;
- Reduction of toxicity, mobility, or volume of contaminated material;
- Implementability;
- Cost effectiveness;
- Community Acceptance; and
- Land use.

The following is a detailed description of the alternatives analysis and remedy selection to address impacted media at the Site. This analysis was prepared in accordance with 6 NYCRR Part 375-1.8(f) and Part 375-3.8(f) and Section 4.3(c) of NYSDEC DER-10. As required, a minimum of two remedial alternatives (including a Track 1 scenario) are evaluated, as follows:

- Alternative 1 - Track 1, remediation of all soils above bedrock to Unrestricted Use criteria. This would include removal of all underground storage tanks (if present), excavation to a minimum depth of 10 feet across the Site to remove historic fill and additional excavation to remove deeper impacted areas as needed to meet Unrestricted Use SCOs. This alternative does not allow the use of long-term Institutional/Engineering Controls to address impacted media or prevent exposures which may be required beneath the new building. A SSDS is not required for this alternative due to the low levels of petroleum and CVOC compounds reported in soil gas during the RI. As part of the Track 1 remedy, a post-construction soil vapor intrusion evaluation will be completed. The evaluation will include a provision for implementing actions recommended to address exposures related to soil vapor intrusion within the new building.
- Alternative 2 - Track 2, remediation of all soils to Restricted Residential criteria to a depth of 15 feet below grade, with removal of any additional soils below 15 feet which are a source of contamination to the groundwater. This alternative would require many of the same elements as the Track 1 alternative including removal of all underground storage tanks (if present) and excavation/removal of historic fill. This alternative will likely require the same amount of excavation as Alternative 1 to meet SCOs since fill material was only encountered to a depth of 9-10 feet below grade. This alternative does not allow the use of long-term Institutional/Engineering Controls to meet SCOs. Long-term Institutional/ Engineering Controls are allowed to address or prevent exposures from other impacted media however, such as soil gas. This alternative is provided as a contingency in the event that Track 1 Unrestricted Use SCOs cannot be met. Since both Alternative 1 and Alternative 2 require excavation to remove fill materials, Alternative 2 has been added as a contingency in the event that Alternative 1 cannot be achieved for non-COC parameters. A SSDS is not required for this alternative due to the low levels of petroleum and CVOC compounds reported in soil gas during the RI. However, a post-construction soil vapor intrusion evaluation will need to be completed, including a provision for implementing actions recommended to address exposures related to soil vapor intrusion within the new building. This alternative would require an environmental easement.

- Alternative 3 - Track 4, remediation of all soils to site specific SCOs. This alternative would require many of the same elements as Alternatives 1 and 2 including removal of the USTs and excavation of historic fill material. Alternative 3 allows for long term remediation of deep source material impacting groundwater. Since this alternative allows the use of long-term Institutional/Engineering Controls to meet soil cleanup objectives and to address or prevent exposures from other impacted media such as soil gas, it is presented as a contingency to Alternative 2 in the event that on-going engineering controls are required to meet soil SCOs or if excavation is not completed to the depth required to meet Track 2. A SSDS is not required for this alternative due to the low levels of petroleum and CVOC compounds reported in soil gas during the RI. However, a post-construction soil vapor intrusion evaluation will need to be completed, including a provision for implementing actions recommended to address exposures related to soil vapor intrusion within the new building. In addition, this alternative will require an environmental easement and a Site Management Plan.

3.4 REMEDIAL ALTERNATIVE 1

The following sections provide an evaluation of Alternative 1 based on the nine evaluation criteria as previously discussed.

3.4.1 Overall Protection of Human Health and the Environment

Alternative 1 will be protective of human health and the environment by removing all historic fill material at the Site. The potential for human and environmental exposure to these constituents on-Site will be eliminated by excavation of all soils with parameters in excess of Unrestricted Use criteria, disposing of excavated materials off-Site, and backfilling as needed with certified clean fill or virgin mined materials.

Potential post-remediation exposures to on-Site residents from soil vapors are not expected to require the operation of SSD systems. Additionally, a water proofing membrane/vapor barrier will be installed as part of the building construction. Groundwater use may be restricted at the Site based upon local institutional controls given the generally poor quality of groundwater in the area. Finally, as part of the Track 1 remedy, a post-construction soil vapor intrusion evaluation

will be completed. The evaluation will include a provision for implementing actions recommended to address exposures related to soil vapor intrusion within the new building.

During remedial and construction activity workers and area residents may be exposed to impacted soil and vapors. Worker exposure to soil and vapors will be minimized through implementation of a Health and Safety Plan. Exposures to area residents from dust and/or vapors will be minimized through the use of engineering controls and through implementation of a Community Air Monitoring Plan (CAMP).

3.4.2 Compliance with Remedial Goals, SCGs and RAOs

Alternative 1 will achieve compliance with the remedial goals, SCGs and RAOs for soil through source removal to Track 1 Unrestricted Use cleanup levels. SCGs for groundwater will also be achieved as groundwater is not impacted by site related contaminants. Compliance with SCGs for soil vapor is expected following completion of the remedial action.

3.4.3 Long-Term Effectiveness and Permanence

Alternative 1 achieves long term effectiveness and permanence by permanently removing and/or remediating all soils affected by Site contaminants or historic fill materials. Under this Alternative, risk from soil impacts, soil vapor intrusion, and groundwater will be eliminated. Alternative 1 will continue to meet RAOs for soil, groundwater, and soil vapor in the future, providing a permanent long-term solution for the Site.

3.4.4 Reduction in Toxicity, Mobility or Volume through Treatment

Alternative 1 will permanently eliminate the toxicity, mobility, and volume of contaminants from on-Site soil by meeting Unrestricted Use SCOs through excavation and off-site disposal during redevelopment. The removal/remediation of on-Site soil will also reduce the toxicity, mobility, and volume of contaminants in soil vapor.

3.4.5 Short-Term Effectiveness

There is the potential for short-term adverse impacts and risks to workers, the community, and the environment during the implementation of Alternative 1. Short-term exposure to on-site workers during excavation and loading activities will be addressed with a HASP and mitigated

through the use of personal protective equipment, monitoring and engineering controls. Potential short-term exposure to the surrounding community will be addressed through the use of odor and dust-suppression techniques and through the implementation of a CAMP which will require air monitoring activities during all excavation and soil disturbance activities.

Other potential impacts to the community such as construction-related noise, vibrations and traffic, will be controlled and regulated under the terms of the NYC Department of Buildings issued building permit, which can place a Stop Work Order on the property for unsafe conditions, community impacts or violation of the terms and conditions of the permit. Decontamination procedures of equipment, including trucks transporting soil to off-site disposal facilities, will minimize the potential for impacted soil to be dispersed beyond the Site boundary. A truck traffic plan has also been prepared to minimize disturbance to the local roads and community.

3.4.6 Implementability

The techniques, materials and equipment to implement Alternative 1 are readily available and have been proven effective in remediating the contaminants associated with the Site. Excavation for the remediation of soils and groundwater is a "low tech" and reliable method which has a long and proven track record on the remediation of hazardous waste and petroleum spill sites.

3.4.7 Cost

Costs associated with Alternative 1 are estimated at approximately \$ 923,381. This cost estimate includes the following elements and assumptions:

- Removal of underground storage tanks encountered during Site excavation;
- Removal and disposal of the asphalt cap;
- Excavate historic fill material to 10 ft across the Site with additional excavation as needed to achieve Track 1 Unrestricted Use SCOs;
- Shoring to accommodate excavation to a depth of 10 ft;
- Disposal of approximately 4,203 cy of historic fill material and soil;
- Waste characterization and endpoint verification sampling and analysis;
- HASP and CAMP monitoring for the duration of the remedial activities; and

- Preparation of a Final Engineering Report.

3.4.8 Compatibility with Land Use

The proposed redevelopment of the Site is compatible with its current zoning. Following remediation, the Site will meet the objectives for Unrestricted Use which is appropriate for its planned community use. A local groundwater use restriction will be applicable to prevent future exposure to affected groundwater.

3.4.9 Community Acceptance

This RAWP was subject to a 45-day public comment period to determine if the community had comments on the presented remedial alternatives and selected remedy. As no questions/comment regarding the Site were raised regarding remedial options for the Site, Alternative 1, is be considered to be acceptable to the community.

3.5 REMEDIAL ALTERNATIVE 2

The following sections provide an evaluation of Alternative 2 based on the nine evaluation criteria as previously discussed.

3.5.1 Overall Protection of Human Health and the Environment

Alternative 2 will be protective of human health and the environment by eliminating constituents in soil related to petroleum and historic fill. The potential for human and environmental exposure to these constituents on-site will be eliminated by excavation/remediation of all petroleum contaminated soil and historic fill soils with parameters in excess of residential criteria within the top 15 feet (minimum of 10 feet based upon the depth to fill identified across the site), disposing of excavated materials off-site and backfilling as needed with certified clean fill, virgin mined materials or recycled concrete materials from a NYSDEC permitted recycling facility.

Potential post-remediation exposures to on-Site occupants from soil vapors are not expected to require the operation of SSD systems. Additionally, a water proofing membrane/vapor barrier will be installed as part of the building construction. Groundwater use will be restricted at the Site until groundwater quality recovers. Finally, a post-construction soil vapor intrusion

evaluation will need to be completed, including a provision for implementing actions recommended to address exposures related to soil vapor intrusion within the new building.

During remedial and construction activity, workers and area residents may be exposed to impacted soil and vapors. Worker exposure to soil and vapors will be minimized through implementation of a HASP. Exposures to area residents from dust and or vapors will be minimized through the use of engineering controls and through implementation of a CAMP.

3.5.2 Compliance with Remedial Goals, SCGs and RAOs

Alternative 2 will achieve compliance with the remedial goals, SCGs and RAOs for soil through excavation to 10 feet to Restricted Residential cleanup levels for the top 15 feet of soil at the site. Compliance with SCGs for groundwater and soil vapor is expected following completion of the remedial action by removal of all impacted soil.

3.5.3 Long-term Effectiveness and Permanence

Alternative 2 achieves long term effectiveness and permanence by permanently removing and/or remediating all soils affected by Site contaminants above Restricted Residential SCOs to a depth of 15 feet. Under this Alternative risk from soil impacts and groundwater will be eliminated. Alternative 2 will continue to meet RAOs for soil, groundwater and soil vapor in the future, providing a permanent long-term solution for the Site.

3.5.4 Reduction in Toxicity, Mobility or Volume through Treatment

Alternative 2 will permanently eliminate the toxicity, mobility, and volume of contaminants from on-Site soil by meeting Restricted Residential SCOs in the upper 15 feet.

3.5.5 Short-term Effectiveness

The potential for short-term adverse impacts and risks to the workers, the community, and the environment during the implementation of Alternative 2 is minimal. Short-term exposure to on-site workers during excavation and loading activities will be addressed with a HASP and mitigated through the use of personal protective equipment, monitoring and engineering controls. Potential short-term exposure to the surrounding community will be addressed through the use of

odor and dust-suppression techniques and through the implementation of a CAMP which will require air monitoring activities during all excavation and soil disturbance activities.

Other potential impacts to the community such as construction-related noise, vibrations and traffic will be controlled and regulated under the terms of the NYS Department of Buildings issued building permit which can place a Stop Work Order on the property for unsafe conditions, community impacts or violation of the terms and conditions of the permit. Decontamination procedures of equipment, including trucks transporting soil to off-site disposal facilities will minimize the potential for impacted soil to be dispersed beyond the Site boundary. A truck traffic plan will also be prepared to minimize disturbance to the local roads and community.

3.5.6 Implementability

The techniques, materials and equipment to implement Alternative 2 are readily available and have been proven effective in remediating the contaminants associated with the Site. Excavation for the remediation of soils is both a "low tech" and reliable method which has a long and proven track record on the remediation of hazardous waste and petroleum spill sites. Excavation to remove source materials and meet Restricted Residential SCOs will require shoring but will not require dewatering.

3.5.7 Cost

Costs associated with Alternative 2 are almost identical to Alternative 1 adding only those costs associated with preparation of an Environmental Easement package and are estimated at approximately \$950,981. This cost estimate includes the following elements and assumptions:

- Removal of underground storage tanks encountered during Site excavation;
- Removal and disposal of the asphalt cap;
- Excavate historic fill material to 10 ft across the Site with additional excavation as needed to achieve Track 2 Restricted Residential SCOs;
- Shoring to accommodate excavation to a depth of 10 ft;
- Disposal of approximately 4,203 cy of historic fill material and soil;
- Waste characterization and endpoint verification sampling and analysis;
- HASP and CAMP monitoring for the duration of the remedial activities; and

- Preparation of a Final Engineering Report.
- Preparation of a Site Management Plan; and
- Recording of an Environmental Easement to restrict use of the site to Restricted Residential, Commercial or Industrial and to restrict groundwater use.

3.5.8 Compatibility with Land Use

The proposed redevelopment of the Site is compatible with its current zoning. Following remediation, the Site will meet the objectives for Restricted Residential use which is appropriate for its planned community use. A groundwater use restriction will be required to prevent future exposure to affected groundwater.

3.5.9 Community Acceptance

This RAWP was subject to a 45-day public comment period to determine if the community had comments on the presented remedial alternatives and selected remedy. As no questions/comment regarding the Site were raised regarding remedial options for the Site, this alternative is considered to be acceptable to the community.

3.6 REMEDIAL ALTERNATIVE 3

The following sections provide an evaluation of Alternative 3 based on the nine evaluation criteria as previously discussed.

3.6.1 Overall Protection of Human Health and the Environment

Alternative 3 will be protective of human health and the environment by eliminating some petroleum concentrations and constituents in soil to a depth of 2 feet and by capping the Site with the building foundation or other composite cover system. The potential for human and environmental exposure to these constituents on-Site will be eliminated by the excavation and/or capping of all soil with parameters above Restricted Residential criteria. Residual fill with parameters above Restricted Residential criteria which remain following construction excavation, will be effectively capped with the concrete foundation slab of the new building. Additionally, a water proofing membrane/vapor barrier will be installed as part of the building construction. Groundwater use will be restricted at the Site until groundwater quality recovers.

Finally, a post-construction soil vapor intrusion evaluation will need to be completed, including a provision for implementing actions recommended to address exposures related to soil vapor intrusion within the new building.

During remedial and construction activity, workers and area residents may be exposed to impacted soil and vapors. Worker exposure to soil and vapors will be minimized through implementation of a HASP. Exposures to area residents from dust and or vapors will be minimized through the use of engineering controls and through implementation of a CAMP.

3.6.2 Compliance with Remedial Goals, SCGs and RAOs

Alternative 3 will achieve compliance with the remedial goals, SCGs and RAOs for soil through source removal to Restricted Residential SCOs to depths of 2 to 5 feet. Groundwater quality will continue to improve over time with respect to SCGs. Compliance with SCGs for soil vapor is expected following completion of the remedial action.

3.6.3 Long-term Effectiveness and Permanence

Alternative 3 achieves long term effectiveness and permanence by permanently removing and/or capping all soils affected by Site contaminants. Under this Alternative risk from soil impacts is eliminated for on-site residents. Alternative 2 will continue to meet RAOs for soil in the future, providing a permanent long-term solution for the Site.

3.6.4 Reduction in Toxicity, Mobility or Volume through Treatment

Alternative 3 will reduce the toxicity, mobility, and volume of contaminants from on-Site soil by removing some soil and capping the remainder. The removal/capping of on-Site soil will also reduce the toxicity, mobility, and volume of contaminants within on-Site groundwater and soil vapor.

3.6.5 Short-term Effectiveness

The potential for short-term adverse impacts and risks to the workers, the community, and the environment during the implementation of Alternative 3 is minimal. Short-term exposure to on-site workers during excavation and loading activities will be addressed with a HASP and mitigated through the use of personal protective equipment, monitoring and engineering controls.

Potential short-term exposure to the surrounding community will be addressed through the use of odor and dust-suppression techniques and through the implementation of a CAMP which will require air monitoring activities during all excavation and soil disturbance activities.

Other potential impacts to the community such as construction-related noise, vibrations and traffic will be controlled and regulated under the terms of the NYS Department of Buildings permit, which can place a Stop Work Order on the property for unsafe conditions, community impacts or violation of the terms and conditions of the permit. Decontamination procedures of equipment, including trucks transporting soil to off-site disposal facilities will minimize the potential for impacted soil to be dispersed beyond the Site boundary. A truck traffic plan will also be prepared to minimize disturbance to the local roads and community.

3.6.6 Implementability

The techniques, materials and equipment to implement Alternative 3 are readily available and have been proven effective in remediating the contaminants associated with the Site. Excavation and capping for the remediation / management of soils are both "low tech" s reliable method which have a long and proven track record on the remediation of hazardous waste and petroleum spill sites.

3.6.7 Cost

Costs associated with Alternative 3 are estimated at approximately \$450,407. This cost estimate includes the following elements and assumptions:

- Removal of underground storage tanks encountered during Site excavation;
- Removal and disposal of the asphalt cap;
- Excavate historic fill material to a maximum of 2 ft across the Site as needed to accommodate a slab on-grade foundation;
- Disposal of approximately 840.8 cy of historic fill material and soil;
- Waste characterization and endpoint verification sampling and analysis;
- Capping of the site with a composite cover system;
- HASP and CAMP monitoring for the duration of the remedial activities;

- Recording of an Environmental Easement to restrict use of the site to Restricted Residential, Commercial or Industrial and to restrict groundwater use;
- Preparation of a Final Engineering Report; and,
- Preparation of a Site Management Plan.

3.6.8 Compatibility with Land Use

The proposed redevelopment of the Site is compatible with its current zoning. Following remediation the Site will meet restricted residential use objectives which is appropriate for its planned mixed residential and commercial use. A groundwater use restriction will be required to prevent future exposure to affected groundwater.

3.6.9 Community Acceptance

This RAWP was subject to a 45-day public comment period to determine if the community had comments on the presented remedial alternatives and selected remedy. As no questions/comment regarding the Site were raised regarding remedial options for the Site, this alternative is considered to be acceptable to the community.

3.7 SELECTION OF THE PREFERRED REMEDY

The remedy recommended for the site is a Track 1 alternative which consists of the removal of all underground storage tanks, removal and proper off-Site disposal of all historic fill material with parameters above Unrestricted Use SCOs. Over-excavated areas will be backfilled with either virgin mined materials or certified fill which meet Unrestricted Use SCOs. In addition, a waterproofing membrane/vapor barrier will be installed as part of the building construction. Finally, a post-construction soil vapor intrusion evaluation will need to be completed, including a provision for implementing actions recommended to address exposures related to soil vapor intrusion within the new building.

3.7.1 Preferred Remedy Land Use Factor Evaluation

As required by Article 27, Title 14 of the Environmental Conservation Law 27-1415, the following land use factor evaluation examines whether the preferred alternative is acceptable based on the 14 criteria presented in the following subsections.

Zoning

The property is currently zoned as a paired M1-6/R9 special purpose district. The Special Mixed-Use District was established to encourage investment in, and enhance the vitality of, existing neighborhoods with mixed residential and industrial uses in close proximity and create expanded opportunities for new mixed use communities. New residential and non-residential uses (commercial, community facility and light industrial) can be developed as-of-right and be located side-by-side or within the same building. Pairing an M1 district with an R3 through R10 district (e.g. M1-2/R6) ensures a balanced variety of uses.

According to the NYC DCP, M1 districts are often buffers between M2 or M3 districts and adjacent residential or commercial districts. M1 districts typically include light industrial uses, such as woodworking shops, repair shops, and wholesale service and storage facilities. Nearly all industrial uses are allowed in M1 districts if they meet the stringent M1 performance standards. Offices, hotels and most retail uses are also permitted. Certain community facilities, such as hospitals, are allowed in M1 districts only by special permit, but houses of worship are allowed as-of-right.

Non-contextual districts are generally mapped where there is a diverse mix of building types and no predominant context. R6, R7-1, R7-2, R8, R9 and R10 are non-contextual districts. The bulk regulations for these districts, introduced in 1961, encourage the development of buildings without height limits set back from the street and surrounded by open space. The building form is a product of the “tower-in-the-park” vision of urban planning popular in the 1950s.

The proposed project which includes a mixed-use building with residential apartments and retail space is compatible with the surrounding land use and will be in compliance with the current zoning.

Applicable Comprehensive Community Master Plans or Land Use Plans

The subject property was recently rezoned under the East Harlem Rezoning Action (CEQR No. 17DCP048M) completed by the City in December 2017.

According to the NYC Department of City Planning (DCP), the East Harlem Rezoning Proposal reflects DCP's on-going engagement with Community Board 11, the Steering Committee, DCP's interagency partners, and local elected officials to achieve the following land use objectives:

- Create opportunities for requiring permanently affordable housing to ensure that the neighborhood continues to serve diverse housing needs;
- Modify the existing zoning, where appropriate, to preserve the built neighborhood character;
- Create opportunities for economic development while preserving the vitality of existing commercial and manufacturing uses;
- Establish a Special District that establishes urban design controls that balance new development in response to existing neighborhood context and scale and improves the pedestrian experience; and
- Ensure a successful neighborhood plan by establishing a planning framework that is inclusive of the relevant capital infrastructure needs and services to support current demand and future growth.

The proposed rezoning is expected to result in a net increase of approximately 3,500 dwelling units, a substantial proportion of which are expected to be affordable. The zoning would also strengthen the role of East Harlem as a major transit hub and job center by promoting creation of new job-generating commercial and industrial space. Over ten years, the plan is projected to spur an estimated 122,000 SF of stores and restaurants and 275,000 SF of office and industrial space.

The proposed project is in full compliance with the intent and purpose of the East Harlem Rezoning.

Surrounding Property Uses

The area immediately surrounding the Site is a densely developed urban area, consisting primarily of residential and mixed-use (commercial/retail and residential) properties. East 127th Street is to the north, followed by the Promise Academy Charter School (80 East 128th Street) with East 128th Street beyond. East 126th Street is to the south, followed by a public parking lot (1824 Park Avenue), with a commercial office building beyond. Park Avenue and elevated Metro-North railroad tracks are to the east, followed by the Association to Benefit Children, a parking lot and a commercial building. Residential apartment buildings are to the west (59 East 126th Street and 78 East 127th Street), followed by additional apartment buildings. There are three schools located within one-quarter mile of the project Site.

Citizen Participation

Citizen participation for implementation of the preferred alternative will be performed in accordance with DER 23 and NYCRR Part 375-1.10 and Part 375-3.10. A Citizen Participation Plan has been prepared and is available for public review at the identified document repositories (125th Street Branch of the New York Public Library and the Manhattan Community Board 11).

Environmental Justice Concerns

The Site is located within a potential environmental justice area. The NYSDEC defines a potential environmental justice area as a "minority or low-income community that may bear a disproportionate share of the negative environmental consequences resulting from industrial, municipal, and commercial operations or the execution of federal, state, local, and tribal programs and policies.

Environmental justice means the fair treatment and meaningful involvement of all people regardless of race, color, or income with respect to the development, implementation, and enforcement of environmental laws, regulations, and policies. Fair treatment means that no group of people, including a racial, ethnic, or socioeconomic group, should bear a disproportionate share of the negative environmental consequences resulting from industrial, municipal, and commercial operations or the execution of federal, state, local, and tribal programs and policies.

Since the goal of the remedy will achieve the highest level of cleanup and will remove contaminated materials from the community, the remedy poses no environmental justice concerns.

Land use designations

The proposed remedy is consistent with land-use designations.

Population growth patterns

Population growth patterns support the proposed use for the Site. The preferred remedy will not negatively affect population growth patterns.

Accessibility to existing infrastructure

The Site is accessible to existing infrastructure. The close proximity of the Site to the Willis Avenue Bridge and the Major Deegan Expressway (I-87) will assist soil transportation and contractor access to the Site. The Site is also accessible to mass transit and is within walking distance to the No. 6 subway line with a station at 125th Street and Lexington Avenue (1 block east, 1 block south). The preferred remedy will not alter accessibility to existing infrastructure.

Proximity to cultural resources

The proposed remedy will not negatively impact cultural resources.

Proximity to natural resources

The proposed remedy will improve the local environment and will not negatively impact affect natural resources.

Off-Site groundwater impacts

The proposed remedy will not affect off-site groundwater quality. The proposed remedy will not affect natural resources.

Proximity to floodplains

The NYC Flood Hazard Mapper was reviewed to determine if the Site is located within the 100-year or 500-year flood zones. The review indicates that the entire property is located outside the

100-year and 500-year flood zones. This indicates that there is a minimal risk of flooding at the Site.

Geography and geology of the Site

The selected remedy will excavate soil/fill from the Site to a depth of at least 10 feet below sidewalk grade. The selected alternative and development of the Site have considered the geography and geology of the Site.

Current Institutional Controls

There are no Institutional Controls presently assigned to the Site.

3.8 SUMMARY OF SELECTED REMEDIAL ACTIONS

The remedy recommended for the Site is a Track 1 alternative (Alternative 1) which consists of the removal of all on-Site soil which exceeds Unrestricted Use SCOs. It is expected that a Track 1 alternative will require excavation to a minimum depth of 10 feet across the Site with additional excavation as needed to remove soil/fill with contaminants above Unrestricted Use SCOs. The remedy will include the following items:

1. Removal and disposal of the asphalt cap to allow removal of the soil beneath;
2. Excavation of soil/fill exceeding Track 1 Unrestricted Use SCOs as listed in **Table 1** to a minimum depth of 10 feet across the Site with additional excavation as needed to meet Track 1 Unrestricted Use SCOs;
3. Shoring and support of excavation work as required or as necessary to facilitate the excavation;
4. Screening for indications of contamination (by visual means, odor, and monitoring with PID) of all excavated soil during any intrusive Site work;
5. Collection and analysis of end-point samples to evaluate the performance of the remedy with respect to attainment of Track 1 Unrestricted Use SCOs;
6. Appropriate off-Site disposal of all material removed from the Site in accordance with all Federal, State and local rules and regulations for handling, transport, and disposal;

7. Import of materials to be used for backfill and cover in compliance with: (1) chemical limits and other specifications included in **Table 1**, (2) all Federal, State and local rules and regulations for handling and transport of material;
8. As part of the Track 1 remedy, a post-construction soil vapor intrusion evaluation will be completed. The evaluation will include a provision for implementing actions recommended to address exposures related to soil vapor intrusion within the new building;
9. If Track 1 Unrestricted Use SCOs are not achieved, a composite cover system consisting of the concrete building slab will be constructed;
10. If Track 1 cleanup is not achieved, implementation of a Site Management Plan (SMP) for long term maintenance of the Engineering Controls; and
11. If Track 1 cleanup is not achieved, an Environmental Easement will be filed against the Site to ensure implementation of the SMP.

The intent of the remedy is to achieve Track 1 Unrestricted Use therefore, no Environmental Easement (EE) or site management is anticipated. If the soil vapor intrusion (SVI) evaluation is not completed prior to completion of the Final Engineering Report (FER), then a Site Management Plan (SMP) and EE will be required to address the SVI evaluation and implement action as needed; if a mitigation or monitoring action is needed, a Track 1 cleanup can only be achieved if the mitigation system or other required action is no longer needed within 5 years of the date of the Certificate of Completion (COC).

Although the goal of the remedy will be to remove all soil exceeding the Track 1 Unrestricted Use SCOs, if Track 1 Unrestricted Use SCOs cannot be achieved including achievement of groundwater and soil vapor remedial objectives, then a Track 2 or Track 4 remedy may result as described above.

All responsibilities associated with the Remedial Action, including permitting requirements and pretreatment requirements, will be addressed in accordance with all applicable Federal, State and local rules and regulations.

Remedial activities will be performed at the Site in accordance with this NYSDEC-approved RAWP. Any anticipated deviations to the RAWP shall be submitted to the NYSDEC for review.

4.0 REMEDIAL ACTION PROGRAM

The objective of this section of the Remedial Action Work Plan, is to present a scope of work which will be approved by NYSDEC and when completely implemented will ready the BCP site for development under the Contemplated Use consistent with the requirements of the Brownfield Cleanup Program.

4.1 GOVERNING DOCUMENTS

Governing documents and procedures included in the Remedial Work Plan include a Site-specific Health and Safety Plan (HASP), a Community Air Monitoring Plan (CAMP), a Citizen Participation Plan, a Soil Management Plan (SoMP), a Quality Assurance Project Plan (QAPP), fluid management procedures, and contractors' site operations and quality control procedures. Highlights of these documents and procedures are provided in the following sections.

4.1.1 Health & Safety Plan (HASP)

Contractors and subcontractors will have the option of adopting this HASP or developing their own Site-specific document. If a contractor or subcontractor chooses to prepare their own HASP, the Remedial Engineer will insure that it meets the minimum requirements as detailed in the Site-specific HASP prepared for the Site.

Activities performed under the HASP will comply with applicable parts of OSHA Regulations, primarily 29 CFR Parts 1910 and 1926. Modifications to the HASP may be made with the approval of the Remedial Engineer (RE), Site Safety Manager (SSM) and/or Project Manager (PM).

All remedial work performed under this plan will be in full compliance with governmental requirements, including Site and worker safety requirements mandated by Federal OSHA.

The Participant and associated parties preparing the remedial documents submitted to the State and those performing the construction work, are completely responsible for the preparation of an appropriate Health and Safety Plan and for the appropriate performance of work according to that plan and applicable laws.

The Health and Safety Plan (HASP) and requirements defined in this Remedial Action Work Plan pertain to all remedial and invasive work performed at the Site until the issuance of a Certificate of Completion.

The Site Safety Coordinator will be Chawinie Reilly. Her resume is provided in **Attachment F**. Confined space entry will comply with all OSHA requirements to address the potential risk posed by combustible and toxic gasses. A copy of the Site-Specific Health and Safety Plan is provided in **Attachment B**.

4.1.2 Quality Assurance Project Plan (QAPP)

The fundamental QA objective with respect to accuracy, precision, and sensitivity of analysis for laboratory analytical data is to achieve the QC acceptance of the analytical protocol. The accuracy, precision and completeness requirements will be addressed by the laboratory for all data generated.

Collected samples will be appropriately packaged, placed in coolers and shipped via overnight courier or delivered directly to the analytical laboratory by field personnel. Samples will be containerized in appropriate laboratory provided glassware and shipped in plastic coolers. Samples will be preserved through the use of ice or a cold-pak(s) to maintain a temperature of 4°C.

Dedicated disposable sampling materials will be used for both soil and groundwater samples (if collected), eliminating the need to prepare field equipment (rinsate) blanks. However, if non-disposable equipment is used, (stainless steel scoop, etc.) field rinsate blanks will be prepared at the rate of 1 for every eight samples collected.

Decontamination of non-dedicated sampling equipment will consist of the following:

- Gently tap or scrape to remove adhered soil
- Rinse with tap water
- Wash withalconox® detergent solution and scrub
- Rinse with tap water
- Rinse with distilled or deionized water

Prepare field blanks by pouring distilled or de-ionized water over decontaminated equipment and collecting the water in laboratory provided containers. Trip blanks will accompany samples each time they are transported to the laboratory. Matrix spike and matrix spike duplicates (MS/MSD) will be collected at the rate of one per 20 samples submitted to the laboratory. Laboratory reports will be upgradeable to ASP category B deliverables for use in the preparation of a data usability report (DUSR). The QAPP for the Site is provided in **Attachment C**.

4.1.3 Construction Quality Assurance Plan (CQAP)

All construction work related to the remedy (i.e. soil excavation) will be monitored by EBC / AMC field personnel under the direct supervision of the Remedial Engineer. Monitoring during soil excavation will be performed to protect the health of site workers and the surrounding community. A Health and Safety Plan (HASP) and Community Air Monitoring Plan (CAMP) have been specifically developed for this project. These plans specify the monitoring procedures, action levels, and contingency measures that are required to protect public health.

All intrusive and soil disturbance activities will be monitored by an environmental professional (EP) under the direct supervision of the Remedial Engineer who will record observations in the site field book and complete a photographic log of the daily activities. The EP will provide daily updates to the Project Manager and Remedial Engineer who will both make periodic visits to the site as needed to assure construction quality. Daily updates will also be submitted to the NYSDEC. See section 4.4.1 Daily Reports.

4.1.4 Soil/Materials Management Plan (SoMP)

A SoMP has been prepared for excavation, handling, storage, transport and disposal of all soils/materials that are disturbed / excavated at the Site. The SoMP includes all of the controls that will be applied to these efforts to assure effective, nuisance-free performance in compliance with all applicable Federal, State and local laws and regulations. The SoMP is presented in Section 5.4.

4.1.5 Erosion and Sediment Control Plan (ESCP)

Erosion and sediment controls will be performed in conformance with requirements presented in the New York State Guidelines for Urban Erosion and Sediment Control. Typical measures that

will be utilized at various stages of the project to limit the potential for erosion and migration of soil include the use of hay bales, temporary stabilized construction entrances/exits, placement of silt fencing and/or hay bales around soil stockpiles, and dust control measures.

4.1.6 Community Air Monitoring Plan (CAMP)

The CAMP provides measures for protection for the downwind community (i.e., off-site receptors including residences, businesses, and on-site workers not directly involved in the remedial work) from potential airborne contaminant releases resulting from remedial activities.

The action levels specified require increased monitoring, corrective actions to abate emissions, and/or work shutdown. Additionally, the CAMP helps to confirm that the remedial work did not spread contamination off-site through the air. The primary concerns for this site are vapors, nuisance odors and dust particulates.

The primary concerns for this site are vapors, nuisance odors and dust particulates. The CAMP prepared for implementation of the RAWP is provided in **Attachment D**.

4.1.7 Contractors Site Operations Plan (SOP)

The Remedial Engineer has reviewed all plans and submittals for this remedial project (including those listed above and contractor and sub-contractor document submittals) and confirms that they are in compliance with this RAWP. The Remedial Engineer is responsible to ensure that all later document submittals for this remedial project, including contractor and sub-contractor document submittals, are in compliance with this RAWP. All remedial documents will be submitted to NYSDEC and NYSDOH in a timely manner and prior to the start of work.

4.1.8 Citizen Participation Plan (CPP)

The public will be informed of key project documents and events through the distribution of fact sheets through the Department's List Serv. The public was initially informed of the Site and the opportunity to join the List Serv through an ad placed in the local newspaper and mailed fact sheets.

No changes will be made to approved Fact Sheets authorized for release by NYSDEC without written consent of the NYSDEC. No other information, such as brochures and flyers, will be included with the Fact Sheet mailing.

Document repositories have been established at the following locations and contain all applicable project documents:

New York Public Library, 125th Street Branch
224 E 125th St
New York, NY 10035
(212) 534-5050

Hours

Mon	11:00 AM - 7:00 PM	Thu	11:00 AM - 7:00 PM	Sun - Closed
Tue	11:00 AM - 7:00 PM	Fri	10:00 AM - 5:00 PM	
Wed	11:00 AM - 7:00 PM	Sat	10:00 AM - 5:00 PM	

Manhattan Community Board 11
1664 Park Avenue, Ground Floor
New York, NY, 10035
212-831-8929

Site-related documents can also be found on DECinfo Locator at:

<https://www.dec.ny.gov/data/DecDocs/C231140>

4.2 GENERAL REMEDIAL ACTION INFORMATION

4.2.1 Project Organization

The Project Manager for the Remedial Activity will be Mr. Keith Butler. Overall responsibility for the BCP project will be Mr. Charles B. Sosik, P.G., P.HG. The Remedial Engineer for this project is Mr. Ariel Czemerinski, P.E. Mr. Tom Gallo will be the Site Safety Officer and Ms. Chawnie Reilly will serve as the Quality Assurance Officer (QAO). Resumes of key personnel involved in the Remedial Action are included in **Attachment F**. Additional information regarding the roles of the project manager, Site Safety Officer and QAO are included in the

Construction Health and Safety Plan (CHASP) and Quality Assurance Project Plan (QAPP) (Attachments B and C).

4.2.2 Remedial Engineer

The Remedial Engineer for this project will be Mr. Ariel Czemerinski, P.E. The Remedial Engineer is a registered professional engineer licensed by the State of New York. The Remedial Engineer will have primary direct responsibility for implementation of the remedial program for the Site. The Remedial Engineer will certify in the Final Engineering Report that the remedial activities were observed by qualified environmental professionals under his supervision and that the remediation requirements set forth in the Remedial Action Work Plan and any other relevant provisions of ECL 27-1419 have been achieved in full conformance with that Plan. Other Remedial Engineer certification requirements are listed later in this RAWP.

The Remedial Engineer will review all pre-remedial plans submitted by contractors and subcontractors involved in all aspects of remedial construction, including soil excavation, stockpiling, characterization, removal and disposal, air monitoring, emergency spill response services, import of back fill material, and management of waste transport and disposal, and will certify compliance in the Final Remediation Report. The Remedial Engineer will provide the certifications listed in Section 10.1 in the Final Engineering Report.

4.2.3 Remedial Action Schedule

The remedial action will begin with mobilization of equipment and material to the Site, which will begin approximately 1 week following RAWP approval and 10 days after the distribution of the remedial construction Fact Sheet. A pre-construction meeting will be held among NYSDEC, the Remedial Engineer, and the selected remedial contractor prior to site mobilization. Mobilization will be followed by soil removal and disposal and confirmation sampling. The work is expected to take 6 months as part of the construction excavation and foundation installation.

4.2.4 Work Hours

The hours for operation of remedial construction will conform to the New York City Department of Buildings construction code requirements or according to specific variances issued by that

agency. DEC will be notified by the Applicant of any variances issued by the Department of Buildings. NYSDEC reserves the right to deny alternate remedial construction hours.

4.2.5 Site Security

A construction fence will be erected around the entire property as required by the NYC Department of Buildings. The fence will be maintained as required and secured at the end of each work day.

4.2.6 Traffic Control

The Participants' construction management personnel will direct the arrival or departure of construction vehicles and provide flag services as needed to maintain safe travel exiting and entering the Site from Park Avenue. Traffic related to on-going remedial activity will require the staging of 10-wheel dump trucks on Park Avenue on a daily basis during soil excavation activity. The soil disposal transport route will be as follows:

- EXITING SITE – Turn Right onto Park Avenue heading south for one block to 125th Street. Turn left on 125th Street heading east. Continue on 125th Street following the signs and crossing the Robert F. Kennedy Bridge to the Brooklyn – Queens Expressway BQE (I-278). Follow the signs and head north on I-278 to the Major Deegan Expressway (I-87). Follow the signs and head north on I-87.
- ENTERING SITE - from the I-87 heading south. Follow the signs to the Brooklyn-Queens Expressway (I-278) west. Turn onto I-278 west and follow the signs to Robert F. Kennedy Bridge – 125th Street. Take 125th Street heading west to Park Avenue. Turn Right on Park Avenue heading north one block to the site entrance on the left (west side).

A map showing the truck routes is included as **Figure 10**.

4.2.7 Worker Training and Monitoring

An excavation contractor with appropriate experience, personnel and training (minimum 24 hr. OSHA HAZWOPPER) is required to perform the removal of the petroleum impacted soil, non-hazardous historic fill and uncontaminated native soil. The excavation contractor's on-site

personnel engaged in this work will all have a minimum of 24 hour Hazardous Waste Operations and Emergency Response Operations training.

All field personnel involved in remedial activities will participate in training, if required under 29 CFR 1910.120, including 24 and 40-hour hazardous waste operator training and annual 8-hour refresher training. The Site Safety Officer will be responsible for maintaining workers training records.

Personnel entering any exclusion zone will be trained in the provisions of the HASP and be required to sign a HASP acknowledgment.

All on-site personnel engaged in remedial or sampling activities must receive adequate Site-specific training in the form of an on-site Health and Safety briefing prior to participating in field work with emphasis on the following:

- Protection of the adjacent community from hazardous vapors and / or dust which may be released during intrusive activities.
- Identification of chemicals known or suspected to be present on-site and the health effects and hazards of those substances.
- The need for vigilance in personnel protection, and the importance of attention to proper use, fit and care of personnel protective equipment.
- Decontamination procedures.
- Site control including work zones, access and security.
- Hazards and protection against heat or cold.
- The proper observance of daily health and safety practices, such as entry and exit of work zones and site. Proper hygiene during lunch, break, etc.
- Emergency procedures to be followed in case of fire, explosion and sudden release of hazardous gases.

4.2.8 Agency Approvals

The Applicant has addressed all SEQRA requirements for this Site. All permits or government approvals required for remedial construction have been, obtained prior to the start of remedial construction.

The planned end use for the Site is in conformance with the current zoning for the property as determined by New York City Department of Planning. A Certificate of Completion will not be issued for the project unless conformance with zoning designation is demonstrated.

A complete list of all local, regional and national governmental permits, certificates or other approvals or authorizations required to perform the remedial and development work is attached in **Table 17**. This list includes a citation of the law, statute or code to be complied with, the originating agency, and a contact name and phone number in that agency. This list will be updated in the Final Remediation Report.

4.2.9 Pre-Construction Meeting with NYSDEC

A pre-construction meeting or teleconference call with the Project Manager, Remedial Engineer, Construction Manager, Owner's Representative and the NYSDEC will take place prior to the start of major construction activities.

4.2.10 Emergency Contact Information

An emergency contact sheet with names and phone numbers is included in **Table 18**. That document will define the specific project contacts for use by NYSDEC and NYSDOH in the case of a day or night emergency.

4.2.11 Remedial Action Costs

The total estimated cost of the Remedial Action is \$ 923,381. An itemized and detailed summary of estimated costs for all remedial activity is attached as **Attachment G**.

4.3 SITE PREPARATION

4.3.1 Mobilization

Mobilization will include the delivery of construction equipment and materials to the Site. All construction personnel will receive site orientation and training in accordance with the Site-specific HASP, CAMP and established policies and procedures to be followed during the implementation of the RAWP. The remediation contractor, construction manager and all associated subcontractors will each receive a copy of the RAWP and the Site-specific HASP and will be briefed on their contents.

4.3.2 Erosion and Sedimentation Controls

Soil erosion and sediment control measures for management of storm water will be installed in accordance with the New York Guidelines for Urban Erosion and Sediment Control. Haybales and/or silt fence will be placed by the remedial contractor at locations surrounding excavation areas and within the perimeter fencing as needed, to control stormwater runoff and surface water from exiting the excavation. These control measures will be installed prior to initiating the soil excavation.

4.3.3 Stabilized Construction Entrance(s)

Stabilized construction entrances will be installed at all points of vehicle ingress and egress to the Site. The stabilized entrances will be constructed of a 4 to 6-inch bed of crushed stone or crushed concrete which will be sloped back toward the interior of the Site. The stabilized entrances will be inspected on a daily basis during soil loading activities and reinforced as needed with additional stone/concrete material to prevent the accumulation of ruts, mud or soil.

4.3.4 Utility Marker and Easements Layout

The Applicant and its contractors are solely responsible for the identification of utilities that might be affected by work under the RAWP and implementation of all required, appropriate, or necessary health and safety measures during performance of work under this RAWP. The Applicant and its contractors are solely responsible for safe execution of all invasive and other work performed under this RAWP. The Applicant and its contractors must obtain any local, State or Federal permits or approvals pertinent to such work that may be required to perform work

under this RAWP. Approval of this RAWP by NYSDEC does not constitute satisfaction of these requirements.

The presence of utilities and easements on the Site has been investigated by the Remedial Engineer. It has been determined that no risk or impediment to the planned work under this Remedial Action Work Plan is posed by utilities or easements on the Site.

4.3.5 Sheet piling and Shoring

Appropriate management of structural stability of on-Site or off-Site structures during on-Site activities including excavation is the sole responsibility of the Applicant and its contractors. The Applicant and its contractors are solely responsible for safe execution of all invasive and other work performed under this Plan. The Applicant and its contractors must obtain any local, State or Federal permits or approvals that may be required to perform work under this Plan. Further, the Applicant and its contractors are solely responsible for the implementation of all required, appropriate, or necessary health and safety measures during performance of work under the approved Plan.

The exact means and methods for the support of excavation (SOE) have not been determined yet and will be forwarded to DEC upon receipt.

4.3.6 Equipment and Material Staging

All equipment and work materials will be staged on-Site in areas as designated by the General Contractor, and / or Construction Site Superintendent.

4.3.7 Decontamination Area

A temporary truck decontamination pad will be constructed to decontaminate trucks and other vehicles/equipment leaving the Site. The pad will be constructed by placing a 4 to 6-inch bed of stone aggregate such as crushed rock or RCA. The pad will be bermed at the sides and sloped back to the interior of the Site. The truck pad will be sized to accommodate the largest construction vehicle used and located in line with the stabilized construction entrance. The pad will be inspected on a daily basis during soil loading activities and reinforced as needed with additional stone/concrete material to prevent the accumulation of ruts, mud or soil. Soil on the

truck pad will be removed with the truck pad and loaded out with excavated soil to an off-site disposal facility. The generation of decon water is not anticipated (see Section 5.5 – Soil/Materials Management Plan).

4.3.8 Site Fencing

An 8-foot-high construction fence is present around the portions of the Site which are not bordered by adjacent buildings (west) with an entrance / exit gate located on Park Avenue. This fence will be properly secured at the end of the day and supplemented, as needed, by installing orange safety fencing around open excavations to ensure on-site worker safety.

4.3.9 Demobilization

Demobilization will consist of the restoration of material staging areas and the disposal of materials and/or general refuse in accordance with acceptable rules and regulations. Materials used in remedial activities will be removed and disposed properly. All equipment will be decontaminated prior to leaving the Site.

4.4 REPORTING

All daily and monthly Reports will be included in the Final Engineering Report.

4.4.1 Daily Reports

Daily reports will be submitted to NYSDEC and NYSDOH Project Managers by the end of each day in which remedial activity takes place. Daily reports will include:

- An update of progress made during the reporting day;
- A summary of any and all complaints with relevant details (names, phone numbers);
- A summary of CAMP finding, including excursions;
- An explanation of notable Site conditions.

Daily reports are not intended to be the mode of communication for notification to the NYSDEC of emergencies (accident, spill), requests for changes to the RAWP or other sensitive or time critical information. However, such conditions must also be included in the daily reports. Emergency conditions and changes to the RAWP will be addressed directly to NYSDEC Project Manager via personal communication.

These reports will include a summary of air sampling results, odor and dust problems and corrective actions, and all complaints received from the public.

4.4.2 Monthly Reports

Monthly reports will be submitted to NYSDEC and NYSDOH Project Managers within one week following the end of the month of the reporting period and will include:

- Activities relative to the Site during the previous reporting period and those anticipated for the next reporting period, including a quantitative presentation of work performed (i.e. tons of material exported and imported, etc.);
- Description of approved activity modifications, including changes of work scope and/or schedule;
- Sampling results received following internal data review and validation, as applicable; and,
- An update of the remedial schedule including the percentage of project completion, unresolved delays encountered or anticipated that may affect the future schedule, and efforts made to mitigate such delays.

4.4.3 Other Reporting

Photographs will be taken of all remedial activities and submitted to NYSDEC in digital (JPEG, PDF) format. Photos will illustrate all remedial program elements and will be of acceptable quality. Representative photos of the Site prior to any Remedial Actions will be provided. Representative photos will be provided of each contaminant source, source area and Site structures before, during and after remediation. Photos will be included in the daily reports as needed, and a comprehensive collection of photos will be included in the Final Engineering Report.

Job-site record keeping for all remedial work will be appropriately documented. These records will be maintained on-Site at all times during the project and be available for inspection by NYSDEC and NYSDOH staff.

4.4.4 Complaint Management Plan

Complaints from the public regarding nuisance or other Site conditions including noise, odor, truck traffic etc., will be recorded in the Site field book and reported to the NYSDEC via email on the same day as the complaint is received.

4.4.5 Deviations from the Remedial Action Work Plan

Minor deviations from the RAWP will be identified in the daily update report and will be noted in the Final Engineering Report. When deviations are reported, a brief discussion will be provided which will state the following:

- Reasons for deviating from the approved RAWP;
- Effect of the deviations on overall remedy.

Major changes to the scope of work must be discussed with the NYSDEC and the NYSDOH prior to implementation. If the changes are considered to be significant enough, an addendum to the RAWP Work Plan will be prepared and submitted to NYSDEC / NYSDOH for review.

5.0 REMEDIAL ACTION: MATERIAL REMOVAL FROM SITE

Excavation work includes the following: the removal and off-Site disposal of the top 10 feet of soil/fill material across the Site, with additional excavation as needed to meet Unrestricted Use SCOs. Soil excavation will be performed using conventional equipment such as track-mounted excavators, backhoes and loaders.

All excavation work will be performed in accordance with the Site-specific HASP and CAMP. If an underground storage tank (UST) is discovered during excavation the NYSDEC Project Manager will be immediately notified and the UST removed and closed in accordance with DER-10, NYSDEC PBS regulations and NYC Fire Department regulations. It is anticipated that the excavation of non-hazardous petroleum impacted soil and historic fill material will be performed by an excavation contractor using appropriately trained personnel (24 hr. HAZWOPER).

Over excavated areas will be backfilled using clean native soil excavated from other areas of the Site or imported material meeting Unrestricted Use and Protection of Groundwater SCOs. Reused or imported materials used for backfill and cover will be in compliance with: (1) chemical limits and other specifications included in **Table 1**, (2) all Federal, State and local rules and regulations for handling and transport of material (see Sections 5.5.7, 5.5.8, and 5.5.10 for sampling and analysis requirements). An excavation plan showing the excavation depths to achieve the Track 1 remedy is provided in **Figure 11**.

Dewatering is not expected to be required unless there are heavy rains or snow melt which needs to be removed from the excavation.

5.1 CONTINGENCY

5.1.1 UST Removal Methods

Any USTs encountered during excavation activities at the Site will be removed in accordance with the procedures described under the NYSDEC Memorandum for the Permanent Abandonment of Petroleum Storage Tanks and Section 5.5 of Draft DER-10 as follows:

- Remove all product to its lowest draw-off point

- Drain and flush piping into the tank
- Vacuum out the tank bottom consisting of water product and sludge
- Dig down to the top of the tank and expose the upper half of the tank
- Remove the fill tube and disconnect the fill, gauge, product and vent lines and pumps. Cap and plug open ends of lines
- Temporarily plug all tank openings, complete the excavation, remove the tank and place it in a secure location
- Render the tank safe and check the tank atmosphere to ensure that petroleum vapors have been satisfactorily purged from the tank
- Clean tank or remove to a storage yard for cleaning
- If the tank is to be moved it must be transported by licensed waste transporter. Plug and cap all holes prior to transport leaving a 1/8 inch vent hole located at the top of the tank during transport
- After cleaning the tank must be made acceptable for disposal at a scrap yard cleaning the tank interior with a high-pressure rinse and cutting the tank in several pieces.
- Collection and analysis of bottom and sidewall excavation endpoint samples.

During the tank and pipeline removal the following field observations should be made and recorded:

- A description and photographic documentation of the tank and pipeline condition (pitting, holes, staining, leak points, evidence of repairs, etc.)
- Examination of the excavation floor and sidewalls for physical evidence of contamination (odor, staining, sheen, etc.)
- Periodic field screening (through bucket return) of the floor and sidewalls of the excavation with a calibrated photoionization detector (PID).

5.2 SOIL CLEANUP OBJECTIVES

The Soil Cleanup Objectives for this Site are listed in **Table 1**. **Table 8** summarizes all soil samples that exceed the SCOs proposed for this Remedial Action. Spider maps showing all soil samples that exceed the SCOs proposed for this Remedial Action are shown in **Figure 7**.

5.3 REMEDIAL PERFORMANCE EVALUATION (POST EXCAVATION END-POINT SAMPLING)

Post excavation (endpoint) soil samples will be collected from across the Site to verify that remedial goals have been achieved. Endpoint soil samples will be collected from the Site as follows:

- (1) Site-wide bottom of excavation endpoint soil samples will be collected following removal of all soil to verify that remedial goals have been achieved (**Figure 12**). The Site-wide endpoint soil samples will be analyzed for VOCs, SVOCs, pesticides, PCBs, metals and PFAS compounds.

5.3.1 End-Point Sampling Frequency

Endpoint sampling frequency will be in accordance with DER-10 section 5.4 which recommends the collection of one bottom sample per 900 SF of bottom area and one sidewall sample per 30 liner feet. All attempts will be made to sample the sidewalls in accordance with DER-10 to confirm that the goals of the remedial actions have been met even in the presence of sheeting/shoring and when the excavation extends past the site boundary Sidewall samples will also be collected where excavation extends beyond depths of 10 feet.

5.3.2 Methodology

Collected samples will be placed in glass jars supplied by the analytical laboratory and stored in a cooler with ice to maintain a temperature of 4 degrees Celsius (4° C). Samples will either be picked up at the Site by a laboratory dispatched courier at the end of the day or transported back to the EBC/AMC office where they will be picked up the following day by the laboratory courier. All samples will be analyzed by a NYSDOH ELAP certified environmental laboratory

All site-wide post-excavation (endpoint) soil samples will be analyzed for VOCs by USEPA Method 8260B, SVOCs by USEPA method 8270, pesticides/PCBs by USEPA Method 8081/8082, TAL metals, 4-dioxane and PFAS compounds.

5.3.3 Reporting of Results

Sample analysis will be provided by a New York State certified environmental laboratory. Laboratory reports will include ASP category B deliverables for use in the preparation of a data

usability summary report (DUSR). All results will be provided in accordance with the NYSDEC Environmental Information Management System (EIMS) electronic data deliverable (EDD) format.

5.3.4 QA/QC

The fundamental QA objective with respect to accuracy, precision, and sensitivity of analysis for laboratory analytical data is to achieve the QC acceptance of the analytical protocol. The accuracy, precision and completeness requirements will be addressed by the laboratory for all data generated.

Collected samples will be appropriately packaged, placed in coolers and shipped via overnight courier or delivered directly to the analytical laboratory by field personnel. Samples will be containerized in appropriate laboratory provided glassware and shipped in plastic coolers. Samples will be preserved through the use of ice or cold-pak(s) to maintain a temperature of 4° C.

Dedicated disposable sampling materials will be used for soil samples, eliminating the need to prepare field equipment (rinsate) blanks. However, if non-disposable equipment is used, (stainless steel scoop, etc.) field rinsate blanks will be prepared at the rate of 1 for every eight samples collected. Field blanks will be prepared by pouring distilled or deionized water over decontaminated equipment and collecting the water in laboratory provided containers.

Trip blanks will accompany samples each time they are transported to the laboratory. Matrix spike and matrix spike duplicates (MS/MSD) will be collected at the rate of one per 20 samples submitted to the laboratory.

5.3.5 DUSR

The DUSR provides a thorough evaluation of analytical data without third party data validation. The primary objective of a DUSR is to determine whether or not the data, as presented, meets the site/project specific criteria for data quality and data use. Verification and/or performance monitoring samples collected under this RAWP will be reviewed and evaluated in accordance with the Guidance for the Development of Data Usability Summary Reports as presented in

Appendix 2B of DER-10. The completed DUSR for verification/performance samples collected during implementation of this RAWP will be included in the Final Engineering Report.

5.3.6 Reporting of End-Point Data in FER

All endpoint data collected as part of this remedial action will be summarized and presented in the Final Engineering Report. The summary tables will include comparison of results to Unrestricted Use SCOs to verify attainment of Track 1. Laboratory reports and the DUSR will be included as an appendix in the FER.

5.4 ESTIMATED MATERIAL REMOVAL QUANTITIES

It is expected that 4,203 cubic yards (6,725 tons) of non-hazardous historic fill material will be generated by excavating the entire Site to a depth of at least 10 feet to meet the Track 1 SCOs. Clean native soil, if excavated for the building foundation may be reused, if found to be suitable, backfill behind shoring installed around the perimeter of Site, or in over-excavated areas.

5.5 SOIL/MATERIALS MANAGEMENT PLAN

Excavated soil will be secured and temporarily stored on-site until arrangements can be made for off-site disposal. As an alternative, waste characterization soil samples may be collected prior to commencement of excavation activities to allow the soil/fill to be loaded directly on to trucks for transport to the disposal facility. Based on the results of the Remedial Investigation, all soil/fill is expected to be classified as non-hazardous. The final determination on classification will be based on the results of waste characterization analysis and the NYSDEC.

Soil excavation will be performed in accordance with the procedures described under Section 5.5 of DER-10 as follows:

- A description and photographic documentation of the excavation.
- Examination of the excavation floor and sidewalls for physical evidence of contamination (odor, staining, sheen, etc.).
- Periodic field screening (through bucket return) of the floor and sidewalls of the excavation with a calibrated photoionization detector (PID).

Final excavation depth, length, and width will be determined by the Remedial Engineer or his designee and will depend on the horizontal and vertical extent of contaminated soils as identified through physical examination (PID response, odor, staining, etc.).

The following procedure will be used for the excavation of impacted soil (as necessary and appropriate):

- Wear appropriate health and safety equipment as outlined in the HASP;
- Prior to excavation, ensure that the area is clear of utility lines or other obstructions. Lay plastic sheeting on the ground next to the area to be excavated;
- Using a rubber-tired backhoe or track mounted excavator, remove overburden soils and stockpile or dispose of separate from the impacted soil;
- If USTs are discovered, the NYSDEC will be notified and the best course of action to remove the structure should be determined in the field. This may involve the continued removal of overburden to access the top of the structure or continued trenching around the perimeter to minimize its disturbance;
- If physically contaminated soil is present (e.g., staining, odors, sheen, PID response, etc), an attempt will be made to remove it to the extent not limited by the site boundaries. If possible, physically impacted soil will be removed using the backhoe or excavator, segregated from clean soils and overburden, and staged on separate dedicated plastic sheeting or live loaded into trucks from the disposal facility. Removal of the impacted soils will continue until visibly clean material is encountered and monitoring instruments indicate that no contaminants are present;
- Excavated soils which are temporarily stockpiled on-site will be covered with 6-mil polyethylene sheeting while disposal options are determined. Sheeting will be checked on a daily basis and replaced, repaired or adjusted as needed to provide full coverage. The sheeting will be shaped and secured in such a manner as to drain runoff and direct it toward the interior of the property;
- Once the Remedial Engineer is satisfied with the removal effort, verification or confirmatory samples will be collected from the excavation.

5.5.1 Excavation of Historic Fill Soil

Historic fill material is present beneath the Site to depths which extend to approximately 10 feet across the Site. The historic fill material contains petroleum related VOCs, SVOCs, metals and pesticides above Unrestricted Use and/or Restricted Residential SCOs. Historic fill material will be segregated from non-contaminated native soils and disposed of off-Site at a permitted disposal facility.

If fill/soil with lead levels above 1,500 mg/kg is encountered during waste characterization soil sampling, the soil/fill may require further analysis, including TCLP testing, and segregation for disposal at alternate facilities. Excavated historic fill materials will be secured and temporarily stored on-Site until arrangements can be made for off-Site disposal. It is anticipated that the historic fill material will be classified as non-hazardous material. If this material is classified as non-hazardous, then the excavation of historic fill material will be performed by the excavation contractor for the construction project using trained personnel (24 hr HAZWOPER). If this material is classified as hazardous, then 40 hr HAZWOPER trained personnel will be needed to perform the excavation of this material.

5.5.2 Soil Screening Methods

Visual, olfactory and PID soil screening and assessment will be performed by an environmental professional during all remedial and development excavations into known or potentially contaminated material (Residual Contamination Zone). Soil screening will be performed regardless of when the invasive work is done and will include all excavation and invasive work performed during the remedy and during development phase, such as excavations for foundations and utility work, prior to issuance of the COC.

All primary contaminant sources (including but not limited to tanks and hotspots) identified during Site Characterization, Remedial Investigation, and Remedial Action will be surveyed by a surveyor licensed to practice in the State of New York. This information will be provided on maps in the Final Engineering Report.

Screening will be performed by environmental professionals. Resumes will be provided for all personnel responsible for field screening (i.e. those representing the Remedial Engineer) of invasive work for unknown contaminant sources during remediation and development work.

5.5.2 Excavation of Native Soils

Native soils present below the fill material may require excavation for the new building's elevator pits and/or structural elements. Excavation of native soil will begin following removal of impacted soil/historic fill. If evidence of contamination is discovered while excavating the native soil, the contaminated soil will be removed to the extent possible and segregated from clean native soil for proper disposal. Clean native soil may be stockpiled on-Site and characterized for reuse on-Site in over excavated areas or behind shoring constructed around the perimeter of the Site. Any excess soil will be disposed of off-Site as a beneficial re-use material or reused on-Site if found to meet SCOs through testing and if acceptable to the structural engineer.

It is anticipated that the excavation of native soil will be performed by the excavation contractor for the construction project.

5.5.3 Soil Screening Methods

Visual, olfactory and PID soil screening and assessment will be performed by an environmental professional during all remedial and development excavations into known or potentially contaminated material (Residual Contamination Zone). Soil screening will be performed regardless of when the invasive work is done and will include all excavation and invasive work performed during the remedy and during development phase, such as excavations for foundations and utility work, prior to issuance of the COC.

All primary contaminant sources (including but not limited to tanks and hotspots) identified during Site Characterization, Remedial Investigation, and Remedial Action will be surveyed by a surveyor licensed to practice in the State of New York. This information will be provided on maps in the Final Engineering Report.

Screening will be performed by environmental professionals. Resumes will be provided for all personnel responsible for field screening (i.e., those representing the Remedial Engineer) of invasive work for unknown contaminant sources during remediation and development work.

5.5.4 Stockpile Methods

Stockpiles will be inspected at a minimum once each week and after every storm event. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by NYSDEC.

Excavated soil that is to be stockpiled on-site pending disposal, will be placed atop a minimum of two layers of 8-mil. polyethylene sheeting. In addition, stockpiles will be kept covered at all times with appropriately anchored tarps. Stockpiles will be routinely inspected, and damaged tarp covers will be promptly replaced. Soils which exhibit strong odors will be completely sealed with heavy tarps or vapor suppressant foam.

5.5.5 Materials Excavation and Load Out

The Remedial Engineer or an EP under his/her supervision will oversee all invasive work and the excavation and load-out of all excavated material. The Participant and its contractors are solely responsible for safe execution of all invasive and other work performed under this Plan.

Loaded vehicles leaving the Site will be appropriately lined, tarped, securely covered, manifested, and placarded in accordance with appropriate Federal, State, local, and NYSDOT requirements (and all other applicable transportation requirements).

Where effective, the equipment will be “dry” decontaminated using a broom and/or brushes. The EP will be responsible for ensuring that all outbound trucks are dry-brushed and cleaned on the truck equipment pad before leaving the Site until the remedial construction is complete. Locations where vehicles enter or exit the Site shall be inspected daily for evidence of off-Site sediment tracking. The EP will be responsible for ensuring that all egress points for truck and equipment transport from the Site will be clean of dirt and other materials derived from the Site during Site remediation and development. Cleaning of the adjacent streets will be performed as needed to maintain a clean condition with respect to Site derived materials.

The Participant and associated parties preparing the remedial documents submitted to the State, and parties performing this work, are completely responsible for the safe performance of all invasive work, the structural integrity of excavations, and for structures that may be affected by excavations (such as building foundations and bridge footings).

The Remedial Engineer will ensure that Site development activities will not interfere with, or otherwise impair or compromise, remedial activities proposed in this Remedial Action Work Plan.

Development-related grading cuts and fills will not interfere with, or otherwise impair or compromise, the performance of remediation required by this plan.

Mechanical processing of historical fill material and contaminated soil on-Site is prohibited. All primary contaminant sources (including but not limited to tanks and hotspots) identified during Site Characterization, Remedial Investigation, and Remedial Action will be located and shown on maps to be reported in the Final Engineering Report.

5.5.6 Materials Transport Off-Site

All transport of materials will be performed by licensed haulers in accordance with appropriate local, State, and Federal regulations, including 6 NYCRR Part 364. Haulers will be appropriately licensed and trucks properly placarded. Truck transport routes are as follows:

- EXITING SITE – Turn Right onto Park Avenue heading south for one block to 125th Street. Turn left on 125th Street heading east. Continue on 125th Street following the signs and crossing the Robert F. Kennedy Bridge to the Brooklyn – Queens Expressway BQE (I-278). Follow the signs and head north on I-278 to the Major Deegan Expressway (I-87). Follow the signs and head north on I-87.
- ENTERING SITE - from the I-87 heading south. Follow the signs to the Brooklyn-Queens Expressway (I-278) west. Turn onto I-278 west and follow the signs to Robert F. Kennedy Bridge – 125th Street. Take 125th Street heading west to Park Avenue. Turn Right on Park Avenue heading north one block to the site entrance on the left (west side).

These routes are shown in **Figure 10**.

These are the most appropriate routes to and from the Site and take into account: (a) limiting transport through residential areas and past sensitive sites; (b) use of city mapped truck routes; (c) prohibiting off- Site queuing of trucks entering the facility; (d) limiting total distance to major highways; (e) promoting safety in access to highways; and (f) overall safety in transport.

Trucks will be prohibited from stopping and idling in residential neighborhoods around the project Site. Egress points for truck and equipment transport from the Site will be kept clean of dirt and other materials during Site remediation and development. Material transported by trucks exiting the Site will be secured with covers. Wet loads are not anticipated since the entire site will be dewatered prior to excavating soils. However, if wet soils are excavated they will be stockpiled within the excavation to dry or blended with dry soils. No loads of material capable of generating free liquid will be allowed to leave the Site. All trucks will be inspected, dry-brushed and / or washed, as needed, before leaving the Site.

5.5.7 Materials Disposal Off-Site

Multiple disposal facility designations may be employed for the materials removed from the Site. Once final arrangements have been made, the disposal facility acceptance letters will be provided to the NYSDEC Project Manager before the start of excavation activities. It is anticipated that the soil will be disposed of at up to 3 different facilities, based on the following classification:

- Non Hazardous - Contaminated (historic fill / petroleum) Low Lead < 1,500 mg/kg
- Non Hazardous - Contaminated (historic fill / petroleum) High Lead > 1,500 mg/kg
- Uncontaminated Native Soil - meets criteria of beneficial reuse

The total quantity of material expected to be disposed off-Site is 4,203 cubic yards, including 4,203 cubic yards of historic fill material and petroleum impacted soil.

Hazardous Soil Disposal and Transport

It is not expected that any soil will be classified as hazardous, however if any soil is classified as hazardous it will be shipped under a hazardous waste manifest system. All hazardous waste transported and disposed of must have a USEPA ID Number and waste code and must be distributed in accordance with the regulatory requirements.

The multi-part manifest will be filled out for each load of soil shipped off Site. At a minimum, the following information will be recorded on each manifest:

- 1) Generator's Name, Address, and Phone Number
- 2) Destination Facility Name, Address and Phone Number
- 3) EPA ID Number
- 4) Waste classification code
- 5) Transporter Name, Address, Phone Number, License Plate Number, Driver Name, and SW Haulers Permit #
- 6) Signatures – Generator or an authorized agent for the generator shall print, sign, and date each non-hazardous material manifest after each truck is loaded. The transporter shall then sign and date noting time material was picked up at the site. Both the transporter and a representative of the disposal facility will sign the non-hazardous material manifest when the material has been delivered to disposal facility.

Non-Hazardous Soil Disposal and Transport

Non-hazardous historic fill material and petroleum contaminated soil classified as non-hazardous, will be handled, at a minimum, as a Municipal Solid Waste per 6NYCRR Part 360-1.2. Historical fill material and contaminated soils from the Site are prohibited from being disposed at Part 360-16 Registration Facilities (also known as Soil Recycling Facilities).

Soils that are contaminated but non-hazardous and are being removed from the Site are considered by the Division of Materials Management (DMM) in NYSDEC to be Construction and Demolition (C/D) materials with contamination not typical of virgin soils. These soils may be sent to a permitted Part 360 landfill. They may be sent to a permitted C/D processing facility without permit modifications only upon prior notification of NYSDEC Region 2 DSHM. This material is prohibited from being sent or redirected to a Part 360-16 Registration Facility. In this

case, as dictated by DMM, special procedures will include, at a minimum, a letter to the C/D facility that provides a detailed explanation that the material is derived from a DER remediation Site, that the soil material is contaminated and that it must not be redirected to on-Site or off-Site Soil Recycling Facilities. The letter will provide the project identity and the name and phone number of the Remedial Engineer. The letter will include as an attachment a summary of all chemical data for the material being transported. Soil classified as non-hazardous fill will be transported under a non-hazardous waste manifest obtained from the selected disposal facility. The multi-part manifest will be filled out for each load of soil shipped off of the Site. At a minimum, the following information will be recorded on each manifest:

- 1) Generator's Name, Address, and Phone Number
- 2) Destination Facility Name, Address and Phone Number
- 3) Transporter Name, Address, Phone Number, License Plate Number, Driver Name, and SW Haulers Permit #
- 4 Signatures – Generator or an authorized agent for the generator shall print, sign, and date each non-hazardous material manifest after each truck is loaded. The transporter shall then sign and date noting time material was picked up at the site. Both the transporter and a representative of the disposal facility will sign the non-hazardous material manifest when the material has been delivered to disposal facility.

A copy of the manifest will be retained by AMC on-Site personnel for each shipment. Final signed manifests will be forwarded by the disposal facility to the generator. Copies of the final manifests will be presented in the FER.

Clean Soil Disposal

Clean native soil removed from the Site for development purposes (i.e., elevator pits) will be handled as unregulated or beneficial use disposal. This soil will undergo a testing program to confirm that it meets Unrestricted Use SCOs or Residential/Groundwater Protection SCOs prior to unregulated disposal or meets Unrestricted Use SCOs prior to reuse on-Site. Confirmation testing of clean soils will be in accordance with DER-10 Section 5.4(e)(10) as follows:

Contaminant	VOCs	SVOCs, Inorganics & PCBs/Pesticides	
Soil Quantity (cubic yards)	Discrete Samples	Composite	Discrete Samples/Composite
0-50	1	1	Each composite sample for analysis is created from 3-5 discrete samples from representative locations in the fill.
50-100	2	1	
100-200	3	1	
200-300	4	1	
300-400	4	2	
400-500	5	2	
500-800	6	2	
800-1000	7	2	
1000	Add an additional 2 VOC and 1 composite for each additional 1000 cubic yards or consult with DER		

Uncontaminated native soil confirmed by the above testing program and removed from the site, will be disposed of as C&D material or sent to a beneficial re-use facility. Note that clean soils disposed of at an out-of-state facility will be subject to the testing requirements of that facility in lieu of testing program outlined above the final destination of soils whether classified as contaminated or uncontaminated must be approved by the Remedial Engineer.

C&D and Scrap Metal Disposal

Concrete demolition material generated on the Site from building slabs, parking areas and other structures will be segregated, sized and shipped to a concrete recycling facility. Concrete crushing or processing on-Site is prohibited. Asphalt removed from the parking areas will be sent to a separate recycling facility.

Additionally, it is common to encounter scrap metals and large boulders (greater than one foot in diameter) during excavation which may not be accepted by either the licensed disposal facility or the C&D facility. These materials will be segregated and subsequently recycled at local facilities. Metal objects that are free of dirt and other debris will be taken to a local scrap metal facility (see Section 5.1 regarding UST disposal).

Bricks and other C&D material are also not accepted by most soil disposal facilities if present at greater than 5% by volume. This material, if encountered, will be sent to a C&D landfill or other C&D processing facility. C&D material of this type is most often encountered on sites in which former basement structures have been filled in with material from demolishing a former building. There was no evidence of former basement areas identified during previous investigations performed at the Site.

Scale Tickets

All trucks to be utilized for transport of hazardous or non-hazardous contaminated soil shall be weighed before and after unloading at the disposal facility. Disposal facilities must provide truck scales capable of generating load tickets measured in tons. The tonnage transported and disposed will be determined by the disposal facility and reported on a certified scale ticket which will be attached to each returned manifest. Weights will be reported on the certified scale ticket as Tare and Gross weights.

C&D Transport Tickets / Bills of Lading

Bill of Lading system or equivalent will be used for the disposal of C&D and related materials. Documentation for materials disposed of at recycling facilities (such as metal, concrete, asphalt) and as non-regulated C&D will include transport tickets for each load stating the origin of the material, the destination of the material and the quantity transported. This information will be reported in the Final Engineering Report.

Disposal Facility Documentation

The following documentation will be obtained and reported by the Remedial Engineer for each disposal location used in this project to fully demonstrate and document that the disposal of material derived from the Site conforms with all applicable laws: (1) a letter from the Remedial Engineer or BCP Applicant to the receiving facility describing the material to be disposed and requesting formal written acceptance of the material. This letter will state that material to be disposed is contaminated material generated at an environmental remediation Site in New York State. The letter will provide the project identity and the name and phone number of the Remedial Engineer. The letter will include as an attachment a summary of all chemical data for

the material being transported (including Site Characterization data); and (2) a letter from all receiving facilities stating it is in receipt of the correspondence (above) and is approved to accept the material. Disposal facility request letters and disposal facility approval letters will be forwarded to the NYSDECC for approval prior to the commencement of soil removal activities. These documents will be included in the FER. 0

The Final Engineering Report will include an accounting of the destination of all material removed from the Site during this Remedial Action, including excavated soil, contaminated soil, historic fill, solid waste, and hazardous waste, non-regulated material, and fluids. Documentation associated with disposal of all material must also include records and approvals for receipt of the material. This information will also be presented in a tabular form in the FER.

5.5.8 Materials Reuse On-Site

Re-use of on-Site clean native soil will only be allowed if the material is found to meet Unrestricted Use SCOs (for Track 1) or Restricted Residential Use SCOs (for Track 2) through the verification testing program detailed above. It is estimated that 1,000 cubic yards of clean native soil will be reused behind the shoring constructed around the perimeter of the Site. Additional soil may be re-used on-site to backfill over excavated areas. A letter summarizing sample collection, analytical results, volumes, soil location and intended re-use location will be provided to the NYSDEC prior to re-use of site soils as fill.

The Remedial Engineer will ensure that procedures defined for materials reuse in this RAWP are followed and that unacceptable material will not remain on-Site.

As there are no buildings onsite except for a temporary parking lot attendant's booth, the re-use of demolition materials is not proposed. Concrete crushing or processing on-Site is prohibited. Contaminated on-Site material, including historic fill material and contaminated soil, removed for grading or other purposes will not be reused within a cover soil layer, within landscaping berms, or as backfill for subsurface utility lines.

5.5.9 Fluids Management

As the depth to groundwater at the Site is approximately 5 feet below the planned excavation depth, dewatering operations should not be required during construction. However, water may accumulate following storm events or from melting snow which would require removal. If this occurs then dewatering fluids will be handled, transported and disposed of in accordance with applicable local, State, and Federal regulations. Liquids discharged into the New York City sewer system will be addressed through approval by the NYCDEP. The pumping and treatment system design will be detailed in the NYCDEP discharge permit submittal. This submittal as well as the approved permit will be provided to the DEC prior to initiating dewatering operations. Dewatered fluids will not be recharged back to the land surface or subsurface of the Site.

5.5.10 Backfill from Off-Site Sources

Off-site fill material may be needed to stabilize the entrance - exit areas of the Site, for temporary driveways for loading trucks and as an underlayment to structural components of the new buildings including slabs and footings. Recycled Concrete Aggregate (RCA) derived from recognizable and uncontaminated concrete and supplied by facilities permitted by, and in full compliance with Part 360-16 and DSNY regulations, is an acceptable form of backfill material. The Remedial Engineer is responsible for ensuring that the facility is compliant with the registration and permitting requirements of 6 NYCRR Part 360 and DSNY regulations at the time the RCA is acquired. RCA imported from compliant facilities does not require additional testing unless required by NYS DEC and DSNY under its terms of operations for the facility. Documentation of part 360-16 and DSNY compliance must be provided to the Remedial Engineer before the RCA is transported to the Site.

Fill material may also consist of virgin mined sand, gravel or stone products. Gravel or stone material from a virgin mined source may be imported to the Site without testing provided that the material meets the specifications of the geotechnical engineer, Remedial Engineer, and Redevelopment Construction Documents and that the source of the material is approved by the Remediation Engineer and the NYSDEC Project Manager. This material must contain less than 10% fines and not be blended with soil or other material. As per DER-10, if soil from sourced

from a virgin mine or pit is imported, at least one round of characterization sampling (2 discrete samples) for the first 100 cubic yards is required in accordance with Table 5.4(e)10 of DER-10, with additional sampling at a rate of 1 discrete sample per additional 100 cubic yards.

The source approval process will require a review of the following information:

- The origin of the material;
- The address of the facility which mines/processes the material;
- A letter from the facility stating that the material to be delivered to the site is a virgin mined material and that it has not been co-mingled with other materials during processing or stockpiling.

All materials proposed for import onto the Site will be approved by the Remedial Engineer and will be in compliance with provisions in this RAWP prior to receipt at the Site. Material from industrial sites, spill sites or other potentially contaminated sites will not be imported to the Site.

The Final Engineering Report will include the following certification by the Remedial Engineer: “I certify that all import of soils from off-Site, including source evaluation, approval and sampling, has been performed in a manner that is consistent with the methodology defined in the Remedial Action Work Plan”.

Under no circumstances will fill materials be imported to the Site without prior approval from the NYSDEC Project Manager. Any soil imported to the Site needs to be tested in accordance with Table 4 of NYSDEC CP-51 Soil Cleanup Guidance Policy. Soils that meet ‘exempt’ fill requirements under 6 NYCRR Part 360, but do not meet backfill or cover soil objectives for this Site, will not be imported onto the Site without prior approval by NYSDEC. Solid waste will not be imported onto the Site.

5.5.11 Stormwater Pollution Prevention

Barriers and hay bale checks will be installed and inspected once a week and after every storm event. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by NYSDEC. All necessary repairs shall be made immediately. Accumulated sediments will be removed as required to keep the barrier and hay bale check functional. All undercutting or erosion of the silt fence toe anchor shall be repaired immediately

with appropriate backfill materials. Manufacturer's recommendations will be followed for replacing silt fencing damaged due to weathering. Erosion and sediment control measures identified in the RAWP shall be observed to ensure that they are operating correctly. Where discharge locations or points are accessible, they shall be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to receiving waters. Silt fencing or hay bales will be installed around the entire perimeter of the remedial construction area.

5.5.12 Contingency Plan

If underground tanks or other previously unidentified contaminant sources are found during on-Site remedial excavation or development related construction, sampling will be performed on product, sediment and surrounding soils, etc. Chemical analytical work will be for full scan parameters (TAL metals, TCL volatiles and semi-volatiles, TCL pesticides, PCBs, 1,4-dioxanene and PFAS compounds). These analyses will not be limited to STARS parameters where tanks are identified without prior approval by NYSDEC. Analyses will not be otherwise limited without NYSDEC approval.

Identification of unknown or unexpected contaminated media identified by screening during invasive Site work will be promptly communicated by phone to NYSDEC's Project Manager. These findings will be also included in daily and periodic electronic media reports.

5.5.13 Community Air Monitoring Plan

The Community Air Monitoring Plan (CAMP) provides measures for protection for on-site workers and the downwind community (i.e., off-site receptors including residences, businesses, and on-site workers not directly involved in the remedial work) from potential airborne contaminant releases resulting from remedial activities at construction sites.

The action levels specified herein require increased monitoring, corrective actions to abate emissions, and/or work shutdown. Additionally, the CAMP helps to confirm that the remedial work did not spread contamination off-site through the air. The primary concerns for this site are odors associated with excavation of petroleum contaminated soil. Exceedances observed in the CAMP will be reported to NYSDEC and NYSDOH Project Managers and included in the Daily Report. The complete CAMP developed for this Site is included in **Attachment D**.

5.5.14 Odor, Dust and Nuisance Control Plan

The Final Engineering Report will include the following certification by the Remedial Engineer: “I certify that all invasive work during the remediation and all invasive development work were conducted in accordance with dust and odor suppression methodology defined in the Remedial Action Work Plan.”

5.5.14.1 Odor Control Plan

This odor control plan is capable of controlling emissions of nuisance odors off-Site and on-Site. If nuisance odors are identified, work will be halted, and the source of odors will be identified and corrected. Work will not resume until all nuisance odors have been abated. NYSDEC and NYSDOH will be notified of all odor events and of all other complaints about the project. Implementation of all odor controls, including the halt of work, will be the responsibility of the Applicant’s Remediation Engineer, who is responsible for certifying the Final Engineering Report.

All necessary means will be employed to prevent on and off-Site nuisances. At a minimum, procedures will include: (a) use of closed settling tanks and carbon treatment of exhaust air from the pumping / dewatering system (b) limiting the area of open excavations; (c) shrouding open excavations with tarps and other covers; and (d) using foams to cover exposed odorous soils. If odors develop and cannot be otherwise controlled, additional means to eliminate odor nuisances will include: (e) direct load-out of soils to trucks for off-Site disposal; (f) use of chemical odorants in spray or misting systems, (g) use of perimeter misting systems; and, (h) use of staff to monitor odors in surrounding neighborhoods.

Where odor nuisances have developed during remedial work and cannot be corrected, or where the release of nuisance odors cannot otherwise be avoided due to on-Site conditions or close proximity to sensitive receptors, odor control will be achieved by sheltering excavation and handling areas under tented containment structures equipped with appropriate air venting/filtering systems.

5.5.14.2 Dust Control Plan

A dust suppression plan that addresses dust management during invasive on-Site work, will include, at a minimum, the items listed below:

- Dust suppression will be achieved through spraying water directly onto off-road areas including excavations and stockpiles.
- Gravel will be used on roadways to provide a clean and dust-free road surface.
- On-Site roads will be limited in total area to minimize the area required for water application.

5.5.14.3 Nuisance Control Plan

A plan for rodent control will be developed and utilized by the contractor prior to and during Site clearing and Site grubbing, and during all remedial work. A plan will be developed and utilized by the contractor for all remedial work and conforms, to NYCDEP noise control standards.

6.0 RESIDUAL CONTAMINATION TO REMAIN ON-SITE

If a Track 1 cleanup is achieved, all on-Site soil remaining after completion of remediation will meet Track 1 Unrestricted Use SCOs, and an Institutional Control (IC) will not be required to protect human health and the environment.

However, if a Track 1 cleanup is not achieved, the Track 4 alternative will be implemented as a contingency, including a site cover system (EC) and an IC will be required. The Track 4 alternative will allow Restricted Residential use of the property. Long-term management of the EC/IC will be executed under an environmental easement recorded with the NYC Department of Finance, Office of the City Register.

If Track 1 is not achieved, long-term management of ICs and of residual contamination will be executed under a Site-specific Site Management Plan (SMP) that will be developed and submitted to DEC, if needed. The FER will report residual contamination on the Site in tabular and map form.

7.0 ENGINEERING CONTROLS

The intent of this project is to achieve Track 1 Unrestricted Use remedy. If a Track 1 Cleanup cannot be achieved, then a Track 4 Restricted Residential cleanup is proposed.

If a Track 4 remedy is achieved, the Site will be restricted to Restricted-Residential, Commercial and Industrial uses and a site cover may be required to allow for the intended use of the Site. The cover will consist either of the structures such as buildings, pavement, sidewalks comprising the site development or two feet of soil meeting the SCOs as set forth in 6 NYCRR Part 375-6.7(d) and Table 375-6.8(b). The soil cover will be placed over a demarcation layer, with the upper six inches of the soil of sufficient quality to maintain a vegetation layer. Any fill material brought to the Site will meet the requirements for the identified site use as set forth in 6 NYCRR Part 375-6.7(d).

8.0 INSTITUTIONAL CONTROLS

Since the intent of this project is to achieve Track 1 cleanup criteria, institutional controls are not expected to be part of the final remedy for the Site.

If Track 1 cleanup is not achieved, ICs will be incorporated into the remedy to render the overall Site remedy protective of public health and the environmental. Two elements have been designed to ensure continual and proper management of residual contamination in perpetuity: an Environmental Easement and a SMP.

If required, a Site-Specific Environmental Easement will be recorded with the City of New York to provide an enforceable means of ensuring the continual and proper management of residual contamination and protection of public health and the environment in perpetuity or until released in writing by NYSDEC. It requires that the grantor of the Environmental Easement and the grantor's successors and assigns adhere to all Engineering and Institutional Controls (ECs/ICs) placed on the Site by this NYSDEC-approved remedy. ICs provide restrictions on Site usage and mandate operation, maintenance, monitoring and reporting measures for all ECs and ICs.

The SMP describes appropriate methods and procedures to ensure compliance with all ECs and ICs that are required by the Environmental Easement. Once the SMP has been approved by the NYSDEC, compliance with the SMP is required by the grantor of the Environmental Easement and grantor's successors and assigns.

8.1 ENVIRONMENTAL EASEMENT

An Environmental Easement, as defined in Article 71 Title 36 of the Environmental Conservation Law, is required when residual contamination is left on-Site after the Remedial Action is complete. If the Site will have residual contamination after completion of all Remedial Actions than an Environmental Easement is required. If an Environmental Easement is needed following completion of the remedy an Environmental Easement approved by NYSDEC will be filed and recorded with the City of New York. The Environmental Easement (if needed) will be submitted as part of the Final Remediation Report.

The Environmental Easement renders the Site a Controlled Property. The Environmental Easement must be recorded with the City of New York before the Certificate of Completion can be issued by NYSDEC. These Institutional Controls are requirements or restrictions placed on the Site that are listed in, and required by, the Environmental Easement. ICs can, generally, be subdivided between controls that support ECs, and those that place general restrictions on Site usage or other requirements. ICs in both of these groups are closely integrated with the SMP, which provides all of the methods and procedures to be followed to comply with this remedy.

The ICs which will be needed to support ECs are:

- Use of groundwater underlying the Controlled Property is prohibited without the approval of NYSDOH and any other applicable NYC Health Department regulations;
- Compliance with the Environmental Easement by the Grantee and the Grantee's successor's is required;
- Grantor agrees to submit to NYSDEC a written statement that certifies, under penalty of perjury, that: (1) controls employed at the Controlled Property are unchanged from the previous certification or that any changes to the controls were approved by the NYSDEC; and, (2) nothing has occurred that impairs the ability of the controls to protect public health and environment or that constitute a violation or failure to comply with the Controls;
- NYSDEC retains the right to access such Controlled Property at any time in order to evaluate the continued maintenance of any and all controls. This certification shall be submitted annually, or an alternate period of time that NYSDEC may allow. This annual statement must be certified by an expert that the NYSDEC finds acceptable;

8.2 SITE MANAGEMENT PLAN

Site Management is the last phase of remediation and begins with the approval of the Final Engineering Report and issuance of the Certificate of Completion (COC) for the Remedial Action. The SMP is submitted as a separate and independent document from the FER. Site Management continues in perpetuity or until released in writing by NYSDEC. The property owner is responsible to ensure that all Site Management responsibilities defined in the Environmental Easement and the SMP are performed.

The SMP is intended to provide a detailed description of the procedures required to manage residual contamination left in place at the Site following completion of the Remedial Action in accordance with the BCA with the NYSDEC. This includes: (1) development, implementation, and management of all Engineering and Institutional Controls; (2) development and implementation of monitoring systems and a Monitoring Plan; (3) development of a plan to operate and maintain any treatment, collection, containment, or recovery systems (including, where appropriate, preparation of an Operation and Maintenance Manual); (4) submittal of Site Management Reports, performance of inspections and certification of results, and demonstration of proper communication of Site information to NYSDEC; and (5) defining criteria for termination of treatment system operation.

To address these needs, this SMP will include four plans: (1) an Engineering and Institutional Control Plan for implementation and management of EC/ICs; (2) a Monitoring Plan for implementation of Site Monitoring; (3) an Operation and Maintenance Plan for implementation of remedial collection, containment, treatment, and recovery systems; and (4) a Site Management Reporting Plan for submittal of data, information, recommendations, and certifications to NYSDEC. The SMP will be prepared in accordance with the requirements in NYSDEC Draft DER-10 Technical Guidance for Site Investigation and Remediation, dated [month, year], and the guidelines provided by NYSDEC.

Site management activities, reporting, and EC/IC certification will be scheduled on a certification period basis. The certification period will be annually. The Site Management Plan will be based on a calendar year and will be due for submission to NYSDEC by March 1 of the year following the reporting period.

No exclusions for handling of residual contaminated soils will be provided in the SMP. All handling of residual contaminated material will be subject to provisions contained in the SMP.

9.0 FINAL ENGINEERING REPORT

A Final Engineering Report (FER) and Certificate of Completion (COC) will be submitted to NYSDEC following implementation of the Remedial Action defined in this RAWP. The FER provides the documentation that the remedial work required under this RAWP has been completed and has been performed in compliance with this plan. The FER will provide a comprehensive account of the locations and characteristics of all material removed from the Site including the surveyed map(s) of all sources. The Final Engineering Report will include as-built drawings for all constructed elements, certifications, manifests, bills of lading as well as the complete Site Management Plan (formerly the Operation and Maintenance Plan). The FER will provide a description of the changes in the Remedial Action from the elements provided in the RAWP and associated design documents. The FER will provide a tabular summary of all performance evaluation sampling results and all material characterization results and other sampling and chemical analysis performed as part of the Remedial Action. The FER will provide test results demonstrating that all mitigation and remedial systems are functioning properly. The FER will be prepared in conformance with DER-10.

Where determined to be necessary by NYSDEC, a Financial Assurance Plan will be required to ensure the sufficiency of revenue to perform long-term operations, maintenance and monitoring tasks defined in the Site Management Plan and Environmental Easement. This determination will be made by NYSDEC in the context of the Final Engineering Report review.

The Final Engineering Report will include written and photographic documentation of all remedial work performed under this remedy. The FER will include an itemized tabular description of actual costs incurred during all aspects of the Remedial Action.

If a Track 1 cleanup is not achieved, then the FER will provide a thorough summary of all residual contamination left on the Site after the remedy is complete. Residual contamination includes all contamination that exceeds the Track 1 Unrestricted Use SCO in 6NYCRR Part 375-6. A table that shows exceedances from Track 1 Unrestricted SCOs for all soil/fill remaining at the Site after the Remedial Action and a map that shows the location and summarizes exceedances from Track 1 Unrestricted SCOs for all soil/fill remaining at the Site after the Remedial Action will be included in the FER.

The FER will provide a thorough summary of all residual contamination that exceeds the SCOs defined for the Site in the RAWP and must provide an explanation for why the material was not removed as part of the Remedial Action. A table that shows residual contamination in excess of Site SCOs and a map that shows residual contamination in excess of Site SCOs will be included in the FER.

The Final Engineering Report will include an accounting of the destination of all material removed from the Site, including excavated contaminated soil, historic fill, solid waste, hazardous waste, non-regulated material, and fluids. Documentation associated with disposal of all material must also include records and approvals for receipt of the material. It will provide an accounting of the origin and chemical quality of all material imported onto the Site.

Before approval of a FER and issuance of a Certificate of Completion, all project reports must be submitted in digital form on electronic media (PDF).

9.1 CERTIFICATIONS

The following certification will appear in front of the Executive Summary of the Final Engineering Report. The certification will be signed by the Remedial Engineer who is a Professional Engineer registered in New York State. This certification will be appropriately signed and stamped. The certification will include the following statements:

I _____certify that I am currently a NYS registered professional engineer, I had primary direct responsibility for the implementation of the subject construction program, and I certify that the Remedial Work Plan (or Remedial Design or Plans and Specifications) was implemented and that all construction activities were completed in substantial conformance with the DER-approved Remedial Work Plan (or Remedial Design or Plans and Specifications).

Additionally, I certify that:

- All documents generated in support of this report have been submitted in accordance with the DER's electronic submission protocols and have been accepted by the Department;*

- *All data generated in support of this report have been submitted in accordance with the Department's electronic data deliverable and have been accepted by the Department;*
- *All information and statements in this certification form are true. I understand that a false statement made herein is punishable as a Class "A" misdemeanor, pursuant to Section 210.45 of the Penal Law. I, [name], of [business address], am certifying as Owner's Designated Site Representative: [and I have been authorized and designated by all site owners to sign this certification] for this site.*

If the Remedial Action Work Plan (or Remedial Design or Plans and Specifications) identifies time frames to be achieved by the remedial program, the certification must include:

The data submitted to DER demonstrates that the remediation requirements set forth in the Remedial Work Plan (or Remedial Design or Plans and Specifications) and all applicable statutes and regulations have been or will be achieved in accordance with the time frames, if any, established in the work plan (or Remedial Design or Plans and Specifications).

If the remedial program requires ICs or ECs, the certification will include:

All use restrictions, institutional controls, engineering controls and/or any operation and maintenance requirements applicable to the site are contained in an environmental easement created and recorded pursuant to ECL 71-3605 and that any affected local governments, as defined in ECL 71-3603, have been notified that such easement has been recorded.

If the remedial program requires applicable SMP, the certification will include:

A Site Management Plan has been submitted for the continual and proper operation, maintenance, and monitoring of any engineering controls employed at the site including the proper maintenance of any remaining monitoring wells, and that such plan has been approved by DER.

If the remedial program requires financial assurance, the certification will include:

Any financial assurance mechanisms required by DEC pursuant to Environmental Conservation Law have been executed.

10.0 SCHEDULE

The remedial action will begin with mobilization of equipment and material to the Site which will begin approximately 1 week following RAWP approval and within 10 days of the distribution of the Construction Fact Sheet. Mobilization will be followed by the installation of shoring structures, removal and disposal of the USTs (if present), excavation and disposal of petroleum impacted soil and historic fill materials and by confirmation endpoint soil sampling. Excavation work may proceed in several stages as needed to accommodate pile or sheet driving equipment, underpinning and other components related to the support of excavation (SOE). The work is expected to take approximately 6 months as part of the construction excavation and foundation installation. The schedule of tasks completed under this RAWP is as follows:

Conduct pre-construction meeting with NYSDEC	Within 3 weeks of RAWP approval
Mobilize equipment to the site and construct truck pad and other designated areas	Within 3 weeks following the pre-construction meeting and issuance of Pre-Construction Fact Sheet
Mobilize shoring contractor and equipment to the Site	Within 3 weeks following the pre-construction meeting
Mobilize excavation contractor and equipment to the Site	Within 3 weeks following the installation of shoring or as shoring proceeds
Begin excavation of USTs (if present)	Upon discovery during initial excavation cut (top six feet of soil).
Complete excavation and disposal of historic fill material and clean native soil.	Within 12 months of mobilization
Perform endpoint verification of entire site	Performed in sequence as final depth of each excavated area is complete.
Submit SMP (as a contingency) if Track 1 Cleanup is not achieved	By August 15 th of the year in which the COC is sought or as required by DEC.
Submit FER	By September 15 th of the year in which the COC is sought or as required by DEC.

TABLES

TABLE 1
Soil Cleanup Objectives

Contaminant	CAS Number	Protection of Public Health				Protection of Ecological Resources	Protection of Ground-water	Unrestricted Use
		Residential	Restricted-Residential	Commercial	Industrial			
METALS								
Arsenic	7440-38 -2	16f	16f	16f	16f	13f	16f	13 ^c
Barium	7440-39 -3	350f	400	400	10,000 d	433	820	350 ^c
Beryllium	7440-41 -7	14	72	590	2,700	10	47	7.2
Cadmium	7440-43 -9	2.5f	4.3	9.3	60	4	7.5	2.5 ^c
Chromium, hexavalent ^h	18540-29-9	22	110	400	800	1e	19	1 ^b
Chromium, trivalent ^h	16065-83-1	36	180	1,500	6,800	41	NS	30 ^c
Copper	7440-50 -8	270	270	270	10,000 d	50	1,720	50
Total Cyanide ^h		27	27	27	10,000 d	NS	40	27
Lead	7439-92 -1	400	400	1,000	3,900	63f	450	63 ^c
Manganese	7439-96 -5	2,000f	2,000f	10,000 d	10,000 d	1600f	2,000f	1600 ^c
Total Mercury		0.81j	0.81j	2.8j	5.7j	0.18f	0.73	0.18 ^c
Nickel	7440-02 -0	140	310	310	10,000 d	30	130	30
Selenium	7782-49 -2	36	180	1,500	6,800	3.9f	4f	3.9 ^c
Silver	7440-22 -4	36	180	1,500	6,800	2	8.3	2
Zinc	7440-66 -6	2200	10,000 d	10,000 d	10,000 d	109f	2,480	109 ^c
PESTICIDES / PCBs								
2,4,5-TP Acid (Silvex)	93-72-1	58	100a	500b	1,000c	NS	3.8	3.8
4,4'-DDE	72-55-9	1.8	8.9	62	120	0.0033 e	17	0.0033 ^b
4,4'-DDT	50-29-3	1.7	7.9	47	94	0.0033 e	136	0.0033 ^b
4,4'-DDD	72-54-8	2.6	13	92	180	0.0033 e	14	0.0033 ^b
Aldrin	309-00-2	0.019	0.097	0.68	1.4	0.14	0.19	0.005 ^c
alpha-BHC	319-84-6	0.097	0.48	3.4	6.8	0.04g	0.02	0.02
beta-BHC	319-85-7	0.072	0.36	3	14	0.6	0.09	0.036
Chlordane (alpha)	5103-71 -9	0.91	4.2	24	47	1.3	2.9	0.094
delta-BHC	319-86-8	100a	100a	500b	1,000c	0.04g	0.25	0.04
Dibenzofuran	132-64-9	14	59	350	1,000c	NS	210	7
Dieldrin	60-57-1	0.039	0.2	1.4	2.8	0.006	0.1	0.005 ^c
Endosulfan I	959-98-8	4.8i	24i	200i	920i	NS	102	2.4
Endosulfan II	33213-65-9	4.8i	24i	200i	920i	NS	102	2.4
Endosulfan sulfate	1031-07 -8	4.8i	24i	200i	920i	NS	1,000c	2.4
Endrin	72-20-8	2.2	11	89	410	0.014	0.06	0.014
Heptachlor	76-44-8	0.42	2.1	15	29	0.14	0.38	0.042
Lindane	58-89-9	0.28	1.3	9.2	23	6	0.1	0.1
Polychlorinated biphenyls	1336-36 -3	1	1	1	25	1	3.2	0.1
SEMI-VOLATILES								
Acenaphthene	83-32-9	100a	100a	500b	1,000c	20	98	20
Acenaphthylene	208-96-8	100a	100a	500b	1,000c	NS	107	100 ^a
Anthracene	120-12-7	100a	100a	500b	1,000c	NS	1,000c	100 ^a
Benz(a)anthracene	56-55-3	1f	1f	5.6	11	NS	1f	1 ^c
Benzo(a)pyrene	50-32-8	1f	1f	1f	1.1	2.6	22	1 ^c
Benzo(b) fluoranthene	205-99-2	1f	1f	5.6	11	NS	1.7	1 ^c
Benzo(g,h,i) perylene	191-24-2	100a	100a	500b	1,000c	NS	1,000c	100
Benzo(k) fluoranthene	207-08-9	1	3.9	56	110	NS	1.7	0.8 ^c
Chrysene	218-01-9	1f	3.9	56	110	NS	1f	1 ^c
Dibenz(a,h) anthracene	53-70-3	0.33e	0.33e	0.56	1.1	NS	1,000c	0.33 ^b
Fluoranthene	206-44-0	100a	100a	500b	1,000c	NS	1,000c	100 ^a
Fluorene	86-73-7	100a	100a	500b	1,000c	30	386	30
Indeno(1,2,3-cd) pyrene	193-39-5	0.5f	0.5f	5.6	11	NS	8.2	0.5 ^c
m-Cresol	108-39-4	100a	100a	500b	1,000c	NS	0.33e	0.33 ^b
Naphthalene	91-20-3	100a	100a	500b	1,000c	NS	12	12
o-Cresol	95-48-7	100a	100a	500b	1,000c	NS	0.33e	0.33 ^b
p-Cresol	106-44-5	34	100a	500b	1,000c	NS	0.33e	0.33 ^b
Pentachlorophenol	87-86-5	2.4	6.7	6.7	55	0.8e	0.8e	0.8 ^b
Phenanthrene	85-01-8	100a	100a	500b	1,000c	NS	1,000c	100
Phenol	108-95-2	100a	100a	500b	1,000c	30	0.33e	0.33 ^b
Pyrene	129-00-0	100a	100a	500b	1,000c	NS	1,000c	100

TABLE 1
Soil Cleanup Objectives

Contaminant	CAS Number	Protection of Public Health				Protection of Ecological Resources	Protection of Ground-water	Unrestricted Use
		Residential	Restricted-Residential	Commercial	Industrial			
VOLATILES								
1,1,1-Trichloroethane	71-55-6	100a	100a	500b	1,000c	NS	0.68	0.68
1,1-Dichloroethane	75-34-3	19	26	240	480	NS	0.27	0.27
1,1-Dichloroethene	75-35-4	100a	100a	500b	1,000c	NS	0.33	0.33
1,2-Dichlorobenzene	95-50-1	100a	100a	500b	1,000c	NS	1.1	1.1
1,2-Dichloroethane	107-06-2	2.3	3.1	30	60	10	0.02f	0.02 ^c
cis-1,2-Dichloroethene	156-59-2	59	100a	500b	1,000c	NS	0.25	0.25
trans-1,2-Dichloroethene	156-60-5	100a	100a	500b	1,000c	NS	0.19	0.19
1,3-Dichlorobenzene	541-73-1	17	49	280	560	NS	2.4	2.4
1,4-Dichlorobenzene	106-46-7	9.8	13	130	250	20	1.8	1.8
1,4-Dioxane	123-91-1	9.8	13	130	250	0.1e	0.1e	0.1 ^b
Acetone	67-64-1	100a	100b	500b	1,000c	2.2	0.05	0.05
Benzene	71-43-2	2.9	4.8	44	89	70	0.06	0.06
Butylbenzene	104-51-8	100a	100a	500b	1,000c	NS	12	12
Carbon tetrachloride	56-23-5	1.4	2.4	22	44	NS	0.76	0.76
Chlorobenzene	108-90-7	100a	100a	500b	1,000c	40	1.1	1.1
Chloroform	67-66-3	10	49	350	700	12	0.37	0.37
Ethylbenzene	100-41-4	30	41	390	780	NS	1	1
Hexachlorobenzene	118-74-1	0.33e	1.2	6	12	NS	3.2	0.33 ^b
Methyl ethyl ketone	78-93-3	100a	100a	500b	1,000c	100a	0.12	0.12
Methyl tert-butyl ether	1634-04 -4	62	100a	500b	1,000c	NS	0.93	0.93
Methylene chloride	75-09-2	51	100a	500b	1,000c	12	0.05	0.05
n-Propylbenzene	103-65-1	100a	100a	500b	1,000c	NS	3.9	3.9
sec-Butylbenzene	135-98-8	100a	100a	500b	1,000c	NS	11	11
tert-Butylbenzene	98-06-6	100a	100a	500b	1,000c	NS	5.9	5.9
Tetrachloroethene	127-18-4	5.5	19	150	300	2	1.3	1.3
Toluene	108-88-3	100a	100a	500b	1,000c	36	0.7	0.7
Trichloroethene	79-01-6	10	21	200	400	2	0.47	0.47
1,2,4-Trimethylbenzene	95-63-6	47	52	190	380	NS	3.6	3.6
1,3,5-Trimethylbenzene	108-67-8	47	52	190	380	NS	8.4	8.4
Vinyl chloride	75-01-4	0.21	0.9	13	27	NS	0.02	0.02
Xylene (mixed)	1330-20 -7	100a	100a	500b	1,000c	0.26	1.6	0.26

All soil cleanup objectives (SCOs) are in parts per million (ppm). NS=Not specified. See Technical Support Document (TSD). Footnotes

a The SCOs for residential, restricted-residential and ecological resources use were capped at a maximum value of 100 ppm. See TSD section 9.3.

b The SCOs for commercial use were capped at a maximum value of 500 ppm. See TSD section 9.3.

c The SCOs for industrial use and the protection of groundwater were capped at a maximum value of 1000 ppm. See TSD section 9.3.

d The SCOs for metals were capped at a maximum value of 10,000 ppm. See TSD section 9.3.

e For constituents where the calculated SCO was lower than the contract required quantitation limit (CRQL), the CRQL is used as the SCO value.

TABLE 2
SUMMARY OF
SAMPLING PROGRAM RATIONALE AND ANALYSIS

Matrix	Location	Number of Samples	Rationale for Sampling	Laboratory Analysis
Subsurface soil (0 to 18 feet bgs)	15 soil borings throughout the site. Samples collected at various intervals for analysis, including 0-2', 5-7', 8-10' and 16-18'	30	To evaluate the extent of soil impact and obtain information on soil quality at the Site.	VOCs EPA Method 8260B, SVOCs EPA Method 8270, pesticide / PCBs EPA Method 8081/8082, and TAL metals.
Subsurface soil (0 to 18 feet bgs)	From 6 soil borings (SB2001 through SB2006) throughout the site	12	To evaluate the quality of fill materials and the presense of emergent contaminants in soil at the site	21 PFAS Compounds by EPA Method 537 Modified, 1,4-dioxane EPA 8270.
Total (Soils)		42		
Groundwater (water table)	From 3 temporary monitoring wells and one previously existing monitoring well across the Site.	4	To assess groundwater quality at the Site.	VOCs EPA Method 8260B plus TICs, SVOCs EPA Method 8270 plus TICs, pesticide / PCBs EPA Method 8081/8082, TAL metals and dissolved and total.
Groundwater (water table)	From MW4 and MW2001 through MW2004	5	To assess presense of PFOS compounds	PFOS compounds USEPA Method 537
Total (Groundwater)		9		
Soil Gas (5 ft below existing grade)	Six soil gas implants installed across the Site.	6	Evaluate soil gas across the Site.	VOCs EPA Method TO15
Total (Soil Gas)		6		
Duplicates	Soil and groundwater duplicates	2	To meet requirements of QA / QC program	VOCs EPA Method 8260B, SVOCs EPA Method 8270 BN, pesticide / PCBs EPA Method 8081/8082, TAL metals.
Groundwater Duplicate	One duplicate groundwater sample per day	1	To meet requirements of QA / QC program	21 PFAS Compounds by EPA Method 537 Modified, 1,4-dioxane EPA 8270 SIM.
Equipment / Materials Rinsate Blank for PFAS (GW)	One blank sample for groundwater per day	1	To meet requirements of QA / QC program	21 PFAS Compounds by EPA Method 537 Modified, 1,4-dioxane EPA 8270 SIM.
Groundwater MS/MSD	Matrix spike and Matrix spike duplicates at	1	To meet requirements of QA / QC	21 PFAS Compounds by EPA Method 537
Trip Blanks	One laboratory prepared trip blank to accompany samples each time they are delivered to the laboratory.	2	To meet requirements of QA / QC program	VOCs EPA Method 8260B
Total (QA / QC Samples)		7		

Table 3
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	SB1				SB2				SB3			
				(0-2)		(16-18)		(0-2)		(16-18)		(0-2)		(16-18)	
				3/18/2019		3/18/2019		3/18/2019		3/18/2019		3/18/2019		3/18/2019	
				µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
1,1,1,2-Tetrachloroethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,1,1-Trichloroethane	680	100,000	500,000	< 30	30	< 20	20	< 23	23	< 20	20	< 35	35	< 21	21
1,1,2,2-Tetrachloroethane				< 490	490	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,1,2-Trichloroethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,1-Dichloroethane	270	26,000	240,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,1-Dichloroethene	330	100,000	500,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,1-Dichloropropene				-	-	-	-	-	-	-	-	-	-	-	-
1,2,3-Trichlorobenzene				< 490	490	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,2,3-Trichloropropane				-	-	-	-	-	-	-	-	-	-	-	-
1,2,4-Trichlorobenzene				< 490	490	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,2,4-Trimethylbenzene	3,600	52,000	190,000	-	-	-	-	-	-	-	-	-	-	-	-
1,2-Dibromo-3-chloropropane				< 490	490	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,2-Dibromomethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,2-Dichlorobenzene	1,100	100,000	500,000	< 490	490	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,2-Dichloroethane	20	3,100	30,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,2-Dichloropropane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,3,5-Trimethylbenzene	8,400	52,000	190,000	-	-	-	-	-	-	-	-	-	-	-	-
1,3-Dichlorobenzene	2,400	4,900	280,000	< 490	490	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,3-Dichloropropane				-	-	-	-	-	-	-	-	-	-	-	-
1,4-Dichlorobenzene	1,800	13,000	130,000	< 490	490	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
1,4-dioxane	100	13,000	130,000	< 100	100	< 74	74	< 87	87	< 74	74	< 100	100	< 78	78
2,2-Dichloropropane				-	-	-	-	-	-	-	-	-	-	-	-
2-Chlorotoluene				-	-	-	-	-	-	-	-	-	-	-	-
2-Hexanone (Methyl Butyl Ketone)				< 37	37	< 25	25	< 29	29	< 25	25	< 48	48	< 26	26
2-Isopropyltoluene				-	-	-	-	-	-	-	-	-	-	-	-
4-Chlorotoluene				-	-	-	-	-	-	-	-	-	-	-	-
4-Methyl-2-Pentanone				< 37	37	< 25	25	< 29	29	< 25	25	< 48	48	< 26	26
Acetone	50	100,000	500,000	20	29	40	25	45	29	22	25	25	28	9.9	26
Acrolein				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Acrylonitrile				< 30	30	< 20	20	< 23	23	< 20	20	< 38	38	< 21	21
Benzene	60	4,800	44,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Bromobenzene				-	-	-	-	-	-	-	-	-	-	-	-
Bromochloromethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Bromodichloromethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Bromoforn				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Bromomethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Carbon Disulfide				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Carbon tetrachloride	760	2,400	22	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Chlorobenzene	1,100	100,000	500,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Chloroethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Chloroform	370	49,000	350,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Chloromethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
cis-1,2-Dichloroethene	250	100,000	500,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
cis-1,3-Dichloropropene				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Cyclohexane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Dibromochloromethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Dibromomethane				-	-	-	-	-	-	-	-	-	-	-	-
Dichlorodifluoromethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Ethylbenzene	1,000	41,000	390,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Hexachlorobutadiene				-	-	-	-	-	-	-	-	-	-	-	-
Isopropylbenzene				< 490	490	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
m&p-Xylenes	260	100,000	500,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Methyl Ethyl Ketone (2-Butanone)	120	100,000	500,000	< 44	44	< 30	30	< 35	35	< 30	30	< 57	57	< 31	31
Methyl t-butyl ether (MTBE)	930	100,000	500,000	< 15	15	< 9.9	9.9	< 12	12	< 9.9	9.9	< 19	19	< 10	10
Methylacetate				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Methylcyclohexane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Methylene chloride	50	100,000	500,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Naphthalene	12,000	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
n-Butylbenzene	12,000	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
n-Propylbenzene	3,900	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
o-Xylene	260	100,000	500,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
p-Isopropyltoluene				-	-	-	-	-	-	-	-	-	-	-	-
sec-Butylbenzene	11,000	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
Styrene				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
tert-butyl alcohol				< 150	150	< 99	99	< 120	120	< 99	99	< 190	190	< 100	100
tert-Butylbenzene	5,900	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
Tetrachloroethene	1,300	19,000	150,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Tetrahydrofuran (THF)				-	-	-	-	-	-	-	-	-	-	-	-
Toluene	700	100,000	500,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
trans-1,2-Dichloroethene	190	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
trans-1,3-Dichloropropene				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
trans-1,4-dichloro-2-butene				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Trichloroethene	470	21,000	200,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Trichlorofluoromethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Trichlorotrifluoroethane				< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Vinyl Chloride	20	900	13,000	< 7.4	7.4	< 4.9	4.9	< 5.8	5.8	< 4.9	4.9	< 9.5	9.5	< 5.2	5.2
Total BTEX Concentration				0		0		0		0		0		0	
Total VOCs Concentration				20		40		45		22		25		9.9	

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL - Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RSCO Guidance Value

Table 3
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	SB4				SB5				SB6			
				(0-2)		(16-18)		(0-2)		(16-18)		(0-2)		(16-18)	
				3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019	
				µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
1,1,1,2-Tetrachloroethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
1,1,1-Trichloroethane	680	100,000	500,000	< 19	19	< 17	17	< 1900	1,900	< 24	24	< 20	20	< 20	20
1,1,2,2-Tetrachloroethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 430	430	< 5.0	5.0
1,1,2-Trichloroethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
1,1-Dichloroethane	270	26,000	240,000	< 4.8	4.8	< 4.3	4.3	< 270	270	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
1,1-Dichloroethene	330	100,000	500,000	< 4.8	4.8	< 4.3	4.3	< 330	330	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
1,1-Dichloropropene				-	-	-	-	-	-	-	-	-	-	-	-
1,2,3-Trichlorobenzene				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 430	430	< 5.0	5.0
1,2,3-Trichloropropane				-	-	-	-	-	-	-	-	-	-	-	-
1,2,4-Trichlorobenzene				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 430	430	< 5.0	5.0
1,2,4-Trimethylbenzene	3,600	52,000	190,000	-	-	-	-	-	-	-	-	-	-	-	-
1,2-Dibromo-3-chloropropane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 430	430	< 5.0	5.0
1,2-Dibromomethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
1,2-Dichlorobenzene	1,100	100,000	500,000	< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 430	430	< 5.0	5.0
1,2-Dichloroethane	20	3,100	30,000	< 4.8	4.8	< 4.3	4.3	< 47	47	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
1,2-Dichloropropane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
1,3,5-Trimethylbenzene	8,400	52,000	190,000	-	-	-	-	-	-	-	-	-	-	-	-
1,3-Dichlorobenzene	2,400	4,900	280,000	< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 430	430	< 5.0	5.0
1,3-Dichloropropane				-	-	-	-	-	-	-	-	-	-	-	-
1,4-Dichlorobenzene	1,800	13,000	130,000	< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 430	430	< 5.0	5.0
1,4-dioxane	100	13,000	130,000	< 73	73	< 65	65	< 3700	3,700	< 91	91	< 77	77	< 75	75
2,2-Dichloropropane				-	-	-	-	-	-	-	-	-	-	-	-
2-Chlorotoluene				-	-	-	-	-	-	-	-	-	-	-	-
2-Hexanone (Methyl Butyl Ketone)				< 24	24	< 22	22	< 2300	2,300	< 30	30	< 26	26	< 25	25
2-Isopropyltoluene				-	-	-	-	-	-	-	-	-	-	-	-
4-Chlorotoluene				-	-	-	-	-	-	-	-	-	-	-	-
4-Methyl-2-Pentanone				< 24	24	< 22	22	< 2300	2,300	< 30	30	< 26	26	< 25	25
Acetone	50	100,000	500,000	16	24	17	22	720	470	17	30	24	28	18	25
Acrolein				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Acrylonitrile				< 19	19	< 17	17	< 1900	1,900	< 24	24	< 20	20	< 20	20
Benzene	60	4,800	44,000	< 4.8	4.8	< 4.3	4.3	< 60	60	< 6.1	6.1	1.5	5.1	< 5.0	5.0
Bromobenzene				-	-	-	-	-	-	-	-	-	-	-	-
Bromochloromethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Bromodichloromethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Bromoform				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Bromomethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Carbon Disulfide				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	2.8	5.1	< 5.0	5.0
Carbon tetrachloride	760	2,400	22	< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Chlorobenzene	1,100	100,000	500,000	< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Chloroethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Chloroform	370	49,000	350,000	< 4.8	4.8	< 4.3	4.3	< 370	370	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Chloromethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
cis-1,2-Dichloroethene	250	100,000	500,000	< 4.8	4.8	< 4.3	4.3	< 250	250	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
cis-1,3-Dichloropropene				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Cyclohexane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Dibromochloromethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Dibromomethane				-	-	-	-	-	-	-	-	-	-	-	-
Dichlorodifluoromethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Ethylbenzene	1,000	41,000	390,000	< 4.8	4.8	< 4.3	4.3	32,000	4,700	< 6.1	6.1	3.8	5.1	< 5.0	5.0
Hexachlorobutadiene				-	-	-	-	-	-	-	-	-	-	-	-
Isopropylbenzene				< 4.8	4.8	< 4.3	4.3	5,900	4,700	< 6.1	6.1	< 430	430	< 5.0	5.0
m&p-Xylenes	260	100,000	500,000	< 4.8	4.8	< 4.3	4.3	180,000	4,700	< 6.1	6.1	13	5.1	1.2	5.0
Methyl Ethyl Ketone (2-Butanone)	120	100,000	500,000	< 29	29	< 26	26	< 190	190	< 36	36	18	31	< 30	30
Methyl t-butyl ether (MTBE)	930	100,000	500,000	< 9.7	9.7	< 8.7	8.7	< 930	930	< 12	12	< 10	10	< 10	10
Methylacetate				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	23	5.1	< 5.0	5.0
Methylcyclohexane				< 4.8	4.8	< 4.3	4.3	4,300	470	< 6.1	6.1	2.4	5.1	< 5.0	5.0
Methylene chloride	50	100,000	500,000	< 4.8	4.8	< 4.3	4.3	< 190	190	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Naphthalene	12,000	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
n-Butylbenzene	12,000	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
n-Propylbenzene	3,900	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
o-Xylene	260	100,000	500,000	< 4.8	4.8	< 4.3	4.3	74,000	4,700	< 6.1	6.1	8.9	5.1	< 5.0	5.0
p-Isopropyltoluene				-	-	-	-	-	-	-	-	-	-	-	-
sec-Butylbenzene	11,000	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
Styrene				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
tert-butyl alcohol				< 97	97	< 87	87	< 9300	9,300	< 120	120	< 100	100	< 100	100
tert-Butylbenzene	5,900	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
Tetrachloroethene	1,300	19,000	150,000	< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	1.1	5.0
Tetrahydrofuran (THF)				-	-	-	-	-	-	-	-	-	-	-	-
Toluene	700	100,000	500,000	< 4.8	4.8	< 4.3	4.3	5,900	470	< 6.1	6.1	73	430	< 5.0	5.0
trans-1,2-Dichloroethene	190	100,000	500,000	-	-	-	-	-	-	-	-	-	-	-	-
trans-1,3-Dichloropropene				< 4.8	4.8	< 4.3	4.3	< 190	190	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
trans-1,4-dichloro-2-butene				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Trichloroethene	470	21,000	200,000	< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Trichlorofluoromethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Trichlorotrifluoroethane				< 4.8	4.8	< 4.3	4.3	< 470	470	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Vinyl Chloride	20	900	13,000	< 4.8	4.8	< 4.3	4.3	< 47	47	< 6.1	6.1	< 5.1	5.1	< 5.0	5.0
Total BTEX Concentration				0		0		291,900.00		0		100.2		1.2	
Total VOCs Concentration				16		17		302,820.00		17		170.4		20.3	

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL - Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RSCO Guidance Value

Table 3
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	SB7				Duplicate	
				(0-2)		(16-18)		SB1 (0-2)	
				3/19/2019		3/19/2019		3/18/2019	
				µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL
1,1,1,2-Tetrachloroethane				< 4.8	4.8	< 5.2	5.2	< 250	250
1,1,1-Trichloroethane	680	100,000	500,000	< 19	19	< 21	21	< 1000	1,000
1,1,2,2-Tetrachloroethane				< 4.8	4.8	< 5.2	5.2	< 250	250
1,1,2-Trichloroethane				< 4.8	4.8	< 5.2	5.2	< 250	250
1,1-Dichloroethane	270	26,000	240,000	< 4.8	4.8	< 5.2	5.2	< 250	250
1,1-Dichloroethene	330	100,000	500,000	< 4.8	4.8	< 5.2	5.2	< 250	250
1,1-Dichloropropene				-	-	-	-	-	-
1,2,3-Trichlorobenzene				< 4.8	4.8	< 5.2	5.2	< 250	250
1,2,3-Trichloropropane				-	-	-	-	-	-
1,2,4-Trichlorobenzene				< 4.8	4.8	< 5.2	5.2	< 250	250
1,2,4-Trimethylbenzene	3,600	52,000	190,000	-	-	-	-	-	-
1,2-Dibromo-3-chloropropane				< 4.8	4.8	< 5.2	5.2	< 250	250
1,2-Dibromomethane				< 4.8	4.8	< 5.2	5.2	< 250	250
1,2-Dichlorobenzene	1,100	100,000	500,000	< 4.8	4.8	< 5.2	5.2	< 250	250
1,2-Dichloroethane	20	3,100	30,000	< 4.8	4.8	< 5.2	5.2	< 25	25
1,2-Dichloropropane				< 4.8	4.8	< 5.2	5.2	< 250	250
1,3,5-Trimethylbenzene	8,400	52,000	190,000	-	-	-	-	-	-
1,3-Dichlorobenzene	2,400	4,900	280,000	< 4.8	4.8	< 5.2	5.2	< 250	250
1,3-Dichloropropane				-	-	-	-	-	-
1,4-Dichlorobenzene	1,800	13,000	130,000	< 4.8	4.8	< 5.2	5.2	< 250	250
1,4-dioxane	100	13,000	130,000	< 73	73	< 78	78	< 2000	2,000
2,2-Dichloropropane				-	-	-	-	-	-
2-Chlorotoluene				-	-	-	-	-	-
2-Hexanone (Methyl Butyl Ketone)				< 24	24	< 26	26	< 1300	1,300
2-Isopropyltoluene				-	-	-	-	-	-
4-Chlorotoluene				-	-	-	-	-	-
4-Methyl-2-Pentanone				< 24	24	< 26	26	< 1300	1,300
Acetone	50	100,000	500,000	36	24	12	26	< 250	250
Acrolein				< 4.8	4.8	< 5.2	5.2	< 250	250
Acrylonitrile				< 19	19	< 21	21	< 1000	1,000
Benzene	60	4,800	44,000	< 4.8	4.8	< 5.2	5.2	< 60	60
Bromobenzene				-	-	-	-	-	-
Bromochloromethane				< 4.8	4.8	< 5.2	5.2	< 250	250
Bromodichloromethane				< 4.8	4.8	< 5.2	5.2	< 250	250
Bromoforn				< 4.8	4.8	< 5.2	5.2	< 250	250
Bromomethane				< 4.8	4.8	< 5.2	5.2	< 250	250
Carbon Disulfide				< 4.8	4.8	< 5.2	5.2	< 250	250
Carbon tetrachloride	760	2,400	22	< 4.8	4.8	< 5.2	5.2	< 250	250
Chlorobenzene	1,100	100,000	500,000	< 4.8	4.8	< 5.2	5.2	< 250	250
Chloroethane				< 4.8	4.8	< 5.2	5.2	< 250	250
Chloroform	370	49,000	350,000	< 4.8	4.8	< 5.2	5.2	< 250	250
Chloromethane				< 4.8	4.8	< 5.2	5.2	< 250	250
cis-1,2-Dichloroethene	250	100,000	500,000	< 4.8	4.8	< 5.2	5.2	< 250	250
cis-1,3-Dichloropropene				< 4.8	4.8	< 5.2	5.2	< 250	250
Cyclohexane				< 4.8	4.8	< 5.2	5.2	< 250	250
Dibromochloromethane				< 4.8	4.8	< 5.2	5.2	< 250	250
Dibromomethane				-	-	-	-	-	-
Dichlorodifluoromethane				< 4.8	4.8	< 5.2	5.2	< 250	250
Ethylbenzene	1,000	41,000	390,000	< 4.8	4.8	< 5.2	5.2	< 250	250
Hexachlorobutadiene				-	-	-	-	-	-
Isopropylbenzene				< 4.8	4.8	< 5.2	5.2	< 250	250
m&p-Xylenes	260	100,000	500,000	< 4.8	4.8	< 5.2	5.2	< 250	250
Methyl Ethyl Ketone (2-Butanone)	120	100,000	500,000	< 29	29	< 31	31	< 120	120
Methyl t-butyl ether (MTBE)	930	100,000	500,000	< 9.7	9.7	< 10	10	< 500	500
Methylacetate				7.2	4.8	< 5.2	5.2	< 250	250
Methylcyclohexane				< 4.8	4.8	< 5.2	5.2	< 250	250
Methylene chloride	50	100,000	500,000	< 4.8	4.8	< 5.2	5.2	< 100	100
Naphthalene	12,000	100,000	500,000	-	-	-	-	-	-
n-Butylbenzene	12,000	100,000	500,000	-	-	-	-	-	-
n-Propylbenzene	3,900	100,000	500,000	-	-	-	-	-	-
o-Xylene	260	100,000	500,000	< 4.8	4.8	< 5.2	5.2	< 250	250
p-Isopropyltoluene				-	-	-	-	-	-
sec-Butylbenzene	11,000	100,000	500,000	-	-	-	-	-	-
Styrene				< 4.8	4.8	< 5.2	5.2	< 250	250
tert-butyl alcohol				< 97	97	< 100	100	< 5000	5,000
tert-Butylbenzene	5,900	100,000	500,000	-	-	-	-	-	-
Tetrachloroethene	1,300	19,000	150,000	< 4.8	4.8	< 5.2	5.2	< 250	250
Tetrahydrofuran (THF)				-	-	-	-	-	-
Toluene	700	100,000	500,000	< 4.8	4.8	< 5.2	5.2	< 250	250
trans-1,2-Dichloroethene	190	100,000	500,000	-	-	-	-	-	-
trans-1,3-Dichloropropene				< 4.8	4.8	< 5.2	5.2	< 190	190
trans-1,4-dichloro-2-butene				< 4.8	4.8	< 5.2	5.2	< 250	250
Trichloroethene	470	21,000	200,000	< 4.8	4.8	< 5.2	5.2	< 250	250
Trichlorofluoromethane				< 4.8	4.8	< 5.2	5.2	< 250	250
Trichlorotrifluoroethane				< 4.8	4.8	< 5.2	5.2	< 250	250
Vinyl Chloride	20	900	13,000	< 4.8	4.8	< 5.2	5.2	< 25	25
Total BTEX Concentration				0		0		0	
Total VOCs Concentration				43.2		12		0	

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL - Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RSCO Guidance Value

Table 3
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	F1				F2				F3			
				(0-2)		(5-7)		(0-2)		(5-7)		(0-2)		(5-7)	
				6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019	
				µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
1,1,1,2-Tetrachloroethane				< 27	27	< 21	21	< 4.7	4.7	< 5.5	5.5	< 22	22	< 8.1	8.1
1,1,1-Trichloroethane	680	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,1,2,2-Tetrachloroethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,1,2-Trichloroethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,1-Dichloroethane	270	26,000	240,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,1-Dichloroethene	330	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,1-Dichloropropene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,2,3-Trichlorobenzene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,2,3-Trichloropropane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,2,4-Trichlorobenzene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,2,4-Trimethylbenzene	3,600	52,000	190,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	96	470
1,2-Dibromo-3-chloropropane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,2-Dibromomethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,2-Dichlorobenzene	1,100	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,2-Dichloroethane	20	3,100	30,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,2-Dichloropropane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,3,5-Trimethylbenzene	8,400	52,000	190,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	70	470
1,3-Dichlorobenzene	2,400	4,900	280,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,3-Dichloropropane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,4-Dichlorobenzene	1,800	13,000	130,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
1,4-dioxane	100	13,000	130,000	< 100	100	< 79	79	< 71	71	< 82	82	< 81	81	< 100	100
2,2-Dichloropropane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
2-Chlorotoluene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
2-Hexanone (Methyl Butyl Ketone)				< 34	34	< 26	26	< 24	24	< 27	27	< 27	27	< 41	41
2-Isopropyltoluene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	29	8.1
4-Chlorotoluene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
4-Methyl-2-Pentanone				< 34	34	< 26	26	< 24	24	< 27	27	< 27	27	< 41	41
Acetone	50	100,000	500,000	13	34	< 26	26	10	24	15	27	35	27	< 31	31
Acrolein				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Acrylonitrile				< 27	27	< 21	21	< 9.5	9.5	< 11	11	< 11	11	< 16	16
Benzene	60	4,800	44,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Bromobenzene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Bromochloromethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Bromodichloromethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Bromoforn				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Bromomethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Carbon Disulfide				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	9.9	8.1
Carbon tetrachloride	760	2,400	22	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Chlorobenzene	1,100	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Chloroethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Chloroform	370	49,000	350,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Chloromethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
cis-1,2-Dichloroethene	250	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
cis-1,3-Dichloropropene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Cyclohexane				-	-	-	-	-	-	-	-	-	-	-	-
Dibromochloromethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Dibromomethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Dichlorodifluoromethane				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Ethylbenzene	1,000	41,000	390,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	5.2	8.1
Hexachlorobutadiene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Isopropylbenzene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	11	8.1
m&p-Xylenes	260	100,000	500,000	1.9	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Methyl Ethyl Ketone (2-Butanone)	120	100,000	500,000	< 41	41	< 32	32	< 28	28	< 33	33	< 32	32	< 49	49
Methyl t-butyl ether (MTBE)	930	100,000	500,000	< 14	14	< 11	11	< 9.5	9.5	< 11	11	< 11	11	< 16	16
Methylacetate				-	-	-	-	-	-	-	-	-	-	-	-
Methylcyclohexane				-	-	-	-	-	-	-	-	-	-	-	-
Methylene chloride	50	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Naphthalene	12,000	100,000	500,000	< 6.8	6.8	< 5.3	5.3	1.5	4.7	< 5.5	5.5	< 5.4	5.4	700	470
n-Butylbenzene	12,000	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	360	280
n-Propylbenzene	3,900	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	29	8.1
o-Xylene	260	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	2	8.1
p-Isopropyltoluene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	330	280
sec-Butylbenzene	11,000	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	360	280
Styrene				< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
tert-butyl alcohol				< 140	140	< 110	110	< 95	95	< 110	110	< 110	110	< 160	160
tert-Butylbenzene	5,900	100,000	500,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	5.5	8.1
Tetrachloroethene	1,300	19,000	150,000	< 6.8	6.8	< 5.3	5.3	< 4.7	4.7	< 5.5	5.5	< 5.4	5.4	< 8.1	8.1
Tetrahydrofuran (THF)				< 14	14	< 11	11	< 9.5	9.5	<					

Table 3
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	F4				P1				P2			
				(0-2)		(5-7)		(0-2)		(8-10)		(0-2)		(8-10)	
				6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019	
				µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
1,1,1,2-Tetrachloroethane				< 22	22	< 4.7	4.7	< 25	25	< 18	18	< 5.7	5.7	< 23	23
1,1,1-Trichloroethane	680	100,000	500,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,1,2,2-Tetrachloroethane				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,1,2-Trichloroethane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,1-Dichloroethane	270	26,000	240,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,1-Dichloroethene	330	100,000	500,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,1-Dichloropropene				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,2,3-Trichlorobenzene				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,2,3-Trichloropropane				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,2,4-Trichlorobenzene				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,2,4-Trimethylbenzene	3,600	52,000	190,000	79	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,2-Dibromo-3-chloropropane				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,2-Dibromomethane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,2-Dichlorobenzene	1,100	100,000	500,000	< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,2-Dichloroethane	20	3,100	30,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,2-Dichloropropane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,3,5-Trimethylbenzene	8,400	52,000	190,000	56	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,3-Dichlorobenzene	2,400	4,900	280,000	< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,3-Dichloropropane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,4-Dichlorobenzene	1,800	13,000	130,000	< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
1,4-dioxane	100	13,000	130,000	< 82	82	< 70	70	< 93	93	< 69	69	< 85	85	< 85	85
2,2-Dichloropropane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
2-Chlorotoluene				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
2-Hexanone (Methyl Butyl Ketone)				< 27	27	< 23	23	< 31	31	< 23	23	< 28	28	< 28	28
2-Isopropyltoluene				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
4-Chlorotoluene				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
4-Methyl-2-Pentanone				< 27	27	< 23	23	< 31	31	< 23	23	< 28	28	< 28	28
Acetone	50	100,000	500,000	< 27	27	< 23	23	47	31	4.7	23	20	28	5.9	28
Acrolein				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Acrylonitrile				< 22	22	< 9.3	9.3	< 25	25	< 18	18	< 11	11	< 23	23
Benzene	60	4,800	44,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Bromobenzene				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Bromochloromethane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Bromodichloromethane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Bromoform				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Bromomethane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Carbon Disulfide				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Carbon tetrachloride	760	2,400	22	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Chlorobenzene	1,100	100,000	500,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Chloroethane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Chloroform	370	49,000	350,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Chloromethane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
cis-1,2-Dichloroethene	250	100,000	500,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
cis-1,3-Dichloropropene				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Cyclohexane				-	-	-	-	-	-	-	-	-	-	-	-
Dibromochloromethane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Dibromomethane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Dichlorodifluoromethane				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Ethylbenzene	1,000	41,000	390,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Hexachlorobutadiene				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Isopropylbenzene				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
m&p-Xylenes	260	100,000	500,000	130	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Methyl Ethyl Ketone (2-Butanone)	120	100,000	500,000	< 33	33	< 28	28	9.2	37	< 27	27	7.9	34	< 34	34
Methyl t-butyl ether (MTBE)	930	100,000	500,000	< 11	11	< 9.3	9.3	< 12	12	< 9.1	9.1	< 11	11	< 11	11
Methylacetate				-	-	-	-	-	-	-	-	-	-	-	-
Methylcyclohexane				-	-	-	-	-	-	-	-	-	-	-	-
Methylene chloride	50	100,000	500,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Naphthalene	12,000	100,000	500,000	< 350	350	< 4.7	4.7	3.5	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
n-Butylbenzene	12,000	100,000	500,000	< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
n-Propylbenzene	3,900	100,000	500,000	< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
o-Xylene	260	100,000	500,000	< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
p-Isopropyltoluene				< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
sec-Butylbenzene	11,000	100,000	500,000	< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Styrene				< 5.4	5.4	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
tert-butyl alcohol				< 110	110	< 93	93	< 120	120	< 91	91	< 110	110	< 110	110
tert-Butylbenzene	5,900	100,000	500,000	< 350	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Tetrachloroethene	1,300	19,000	150,000	84	350	< 4.7	4.7	< 6.2	6.2	< 4.6	4.6	< 5.7	5.7	< 5.6	5.6
Tetrahydrofuran (THF)				< 11	11	< 9.3									

Table 3
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	P3				P4			
				(0-2)		(8-10)		(0-2)		(8-10)	
				6/7/2019		6/7/2019		6/7/2019		6/7/2019	
				µg/Kg		µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL
1,1,1,2-Tetrachloroethane				< 23	23	< 25	25	< 4.3	4.3	< 4.9	4.9
1,1,1-Trichloroethane	680	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
1,1,2,2-Tetrachloroethane				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
1,1,2-Trichloroethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
1,1-Dichloroethane	270	26,000	240,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
1,1-Dichloroethene	330	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
1,1-Dichloropropene				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
1,2,3-Trichlorobenzene				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
1,2,3-Trichloropropane				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
1,2,4-Trichlorobenzene				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
1,2,4-Trimethylbenzene	3,600	52,000	190,000	< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
1,2-Dibromo-3-chloropropane				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
1,2-Dibromomethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
1,2-Dichlorobenzene	1,100	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
1,2-Dichloroethane	20	3,100	30,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
1,2-Dichloropropane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
1,3,5-Trimethylbenzene	8,400	52,000	190,000	< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
1,3-Dichlorobenzene	2,400	4,900	280,000	< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
1,3-Dichloropropane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
1,4-Dichlorobenzene	1,800	13,000	130,000	< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
1,4-dioxane	100	13,000	130,000	< 86	86	< 93	93	< 64	64	< 74	74
2,2-Dichloropropane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
2-Chlorotoluene				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
2-Hexanone (Methyl Butyl Ketone)				< 29	29	< 31	31	< 21	21	< 25	25
2-Isopropyltoluene				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
4-Chlorotoluene				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
4-Methyl-2-Pentanone				< 29	29	< 31	31	< 21	21	< 25	25
Acetone	50	100,000	500,000	7.7	29	12	31	< 21	21	6.6	25
Acrolein				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Acrylonitrile				< 23	23	< 12	12	< 8.6	8.6	< 9.9	9.9
Benzene	60	4,800	44,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Bromobenzene				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
Bromochloromethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Bromodichloromethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Bromoform				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Bromomethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Carbon Disulfide				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Carbon tetrachloride	760	2,400	22	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Chlorobenzene	1,100	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Chloroethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Chloroform	370	49,000	350,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Chloromethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
cis-1,2-Dichloroethene	250	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
cis-1,3-Dichloropropene				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Cyclohexane				-	-	-	-	-	-	-	-
Dibromochloromethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Dibromomethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Dichlorodifluoromethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Ethylbenzene	1,000	41,000	390,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Hexachlorobutadiene				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
Isopropylbenzene				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
m&p-Xylenes	260	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Methyl Ethyl Ketone (2-Butanone)	120	100,000	500,000	< 35	35	< 37	37	< 26	26	< 30	30
Methyl t-butyl ether (MTBE)	930	100,000	500,000	< 12	12	< 12	12	< 8.6	8.6	< 9.9	9.9
Methylacetate				-	-	-	-	-	-	-	-
Methylcyclohexane				-	-	-	-	-	-	-	-
Methylene chloride	50	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	12	4.9
Naphthalene	12,000	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
n-Butylbenzene	12,000	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
n-Propylbenzene	3,900	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
o-Xylene	260	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
p-Isopropyltoluene				< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
sec-Butylbenzene	11,000	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
Styrene				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
tert-butyl alcohol				< 120	120	< 120	120	< 86	86	< 99	99
tert-Butylbenzene	5,900	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 430	430	< 4.9	4.9
Tetrachloroethene	1,300	19,000	150,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Tetrahydrofuran (THF)				< 12	12	< 12	12	< 8.6	8.6	< 9.9	9.9
Toluene	700	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
trans-1,2-Dichloroethene	190	100,000	500,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
trans-1,3-Dichloropropene				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
trans-1,4-dichloro-2-butene				< 12	12	< 12	12	< 860	860	< 9.9	9.9
Trichloroethene	470	21,000	200,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Trichlorofluoromethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Trichlorotrifluoroethane				< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Vinyl Chloride	20	900	13,000	< 5.8	5.8	< 6.2	6.2	< 4.3	4.3	< 4.9	4.9
Total BTEX Concentration				0		0		0		0	
Total VOCs Concentration				7.7		0		0		0	

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RCSCO Guidance Value

Table 4
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Semi-Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	SB1				SB2				SB3			
				(0-2)		(16-18)		(0-2)		(16-18)		(0-2)		(16-18)	
				3/18/2019		3/18/2019		3/18/2019		3/18/2019		3/18/2019		3/18/2019	
				µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
1,1-Biphenyl				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
1,2,4,5-Tetrachlorobenzene				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
1,2,4-Trichlorobenzene				-	-	-	-	-	-	-	-	-	-	-	-
1,2-Dichlorobenzene				-	-	-	-	-	-	-	-	-	-	-	-
1,2-Diphenylhydrazine				-	-	-	-	-	-	-	-	-	-	-	-
1,3-Dichlorobenzene				-	-	-	-	-	-	-	-	-	-	-	-
1,4-Dichlorobenzene				-	-	-	-	-	-	-	-	-	-	-	-
2,3,4,6-tetrachlorophenol				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
2,4,5-Trichlorophenol				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
2,4,6-Trichlorophenol				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
2,4-Dichlorophenol				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
2,4-Dimethylphenol				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
2,4-Dinitrophenol				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
2,4-Dinitrotoluene				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
2,6-Dinitrotoluene				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
2-Chloronaphthalene				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
2-Chlorophenol				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
2-Methylnaphthalene				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
2-Methylphenol (o-cresol)	330	100,000	500,000	< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
2-Nitroaniline				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
2-Nitrophenol				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
3&4-Methylphenol (m&p-cresol)	330	100,000	500,000	< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
3,3'-Dichlorobenzidine				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
3-Nitroaniline				< 760	760	< 730	730	< 750	750	< 740	740	< 720	720	< 740	740
4,6-Dinitro-2-methylphenol				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
4-Bromophenyl phenyl ether				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
4-Chloro-3-methylphenol				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
4-Chloroaniline				< 760	760	< 730	730	< 750	750	< 740	740	< 720	720	< 740	740
4-Chlorophenyl phenyl ether				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
4-Nitroaniline				< 1900	1,900	< 1800	1,800	< 1900	1,900	< 1900	1,900	< 1800	1,800	< 1800	1,800
4-Nitrophenol				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Acenaphthene	20,000	100,000	500,000	< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Acenaphthylene	100,000	100,000	500,000	1,200	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
Acetophenone				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Aniline				-	-	-	-	-	-	-	-	-	-	-	-
Anthracene	100,000	100,000	500,000	610	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Atrazine				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Benz(a)anthracene	1,000	1,000	5,600	2,100	270	< 260	260	< 260	260	< 260	260	260	250	< 260	260
Benzaldehyde				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Benzidine				-	-	-	-	-	-	-	-	-	-	-	-
Benzo(a)pyrene	1,000	1,000	1,000	2,600	150	< 150	150	< 150	150	< 150	150	230	140	< 150	150
Benzo(b)fluoranthene	1,000	1,000	5,600	2,900	270	< 260	260	< 260	260	< 260	260	240	250	< 260	260
Benzo(ghi)perylene	100,000	100,000	500,000	1,700	270	< 260	260	< 260	260	< 260	260	270	250	< 260	260
Benzo(k)fluoranthene	800	3,900	56,000	2,400	270	< 260	260	< 260	260	< 260	260	210	250	< 260	260
Benzoic Acid				-	-	-	-	-	-	-	-	-	-	-	-
Benzyl butyl phthalate				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Bis(2-chloroethoxy)methane				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Bis(2-chloroethyl)ether				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
Bis(2-chloroisopropyl)ether				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Bis(2-ethylhexyl)phthalate				410	270	< 260	260	< 260	260	< 260	260	340	250	< 260	260
Caprolactam				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Carbazole				230	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Chrysene	1,000	3,900	56,000	2,500	270	< 260	260	< 260	260	< 260	260	310	250	< 260	260
Dibenz(a,h)anthracene	330	330	560	570	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
Dibenzofuran	7,000	59,000	59,000	< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Diethyl phthalate				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Dimethylphthalate				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Di-n-butylphthalate				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Di-n-octylphthalate				130	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Fluoranthene	100,000	100,000	500,000	4,300	270	< 260	260	< 260	260	< 260	260	260	250	< 260	260
Fluorene	30,000	100,000	500,000	150	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Hexachlorobenzene				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
Hexachlorocyclopentadiene				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Hexachlorocyclopentadiene				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Hexachloroethane				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
Indeno(1,2,3-cd)pyrene	500	500	5,600	1,900	270	< 260	260	< 260	260	< 260	260	200	250	< 260	260
Isophorone				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
Naphthalene	12,000	100,000	500,000	< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Nitrobenzene				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
N-Nitrosodimethylamine				< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
N-Nitrosodi-n-propylamine				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
N-Nitrosodiphenylamine				< 150	150	< 150	150	< 150	150	< 150	150	< 140	140	< 150	150
Pentachloronitrobenzene				-	-	-	-	-	-	-	-	-	-	-	-
Pentachlorophenol	800	6,700	6,700	< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Phenanthrene	100,000	100,000	500,000	1,900	150	< 150	150	< 150	150	< 150	150	470	140	< 150	150
Phenol	330	100,000	500,000	< 270	270	< 260	260	< 260	260	< 260	260	< 250	250	< 260	260
Pyrene	100,000	100,000	500,000	3,600	270	< 260	260	< 260	260	< 260	260	290	250	< 260	260
Pyridine				-	-	-	-	-	-	-	-	-	-	-	-

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellular Grade

RL- Reporting Limit

COMPOUND	NYDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	SB4				SB5				SB6			
				(0-2)		(16-18)		(0-2)		(16-18)		(0-2)		(16-18)	
				3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019	
				µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
1,1-Biphenyl				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
1,2,4,5-Tetrachlorobenzene				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
1,2,4-Trichlorobenzene				-	-	-	-	-	-	-	-	-	-	-	-
1,2-Dichlorobenzene				-	-	-	-	-	-	-	-	-	-	-	-
1,2-Diphenylhydrazine				-	-	-	-	-	-	-	-	-	-	-	-
1,3-Dichlorobenzene				-	-	-	-	-	-	-	-	-	-	-	-
1,4-Dichlorobenzene				-	-	-	-	-	-	-	-	-	-	-	-
2,3,4,6-tetrachlorophenol				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
2,4,5-Trichlorophenol				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
2,4,6-Trichlorophenol				< 150	150	< 140	140	< 1400	1,400	< 150	150	< 150	150	< 160	160
2,4-Dichlorophenol				< 150	150	< 140	140	< 1400	1,400	< 150	150	< 150	150	< 160	160
2,4-Dimethylphenol				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
2,4-Dinitrophenol				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
2,4-Dinitrotoluene				< 150	150	< 140	140	< 1400	1,400	< 150	150	< 150	150	< 160	160
2,6-Dinitrotoluene				< 150	150	< 140	140	< 1400	1,400	< 150	150	< 150	150	< 160	160
2-Chloronaphthalene				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
2-Chlorophenol				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
2-Methylnaphthalene				< 260	260	< 250	250	1,600	2,500	< 250	250	< 260	260	< 290	290
2-Methylphenol (o-cresol)	330	100,000	500,000	< 260	260	< 250	250	< 720	720	< 250	250	< 260	260	< 290	290
2-Nitroaniline				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
2-Nitrophenol				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
3&4-Methylphenol (m&p-cresol)	330	100,000	500,000	< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
3,3'-Dichlorobenzidine				< 150	150	< 140	140	< 1400	1,400	< 150	150	< 150	150	< 160	160
3-Nitroaniline				< 730	730	< 710	710	< 7200	7,200	< 730	730	< 740	740	< 820	820
4,6-Dinitro-2-methylphenol				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
4-Bromophenyl phenyl ether				< 260	260	< 250	250	< 2500	2,500	< 250	250	< 260	260	< 290	290
4-Chloro-3-methylphenol				< 260	260										

Bold/highlighted- Indicated exceedance of the NYSDEC RCSCO Guidance Value

Table 4
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Semi-Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	SB7				Duplicate	
				(0-2)		(16-18)		SB1 (0-2)	
				3/19/2019		3/19/2019		3/18/2019	
				µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL
1,1-Biphenyl				< 260	260	< 270	270	< 1300	1,300
1,2,4,5-Tetrachlorobenzene				< 260	260	< 270	270	< 1300	1,300
1,2,4-Trichlorobenzene				-	-	-	-	-	-
1,2-Dichlorobenzene				-	-	-	-	-	-
1,2-Diphenylhydrazine				-	-	-	-	-	-
1,3-Dichlorobenzene				-	-	-	-	-	-
1,4-Dichlorobenzene				-	-	-	-	-	-
2,3,4,6-tetrachlorophenol				< 260	260	< 270	270	< 1300	1,300
2,4,5-Trichlorophenol				< 260	260	< 270	270	< 1300	1,300
2,4,6-Trichlorophenol				< 150	150	< 150	150	< 750	750
2,4-Dichlorophenol				< 150	150	< 150	150	< 750	750
2,4-Dimethylphenol				< 260	260	< 270	270	< 1300	1,300
2,4-Dinitrophenol				< 260	260	< 270	270	< 1300	1,300
2,4-Dinitrotoluene				< 150	150	< 150	150	< 750	750
2,6-Dinitrotoluene				< 150	150	< 150	150	< 750	750
2-Chloronaphthalene				< 260	260	< 270	270	< 1300	1,300
2-Chlorophenol				< 260	260	< 270	270	< 1300	1,300
2-Methylnaphthalene				< 260	260	< 270	270	< 1300	1,300
2-Methylphenol (o-cresol)	330	100,000	500,000	< 260	260	< 270	270	< 330	330
2-Nitroaniline				< 260	260	< 270	270	< 1300	1,300
2-Nitrophenol				< 260	260	< 270	270	< 1300	1,300
3,4-Methylphenol (m&p-cresol)	330	100,000	500,000	< 260	260	< 270	270	< 1300	1,300
3,3'-Dichlorobenzidine				< 150	150	< 150	150	< 750	750
3-Nitroaniline				< 730	730	< 760	760	< 3800	3,800
4,6-Dinitro-2-methylphenol				< 260	260	< 270	270	< 1300	1,300
4-Bromophenyl phenyl ether				< 260	260	< 270	270	< 1300	1,300
4-Chloro-3-methylphenol				< 260	260	< 270	270	< 1300	1,300
4-Chloroaniline				< 730	730	< 760	760	< 3800	3,800
4-Chlorophenyl phenyl ether				< 260	260	< 270	270	< 1300	1,300
4-Nitroaniline				< 1800	1,800	< 1900	1,900	< 9400	9,400
4-Nitrophenol				< 260	260	< 270	270	< 1300	1,300
Acenaphthene	20,000	100,000	500,000	< 260	260	< 270	270	< 1300	1,300
Acenaphthylene	100,000	100,000	500,000	< 150	150	< 150	150	1,400	750
Acetophenone				< 260	260	< 270	270	< 1300	1,300
Aniline				-	-	-	-	-	-
Anthracene	100,000	100,000	500,000	< 260	260	< 270	270	1,400	1,300
Atrazine				< 260	260	< 270	270	< 1300	1,300
Benz(a)anthracene	1,000	1,000	5,600	270	260	< 270	270	4,300	1,300
Benzaldehyde				< 260	260	< 270	270	< 1300	1,300
Benzidine				-	-	-	-	-	-
Benzo(a)pyrene	1,000	1,000	1,000	260	150	< 150	150	4,000	750
Benzo(b)fluoranthene	1,000	1,000	5,600	240	260	< 270	270	4,300	1,300
Benzo(ghi)perylene	100,000	100,000	500,000	180	260	< 270	270	2,600	1,300
Benzo(k)fluoranthene	800	3,900	56,000	220	260	< 270	270	3,700	1,300
Benzoic Acid				-	-	-	-	-	-
Benzyl butyl phthalate				< 260	260	< 270	270	< 1300	1,300
Bis(2-chloroethoxy)methane				< 260	260	< 270	270	< 1300	1,300
Bis(2-chloroethyl)ether				< 150	150	< 150	150	< 750	750
Bis(2-chloroisopropyl)ether				< 260	260	< 270	270	< 1300	1,300
Bis(2-ethylhexyl)phthalate				< 260	260	< 270	270	< 1300	1,300
Caprolactam				< 260	260	< 270	270	< 1300	1,300
Carbazole				< 260	260	< 270	270	< 1300	1,300
Chrysene	1,000	3,900	56,000	290	260	< 270	270	4,600	1,300
Dibenz(a,h)anthracene	330	330	560	< 150	150	< 150	150	820	750
Dibenzofuran	7,000	59,000	59,000	< 260	260	< 270	270	< 330	330
Diethyl phthalate				< 260	260	< 270	270	< 1300	1,300
Dimethylphthalate				< 260	260	< 270	270	< 1300	1,300
Di-n-butylphthalate				< 260	260	< 270	270	< 1300	1,300
Di-n-octylphthalate				< 260	260	< 270	270	< 1300	1,300
Fluoranthene	100,000	100,000	500,000	460	260	< 270	270	8,200	1,300
Fluorene	30,000	100,000	500,000	< 260	260	< 270	270	< 1300	1,300
Hexachlorobenzene				< 150	150	< 150	150	< 330	330
Hexachlorobutadiene				< 260	260	< 270	270	< 1300	1,300
Hexachlorocyclopentadiene				< 260	260	< 270	270	< 1300	1,300
Hexachloroethane				< 150	150	< 150	150	< 750	750
Indeno(1,2,3-cd)pyrene	500	500	5,600	230	260	< 270	270	3,100	1,300
Isophorone				< 150	150	< 150	150	< 750	750
Naphthalene	12,000	100,000	500,000	< 260	260	< 270	270	< 1300	1,300
Nitrobenzene				< 150	150	< 150	150	< 750	750
N-Nitrosodimethylamine				< 260	260	< 270	270	< 1300	1,300
N-Nitrosodi-n-propylamine				< 150	150	< 150	150	< 750	750
N-Nitrosodiphenylamine				< 150	150	< 150	150	< 750	750
Pentachloronitrobenzene				-	-	-	-	-	-
Pentachlorophenol	800	6,700	6,700	< 260	260	< 270	270	< 800	800
Phenanthrene	100,000	100,000	500,000	150	150	< 150	150	7,200	750
Phenol	330	100,000	500,000	< 260	260	< 270	270	< 330	330
Pyrene	100,000	100,000	500,000	470	260	< 270	270	6,700	1,300
Pyridine				-	-	-	-	-	-

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RSCSO Guidance Value

Table 4
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Semi-Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	F1				F2				F3			
				(0-2)		(5-7)		(0-2)		(5-7)		(0-2)		(5-7)	
				6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019	
				µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
1,1-Biphenyl				-	-	-	-	-	-	-	-	-	-	-	-
1,2,4,5-Tetrachlorobenzene				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
1,2,4-Trichlorobenzene				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
1,2-Dichlorobenzene				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
1,2-Diphenylhydrazine				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
1,3-Dichlorobenzene				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
1,4-Dichlorobenzene				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
2,3,4,6-tetrachlorophenol				-	-	-	-	-	-	-	-	-	-	-	-
2,4,5-Trichlorophenol				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
2,4,6-Trichlorophenol				< 200	200	< 190	190	< 180	180	< 170	170	< 180	180	< 210	210
2,4-Dichlorophenol				< 200	200	< 190	190	< 180	180	< 170	170	< 180	180	< 210	210
2,4-Dimethylphenol				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
2,4-Dinitrophenol				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
2,4-Dinitrotoluene				< 200	200	< 190	190	< 180	180	< 170	170	< 180	180	< 210	210
2,6-Dinitrotoluene				< 200	200	< 190	190	< 180	180	< 170	170	< 180	180	< 210	210
2-Chloronaphthalene				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
2-Chlorophenol				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
2-Methylnaphthalene				< 280	280	< 270	270	2,500	250	< 240	240	< 260	260	420	290
2-Methylphenol (o-cresol)	330	100,000	500,000	< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
2-Nitroaniline				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
2-Nitrophenol				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
3&4-Methylphenol (m&p-cresol)	330	100,000	500,000	< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
3,3'-Dichlorobenzidine				< 200	200	< 190	190	< 180	180	< 170	170	< 180	180	< 210	210
3-Nitroaniline				< 390	390	< 380	380	< 350	350	< 350	350	< 360	360	< 420	420
4,6-Dinitro-2-methylphenol				< 240	240	< 230	230	< 210	210	< 210	210	< 220	220	< 250	250
4-Bromophenyl phenyl ether				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
4-Chloro-3-methylphenol				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
4-Chloroaniline				< 310	310	< 300	300	< 280	280	< 280	280	< 290	290	< 330	330
4-Chlorophenyl phenyl ether				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
4-Nitroaniline				< 390	390	< 380	380	< 350	350	< 350	350	< 360	360	< 420	420
4-Nitrophenol				< 390	390	< 380	380	< 350	350	< 350	350	< 360	360	< 420	420
Acenaphthene	20,000	100,000	500,000	< 280	280	< 270	270	1,700	250	< 240	240	< 260	260	240	290
Acenaphthylene	100,000	100,000	500,000	460	280	< 270	270	3,300	250	< 240	240	830	260	490	290
Acetophenone				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
Aniline				< 310	310	< 300	300	< 280	280	< 280	280	< 290	290	< 330	330
Anthracene	100,000	100,000	500,000	390	280	< 270	270	6,800	2,500	< 240	240	410	260	380	290
Atrazine				-	-	-	-	-	-	-	-	-	-	-	-
Benz(a)anthracene	1,000	1,000	5,600	1,900	280	170	270	11,000	2,500	120	240	1,800	260	1,000	290
Benzaldehyde				-	-	-	-	-	-	-	-	-	-	-	-
Benzdine				< 390	390	< 380	380	< 350	350	< 350	350	< 360	360	< 420	420
Benzo(a)pyrene	1,000	1,000	1,000	1,900	200	170	190	8,700	1,800	130	170	2,200	180	1,100	210
Benzo(b)fluoranthene	1,000	1,000	5,600	1,600	280	160	270	7,000	2,500	130	240	1,800	260	1,500	290
Benzo(ghi)perylene	100,000	100,000	500,000	980	280	150	270	4,300	250	120	240	1,500	260	930	290
Benzo(k)fluoranthene	800	3,900	56,000	1,700	280	170	270	5,900	250	< 240	240	1,700	260	1,300	290
Benzoic Acid				< 2000	2,000	< 1900	1,900	< 1800	1,800	< 1700	1,700	< 1800	1,800	< 2100	2,100
Benzyl butyl phthalate				240	280	< 270	270	< 250	250	< 240	240	120	260	< 290	290
Bis(2-chloroethoxy)methane				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
Bis(2-chloroethyl)ether				< 200	200	< 190	190	< 180	180	< 170	170	< 180	180	< 210	210
Bis(2-chloroisopropyl)ether				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
Bis(2-ethylhexyl)phthalate				5,200	280	< 270	270	1,800	250	< 240	240	320	260	< 290	290
Caprolactam				-	-	-	-	-	-	-	-	-	-	-	-
Carbazole				< 200	200	< 190	190	1,500	180	< 170	170	< 180	180	530	210
Chrysene	1,000	3,900	56,000	1,700	280	170	270	9,400	2,500	160	240	2,000	260	1,600	290
Dibenz(a,h)anthracene	330	330	560	350	200	< 190	190	1,800	180	< 170	170	500	180	290	210
Dibenzofuran	7,000	59,000	59,000	< 280	280	< 270	270	3,300	250	< 240	240	< 260	260	< 290	290
Diethyl phthalate				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
Dimethylphthalate				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
Di-n-butylphthalate				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
Di-n-octylphthalate				460	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
Fluoranthene	100,000	100,000	500,000	3,100	280	260	270	24,000	2,500	180	240	2,600	260	2,500	290
Fluorene	30,000	100,000	500,000	< 280	280	< 270	270	6,600	250	< 240	240	< 260	260	830	290
Hexachlorobenzene				< 200	200	< 190	190	< 180	180	< 170	170	< 180	180	< 210	210
Hexachlorobutadiene				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
Hexachlorocyclopentadiene				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
Hexachloroethane				< 200	200	< 190	190	< 180	180	< 170	170	< 180	180	< 210	210
Indeno(1,2,3-cd)pyrene	500	500	5,600	1,200	280	150	270	5,400	250	< 240	240	1,700	260	1,000	290
Isophorone				< 200	200	< 190	190	< 180	180	< 170	170	< 180	180	< 210	210
Naphthalene	12,000	100,000	500,000	< 280	280	< 270	270	2,300	250	< 240	240	< 260	260	340	290
Nitrobenzene				< 200	200	< 190	190	< 180	180	< 170	170	< 180	180	< 210	210
N-Nitrosodimethylamine				< 280	280	< 270	270	< 250	250	< 240	240	< 260	260	< 290	290
N															

Table 4
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Semi-Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	F4				P1				P2			
				(0-2)		(5-7)		(0-2)		(8-10)		(0-2)		(8-10)	
				6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019	
				µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
1,1-Biphenyl				-	-	-	-	-	-	-	-	-	-	-	-
1,2,4,5-Tetrachlorobenzene				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
1,2,4-Trichlorobenzene				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
1,2-Dichlorobenzene				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
1,2-Diphenylhydrazine				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
1,3-Dichlorobenzene				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
1,4-Dichlorobenzene				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
2,3,4,6-tetrachlorophenol				-	-	-	-	-	-	-	-	-	-	-	-
2,4,5-Trichlorophenol				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
2,4,6-Trichlorophenol				< 180	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
2,4-Dichlorophenol				< 180	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
2,4-Dimethylphenol				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
2,4-Dinitrophenol				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
2,4-Dinitrotoluene				< 180	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
2,6-Dinitrotoluene				< 180	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
2-Chloronaphthalene				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
2-Chlorophenol				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
2-Methylnaphthalene				180	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
2-Methylphenol (o-cresol)	330	100,000	500,000	< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
2-Nitroaniline				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
2-Nitrophenol				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
3&4-Methylphenol (m&p-cresol)	330	100,000	500,000	< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
3,3'-Dichlorobenzidine				< 180	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
3-Nitroaniline				< 370	370	< 370	370	< 360	360	< 340	340	< 360	360	< 390	390
4,6-Dinitro-2-methylphenol				< 220	220	< 220	220	< 220	220	< 210	210	< 220	220	< 230	230
4-Bromophenyl phenyl ether				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
4-Chloro-3-methylphenol				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
4-Chloroaniline				< 300	300	< 290	290	< 290	290	< 280	280	< 290	290	< 310	310
4-Chlorophenyl phenyl ether				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
4-Nitroaniline				< 370	370	< 370	370	< 360	360	< 340	340	< 360	360	< 390	390
4-Nitrophenol				< 370	370	< 370	370	< 360	360	< 340	340	< 360	360	< 390	390
Acenaphthene	20,000	100,000	500,000	< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Acenaphthylene	100,000	100,000	500,000	160	260	< 260	260	< 250	250	< 240	240	110	250	< 270	270
Acetophenone				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Aniline				< 300	300	< 290	290	< 290	290	< 280	280	< 290	290	< 310	310
Anthracene	100,000	100,000	500,000	180	260	< 260	260	< 250	250	< 240	240	150	250	< 270	270
Atrazine				-	-	-	-	-	-	-	-	-	-	-	-
Benz(a)anthracene	1,000	1,000	5,600	930	260	< 260	260	170	250	< 240	240	640	250	< 270	270
Benzaldehyde				-	-	-	-	-	-	-	-	-	-	-	-
Benzidine				< 370	370	< 370	370	< 360	360	< 340	340	< 360	360	< 390	390
Benzo(a)pyrene	1,000	1,000	1,000	1,100	180	< 180	180	190	180	130	170	670	180	< 190	190
Benzo(b)fluoranthene	1,000	1,000	5,600	1,200	260	< 260	260	190	250	< 240	240	590	250	< 270	270
Benzo(ghi)perylene	100,000	100,000	500,000	1,200	260	< 260	260	170	250	240	240	440	250	160	270
Benzo(k)fluoranthene	800	3,900	56,000	1,000	260	< 260	260	170	250	< 240	240	580	250	< 270	270
Benzoic Acid				< 1800	1,800	< 1800	1,800	< 1800	1,800	< 1700	1,700	< 1800	1,800	< 1900	1,900
Benzyl butyl phthalate				< 260	260	< 260	260	260	250	< 240	240	780	250	< 270	270
Bis(2-chloroethoxy)methane				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Bis(2-chloroethyl)ether				< 180	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
Bis(2-chloroisopropyl)ether				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Bis(2-ethylhexyl)phthalate				< 260	260	< 260	260	820	250	< 240	240	550	250	< 270	270
Caprolactam				-	-	-	-	-	-	-	-	-	-	-	-
Carbazole				< 180	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
Chrysene	1,000	3,900	56,000	1,100	260	< 260	260	190	250	< 240	240	660	250	< 270	270
Dibenz(a,h)anthracene	330	330	560	360	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
Dibenzofuran	7,000	59,000	59,000	< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Diethyl phthalate				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Dimethylphthalate				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Di-n-butylphthalate				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Di-n-octylphthalate				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Fluoranthene	100,000	100,000	500,000	1,700	260	< 260	260	310	250	< 240	240	1,300	250	< 270	270
Fluorene	30,000	100,000	500,000	< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Hexachlorobenzene				< 180	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
Hexachlorobutadiene				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Hexachlorocyclopentadiene				< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Hexachloroethane				< 180	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
Indeno(1,2,3-cd)pyrene	500	500	5,600	1,200	260	< 260	260	150	250	260	240	490	250	150	270
Isophorone				< 180	180	< 180	180	< 730	730	< 170	170	< 180	180	< 190	190
Naphthalene	12,000	100,000	500,000	< 260	260	< 260	260	< 250	250	< 240	240	< 250	250	< 270	270
Nitrobenzene				< 180	180	< 180	180	< 180	180	< 170	170	< 180	180	< 190	190
N-Nitrosodimethylamine				< 260	260	< 260	260	< 250	250	< 240	240				

Table 4
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Semi-Volatile Organic Compounds

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	P3				P4			
				(0-2)		(8-10)		(0-2)		(8-10)	
				6/7/2019		6/7/2019		6/7/2019		6/7/2019	
				µg/Kg		µg/Kg		µg/Kg		µg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL
1,1-Biphenyl				-	-	-	-	-	-	-	-
1,2,4,5-Tetrachlorobenzene				< 250	250	< 240	240	< 250	250	< 250	250
1,2,4-Trichlorobenzene				< 250	250	< 240	240	< 250	250	< 250	250
1,2-Dichlorobenzene				< 250	250	< 240	240	< 250	250	< 250	250
1,2-Diphenylhydrazine				< 250	250	< 240	240	< 250	250	< 250	250
1,3-Dichlorobenzene				< 250	250	< 240	240	< 250	250	< 250	250
1,4-Dichlorobenzene				< 250	250	< 240	240	< 250	250	< 250	250
2,3,4,6-tetrachlorophenol				-	-	-	-	-	-	-	-
2,4,5-Trichlorophenol				< 250	250	< 240	240	< 250	250	< 250	250
2,4,6-Trichlorophenol				< 180	180	< 170	170	< 180	180	< 180	180
2,4-Dichlorophenol				< 180	180	< 170	170	< 180	180	< 180	180
2,4-Dimethylphenol				< 250	250	< 240	240	< 250	250	< 250	250
2,4-Dinitrophenol				< 250	250	< 240	240	< 250	250	< 250	250
2,4-Dinitrotoluene				< 180	180	< 170	170	< 180	180	< 180	180
2,6-Dinitrotoluene				< 180	180	< 170	170	< 180	180	< 180	180
2-Chloronaphthalene				< 250	250	< 240	240	< 250	250	< 250	250
2-Chlorophenol				< 250	250	< 240	240	< 250	250	< 250	250
2-Methylnaphthalene				< 250	250	< 240	240	< 250	250	< 250	250
2-Methylphenol (o-cresol)	330	100,000	500,000	< 250	250	< 240	240	< 250	250	< 250	250
2-Nitroaniline				< 250	250	< 240	240	< 250	250	< 250	250
2-Nitrophenol				< 250	250	< 240	240	< 250	250	< 250	250
3&4-Methylphenol (m&p-cresol)	330	100,000	500,000	< 250	250	< 240	240	< 250	250	< 250	250
3,3-Dichlorobenzidine				< 180	180	< 170	170	< 180	180	< 180	180
3-Nitroaniline				< 360	360	< 340	340	< 360	360	< 350	350
4,6-Dinitro-2-methylphenol				< 210	210	< 210	210	< 220	220	< 210	210
4-Bromophenyl phenyl ether				< 250	250	< 240	240	< 250	250	< 250	250
4-Chloro-3-methylphenol				< 250	250	< 240	240	< 250	250	< 250	250
4-Chloroaniline				< 290	290	< 270	270	< 290	290	< 280	280
4-Chlorophenyl phenyl ether				< 250	250	< 240	240	< 250	250	< 250	250
4-Nitroaniline				< 360	360	< 340	340	< 360	360	< 350	350
4-Nitrophenol				< 360	360	< 340	340	< 360	360	< 350	350
Acenaphthene	20,000	100,000	500,000	< 250	250	< 240	240	< 250	250	< 250	250
Acenaphthylene	100,000	100,000	500,000	< 250	250	< 240	240	< 250	250	< 250	250
Acetophenone				< 250	250	< 240	240	< 250	250	< 250	250
Aniline				< 290	290	< 270	270	< 290	290	< 280	280
Anthracene	100,000	100,000	500,000	< 250	250	< 240	240	< 250	250	< 250	250
Atrazine				-	-	-	-	-	-	-	-
Benz(a)anthracene	1,000	1,000	5,600	130	250	< 240	240	170	250	< 250	250
Benzaldehyde				-	-	-	-	-	-	-	-
Benzidine				< 360	360	< 340	340	< 360	360	< 350	350
Benzo(a)pyrene	1,000	1,000	1,000	160	180	< 170	170	190	180	< 180	180
Benzo(b)fluoranthene	1,000	1,000	5,600	150	250	< 240	240	190	250	< 250	250
Benzo(ghi)perylene	100,000	100,000	500,000	140	250	< 240	240	170	250	< 250	250
Benzo(k)fluoranthene	800	3,900	56,000	140	250	< 240	240	170	250	< 250	250
Benzoic Acid				< 1800	1,800	< 1700	1,700	< 1800	1,800	< 1800	1,800
Benzyl butyl phthalate				180	250	< 240	240	260	250	< 250	250
Bis(2-chloroethoxy)methane				< 250	250	< 240	240	< 250	250	< 250	250
Bis(2-chloroethyl)ether				< 180	180	< 170	170	< 180	180	< 180	180
Bis(2-chloroisopropyl)ether				< 250	250	< 240	240	< 250	250	< 250	250
Bis(2-ethylhexyl)phthalate				110	250	< 240	240	820	250	< 250	250
Caprolactam				-	-	-	-	-	-	-	-
Carbazole				< 180	180	< 170	170	< 180	180	< 180	180
Chrysene	1,000	3,900	56,000	180	250	< 240	240	190	250	< 250	250
Dibenz(a,h)anthracene	330	330	560	< 180	180	< 170	170	< 180	180	< 180	180
Dibenzofuran	7,000	59,000	59,000	< 250	250	< 240	240	< 250	250	< 250	250
Diethyl phthalate				< 250	250	< 240	240	< 250	250	< 250	250
Dimethylphthalate				< 250	250	< 240	240	< 250	250	< 250	250
Di-n-butylphthalate				140	250	< 240	240	< 250	250	< 250	250
Di-n-octylphthalate				< 250	250	< 240	240	< 250	250	< 250	250
Fluoranthene	100,000	100,000	500,000	260	250	< 240	240	310	250	< 250	250
Fluorene	30,000	100,000	500,000	< 250	250	< 240	240	< 250	250	< 250	250
Hexachlorobenzene				< 180	180	< 170	170	< 180	180	< 180	180
Hexachlorobutadiene				< 250	250	< 240	240	< 250	250	< 250	250
Hexachlorocyclopentadiene				< 250	250	< 240	240	< 250	250	< 250	250
Hexachloroethane				< 180	180	< 170	170	< 180	180	< 180	180
Indeno(1,2,3-cd)pyrene	500	500	5,600	140	250	< 240	240	150	250	< 250	250
Isophorone				< 1100	1,100	< 170	170	< 730	730	< 180	180
Naphthalene	12,000	100,000	500,000	< 250	250	< 240	240	< 250	250	< 250	250
Nitrobenzene				< 180	180	< 170	170	< 180	180	< 180	180
N-Nitrosodimethylamine				< 250	250	< 240	240	< 250	250	< 250	250
N-Nitrosodi-n-propylamine				< 180	180	< 170	170	< 180	180	< 180	180
N-Nitrosodiphenylamine				< 250	250	< 240	240	< 250	250	< 250	250
Pentachloronitrobenzene				< 250	250	< 240	240	< 250	250	< 250	250
Pentachlorophenol	800	6,700	6,700	< 210	210	< 210	210	< 220	220	< 210	210
Phenanthrene	100,000	100,000	500,000	< 250	250	< 240	240	160	250	< 250	250
Phenol	330	100,000	500,000	< 250	250	< 240	240	< 250	250	< 250	250
Pyrene	100,000	100,000	500,000	280	250	< 240	240	360	250	< 250	250
Pyridine				< 250	250	< 240	240	< 250	250	< 250	250

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL - Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RCSCO Guidance Value

Table 5
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Pesticides PCBs

	COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	SB1				SB2				SB3				SB4			
					(0-2)		(16-18)		(0-2)		(16-18)		(0-2)		(16-18)		(0-2)		(16-18)	
					3/18/2019		3/18/2019		3/18/2019		3/18/2019		3/18/2019		3/18/2019		3/19/2019		3/19/2019	
					µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
					Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
Pesticides	4,4' -DDD	3.3	13,000	92,000	< 2.3	2.3	< 2.2	2.2	15	2.3	< 2.2	2.2	8.6	2.2	< 2.2	2.2	3.3	2.2	< 2.1	2.1
	4,4' -DDE	3.3	8,900	62,000	5.8	2.3	< 2.2	2.2	4.6	2.3	< 2.2	2.2	61	2.2	< 2.2	2.2	4.9	2.2	< 2.1	2.1
	4,4' -DDT	3.3	7,900	47,000	30	2.3	< 2.2	2.2	< 2.3	2.3	< 2.2	2.2	78	2.2	< 2.2	2.2	33	2.2	< 2.1	2.1
	a-BHC	20	480	3,400	< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
	a-Chlordane	94	4,200	24,000	6.6	3.8	< 3.7	3.7	< 3.8	3.8	< 3.7	3.7	28	3.6	< 3.7	3.7	6.1	3.7	< 3.5	3.5
	Aldrin	5	97	680	< 3.8	3.8	< 3.7	3.7	< 3.8	3.8	< 3.7	3.7	< 3.6	3.6	< 3.7	3.7	< 3.7	3.7	< 3.5	3.5
	b-BHC	36	360	3,000	< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
	Chlordane	94	4,200	24,000	39	38	< 37	37	< 38	38	< 37	37	160	36	< 37	37	< 37	37	< 35	35
	d-BHC	40	100,000	500,000	< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
	Dieldrin	5	200	1,400	40	3.8	< 3.7	3.7	< 3.8	3.8	< 3.7	3.7	9.8	3.6	< 3.7	3.7	< 3.7	3.7	< 3.5	3.5
	Endosulfan I	2,400	24,000	200,000	< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
	Endosulfan II	2,400	24,000	200,000	< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
	Endosulfan sulfate	2,400	24,000	200,000	< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
	Endrin	14	11,000	89,000	< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
	Endrin aldehyde				< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
	Endrin ketone				< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
	g-BHC				< 1.5	1.5	< 1.5	1.5	< 1.5	1.5	< 1.5	1.5	< 1.5	1.5	< 1.5	1.5	< 1.5	1.5	< 1.4	1.4
	g-Chlordane				7.5	3.8	< 3.7	3.7	< 3.8	3.8	< 3.7	3.7	28	3.6	< 3.7	3.7	< 3.7	3.7	< 3.5	3.5
	Heptachlor	42	2,100	15,000	< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
	Heptachlor epoxide				< 7.5	7.5	< 7.3	7.3	< 7.6	7.6	< 7.3	7.3	< 7.3	7.3	< 7.4	7.4	< 7.3	7.3	< 7.1	7.1
PCBs	Methoxychlor				< 38	38	< 37	37	< 38	38	< 37	37	< 36	36	< 37	37	< 37	37	< 35	35
	Toxaphene				< 150	150	< 150	150	< 150	150	< 150	150	< 150	150	< 150	150	< 150	150	< 140	140
	PCB-1016	100	1,000	1,000	< 75	75	< 73	73	< 76	76	< 73	73	< 73	73	< 74	74	< 73	73	< 71	71
	PCB-1221	100	1,000	1,000	< 75	75	< 73	73	< 76	76	< 73	73	< 73	73	< 74	74	< 73	73	< 71	71
	PCB-1232	100	1,000	1,000	< 75	75	< 73	73	< 76	76	< 73	73	< 73	73	< 74	74	< 73	73	< 71	71
	PCB-1242	100	1,000	1,000	< 75	75	< 73	73	< 76	76	< 73	73	< 73	73	< 74	74	< 73	73	< 71	71
	PCB-1248	100	1,000	1,000	< 75	75	< 73	73	< 76	76	< 73	73	< 73	73	< 74	74	< 73	73	< 71	71
	PCB-1254	100	1,000	1,000	< 75	75	< 73	73	< 76	76	< 73	73	120	73	< 74	74	< 73	73	< 71	71
	PCB-1260	100	1,000	1,000	< 75	75	< 73	73	< 76	76	< 73	73	< 73	73	< 74	74	< 73	73	< 71	71
	PCB-1262	100	1,000	1,000	< 75	75	< 73	73	< 76	76	< 73	73	< 73	73	< 74	74	< 73	73	< 71	71
	PCB-1268	100	1,000	1,000	< 75	75	< 73	73	< 76	76	< 73	73	< 73	73	< 74	74	< 73	73	< 71	71

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RCSCO Guidance Value

Table 5
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Pesticides PCBs

	COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	SB5				SB6				SB7				Duplicate	
					(0-2)		(16-18)		(0-2)		(16-18)		(0-2)		(16-18)		SB1 (0-2')	
					3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/18/2019	
					µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
					Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
Pesticides	4,4'-DDD	3.3	13,000	92,000	130	22	< 2.2	2.2	2.8	2.3	< 2.5	2.5	< 2.2	2.2	< 2.3	2.3	< 2.3	2.3
	4,4'-DDE	3.3	8,900	62,000	< 22	22	< 2.2	2.2	5.2	2.3	< 2.5	2.5	< 2.2	2.2	< 2.3	2.3	7.6	2.3
	4,4'-DDT	3.3	7,900	47,000	53	22	< 2.2	2.2	4.7	2.3	< 2.5	2.5	7	2.2	< 2.3	2.3	49	2.3
	a-BHC	20	480	3,400	< 15	15	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	a-Chlordane	94	4,200	24,000	< 36	36	< 3.6	3.6	< 7.5	7.5	< 4.2	4.2	< 3.6	3.6	< 3.8	3.8	< 10	10
	Aldrin	5	97	680	< 15	15	< 3.6	3.6	< 3.8	3.8	< 4.2	4.2	< 3.6	3.6	< 3.8	3.8	< 3.8	3.8
	b-BHC	36	360	3,000	< 15	15	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	Chlordane	94	4,200	24,000	< 360	360	< 36	36	< 38	38	< 42	42	< 36	36	< 38	38	67	38
	d-BHC	40	100,000	500,000	< 15	15	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	Dieldrin	5	200	1,400	25	15	< 3.6	3.6	< 3.8	3.8	< 4.2	4.2	< 3.6	3.6	< 3.8	3.8	40	3.8
	Endosulfan I	2,400	24,000	200,000	< 73	73	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	Endosulfan II	2,400	24,000	200,000	< 73	73	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	Endosulfan sulfate	2,400	24,000	200,000	< 73	73	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	Endrin	14	11,000	89,000	< 36	36	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	Endrin aldehyde				< 73	73	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	Endrin ketone				< 73	73	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	g-BHC				< 15	15	< 1.5	1.5	< 1.5	1.5	< 1.7	1.7	< 1.4	1.4	< 1.5	1.5	< 1.5	1.5
	g-Chlordane				< 36	36	< 3.6	3.6	< 7.5	7.5	< 4.2	4.2	< 3.6	3.6	< 3.8	3.8	9.4	3.8
	Heptachlor	42	2,100	15,000	< 36	36	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	Heptachlor epoxide				< 73	73	< 7.3	7.3	< 7.5	7.5	< 8.3	8.3	< 7.2	7.2	< 7.6	7.6	< 7.6	7.6
	Methoxychlor				< 360	360	< 36	36	< 38	38	< 42	42	< 36	36	< 38	38	< 38	38
	Toxaphene				< 1500	1,500	< 150	150	< 150	150	< 170	170	< 140	140	< 150	150	< 150	150
PCBs	PCB-1016	100	1,000	1,000	< 73	73	< 73	73	< 75	75	< 83	83	< 72	72	< 76	76	< 76	76
	PCB-1221	100	1,000	1,000	< 73	73	< 73	73	< 75	75	< 83	83	< 72	72	< 76	76	< 76	76
	PCB-1232	100	1,000	1,000	< 73	73	< 73	73	< 75	75	< 83	83	< 72	72	< 76	76	< 76	76
	PCB-1242	100	1,000	1,000	< 73	73	< 73	73	< 75	75	< 83	83	< 72	72	< 76	76	< 76	76
	PCB-1248	100	1,000	1,000	< 73	73	< 73	73	< 75	75	< 83	83	< 72	72	< 76	76	< 76	76
	PCB-1254	100	1,000	1,000	< 73	73	< 73	73	< 75	75	< 83	83	< 72	72	< 76	76	< 76	76
	PCB-1260	100	1,000	1,000	82	73	< 73	73	< 75	75	< 83	83	< 72	72	< 76	76	< 76	76
	PCB-1262	100	1,000	1,000	< 73	73	< 73	73	< 75	75	< 83	83	< 72	72	< 76	76	< 76	76
	PCB-1268	100	1,000	1,000	< 73	73	< 73	73	< 75	75	< 83	83	< 72	72	< 76	76	< 76	76

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RCSCO Guidance Value

Table 5
1840-1856 Park Avenue
Manhattan, New York
Soil Analytical Results
Pesticides PCBs

	COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	F1				F2				F3				F4			
					(0-2)		(5-7)		(0-2)		(5-7)		(0-2)		(5-7)		(0-2)		(5-7)	
					6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019	
					µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
					Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
Pesticides	4,4' -DDD	3.3	13,000	92,000	12	2.4	18	2.3	< 2.1	2.1	< 2.1	2.1	92	11	200	12	< 2.2	2.2	< 2.2	2.2
	4,4' -DDE	3.3	8,900	62,000	18	2.4	110	23	< 3.0	3.0	< 2.1	2.1	24	2.2	130	12	< 2.2	2.2	< 2.2	2.2
	4,4' -DDT	3.3	7,900	47,000	34	2.4	210	23	4.3	2.1	< 2.1	2.1	< 2.2	2.2	< 8.3	8.3	< 2.2	2.2	< 2.2	2.2
	a-BHC	20	480	3,400	< 7.9	7.9	< 7.6	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 8.3	8.3	< 7.4	7.4	< 7.4	7.4
	a-Chlordane	94	4,200	24,000	26	4.0	54	3.8	12	3.5	< 3.5	3.5	24	3.7	98	21	< 3.7	3.7	< 3.7	3.7
	Aldrin	5	97	680	< 4.0	4.0	< 3.8	3.8	< 3.5	3.5	< 3.5	3.5	< 3.7	3.7	< 8.3	8.3	< 3.7	3.7	< 3.7	3.7
	b-BHC	36	360	3,000	< 7.9	7.9	< 7.6	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 8.3	8.3	< 7.4	7.4	< 7.4	7.4
	Chlordane	94	4,200	24,000	110	40	190	38	34	14	< 35	35	73	37	330	210	< 37	37	< 37	37
	d-BHC	40	100,000	500,000	< 7.9	7.9	< 7.6	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 8.3	8.3	< 7.4	7.4	< 7.4	7.4
	Dieldrin	5	200	1,400	7.2	4.0	16	3.8	< 3.5	3.5	< 3.5	3.5	14	3.7	250	21	< 3.7	3.7	< 3.7	3.7
	Endosulfan I	2,400	24,000	200,000	< 7.9	7.9	< 7.6	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 42	42	< 7.4	7.4	< 7.4	7.4
	Endosulfan II	2,400	24,000	200,000	< 7.9	7.9	< 7.6	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 42	42	< 7.4	7.4	< 7.4	7.4
	Endosulfan sulfate	2,400	24,000	200,000	< 7.9	7.9	< 7.6	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 42	42	< 7.4	7.4	< 7.4	7.4
	Endrin	14	11,000	89,000	< 7.9	7.9	< 7.6	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 21	21	< 7.4	7.4	< 7.4	7.4
	Endrin aldehyde				< 7.9	7.9	< 7.6	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 42	42	< 7.4	7.4	< 7.4	7.4
	Endrin ketone				< 7.9	7.9	< 7.6	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 42	42	< 7.4	7.4	< 7.4	7.4
	g-BHC				< 1.6	1.6	< 1.5	1.5	< 1.4	1.4	< 1.4	1.4	< 1.5	1.5	< 8.3	8.3	< 1.5	1.5	< 1.5	1.5
	g-Chlordane				23	4.0	31	3.8	6.2	3.5	< 3.5	3.5	14	3.7	70	21	< 3.7	3.7	< 3.7	3.7
	Heptachlor	42	2,100	15,000	< 7.9	7.9	< 7.6	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 42	42	< 7.4	7.4	< 7.4	7.4
	Heptachlor epoxide				< 7.9	7.9	9.1	7.6	< 7.1	7.1	< 7.0	7.0	< 7.4	7.4	< 42	42	< 7.4	7.4	< 7.4	7.4
PCBs	Methoxychlor				< 40	40	< 38	38	< 35	35	< 35	35	< 37	37	< 210	210	< 37	37	< 37	37
	Toxaphene				< 160	160	< 150	150	< 140	140	< 140	140	< 150	150	< 830	830	< 150	150	< 150	150
	PCB-1016	100	1,000	1,000	< 78	78	< 76	76	< 71	71	< 70	70	< 74	74	< 83	83	< 74	74	< 74	74
	PCB-1221	100	1,000	1,000	< 78	78	< 76	76	< 71	71	< 70	70	< 74	74	< 83	83	< 74	74	< 74	74
	PCB-1232	100	1,000	1,000	< 78	78	< 76	76	< 71	71	< 70	70	< 74	74	< 83	83	< 74	74	< 74	74
	PCB-1242	100	1,000	1,000	< 78	78	< 76	76	< 71	71	< 70	70	< 74	74	< 83	83	< 74	74	< 74	74
	PCB-1248	100	1,000	1,000	< 78	78	< 76	76	< 71	71	< 70	70	< 74	74	< 83	83	< 74	74	< 74	74
	PCB-1254	100	1,000	1,000	< 78	78	< 76	76	< 71	71	< 70	70	< 74	74	< 83	83	< 74	74	< 74	74
	PCB-1260	100	1,000	1,000	< 78	78	< 76	76	< 71	71	< 70	70	< 74	74	< 83	83	< 74	74	< 74	74
	PCB-1262	100	1,000	1,000	< 78	78	< 76	76	< 71	71	< 70	70	< 74	74	< 83	83	< 74	74	< 74	74
	PCB-1268	100	1,000	1,000	< 78	78	< 76	76	< 71	71	< 70	70	< 74	74	< 83	83	< 74	74	< 74	74

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RCSCO Guidance Value

Table 6
1840-1856 Avenue
Manhattan, New York
Soil Analytical Results
Metals

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Commercial Soil Cleanup Objectives*	SB1				SB2				SB3				SB4			
				(0-2)		(16-18)		(0-2)		(16-18)		(0-2)		(16-18)		(0-2)		(16-18)	
				3/18/2019		3/18/2019		3/18/2019		3/18/2019		3/18/2019		3/18/2019		3/19/2019		3/19/2019	
				µg/Kg		µg/Kg		mg/Kg		mg/Kg		mg/Kg		mg/Kg		mg/Kg		mg/Kg	
				Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
Aluminum				10,400	40	3,070	39	17,900	34	4,760	36	6,520	33	4,370	35	10,300	32	7,390	32
Antimony				< 5.0	5.0	< 3.9	3.9	< 3.4	3.4	< 3.6	3.6	< 3.3	3.3	< 3.5	3.5	< 3.2	3.2	< 3.2	3.2
Arsenic	13	16	16	7.57	0.80	1.01	0.77	3.24	0.68	1.19	0.71	5.77	0.67	1.05	0.69	3.54	0.65	1.67	0.64
Barium	350	350	400	491	0.8	32.9	0.8	73.9	0.7	64.7	0.7	189	0.7	51.2	0.7	108	0.6	43.3	0.6
Beryllium	7.2	14	590	0.43	0.32	< 0.31	0.31	0.42	0.27	0.32	0.28	0.29	0.27	0.29	0.28	0.43	0.26	0.35	0.26
Cadmium	2.5	2.5	9.3	1.13	0.40	< 0.39	0.39	1.22	0.34	< 0.36	0.36	1.24	0.33	< 0.35	0.35	0.63	0.32	< 0.32	0.32
Calcium				25,500	40	968	3.9	9,150	3.4	1,450	3.6	57,100	33	1,540	3.5	38,700	32	2,760	3.2
Chromium	30	180	1,500	25.9	0.40	9.66	0.39	23.5	0.34	13.5	0.36	20.6	0.33	11.5	0.35	21.7	0.32	20.1	0.32
Cobalt				8.1	0.40	3.87	0.39	11.7	0.34	5.14	0.36	5.71	0.33	4.42	0.35	10.4	0.32	5.28	0.32
Copper	50	270	270	35	0.8	20.9	0.8	137	6.8	25	0.7	29.5	0.7	16.9	0.7	63.4	0.6	35.2	0.6
Iron				20,700	40	9,080	3.9	21,900	34	10,200	36	23,100	33	8,670	35	22,200	32	8,720	32
Lead	63	400	1,000	2,420	80	2.3	0.8	122	0.7	4.4	0.7	182	6.7	4	0.7	152	6.5	4	0.6
Magnesium				4,200	4.0	1,280	3.9	5,440	34	2,020	3.6	13,400	33	2,090	3.5	15,900	32	3,270	3.2
Manganese	1,600	2,000	10,000	398	4.0	250	3.9	259	3.4	411	3.6	284	3.3	298	3.5	291	3.2	118	0.32
Mercury	0.18	0.81	2.8	0.49	0.07	< 0.03	0.03	0.19	0.07	< 0.03	0.03	0.37	0.06	< 0.03	0.03	0.23	0.07	< 0.03	0.03
Nickel	30	140	310	20.9	0.40	8.04	0.39	31.8	0.34	11.4	0.36	14.2	0.33	10.7	0.35	18.5	0.32	15.9	0.32
Potassium				1,180	8	569	8	1,060	7	820	7	1,230	7	1,080	7	2,570	6	840	6
Selenium	3.9	36	1,500	< 1.6	1.6	< 1.5	1.5	< 1.4	1.4	< 1.4	1.4	< 1.3	1.3	< 1.4	1.4	< 1.3	1.3	< 1.3	1.3
Silver	2	36	1,500	< 0.40	0.40	< 0.39	0.39	< 0.34	0.34	< 0.36	0.36	< 0.33	0.33	< 0.35	0.35	< 0.32	0.32	< 0.32	0.32
Sodium				413	8	135	8	1,010	7	259	7	430	7	241	7	751	6	606	6
Thallium				< 1.6	1.6	< 1.5	1.5	< 1.4	1.4	< 1.4	1.4	< 1.3	1.3	< 1.4	1.4	< 1.3	1.3	< 1.3	1.3
Vanadium				33	0.40	13.9	0.39	46.7	0.34	17.2	0.36	28.4	0.33	18	0.35	70.4	0.32	20.7	0.32
Zinc	109	2,200	10,000	348	8.0	11	0.8	110	0.7	18.1	0.7	1,210	6.7	15.1	0.7	184	6.5	20.1	0.6

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RSCSO Guidance Value

Table 6
1840-1856 Avenue
Manhattan, New York
Soil Analytical Results
Metals

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	SB5				SB6				SB7				Duplicate	
			(0-2)		(16-18)		(0-2)		(16-18)		(0-2)		(16-18)		SB1 (0-2')	
			3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/18/2019	
			mg/Kg		mg/Kg		mg/Kg		mg/Kg		mg/Kg		mg/Kg		mg/Kg	
			Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
Aluminum			6,910	38	4,400	36	9,140	36	7,910	45	8,760	33	5,270	40	8,990	38
Antimony			< 3.8	3.8	< 3.6	3.6	< 3.6	3.6	< 4.5	4.5	< 3.3	3.3	< 4.0	4.0	< 3.8	3.8
Arsenic	13	16	6.5	0.76	< 0.73	0.73	5.47	0.73	2.29	0.90	3.53	0.65	1.2	0.80	5.89	0.76
Barium	350	350	97.3	0.8	24.1	0.7	89	0.7	175	0.9	254	0.7	34	0.8	274	0.8
Beryllium	7.2	14	0.46	0.30	< 0.29	0.29	0.42	0.29	0.65	0.36	0.39	0.26	0.38	0.32	0.38	0.31
Cadmium	2.5	2.5	0.52	0.38	< 0.36	0.36	0.44	0.36	< 0.45	0.45	0.51	0.33	< 0.40	0.40	1.08	0.38
Calcium			51,800	38	1,540	3.6	30,000	36	18,300	45	21,100	33	1,450	4.0	24,000	38
Chromium	30	180	29.4	0.38	9.01	0.36	17.3	0.36	17.2	0.45	24.2	0.33	20.1	0.40	20.4	0.38
Cobalt			7.34	0.38	3.06	0.36	8.03	0.36	7.29	0.45	7.7	0.33	3.48	0.40	7.51	0.38
Copper	50	270	50.4	0.8	9.5	0.7	41.8	0.7	17	0.9	29.6	0.7	17	0.8	53.9	0.8
Iron			23,900	38	7,720	3.6	17,100	36	15,300	45	16,500	33	9,200	4.0	30,500	38
Lead	63	400	53.5	0.8	1.8	0.7	61.1	0.7	6.6	0.9	235	6.5	2.7	0.8	1,450	7.6
Magnesium			23,900	38	1,870	3.6	13,200	36	7,530	45	5,760	33	1,950	4.0	4,010	3.8
Manganese	1,600	2,000	228	3.8	96	0.36	602	3.6	409	4.5	486	3.3	81.5	0.40	398	3.8
Mercury	0.18	0.81	0.31	0.07	< 0.03	0.03	0.75	0.08	< 0.08	0.08	0.34	0.07	< 0.03	0.03	0.53	0.07
Nickel	30	140	14.5	0.38	9.64	0.36	17.4	0.36	16.6	0.45	20.2	0.33	11.1	0.40	19.6	0.38
Potassium			1,940	8	988	7	1,720	7	2,800	9	1,810	7	728	8	1,120	8
Selenium	3.9	36	< 1.5	1.5	< 1.5	1.5	< 1.5	1.5	< 1.8	1.8	< 1.3	1.3	< 1.6	1.6	< 1.5	1.5
Silver	2	36	< 0.38	0.38	< 0.36	0.36	< 0.36	0.36	< 0.45	0.45	< 0.33	0.33	< 0.40	0.40	< 0.38	0.38
Sodium			584	8	131	7	611	7	331	9	210	7	246	8	200	8
Thallium			< 1.5	1.5	< 1.5	1.5	< 1.5	1.5	< 1.8	1.8	< 1.3	1.3	< 1.6	1.6	< 1.5	1.5
Vanadium			61	0.38	13.3	0.36	41.2	0.36	23	0.45	31.5	0.33	16.7	0.40	27.5	0.38
Zinc	109	2,200	91.9	0.8	46.4	0.7	74.8	0.7	31.1	0.9	161	6.5	19.7	0.8	306	7.6

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RCSCO Guidance Value

Table 6
1840-1856 Avenue
Manhattan, New York
Soil Analytical Results
Metals

COMPOUND	NYSDEC Part 375.6 Unrestricted Use Soil Cleanup Objectives*	NYSDEC Part 375.6 Restricted Residential Soil Cleanup Objectives*	F1				F2				F3				F4			
			(0-2)		(5-7)		(0-2)		(5-7)		(0-2)		(5-7)		(0-2)		(5-7)	
			6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019		6/7/2019	
			mg/Kg		mg/Kg		mg/Kg		mg/Kg		mg/Kg		mg/Kg		mg/Kg		mg/Kg	
			Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
Aluminum			7,300	37	7,210	35	11,100	32	4,640	32	8,460	38	4,750	43	5,620	37	10,600	39
Antimony			< 3.7	3.7	< 3.5	3.5	< 3.2	3.2	< 3.2	3.2	< 3.8	3.8	7	4.3	7.3	3.7	< 3.9	3.9
Arsenic	13	16	4.5	0.73	2.67	0.69	3.63	0.64	1.09	0.63	2.77	0.76	2.7	0.86	5.78	0.75	3.25	0.78
Barium	350	350	106	0.7	74.2	0.7	73.8	0.6	17.6	0.6	447	0.8	995	0.9	508	0.7	24.9	0.8
Beryllium	7.2	14	0.32	0.29	0.29	0.28	0.38	0.26	0.21	0.25	0.37	0.30	0.2	0.34	0.26	0.30	0.3	0.31
Cadmium	2.5	2.5	0.92	0.37	< 0.35	0.35	0.34	0.32	< 0.32	0.32	0.47	0.38	4.05	0.43	0.83	0.37	< 0.39	0.39
Calcium			61,600	37	22,100	35	10,200	32	1,550	3.2	13,700	38	85,200	43	33,700	37	753	3.9
Chromium	30	180	19.2	0.37	14.1	0.35	26.3	0.32	9.22	0.32	23.3	3.8	36.4	0.43	15.3	0.37	15.5	0.39
Cobalt			5.42	0.37	5.68	0.35	9.14	0.32	3.59	0.32	7.86	0.38	7.05	0.43	4.7	0.37	7.13	0.39
Copper	50	270	67.4	0.7	21.3	0.7	44.6	0.6	5.9	0.6	18.3	0.8	24	0.9	75.7	0.7	11.9	0.8
Iron			11,200	37	14,600	35	19,400	32	7,250	3.2	15,300	38	12,800	43	10,500	37	14,100	39
Lead	63	400	168	7.3	103	0.7	57.8	0.6	2.5	0.6	102	0.8	653	8.6	619	7.5	6.3	0.8
Magnesium			5,330	3.7	3,260	3.5	4,680	3.2	1,910	3.2	2,890	3.8	4,700	4.3	5,710	37	2,420	3.9
Manganese	1,600	2,000	307	3.7	324	3.5	298	3.2	169	3.2	309	3.8	264	4.3	173	3.7	335	3.9
Mercury	0.18	0.81	0.31	0.08	0.29	0.15	0.13	0.07	< 0.03	0.03	0.12	0.07	1.21	0.08	1.58	0.13	< 0.07	0.07
Nickel	30	140	27.3	0.37	11.2	0.35	19.2	0.32	8.92	0.32	18.8	0.38	9.3	0.43	12.2	0.37	12.7	0.39
Potassium			940	7	1,140	7	1,650	6	592	6	1,480	8	1,240	9	1,040	7	875	8
Selenium	3.9	36	< 1.5	1.5	< 1.4	1.4	< 1.3	1.3	< 1.3	1.3	< 1.5	1.5	< 1.7	1.7	< 1.5	1.5	< 1.6	1.6
Silver	2	36	< 0.37	0.37	< 0.35	0.35	< 0.32	0.32	< 0.32	0.32	< 0.38	0.38	< 0.43	0.43	< 0.37	0.37	< 0.39	0.39
Sodium			706	7	195	7	492	6	84	6	167	8	487	9	239	7	154	8
Thallium			< 1.5	1.5	< 1.4	1.4	< 1.3	1.3	< 1.3	1.3	< 1.5	1.5	< 1.7	1.7	< 1.5	1.5	< 1.6	1.6
Vanadium			26.6	0.37	15.2	0.35	41.5	0.32	10.7	0.32	26.3	0.38	19.2	0.43	23.2	0.37	20.7	0.39
Zinc	109	2,200	194	7.3	76.2	0.7	70.9	0.6	14.5	0.6	241	7.6	911	8.6	290	7.5	26.5	0.8

Notes:

* - 6 NYCRR Part 375-6 Remedial Program Soil Cleanup Objectives

BCG - Below Cellar Grade

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RRSCO Guidance Value

Bold/highlighted- Indicated exceedance of the NYSDEC RCSCO Guidance Value

Table 7
1840-1856 Park Avenue
New York, New York
Soil Analytical Results
PFAS and 1,4-dioxane

Compound	SB2001				SB2002				SB2003			
	(0-2')		(15-17')		(0-2')		(15-17')		(0-2')		(15-17')	
	6/30/2020		6/30/2020		6/30/2020		6/30/2020		6/30/2020		6/30/2020	
	µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL
Perfluorobutanoic Acid (PFBA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluoropentanoic Acid (PFPeA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluorobutanesulfonic Acid (PFBS)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluorohexanoic Acid (PFHxA)	0.054J	0.487	ND	0.465	0.060J	0.543	ND	0.572	0.060J	0.536	ND	0.495
Perfluoroheptanoic Acid (PFHpA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluorohexanesulfonic Acid (PFHxS)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluorooctanoic Acid (PFOA)	ND	0.487	0.168J	0.465	0.052J	0.543	ND	0.572	ND	0.536	ND	0.495
1H,1H,2H,2H-Perfluorooctanesulfonic Acid (6:2FTS)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluoroheptanesulfonic Acid (PFHpS)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluorononanoic Acid (PFNA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluorooctanesulfonic Acid (PFOS)	ND	0.487	0.278J	0.465	0.165J	0.543	ND	0.572	0.495J	0.536	ND	0.495
Perfluorodecanoic Acid (PFDA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
1H,1H,2H,2H-Perfluorodecanesulfonic Acid (8:2FTS)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
N-Methyl Perfluorooctanesulfonamidoacetic Acid (NMeFOSAA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluoroundecanoic Acid (PFUnA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	0.089J	0.536	ND	0.495
Perfluorodecanesulfonic Acid (PFDS)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluorooctanesulfonamide (FOSA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	4.95
N-Ethyl Perfluorooctanesulfonamidoacetic Acid (NEtFOSAA)	ND	0.487	ND	0.465	0.104J	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluorododecanoic Acid (PFDoA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluorotridecanoic Acid (PFTTrDA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Perfluorotetradecanoic Acid (PFTA)	ND	0.487	ND	0.465	ND	0.543	ND	0.572	ND	0.536	ND	0.495
Combined PFOA and PFOS	ND		0.446J		0.217J		ND		0.495J		ND	
Combined Total Detections	0.054J		0.446J		0.381J		ND		0.644J		ND	

Compound	SB2001				SB2002				SB2003			
	(0-2')		(15-17')		(0-2')		(15-17')		(0-2')		(15-17')	
	6/30/2020		6/30/2020		6/30/2020		6/30/2020		6/30/2020		6/30/2020	
	µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL
1,4-dioxane	< 73	73	< 71	71	< 74	74	< 71	71	< 74	74	< 70	70

Notes:

DL- Detection Limit

J- The value is estimated.

ND- Not Detected

The USEPA Health Advisory Level for drinking water is 70 ng/L (ppt) for combined detections of PFOA and PFOs

Table 7
1840-1856 Park Avenue
New York, New York
Soil Analytical Results
PFAS and 1,4-dioxane

Compound	SB2004				SB2005				SB2006				SB Duplicate	
	(0-2')		(15-17')		(0-2')		(15-17')		(0-2')		(15-17')		SB1 (15-17')	
	6/30/2020		6/30/2020		6/30/2020		6/30/2020		6/30/2020		6/30/2020		6/30/2020	
	µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL
Perfluorobutanoic Acid (PFBA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
Perfluoropentanoic Acid (PFPeA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	0.055J	0.531	ND	0.464	ND	0.529
Perfluorobutanesulfonic Acid (PFBS)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
Perfluorohexanoic Acid (PFHxA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	0.083J	0.531	ND	0.464	0.068J	0.529
Perfluoroheptanoic Acid (PFHpA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	0.051J	0.531	ND	0.464	0.061J	0.529
Perfluorohexanesulfonic Acid (PFHxS)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
Perfluorooctanoic Acid (PFOA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	0.085J	0.531	0.186J	0.464	0.617	0.529
1H,1H,2H,2H-Perfluorooctanesulfonic Acid (6:2FTS)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
Perfluoroheptanesulfonic Acid (PFHpS)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
Perfluorononanoic Acid (PFNA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	0.082J	0.529
Perfluorooctanesulfonic Acid (PFOS)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	0.795	0.531	0.222J	0.464	0.832	0.529
Perfluorodecanoic Acid (PFDA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	0.153J	0.531	ND	0.464	ND	0.529
1H,1H,2H,2H-Perfluorodecanesulfonic Acid (8:2FTS)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
N-Methyl Perfluorooctanesulfonamidoacetic Acid (NMeFOSAA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
Perfluoroundecanoic Acid (PFUnA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	0.126J	0.531	ND	0.464	ND	0.529
Perfluorodecanesulfonic Acid (PFDS)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
Perfluorooctanesulfonamide (FOSA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
N-Ethyl Perfluorooctanesulfonamidoacetic Acid (NEtFOSAA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
Perfluorododecanoic Acid (PFDoA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	0.253J	0.531	ND	0.464	ND	0.529
Perfluorotridecanoic Acid (PFTrDA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	ND	0.531	ND	0.464	ND	0.529
Perfluorotetradecanoic Acid (PFTA)	ND	0.503	ND	0.501	ND	0.622	ND	0.535	0.104J	0.531	ND	0.464	ND	0.529
Combined PFOA and PFOS	ND		ND		ND		ND		0.880J		0.408J		1.45	
Combined Total Detections	ND		ND		ND		ND		2.2J		0.408J		1.66J	

Compound	SB2004				SB2005				SB2006				SB Duplicate	
	(0-2')		(15-17')		(0-2')		(15-17')		(0-2')		(15-17')		SB4 (15-17')	
	6/30/2020		6/30/2020		6/30/2020		6/30/2020		6/30/2020		6/30/2020		6/30/2020	
	µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg		µg/Kg	
	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL
1,4-dioxane	< 78	78	< 72	72	< 77	77	< 77	77	< 79	79	< 69	69	< 72	72

Notes:

DL- Detection Limit

J- The value is estimated.

ND- Not Detected

The USEPA Health Advisory Level for drinking water is 70 ng/L (ppt) for combined detections of PFOA and PFOs

Table 8
1840-1956 Park Avenue
New York, NY
Parameters Detected Above Track 1 Soil Cleanup Objectives

COMPOUND	Range in Exceedances	Frequency of Detection	SB1		SB2		SB3		SB4		SB5		SB6		SB7		F1		F2		F3		F4	
			(0-2)	(16-18)	(0-2)	(16-18)	(0-2)	(16-18)	(0-2)	(16-18)	(0-2)	(16-18)	(0-2)	(16-18)	(0-2)	(16-18)	(0-2)	(5-7)	(0-2)	(5-7)	(0-2)	(5-7)	(0-2)	(5-7)
			3/18/2019	3/18/2019	3/18/2019	3/18/2019	3/18/2019	3/18/2019	3/19/2019	3/19/2019	3/19/2019	3/19/2019	3/19/2019	3/19/2019	3/19/2019	3/19/2019	3/19/2019	6/7/2019	6/7/2019	6/7/2019	6/7/2019	6/7/2019	6/7/2019	6/7/2019
Sample Results in ug/kg																								
Acetone	720	1	-	-	-	-					720													
n-Butylbenzene	32,000	1	-	-	-	-	-	-	-	-	32,000		-	-	-	-	-	-	-	-	-	-	-	-
Toluene	5,900	1	-	-	-	-					5,900													
Sample Results in ug/kg																								
Benzo(a)anthracene	2,100-66000	5	2,100	-	-	-	-	-	-	-	66,000	-	-	-	-	1,900	-	11,000	-	1,800	-	-	-	-
Benzo(a)pyrene	2,600-44,000	7	2,600	-	-	-	-	-	-	-	44,000		-	-	-	1,900	-	8,700	-	2,200	1,100	1,100		
Benzo(b)fluoranthene	2,900-45,000	7	2,900	-	-	-	-	-	-	-	45,000	-	-	-	-	1,600	-	7,000	-	1,800	1,500	1,200		
Benzo(k)fluoranthene	2,400-39,000	7	2,400	-	-	-	-	-	-	-	39,000		-	-	-	1,700	-	5,900	-	1,700	1,300	1,000		
Chrysene	2,500-58,000	7	2,500	-	-	-	-	-	-	-	58,000		-	-	-	1,700	-	9,400	-	2,000	1,600	1,100	-	
Dibenzo(a,h)anthracene	570-6,300	6	570	-	-	-	-	-	-	-	6,300		-	-	-	350	-	1,800	-	500	-	360		
Indeno(1,2,3-cd)pyrene	1,900-21,000	7	1,900	-	-	-	-	-	-	-	21,000		-	-	-	1,200	-	5,400	-	1,700	1,100	1,200	-	
Sample Results in ug/kg																								
4,4'-DDD	8.6-200	7	-	-	15	-	8.6	-	-	-	130		-	-	-	12	18	-	-	92	200	-	-	
4,4'-DDE	4.6-130	9	5.8	-	4.6	-	61	-	4.9	-	-		5.2	-	-	18	110	-	-	24	130	-	-	
4,4'-DDT	4.7-210	9	30	-	-	-	78	-	33	-	53		4.7	-	7	34	210	4.3	-	-	-	-	-	
a-Chlordane	98	1	-	-	-	-	-	-	-	-	-		-	-	-	-	-	-	-	98	-	-	-	
Dieldrin	7.2-250	7	40	-	-	-	9.8	-	-	-	25		-	-	-	7.2	16	-	-	14	250	-	-	
Sample Results in mg/kg																								
PCB-1254	120	1	-	-	-	-	120	-	-	-	-		-	-	-	-	-	-	-	-	-	-	-	
Sample Results in mg/kg																								
Barium	447-995	4	491	-	-	-	-	-	-	-	-		-	-	-	-	-	-	-	447	995	508		
Beryllium	0.26	1	-	-	-	-	-	-	-	-	-		-	-	-	-	-	-	-	-	-	0.26		
Cadmium	4.05	1	-	-	-	-	-	-	-	-	-		-	-	-	-	-	-	-	-	4.05	-		
Chromium	36.4	1	-	-	-	-	-	-	-	-	-		-	-	-	-	-	-	-	-	36.4	-		
Copper	50.4-137	5	-	-	137	-	-	-	63.4	-	50.4		-	-	-	67.4	-	-	-	-	-	-	-	
Lead	102-2,420	10	2,420	-	122	-	182	-	152	-	-		-	-	235	103	168	103	-	-	102	653	619	
Mercury	0.19-1.58	11	0.49	-	0.19	-	0.37	-	0.23	-	0.31		0.75	-	0.34	0.29	0.31	0.29	-	-	-	1.21	1.58	
Nickel	31.8	1	-	-	31.8	-	-	-	-	-	-		-	-	-	-	-	-	-	-	-	-	-	
Zinc	110-1,210	9	348	-	110	-	1,210	-	184	-	-		-	-	348	-	194	-	-	241	911	290	-	

Notes:
 Bold/highlighted- Indicated exceedance of the NYSDEC UUSCO Guidance Value
 Bold/highlighted- Indicated exceedance of the NYSDEC RRSCO Guidance Value
 Bold/highlighted- Indicated exceedance of the NYSDEC RCSCO Guidance Value

Table 9
1840-1856 Park Avenue
Manhattan, New York
Ground Water Analytical Results
Volatile Organic Compounds

Compound	NYSDEC Groundwater Quality Standards	MW1		MW2		MW3		MW4		GW Duplicate (MW4)	
		3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019	
		µg/L		µg/L		µg/L		µg/L		µg/L	
		Results	RL	Results	RL	Results	RL	Results	RL	Results	RL
1,1,1-Trichloroethane	5	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
1,1,2,2-Tetrachloroethane	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
1,1,2-Trichloroethane	1	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
1,1-Dichloroethane	5	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
1,1-Dichloroethene	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
1,2,3-Trichlorobenzene		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
1,2,4-Trichlorobenzene		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
1,2-Dibromo-3-chloropropane	0.04	< 0.50	0.50	< 0.50	0.50	< 0.50	0.50	< 0.50	0.50	< 0.50	0.50
1,2-Dibromoethane		< 0.25	0.25	< 0.25	0.25	< 0.25	0.25	< 0.25	0.25	< 0.25	0.25
1,2-Dichlorobenzene	5	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
1,2-Dichloroethane	0.6	< 0.60	0.60	< 0.60	0.60	< 0.60	0.60	< 0.60	0.60	< 0.60	0.60
1,2-Dichloropropane	0.94	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
1,3-Dichlorobenzene		< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
1,4-Dichlorobenzene	5	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
1,4-dioxane		< 100	100	< 100	100	< 100	100	< 0.20	0.20	< 0.20	0.20
2-Hexanone (Methyl Butyl Ketone)		< 2.5	2.5	< 2.5	2.5	< 2.5	2.5	< 2.5	2.5	< 2.5	2.5
4-Methyl-2-Pentanone		< 2.5	2.5	< 2.5	2.5	< 2.5	2.5	< 2.5	2.5	< 2.5	2.5
Acetone		< 5.0	5.0	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
Benzene	1	< 0.70	0.70	< 0.70	0.70	< 0.70	0.70	< 0.70	0.70	< 0.70	0.70
Bromochloromethane	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Bromodichloromethane		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Bromoform		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Bromomethane	5	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
Carbon Disulfide	60	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Carbon tetrachloride	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Chlorobenzene	5	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
Chloroethane	5	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
Chloroform	7	3.5	2.0	1.3	2.0	0.74	2.0	1.9	2.0	1.8	2.0
Chloromethane	60	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
cis-1,2-Dichloroethene	5	< 1.0	1.0	0.86	1.0	0.46	1.0	0.27	1.0	0.28	1.0
cis-1,3-Dichloropropene		< 0.40	0.40	< 0.40	0.40	< 0.40	0.40	< 0.40	0.40	< 0.40	0.40
Cyclohexane		< 5.0	5.0	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
Dibromochloromethane		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Dichlorodifluoromethane	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Ethylbenzene	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Isopropylbenzene	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
m&p-Xylenes	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Methyl Ethyl Ketone (2-Butanone)		< 5.0	5.0	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
Methyl t-butyl ether (MTBE)	10	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Methylacetate		< 2.5	2.5	< 2.5	2.5	< 2.5	2.5	< 2.5	2.5	< 2.5	2.5
Methylcyclohexane		< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
Methylene chloride	5	< 3.0	3.0	< 3.0	3.0	< 3.0	3.0	< 3.0	3.0	< 3.0	3.0
o-Xylene	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Styrene	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Tetrachloroethene	5	5.4	1.0	7	1.0	7.4	1.0	5.2	1.0	5.1	1.0
Toluene	5	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
Total Xylenes		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
trans-1,2-Dichloroethene	5	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0	< 2.0	2.0
trans-1,3-Dichloropropene	0.4	< 0.40	0.40	< 0.40	0.40	< 0.40	0.40	< 0.40	0.40	< 0.40	0.40
Trichloroethene	5	1.3	1.0	1.9	1.0	2.4	1.0	1.7	1.0	1.7	1.0
Trichlorofluoromethane	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Trichlorotrifluoroethane		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Vinyl Chloride	2	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0

Notes:

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC Groundwater Standard

Table 10
1840-1856 Park Avenue
Manhattan, New York
Groundwater Analytical Results
Semi-Volatile Organic Compounds

Compound	NYSDEC Groundwater Quality Standards µg/L	MW1		MW2		MW3		MW4		GW Duplicate (MW4)	
		3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019	
		µg/L		µg/L		µg/L		µg/L		µg/L	
		Results	RL	Results	RL	Results	RL	Results	RL	Results	RL
1,1-Biphenyl		< 3.5	3.5	< 3.4	3.4	< 3.5	3.5	< 3.5	3.5	< 3.7	3.7
1,2,4,5-Tetrachlorobenzene		< 3.5	3.5	< 3.4	3.4	< 3.5	3.5	< 3.5	3.5	< 3.7	3.7
2,3,4,6-tetrachlorophenol		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
2,4,5-Trichlorophenol	1	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
2,4,6-Trichlorophenol		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
2,4-Dichlorophenol	1	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
2,4-Dimethylphenol		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
2,4-Dinitrophenol	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
2,4-Dinitrotoluene		< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
2,6-Dinitrotoluene	5	< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
2-Chloronaphthalene		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
2-Chlorophenol	50	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
2-Methylnaphthalene	50	< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
2-Methylphenol (o-cresol)	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
2-Nitroaniline	5	< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
2-Nitrophenol	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
3&4-Methylphenol (m&p-cresol)		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
3,3'-Dichlorobenzidine		< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
3-Nitroaniline	5	< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
4,6-Dinitro-2-methylphenol		< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
4-Bromophenyl phenyl ether		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
4-Chloro-3-methylphenol	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
4-Chloroaniline	5	< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
4-Chlorophenyl phenyl ether		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
4-Nitroaniline		< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
4-Nitrophenol	5	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Acenaphthene	20	< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Acetophenone		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Anthracene	50	< 0.51	0.51	< 0.49	0.49	< 0.50	0.50	< 0.51	0.51	< 0.53	0.53
Atrazine		< 1.0	1.0	< 0.98	0.98	< 0.99	0.99	< 1.0	1.0	< 1.1	1.1
Benz(a)anthracene	0.002	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02
Benzaldehyde		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Benzo(a)pyrene	0.002	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02
Benzo(b)fluoranthene	0.002	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02
Benzo(ghi)perylene	5	< 0.51	0.51	< 0.49	0.49	< 0.50	0.50	< 0.51	0.51	< 0.53	0.53
Benzo(k)fluoranthene	0.002	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02
Benzyl butyl phthalate	50	< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Bis(2-chloroethoxy)methane		< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
Bis(2-chloroethyl)ether		< 0.51	0.51	< 0.49	0.49	< 0.50	0.50	< 0.51	0.51	< 0.53	0.53
Bis(2-chloroisopropyl)ether		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Bis(2-ethylhexyl)phthalate	50	< 1.0	1.0	< 0.98	0.98	< 0.99	0.99	< 1.0	1.0	< 1.1	1.1
Caprolactam		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Carbazole		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Chrysene	0.002	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02
Dibenz(a,h)anthracene	50	< 0.51	0.51	< 0.49	0.49	< 0.50	0.50	< 0.51	0.51	< 0.53	0.53
Dibenzofuran	5	< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
Diethyl phthalate	50	4.8	5.1	< 4.9	4.9	1.7	5.0	< 5.1	5.1	< 5.3	5.3
Dimethylphthalate	50	< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Di-n-butylphthalate	50	< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Di-n-octylphthalate	50	< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Fluoranthene	50	< 0.51	0.51	< 0.49	0.49	< 0.50	0.50	< 0.51	0.51	< 0.53	0.53
Fluorene	50	< 0.51	0.51	< 0.49	0.49	< 0.50	0.50	< 0.51	0.51	< 0.53	0.53
Hexachlorobenzene	0.35	< 0.04	0.04	< 0.04	0.04	< 0.04	0.04	< 0.04	0.04	< 0.04	0.04
Hexachlorobutadiene		< 0.50	0.50	< 0.49	0.49	< 0.50	0.50	< 0.50	0.50	< 0.50	0.50
Hexachlorocyclopentadiene		< 0.51	0.51	< 0.49	0.49	< 0.50	0.50	< 0.51	0.51	< 0.53	0.53
Hexachlorocyclopentadiene		< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
Hexachloroethane		< 1.0	1.0	< 0.98	0.98	< 0.99	0.99	< 1.0	1.0	< 1.1	1.1
Indeno(1,2,3-cd)pyrene	0.002	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02	< 0.02	0.02
Isophorone	50	< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Naphthalene	10	< 5.0	5.0	< 4.9	4.9	< 5.0	5.0	< 5.0	5.0	< 5.0	5.0
Nitrobenzene	5	< 0.40	0.40	< 0.39	0.39	< 0.40	0.40	< 0.40	0.40	< 0.40	0.40
N-Nitrosodimethylamine		< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	< 0.21	0.21
N-Nitrosodi-n-propylamine		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
N-Nitrosodiphenylamine		< 5.1	5.1	< 4.9	4.9	< 5.0	5.0	< 5.1	5.1	< 5.3	5.3
Pentachlorophenol	1	< 0.51	0.51	< 0.49	0.49	< 0.50	0.50	< 0.51	0.51	< 0.53	0.53
Phenanthrene	50	< 0.51	0.51	< 0.49	0.49	< 0.50	0.50	< 0.51	0.51	< 0.53	0.53
Phenol	1	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0	< 1.0	1.0
Pyrene	50	< 0.51	0.51	< 0.49	0.49	< 0.50	0.50	< 0.51	0.51	< 0.53	0.53

Notes:

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC Groundwater Standard

Table 11
1840-1856 Park Avenue
Manhattan, New York
Groundwater Analytical Results
Pesticides/PCBs

	Compound	NYSDEC Groundwater Quality Standards µg/L	MW1		MW2		MW3		MW4		GW Duplicate (MW4)	
			3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019	
			µg/L		µg/L		µg/L		µg/L		µg/L	
			Results	RL	Results	RL	Results	RL	Results	RL	Results	RL
Pesticides	4,4-DDD	0.3	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.010	0.010
	4,4-DDE	0.2	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.003	0.003
	4,4-DDT	0.2	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.003	0.003
	a-BHC	0.01	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.006	0.006
	a-chlordane		< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.013	0.013
	Alachlor	0.5	< 0.074	0.074	< 0.075	0.075	< 0.074	0.074	< 0.071	0.071	< 0.094	0.094
	Aldrin		< 0.002	0.002	< 0.002	0.002	< 0.002	0.002	< 0.001	0.001	< 0.002	0.002
	b-BHC	0.04	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.006	0.006
	Chlordane	0.05	< 0.05	0.05	< 0.050	0.050	< 0.05	0.05	< 0.05	0.05	< 0.050	0.050
	d-BHC	0.04	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.006	0.006
	Dieldrin	0.004	0.011	0.002	0.004	0.002	0.016	0.002	0.01	0.001	0.018	0.002
	Endosulfan I		< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.013	0.013
	Endosulfan II		< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.013	0.013
	Endosulfan Sulfate		< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.013	0.013
	Endrin		< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.006	0.006
	Endrin aldehyde	5	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.013	0.013
	Endrin ketone	5	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.013	0.013
	gamma-BHC	0.05	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.006	0.006
	g-chlordane		< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.013	0.013
	Heptachlor	0.04	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.006	0.006
	Heptachlor epoxide	0.03	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.009	0.009	< 0.006	0.006
	Methoxychlor	35	< 0.098	0.098	< 0.10	0.10	< 0.098	0.098	< 0.094	0.094	< 0.13	0.13
	Toxaphene	0.06	< 0.25	0.25	< 0.25	0.25	< 0.25	0.25	< 0.24	0.24	< 0.25	0.25
PCBs	PCB-1016	0.09	< 0.049	0.049	< 0.050	0.050	< 0.049	0.049	< 0.047	0.047	< 0.063	0.063
	PCB-1221	0.09	< 0.049	0.049	< 0.050	0.050	< 0.049	0.049	< 0.047	0.047	< 0.063	0.063
	PCB-1232	0.09	< 0.049	0.049	< 0.050	0.050	< 0.049	0.049	< 0.047	0.047	< 0.063	0.063
	PCB-1242	0.09	< 0.049	0.049	< 0.050	0.050	< 0.049	0.049	< 0.047	0.047	< 0.063	0.063
	PCB-1248	0.09	< 0.049	0.049	< 0.050	0.050	< 0.049	0.049	< 0.047	0.047	< 0.063	0.063
	PCB-1254	0.09	< 0.049	0.049	< 0.050	0.050	< 0.049	0.049	< 0.047	0.047	< 0.063	0.063
	PCB-1260	0.09	< 0.049	0.049	< 0.050	0.050	< 0.049	0.049	< 0.047	0.047	< 0.063	0.063
	PCB-1262		< 0.049	0.049	< 0.050	0.050	< 0.049	0.049	< 0.047	0.047	< 0.063	0.063
	PCB-1268		< 0.049	0.049	< 0.050	0.050	< 0.049	0.049	< 0.047	0.047	< 0.063	0.063

Notes:

RL- Reporting limit

Bold/highlighted- Indicated exceedance of the NYSDEC Groundwater Standard

Table 12
1840-1856 Park Avenue
Manhattan, New York
Groundwater Analytical Results
Total Metals

Compound	NYSDEC Groundwater Quality Standards mg/L	MW1		MW2		MW3		MW4		GW Duplicate (MW4)	
		3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019	
		mg/L		mg/L		mg/L		mg/L		mg/L	
		Results	RL	Results	RL	Results	RL	Results	RL	Results	RL
Aluminum	0.1	1.43	0.010	1.99	0.010	2.8	0.010	1.85	0.010	1.8	0.010
Antimony	0.003	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004
Arsenic	0.025	0.078	0.010	0.07	0.010	0.076	0.010	0.091	0.010	0.089	0.010
Barium	1	< 0.001	0.001	< 0.001	0.001	< 0.001	0.001	< 0.001	0.001	< 0.001	0.001
Beryllium	0.003	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004
Cadmium	0.005	78.2	0.010	138	0.010	99.4	0.010	82.4	0.010	80.1	0.010
Calcium		0.002	0.001	0.003	0.001	0.004	0.001	0.003	0.001	0.002	0.001
Chromium	0.05	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005
Cobalt		0.007	0.005	0.012	0.005	0.012	0.005	0.007	0.005	0.007	0.005
Copper	0.2	1.3	0.01	2	0.01	3.16	0.01	2.02	0.01	1.9	0.01
Iron	0.3	< 0.002	0.002	0.003	0.002	< 0.002	0.002	< 0.002	0.002	< 0.002	0.002
Lead	0.025	11.3	0.010	20.4	0.010	16.4	0.010	15	0.010	14.7	0.010
Magnesium	35	0.335	0.005	1.01	0.005	1.31	0.005	0.332	0.005	0.319	0.005
Manganese	0.3	< 0.0002	0.0002	< 0.0002	0.0002	< 0.0002	0.0002	< 0.0002	0.0002	< 0.0002	0.0002
Mercury	0.0007	< 0.004	0.004	0.006	0.004	0.007	0.004	0.005	0.004	0.005	0.004
Nickel	0.1	10.6	0.1	12.9	0.1	11	0.1	8.9	0.1	8.7	0.1
Potassium		< 0.0030	0.0030	< 0.0030	0.0030	< 0.0030	0.0030	< 0.0030	0.0030	< 0.0030	0.0030
Selenium	0.01	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010
Silver	0.05	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005
Sodium	20	256	10	314	10	247	10	224	1.0	232	1.0
Thallium	0.0005	< 0.0005	0.0005	< 0.0005	0.0005	< 0.0005	0.0005	< 0.0005	0.0005	< 0.0005	0.0005
Vanadium		< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010
Zinc	5	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010	< 0.010	0.010

Notes:

RL- Reporting limit

Bold/highlighted- Indicated exceedance of the NYSDEC Groundwater Standard

Table 13
1840-1856 Park Avenue
Manhattan, New York
Groundwater Analytical Results
Dissolved Metals

Compound	NYSDEC Groundwater Quality Standards mg/L	MW1		MW2		MW3		MW4		GW Duplicate (MW4)	
		3/19/2019		3/19/2019		3/19/2019		3/19/2019		3/19/2019	
		mg/L		mg/L		mg/L		mg/L		mg/L	
		Results	RL	Results	RL	Results	RL	Results	RL	Results	RL
Aluminum (Dissolved)	0.1	0.042	0.011	0.06	0.011	0.048	0.011	0.039	0.011	0.041	0.011
Antimony (Dissolved)-LDL	0.025	< 0.003	0.003	< 0.003	0.003	< 0.003	0.003	< 0.003	0.003	< 0.003	0.003
Arsenic, (Dissolved)	1	0.046	0.011	0.039	0.011	0.052	0.011	0.072	0.011	0.072	0.011
Barium (Dissolved)	0.003	< 0.001	0.001	< 0.001	0.001	< 0.001	0.001	< 0.001	0.001	< 0.001	0.001
Beryllium (Dissolved)	0.005	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004
Cadmium (Dissolved)		80.6	0.01	137	0.01	101	0.01	80.8	0.01	80.4	0.01
Calcium (Dissolved)	0.05	< 0.001	0.001	< 0.001	0.001	< 0.001	0.001	< 0.001	0.001	< 0.001	0.001
Chromium (Dissolved)		< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005
Cobalt, (Dissolved)	0.2	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005
Copper, (Dissolved)	0.003	< 0.0003	0.0003	< 0.0003	0.0003	< 0.0003	0.0003	< 0.0003	0.0003	< 0.0003	0.0003
Iron, (Dissolved)	0.01	< 0.01	0.01	< 0.01	0.01	< 0.01	0.01	< 0.01	0.01	< 0.01	0.01
Lead (Dissolved)	0.0005	< 0.0003	0.0003	< 0.0003	0.0003	< 0.0003	0.0003	< 0.0003	0.0003	< 0.0003	0.0003
Magnesium (Dissolved)	0.3	< 0.01	0.01	< 0.01	0.01	< 0.01	0.01	< 0.01	0.01	< 0.01	0.01
Manganese, (Dissolved)	0.025	< 0.002	0.002	< 0.002	0.002	< 0.002	0.002	< 0.002	0.002	< 0.002	0.002
Mercury (Dissolved)	35	11.3	0.01	18.9	0.01	15.4	0.01	14.1	0.01	13.9	0.01
Nickel, (Dissolved)	0.3	0.262	0.005	0.89	0.005	1.11	0.005	0.258	0.005	0.252	0.005
Potassium (Dissolved)	0.0007	< 0.0002	0.0002	< 0.0002	0.0002	< 0.0002	0.0002	< 0.0002	0.0002	< 0.0002	0.0002
Selenium (Dissolved)-LDL	0.1	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004	< 0.004	0.004
Silver (Dissolved)		10.2	0.1	12.4	0.1	10.6	0.1	8.5	0.1	8.5	0.1
Sodium (Dissolved)	0.05	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005	< 0.005	0.005
Thallium (Dissolved)	20	215	1.1	295	1.1	242	1.1	208	1.1	201	1.1
Vanadium, (Dissolved)		< 0.011	0.011	< 0.011	0.011	< 0.011	0.011	< 0.011	0.011	< 0.011	0.011
Zinc, (Dissolved)	5	< 0.011	0.011	< 0.011	0.011	< 0.011	0.011	< 0.011	0.011	< 0.011	0.011

Notes:

RL- Reporting limit

Bold/highlighted- Indicated exceedance of the NYSDEC Groundwater Standard

Table 14
1840-1856 Park Avenue
New York, New York
Groundwater Analytical Results
PFAS and 1,4-dioxane

Compound	MW4		MW2001		MW2002		MW2003		MW2004		Duplicate (MW2004)	
	3/19/2019		7/1/2020		7/1/2020		7/1/2020		7/1/2020		7/1/2020	
	ng/L		ng/L		ng/L		ng/L		ng/L		ng/L	
	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL
Perfluorobutanoic Acid (PFBA)	19.9	1.92	11.2	1.82	10.5	1.85	15.9	1.79	16.4	1.8	15.7	1.78
Perfluoropentanoic Acid (PFPeA)	35.2	1.92	21.4	1.82	29.5	1.85	29.7	1.79	37.3	1.8	36.6	1.78
Perfluorobutanesulfonic Acid (PFBS)	6.67	1.92	8.29	1.82	8	1.85	14.3	1.79	19.2	1.8	18.4	1.78
Perfluorohexanoic Acid (PFHxA)	26.6	1.92	20.7	1.82	22.9	1.85	34.8	1.79	29.2	1.8	28.5	1.78
Perfluoroheptanoic Acid (PFHpA)	14.1	1.92	11.2	1.82	9.53	1.85	30.4	1.79	17.5	1.8	16.8	1.78
Perfluorohexanesulfonic Acid (PFHxS)	13	1.92	6.87	1.82	7.64	1.85	20.7	1.79	14	1.8	14.2	1.78
Perfluorooctanoic Acid (PFOA)	34.3	1.92	32.8	1.82	31.3	1.85	57.2	1.79	63.3	1.8	60.2	1.78
1H,1H,2H,2H-Perfluorooctanesulfonic Acid (6:2FTS)	1.61JB	1.92	ND	1.82	ND	1.85	4.15F	1.79	ND	1.8	ND	1.78
Perfluoroheptanesulfonic Acid (PFHpS)	0.609J	1.92	ND	1.82	0.637J	1.85	1.50J	1.79	1.79J	1.8	1.46J	1.78
Perfluorononanoic Acid (PFNA)	3.05	1.92	4.35	1.82	5.41	1.85	6.5	1.79	5.36	1.8	4.91	1.78
Perfluorooctanesulfonic Acid (PFOS)	55	1.92	60.2	1.82	78.5	1.85	129	1.79	54.7	1.8	50.5	1.78
Perfluorodecanoic Acid (PFDA)	1.52J	1.92	5.67	1.82	8.28	1.85	3.94	1.79	1.42J	1.8	1.17J	1.78
1H,1H,2H,2H-Perfluorodecanesulfonic Acid (8:2FTS)	ND	1.92	ND	1.82	ND	1.85	ND	1.79	ND	1.8	ND	1.78
N-Methyl Perfluorooctanesulfonamidoacetic Acid (NMeFOSAA)	ND	1.92	ND	1.82	ND	1.85	ND	1.79	ND	1.8	ND	1.78
Perfluoroundecanoic Acid (PFUnA)	ND	1.92	0.955J	1.82	0.963J	1.85	0.612JF	1.79	ND	1.8	ND	1.78
Perfluorodecanesulfonic Acid (PFDS)	0.391J	1.92	3.94	1.82	4.4	1.85	0.894J	1.79	ND	1.8	ND	1.78
Perfluorooctanesulfonamide (FOSA)	ND	1.92	ND	1.82	ND	1.85	ND	1.79	ND	1.8	ND	1.78
N-Ethyl Perfluorooctanesulfonamidoacetic Acid (NEtFOSAA)	ND	1.92	ND	1.82	ND	1.85	ND	1.79	ND	1.8	ND	1.78
Perfluorododecanoic Acid (PFDoA)	ND	1.92	ND	1.82	ND	1.85	ND	1.79	ND	1.8	ND	1.78
Perfluorotridecanoic Acid (PFTrDA)	ND	1.92	ND	1.82	ND	1.85	ND	1.79	ND	1.8	ND	1.78
Perfluorotetradecanoic Acid (PFTA)	ND	1.92	ND	1.82	ND	1.85	ND	1.79	ND	1.8	ND	1.78
Combined PFOA and PFOS	89.3		93		110		186		118		111	
Combined Total Detections	211.95JB		187.575J		213.16J		349.596JF		260.17J		248.44J	

Compound	MW2001		MW2002		MW2003		MW2004		Duplicate (MW2004)	
	7/1/2020		7/1/2020		7/1/2020		7/1/2020		7/1/2020	
	µg/L		µg/L		µg/L		µg/L		µg/L	
	Result	DL	Result	DL	Result	DL	Result	DL	Result	DL
1,4-dioxane	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20

Notes:

DL- Detection Limit

J- The value is estimated.

ND- Not Detected

The USEPA Health Advisory Level for drinking water is 70 ng/L (ppt) for combined detections of PFOA and PFOS

TABLE 15
1840-1856 Park Avenue
New York, NY
Parameters Detected Above Ambient Water Quality Standards

VOCs

COMPOUND	Range in Detections	MW1 3/19/2019	MW2 3/19/2019	MW3 3/19/2019	MW-4 3/19/2019
<i>Sample Results in (µg/L)</i>					
Tetrachloroethene	5.2-7.4	5.4	7	7.4	5.2

Pesticides/PCBs

COMPOUND	Range in Detections	MW1 3/19/2019	MW2 3/19/2019	MW3 3/19/2019	MW-4 3/19/2019
<i>Sample Results in (mg/L)</i>					
Dieldrin	0.004-0.016	0.011	0.004	0.016	0.01

Metals (Dissolved)

COMPOUND	Range in Detections	MW1 2/22/2013	MW2 2/13/2013	MW3 2/22/2013	MW10 3/1/2013
<i>Sample Results in (mg/L)</i>					
Manganese	0.258-1.11	0.262	0.89	1.11	0.258
Sodium	208-295	215	295	242	208

Table 16
1840-1856 Park Avenue
Manhattan, New York
Soil Gas - Volatile Organic Compounds

COMPOUNDS	NYSDOH Maximum Sub-Slab Value (µg/m ³) ^(a)	NYSDOH Soil Outdoor Background Levels (µg/m ³) ^(a)	SV1		SV2		SV3		SV4		SV5		SV6	
			3/20/2019		3/20/2019		3/20/2019		3/20/2019		3/20/2019		3/20/2019	
			(µg/m ³)		(µg/m ³)		(µg/m ³)		(µg/m ³)		(µg/m ³)		(µg/m ³)	
			Result	RL	Result	RL	Result	RL	Result	RL	Result	RL	Result	RL
1,1,1,2-Tetrachloroethane			< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,1,1-Trichloroethane	100	<2.0 - 2.8	57.3	1.00	3.18	1.00	1.29	1.00	8.29	1.00	1.28	1.00	4.11	1.00
1,1,2,2-Tetrachloroethane		<1.5	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,1,2-Trichloroethane		<1.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,1-Dichloroethane		<1.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,1-Dichloroethene		<1.0	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20
1,2,4-Trichlorobenzene		NA	2.91	1.00	2.92	1.00	2.06	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,2,4-Trimethylbenzene		<1.0	1.13	1.00	1.1	1.00	1	1.00	1.15	1.00	< 1.00	1.00	< 1.00	1.00
1,2-Dibromoethane		<1.5	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,2-Dichlorobenzene		<2.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,2-Dichloroethane		<1.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,2-Dichloropropane			< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,2-Dichlorotetrafluoroethane			< 1.00	1.00	12.6	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,3,5-Trimethylbenzene		<1.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,3-Butadiene		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	2.09	1.00	< 1.00	1.00
1,3-Dichlorobenzene		<2.0	1.72	1.00	1.65	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,4-Dichlorobenzene		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
1,4-Dioxane			< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
2-Hexanone			< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
4-Ethyltoluene		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
4-Isopropyltoluene			< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
4-Methyl-2-pentanone			1.12	1.00	1.19	1.00	< 1.00	1.00	1.52	1.00	1.67	1.00	1.76	1.00
Acetone		NA	165	5.01	130	5.01	347	5.01	261	5.01	254	5.01	729	9.99
Acrylonitrile			< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Benzene		<1.6 - 4.7	1.3	1.00	2.12	1.00	1.53	1.00	1.37	1.00	1.96	1.00	2.39	1.00
Benzyl Chloride		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Bromodichloromethane		<5.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Bromoform		<1.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Bromomethane		<1.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Carbon Disulfide		NA	< 1.00	1.00	8.06	1.00	< 1.00	1.00	< 1.00	1.00	1.75	1.00	11	1.00
Carbon Tetrachloride	5	<3.1	0.28	0.20	0.33	0.20	0.26	0.20	0.3	0.20	0.37	0.20	0.22	0.20
Chlorobenzene		<2.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Chloroethane		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Chloroform		<2.4	1.69	1.00	< 1.00	1.00	< 1.00	1.00	2.63	1.00	1.13	1.00	< 1.00	1.00
Chloromethane		<1.0 - 1.4	< 1.00	1.00	1.32	1.00	< 1.00	1.00	4.52	1.00	< 1.00	1.00	9.16	1.00
cis-1,2-Dichloroethene		<1.0	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	0.43	0.20	< 0.20	0.20	< 0.20	0.20
cis-1,3-Dichloropropene		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Cyclohexane		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Dibromochloromethane		<5.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Dichlorodifluoromethane		NA	3.62	1.00	3.06	1.00	20.9	1.00	11.4	1.00	4.05	1.00	4.53	1.00
Ethanol			33	1.00	32.6	1.00	27.3	1.00	63.8	1.00	37.1	1.00	28.2	1.00
Ethyl Acetate		NA	< 1.00	1.00	8.25	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Ethylbenzene		<4.3	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	1.15	1.00	< 1.00	1.00	< 1.00	1.00
Heptane		NA	1.01	1.00	1.02	1.00	1.06	1.00	1.26	1.00	< 1.00	1.00	2.04	1.00
Hexachlorobutadiene		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Hexane		<1.5	1.07	1.00	1.58	1.00	< 1.00	1.00	2.87	1.00	1.71	1.00	2.68	1.00
Isopropylalcohol		NA	2.34	1.00	2.34	1.00	3.12	1.00	4.79	1.00	< 1.00	1.00	4.27	1.00
Isopropylbenzene			< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Xylene (m&p)		<4.3	2.8	1.00	3.17	1.00	2.57	1.00	4.3	1.00	3.37	1.00	2.54	1.00
Methyl Ethyl Ketone			11.1	1.00	14.9	1.00	20.3	1.00	4.27	1.00	25.6	1.00	26.6	1.00
MTBE		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Methylene Chloride		<3.4	4.44	3.00	< 3.00	3.00	< 3.00	3.00	< 3.00	3.00	< 3.00	3.00	< 3.00	3.00
n-Butylbenzene			< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Xylene (o)		<4.3	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	1.22	1.00	< 1.00	1.00	< 1.00	1.00
Propylene		NA	< 1.00	1.00	9.15	1.00	5.85	1.00	11	1.00	28.7	1.00	< 1.00	1.00
sec-Butylbenzene			< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Styrene		<1.0	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Tetrachloroethene	30		1.61	0.25	< 0.25	0.25	1.03	0.25	0.64	0.25	0.66	0.25	0.7	0.25
Tetrahydrofuran		NA	10.7	1.00	14.9	1.00	15.6	1.00	2.98	1.00	26.4	1.00	19.5	1.00
Toluene		1.0 - 6.1	3.13	1.00	3.11	1.00	3.31	1.00	3.54	1.00	3.48	1.00	3.37	1.00
trans-1,2-Dichloroethene		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
trans-1,3-Dichloropropene		NA	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Trichloroethene	2	<1.7	0.39	0.20	< 0.20	0.20	< 0.20	0.20	0.98	0.20	< 0.20	0.20	0.32	0.20
Trichlorofluoromethane		NA	6.18	1.00	8.42	1.00	454	5.00	14.7	1.00	12.4	1.00	19.4	1.00
Trichlorotrifluoroethane			< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00	< 1.00	1.00
Vinyl Chloride		<1.0	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20	< 0.20	0.20
BTEX			7.23		8.40		7.41		11.58		8.81		8.30	
CVOCs			59.58		3.51		2.58		10.64		2.31		5.35	
Total VOCs			313.84		266.97		908.18		410.11		407.72		871.79	

Notes:

NA No guidance value or standard available

(a) Final Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October 2006, New York State Department of Health.

(b) NYSDOH Guidance for Evaluating Soil Vapor Intrusion in the State of New York, February 2005, Summary of Background Levels for Selected Compounds (NYSDOH Database, Outdoor values)

TABLE 17
Project Permit Listing
To Be Updated as Project Progresses

<i>Permit</i>	<i>Permit Number</i>	<i>Originating Agency</i>	<i>Pursuant to</i>	<i>Issued</i>	<i>Expires</i>	<i>Contact Phone</i>

Note: This list will be updated as the project progresses

Table 18
Emergency Contact List

General Emergencies		911
NYC Police		911
NYC Fire Department		911
NYC Health & Hospitals - Harlem		(212) 939-1000
NYSDEC Spills Hotline		1-800-457-7362
NYSDEC Project Manager		(518) 402-9687
NYC Department of Health		(212) 676-2400
National Response Center		1-800-424-8802
Poison Control		1-800-222-1222
EBC Project Manager	Keith Butler	(631) 504-6000
EBC BCP Program Manager	Charles Sosik	(631) 504-6000
EBC Site Safety Officer	Thomas Gallo	(631) 504-6000
Remedial Engineer	Ariel Czemerinski	(718) 545-0474
Developer	Evan Kashanian	(646) 834-9380
Construction Manager	To be determined	

FIGURES

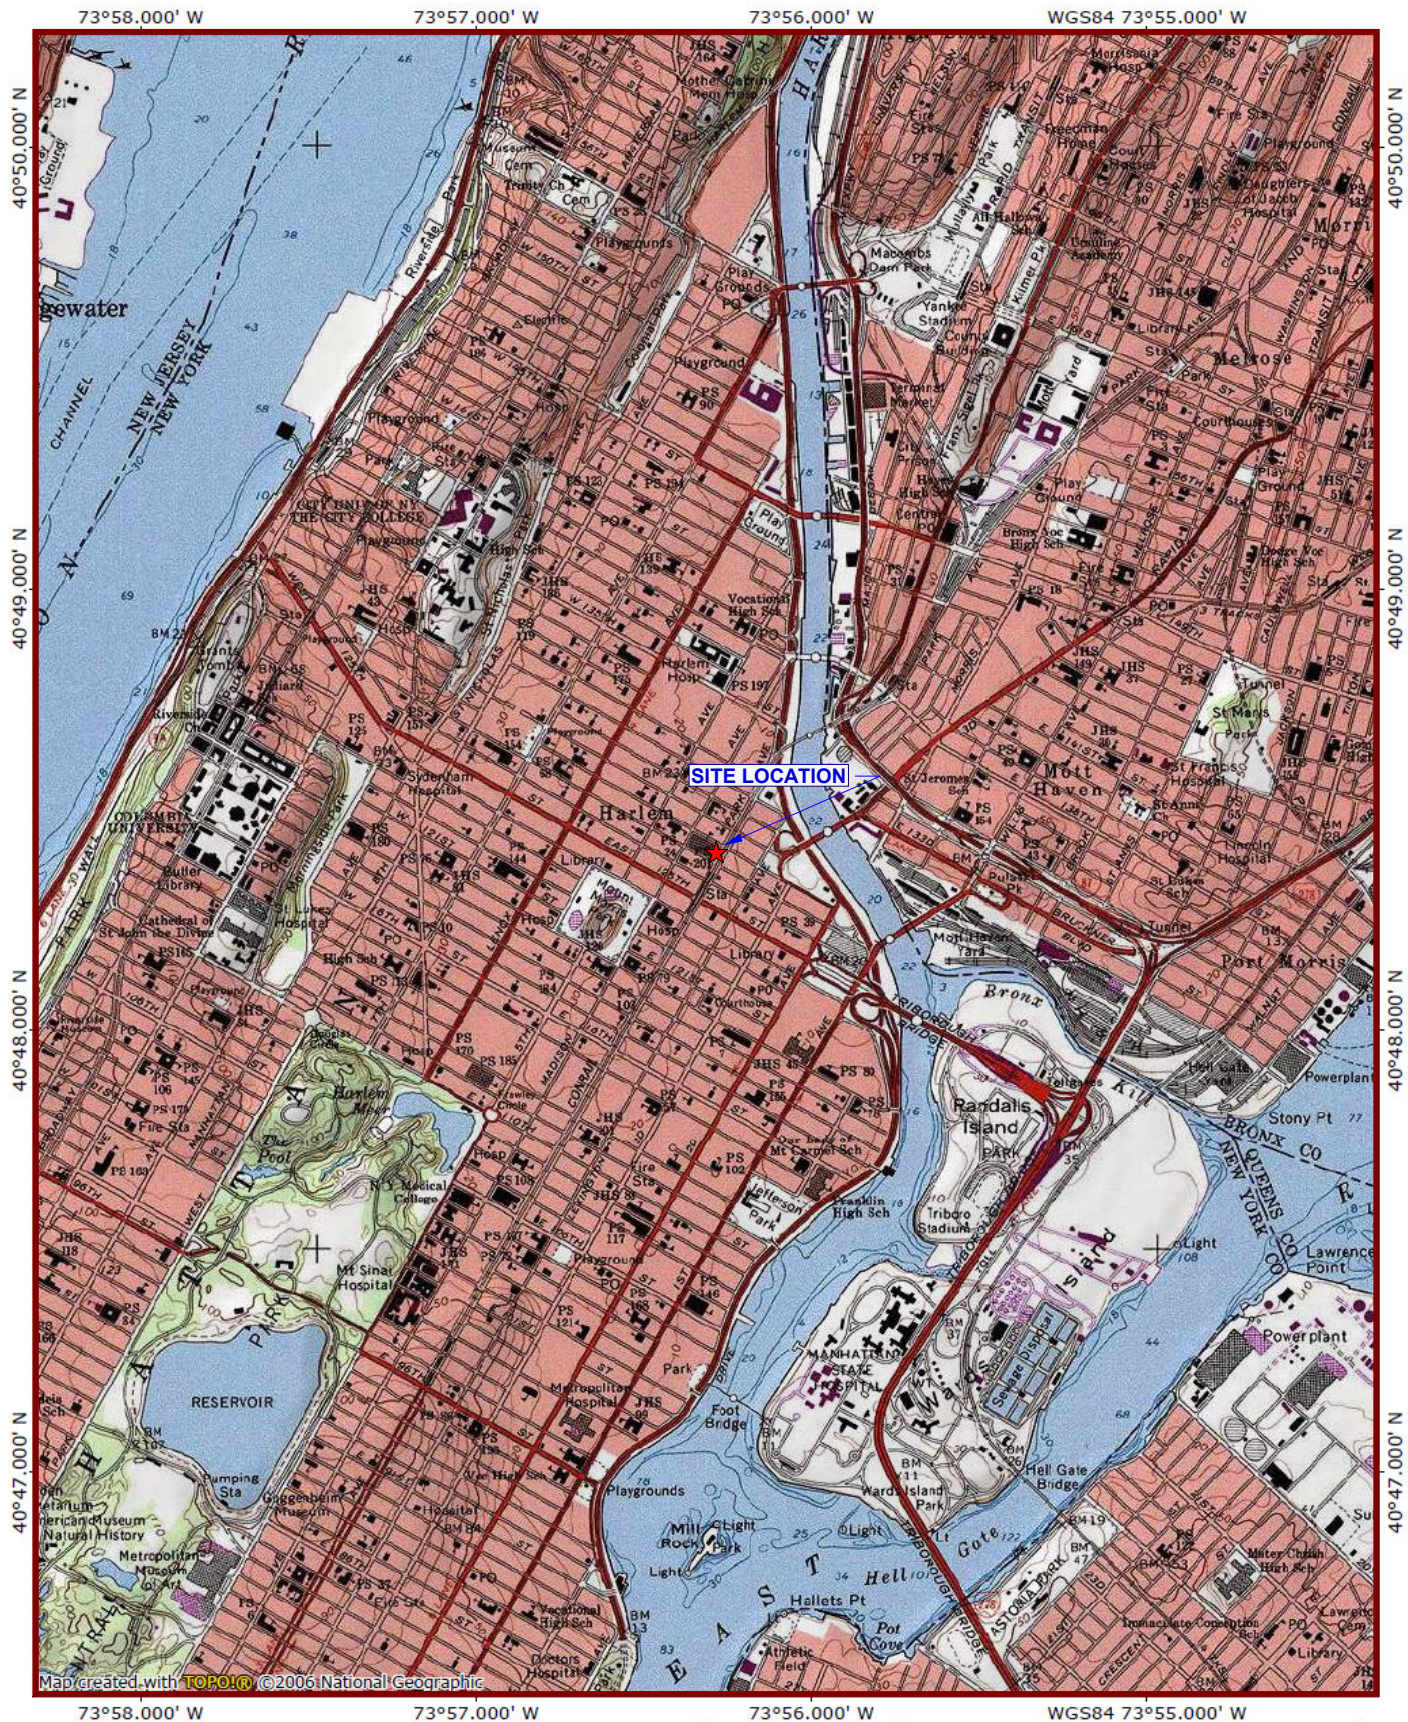



Figure No.
1

Site Name:	1840 PARK AVENUE
Site Address:	1840-1856 PARK AVENUE, MANHATTAN, NY
Drawing Title:	SITE LOCATION MAP



East 126th Street

SIDEWALK

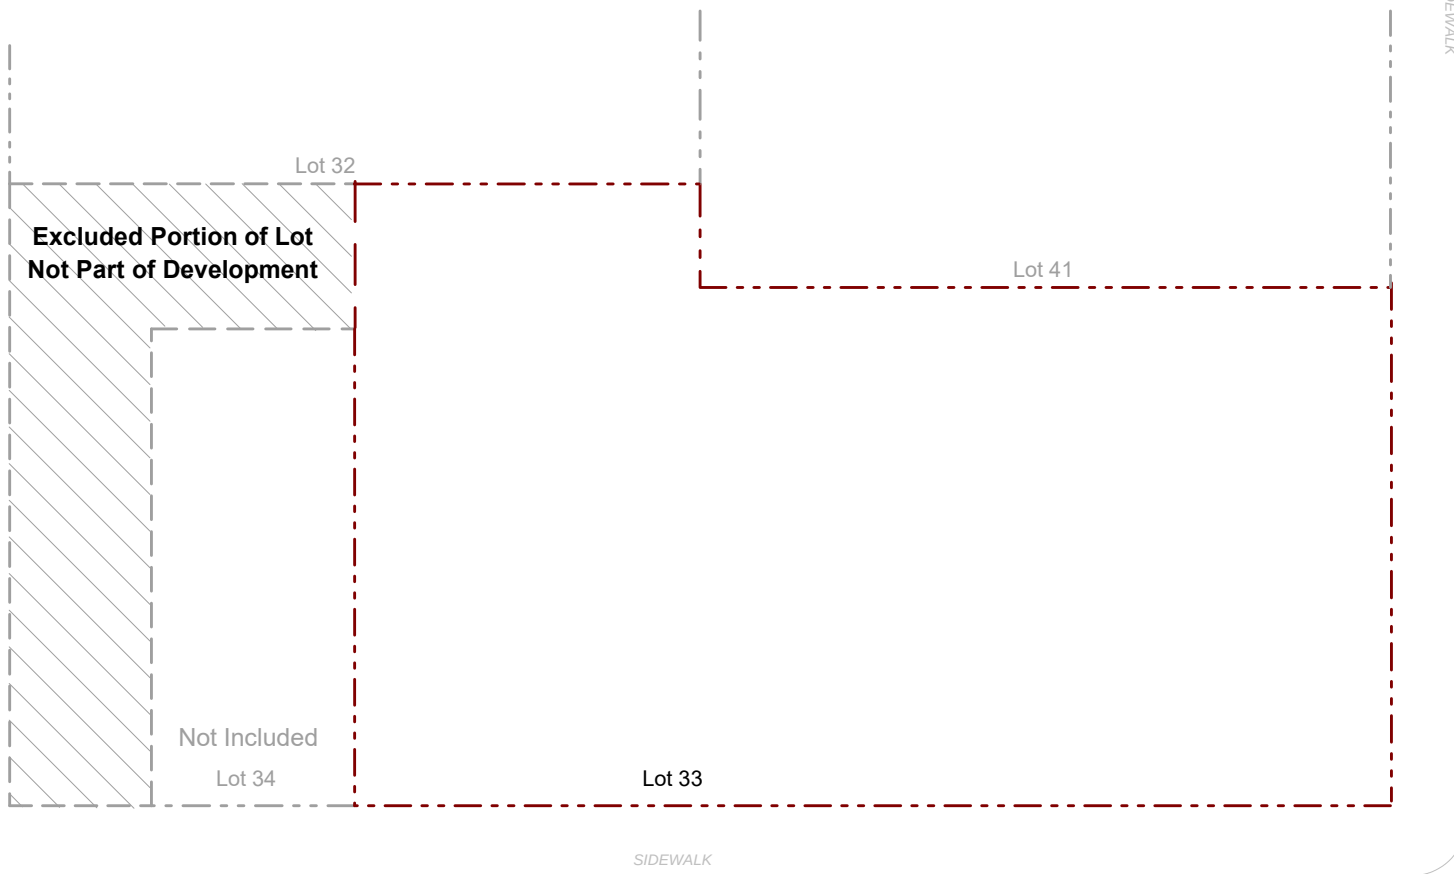

East 127th Street

SIDEWALK

SIDEWALK

Park Avenue

SCALE:



Scale 1 Inch = 30 feet

KEY:

- Site Boundary
- Excluded Portion of Lot


EBC

ENVIRONMENTAL BUSINESS CONSULTANTS

Phone 631.504.6000
Fax 631.924.2870

Figure No.
2


Site Name:	1840 PARK AVENUE
Site Address:	1840- 1856 PARK AVENUE, MANHATTAN, NY
Drawing Title:	SITE PLAN

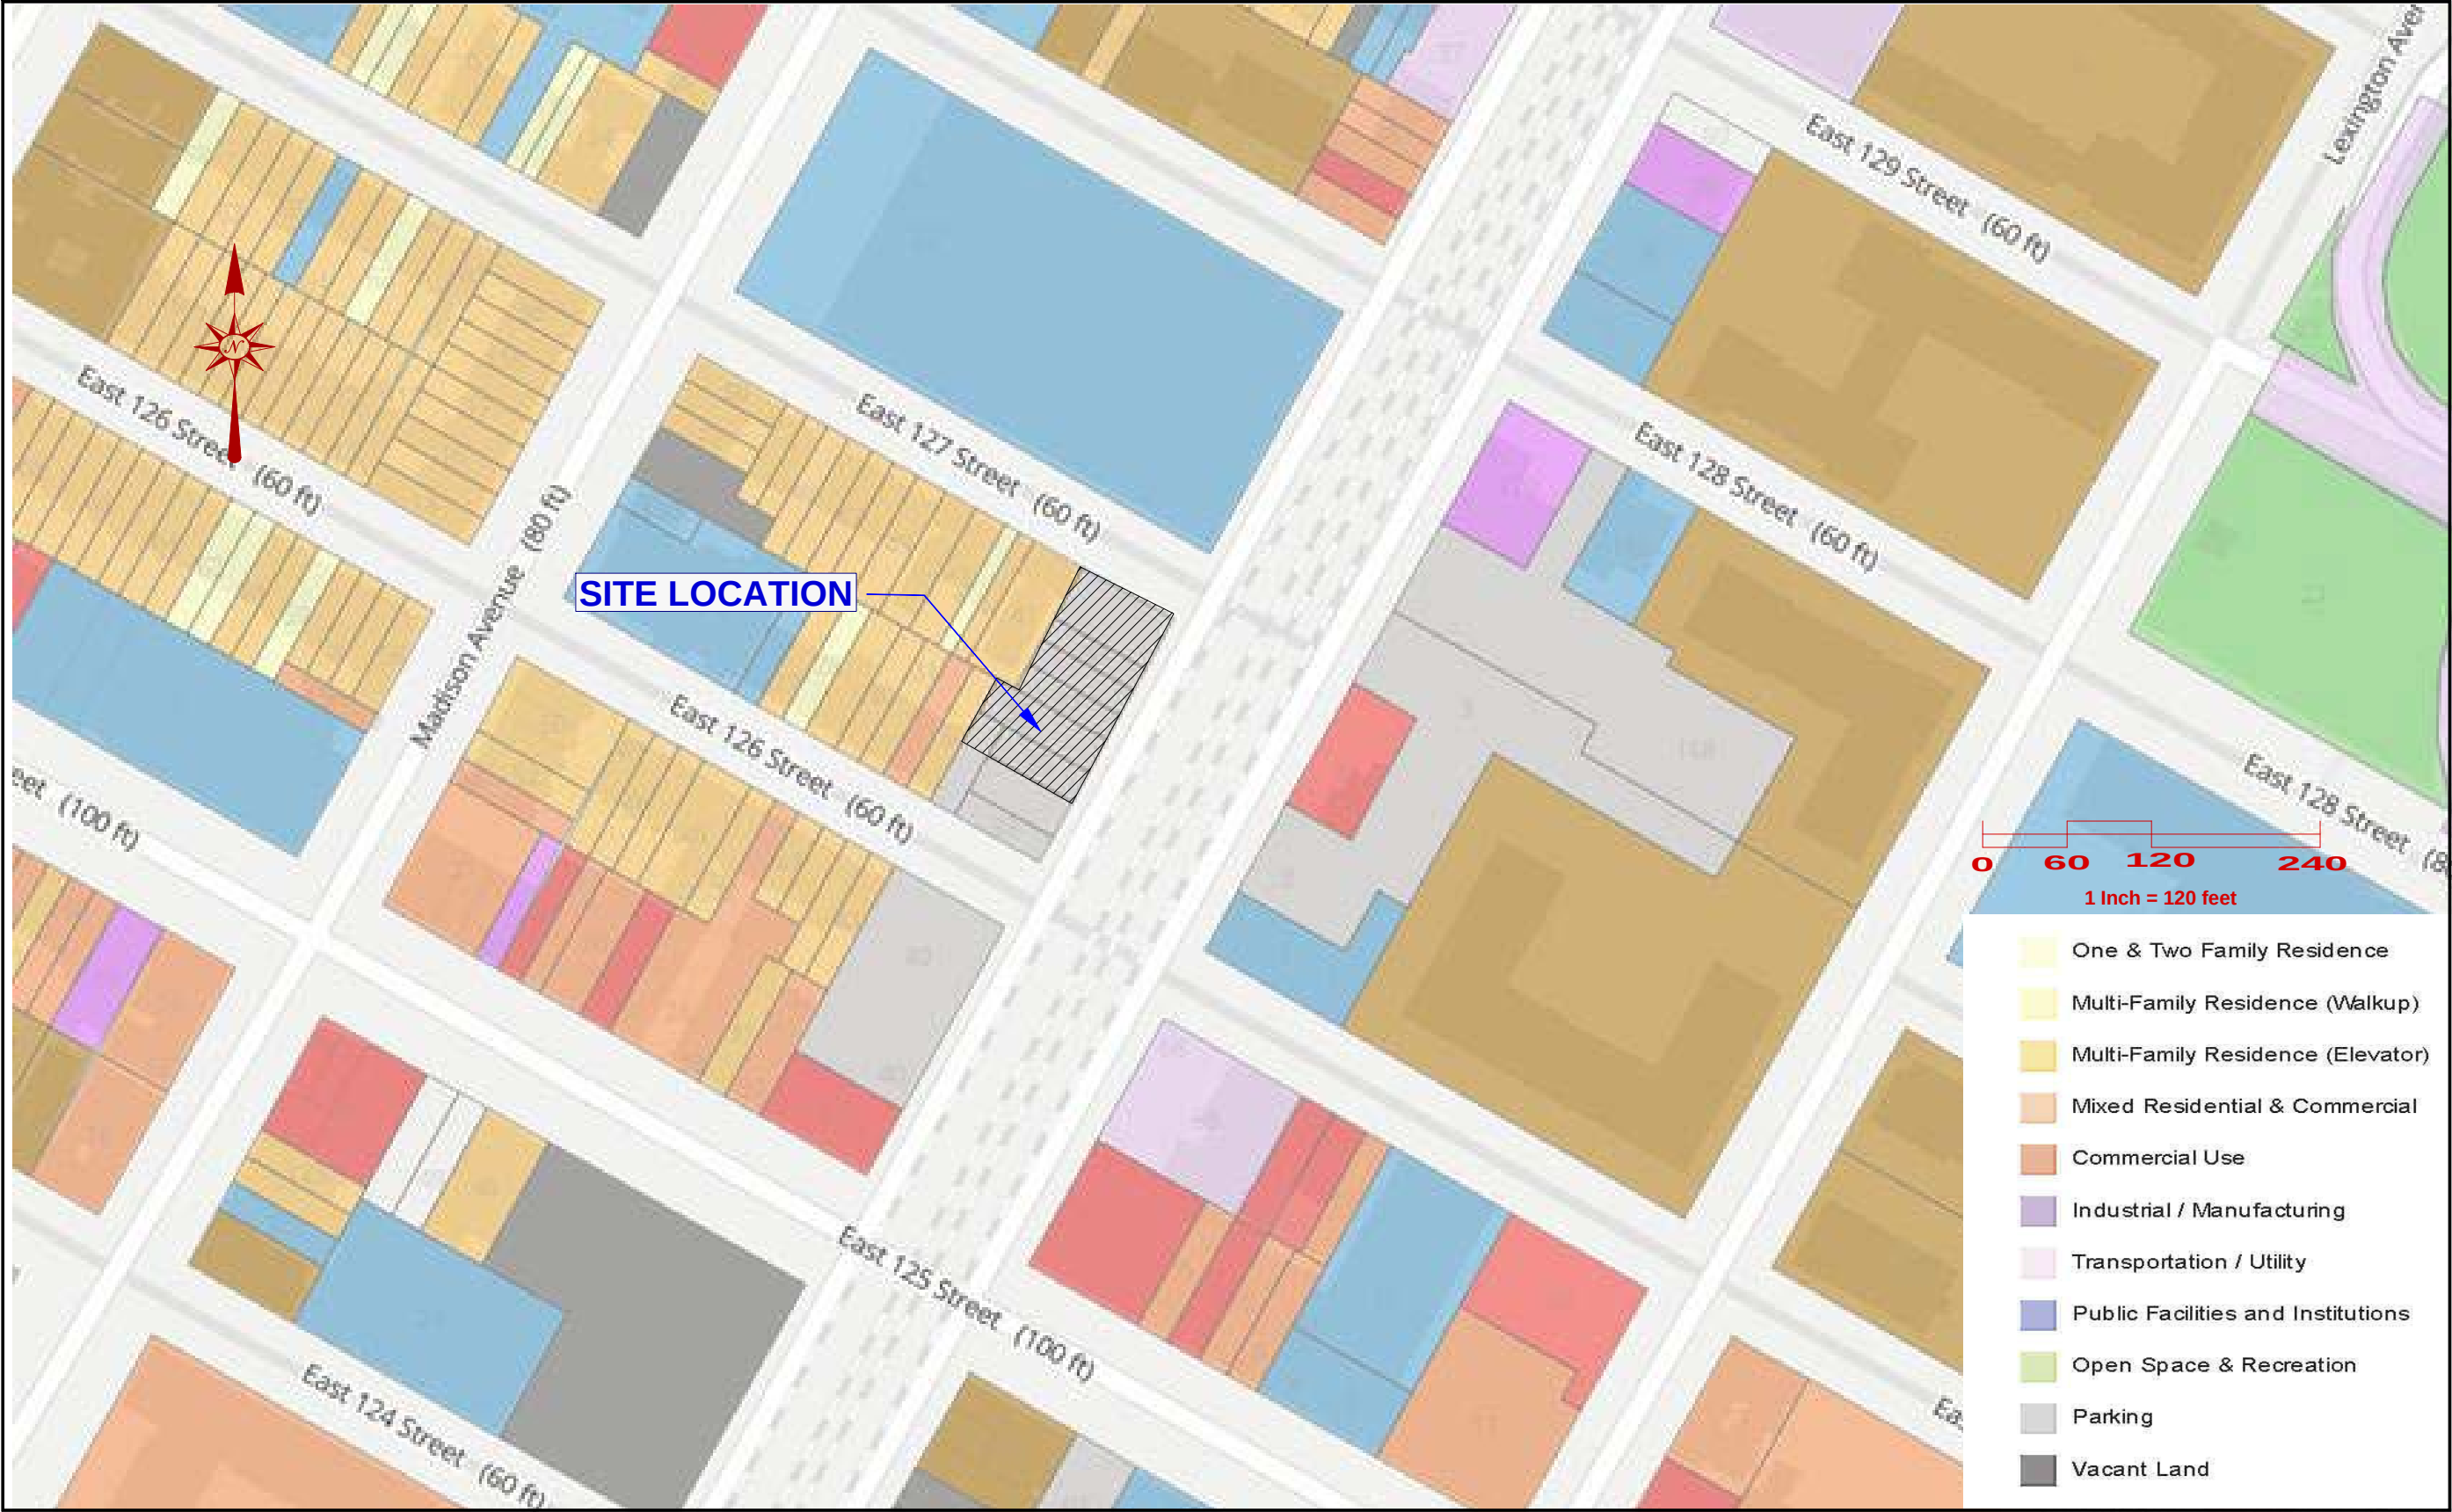



East 126th Street
SIDEWALK


East 127th Street
SIDEWALK

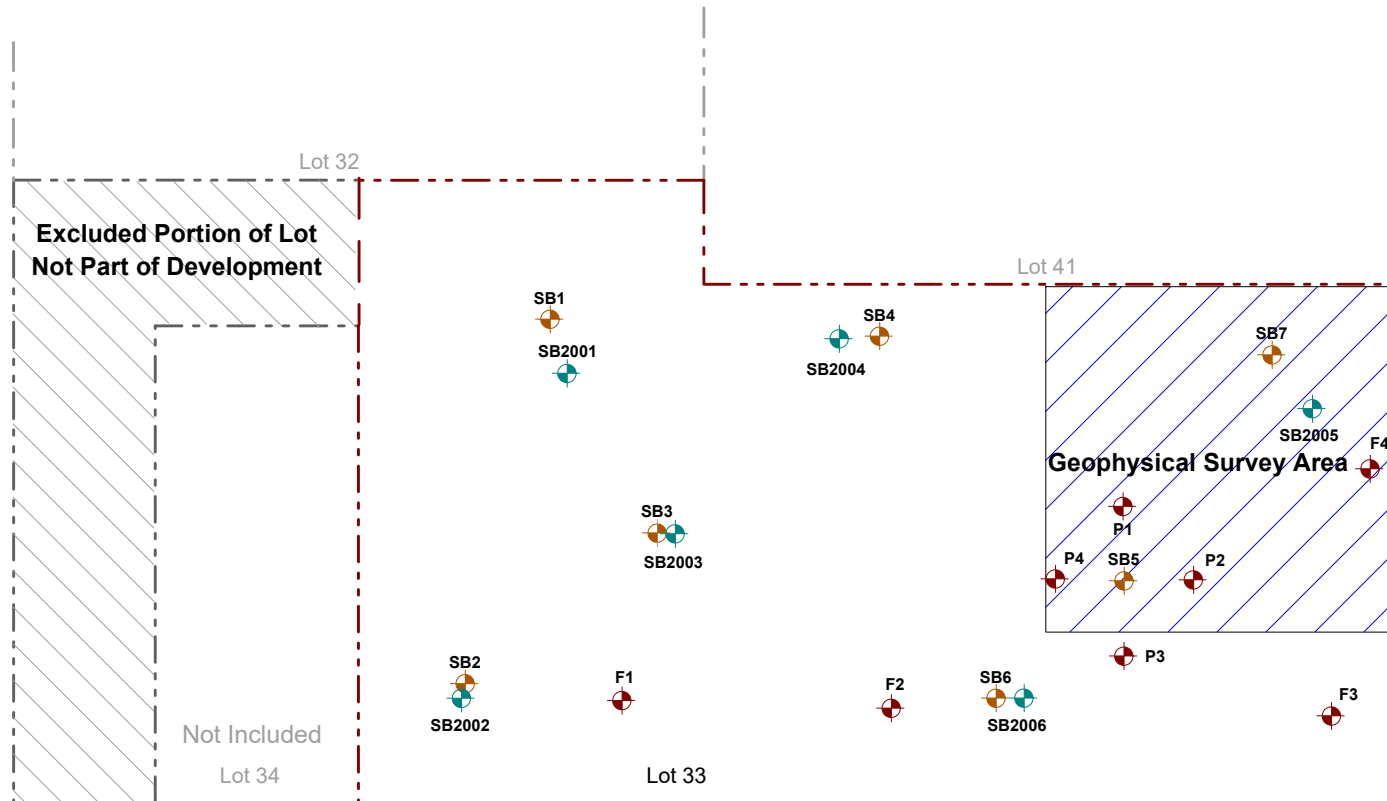

SIDEWALK

Park Avenue

SCALE:



Scale 1 Inch = 30 feet

KEY:

- Site Boundary
- Geophysical Area
- Excluded Portion of Lot
- March 2019 Soil Boring Sample Location
- June 2019 Soil Boring Sample Location
- June 2020 EC Soil Boring Sample Location

IBC

ENVIRONMENTAL BUSINESS CONSULTANTS

Phone 631.504.6000
Fax 631.924.2870


Figure No.
4

Site Name:	1840 PARK AVENUE
Site Address:	1840- 1856 PARK AVENUE, MANHATTAN, NY
Drawing Title:	SOIL SAMPLING LOCATIONS



East 126th Street

SIDEWALK

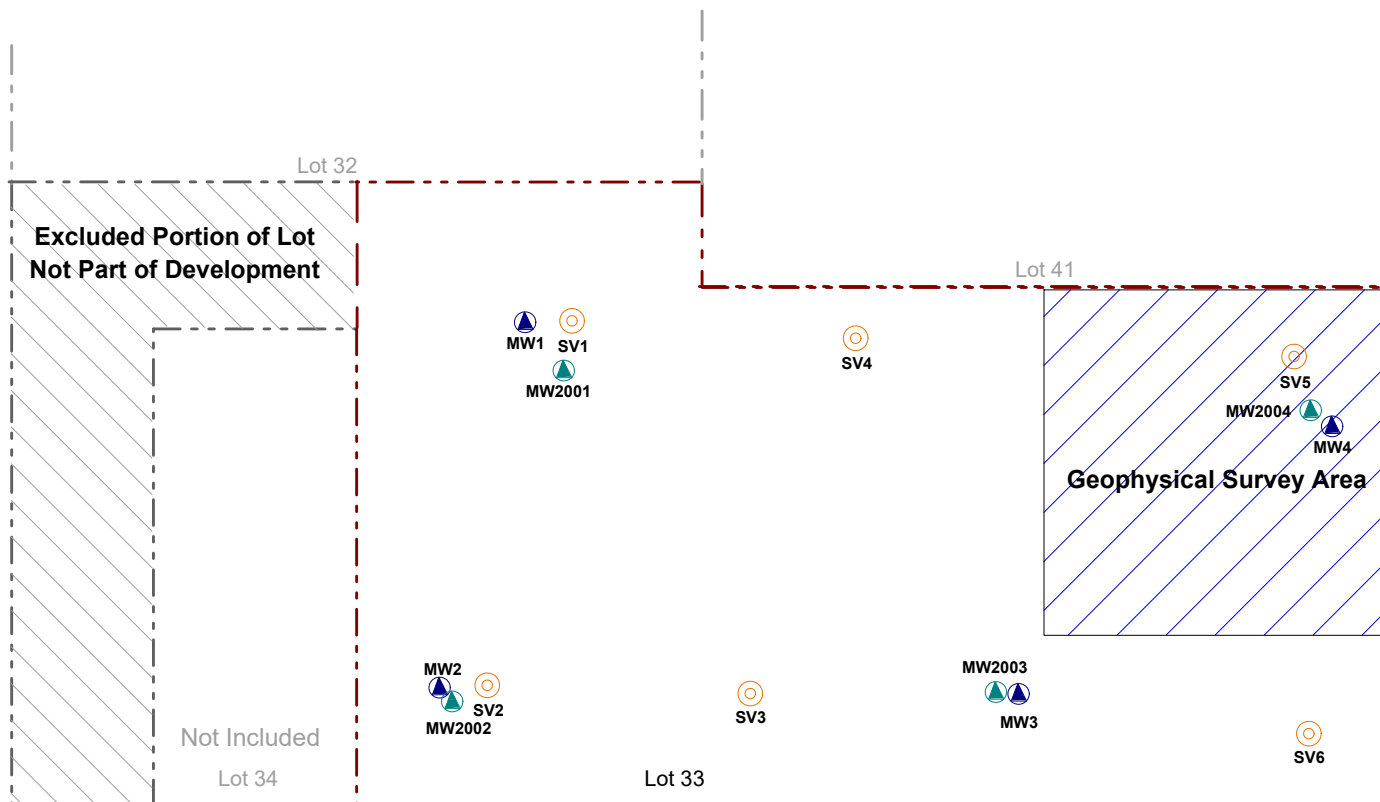

East 127th Street

SIDEWALK

SIDEWALK

Park Avenue

SCALE:



Scale 1 Inch = 30 feet

KEY:

- Site Boundary
- Geophysical Area
- Excluded Portion of Lot
- Soil Vapor Sample Location
- Groundwater Sample Location
- Groundwater Sample Location

IBC

ENVIRONMENTAL BUSINESS CONSULTANTS

Phone 631.504.6000
Fax 631.924.2870


Figure No.
5

Site Name:	1840 PARK AVENUE
Site Address:	1840- 1856 PARK AVENUE, MANHATTAN, NY
Drawing Title:	MONITORING WELL AND SOIL GAS LOCATIONS




East 126th Street

SIDEWALK

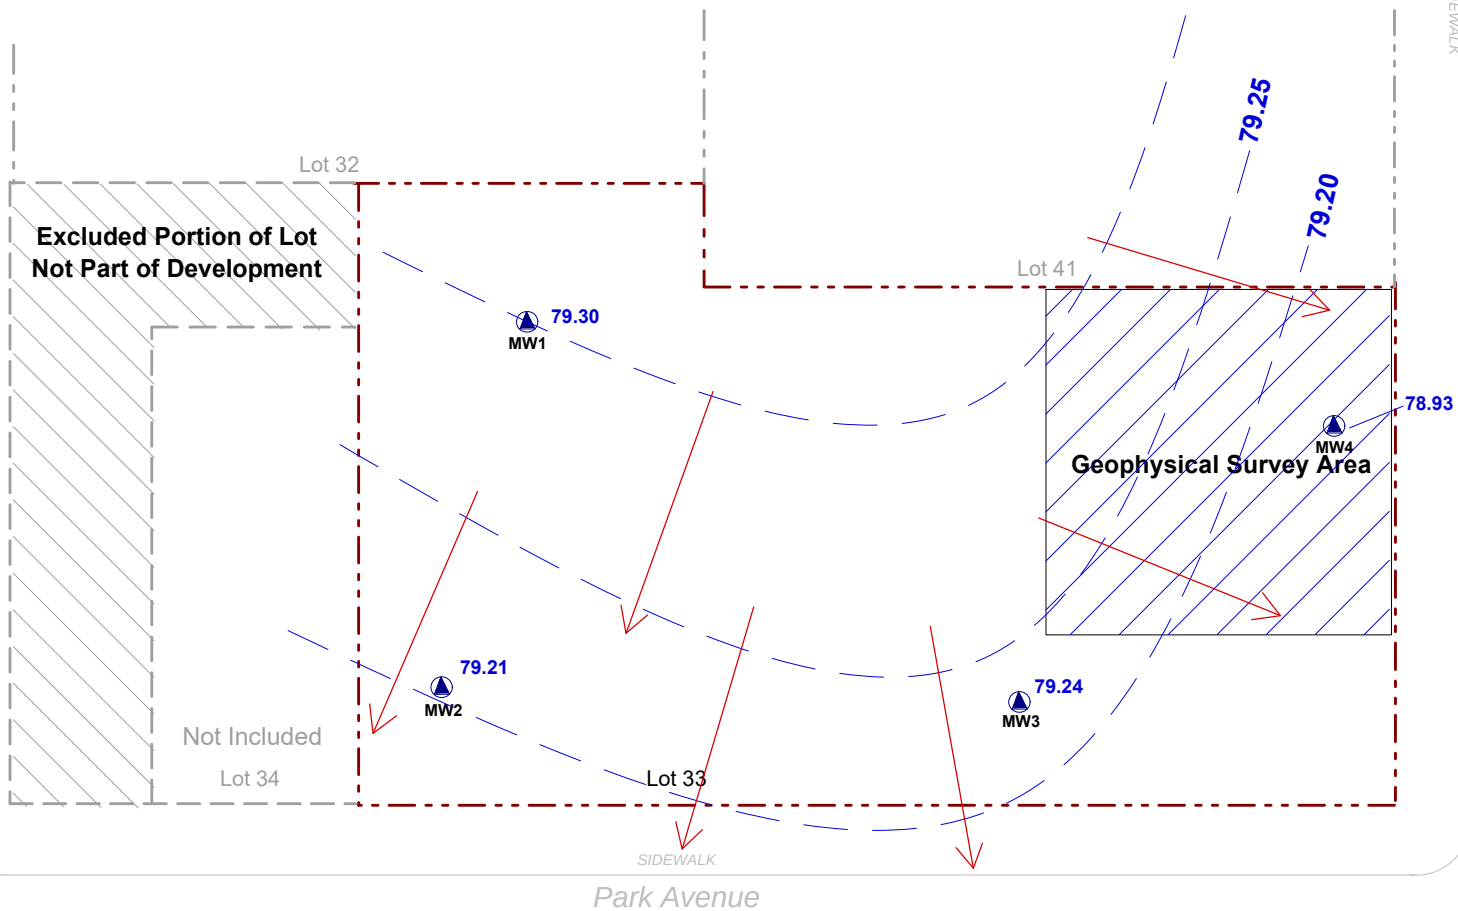

SCALE:



KEY:

- Site Boundary
- Geophysical Area
- Groundwater Sample Location
- Groundwater Flow Direction
- Excluded Portion of Lot

IBC

ENVIRONMENTAL BUSINESS CONSULTANTS

Phone 631.504.6000
Fax 631.924.2870


Figure No.
6

Site Name: **1840 PARK AVENUE**

Site Address: **1840- 1856 PARK AVENUE, MANHATTAN, NY**

Drawing Title: **GROUNDWATER CONTOUR MAP**


SCALE:



KEY:

- Site Boundary
- Geophysical Area
- Excluded Portion of Lot
- March 2019 Soil Boring Sample Location
- June 2019 Soil Boring Sample Location


- Exceedance above UUSCOs
- Exceedance above RRSCOs
- Exceedance above RCSCOs

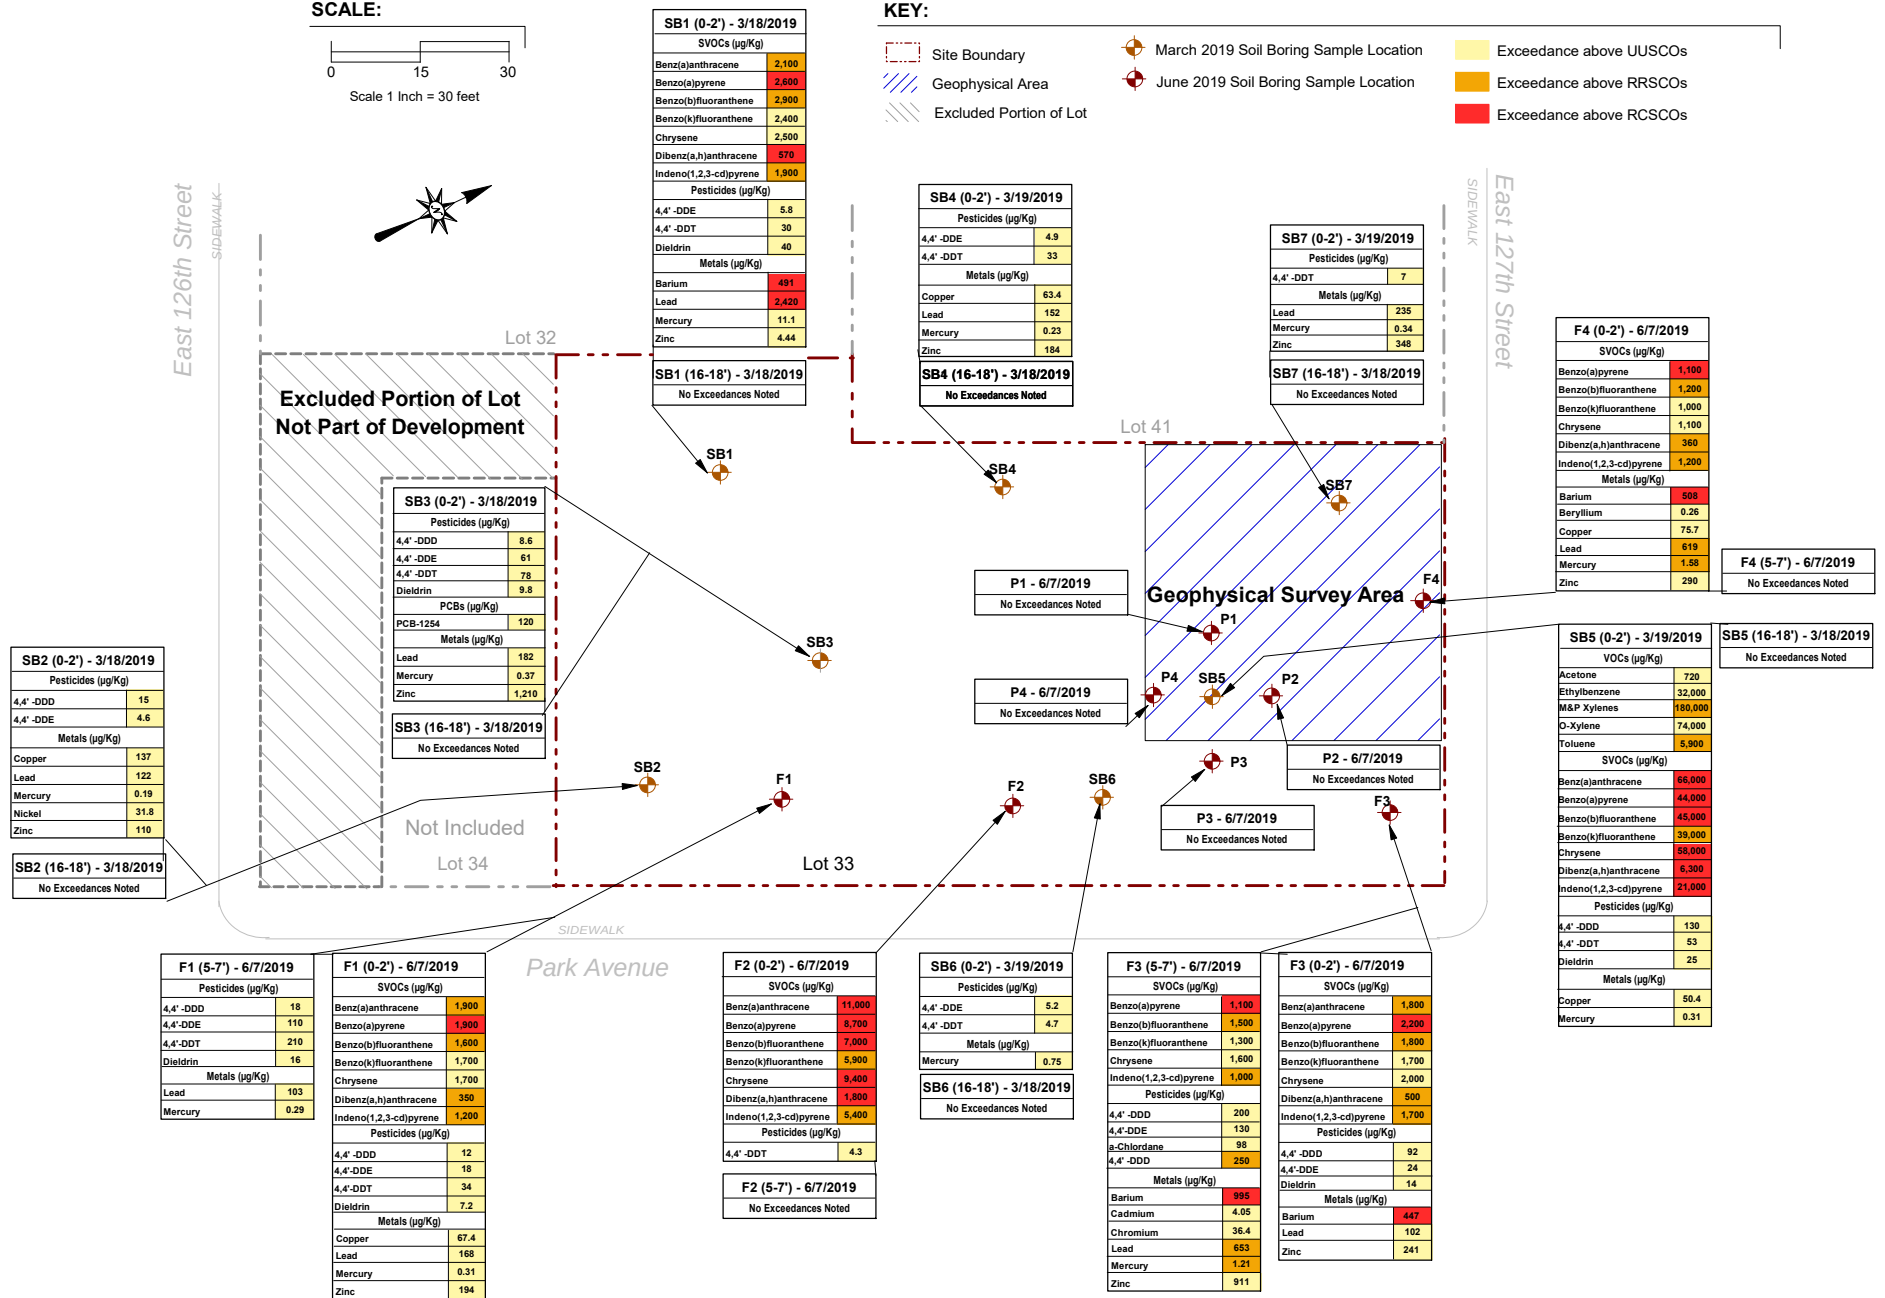


Phone 631.504.6000
Fax 631.924.2870

Figure No.
7

Site Name: **1840 PARK AVENUE**
Site Address: **1840- 1856 PARK AVENUE, MANHATTAN, NY**
Drawing Title: **SOIL RESULTS ABOVE SCOs**

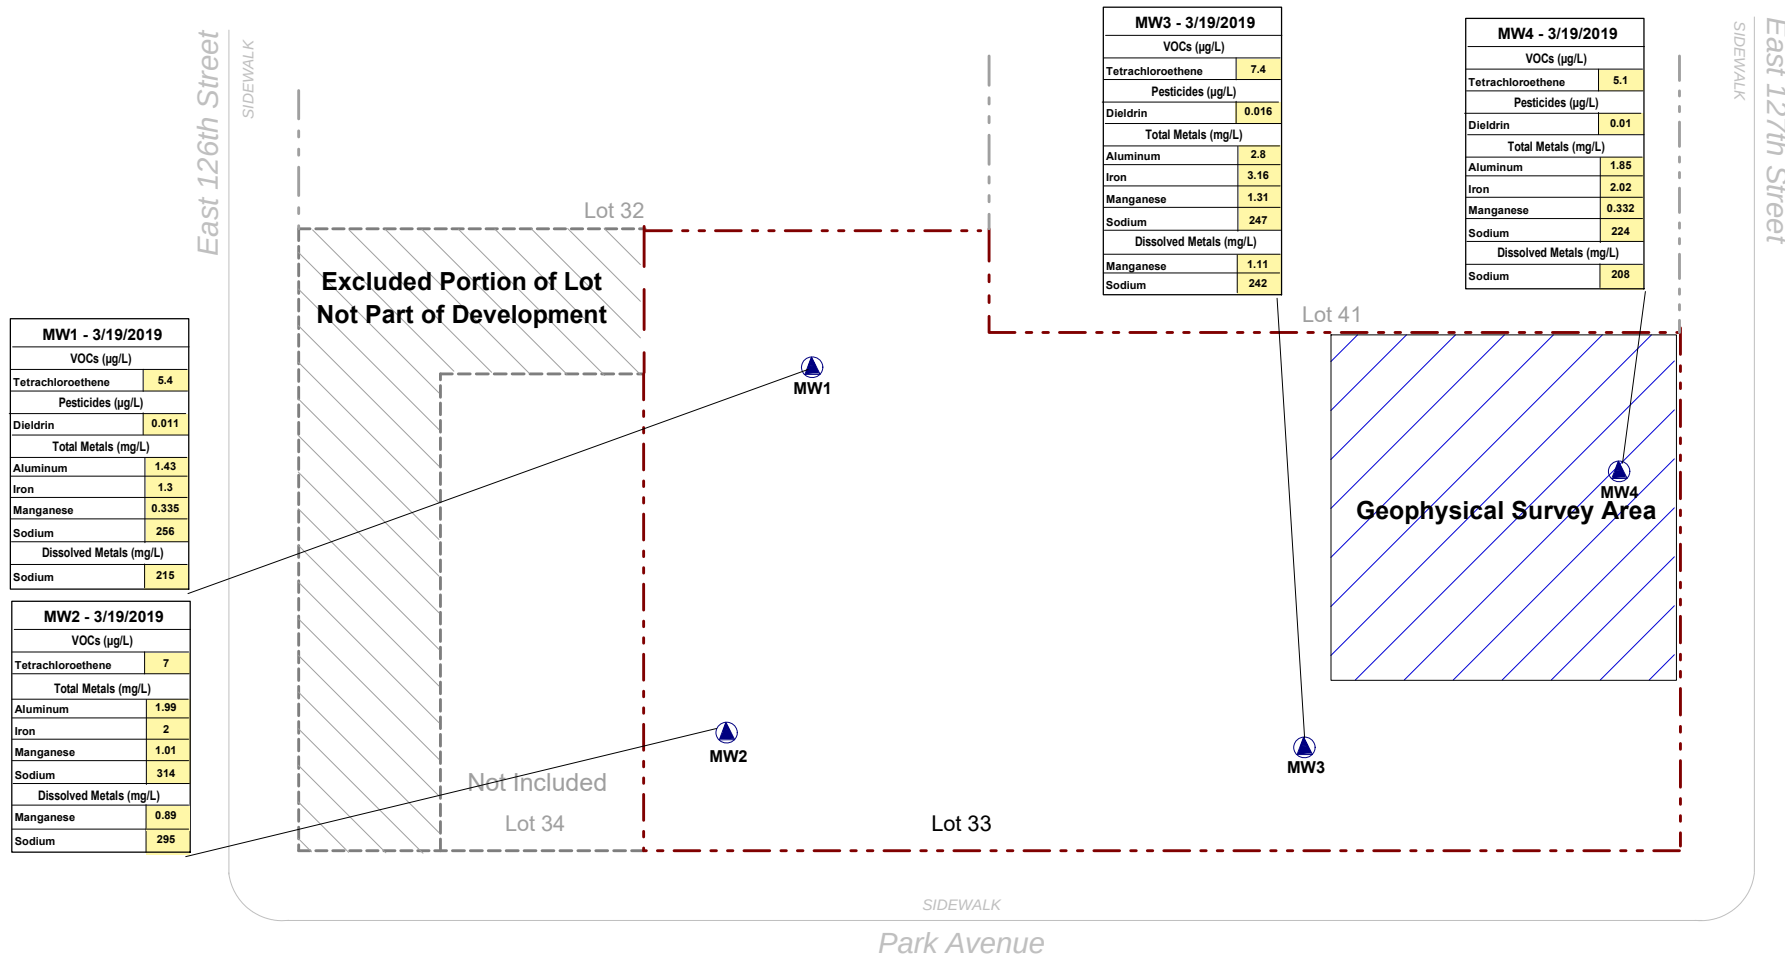

SCALE:



KEY:

- Site Boundary
- Geophysical Area
- Excluded Portion of Lot
- Soil Vapor Sample Location
- Groundwater Sample Location
- Soil Boring Sample Location

EBC

ENVIRONMENTAL BUSINESS CONSULTANTS

Phone 631.504.6000
Fax 631.924.2870

Figure No.
8

Site Name: **1840 PARK AVENUE**

Site Address: **1840- 1856 PARK AVENUE, MANHATTAN, NY**

Drawing Title: **GROUNDWATER RESULTS ABOVE STANDARDS**



SV1 - 3/20/2019

1,1,1-Trichloroethane	57.3
1,2,4-Trichlorobenzene	2.91
1,2,4-Trimethylbenzene	1.13
1,3-Dichlorobenzene	1.72
4-Methyl-2-pentanone	1.12
Acetone	165
Benzene	1.3
Carbon Tetrachloride	0.28
Chloroform	1.69
Dichlorodifluoromethane	3.62
Ethanol	33
Heptane	1.01
Hexane	1.07
Isopropylalcohol	2.34
Xylene (m&p)	2.8
Methyl Ethyl Ketone	11.1
Methylene Chloride	4.44
Tetrachloroethene	1.61
Tetrahydrofuran	10.7
Toluene	3.13
Trichloroethene	0.39
Trichlorofluoromethane	6.18

SV2 - 3/20/2019

1,1,1-Trichloroethane	3.18
1,2,4-Trichlorobenzene	2.92
1,2,4-Trimethylbenzene	1.1
1,2-Dichlorotetrafluoroethane	12.6
1,3-Dichlorobenzene	1.65
4-Methyl-2-pentanone	1.19
Acetone	130
Benzene	2.12
Carbon Disulfide	8.06
Carbon Tetrachloride	0.33
Chloromethane	1.32
Dichlorodifluoromethane	3.06
Ethanol	32.6
Ethyl Acetate	8.25
Heptane	1.02
Hexane	1.58
Isopropylalcohol	2.34
Xylene (m&p)	3.17
Methyl Ethyl Ketone	14.9
Propylene	9.15
Tetrahydrofuran	14.9
Toluene	3.11
Trichlorofluoromethane	8.42

SV3 - 3/20/2019

1,1,1-Trichloroethane	1.29
1,2,4-Trichlorobenzene	2.06
1,2,4-Trimethylbenzene	1
Acetone	347
Benzene	1.53
Carbon Tetrachloride	0.26
Dichlorodifluoromethane	20.9
Ethanol	27.3
Heptane	1.06
Isopropylalcohol	3.12
Xylene (m&p)	2.57
Methyl Ethyl Ketone	20.3
Propylene	5.85
Tetrachloroethene	1.03
Tetrahydrofuran	15.6
Toluene	3.31
Trichlorofluoromethane	454

SV5 - 3/20/2019


1,1,1-Trichloroethane	1.28
1,3-Butadiene	2.09
4-Methyl-2-pentanone	1.67
Acetone	254
Benzene	1.96
Carbon Disulfide	1.75
Carbon Tetrachloride	0.37
Chloroform	1.13
Dichlorodifluoromethane	4.05
Ethanol	37.1
Hexane	1.71
Xylene (m&p)	3.37
Methyl Ethyl Ketone	25.6
Propylene	28.7
Tetrachloroethene	0.66
Tetrahydrofuran	26.4
Toluene	3.48
Trichlorofluoromethane	12.4

SV6 - 3/20/2019


1,1,1-Trichloroethane	4.11
4-Methyl-2-pentanone	1.76
Acetone	729
Benzene	2.39
Carbon Disulfide	11
Carbon Tetrachloride	0.22
Chloromethane	9.16
Dichlorodifluoromethane	4.53
Ethanol	28.2
Heptane	2.04
Hexane	2.68
Isopropylalcohol	4.27
Xylene (m&p)	2.54
Methyl Ethyl Ketone	26.6
Tetrachloroethene	0.7
Tetrahydrofuran	19.5
Toluene	3.37
Trichloroethene	0.32
Trichlorofluoromethane	19.4

SV4 - 3/20/2019

1,1,1-Trichloroethane	8.29
1,2,4-Trimethylbenzene	1.15
4-Methyl-2-pentanone	1.52
Acetone	261
Benzene	1.37
Carbon Tetrachloride	0.3
Chloroform	2.63
Chloromethane	4.52
cis-1,2-Dichloroethene	0.43
Dichlorodifluoromethane	11.4
Ethanol	63.8
Ethylbenzene	1.15
Heptane	1.26
Hexane	2.87
Isopropylalcohol	4.79
Xylene (m&p)	4.3
Methyl Ethyl Ketone	4.27
Xylene (o)	1.22
Propylene	11
Tetrachloroethene	0.64
Tetrahydrofuran	2.98
Toluene	3.54
Trichloroethene	0.98
Trichlorofluoromethane	14.7

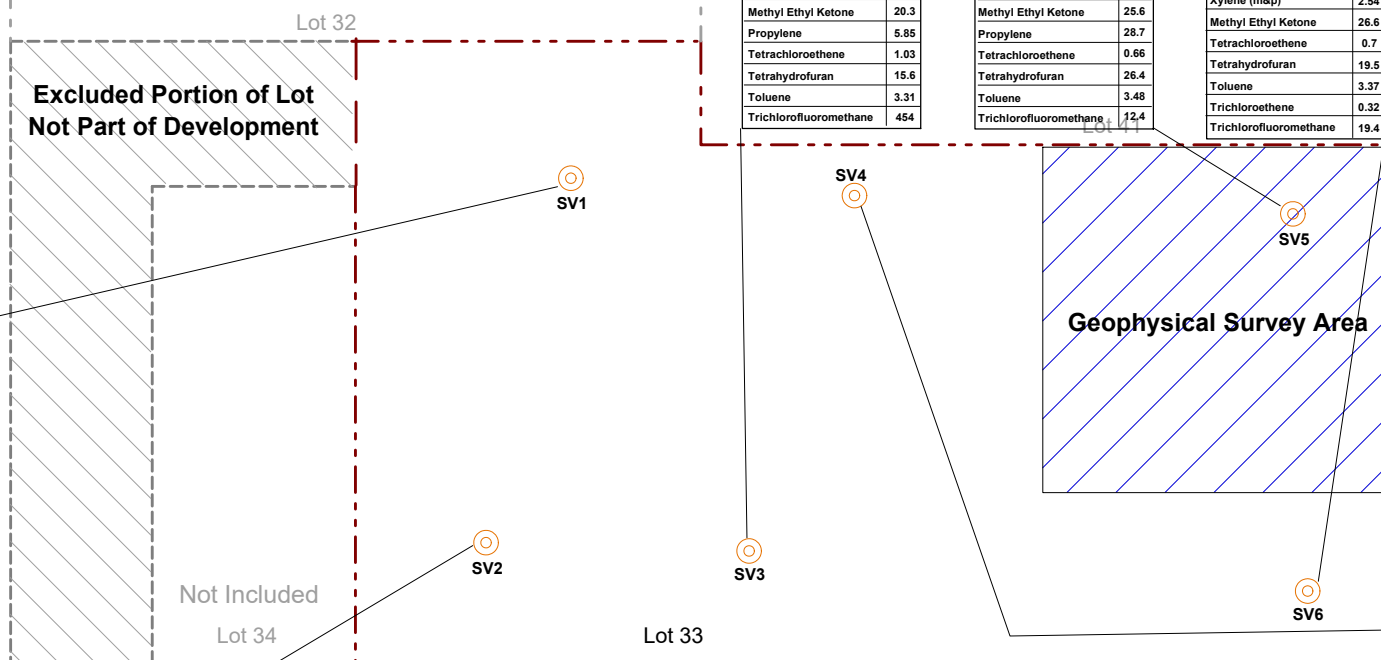

SCALE:



Scale 1 Inch = 30 feet

KEY:


- Site Boundary
- Geophysical Area
- Excluded Portion of Lot
- Soil Vapor Sample Location

EBC

ENVIRONMENTAL BUSINESS CONSULTANTS

Phone 631.504.6000
Fax 631.924.2870**Figure No.**
9

Site Name:	1840 PARK AVENUE
Site Address:	1840- 1856 PARK AVENUE, MANHATTAN, NY
Drawing Title:	SOIL VAPOR DETECTIONS

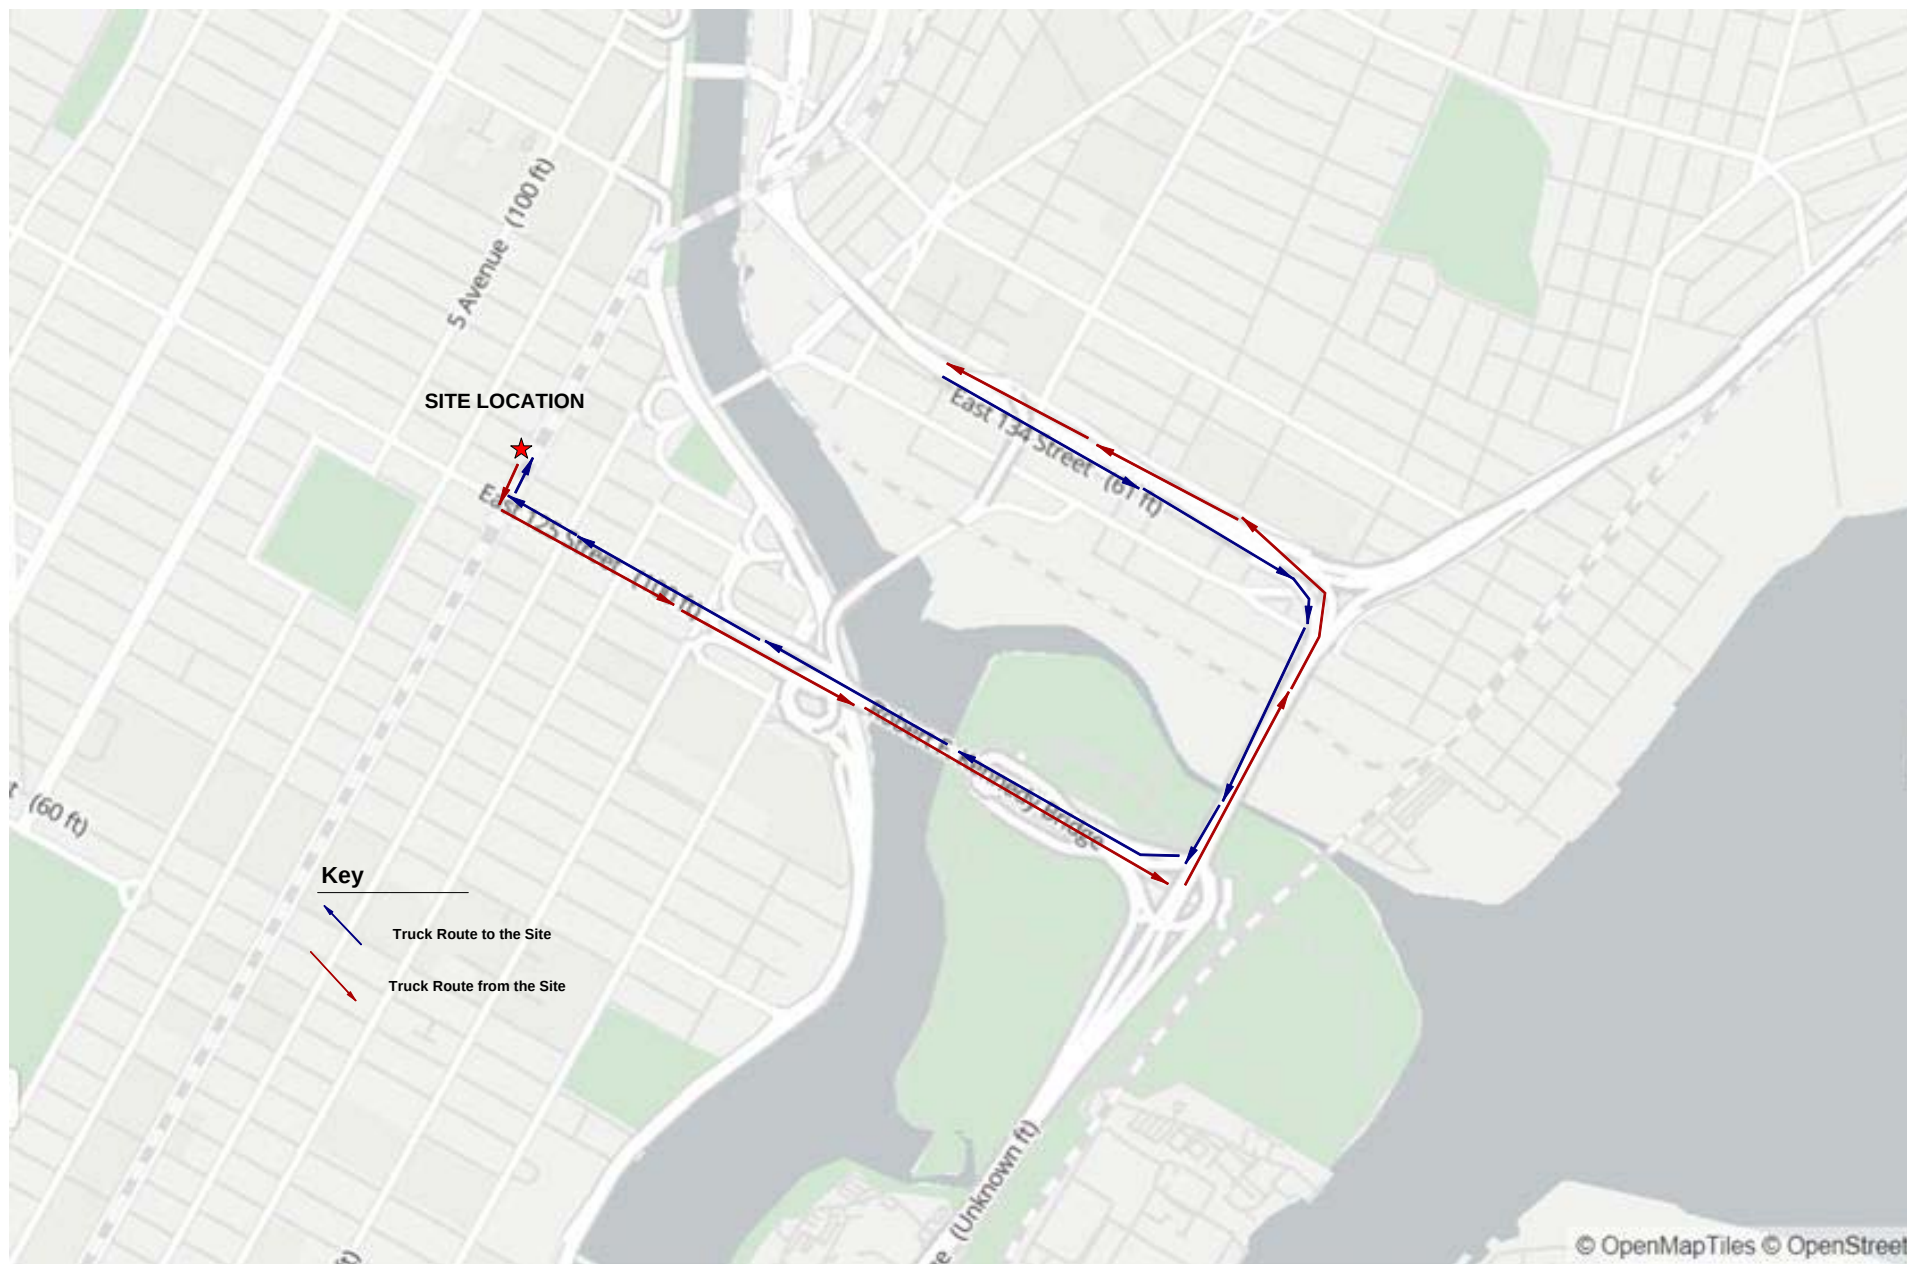

ENVIRONMENTAL BUSINESS CONSULTANTS
1808 MIDDLE COUNTRY ROAD, RIDGE, NY 11961

Phone 631.504.6000
Fax 631.924.2780


1840 PARK AVENUE
1840-1856 PARK AVENUE, HARLEM, NY

FIGURE 10 TRUCK ROUTES



East 126th Street

SIDEWALK

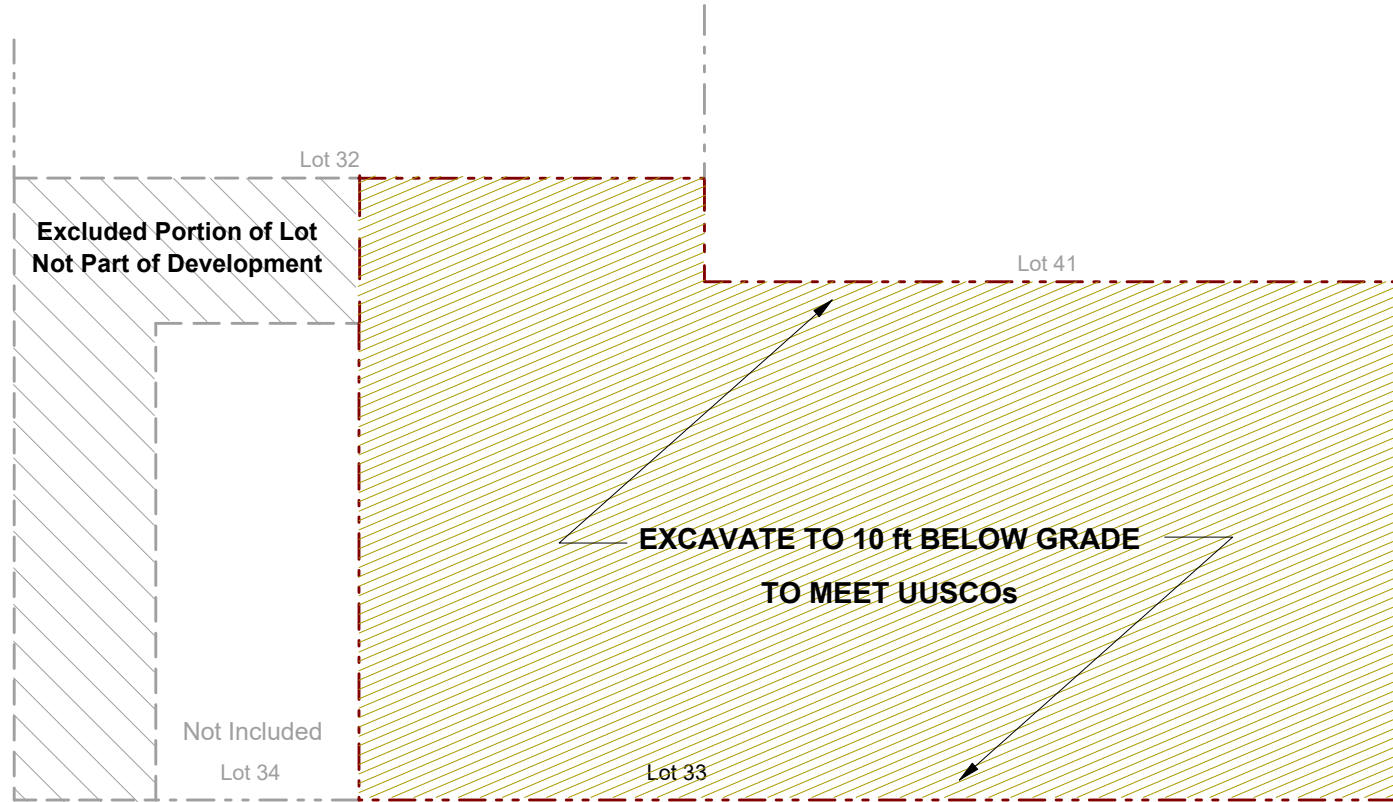


East 127th Street

SIDEWALK

SIDEWALK

Park Avenue

SCALE:



Scale 1 Inch = 30 feet

KEY:

- Site Boundary
- Excluded Portion of Lot



AMC Engineering
1836 42nd Street
Astoria, NY 11105


Figure No.
11

Site Name:	1840 PARK AVENUE
Site Address:	1840- 1856 PARK AVENUE, MANHATTAN, NY
Drawing Title:	EXCAVATION PLAN



East 126th Street


SIDEWALK

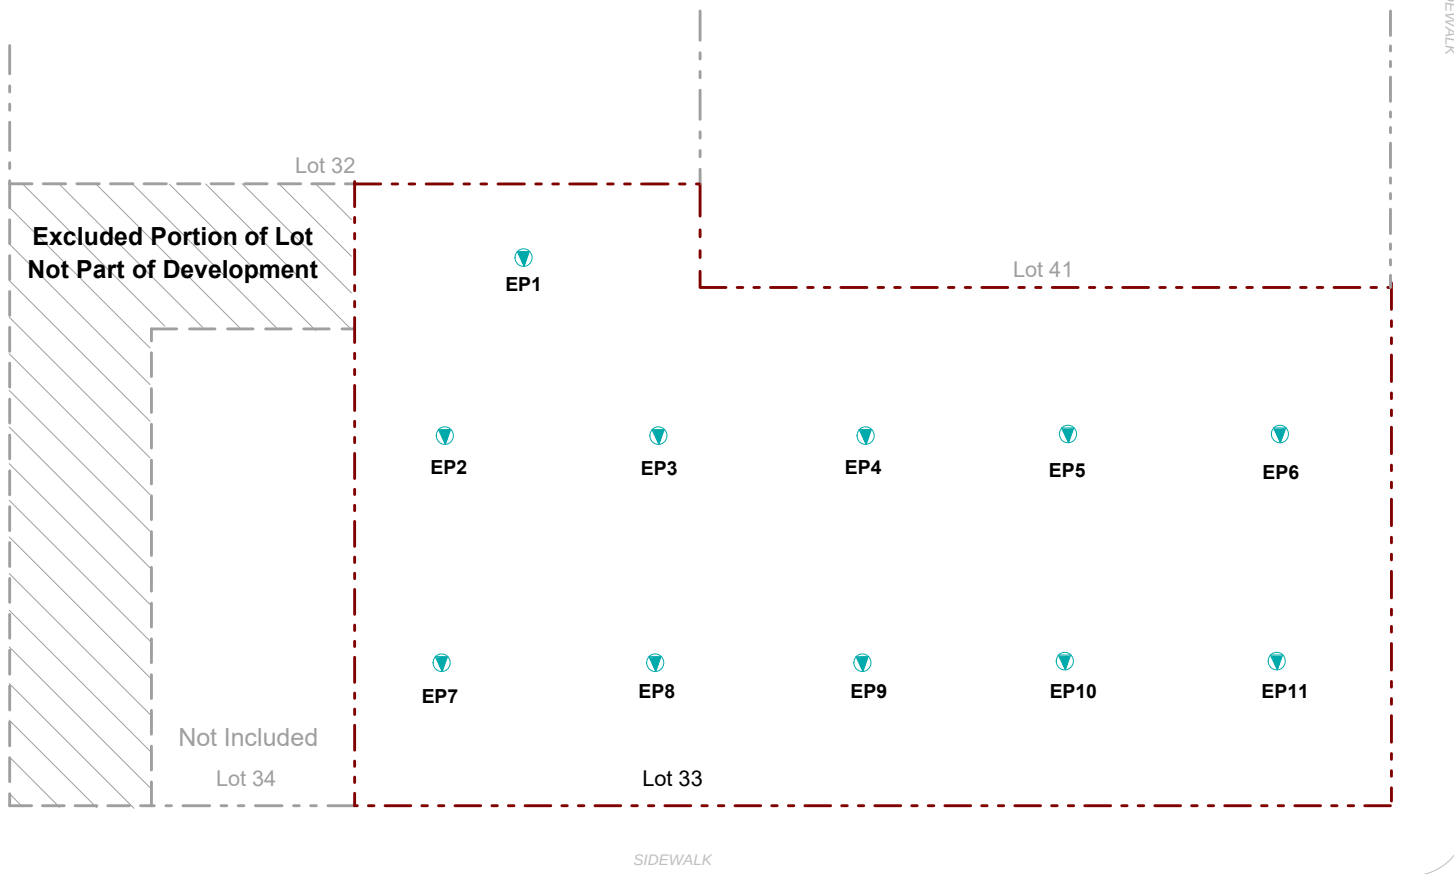

SIDEWALK

Park Avenue

SCALE:



Scale 1 Inch = 30 feet

KEY:

-  Site Boundary
-  Excluded Portion of Lot
-  Proposed Endpoint Sample Location

EBC

ENVIRONMENTAL BUSINESS CONSULTANTS

Phone 631.504.6000
Fax 631.924.2870


Figure No.
12

Site Name:	1840 PARK AVENUE
Site Address:	1840- 1856 PARK AVENUE, MANHATTAN, NY
Drawing Title:	ENDPOINT SAMPLING LOCATIONS



East 126th Street

SIDEWALK

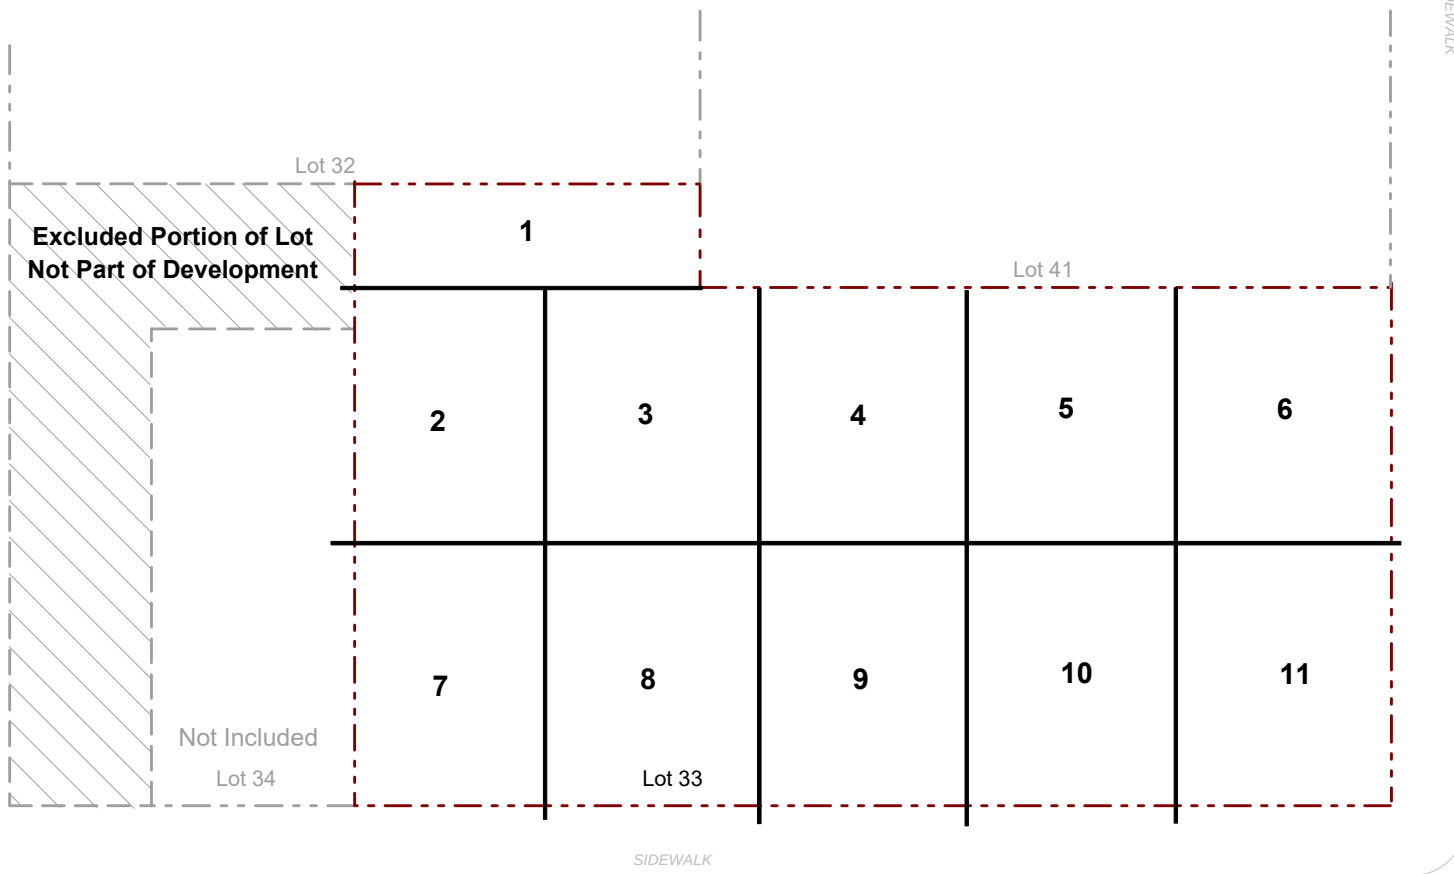

Park Avenue

SCALE:



Scale 1 Inch = 30 feet

KEY:

- Site Boundary
- Excluded Portion of Lot
- Proposed Endpoint Sample Location

EBC

ENVIRONMENTAL BUSINESS CONSULTANTS

Phone 631.504.6000
Fax 631.924.2870

Figure No.
13

Site Name: **1840 PARK AVENUE**

Site Address: **1840-1856 PARK AVENUE, MANHATTAN, NY**

Drawing Title: **GRID MAP**

ATTACHMENT A

Metes and Bounds Description of Property

Block 1751, part of lot 33

Beginning at a point or corner formed by the intersection of the southerly side of 127th Street with the westerly side of Park avenue;

Running Thence westerly and parallel along the southerly side of 127th Street, 75 feet;

Thence southerly and parallel with Park Avenue, 99 feet 11 inches;

Thence westerly and parallel with the northerly side of 126th Street, 15 feet;

Thence southerly and parallel with Park Avenue, 50 feet;

Thence easterly and parallel with 126th Street, 90 feet;

Thence northerly and parallel with said Park Avenue, 149 feet 11 inches to the point of place of beginning.

ATTACHMENT B ***Health and Safety Plan***

1840 PARK AVENUE
1840-1856 PARK AVENUE
HARLEM, NEW YORK 10035
Block 1751, p/o Lot No. 33

CONSTRUCTION HEALTH AND SAFETY PLAN

AUGUST 2020

Prepared for:
126th Street Equities LLC
316 West 118th Street
New York, New York 10026

,

Prepared by:



ENVIRONMENTAL BUSINESS CONSULTANTS

1808 Middle Country Road
Ridge, NY 11961

TABLE OF CONTENTS
CONSTRUCTION HEALTH AND SAFETY PLAN
1840 PARK AVENUE, HARLEM, NY

STATEMENT OF COMMITMENT	SC-1
1.0 INTRODUCTION AND SITE ENTRY REQUIREMENTS.....	1
1.1 Training Requirements	1
1.2 Medical Monitoring Requirements.....	2
1.3 Site Safety Plan Acceptance, Acknowledgment and Amendments.....	2
1.4 Key Personnel - Roles and Responsibilities	2
2.0 SITE BACKGROUND AND SCOPE OF WORK	4
2.1 Previous Investigations	4
2.1.1 Remedial Investigation Report (EBC August 2019).....	4
2.2 Redevelopment Plans	6
2.3 Description of Remedial Action	6
3.0 HAZARD ASSESSMENT	7
3.1 Physical Hazards.....	7
3.1.1 Tripping Hazards.....	7
3.1.2 Climbing Hazards.....	7
3.1.3 Cuts and Lacerations	7
3.1.4 Lifting Hazards	7
3.1.5 Utility Hazards.....	7
3.1.6 Traffic Hazards.....	7
3.2 Work in Extreme Temperatures.....	7
3.2.1 Heat Stress	8
3.2.2 Cold Exposure.....	9
3.3 Chemical Hazards.....	9
3.3.1 Respirable Dust.....	10
3.3.2 Dust Control and Monitoring During Earthwork	10
3.3.3 Organic Vapors	10
4.0 PERSONAL PROTECTIVE EQUIPMENT	11
4.1 Level D	11
4.2 Level C	11
4.3 Activity-Specific Levels of Personal Protection.....	12
5.0 AIR MONITORING AND ACTION LEVELS	13
5.1 Air Monitoring Requirements	13
5.2 Work Stoppage Responses	13
5.3 Action Levels During Excavation Activities	13
6.0 SITE CONTROL.....	15
6.1 Work Zones	15

TABLE OF CONTENTS

CONSTRUCTION HEALTH AND SAFETY PLAN

1840 PARK AVENUE, HARLEM, NY

7.0	CONTINGENCY PLAN/EMERGENCY RESPONSE PLAN.....	16
7.1	Emergency Equipment On-site	16
7.2	Emergency Telephone Numbers.....	16
7.3	Personnel Responsibilities During an Emergency	16
7.4	Medical Emergencies.....	17
7.5	Fire or Explosion.....	17
7.6	Evacuation Routes	17
7.7	Spill Control Procedures	18
7.8	Vapor Release Plan	18

FIGURES

Figure 1 Route to Hospital (Appendix D)

APPENDICES

APPENDIX A	SITE SAFETY ACKNOWLEDGMENT FORM
APPENDIX B	SITE SAFETY PLAN AMENDMENTS
APPENDIX C	CHEMICAL HAZARDS
APPENDIX D	HOSPITAL INFORMATION, MAP AND FIELD ACCIDENT REPORT

STATEMENT OF COMMITMENT

This Construction Health and Safety Plan (CHASP) has been prepared to ensure that workers are not exposed to risks from hazardous materials during the Remedial Action at the 1840 Park Avenue Site.

This CHASP, which applies to persons present at the Site actually or potentially exposed to hazardous materials, describes emergency response procedures for actual and potential chemical hazards. This CHASP is also intended to inform and guide personnel entering the work area or exclusion zone. Persons are to acknowledge that they understand the potential hazards and the contents of this Health and Safety policy by signing off on receipt of their individual copy of the document. Contractors and suppliers are retained as independent contractors and are responsible for ensuring the health and safety of their own employees.

1.0 INTRODUCTION AND SITE ENTRY REQUIREMENTS

This document describes the health and safety guidelines developed by Environmental Business Consultants (EBC) for the planned Remedial Action at the 1840 Park Avenue Brownfield Site located at 1840-1856 Park Avenue, Harlem NY to protect on-Site personnel, visitors, and the public from physical harm and exposure to hazardous materials or wastes during remedial activities. In accordance with the Occupational Safety and Health Administration (OSHA) 29 CFR Part 1910.120 Hazardous Waste Operations and Emergency Response Final rule, this CHASP, including the attachments, addresses safety and health hazards related to excavation, loading and other soil disturbance activities and is based on the best information available. The CHASP may be revised by EBC at the request of the developer and/or a regulatory agency upon receipt of new information regarding Site conditions. Changes will be documented by written amendments signed by EBC's project manager, Site Safety Officer and/or the EBC Health and Safety Consultant.

1.1 Training Requirements

Personnel entering the exclusion zone or decontamination zone are required to be certified in health and safety practices for hazardous waste Site operations as specified in the Federal OSHA Regulations CFR 1910.120e (revised 3/6/90).

Paragraph (e - 3) of the above referenced regulations requires that all on-Site management personnel directly responsible for or who supervise employees engaged in hazardous waste operations, must initially receive 8 hours of supervisor training related to managing hazardous waste work.

Paragraph (e - 8) of the above referenced regulations requires that workers and supervisors receive 8 hours of refresher training annually on the items specified in Paragraph (e-1) and/or (e-3).

Additionally, all on-Site personnel must receive adequate Site-specific training in the form of an on-Site Health and Safety briefing prior to participating in field work with emphasis on the following:

- Protection of the adjacent community from hazardous vapors and / or dust which may be released during intrusive activities.
- Identification of chemicals known or suspected to be present on-Site and the health effects and hazards of those substances.
- The need for vigilance in personnel protection, and the importance of attention to proper use, fit and care of personnel protective equipment.
- Decontamination procedures.
- Site control including work zones, access and security.
- Hazards and protection against heat or cold.
- The proper observance of daily health and safety practices, such as entry and exit of work zones and Site. Proper hygiene during lunch, break, etc.
- Emergency procedures to be followed in case of fire, explosion and sudden release of hazardous gases.

Health and Safety meetings will be conducted on a daily basis and will cover protective clothing and other equipment to be used that day, potential and chemical and physical hazards, emergency procedures, and conditions and activities from the previous day.

1.2 Medical Monitoring Requirements

Field personnel and visitors entering the exclusion zone or decontamination zone must have completed appropriate medical monitoring required under OSHA 29 CFR 1910.120(f) if respirators or other breathing related PPE is needed. Medical monitoring enables a physician to monitor each employee's health, physical condition, and his fitness to wear respiratory protective equipment and carry out on-Site tasks.

1.3 Site Safety Plan Acceptance, Acknowledgment and Amendments

The project superintendent and the Site Safety Officer are responsible for informing personnel (EBC employees and/or owner or owners representatives) entering the work area of the contents of this plan and ensuring that each person signs the safety plan acknowledging the on-Site hazards and procedures required to minimize exposure to adverse effects of these hazards. A copy of the Acknowledgement Form is included in **Appendix A**.

Site conditions may warrant an amendment to the CHASP. Amendments to the HASP are acknowledged by completing forms included in **Appendix B**.

1.4 Key Personnel - Roles and Responsibilities

Personnel responsible for implementing this Health and Safety Plan are:

Name	Title	Address	Contact Numbers
Keith Butler	EBC Project Manager	1808 Middle Country Rd Ridge, NY 11961	(631) 504-6000
Tom Gallo	Site Safety Officer	1808 Middle Country Rd Ridge, NY 11961	(631) 504-6000

The project manager is responsible for overall project administration and, with guidance from the Site Safety Officer, for supervising the implementation of this CHASP. The Site Safety Officer will conduct daily (tail gate or tool box) safety meetings at the project Site and oversee daily safety issues. Each subcontractor and supplier (defined as an OSHA employer) is also responsible for the health and safety of its employees. If there is any dispute about health and safety or project activities, on-Site personnel will attempt to resolve the issue. If the issue cannot be resolved at the Site, then the project manager will be consulted.

The Site Safety Officer is also responsible for coordinating health and safety activities related to hazardous material exposure on-Site. The Site Safety Officer is responsible for the following:

1. Educating personnel about information in this CHASP and other safety requirements to be observed during Site operations, including, but not limited to, decontamination procedures, designation of work zones and levels of protection, air monitoring, fit testing,

- and emergency procedures dealing with fire and first aid.
2. Coordinating Site safety decisions with the project manager.
 3. Designating exclusion, decontamination and support zones on a daily basis.
 4. Monitoring the condition and status of known on-Site hazards and maintaining and implementing the air quality monitoring program specified in this CHASP.
 5. Maintaining the work zone entry/exit log and Site entry/exit log.
 6. Maintaining records of safety problems, corrective measures and documentation of chemical exposures or physical injuries (the Site Safety Officer will document these conditions in a bound notebook and maintain a copy of the notebook on-Site).

The person who observes safety concerns and potential hazards that have not been addressed in the daily safety meetings should immediately report their observations/concerns to the Site safety officer or appropriate key personnel.

2.0 SITE BACKGROUND AND SCOPE OF WORK

The street address for the Site is 1840-1856 Park Avenue, New York, NY 10035. The Site is located in the Harlem neighborhood of New York (Manhattan) and is comprised of portion of a single tax parcel (Block: 1751, Lot No. 33, formerly Lot Nos. 33, 35, 36, 37, 38, 40, 132, and 137) totaling 9,458 square feet (0.22 acres). The far southern portion of Lot No. 33 having an area of 2,452 ft² is to be excluded from the development project and the scope of this investigation.

2.1 Previous Investigations

A Remedial Investigation was completed at the Site from March 12, 2019 through June 7, 2019, with a supplemental investigation for emerging contaminants completed in June and July 2020. The results of the investigations are documented in a Remedial Investigation Report dated July 2019 and revised in July 2020. The goals of the Remedial Investigation were to define the nature and extent of contamination in soil, groundwater and any other impacted media; to identify the source(s) of the contamination; to assess the impact of the contamination on public health and/or the environment; and to provide information to support the development of a Remedial Work Plan to address the contamination.

Activities completed under the RI:

- Installed twenty-one (21) soil borings and collected forty-five (45) soil samples for laboratory analysis of volatile organic compounds (VOCs), semi-volatile organic compounds (SVOCs), herbicides, pesticides, organophosphate pesticides, PCBs, metals, 1,4-dioxane and PFAS compounds;
- Installed seven groundwater monitoring wells and collected eight groundwater samples (7 from temporary wells and one from a previously existing well) for laboratory analysis of VOCs, SVOCs, pesticides, PCBs, metals (total and dissolved), 1,4-dioxane, and PFAS compounds; and
- Installed six soil gas implants and collected six soil gas samples for laboratory analysis of VOCs.

The results of sampling performed during this RI identified an area of petroleum-related VOCs at the northwestern portion of the Site, with the highest concentrations in the vicinity of soil boring SB5. This area represents the location of several historic auto repair shops, as well as a potential UST identified during the geophysical survey. This impacted area is estimated to be approximately 40 square feet (SF). Total petroleum VOCs in SB5 reached a maximum of 291,000 µg/Kg at the 0-2 ft interval, and decreased to non-detectable levels at the water table at 16-18 ft. A small area of petroleum contamination was also identified at boring F3 (6-8') Total VOCs in sample F3 (6-8') were 2,331 µg/Kg, and are likely attributable to the presence of heterogeneous fill material.

Historic fill materials have been identified across the Site to depths 6 to 10 feet below grade. Depending on location, the historic fill material contains SVOCs, pesticides, PCBs, and one or more metals including arsenic, barium, beryllium, cadmium, chromium, copper, lead, mercury, nickel, and zinc above unrestricted and/or restricted use SCOs. Most notably were pesticide impacts in samples SB5 (0-2'), F1 (5-7') and F3 (6-8') and metals impacts in samples SB1 (0-

2'), F3 (0-2'), F3 (6-8') and F4 (0-2').

Low levels of PFAS compounds were detected in six of the 12 soil samples analyzed, with concentrations ranging from non-detect to 2.2 ug/kg.

The chlorinated VOC tetrachloroethene (PCE) was detected above its NYSDEC AWQ in each of the samples collected across the Site. However, as PCE was not detected in site soils, with the exception of one shallow sample, the presence of PCE appears attributable to an off-site source of generally degraded regional water quality.

The pesticide dieldrin was detected in each of the four groundwater samples collected/analyzed, with concentrations exceeding the AWQ in three samples. This compound was detected in shallow to intermediate soil samples, but was not identified in any of the deep soil samples.

Moderate levels of PFAS compounds were detected in each of the five groundwater samples collected from the site. The combined PFOA and PFOS concentration measured in these samples ranged from 89.3 ng/L (MW4) to 186 ng/L (MW2003) which are above the USEPA Health Advisory Level of 70 ng/L.

2.2 Redevelopment Plans

The proposed redevelopment project consists of constructing an 18-story mixed-use (commercial/residential) building, with a single basement level. The building will occupy the majority of site footprint, with a paved yard area at the southeastern portion. The cellar level will consist of 7,245 SF of commercial space, utility/mechanical rooms, a bicycle room, restrooms, elevators and stairways. The 1st floor will include 8,917 SF of commercial space, the residential entrance lobby, restrooms, elevators and stairways. The 2nd floor will contain 5,348 SF of commercial space, a bicycle room, utility space, elevators and stairways. The 3rd floor will consist of utility and mechanical space, a tenant laundry, a fitness center, and lounges, including an outdoor recreation area atop the 2nd floor roof. Floors 4 through 18 will consist of 65 studio, 29 1-bedroom and 58 2-bedroom residential apartments, elevators and stairways. The 18th floor will also include a 961 SF indoor recreational space and a 670 SF outdoor recreation area. Rooftop mechanical and stair penthouses will be located atop the 18th floor level, including a 3,687 SF outdoor recreation area.

2.3 Description of Remedial Action

The remedy will include the following items:

- Removal and disposal of the asphalt cap;
- Removal of underground storage tanks encountered during Site excavation;
- Shoring to accommodate excavation to a depth of 10 ft;
- Excavate historic fill material to 10' across the Site with additional excavation as needed to achieve Track 1 Unrestricted Use SCOs;
- Disposal of approximately 4,203 cy of historic fill;
- Waste characterization and endpoint verification sampling and analysis;

- HASP and CAMP monitoring for the duration of the remedial activities; and
- Preparation of a Final Engineering Report.

3.0 HAZARD ASSESSMENT

This section identifies the hazards associated with the proposed scope of work, general physical hazards that can be expected at most Sites; and presents a summary of documented or potential chemical hazards at the Site. Every effort must be made to reduce or eliminate these hazards. Those that cannot be eliminated must be guarded against using engineering controls and/or personal protective equipment.

3.1 Physical Hazards

3.1.1 Tripping Hazards

An area of risk associated with on-Site activities are presented by uneven ground, concrete, curbstones or equipment which may be present at the Site thereby creating a potential tripping hazard. During intrusive work, care should be taken to mark or remove any obstacles within the exclusion zone.

3.1.2 Climbing Hazards

During Site activities, workers may have to work on excavating equipment by climbing. The excavating contractor will conform with any applicable NIOSH and OSHA requirements or climbing activities.

3.1.3 Cuts and Lacerations

Field activities that involve excavating activities usually involve contact with various types of machinery. A first aid kit approved by the American Red Cross will be available during all intrusive activities.

3.1.4 Lifting Hazards

Improper lifting by workers is one of the leading causes of industrial injuries. Field workers in the excavation program may be required to lift heavy objects. Therefore, all members of the field crew should be trained in the proper methods of lifting heavy objects. All workers should be cautioned against lifting objects too heavy for one person.

3.1.5 Utility Hazards

Before conducting any excavation, the excavation contractor will be responsible for locating and verifying all existing utilities at each excavation.

3.1.6 Traffic Hazards

All traffic, vehicular and pedestrian, shall be maintained and protected at all times consistent with local, state and federal agency regulations regarding such traffic and in accordance with NYCDOT guidelines. The excavation contractor shall carry on his operations without undue interference or delays to traffic. The excavation contractor shall furnish all labor, materials, guards, barricades, signs, lights, and anything else necessary to maintain traffic and to protect his work and the public, during operations.

3.2 Work in Extreme Temperatures

Work under extremely hot or cold weather conditions requires special protocols to minimize the chance that employees will be affected by heat or cold stress.

3.2.1 Heat Stress

The combination of high ambient temperature, high humidity, physical exertion, and personal protective apparel, which limits the dissipation of body heat and moisture, can cause heat stress.

The following prevention, recognition and treatment strategies will be implemented to protect personnel from heat stress. Personnel will be trained to recognize the symptoms of heat stress and to apply the appropriate treatment.

1. Prevention

- a. Provide plenty of fluids. Available in the support zone will be a 50% solution of fruit punch and water or plain water.
- b. Work in Pairs. Individuals should avoid undertaking any activity alone.
- c. Provide cooling devices. A spray hose and a source of water will be provided to reduce body temperature, cool protective clothing and/or act as a quick-drench shower in case of an exposure incident.
- d. Adjustment of the work schedule. As is practical, the most labor-intensive tasks should be carried out during the coolest part of the day.

2. Recognition and Treatment

a. Heat Rash (or prickly heat):

Cause: Continuous exposure to hot and humid air, aggravated by chafing clothing.

Symptoms: Eruption of red pimples around sweat ducts accompanied by intense itching and tingling.

Treatment: Remove source of irritation and cool skin with water or wet cloths.

b. Heat Cramps (or heat prostration)

Cause: Profuse perspiration accompanied by inadequate replenishment of body water and electrolytes.

Symptoms: Muscular weakness, staggering gait, nausea, dizziness, shallow breathing, pale and clammy skin, approximately normal body temperature.

Treatment: Perform the following while making arrangement for transport to a medical facility. Remove the worker to a contamination reduction zone. Remove protective clothing. Lie worker down on back in a cool place and raise feet 6 to 12 inches. Keep warm, but loosen all clothing. If conscious, provide sips of salt-water solution, using one teaspoon of salt in 12 ounces of water. Transport to a medical facility.

c. Heat Stroke

Cause: Same as heat exhaustion. This is also an extremely serious condition.

Symptoms: Dry hot skin, dry mouth, dizziness, nausea, headache, rapid pulse.

Treatment: Cool worker immediately by immersing or spraying with cool water or sponge bare skin after removing protective clothing. Transport to hospital.

3.2.2 Cold Exposure

Exposure to cold weather, wet conditions and extreme wind-chill factors may result in excessive loss of body heat (hypothermia) and /or frostbite. To guard against cold exposure and to prevent cold injuries, appropriate warm clothing should be worn, warm shelter must be readily available, rest periods should be adjusted as needed, and the physical conditions of on-Site field personnel should be closely monitored. Personnel and supervisors working on-Site will be made aware of the signs and symptoms of frost bite and hypothermia such as shivering, reduced blood pressure, reduced coordination, drowsiness, impaired judgment, fatigue, pupils dilated but reactive to light and numbing of the toes and fingers.

3.3 Chemical Hazards

“Historic fill” materials, present throughout the New York City area typically contain elevated levels of semi-volatile organic compounds and metals. These “contaminants” are not related to a chemical release occurring on the Site, but are inherent in the reworked fill material in the area which contains ash and bits of tar and asphalt. Considering the previous sampling results and the past and present use of the Site, the following compounds are considered for the Site as potential contaminants:

Volatile organic compounds reported to be present at elevated concentrations in soil and groundwater at the Site include the following:

Xylenes	Toluene	Ethylbenzene	Acetone

Semi-Volatile organic compounds reported to be present at elevated concentrations in soil at the Site include the following:

Benzo(a)anthracene	Benzo(a)pyrene	Benzo(b)fluoranthene
Benzo(k)fluoranthene	Indeno(1,2,3-cd)pyrene	Dibenz(a,h)anthracene
Chrysene		

Metals reported to be present at elevated concentrations in soil at the Site include the following:

Chromium	Cadmium	Lead	Mercury	Nickel
Barium	Beryllium	Copper	Zinc	

Pesticides reported to be present at elevated concentrations in soil at the Site include the following:

4,4-DDD	4,4-DDE	4,4-DDT	a-Chlordane

VOCs reported to be present at elevated concentrations in groundwater at the Site include the following:

Perchloroethene

The primary routes of exposure to these contaminants are inhalation, ingestion and absorption.

3.3.1 Respirable Dust

Dust may be generated from vehicular traffic and/or excavation activities. If visible observation

detects elevated levels of dust, a program of wetting will be employed by the Site Safety Officer. If elevated dust levels persist, the Site Safety Officer will employ dust monitoring using a particulate monitor (Minirae or equivalent). If monitoring detects concentrations greater than $150 \mu\text{g}/\text{m}^3$ over daily background, the Site Safety Officer will take corrective actions as defined herein, including the use of water for dust suppression and if this is not effective, requiring workers to wear APRs with efficiency particulate air (HEPA) cartridges.

Absorption pathways for dust and direct contact with soils or groundwater will be mitigated with the implementation of latex gloves, hand washing and decontamination exercises when necessary.

3.3.2 Dust Control and Monitoring During Earthwork

Dust generated during excavation activities or other earthwork may contain contaminants identified in soils at the Site. Dust will be controlled by wetting the working surface with water. Calcium chloride may be used if the problem cannot be controlled with water. Air monitoring and dust control techniques are specified in a Site-specific Dust Control Plan (if applicable). Site workers will not be required to wear APR's unless dust concentrations are consistently over $150 \mu\text{g}/\text{m}^3$ over Site-specific background in the breathing zone as measured by a dust monitor unless the Site Safety Officer directs workers to wear APRs. The Site Safety Officer will use visible dust as an indicator to implement the dust control plan.

3.3.3 Organic Vapors

Elevated levels of VOCs were detected in both soil and soil vapor samples collected during previous investigations at the Site. Therefore, excavation activities may cause the release of organic vapors to the atmosphere. The Site Safety Officer will periodically monitor organic vapors with a Photoionization Detector (PID) during excavation activities to determine whether organic vapor concentrations exceed action levels shown in Section 5 and/or the Community Air Monitoring Plan.

4.0 PERSONAL PROTECTIVE EQUIPMENT

Personal protective equipment (PPE) shall be selected in accordance with the Site air monitoring program, OSHA 29 CFR 1910.120(c), (g), and 1910.132. Protective equipment shall be NIOSH approved and respiratory protection shall conform to OSHA 29 CFR Part 1910.133 and 1910.134 specifications; head protection shall conform to 1910.135; eye and face protection shall conform to 1910.133; and foot protection shall conform to 1910.136. The only true difference among the levels of protection from D thru B is the addition of the type of respiratory protection. **It is anticipated that work will be performed in Level D PPE.**

4.1 Level D

Level D PPE shall be donned when the atmosphere contains no known hazards and work functions preclude splashes, immersion, or the potential for inhalation of, or contact with, hazardous concentrations of harmful chemicals. Level D PPE consists of:

- standard work uniform, coveralls, or tyvek, as needed;
- steel toe and steel shank work boots;
- hard hat;
- gloves, as needed;
- safety glasses;
- hearing protection;
- equipment replacements are available as needed.

4.2 Level C

Level C PPE shall be donned when the concentrations of measured total organic vapors in the breathing zone exceed background concentrations (using a portable OVA, or equivalent), but are less than 5 ppm. The specifications on the APR filters used must be appropriate for contaminants identified or expected to be encountered. Level C PPE shall be donned when the identified contaminants have adequate warning properties and criteria for using APR have been met. Level C PPE consists of:

- chemical resistant or coated tyvek coveralls;
- steel-toe and steel-shank workboots;
- chemical resistant overboots or disposable boot covers;
- disposable inner gloves (surgical gloves);
- disposable outer gloves;
- full face APR fitted with organic vapor/dust and mist filters or filters appropriate for the identified or expected contaminants;
- hard hat;
- splash shield, as needed; and,
- ankles/wrists taped with duct tape.

The Site Safety Officer will verify if Level C is appropriate by checking organic vapor concentrations using compound and/or class-specific detector tubes.

- chemical resistant coveralls;
- steel-toe and steel-shank workboots;
- chemical resistant overboots or disposable boot covers;
- disposable inner gloves;
- disposable outer gloves;
- hard hat; and,
- ankles/wrists taped.

The exact PPE ensemble is decided on a Site-by-Site basis by the Site Safety Officer with the intent to provide the most protective and efficient worker PPE.

4.3 Activity-Specific Levels of Personal Protection

The required level of PPE is activity-specific and is based on air monitoring results (Section 4.0) and properties of identified or expected contaminants. **It is expected that Site work will be performed in Level D.** If air monitoring results indicate the necessity to upgrade the level of protection engineering controls (i.e. Facing equipment away from the wind and placing Site personnel upwind of drilling locations, active venting, etc.) will be implemented before requiring the use of respiratory protection.

5.0 AIR MONITORING AND ACTION LEVELS

29 CFR 1910.120(h) specifies that monitoring shall be performed where there may be a question of employee exposure to hazardous concentrations of hazardous substances in order to assure proper selection of engineering controls, work practices and personal protective equipment so that employees are not exposed to levels which exceed permissible exposure limits, or published exposure levels if there are no permissible exposure limits, for hazardous substances.

5.1 Air Monitoring Requirements

If excavation work is performed, air will be monitored for VOCs with a portable ION Science 3000EX photoionization detector, or the equivalent. If necessary, Lower Explosive Limit (LEL) and oxygen will be monitored with a Combustible Gas Indicator (CGI). If appropriate, fugitive dust will be monitored using a MiniRam Model PDM-3 aerosol monitor. Air will be monitored when any of the following conditions apply:

- initial Site entry;
- during any work where a potential IDLH condition or flammable atmosphere could develop;
- excavation work begins on another portion of the Site;
- contaminants, other than those previously identified, have been discovered;
- each time a different task or activity is initiated;
- during trenching and/or excavation work.

The designated Site Safety Officer will record air monitoring data and ensure that air monitoring instruments are calibrated and maintained in accordance with manufacturer's specifications. Instruments will be zeroed daily and checked for accuracy. Monitoring results will be recorded in a field notebook and will be transferred to instrument reading logs.

5.2 Work Stoppage Responses

The following responses will be initiated whenever one or more of the action levels necessitating a work stoppage are exceeded:

- 1 The SSO will be consulted immediately
- 2 All personnel (except as necessary for continued monitoring and contaminant migration, if applicable) will be cleared from the work area (eg from the exclusion zone).
- 3 Monitoring will be continued until intrusive work resumes.

5.3 Action Levels During Excavation Activities

Instrument readings will be taken in the breathing zone above the excavation pit unless otherwise noted. Each action level is independent of all other action levels in determining responses.

Organic Vapors (PID)	LEL %	Responses
0-1 ppm above background	0%	• Continue excavating • Level D protection • Continue monitoring every 10 minutes

1-5 ppm Above Background, Sustained Reading	1-10%	• Continue excavating • Go to Level C protection or employ engineering controls • Continue monitoring every 10 minutes
5-25 ppm Above Background, Sustained Reading	10-20%	• Discontinue excavating, unless PID is only action level exceeded. • Level C protection or employ engineering controls • Continue monitoring for organic vapors 200 ft downwind • Continuous monitoring for LEL at excavation pit
>25 ppm Above Background, Sustained Reading	>20%	• Discontinue excavating • Withdraw from area, shut off all engine ignition sources. • Allow pit to vent • Continuous monitoring for organic vapors 200 ft downwind.

Notes: Air monitoring will occur in the breathing zone 30 inches above the excavation pit. Readings may also be taken in the excavation pit but will not be used for action levels.

If action levels for any one of the monitoring parameters are exceeded, the appropriate responses listed in the right hand column should be taken. If instrument readings do not return to acceptable levels after the excavation pit has been vented for a period of greater than one-half hour, a decision will then be made whether or not to seal the pit with suppressant foam.

If, during excavation activities, downwind monitoring PID readings are greater than 5 ppm above background for more than one-half hour, excavation will stop until sustained levels are less than 5 ppm (see Community Air Monitoring Plan).

6.0 SITE CONTROL

6.1 Work Zones

The primary purpose of Site controls is to establish the perimeter of a hazardous area, to reduce the migration of contaminants into clean areas, and to prevent access or exposure to hazardous materials by unauthorized persons. When operations are to take place involving hazardous materials, the Site Safety Officer will establish an exclusion zone, a decontamination zone, and a support zone. These zones "float" (move around the Site) depending on the tasks being performed on any given day. The Site Safety Officer will outline these locations before work begins and when zones change. The Site Safety Officer records this information in the Site log book.

Due to the dimensions of the Site and the work area, it is expected that an exclusion zone will include the entire fenced area with the exception of the construction entrance area, which will serve as the decontamination zone. A support zone if needed will be located outside of the fenced area. All on-Site workers engaged in the excavation of hazardous or contaminated materials must provide evidence of OSHA 24 or 40-hour Hazardous Waste Operations and Emergency Response Operations training to conduct work within the exclusion zone established by the Site Safety Officer. Gross decontamination (as determined by the Site Health and Safety Officer) is conducted in the exclusion zone; all other decontamination is performed in the decontamination zone or trailer.

Protective equipment is removed in the decontamination zone. Disposable protective equipment is stored in receptacles staged in the decontamination zone, and non-disposable equipment is decontaminated. All personnel and equipment exit the exclusion zone through the decontamination zone. If a decontamination trailer is provided the first aid equipment, an eye wash unit, and drinking water are kept in the decontamination trailer.

The support zone is used for vehicle parking, daily safety meetings, and supply storage. Eating, drinking, and smoking are permitted only in the support zone. When a decontamination trailer is not provided, the eye wash unit, first aid equipment, and drinking water are kept at a central location designated by the Site Safety Officer.

7.0 CONTINGENCY PLAN/EMERGENCY RESPONSE PLAN

Site personnel must be prepared in the event of an emergency. Emergencies can take many forms: illnesses, injuries, chemical exposure, fires, explosions, spills, leaks, releases of harmful contaminants, or sudden changes in the weather.

Emergency telephone numbers and a map to the hospital will be posted in the command post. Site personnel should be familiar with the emergency procedures, and the locations of Site safety, first aid, and communication equipment.

7.1 Emergency Equipment On-Site

Private telephones:	Site personnel.
Two-way radios:	Site personnel where necessary.
Emergency Alarms:	On-Site vehicle horns*.
First aid kits:	On-Site, in vehicles or office.
Fire extinguisher:	On-Site, in office or on equipment.

* Horns: Air horns will be supplied to personnel at the discretion of the project superintendent or Site Safety Officer.

7.2 Emergency Telephone Numbers

General Emergencies	911
New York City Police	911
NYC Health + Hospitals	1-212-263-5800
NYSDEC Spills Division	1-800-457-7362
NYSDEC Hazardous Waste Division	1-718-482-4994
NYCDEP	1-718-699-9811
NYC Department of Health	1-212-788-4711
NYC Fire Department	911
National Response Center	1-800-424-8802
Poison Control	1-212-340-4494
Site Safety Officer	1-631-504-6000
Alternate Site Safety Officer	1-631-504-6000

7.3 Personnel Responsibilities During an Emergency

The project manager is primarily responsible for responding to and correcting any emergency situations. However, in the absence of the project manager, the Site Safety Officer shall act as the project manager's on-Site designee and perform the following tasks:

- Take appropriate measures to protect personnel including: withdrawal from the exclusion zone, evacuate and secure the Site, or upgrade/downgrade the level of protective clothing and respiratory protection;
- Ensure that appropriate federal, state, and local agencies are informed and emergency response plans are coordinated. In the event of fire or explosion, the local fire department

should be summoned immediately. If toxic materials are released to the air, the local authorities should be informed in order to assess the need for evacuation;

- Ensure appropriate decontamination, treatment, or testing for exposed or injured personnel;
- Determine the cause of incidents and make recommendations to prevent recurrence; and,
- Ensure that all required reports have been prepared.

The following key personnel are planned for this project:

• Project Manager	Keith Butler (631) 504-6000
• Construction Health and Safety Manager	Evan Kashanian (347) 234-2285
• Site Safety Officer	Tom Gallo (631) 504-6000

7.4 Medical Emergencies

A person who becomes ill or injured in the exclusion zone will be decontaminated to the maximum extent possible. If the injury or illness is minor, full decontamination will be completed and first aid administered prior to transport. First aid will be administered while waiting for an ambulance or paramedics. A Field Accident Report (**Appendix D**) must be filled out for any injury.

A person transporting an injured/exposed person to a clinic or hospital for treatment will take the directions to the hospital (**Appendix D**), and information on the chemical(s) to which they may have been exposed (**Appendix C**).

7.5 Fire or Explosion

In the event of a fire or explosion, the local fire department will be summoned immediately. The Site Safety Officer or his designated alternate will advise the fire commander of the location, nature and identification of the hazardous materials on-Site. If it is safe to do so, Site personnel may:

- use fire fighting equipment available on Site; or,
- remove or isolate flammable or other hazardous materials that may contribute to the fire.

7.6 Evacuation Routes

Evacuation routes established by work area locations for each Site will be reviewed prior to commencing Site operations. As the work areas change, the evacuation routes will be altered accordingly, and the new route will be reviewed.

Under extreme emergency conditions, evacuation is to be immediate without regard for equipment. The evacuation signal will be a continuous blast of a vehicle horn, if possible, and/or by verbal/radio communication. When evacuating the Site, personnel will follow these instructions:

- Keep upwind of smoke, vapors, or spill location.
- Exit through the decontamination corridor if possible.
- If evacuation through the decontamination corridor is not possible, personnel should remove contaminated clothing once they are in a safe location and leave it near the exclusion zone or in a safe place.
- The Site Safety Officer will conduct a head count to ensure that all personnel have been evacuated safely. The head count will be correlated to the Site and/or exclusion zone entry/exit log.
- If emergency Site evacuation is necessary, all personnel are to escape the emergency situation and decontaminate to the maximum extent practical.

7.7 Spill Control Procedures

Spills associated with Site activities may be attributed to project equipment and include gasoline, diesel and hydraulic oil. In the event of a leak or a release, Site personnel will inform their supervisor immediately, locate the source of spillage and stop the flow if it can be done safely. A spill containment kit including absorbent pads, booms and/or granulated speedy dry absorbent material will be available to Site personnel to facilitate the immediate recovery of the spilled material. Daily inspections of Site equipment components including hydraulic lines, fuel tanks, etc. will be performed by their respective operators as a preventative measure for equipment leaks and to ensure equipment soundness. In the event of a spill, Site personnel will immediately notify the NYSDEC (1-800-457-7362), and a spill number will be generated.

7.8 Vapor Release Plan

If work zone organic vapor (excluding methane) exceeds 5 ppm, then a downwind reading will be made either 200 feet from the work zone or at the property line, whichever is closer. If readings at this location exceed 5 ppm over background, the work will be stopped.

If 5 ppm of VOCs are recorded over background on a PID at the property line, then an off-Site reading will be taken within 20 feet of the nearest residential or commercial property, whichever is closer. If efforts to mitigate the emission source are unsuccessful for 30 minutes, then the designated Site Safety Officer will:

- Contact the local police;
- Continue to monitor air every 30 minutes, 20 feet from the closest off-Site property. If two successive readings are below 5 ppm (non-methane), off-Site air monitoring will be halted; and
- All property line and off-Site air monitoring locations and results associated with vapor releases will be recorded in the Site safety log book.

APPENDIX A
SITE SAFETY ACKNOWLEDGEMENT FORM

DAILY BRIEFING SIGN-IN SHEET

Date: _____ Person Conducting Briefing: _____

Project Name and Location: _____

1. AWARENESS (topics discussed, special safety concerns, recent incidents, etc...):

2. OTHER ISSUES (HASP changes, attendee comments, etc...):

3. ATTENDEES (Print Name):

1.	11.
2.	12.
3.	13.
4.	14.
5.	15.
6.	16.
7.	17.
8.	18.
9.	19.
10.	20.

APPENDIX B
SITE SAFETY PLAN AMENDMENTS

SITE SAFETY PLAN AMENDMENT FORM

Site Safety Plan Amendment #: _____

Site Name: _____

Reason for Amendment: _____

Alternative Procedures: _____

Required Changes in PPE: _____

Project Superintendent (signature)

Date

Health and Safety Consultant (signature)

Date

Site Safety Officer (signature)

Date

APPENDIX C

CHEMICAL HAZARDS

CHEMICAL HAZARDS

The attached International Chemical Safety Cards are provided for contaminants of concern that have been identified in soils and/or groundwater at the site.

International Chemical Safety Cards

ACETONE

ICSC: 0087



2-Propanone
Dimethyl ketone
Methyl ketone
 C_3H_6O / CH_3COCH_3
Molecular mass: 58.1

ICSC # 0087
CAS # 67-64-1
RTECS # [AL3150000](#)
UN # 1090
EC # 606-001-00-8
April 22, 1994 Validated
Fi, review at IHE: 10/09/89



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable.	NO open flames, NO sparks, and NO smoking.	Powder, alcohol-resistant foam, water in large amounts, carbon dioxide.
EXPLOSION	Vapour/air mixtures are explosive.	Closed system, ventilation, explosion-proof electrical equipment and lighting. Do NOT use compressed air for filling, discharging, or handling.	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE			
• INHALATION	Sore throat. Cough. Confusion. Headache. Dizziness. Drowsiness. Unconsciousness.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Dry skin.	Protective gloves.	Remove contaminated clothes. Rinse skin with plenty of water or shower.
• EYES	Redness. Pain. Blurred vision. Possible corneal damage.	Safety spectacles or face shield . Contact lenses should not be worn.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Nausea. Vomiting. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Personal protection: self-contained breathing apparatus. Ventilation. Collect leaking liquid in sealable containers. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT wash away into sewer. Then wash away with plenty of water.	Fireproof. Separated from strong oxidants. Store in an area without drain or sewer access.	F symbol Xi symbol R: 11-36-66-67 S: 2-9-16-26 UN Hazard Class: 3 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0087

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

ACETONE

ICSC: 0087

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR. PHYSICAL DANGERS: The vapour is heavier than air and may travel along the ground; distant ignition possible. CHEMICAL DANGERS: The substance can form explosive peroxides on contact with strong oxidants such as acetic acid, nitric acid, hydrogen peroxide. Reacts with chloroform and bromoform under basic conditions, causing fire and explosion hazard. Attacks plastic. OCCUPATIONAL EXPOSURE LIMITS: TLV: 500 ppm as TWA, 750 ppm as STEL; A4 (not classifiable as a human carcinogen); BEI issued; (ACGIH 2004). MAK: 500 ppm 1200 mg/m³ Peak limitation category: I(2); Pregnancy risk group: D; (DFG 2006). OSHA PEL⁺: TWA 1000 ppm (2400 mg/m³) NIOSH REL: TWA 250 ppm (590 mg/m³) NIOSH IDLH: 2500 ppm 10%LEL See: 67641	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation and through the skin. INHALATION RISK: A harmful contamination of the air can be reached rather quickly on evaporation of this substance at 20°C; on spraying or dispersing, however, much faster. EFFECTS OF SHORT-TERM EXPOSURE: The vapour irritates the eyes and the respiratory tract. The substance may cause effects on the central nervous system , liver , kidneys and gastrointestinal tract . EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact with skin may cause dermatitis. The substance may have effects on the blood and bone marrow .

PHYSICAL PROPERTIES	Boiling point: 56°C Melting point: -95°C Relative density (water = 1): 0.8 Solubility in water: miscible Vapour pressure, kPa at 20°C: 24	Relative vapour density (air = 1): 2.0 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.2 Flash point: -18°C c.c. Auto-ignition temperature: 465°C Explosive limits, vol% in air: 2.2-13 Octanol/water partition coefficient as log Pow: -0.24

ENVIRONMENTAL DATA	

NOTES

Use of alcoholic beverages enhances the harmful effect. Transport Emergency Card: TEC (R)-30S1090 NFPA Code: H 1; F 3; R 0; Card has been partially updated in July 2007: see Occupational Exposure Limits. Card has been partially updated in January 2008: see Storage.

ADDITIONAL INFORMATION

ICSC: 0087 (C) IPCS, CEC, 1994	ACETONE

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

ETHYLBENZENE

ICSC: 0268



Ethylbenzol
Phenylethane
EB
 $C_8H_{10} / C_6H_5C_2H_5$
Molecular mass: 106.2

ICSC # 0268
CAS # 100-41-4
RTECS # [DA0700000](#)
UN # 1175
EC # 601-023-00-4
March 13, 1995 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable.	NO open flames, NO sparks, and NO smoking.	Powder, AFFF, foam, carbon dioxide.
EXPLOSION	Vapour/air mixtures are explosive.	Closed system, ventilation, explosion-proof electrical equipment and lighting. Do NOT use compressed air for filling, discharging, or handling.	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		PREVENT GENERATION OF MISTS!	
• INHALATION	Cough. Dizziness. Drowsiness. Headache.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Dry skin. Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness. Pain. Blurred vision.	Face shield or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	(Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Give a slurry of activated charcoal in water to drink. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Ventilation. Collect leaking liquid in covered containers. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT wash away into sewer. Personal protection: A filter respirator for organic gases and vapours.	Fireproof. Separated from strong oxidants.	F symbol Xn symbol R: 11-20 S: 2-16-24/25-29 UN Hazard Class: 3 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0268

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

ETHYLBENZENE

ICSC: 0268

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH AROMATIC ODOUR. PHYSICAL DANGERS: The vapour mixes well with air, explosive mixtures are easily formed. CHEMICAL DANGERS: Reacts with strong oxidants. Attacks plastic and rubber. OCCUPATIONAL EXPOSURE LIMITS: TLV: 100 ppm as TWA 125 ppm as STEL A3 (confirmed animal carcinogen with unknown relevance to humans); BEI issued (ACGIH 2005). MAK: skin absorption (H); Carcinogen category: 3A; (DFG 2004). OSHA PEL: TWA 100 ppm (435 mg/m³) NIOSH REL: TWA 100 ppm (435 mg/m³) ST 125 ppm (545 mg/m³) NIOSH IDLH: 800 ppm 10%LEL See: 100414	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its vapour, through the skin and by ingestion. INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C. EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes the skin and the respiratory tract Swallowing the liquid may cause aspiration into the lungs with the risk of chemical pneumonitis. The substance may cause effects on the central nervous system Exposure far above the OEL could cause lowering of consciousness. EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact with skin may cause dermatitis.

PHYSICAL PROPERTIES	Boiling point: 136°C Melting point: -95°C Relative density (water = 1): 0.9 Solubility in water, g/100 ml at 20°C: 0.015 Vapour pressure, kPa at 20°C: 0.9 Relative vapour density (air = 1): 3.7	Relative density of the vapour/air-mixture at 20°C (air = 1): 1.02 Flash point: 18°C c.c. Auto-ignition temperature: 432°C Explosive limits, vol% in air: 1.0-6.7 Octanol/water partition coefficient as log Pow: 3.2

ENVIRONMENTAL DATA	The substance is harmful to aquatic organisms.	

NOTES

The odour warning when the exposure limit value is exceeded is insufficient.	Transport Emergency Card: TEC (R)-30S1175 or 30GF1-I+II NFPA Code: H2; F3; R0

ADDITIONAL INFORMATION

ICSC: 0268	ETHYLBENZENE
(C) IPCS, CEC, 1994	

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

o-XYLENE

ICSC: 0084



ortho-Xylene
1,2-Dimethylbenzene
o-Xylol
 $C_6H_4(CH_3)_2 / C_8H_{10}$
Molecular mass: 106.2

ICSC # 0084
CAS # 95-47-6
RTECS # [ZE2450000](#)
UN # 1307
EC # 601-022-00-9
August 03, 2002 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Flammable.	NO open flames, NO sparks, and NO smoking.	Powder, water spray, foam, carbon dioxide.
EXPLOSION	Above 32°C explosive vapour/air mixtures may be formed.	Above 32°C use a closed system, ventilation, and explosion-proof electrical equipment. Prevent build-up of electrostatic charges (e.g., by grounding).	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		STRICT HYGIENE! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
•INHALATION	Dizziness. Drowsiness. Headache. Nausea.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
•SKIN	Dry skin. Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES	Redness. Pain.	Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Burning sensation. Abdominal pain. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Ventilation. Remove all ignition sources. Collect leaking and spilled liquid in sealable containers as far as possible. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT let this chemical enter the environment. (Extra personal protection: filter respirator for organic gases and vapours.)	Fireproof. Separated from strong oxidants strong acids	Note: C Xn symbol R: 10-20/21-38 S: 2-25 UN Hazard Class: 3 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0084

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

o-XYLENE

ICSC: 0084

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.
	PHYSICAL DANGERS: As a result of flow, agitation, etc., electrostatic charges can be generated.	INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C.
	CHEMICAL DANGERS: Reacts with strong acids strong oxidants	EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes and the skin The substance may cause effects on the central nervous system If this liquid is swallowed, aspiration into the lungs may result in chemical pneumonitis.
	OCCUPATIONAL EXPOSURE LIMITS: TLV: 100 ppm as TWA 150 ppm as STEL A4 (ACGIH 2001). BEI (ACGIH 2001). MAK: 100 ppm 440 mg/m³ Peak limitation category: II(2) skin absorption (H); Pregnancy risk group: D (DFG 2005). EU OEL: 50 ppm as TWA 100 ppm as STEL (skin) (EU 2000). OSHA PEL†: TWA 100 ppm (435 mg/m³) NIOSH REL: TWA 100 ppm (435 mg/m³) ST 150 ppm (655 mg/m³) NIOSH IDLH: 900 ppm See: 95476	EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. The substance may have effects on the central nervous system. Exposure to the substance may enhance hearing damage caused by exposure to noise. Animal tests show that this substance possibly causes toxicity to human reproduction or development.
PHYSICAL PROPERTIES	Boiling point: 144°C Melting point: -25°C Relative density (water = 1): 0.88 Solubility in water: none Vapour pressure, kPa at 20°C: 0.7	Relative vapour density (air = 1): 3.7 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.02 Flash point: 32°C c.c. Auto-ignition temperature: 463°C Explosive limits, vol% in air: 0.9-6.7 Octanol/water partition coefficient as log Pow: 3.12
ENVIRONMENTAL DATA	The substance is toxic to aquatic organisms.	
NOTES		
Depending on the degree of exposure, periodic medical examination is indicated. The recommendations on this Card also apply to technical xylene. See ICSC 0086 p-Xylene and 0085 m-Xylene.		
Transport Emergency Card: TEC (R)-30S1307-III NFPA Code: H 2; F 3; R 0;		
ADDITIONAL INFORMATION		
ICSC: 0084		
o-XYLENE		
(C) IPCS, CEC, 1994		

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

p-XYLENE

ICSC: 0086



para-Xylene
1,4-Dimethylbenzene
p-Xylol
 $C_6H_4(CH_3)_2$ / C_8H_{10}
Molecular mass: 106.2

ICSC # 0086
CAS # 106-42-3
RTECS # [ZE2625000](#)
UN # 1307
EC # 601-022-00-9
August 03, 2002 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Flammable.	NO open flames, NO sparks, and NO smoking.	Powder, water spray, foam, carbon dioxide.
EXPLOSION	Above 27°C explosive vapour/air mixtures may be formed.	Above 27°C use a closed system, ventilation, and explosion-proof electrical equipment. Prevent build-up of electrostatic charges (e.g., by grounding).	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		STRICT HYGIENE! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
•INHALATION	Dizziness. Drowsiness. Headache. Nausea.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
•SKIN	Dry skin. Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES	Redness. Pain.	Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Burning sensation. Abdominal pain. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Ventilation. Remove all ignition sources. Collect leaking and spilled liquid in sealable containers as far as possible. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT let this chemical enter the environment. (Extra personal protection: filter respirator for organic gases and vapours.)	Fireproof. Separated from strong oxidants, strong acids	Note: C Xn symbol R: 10-20/21-38 S: 2-25 UN Hazard Class: 3 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0086

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

p-XYLENE

ICSC: 0086

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR. PHYSICAL DANGERS: As a result of flow, agitation, etc., electrostatic charges can be generated. CHEMICAL DANGERS: Reacts with strong acids strong oxidants OCCUPATIONAL EXPOSURE LIMITS: TLV: 100 ppm as TWA 150 ppm as STEL A4 (ACGIH 2001). BEI (ACGIH 2001). MAK: 100 ppm 440 mg/m³ Peak limitation category: II(2) skin absorption (H); Pregnancy risk group: D (DFG 2005). EU OEL: 50 ppm as TWA 100 ppm as STEL (skin) (EU 2000). OSHA PEL⁺: TWA 100 ppm (435 mg/m³) NIOSH REL: TWA 100 ppm (435 mg/m³) ST 150 ppm (655 mg/m³) NIOSH IDLH: 900 ppm See: 95476	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion. INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C. EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes and the skin The substance may cause effects on the central nervous system If this liquid is swallowed, aspiration into the lungs may result in chemical pneumonitis. EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. The substance may have effects on the central nervous system. Animal tests show that this substance possibly causes toxicity to human reproduction or development.

PHYSICAL PROPERTIES	Boiling point: 138°C Melting point: 13°C Relative density (water = 1): 0.86 Solubility in water: none Vapour pressure, kPa at 20°C: 0.9	Relative vapour density (air = 1): 3.7 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.02 Flash point: 27°C c.c. Auto-ignition temperature: 528°C Explosive limits, vol% in air: 1.1-7.0 Octanol/water partition coefficient as log Pow: 3.15

ENVIRONMENTAL DATA	The substance is toxic to aquatic organisms.	

NOTES

Depending on the degree of exposure, periodic medical examination is indicated. The recommendations on this Card also apply to technical xylene. See ICSC 0084 o-Xylene and 0085 m-Xylene.

Transport Emergency Card: TEC (R)-30S1307-III
NFPA Code: H 2; F 3; R 0;

ADDITIONAL INFORMATION

ICSC: 0086	p-XYLENE

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

m-XYLENE

ICSC: 0085



meta-Xylene
1,3-Dimethylbenzene
m-Xylol
 $C_6H_4(CH_3)_2$ / C_8H_{10}
Molecular mass: 106.2

ICSC # 0085
CAS # 108-38-3
RTECS # [ZE2275000](#)
UN # 1307
EC # 601-022-00-9
August 03, 2002 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Flammable.	NO open flames, NO sparks, and NO smoking.	Powder, water spray, foam, carbon dioxide.
EXPLOSION	Above 27°C explosive vapour/air mixtures may be formed.	Above 27°C use a closed system, ventilation, and explosion-proof electrical equipment. Prevent build-up of electrostatic charges (e.g., by grounding).	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		STRICT HYGIENE!	
• INHALATION	Dizziness. Drowsiness. Headache. Nausea.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Dry skin. Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness. Pain.	Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Burning sensation. Abdominal pain. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Ventilation. Remove all ignition sources. Collect leaking and spilled liquid in sealable containers as far as possible. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT let this chemical enter the environment. (Extra personal protection: filter respirator for organic gases and vapours.)	Fireproof. Separated from strong oxidants strong acids	Note: C Xn symbol R: 10-20/21-38 S: 2-25 UN Hazard Class: 3 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0085

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

m-XYLENE

ICSC: 0085

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.	
	PHYSICAL DANGERS: As a result of flow, agitation, etc., electrostatic charges can be generated.	INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C.	
	CHEMICAL DANGERS: Reacts with strong acids strong oxidants	EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes and the skin The substance may cause effects on the central nervous system If this liquid is swallowed, aspiration into the lungs may result in chemical pneumonitis.	
	OCCUPATIONAL EXPOSURE LIMITS: TLV: 100 ppm as TWA 150 ppm as STEL A4 (ACGIH 2001). BEI (ACGIH 2001). MAK: 100 ppm 440 mg/m³ Peak limitation category: II(2) skin absorption (H); Pregnancy risk group: D (DFG 2005). EU OEL: 50 ppm as TWA 100 ppm as STEL (skin) (EU 2000). OSHA PEL†: TWA 100 ppm (435 mg/m³) NIOSH REL: TWA 100 ppm (435 mg/m³) ST 150 ppm (655 mg/m³) NIOSH IDLH: 900 ppm See: 95476	EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. The substance may have effects on the central nervous system Animal tests show that this substance possibly causes toxicity to human reproduction or development.	
	PHYSICAL PROPERTIES	Boiling point: 139°C Melting point: -48°C Relative density (water = 1): 0.86 Solubility in water: none Vapour pressure, kPa at 20°C: 0.8	Relative vapour density (air = 1): 3.7 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.02 Flash point: 27°C c.c. Auto-ignition temperature: 527°C Explosive limits, vol% in air: 1.1-7.0 Octanol/water partition coefficient as log Pow: 3.20
		ENVIRONMENTAL DATA	The substance is toxic to aquatic organisms. 
NOTES			
Depending on the degree of exposure, periodic medical examination is indicated. The recommendations on this Card also apply to technical xylene. See ICSC 0084 o-Xylene and 0086 p-Xylene. NFPA Code: H 2; F 3; R 0; Transport Emergency Card: TEC (R)-30S1307-III			
ADDITIONAL INFORMATION			
ICSC: 0085 (C) IPCS, CEC, 1994 m-XYLENE			
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.		

International Chemical Safety Cards

TOLUENE

ICSC: 0078



Methylbenzene
Toluol
Phenylmethane
 $C_6H_5CH_3$ / C_7H_8
Molecular mass: 92.1

ICSC # 0078
CAS # 108-88-3
RTECS # [XS5250000](#)
UN # 1294
EC # 601-021-00-3
October 10, 2002 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable.	NO open flames, NO sparks, and NO smoking.	Powder, AFFF, foam, carbon dioxide.
EXPLOSION	Vapour/air mixtures are explosive.	Closed system, ventilation, explosion-proof electrical equipment and lighting. Prevent build-up of electrostatic charges (e.g., by grounding). Do NOT use compressed air for filling, discharging, or handling. Use non-sparking handtools.	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		STRICT HYGIENE! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
• INHALATION	Cough. Sore throat. Dizziness. Drowsiness. Headache. Nausea. Unconsciousness.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Dry skin. Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap. Refer for medical attention.
• EYES	Redness. Pain.	Safety goggles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Burning sensation. Abdominal pain. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.
SPILLAGE DISPOSAL		STORAGE	PACKAGING & LABELLING
Evacuate danger area in large spill! Consult an expert in large spill! Remove all ignition sources. Ventilation. Collect leaking liquid in sealable containers. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT wash away into sewer. Do NOT let this chemical enter the environment. Personal protection: self-contained breathing apparatus		Fireproof. Separated from strong oxidants.	F symbol Xn symbol R: 11-38-48/20-63-65-67 S: 2-36/37-46-62 UN Hazard Class: 3 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0078

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

TOLUENE

ICSC: 0078

I M P O R T A N T I N F O R M A T I O N	PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.
	PHYSICAL DANGERS: The vapour mixes well with air, explosive mixtures are formed easily. As a result of flow, agitation, etc., electrostatic charges can be generated.	INHALATION RISK: A harmful contamination of the air can be reached rather quickly on evaporation of this substance at 20°C.
	CHEMICAL DANGERS: Reacts violently with strong oxidants causing fire and explosion hazard.	EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes and the respiratory tract The substance may cause effects on the central nervous system If this liquid is swallowed, aspiration into the lungs may result in chemical pneumonitis. Exposure at high levels may result in cardiac dysrhythmia and unconsciousness.
	OCCUPATIONAL EXPOSURE LIMITS: TLV: 50 ppm as TWA (skin) A4 BEI issued (ACGIH 2004). MAK: 50 ppm 190 mg/m ³ H Peak limitation category: II(4) Pregnancy risk group: C (DFG 2004). OSHA PEL: TWA 200 ppm C 300 ppm 500 ppm (10-minute maximum peak) NIOSH REL: TWA 100 ppm (375 mg/m ³) ST 150 ppm (560 mg/m ³) NIOSH IDLH: 500 ppm See: 108883	EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. The substance may have effects on the central nervous system Exposure to the substance may enhance hearing damage caused by exposure to noise. Animal tests show that this substance possibly causes toxicity to human reproduction or development.

PHYSICAL PROPERTIES	Boiling point: 111°C Melting point: -95°C Relative density (water = 1): 0.87 Solubility in water: none Vapour pressure, kPa at 25°C: 3.8 Relative vapour density (air = 1): 3.1	Relative density of the vapour/air-mixture at 20°C (air = 1): 1.01 Flash point: 4°C c.c. Auto-ignition temperature: 480°C Explosive limits, vol% in air: 1.1-7.1 Octanol/water partition coefficient as log Pow: 2.69

ENVIRONMENTAL DATA	The substance is toxic to aquatic organisms.	

NOTES

Depending on the degree of exposure, periodic medical examination is suggested. Use of alcoholic beverages enhances the harmful effect.

Transport Emergency Card: TEC (R)-30S1294

NFPA Code: H 2; F 3; R 0;

ADDITIONAL INFORMATION

ICSC: 0078

TOLUENE

(C) IPCS, CEC, 1994

IMPORTANT
LEGAL
NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZ(a)ANTHRACENE

ICSC: 0385



1,2-Benzoanthracene
Benzo(a)anthracene
2,3-Benzphenanthrene
Naphthanthracene
 $C_{18}H_{12}$
Molecular mass: 228.3

ICSC # 0385
CAS # 56-55-3
RTECS # [CV9275000](#)
EC # 601-033-00-9
October 23, 1995 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.		Water spray, powder. In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION	Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE		AVOID ALL CONTACT!	
•INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
•SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES		Safety goggles face shield or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION		Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into sealable containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Personal protection: complete protective clothing including self-contained breathing apparatus.	Well closed.	T symbol N symbol R: 45-50/53 S: 53-45-60-61

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0385

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

ICSC: 0385

BENZ(a)ANTHRACENE

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: COLOURLESS TO YELLOW BROWN FLUORESCENT FLAKES OR POWDER.	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.
	PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air.	INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly.
	CHEMICAL DANGERS:	EFFECTS OF SHORT-TERM EXPOSURE:
	OCCUPATIONAL EXPOSURE LIMITS: TLV: A2 (suspected human carcinogen); (ACGIH 2004). MAK: Carcinogen category: 2 (as pyrolysis product of organic materials) (DFG 2005).	EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: This substance is probably carcinogenic to humans.
PHYSICAL PROPERTIES	Sublimation point: 435°C Melting point: 162°C Relative density (water = 1): 1.274 Solubility in water: none	Vapour pressure, Pa at 20°C: 292 Octanol/water partition coefficient as log Pow: 5.61
ENVIRONMENTAL DATA	Bioaccumulation of this chemical may occur in seafood.	
NOTES		
This substance is one of many polycyclic aromatic hydrocarbons - standards are usually established for them as mixtures, e.g., coal tar pitch volatiles. However, it may be encountered as a laboratory chemical in its pure form. Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken. Do NOT take working clothes home. Tetraphene is a common name. Card has been partly updated in October 2005 and August 2006: see sections Occupational Exposure Limits, EU classification.		
ADDITIONAL INFORMATION		
ICSC: 0385 BENZ(a)ANTHRACENE (C) IPCS, CEC, 1994		
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

International Chemical Safety Cards

BENZO(a)PYRENE

ICSC: 0104



Benz(a)pyrene
3,4-Benzopyrene
Benzo(d,e,f)chrysene
 $C_{20}H_{12}$
Molecular mass: 252.3

ICSC # 0104
CAS # 50-32-8
RTECS # [DJ3675000](#)
EC # 601-032-00-3
October 17, 2005 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Water spray, foam, powder, carbon dioxide.
EXPLOSION			
EXPOSURE	See EFFECTS OF LONG-TERM OR REPEATED EXPOSURE.	AVOID ALL CONTACT! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
• INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
• SKIN	MAY BE ABSORBED!	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES		Safety goggles or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	Induce vomiting (ONLY IN CONSCIOUS PERSONS!). Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Evacuate danger area! Personal protection: complete protective clothing including self-contained breathing apparatus. Do NOT let this chemical enter the environment. Sweep spilled substance into sealable containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place.	Separated from strong oxidants.	T symbol N symbol R: 45-46-60-61-43-50/53 S: 53-45-60-61

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0104

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZO(a)PYRENE

ICSC: 0104

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: PALE-YELLOW CRYSTALS	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol, through the skin and by ingestion.
	PHYSICAL DANGERS:	INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed.
	CHEMICAL DANGERS: Reacts with strong oxidants causing fire and explosion hazard.	EFFECTS OF SHORT-TERM EXPOSURE:
	OCCUPATIONAL EXPOSURE LIMITS: TLV: Exposure by all routes should be carefully controlled to levels as low as possible A2 (suspected human carcinogen); (ACGIH 2005). MAK: Carcinogen category: 2; Germ cell mutagen group: 2; (DFG 2005).	EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: This substance is carcinogenic to humans. May cause heritable genetic damage to human germ cells. Animal tests show that this substance possibly causes toxicity to human reproduction or development.
PHYSICAL PROPERTIES	Boiling point: 496°C Melting point: 178.1°C Density: 1.4 g/cm³	Solubility in water: none (<0.1 g/100 ml) Vapour pressure : negligible Octanol/water partition coefficient as log Pow: 6.04
ENVIRONMENTAL DATA	The substance is very toxic to aquatic organisms. Bioaccumulation of this chemical may occur in fish, in plants and in molluscs. The substance may cause long-term effects in the aquatic environment.	
NOTES		
Do NOT take working clothes home. Benzo(a)pyrene is present as a component of polycyclic aromatic hydrocarbons (PAHs) in the environment, usually resulting from the incomplete combustion or pyrolysis of organic matters, especially fossil fuels and tobacco.		
ADDITIONAL INFORMATION		
ICSC: 0104		BENZO(a)PYRENE
(C) IPCS, CEC, 1994		
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

International Chemical Safety Cards

BENZO(b)FLUORANTHENE

ICSC: 0720



Benz(e)acephenanthrylene
2,3-Benzofluoranthene
Benzo(e)fluoranthene
3,4-Benzofluoranthene
 $C_{20}H_{12}$
Molecular mass: 252.3

ICSC # 0720
CAS # 205-99-2
RTECS # [CU1400000](#)
EC # 601-034-00-4
March 25, 1999 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE			In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION			
EXPOSURE		AVOID ALL CONTACT!	
•INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
•SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES		Safety spectacles or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into covered containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment.	Provision to contain effluent from fire extinguishing. Well closed.	T symbol N symbol R: 45-50/53 S: 53-45-60-61

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0720

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZO(b)FLUORANTHENE

ICSC: 0720

I	PHYSICAL STATE; APPEARANCE: COLOURLESS CRYSTALS	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation

M P O R T A N T D A T A	PHYSICAL DANGERS:		of its aerosol and through the skin.
	CHEMICAL DANGERS: Upon heating, toxic fumes are formed.		INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly.
	OCCUPATIONAL EXPOSURE LIMITS: TLV: A2 (suspected human carcinogen); (ACGIH 2004). MAK: Carcinogen category: 2; (DFG 2004).		EFFECTS OF SHORT-TERM EXPOSURE:
			EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: This substance is possibly carcinogenic to humans. May cause genetic damage in humans.
PHYSICAL PROPERTIES	Boiling point: 481°C Melting point: 168°C Solubility in water: none		Octanol/water partition coefficient as log Pow: 6.12
ENVIRONMENTAL DATA	This substance may be hazardous to the environment; special attention should be given to air quality and water quality.		
NOTES			
Benzo(b)fluoranthene is present as a component of polycyclic aromatic hydrocarbons (PAH) content in the environment usually resulting from the incomplete combustion or pyrolysis of organic matters, especially fossil fuels and tobacco.ACGIH recommends environment containing benzo(b)fluoranthene should be evaluated in terms of the TLV-TWA for coal tar pitch volatile, as benzene soluble 0.2 mg/m³. Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken.			
ADDITIONAL INFORMATION			
ICSC: 0720		BENZO(b)FLUORANTHENE	
(C) IPCS, CEC, 1994			
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.		

International Chemical Safety Cards

BENZO(g,h,i)FLUORANTHENE

ICSC: 0527



2,13-Benzofluoranthene
Benzo(mno)fluoranthene
 $C_{18}H_{10}$
Molecular mass: 226.3

ICSC # 0527

CAS # 203-12-3

RTECS # [DF6140000](#)

March 25, 1998 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Water spray, powder.
EXPLOSION			
EXPOSURE		PREVENT DISPERSION OF DUST!	
• INHALATION		Local exhaust or breathing protection.	
• SKIN	MAY BE ABSORBED!	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap. Refer for medical attention. Wear protective gloves when administering first aid.
• EYES		Safety goggles, face shield, or eye protection in combination with breathing protection if powder.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment.	Well closed.	R: S:

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0527

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZO(g,h,i)FLUORANTHENE

ICSC: 0527

I	PHYSICAL STATE; APPEARANCE: YELLOW CRYSTALS	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol and through the skin.
M		
P	PHYSICAL DANGERS:	

O R T A N T D A T A	CHEMICAL DANGERS: The substance decomposes on heating producing toxic fumes.		INHALATION RISK:	EFFECTS OF SHORT-TERM EXPOSURE:
	OCCUPATIONAL EXPOSURE LIMITS: TLV not established.		EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: See Notes.	
PHYSICAL PROPERTIES	Melting point: 149°C Solubility in water: none Vapour pressure, Pa at 20°C: <10		Relative vapour density (air = 1): 7.8 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.0 Octanol/water partition coefficient as log Pow: 7.23	
ENVIRONMENTAL DATA	This substance may be hazardous to the environment; special attention should be given to the total environment. In the food chain important to humans, bioaccumulation takes place, specifically in oils and fats.			
NOTES				
Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken. Also consult ICSC #0720 and 0721.				
ADDITIONAL INFORMATION				
ICSC: 0527		BENZO(g,h,i)FLUORANTHENE		
(C) IPCS, CEC, 1994				
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.			

International Chemical Safety Cards

BENZO(k)FLUORANTHENE

ICSC: 0721



Dibenzo(b,jk)fluorene
8,9-Benzofluoranthene
11,12-Benzofluoranthene
 $C_{20}H_{12}$
Molecular mass: 252.3

ICSC # 0721
CAS # 207-08-9
RTECS # [DF6350000](#)
EC # 601-036-00-5
March 25, 1999 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE			In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION			
EXPOSURE		AVOID ALL CONTACT!	
• INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES		Safety spectacles or eye protection in combination with breathing protection if powder.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into covered containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment.	Provision to contain effluent from fire extinguishing. Well closed.	T symbol N symbol R: 45-50/53 S: 53-45-60-61

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0721

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZO(k)FLUORANTHENE

ICSC: 0721

I	PHYSICAL STATE; APPEARANCE: YELLOW CRYSTALS	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol and through the skin.
M		

P O R T A N T D A T A	PHYSICAL DANGERS: CHEMICAL DANGERS: Upon heating, toxic fumes are formed. OCCUPATIONAL EXPOSURE LIMITS: TLV not established. MAK: Carcinogen category: 2; (DFG 2004). INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly. EFFECTS OF SHORT-TERM EXPOSURE: EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: This substance is possibly carcinogenic to humans.
PHYSICAL PROPERTIES	Boiling point: 480°C Melting point: 217°C Solubility in water: none Octanol/water partition coefficient as log Pow: 6.84
ENVIRONMENTAL DATA	This substance may be hazardous to the environment; special attention should be given to air quality and water quality. Bioaccumulation of this chemical may occur in crustacea and in fish. 
NOTES	
Benzo(k)fluoranthene is present as a component of polycyclic aromatic hydrocarbons (PAH) content in the environment usually resulting from the incomplete combustion or pyrolysis of organic matters, especially fossil fuels and tobacco.ACGIH recommends environment containing benzo(k)fluoranthene should be evaluated in terms of the TLV-TWA for coal tar pitch volatile, as benzene soluble 0.2 mg/m ³ . Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken.	
ADDITIONAL INFORMATION	
ICSC: 0721 BENZO(k)FLUORANTHENE (C) IPCS, CEC, 1994	
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

CHRYSENE

ICSC: 1672



Benzoaphenanthrene
1,2-Benzophenanthrene
1,2,5,6-Dibenzonaphthalene
 $C_{18}H_{12}$
Molecular mass: 228.3

ICSC # 1672
CAS # 218-01-9
RTECS # [GC0700000](#)
UN # 3077
EC # 601-048-00-0
October 12, 2006 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Water spray. Dry powder. Foam. Carbon dioxide.
EXPLOSION	Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE	See EFFECTS OF LONG-TERM OR REPEATED EXPOSURE.	AVOID ALL CONTACT!	
•INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
•SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES		Safety goggles	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Personal protection: P3 filter respirator for toxic particles. Do NOT let this chemical enter the environment. Sweep spilled substance into sealable containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place.	Separated from strong oxidants, Provision to contain effluent from fire extinguishing. Store in an area without drain or sewer access.	T symbol N symbol R: 45-68-50/53 S: 53-45-60-61 UN Hazard Class: 9 UN Packing Group: III Signal: Warning Aqua-Cancer Suspected of causing cancer Very toxic to aquatic life with long lasting effects Very toxic to aquatic life

SEE IMPORTANT INFORMATION ON BACK

International Chemical Safety Cards

CHRYSENE

ICSC: 1672

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: COLOURLESS TO BEIGE CRYSTALS OR POWDER PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air. CHEMICAL DANGERS: The substance decomposes on burning producing toxic fumes Reacts violently with strong oxidants OCCUPATIONAL EXPOSURE LIMITS: TLV: A3 (confirmed animal carcinogen with unknown relevance to humans); (ACGIH 2006). MAK not established.	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol, through the skin and by ingestion. INHALATION RISK: A harmful concentration of airborne particles can be reached quickly when dispersed EFFECTS OF SHORT-TERM EXPOSURE: EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: This substance is possibly carcinogenic to humans.

PHYSICAL PROPERTIES	Boiling point: 448°C Melting point: 254 - 256°C Density: 1.3 g/cm ³	Solubility in water: very poor Octanol/water partition coefficient as log Pow: 5.9

ENVIRONMENTAL DATA	The substance is very toxic to aquatic organisms. Bioaccumulation of this chemical may occur in seafood. It is strongly advised that this substance does not enter the environment. 

NOTES

Depending on the degree of exposure, periodic medical examination is suggested. Do NOT take working clothes home. This substance does not usually occur as a pure substance but as a component of polyaromatic hydrocarbon (PAH) mixtures. Human population studies have associated PAH's exposure with cancer and cardiovascular diseases.

Transport Emergency Card: TEC (R)-90GM7-III

ADDITIONAL INFORMATION

ICSC: 1672

CHRYSENE

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

DIBENZO(a,h)ANTHRACENE

ICSC: 0431



1,25,6-Dibenzanthracene



Molecular mass: 278.4

ICSC # 0431

CAS # 53-70-3

RTECS # [HN2625000](#)

EC # 601-041-00-2

October 23, 1995 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Water spray, powder.
EXPLOSION			
EXPOSURE		AVOID ALL CONTACT!	
•INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
•SKIN	Redness. Swelling. Itching.	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES	Redness.	Face shield or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION		Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth.
SPILLAGE DISPOSAL		STORAGE	PACKAGING & LABELLING
Sweep spilled substance into sealable containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Personal protection: P3 filter respirator for toxic particles.		Well closed.	T symbol N symbol R: 45-50/53 S: 53-45-60-61
SEE IMPORTANT INFORMATION ON BACK			
ICSC: 0431		Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

International Chemical Safety Cards

DIBENZO(a,h)ANTHRACENE

ICSC: 0431

I	PHYSICAL STATE; APPEARANCE: COLOURLESS CRYSTALLINE POWDER.	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.
M		
P	PHYSICAL DANGERS:	INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration
O		

R T A N T D A T A	CHEMICAL DANGERS: OCCUPATIONAL EXPOSURE LIMITS: TLV not established.		of airborne particles can, however, be reached quickly. EFFECTS OF SHORT-TERM EXPOSURE: EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the skin , resulting in photosensitization. This substance is probably carcinogenic to humans.
	PHYSICAL PROPERTIES Boiling point: 524°C Melting point: 267°C Relative density (water = 1): 1.28		Solubility in water: none Octanol/water partition coefficient as log Pow: 6.5
	ENVIRONMENTAL DATA Bioaccumulation of this chemical may occur in seafood.		
	NOTES This is one of many polycyclic aromatic hydrocarbons - standards are usually established for them as mixtures, e.g., coal tar pitch volatiles. However, it may be encountered as a laboratory chemical in its pure form. Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken. Do NOT take working clothes home. DBA is a commonly used name. This substance is one of many polycyclic aromatic hydrocarbons (PAH).		
	ADDITIONAL INFORMATION		
ICSC: 0431			DIBENZO(a,h)ANTHRACENE (C) IPCS, CEC, 1994
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.		

International Chemical Safety Cards

INDENO(1,2,3-cd)PYRENE

ICSC: 0730



o-Phenylene pyrene
2,3-Phenylene pyrene

$C_{22}H_{12}$

Molecular mass: 276.3

ICSC # 0730

CAS # 193-39-5

RTECS # [NK9300000](#)

March 25, 1999 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE			In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION			
EXPOSURE		AVOID ALL CONTACT!	
•INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
•SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES		Safety spectacles or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into covered containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment.	Provision to contain effluent from fire extinguishing. Well closed.	R: S:

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0730

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

INDENO(1,2,3-cd)PYRENE

ICSC: 0730

I	PHYSICAL STATE; APPEARANCE: YELLOW CRYSTALS	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol and through the skin.
M	PHYSICAL DANGERS:	INHALATION RISK:
P		

O R T A N T D A T A	CHEMICAL DANGERS: Upon heating, toxic fumes are formed. OCCUPATIONAL EXPOSURE LIMITS: TLV not established. MAK: Carcinogen category: 2; (DFG 2004). Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly. EFFECTS OF SHORT-TERM EXPOSURE: EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: This substance is possibly carcinogenic to humans.
PHYSICAL PROPERTIES	Boiling point: 536°C Melting point: 164°C Solubility in water: none Octanol/water partition coefficient as log Pow: 6.58
ENVIRONMENTAL DATA	This substance may be hazardous to the environment; special attention should be given to air quality and water quality. Bioaccumulation of this chemical may occur in fish. 
NOTES	
Indeno(1,2,3-cd)pyrene is present as a component of polycyclic aromatic hydrocarbons (PAH) content in the environment usually resulting from the incomplete combustion or pyrolysis of organic matters, especially fossil fuels and tobacco.ACGIH recommends environment containing Indeno(1,2,3-c,d)pyrene should be evaluated in terms of the TLV-TWA for coal tar pitch volatile, as benzene soluble 0.2 mg/m³. Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken.	
ADDITIONAL INFORMATION	
ICSC: 0730 INDENO(1,2,3-cd)PYRENE (C) IPCS, CEC, 1994	
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BARIUM SULFATE

ICSC: 0827



Barium sulphate
Blanc fixe
Artificial barite
 BaSO_4

Molecular mass: 233.43

ICSC # 0827

CAS # 7727-43-7

RTECS # [CR0600000](#)

October 20, 1999 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Not combustible. Gives off irritating or toxic fumes (or gases) in a fire.		In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION			
EXPOSURE		PREVENT DISPERSION OF DUST!	
•INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
•SKIN		Protective gloves.	Remove contaminated clothes. Rinse skin with plenty of water or shower.
•EYES		Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth.
SPILLAGE DISPOSAL		STORAGE	PACKAGING & LABELLING
Sweep spilled substance into containers; if appropriate, moisten first to prevent dusting. Personal protection: P1 filter respirator for inert particles.			R: S:
SEE IMPORTANT INFORMATION ON BACK			
ICSC: 0827		Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

International Chemical Safety Cards

BARIUM SULFATE

ICSC: 0827

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: ODOURLESS TASTELESS, WHITE OR YELLOWISH CRYSTALS OR POWDER.	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol.
	PHYSICAL DANGERS:	INHALATION RISK: Evaporation at 20°C is negligible; a nuisance-causing concentration of airborne particles can, however, be reached quickly.
	CHEMICAL DANGERS: Reacts violently with aluminium powder.	EFFECTS OF SHORT-TERM EXPOSURE:
	OCCUPATIONAL EXPOSURE LIMITS: TLV: 10 mg/m³ as TWA; (ACGIH 2004). MAK: (Inhalable fraction) 4 mg/m³; (Respirable fraction) 1.5 mg/m³; (DFG 2004). OSHA PEL†: TWA 15 mg/m³ (total) TWA 5 mg/m³ (resp) NIOSH REL: TWA 10 mg/m³ (total) TWA 5 mg/m³ (resp) NIOSH IDLH: N.D. See: IDLH INDEX	EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Lungs may be affected by repeated or prolonged exposure to dust particles , resulting in baritosis (a form of benign pneumoconiosis).
PHYSICAL PROPERTIES	Melting point (decomposes): 1600°C Density: 4.5 g/cm³	Solubility in water: none
ENVIRONMENTAL DATA		
NOTES		
Occurs in nature as the mineral barite; also as barytes, heavy spar. Card has been partly updated in October 2005. See section Occupational Exposure Limits.		
ADDITIONAL INFORMATION		
ICSC: 0827 (C) IPCS, CEC, 1994 BARIUM SULFATE		
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

International Chemical Safety Cards

BERYLLIUM

ICSC: 0226



Glucinium
Be
Atomic mass: 9.0

ICSC # 0226
CAS # 7440-41-7
RTECS # [DS1750000](#)
UN # 1567
EC # 004-001-00-7
October 20, 1999 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Special powder, dry sand, NO other agents.
EXPLOSION	Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE		PREVENT DISPERSION OF DUST! AVOID ALL CONTACT!	IN ALL CASES CONSULT A DOCTOR!
• INHALATION	Cough. Shortness of breath. Sore throat. Weakness. Symptoms may be delayed (see Notes).	Local exhaust. Breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Redness.	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse skin with plenty of water or shower.
• EYES	Redness. Pain.	Face shield or eye protection in combination with breathing protection if powder.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Evacuate danger area! Consult an expert! Carefully collect the spilled substance into containers; if appropriate moisten first, then remove to safe place. Chemical protection suit including self-contained breathing apparatus. Do NOT let this chemical enter the environment.	Separated from strong acids, bases food and feedstuffs	Unbreakable packaging; put breakable packaging into closed unbreakable container. Do not transport with food and feedstuffs. Note: E T+ symbol R: 49-25-26-36/37/38-43-48/23 S: 53-45 UN Hazard Class: 6.1 UN Subsidiary Risks: 4.1 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0226

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BERYLLIUM

ICSC: 0226

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: GREY TO WHITE POWDER.		ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol and by ingestion.
	PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air.		INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed.
	CHEMICAL DANGERS: Reacts with strong acids and strong bases forming flammable/explosive gas (hydrogen - see ICSC0001) Forms shock sensitive mixtures with some chlorinated solvents, such as carbon tetrachloride and trichloroethylene.		EFFECTS OF SHORT-TERM EXPOSURE: The aerosol of this substance is irritating to the respiratory tract Inhalation of dust or fumes may cause chemical pneumonitis. Exposure may result in death. The effects may be delayed. Medical observation is indicated.
	OCCUPATIONAL EXPOSURE LIMITS: TLV: 0.002 mg/m³ as TWA 0.01 mg/m³ as STEL A1 (confirmed human carcinogen); (ACGIH 2004). Intended change 0.00002 mg/m³ Skin, Inhal. SEN (ACGIH 2005). MAK: sensitization of respiratory tract and skin (Sah); Carcinogen category: 1; (DFG 2004). OSHA PEL: TWA 0.002 mg/m³ C 0.005 mg/m³ 0.025 mg/m³ 30-minute maximum peak NIOSH REL: Ca Not to exceed 0.0005 mg/m³ See Appendix A NIOSH IDLH: Ca 4 mg/m³ (as Be) See: IDLH INDEX		EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact may cause skin sensitization. Lungs may be affected by repeated or prolonged exposure to dust particles , resulting in chronic beryllium disease (cough, weight loss, weakness). This substance is carcinogenic to humans.
PHYSICAL PROPERTIES	Boiling point: above 2500°C Melting point: 1287°C Density: 1.9 g/cm³	Solubility in water: none	
ENVIRONMENTAL DATA	The substance is very toxic to aquatic organisms.		
NOTES			
Depending on the degree of exposure, periodic medical examination is suggested. Do NOT take working clothes home. Transport Emergency Card: TEC (R)-61GTF3-II NFPA Code: H3; F1; R0			
ADDITIONAL INFORMATION			
ICSC: 0226			
BERYLLIUM			
(C) IPCS, CEC, 1994			

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

CHROMIUM

ICSC: 0029



Chrome
Cr
Atomic mass: 52.0
(powder)

ICSC # 0029
CAS # 7440-47-3
RTECS # [GB4200000](#)
October 27, 2004 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible under specific conditions.	No open flames if in powder form.	In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION		Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE		PREVENT DISPERSION OF DUST!	
•INHALATION	Cough.	Local exhaust or breathing protection.	Fresh air, rest.
•SKIN		Protective gloves.	Remove contaminated clothes. Rinse skin with plenty of water or shower.
•EYES	Redness.	Safety goggles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth.
SPILLAGE DISPOSAL		STORAGE	PACKAGING & LABELLING
Sweep spilled substance into containers; if appropriate, moisten first to prevent dusting. Personal protection: P2 filter respirator for harmful particles.			R: S:
SEE IMPORTANT INFORMATION ON BACK			
ICSC: 0029		Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

International Chemical Safety Cards

CHROMIUM

ICSC: 0029

I	PHYSICAL STATE; APPEARANCE: GREY POWDER	ROUTES OF EXPOSURE:
M	PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air.	INHALATION RISK: A harmful concentration of airborne particles can be reached quickly when dispersed.
P		

O R T A N T D A T A	CHEMICAL DANGERS: Chromium is a catalytic substance and may cause reaction in contact with many organic and inorganic substances , causing fire and explosion hazard.		EFFECTS OF SHORT-TERM EXPOSURE: May cause mechanical irritation to the eyes and the respiratory tract.			
	OCCUPATIONAL EXPOSURE LIMITS: TLV: (as Cr metal, Cr(III) compounds) 0.5 mg/m³ as TWA A4 (ACGIH 2004). MAK not established.		EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:			
	OSHA PEL*: TWA 1 mg/m³ See Appendix C *Note: The PEL also applies to insoluble chromium salts.					
	NIOSH REL: TWA 0.5 mg/m³ See Appendix C					
	NIOSH IDLH: 250 mg/m³ (as Cr) See: 7440473					
PHYSICAL PROPERTIES		Boiling point: 2642°C Melting point: 1900°C Density: 7.15 g/cm³			Solubility in water: none	
ENVIRONMENTAL DATA						
NOTES						
The surface of the chromium particles is oxidized to chromium(III)oxide in air. See ICSC 1531 Chromium(III) oxide.						
ADDITIONAL INFORMATION						
ICSC: 0029 CHROMIUM						
(C) IPCS, CEC, 1994						
IMPORTANT LEGAL NOTICE:		Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.				

International Chemical Safety Cards

COPPER

ICSC: 0240



Cu
(powder)

ICSC # 0240

CAS # 7440-50-8

RTECS # [GL5325000](#)

September 24, 1993 Validated

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Special powder, dry sand, NO other agents.
EXPLOSION			
EXPOSURE		PREVENT DISPERSION OF DUST!	
• INHALATION	Cough. Headache. Shortness of breath. Sore throat.	Local exhaust or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness. Pain.	Safety goggles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Abdominal pain. Nausea. Vomiting.	Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.
SPILLAGE DISPOSAL		STORAGE	PACKAGING & LABELLING
Sweep spilled substance into containers. Carefully collect remainder. Then remove to safe place. (Extra personal protection: P2 filter respirator for harmful particles).		Separated from - See Chemical Dangers.	R: S:
SEE IMPORTANT INFORMATION ON BACK			
ICSC: 0240		Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

International Chemical Safety Cards

COPPER

ICSC: 0240

I M P	PHYSICAL STATE; APPEARANCE: RED POWDER, TURNS GREEN ON EXPOSURE TO MOIST AIR.	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation and by ingestion.
	PHYSICAL DANGERS:	INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed.
	CHEMICAL DANGERS:	

O R T A N T D A T A	Shock-sensitive compounds are formed with acetylenic compounds, ethylene oxides and azides. Reacts with strong oxidants like chlorates, bromates and iodates, causing explosion hazard.		EFFECTS OF SHORT-TERM EXPOSURE: Inhalation of fumes may cause metal fume fever. See Notes.
	OCCUPATIONAL EXPOSURE LIMITS: TLV: 0.2 mg/m³ fume (ACGIH 1992-1993). TLV (as Cu, dusts & mists): 1 mg/m³ (ACGIH 1992-1993). Intended change 0.1 mg/m³ Inhal., A4 (not classifiable as a human carcinogen); MAK: 0.1 mg/m³ (Inhalable fraction) Peak limitation category: II(2) Pregnancy risk group: D (DFG 2005). OSHA PEL*: TWA 1 mg/m³ *Note: The PEL also applies to other copper compounds (as Cu) except copper fume. NIOSH REL*: TWA 1 mg/m³ *Note: The REL also applies to other copper compounds (as Cu) except Copper fume. NIOSH IDLH: 100 mg/m³ (as Cu) See: 7440508		EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact may cause skin sensitization.
	PHYSICAL PROPERTIES		
	Boiling point: 2595°C Melting point: 1083°C Relative density (water = 1): 8.9		Solubility in water: none
	ENVIRONMENTAL DATA		
	NOTES		
	The symptoms of metal fume fever do not become manifest until several hours.		
ADDITIONAL INFORMATION			
ICSC: 0240			COPPER
(C) IPCS, CEC, 1994			
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.		

International Chemical Safety Cards

LEAD

ICSC: 0052



Lead metal
Plumbum
Pb
Atomic mass: 207.2
(powder)

ICSC # 0052

CAS # 7439-92-1

RTECS # [OF7525000](#)

October 08, 2002 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Not combustible. Gives off irritating or toxic fumes (or gases) in a fire.		In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION	Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE	See EFFECTS OF LONG-TERM OR REPEATED EXPOSURE.	PREVENT DISPERSION OF DUST! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
•INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
•SKIN		Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES		Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Abdominal pain. Nausea. Vomiting.	Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth. Give plenty of water to drink. Refer for medical attention.
SPILLAGE DISPOSAL		STORAGE	PACKAGING & LABELLING
Sweep spilled substance into containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment. Personal protection: P3 filter respirator for toxic particles.		Separated from food and feedstuffs incompatible materials See Chemical Dangers.	R: S:
SEE IMPORTANT INFORMATION ON BACK			
ICSC: 0052		Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

International Chemical Safety Cards

I M P O R T A N T T A D A	PHYSICAL STATE; APPEARANCE: BLUISH-WHITE OR SILVERY-GREY SOLID IN VARIOUS FORMS. TURNS TARNISHED ON EXPOSURE TO AIR. PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air. CHEMICAL DANGERS: On heating, toxic fumes are formed. Reacts with oxidants. Reacts with hot concentrated nitric acid, boiling concentrated hydrochloric acid and sulfuric acid. Attacked by pure water and by weak organic acids in the presence of oxygen. OCCUPATIONAL EXPOSURE LIMITS: TLV: 0.05 mg/m³ A3 (confirmed animal carcinogen with unknown relevance to humans); BEI issued (ACGIH 2004). MAK: Carcinogen category: 3B; Germ cell mutagen group: 3A; (DFG 2004). EU OEL: as TWA 0.15 mg/m³ (EU 2002). OSHA PEL*: 1910.1025 TWA 0.050 mg/m³ See Appendix C *Note: The PEL also applies to other lead compounds (as Pb) -- see Appendix C. NIOSH REL*: TWA 0.050 mg/m³ See Appendix C *Note: The REL also applies to other lead compounds (as Pb) -- see Appendix C. NIOSH IDLH: 100 mg/m³ (as Pb) See: 7439921 ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation and by ingestion. INHALATION RISK: A harmful concentration of airborne particles can be reached quickly when dispersed, especially if powdered. EFFECTS OF SHORT-TERM EXPOSURE: EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the blood bone marrow central nervous system peripheral nervous system kidneys , resulting in anaemia, encephalopathy (e.g., convulsions), peripheral nerve disease, abdominal cramps and kidney impairment. Causes toxicity to human reproduction or development.

PHYSICAL PROPERTIES	Boiling point: 1740°C Melting point: 327.5°C Density: 11.34 g/cm³ Solubility in water: none
ENVIRONMENTAL DATA	Bioaccumulation of this chemical may occur in plants and in mammals. It is strongly advised that this substance does not enter the environment. 

NOTES

Depending on the degree of exposure, periodic medical examination is suggested. Do NOT take working clothes home.

Transport Emergency Card: TEC (R)-51S1872

ADDITIONAL INFORMATION

ICSC: 0052 (C) IPCS, CEC, 1994	

LEAD

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

MERCURY

ICSC: 0056



Quicksilver
Liquid silver
Hg
Atomic mass: 200.6

ICSC # 0056
CAS # 7439-97-6
RTECS # [OV4550000](#)
UN # 2809
EC # 080-001-00-0
April 22, 2004 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Not combustible. Gives off irritating or toxic fumes (or gases) in a fire.		In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION	Risk of fire and explosion.		In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		STRICT HYGIENE! AVOID EXPOSURE OF (PREGNANT) WOMEN! AVOID EXPOSURE OF ADOLESCENTS AND CHILDREN!	IN ALL CASES CONSULT A DOCTOR!
• INHALATION	Abdominal pain. Cough. Diarrhoea. Shortness of breath. Vomiting. Fever or elevated body temperature.	Local exhaust or breathing protection.	Fresh air, rest. Artificial respiration if indicated. Refer for medical attention.
• SKIN	MAY BE ABSORBED! Redness.	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap. Refer for medical attention.
• EYES		Face shield, or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work. Wash hands before eating.	Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Evacuate danger area in case of a large spill! Consult an expert! Ventilation. Collect leaking and spilled liquid in sealable non-metallic containers as far as possible. Do NOT wash away into sewer. Do NOT let this chemical enter the environment. Chemical protection suit including self-contained breathing apparatus.	Provision to contain effluent from fire extinguishing. Separated from food and feedstuffs Well closed.	Special material. Do not transport with food and feedstuffs. T symbol N symbol R: 23-33-50/53 S: 1/2-7-45-60-61 UN Hazard Class: 8 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0056

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

MERCURY

ICSC: 0056

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: ODOURLESS, HEAVY AND MOBILE SILVERY LIQUID METAL. PHYSICAL DANGERS: CHEMICAL DANGERS: Upon heating, toxic fumes are formed. Reacts violently with ammonia and halogens causing fire and explosion hazard. Attacks aluminium and many other metals forming amalgams. OCCUPATIONAL EXPOSURE LIMITS: TLV: 0.025 mg/m³ as TWA (skin) A4 BEI issued (ACGIH 2004). MAK: 0.1 mg/m³ Sh Peak limitation category: II(8) Carcinogen category: 3B (DFG 2003). OSHA PEL: C 0.1 mg/m³ NIOSH REL: Hg Vapor: TWA 0.05 mg/m³ skin Other: C 0.1 mg/m³ skin NIOSH IDLH: 10 mg/m³ (as Hg) See: 7439976	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its vapour and through the skin, also as a vapour! INHALATION RISK: A harmful contamination of the air can be reached very quickly on evaporation of this substance at 20°C. EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the skin. Inhalation of the vapours may cause pneumonitis. The substance may cause effects on the central nervous system and kidneys. The effects may be delayed. Medical observation is indicated. EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the central nervous system kidneys, resulting in irritability, emotional instability, tremor, mental and memory disturbances, speech disorders. Danger of cumulative effects. Animal tests show that this substance possibly causes toxic effects upon human reproduction.

PHYSICAL PROPERTIES	Boiling point: 357°C Melting point: -39°C Relative density (water = 1): 13.5 Solubility in water: none Vapour pressure, Pa at 20°C: 0.26 Relative vapour density (air = 1): 6.93 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.009

ENVIRONMENTAL DATA	The substance is very toxic to aquatic organisms. In the food chain important to humans, bioaccumulation takes place, specifically in fish. 

NOTES

Depending on the degree of exposure, periodic medical examination is indicated. No odour warning if toxic concentrations are present. Do NOT take working clothes home.

Transport Emergency Card: TEC (R)-80GC9-II+III

ADDITIONAL INFORMATION

ICSC: 0056	
(C) IPCS, CEC, 1994	
MERCURY	

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

ZINC POWDER

ICSC: 1205



Blue powder
Merrillite
Zn
Atomic mass: 65.4
(powder)

ICSC # 1205
CAS # 7440-66-6
RTECS # [ZG8600000](#)
UN # 1436 (zinc powder or dust)
EC # 030-001-00-1
October 24, 1994 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable. Many reactions may cause fire or explosion. Gives off irritating or toxic fumes (or gases) in a fire.	NO open flames, NO sparks, and NO smoking. NO contact with acid(s), base (s) and incompatible substances (see Chemical Dangers).	Special powder, dry sand, NO other agents. NO water.
EXPLOSION	Risk of fire and explosion on contact with acid(s), base(s), water and incompatible substances.	Closed system, ventilation, explosion-proof electrical equipment and lighting. Prevent build-up of electrostatic charges (e.g., by grounding). Prevent deposition of dust.	In case of fire: cool drums, etc., by spraying with water but avoid contact of the substance with water.
EXPOSURE		PREVENT DISPERSION OF DUST! STRICT HYGIENE!	
• INHALATION	Metallic taste and metal fume fever. Symptoms may be delayed (see Notes).	Local exhaust.	Fresh air, rest. Refer for medical attention.
• SKIN	Dry skin.	Protective gloves.	Rinse and then wash skin with water and soap.
• EYES		Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Abdominal pain. Nausea. Vomiting.	Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth. Refer for medical attention.
SPILLAGE DISPOSAL		STORAGE	PACKAGING & LABELLING
Extinguish or remove all ignition sources. Do NOT wash away into sewer. Sweep spilled substance into containers. then remove to safe place. Personal protection: self-contained breathing apparatus.		Fireproof. Separated from acids, bases oxidants Dry.	Airtight. F symbol N symbol R: 15-17-50/53 S: 2-7/8-43-46-60-61 UN Hazard Class: 4.3 UN Subsidiary Risks: 4.2

SEE IMPORTANT INFORMATION ON BACK

ICSC: 1205

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

ZINC POWDER

ICSC: 1205

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: ODOURLESS GREY TO BLUE POWDER.	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation and by ingestion.
	PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air. If dry, it can be charged electrostatically by swirling, pneumatic transport, pouring, etc.	INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed.
	CHEMICAL DANGERS: Upon heating, toxic fumes are formed. The substance is a strong reducing agent and reacts violently with oxidants. Reacts with water and reacts violently with acids and bases forming flammable/explosive gas (hydrogen - see ICSC0001) Reacts violently with sulfur, halogenated hydrocarbons and many other substances causing fire and explosion hazard.	EFFECTS OF SHORT-TERM EXPOSURE: Inhalation of fumes may cause metal fume fever. The effects may be delayed.
	OCCUPATIONAL EXPOSURE LIMITS: TLV not established.	EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact with skin may cause dermatitis.
PHYSICAL PROPERTIES	Boiling point: 907°C Melting point: 419°C Relative density (water = 1): 7.14	Solubility in water: reaction Vapour pressure, kPa at 487°C: 0.1 Auto-ignition temperature: 460°C
ENVIRONMENTAL DATA		
NOTES		
Zinc may contain trace amounts of arsenic, when forming hydrogen, may also form toxic gas arsine (see ICSC 0001 and ICSC 0222). Reacts violently with fire extinguishing agents such as water, halons, foam and carbon dioxide. The symptoms of metal fume fever do not become manifest until several hours later. Rinse contaminated clothes (fire hazard) with plenty of water. Transport Emergency Card: TEC (R)-43GWS-II+III NFPA Code: H0; F1; R1;		
ADDITIONAL INFORMATION		
ICSC: 1205		ZINC POWDER
(C) IPCS, CEC, 1994		
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

Material Safety Data Sheet

Version 4.0

Revision Date 03/12/2010

Print Date 12/09/2011

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : 4,4'-DDD PESTANAL,250 MG (2,2-BIS(4-CHL&

Product Number : 35486

Brand : Fluka

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Toxic by ingestion, Harmful by skin absorption., Possible carcinogen.

GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H301 Toxic if swallowed.

H312 Harmful in contact with skin.

H351 Suspected of causing cancer.

H400 Very toxic to aquatic life.

H413 May cause long lasting harmful effects to aquatic life.

Precautionary statement(s)

P273 Avoid release to the environment.

P280 Wear protective gloves/protective clothing.

P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

HMIS Classification

Health hazard: 2

Chronic Health Hazard: *

Flammability: 0

Physical hazards: 0

NFPA Rating

Health hazard: 2

Fire: 0

Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. May cause respiratory tract irritation.

Skin Harmful if absorbed through skin. May cause skin irritation.

Eyes May cause eye irritation.

Ingestion Toxic if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : 1,1-Dichloro-2,2-bis(4-chlorophenyl)ethane
4,4'-DDD
TDE

Formula : $C_{14}H_{10}Cl_4$
Molecular Weight : 320.04 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane			
72-54-8	200-783-0	-	-

4. FIRST AID MEASURES

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Use personal protective equipment. Avoid dust formation. Avoid breathing dust. Ensure adequate ventilation. Evacuate personnel to safe areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Contains no substances with occupational exposure limit values.

Personal protective equipment

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

Handle with gloves.

Eye protection

Face shield and safety glasses

Skin and body protection

Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Hygiene measures

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form solid

Safety data

pH	no data available
Melting point	94.0 - 96.0 °C (201.2 - 204.8 °F)
Boiling point	193.0 °C (379.4 °F) at 1.3 hPa (1.0 mmHg)
Flash point	no data available
Ignition temperature	no data available
Lower explosion limit	no data available
Upper explosion limit	no data available
Vapour pressure	< 0.00001 hPa (< 0.00001 mmHg) at 25.0 °C (77.0 °F)
Density	1.38 g/cm ³
Water solubility	no data available
Partition coefficient: n-octanol/water	log Pow: 6.02

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Conditions to avoid

no data available

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Hazardous decomposition products formed under fire conditions. - Nature of decomposition products not known.

11. TOXICOLOGICAL INFORMATION

Acute toxicity

LD50 Oral - Hamster - > 5,000 mg/kg

TDLo Oral - Human - 428.5 mg/kg

Remarks: Endocrine:Adrenal cortex hypoplasia.

TDLo Oral - rat - 6,000 mg/kg

Remarks: Cardiac:Other changes. Gastrointestinal:Other changes. Kidney, Ureter, Bladder:Changes in both tubules and glomeruli.

TDLo Oral - rat - 14 mg/kg

Remarks: Liver:Changes in liver weight. Endocrine:Estrogenic. Musculoskeletal:Other changes.

TDLo Oral - rat - 2,100 mg/kg

Remarks: Behavioral:Altered sleep time (including change in righting reflex).

LD50 Dermal - rabbit - 1,200 mg/kg

Remarks: Behavioral:Excitement. Behavioral:Convulsions or effect on seizure threshold. Skin irritation

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Specific target organ toxicity - single exposure (GHS)

no data available

Specific target organ toxicity - repeated exposure (GHS)

no data available

Aspiration hazard

no data available

Potential health effects**Inhalation**

May be harmful if inhaled. May cause respiratory tract irritation.

Ingestion

Toxic if swallowed.

Skin

Harmful if absorbed through skin. May cause skin irritation.

Eyes May cause eye irritation.

Signs and Symptoms of Exposure

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Additional Information

RTECS: KI0700000

12. ECOLOGICAL INFORMATION

Toxicity

Toxicity to fish	LC50 - other fish - 1.18 - 9 mg/l - 96.0 h LC50 - Lepomis macrochirus (Bluegill) - 0.04 - 0.05 mg/l - 96.0 h LC50 - Oncorhynchus mykiss (rainbow trout) - 0.06 - 0.09 mg/l - 96.0 h LC50 - Pimephales promelas (fathead minnow) - 3.47 - 5.58 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates.	EC50 - Daphnia pulex (Water flea) - 0.01 mg/l - 48 h

Persistence and degradability

no data available

Bioaccumulative potential

Indication of bioaccumulation.

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

13. DISPOSAL CONSIDERATIONS

Product

Observe all federal, state, and local environmental regulations. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN-Number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solids, organic, n.o.s. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)
Reportable Quantity (RQ): 1 lbs
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

UN-Number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)
Marine pollutant: No

IATA

UN-Number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solid, organic, n.o.s. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)

15. REGULATORY INFORMATION

OSHA Hazards

Toxic by ingestion, Harmful by skin absorption., Possible carcinogen.

DSL Status

This product contains the following components that are not on the Canadian DSL nor NDSL lists.

2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No. 72-54-8

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No. 72-54-8	Revision Date

Pennsylvania Right To Know Components

2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No. 72-54-8	Revision Date

New Jersey Right To Know Components

2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No. 72-54-8	Revision Date

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.	CAS-No. 72-54-8	Revision Date
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane		

16. OTHER INFORMATION

Further information

Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.



Sprayon® LU711 Lubricant
Because your environment demands a
TRUE Industrial Lubricant
Sprayon.com

CYTOP Phosphines by Cytec
Buy from one of the global leaders.
Discover Cytec's full product range
www.cytec.com

AdChoices

· [Ads by Google](#) [MSDS Sheets](#) [Data MSDS](#) [MSDS Search](#) [MSDS Chemical](#)

Search

72-55-9 msds

+ G.O

MSDS 250,000+

MSDS : 2,2-Bis-(4-chlorophenyl)-1,1-dichloroethylene, 99%
CAS : 72-55-9
SYNONYMS : p,p'-DDE ; ethylene,1,1-dichloro-2,2-bis-(p-chlorophenyl)- ; DDT dehydrochloride ; DDE; 1-1'-(Dichloroethenylidene)bis(4-chlorobenzene)

[MSDS Safety Sheet](#)

We Get Companys In
Compliance & Keep Them
There! Custom Catalogs
www.MSDSCatalogService.com

[Hazardous Waste Disposal](#)

Free Estimates! Bulk &
Drummed Liquid & Solid Haz
& Non-Haz Waste
www.NEDTinc.com

AdChoices

Catalog of Chemical Suppliers, Buyers, Custom Synthesis Companies And Equipment Manufacturers
[2,2-Bis-(4-chlorophenyl)-1,1-dichloroethylene, 99% 72-55-9]

Suppliers:

Not Available

Buyers:

Not Available

[Sprayon® LU711 Lubricant](#) Because your environment demands a TRUE Industrial Lubricant Sprayon.com

[MSDS Safety Sheet](#) We Get Companys In Compliance & Keep Them There! Custom Catalogs www.MSDSCatalogService.com

[Hazardous Waste Disposal](#) Free Estimates! Bulk & Drummed Liquid & Solid Haz & Non-Haz Waste www.NEDTinc.com

AdChoices

**** SECTION 2 - COMPOSITION, INFORMATION ON INGREDIENTS ****

```
+-----+-----+-----+-----+
| CAS# | Chemical Name | % | EINECS# |
|-----|-----|-----|-----|
| 72-55-9 | 2,2-Bis-(4-chlorophenyl)-1,1-dichloro- | 99 | 200-784-6 |
| |ethylene | | |
```

Hazard Symbols: XN

Risk Phrases: 22 33

**** SECTION 3 - HAZARDS IDENTIFICATION ****

EMERGENCY OVERVIEW

Harmful if swallowed. Danger of cumulative effects.Cancer suspect
agent.Possible risks of irreversible effects.

Potential Health Effects

Eye:

May cause eye irritation.

Skin:

May cause skin irritation.

Ingestion:

May cause irritation of the digestive tract. May be harmful if
swallowed. Ingestion of large amounts may cause liver and/or kidney
damage.

Inhalation:

May cause respiratory tract irritation.

Chronic:

May cause cancer according to animal studies. Adverse reproductive
effects have been reported in animals. Laboratory experiments have
resulted in mutagenic effects.

**** SECTION 4 - FIRST AID MEASURES ****

Eyes:

Flush eyes with plenty of water for at least 15 minutes,
occasionally lifting the upper and lower eyelids. Get medical aid.

Skin:

Get medical aid. Flush skin with plenty of water for at least 15
minutes while removing contaminated clothing and shoes. Wash clothing
before reuse.

Ingestion:

If victim is conscious and alert, give 2-4 cupfuls of milk or water.

Never give anything by mouth to an unconscious person. Get medical
aid immediately.

Inhalation:

Remove from exposure and move to fresh air immediately. If not
breathing, give artificial respiration. If breathing is difficult,
give oxygen. Get medical aid.

Notes to Physician:

Treat symptomatically and supportively.

**** SECTION 5 - FIRE FIGHTING MEASURES ****

General Information:

MSDS PAGE: MSDS 72-55-9 CAS 2,2-Bis-(4-chlorophenyl)-1,1-dichloroethylene, 99% p,p'-DDE ; ethylene,1,1-di...

As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Water runoff can cause environmental damage. Dike and collect water used to fight fire. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion. Will burn if involved in a fire.

Extinguishing Media:

For large fires, use water spray, fog or regular foam. For small fires, use dry chemical, carbon dioxide, water spray or regular foam. Cool containers with flooding quantities of water until well after fire is out.

**** SECTION 6 - ACCIDENTAL RELEASE MEASURES ****

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks:

Avoid runoff into storm sewers and ditches which lead to waterways. Clean up spills immediately, observing precautions in the Protective Equipment section. Sweep up, then place into a suitable container for disposal. Avoid generating dusty conditions. Provide ventilation.

**** SECTION 7 - HANDLING and STORAGE ****

Handling:

Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Do not ingest or inhale. Use with adequate ventilation.

Storage:

Keep container closed when not in use. Store in a tightly closed container. Store in a cool, dry, well-ventilated area away from incompatible substances.

**** SECTION 8 - EXPOSURE CONTROLS, PERSONAL PROTECTION ****

Engineering Controls:

Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low.

Exposure Limits

CAS# 72-55-9:

Personal Protective Equipment

Eyes:

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin:

Wear appropriate protective gloves to prevent skin exposure.

Clothing:

Wear appropriate protective clothing to prevent skin exposure.

Respirators:

A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

**** SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES ****

Physical State: Crystals

Color: white

Odor: None reported.

pH: Not available.

Vapor Pressure: 6.5106 mm Hg @ 20 C

Viscosity: Not available.

Boiling Point: 336 deg C

Freezing/Melting Point: 88.00 - 90.00 deg C

Autoignition Temperature: Not available.

Flash Point: Not available.

Explosion Limits, lower: Not available.

Explosion Limits, upper: Not available.

Decomposition Temperature:

Solubility in water: 0.010 ppm

Specific Gravity/Density:

Molecular Formula: C14H8Cl4

Molecular Weight: 318.02

**** SECTION 10 - STABILITY AND REACTIVITY ****

Chemical Stability:

Stable under normal temperatures and pressures.

Conditions to Avoid:

Incompatible materials, dust generation, strong oxidants.

Incompatibilities with Other Materials:

Strong oxidizing agents - strong bases.

Hazardous Decomposition Products:

Hydrogen chloride, carbon monoxide, carbon dioxide.

Hazardous Polymerization: Has not been reported.

**** SECTION 11 - TOXICOLOGICAL INFORMATION ****

RTECS#:

CAS# 72-55-9: KV9450000

LD50/LC50:

CAS# 72-55-9: Oral, mouse: LD50 = 700 mg/kg; Oral, rat: LD50 = 880 mg/kg.

Carcinogenicity:

2,2-Bis-(4-chlorophenyl)-1,1-dichloroethylene -

California: carcinogen, initial date 1/1/89

MSDS PAGE: MSDS 72-55-9 CAS 2,2-Bis-(4-chlorophenyl)-1,1-dichloroethylene, 99% p,p'-DDE ; ethylene,1,1-di...

Other:

See actual entry in RTECS for complete information.

**** SECTION 12 - ECOLOGICAL INFORMATION ****

Ecotoxicity:

Estimated BCF value = 8,300 based on water solubility. Estimated Koc value = 8,300. There was no movement of DDE reported in soil column mobility experiments.

**** SECTION 13 - DISPOSAL CONSIDERATIONS ****

Dispose of in a manner consistent with federal, state, and local regulations.

**** SECTION 14 - TRANSPORT INFORMATION ****

IATA

Not regulated as a hazardous material.

IMO

Not regulated as a hazardous material.

RID/ADR

Not regulated as a hazardous material.

USA RQ: CAS# 72-55-9: 1 lb final RQ; 0.454 kg final RQ

**** SECTION 15 - REGULATORY INFORMATION ****

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols: XN

Risk Phrases:

R 22 Harmful if swallowed.

R 33 Danger of cumulative effects.

Safety Phrases:

S 24/25 Avoid contact with skin and eyes.

WGK (Water Danger/Protection)

CAS# 72-55-9: 3

Canada

None of the chemicals in this product are listed on the DSL/NDL list.

CAS# 72-55-9 is listed on Canada's Ingredient Disclosure List.

US FEDERAL

TSCA

CAS# 72-55-9 is not listed on the TSCA inventory.

It is for research and development use only.

**** SECTION 16 - ADDITIONAL INFORMATION ****

MSDS Creation Date: 9/28/1998 Revision #3 Date: 3/18/2003

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no way shall the company be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if the company has been advised of the possibility of such damages.

Search More



ALL MSDS PAGES IN THIS GROUP

NAME	CAS
M-Benzoyloxybenzyl Alcohol , 97%	1700-30-7
Octaphenylcyclotetrasiloxane, 98%	546-56-5
Cetylpyridinium chloride	123-03-5
3,4-Difluorophenol, 99%	2713-33-9
1-Benzyl-4-Hydroxypiperidine, 97%	4727-72-4
4-tert-Butylbenzoyl chloride	1710-98-1
Borane-morpholine complex, 97%	4856-95-5
Benzyl Ether, 99%	103-50-4
5-Amino-1-Naphtol (Pract)	83-55-6
Pyridinium-P-Toluenesulfonate 98%	24057-28-1
Pyrogallol Red, 98% (Titr.)	32638-88-3
Amberlite ira 416	9002-26-0
3-Methoxybenzonitrile, 98%	1527-89-5
1-Adamantanemethanol, 99%	770-71-8
Inosine, 99%	58-63-9
Pentafluoropropionic Acid	422-64-0
Pyruvic Acid	127-17-3
Potassium hydrogen fluoride, 99+%	7789-29-9
Aluminum Nitride, 98% Particle Size <10 Micron	24304-00-5
Nickel(II) hydroxide, c.p., 60-61% Ni	12054-48-7
1-Adamantanamine sulfate, 99%	31377-23-8
S-(Thiobenzoyl)-Thioglycolic Acid, 97%	942-91-6
N,N-Dimethyl-P-Nitroaniline	100-23-2
Benzofuroxan	480-96-6
cis-2-Aminomethyl-1-cyclohexanol hydrochloride, 99%	24947-68-0
Silver Phosphate, 98% (Titr.)	7784-09-0

International Chemical Safety Cards

DDT

ICSC: 0034



Dichlorodiphenyltrichloroethane
1,1,1-Trichloro-2,2-bis(p-chlorophenyl)ethane
2,2-bis(p-Chlorophenyl)-1,1,1-trichloroethane
1,1'-(2,2,2-Trichloroethylidene)bis(4-chlorobenzene)
p,p'-DDT
 $C_{14}H_9Cl_5$

Molecular mass: 354.5



ICSC # 0034

CAS # 50-29-3

RTECS # [KJ3325000](#)

UN # 2761

EC # 602-045-00-7

April 20, 2004 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible. Liquid formulations containing organic solvents may be flammable. Gives off irritating or toxic fumes (or gases) in a fire.	NO open flames.	Powder, water spray, foam, carbon dioxide.
EXPLOSION			
EXPOSURE		PREVENT DISPERSION OF DUST! STRICT HYGIENE! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
• INHALATION	Cough.	Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness.	Safety goggles, or eye protection in combination with breathing protection if powder.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Tremors. Diarrhoea. Dizziness. Headache. Vomiting. Numbness. Paresthesias. Hyperexcitability. Convulsions.	Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth. Give a slurry of activated charcoal in water to drink. Rest. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Do NOT let this chemical enter the environment. Sweep spilled substance into sealable non-metallic containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Personal protection: P3 filter respirator for toxic particles.	Provision to contain effluent from fire extinguishing. Separated from iron, aluminum and its salts, food and feedstuffs See Chemical Dangers.	Do not transport with food and feedstuffs. Severe marine pollutant. T symbol N symbol R: 25-40-48/25-50/53 S: 1/2-22-36/37-45-60-61 UN Hazard Class: 6.1 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0034

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

DDT

ICSC: 0034

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: COLOURLESS CRYSTALS WHITE POWDER. TECHNICAL PRODUCT IS WAXY SOLID. PHYSICAL DANGERS: CHEMICAL DANGERS: On combustion, forms toxic and corrosive fumes including hydrogen chloride. Reacts with aluminium and iron. OCCUPATIONAL EXPOSURE LIMITS: TLV: 1 mg/m³ as TWA A3 (ACGIH 2004). MAK: 1 mg/m³ H Peak limitation category: II(8) (DFG 2003). OSHA PEL: TWA 1 mg/m³ skin NIOSH REL: Ca TWA 0.5 mg/m³ See Appendix A NIOSH IDLH: Ca 500 mg/m³ See: 50293	ROUTES OF EXPOSURE: The substance can be absorbed into the body by ingestion. INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly especially if powdered. EFFECTS OF SHORT-TERM EXPOSURE: May cause mechanical irritation. The substance may cause effects on the central nervous system, resulting in convulsions and respiratory depression. Exposure at high levels may result in death. Medical observation is indicated. EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the central nervous system and liver. This substance is possibly carcinogenic to humans. Animal tests show that this substance possibly causes toxicity to human reproduction or development.

PHYSICAL PROPERTIES	Boiling point: 260°C Melting point: 109°C Density: 1.6 g/cm³ Solubility in water: poor Octanol/water partition coefficient as log Pow: 6.36

ENVIRONMENTAL DATA	The substance is very toxic to aquatic organisms. This substance may be hazardous to the environment; special attention should be given to birds. Bioaccumulation of this chemical may occur along the food chain, for example in milk and aquatic organisms. This substance does enter the environment under normal use. Great care, however, should be given to avoid any additional release, e.g. through inappropriate disposal.	

NOTES

Depending on the degree of exposure, periodic medical examination is indicated. Carrier solvents used in commercial formulations may change physical and toxicological properties. Do NOT take working clothes home. Consult national legislation. Agritan, Azotox, Anofex, Ixodex, Gesapon, Gesarex, Gesarol, Guesapon, Clofenotane, Zeidane, Dicophane, Neocid are trade names.

Transport Emergency Card: TEC (R)-61GT7-III

ADDITIONAL INFORMATION

ICSC: 0034	DDT

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

Material Safety Data Sheet

Version 4.2

Revision Date 01/18/2011

Print Date 12/09/2011

1. PRODUCT AND COMPANY IDENTIFICATION

Product name	: α -Chlordane	
Product Number	: 442449	
Brand	: Supelco	
Product Use	: For laboratory research purposes.	
Supplier	: Sigma-Aldrich 3050 Spruce Street SAINT LOUIS MO 63103 USA	Manufacturer : Sigma-Aldrich Corporation 3050 Spruce St. St. Louis, Missouri 63103 USA
Telephone	: +1 800-325-5832	
Fax	: +1 800-325-5052	
Emergency Phone # (For both supplier and manufacturer)	: (314) 776-6555	
Preparation Information	: Sigma-Aldrich Corporation Product Safety - Americas Region 1-800-521-8956	

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Toxic by inhalation., Toxic by ingestion, Toxic by skin absorption, Irritant

GHS Classification

Acute toxicity, Inhalation (Category 4)

Acute toxicity, Oral (Category 4)

Acute toxicity, Dermal (Category 3)

Skin irritation (Category 2)

Eye irritation (Category 2A)

Specific target organ toxicity - single exposure (Category 3)

Acute aquatic toxicity (Category 1)

GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H302 + H332

Harmful if swallowed or if inhaled.

H311

Toxic in contact with skin.

H315

Causes skin irritation.

H319

Causes serious eye irritation.

H335

May cause respiratory irritation.

H400

Very toxic to aquatic life.

Precautionary statement(s)

P261

Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P273

Avoid release to the environment.

P280

Wear protective gloves/ protective clothing.

P305 + P351 + P338

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P312

Call a POISON CENTER or doctor/ physician if you feel unwell.

HMIS Classification

Health hazard: 2
Flammability: 0
Physical hazards: 0

NFPA Rating

Health hazard: 2
Fire: 0
Reactivity Hazard: 0

Potential Health Effects

Inhalation Toxic if inhaled. Causes respiratory tract irritation.
Skin Toxic if absorbed through skin. Causes skin irritation.
Eyes Causes eye irritation.
Ingestion Toxic if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Molecular Weight : 208.29 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
Chlordane			
5103-71-9	225-825-5	-	-

4. FIRST AID MEASURES**General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES**Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

Hazardous combustion products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

6. ACCIDENTAL RELEASE MEASURES**Personal precautions**

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE**Precautions for safe handling**

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Contains no substances with occupational exposure limit values.

Personal protective equipment**Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N99 (US) or type P2 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Eye protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin and body protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Hygiene measures

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

9. PHYSICAL AND CHEMICAL PROPERTIES**Appearance**

Form crystalline

Colour colourless

Safety data

pH no data available

Melting/freezing point 93.0 - 94.0 °C (199.4 - 201.2 °F)

Boiling point no data available

Flash point no data available

Ignition temperature no data available

Autoignition temperature no data available

Lower explosion limit no data available

Upper explosion limit no data available

Vapour pressure no data available

Density	no data available
Water solubility	no data available
Partition coefficient: n-octanol/water	no data available
Relative vapour density	no data available
Odour	no data available
Odour Threshold	no data available
Evaporation rate	no data available

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

no data available

Conditions to avoid

no data available

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas
Other decomposition products - no data available

11. TOXICOLOGICAL INFORMATION

Acute toxicity

Oral LD50

LD50 Oral - rat - 500.0 mg/kg

Inhalation LC50

Dermal LD50

Other information on acute toxicity

no data available

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Teratogenicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

no data available

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

no data available

Potential health effects

Inhalation	Toxic if inhaled. Causes respiratory tract irritation.
Ingestion	Toxic if swallowed.
Skin	Toxic if absorbed through skin. Causes skin irritation.
Eyes	Causes eye irritation.

Synergistic effects

no data available

Additional Information

RTECS: Not available

12. ECOLOGICAL INFORMATION

Toxicity

Toxicity to fish LC50 - *Lepomis macrochirus* (Bluegill) - 0.0074 mg/l - 96 h

Persistence and degradability

no data available

Bioaccumulative potential

Bioaccumulation *Lepomis macrochirus* (Bluegill) - 24 h
Bioconcentration factor (BCF): 322

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life.

no data available

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN-Number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Chlordane)
Marine pollutant:
Poison Inhalation Hazard: No

IMDG

UN-Number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Chlordane)
Marine pollutant: Marine pollutant

IATA

UN-Number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Chlordane)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

OSHA Hazards

Toxic by inhalation., Toxic by ingestion, Toxic by skin absorption, Irritant

DSL Status

This product contains the following components that are not on the Canadian DSL nor NDSL lists.

Chlordane

CAS-No.
5103-71-9

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

Chlordane

CAS-No.
5103-71-9

Revision Date

New Jersey Right To Know Components

Chlordane

CAS-No.
5103-71-9

Revision Date

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Further information

Copyright 2011 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

APPENDIX D
HOSPITAL INFORMATION AND MAP
FIELD ACCIDENT REPORT



FIELD ACCIDENT REPORT

This report is to be filled out by the designated Site Safety Officer after EVERY accident.

PROJECT NAME _____ PROJECT. NO. _____

Date of Accident _____ Time _____ Report By _____

Type of Accident (Check One):

☐ () Vehicular

☐ () Personal

☐ () Property

Name of Injured _____ DOB or Age _____

How Long Employed _____

Names of Witnesses _____

Description of Accident _____

Action Taken _____

Did the Injured Lose Any Time? _____ How Much (Days/Hrs.)? _____

Was Safety Equipment in Use at the Time of the Accident (Hard Hat, Safety Glasses, Gloves, Safety Shoes, etc.)? _____

(If not, it is the EMPLOYEE'S sole responsibility to process his/her claim through his/her Health and Welfare Fund.)

INDICATE STREET NAMES, DESCRIPTION OF VEHICLES, AND NORTH ARROW

HOSPITAL INFORMATION AND MAP

The hospital nearest the site is:

NYC Health and Hospitals – Harlem
 506 Lenox Avenue, New York, NY 10037
 212-939-1000

1.0 Miles – About 3 Minutes

1840 Park Avenue, New York, NY 10035

Head southwest on Park Avenue toward East 126th Street


Turn right onto East 125th Street

East 125th Street becomes West 125th Street

Turn right onto Malcolm X. Boulevard

Destination will be on the right (if you've reached West 136th Street you've gone too far)

506 Lenox Avenue, New York, NY 10037

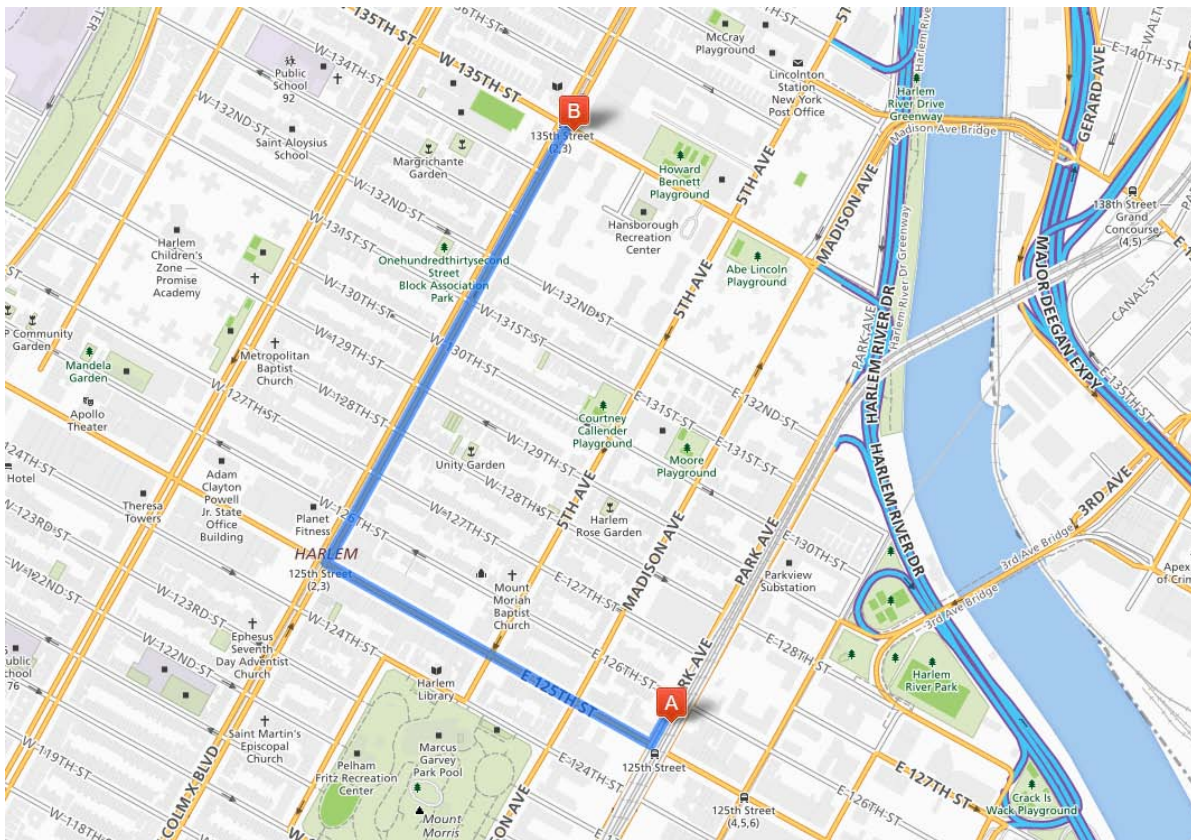

ATTACHMENT C
Quality Assurance Project Plan

QUALITY ASSURANCE PROJECT PLAN
1840 Park Avenue
Harlem, NY

Prepared on behalf of:

126th Street Equities LLC
316 West 118th Street
New York, New York 10026

Prepared by:



ENVIRONMENTAL BUSINESS CONSULTANTS

1808 MIDDLE COUNTRY ROAD
RIDGE, NY 11961

TABLE OF CONTENTS

QUALITY ASSURANCE PROJECT PLAN

1840 Park Avenue, Harlem NY

1.0	PROJECT ORGANIZATION AND RESPONSIBILITIES	1
1.1	Organization	1
2.0	QUALITY ASSURANCE PROJECT PLAN OBJECTIVES	2
2.1	Overview.....	2
2.2	QA/QC Requirements for Analytical Laboratory.....	2
2.2.1	Instrument calibration.....	2
2.2.2	Continuing Instrument calibration.....	2
2.2.3	Method Blanks.....	2
2.2.4	Trip Blanks	3
2.2.5	Surrogate Spike Analysis.....	3
2.2.6	Matrix Spike / Matrix Spike duplicate / Matrix Spike Blank.....	3
2.3	Accuracy	3
2.4	Precision	4
2.5	Sensitivity	4
2.6	Representativeness.....	4
2.7	Completeness.....	4
2.8	Laboratory Custody Procedures	5
3.0	ANALYTICAL PROCEDURES	6
3.1	Laboratory Analyses.....	6
4.0	DATA REDUCTION, VALIDATION, REVIEW. AND REPORTING	7
4.1	Overview.....	7
4.2	Data Reduction	7
4.3	Laboratory Data Reporting.....	7
5.0	CORRECTIVE ACTION	8

TABLES

Table 1	Analytical Summary Table
Table 2	Containers Preservatives and Holding Times

1.0 INTRODUCTION

This Quality Assurance Project Plan (QAPP) has been prepared in accordance with DER-10 to detail procedures to be followed during the course of the sampling and analytical portion of the project, as required by the approved work plan.

To ensure the successful completion of the project each individual responsible for a given component of the project must be aware of the quality assurance objectives of his / her particular work and of the overall project. The Project Director, Charles Sosik will be directly responsible to the client for the overall project conduct and quality assurance/quality control (QA/QC) for the project. The Project Director will be responsible for overseeing all technical and administrative aspects of the project and for directing QA/QC activities. Ms. Chawinie Miller will serve as the Quality Assurance Officer (QAO) and in this role may conduct:

- conduct periodic field and sampling audits;
- interface with the analytical laboratory to resolve problems; and
- interface with the data validator and/or the preparer of the DUSR to resolve problems.

Robert Bennett will serve as the Project Manager and will be responsible for implementation of the remedial action and coordination with field sampling crews and subcontractors. Reporting directly to the Project Manager will be the Field Operations Officer, Kevin Waters; who will serve as the on-Site qualified environmental professional who will record observations, monitor excavation activities and be responsible for the collection and handling of all samples.

1.1 Organization

Project QA will be maintained under the direction of the Project Manager, in accordance with this QAPP. QC for specific tasks will be the responsibility of the individuals and organizations listed below, under the direction and coordination of the Project Manager

GENERAL RESPONSIBILITY	SCOPE OF WORK	RESPONSIBILITY OF QUALITY CONTROL
Field Operations	Monitoring of Remedial Activities, sample collection and handling	T. Gallo, EBC
Project Manager	Implementation of the Remedial Action according to the RAWP	Keith Butler, EBC
Laboratory Analysis	Analysis of soil samples by NYSDEC ASP methods Laboratory	NYSDOH-Certified Laboratory
Data review	Review for completeness and compliance	3 rd party validation

2.0 QUALITY ASSURANCE PROJECT PLAN OBJECTIVES

2.1 Overview

Overall project goals are defined through the development of Data Quality Objectives (DQOs), which are qualitative and quantitative Statements that specify the quality of the data required to support decisions; DQOs, as described in this section, are based on the end uses of the data as described in the work plan.

In this plan, Quality Assurance and Quality Control are defined as follows:

- Quality Assurance - The overall integrated program for assuring reliability of monitoring and measurement data.
- Quality Control - The routine application of procedures for obtaining prescribed standards of performance in the monitoring and measurement process.

2.2 QA / QC Requirements for Analytical Laboratory

Samples will be analyzed by a New York State Department of Health (NYSDOH) certified laboratory. Data generated from the laboratory will be used to evaluate contaminants such as metals, semi-volatile organic compounds (SVOCs) and pesticides / PCBs in both historic fills and native soils, chlorinated and other volatile organic compounds (VOCs) in soil and PFOS compounds. The QA requirements for all subcontracted analytical laboratory work performed on this project are described below. QA elements to be evaluated include accuracy, precision, sensitivity, representativeness, and completeness. The data generated by the analytical laboratory for this project are required to be sensitive enough to achieve detection levels low enough to meet required quantification limits as specified in NYSDEC Analytical Services Protocol (NYSDEC ASP, 07/2005). The analytical results meeting the required quantification limits will provide data sensitive enough to meet the data quality objectives of this remedial program as described in the work plan. Reporting of the data must be clear, concise, and comprehensive. The QC elements that are important to this project are completeness of field data, sample custody, sample holding times, sample preservation, sample storage, instrument calibration and blank contamination.

2.2.1 Instrument Calibration

Calibration curves will be developed for each of the compounds to be analyzed. Standard concentrations and a blank will be used to produce the initial curves. The development of calibration curves and initial calibration response factors must be consistent with method requirements presented in the most recent version of (NYSDEC ASP 07/2005).

2.2.2 Continuing Instrument Calibration

The initial calibration curve will be verified every 12 hrs by analyzing one calibration standard. The standard concentration will be the midpoint concentration of the initial calibration curve. The calibration check compound must come within 25% relative percent difference (RPD) of the average response factor obtained during initial calibration. If the RPD is greater than 25%, then corrective action must be taken as provided in the specific methodology.

2.2.3 Method Blanks

Method blank or preparation blank is prepared from an analyte-free matrix which includes the same reagents, internal standards and surrogate standards as the related samples. It is carried through the entire sample preparation and analytical procedure. A method blank analysis will be performed once for each 12 hr period during the analysis of samples for volatiles. An acceptable method blank will contain less than two (2) times the CRQL of methylene chloride, acetone and 2-butanone. For all other target compounds, the method blank must contain less than or equal to the CRQL of any single target compound. For non-target peaks in the method blank, the peak area must be less than 10 percent of the nearest internal standard. The method blank will be used to demonstrate the level of laboratory background and reagent contamination that might result from the analytical process itself.

2.2.4 Trip Blanks.

Trip blanks consist of a single set of sample containers filled at the laboratory with deionized, laboratory-grade water. The water used will be from the same source as that used for the laboratory method blank. The containers will be carried into the field and handled and transported in the same way as the samples collected that day. Analysis of the trip blank for VOCs is used to identify contamination from the air, shipping containers, or from other items coming in contact with the sample bottles. (The bottles holding the trip blanks will be not opened during this procedure.) A complete set of trip blanks will be provided with each shipment of samples to the certified laboratory.

2.2.5 Surrogate Spike Analysis

For organic analyses, all samples and blanks will be spiked with surrogate compounds before purging or extraction in order to monitor preparation and analyses of samples. Surrogate spike recoveries shall fall within the advisory limits in accordance with the NY5DEC ASP protocols for samples falling within the quantification limits without dilution.

2.2.6 Matrix Spike / Matrix Spike Duplicate / Matrix Spike Blank (MS/MSDIMSB) Analysis

MS, MSD and MSB analyses will be performed to evaluate the matrix effect of the sample upon the analytical methodology along with the precision of the instrument by measuring recoveries. The MS / MSD / MSB samples will be analyzed for each group of samples of a similar matrix at a rate of 5% (one for every 20 field samples). The RPD will be calculated from the difference between the MS and MSD. Matrix spike blank analysis will be performed to indicate the appropriateness of the spiking solution(s) used for the MS/MSD.

2.3 Accuracy

Accuracy is defined as the nearness of a real or the mean (x) of a set of results to the true value. Accuracy is assessed by means of reference samples and percent recoveries. Accuracy includes both precision and recovery and is expressed as percent recovery (% REC). The MS sample is used to determine the percent recovery. The matrix spike percent recovery (% REC) is calculated by the following equation:

$$\%REC = \frac{SSR - SR}{SA} \times 100$$

Where:

SSR = spike sample results

SR = sample results

SA = spike added from spiking mix

2.4 Precision

Precision is defined as the measurement of agreement of a set of replicate results among themselves without a Precision is defined as the measurement of agreement of a set of replicate results among themselves without assumption of any prior information as to the true result. Precision is assessed by means of duplicate/replicate sample analyses.

Analytical precision is expressed in terms of RPD. The RPD is calculated using the following formula:

$$RPD = \frac{D^1 - D^2}{(D^1 + D^2)/2} \times 100$$

Where:

RPD = relative percent difference

D¹ = first sample value

D² = second sample value (duplicate)

2.5 Sensitivity

The sensitivity objectives for this plan require that data generated by the analytical laboratory achieve quantification levels low enough to meet the required detection limits specified by NYSDEC ASP and to meet all site-specific standards, criteria and guidance values (SGCs) established for this project.

2.6 Representativeness

Representativeness is a measure of the relationship of an individual sample taken from a particular site to the remainder of that site and the relationship of a small aliquot of the sample (i.e., the one used in the actual analysis) to the sample remaining on site. The representativeness of samples is assured by adherence to sampling procedures described in the Remedial Action Work Plan.

2.7 Completeness

Completeness is a measure of the quantity of data obtained from a measurement system as compared to the amount of data expected from the measurement system. Completeness is defined as the percentage of all results that are not affected by failing QC qualifiers, and should be between 70 and 100% of all analyses performed. The objective of completeness in laboratory reporting is to provide a thorough data support package. The laboratory data package provides documentation of sample analysis and results in the form of summaries, QC data, and raw analytical data. The laboratory will be required to submit data packages that follow NYSDEC ASP reporting format which, at a minimum, will include the following components:

1. All sample chain-of-custody forms.
2. The case narrative(s) presenting a discussion of any problems and/or procedural changes required during analyses. Also presented in the case narrative are sample summary forms.
3. Documentation demonstrating the laboratory's ability to attain the contract specified detection limits for all target analytes in all required matrices.
4. Tabulated target compound results and tentatively identified compounds.
5. Surrogate spike analysis results (organics).
6. Matrix spike/matrix spike duplicate/matrix spike blank results.

7. QC check sample and standard recovery results
8. Blank results (field, trip, and method).
9. Internal standard area and RT summary.

2.8 Laboratory Custody Procedures

The following elements are important for maintaining the field custody of samples:

- Sample identification
- Sample labels
- Custody records
- Shipping records
- Packaging procedures

Sample labels will be attached to all sampling bottles before field activities begin; each label will contain an identifying number. Each number will have a suffix that identifies the site and where the sample was taken. Approximate sampling locations will be marked on a map with a description of the sample location. The number, type of sample, and sample identification will be entered into the field logbook. A chain-of-custody form, initiated at the analytical laboratory will accompany the sample bottles from the laboratory into the field. Upon receipt of the bottles and cooler, the sampler will sign and date the first received blank space. After each sample is collected and appropriately identified, entries will be made on the chain-of-custody form that will include:

- Site name and address
- Samplers' names and signatures

3.0 ANALYTICAL PROCEDURES

3.1 Laboratory Analysis

Samples will be analyzed by the NYSDOH ELAP laboratory for one or more of the following parameters: VOCs in soil by USEPA Method 8260, SVOCs in soil by USEPA Method 8270BN, Target Analyte List (TAL) Metals in soil, pesticides / PCBs in soil by USEPA Method 8081/8082 and PFOS compounds by USEPA Method 537. If any modifications or additions to the standard procedures are anticipated, and if any nonstandard sample preparation or analytical protocol is to be used, the modifications and the nonstandard protocol will be explicitly defined and documented. Prior approval by EBC's PM will be necessary for any nonstandard analytical or sample preparation protocol used by the laboratory, i.e., dilution of samples or extracts by greater than a factor of five (5).

4.0 DATA REDUCTION, REVIEW, AND REPORTING

4.1 Overview

The process of data reduction, review, and reporting ensures the assessments or a conclusion based on the final data accurately reflects actual site conditions. This plan presents the specific procedures, methods, and format that will be employed for data reduction, review and reporting of each measurement parameter determined in the laboratory and field. Also described in this section is the process by which all data, reports, and work plans are proofed and checked for technical and numerical errors prior to final submission.

4.2 Data Reduction

Standard methods and references will be used as guidelines for data handling, reduction, validation, and reporting. All data for the project will be compiled and summarized with an independent verification at each step in the process to prevent transcription/typographical errors. Any computerized entry of data will also undergo verification review.

Sample analysis will be provided by a New York State certified environmental laboratory. Laboratory reports will include ASP category B deliverables for use in the preparation of a data usability summary report (DUSR). All results will be provided in accordance with the NYSDEC Environmental Information Management System (EIMS) electronic data deliverable (EDD) format. Analytical results shall be presented on standard NYSDEC ASP-B forms or equivalents, and include the dates the samples were received and analyzed, and the actual methodology used. Note that when waste characterization samples are analyzed they will be in results only format and will not be evaluated in the DUSR.

Laboratory QA/QC information required by the method protocols will be compiled, including the application of data QA/QC qualifiers as appropriate. In addition, laboratory worksheets, laboratory notebooks, chains-of-custody, instrument logs, standards records, calibration records, and maintenance records, as applicable, will be provided in the laboratory data packages to determine the validity of data. Specifics on internal laboratory data reduction protocols are identified in the laboratory's SOPs.

Following receipt of the laboratory analytical results by EBC, the data results will be compiled and presented in an appropriate tabular form. Where appropriate, the impacts of QA/QC qualifiers resulting from laboratory or external validation reviews will be assessed in terms of data usability.

4.3 Laboratory Data Reporting

All sample data packages submitted by the analytical laboratory will be required to be reported in conformance to the NYSDEC ASP (7/2005), Category B data deliverable requirements as applicable to the method utilized. All results will be provided in accordance with the NYSDEC Environmental Information Management System (EIMS) electronic data deliverable (EDD) format. Note that waste characterization samples if analyzed will be in results only format and will not be evaluated in the DUSR.

5.0 CORRECTIVE ACTION

Review and implementation of systems and procedures may result in recommendations for corrective action. Any deviations from the specified procedures within approved project plans due to unexpected site-specific conditions shall warrant corrective action. All errors, deficiencies, or other problems shall be brought to the immediate attention of the EBC PM, who in turn shall contact the Quality Assurance/Data Quality Manager or his designee (if applicable).

Procedures have been established to ensure that conditions adverse to data quality are promptly investigated, evaluated and corrected. These procedures for review and implementation of a change are as follows:

- Define the problem.
- Investigate the cause of the problem.
- Develop a corrective action to eliminate the problem, in consultation with the personnel who defined the problem and who will implement the change.
- Complete the required form describing the change and its rationale (see below for form requirements).
- Obtain all required written approvals.
- Implement the corrective action.
- Verify that the change has eliminated the problem.

During the field investigation, all changes to the sampling program will be documented in field logs/sheets and the EBC PM advised.

If any problems occur with the laboratory or analyses, the laboratory must immediately notify the PM, who will consult with other project staff. All approved corrective actions shall be controlled and documented.

All corrective action documentation shall include an explanation of the problem and a proposed solution which will be maintained in the project file or associated logs. Each report must be approved by the necessary personnel (e.g., the PM) before implementation of the change occurs. The PM shall be responsible for controlling, tracking, implementing and distributing identified changes.

TABLE 1
SUMMARY OF
SAMPLING PROGRAM RATIONALE AND ANALYSIS

Matrix	Location	Approximate Number of Samples	Frequency	Rationale for Sampling	Laboratory Analysis	Duplicates	Matrix Spikes	Spike Duplicates	Trip Blanks
Soil	Site Wide Excavation	11	1 per 900 square feet of excavation base	Endpoint Verification of excavations	VOCs EPA Method 8260B, PFOS Compounds EPA Method 537, SVOCs EPA Method 8270, pesticide / PCBs EPA Method 8081/8082, TAL metals EPA 6010.	1 per day	1 per 20 samples	1 per 20 samples	1 per trip
Soil	Excavated Historic Fill Material	6	1 per 800 cy	Waste Characterization for disposal if not stockpiled on site	VOCs EPA Method 8260B, PAHs EPA Method 8270, RCRA metals, pesticides and PCBs by EPA 8081/8082, other as per disposal facility	0	0	0	0
Soil	Excavated Uncontaminated Native Soil	7	7 Grabs for 1st 1,000 cy, 2 for each additional 1,000 cy As per CP51	Clean Verification for disposal pr reuse on-site	VOCs EPA Method 8260B	0	0	0	0
Soil	Excavated Uncontaminated Native Soil	2	2 Composites for 1st 1,000 cy, 1 for each additional 1,000 cy As per CP51	Clean Verification for disposal pr reuse on-site	SVOCs, pesticides/and PCBs by EPA 8081/8082, and RCRA metals.	0	0	0	0

TABLE 2
SAMPLE COLLECTION AND ANALYSIS PROTOCOLS

Sample Type	Matrix	Sampling Device	Parameter	Sample Container	Sample Preservation	Analytical Method#	CRQL / MDLH	Holding Time
Grab	Soil	Scoop Direct into Jar	VOCs	(1) 2 oz Jar	Cool to 4° C	EPA Method 8260C (test method 5035A)	Compound specific (1-5 ug/kg)	14 days
Grab	Soil	Scoop Direct into Jar	SVOCs	(1) 8 oz jar	Cool to 4° C	EPA Method 8270D	Compound specific (1-5 ug/kg)	14 day ext/40 days
Grab	Soil	Scoop Direct into Jar	Pest/PCBs	from 8oz jar above	Cool to 4° C	EPA Method 8081B/8082A	Compound specific (1-5 ug/kg)	14 day ext/40 days
Grab	Soil	Scoop Direct into Jar	Metals	from 8oz jar above	Cool to 4° C	TAL Metals 6010	Compound specific (01-1 mg/kg)	6 months
Grab	Soil	Scoop Direct into Jar	PFAS Target Analyte List	from 8oz jar above	Cool to 4° C	EPA Method 537	Compound specific (1 ug/kg)	14 days

Notes:

All holding times listed are from Verified Time of Sample Receipt (VTSR) unless noted otherwise. * Holding time listed is from time of sample collection.

The number in parentheses in the "Sample Container" column denotes the number of containers needed.

Triple volume required when collected MS/MSD samples

The number of trip blanks are estimated.

CRQL / MDL = Contract Required Quantitation Limit / Method Detection Limit

NA = Not available or not applicable.

ATTACHMENT D

Community Air Monitoring Plan

COMMUNITY AIR MONITORING PLAN

1840 PARK AVENUE
HARLEM, NY

OCTOBER 2020

Prepared on behalf of:

126th Street Equities LLC
316 118th Street
New York, NY 10026

Prepared by:



ENVIRONMENTAL BUSINESS CONSULTANTS

RIDGE, NY 11961

**COMMUNITY AIR MONITORING PLAN
TABLE OF CONTENTS**

1.0	INTRODUCTION.....	1
1.1	Regulatory Requirements	1
2.0	AIR MONITORING.....	2
2.1	Meteorological Data	2
2.2	Community Air Monitoring Requirements	2
3.0	VOC MONITORING, RESPONSE LEVELS, AND ACTIONS	3
3.1	Potential Corrective Measures and VOC Suppression Techniques	3
4.0	PARTICULATE MONITORING.....	4
4.1	Potential Particulate Suppression Techniques.....	4
5.0	DATA QUALITY ASSURANCE	6
5.1	Calibration	6
5.2	Operations	6
5.3	Data Review.....	6
6.0	RECORDS AND REPORTING	7

APPENDICES

Appendix A Action Limit Report

1.0 INTRODUCTION

This Community Air Monitoring Plan (CAMP) has been prepared for the excavation and remediation activities to be performed under a Remedial Action Work Plan (RAWP). The CAMP provides measures for protection for the downwind community (i.e., off-site receptors including residences, businesses, and on-site workers not directly involved in the remedial activities) from potential airborne contaminant releases resulting from remedial activities at the site.

Compliance with this CAMP is required during all activities associated with redevelopment that have the potential to generate airborne particulate matter and volatile organic compounds (VOCs). These activities include soil excavation and tank removal. This CAMP has been prepared to ensure that remedial activities do not adversely affect passersby, residents, or workers in the area immediately surrounding the Site and to preclude or minimize airborne migration of site-related contaminants to off-site areas.

1.1 Regulatory Requirements

This CAMP was established in accordance with the following requirements:

- New York State Department of Health's (NYSDOH) Generic Community Air Monitoring Plan as presented in DER-10 Technical Guidance for Site Investigation and Remediation (NYSDEC May 3, 2010). This guidance specifies that a community air-monitoring program shall be implemented to protect the surrounding community and to confirm that the work does not spread contamination off-site through the air;
- New York State Department of Environmental Conservation (NYSDEC) DER-10 Technical Guidance for Site Investigation and Remediation: This guidance provides a basis for developing and implementing a fugitive dust suppression and particulate monitoring program as an element of a hazardous waste site's health and safety program.

2.0 AIR MONITORING

Petroleum related VOCs / SVOCs, chlorinated VOCs and SVOCs and heavy metals are the constituents of concern at the Site. The appropriate method to monitor air for these constituents during remediation activities is through real-time VOC and air particulate (dust) monitoring.

The continuous monitoring locations for VOCs and particulates must reflect the nearest potentially exposed individuals and the location of ventilation system intakes for nearby structures.

2.1 Meteorological Data

At a minimum, wind direction will be evaluated at the start of each workday, noon of each workday, and the end of each workday. These readings will be utilized to position the monitoring equipment in appropriate upwind and downwind locations.

2.2 Community Air Monitoring Requirements

To establish ambient air background concentrations, air will be monitored at several locations around the site perimeter before activities begin. These points will be monitored periodically in series during the site work. When the excavation area is within 20 feet of potentially exposed populations or occupied structures, the perimeter monitoring points will be located to represent the nearest potentially exposed individuals at the downwind location and will take into account the locations of ventilation system intakes of nearby structures. The use of engineering controls such as vapor/dust barriers, temporary enclosures or ventilation devices will be considered for use by the health and safety officer should repeated dust and/or odor exceedances occur.

Fugitive respirable dust will be monitored using a MiniRam Model PDM-3 aerosol monitor (or equivalent). Air will be monitored for VOCs with a portable miniRAE 3000 photoionization detector (PID), or equivalent. All air monitoring data will be documented in a site log book by the designated site safety officer. The site safety officer or delegate must ensure that air monitoring instruments are calibrated and maintained in accordance with manufacturer's specifications. All instruments will be zeroed daily and checked for accuracy. A daily log will be kept. If additional monitoring is required, the protocols will be developed and appended to this plan.

3.0 VOC MONITORING, RESPONSE LEVELS, AND ACTIONS

Volatile organic compounds (VOCs) will be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis. Upwind concentrations will be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work will be performed using equipment appropriate to measure the types of contaminants known or suspected to be present.

The equipment will be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment will be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown. All 15-minute readings must be recorded and be available for State (DEC and DOH) personnel to review. Instantaneous readings, if any, used for decision purposes should also be recorded.
- If total VOC concentrations opposite the walls of occupied structures or next to the intake vents exceed 1 ppm, monitoring should occur within the occupied structure(s) (if access is granted by owner or occupants). Background readings in the occupied spaces must be taken prior to the commencement of the planned work. Any unusual background readings should be discussed with NYSDOH prior to the commencement of the work.

All readings will be recorded and made available for NYSDEC and NYSDOH personnel to review. If an exceedance of the Action Limits occurs, an Action Limit Report, as shown in **Appendix A**, will be completed. In addition, NYSDEC and NYSDOH will be immediately notified of any exceedances of the CAMP action levels.

3.1 Potential Corrective Measures and VOC Suppression Techniques

If the 15-minute integrated VOC level at the downwind location persists at a concentration that exceeds the upwind level by more than 5 ppm but less than 25 ppm during remediation activities, then vapor suppression techniques will be employed. The following techniques, or others, may be employed to mitigate the generation and migration of fugitive organic vapors:

- limiting the excavation size;
- limiting the drop-height when loading soil into trucks;
- spraying chemical odorants onto the soil;
- covering soil stockpiles with 6-mil plastic sheeting or tarps;
- hauling waste materials in properly tarped containers; and/or
- applying vapor suppressant foam.

4.0 PARTICULATE MONITORING

Air monitoring for particulates (i.e., dust) will be performed continuously during excavation and loading activities using both air monitoring equipment and visual observation at upwind and downwind locations. Monitoring equipment capable of measuring particulate matter smaller than 10 microns (PM10) and capable of integrating (averaging) over periods of 15 minutes or less will be set up at upwind (i.e., background) and downwind locations, at heights approximately four to five feet above land surface (i.e., the breathing zone). Monitoring equipment will be MIE Data Ram monitors, or equivalent. The audible alarm on the particulate monitoring device will be set at 90 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$). This setting will allow proactive evaluation of worksite conditions prior to reaching the action level of $100 \mu\text{g}/\text{m}^3$ above background. The monitors will be calibrated at least once per day prior to work activities and recalibrated as needed thereafter. In addition, fugitive dust migration will be visually assessed during all intrusive work activities.

The following summarizes particulate action levels and the appropriate responses:

- If the downwind PM-10 particulate level is $100 \mu\text{g}/\text{m}^3$ greater than background (upwind perimeter) for the 15-minute period, or if airborne dust is observed leaving the work area, then dust suppression techniques must be employed. Work may continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed $150 \mu\text{g}/\text{m}^3$ above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than $150 \mu\text{g}/\text{m}^3$ above the upwind level, work must be stopped and an evaluation of activities initiated. Work can resume provided that dust suppression measures (as described in Section 2.3.1 below) and other controls are successful in reducing the downwind PM-10 particulate concentration to within $150 \mu\text{g}/\text{m}^3$ of the upwind level and in preventing visible dust migration.
- If the total particulate concentrations opposite the walls of occupied structures or next to intake vents exceeds $150 \mu\text{g}/\text{m}^3$, work activities should be suspended until controls are implemented and are successful in reducing the total particulate concentration to $150 \mu\text{g}/\text{m}^3$ or less at the monitoring point.

All readings will be recorded and be available for NYSDEC and NYSDOH personnel to review. If an exceedance of the Action Limits occurs, an Action Limit Report as shown in **Appendix A** will be completed. In addition, NYSDEC and NYSDOH will be immediately notified of any exceedances of the CAMP action levels.

4.1 Potential Particulate Suppression Techniques

If the integrated particulate level at the downwind location exceeds the upwind level by more than $100 \mu\text{g}/\text{m}^3$ at any time during remediation activities, then dust suppression techniques will be employed. The following techniques, or others, may be employed to mitigate the generation and migration of fugitive dusts:

- limiting the excavation size;

- spraying water onto the excavation faces and equipment;
- covering soil stockpiles with plastic sheeting or tarps;
- Use of gravel paths / roadways;
- hauling waste materials in properly tarped containers; and/or
- limiting vehicle speeds onsite.

Work may continue with dust suppression techniques provided that downwind PM₁₀ levels are not more than 150 µg/m³ greater than the upwind levels.

There may also be situations where the dust is generated by remediation activities and migrates to downwind locations, but is not detected by the monitoring equipment at or above the action level. Therefore, if dust is observed leaving the working area, dust suppression techniques such as those listed above will be employed.

If dust suppression techniques do not lower particulates to below 150 µg/m³, or visible dust persists, work will be suspended until appropriate corrective measures are identified and implemented to remedy the situation.

All air monitoring readings will be recorded in the field logbook and will be available for the NYSDEC and NYSDOH personnel to review.

5.0 DATA QUALITY ASSURANCE

5.1 Calibration

Instrument calibration shall be documented on instrument calibration and maintenance sheets or in the designated field logbook. All instruments shall be calibrated as required by the manufacturer. Calibration checks may be used during the day to confirm instrument accuracy. Duplicate readings may be taken to confirm individual instrument response.

5.2 Operations

All instruments shall be operated in accordance with the manufacturer's specifications. Manufacturers' literature, including an operations manual for each piece of monitoring equipment will be maintained on-site by the SSO for reference.

5.3 Data Review

The SSO will interpret all monitoring data based the established criteria and his/her professional judgment. The SSO shall review the data with the PM to evaluate the potential for worker exposure, upgrades/downgrades in level of protection, comparison to direct reading instrumentation and changes in the integrated monitoring strategy.

Monitoring and sampling data, along with all sample documentation will be periodically reviewed by the PM.

6.0 RECORDS AND REPORTING

All air readings must be recorded on daily air monitoring log sheets and made available for review by personnel from NYSDEC and NYSDOH. Additionally, NYSDEC and NYSDOH will be immediately notified of any exceedances of the CAMP action levels.

APPENDIX A
ACTION LIMIT REPORT

**CAMP
ACTION LIMIT REPORT**

Project Location: _____

Date: _____

Time: _____

Name: _____

Contaminant: _____ PM-10: _____ VOC: _____

Wind Speed: _____

Wind Direction: _____

Temperature: _____

Barometric Pressure: _____

DOWNWIND DATA

Monitor ID #: _____ Location: _____ Level Reported: _____

Monitor ID#: _____ Location: _____ Level Reported: _____

UPWIND DATA

Monitor ID #: _____ Location: _____ Level Reported: _____

Monitor ID#: _____ Location: _____ Level Reported: _____

BACKGROUND CORRECTED LEVELS

Monitor ID #: Location: _____ Level Reported: Level Reported: _____

ACTIONS TAKEN

ATTACHMENT E ***Citizen Participation Plan***



New York State Department of Environmental Conservation

Brownfield Cleanup Program

Citizen Participation Plan **for** **1840 PARK AVENUE SITE**

**1840-1856 PARK AVENUE
HARLEM, NY**

August 2019

Contents

<u>Section</u>	<u>Page Number</u>
1. What is New York’s Brownfield Cleanup Program?	1
2. Citizen Participation Activities	1
3. Major Issues of Public Concern.....	6
4. Site Information	6
5. Investigation and Cleanup Process.....	8
Appendix A - Project Contacts and Locations of Reports and Information.....	11
Appendix B - Site Contact List	12
Appendix C - Site Location Map	16
Appendix D - Brownfield Cleanup Program Process.....	17

* * * * *

Note: The information presented in this Citizen Participation Plan was current as of the date of its approval by the New York State Department of Environmental Conservation. Portions of this Citizen Participation Plan may be revised during the site’s investigation and cleanup process.

Applicant: **126th Street Equities LLC**
Site Name: **1840 Park Avenue (“Site”)**
Site Address: **1840-1856 Park Avenue, Harlem, NY**
Site County: **New York**
Site Number: **To be added**

1. What is New York’s Brownfield Cleanup Program?

New York’s Brownfield Cleanup Program (BCP) works with private developers to encourage the voluntary cleanup of contaminated properties known as “brownfields” so that they can be reused and developed. These uses include recreation, housing, and business.

A *brownfield* is any real property that is difficult to reuse or redevelop because of the presence or potential presence of contamination. A brownfield typically is a former industrial or commercial property where operations may have resulted in environmental contamination. A brownfield can pose environmental, legal, and financial burdens on a community. If a brownfield is not addressed, it can reduce property values in the area and affect economic development of nearby properties.

The BCP is administered by the New York State Department of Environmental Conservation (NYSDEC) which oversees Applicants that conduct brownfield site investigation and cleanup activities. An Applicant is a person who has requested to participate in the BCP and has been accepted by NYSDEC. The BCP contains investigation and cleanup requirements, ensuring that cleanups protect public health and the environment. When NYSDEC certifies that these requirements have been met, the property can be reused or redeveloped for the intended use.

For more information about the BCP, go online at: <http://www.dec.ny.gov/chemical/8450.html>.

2. Citizen Participation Activities

Why NYSDEC Involves the Public and Why It Is Important

NYSDEC involves the public to improve the process of investigating and cleaning up contaminated sites, and to enable citizens to participate more fully in decisions that affect their health, environment, and social well-being. NYSDEC provides opportunities for citizen involvement and encourages early two-way communication with citizens before decision-makers form or adopt final positions.

Involving citizens affected and interest in site investigation and cleanup programs is important for many reasons. These include:

- Promoting the development of timely, effective site investigation and cleanup programs that protect public health and the environment;
- Improving public access to, and understanding of, issues and information related to a particular site and that Site’s investigation and cleanup process;

- Providing citizens with early and continuing opportunities to participate in NYSDEC's site investigation and cleanup process;
- Ensuring that NYSDEC makes site investigation and cleanup decisions that benefit from input that reflects the interests and perspectives found within the affected community; and
- Encouraging dialogue to promote the exchange of information among the affected/interested public, State agencies, and other interested parties that strengthens trust among the parties, increases understanding of site and community issues and concerns, and improves decision-making.

This Citizen Participation (CP) Plan provides information about how NYSDEC will inform and involve the public during the investigation and cleanup of the Site identified above. The public information and involvement program will be carried out with assistance, as appropriate, from the Applicant.

Project Contacts

Appendix A identifies NYSDEC project contact(s) to whom the public should address questions or request information about the site's investigation and cleanup program. The public's suggestions about this CP Plan and the CP program for the Site are always welcome. Interested people are encouraged to share their ideas and suggestions with the project contacts at any time.

Locations of Reports and Information

The locations of the reports and information related to the Site's investigation and cleanup program also are identified in Appendix A. These locations provide convenient access to important project documents for public review and comment. Some documents may be placed on the NYSDEC website. If this occurs, NYSDEC will inform the public in fact sheets distributed about the Site and by other means, as appropriate.

Site Contact List

Appendix B contains the site contact list. This list has been developed to keep the community informed about, and involved in, the site's investigation and cleanup process. The site contact list will be used periodically to distribute fact sheets that provide updates about the status of the project. These will include notifications of upcoming activities at the Site (such as fieldwork), as well as availability of project documents and announcements about public comment periods.

The site contact list includes, at a minimum:

- Chief executive officer and planning board chairperson of each county, city, town and village in which the Site is located;
- Residents, owners, and occupants of the Site and properties adjacent to the Site;
- The public water supplier which services the area in which the Site is located;
- Any person who has requested to be placed on the site contact list;

- The administrator of any school or day care facility located on or near the Site for purposes of posting and/or dissemination of information at the facility; and
- Location(s) of reports and information.

The site contact list will be reviewed periodically and updated as appropriate. Individuals and organizations will be added to the site contact list upon request. Such requests should be submitted to the NYSDEC project contact(s) identified in Appendix A. Other additions to the site contact list may be made at the discretion of the NYSDEC project manager, in consultation with other NYSDEC staff as appropriate.

CP Activities

The table at the end of this section identifies the CP activities, at a minimum, that have been and will be conducted during the Site's investigation and cleanup program. The flowchart in Appendix D shows how these CP activities integrate with the site investigation and cleanup process. The public is informed about these CP activities through fact sheets and notices distributed at significant points during the program. Elements of the investigation and cleanup process that match up with the CP activities are explained briefly in Section 5.

- **Notices and fact sheets** help the interested and affected public to understand contamination issues related to a site, and the nature and progress of efforts to investigate and clean up a site.
- **Public forums, comment periods and contact with project managers** provide opportunities for the public to contribute information, opinions and perspectives that have potential to influence decisions about a site's investigation and cleanup.
- **Document repositories** allow the public to access and review project documents including investigation and cleanup work plans and final reports.

The public is encouraged to contact project staff at any time during the Site's investigation and cleanup process with questions, comments, or requests for information. This CP Plan may be revised due to changes in major issues of public concern identified in Section 3 or in the nature and scope of investigation and cleanup activities. Modifications may include additions to the site contact list and changes in planned citizen participation activities.

Technical Assistance Grant

NYSDEC must determine if the Site poses a significant threat to public health or the environment. This determination generally is made using information developed during the investigation of the Site, as described in Section 5.

If the Site is determined to be a significant threat, a qualifying community group may apply for a Technical Assistance Grant (TAG). The purpose of a TAG is to provide funds to the qualifying group to obtain independent technical assistance. This assistance helps the TAG recipient to

interpret and understand existing environmental information about the nature and extent of contamination related to the Site and the development/implementation of a remedy.

An eligible community group must certify that its membership represents the interests of the community affected by the Site, and that its members' health, economic well-being or enjoyment of the environment may be affected by a release or threatened release of contamination at the Site.

For more information about TAGs, go online at <http://www.dec.ny.gov/regulations/2590.html>.

Note: The table identifying the citizen participation activities related to the Site's investigation and cleanup program follows on the next page:

Citizen Participation Requirements (Activities)	Timing of CP Activity(ies)
Application Process: • Prepare site contact list • Establish document repositories	
• Publish notice in Environmental Notice Bulletin (ENB) announcing receipt of application and 30-day public comment period • Publish above ENB content in local newspaper • Mail above ENB content to site contact list • Conduct 30-day public comment period	At time of preparation of application to participate in the BCP. When NYSDEC determines that BCP application is complete. The 30-day public comment period begins on date of publication of notice in ENB. End date of public comment period is as stated in ENB notice. Therefore, ENB notice, newspaper notice, and notice to the site contact list should be provided to the public at the same time.
After Execution of Brownfield Site Cleanup Agreement: • Prepare Citizen Participation (CP) Plan	
Before NYSDEC Approves Remedial Investigation (RI) Work Plan: • Distribute fact sheet to site contact list about proposed RI activities and announcing 30-day public comment period about draft RI Work Plan • Conduct 30-day public comment period	
After Applicant Completes Remedial Investigation: • Distribute fact sheet to site contact list that describes RI results	Before NYSDEC approves RI Report
Before NYSDEC Approves Remedial Work Plan (RWP): • Distribute fact sheet to site contact list about proposed RWP and announcing 45-day public comment period • Public meeting by NYSDEC about proposed RWP (if requested by affected community or at discretion of NYSDEC project manager) • Conduct 45-day public comment period	Before NYSDEC approves RWP. Forty-five day public comment period begins/ends as per dates identified in fact sheet. Public meeting would be held within the 45-day public comment period.
Before Applicant Starts Cleanup Action: • Distribute fact sheet to site contact list that describes upcoming cleanup action	Before the start of cleanup action.
After Applicant Completes Cleanup Action: • Distribute fact sheet to site contact list that announces that cleanup action has been completed and that summarizes the Final Engineering Report • Distribute fact sheet to site contact list announcing issuance of Certificate of Completion (COC)	At the time NYSDEC approves Final Engineering Report. These two fact sheets are combined if possible if there is not a delay in issuing the COC.

3. Major Issues of Public Concern

This section of the CP Plan identifies major issues of public concern that relate to the Site. Additional major issues of public concern may be identified during the course of the Site's investigation and cleanup process.

The Site is located in an Environmental Justice Area. Environmental justice is defined as the fair treatment and meaningful involvement of all people regardless of race, color, national origin, or income with respect to the development, implementation, and enforcement of environmental laws, regulations, and policies.

Environmental justice efforts focus on improving the environment in communities, specifically minority and low-income communities, and addressing disproportionate adverse environmental impacts that may exist in those communities. While this Site is in an Environmental Justice Area, there is no need to translate any future fact sheets into another language.

The major issues of concern to the public will be potential impacts of nuisance odors and dust during the removal of affected soil at the Site. Another example of a major issue of public concern would be the impact of increased truck traffic on the surrounding neighborhood. Construction safety issues will also be addressed.

This work will be performed in accordance with procedures which will be specified under a detailed Remedial Program which considers and takes preventive measures for exposures to future residents of the property and those on adjacent properties during construction. Detailed plans to monitor the potential for exposure including a Health and Safety Plan (HASP) and a Community Air Monitoring Plan (CAMP) are required components of the remedial program. Implementation of these plans will be under the direct oversight of the NYSDEC and the New York State Department of Health (NYSDOH).

These plans will specify the following worker and community health and safety activities during remedial activity at the Site:

- On-site air monitoring for worker protection;
- Perimeter air monitoring for community protection;
- The use of odor, vapor, and dust controls, such as water or foam sprays, as needed;
- Monitoring and control of soil, sediments, and water generated during remediation; and
- Truck routes which avoid residential streets.

The HASP and the CAMP will be prepared as part of the Remedial Action Work Plan (RAWP) and will be available for public review at the document repository as identified in Appendix A (page 11).

Furthermore, the Applicant has prepared a Scoping Sheet for Major Issues of Public Concern which will assist them in identifying any concerns. Experience from similar projects, 311 complaints and other construction projects in the area will help in identifying such issues.

4. Site Information

Appendix C contains a map identifying the location of the Site.

Site Description

The street address for the Site is 1840-1856 Park Avenue, New York, NY 10035. The Site is located in the Harlem neighborhood of New York (Manhattan) and is comprised of portion of a single tax parcel (Block: 1751, Lot No. 33, formerly Lot Nos. 33, 35, 36, 37, 38, 40, 132, and 137) totaling 9,458 square feet (0.22 acres). The far southern portion of Lot No. 33 having an area of 2,452 ft² is to be excluded from the development project and the scope of this investigation. The Site has approximately 170 feet of street frontage along Park Avenue, 75 feet of street frontage along East 127th Street, and 90 feet of Street frontage along East 126th Street. The property is currently developed with an asphalt-paved parking lot. No buildings or other structures are present, although chain-link and/or corrugated metal fencing are present along the northern, southern and eastern property boundaries, with access gates leading from East 126th (south) and East 127th Streets (north).

Surrounding land use consists primarily of residential and mixed-use (commercial/retail and residential) properties. East 127th Street is to the north, followed by the Promise Academy Charter School (80 East 128th Street) with East 128th Street beyond. East 126th Street is to the south, followed by a public parking lot (1824 Park Avenue), with a commercial office building beyond. Park Avenue and elevated Metro-North railroad tracks are to the east, followed by the Association to Benefit Children, a parking lot and a commercial building. Residential apartment buildings are to the west (59 East 126th Street and 78 East 127th Street), followed by additional apartment buildings. There are three schools located within ¼ mile of the project Site

History of Site Use, Investigation, and Cleanup

Historically the property developed with multiple low-rise commercial/retail and residential buildings, including several auto repair shops and equipment storage yard.

A Remedial Investigation was completed at the Site from March 12, 2019 through June 7, 2019 and documented in a Remedial Investigation Report dated July 2019. The goals of the Remedial Investigation were to define the nature and extent of contamination in soil, groundwater and any other impacted media; to identify the source(s) of the contamination; to assess the impact of the contamination on public health and/or the environment; and to provide information to support the development of a Remedial Work Plan to address the contamination.

Activities completed under the RI:

- Installed eleven soil borings and collected thirty-two soil samples for laboratory analysis of volatile organic compounds (VOCs), semi-volatile organic compounds (SVOCs), herbicides, pesticides, organophosphate pesticides, PCBs, and metals;
- Installed four groundwater monitoring wells and collected three groundwater samples for laboratory analysis of VOCs, SVOCs, pesticides, PCBs, and total and dissolved metals;
- Installed six soil gas implants and collected six soil gas samples for laboratory analysis of VOCs.

The results of sampling performed during this RI identified an area of petroleum-related VOCs at the northwestern portion of the Site, with the highest concentrations in the vicinity of soil boring SB5. This area represents the location of several historic auto repair shops, as well as a potential UST identified during the geophysical survey. This impacted area is estimated to be approximately 40 sf. Total petroleum VOCs in SB5 reached a maximum of 291,000 µg/Kg at the 0-2 ft interval, and decreased to non-detectable levels at the water table at 16-18 ft. A small area of petroleum contamination was also identified at boring F3 (6-8') Total VOCs in sample F3 (6-8') were 2,331 µg/Kg, and are likely attributable to the presence of heterogeneous fill material.

Historic fill materials have been identified across the Site to depths 6 to 10 feet below grade. Depending on location, the historic fill material contains SVOCs, pesticides, PCBs, and one or more metals including arsenic, barium, beryllium, cadmium, chromium, copper, lead, mercury, nickel, and zinc above unrestricted and/or restricted use SCOs. Most notably were pesticide impacts in samples SB5 (0-2'), F1 (5-7') and F3 (6-8') and metals impacts in samples SB1 (0-2'), F3 (0-2'), F3 (6-8') and F4 (0-2').

The chlorinated VOC PCE was detected above its NYSDEC AWQ in each of the samples collected across the Site. However, as PCE was not detected in site soils, with the exception of one shallow sample, the presence of PCE appears attributable to an off-site source of generally degraded regional water quality.

The pesticide dieldrin was detected in each of the four groundwater samples collected/analyzed, with concentrations exceeding the AWQ in three samples. This compound was detected in shallow to intermediate soil samples, but was not identified in any of the deep soil samples.

Moderate levels of PFAS compounds were detected in the one groundwater sample collected from the site (MW4). The combined PFOA and PFOS concentration measured in this sample (89.3 ng/L) was above the USEPA Health Advisory Level of 70 ng/L.

5. Investigation and Cleanup Process

Application

The Requestor has applied for and has been accepted into New York's Brownfield Cleanup Program (BCP) as a Volunteer. This means that the Applicant was not responsible for the disposal or discharge of the contaminants or whose ownership or operation of the Site took place after the discharge or disposal of contaminants. The Volunteer must fully characterize the nature and extent of contamination on-site, and must conduct a qualitative exposure assessment, (a process that characterizes the actual or potential exposures of people, fish and wildlife to contaminants on the Site and to contamination that has migrated from the Site).

The Requestor intends to redevelop the property with a new 19-story mixed-use (commercial/residential) building, with a single basement level. The building will occupy the majority of site footprint, with a paved yard area at the southeastern portion. The cellar level will consist of 7,916 SF of commercial space, utility/mechanical rooms, a bicycle room, restrooms, elevators and stairways. The first floor will include 9,040 SF of commercial space, the residential entrance lobby, restrooms, elevators and stairways. The 2nd floor will contain 6,487 SF of

commercial space, utility space, elevators and stairways. The 3rd floor will consist of utility and mechanical space, a bicycle room, and recreational space, including an outdoor recreation area atop the 2nd floor roof. Floors 4 through 19 will consist of 66-studio, 31 1-bedroom and 63 2-bedroom residential apartments, elevators and stairways.

To achieve this goal, the Applicant will conduct cleanup activities at the Site with oversight provided by NYSDEC. The Brownfield Cleanup Agreement (BCA) executed by NYSDEC and the Applicant sets forth the responsibilities of each party in conducting these activities at the Site.

Investigation

A “remedial investigation” (RI) was completed before the property was entered into the BCP. Upon receipt of the RI, the NYSDEC will determine if the investigation goals and requirements of the BCP have been met or if additional work is needed before a remedy can be selected.

The site investigation has several goals:

- 1) Define the nature and extent of contamination in soil, surface water, groundwater and any other parts of the environment that may be affected;
- 2) Identify the source(s) of the contamination;
- 3) Assess the impact of the contamination on public health and the environment; and
- 4) Provide information to support the development of a proposed remedy to address the contamination or the determination that cleanup is not necessary.

When the investigation is complete, the Applicant will prepare and submit a report that summarizes the results. This report also will recommend whether cleanup action is needed to address site-related contamination. The investigation report is subject to review and approval by NYSDEC.

NYSDEC will use the information in the investigation report to determine if the Site poses a significant threat to public health or the environment. If the Site is a significant threat, it must be cleaned up using a remedy selected by NYSDEC from an analysis of alternatives prepared by the Applicant and approved by NYSDEC. If the Site does not pose a significant threat, the Applicant may select the remedy from the approved analysis of alternatives.

Remedy Selection

When the investigation of the Site has been determined to be complete, the project likely would proceed in one of two directions:

1. The Applicant may recommend in its investigation report that no action is necessary at the Site. In this case, NYSDEC would make the investigation report available for public comment for 45 days. NYSDEC then would complete its review, make any necessary revisions, and, if appropriate, approve the investigation report. NYSDEC would then issue a Certificate of Completion (COC) (described below) to the Applicant.

or

2. The Applicant may recommend in its investigation report that action needs to be taken to address site contamination. After NYSDEC approves the investigation report, the Applicant may then develop a cleanup plan, officially called a Remedial Work Plan. The Remedial Work Plan describes the Applicant's proposed remedy for addressing contamination related to the Site.

When the Applicant submits a proposed Remedial Work Plan for approval, NYSDEC would announce the availability of the proposed plan for public review during a 45-day public comment period.

Cleanup Action

NYSDEC will consider public comments, and revise the draft cleanup plan if necessary, before approving the proposed remedy. The New York State Department of Health (NYSDOH) must concur with the proposed remedy. After approval, the proposed remedy becomes the selected remedy.

The Applicant may then design and perform the cleanup action to address the site contamination. NYSDEC and NYSDOH oversee the activities. When the Applicant completes cleanup activities, it will prepare a Final Engineering Report (FER) that certifies that cleanup requirements have been achieved or will be achieved within a specific time frame. NYSDEC will review the report to be certain that the cleanup is protective of public health and the environment for the intended use of the Site.

Certificate of Completion

When NYSDEC is satisfied that cleanup requirements have been achieved or will be achieved for the Site, it will approve the FER. NYSDEC then will issue a COC to the Applicant. The COC states that cleanup goals have been achieved, and relieves the Applicant from future liability for site-related contamination, subject to certain conditions. The Applicant would be eligible to redevelop the Site after it receives a COC.

Site Management

Site management is the last phase of the site cleanup program. This phase begins when the COC is issued. Site management may be conducted by the Applicant under NYSDEC oversight, if contamination will remain in place. Site management incorporates any institutional and engineering controls required to ensure that the remedy implemented for the Site remains protective of public health and the environment. All significant activities are detailed in a Site Management Plan (SMP).

An institutional control is a non-physical restriction on use of the Site, such as a deed restriction that would prevent or restrict certain uses of the property. An institutional control may be used when the cleanup action leaves some contamination that makes the Site suitable for some, but not all uses.

An engineering control is a physical barrier or method to manage contamination. Examples include: caps, covers, barriers, fences, and treatment of water supplies.

Site management also may include the operation and maintenance of a component of the remedy, such as a system that is pumping and treating groundwater. Site management continues until NYSDEC determines that it is no longer needed.

Appendix A

Project Contacts and Locations of Reports and Information

Project Contacts

For information about the site's investigation and cleanup program, the public may contact any of the following project staff:

New York State Department of Environmental Conservation (NYSDEC):

To be added
Project Manager
New York State Department of
Environmental Conservation
47-40 21st Street
Long Island City, NY 11101-5407
Tel:
Email:

Thomas Panzone
Regional Citizen Participation Specialist
NYSDEC Region 2
Office of Communications Services
47-40 21st Street
Long Island City, NY 11101-5407
Tel: (718) 482-4953
Email: thomas.panzone@dec.ny.gov

New York State Department of Health (NYSDOH):

New York State Department of Health
Bureau of Environmental Exposure Investigation
Empire State Plaza – Corning Tower Room 1787
Albany, New York 12237
Tel: (518) 402-7860
Email: beei@health.ny.gov

Locations of Reports and Information

The facilities identified below are being used to provide the public with convenient access to important project documents:

New York Public Library, 125th Street Branch

224 E 125th Street, New York, NY 10035
(212) 534-5050

Hours

Mon 11:00 AM - 7:00 PM
Tue 11:00 AM - 7:00 PM
Wed 11:00 AM - 7:00 PM
Thu 11:00 AM - 7:00 PM
Fri 10:00 AM - 5:00 PM
Sat 10:00 AM - 5:00 PM
Sun - Closed

Manhattan Community Board 11
1664 Park Avenue, Ground Floor
New York, NY, 10035

Appendix B - Site Contact List

Local Government Contacts:

City of New York

Bill de Blasio
Mayor of New York City
City Hall
New York, NY 10007

Gale Brewer
Manhattan Borough President
1 Centre Street, 19th Floor
New York, NY 10007

Diane Collier
Chair, Manhattan Community Board 11
1664 Park Avenue, Ground Floor
New York, NY, 10035

Mr. Angel D. Mescain
District Manager, Manhattan Community Board 11
1664 Park Avenue, Ground Floor
New York, NY, 10035

Bill Perkins
NYC Council Member, 9th District
Adam Clayton Powell Jr. State Office Building
163 West 125th Street, Room 729,
New York, NY 10027

Marisa Lago
Chair of City Planning
120 Broadway, 31st Floor
New York, NY 10271

Luis Sanchez
New York City Department of Transportation
Manhattan Borough Commissioner
55 Water Street, 9th Floor
New York, NY 10041

Manhattan County Clerk's Office
Norman Goodman, County Clerk
60 Centre Street, Room 161
New York, NY 10007

Letitia James
Public Advocate
1 Centre Street, 15th Floor
New York, NY 10007

Scott M. Stringer
Office of the Comptroller
1 Centre Street
New York, NY 10007
Julie Stein

Office of Environmental Planning & Assessment
NYC Dept. of Environmental Protection
96-05 Horace Harding Expressway
Flushing, NY 11373

Nilda Mesa , Director
NYC Office of Environmental Coordination
100 Gold Street– 2nd Floor
New York, NY 10038

Mark McIntyre
NYC Department of Environmental Remediation
100 Gold Street, 2nd Floor
New York, NY 10038

New York State
Brian A. Benjamin
NYS Senator
163 West 125th Street
Harlem State Office Bldg., Suite 912
New York, NY 10027

Robert J. Rodriguez
NYS Assembly Member
55 East 115th St
New York, NY 10029

Federal
Charles Schumer
U.S. Senator
757 Third Avenue, Suite 17-02
New York, NY 10017

Kirsten Gillibrand
U.S. Senator
780 Third Avenue, Suite 2601
New York, NY 10017

Carolyn Maloney
U.S. House of Representatives
619 Lorimer Street
Brooklyn, NY 11211

Adjacent Property Owner Contacts

Contact information for the identified owners, as listed in the New York City ACRIS Database, are as follows:

North

1. DEPARTMENT OF EDUCATION
52 CHAMBERS ST. LB BY 1
NEW YORK NY 10007-1243

PROMISE ACADEMY II
LOWER AND UPPER ELEMENTARY SCHOOLS
2005 MADISON AVENUE
MANHATTAN 10035

East

2. 1775 TP4 HOUSING DEVELOPMENT FUND COMPANY
405 PARK AVE. STE 103
NEW YORK NY 10022-4405

OCCUPANT / TENANT
1845 PARK AVENUE
MANHATTAN 10035
3. HOUSING PRESERVATION & DEVELOPMENT
134 BROADWAY #77
BROOKLYN NY 11211-6031

OCCUPANT / TENANT
106 EAST 127 STREET
MANHATTAN NY 10035
4. ASSOC TO BENEFIT CHILDREN
419 E. 86TH ST.
NEW YORK NY 10028-6402

ASSOC TO BENEFIT CHILDREN
1841 PARK AVENUE
MANHATTAN 10035

South

5. 1824 PARK AVENUE LLC
1824 PARK AVE.
NEW YORK NY 10035-1610
6. GITTELMAN LAURIE
66 E. 126TH ST.
NEW YORK NY 10035-1647

West

7. 59 EAST 126 LLC
85 DELANCEY ST.
NEW YORK NY 10002-3182

OCCUPANT / TENANT
59 E. 126TH ST.
MANHATTAN 10035
8. 78-80 EAST 127TH ST HDFC C/O
ELITE PROPERTY MGMT
78-80 EAST 127TH ST. HDFC
10 MANHATTAN AVE.
NEW ROCHELLE NY 10801-4211

OCCUPANT / TENANT
78 E. 127TH ST.
MANHATTAN 10035

9.3 Local News Media

Amsterdam News
2340 Frederick Douglass Blvd
New York, NY 10027
(212) 932-7400

New York Daily News
4 New York Plaza
New York, NY 10004

New York Post
1211 Avenue of the Americas
New York, NY 10036-8790

NY 1 News
75 Ninth Avenue
New York, NY 10011

Impacto New York
225 West 35th Street, Suite 305
New York, NY 10001

La Voz Hispana NY
159 East 116th Street
New York, NY 10029

9.4 Public Water Supplier

New York City Department of Environmental Protection
Bureau of Environmental Planning and Analysis
59-17 Junction Boulevard
Flushing, NY 11373

Requested Contacts

No requests have been made at this time.


Schools and Daycare Facilities

1. Promise Academy II Lower Elementary
245 West 129th St., New York, NY 10027
(646) 556-6283
Attn: Sheryl Ragland, Principal
2. Promise Academy II Middle and High School
35 E 125th St, New York, NY 10035
(212) 360-3225
Attn: Katherine Hurtado, Principal
3. Harlem Renaissance High School
22 E 128th St
New York, NY 10035
(212) 996-3795
Attn: James Caputo

Appendix C - Site Location Map



Appendix D– Brownfield Cleanup Program Process

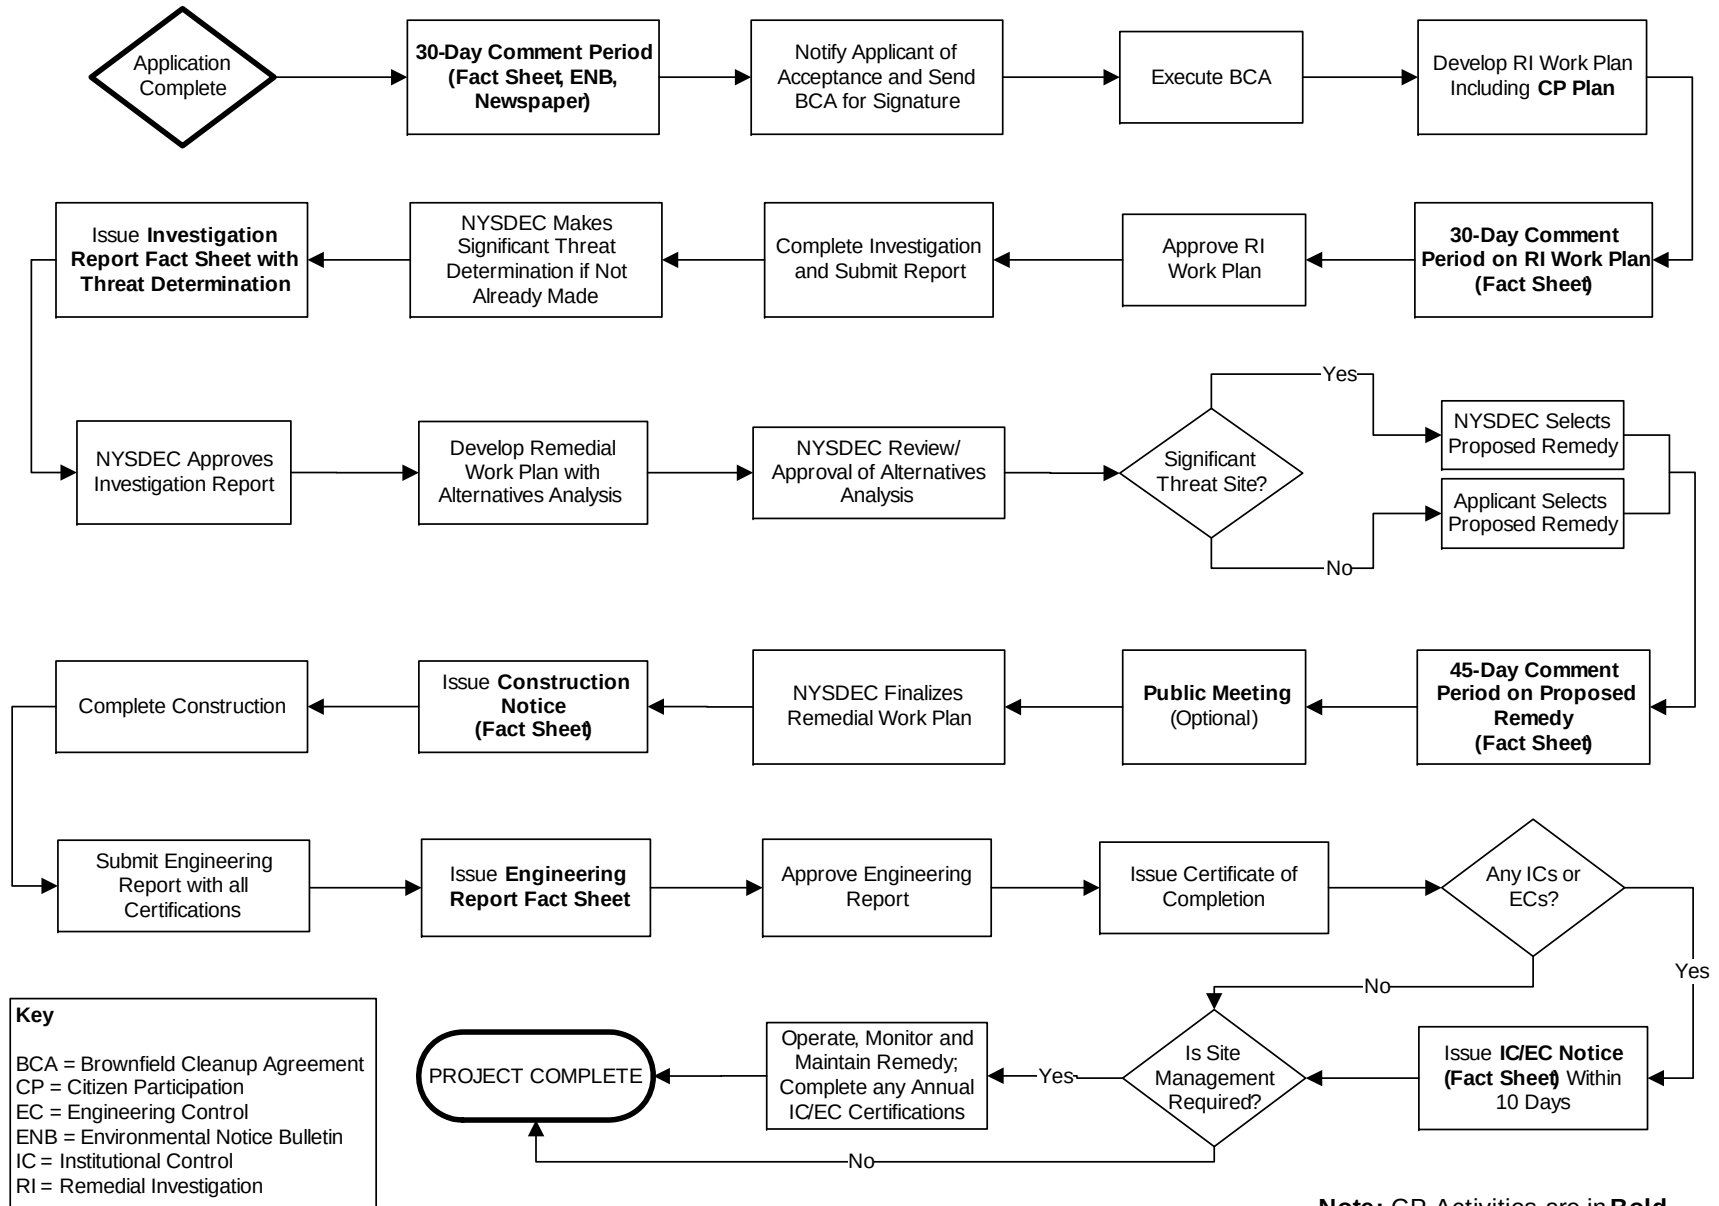

Remedial Programs

Scoping Sheet for Major Issues of Public Concern

Instructions

This Scoping Sheet assesses: major issues of public concern; impacts of the site and its remedial program on the community; community interest in the site; information the public needs; and information needed from the public, if applicable.

The information generated helps to plan and conduct required citizen participation (CP) activities, and to choose and conduct additional CP activities, if appropriate. The scoping sheet can be revisited and updated as appropriate during the site's remedial process to more effectively implement the site's CP program.

Note: Use the information as an aid to prepare and update the Major Issues of Public Concern section of the site CP Plan.

General Instructions

- When to prepare: During preparation of the CP Plan for the site. It can be revisited and updated anytime during the site remedial process.
- Fill in site name and other information as appropriate.

Instructions for Numbered Parts

Consider the bulleted issues and questions below and any others that may be appropriate to the site and the community to help complete the five Parts of this Scoping Sheet. Include the issue stakeholders in Parts 1 through 3 and adjust the site's contact list accordingly.

Part 1. List Major Issues of Public Concern and Information the Community Wants.

- Is our health being impacted? (e.g. Are there problems with our drinking water or air? Are you going to test our water, yards, sumps, basements? Have health studies been done?)
- There are odors in the neighborhood. Do they come from the site and are they hazardous?
- Are there restrictions on what we may do (e.g. Can our children play outside? Can we garden? Must we avoid certain areas? Can we continue to recreate (fish, hunt, hike, etc. on/around the site?)
- How and when were the site's contamination problems created?
- What contaminants are of concern and why? How will you look for contamination and find out where it is going? What is the schedule for doing that?
- The site is affecting our property values!
- How can we get more information (e.g. who are the project contacts?)
- How will we be kept informed and involved during the site remedial process?
- Who has been contacted in the community about site remedial activities?
- What has been done to this point? What happens next and when?
- The site is going to be cleaned up for restricted use. What does that mean? We don't want redevelopment on a "dirty" site.

Part 2. List Important Information Needed From the Community, if Applicable.

- Can the community supplement knowledge about past/current uses of the site?
- Does the community have knowledge that the site may be significantly impacting nearby properties, natural resources, etc.?

- Are there activities currently taking place at the site or at nearby properties that may need to be restricted?
- Who may be interested or affected by the site that has not yet been identified?
- Are there unique community characteristics that could affect how information is exchanged?
- Do the community and/or individuals have any concerns they want monitored?
- Does the community have information about other sources in the area for the contamination?

Part 3. List Major Issues and Information That Need to be Communicated to the Community.

- The process and general schedule to investigate, remediate and, if applicable, redevelop the site.
- Current understanding about the site contamination and effects, if any, on public health and the environment.
- Site impacts on the community and any restrictions on the public's use of the site and/or nearby properties.
- Planned CP activities, their schedule, and how they relate to the site's remedial process.
- Ways for the community to obtain/provide information (document repositories, contacts, etc.).

Part 4. Community Characteristics

a. - e. Obtain information from local officials, property owners and residents, site reports, site visits, "windshield surveys," other staff, etc.

f. Has the affected community experienced other **significant** present or past environmental problems unrelated to this site? Such experiences could significantly affect public concerns and perspectives about the site; how the community will relate to project staff; the image and credibility of project staff within the community; and the ways in which project staff communicate with the community.

g. Consider factors such as:

- Is English the primary language of the affected community? If not, provisions should be considered regarding public outreach activities such as fact sheets, meetings, door-to-door visits and other activities to ensure their effectiveness.
- The age demographics of the community. For example, is there a significant number of senior citizens in the community? It may be difficult for some to attend public meetings and use document repositories. This may suggest adopting more direct interaction with the community with activities such as door-to-door visits, additional fact sheets, visits to community and church centers, nursing homes, etc.
- How do people travel about the community? Would most people drive to a public meeting or document repository? Is there adequate public transportation?

Part 5. Affected/Interested Public. Individuals and organizations who need or want information and input can change during the site's remedial process. This need is influenced by real, potential or perceived impacts of the site or the remedial process. Some people may want information and input throughout the remedial process. Others may participate only during specific remedial stages, or may only be interested in particular issues. It is important to revisit this question when reviewing this scoping sheet. Knowing who is interested in the site – and the issues that are important to them – will help in the selection and conduct of appropriate outreach activities, and to identify their timing and the information to be exchanged.

Check all affected/interested parties that apply to the site. **Note: Adjust the site's contact list appropriately.** The following are some ways to identify affected/interested parties:

- Tax maps of adjacent property owners
- Attendees at public meetings
- Telephone discussions
- Letters and e-mails to DER, the remedial party, and other agencies
- Political jurisdictions and boundaries
- Media coverage

- Current/proposed uses of site and/or nearby properties (recreational, commercial, industrial)
- Discussions with community organizations: grass roots organizations, local environmental groups, environmental justice groups, churches, and neighborhood advisory groups



Remedial Programs

Scoping Sheet for Major Issues of Public Concern (see instructions)

Remedial Party: 126th Street Equities LLC

Site Name: 1840 Park Avenue

Site Number: To be added

Site County: New York

Note: For Parts 1. – 3., the individuals, groups, organizations, businesses, and units of government identified should be added to the site contact list as appropriate.

Part 1. List major issues of public concern and information the community wants. Identify individuals, groups, organizations, businesses, and/or units of government related to the issue(s) and/or information. **Use this information as an aid to prepare or update the Major Issues of Public Concern section of the site Citizen Participation Plan.**

Nuisance odors and dust during the removal of affected soil at the Site. Also increased truck traffic on the surrounding neighborhood.

How were these issues and/or information identified?

Experience on similar projects in the area.

Part 2. List important information needed **from** the community, if applicable. Identify individuals, groups, organizations, businesses, and/or units of government related to the needed information.

N/A

How were these information needs identified?

N/A

Part 3. List major issues and information that need to be communicated **to** the community. Identify individuals, groups, organizations, businesses and/or units of government related to the issue(s) and/or information.

See BCP CPP milestones and Site Contact list

How were these issues and/or information identified?

Applicable guidance

Part 4. Identify the following characteristics of the affected/interested community. This knowledge will help to identify and understand issues and information important to the community, and ways to effectively develop and implement the site citizen participation plan (mark all that apply):

a. Land use/zoning around site:

☒ **Residential** ☐ **Agricultural** ☐ **Recreational** ☒ **Commercial** ☐ **Industrial**

b. Residential type around site:

☒ **Urban** ☐ **Suburban** ☐ **Rural**

c. Population density around site:

☒ **High** ☐ **Medium** ☐ **Low**

d. Community economic status:

☐ High ☒ Medium ☐ Low

e. Water supply of nearby residences:

☒ Public ☐ Private Wells ☐ Mixed

☐ Yes ☒ No f. Other environmental issues significantly impacting affected community?

Provide details if appropriate:

[Click here to enter text.](#)

g. Special considerations:

☐ Language ☐ Age ☐ Transportation ☐ Other

Explain marked categories in g.:

[Click here to enter text.](#)

Part 5. The site contact list must include, at a minimum, the individuals, groups, and organizations identified in the instructions for **Part 5**. Are other individuals, groups, organizations, and units of government affected by, or interested in, the site, or its remedial program? (Mark and identify all that apply, then adjust the site contact list as appropriate.)

☐ **Non-Adjacent Residents/Property Owners:** [Click here to enter text.](#)

☒ **Local Officials:** [Click here to enter text.](#)

☒ **Media:** [Click here to enter text.](#)

☐ **Business/Commercial Interests:** [Click here to enter text.](#)

☐ **Labor Group(s)/Employees:** [Click here to enter text.](#)

☐ **Indian Nation:** [Click here to enter text.](#)

☐ **Citizens/Community Group(s):** [Click here to enter text.](#)

☐ **Environmental Justice Group(s):** [Click here to enter text.](#)

☐ **Environmental Group(s):** [Click here to enter text.](#)

☐ **Civic Group(s):** [Click here to enter text.](#)

☐ **Recreational Group(s):** [Click here to enter text.](#)

☐ **Other(s):** [Click here to enter text.](#)

Date Completed: 8/5/19

Prepared By: Charles Sosik

Reviewed By: Thomas Panzone

ATTACHMENT F ***Resumes***

**AMC Engineering**

99 Jericho Turnpike, Suite 300J
Jericho, NY 11590
Phone: (516) 417-8588

ARIEL CZEMERINSKI, P.E.

Mr. Czemerinski is a New York State Professional Engineer and CEO of AMC Engineering PLLC an EBC affiliate. Mr. Czemerinski has with 20 years of experience in the chemical and environmental areas. Areas of expertise include environmental compliance, permitting, remedial system design, process and plant safety, and management of a production facility. Mr. Czemerinski is a Registered Professional Engineer in NY, IN, IL, and MI.

Professional Experience

AMC: 14

Prior: 6 years

Education

Master of Science in Chemical Engineering, Columbia University, New York, NY, Feb. 1990.
Bachelor of Science in Chemical Engineering, University Of Buenos Aires, Buenos Aires, Argentina, May 1987

Areas of Expertise

- Vapor Intrusion - Barrier and Sub Slab Venting System Design
- Environmental Assessment Statements and Environmental Impact Assessments under CEQR, ULURP
- Remedial Program Design and Management
- Environmental Compliance, Clean Water Act, Clean Air Act, Hazardous Materials
- Dewatering & Treatment System Design
- NYCDEP Sewer Discharge Permitting
- Transfer Station Permitting and Compliance
- Chemical Process Design and Optimization
- Wastewater Treatment Systems and Permitting, SPEDES, Air
- Zoning Regulations and Permitting
- Safety and Environmental Training
- Waste Management Plans

Professional Certifications

- OSHA 40-hr HAZWOPER
- OSHA 10-hr Construction Safety and Health



AMC Engineering

99 Jericho Turnpike, Suite 300J
Jericho, NY 11590
Phone: (516) 417-8588

~~PROJECT EXPERIENCE (Representative Projects)~~

Project: Domsey Fiber Corp. - 431 Kent Avenue, Brooklyn NY

Project Description: NYS Brownfield cleanup project / NYC E-Designation. Soil contaminated with chlorinated solvents, petroleum and heavy metals requiring excavation, soil management and disposal under a Remedial Action Work Plan, Soil / Materials Management Plan, Construction Health and Safety Plan and Community Air Monitoring Plan

Client: Express Builders

Regulatory Authority: NYSDEC, NYCOER

Role: Mr. Czemerinski served as the Remedial Engineer for the project.

Project: Springfield Gardens Residential Area BMP - Springfield Gardens, Queens, NY

Project Description: NYC Residential infrastructure (sewer, gas, water) upgrade, drainage channel installation and pond restoration. Soil contaminated with, petroleum and heavy metals requiring excavation, soil management and disposal under a Materials Handling Plan, Construction Health and Safety Plan and Community Air Monitoring Plan

Client: EIC Associates - NYCEDC

Regulatory Authority: NYSDEC, NYCParks

Role: Mr. Czemerinski served as the Remedial Engineer for the project.

Project: Former Domino Sugar Site - Kent Avenue, Brooklyn NY

Project Description: NYC E-Designation. Soil contaminated with semi-volatile organic compounds and heavy metals requiring excavation, soil management and disposal under a Remedial Action Work Plan, Soil / Materials Management Plan, Construction Health and Safety Plan and Community Air Monitoring Plan

Client: Two Trees Management

Regulatory Authority: NYCOER

Role: Mr. Czemerinski served as the Remedial Engineer for the project.

Project: Former Uniforms For Industry Site - Jamaica Avenue, Queens NY

Project Description: NYS Brownfield cleanup project / NYC E-Designation. Soil contaminated with chlorinated solvents, petroleum, mop oil and heavy metals requiring excavation, soil management and disposal under a Remedial Action Work Plan, Soil / Materials Management Plan, Construction Health and Safety Plan and Community Air Monitoring Plan

Client: The Arker Companies

Regulatory Authority: NYSDEC, NYCOER

Role: Mr. Czemerinski served as the Remedial Engineer for the project.



AMC Engineering

99 Jericho Turnpike, Suite 300J
Jericho, NY 11590
Phone: (516) 417-8588

PROJECT EXPERIENCE (Representative Projects)

Project: Former Charles Pfizer & Co. Site - 407 Marcy Avenue, Brooklyn, NY

Project Description: NYS Brownfield cleanup project / NYC E-Designation. Soil contaminated with chlorinated solvents, petroleum, and heavy metals requiring excavation, soil management and disposal under a Remedial Action Work Plan, Soil / Materials Management Plan, Construction Health and Safety Plan and Community Air Monitoring Plan

Client: The Rabsky Group

Regulatory Authority: NYSDEC, NYCOER

Role: Mr. Czemerinski served as the Remedial Engineer for the project.

Project: Former East Coast Industrial Uniforms Site - 39 Skillman Street, Brooklyn, NY

Project Description: NYS Brownfield cleanup project / NYC E-Designation. Soil contaminated with chlorinated solvents, petroleum, and heavy metals requiring excavation, soil management and disposal under a Remedial Action Work Plan, Soil / Materials Management Plan, Construction Health and Safety Plan and Community Air Monitoring Plan

Client: Riverside Builders

Regulatory Authority: NYSDEC, NYCOER

Role: Mr. Czemerinski served as the Remedial Engineer for the project.

Project: Former BP Amoco Service Station Site - 1800 Southern Boulevard, Bronx, NY

Project Description: NYS Brownfield cleanup project / NYC E-Designation. Soil contaminated with petroleum, and heavy metals requiring excavation, soil management and disposal under a Remedial Action Work Plan, Soil / Materials Management Plan, Construction Health and Safety Plan and Community Air Monitoring Plan

Client: SoBro, Joy Construction

Regulatory Authority: NYSDEC, NYCOER

Role: Mr. Czemerinski served as the Remedial Engineer for the project.

Project: Former Dico G Auto & Truck Repair Site - 3035 White Plains Road, Bronx, NY

Project Description: NYS Brownfield cleanup project. Soil contaminated with petroleum, and heavy metals requiring excavation, soil management and disposal under a Remedial Action Work Plan, Soil / Materials Management Plan, Construction Health and Safety Plan and Community Air Monitoring Plan

Client: The Arker Companies

Regulatory Authority: NYSDEC

Role: Mr. Czemerinski served as the Remedial Engineer for the project.



ENVIRONMENTAL BUSINESS CONSULTANTS

Charles B. Sosik, PG, PHG, Principal

Professional Experience

28 years

Education

MS, Hydrogeology, Adelphi University, NY
BS, Geology, Northern Arizona University, AZ

Areas of Expertise

- Brownfields Redevelopment
- Hazardous Waste Site Investigations
- Pre-purchase Site Evaluations and Support
- Regulatory Negotiations
- Remedial Planning and "Cost to Cure" Analysis
- Strategic Planning
- Real Estate Transactions
- NYC "E" Designations

Professional Certification

- Professional Geologist, NH
- Professional Geologist, Hydrogeologist, WA
- OSHA 40-hr HAZMAT
- OSHA 8-hr. Supervisor
- NYC OER Qualified Environmental Professional

Professional Affiliation / Committees

- NYS Council of Professional Geologists (NYSCPG)
 - Association of Groundwater Scientists & Engineers (AGSE)
 - NYS RBCA Advisory Committee
 - Massachusetts LSP Association
 - New Hampshire Association of Professional Geologists
 - Interstate Technology Regulatory Council/MTBE Team
 - Environmental Business Association, Brownfields Task Force
 - Part 375 Working Group
-

PROFILE

Mr. Sosik has 28 years of experience in environmental consulting. He specializes in advising clients on managing environmental compliance with federal, state, and municipal agencies and has successfully directed numerous investigation and remediation projects involving petroleum, pesticides, chlorinated solvents, heavy metals and radiologically activated media. His work included extensive three-dimensional investigations on MTBE, which have been used effectively to help shape public policy. He also has experience in applying models to groundwater related problems and has completed several large-scale projects to determine fate and transport of contaminants, establish spill scenarios, and closure criteria. His experience and expertise in the area of contaminant hydrogeology has resulted in requests from environmental attorneys, property owners and New York State to serve as an expert witness and technical advisor on a variety of legal disputes.

For the past 15 years Mr. Sosik has been primarily engaged in providing environmental consulting to developers responding to the extensive re-zoning of former industrial and commercial properties, which is currently taking place throughout New York City. These services include everything from pre-purchase evaluations and contract negotiations to gaining acceptance in and moving projects through the NYS Brownfields Program. Mr. Sosik has taken a pro-active role in the continued development of the NYS Brownfields Program and related policy, by attending numerous working seminars, active participation in work groups and task forces and by providing commentary to draft versions of new guidance documents. Throughout his professional career, Mr. Sosik has remained committed to developing innovative cost- efficient solutions to environmental issues, specifically tailored to the needs of his clients.

SELECTED PROJECTS

Scavenger Waste Treatment Facility (SWTF), Suffolk County, NY

Water Treatment Plant EIS - Focused EIS - In response to requests from the Suffolk County Council on Environmental Quality and the Brookhaven Conservation Advisory Council, Mr. Sosik prepared a focused EIS to evaluate the potential impacts to an important surface water resource from the proposed facility including cumulative and synergistic effects with established contaminant plumes in the area.

Advanced Residential Communities, Rockville Centre, NY

Brownfield Project – As the senior project manager on this large scale, high profile redevelopment project, Mr. Sosik was asked to develop a plan to accelerate the regulatory process in the face of general community opposition. Through numerous discussions with the BCP management team, He was able to condense the schedule and review period, through the submission of supporting documents (Investigation Report, Remedial Work Plan) with the BCP application package. Community opposition, which focused on the environmental condition of the site as a means to block the project, was used to

advantage in expediting approval of the aggressive interim remedial plan. This will allow the developer to begin remedial work approximately 5 months ahead of schedule.

Former Temco Uniform site, West Haverstraw, NY

Brownfield Project – Mr. Sosik took over management of this project from another consultant following transition of this VCP site to the BCP. Mr. Sosik used the opportunity to renegotiate and revise the scope of work to allow a more cost effective and focused investigation plan without re-writing or resubmitting the RIWP. During the NYSDEC's review of the transition package, he met with and coordinated changes with the NYSDEC Project Manager to gain approval. The result saved the client a significant amount of money, but perhaps more importantly in this case, did so without loss of time.

Grovick Properties, Jackson Heights, NY

Brownfield Project – This Brownfield property is somewhat unique in that it had been investigated and partially remediated by the NYSDEC through the petroleum spill fund. The client was interested in



Charles B. Sosik, PG, PHG, Principal

purchasing the property and redeveloping it as office and retail space. Mr. Sosik reviewed the NYSDEC investigation and developed a supplemental plan to meet the requirements of an RI under the BCP program. By performing this limited amount of field work "up-front" he was able to complete an RI Report and Remedial Plan and submit both with the BCP application package. The NYSDEC and NYSDOH approved the RI Report and the Remedial Plan with minor changes. This cut 120 days from the review process and allowed the client to arrange financing and move his project forward knowing what the clean-up costs would be at the outset.

Metro Management, Bronx, NY

Brownfield Project – The site of a former gas station, the developer had planned to construct a 12-story affordable housing apartment complex with first floor retail space. Since the site was located in an Environmental zone, potential tax credits of 22% for site development, remediation and tangible property could be realized under the BCP. In a pre-application meeting with the NYSDEC, Mr. Sosik realized that the department did not believe the site was eligible for the BCP, since it had been previously investigated and closed under the spills program.

Mr. Sosik assisted the developer in securing financing, and due to the demands of an aggressive construction schedule developed an Interim Remedial Measure (IRM), based on chemical oxidation treatment. Working closely with the clients environmental counsel, Mr. Sosik was able to get the IRM approved without a public comment period. Implementation of the IRM is currently underway.

The project was awarded the 2009 NYC Brownfield Award for Innovation.

Brandt Airflex, NY

Technical Consulting Services - Mr. Sosik provided senior level technical advice and strategic planning in developing an off-site RI/FS for the site, in negotiating a tax reduction for the property due to the environmental condition and in preparing a cost to cure estimate for settlement between business partners. After achieving a favorable tax consideration and settlement agreement for his client

Allied Aviation Services, Dallas, Fort Worth, Airport, Dallas, TX

Jet Fuel Investigation - Mr. Sosik developed and managed an investigative plan to quickly identify the extent and source of jet fuel which was discharging from the Airport's storm drain system to a creek a mile away. Through the use of a refined conceptual model, accelerated investigative techniques and a flexible work plan, he was able to identify the source of the fuel and the migration route within a single week. He then identified remedial options and successfully negotiated a risk based plan with the Texas regulatory agency that had issued a notice of enforcement action against the facility.

KeySpan – Former LILCO Facilities, Various NY Locations

Pesticide Impact Evaluation - Mr. Sosik developed, negotiated and implemented a site screening procedure to evaluate impact to public health and the environment as the result of past herbicide use at 211 utility sites. Using an unsaturated zone leaching model (PRZM) on a small subset of the sites, he was able to establish mass loading schedules for the remaining sites. This was combined with public well

data in a GIS environment to perform queries with respect to mass loading, time transport and proximity to vulnerable public supply wells. Using this approach Mr. Sosik was able to show that there were no concerns for future impact. This effort satisfied the public health and resource concerns of the state environmental agency and county health department in a reasonable amount of time and at a fraction of the cost of a full scale investigation.

Former Computer Circuits (Superfund) Site, Hauppauge, NY

CERCLA RI/FS - As Senior Project Manager for the site, he played a major role in regaining control of the investigation activities for the PRP. This action prevented the USEPA from initiating an extensive investigation at the site using a RAC II contractor allowing the client to perform a more efficient investigation. He was involved in all negotiations with EPA and was the project lead in developing a revised site characterization plan (work plan, field sampling plan, quality assurance plan, etc.). By carefully managing all phases of the investigation and continued interaction with each of the three regulatory agencies involved, Mr. Sosik was able to keep the project focused and incrementally reinforce the clients position. The estimated cost of the revised investigation is expected to save the client 1.5 to 2 million dollars.

Sun Oil, Seaford, NY

Remediation Consulting Services & Project Management - Under an atmosphere of regulatory distrust, political pressure and mounting public hostility toward the client, Mr. Sosik conducted an off-site 3-D investigation to define the extent of contamination and the potential impact on public health. By designing and implementing an aggressive source area remediation program and personal interaction with the public and regulatory agencies, he was able to successfully negotiate a limited off-site remediation favorable to the client. Source area remediation was completed within 6 months and the project successfully closed without damage to the client's public image or working relationship with the regulatory agencies.

Con Edison, Various Locations, NY

Hydrogeologic Consulting Services - Under a general consulting contract, Mr. Sosik conducted detailed subsurface hydrogeologic investigations at five locations to assist in the development of groundwater contingency planning. He also developed and implemented work plans to investigate and remediate existing petroleum, cable fluid, and PCB releases at many of the generating facilities and substations. An important aspect of his role was in assisting the client in strategic planning and negotiations with the regulatory agency.

Keyspan - Tuthill Substation, Aqueboque, NY

Accelerated Site Characterization - Using accelerated site characterization techniques, Mr. Sosik presented the project as a case study in establishing the transport of an herbicide and its metabolites applied at utility sites in the 1980's. The results were then used to establish a screening method for evaluating 211 similar sites controlled by the client in a reasonable and efficient manner.

NYSDEC Spill, East Moriches, NY

Spill Release Analysis - With recognized expertise in the area of gasoline plume development on Long Island, Mr. Sosik was asked by



Charles B. Sosik, PG, PHG, Principal

the State to establish the release date (and principal responsible party) of an extensive petroleum spill, which impacted a residential neighborhood. He used multiple lines of evidence, and a new EPA model (HSSM), which he has helped to refine, to reconstruct the release scenario and spill date, in support of the State Attorney General's cost recovery effort from the PRP.

Minmilt Realty, Farmingdale, NY

Fate & Transport Modeling - He completed an RI/FS at this location for a PCE plume that had been in transit for over 30 years. Mr. Sosik applied a conservative model to evaluate time/concentration impacts under a variety of transport scenarios to a municipal wellfield located 13,000 feet away. Through the use of the model and careful interpretation of an extensive data set compiled from several sources, Mr. Sosik was able to propose a plan which was both acceptable to the regulator and favorable to the client.

Sebonack Golf Course Project, Town of Southampton, NY

IPM Pesticide Study - Provided professional hydrogeologic services in support of the EIS prepared for the development of the site. The proposed development included an 18-hole golf course, clubhouse, dormitory facility, cottages, associated structures, and a 6,000 square foot research station for Southampton College. Mr. Sosik performed an extensive evaluation (using a pesticide-leaching model) on the effects of pesticide and nitrogen loading to groundwater as part of the projects commitment to an Integrated Pest Management (IPM) approach.

NYSDEC, Spills Division, Regions 1 – 4

Petroleum Spills Investigation & Remediation - As a prime contractor/consultant for the NYSDEC in Regions 1-4, Mr. Sosik has managed the investigation and remediation of numerous petroleum spills throughout the State. Many of these projects required the development of innovative investigation and remediation techniques to achieve project goals. He was also involved in many pilot projects and research studies to evaluate innovative investigation techniques such as accelerated site characterization, and alternative approaches to remediation such as monitored natural attenuation and risk based corrective action.

Sun Oil, E. Meadow, NY

Exposure Assessment - Performed to seek closure of the spill file, despite the presence of contaminants above standards, Mr. Sosik determined after the extended assessment that the level of remaining contamination would not pose a future threat to human health or the environment. He used multiple lines of evidence, and a fate and

transport model to show that degradation processes would achieve standards within a reasonable time.

Sand & Gravel Mine, NY

Property Development - As part of the development of a sand and gravel mine, Mr. Sosik provided environmental consulting services to assist in obtaining a mining permit, which would result in the construction of a 150-acre lake. Specifically, Mr. Sosik investigated if the proposed lake would reduce groundwater quantity to domestic and public well fields, and/or accelerate the migration of potential surface contaminants to the lower part of the aquifer. After assuming the lead role in negotiations with the regulatory agency, Mr. Sosik was able to obtain a permit for the client by adequately addressing water quality and quantity issues, and by preparing a monitoring plan and spill response plan, acceptable to all parties.

NYSDEC, Mamaroneck, NY

Site Characterization / Source Identification - In a complex hydrogeologic setting consisting of contaminant transport through fractured metamorphic bedrock and variable overburden materials, Mr. Sosik was able to develop and implement a sub-surface investigation to differentiate and separate the impact associated with each of two sources. The results of this investigation were successful in encouraging the spiller to accept responsibility for the release.

Riverhead Municipal Water District, NY

Site Characterization / Remedial Planning - Using accelerated characterization techniques, he implemented a 3-D site investigation to identify two service stations 4,000 ft. away as the source of contamination impacting a municipal wellfield. In accordance with the strict time table imposed by the need to return the wellfield to production by early spring, he designed and implemented a multi-point (9 RW, 6 IW) recovery and injection well system using a 3-d numerical flow model, and completed the project on time. Using a contaminant transport model, Mr. Sosik developed clean-up goals which were achieved in 9 months of operation, well below the projected 3 to 5 year project duration.

Montauk Fire Department, NY

Site Assessment - Mr. Sosik performed a limited investigation and used a 2-D flow model to demonstrate that the property could not have been the source of contamination which had impacted an adjacent wellfield as per the results of a previous investigation. This small focused effort successfully reversed a \$500,000, and rising, claim against the department by the water district and the NYSDEC.

PREVIOUS EXPERIENCE

P.W. Grosser Consulting, Bohemia, NY

Senior Project Manager, 1999-2006

Environmental Assessment & Remediation, Patchogue, NY

Senior Project Manager, 1994-1999

Miller Environmental Group, Calverton, NY

Project Manager, 1989-1994

DuPont Biosystems, Aston, PA

Hydrogeologist, 1988-1989



ENVIRONMENTAL BUSINESS CONSULTANTS

Charles B. Sosik, PG, PHG, Principal

EXPERT WITNESS TESTIMONY AND DEPOSITIONS

Fact Witness - Testimony on relative age of petroleum spill based on nature and extent of residual and dissolved components at the Delta Service Station in Uniondale, NY Fall/1999

Expert Witness / Expert Report for defendant in cost recovery case by NYS Attorney General regarding a Class II Inactive Hazardous Waste (State Superfund) project by the NYSDEC (October 2004 – present, Report: March 2005, Deposition: April 2005, 2nd Report: Aug. 2013, 2nd Deposition Nov. 2013, Bench Trial: December 2013 - qualified as expert in Federal Court),

Expert Witness / Fact Witness for plaintiff seeking compensation for partial expenses incurred during the investigation and remediation of a USEPA CERCLA site due to the release and migration of contaminants from an "upgradient" industrial property. (Deposition May 2005, case settled April 2007).

Expert Witness / Fact Witness for NYS Attorney General with respect to cost recovery for a NYSDEC petroleum spill site in Holtzville, NY (Deposition April 2005 - case settled).

Expert Witness – Statement of opinion and expert testimony at trial for plaintiff seeking damages from a major oil corporation for contamination under a prior leasing agreement in Rego Park, NY. Case decided in favor of plaintiff. Trial July 2007, in favor of Plaintiff. Qualified as Expert.

Expert Witness / Fact Witness for NYS Attorney General with respect to cost recovery for a NYSDEC petroleum spill site in Lindenhurst, NY (Trial date Dec. 2009, in favor of plaintiff. Qualified as Expert State Supreme Court.

Expert Witness - for NYS Attorney General regarding NYSDEC cost recovery for a petroleum spill site at Riverhead, NY. Case settled July 2008.

Expert Witness for plaintiffs in class action case with respect to damages from chlorinated plume impact to residences in Dayton, OH. (Draft Report – May 2013).

Expert Witness / Fact Witness for defendant with respect to cost recovery and third party responsibility for a NYSDEC petroleum spill site in Lindenhurst, NY (Expert Statement of Fact – October 2005).

Expert Witness for plaintiff seeking damages related to a petroleum spill from the previous owner/operator of a gas station in College Point, NY. Case settled 2009.

Expert Witness for plaintiff (municipal water supply purveyor) seeking damages from major oil companies and manufacturer of MTBE at various locations in Suffolk County, NY. Expert reports July 2007, August 2007 and October 2007, Case settled August, 2008.

Expert Witness - Deposition for NYS Attorney General regarding NYSDEC cost recovery for a petroleum spill site at Sag Harbor, NY. August 2002

Expert Witness for defendant responding to a claim from adjacent commercial property owner on the origin of chlorinated solvents on plaintiff's property located in Cedarhurst, NY. Expert opinion submitted to lead counsel on March 6, 2009, case settled April 2009.

Expert Report - for Attorney General on modeling performed to determine the spill release scenario at a NYSDEC petroleum spill site in East Moriches, NY. June 2000.

Expert Witness - for plaintiff in case regarding impact to private wells from a spill at adjacent Town and County properties with open gasoline spill files in Goshen, NY. Expert report submitted August 2013.

Expert Witness for defendant with respect to cost recovery from Sunoco for a NYSDEC petroleum spill site. (Declaration – January 2013).

Expert Witness - for plaintiff (municipal water supply purveyor) seeking damages from Dow Chemical for PCE impact at various locations in Suffolk County, NY. Affidavit submitted 2011.

MODELING EXPERIENCE (PARTIAL LISTING)

PROJECT	MODEL	APPLICATION
Riverhead Water District, Riverhead, NY	MODFLOW, MODPATH	Remediation system design to intercept MTBE plume and prevent continued impact to municipal well field.
NYSDEC - Region 1, Holbrook, NY	MODFLOW, MODPATH	Simulate transport of MTBE plume to predict future impact.
NYSDEC - Region 1, East Moriches, NY	HSSM	Evaluate release scenario and start date of petroleum spill in support of cost recovery by NYS AG office.
AMOCO, Deer Park, NY	HSSM	Estimate release amount, start date and spill scenario to evaluate the potential for mass unaccounted for
Keyspan Energy, Nassau/Suffolk Counties Substations	PRZM	Estimate mass load of simazine used at 211 electric substations and screen sites according to potential for human health and ecological impacts.
Saboneck Golf Club, Southampton NY	PRZM	Estimate mass load of proposed pesticides on new golf course to evaluate acceptability under an IPM program.
Suffolk County Department of Public Works (SCDPW) Scavenger Waste Treatment Plant, Yaphank, NY	DYNFLOW, DYNTRAC	Evaluate time-transport and nitrogen impact on local river system.
SCDPW SUNY Waste Water Treatment Plant, Stony Brook, NY	DYNFLOW, DYNTRAC	Determine outfall location and time-transport of nitrogen from proposed upgrades to an existing wastewater treatment plant
Water Authority of Great Neck North Great Neck, NY	MODFLOW, MODPATH, MT3D	Review of modeling study performed by EPA to evaluate potential future impact to Well field from PCE plume. Identified serious flaws in model construction and implementation, which invalidated conclusions

PUBLICATIONS / PROFESSIONAL PAPERS

Smart Pump & Treat Strategy for MTBE Impacting a Public Water Supply (14th Annual Conference on Contaminated Soils Proceedings, 1998)

Transport & Transformation of BTEX & MTBE in a Sand Aquifer (Groundwater Monitoring & Remediation 05/1998)

Characteristics of Gasoline Releases in the Water Table Aquifer of Long Island (Petroleum Hydrocarbons Conference Proceedings, 1999)

Field Applications of the Hydrocarbon Spill Screening Model (HSSM) (USEPA Interactive Modeling Web Course

www.epa.gov/athens/software/training/webcourse Authored module on model application and applied use of calculators, 02/2000)

Comparative Evaluation of MTBE Sites on Long Island, US EPA Workshop on MTBE Bioremediation (Cincinnati, 02/2000)

Comparison of Four MTBE Plumes in the Upper Glacial Aquifer of Long Island (American Geophysical Union, San Francisco, 12/1996)

Analysis and Simulation of the Gasoline Spill at East Patchogue, New York (American Geophysical Union, San Francisco, 12/1998)



ENVIRONMENTAL BUSINESS CONSULTANTS

Keith W. Butler, Senior Project Manager

PROFILE

Mr. Butler has extensive project management experience with respect to environmental due diligence and subsurface investigations. He is responsible for the preparation of project proposals, Phase I and II Environmental Site Assessments, Work Plans, Health and Safety Plans, Quality Assurance Project Plans, and investigation reports. Additionally, Mr. Butler has conducted and managed numerous Phase I and II ESAs. In these roles, Mr. Butler is responsible for applying the various state and local regulations, which govern environmental compliance and determine the need for additional investigation and/or remediation.

SELECTED PROJECTS

Madison National Bank, Various Sites, New York

Mr. Butler served as the Project Manager and principal contact for Madison National Bank. He was responsible for the preparation of Transaction Screen and Phase I/II Environmental Site Assessments (ESAs) at various sites throughout the New York metropolitan area, as required by the bank to satisfy client mortgage or construction loan requests.

Jewish Home & Hospital, Manhattan, NY

Most recently, Mr. Butler completed a Phase I ESA at their Bronx campus to obtain US. Housing and Urban Development (HUD) funding for a future construction project. Mr. Butler was also responsible for implementing a Remedial Action Work (RAW) Plan at the Bronx facility as required by the NYSDEC under a Voluntary Cleanup Agreement. The RAW included the preparation of contract documents, excavation of over 2,000 tons petroleum contaminated soils, installation of a Soil Vapor Extraction (SVE) system remedial oversight, and sampling.

Pulte Homes of New York, Patchogue, NY

Mr. Butler served as the Project Manager for the re-development of this six-acre site and was responsible for field oversight and coordination between remediation contractors and various regulatory agencies. Initial phases of the project included the completion of Phase I and II ESAs. Subsequent remediation consisted of UST removal, excavation of petroleum-impacted soils, closure of three NYSDEC spill numbers, removal of contaminated UIC sediment/sludge, the closure of commercial and residential UIC structures and the excavation of arsenic and metals contaminated soil. The project was conducted under approved Remedial Work and Soil Management Plans with oversight from the State, County and Village agencies.

Town of Islip, Blydenburgh Road Landfill, Hauppauge, NY

Mr. Butler served as the Project Manager for the groundwater and leachate monitoring program at the Blydenburgh Road Landfill - Cleanfills 1 and 2 and Leachate Impoundment Area. Mr. Butler was the principal contact for the Town's Resource Recovery Agency. He prepared the quarterly and annual monitoring reports, oversaw sampling efforts, and coordinated with the Town's analytical laboratory and data validation contractors. Mr. Butler was also responsible for preparing quarterly well condition reports and leachate quality reports for compliance with the Town's Suffolk County Discharge Certification Permit.

Ogden Aviation, Various Sites, JFK International Airport, Jamaica, New York

Mr. Butler served as the project manager for the rehabilitation of the satellite fuel farm recovery well system. Recovery wells at the fuel farm had become clogged with iron deposits and bacteria limiting product recovery efforts. Mr. Butler developed and supervised chemical cleaning and redevelopment of recovery wells under the approval of the NYSDEC. The chemical treatment has resulted in significant increases in product recovery volumes.

Brookhaven National Laboratory, Upton, NY

Mr. Butler has worked on a number of remediation system and monitoring well installation projects at BNL. His duties included oversight of installations, system pump tests, performance evaluations, and well development. He also provided oversight of soil borings, temporary well construction, soil and water sampling, and air monitoring for groundwater screening survey of two operable units in hazardous and radioactive waste storage areas. Mr. Butler also provided oversight for groundwater monitoring, well construction, well abandonment, and methane-monitoring wells for landfill closure.

metroPCS, Various Sites, New York

Mr. Butler served as the Project Manager for metroPCS' Long Island region telecommunications site acquisition and expansion program. Mr. Butler was responsible for the preparation of Phase I ESAs, the conduct of Phase II ESAs, including asbestos, lead paint and soil sampling, and coordination of National Environmental Policy Act (NEPA) reports and planning studies at various locations proposed for construction of new cellular telephone facilities. Reports and associated communications were transmitted electronically through metroPCS' data management system.

Dormitory Authority - State of New York, Harlem Hospital Center Modernization Project - Hazardous and Universal Waste Survey, Harlem Hospital, New York, NY

Mr. Butler served as the field team leader for conducting hazardous and universal waste surveys in multiple buildings affiliated with Harlem Hospital Center. The survey included the identification of hazardous and universal waste materials including chemicals, paints, fluorescent bulbs, high intensity discharge bulbs/fixtures, battery operated equipment, above and underground petroleum storage tank identification, PCB containing light ballasts and electrical equipment.



ENVIRONMENTAL BUSINESS CONSULTANTS

Keith W. Butler, Senior Project Manager

The hospital is comprised of a number of buildings, many that were abandoned and slated for demolition.

SVE Monitoring at Newark International Airport, Elizabeth, NJ

A routine leak detection test indicated that two 10,000-gallon underground storage tanks, which were used to store unleaded gasoline, had failed tightness tests. Follow-up investigation revealed that the product had impacted the subsurface environment. In response to this, a soil vapor extraction system was installed to reduce the residual concentrations of petroleum constituents in soil and groundwater and to minimize vapor migration into subsurface utility vaults. Mr. Butler was responsible for implementing the Remedial Action Work Plan, developed for the site by Ogden and the State of New Jersey. Activities conducted under the RAW include quarterly groundwater monitoring, air sampling, vacuum pressure monitoring, system maintenance and reporting.

Federal Express Site, Newark International Airport, Elizabeth, NJ

Mr. Butler worked with Ogden Aviation and the State of New Jersey to address outstanding environmental issues at the site related to a spill of jet fuel, which occurred during a construction accident. Mr. Butler performed a site assessment, which included groundwater monitoring, product gauging, and groundwater flow modeling. After reviewing these data, Mr. Butler determined that fill material at the site was contributing to soil and groundwater contamination and has petitioned the State for partial site closure. Mr. Butler is continuing to address the remaining area of concern through product recovery and continued monitoring.

Northrop Grumman, Various Sites

Mr. Butler conducted three Phase I ESAs and a Phase II investigation for the presence of PCBs in soil. He also inspected and supervised the removal of underground storage tanks, asbestos abatement projects, and sanitary system closures related to the facility decommissioning. Mr. Butler also conducted groundwater investigations and provided oversight during soil sampling, drilling and soil remediation activities.

New York City Department of Environmental Protection, Various Sites

Mr. Butler served as an Environmental Scientist for hazard investigation at seven sewage pump stations. Mr. Butler addressed a wide range of environmental concerns including asbestos, lead based paints, PCB oil, light ballasts, and other hazardous building materials. He conducted field investigations, sampling, and prepared Hazardous Materials Survey Reports for use during preparation of plans and specifications for proposed pump station construction projects.

Fresh Kills Landfill, Staten Island, New York

Mr. Butler participated in the field operations during pump and yield tests conducted on Cells 1 and 9. The tests were performed to determine the hydraulic properties of the landfill's refuse. He collected groundwater and leachate measurements in recovery wells and in adjacent observation wells under pumping and non-pumping conditions.

PREVIOUS EXPERIENCE

DECA Real Estate Advisors

Director of Environmental Services, 2011-2017

VHB Engineering, Surveying and Landscape Architecture PC, Hauppague NY

Senior Project Manager, 2005-2011

Parsons Brinkerhoff, Inc. New York NY

Senior Project Manager, 2004-2005

P.W. Grosser Consulting, Bohemia, NY

Senior Project Manager, 1998-2004

Eder Associates, Locust Valley, NY

Field Hydrogeologist, 1992-1998

EDUCATION

BS, Geology, Slippery Rock University of Pennsylvania, 1990

PROFESSIONAL REGISTRATIONS/CERTIFICATIONS

OSHA Certification, 40-hour Health & Safety Training at Hazardous Waste Sites

OSHA Confined Space Entry Training

OSHA Certification, 8-hour Refresher Health & Safety Training at Hazardous Waste Sites



ENVIRONMENTAL BUSINESS CONSULTANTS

Chawinie Reilly, Project Manager / Industrial Hygienist

Professional Experience

EBC: March 2013

Prior: 8 years

Education

Bachelor of Science, Health Sciences, Concentration in Environmental Health and Safety, Stony Brook University, NY

Areas of Expertise

- Remedial Investigation Work Plans, Remedial Investigation Reports, Remedial Action Work Plans
- Phase I / Property Condition Assessments
- Occupational Health and Safety Sampling
- Indoor Air Quality (IAQ) Investigations
- Mold Investigations and Remediation
- Soil and Ground Water Investigations
- Noise Studies
- Lead Paint and Asbestos Surveys
- Hazardous Materials Assessments

Professional Certification

- OSHA 40-hr HAZWOPER
- NYS Asbestos Inspector
- NYC Asbestos Investigator
- USEPA Lead Inspector
- USEPA Lead Risk Assessor
- OSHA 10-hr Construction Health and Safety
- Hazard Analysis and Critical Control Point (HACCP) Certified

PROFILE

Mrs. Reilly has 13 year's experience as an environmental consultant/contractor and has worked on and managed a wide range of environmental projects. Major responsibilities include Remedial Investigation Work Plans, Remedial Investigation Reports, Remedial Action Work Plan and Noise Remedial Action Work Plans. Mrs. Reilly has conducted Phase Is and Property Condition Assessments for commercial, industrial, and residential properties in New York, New Jersey and Connecticut. In addition, Mrs. Reilly has conducted various IAQ, asbestos, mold and occupational health and safety sampling investigations for a variety of city, state, federal and private clients.

PREVIOUS EXPERIENCE

The Louis Berger Group, New York, New York-Industrial Hygienist, 2008-2013

AEI Consultants, Jersey City, New Jersey- Environmental Scientist, 2005-2008



ENVIRONMENTAL BUSINESS CONSULTANTS

Thomas Gallo, Field Manager / Project Manager

Professional Experience

EBC: July 2015

Education

Bachelor of Arts, Geology, State University of New York at Potsdam, NY

Areas of Expertise

- Phase I Property Assessments
- Phase II Subsurface Investigations
- Indoor Air Quality (IAQ) Investigations
- NYSDEC Spill Site Investigations
- Asbestos Surveys
- Hazardous Materials Assessments
- Remedial Investigation Work Plans, Remedial Investigation Reports, Remedial Action Work Plans
- Remedial Oversight of NYC E-Designation Sites

Professional Certification

- OSHA 40-hr HAZWOPER
- NYS Asbestos Inspector
- OSHA 10-hr Construction Health and Safety

PROFILE

Mr. Gallo has 4 years' experience as an environmental consultant and has worked on and managed a wide range of environmental projects. Major responsibilities include Phase I and Phase II Site Assessments and Investigations for commercial, industrial, and residential properties in New York and New Jersey. Additional responsibilities include Remedial Investigation Work Plans, Remedial Investigation Reports, and Remedial Investigation Work Plans.

Mr. Gallos' field experience includes environmental sampling (groundwater, soil, surface water, air, soil gas), the oversight of soil boring and well installations, managing remediation on Site, tank removals, and spill management and closure. Mr. Gallo has prepared reports for both regulatory and client use.

ATTACHMENT G

Estimated Remedial Costs

1840 Park Avenue
Harlem, NY

Summary of Project Costs

NYS Brownfields Cleanup Program

Costs by Task

TASK - ENVIRONMENTAL REMEDIATION	Alternative 1 - Track 1	Alternative 2 - Track 2	Alternative 3 - Track 4
Excavation and Disposal	\$ 499,140.00	\$ 499,140.00	\$ 233,520.00
Shoring and SOE	\$ 100,000.00	\$ 100,000.00	\$ 25,000.00
Air Monitoring and Field Oversight	\$ 42,500.00	\$ 42,500.00	\$ 21,250.00
Waste Characterization and Facility Approvals	\$ 22,250.00	\$ 22,250.00	\$ 6,800.00
Endpoint analysis, DUSR, EDDs	\$ 20,600.00	\$ 20,600.00	\$ 20,600.00
Project Management	\$ 88,800.00	\$ 88,800.00	\$ 23,150.00
Status Reports	\$ 4,200.00	\$ 4,200.00	\$ 4,200.00
Composite Cover System	-	-	\$ 150,000.00
Environmental Easement Package	-	\$ 12,500.00	\$ 12,500.00
Site Management Plan	-	-	\$ 11,500.00
Final Engineering Report	\$ 25,450.00	\$ 25,450.00	\$ 25,450.00
<i>Subtotal</i>	\$ 802,940.00	\$ 815,440.00	\$ 533,970.00
<i>15% Contingency</i>	\$ 120,441.00	\$ 122,316.00	\$ 80,095.50
<i>Total</i>	\$ 923,381.00	\$ 937,756.00	\$ 614,065.50