



March 4, 2026

To: Ryan Frederiks (NYSDEC), Anthony Bollasina (NYSDEC), and Aaron Keegan (NYSDOH)

From: Peter Zaffram (Inventum) and John Black (Inventum)

CC: James Edwards (Inventum) and Shawn O'Donnell (80 Lyndon Rd., LLC)

RE: Sub-Slab Soil Vapor and Soil Gas Sampling Work Plan  
80 Lyndon Rd., LLC  
Brownfield Cleanup Program Site No. C828230  
80 Lyndon Road  
Fairport, New York (Town of Perinton)

---

Inventum Engineering, P.C. (Inventum), on behalf of 80 Lyndon Rd., LLC (80 Lyndon Rd.), has prepared this Sub-Slab Soil Vapor and Soil Gas Sampling Work Plan for soil gas and indoor air sample collection at the Lyndon Road Brownfield Cleanup Program (BCP) Site (C828230), 80 Lyndon Road, Fairport New York. The indoor air, interior sub-slab soil vapor, and exterior soil gas sampling is within the scopes of the approved Remedial Investigation Work Plan (RI Work Plan) dated September 19, 2024 and the Excavation Interim Remedial Measure Work Plan (Excavation IRM Work Plan) dated September 19, 2024. Figure 1 shows the location of the soil gas sample locations that were installed accordance with the RI Work Plan and Figure 2 shows the proposed locations of the sub-slab and indoor air sample locations to be installed to allow collection of the soil gas samples for the RI and Excavation IRM Work Plans.

The Site was used as a Construction and Demolition (C&D) landfill from 1971 to 1975. During operation, the landfill was permitted as a C&D landfill, reportedly allowing only disposal of boards, wooded debris, and rubble; a construction and demolition (C&D) landfill. In addition, tires, plastics, and evidence of medical waste have been encountered while excavating in accordance with the Excavation IRM Work Plan. The landfill operated until its closure in 1975. All available data suggests 100 percent of the BCP Site was covered by the landfill operator. According to Mike Doser, Director of Planning and Rob Kozarits, Town Engineer – Town of Perinton there was no activity on the BCP Site after the landfill closed until 1988 when the first ice skating facility was developed on the property. Site operations have been limited to the operation of the ice-skating facility since 1988.

80 Lyndon Rd. has owned the property since 2016. In 2024, the site was accepted into the New York State BCP. 80 Lyndon Rd. submitted both a RI Work Plan and Excavation IRM Work Plan, which were approved by NYSDEC and NYSDOH in September 2024, that included provisions for construction of a new ice rink facility, contiguous to and on the eastern side of the existing facilities. The three contiguous buildings are located on the northern portion of the BCP Site, and the amenities of the ice rink facilities consist of ice-skating rinks, locker rooms, bathrooms, viewing areas, training facilities, a commercial pro shop, a restaurant and parking. The general construction of the pre-existing buildings consist of 1-story slab-on-grade foundation structures with shallow pitched metal roofs, metal siding, concrete floors, and full-size ice rinks. The total footprint of the three rink facilities is approximately 115,000 square feet. The

construction for the eastern rink (East Rink) was completed in 2025 and includes a permeable soil vapor collection layer installed under the foundation slab. Perforated piping was also installed within the collection media and routed outside the north wall of the mechanical room (currently capped). The piping is configured to allow installation and operation of a sub-slab vapor extraction system if the sub-slab soil vapor sample results suggest an active system is required.

The remaining portions of the BCP Site consist of parking areas, stormwater retention features, wooded areas, green space, and is bound by Thomas Creek to the east, south, and west.

## Purpose

In accordance with the approved work plans for the 80 Lyndon Rd. BCP Site, indoor ambient and sub-slab, ambient outdoor, and soil gas air samples are to be collected to determine if vapor intrusion is a concern for the ice rink facilities and across the BCP Site.

Outdoor soil gas sampling will be conducted at eight predetermined locations (Figure 2) as outlined in the RI Work Plan which have been installed next to clustered monitoring wells across the site as shown on the attached Figure 2. Soil Vapor Implants to collect the soil gas samples were installed at the selected locations above the groundwater table in the typical pre-existing site fill material at the eight preselected locations on October 23, 2025 and October 24, 2025 at depth ranging from 6-feet to 10-feet below the ground surface. A summary of the installation of Soil Vapor Implants is as follows:

- **Soil Gas Sample Locations (Soil Vapor Implants)**
  - **SG-BCP-01** – Northeast corner of the site along wood line at monitoring well cluster MW-BCP-01.
  - **SG-BCP-02** – Eastern wooded area of the site along Thomas creek at monitoring well cluster MW-BCP-02.
  - **SG-BCP-04** – Southern limits of parking area along wood line and gravel parking lot at monitoring well cluster MW-BCP-04.
  - **SG-BCP-05** – Southern wood line down gradient of relocated soils from the East Rink excavation at monitoring well cluster MW-BCP-05.
  - **SG-BCP-06** – Western portion of the BCP Site in overflow parking area at monitoring well cluster MW-BCP-06.
  - **SG-BCP-07** – North of Rink 2 along northern access road at monitoring well cluster MW-BCP-07.
  - **SG-BCP-08** – In main parking area south of paved parking sports at monitoring well cluster MW-BCP-08.
  - **SG-BCP-09** – Western side of Rink 1 in the grassed area at monitoring well cluster MW-BCP-09.

Collection of sub-slab soil vapor samples within the footprint of the buildings (Figure 2) had been proposed for characterization of soil vapor conditions below the buildings. Indoor ambient air samples are proposed in conjunction with each sub-slab sample location (Figure 2). At each designated sample location with the buildings, the indoor air and sub-slab vapor samples will be co-located and collected concurrently. Indoor ambient air samples will allow for characterization of air quality associated with commercial use. An outdoor ambient air sample will be collected to characterize typical outdoor air conditions during the sub-slab and indoor air sampling event. The soil gas sampling will be collected to determine if soil gas is present



from the decomposition of natural or landfill materials and to characterize soil gas conditions in site fill. The approved work plan includes the installation and sampling of nine sub-slab soil vapor test points, at nine representative indoor ambient air test points throughout the ice rink facilities along with one outdoor ambient air sample. The proposed locations were selected to be representative locations that are currently occupied or accessible to the visitors of the ice rink complex footprint which includes the pre-existing rinks, other commercial spaces, and the East Rink that was constructed in 2025. Indoor ambient air and sub-slab samples will be co-located and collected within 5-feet of the selected locations. The proposed test points are shown on the attached Figure 2 and a summary of the proposed sub-slab and indoor ambient sample locations are as follows:

- **Co-located Sub-Slab and Indoor Ambient Sample Locations** (Vapor Pins® to be installed indoor sub-slab sample locations)
  - **SSV-BCP-01** – Sub-slab sample located at the northwest corner of Rink 1.
    - **IA-BCP-01** – Indoor ambient air sample in the northwest corner of Rink 1.
  - **SSV-BCP-02** – Sub-slab sample located at the southwest portion of Rink 1 located in storage closet adjacent to general seating area.
    - **IA-BCP-02** – Indoor air sample located at the southwest portion of Rink 1 in storage closet adjacent to general seating area.
  - **SSV-BCP-03** – Sub-slab sample located at the northeast corner of Rink 1 in open standing room area, adjacent to Zamboni area.
    - **IA-BCP-03** - Indoor air sample located at the northeast corner of Rink 1 in open standing room area, adjacent to Zamboni area.
  - **SSV-BCP-04** - Sub-slab sample located at the south side of Rink 2 in the “off the ice” training facility (e.g. workout room).
    - **IA-BCP-04** – Indoor air sample located at the south side of Rink 2 in the “off the ice” training facility (e.g. workout room).
  - **SSV-BCP-05** – Sub-slab sample located at the northwest corner of Rink 2 in general seating area.
    - **IA-BCP-05** – Indoor air sample located at the northeast corner of Rink 2 in the general seating area.
  - **SSV-BCP-06** – Sub-slab sample located at the southwest corner of East Rink (new rink facility) which functions as the welcome area / entrance.
    - **IA-BCP-06** – Indoor air sample located at the southwest corner of East Rink (new rink facility) which functions as the welcome area / entrance.
  - **SSV-BCP-07** – Sub-slab sample located at the southeast corner of East Rink (new rink facility) in general seating area. Sample location beneath the bleachers.
    - **IA-BCP-07** – Indoor air sample located in the southeast corner of East Rink (new rink facility) in general seating area. Sample location beneath the bleachers.
  - **SSV-BCP-08** – Sub-slab sample located in the northeast corner of East Rink (new rink facility) in general seating area. Sample location is beneath the bleachers.
    - **IA-BCP-08** – Indoor air sample located at the northeast corner of East Rink (new rink facility) in general seating area. Sample location is beneath the bleachers.
  - **SSV-BCP-09** – Sub-slab sample located at the northwest corner of East Rink (new rink facility) in general seating area. Sample location is beneath the bleachers.



- **IA-BCP-09** – Indoor air sample located at the northeast corner of East Rink (new rink facility) in general seating area. Sample location is beneath the bleachers.

Cleaning products and typical household type construction supplies (e.g. paints, glues, and plumbing supplies) are stored in the Zamboni area (SSV-BCP-03) and used throughout the facility. Waste generation for the ice rink facilities is limited to food waste and general commercial trash (e.g. trash from receptacles) are disposed of in exterior dumpsters on the north side of the building.

## Scope of Work

During installation of sub-slab test points, the interior of the buildings will be surveyed to document materials (e.g. paints, oils, and fuels) that potentially contain Volatile Organic Compounds (VOCs). Additionally, a NYSDOH indoor air quality questionnaire and building inventory form will be completed prior to sampling. One form will be completed for each building. Exterior site conditions will be documented prior to setup and sampling of exterior soil gas locations. Exterior soil gas implants were installed on October 23 and October 24, 2025.

Nine sub-slab test points are proposed to be installed in Rink 1, Rink 2 and the East Rink at the locations shown on Figure 2. Inventum will utilize and install a Vapor Pin<sup>®</sup> sampling device at each sub-slab sample location to collect the sub-slab soil gas samples. Standard operating procedures for utilization of the Vapor Pin<sup>®</sup> system will be adhered to and the Vapor Pin<sup>®</sup> Standard Operating Procedures are provided for reference in Attachment A. Following installation, each location will be leak tested with a Dielectric MGD-2002, Multi-Gas Detector (Helium Detector). If leaks are present, the Vapor Pin<sup>®</sup> will be removed, the core hole will be cleaned with a stiff bristle brush, the area shall be vacuumed of all dust and debris, and the Vapor Pin<sup>®</sup> sampling device reinstalled. If leaks persist, the core hole will be sealed and a new bore hole will be drilled within 5-feet of the selected location, and a new Vapor Pin<sup>®</sup> sampling device will be installed. After installation and leak detection, one to three volumes (probe and tubing) will be purged prior to collecting of any samples. During test point installation and sampling, a Photoionization detector (PiD) will be used to measure and record VOC readings. A calibrated handheld MRU Optima 7 Biogas Landfill Analyzer will be used as the methane monitor to field screen and record any methane (CH<sub>4</sub>) detections from each of the sub-slab boring and Vapor Pin<sup>®</sup>. The MRU Optima 7 Biogas Landfill Analyzer will also be used to screen for dioxygen (O<sub>2</sub>), carbon dioxide (CO<sub>2</sub>), hydrogen sulfide (H<sub>2</sub>S), and differential pressure along with methane. Inventum will document and record field screening results for these compounds along with VOCs in a field book. The specifications of the MRU Optima 7 Biogas Landfill Analyzer (methane monitor) is provided in Attachment B. One duplicate sub-slab sample will be collected using a splitter to ensure sampling is occurring at the same time for the selected duplicate location.

Nine indoor ambient air samples will be collected in Rink 1, Rink 2, and the East Rink. Additionally, one ambient outdoor air sample will be collected along the south side of the ice rink facility in a secure location at 3-feet to 4-feet above the ground surface. Ambient air samples will be collected within a 3-foot radius of the corresponding sub-slab sample location. Ambient air samples will be set up to collect an air sample from 3-feet to 4-feet above ground level. During setup of ambient air samples, a PiD will be used to measure and record any VOCs readings in the general breathing zone. The handheld methane monitor will be used to field screen each sample collection area and any methane, dioxygen, carbon dioxide, hydrogen sulfide detections from ambient air sample locations. All PiD and methane monitor data will be recorded in a field book. One duplicate ambient air sample will be collected at a selected indoor location.

Eight soil gas samples will be collected from pre-installed Soil Vapor Implant locations across the BCP Site. The implants were installed in late October 2025 in the vicinity of eight groundwater monitoring well



clusters (Figure 1). The implants have been installed above the groundwater table in the pre-1975 site fill material. Installation depths range from 6-feet to 10-feet below ground surface (BGS). The implants have been installed with .025-inch Teflon tubing to allow for sampling and were installed using a direct push Geoprobe, following New York State Department of Health (NYSDOH) guidelines. Prior to sampling, each soil gas location will be screened with a PiD to measure and record any VOC readings. The handheld methane monitor will also be used to field screen and record any methane, dioxygen, carbon dioxide, and hydrogen sulfide detections along with differential pressure from ambient air and soil gas sample tubing at each soil gas location. One duplicate soil gas sample will be collected using a splitter to ensure sampling is occurring at the same time for the selected location.

Sub-slab vapor, indoor air, ambient air, and soil gas samples will be collected in general accordance with the NYSDOH guidance document (NYSDOH, 2006, Guidance for Evaluating Soil Vapor Intrusion in the State of New York, as updated). One (1) 8-hour sample will be collected at each sub-slab location in a laboratory certified clean Summa® canister and submitted under chain-of-custody to Pace Laboratories of Buffalo, New York or ALS Laboratories of Rochester, New York<sup>1</sup> for VOC analysis using EPA Method TO-15/TO-15-SIM. Matrix A and C compounds as listed within the NYSDOH guidance document will be analyzed to a reporting limit of 0.20 µg/m<sup>3</sup>. Matrix B, D, E, and F compounds will be analyzed to a reporting limit of 1.0 µg/m<sup>3</sup>.

## HASP

The current Health and Safety Plans (HASPs) as included in the approved RI Work Plan will be adhered to during all work.

## Reporting and Schedule

The sub-slab soil vapor, indoor air, and soil gas sampling for 80 Lyndon Rd. will be implemented in accordance with the following schedule:

- Installation of new sub-slab Vapor Pins® within 15-days of NYSDEC and NSYDOH review and approval of the scope of work outlined within this Work Plan.
- Provide 5-day notice to the NYSDEC and NYDOH prior to installing the nine Vapor Pins®.
- Collect the sub-slab vapor, indoor air, and corresponding ambient air sampling during the first quarter of 2026. Note: this is considered the “heating season” although the majority of the ice rink structures are necessarily not heated.
- Collect the exterior soil gas samples within one to two weeks of collecting the indoor samples or as soon as laboratory supplied canisters are available and weather permits.
- Submit a draft Soil Vapor Summary Report within 30-days of receiving the third party validated analytical data. The report will include:
  - Calibration logs for PiD, helium detector, and methane detector;
  - NYSDOH indoor air quality questionnaire and building inventory forms (one form for each building);
  - Summary of recorded field data consisting of VOC, methane, dioxygen, carbon dioxide, hydrogen sulfide data readings and differential pressure where applicable;

---

<sup>1</sup> It is possible that an alternative laboratory, that is certified to perform the analyses, may be used if Pace or ALS cannot supply the canister at the time of sampling. NYSDEC and NYSDOH will be notified in advance of the sampling if an alternative laboratory is selected.




- Record methane field reading data will be compared to the NYS Division of Materials Management (DMM) guidance for methane as a general screening comparison;
- Sub-slab vapor, indoor air, ambient air, and soil gas analytical data comparison to available NYSDOH guidance document matrices; and
- Final laboratory data packages included EQUiS submittals.




## Figures



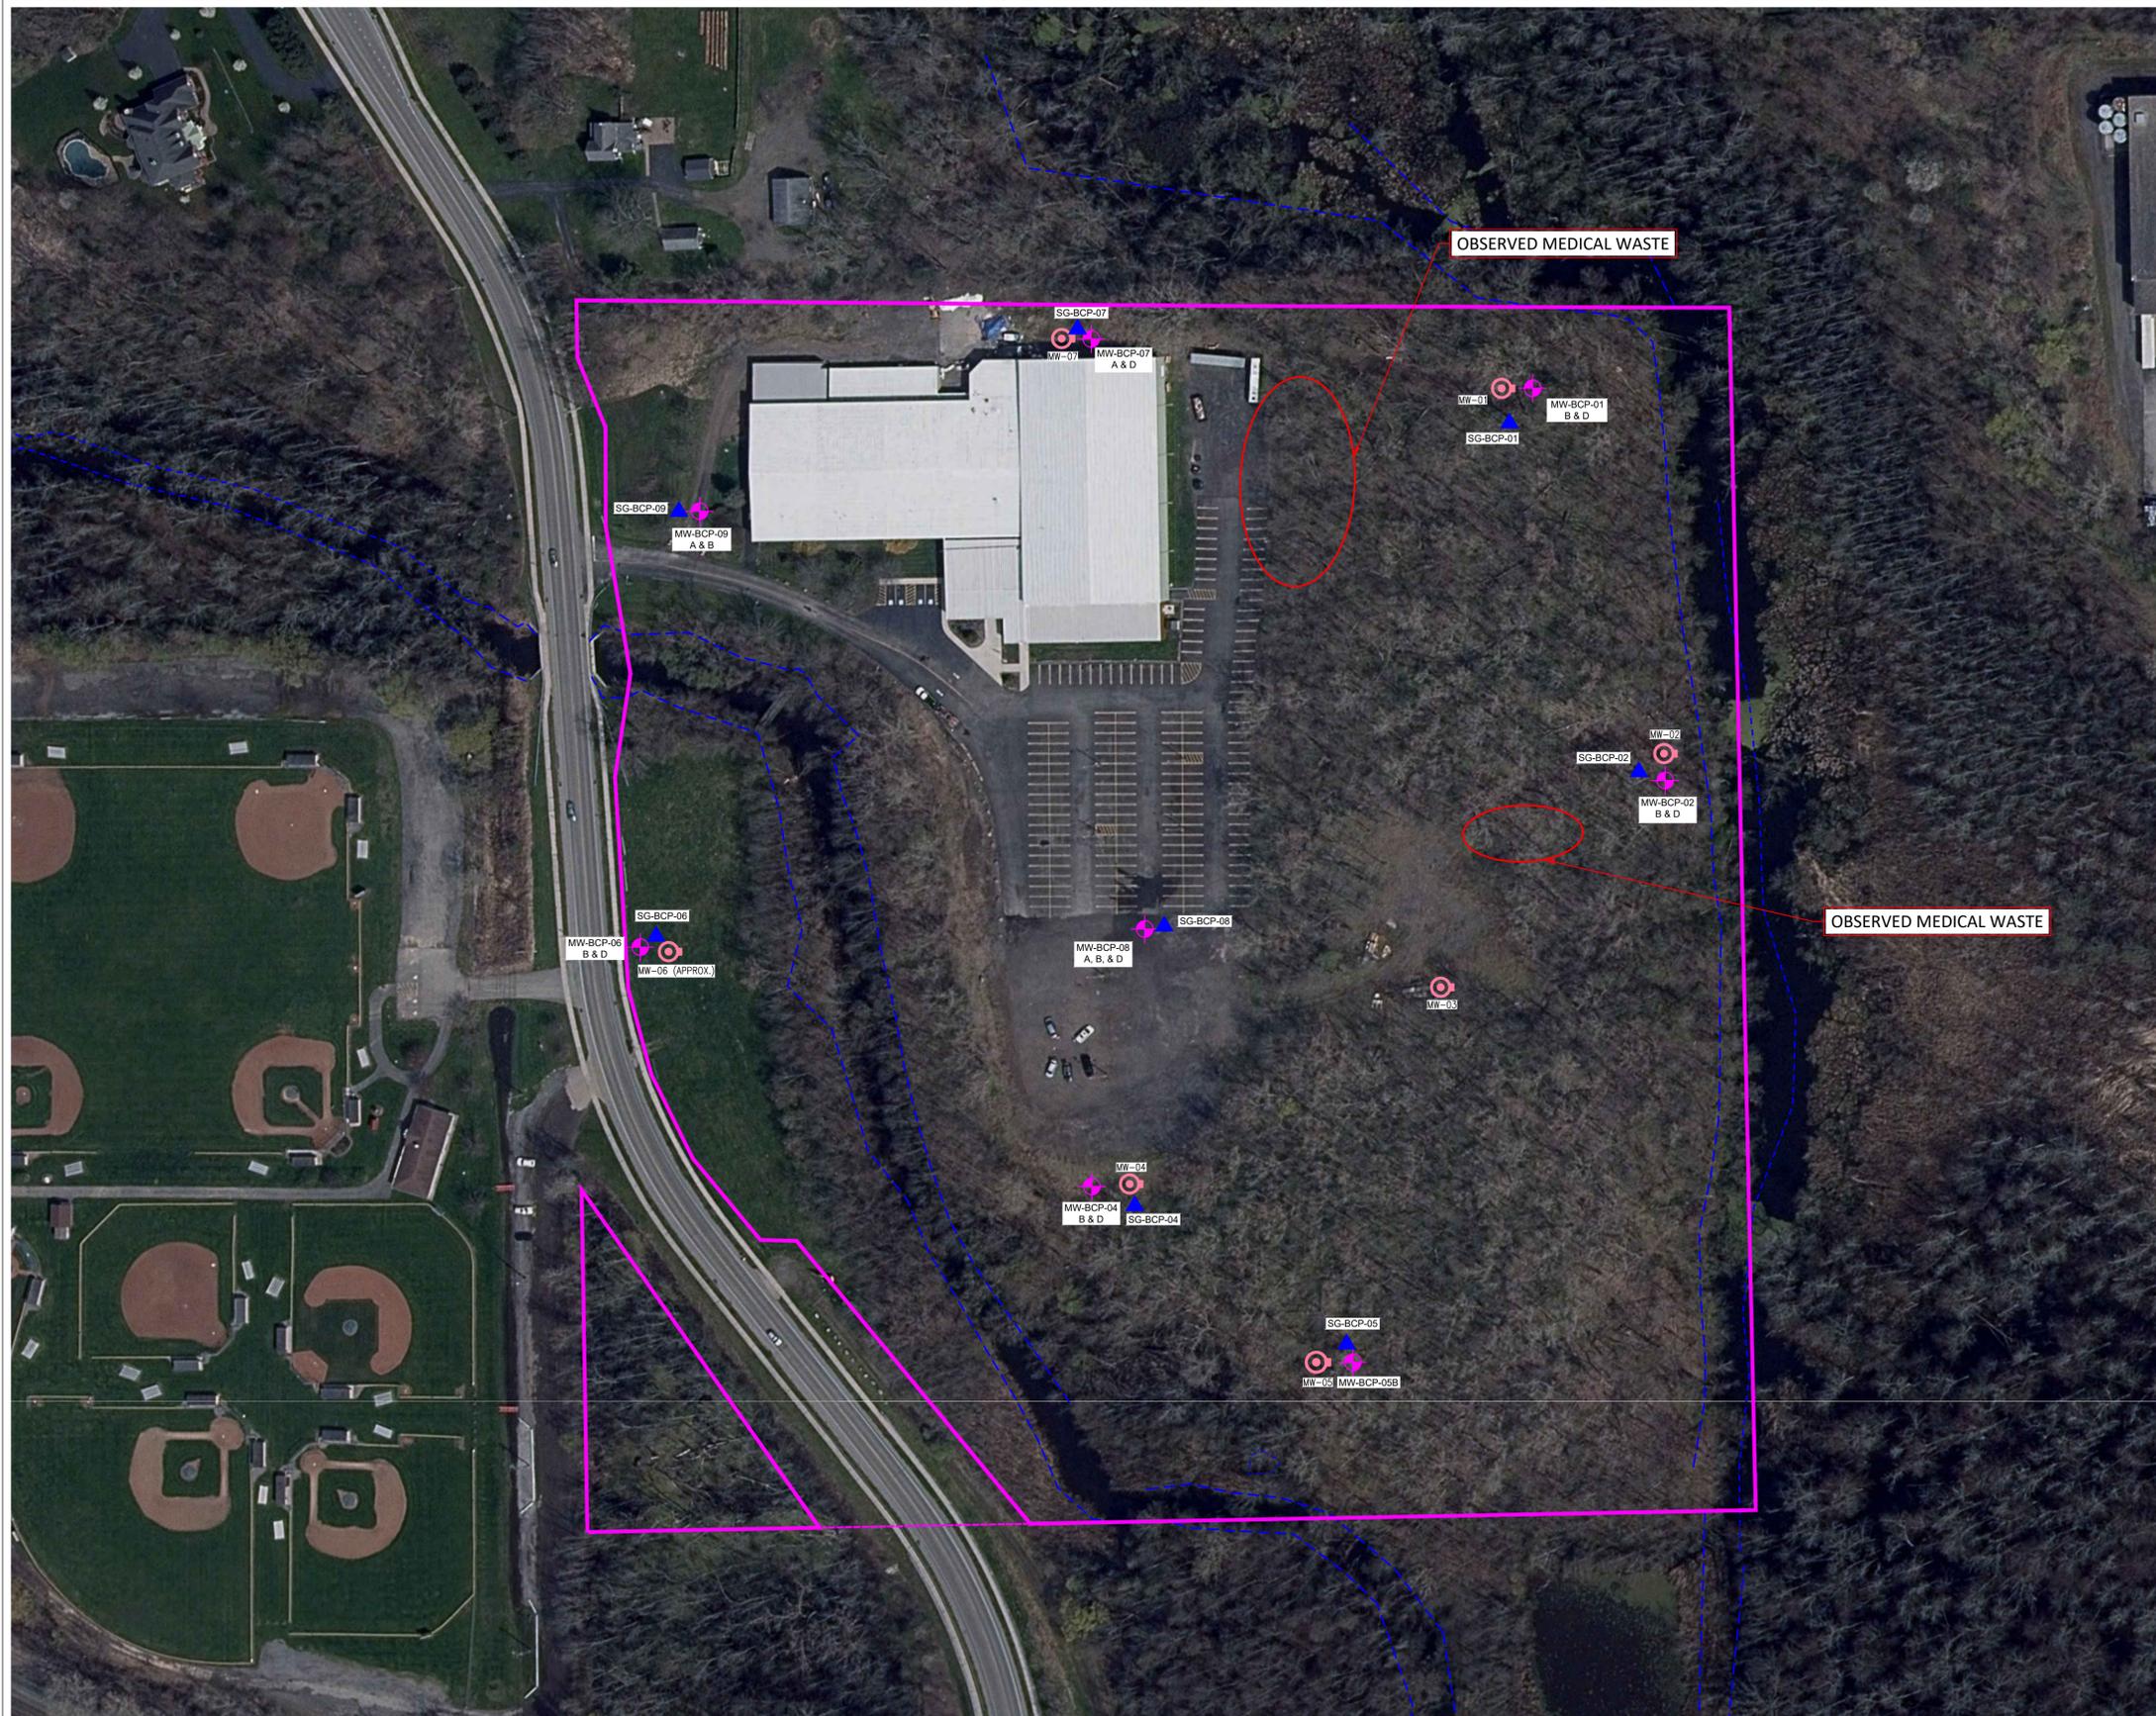

D



Notes:  
1. Outside of site boundary, the location of Thomas Creek is estimated.

Source:  
1. Schultz Associates, 2023, Map of a Survey of 80 Lyndon Road, Town of Perinton, County of Monroe, New York.  
2. Aerial imagery provided by Schultz Associates, 2020.

Legend:

- Existing Monitoring Well
- Proposed/Approved Monitoring Well
- Property Line
- Limits of Thomas Creek
- Soil Gas Sample




DRAWING BY	CB
CHECKED	JE
APPROVED	

PROPERTY OF INVENTUM ENGINEERING  
 IMPORTANT: THIS DRAWING PRINT IS LOANED FOR MUTUAL ASSISTANCE AND IS SUBJECT TO RECALL AT ANY TIME WITHOUT NOTICE. IT IS NOT TO BE REPRODUCED OR REPLICATED IN ANY FORM FOR THE BENEFIT OF PARTIES OTHER THAN THE NECESSARY PARTNERS, FINANCIAL INSTITUTIONS, SUBSIDIARIES OR AGENTS OF INVENTUM ENGINEERING.  
 CONSENT OF INVENTUM ENGINEERING.  
 NOTICE: THIS DRAWING HAS BEEN PREPARED UNDER THE AUTHORITY OF STATE LAW FOR ANY PERSONS ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER. TO ALTER THIS DOCUMENT IN ANY WAY.


SOIL GAS SAMPLE LOCATIONS  
 80 LYNDON ROAD  
 FAIRPORT, NEW YORK 14450

**INVENTUM ENGINEERING**  
 441 CARLISLE DRIVE  
 SUITE C  
 HERNDON, VIRGINIA 20170  
 (703) 722-6049  
 www.InventumEng.com

**FIGURE 1**  
 DRAWING NUMBER

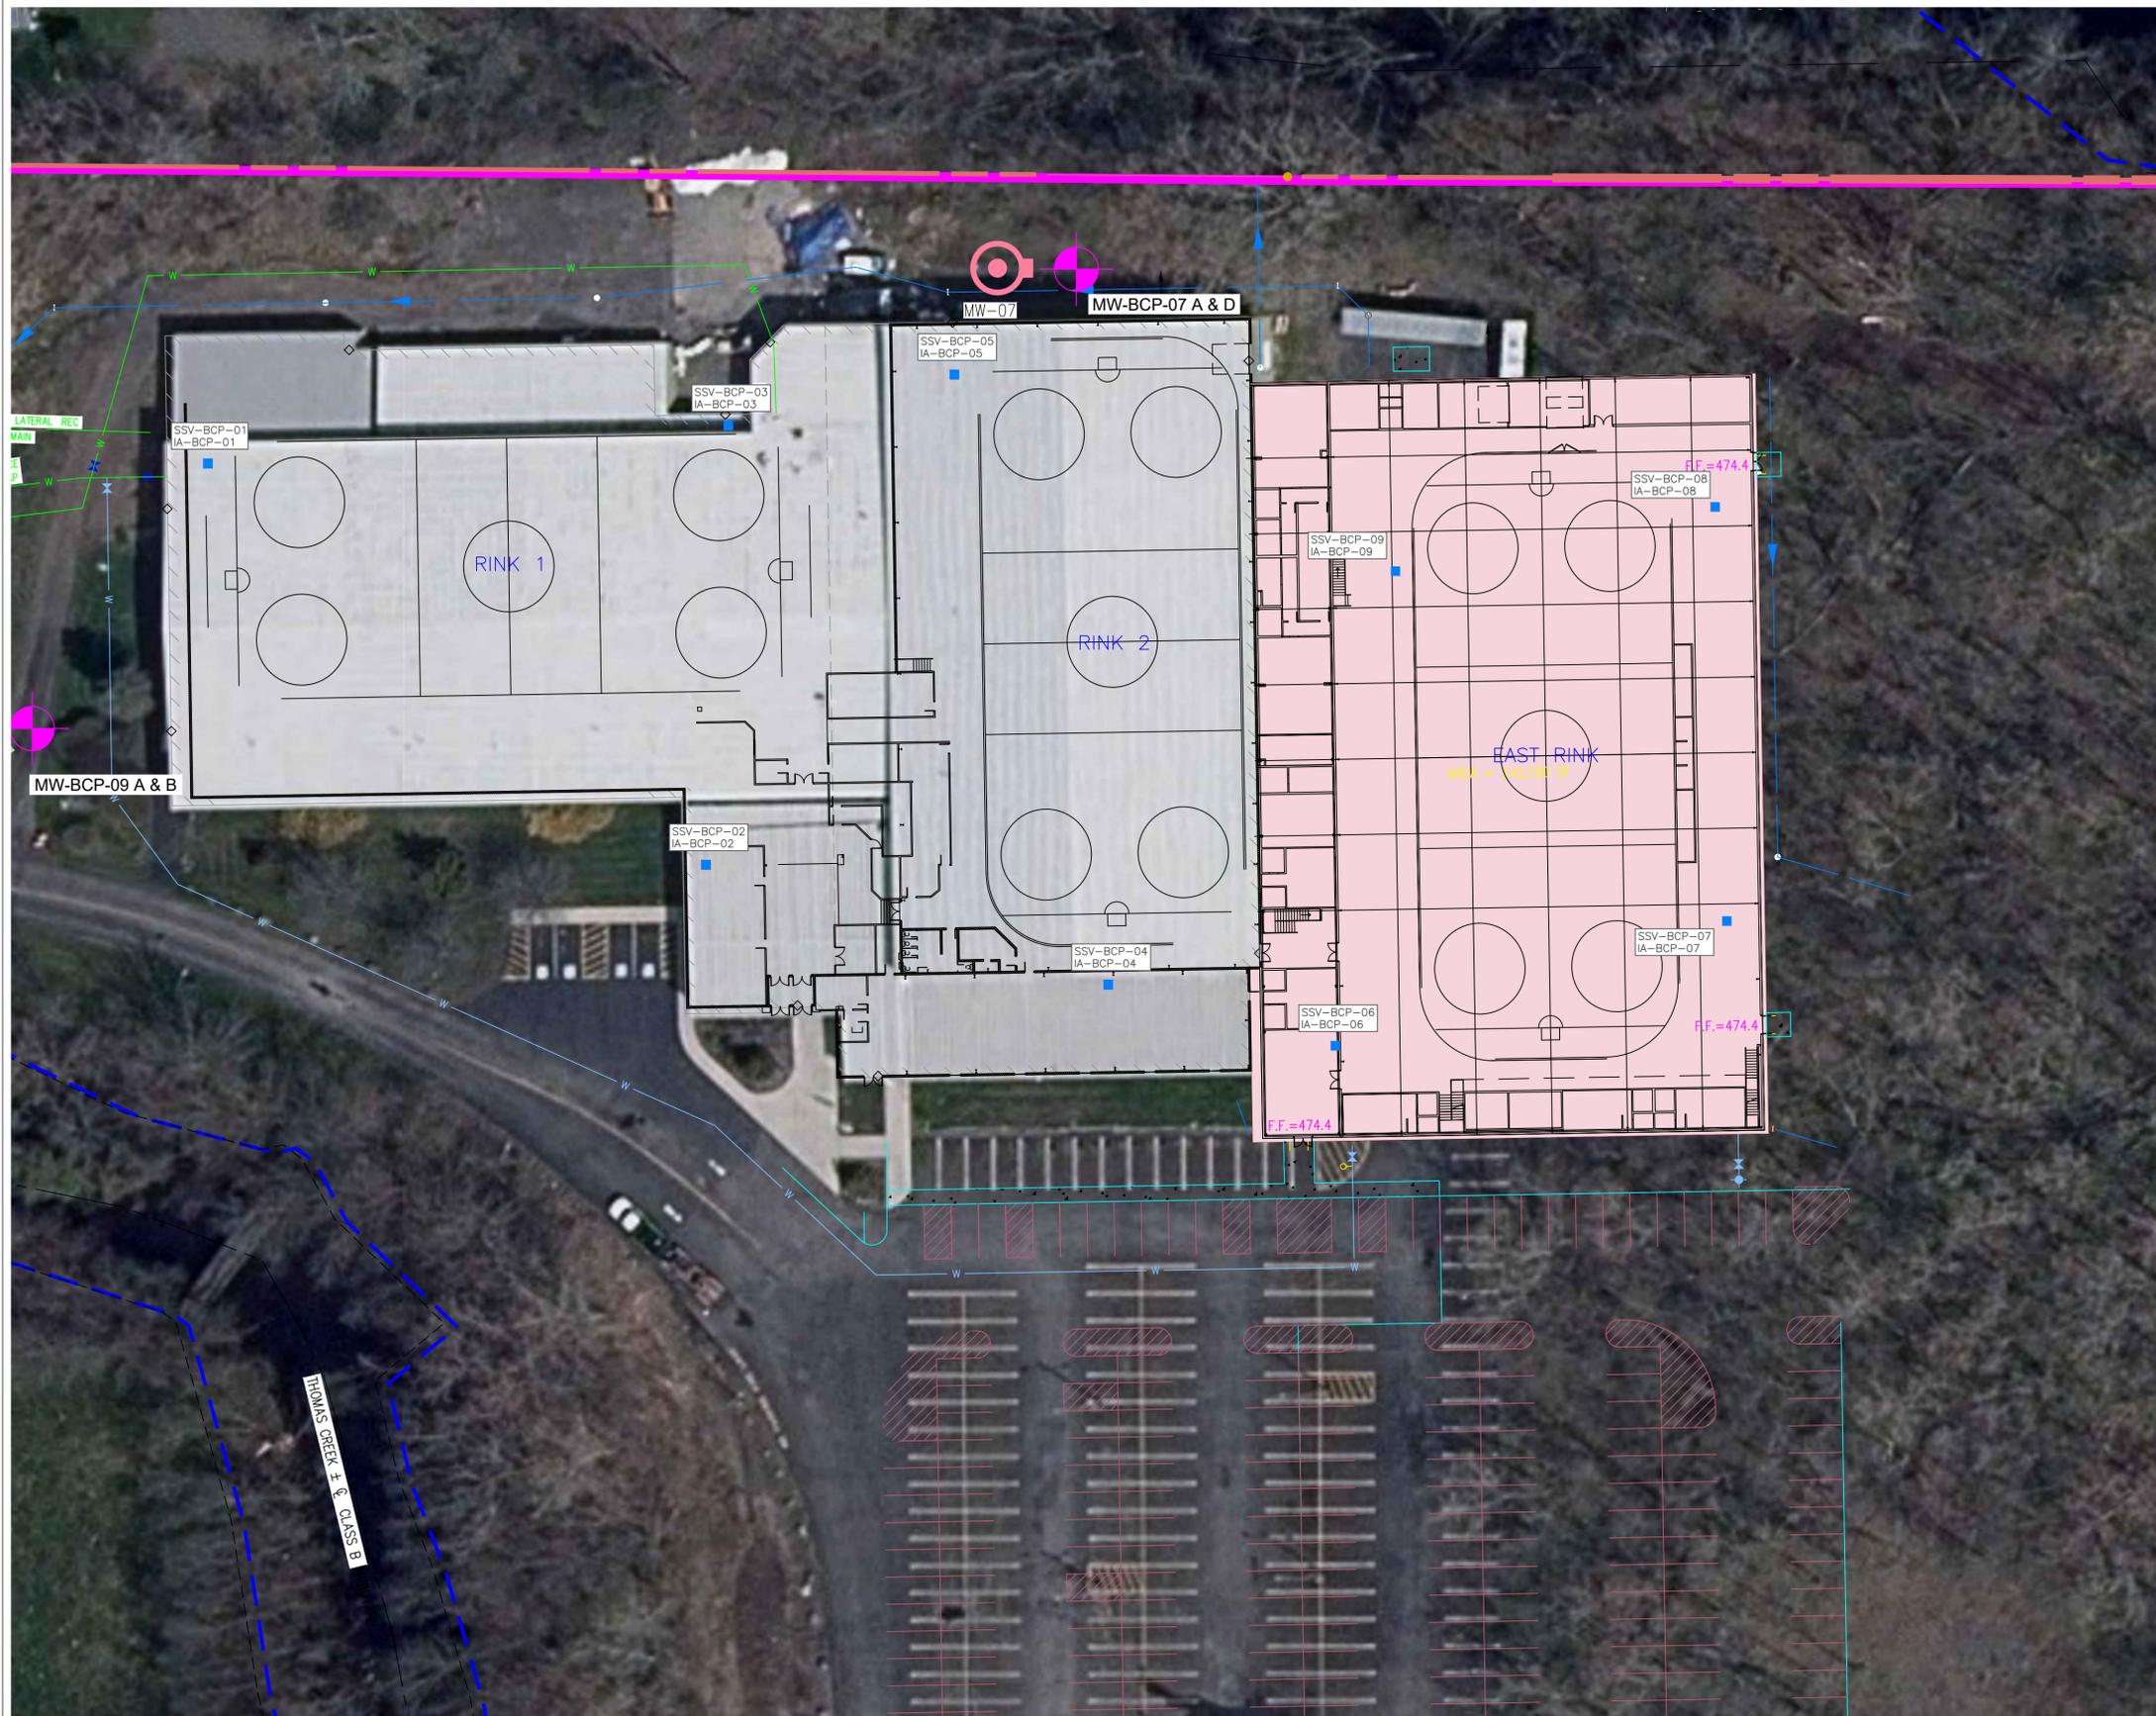

D



Notes:  
1. Outside of site boundary, the location of Thomas Creek is estimated.

Source:  
1. Schultz Associates, 2023, Map of a Survey of 80 Lyndon Road, Town of Perinton, County of Monroe, New York.  
2. Aerial imagery provided by Schultz Associates, 2020.

Legend:

	Existing Monitoring Well
	Proposed/Approved Monitoring Well
	Property Line
	Limits of Thomas Creek
	Soil Vapor/Indoor Air Sample Location



DRAWING BY	CB
CHECKED	JE
APPROVED	

PROPERTY OF INVENTUM ENGINEERING  
 IMPORTANT: THIS DRAWING PRINT IS LOANED FOR MUTUAL ASSISTANCE AND SUCH IS SUBJECT TO RECALL AT ANY TIME WITHOUT NOTICE. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF INVENTUM ENGINEERING.  
 NOTICE: THIS DRAWING HAS BEEN PREPARED UNDER THE ASSISTANCE AND SUPERVISION OF A LICENSED PROFESSIONAL ENGINEER, UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT IN ANY WAY.

SOIL VAPOR AND INDOOR AIR  
 SAMPLE LOCATIONS  
 80 LYNDON ROAD  
 FAIRPORT, NEW YORK 14450

**INVENTUM ENGINEERING**  
 441 CARLISLE DRIVE  
 SUITE C  
 HERNDON, VIRGINIA 20170  
 (703) 722-6049  
 www.InventumEng.com

**FIGURE 2**  
 DRAWING NUMBER

# Attachment A - Vapor Pin Standard Operating Procedures



# Vapor Pin®

## Standard Operating Procedure

### Installation and Extraction

### Vapor Pin® Sampling Device

## Scope & Purpose

### Scope

This standard operating procedure describes the installation and extraction of the Vapor Pin® Sampling Device for use in sub-slab soil-gas sampling.

### Purpose

The purpose of this procedure is to assure good quality control in field operations and uniformity between field personnel in the use of the Vapor Pin® Sampling Device.

## Equipment Needed

- Vapor Pin® Sampling Device
- Vapor Pin® Sleeves
- Vapor Pin® Cap
- Installation/Extraction Tool
- Rotary Hammer Drill
  - 5/8-Inch (16mm) diameter hammer bit
  - 1½-Inch (38mm) diameter hammer bit for flush mount applications
- ¾-Inch (19mm) diameter bottle brush
- Wet/Dry Vacuum with HEPA filter (optional)
- Dead Blow Hammer
- VOC-free hole patching material (hydraulic cement) and a putty knife or trowel
  - This is for repairing the hole following the extraction of the Vapor Pin® Sampling Device

## Installation Procedure

1. Check for buried obstacles (pipes, electrical lines, etc.) prior to proceeding.
2. Set up wet/dry vacuum to collect drill cuttings.
3. For a temporary installation, drill a 5/8-inch (16mm) diameter hole through the slab and approximately 1-inch (25mm) into the underlying soil to form a void. The hole must be 5/8-inch (16mm) in diameter to ensure a seal.
  - If a flush mount installation is required, drill a 1½-inch (38mm) diameter hole at least 1¾-inches (45mm) into the slab. We highly recommend using the Stainless Steel Drilling Guide and to reference the Standard Operating Procedure Drilling Guide & Secure Cover.
4. Remove the drill bit, brush the hole with the bottle brush and remove the loose cuttings with the vacuum.
5. Assemble the Vapor Pin® Sampling Device and Vapor Pin® Sleeve (Figure 1).
6. Place the lower end of the Vapor Pin® Sampling Device assembly into the drilled hole. Place the small hole located in the handle of the Installation/Extraction Tool, over the Vapor Pin® to protect the barb fitting and tap the Vapor Pin® into place using a dead blow hammer (Figure 2). Make sure the Installation/Extraction Tool is aligned parallel to the Vapor Pin® to avoid damaging the barb.
  - During installation, the Vapor Pin® Sleeve may form a slight bulge between the slab and the Vapor Pin® Sampling Device shoulder.
7. Place the Vapor Pin® Cap on the Vapor Pin® to prevent vapor loss prior to sampling (Figure 3).
8. For flush mount installations, cover the Vapor Pin® with a flush mount cover, using either the plastic cover or the optional Stainless Steel Secure Cover (Figure 4).
9. Allow 20 minutes or more (consult applicable guidance for your situation) for the sub-slab soil-gas conditions to re-equilibrate prior to sampling.

# Standard Operating Procedure

## Installation and Extraction

Figure 1.



Figure 2.



Figure 3.



Figure 4.



## Sampling

1. Remove the Vapor Pin® Cap and connect your sample tubing to the barb fitting of the Vapor Pin® Sampling Device.
2. Create a connection by using a short piece of Tygon™ tubing to join the Vapor Pin® Sampling Device with the Nylaflow tubing (Figure 5). Put the Nylaflow tubing as close to the Vapor Pin® Sampling Device as possible to minimize contact between soil gas and Tygon™ tubing. You do not **have** to use Nylaflow tubing, any stiff tubing will suffice.
3. Prior to sampling, conduct a leak test in accordance with applicable guidance. If a leak test is not specified, refer to the SOP Leak Testing the Vapor Pin® Sampling Device, via Mechanical Means (Figure 6). For flush-mount installations, distilled water can be poured directly into the 1½ inch (38mm) hole.

Figure 5.



Figure 6.



Figure 7.



## Extraction Procedure & Reuse Notes

1. Remove the protective cap, and thread the Installation/Extraction Tool onto the Vapor Pin® Sampling Device (Figure 7). Turn the tool clockwise continuously, don't stop turning, the Vapor Pin® Sampling Device will feed into the bottom of the Installation/Extraction Tool and will extract from the hole like a wine cork, **DO NOT PULL!**
2. Fill the void with hydraulic cement and smooth with a trowel or putty knife.
3. Prior to reuse, remove the silicon Vapor Pin® Sleeve and Vapor Pin® Cap and discard. Decontaminate the Vapor Pin® Sampling Device in a Alconox® solution, then heat in an oven to a temperature of 265° F (130°C). For Stainless – ½ hour, Brass 8 minutes.

# VaporPin®

## Standard Operating Procedure

### Leak Testing the Vapor Pin® Sampling Device Via Water Dam

#### Scope & Purpose

##### Scope

The operating procedure describes the methodology to test a Vapor Pin® Sampling Device or equivalent sub-slab sampling device for leakage of indoor air.

##### Purpose

The purpose of this procedure is to assess the potential for indoor air to leak past the Vapor Pin® Sampling Device.

#### Equipment Needed

- Water Dam
- Distilled water
- VOC free modeling clay or equivalent
- Vapor Pin® Sampling Device and associated sample tubing

#### Procedure

1. Drill a 5/8-inch (16mm) hole in the concrete slab and install the Vapor Pin® Sampling Device as per the Standard Operating Procedure (SOP).
2. Clean the slab within a 2-inch radius of the Vapor Pin® Sampling Device to remove dust. Avoid wetting the concrete or wait until the concrete is dry before proceeding and avoid cleaning with VOC-containing substances. A whisk broom or shop vacuum is recommended. Remaining dust can be picked up with a piece of scrap modeling clay.
3. Roll a 1-inch diameter ball of modeling clay between your palms to form a “snake” approximately 7 inches long and press it against the end of the water dam. Push the water dam gently against the slab to form a seal with the concrete.
4. Attach the sample tubing to the top of the Vapor Pin® Sampling Device and pour enough distilled water into the water dam to immerse the base of the Vapor Pin® and the tubing connection at the top of the Vapor Pin® Sampling Device.
5. Purge the sample point as required by the data quality objectives. Concrete will absorb some of the water, which is normal; however, if water is lost to the sub-slab, stop, remove the water from the water dam, and reposition the Vapor Pin® Sampling Device to stop the leakage. Reseat the leak test equipment, if needed.
6. If the Vapor Pin® Sampling Device is installed in the flush-mount configuration, the larger hole can be filled with water in place of the water dam modeling clay.

**Figure 1.** Water dam used for leak detection



## Attachment B - Methane Monitor Specifications





**FIELD ENVIRONMENTAL  
INSTRUMENTS, INC.**

# MRU OPTIMA 7 Biogas Landfill Analyzer (O<sub>2</sub>/CH<sub>4</sub>/CO<sub>2</sub>/H<sub>2</sub>S/Pressure)



## Measuring Ranges

O <sub>2</sub> – Oxygen	0 ... 21.0 %
CO <sub>2</sub> – Carbon dioxide	0 ... 100 %
CH <sub>4</sub> – Methane	0 ... 100 %
H <sub>2</sub> S – Hydrogen sulfide	0.....2,000 ppm * overload 5,000 ppm
Diff. pressure	± 120 inH <sub>2</sub> O

## Dimensions and other data

PC-Interface	USB
Sample gas conditioning	Large condensate separator with PTFE filter
Housing	Fiberglass reinforced
Battery operated / Operating time	6 to 8 h continuous operation
Weight	2.0 lbs.

**Pittsburgh, PA**  
800-393-4009

**Atlanta, GA**  
866-620-6762

**Chicago, IL**  
844-515-9170

**Houston, TX**  
866-323-4006

**Kansas City, KS**  
866-580-5499

**fieldenvironmental.com**  
info@fieldenvironmental.com

**Long Beach, CA**  
844-608-3344

**Los Angeles, CA**  
866-278-2382

**Minneapolis, MN**  
866-580-5512

**Philadelphia, PA**  
866-648-8607

**Portland, OR**  
844-324-9516

**Seattle, WA**  
855-398-5600