



ecology and environment engineering, p.c.

BUFFALO CORPORATE CENTER
368 Pleasant View Drive, Lancaster, New York 14086
Tel: 716/684-8060, Fax: 716/684-0844

May 31, 2000

Christopher Schmidt
Environmental Assistant
Office of Environmental Services
Niagara Falls City Hall
745 Main Street
Niagara Falls, New York 14302-0069

RECEIVED

AUG 3 2000

NYSDEC - REG. 9
FOIL
REL UNREL

Re: Site Investigation Report for the Power City Warehouse, Niagara Falls, New York

Dear Mr. Schmidt:

Ecology and Environment Engineering, P.C. (E & E) is pleased to submit to the City of Niagara Falls this Final Site Investigation (SI) Report for the Power City Warehouse, Niagara Falls, New York. This report includes a description of the field activities, a site location map (Figure 1) and an illustration showing the sample locations (Figure 2), summaries of the samples collected and descriptions of their exact locations (Tables 1 and 2), a discussion of the field investigation results, tabulated summaries of the positive analytical results for each sample location and a tabulated comparison summary of the analytical results with regulatory screening levels (Tables 3 through 7), a summary of the asbestos analyses (Table 8), a photolog (Attachment A), the Data Usability Summary Report (Attachment B), and a Remedial Cost Analysis (Attachment C).

E & E conducted this SI to characterize the nature and extent of contamination at the site. The investigation was conducted in compliance with the requirements of the New York State Department of Environmental Conservation (NYSDEC) guidelines and under the review of the United States Environmental Protection Agency (USEPA) Region 2.

This report is being submitted in final form as per your request stated during the May 22, 2000 telephone conversation between E & E and yourself.

Introduction

The 4.03-acre Power City Warehouse Site is located at 3123 Highland Avenue in the City of Niagara Falls (see Figures 1 and 2). The former industrial location is situated in an area of various land uses, including former and current industrial; light commercial (consisting of small retail stores) and residential. The residences east and west of the site are primarily managed by the Niagara Falls Housing Authority, although some private homes also exist on separate lots. A

railroad right-of-way (ROW) is located south of the site beyond Center Avenue and west of the site beyond Highland Avenue. Homes and a few small businesses are located on the west side of Highland Avenue across from the site. Residential communities continue west toward the railroad ROW. The concentration of industry along Highland Avenue increases northward from the site whereas small businesses become more prevalent to the south.

A small community park is located directly south of Beech Avenue and a church, homes, and an electric power transformer building occupy the south side of Beech Avenue across from the site. Residential communities and a girls' club are located further south, leading to a wide railroad ROW. The rail yard separates this area from the areas further south. Individual homes and a church are located east of the site, and an elementary school is located approximately 0.25 mile northeast of the site. Residential communities continue to the east across Hyde Park Boulevard. Interspersed in the residential areas are a few community service buildings and small businesses such as convenience stores. A large expanse of industrial properties lies directly north of the site, continuing to the intersection of Highland and Hyde Park Boulevard.

Site History

The large, abandoned, brick Power City Warehouse building was formerly used for lead-acid battery manufacturing. Various battery types were produced at the facility, including automobile, truck, and tractor batteries. Battery manufacturing was started at the facility by U.S. Light and Heat Co., then continued under Autolite Co. In the 1960s, Prestolite Co. acquired the facility and changed operations to the manufacturing of hard rubber battery cases, filling of batteries with sulfuric acid, and charging of batteries. In the mid-1970s, all operations were relocated to 3001 Highland Avenue, and the building at 3123 Highland Avenue was vacated. The building has undergone various uses since Prestolite's departure, including use as an automotive body shop and as a warehouse by the Power City Distribution Company and the HDL Distribution Center, Inc. Currently, there is no activity at the site. Potential environmental concerns at the site include the presence of residuals from battery manufacturing processes, and possible building material hazards such as lead-based paint and asbestos.

Site Geology

Based on subsurface conditions observed and reported by E & E while conducting a SI at the Tract II property directly south of the Power City Warehouse Site, the geology in this area consists of glacio-lacustrine deposits and glacial till overlying fractured dolostone bedrock. The layer of glacio-lacustrine clay and silt ranges from approximately 12.5 feet to 23.5 feet in thickness and overlies a relatively thin layer of glacial till. This till is composed of unstratified reddish-brown clay and sand with varying amounts of silt, gravel, and cobbles, as well as fragments from the dolostone bedrock that directly underlies it. The bedrock beneath the overburden at the site is the Lockport Dolostone formation of the Middle Silurian-age Lockport group.

Field Investigation Activities

Introduction

A project work plan was prepared prior to the field activities and reviewed by the City of Niagara Falls and USEPA Region 2. This document included a field sampling plan (FSP), a quality assurance project plan (QAPjP), a health and safety plan (HASp), and a community participation plan (CPP).

Field investigation activities at the Power City Warehouse Site conducted on May 6 and 7, 1999 consisted of a building inspection and multimedia sampling. Sampling activities consisted of surface soil sampling, sludge sampling, collection of a paint chip sample, and collection of suspected asbestos-containing materials (ACM). All field activities were performed as specified in the FSP.

Building Inspection

A general inspection of the Power City Warehouse was performed to determine whether petroleum products such as oil and grease, or other hazardous substances are present in the building. It should be noted that this inspection was limited to the first floor due to the severely dilapidated and unsafe condition of the building's higher floors. During the inspection, three samples of suspected ACM and one sample of suspected lead-based paint chips were collected for analysis. Miscellaneous debris, including hundreds of boxes of greeting cards, boxes of automobile billing records, numerous automobile parts, tires, and an air hammer unit, were found in the various rooms and building additions. The site consists of a main building with a number of additions and rooms, a single-room building labeled by E & E as "Operational Area of Unknown Use" located in the northeast corner of the site, the foundations of an electrical substation building in the southeast corner of the site, and the open yard and loading dock.

Approximately 70% of the rooms and building additions have concrete floors. Based on exposed surfaces and attempts to break through the concrete, the concrete floors were estimated to be approximately 3 feet thick in some rooms and were intact in most cases. Brick floors were also present in some of the rooms (Central Factory Building, E Building Addition, and Storage Inspection room). Round drains/sumps were located in several rooms, including the E Building Addition, F Building, Oil House, Boosting Building, Moulding Room, and Lead Foundry. Water was observed in the drains/sumps in the Lead Foundry and the Boosting Building. A basement access containing several feet of water was discovered in the Central Factory Building directly south of the Lead Foundry. Some staining was discovered on the floor of some of the rooms (i.e., E Building Addition, Moulding Room). A second linear floor drain was found in the Central Factory Building. This floor drain is shorter in length, just as wide (approximately 8 inches), and parallel to the one shown in Figure 2. No standing water was found in these floor drains; however, the sediment in them was moist. Circular impressions on the floor were

observed in the Oil House, suggesting that in the past drums were stored there.

A ventilation system, fire extinguishing system, and an outside alarm were discovered during the inspection of the Operational Area of Unknown Use at the northeast corner of the Power City Warehouse Site. Based on the inspection, it is believed that this building may have been used as a chemical storage area. Miscellaneous debris, including a television set, insulators, and an oxygen tank, was found in the building.

A concrete pad, possibly used as a transformer mount, was found in the northeast corner of the electrical substation located in the southeast corner of the site. Some staining was observed on this concrete pad.

Surface Soil Sampling

Surface soil samples were collected from the 0-to 0.5-foot depth interval in 10 operational rooms within the building and the loading dock and open yard, and two operations areas on the property outside the warehouse (see Figure 2 and Table 1). Visual inspection of the Acid Storage Tank Area concluded that the concrete floor at the Tank Area is completely intact. Therefore, and according to the FSP, no sample was collected from this location.

Within each room, either a grab sample or a composite surface soil sample consisting of up to three aliquots was collected. Sample numbers, types (grab versus composite), locations, and analyses are summarized in Table 1. Table 2 lists descriptions of all the surface soil sample locations.

Various floor coverings in the operational rooms were encountered and sampling procedures varied accordingly. In rooms with brick or highly fractured concrete floors, the bricks were removed or the concrete was broken and samples were collected from the underlying soil. In rooms with floor drains and concrete floors that are completely intact, composite aliquots or individual grab samples were collected from the drains. Selection of aliquot locations was based on site features such as staining, fractured concrete, presence of drains or sumps, or proximity to doorways (see Table 2).

Composite surface soil samples were collected from two locations in the area surrounding the main building: the Operational Area of Unknown Use in the northeastern section of the property and the electrical substation in the southeastern section of the property. Up to three soil aliquots from the 0-to-0.5-foot depth interval were collected and composited at each of the two locations. Similarly, one five-way composite soil sample was collected from the yard surrounding the building and the loading dock area. All surface soil samples were collected as described in the FSP with the following exceptions:

- The dust bin was not found during the field investigation. Consequently, instead of collecting a three-way composite at the dust bin site, a single grab sample was collected from an area of visible soil discoloration at the general location where the dust bin was reported to exist.
- Due to the small size of the Air Room and the presence of one distinct oil-stained location, a single grab soil sample was collected instead of a three-way composite soil sample.
- The concrete floor in the Oil House was completely intact. A dry floor drain was found in the center of the room; a single grab soil sample was collected from this drain instead of a three-way composite soil sample from beneath the concrete floor.
- Due to the small size of the Plate Storage Area, a two-way composite soil sample was collected instead of a three-way sample.
- The concrete floor of the Operational Area of Unknown Use appeared completely intact, and the floor drain contained only air-blown debris and soil. Consequently, a two-way composite sample was collected instead of a four-way composite soil sample. However, the concrete ramp by the north door was fractured. One aliquot of the two-way composite sample was collected from underneath the fractured area of the concrete ramp; the other aliquot was collected adjacent to the outer northeast corner of the room at the end of the concrete, the suspected location to which any spills or leaks in this area would flow.
- The concrete foundation of the Electrical Substation location was mostly intact. Consequently, a three-way composite soil sample was collected at this area instead of a four-way sample. One aliquot was collected beneath the concrete at a seam between two rooms; the other two aliquots were collected adjacent to a concrete pad with visible staining.
- The FSP specified that for comparative purposes, existing data from chemical analyses of background samples collected for the Tract II site SI would be used. However, based on recommendations from EPA Region 2, three background surface soil samples were collected from the area adjacent to Power City Warehouse and were submitted for lead analysis.

*back
green
suppl*

● pH analysis was added to the analyses performed for the soil sample collected from the E Building Addition. This analysis was added because of the possibility that staining on a section of the concrete floor of this building was caused by acid spills.

Composite Sediment Sampling

A composite sediment sample was collected from the building's central floor drain. Three

sediment aliquots were collected from the 0- to 0.5-foot depth interval within the drain and then composited. The three aliquots were evenly spaced along the length of the drain. Sediment sample number, type (grab versus composite), location, and analyses are summarized in Table 1. Table 2 provides a description of the sediment sample location.

Materials Samples

During the asbestos inspection and sampling effort, three samples of suspected ACM were collected. These samples consisted of:

- One sample of magnesium TSI (a type of insulation) from a 3-inch pipe located in the Central Factory Building (sample AS-PCW-01);
- One sample of "Aircell" thermal system insulation (TSI) from a 2-inch pipe located in the Storage/Inspection area (sample AS-PCW-02); and
- One sample of roofing material from a portion of the roof that had fallen into the Storage/Inspection area (sample AS-PCW-03).

The ACM samples were submitted to E & E's subcontract laboratory (Chopra-Lee) for Polarized Light Microscopy (PLM) analysis (see Table 1). As required by New York State Law, Chopra-Lee analyzed organically bound potential ACM using Transmission Electron Microscopy (TEM) to accurately determine the asbestos content. Additionally, one lead paint sample was submitted for Toxicity Characteristic Leaching Procedure (TCLP) lead analysis (Table 1). This sample consisted of different colors paint chips found in the Moulding Room.

Field Investigation Results

Sample Analysis

Each soil, sediment, and paint chip sample collected at the Power City Warehouse Site was submitted to E & E's Analytical Services Center (ASC) for analysis. The ACM samples were submitted for analysis to Chopra-Lee. All sample analyses were performed according to the FSP and are summarized in Table 1. Two of the 13 soil samples were analyzed only for TAL total lead (SS-PCW-04 and SS-PCW-07); two were analyzed only for TCL PCBs (SS-PCW-08 and SS-PCW-13); and one of them (SS-PCW-10) was analyzed only for TCL BNAs and PCBs. The remaining eight of the 13 soil samples and the sediment sample were submitted for target compound list (TCL) base/neutral acid extractable organic compounds (BNA), TCL polychlorinated biphenyls (PCBs), and target analyte lists (TAL) total lead analysis. One of these eight soil samples (SS-PCW-01) was also analyzed for pH. As mentioned earlier, the three background samples were submitted for TAL total lead analysis only while the paint chip sample was submitted for toxicity characteristic leaching procedure (TCLP) lead.

Mr. Christopher Schmidt
SI Report
Power City Warehouse
May 31, 2000
7 of 12



Sample analysis was performed according to the procedures established in New York State Analytical Services Protocol (ASP), October 1995 revision. All resulting data were reviewed by quality assurance specialists. The laboratory Form I reports include USEPA data qualifiers.

Compounds and analytes that were not detected are listed as "ND" in the positive analytical data summary tables (Tables 3 through 7). Concentrations listed with no qualifiers are accepted as such values; however, some of the reported concentrations are qualified due to conditions associated with analysis of the sample. Qualifiers are listed along with reported values in the summary tables.

Several samples contained compounds and analytes at concentrations greater than what could be accurately quantified without diluting the sample. In order to properly analyze such samples, they were diluted and the values were qualified as "D". While this procedure allows for the proper analysis of analytes present at high concentration, it also raises the detection limit.

BNA analyses of samples SS-PCW-03 and SS-PCW-10 were performed on medium level extractions due to the poor quality of the extractions from these samples (see Attachment B). Consequently, the quantitation limits were raised, and very few compounds were detected in these two samples above the raised quantitation limits.

In those cases in which an analyte concentration value can only be estimated, it is qualified with a "J". Similarly, when an elevated detection limit results from a dilution, and the detection limit itself is estimated, the value is qualified as "UJ."

Quality control samples including laboratory blanks were included in the analysis of the field samples. Blanks were used to determine whether other sources of an analyte besides the sample matrix exist. No organic compounds were detected in the laboratory blanks with the exception of acetophenone, a tentatively identified semivolatile organic compound, in laboratory blank SBLKS1.

Tentatively identified compounds (TICs) are chromatograph peaks in gas chromatography/mass spectrometry analyses for volatile and semivolatile organics that are not target compounds, system monitoring compounds, or internal standards. TICs were qualitatively identified through a mass spectral library search, and the identifications were estimated by a qualified data reviewer. No standard response factor is used in the quantitation of TIC compounds; therefore, all TIC concentrations are estimated values. This process is used to identify and estimate concentrations of any potential unknown contaminants in each sample.

Surface Soil Investigation Results

As discussed earlier, three grab and 10 composite surface soil samples were collected at the site.

The results of the organic and inorganic analyses of these samples are presented in Table 3. Additionally, three grab background surface soil samples were collected for lead analysis from the areas adjacent to the site. Background surface soil sample analytical data are presented in Table 4.

A total of 24 semivolatile organic compounds (SVOCs), including 19 polynuclear aromatic hydrocarbons (PAHs) and five phthalates, were found in the nine soil samples analyzed for TCL BNAs (E Building Addition, F Building/F Building Extension, Boosting Building, Moulding Room, Lead foundry, Central Factory Building, Oil House, Operational Area of Unknown Use, and open yard and loading dock). No PAHs were detected in the samples collected from the Boosting Building (SS-PCW-03) and the Oil House (SS-PCW-10); however, the quantitation limits for the analyses of these samples were high due to medium extraction levels (see Attachment B). Consequently, the absence of PAHs in these samples may be an artifact of the raised quantitation limits.

One PCB, Aroclor 1254, was detected in seven of the 11 soil samples analyzed for PCBs. PCB concentrations ranged from 930 $\mu\text{g}/\text{kg}$ (in the Moulding Room sample) to 21,000 $\mu\text{g}/\text{kg}$ (in the E Building Addition sample). PCBs were not detected in the samples collected from the Air Room (SS-PCW-08), the Electrical Substation (SS-PCW-13), or the open yard and loading dock (SS-PCW-12). Pesticide analysis results were also reported for all the samples submitted for TCL PCB analyses as part of the contract laboratory program reporting. A total of 16 pesticides was detected in the 11 samples: methoxychlor was detected in nine of the samples; heptachlor epoxide was detected in seven samples; endrin ketone and DDT were detected in five samples; and dieldrin was detected in four samples (see Table 3). The sample collected at the open yard and loading dock contained the lowest concentrations of pesticides.

Lead was detected in the three background surface soil samples at concentrations ranging from 201 mg/kg to 1,400 mg/kg (see Table 4). Lead was detected at elevated concentrations in all 10 soil samples analyzed for total lead. Concentrations of lead ranged from 2,350 mg/kg (in the E Building Addition sample) to 178,000 mg/kg (in the Storage Plate Area sample) and exceeded the background lead concentrations.

One of the sample SS-PCW-01 (E Building Addition sample) aliquots was collected beneath the concrete at an area with yellow staining suspected to be the result of acid leaks or spills. pH was measured for all the samples submitted for BNA and PCB analyses as part of these analyses. The 4.9 pH measured for sample SS-PCW-01 was much lower than the pH measured in the other soil samples.

Several TICs including unknown PAHs, other unknown aromatics, unknown oxygenated hydrocarbons, other unknown hydrocarbons, unknown alkyl amine, hexadecanoic acid,

octadecanoic acid, unknown carboxylic esters, methoxychlor isomers, nonylphenol isomers, unknown alkyl phenols, anthracenedione, a benxonaphthothiophene isomer, straight-chain alkanes, an unknown terpene, and a benzocarbazole isomer were detected in the surface soil samples. The highest estimated concentration of total TICs was 467.38 $\mu\text{g}/\text{kg}$ and was detected in sample SS-PCW-10 (Oil House sample).

Sediment/Sludge Results

One sludge sample and a duplicate were also collected from the linear central floor drain located in the Central Factory Building. The results for this sludge sample and the field duplicate are presented in Table 5. Seven PAHs were detected in sample SD-PCW-01 and nine PAHs were detected in duplicate sample SD-PCW-01/D. One PCB, Aroclor 1254, was detected at an estimated concentration of 1,800 $\mu\text{g}/\text{kg}$ in sludge sample SD-PCW-01 and 1,200 $\mu\text{g}/\text{kg}$ in the duplicate sample (SD-PCW-01/D). Elevated concentrations of lead were detected in both samples. Lead was detected in sample SD-PCW-01 at a concentration of 225,000 mg/kg and in sample SD-PCW-01/D at a concentration of 270,000 mg/kg .

Several TICs including unknown PAHs, unknown oxygenated hydrocarbons, unknown hydrocarbons, and unknown aromatics were detected in the sludge samples at total estimated concentrations of 243.41 $\mu\text{g}/\text{kg}$ in SD-PCW-01 and 372.66 $\mu\text{g}/\text{kg}$ in SD-PCW-01/D.

Paint Chip Sample

One paint chip sample was collected from the wooden beams in the Moulding Room and was submitted for TCLP lead analysis. The TCLP analysis result was 42.3 mg/L (see Table 6).

Comparison to Regulatory Criteria

Several SVOCs, PCB Aroclor 1254, and lead concentrations exceeded New York State Department of Environmental Conservation (NYSDEC) Technical and Administrative Guidance Memorandum (TAGM) 4046 criteria and EPA Region 3 Risk-based Concentrations (RBCs) in several samples. Table 7 presents a comparison of the sample analytical data to the above regulatory criteria.

Analysis of the 13 surface soil samples indicates the presence of 24 SVOCs, including 19 PAHs and five phthalates. PAH concentrations exceeding NYSDEC criteria and EPA RBCs were detected in seven of the soil samples. Ten of these PAHs, including phenanthrene, fluoranthene, pyrene, chrysesne, benzo(a)anthracene benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, benzo(g,h,i)perylene, and ideno(1,2,3-cd)pyrene, were detected at concentrations exceeding NYSDEC criteria. The concentrations of five of these PAHs also exceed EPA Region 3 RBCs.

Elevated PAH concentrations were detected in the samples collected from the E Building

Mr. Christopher Schmidt
SI Report
Power City Warehouse
May 31, 2000
10 of 12



Addition, F Building/F Building Extension, Moulding Room, Lead Foundry, Central Factory Building, Operational Area of Unknown Use, and the open yard and loading dock. Four PAHs were detected at concentrations exceeding EPA RBCs in the samples collected from the Central Factory Building, E Building Addition, and F Building/F Building Extension; two PAHs were detected at concentrations exceeding EPA RBCs in the samples collected from the Moulding Room, Lead Foundry, and open yard and loading dock; one PAH was detected at a concentration above the RBC in the sample collected from the Operational Area of Unknown Use.

Although PAHs were not detected in samples SS-PCW-03 (Oil House) or SS-PCW-10 (Boosting Building), PAHs may be present at concentrations below the quantitation limits but above screening levels. The quantitation limits of 14,000 $\mu\text{g}/\text{kg}$ for sample SS-PCW-03 and 20,000 $\mu\text{g}/\text{kg}$ for sample SS-PCW-10 exceed NYSDEC criteria for naphthalene, dibenzofuran, and chrysene and exceed EPA RBCs and NYSDEC criteria for benzo(a) anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, benzo(a)pyrene, and indeno(1,2,3-cd)pyrene.

PCB concentrations exceeded the NYSDEC criterion in eight samples. Moreover, in two (E Building Addition and F Building/F Building Extension samples) of these eight samples, concentrations also exceeded the EPA RBCs. One pesticide, heptachlor epoxide, was detected in seven samples at concentrations exceeding the NYSDEC criterion. The concentration of heptachlor epoxide in the sample from Central Factory Building also exceeded the EPA RBC. Dieldrin was detected at concentrations above NYSDEC criteria in four samples; aldrin was detected at concentrations above NYSDEC criteria in three samples; endrin was detected at concentrations above NYSDEC criteria in two samples; and gamma-BHC (lindane) and methoxychlor were detected at concentrations above NYSDEC criteria in one sample. The samples collected from the Central Factory Building, E Building Addition, and F Building/F Building Extension contained at least three pesticides each at concentrations exceeding the NYSDEC criteria.

Lead concentrations exceeded the NYSDEC criterion and EPA RBC in all 10 samples analyzed.

Concentrations of five PAHs and Aroclor 1254 in the sediment samples exceeded NYSDEC criteria. Benzo(a)pyrene and lead concentrations in both sludge samples exceeded both NYSDEC criteria and the EPA RBCs.

Finally, the TCLP analysis of the paint chip sample result of 42.3 mg/L exceeds USEPA's threshold of value of 5 mg/L.

Asbestos Sampling Results

Two samples of pipe insulation and one sample of roofing material suspected of containing asbestos were collected inside the main building at the site. Analytical results indicate that all

three samples contained more than 10% asbestos, and should be considered as ACM. The specific type of asbestos and respective concentration in each sample is summarized in Table 8.

A general quantification of these materials was performed during the sampling effort. This quantification indicated that more than 1,000 linear feet of both types of pipe insulation were present in the building. Moreover, the total area of roofing which is constructed of the same materials as those found collapsed in the Storage/Inspection area (tar and felt roofing materials) should be considered as ACM and handled appropriately. Also, during the building inspection, floor tiles that typically contain asbestos were observed in the west side of the Central Factory Building. Such materials are classified as "Presumed ACM" and are not sampled during initial asbestos surveys.

Draft Remedial Cost Analysis

In October 1999, a draft remedial analysis was prepared based on the above-presented data in accordance with the scope of work presented to the City of Niagara Falls in E & E's letter dated August 11, 1999. This cost analysis does not include costs for the actual demolition of buildings at the site, the asbestos survey, or additional sampling that may be required for disposal of site materials. A copy of this analysis is presented in Attachment C.

Conclusions and Recommendations

Data Limitations and Recommendations for Future Work

Site sampling locations were selected to represent the overall site conditions. Most of the soil samples collected were composite samples consisting of two to five aliquots collected from the same room or operational area. To better identify the source of contamination detected within each sampled area, multiple single-source grab samples will be required. A number of drains and sumps were found in the building and according to the FSP were not sampled. Therefore, E & E also recommends sampling of these drains and sumps. A human health risk evaluation should be performed prior to building demolition to determine risk to workers.

A total of three asbestos samples was collected from the main building; however, additional asbestos sampling will be needed if this material is removed. Before the building is demolished, a complete asbestos survey will be necessary to determine the quantity of ACM to be removed.

As previously noted, the investigation was performed only at the ground level of the building due to the severely dilapidated and unsafe condition of the building. As a result, the basement and upper floors were not inspected. Sampling was limited only to surface soils and precursory materials sampling (asbestos and paint).

Mr. Christopher Schmidt
SI Report
Power City Warehouse
May 31, 2000
12 of 12



Indications of Contaminant Sources

Lead was detected at concentrations exceeding NYSDEC regulatory criteria at all the locations sampled, including the open yard. In addition, elevated PCB and PAHs concentrations were detected in most of the rooms and operational areas sampled. The source of these compounds is most likely associated with the activities conducted in the warehouse at the time of operation. The source of pesticides in the samples collected inside the buildings is unknown. The source of elevated PCB, PAH, and lead concentrations in the central drain is also unknown.

If you have any questions regarding this submittal, please contact Jon Nickerson or me at 716/684-8060.


Sincerely,
Ecology and Environment Engineering, P.C.

Lea Angelaki
Project Manager


attachments

cc: Jon Nickerson, CHMM (E & E)
CTF-NF01


FIGURES

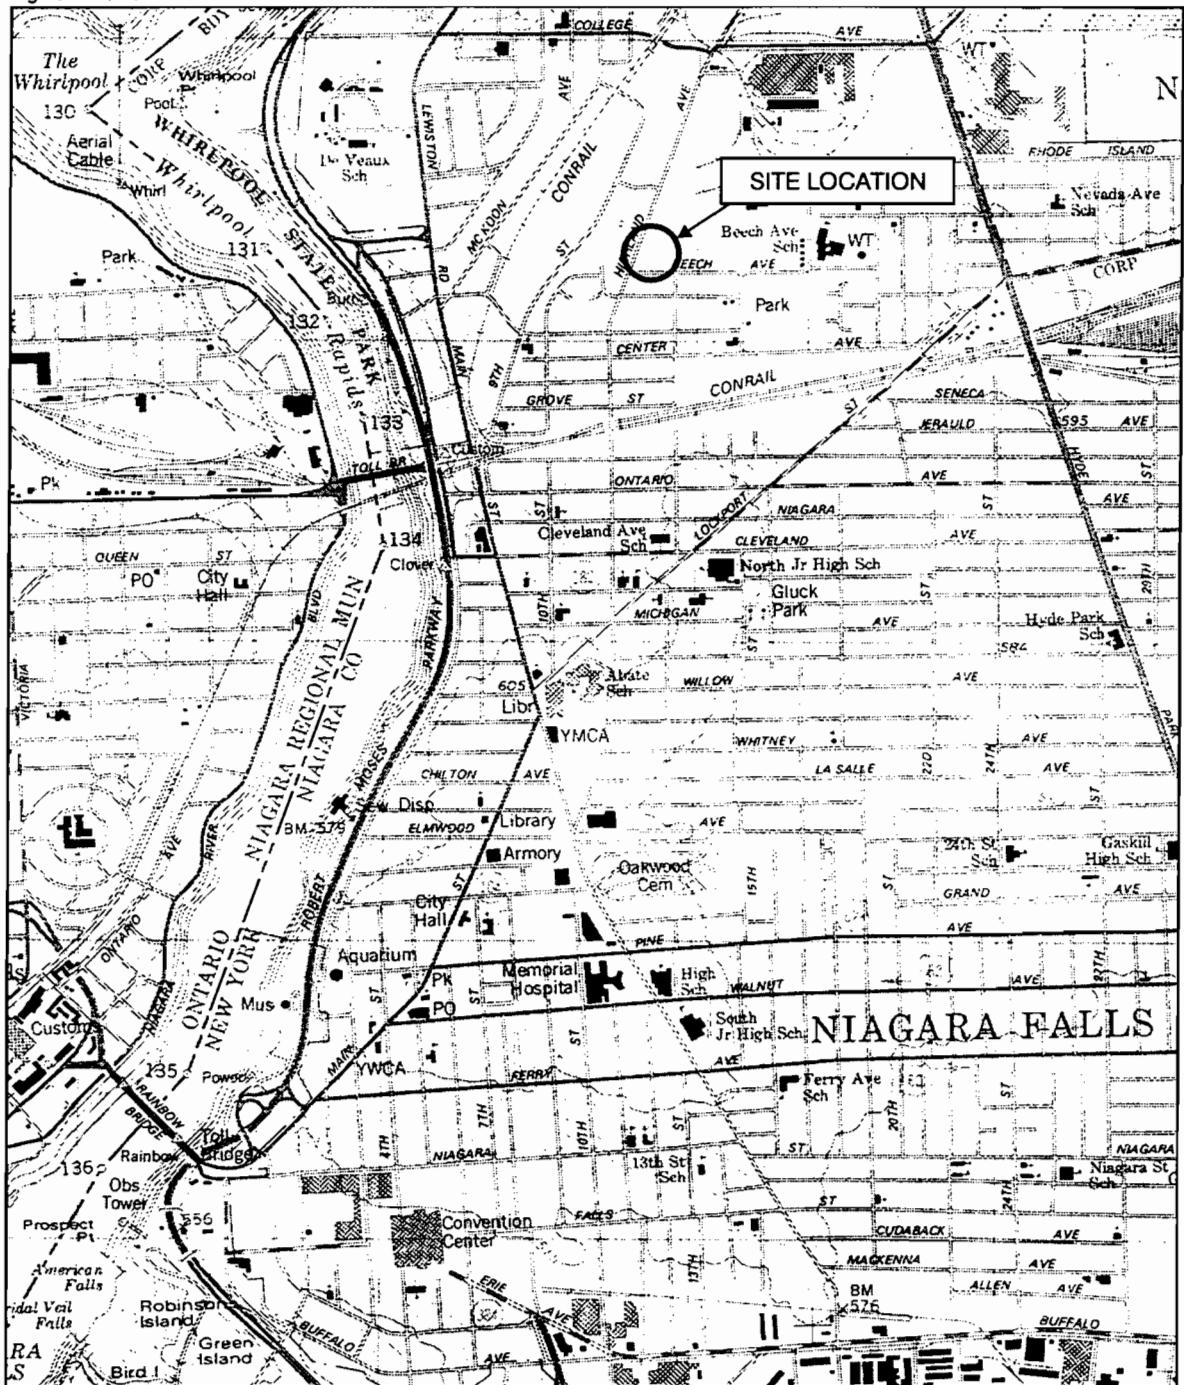

SOURCE: USGS 7.5 Minute Series (Topographic) Quadrangle: Niagara Falls, NY - Ont., 1980.



**Figure 1 POWER CITY WAREHOUSE SITE,
NIAGARA FALLS, NY**

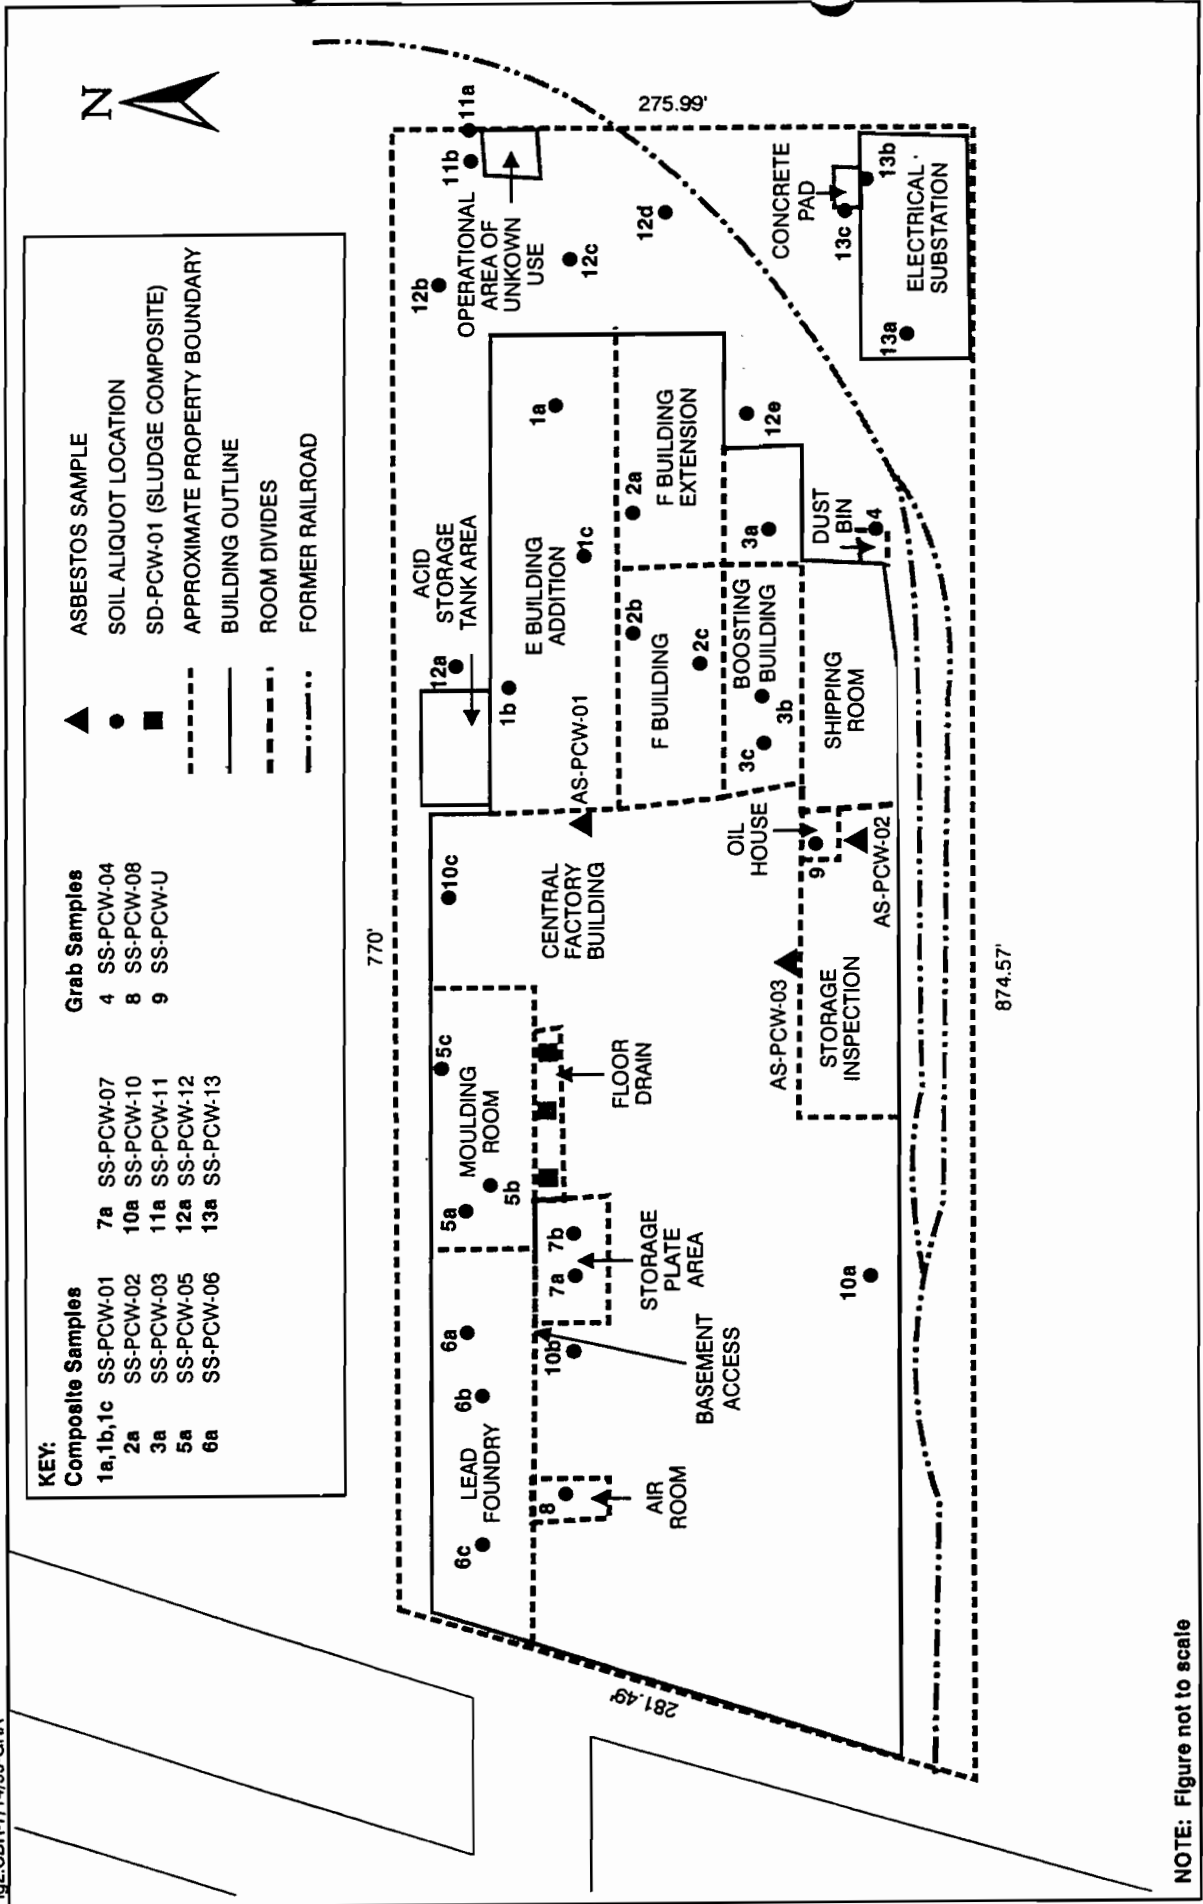

NOTE: Figure not to scale
 ©1999 Ecology and Environment, Inc.

Figure 2 SITE PLAN WITH APPROXIMATE SAMPLE LOCATIONS
 POWER CITY WAREHOUSE SITE
 NIAGARA FALLS, NEW YORK

TABLES

**Table 1 Sample Summary,
 Power City Warehouse Site**

Sample Number	Sample Location	Sample Type ^a	Sample Analyses
Surface Soil Samples from Operational Rooms			
SS-PCW-01	E Building Addition	three-way Composite	TCL BNAs, PCBs; TAL Total Lead, pH
SS-PCW-02	F Building/F Building Extension	three-way Composite	TCL BNAs, PCBs; TAL Total Lead
SS-PCW-03	Boosting Building	three-way Composite	TCL BNAs, PCBs; TAL Total Lead
SS-PCW-04	Dust Bin	Grab	TAL Total Lead
Surface Soil Samples from Operational Rooms			
SS-PCW-05	Moulding Room	three-way Composite	TCL BNAs, PCBs; TAL Total Lead
SS-PCW-06	Lead Foundry	three-way Composite	TCL BNAs, PCBs; TAL Total Lead
SS-PCW-07	Storage Plate Area	two-way Composite	TAL Total Lead
SS-PCW-08	Air Room	Grab	TCL PCBs
SS-PCW-09	Central Factory Building	three-way Composite	TCL BNAs, PCBs; TAL Total Lead
SS-PCW-10	Oil House	Grab	TCL BNAs, PCBs
Composite Operational Areas Surface Soil Samples			
SS-PCW-11	Operational Area of Unknown Use	two-way Composite	TCL BNAs, PCBs; TAL Total Lead
SS-PCW-13	Electrical Substation	three-way Composite	TCL PCBs
Composite Open Yard and Loading Dock Sample			
SS-PCW-12	Open Yard and Loading Dock	five-way Composite	TCL BNAs, PCBs; TAL Total Lead

Table 1 (continued)

Sample Number	Sample Location	Sample Type ^a	Sample Analyses
Composite Sediment Samples			
SD-PCW-01	Central Floor Drain	three-way Composite	TCL BNAs, PCBs; TAL Total Lead
SD-PCW-01/D	Central Floor Drain	three-way Composite	TCL BNAs, PCBs; TAL Total Lead
Materials Samples			
PT-PCW-01	Lead Paint	Composite	TCLP Lead
SS-PCW-01	Potential ACM	Grab	Polarized Light Microscopy
Background Samples			
SS-PCW-BK01	Southeast of corner of Profit Lane and 9 th Street	Grab	TAL Total Lead
SS-PCW-BK02	Tulip Corporation yard on Highland Avenue north of Power City Warehouse	Grab	TAL Total Lead
SS-PCW-BK03	East of Doris Jones Tennis Courts (Highland Avenue)	Grab	TAL Total Lead
<p>^a Composite samples are identified by the number of aliquots which comprise the total sample. For example, a three-way composite is a composite sample consisting of three aliquots</p> <p>Key:</p> <ul style="list-style-type: none"> ACM = asbestos-containing material AS = asbestos sample BK = background sample BNA = base/neutral acid extractable organic compound /D = duplicate sample PCB = polychlorinated biphenyl PCW = Power City Warehouse Site PT = paint chips sample SD = sediment/sludge sample SS = surface soil sample TAL = target analyte list TCL = target compound list TCLP = toxicity characteristic leaching procedure 			

**Table 2 Descriptions of Surface Soil and Sediment Sampling Locations
 (Individual Aliquots and Grab Samples),
 Power City Warehouse Site**

Sample Number	Building/Room	Aliquot Number	Aliquot / Grab Sample Location
Surface Soil Samples from Operational Rooms			
SS-PCW-01	E Building Addition	1a	Inside a covered round sump at the east side of the E Building Addition.
		1b	Yellow-stained brick floor at the north side of the E Building Addition.
		1c	Underneath brick floor with dark staining.
SS-PCW-02	F Building/F Building Extension	2a	Inside a 12-inch, round floor drain in the F Building Extension, east of the collapsed roof.
		2b	Underneath the red brick floor at the north section of F Building.
		2c	Adjacent to a big pile of miscellaneous debris at the south section of F Building.
SS-PCW-03	Boosting Building	3a	Inside a 14-inch drain at the east side of the Boosting Building.
		3b	Inside a sump located in the center section of the Boosting Building. Water was preset in the sump.
		3c	At a seam on the floor to which any spills or leaks in this area would flow (west side of the Boosting Building).
SS-PCW-04	Dust Bin	Grab	From an area of visible soil

Table 2 (continued)

Sample Number	Sample Location	Aliquot Number	Aliquot Location
Surface Soil Samples from Operational Rooms			
SS-PCW-05	Moulding Room	5a	Inside a 4-inch floor drain at the west side of the Moulding Room.
		5b	Approximately 25 feet south of the north wall of the room.
		5c	Adjacent to the north wall.
SS-PCW-06	Lead Foundry	6a	From a sump-like elbow access port covered with wooden blocks located approximately 6 feet from the north wall (6 inches of water in the sump).
		6b	In the center of the Lead Foundry from the only low point in the concrete floor from which soil was easily accessible.
		6c	Inside the floor drain on the west side of the Lead Foundry.
SS-PCW-07	Storage Plate Area	7a	Underneath the heavily broken up concrete floor.
		7b	Underneath the heavily broken-up concrete floor east of aliquot 1b.
SS-PCW-08	Air Room	Grab	From an area with visible oil staining on the floor.
SS-PCW-09	Central Factory Building	9a	Underneath the heavily broken-up concrete floor in the south section of the room.
		9b	From a 2-inch drain in the north section of the room southwest of the basement access.
SS-PCW-09		9c	Underneath the brick floor, approximately 8 feet south of the north wall in the east side of the room.
SS-PCW-10	Oil House	Grab	Inside a floor drain in the middle of the room.

Table 2 (continued)

Sample Number	Sample Location	Aliquot Number	Aliquot Location
Composite Operational Areas and Open Yard and Loading Dock Surface Soil Samples			
SS-PCW-11	Operational Area of Unknown Use	11a	Adjacent to the outer northeast corner of the building, at the end of the concrete, the suspected location to which any spills or leaks in this area would flow.
		11b	Underneath the fractured area of the concrete ramp in the north side of the building.
SS-PCW-12	Open Yard and Loading Dock	12a	Adjacent to the loading dock at the north side of the main warehouse building, approximately 5 feet east of the east wall and 20 feet north of the north wall.
		12b	At the open yard, approximately 10 feet south of the property line and 10 feet east of the northeast corner of the E Building Addition.
		12c	At the open yard, approximately 21 feet east of the east wall of the E Building Addition and 41 feet south of the northeast corner of the E Building Addition.
		12d	At the open yard, approximately 27 feet east of the east wall of the F Building Extension and 21 feet north of the southeast corner of the F Building Extension.
SS-PCW-12		12e	At the open yard, approximately 3 feet east of the east wall of the Boosting Building and 5 feet south of the south wall of the F Building Extension.

Table 2 (continued)

Sample Number	Sample Location	Aliquot Number	Aliquot Location
SS-PCW-13	Electrical Substation	13a	At a seam in the concrete floor between rooms in the northeast side of the substation foundation, approximately 5 feet east of the F Building Extension in southeast corner and 20 feet south of the transformer pad.
		13b	Adjacent to the transformer pad located in the northeast corner of the building, approximately 3 feet south of the southeast corner of the transformer pad.
		13c	Adjacent to the west side of the transformer pad.
Composite Sediment Samples			
SD-PCW-01 and SD-PCW-01/D	Central Floor Drain	1a, 1b, and 1c	The three aliquots were collected at equal distances along the length of the drain.
Key: /D = duplicate sample PCW = Power City Warehouse Site SD = sediment/sludge sample SS = surface soil sample			

**Table 3 Positive Analytical Results Summary, Surface Soil,
 Power City Warehouse, Niagara Falls, New York**

Sample ID: Location:	SS-PCW-01 E Building Addition	SS-PCW-02 F Building/ F Extension	SS-PCW-03 Boosting Building	SS-PCW-04 Dust Bin	SS-PCW-05 Moulding Room
TCL BNA (µg/kg)					
Naphthalene	1,100 J	ND	ND	NA	ND
2-methylnaphthalene	510 J	ND	ND	NA	ND
Acenaphthylene	580 J	ND	ND	NA	ND
Acenaphthene	3,900 J	4,600 J	ND	NA	ND
Dibenzofuran	2,400 J	2,700 J	ND	NA	ND
Diethylphthalate	ND	ND	ND	NA	ND
Fluorene	3,500 J	3,100 J	ND	NA	ND
Phenanthrene	33,000 D	91,000	ND	NA	5,500 J
Anthracene	12,000	7,400 J	ND	NA	ND
Carbazole	4,600	7,600 J	ND	NA	ND
Di-n-Butylphthalate	ND	ND	ND	NA	ND
Fluoranthene	53,000 D	87,000 D	ND	NA	10,000 J
Pyrene	50,000 D	100,000 D	ND	NA	9,100 J
Butylbenzylphthalate	ND	1,700 J	13,000 J	NA	ND
Benzo(a)anthracene	2,800	22,000	ND	NA	3,900 J
Chrysene	22,000 D	35,000	ND	NA	6,400 J
bis(2-Ethylhexyl)phthalate	5,300	1,400 J	1,800 J	NA	3,100 J
Di-n-Octyl Phthalate	ND J	2,000 J	ND	NA	ND
Benzo(b)Fluoranthene	23,000 D	33,000 D	ND	NA	7,500 J
Benzo(k)Fluoranthene	24,000 D	38,000 D	ND	NA	6,400 J
Benzo(a)pyrene	30,000 J	28,000 D	ND	NA	4,900 J
Indeno(1,2,3-cd)pyrene	9,800 J	7,700 J	ND	NA	1,500 J
Dibenz(a,h)anthracene	3,600 J	2,500 J	ND	NA	ND
Benzo(g,h,i)perylene	8,900 J	6,300 J	ND	NA	1,600 J

Table 3 (continued)

Sample ID: Location:	SS-PCW-01 E Building Addition	SS-PCW-02 F Building/ F Extension	SS-PCW-03 Boosting Building	SS-PCW-04 Dust Bin	SS-PCW-05 Moulding Room
TCL Pesticide/PCB (µg/kg)					
Aldrin	120	92	ND	NA	ND
Heptachlor Epoxide	390	310	ND	NA	130
Dieldrin	260	110 J	ND	NA	ND
Endrin	290	ND	ND	NA	ND
Endosulfan Sulfate	120	ND	ND	NA	ND
4,4'-DDT	260	120 J	ND	NA	ND
Methoxychlor	950	ND	1,800	NA	300 J
Endrin Ketone	140	150	ND	NA	ND
gamma-Chlordane	150	ND	ND	NA	ND
Aroclor 1254	21,000	7,900	1,300 J	NA	930 J
TAL Metals (mg/kg)					
Lead	2,350	3,540	3,650	11,300	19,200
pH (s.u)					
pH	4.9	6.3	7.2	NA	7.8
Key: BNA = base/neutral acid extractable organic compound D = diluted sample analysis, no affect on data usability J = estimated value NA = sample not analyzed for this compound ND = compound not detected PCB = polychlorinated biphenyl PCW = Power City Warehouse Site SS = surface soil sample s.u. = standard units TAL = target analyte list µg/kg = micrograms per kilogram mg/kg = milligrams per kilogram					

**Table 3 (continued) Positive Analytical Results Summary, Surface Soil,
 Power City Warehouse, Niagara Falls, New York**

Sample ID: Location:	SS-PCW-06 Lead Foundry	SS-PCW-07 Storage Plate Area	SS-PCW-08 Air Room	SS-PCW-09 Central Factory Bldg.
TCL BNA (µg/kg)				
Naphthalene	ND	NA	NA	2,800 J
2-methylnaphthalene	ND	NA	NA	1,200 J
Acenaphthylene	ND	NA	NA	640 J
Acenaphthene	ND	NA	NA	6,600
Dibenzofuran	ND	NA	NA	4,400 J
Diethylphthalate	ND	NA	NA	ND
Fluorene	ND	NA	NA	5,700
Phenanthrene	6,500 J	NA	NA	68,000 D
Anthracene	ND	NA	NA	19,000
Carbazole	ND	NA	NA	9,000
Di-n-Butylphthalate	ND	NA	NA	790 J
Fluoranthene	13,000 J	NA	NA	63,000 D
Pyrene	11,000 J	NA	NA	130,000 DJ
Butylbenzylphthalate	ND	NA	NA	ND
Benzo(a)anthracene	4,300 J	NA	NA	29,000
Chrysene	7,700 J	NA	NA	36,000
bis(2-Ethylhexyl)phthalate	ND	NA	NA	2,000 J
Di-n-Octyl Phthalate	ND	NA	NA	ND
Benzo(b)Fluoranthene	8,100 J	NA	NA	35,000 J
Benzo(k)Fluoranthene	7,800 J	NA	NA	39,000 J
Benzo(a)pyrene	4,800 J	NA	NA	31,000 J
Indeno(1,2,3-cd)pyrene	1,900 J	NA	NA	7,500 J
Dibenz(a,h)anthracene	ND	NA	NA	2,700 J
Benzo(g,h,i)perylene	ND	NA	NA	7,300 J
TCL Pesticide/PCB (µg/kg)				
beta-BHC	73 J	NA	ND	87
delta-BHC	280	NA	ND	240
gamma-BHC	79 J	NA	ND	54 J
Heptachlor	ND	NA	ND	55 J
Aldrin	ND	NA	ND	210
Heptachlor Epoxide	200	NA	ND	700

Table 3 (continued)

Sample ID: Location:	SS-PCW-06 Lead Foundry	SS-PCW-07 Storage Plate Area	SS-PCW-08 Air Room	SS-PCW-09 Central Factory Bldg.
Dieldrin	ND	NA	ND	240
Endrin	ND	NA	ND	330
Endosulfan II	ND	NA	ND	150
Endosulfan Sulfate	ND	NA	ND	210
4,4'-DDT	150 J	NA	ND	400
Methoxychlor	650 J	NA	ND	1,500
Endrin Ketone	120 J	NA	ND	340
Aroclor 1254	2,100 J	NA	ND	17,000
TAL Metals (mg/kg)				
Lead	137,000	178,000	NA	31,800
pH (s.u.)				
pH	7.3	NA	6.8	6.9
Key:				
BNA	=	base/neutral acid extractable organic compound		
D	=	diluted sample analysis, no affect on data usability		
J	=	estimated value		
NA	=	sample not analyzed for this compound.		
ND	=	compound not detected		
PCB	=	polychlorinated biphenyl		
PCW	=	Power City Warehouse Site		
SS	=	surface soil sample		
s.u.	=	standard units		
TAL	=	target analyte list		
µg/kg	=	micrograms per kilogram		
mg/kg	=	milligrams per kilogram		

Mr. Christopher Schmidt
 SI Report Tables
 Power City Warehouse
 May 31, 2000
 11 of 16



**Table 3 (continued) Positive Analytical Results Summary, Surface Soil,
 Power City Warehouse, Niagara Falls, New York**

Sample ID: Location:	SS-PCW-10 Oil House	SS-PCW-11 Area of Unknown Use	SS-PCW-12 Loading Dock & Open Yard	SS-PCW-13 Electrical Substation
TCL BNA (µg/kg)				
Naphthalene	ND	480	330 J	NA
2-methylnaphthalene	ND	300 J	230 J	NA
Acenaphthylene	ND	75 J	170 J	NA
Acenaphthene	ND	360 J	1,800	NA
Dibenzofuran	ND	310 J	830	NA
Diethylphthalate	ND	55 J	ND	NA
Fluorene	ND	360 J	1,300	NA
Phenanthrene	ND	4,200 D	17,000 D	NA
Anthracene	ND	710	4,100 DJ	NA
Carbazole	ND	450	1,300	NA
Di-n-Butylphthalate	ND	100 J	ND	NA
Fluoranthene	ND	4,800 D	21,000 D	NA
Pyrene	ND	6,900 D	20,000 D	NA
Butylbenzylphthalate	ND	150 J	220 J	NA
Benzo(a)anthracene	ND	1,800 D	6,500 D	NA
Chrysene	ND	2,300 D	7,100 D	NA
bis(2-Ethylhexyl)phthalate	3,300 J	570 J	160 J	NA
Di-n-Octyl Phthalate	ND	ND J	ND	NA
Benzo(b)Fluoranthene	ND	2,500 J	6,300 D	NA
Benzo(k)Fluoranthene	ND	2,400 J	6,500 D	NA
Benzo(a)pyrene	ND	2,000 J	6,500 D	NA
Indeno(1,2,3-cd)pyrene	ND	800 J	2,200 J	NA
Dibenz(a,h)anthracene	ND	300 J	820 J	NA
Benzo(g,h,i)perylene	ND	930 J	2,100 J	NA
TCL Pesticide/PCB (µg/kg)				
beta-BHC	ND	70	ND	ND
gamma-BHC	ND J	55	ND	ND
Heptachlor	ND	65	ND	ND
Heptachlor Epoxide	ND	ND	74	180
Dieldrin	ND J	110	ND	ND

Table 3 (continued)

Sample ID: Location:	SS-PCW-10 Oil House	SS-PCW-11 Area of Unknown Use	SS-PCW-12 Loading Dock & Open Yard	SS-PCW-13 Electrical Substation
4,4'-DDT	ND	200	ND	ND
Methoxychlor	380 J	37,000	140	810
Endrin Ketone	200 J	ND	ND	ND
Endrin aldehyde	ND	220	ND	ND
gamma-Chlordane	ND	69	ND	ND
Aroclor-1260	3,700	3,800 J	ND	ND
TAL Metals (mg/kg)				
Lead	NA	8,240	2,790	NA
pH (s.u.)				
pH	8	9.6	8.5	8.8
Key:				
BNA = base/neutral acid extractable organic compound				
D = diluted sample analysis, no affect on data usability				
J = estimated value				
NA = sample not analyzed for this compound				
ND = compound not detected				
PCB = polychlorinated biphenyl				
PCW = Power City Warehouse Site				
SS = surface soil sample				
s.u. = standard units				
TAL = target analyte list				
TCL = target compound list				
µg/kg = micrograms per kilogram				
mg/kg = milligrams per kilogram.				

**Table 4 Positive Analytical Results Summary, Background Surface Soil,
 Power City Warehouse, Niagara Falls, New York**

Sample ID: Location:	SS-PCW-BK01 Background	SS-PCW-BK02 Background	SS-PCW-BK03 Background
TAL Metals (mg/kg)			
Lead	201	1400	281
Key:			
BK = background sample			
PCW = Power City Warehouse Site			
SS = surface soil sample			
TAL = target analyte list			
mg/kg = milligrams per kilogram			

TULIP CORP.
YARD

Table 5 Positive Analytical Results Summary, Sediment/Sludge, Power City Warehouse, Niagara Falls, New York

Sample ID:	SD-PCW-01	SD-PCW-01/D
Location:	Central Floor Drain	Central Floor Drain
TCL BNA (µg/kg)		
Phenanthrene	1,800 J	5,500 J
Fluoranthene	2,700 J	6,100 J
Pyrene	2,400 J	5,000 J
Benzo(a)anthracene	ND	2,400 J
Chrysene	1,800 J	3,400 J
Benzo(b)Fluoranthene	2,400 J	3,100 J
Benzo(k)Fluoranthene	2,100 J	3,900 J
Benzo(a)pyrene	2,100 J	2,900 J
Benzo(g,h,i)perylene	ND	1,600 J
TCL Pesticide/PCB (µg/kg)		
Aroclor 1254	1,800 J	1,200 J
TAL Total Lead (mg/kg)		
Lead	225,000	270,000
pH (s.u.)		
pH	8.3	8.3
Key:		
BNA	= base/neutral acid extractable organic compound	
J	= estimated value	
ND	= compound not detected	
PCB	= polychlorinated biphenyl	
PCW	= Power City Warehouse Site	
SD	= sediment sample	
s.u.	= standard units	
TAL	= target analyte list	
TCL	= target compound list	
µg/kg	= micrograms per kilogram	
mg/kg	= milligrams per kilogram	

Table 6 Analytical Results Summary, Paint Chips, Power City Warehouse, Niagara Falls, New York

Sample ID:	PT-PCW-01
Location:	Paint - Moulding Room
TCLP Lead (mg/L)	42.3
Key:	
PCW	= Power City Warehouse Site
TCLP	= toxicity characteristic leaching procedure
mg/L	= milligrams per liter

**Table 7 Summary of Screening of Analytical Results for Surface Soil,
 Power City Warehouse, Niagara Falls, New York**

Compound	Frequency of Detection	Minimum Concentration Detected	Maximum Concentration Detected	Local Background Concentration	EPA Region 3 Industrial Soil RBC	Frequency of Detections Exceeding RBC	NYSDEC TAGM 4046 Level	Frequency of Detections Exceeding TAGM 4046
Semi-Volatile Organics (mg/kg)								
Naphthalene	4/9	0.33 J	2.80 J	ND	41,000	0/9	13 ^d	0/9
2-methylnaphthalene	3/9	0.23 J	1.2 J	ND	41,000 ^a	0/9	36.4 ^d	0/9
Acenaphthylene	4/9	0.075 J	0.64 J	ND	41,000 ^a	0/9	41 ^d	0/9
Acenaphthene	5/9	0.36 J	6.60	0.065 J	120,000	0/9	50 ^e	0/9
Dibenzofuran	5/9	0.31 J	4.40 J	ND	8,200	0/9	6.2 ^d	0/9
Diethylphthalate	1/9	0.055 J	0.055 J	ND	1,600,000	0/9	7.1	0/9
Fluorene	5/9	0.36 J	5.70	ND	82,000	0/9	50 ^e	0/9
Phenanthrene	7/9	4.20 D	91.00	0.45	41,000 ^a	0/9	50 ^e	2/9
Anthracene	5/9	0.71	19.00	0.1 J	610,000	0/9	50 ^e	0/9
Carbazole	5/9	0.45	9.00	0.071 J	290,000 ^b	0/9	NA	NA
Di-n-butylphthalate	1/9	0.10 J	0.79 J	ND	200,000	0/9	8.1 ^d	0/9
Fluoranthene	7/9	4.8 D	87.00 D	0.67	82,000	0/9	50 ^e	3/9
Pyrene	7/9	6.9 D	130.00 DJ	0.63	61,000	0/9	50 ^e	2/9
Butylbenzylphthalate	4/9	0.15 J	13.00 J	ND	410,000	0/9	50 ^e	0/9
Benzo(a)anthracene	7/9	1.80 D	29.00	0.4 J	7.8 ^b	2/9	0.224 ^f	7/9
Chrysene	7/9	2.30	36.00	0.48	780 ^b	0/9	0.4 ^d	7/9
bis(2-ethylhexyl)phthalate	8/9	0.16 J	5.30	ND	410	0/9	50 ^e	0/9
Di-n-octylphthalate	1/9	2.00 J	2.00 J	ND	410,000	0/9	50 ^e	0/9
Benzo(b)Fluoranthene	7/9	2.50	39.00	0.35 J	7.8 ^b	4/9	1.1 ^d	7/9

Mr. Christopher Schmidt
 SI Report
 Power City Warehouse
 May 31, 2000
 15 of 16



Table 7 (continued)

Compound	Frequency of Detection	Minimum Concentration Detected	Maximum Concentration Detected	Local Background Concentration	EPA Region 3 Industrial Soil RBC	Frequency of Detections Exceeding RBC	NYSDEC TAGM 4046 Level	Frequency of Detections Exceeding TAGM 4046
Semi-Volatile Organics (mg/kg)								
Benzo(k)Fluoranthene	7/9	2.40	39.00 J	0.36 J	78 ^b	0/9	1.1 ^d	7/9
Dibenz(a,h)anthracene	6/9	0.30 J	12.0 J	0.13 J	0.78 ^b	5/9	0.014 ^f	6/9
Benzo(a)pyrene	7/9	2.00	31.00 J	0.41 J	0.78 ^b	7/9	0.061 ^f	7/9
Indeno(1,2,3-cd)pyrene	7/9	0.80	9.80	0.29 J	7.8 ^b	1/9	3.2 ^d	3/9
Benzo(g,h,i)perylene	6/9	0.93	8.90	0.34 J	NA	NA	50 ^e	0/9
Pesticides/PCBs (mg/kg)								
beta-BHC	3/11	0.070	0.087	ND	NA	NA	0.2	0/11
delta-BHC	2/11	0.24	0.28	ND	NA	NA	0.3	0/11
gamma-BHC	3/11	0.054 J	0.079 J	ND	4.4	0/11	0.06	1/11
Heptachlor	2/11	0.055	0.065	ND	1.3	0/11	0.10	0/11
Aldrin	3/11	0.092	0.21	ND	0.34	0/11	0.041	3/11
Heptachlor Epoxide	7/11	0.074	0.70	0.0025 J	0.63	1/11	0.02	7/11
Dieldrin	4/11	0.11	0.26	0.3 D	0.36	0/11	0.044	4/11
Endrin	2/11	0.29	0.33	ND	610	0/11	0.10	2/11
Endosulfan II	1/11	0.15	0.15	ND	NA	0/11	0.9	0/11
Endosulfan Sulfate	2/11	0.12	0.21	ND	NA	0/11	1.0	0/11
4,4'-DDT	5/11	0.12 J	0.40	ND	17	0/11	2.1	0/11
Methoxychlor	9/11	0.14	37	ND	10000	0/11	10	1/11
Endrin Ketone	5/11	0.12	0.34	ND	NA	NA	NA	NA
Endrin aldehyde	1/11	0.22	0.22	ND	NA	NA	NA	NA



Table 7 (continued)

Compound	Frequency of Detection	Minimum Concentration Detected	Maximum Concentration Detected	Local Background Concentration	EPA Region 3 Industrial Soil RBC	Frequency of Detections Exceeding RBC	NYSDEC TAGM 4046 Level	Frequency of Detections Exceeding TAGM 4046
gamma-Chlordane	2/11	0.069	0.15	ND	16	0/11	0.54	0/11
Aroclor-1254	8/11	0.930 J	21,000	ND	2.9 ^b	5/11	1 ^B	7/11
Lead (mg/kg)	10/10	2,350	178,000	201-1,400	400 ^c	10/10	201-1,400	10/10

^a Corresponds to an upper-bound cancer risk of 1×10^{-6} .
^b RBC for naphthalene.
^c EPA screening level for lead in soil in residential setting.
^d Soil cleanup objective to protect groundwater quality.
^e Objective for individual SVOCs is <50 ppm.
^f Objective based on potential cancer risk for soil.

Key:

D = diluted sample analysis, no affect on data usability	EPA = Environmental Protection Agency
J = estimated value	mg/kg = milligrams per kilogram
ND = not detected	NYSDEC = New York State Department of Environmental Conservation
NA = no value or not applicable	PCB = polychlorinated biphenyl
ppm = parts per million	RBC = Risk-based Concentration
SVOC = semivolatile organic compound	TAGM = Technical and Administrative Guidance Memorandum

270,000
Talco Corporation

S-16

Table 8 Analytical Results Summary, Suspected Asbestos-containing Material, Power City Warehouse, Niagara Falls, New York

Sample Identification	Material Description	Asbestos Content	Other Content
AS-PCW-01	Magnesium TSI type 3" pipe insulation	30% Chrysotile	70% non-fibrous material
AS-PCW-02	"air-cell" type pipe insulation	68% Chrysotile	6% cellulose and 26% non-fibrous material
AS-PCW-03	roofing material	49% Chrysotile	3% synthetic and 48% non-fibrous material

ATTACHMENT A

Photolog

PHOTOGRAPHIC RECORD

SITE NAME: Power City Warehouse
SITE LOCATION: Niagara Falls, New York
JOB NUMBER: 000970.NF01.00.04.90

Photo Number:

1

Photographer:

L. Angelaki

Date:

5-6-99



Subject: Power City Warehouse exterior (west side).

Photo Number: 2

Photographer:

L. Angelaki

Date:

5-6-99



Subject: F Building.

PHOTOGRAPHIC RECORD

SITE NAME: Power City Warehouse
SITE LOCATION: Niagara Falls, New York
JOB NUMBER: 000970.NF01.00.04.90

Photo Number:


3

Photographer:

L. Angelaki

Date:

5-6-99

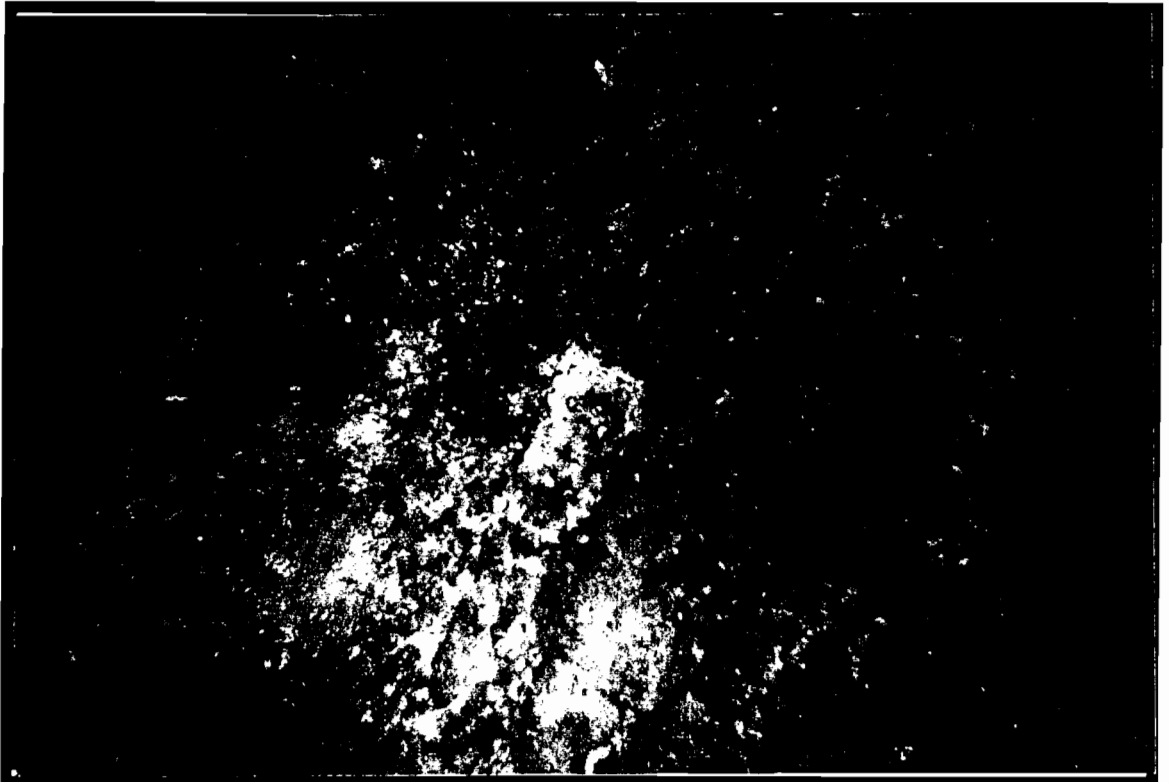

Subject: E Building Addition, yellow-stained floor probably caused by acid spill/leak.

Photo Number:


4

Photographer:

L. Angelaki

Date:

5-6-99

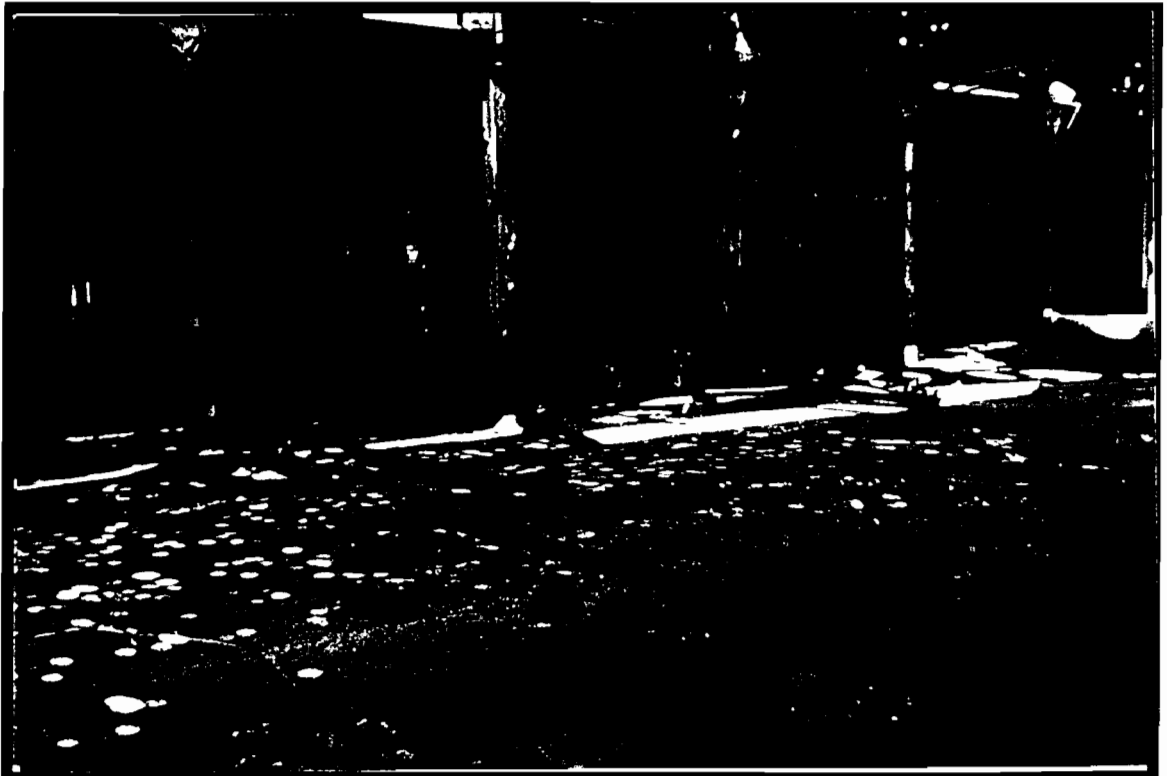

Subject: Central Factory Building and drain.

PHOTOGRAPHIC RECORD

SITE NAME: Power City Warehouse
SITE LOCATION: Niagara Falls, New York
JOB NUMBER: 000970.NF01.00.04.90

Photo Number:

5

Photographer:

L. Angelaki

Date:

5-6-99



Subject: Central Factory Building (east side).

Photo Number:


6

Photographer:

L. Angelaki

Date:

5-6-99

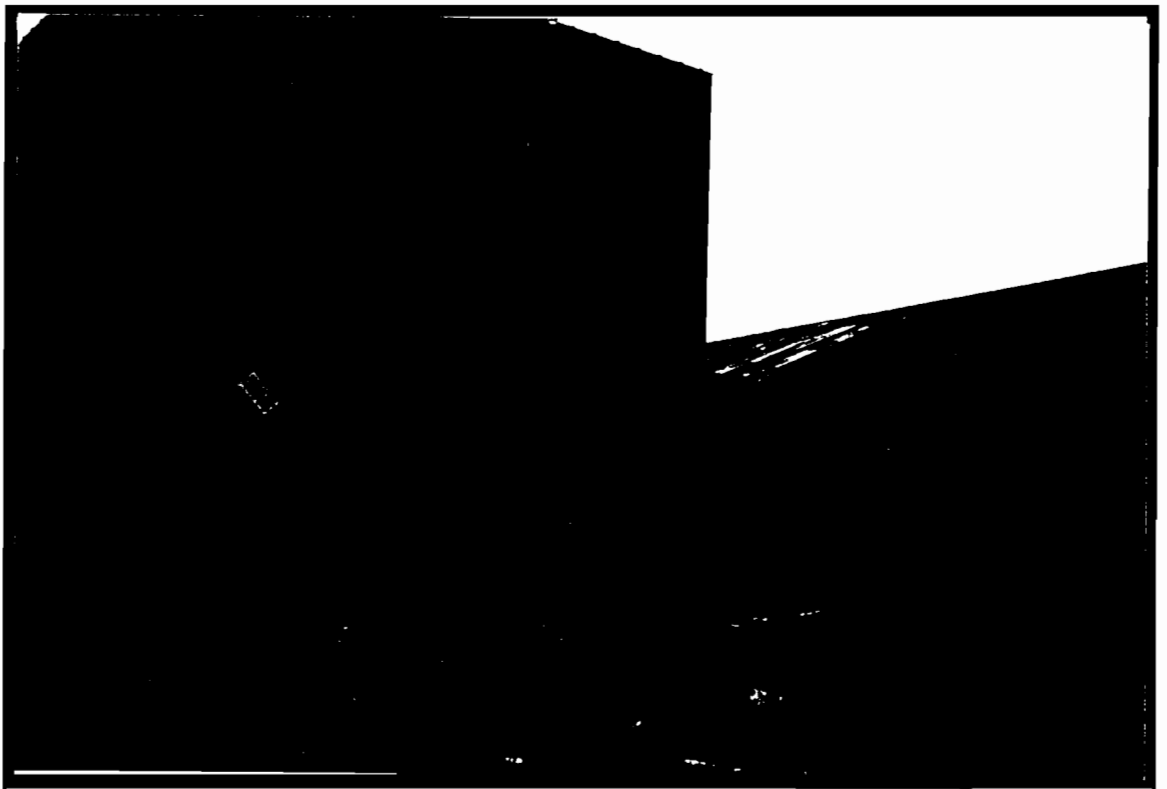

Subject: Shipping Room exterior (east side).

ATTACHMENT B

Data Usability Summary Report

**Ecology and Environment, Inc., (E & E)
Data Usability Summary Report (DUSR)**

Prepared by: Marcia Meredith Galloway
Project Name: Power City Warehouse
Project #: 000970-NF01-00-04-00

Date Prepared: July 12, 1999
Lab Name: E & E Analytical Services Center

Lab Report No.: 9901.360, 370
Report Date: June 3, 1999
Date Sample(s) Taken: May 6 and 7, 1999

Sample Matrices: 19 Soils 0 Water
Field QC Samples: Field Dup SD-PCW-01/D

Project Sample ID: = SS-PCW-01 to SS-PCW-13, SD-PCW-01, PT-PCW-01, and SS-PCW-BK01 to SS-PCW-BK03

Specific analyses conducted on each sample are documented on the chain-of-custody (COC) forms and include the following: Target Compound List (TCL) Base Neutral Acid Extractables (BNAs), TCL Polychlorinated Biphenyls (PCBS), and Total Lead. All methods follow Contract Laboratory Procedures (CLP) found in New York State Department of Environmental Conservation (NYSDEC) Analytical Services Protocol (ASP) 10/95.

The analytical data provided by the laboratory were reviewed for precision, accuracy, and completeness per NYSDEC Division of Environmental Remediation Guidance for the Development of DUSRs. Specific criteria for QC limits were obtained from the NYSDEC ASP 10/95. Qualifiers were assigned based on guidance in United States Environmental Protection Agency (USEPA) Functional Guidelines for Reviewing Organic and Inorganic Analyses. Compliance with the project QA program is indicated on the attached checklist and concerns are listed below. The checklist also indicates whether data qualification is required and/or the type of qualifier assigned. Qualifiers for specific samples were marked on copies of laboratory Form 1's and are attached to this DUSR.

Major Concerns: None

Minor Concerns:

TCL BNAs -

Samples SD-PCW-01, SD-PCW-01D, SS-PCW-01DL, SS-PCW-02, SS-PCW-03, SS-PCW-05, SS-PCW-06, and SS-PCW-10 were extracted using the medium level protocol due to matrix and the viscous nature of the extracts. The detection limits of these samples are elevated. For sample SS-PCW-01DL, the comparability of the results are not affected because the a low concentration run also was reported. For sample SS-PCW-02, the comparability of the results are not affected because the concentrations of contaminants are so high. For the remaining the samples, the medium level extraction resulted in no contaminants reported above the detection limit. Samples SD-PCW-01, SD-PCW-01D,, SS-PCW-05, and SS-PCW-06 had several polynuclear aromatic hydrocarbons reported below the detection limit and qualified "J" as estimated. For samples SS-PCW-03 and SS-PCW-10, the comparability of the data are affected by the high detection limits because only phthalates were detected in the samples which are typical of field or laboratory contamination. Since the samples could not be extracted by the laboratory at low level due to the viscous nature of the extracts, there is no corrective action necessary. These samples did contain high levels of PCBs and lead that exceed

Ecology and Environment, Inc., (E & E)
Data Usability Summary Report (DUSR)

Prepared by: Marcia Meredith Galloway

Project Name: Power City Warehouse

Project #: 000970-NF01-00-04-00

Date Prepared: July 12, 1999

Lab Name: E & E Analytical Services Center

NYSDEC criteria, there the overall usability of the data are not affected. For sample SS-PCW-10, the tentatively identified compound (TICs) evaluation of the sample also confirmed the presence of the pesticide methoxychlor. No other significant TICs were reported in the samples analyzed at medium level.

Internal standard recoveries for the later eluting compounds were low for several samples due to hydrocarbon interferences from the sample matrix. In most cases, the diluted analysis of these samples gave acceptable internal standard recoveries confirming the matrix effects. Positive values and detection limits associated with the low internal standard recoveries are flagged "J" as estimated (see attached Form 1's). For sample SS-PCW-09, surrogate recoveries were diluted out and no data qualification are necessary. Recovery of the surrogate terphenyl-d14 was high for samples SS-PCW-11 and SS-PCW-12. Surrogate recoveries were acceptable for the secondary dilutions of these samples. No data qualification are necessary because only one surrogate was outside limits.

The level of several PAH compounds exceeded the calibrated range for samples SS-PCW-01, SS-PCW-02, SS-PCW-09, SS-PCW-11, and SS-PCW-12. The samples were reanalyzed at secondary dilutions. Results from both analyses are included in the laboratory. Results from the diluted analysis are reported as flagged "D". The results are acceptable with no affect on data usability.

Recovery of pyrene was erratic for the low level matrix spike/spike duplicate (MS/MSD) analysis of samples SS-PCW-01 due to the high concentration of pyrene native to this sample. RPD values for acenaphthene and pyrene were high for the low level MS/MSD due to the presence of compounds in the sample. Spiked blank recoveries were all within acceptable limits, and no data qualification are necessary.

TCL PCBs

Because the samples were analyzed by CLP methods, both pesticides and PCBs were reported. The pesticide results did not exceed any EPA risk-based criteria for industrial soils. The only high concentration pesticide was methoxychlor in samples collected outside the buildings. All samples were extracted using 1.0 gram of sample due to the high concentration of PCBs expected. Quantitation limits of were elevated, but there is no effect on data usability because PCBs were detected in the samples.

Samples were analyzed at secondary dilutions based on matrix or the level of target compounds present. As per the Statement of Work, all diluted samples were also analyzed 10 more concentrated. Results from both analyses are included in this report. In general, the lower dilution result was reported. All PCB results were confirmed on a second column in addition to the pattern recognition. If the percent difference of the concentrations of the PCBs in the original and confirmation exceeded 25, then the results were flagged "P" by the laboratory. The "P" flags were converted to "J" flags on

Ecology and Environment, Inc., (E & E)
Data Usability Summary Report (DUSR)

Prepared by: Marcia Meredith Galloway
Project Name: Power City Warehouse
Project #: 000970-NF01-00-04-00

Date Prepared: July 12, 1999
Lab Name: E & E Analytical Services Center

the final report indicating the concentrations are estimated.

Recovery of the surrogate decachlorobiphenyl exceeded advisory limits on the RTX-5 column for sample SS-PCW-08DL and on the RTX-35 column for SS-PCW-08DL, SS-PCW-09, SS-PCW-09DL, and SS-PCW-13. No corrective action was required and no data qualification are required because the reported result were already qualified for the concern due to the "P" flag.

TOTAL LEAD

Recovery limits were not applied to the matrix spike analysis of sample SS-PCW-01 since the sample concentration exceeded the spike amount added by more than four times.

DUSR CHECKLIST FOR LABORATORY REPORT #: <u>9901.360, 370</u>	CIRCLE ONE	QUALIFIERS
LABORATORY: <u>EVE ANALYTICAL SERVICES CENTER</u>		
1) Statements made in the Analytical Data Case Narrative supported by the analytical data or indicated severe concerns? <u>MMG 7/12/99</u>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
2) Coolers received properly with no discrepancies?	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
3) Chain of custody records present and completed correctly?	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
4) Samples correctly preserved and documented at lab?	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
5) Analysis run as per the method in the work plan? <u>BACKGROUND SAMPLES ADD TO</u>	Yes <input checked="" type="radio"/> No <input type="radio"/> NA	<u>NONE</u>
6) Holding times met for all matrices and analytical parameters?	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
7) Instrument performance checks within acceptance criteria?	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
8) Initial calibrations run correctly and within acceptance criteria?	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
9) Daily calibrations run correctly and within acceptance criteria?	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
10) Method blanks \leq reporting limit and at rate of 1/20 samples? <u>One BNA TK, Acetophenone</u>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
11) Field blanks \leq reporting limit and run per work plan?	Yes <input type="radio"/> No <input checked="" type="radio"/> NA	_____
12) Compounds found in blanks common lab and field contaminants?	Yes <input type="radio"/> No <input checked="" type="radio"/> NA	_____
13) Surrogates within the acceptance limits?	Yes <input type="radio"/> No <input checked="" type="radio"/> NA	_____
14) MS/MSD or MS/D analyzed at rate of 1/20 samples?	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
15) MS/MSD or MS/D meet the %R and RPD acceptance criteria? <u>Spike compounds present in sample at high concentration</u>	Yes <input type="radio"/> No <input checked="" type="radio"/> NA	<u>None</u>
16) LCS or LSCD analyzed at rate of 1/20 samples? <u>MMG 7/12/99</u>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
17) LCS LCS meet the %R and RPD acceptance criteria? <u>MMG 7/12/99</u>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
18) Internal standards meet the acceptance criteria for GC/MS?	Yes <input type="radio"/> No <input checked="" type="radio"/> NA	<u>Yes "J"</u>
19) Field duplicate results \leq 40 RPD waters and \leq 70 RPD soils? <u>- trace level results are not considered in evaluation.</u>	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	<u>See attached</u>
20) Dilutions made as required and were reporting levels elevated?	<input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> NA	_____
21) Discrepancies noted when review of raw data (instrument printouts and chromatograms) was performed?	Yes <input type="radio"/> No <input checked="" type="radio"/> NA	_____
22) Did discrepancies noted above significantly impact the usability of the data based on data needs and objectives of the project?	Yes <input type="radio"/> No <input checked="" type="radio"/> NA	_____
Comments: _____		
Completed by: <u>Margie M. Galloway</u> Date: <u>7/12/99</u>		

1C
SEMIVOLATILE ORGANICS ANALYSIS DATA SHEET

DEC SAMPLE NO.

SS-PCW-01

Lab Name: E & E INC. Contract: _____

Lab Code: EANDE Case No.: 9901.360 SAS No.: _____ SDG No.: SSPCW01

Matrix: (soil/water) SOIL Lab Sample ID: 33106

Sample wt/vol: 30.6 (g/mL) G Lab File ID: I7057

Level: (low/med) LOW Date Received: 05/06/99

% Moisture: 21 decanted: (Y/N) N Date Extracted: 05/10/99

Concentrated Extract Volume: 500.0 (uL) Date Analyzed: 05/24/99

Injection Volume: 2.0 (uL) Dilution Factor: 10.0

GPC Cleanup: (Y/N) Y pH: 4.9

CONCENTRATION UNITS:
(ug/L or ug/Kg) UG/KG

CAS NO. COMPOUND UG/KG Q

132-64-9	Dibenzofuran	2400	J
121-14-2	2,4-Dinitrotoluene	4100	U
84-66-2	Diethylphthalate	4100	U
7005-72-3	4-Chlorophenyl-phenylether	4100	U
86-73-7	Fluorene	3500	J
100-01-6	4-Nitroaniline	10000	U
534-52-1	4,6-Dinitro-2-methylphenol	10000	U
86-30-6	N-Nitrosodiphenylamine (1)	4100	U
101-55-3	4-Bromophenyl-phenylether	4100	U
118-74-1	Hexachlorobenzene	4100	U
87-86-5	Pentachlorophenol	10000	U
85-01-8	Phenanthrene	73000	E
120-12-7	Anthracene	12000	
86-74-8	Carbazole	4600	
84-74-2	Di-n-Butylphthalate	4100	U
206-44-0	Fluoranthene	92000	E
129-00-0	Pyrene	130000	E
85-68-7	Butylbenzylphthalate	4100	U
91-94-1	3,3'-Dichlorobenzidine	4100	U
56-55-3	Benzo(a)Anthracene	28000	
218-01-9	Chrysene	37000	E
117-81-7	bis(2-Ethylhexyl) Phthalate	5300	
117-84-0	Di-n-Octyl Phthalate	4100	U
205-99-2	Benzo(b) Fluoranthene	38000	E
207-08-9	Benzo(k) Fluoranthene	35000	E
50-32-8	Benzo(a) Pyrene	30000	
193-39-5	Indeno(1,2,3-cd) Pyrene	9800	
53-70-3	Dibenz(a,h) Anthracene	3600	J
191-24-2	Benzo(g,h,i) Perylene	8900	

(1) - Cannot be separated from Diphenylamine

4 44444
mmg
7/12/99

1C
SEMIVOLATILE ORGANICS ANALYSIS DATA SHEET

DEC SAMPLE NO.

SS-PCW-02

Lab Name: E & E INC.

Contract:

Lab Code: EANDE

Case No.: 9901.360 SAS No.:

SDG No.: SSPCW01

Matrix: (soil/water) SOIL

Lab Sample ID: 33107

Sample wt/vol: 1.0 (g/mL) G

Lab File ID: I7000

Level: (low/med) MED

Date Received: 05/06/99

% Moisture: 18 decanted: (Y/N) N

Date Extracted: 05/11/99

Concentrated Extract Volume: 500.0 (uL)

Date Analyzed: 05/18/99

Injection Volume: 2.0 (uL)

Dilution Factor: 1.0

GPC Cleanup: (Y/N) Y

pH: 6.3

CONCENTRATION UNITS:
(ug/L or ug/Kg) UG/KG

CAS NO. COMPOUND UG/KG Q

132-64-9	Dibenzofuran	2700	J
121-14-2	2,4-Dinitrotoluene	12000	U
84-66-2	Diethylphthalate	12000	U
7005-72-3	4-Chlorophenyl-phenylether	12000	U
86-73-7	Fluorene	3100	J
100-01-6	4-Nitroaniline	30000	U
534-52-1	4,6-Dinitro-2-methylphenol	30000	U
86-30-6	N-Nitrosodiphenylamine (1)	12000	U
101-55-3	4-Bromophenyl-phenylether	12000	U
118-74-1	Hexachlorobenzene	12000	U
87-86-5	Pentachlorophenol	30000	U
85-01-8	Phenanthrene	91000	
120-12-7	Anthracene	7400	J
86-74-8	Carbazole	7600	J
84-74-2	Di-n-Butylphthalate	12000	U
206-44-0	Fluoranthene	110000	E
129-00-0	Pyrene	110000	E
85-68-7	Butylbenzylphthalate	1700	J
91-94-1	3,3'-Dichlorobenzidine	12000	U
56-55-3	Benzo(a)Anthracene	22000	
218-01-9	Chrysene	35000	
117-81-7	bis(2-Ethylhexyl)Phthalate	1400	J
117-84-0	Di-n-Octyl Phthalate	2000	J
205-99-2	Benzo(b)Fluoranthene	34000	
207-08-9	Benzo(k)Fluoranthene	33000	
50-32-8	Benzo(a)Pyrene	27000	
193-39-5	Indeno(1,2,3-cd)Pyrene	7700	J
53-70-3	Dibenz(a,h)Anthracene	2500	J
191-24-2	Benzo(g,h,i)Perylene	6300	J

(1) - Cannot be separated from Diphenylamine

FHP

mmg
7/2/99

1C
SEMIVOLATILE ORGANICS ANALYSIS DATA SHEET

DEC SAMPLE NO.

SS-PCW-09

Lab Name: E & E INC.

Contract:

Lab Code: EANDE

Case No.: 9901.360 SAS No.:

SDG No.: SSPCW01

Matrix: (soil/water) SOIL

Lab Sample ID: 33116

Sample wt/vol: 30.4 (g/mL) G

Lab File ID: I7060

Level: (low/med) LOW

Date Received: 05/06/99

% Moisture: 34 decanted: (Y/N) N

Date Extracted: 05/10/99

Concentrated Extract Volume: 500.0 (uL)

Date Analyzed: 05/24/99

Injection Volume: 2.0 (uL)

Dilution Factor: 10.0

GPC Cleanup: (Y/N) Y pH: 6.9

CONCENTRATION UNITS:
(ug/L or ug/Kg) UG/KG

CAS NO. COMPOUND Q

132-64-9	Dibenzofuran	4400	J
121-14-2	2,4-Dinitrotoluene	4900	U
84-66-2	Diethylphthalate	4900	U
7005-72-3	4-Chlorophenyl-phenylether	4900	U
86-73-7	Fluorene	5700	
100-01-6	4-Nitroaniline	12000	U
534-52-1	4,6-Dinitro-2-methylphenol	12000	U
86-30-6	N-Nitrosodiphenylamine (1)	4900	U
101-55-3	4-Bromophenyl-phenylether	4900	U
118-74-1	Hexachlorobenzene	4900	U
87-86-5	Pentachlorophenol	12000	U
85-01-8	Phenanthrene	110000	E
120-12-7	Anthracene	19000	
86-74-8	Carbazole	9000	
84-74-2	Di-n-Butylphthalate	790	J
206-44-0	Fluoranthene	120000	E
129-00-0	Pyrene	140000	E
85-68-7	Butylbenzylphthalate	4900	U
91-94-1	3,3'-Dichlorobenzidine	4900	U
56-55-3	Benzo(a)Anthracene	29000	
218-01-9	Chrysene	36000	
117-81-7	bis(2-Ethylhexyl) Phthalate	2000	J
117-84-0	Di-n-Octyl Phthalate	4900	U
205-99-2	Benzo(b)Fluoranthene	35000	
207-08-9	Benzo(k)Fluoranthene	39000	
50-32-8	Benzo(a)Pyrene	31000	
193-39-5	Indeno(1,2,3-cd)Pyrene	7500	
53-70-3	Dibenz(a,h)Anthracene	2700	J
191-24-2	Benzo(g,h,i)Perylene	7300	

(1) - Cannot be separated from Diphenylamine

J
↓
mmg
7/2/99

1C
SEMIVOLATILE ORGANICS ANALYSIS DATA SHEET

DEC SAMPLE NO.

SS-PCW-09DL

Lab Name: E & E INC.

Contract:

Lab Code: EANDE

Case No.: 9901.360 SAS No.:

SDG No.: SSPCW01

Matrix: (soil/water) SOIL

Lab Sample ID: 33116DL

Sample wt/vol: 30.4 (g/mL) G

Lab File ID: I7067

Level: (low/med) LOW

Date Received: 05/06/99

% Moisture: 34 decanted: (Y/N) N

Date Extracted: 05/10/99

Concentrated Extract Volume: 500.0 (uL)

Date Analyzed: 05/25/99

Injection Volume: 2.0 (uL)

Dilution Factor: 50.0

GPC Cleanup: (Y/N) Y pH: 6.9

CONCENTRATION UNITS:
(ug/L or ug/Kg) UG/KG

CAS NO. COMPOUND UG/KG Q

132-64-9-----	Dibenzofuran	4100	DJ
121-14-2-----	2,4-Dinitrotoluene	25000	U
84-66-2-----	Diethylphthalate	25000	U
7005-72-3-----	4-Chlorophenyl-phenylether	25000	U
86-73-7-----	Fluorene	5000	DJ
100-01-6-----	4-Nitroaniline	62000	U
534-52-1-----	4,6-Dinitro-2-methylphenol	62000	U
86-30-6-----	N-Nitrosodiphenylamine (1)	25000	U
101-55-3-----	4-Bromophenyl-phenylether	25000	U
118-74-1-----	Hexachlorobenzene	25000	U
87-86-5-----	Pentachlorophenol	62000	U
85-01-8-----	Phenanthrene	68000	D
120-12-7-----	Anthracene	14000	DJ
86-74-8-----	Carbazole	7600	DJ
84-74-2-----	Di-n-Butylphthalate	25000	U
206-44-0-----	Fluoranthene	63000	D
129-00-0-----	Pyrene	130000	D
85-68-7-----	Butylbenzylphthalate	25000	U
91-94-1-----	3,3'-Dichlorobenzidine	25000	U
56-55-3-----	Benzo(a)Anthracene	24000	DJ
218-01-9-----	Chrysene	30000	D
117-81-7-----	bis(2-Ethylhexyl) Phthalate	25000	U
117-84-0-----	Di-n-Octyl Phthalate	25000	U
205-99-2-----	Benzo(b) Fluoranthene	38000	D
207-08-9-----	Benzo(k) Fluoranthene	35000	D
50-32-8-----	Benzo(a) Pyrene	27000	D
193-39-5-----	Indeno(1,2,3-cd) Pyrene	9700	DJ
53-70-3-----	Dibenz(a,h) Anthracene	2600	DJ
191-24-2-----	Benzo(g,h,i) Perylene	10000	DJ

(1) - Cannot be separated from Diphenylamine

J
↓
mmg
7/12/99

1C
SEMIVOLATILE ORGANICS ANALYSIS DATA SHEET

DEC SAMPLE NO.

SS-PCW-11

Lab Name: E & E INC. Contract: _____
 Lab Code: EANDE Case No.: 9901.360 SAS No.: _____ SDG No.: SSPCW01
 Matrix: (soil/water) SOIL Lab Sample ID: 33217
 Sample wt/vol: 31.8 (g/mL) G Lab File ID: I7061
 Level: (low/med) LOW Date Received: 05/07/99
 % Moisture: 16 decanted: (Y/N) N Date Extracted: 05/10/99
 Concentrated Extract Volume: 500.0 (uL) Date Analyzed: 05/24/99
 Injection Volume: 2.0 (uL) Dilution Factor: 1.0
 GPC Cleanup: (Y/N) Y pH: 9.6

CONCENTRATION UNITS:
(ug/L or ug/Kg) UG/KG Q

CAS NO.	COMPOUND	CONCENTRATION UNITS: (ug/L or ug/Kg) UG/KG	Q
132-64-9	Dibenzofuran	310	J
121-14-2	2,4-Dinitrotoluene	370	U
84-66-2	Diethylphthalate	55	J
7005-72-3	4-Chlorophenyl-phenylether	370	U
86-73-7	Fluorene	360	J
100-01-6	4-Nitroaniline	930	U
534-52-1	4,6-Dinitro-2-methylphenol	930	U
86-30-6	N-Nitrosodiphenylamine (1)	370	U
101-55-3	4-Bromophenyl-phenylether	370	U
118-74-1	Hexachlorobenzene	370	U
87-86-5	Pentachlorophenol	930	U
85-01-8	Phenanthrene	4100	E
120-12-7	Anthracene	710	
86-74-8	Carbazole	450	
84-74-2	Di-n-Butylphthalate	100	J
206-44-0	Fluoranthene	3000	E
129-00-0	Pyrene	12000	E
85-68-7	Butylbenzylphthalate	150	J
91-94-1	3,3'-Dichlorobenzidine	370	U
56-55-3	Benzo (a) Anthracene	1600	
218-01-9	Chrysene	2300	
117-81-7	bis(2-Ethylhexyl) Phthalate	570	
117-84-0	Di-n-Octyl Phthalate	370	U
205-99-2	Benzo (b) Fluoranthene	2500	
207-08-9	Benzo (k) Fluoranthene	2400	
50-32-8	Benzo (a) Pyrene	2000	
193-39-5	Indeno (1,2,3-cd) Pyrene	800	
53-70-3	Dibenz (a,h) Anthracene	300	J
191-24-2	Benzo (g,h,i) Perylene	930	

(1) - Cannot be separated from Diphenylamine

J
↓
MMS
7/2/90

1C
SEMIVOLATILE ORGANICS ANALYSIS DATA SHEET

DEC SAMPLE NO.

SS-PCW-11DL

Lab Name: E & E INC.

Contract:

Lab Code: EANDE

Case No.: 9901.360 SAS No.:

SDG No.: SSPCW01

Matrix: (soil/water) SOIL

Lab Sample ID: 33217DL

Sample wt/vol: 31.8 (g/mL) G

Lab File ID: I7086

Level: (low/med) LOW

Date Received: 05/07/99

% Moisture: 16 decanted: (Y/N) N

Date Extracted: 05/10/99

Concentrated Extract Volume: 500.0 (uL)

Date Analyzed: 05/26/99

Injection Volume: 2.0 (uL)

Dilution Factor: 3.0

GPC Cleanup: (Y/N) Y pH: 9.6

CONCENTRATION UNITS:

(ug/L or ug/Kg) UG/KG Q

CAS NO.	COMPOUND	UG/KG	Q
132-64-9-----	Dibenzofuran	310	DJ
121-14-2-----	2,4-Dinitrotoluene	1100	U
84-66-2-----	Diethylphthalate	1100	U
7005-72-3-----	4-Chlorophenyl-phenylether	1100	U
86-73-7-----	Fluorene	320	DJ
100-01-6-----	4-Nitroaniline	2800	U
534-52-1-----	4,6-Dinitro-2-methylphenol	2800	U
86-30-6-----	N-Nitrosodiphenylamine (1)	1100	U
101-55-3-----	4-Bromophenyl-phenylether	1100	U
118-74-1-----	Hexachlorobenzene	1100	U
87-86-5-----	Pentachlorophenol	2800	U
85-01-8-----	Phenanthrene	4200	D
120-12-7-----	Anthracene	710	DJ
86-74-8-----	Carbazole	500	DJ
84-74-2-----	Di-n-Butylphthalate	120	DJ
206-44-0-----	Fluoranthene	4800	D
129-00-0-----	Pyrene	6900	D
85-68-7-----	Butylbenzylphthalate	210	DJ
91-94-1-----	3,3'-Dichlorobenzidine	1100	U
56-55-3-----	Benzo(a)Anthracene	1800	D
218-01-9-----	Chrysene	2300	D
117-81-7-----	bis(2-Ethylhexyl) Phthalate	540	DJ
117-84-0-----	Di-n-Octyl Phthalate	1100	U
205-99-2-----	Benzo(b) Fluoranthene	2500	D
207-08-9-----	Benzo(k) Fluoranthene	2900	D
50-32-8-----	Benzo(a) Pyrene	2200	D
193-39-5-----	Indeno(1,2,3-cd) Pyrene	690	DJ
53-70-3-----	Dibenz(a,h)Anthracene	250	DJ
191-24-2-----	Benzo(g,h,i) Perylene	710	DJ

(1) - Cannot be separated from Diphenylamine

J
↓
MAG
7/12/99

1C
SEMIVOLATILE ORGANICS ANALYSIS DATA SHEET

DEC SAMPLE NO.

SS-PCW-12

Lab Name: E & E INC.

Contract:

Lab Code: EANDE

Case No.: 9901.360 SAS No.:

SDG No.: SSPCW01

Matrix: (soil/water) SOIL

Lab Sample ID: 33218

Sample wt/vol: 31.5 (g/mL) G

Lab File ID: I7062

Level: (low/med) LOW

Date Received: 05/07/99

% Moisture: 9 decanted: (Y/N) N

Date Extracted: 05/10/99

Concentrated Extract Volume: 500.0 (uL)

Date Analyzed: 05/24/99

Injection Volume: 2.0 (uL)

Dilution Factor: 1.0

GPC Cleanup: (Y/N) Y pH: 8.5

CONCENTRATION UNITS:
(ug/L or ug/Kg) UG/KG

CAS NO.	COMPOUND	UG/KG	Q
132-64-9	Dibenzofuran	830	
121-14-2	2,4-Dinitrotoluene	350	U
84-66-2	Diethylphthalate	350	U
7005-72-3	4-Chlorophenyl-phenylether	350	U
86-73-7	Fluorene	1300	
100-01-6	4-Nitroaniline	870	U
534-52-1	4,6-Dinitro-2-methylphenol	870	U
86-30-6	N-Nitrosodiphenylamine (1)	350	U
101-55-3	4-Bromophenyl-phenylether	350	U
118-74-1	Hexachlorobenzene	350	U
87-86-5	Pentachlorophenol	870	U
85-01-8	Phenanthrene	24000	E
120-12-7	Anthracene	5200	E
86-74-8	Carbazole	1300	
84-74-2	Di-n-Butylphthalate	350	U
206-44-0	Fluoranthene	17000	E
129-00-0	Pyrene	51000	E
85-68-7	Butylbenzylphthalate	220	J
91-94-1	3,3'-Dichlorobenzidine	350	U
56-55-3	Benzo (a) Anthracene	6600	E
218-01-9	Chrysene	7400	E
117-81-7	bis(2-Ethylhexyl) Phthalate	160	J
117-84-0	Di-n-Octyl Phthalate	350	U
205-99-2	Benzo (b) Fluoranthene	6300	E
207-08-9	Benzo (k) Fluoranthene	6200	E
50-32-8	Benzo (a) Pyrene	5800	E
193-39-5	Indeno (1,2,3-cd) Pyrene	2200	
53-70-3	Dibenz (a, h) Anthracene	820	
191-24-2	Benzo (g, h, i) Perylene	2100	

(1) - Cannot be separated from Diphenylamine

J
↓
mm
7/12/99

ATTACHMENT C
Remedial Cost Analysis

Draft Remedial Cost Analysis

This cost analysis was prepared based on the results of the site investigation, site sketches, and site visits as per the scope of work presented to the City of Niagara Falls in E & E's August 11, 1999 letter. As such, it does not include costs for the actual demolition of the buildings at the site, asbestos survey costs, or additional sampling that may be required for disposal of site materials.

In addition to other costs associated with the remediation of the Power City Warehouse, a risk-based screening analysis will be needed to evaluate potential risks to workers from exposures to contaminants present in soils during future excavation and construction activities at the site. It is estimated that preparation of the risk evaluation would cost less than \$5,000.

**Remedial Alternative Cost Analysis for the Power City Warehouse Site
Niagara Falls, New York**

General Cost Estimate Assumptions

Cost is for removal and disposal only, actual building demolition is not included.
25% of the roofing, wood and soil is hazardous;
75% of the concrete, brick, and steel is recyclable; 25% of the remaining volume (or 6.25% of the total volume) is hazardous. Site will be backfilled to existing grade with clean soils.

Cost Scenarios

Building Slab Remains

Scenario 1: Buildings will be demolished to grade, leaving the ground floor intact.
Building basement(s) will be filled with crushed debris. Site soils will be excavated one foot deep.
Site excavations will be backfilled with one foot of clean soil.

Estimated Cost: \$ 462,000

Scenario 2: Buildings will be demolished to grade, leaving the ground floor intact.
Building basement(s) will be filled with crushed debris. Site soils will be excavated two feet deep.
Site excavations will be backfilled with two feet of clean soil.

Estimated Cost: \$ 713,000

Building Slab Removed

Scenario 3: Buildings will be demolished and the ground floor removed.
Building basement(s) will be filled with crushed debris. Site soils will be excavated one foot deep.
Site excavations will be backfilled with one foot of clean soil.

Estimated Cost: \$ 784,000

Scenario 4: Buildings will be demolished and the ground floor removed.
Building basement(s) will be filled with crushed debris. Site soils will be excavated two feet deep.
Site excavations will be backfilled with two feet of clean soil.

Estimated Cost: \$ 1,890,000

Scenario 1 Assumptions

The building will be removed to grade. The concrete slab will remain. Basement will be filled.
 Volume of basement is approx. 75,000 cubic feet, 2,800 cubic yards.
 Soil will be removed outside the building limits to a depth of 1' below grade.

Percentage of material that can be recycled is shown in the table below. Also shown are the estimated percentages of materials to be disposed off site as C&D/non-hazardous waste and hazardous waste.

Item	Total Quantity Units	Recycle Quantity	Disposal Quantity	
			C&D/Non Haz	Hazardous
<u>CONCRETE</u>				
Volume of Concrete	770 CY	580	140	50
Specific Weight	2600 LB/CY			
Weight of Concrete	1000 Ton	750	190	60
<u>STEEL</u>				
Volume of Steel	40 CY	30	10	0
Weight of Steel	310 Ton	230	60	20
<u>ROOFING</u>				
Volume of Roofing	120 CY	0	90	30
Specific Weight	700 LB/CY			
Weight of Roofing	40 Ton	0	30	10
<u>WOOD</u>				
Volume of Wood	370 CY	0	280	90
Specific Weight	500 LB/CY			
Weight of Wood	90 Ton	0	70	20
<u>BRICK</u>				
Volume of Brick	2,500 CY	1,880	470	160
Specific Weight	1,700 LB/CY			
Weight of Brick	2,100 Ton	1,580	390	130
<u>SOIL</u>				
Volume Excavated Soil	2,000 CY	0	1,500	500
Specific Weight	1.6 Tons/CY			
Weight of Soil	3,200 Tons	0	2,400	800
	5,800 CY	2,490	2,490	830
TOTALS	6,740 Tons	2,560	3,140	1,040

Recyclable Transport	311 CY	(Assumes 10 CY w/25% air space per load)
C&D Transport (no soils)	99 Loads	(Assumes 10 CY per load)
Haz Waste Transport	83 Loads	(Assumes 10 CY per load)

Power City Warehouse

Cost Estimate

Scenario 1: Slab remains and one foot of site soils are removed and replaced with clean soils.

Remedial Alternative Item	Units	Quantity	Unit Cost (\$)	Total Cost (\$)
Site Work				
Mobilization/Demobilization	LS	1	2,000	2,000
Site prep/clearing/grubbing	LS	1	15,000	15,000
Soil Excavation (Backhoe)	CY	2,000	1.79	3,580
Dust Control	LS	1	5,000	5,000
Backfill Site (including basement)	CY	4,800	6.15	29,520
Filling/Compaction (basement)	CY	2,800	2.78	7,784
Subtotal				62,884
Transportation/Off-Site Disposal of Recyclables				
Load Recyclables	CY	2,490	1.59	3,959
Transport Recyclable Material	CY	2,490	11.35	28,262
Concrete Disposal by Recycling	Ton	750	0	0
Brick Disposal by Recycling	Ton	1,580	0	0
Steel Disposal by Recycling	Ton	230	(40)	(9,200)
Subtotal				23,021
Transportation/Off-Site Disposal of C&D (no soil)				
Load C&D	CY	990	1.59	1,574
C&D Transportation (no soil)	Load	99	140	13,860
C&D Disposal	Ton	740	40	29,600
Subtotal				45,034
Transportation/Off-Site Disposal of Non-hazardous Soil				
Soil Loading	CY	1,500	1.59	2,385
Soil Transport and Disposal	Ton	2,400	30	72,000
Subtotal				74,385
Transportation/Off-Site Disposal of Hazardous Waste				
Load Hazardous Waste	CY	830	2.26	1,876
Haz Waste Transportation	Load	83	650	53,950
Haz Waste Disposal	Ton	1,040	135	140,400
Subtotal				196,226
Subtotal				401,550
Contingency (15%)				60,000
Total Disposal Cost (rounded)				462,000

Scenario 2 Assumptions

The building will be removed to grade. The concrete slab will remain. Basement will be filled.
 Volume of basement is approx. 75,000 cubic feet, 2,800 cubic yards.
 Soil will be removed outside the building limits to a depth of two feet below grade.

Percentage of material that can be recycled is shown in the table below. Also shown are the estimated percentages of materials to be disposed off site as C&D/non-hazardous waste and and hazardous waste.

Item	Total Quantity Units	Recycle Quantity	Disposal Quantity	
			C&D/Non Haz	Hazardous
<u>CONCRETE</u>				
Volume of Concrete	770 CY	580	140	50
Specific Weight	2600 LB/CY			
Weight of Concrete	1000 Ton	750	190	60
<u>STEEL</u>				
Volume of Steel	40 CY	30	10	0
Weight of Steel	310 Ton	230	60	20
<u>ROOFING</u>				
Volume of Roofing	120 CY	0	90	30
Specific Weight	700 LB/CY			
Weight of Roofing	40 Ton	0	30	10
<u>WOOD</u>				
Volume of Wood	370 CY	0	280	90
Specific Weight	500 LB/CY			
Weight of Wood	90 Ton	0	70	20
<u>BRICK</u>				
Volume of Brick	2,500 CY	1,880	470	160
Specific Weight	1,700 LB/CY			
Weight of Brick	2,100 Ton	1,580	390	130
<u>SOIL</u>				
Volume Excavated Soil	3,900 CY	0	2,930	980
Specific Weight	1.6 Tons/CY			
Weight of Soil	6,200 Tons	0	4,650	1550
	7,700 CY	2,490	3,920	1,310
TOTALS	9,740 Tons	2,560	5,390	1,790

Recyclable Transport	311 CY	(Assumes 10 CY w/25% air space per load)
C&D Transport (no soils)	99 Loads	(Assumes 10 CY per load)
Haz Waste Transport	131 Loads	(Assumes 10 CY per load)

Power City Warehouse

Cost Estimate

Scenario 2: Slab remains and two feet of site soils are removed and replaced with clean soils.

Remedial Alternative Item	Units	Quantity	Unit Cost (\$)	Total Cost (\$)
Site Work				
Mobilization/Demobilization	LS	1	2,000	2,000
Site prep/clearing/grubbing	LS	1	15,000	15,000
Soil Excavation (Backhoe)	CY	3,900	1.79	6,981
Dust Control	LS	1	5,000	5,000
Backfill Site (including basement)	CY	6,700	6.15	41,205
Filling/Compaction (basement)	CY	2,800	2.78	7,784
Subtotal				77,970
Transportation/Off-Site Disposal of Recyclables				
Load Recyclables	CY	2,490	1.59	3,959
Transport Recyclable Material	CY	2,490	11.35	28,262
Concrete Disposal by Recycling	Ton	750	0	0
Brick Disposal by Recycling	Ton	1,580	0	0
Steel Disposal by Recycling	Ton	230	(40)	(9,200)
Subtotal				23,021
Transportation/Off-Site Disposal of C&D (no soil)				
Load C&D	CY	990	1.59	1,574
C&D Transportation (no soil)	Load	99	140	13,860
C&D Disposal	Ton	740	40	29,600
Subtotal				45,034
Transportation/Off-Site Disposal of Non-hazardous Soil				
Soil Loading	CY	2,930	1.59	4,659
Soil Transport and Disposal	Ton	4,650	30	139,500
Subtotal				144,159
Transportation/Off-Site Disposal of Hazardous Waste				
Load Hazardous Waste	CY	1,310	2.26	2,961
Haz Waste Transportation	Load	131	650	85,150
Haz Waste Disposal	Ton	1,790	135	241,650
Subtotal				329,761
Subtotal				619,944
Contingency (15%)				93,000
Total Disposal Cost (rounded)				713,000

Scenario 3 Assumptions

The building will be removed to grade. The concrete slab will be removed, approximately 6,400 cubic yards. Basement will be filled.

Volume of basement is approx. 75,000 cubic feet, 2,800 cubic yards.

Soil will be removed outside the building limits to a depth of one foot below grade.

Percentage of material that can be recycled is shown in the table below. Also shown are the estimated percentages of materials to be disposed off site as C&D/non-hazardous waste and and hazardous waste.

Item	Total Quantity Units	Recycle Quantity	Disposal Quantity	
			C&D/Non Haz	Hazardous
<u>CONCRETE</u>				
		75%	18.75%	6.25%
Volume of Concrete	7,190 CY	5,390	1,350	450
Specific Weight	2,600 LB/CY			
Weight of Concrete	9,350 Ton	7,010	1,750	580
<u>STEEL</u>				
		75%	18.75%	6.25%
Volume of Steel	40 CY	30	10	0
Weight of Steel	310 Ton	230	60	20
<u>ROOFING</u>				
		0%	75%	25%
Volume of Roofing	120 CY	0	90	30
Specific Weight	700 LB/CY			
Weight of Roofing	40 Ton	0	30	10
<u>WOOD</u>				
		0%	75%	25%
Volume of Wood	370 CY	0	280	90
Specific Weight	500 LB/CY			
Weight of Wood	90 Ton	0	70	20
<u>BRICK</u>				
		75%	18.75%	6.25%
Volume of Brick	2,500 CY	1,880	470	160
Specific Weight	1,700 LB/CY			
Weight of Brick	2,100 Ton	1,580	390	130
<u>SOIL</u>				
		0%	75%	25%
Volume Excavated Soil	2,000 CY	0	1,500	500
Specific Weight	1.6 Tons/CY			
Weight of Soil	3,200 Tons	0	2,400	800
	12,220 CY	7,300	3,700	1,230
TOTALS	15,090 Tons	8,820	4,700	1,560

Recyclable Transport	913 CY	(Assumes 10 CY w/25% air space per load)
C&D Transport (no soils)	220 Loads	(Assumes 10 CY per load)
Haz Waste Transport	123 Loads	(Assumes 10 CY per load)

Power City Warehouse

Cost Estimate

Scenario 3: Building slab is removed, and one foot of site soils are removed.

The entire site then is covered with one foot of clean soils.

Remedial Alternative Item	Units	Quantity	Unit Cost (\$)	Total Cost (\$)
Site Work				
Mobilization/Demobilization	LS	1	2,000	2,000
Site prep/clearing/grubbing	LS	1	15,000	15,000
Soil Excavation (Backhoe)	CY	2,000	1.79	3,580
Dust Control	LS	1	5,000	5,000
Backfill Site (including basement)	CY	11,200	6.15	68,880
Filling/Compaction (basement)	CY	2,800	2.78	7,784
Subtotal				102,244
Transportation/Off-Site Disposal of Recyclables				
Load Recyclables	CY	7,300	1.59	11,607
Transport Recyclable Material	CY	7,300	11.35	82,855
Concrete Disposal by Recycling	Ton	7,010	0	0
Brick Disposal by Recycling	Ton	1,580	0	0
Steel Disposal by Recycling	Ton	230	(40)	(9,200)
Subtotal				85,262
Transportation/Off-Site Disposal of C&D (no soil)				
Load C&D	CY	2,200	1.59	3,498
C&D Transportation (no soil)	Load	220	140	30,800
C&D Disposal	Ton	2,300	40	92,000
Subtotal				126,298
Transportation/Off-Site Disposal of Non-hazardous Soil				
Soil Loading	CY	1,500	1.59	2,385
Soil Transport and Disposal	Ton	2,400	30	72,000
Subtotal				74,385
Transportation/Off-Site Disposal of Hazardous Waste				
Load Hazardous Waste	CY	1,230	2.26	2,780
Haz Waste Transportation	Load	123	650	79,950
Haz Waste Disposal	Ton	1,560	135	210,600
Subtotal				293,330
Subtotal				681,519
Contingency (15%)				102,000
Total Disposal Cost (rounded)				784,000

Scenario 4 Assumptions

The building will be removed to grade. The concrete slab will be removed to two feet below grade. Concrete floor is approximately 1-foot thick, 6,400 cubic yards. Soil is assumed for the next foot. Basement will be filled.

Volume of basement is approx. 75,000 cubic feet, 2,800 cubic yards.

Soil will be removed outside the building limits to a depth of two feet below grade.

Percentage of material that can be recycled is shown in the table below. Also shown are the estimated percentages of materials to be disposed off site as C&D/non-hazardous waste and hazardous waste.

Item	Total Quantity Units	Recycle Quantity	Disposal Quantity	
			C&D/Non Haz	Hazardous
<u>CONCRETE</u>				
Volume of Concrete	7,190 CY	5,390	1,350	450
Specific Weight	2,600 LB/CY			
Weight of Concrete	9,350 Ton	7,010	1,750	580
<u>STEEL</u>				
Volume of Steel	40 CY	30	10	0
Weight of Steel	310 Ton	230	60	20
<u>ROOFING</u>				
Volume of Roofing	120 CY	0	90	30
Specific Weight	700 LB/CY			
Weight of Roofing	40 Ton	0	30	10
<u>WOOD</u>				
Volume of Wood	370 CY	0	280	90
Specific Weight	500 LB/CY			
Weight of Wood	90 Ton	0	70	20
<u>BRICK</u>				
Volume of Brick	2,500 CY	1,880	470	160
Specific Weight	1,700 LB/CY			
Weight of Brick	2,100 Ton	1,580	390	130
<u>SOIL</u>				
Volume Excavated Soil	10,300 CY	0	7,730	2580
Specific Weight	1.6 Tons/CY			
Weight of Soil	16,500 Tons	0	12,380	4130
TOTALS	20,520 CY	7,300	9,930	3,310
	28,390 Tons	8,820	14,680	4,890

Recyclable Transport	913 CY	(Assumes 10 CY w/25% air space per load)
C&D Transport (no soils)	220 Loads	(Assumes 10 CY per load)
Haz Waste Transport	331 Loads	(Assumes 10 CY per load)

Power City Warehouse

Cost Estimate

Scenario 4: Building slab is removed to two feet below top of slab and two feet of site soils are removed. Site is restored to grade with clean soils.

Remedial Alternative Item	Units	Quantity	Unit Cost (\$)	Total Cost (\$)
Site Work				
Mobilization/Demobilization	LS	1	2,000	2,000
Site prep/clearing/grubbing	LS	1	15,000	15,000
Soil Excavation (Backhoe)	CY	10,300	1.79	18,437
Dust Control	LS	1	5,000	5,000
Backfill Site (including basement)	CY	19,500	6.15	119,925
Filling/Compaction (basement)	CY	2,800	2.78	7,784
Subtotal				168,146
Transportation/Off-Site Disposal of Recyclables				
Load Recyclables	CY	7,300	1.59	11,607
Transport Recyclable Material	CY	7,300	11.35	82,855
Concrete Disposal by Recycling	Ton	7,010	0	0
Brick Disposal by Recycling	Ton	1,580	0	0
Steel Disposal by Recycling	Ton	230	(40)	(9,200)
Subtotal				85,262
Transportation/Off-Site Disposal of C&D (no soil)				
Load C&D	CY	2,200	1.59	3,498
C&D Transportation (no soil)	Load	220	140	30,800
C&D Disposal	Ton	2,300	40	92,000
Subtotal				126,298
Transportation/Off-Site Disposal of Non-hazardous Soil				
Soil Loading	CY	7,730	1.59	12,291
Soil Transport and Disposal	Ton	12,380	30	371,400
Subtotal				383,691
Transportation/Off-Site Disposal of Hazardous Waste				
Load Hazardous Waste	CY	3,310	2.26	7,481
Haz Waste Transportation	Load	331	650	215,150
Haz Waste Disposal	Ton	4,890	135	660,150
Subtotal				882,781
Subtotal				1,646,177
Contingency (15%)				247,000
Total Disposal Cost (rounded)				1,890,000