



February 16, 2024

Mr. Justin Starr, P.G.
Remedial Bureau C Division of Environmental Remediation
New York State Department of Environmental Conservation
625 Broadway, Albany, NY 12233-7014

**RE: PRE-DESIGN INVESTIGATION WORK PLAN
350-352 LIBERTY SITE – ERP SITE # B00189
350-352 LIBERTY STREET, NEWBURGH, NEW YORK
(HRP # NEW6312.RA)**

Dear Mr. Starr:

HRP Associates, Inc. (HRP) was authorized to complete a Pre-Design Investigation Work Plan at the 350-352 Liberty Street Site, located at 350-352 Liberty Street, Newburgh, New York (the Site). The Site location is depicted on **Figure 1**.

C.T. Male Associates completed the initial remedial investigation in 2013. The RI Report dated April 2013, investigated the nature and extent of contamination in soil, groundwater, and soil vapor. The RI determined select SVOCs and metals were detected at concentrations exceeding respective cleanup values in near-surface soils, select VOCs and mercury were detected at concentrations exceeding respective cleanup values in subsurface soils, and several VOCs were detected at concentrations exceeding respective cleanup values in groundwater. These exceedances were attributed to the likely release from former underground storage tanks (USTs), two former drainage structures, two former hydraulic lifts, and petroleum impacted soils identified on the Site. The last round of groundwater sampling was completed at the Site in July 2012. Two data gaps were identified following the completion of the 2013 RI:

- In accordance with DER-10, sample analysis during a remedial investigation must be for a full suite of analyses indicating additional sample analysis for emerging contaminants is required. Groundwater samples are to be collected and analyzed for per- and polyfluoralkyl substances (PFAS) and 1,4-dioxane from existing Site monitoring wells.
- Data validation was not performed on the soil vapor intrusion analytical results from March 2012 at the adjacent apartment building south of the Site.

To address these data gaps, HRP proposes additional RI work including sampling the five existing monitoring wells in order to analyze Site groundwater for emerging contaminants including PFAS and 1,4-dioxane parameters and to collect soil vapor samples from the lowest floor of the adjacent apartment building south of the Site.

The purpose of this letter is to outline the proposed investigation. The work is to be completed in general accordance with this letter, including the Health and Safety Plan (HASP).

Based on our analysis of Site data collected to date and discussions with NYSDEC, HRP proposes additional investigation tasks be completed as outlined below. Proposed investigation locations are depicted on **Figure 2**. Sample types and locations are summarized on **Table 1** and sample QA/QC details (analyses, containers, hold times etc.) are summarized on **Table 2**.

Investigation, Environmental Sampling, and Implementation

HRP proposes the following field activities be completed:

- Collect depth to water measurements at all existing and accessible groundwater monitoring wells. Depth to water measurements will be collected to the nearest 0.01 foot from the top of casings. Data will be used to construct a groundwater contour map to determine groundwater flow and hydraulic gradient of the Site.
- Collect groundwater samples from up to five existing monitoring well locations (**Figure 2**) to be analyzed for analytes identified by the NYSDEC as “emerging contaminants” that were not analyzed during the initial phase of the RI. Up to 10 groundwater samples (5 site samples, 1 duplicate, 1 MS, 1 MSD, 1 equipment blank, and 1 PFAS blank) will be analyzed for PFAS via Draft Method 1633, and 1,4-dioxane via EPA Method 8270 SIM. A peristaltic pump equipped with high-density polyethylene (HDPE) tubing will be used to sample Site wells. Water quality parameters such as temperature, pH, conductivity, dissolved oxygen, oxidation reduction potential, and turbidity will be recorded and allowed to stabilize in accordance with EPA low-flow groundwater sampling procedures prior to sample collection.
- Protocols for the collection and analysis of water samples for PFAS will be in accordance with the *NYSDEC Sampling Analysis and Assessment of PFAS Under NYSDEC Part 375 Remedial Programs, April 2023* guidance. Certain procedures must be modified due to the presence of PFAS in multiple types of products that could result in contamination of water samples collected without taking precautions to eliminate or minimize the presence of outside influences on concentrations found in the samples collected.

Sampling Considerations

Specific materials that are prohibited for use when sampling for PFAS include pumps and tubing containing Teflon® and other fluoropolymer-containing materials. Acceptable materials for pumps, tubing, and other sampling equipment include peristaltic pumps, high-density polyethylene (HDPE), and silicone tubing. Additional materials for sampling equipment may be acceptable, but such requests must be preapproved by NYSDEC, and requests to use alternate equipment will include results from equipment blanks indicating that PFAS were not detected.

At least one equipment blank will be generated and collected for laboratory analysis. Decontamination, if needed for sampling equipment, will be performed using solutions of Alconox® or Liquinox® in potable water, followed by rinsing with deionized water (Liquinox® will not be used if sampling for 1,4- dioxane is to occur, since Liquinox® contains a small amount of 1,4-dioxane).



For sample collection and equipment storage, containers and equipment will not contain or come in contact with aluminum foil, low-density polyethylene (LDPE), glass, polytetrafluoroethylene (PTFE) (including PTFE- or Teflon™-lined caps for sampling containers). Chemical ice packs will not be used. Pre-cleaned sample bottles with closures, coolers, ice, sample labels, and a chain of custody form will be provided by the laboratory. Deionized water for QA/QC blanks will also be supplied by the laboratory, and natural ice will be used to maintain a temperature of $4^{\circ}\text{C} \pm 2^{\circ}$ prior to delivery to the laboratory.

Clothing or boots made of or with PTFE material (including GORE-TEX® or other synthetic water resistant and/or stain resistant materials, or Tyvek® material or that have been waterproofed with PFAS materials) will not be worn on the day of sampling. All clothing worn by sampling personnel must have been laundered multiple times.

Because some personal care products are known to contain PFAS, cosmetics, moisturizers, hand cream and other related products will not be used on the day of sampling. However, if it can be demonstrated that a product does not contain PFAS, use of those products will be acceptable for use if approved by the NYSDEC project manager.

Some products typically used for field documentation will not be used for field documentation during PFAS sampling events due to the potential for PFAS in the materials. Such materials include waterproof/treated paper or field books, plastic clipboards, non-Sharpie® markers, Post-It® notes, and other adhesive paper products. Plain paper, metal clipboards, Sharpies®, and pens will be used for field documentation. The laboratory will be responsible for supplying chain-of-custody forms that meet acceptable criteria for PFAS sampling.

Since many food and drink packaging materials contain PFAS, pre-packaged food and fast food wrappers or containers will be prohibited from the site and the field vehicle. However, bottled water or hydration drinks will be allowed.

Sampling Activities

Samples will be collected for PFAS analysis in a similar manner to samples collected for analysis for other types of constituents in accordance with the sampling procedures identified below.

- The sampler must wear nitrile gloves while filling and sealing the sample bottles. New nitrile gloves must be used for each sampling location.
- Samples for PFAS analysis will be collected first, prior to collecting samples for any other parameters into any other containers to avoid contact with any other types of sample containers, bottles, or package materials, and sampler should not handle other sampling equipment or bottles after donning the nitrile gloves until after the sample for PFAS analysis has been collected and stored for transport.

- As for all other samples, the sample bottle cap will not be placed on any surface when collecting the sample and the sampler will avoid all contact with the inside of the sample bottle or its cap.
- Once the sample is collected and capped with an acceptable cap and liner closure system, the sample bottle(s) will be labeled and placed in the shipping container/cooler packed only with ice to be maintained at $4 \pm 2^\circ$ Celsius until delivery to the laboratory.

Soil Vapor Intrusion

To assess the migration of gaseous vadose zone contamination and evaluate the SVI exposure pathway, an SVI investigation will be performed within the adjacent offsite apartment building located at 348 Liberty Street (**Figure 2**). The SVI investigation will include a total of two sub-slab soil vapor samples, three indoor air samples, and one ambient air sample, each to be collected concurrently during the heating season. The third indoor air sample will be a duplicate sample collected for laboratory QA/QC purposes.

The soil gas will be sampled in accordance with the New York State Department of Health's Guidance for Evaluating Soil Vapor Intrusion in the State of New York, October 2006 (updated May 2017). Specific locations will be chosen with consultation with the NYSDEC, property owners, and as field conditions allow. HRP will install a new sub-slab access point in an adequate location beneath the concrete slab and will use leak detection testing to confirm the competency of the vapor point. Prior to soil vapor sampling, the integrity of the seal will be evaluated using a helium tracer gas. In the event that the probe fails the tightness test, the subsurface probe seal will be modified and the integrity testing repeated.

Indoor and ambient air samples will be collected simultaneous to sub-slab samples and will be placed at a height corresponding to the average breathing level (i.e. approximately five feet above the ground surface). Collected at a flow rate of less than 0.2 liters/minute, the sampling duration will be at least 24 hours. Soil gas and air samples will be collected in Summa canisters and analyzed using USEPA Method TO-15. Samples will be submitted to an ELAP-approved laboratory. In addition, a chemical inventory of the rooms where samples will be located will be completed prior to sampling.

Decontamination Procedures

Non-dedicated sampling equipment (i.e., submersible pumps, water level indicators, etc.) will be subject to decontamination procedures prior to each sample being collected to reduce the potential for cross-contamination. The decontamination procedures will include the use of a scrub wash with a solution consisting of Alconox® detergent and potable water followed by a rinse with DI water. The decontaminated equipment will be stored in clean environments (i.e., the manufacturer's storage case). Liquinox® will not be used if samples are to be collected for 1,4-dioxane analysis, since Liquinox® may contain a small amount of 1,4-dioxane. The decontaminated equipment will be stored in clean environments (i.e., the manufacturer's storage case).



Disposal of Investigation Derived Waste

It is anticipated that purge water generated during the low-flow sampling of monitoring wells and decontamination fluids will be containerized upon production and securely staged on-site pending laboratory analysis and discussions with NYSDEC and City of Newburgh to determine appropriate disposal.

Analytical Data Quality Evaluation

All laboratory analysis will be completed by an Environmental Laboratory Approval Program (ELAP) laboratory that will be contracted to HRP. The selected laboratory will provide data deliverables in formats acceptable to the NYSDEC and data validator (NY ASP B and NYSDEC EQuIS formats).

Upon receipt of the sample data, the validation contractor will quantitatively and qualitatively validate the laboratory data. The validation of the analytical data will be performed according to the protocols and QC requirements of the analytical methods, the National Functional Guidelines for Organic Data Review, January 2017 and the National Functional Guidelines for Inorganic Data Review January 2017, and the reviewer's professional judgment.

Pre-Design Investigation Report

A pre-design investigation report will be prepared as part of this work assignment following completion of the pre-design field activities. The report will provide a description of the field activities, present data collected during field activities, present a physical description of the Site including geology and hydrogeology, and provide an analysis and interpretation of the available data in the context of existing Site conditions.

The report prepared as part of this assignment will also provide a data validation/usability evaluation, identification, and location of contaminants.

Electronic Data Delivery

In addition to appropriate data summary tables included in the report, all environmental data will be submitted electronically in a specified Electronic Data Deliverable (EDD) format named in accordance with the data submission procedures outlined by the NYSDEC.

Key Project Personnel

Primary project staffs are listed below:




Personnel	Company	Title for this Work Assignment	Responsibility
<u>Jesse Zahn, CHMM, P.G.</u> (Senior Project Manager)	HRP Associates, Inc. (Prime Consultant)	Project Manager	Overall management of the Project
<u>Bryan Sherman</u> (Project Manager)	HRP Associates, Inc.	Office Health & Safety Manager	Approval of HASP and responsible for overall health and safety issues with the Project
<u>Michael Varni</u> (Senior Project Geologist)	HRP Associates, Inc.	Corporate QA/QC Officer	Responsible for QA/QC on the WA
<u>John Gorman</u> (Project Consultant)	HRP Associates, Inc.	Field Manager and Site Health & Safety Officer	Responsible for the on-site sampling and investigative tasks

If you have any questions or require additional information, please feel free to contact HRP at (518) 877-7101.

Sincerely,
 HRP Associates, Inc.



John Gorman
 Project Consultant

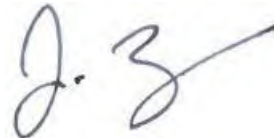

Jesse Zahn, CHMM, PG
 Regional Office Manager

Attachments: HASP, Tables, and Figures



TABLES

**Table 1
Sampling Summary
Pre-Design Remedial Investigation**

**350-352 Liberty Street Site
NYSDEC Site # B00189
350-352 Liberty Street
Newburgh, New York**

Activity/ Matrix	Number of Sample Locations	Proposed Sample Locations	Number of Samples to be Collected	Analyses
Monitoring Well Sampling/ Groundwater	5	5 proposed well locations on Site property, with 2 locations selected for duplicate, MS, MSD, PFAS blank, equipment blank	10	PFAS by EPA Draft Method 1633 1,4-Dioxane by EPA Method 8270 SIM
Vapor Intrusion Investigation/ Soil Vapor and Air	align="center">2	Soil Vapor (2 locations)	2	VOCs by EPA Method TO-15
		Indoor Air (2 locations with 1 selected for duplicate)	3	
		Outdoor Air (1 location)	1	

Acronym List:

PFAS: Per- and Polyfluoroalkyl Substances



**Table 2
Analytical Methods/Quality Assurance Summary
Pre-Design Remedial Investigation**

**350-352 Liberty Street Site
NYSDEC Site # B00189
350-352 Liberty Street
Newburgh, New York**

Parameter	Matrix	Number of Samples (including Field QC)	Preparation Method	Analytical Method	Containers per Sample			Preservation Requirements			Maximum Holding Time
					No.	Size	Type	Temp.	Light Sensitive	Chemical	
SOIL VAPOR, AIR											
VOCs	Soil Vapor, Air	6	NA	EPA TO-15	1	6-Liter	summa canister	NA	No	NA	30 days (summa canister)
GROUNDWATER											
PFAS	Aqueous	10	NA	Draft Method 1633	1	250 ml	plastic	2-6° C	No	NA	14/28 days
1,4-Dioxane	Aqueous	9	NA	SW-846 Method 8270 SIM	2	500 ml	amber glass	2-6° C	Yes	NA	7 days



Acronym List:

VOCs: Volatile Organic Compounds

PFAS: Per- and polyfluoralkyl substances



FIGURES

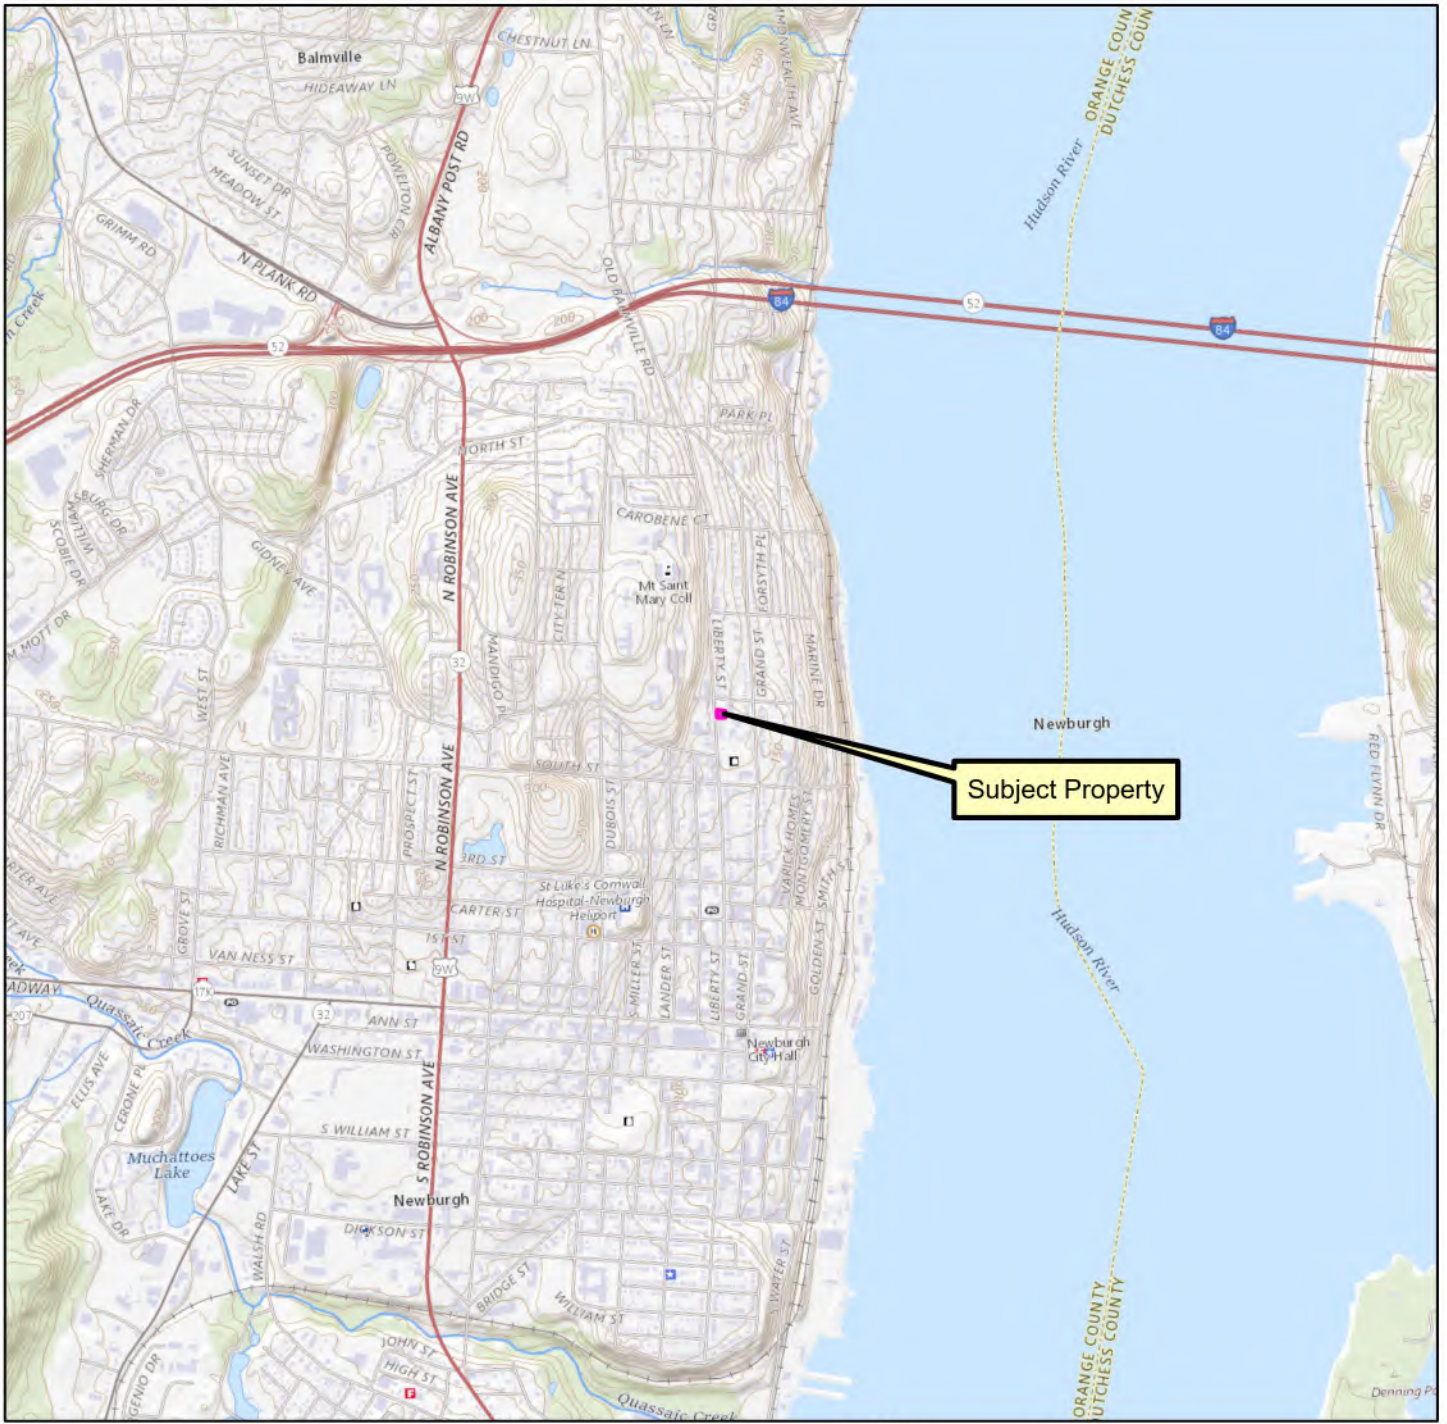

1:24,000




USGS Quadrangle Information
 Quad ID: 41074-E1
 Name: Newburgh, New York

Figure 1
Subject Property Location Map
350-352 Liberty Street
Newburgh, New York
HRP # NEW6313.RA
Scale 1" = 2,000'



ONE FAIRCHILD SQUARE
 SUITE 110
 CLIFTON PARK, NY 12065
 (518) 877-7101
 HRPASSOCIATES.COM

Path: S:\Data\NEWBC - CITY OF NEWBURGH\350-352 LIBERTY ST., NEWBURGH, NY\NEW6313RA - ERP Cap. 350-352 Liberty\GIS\Figures\Figures.aprx

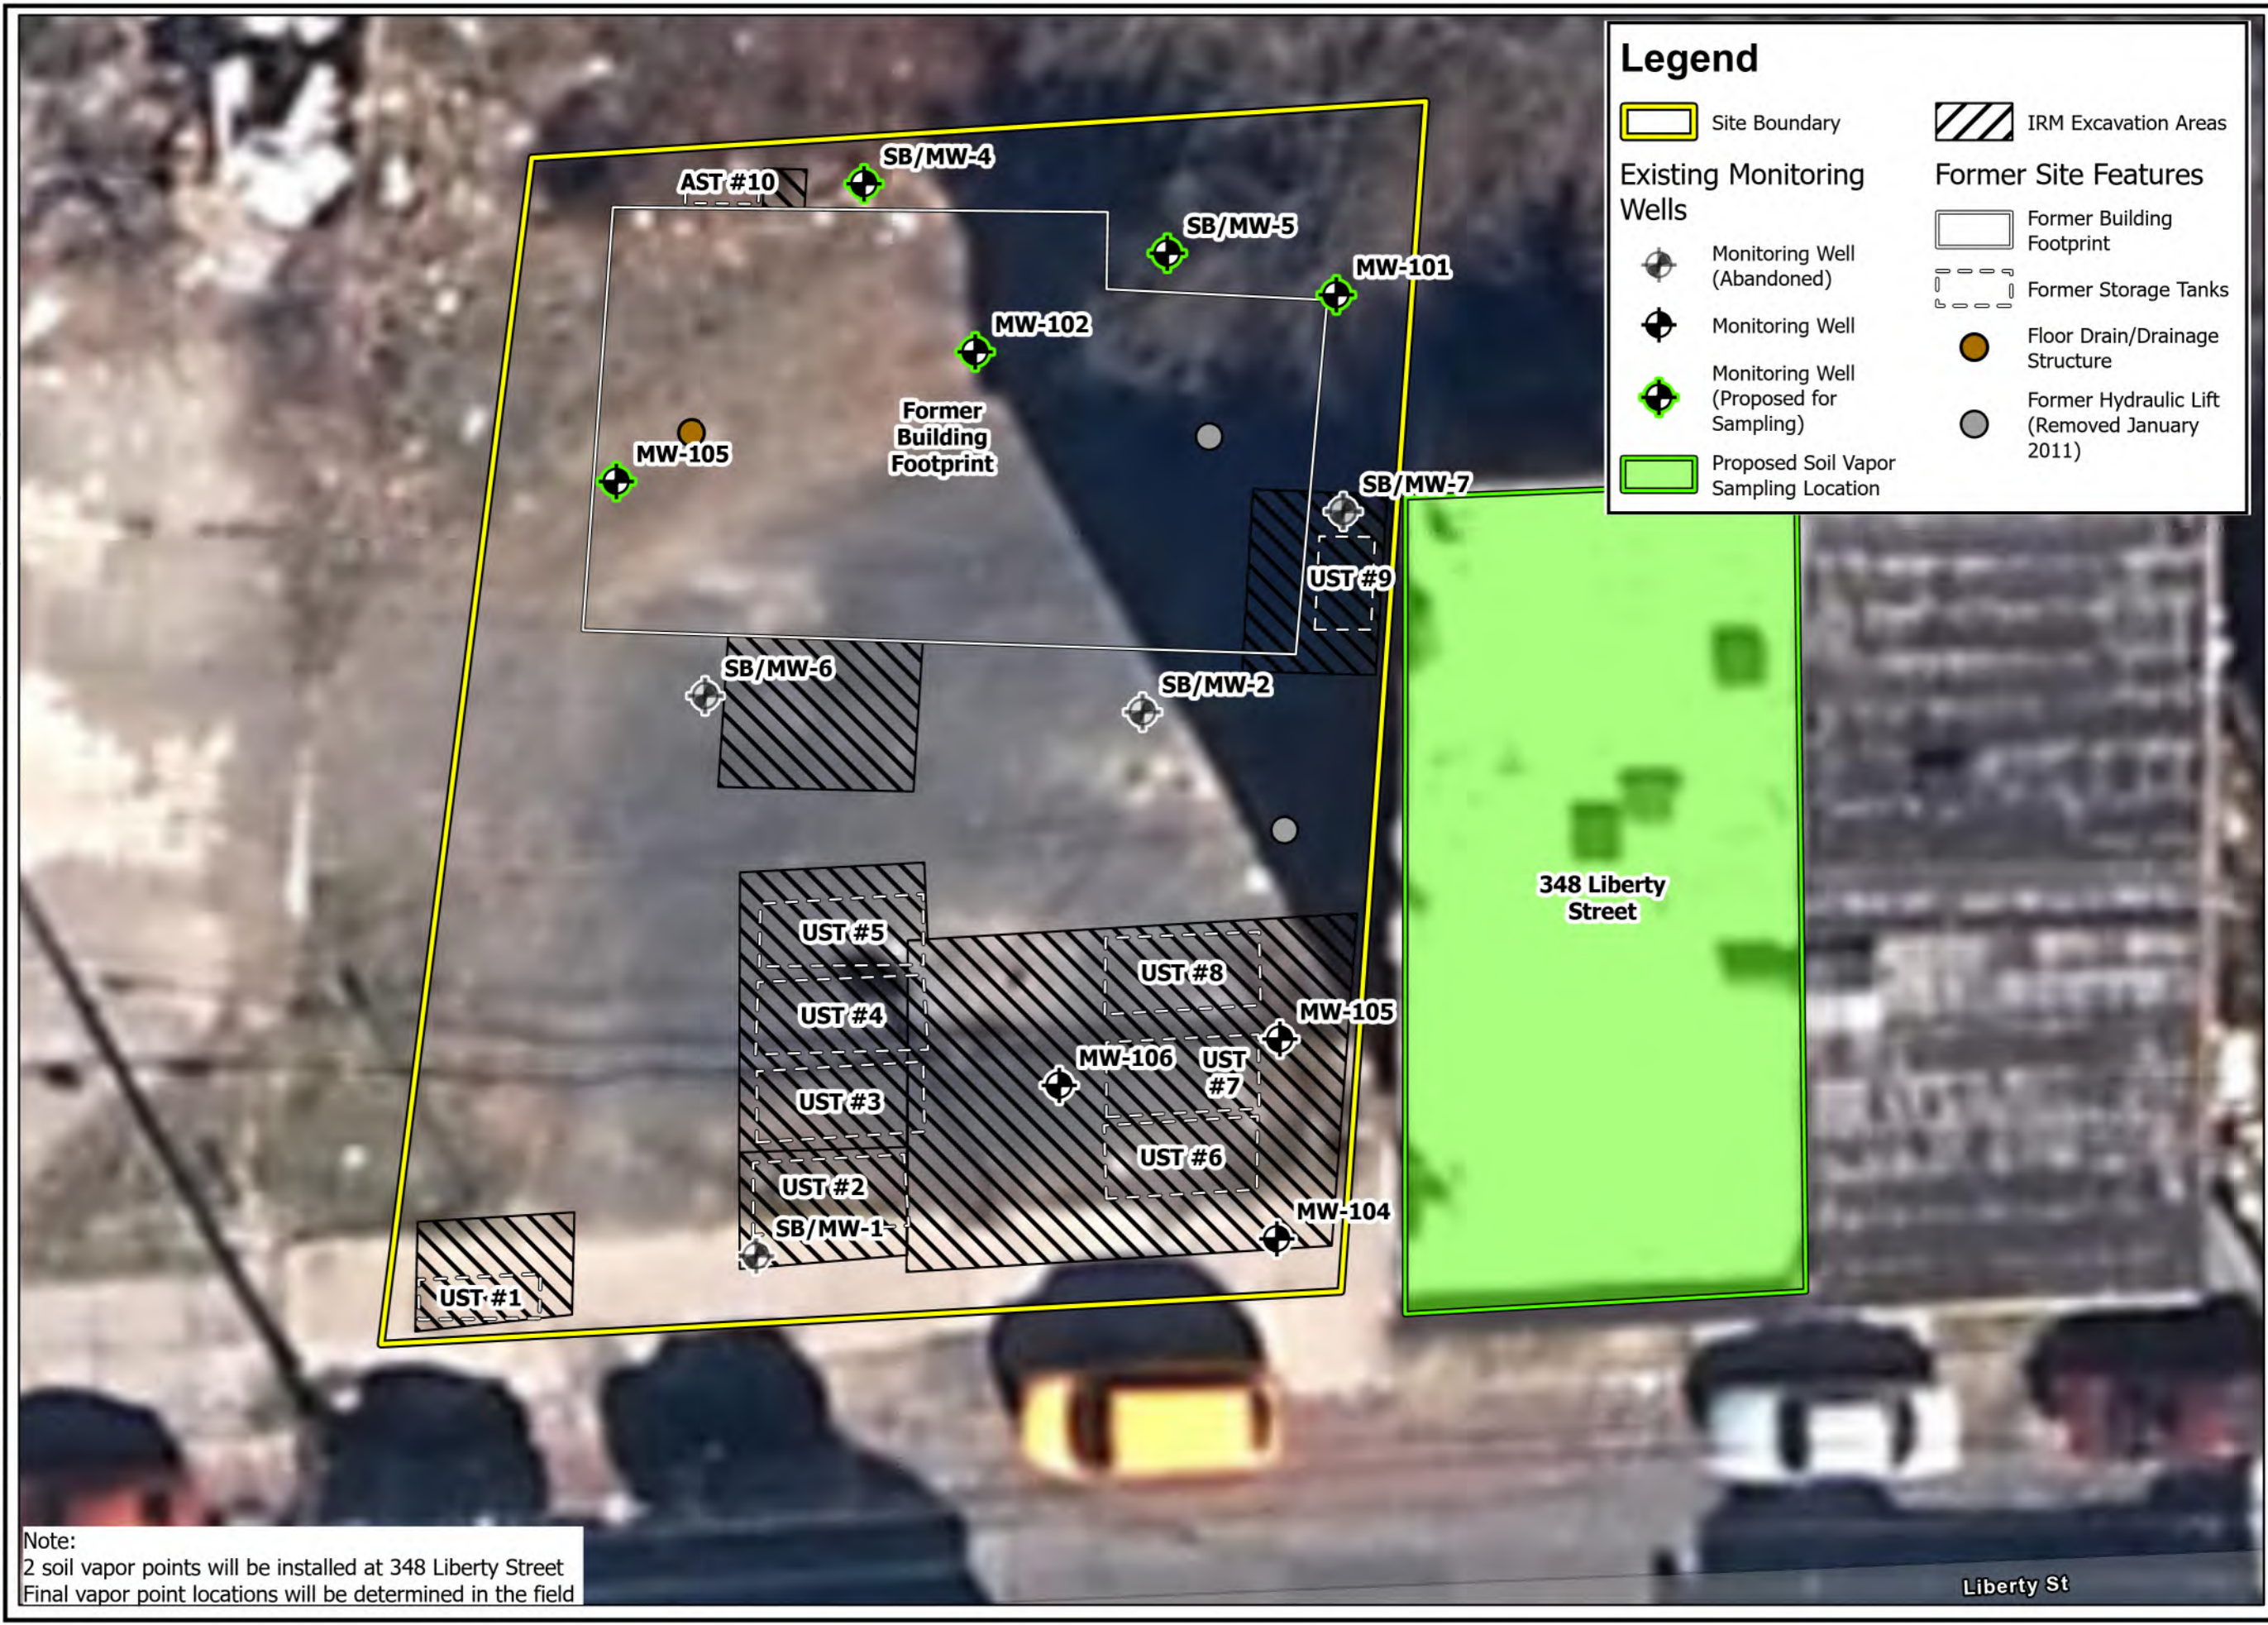

Legend

Site Boundary	IRM Excavation Areas
Existing Monitoring Wells	Former Site Features
Monitoring Well (Abandoned)	Former Building Footprint
Monitoring Well	Former Storage Tanks
Monitoring Well (Proposed for Sampling)	Floor Drain/Drainage Structure
Proposed Soil Vapor Sampling Location	Former Hydraulic Lift (Removed January 2011)

North

0 5 10
 Feet

Revisions	No.	Date

Designed By:	JG
Drawn By:	EWJ
Reviewed By:	MEW

Issue Date:	02/13/2024
Project No:	NEW6313.RA
Sheet Size:	11x17

Proposed Sampling Locations

350-352 Liberty Street
 Newburgh, New York

Figure No.

2

Note:
 2 soil vapor points will be installed at 348 Liberty Street
 Final vapor point locations will be determined in the field

Liberty St

Health and Safety Plan



MOVE YOUR ENVIRONMENT FORWARD

SITE-SPECIFIC HEALTH AND SAFETY PLAN (HASP)

350-352 Liberty Street Site

350-352 Liberty Street
Newburgh, New York 12550

Prepared For:

New York State Department of Environmental Conservation
625 Broadway
Albany, New York 12233

Prepared By:

HRP Associates, Inc.
1 Fairchild Square, Suite 110
Clifton Park, NY 12065

HRP #: NEW6312.RA

Issued On: February 16, 2024

Addendum Number	Date Issued	Reason For Modification



Disclaimer

HRP Associates does not guarantee the health or safety of any person entering this site. Due to the potential hazards of this site and the activity occurring thereon, it is not possible to discover, evaluate, and provide protection for all possible hazards which may be encountered. Strict adherence to the health and safety guidelines set forth herein will reduce, but not eliminate, the potential for injury at this site. The health and safety guidelines in this plan were prepared specifically for this site for use and should not be used on any other site.

CERTIFICATION

This Addendum to HRP's Generic Health and Safety Plan has been prepared under the supervision of, and has been reviewed by, a Certified Safety Professional (CSP) certified by the Board of Certified Safety Professionals (BCSP).



Bryan Sherman, ASP
BCSP # 31838

TABLE OF CONTENTS

CERTIFICATION	I
1.0 EMERGENCY CONTACTS/PLANNING.....	1
2.0 INTRODUCTION	2
2.1 Purpose and Scope.....	2
2.2 Site Information and Areas of Environmental Concern.....	2
2.2.1 Site Information and Description	2
2.3 Background and Project Description.....	2
2.3.1 Personnel Designations.....	3
3.0 AREAS OF ENVIRONMENTAL CONCERN.....	5
3.1 Scope of Work.....	5
4.0 HAZARD ANALYSIS	7
4.1 Hazard Analysis Summary/Minimization	8
4.2 Changes in Conditions or Scope.....	8
4.3 Monitoring Procedures.....	8
5.0 ENGINEERING CONTROL MEASURES/GENERAL SAFETY.....	10
5.1 Protective Zones	10
6.0 PERSONAL PROTECTIVE EQUIPMENT (PPE).....	11
6.1 Level of Protection	11
7.0 DECONTAMINATION	13
7.1 Decontamination Procedures	13
7.2 Emergency Decontamination.....	13
7.3 Personal Hygiene.....	13
8.0 EMERGENCY ACTION PLAN/SPILL RESPONSE.....	14
9.0 TRAINING/MEDICAL SURVEILLANCE.....	15
9.1 Training Requirements.....	15
9.2 Pre-Entry Briefing.....	15
9.3 Morning Safety (Tailgate) Meeting	15
9.4 Medical Surveillance	16
10.0 AUTHORIZATIONS.....	17
11.0 FIELD TEAM REVIEW	18
12.0 APPROVALS	19

Figures

Figure 1	Site Location Map
Figure 2	Site Plan With Areas of Environmental Concern
Figure 3	Route and Map to Nearest Hospital and Medical Center

Tables

Table 1a	Chemical Hazards Known or Suspected On-Site
Table 1b	Physical Hazards Known or Suspected On-Site

Appendices

Appendix A	Safety and Logistics Planning Call Log
Appendix B	Personnel Log
Appendix C	Supervisor's Investigation Report
Appendix D	Daily Job Brief Record
Appendix E	Equipment Calibration Log
Appendix F	HRP Safe Work Permit
Appendix G	Safety Data Sheets (for chemicals brought to the Site)

1.0 EMERGENCY CONTACTS/PLANNING

The Site Health and Safety Officer will coordinate the entry and exit of response personnel in the event of an emergency. The following information, including directions to the nearest hospital shall be posted on the Site. When contacting the local authorities, be sure to provide: your name, facility name, full address, telephone number, and the nature of the emergency.

Emergency Phone Numbers 350-352 Liberty Street Newburgh, NY 12550	
Emergency Contact	Phone Number
Fire, Ambulance, Police Emergency:	911
Newburgh Police Department	845-561-3131
City of Newburgh Fire Department	845-562-1212
Montefiore St. Luke's Cornwall Hospital	845-561-4400
Poison Control Center	1-800-222-1222
DEC Spills Hotline	1-800-457-7362
National Response Center	800-424-8802
Project Manager: Jesse Zahn	518-877-7101
Site Safety Officer: John Gorman Alternate: Reed Lewandowski Leah Topping Noah Zaffino	518-877-7101
NYSDEC Project Manager: Justin Starr, P.G.	518-660-1347

Map and directions to the following medical facilities are provided in **Figure 3**:

- **Montefiore St. Luke's Cornwall Hospital** – Located at 70 Dubois Street, Newburgh, NY (approximately 0.6 miles from the work Site)

First Aid, Fire Protection, Emergency Response Equipment Storage Locations	
First Aid Kit:	In Vehicle
Fire Extinguisher:	In Vehicle
Eye Wash (Bottle):	In Vehicle

A Safety and Logistics Planning call will be held prior to conducting any intrusive activities at the site. Representatives from HRP and each subcontractor will attend the call to discuss logistical and safety challenges general to the scope of work and specific to the Site. This call is documented on the Safety and Logistics Planning Call Log in **Appendix A**.

2.0 INTRODUCTION

2.1 Purpose and Scope

This Health and Safety Plan (HASP) addresses the health and safety practices that will be employed by HRP Associates, Inc. personnel and our subcontractors participating in the pre-design investigation work plan that will be performed at the site. The pre-design investigation (PDI) will address data gaps from the 2013 remedial investigation and help prepare the Site for the install of a cover system.

This HASP has been developed in accordance with HRP's Generic Safety and Health Program as required under OSHA's Hazardous Waste Operations Standard (29 CFR 1910.120) (Standard). It has been developed to establish minimum standards necessary for onsite investigation activities to protect the health and safety of HRP personnel. HRP site personnel have received the required level of training and field experience as required under subpart (e) of the Standard and have received medical examinations in accordance with HRP's medical surveillance program as required under subpart (f) of the Standard. No other personnel will be permitted in the Exclusion Zone unless they have received training and medical surveillance under the Standard.

HRP personnel and associated contractors shall be familiar with this HASP prior to conducting proposed site work. This plan must be present on site and be available for reference/inspection when the subject site work is being conducted.

2.2 Site Information and Areas of Environmental Concern

2.2.1 Site Information and Description

Site Name: 350-352 Liberty Street Site
Site Address: 350-352 Liberty Street, Newburgh
Site Contact: Justin Starr (NYSDEC)
Phone Number: 518-660-1347

2.3 Background and Project Description

The site is a 0.12-acre parcel located on the east side of Liberty Street in the City of Newburgh, Orange County. There are currently no structures at the site. The site is currently covered by areas of asphalt and clean backfill. The site is zoned for commercial use. A former gas station and repair shop building that operated from 1954 to the mid-1980s was demolished in 2010. Nine underground petroleum tanks, one aboveground storage tank, and two underground hydraulic lifts were identified and removed from the site. The City of Newburgh acquired the property in the 1980s for delinquent tax payments. The site has been idle since the property was acquired by the City.

The primary contaminants of concern in shallow soils at the site include arsenic, barium, cadmium, copper, lead, mercury, benzo(a)anthracene benzo(a)pyrene, benzo(b)fluoranthene, chrysene, and indeno(1,2,3-cd) pyrene. The primary contaminants of concern in subsurface soils at the site include

acetone, methylene chloride, mercury, and selenium. 1,2,4-trimethylbenzene, 1,3,5-trimethylbenzene, and benzene are the primary contaminants of concern in site groundwater.

2.3.1 Personnel Designations

The following personnel are designated to perform the stated project activities and to ensure that the requirements of this HASP are met. The same person may fill more than one role, and/or serve as an alternate in the absence of the designated team member. All subcontractors must have received the required level of training and field experience as required under subpart (e) of OSHA 29 CFR 1910.120 and OSHA 29 CFR 1926.65 for Hazardous Waste Operations and Emergency Response (HAZWOPER).

Project Team Member	Responsibilities and Tasks
<p>John Gorman (Alternate: Reed Lewandowski Leah Topping Noah Zaffino) (Health and Safety Officer)</p>	<p>HSO – HRP Associates, Inc.</p> <ul style="list-style-type: none"> - Ensuring all site work is being performed in accordance with HRP Associates, Inc. Safety Program, as well as in accordance with local, state and federal regulations. - Directing and implementing HRP’s HASP. - Conduct a job orientation meeting and routine safety meetings for HRP Associates, Inc. employees, as applicable. - Provide copies of these inspections, recordkeeping/personnel logs to the engineer as required. - Ensuring all project personnel have been adequately trained in the recognition and avoidance of unsafe conditions. - Authorizing Stop Work Orders that shall be executed upon the determination of an imminent health and safety concern and will notify the appropriate contacts upon issuance of this order. - Directing activities, as defined in the HRP’s written HASP, during emergency situations. - Providing personnel monitoring where applicable. - Ensuring that adequate personal protective equipment and first aid supplies are available. - Ensure site security, to the extent practicable. - Ensure accident victims are promptly cared for, and the incident is investigated and properly reported.
<p>Jesse Zahn (Site Supervisor/ Project Manager)</p>	<p>Site Supervisor/Project Manager – HRP Associates, Inc.</p> <ul style="list-style-type: none"> - Monitor and assist the site Health and Safety officer. - Maintain appropriate rules, regulations and codes at the job site. - Provide advance safety planning for all activities through the use of scheduling and administrative controls. - Obtain site-specific health and safety information and communicate that information with the appropriate personnel (i.e. contractors, client, etc.) - Report all injuries, illnesses and other incidents to the Director of Safety. - Ensure all HRP personnel are trained and qualified to perform site work.



Project Team Member	Responsibilities and Tasks
	<p>A complete list of HRP employee and subcontractor responsibilities (as applicable) can be found in the HRP Generic Health and Safety Plan and provided upon request.</p> <p><u>1</u> A list of site workers will be maintained in the Personnel Log (Appendix B)</p> <p><u>2</u> Supervisors Investigation Report included as (Appendix C)</p>

3.0 AREAS OF ENVIRONMENTAL CONCERN

3.1 Scope of Work

C.T. Male Associates completed the initial remedial investigation in 2013. The RI Report dated April 2013, investigated the nature and extent of contamination in soil, groundwater, and soil vapor. The RI determined select SVOCs and metals were detected at concentrations exceeding respective cleanup values in near-surface soils, select VOCs and mercury were detected at concentrations exceeding respective cleanup values in subsurface soils, and several VOCs were detected at concentrations exceeding respective cleanup values in groundwater. These exceedances were attributed to the likely release from former underground storage tanks (USTs), two former drainage structures, two former hydraulic lifts, and petroleum impacted soils identified on the Site. The last round of groundwater sampling was completed at the Site in July 2012. Two data gaps were identified following the completion of the 2013 RI:

- In accordance with DER-10, sample analysis during a remedial investigation must be for a full suite of analyses indicating additional sample analysis for emerging contaminants is required. Groundwater samples are to be collected and analyzed for per- and polyfluorylalkyl substances (PFAS) and 1,4-dioxane from existing Site monitoring wells.
- Data validation was not performed on the soil vapor intrusion analytical results from March 2012 at the adjacent apartment building south of the Site.

To address these data gaps, HRP proposes additional RI work including sampling the five existing monitoring wells in order to analyze Site groundwater for emerging contaminants including PFAS and 1,4-dioxane parameters and to collect soil vapor samples from the lowest floor of the adjacent apartment building south of the Site.

To prepare the Site for the installation of the Site cover, the above-grade portions of trees, shrubs, and other vegetation will be removed from within the soil cover areas. Removed vegetation will be chipped and stockpiled on-Site and allowed to naturally degrade. Root structures and debris (e.g., plastic pipe) that are removed from the soil cover areas during clearing and grubbing will be transported to a landfill for disposal.

Prior to conducting any clearing and grubbing and/or subgrade preparation activities, silt fence will be installed at appropriate locations around the work areas to minimize the potential for erosion and sediment migration due to surface water runoff. These best management practice controls will remain in place until adequate surface stabilization has been achieved throughout the work areas.

Once the vegetative soil cover is installed and graded, it will be seeded, fertilized and mulched to establish a vegetated cover.

In areas where concrete building slabs are used as part of the cover system, repairs will be made to the concrete, as needed. These repairs will include the excavation of exposed soil to a depth of 12 inches and placement within the soil cover area where the damage to the concrete is greater than 2 feet in diameter. After excavation of the soil, clean backfill soil will be placed in the excavations. Areas where the damage is less than 2 feet in diameter will be excavated and a minimum of 6 inches of

concrete installed to the limits of the opening. In areas where the damage is less than 6 inches in diameter a concrete patch will be installed. To install the concrete patch, damaged concrete will be removed, the area will be washed with water, then the resulting hole will be filled with 3,500 pounds per square inch (psi) concrete and allowed to cure.

A demarcation layer of non-woven geotextile will be placed on the prepared subgrade, followed by 12 inches of soil fill (6 inches of common fill and 6 inches of topsoil). Additionally, at some locations around the edge of the soil cover, the existing grade will be excavated such that when the 12-inch-thick cover is placed, it will be flush with surrounding grade at the cover limit. In other locations, termination of the soil cover will be accomplished by grading the cover soils beyond the limit of the required 12-inch-thick cover at an approximate 4 horizontal to 1 vertical downward slope to blend into existing grade.

4.0 HAZARD ANALYSIS

The project hazard analysis below identifies the hazards that are anticipated to be encountered by the project team.

Physical Hazards Present	<input checked="" type="checkbox"/> Electricity <input checked="" type="checkbox"/> Trips/Falls/Floor openings <input type="checkbox"/> Holes/Pits <input checked="" type="checkbox"/> Inclement weather <input checked="" type="checkbox"/> Heat <input checked="" type="checkbox"/> Cold <input checked="" type="checkbox"/> Vibration <input checked="" type="checkbox"/> Flying particles	<input type="checkbox"/> Ionizing radiation <input type="checkbox"/> Non-Ionizing radiation <input type="checkbox"/> Lasers <input type="checkbox"/> Overhead hazards <input checked="" type="checkbox"/> Noise <input checked="" type="checkbox"/> Visible dust <input type="checkbox"/> Falling objects <input type="checkbox"/> Other _____
Health/Chemical Hazards Present ¹	<input checked="" type="checkbox"/> Dust/Fumes/Particulates <input checked="" type="checkbox"/> Flammable/Combustible <input type="checkbox"/> Compressed gas <input type="checkbox"/> Explosive <input type="checkbox"/> Water reactive <input type="checkbox"/> Unstable <input checked="" type="checkbox"/> Contact with contaminated media	<input type="checkbox"/> Oxidizer <input type="checkbox"/> Corrosive <input type="checkbox"/> Toxic <input type="checkbox"/> Highly Toxic <input type="checkbox"/> Irritant <input type="checkbox"/> Sensitizer <input checked="" type="checkbox"/> Carcinogen/Mutagen <input type="checkbox"/> Other <u>Asbestos</u>
Environmental/Equipment Hazards Present	<input checked="" type="checkbox"/> Heavy machinery <input type="checkbox"/> Drilling <input checked="" type="checkbox"/> Water operations <input checked="" type="checkbox"/> Mobile equipment <input checked="" type="checkbox"/> Road work <input type="checkbox"/> Railroad work <input type="checkbox"/> Forklifts <input type="checkbox"/> Power tools <input type="checkbox"/> Welding <input type="checkbox"/> Gas cylinders <input checked="" type="checkbox"/> Overhead/underground utilities	<input checked="" type="checkbox"/> Trenching/excavation <input type="checkbox"/> Elevated heights/man lifts <input type="checkbox"/> Scaffolding <input type="checkbox"/> Ladders <input type="checkbox"/> Confined spaces <input type="checkbox"/> Energized equipment <input type="checkbox"/> Overhead hazards <input checked="" type="checkbox"/> Drums/container handling <input checked="" type="checkbox"/> Insects/rodents/snakes <input type="checkbox"/> Biological hazards <input type="checkbox"/> Other _____
Personal Safety Considerations	<input type="checkbox"/> Security Issues <input type="checkbox"/> Remote setting <input checked="" type="checkbox"/> Employees working alone <input type="checkbox"/> Limited lighting	<input type="checkbox"/> Off hour shifts <input type="checkbox"/> Dangerous wildlife/animals <input type="checkbox"/> Limited cell phone service <input type="checkbox"/> Other _____

¹ **Table 1** (following the text of this HASP) provides a list of chemical substances for reference, along with odor threshold, permissible exposure limit (PEL), threshold limit value (TLV), OSHA ceiling, IDLH concentration, route of exposure and symptoms of acute exposure, if any.

Details of specific hazards associated with individual tasks will be discussed in the Daily Job Brief Record (**Appendix D**).

4.1 Hazard Analysis Summary/Minimization

HRP's Corporate Health & Safety Plan (in conjunction with this HASP) will be cross-referenced in order to obtain the safe work practice procedures for mitigating and preventing project site hazards identified in the table above. Job site hazard prevention and minimization information can be found in Section 3 of HRP's Generic Health & Safety Plan.

Confined Spaces

Only properly trained HRP personnel are authorized to enter confined spaces. Confined space entry may be performed by subcontractors who have the proper training and experience to conduct this work. Confined space entry is not anticipated during the RA.

Excavations

It is HRP's policy to ensure that for excavation projects the subcontracted environmental contractor will provide a competent person to perform daily and as needed inspections of excavation sites. Competent persons must have the ability to recognize occupational hazards and the authority to correct them. This policy will be conveyed through the subcontract agreement with the environmental contractor. At a minimum HRP will provide our employees involved with construction projects with awareness level training regarding excavation hazards and notify the subcontracted firm if any obvious excavation safety hazard exists during on-site activities.

Chemical Hazards

Hazardous chemicals known or suspected to be onsite are listed in **Table 1a** (follows text). **Table 1a** includes Chemical name, odor threshold OSHA PEL, ACGIH TLV, OSHA STEL, IDLH concentrations, routes of exposure and symptoms of acute exposure. **Table 1a** also contains a list of abbreviations following the text. Chemicals likely to be encountered during site work are highlighted.

4.2 Changes in Conditions or Scope

Should conditions or the scope of work described herein change significantly, a HASP Addendum will be completed.

4.3 Monitoring Procedures

Air monitoring will be used to determine the concentrations of various chemicals while working in the exclusion zone to evaluate worker exposure to contaminated media during soil capping activities. To determine potential health hazards and the level of personal protection needed during sampling activities within the areas of concern, a Photoionization Detector (PID) will be periodically operated to monitor air quality for the purpose of ensuring minimal exposure to volatile organic compounds. Monitoring of atmospheres adjacent to on-going excavations and around the treatment area shall also be conducted with a PID.

The following environmental monitoring instruments/procedures shall be used on-site at the specified intervals.

Instrument/Procedure

Photoionization Detector (PID)
 in the breathing zone

Sampling Interval

Periodically as deemed by HSO

Background ambient air levels will be established outside the exclusion zone prior to commencement of Site work. Ambient air sampling will occur in the breathing zone of Site workers for comparison to the action levels (described below). Additionally, air sampling will be conducted in the vicinity of any intrusive exploration (i.e., near excavations, trenches, etc.) to determine if any contaminants are present.

The following *Action Levels* will be used:

Instrument	Action Level	Level of Protection or Action Required
PID	No reading above background	<ul style="list-style-type: none"> ▪ No action required. ▪ Continue PID monitoring. ▪ (Modified) Level D protection.
PID	Up to 5 ppm above background	<ul style="list-style-type: none"> ▪ Evacuate exclusion zone. ▪ Recheck levels after 15 minutes. ▪ If levels are sustained, reassess. ▪ Use engineering controls to lower breathing zone vapors. ▪ Level C protection (at the HSO direction).
PID	>5 ppm above background	<ul style="list-style-type: none"> ▪ Evacuate exclusion zone. ▪ Recheck levels after 15 minutes. ▪ Use engineering controls to lower breathing zone vapors. ▪ If levels are sustained, contact Safety Manager, and re-evaluate HASP.

When an action level is equaled or exceeded, the work area shall be evacuated, and the area re-tested with the sampling device. If the appropriate action level continues to be exceeded, the HSO will have to assess the use of engineering controls to lower vapor levels or availability of required increased personal protection equipment before authorizing re-entry to the exclusion zone.

Calibration of all instruments will occur at least once per day, when in use. An equipment calibration log is included in **Appendix E**.

5.0 **ENGINEERING CONTROL MEASURES/GENERAL SAFETY**

5.1 **Protective Zones**

Prior to commencement of work in an area of suspected contamination, protective zones specific for each phase of the Plan will be established by the HSO if necessary, prior to the start of field work. The purpose of the protective zones is to prevent potential cross-contamination of adjacent areas as well as to protect project personnel from exposure to contaminated areas.

Protective zones shall be delineated as follows:

- Exclusion Zone: This is the contaminated area in which intrusive activities are performed. The "Area of Environmental Concern" (AOEC) is located within this area. A single access point for entrance and exit should be established and maintained, if possible. This zone should be delineated from the Contaminant Reduction Zone via perimeter cones or caution tape, or other applicable method. The Exclusion Zone delineation and any necessary modifications will be based on Site conditions.
- Contaminant Reduction Zone: This zone is a transition zone located between the Exclusion Zone and the Support Zone and is utilized to decontaminate personnel and equipment.
- Support Zone: This zone will be utilized for equipment and vehicle storage and will be kept free of contaminated material. The HSO will determine the location of this zone. In the event of a Site evacuation, the rally point will be at the Site entrance on West Liberty Street (Figure 2). The designated rally point may be relocated by the HSO based on project or Site conditions. All Site workers will be notified of any relocation prior to implementation.

6.0 PERSONAL PROTECTIVE EQUIPMENT (PPE)

6.1 Level of Protection

As identified in **Section 4.0**, the overall health and safety risk associated with chemical hazards for HRP and associated contractors is considered significant. This is primarily due to the moderate concentrations of chemical contaminants expected based on minimal contact personnel will have with any potentially contaminated media. Therefore, the minimal level of protection for HRP personnel during the conduct of all the environmental work performed at the Site will be Level D PPE, and will generally consist of the PPE listed below:

- Steel toe/shank work boots
- Hard hat,
- Safety vest
- Coveralls/Tyvek, as necessary
- Safety glasses
- Safety goggles/face shield, as necessary
- Hearing protection, as necessary
- Work gloves

If Site conditions warrant, an upgrade to Level C PPE may be required (refer to **Section 4.3** for the appropriate *Action Levels*) then the contractors will make Level C personal protective equipment (PPE) readily available. Level C PPE generally includes:

- Full face, air purifying respirator with organic vapor cartridges
- Same as Level D, but also includes coveralls with taped pant/boot and glove/shirt

If it is determined protection beyond Level C is required, HRP will re-evaluate the HASP as well as the Site conditions, and will revise the HASP as required. The following table provides a summary of the minimum level of PPE required on Site:

Description	Level of Protection ¹	
	D	C
Body		
Work Clothes	R	R
Chemical Protective Suit (Tyvek)	O	R
High Visibility Vest	R	R
Apron	O	O
Fall Protection	O ²	O ²
Head		
Hard Hat	R	R
Head Warmer	O	O
Eyes & Face		
Safety Glasses	R	R
Goggles (based on hazard)	O	R
Face Shield	O	O
Ears		
Plugs or Muffs	R ²	R ²

Description	Level of Protection ¹	
	D	C
Hands & Arms		
Work Gloves	R	O ²
Chemical Resistant Gloves (Nitrile)	O	R
Insulated Gloves	O	O
Foot		
Work Boots/Steel Toe Boots	R	R
Chemical Resistant Boots	O	O
Disposable Boot Covers	O	O
Respiratory Protection ³		
½ Mask Air Purifying Respirator (APR) or Full Face APR	NA	R
Dust Protection	O	NA
Powered APR	NA	NA
SCBA/Supplied Air Respirator	NA	NA
<p>R = Required, O = Optional, NA = Not Applicable ¹ The level of protection identified here does not include the necessary equipment for entering confined spaces. Refer to Moran Environmental Recovery's Safety Manual Confined Space Program for atmospheric sampling protocols and breathing and rescue equipment necessary for those operations. ² The use of this PPE may or may not be required depending on Site conditions/location and will be addressed at the time of task assignment by the HSO. ³ Respiratory protection necessary to protect against VOC, dusts/particulates and not oxygen deficient atmospheres.</p>		

The following table provides a general description of potential field activity tasks to be performed and associated (recommended) PPE. The use of this PPE may or may not vary depending on Site conditions including but not limited to those described in the air monitoring section above and will be addressed at the time of task assignment by the HSO.

Task Description	Invasive (Y/N)	Protection Level
<u>Groundwater Sampling</u> – Gauging and low-flow sampling of monitoring wells	Y	Modified Level D or Level C –Eye protection required during collection of any liquid sample
<u>Soil Vapor Sampling</u> – Using a hammer drill to install sub-slab vapor points, chemical inventory	Y	Modified Level D – Use of power tools/electricity (hammer-drill)
<u>Decontamination</u> – Use of Alconox or Liquinox for decontaminating water level tape	N	Modified Level D – or Upgrade to Level C dependent on monitoring
<u>Waste Management</u> – Purged groundwater, decontamination water, PPE disposal	N	Modified Level D – or Upgrade to Level C dependent on monitoring
<u>Site Mobilization and Preparation</u> – Utility surveying, fence and barrier installation, decontamination and work zone set up, soil staging areas preparation	N	Level D
<u>Site Control (Exclusion, Decontamination, Support Zones)</u>	N	Modified Level D – or Upgrade to Level C dependent on monitoring
<u>Communications</u> - Use of hand signals, backup alarms, and voice	N	NA
<u>Site Restoration</u>	N	Level D

7.0 DECONTAMINATION

7.1 Decontamination Procedures

All personnel and equipment leaving the exclusion zone must be properly cleaned and decontaminated. When there is evidence of chemical contamination during the Site operations, all personnel will be decontaminated under the direction of the HSO. Clean-up and/or decontamination of personnel shall consist of washing off excessively soiled PPE with a disinfectant detergent scrub and water. At the very least, all personnel should wash their hands and face before leaving the exclusion zone. After washing, all disposable clothing (coveralls, gloves, etc.) will be removed and placed in a double lined plastic bag.

Sampling tools and any other non-disposable items will be decontaminated between sampling points, and at the direction of HRP personnel, to prevent cross-contamination of work areas or environmental samples, as applicable.

7.2 Emergency Decontamination

If immediate medical attention is required in an emergency, decontamination will be performed after the victim has been stabilized. If a worker has been exposed to an extremely toxic or corrosive material, then emergency decontamination will consist of flushing with copious amounts of water. If the victim cannot be decontaminated because it will interfere with emergency medical aid being administered, then the victim should be wrapped with plastic or other available items (i.e. an uncontaminated coverall) to reduce potential contamination of other personnel or medical equipment.

If a Site worker has been overcome by heat related illness, then any protective clothing should be removed immediately. In the case of non-medical emergency evacuation, decontamination should be performed as quickly as possible, unless instant evacuation is necessary to save life or prevent injury.

7.3 Personal Hygiene

All employees will be required to wash their hands and face prior to eating, smoking, drinking and going to the bathroom. Workers will be required to remove contaminated PPE and clothing prior to leaving the Contaminant Reduction Zone. All field personnel should avoid contact with potentially contaminated substances such as puddles, pools, mud, etc.

Additional personal hygiene requirements, intended to prevent the spread of the novel corona virus to Site workers will be in effect during Site activities. These procedures include mobile handwashing stations and the requirement for Site workers to wear face coverings. Additional details are included in **Appendix H**.

8.0 EMERGENCY ACTION PLAN/SPILL RESPONSE

In the event of a worker injury, fire, explosion, spill, flood, or other emergency that threatens the safety and health of Site workers, the following procedure will be implemented:

1. If the emergency originates within the work area covered by this Plan, the HRP HSO shall act as the Emergency Coordinator. The emergency evacuation signal is an air horn or a loud yell. All emergency situations (including worker injuries, no matter how small) will be reported to the HSO, who will determine the appropriate emergency response, up to and including evacuation. Only the HSO may initiate evacuation of the work area. The HSO will be responsible for reporting any emergency situation to the appropriate authorities, using a telephone or other appropriate method.
2. In the case of an evacuation, Site workers will exit the Site along the safest route(s) and assemble with team members at a safe rally point. Those workers in the Exclusion Zone will follow the emergency decontamination procedures outlined in Section 7.2. Accounting of all Site personnel will be conducted by the HSO using the personnel log at a location determined by the HSO.
3. HRP personnel are not permitted to participate in handling the emergency. Fire and medical emergencies will be handled by the local fire department and ambulance service or other emergency responders. In the case of a spill of hazardous materials the NYSDEC will be contacted.

In addition, the HSO/Project Manager must advise the Site contact that the New York Spill Hotline should be contacted and, if the spill quantity is greater than the Reportable Quantity (RQ) under CERCLA and/or SARA, the National Response Center (NRC) and Local Emergency Planning Committee should also be contacted. If the spill begins to flow overland and threatens to contaminate a storm drain or surface water, HRP personnel may attempt to contain and isolate the spill using any available resources, but only if, in the judgment of the HSO, such action will not expose the workers to dangerous levels of hazardous substances and is necessary to preserve life or property. In the event that a spill of material of any amount threatens to reach navigable waters, the NRC shall be contacted.

4. Once initial emergency procedures to protect worker safety and health have been addressed, and control of emergency has been completed and cleared by the incident commander, the HSO will complete an Investigation Report and submit this form to the appropriate personnel (HRP and/or client contact).
5. All Site workers will be familiarized with the above procedures during the pre-entry briefing to be conducted before Site work begins.

9.0 TRAINING/MEDICAL SURVEILLANCE

9.1 Training Requirements

All HRP and HRP subcontractor personnel who enter the work zone and/or Exclusion Zone must have successfully completed the 40-hour or 24-hour training requirement outlined in 29 CFR 1910(e). If the 40-hour or 24-hour training of any person occurred more than 12 months prior to commencement of work, then that person must have attended an 8-hour refresher course within the 12 months prior to commencement of work. If respirators are in use in the Exclusion Zone, then all personnel must have undergone respirator training and a fit test within the last 12 months. Training certificates and records for HRP employee(s) are on file at HRP. All other contractors will be required to supply written proof of training before being allowed into the Exclusion Zone.

9.2 Pre-Entry Briefing

Prior to commencement of work in an area of suspected contamination, HRP's Health and Safety Officer will conduct a pre-entry briefing with on-site contractors, which will include the following:

- Name of the HSO and person responsible for the visitor log.
- Description of the parcel as well as location of emergency telephones and the location/boundaries of the Exclusion Zone, Contamination Reduction Zone, and Support Zone, if established.
- Review of hospital locations and directions.
- Review of tasks to be conducted within the parcel by the Site workers.
- Review of the Emergency Action Plan and rally point, including the nearest emergency communications and telephone numbers.
- The nature, level, and degree of anticipated hazards (physical and chemical) involved in the Site work.
- Required personal protective equipment.
- Decontamination procedures.

The HSO should also, at this time, ensure that all on-site HRP and HRP subcontractor personnel have read the HASP and signed the last page of the original (Section 11.0). If additional information on the Site becomes available, the HSO will call additional briefings as necessary.

9.3 Morning Safety (Tailgate) Meeting

The HRP HSO will conduct a safety overview meeting at the beginning of each workday on the Site. The meeting will be given in addition to any tailgate meetings that the subcontractor conducts. A summary of the meeting topics signed by the personnel attending the meeting is included in **Appendix D**.

9.4 Medical Surveillance

All HRP and HRP subcontractor personnel entering the Exclusion Zone must have had a physical within the 12 months prior to commencement of Site work. A physician's or licensed health care professional's written opinion regarding fitness for work for each employee including work limitations, if any, is on file at HRP, as applicable. A written opinion for all other Site personnel must be supplied prior to commencement of Site work to the HRP HSO. Any work limitations for Site personnel, or relevant medical information (i.e., allergic reactions to medication) should be included in this Plan.

10.0 AUTHORIZATIONS

Personnel authorized to enter the Exclusion Zone include the personnel listed in **Section 2.3.1**. Persons not listed in **Section 2.3.1** may enter the Exclusion Zone only if the appropriate training and medical fitness certifications have been supplied to either the HRP Project Manager or Health and Safety Manager and the HSO or his/her designee on Site has approved Site entry. All personnel entering or leaving the Exclusion Zone must sign in and sign out with the recordkeeper.

11.0 FIELD TEAM REVIEW

All HRP personnel shall sign below after reading this HASP and shall agree with the following statement:


*"I have read and understand this Site-specific Health and Safety Plan.
I will comply with the provisions set forth therein."*

Printed Name	Signature	Date



12.0 APPROVALS

This plan meets the minimum requirements of 29 CFR 1910.120 and 29 CFR 1929.65 and has been written for specified Site conditions, dates, and personnel, and must be amended if conditions change. By their signature, the undersigned certify that this HASP is approved and will be utilized during activities at the project.



John Gorman
On-Site Health and Safety Officer

2/16/2024

Date



Jesse Zahn
Regional Office Manager

2/16/2024

Date



Bryan Sherman, ASP
Project Manager/Office Health Safety Officer

2/16/2024

Date

Subcontractor:

I have been provided a copy of this HASP for review.

Name

Date

Representing _____



The Designated Competent person representing [subcontractor] at the site will be

_____.

Any alternate Competent Person will be noted in the Daily Job Brief Record (**Appendix D**).

ADDITIONAL APPROVALS (or Re-Approvals)	
Name:	Date:

FIGURES

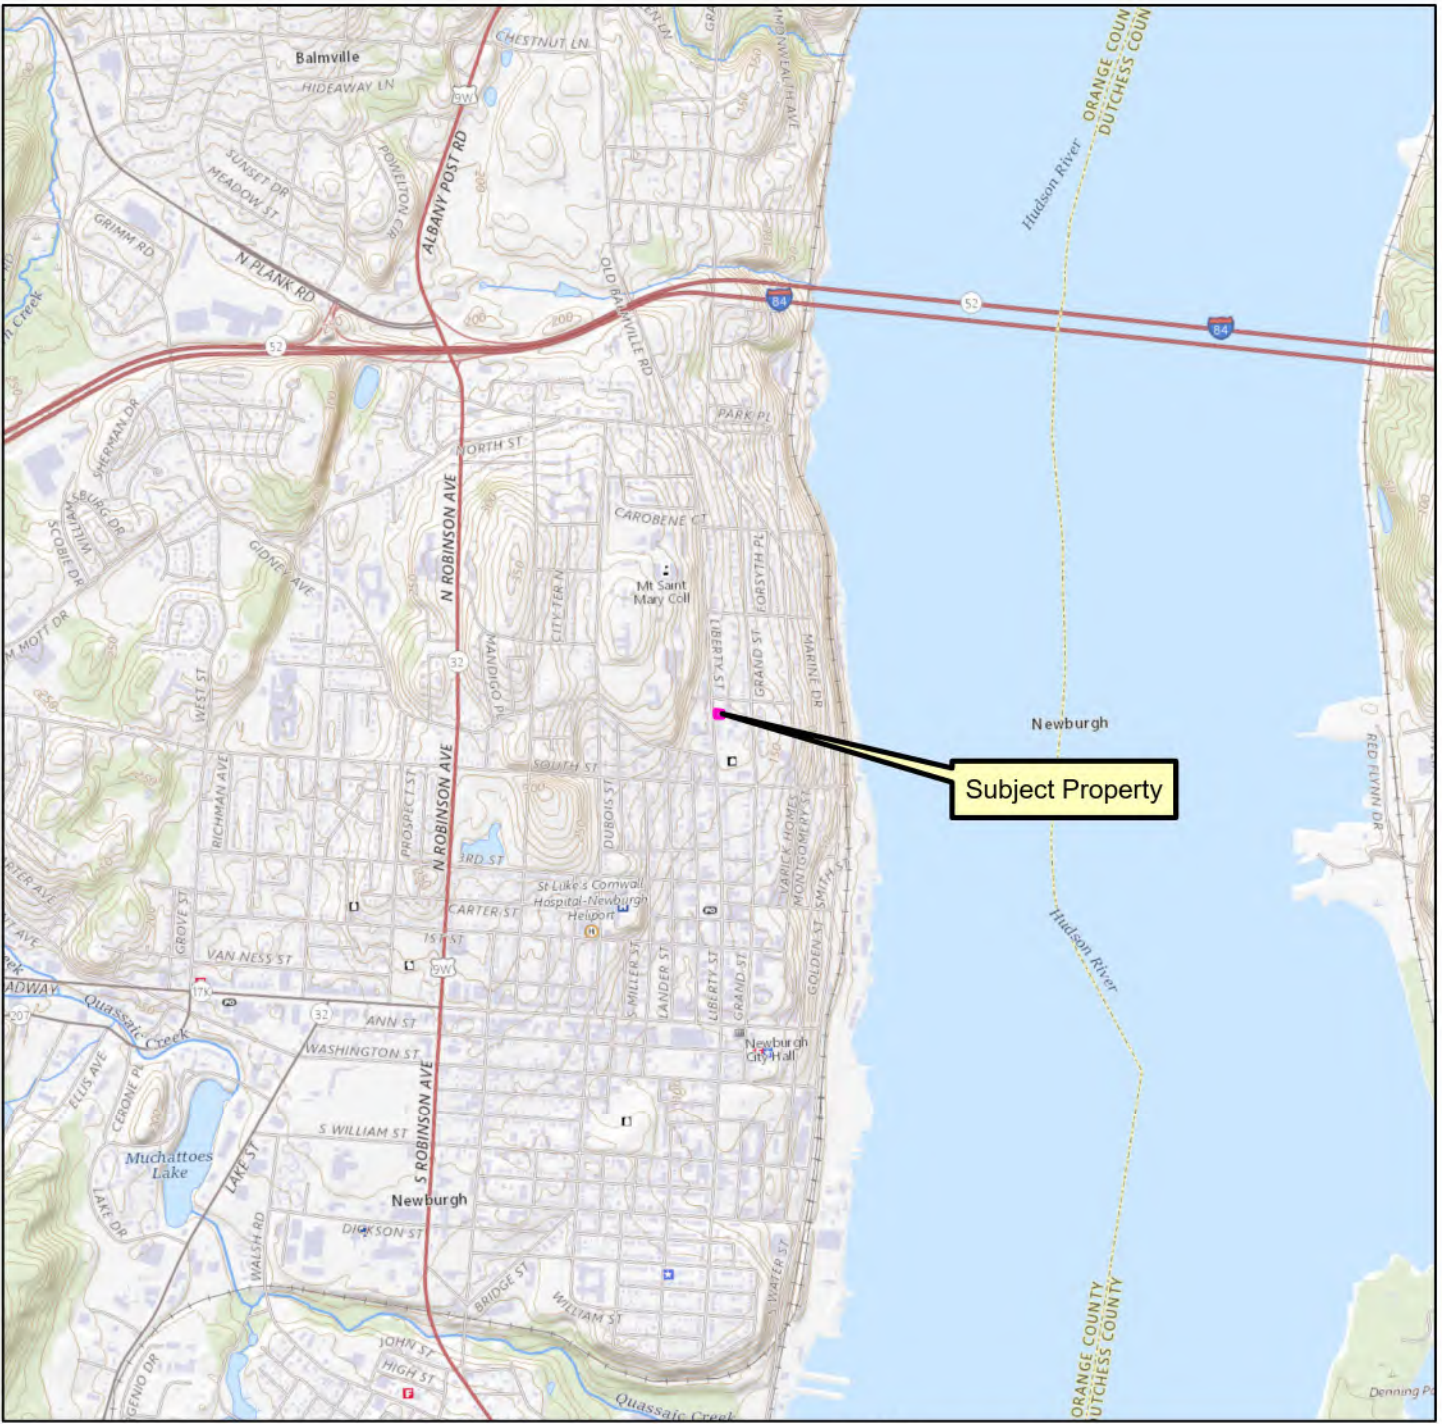

1:24,000

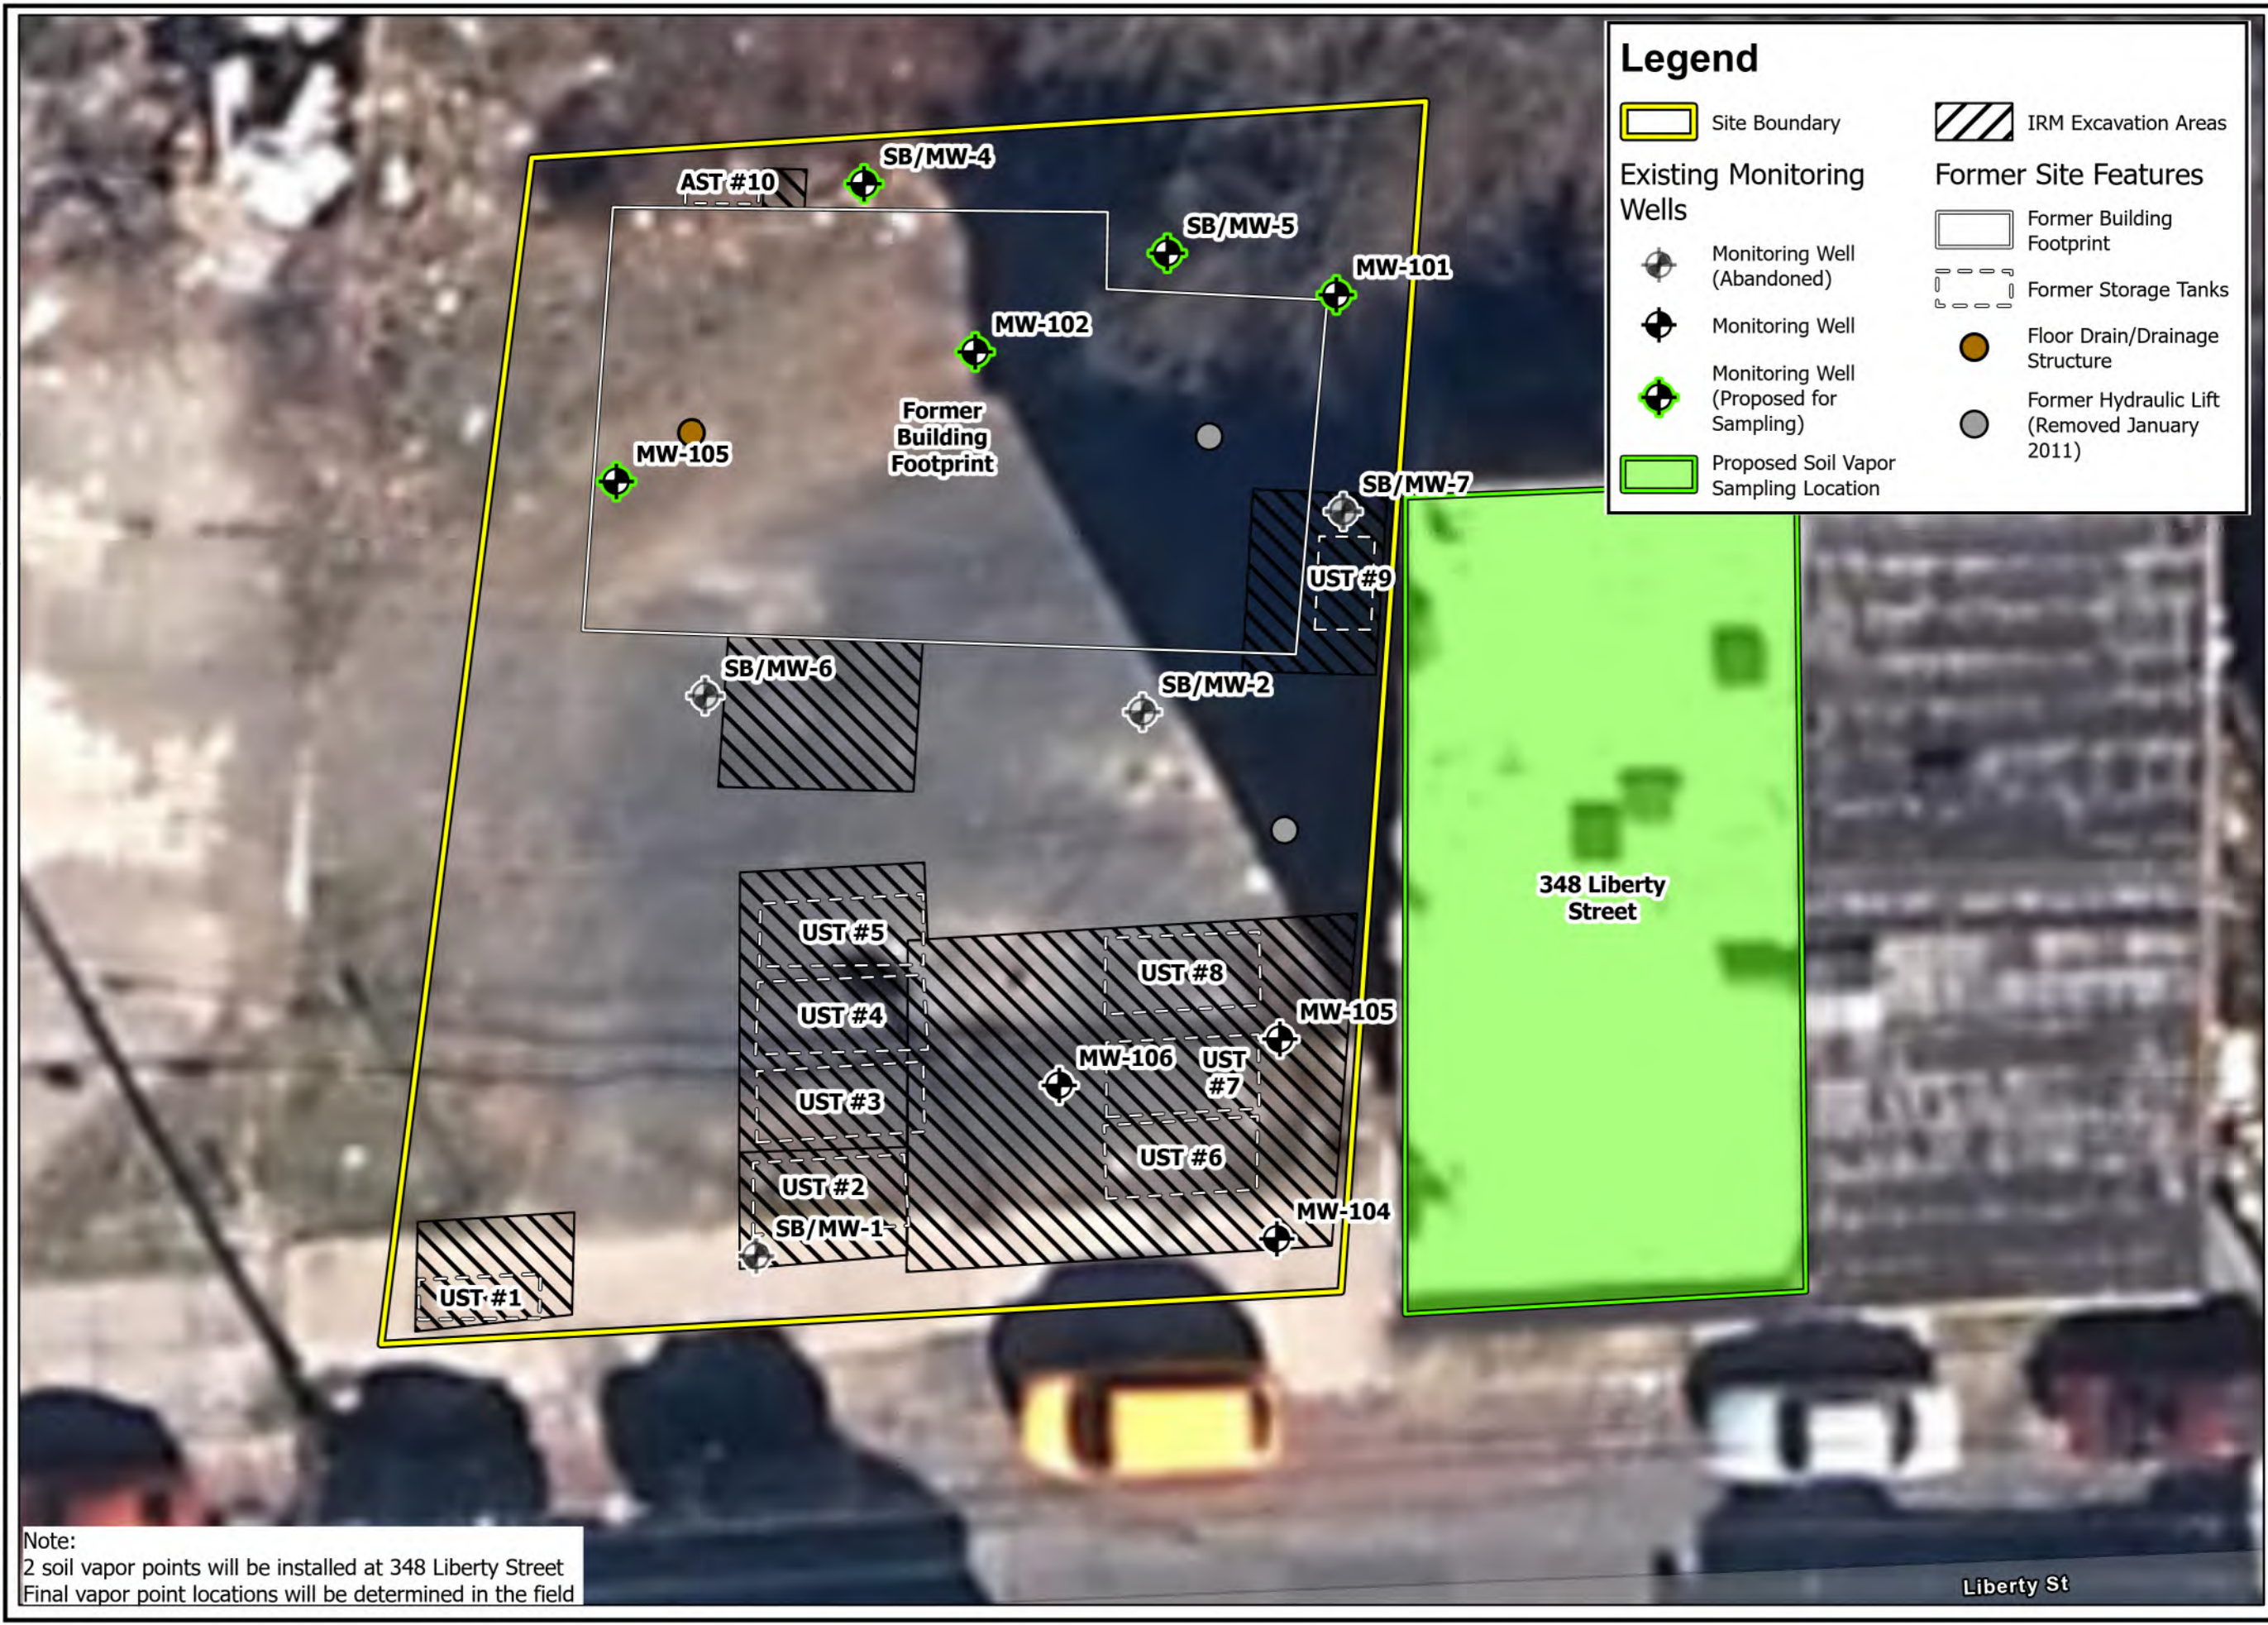


Figure 1
Subject Property Location Map
350-352 Liberty Street
Newburgh, New York
HRP # NEW6313.RA
Scale 1" = 2,000'

USGS Quadrangle Information
 Quad ID: 41074-E1
 Name: Newburgh, New York

ONE FAIRCHILD SQUARE
 SUITE 110
 CLIFTON PARK, NY 12065
 (518) 877-7101
 HRPASSOCIATES.COM

Path: S:\Data\NEWBC - CITY OF NEWBURGH\350-352 LIBERTY ST., NEWBURGH, NY\NEW6313RA - ERP Cap. 350-352 Liberty\GIS\Figures\Figures.aprx



Legend

Site Boundary	IRM Excavation Areas
Existing Monitoring Wells	Former Site Features
Monitoring Well (Abandoned)	Former Building Footprint
Monitoring Well	Former Storage Tanks
Monitoring Well (Proposed for Sampling)	Floor Drain/Drainage Structure
Proposed Soil Vapor Sampling Location	Former Hydraulic Lift (Removed January 2011)

North

0 5 10
 Feet

Revisions	No.	Date

Designed By:	JG
Drawn By:	EWJ
Reviewed By:	MEW

Issue Date:	02/13/2024
Project No:	NEW6313.RA
Sheet Size:	11x17

Proposed Sampling Locations

350-352 Liberty Street
 Newburgh, New York

Figure No.

2

Note:
 2 soil vapor points will be installed at 348 Liberty Street
 Final vapor point locations will be determined in the field

Liberty St

Figure 3: Route and Map to Nearest Hospital and Medical Center

Directions to Montefiore St Luke's Cornwall Hospital

Total Estimated Time: 3 minutes
Total Estimated Distance: 0.6 miles

Begin at 350-352 Liberty Street, Newburgh, NY
End at Montefiore St Luke's Cornwall Hospital
70 Dubois Street, Newburgh, NY

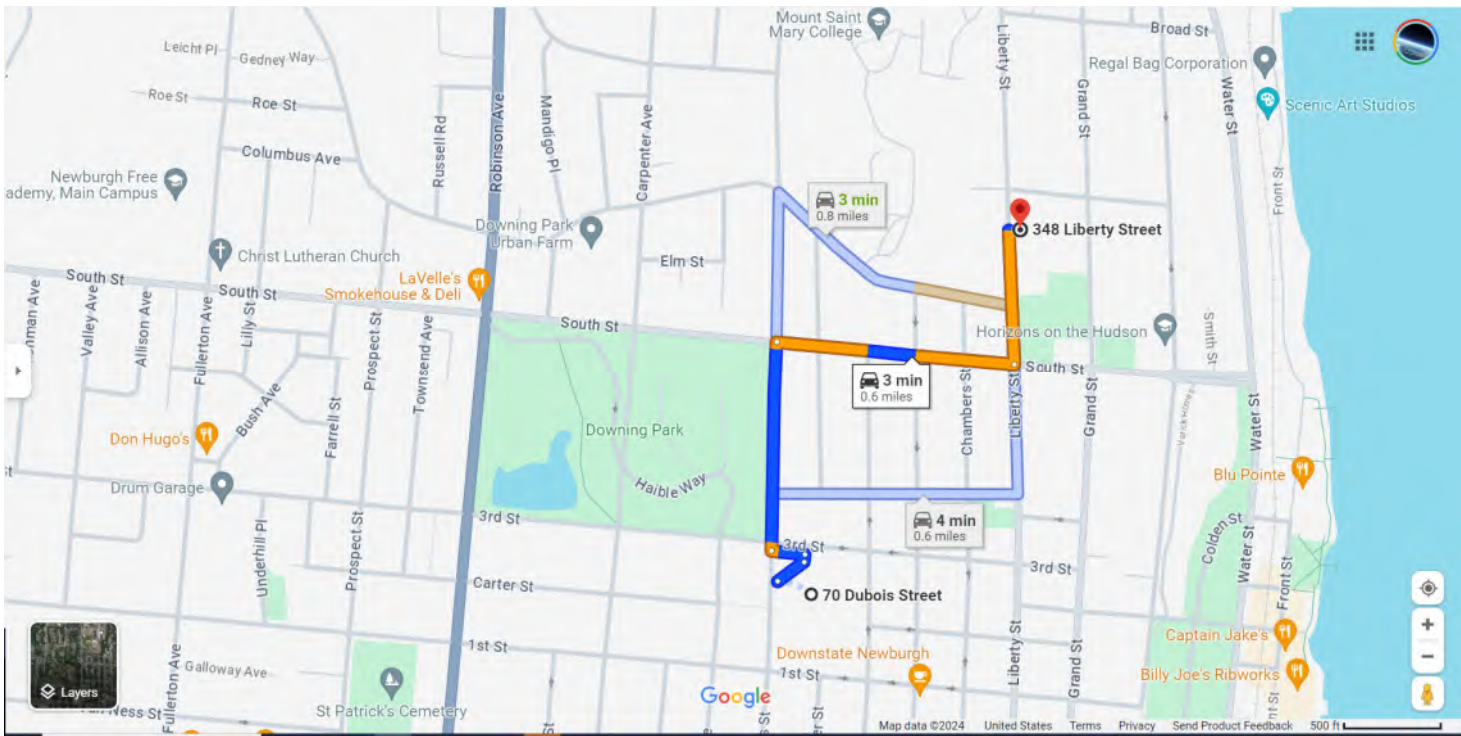


TABLE 1a

Chemical Hazards Known or Suspected On-Site

TABLE 1a
CHEMICAL HAZARDS KNOWN OR SUSPECTED ON-SITE

CONTAMINANT	ODOR THRESHOLD	OSHA PEL ¹	TLV (ACGIH)	OSHA CEILING ² /STEL	IDLH CONC.	ROUTES OF EXPOSURE	SYMPTOMS OF ACUTE EXPOSURE ³
1,1,1 Trichloroethane	44 ppm	350 ppm	350 ppm	---	700 ppm	Inh, Ing, Con	Head, Lass, CNS, Derm
1,1,2-Trichloroethane	---	10 ppm	10 ppm	----	[100 ppm]	Inh, Ing, Abs, Con	Eyes, Nose Irrit, Resp Irrit, CNS, Liver, Kidney Damage, Derm, [Carc]
1,2,4 Trimethylbenzene 1,3,5 Trimethylbenzene		25 mg/m ³	25 ppm	25 mg/m ³	ND	Inh, Ing, Con	Irrit Eyes, Skin, Nose, Throat, Resp Sys, Bron, Hyprochronic Anemia, Head, Drow, Ftg, Dizz, Nau, Inco, Vomit, Conf, Chemical Pneu (aspir lig)
1,1' Biphenyl	0.0062 mg/m ³	0.2 ppm	0.2 ppm	---	100 mg/m ³	Inh	
1,1-Dichloroethane	120 ppm	100 ppm	100 ppm	---	3,000 ppm	Inh, Ing, Con	CNS Depres, Skin Irrit, Liver, Lung and Kidney Damage
1,1-Dichloroethylene	500 ppm	---	5 ppm	---	---	Inh, Con	CNS depress, Resp, [Carc]
1,2-Dichlorobenzene	50 ppm	50 ppm	25 ppm		200 ppm	Inh, Ing, Abs, Con	Irrit, Resp
1,2-Dichloroethylene	26-87 ppm	200 ppm	200 ppm	---	1,000 ppm	Inh, Ing, Con	Vomit, Irrit Eyes, Resp Sys; CNS Depres
1,2-Dichloropropane	130-190 ppm	75 ppm	75 ppm	---	[400 ppm]	Inh, Con, Ing	Eye irritation, Drow, light-headedness; irritated skin, [Carc]
1,3-Dichlorobenzene	---	----	---	----	---	----	----
1,4-Dichlorobenzene	20 ppm	75 ppm	10 ppm	----	[150 ppm]	Inh, Ing	[Carc], Eye Irrit, swelling around eye, headache, nausea, vomiting
1-Methylnaphthalene	0.02 ppm	---	---	---	---	---	---
2,4-Dichlorophenol	1.4007 mg/m ³	---	---	---	---	---	---
2,4-Dimethylphenol	0.001 mg/m ³	---	---	---	---	---	---
2-Methylnaphthalene	0.01 ppm	---	---	---	---	---	---
2-Methylphenol (o-cresol) [skin]	1.4 mg/L	5 ppm	5 ppm	---	250 ppm	Inh, Abs, Ing, Con	Confusion, depression, Resp Fail; difficulty breathing, irregular rapid respiration, weak pulse; skin, eye burns; dermatitis

TABLE 1a
CHEMICAL HAZARDS KNOWN OR SUSPECTED ON-SITE

CONTAMINANT	ODOR THRESHOLD	OSHA PEL ¹	TLV (ACGIH)	OSHA CEILING ² /STEL	IDLH CONC.	ROUTES OF EXPOSURE	SYMPTOMS OF ACUTE EXPOSURE ³
3, 3'-Dichlorobenzidine	---	None	---	---	---	Inh, Abs, Ing, Con	Sens, Derm, Head, Dizz, Burns, GI Upset, [Carc]
4-Isopropyltoluene	---	---	---	---	---	Con, Inh, Ing	Defat, Eryt
Acenephtene	0.5048 mg/m ³	---	---	---	---	---	---
Acenaphthylene	---	---	---	---	---	---	---
Acetone	47.5 mg/m ³	1,000 ppm	500 ppm		2,500 ppm	Ing, Inh, Con	Head, Dizz; Irrit Eyes, Nose, Throat; Derm, CNS, Depress, Derm
Acetonitrile	70 mg/m ³	40 ppm	20 ppm	---	500 ppm	Inh, Ing, Abs, Con	Asphy; Nau, Vomit; Chest Pain; Weak, Stupor, Convuls; Eye Irrit
Aldrin	---	0.25 mg/m ³	0.25 mg/m ³	---	25 mg/m ³	Inh, Abs, Ing, Con	Head, Dizz, Nau, Vomit, Mal, Myo, [Carc]
Anthracene (Coal Tar Pitch)	---	0.2 mg/m ³			[80 mg/m ³]	Inh, Con	Derm, bron, [carc]
Antifreeze		50 ppm	100 mg/m ³ (aerosol)	---	ND	Inh, Ing, Con	Irrit Eyes, Skin, Nose, Throat, Nau, Vomit, Abdom Pain, Lass, Dizz, Stup, Conv, CNS, Depres, Skin Sen
Arsenic	----	0.010 mg/m ³	0.01 mg/m ³	----	[5 mg/m ³]	Abs, Inh, Con, Ing	Derm; GI; Resp Irrit; ulceration of nasal septum; Resp, Irrit, Hyper Pig of Skin, [Carc]
Barium (elemental)	---	0.5 mg/m ³	0.5 mg/m ³		50 mg/m ³ (barium components)	Inh, Ing, Con	Resp. Irrit, GI, Muscle Spasm, Eye Irrit, Slow Pulse; skin burns
Benzene*	4.7 ppm	1 ppm	0.5 ppm	5 ppm	[500 ppm]	Inh, Ing, Abs, Con	Irrit Eyes, Nose, Throat; Head, Nau, Derm, Ftg, Anor, Lass, [Carc]
Benzo(a)anthracene (coal tar pitch)	---	0.2 mg/m ³			[80 mg/m ³]	Inh, Con	[Carc], Derm, Bron
Benzo(a)pyrene (coal tar pitch)	---	0.2 mg/m ³	---		[80 mg/m ³]	Inh, Con	[Carc], Derm, Bron
Benzo(b)fluoranthene (coal tar pitch)	---	0.2 mg/m ³	---		[80 mg/m ³]	Inh, Con	[Carc], Derm, Bron

TABLE 1a
CHEMICAL HAZARDS KNOWN OR SUSPECTED ON-SITE

CONTAMINANT	ODOR THRESHOLD	OSHA PEL ¹	TLV (ACGIH)	OSHA CEILING ² /STEL	IDLH CONC.	ROUTES OF EXPOSURE	SYMPTOMS OF ACUTE EXPOSURE ³
Benzo(g,h,i)perylene (coal tar pitch)	---	0.2 mg/m ³			[80 mg/m ³]	Inh, Con	[Carc], Derm, Bron
Benzo(k)fluoranthene (coal tar pitch)	---	0.2 mg/m ³			[80 mg/m ³]	Inh, Con	[Carc], Derm, Bron
Bis (2-ethylhexyl) Phthalate**	N/A	5 mg/m ³	5 mg/m ³	10 mg/m ³	[5,000 mg/m ³]	Inh, Ing, Con	[Carc], Irrit Eyes
Cadmium (dust)	---	0.005 mg/m ³	Lowest concentration feasible 0.01 mg/m ³	---	[9 mg/m ³]	Inh, Ing	CNS, Resp, Irrit, Vomit, Cough, Head, Chills, Nau, Diarr, Pulm Edema, Dysp, Chest Tight, [Carc]
Carbazole	---	---	---	---	---	Inh	---
Carbon disulfide	0.1-0.2 ppm	20 ppm	1 ppm	30 ppm	500 ppm	Inh, Abs, Ing, Con	Diz, Head, Ftg, Ner, anorexia, trembling hands, loss of fine motor coord, gastritis, eye, skin burns, Derm
Carbon Tetrachloride***	21.4 ppm	10 ppm	5 ppm	25 ppm	[200 ppm]	Inh, Abs, Con, Ing	CNS Depres, Nau, Vomit, Irrit, Irrit Eyes, Skin, Drow, Dizz, [Carc]
Chlorobenzene***	0.98 mg/m ³	75 ppm	10 ppm	---	1,000 ppm	Inh, Ing, Con	Irrit, Drow, CNS, Depres, Eyes, Skin, Nose, Inco.
Chloroform***	85 ppm	50 ppm	10 ppm	50 ppm	[500 ppm]	Inh, Ing, Con, Abs	Dizz, Dullness, Nau, Head, Ftg, Irrit Eyes, Skin, Conf, [Carc]
Chromium	---	1 mg/m ³	0.5 mg/m ³	---	250 mg/m ³	Inh, Ing, Con	Irrit Eyes, Sens Derm
Chrysene (coal tar pitch)		0.2 mg/m ³	---		[80 mg/m ³]	Inh, Con	Derm, Bron, [Carc]
Cis-1-2-Dichloroethylene	---	200 ppm	200 ppm	----	1000 ppm	Inh, Con, Ing	Irrit Eyes, Resp, CNS Depres
Copper (dusts and mists) (fumes)		1 mg/m ³ 0.1 mg/m ³	1 mg/m ³ 0.2 mg/m ³	----	100 mg/m ³	Inh, Ing, Con	Vomit, Derm, CNS, Irrit, Derm, Nau, Taste (metallic)
Cyanide	0.9 mg/m ³	5 mg/m ³	5 mg/m ³ (10 min)	5 mg/m ³	25 mg/m ³	Inh, Ing, Abs, Con	Weak, Head, Nau, Conf, Cyan
Dibenzo(a,h)anthracene						Inh, Ing	
Dichloromethane	540 mg/m ³	25 ppm	50 ppm	125 ppm	[2,300 ppm]	Inh, Abs, Ing, Con	Irrit Eyes, Skin, lass, drow, dizz, Numb, tingl, Nau, [Carc]

TABLE 1a
CHEMICAL HAZARDS KNOWN OR SUSPECTED ON-SITE

CONTAMINANT	ODOR THRESHOLD	OSHA PEL ¹	TLV (ACGIH)	OSHA CEILING ² /STEL	IDLH CONC.	ROUTES OF EXPOSURE	SYMPTOMS OF ACUTE EXPOSURE ³
Diethylphthalate**	---	None	5 mg/m ³	---	N.D.	Inh, Ing, Con	Irrit Eyes, Skin, Nose, Throat, Head, Dizz, Nau, Lac, Possible Polyneur, Vestibular Dysfunc, Pain, Numb, lass, Spasms in Arms and Legs
Di-n-octylphthalate	---	---	---	---	---	Inh, Ing, Con	---
Dimethylphthalate	---	5 mg/m ³	5 mg/m ³	---	2,000 mg/m ³	Inh, Ing, Con	Irrit, Resp, Abdom
Ethyl Benzene*	8.7 mg/m ³	100 ppm	100 ppm	125 ppm	700 ppm	Inh, Abs, Con	Head. Irrit, Derm, Narc., Irrit Eyes, Skin; Coma
Fluoranthene		0.2 mg/m ³	0.2 mg/m ³			Ing, Inh	[Carc]
Fluorine*	6 mg/m ³	0.1 ppm	1 ppm	2 ppm	25 ppm	Inh, Con	
Fuel Oil/#2	----	----	300 ppm	----		Inh, Abs, Ins, Con	Irrit Eyes, Skin, Derm, Head, Ftg, Blurred Vision, Dizz, Conf
Ideno(1,2,3-cd)pyrene		0.2 mg/m ³				Ing, Inh	
Lead (inorganic forms and dust as Pb)****		0.05 mg/m ³	0.05 mg/m ³		100 mg/m ³	Inh, Ing, Con	Irrit, Cns, Vomit, Narco, Weak, Pall, Insom, Lass, Abdom, Constip
Mercury (organic alkyl compounds) [skin]		0.01 mg/m ³	0.01 mg/m ³	0.03 mg/m ³	2 mg/m ³	Inh, Abs, Ing, Con	Irrit Eyes, Skin; Cough & Chest Pain, Bron Pneu, Tremor, Insom, Irrty, Indecision, Head, Ftg, Weak, Stomatitis, Salv, GI Dist, Anor, Low-wgt, Ataxia
Mercury (compounds)	----	0.1 mg/m ³	0.025 mg/m ³	0.1 mg/m ³	10 mg/m ³	Inh, Abs, Ing, Con	Irrit Eyes, Skin; Cough & Chest Pain, Bron Pneu, Tremor, Insom, Irrty, Indecision, Head, Ftg, Weak, Stomatitis, Salv, GI Dist, Anor, Low-wgt, Ataxia
Methanol	13.1150 mg/m ³	200 ppm	200 ppm	---	6,000 ppm	Inh, Abs, Ing, Con	Irrit Eyes, Skin, Resp, Head, drow, dizz, Nau, Vomit, vis dist, Optic, derm
Methyl Ether	----	----	---	----	---	Inh	Poison

TABLE 1a
CHEMICAL HAZARDS KNOWN OR SUSPECTED ON-SITE

CONTAMINANT	ODOR THRESHOLD	OSHA PEL ¹	TLV (ACGIH)	OSHA CEILING ² /STEL	IDLH CONC.	ROUTES OF EXPOSURE	SYMPTOMS OF ACUTE EXPOSURE ³
Methyl Ethyl Ketone (2-Butanone)***	0.7375 mg/m ³	200 ppm	200 ppm	300 ppm	3,000 ppm	Inh, Con, Ing	Irrit Eyes, Skin, Nose, Throat, Head, Dizz, Vomit, Derm
Methylene Chloride	540 mg/m ³	25 ppm	50 ppm	125 ppm	[2,300 ppm]	Inh, Ing, Con, Abs	Ftg, Weak, dizz, drow, Numb, Tingle [carc], Irrit Eyes, Skin, Nau
Mineral Spirit	20 ppm	500 ppm	100 ppm	---	20,000 mg/m ³	Inh, Ing, Con	Irrit Eyes, Nose, Throat, Dizz, Derm, Chemical pneu
Methyl tert butyl ether (MTBE)	---	---	50 ppm	---		Inh, Abs	
Naphtha	0.86 ppm	100 ppm	400 ppm	---	1,000 ppm	Inh, Con, Ing	Light Head, Drow, Irrit, Derm, Irrit Eyes, Skin, Nose
Naphthalene*	0.084 ppm	10 ppm	10 ppm	15 ppm	250 ppm	Inh, Abs, Ing, Con	Eye irritation; headache; confusion, excitement, malaise (vague feeling of ill-being); nausea, vomiting, abdominal pain; irritated bladder; profuse sweating; renal shutdown; dermatitis
Nickel (metal)	---	1 mg/m ³	1.5 mg/m ³	---	[10 mg/m ³]	Inh, Ing, Con	Head, Verti, Nau, Vomit, Pain, Cough, Weak, Convuls, Delirium, Pneu, ,[Carc]
Nitrobenzene	0.0235 mg/m ³	1 ppm	1 ppm	---	200 ppm	Inh, Abs, Ing, Con	Irrit Eyes, Skin, Anoxia, Derm, Anem, Methem
n-Butylbenzene	---	---	---	---	---	---	---
n-Propylbenzene	---	---	---	---	---	---	---
PCBs 42% chlorine (Aroclor 1242)	---	1 mg/m ³ (skin)	1 mg/m ³ (skin)	---	[5 mg/m ³]	Inh, Abs, Ing, Con	Irrit Eyes, Chloracne, Liver Damage [carc]
PCBs 54% chlorine (Aroclor 1254)	---	0.5 mg/m ³ (skin)	0.5 mg/m ³ (skin)	---	[5 mg/m ³]	Inh, Abs, Ing, Con	Irrit Eyes; Chloracne, Liver Damage [carc]
Petroleum Distillates	---	500 ppm	100 ppm		[1,100 ppm]	Inh, Ing, Con	Dizz, Drow, Head, Dry Skin, Nau, Irrit Eyes, Nose, Throat, [Carc]

TABLE 1a
CHEMICAL HAZARDS KNOWN OR SUSPECTED ON-SITE

CONTAMINANT	ODOR THRESHOLD	OSHA PEL ¹	TLV (ACGIH)	OSHA CEILING ² /STEL	IDLH CONC.	ROUTES OF EXPOSURE	SYMPTOMS OF ACUTE EXPOSURE ³
Phenanthrene (Coal Tar Pitch)		0.2 mg/m ³	0.2 mg/m ³		[80 mg/m ³]	Inh, Con	Derm, bron, (carc)
Phenol**	0.1786 mg/m ³	5 ppm	5 ppm	---	250 ppm	Inh, Abs, Ing, Con	Irrit Eyes, Nose, Throat, Anor, Low Wgt, Weak Musc Ache, Pain, Dark Urine, Cyan, Liver, Kidney Damage, Skin, Burns, Derm, Ochronosis, Tremor, Convuls, Twitch
Pyrene		0.2 mg/m ³			[80 mg/m ³]	Inh, Con	[Carc]
Sec-Butylbenzene	---	---	---	---	---	---	---
Selenium	N/A	0.2 mg/m ³	0.2 mg/m ³	Unknown	1 mg/m ³	Inh, Ing, Con	Irrit, Head, Fever, Chills, Skin/Eye Burns, Metallic Taste, GI, Dysp, Bron
Silver (metal and soluble compounds as Ag)	----	0.01 mg/m ³	Metal = 0.1 mg/m ³ Soluble 0.01 mg/m ³		10 mg/m ³	Inh, Ing, Con	Blue-gray Eyes, Nasal Septum, Throat, Skin; Irrit, Ulcer, Skin, GI Dist
Tetrachloroethylene (a.k.a. perchloroethylene)***	4.68 ppm	100 ppm	25 ppm	200 ppm	[150 ppm]	Inh, Ing, Con, Abs	Irrit Eyes, Skin, Nose, throat, Resp. Nau, flush face, Neck, dizz, inco, head, drow, eryth, [Carc]
Toluene*	2.14 ppm	200 ppm	50 ppm	300 ppm	500 ppm	Inh, Abs, Ins, Con	Resp, Irrit, Ftg, Conf, Dizz, Head, Derm, Euph, Head, Dilated Pupils, Lac, Ner, Musc FTg, Insom, Pares, Derm, lass
Petroleum Distillates (naphtha)	10 ppm	100 ppm	400 ppm	---	1,000 ppm	Con, Inh, Ing	---
Trans 1,2-Dichloroethylene	0.3357 mg/m ³	200 ppm	200 ppm	---	1,000 ppm	Inh, Con	Irrit, Resp, CNS depress
Trichloroethylene	21.4 ppm	100 ppm	50 ppm	200 ppm	[1,000 ppm]	Inh, Con, Abs, Ing	Head, Vert, Nau, Vomit, Derm, Vis Dist, Tremors, Som, Nau, Irrit Eyes, Skin, Card Acc., Ftg, [Carc]
Trichlorofluoromethane	28 mg/m ³	1,000 ppm	1,000 ppm		2,000 ppm	Inh, Con, Ing	Inco, trem, derm, card, asph, frost
Trichlorotrifluoroethane	45 ppm	1,000 ppm	1,000 ppm	1,250 ppm	2,000 ppm	Inh, Con, Ing	Irrit Skin, throat, Drow, Derm, CSN, Depress

TABLE 1a
CHEMICAL HAZARDS KNOWN OR SUSPECTED ON-SITE

CONTAMINANT	ODOR THRESHOLD	OSHA PEL ¹	TLV (ACGIH)	OSHA CEILING ² /STEL	IDLH CONC.	ROUTES OF EXPOSURE	SYMPTOMS OF ACUTE EXPOSURE ³
Vinyl Chloride***	10-20 ppm	1 ppm	1 ppm	5 ppm	ND	Inh, Con	Lass, Abdom, Gi Bleeding; Hepatomegaly; Pallor or Cyan of Extremities; Liq: Frostbite; [Carc]
VM&P Naphtha (petroleum naphtha)	---	---	300 ppm	---	ND	Con, Ing, Inh	Irrit Eyes, Nose, Throat, Dizz, drow, head, nau, dry skin, chem. Pneumonitis
Xylene*	4.5 mg/m ³	100 ppm	100 ppm	150 ppm	900 ppm	Inh, Ing, Abs, Con	Dizz, Drow, Irrit, Excite, Nau, Vomit, Eyes, Skin, Nose, Throat
Zinc (oxide)	---	5 mg/m ³	2 mg/m ³	---	500 mg/m ³	Inh	Dry Throat, Cough, Chills, Tight Chest, Blurred Vision
4,4' DDD	---	---	---	---	---	Ing, Inh, Con	---
4,4' DDE	---	---	---	---	---	Ing, Inh, Con	---
4,4' DDT	5.0725 mg/m ³	1 mg/m ³	1 mg/m ³	---	[500 mg/m ³]	Inh, Abs, Ing, Con	Irrit Eyes, Skin, Pares, Tongue, Lips, Face, Trem, Anxi, Dizz, Conf, Mal, Head, Lass, Conv, Paresi Hands, Vomit, [Carc]
Aldrin		0.25 mg/m ³	0.25 mg/m ³	---	[25 mg/m ³]	Inh, Abs, Ing, Con	Head, Dizz, Nau, Vomit, Mal, Myo [Carc]
Chlordane [skin]	0.0084 mg/m ³	0.5 mg/m ³	0.5 mg/m ³		[100 mg/m ³]	Inh, Abs, Ing, Con	Blurred vision, confusion, delirium, cough; abdominal pian, nausea, vomiting diarrhea; irritability, tremor, convulsions [Carc]
EDB	76.8 mg/m ³	20 ppm		30 ppm	[100 ppm]	Inh, Abs	Resp. Irr, Eye Irr. [Carc]
Endosulfan I Endosulfan II	---	0.1 mg/m ³	0.1 mg/m ³	---	N.D.	Inh, Abs, Ing, Con	Irrit, Skin, Nau, Conf, Agit, Flush, Dry, Trem, Conv, Head
Endosulfan Sulfate		---	0.1 mg/m ³	---	---	Ing, Con	---
Endrin	1.8 x 10 ⁻² ppm	0.1 mg/m ³	0.1 mg/m ⁻³	---	2 mg/m ³	Inh, Abs, Ing, Con	Epil Conv, Stup, Head, Dizz, Abdom, Nau, Vomit, Insom, Agress, Conf, Drow, Lass, Anor
Endrin Aldehyde	1.8 x 10 ⁻² ppm	---	---	---	---	Inh, Con	---
Endrin Ketone	---	---	---	---	---	---	---

TABLE 1a
CHEMICAL HAZARDS KNOWN OR SUSPECTED ON-SITE

CONTAMINANT	ODOR THRESHOLD	OSHA PEL ¹	TLV (ACGIH)	OSHA CEILING ² /STEL	IDLH CONC.	ROUTES OF EXPOSURE	SYMPTOMS OF ACUTE EXPOSURE ³
Heptachlor	0.02 ppm	0.5 mg/m ³	0.05 mg/m ³	---	[35 mg/m ³]	Inh, Abs, Ing, Con	In animals, Trem, Conv, [Carc]
Heptachlor epoxide	0.02 ppm	---	0.05 mg/m ³	---	---	Ing, Inh	Trem, Conv, [Carc]
Hydrogen Cyanide(Hydrocyanic Acid)	0.9 mg/m ³	10 ppm (11 mg/m ³)	4.7 ppm	4.7 ppm	50 ppm	Con, Inh, Ing, Abs	Asphy & death at high levels; Weak, Head, Conf, Nau, Vomit, Incr. Rate and Depth of Respiration or Respiration Slow and Gasping

NOTES

* = Constituent found in ETPH

**=Constituent found in Acid/Base/Neutral Extractable Compounds

***=Constituent found in Volatile Organic Compounds

****=Constituent found in Leaching Lead

¹PEL = Permissible Exposure Limit. If no PEL is available, then the NIOSH Threshold Limit Value (TLV) should be used, if available.

²Ceiling limit or Short Term Exposure Limit (STEL), if available. Again, the NIOSH TLV may be used if no OSHA standard exists.

³Abbreviations are contained on the next page

[] = Potential Occupational Carcinogen

ND = Not Been Determined

ABBREVIATIONS

abdom = Abdominal	lac = Lacrimination (discharge of tears)
abs = Absorption	lass = Lassitude (weakness, exhaustion)
aggress = Aggressiveness	li-head = Lightheadedness
agit = Agitation	liq = Liquid
anor = Anorexia	low-wgt = Weight loss
anos = Anosmia (loss of the sense of smell)	mal = Malaise (vague feeling of discomfort)
Anxi = anxiety	malnut = Malnutrition
anem – Anemia	methem = Methemoglobinemia
aspir = Aspiration	myo = Myoclonic (jerks of limbs)
asph – asphyxia	mg/m = milligrams/cubic meter
bron = Bronchitis	muc memb = Mucous membrane
bron pneu = Bronchitis pneumonitis	mus ftg = Muscle fatigue
[carc] = Potential occupational carcinogen	narco = Narcosis
Card = Cardiac arrhythmias	nau = Nausea
CNS = Central nervous system	ner = Nervousness
conf = Confusion	numb = Numbness
constip = Constipation	optic = Optic nerve damage (blindness)
con = Skin and/or eye contact	pall = Facial pallor
conv = Convulsions	parap = Paralysis
corn = Corneal	ppm = Parts per million
cyan = Cyanosis	pares = Paresthesia
defat = Defatting	paresi = Paresis
depres = Depressant/Depression	peri neur = Peripheral neuropathy
derm = Dermatitis	pneu = Pneumonitis
diarr = Diarrhea	prot = Proteinuria
dist = Disturbance	pulm = Pulmonary
dizz = Dizziness	peri neur = Peripheral neuropathy
drow = Drowsiness	pneu = Pneumonia
dry = Dry mouth	prot = Proteinuria
dysp = Dyspnea (breathing difficulty)	pulm = Pulmonary
emphy = Emphysema	repro = Reproductive
epil-conv = Epileptiform convulsions	resp = Respiratory
eryth = Erythema	skin sen = skin sensitization
euph = Euphoria	salv = Salvation
fib = Fibrosis	som = Somnolence (sleepiness unnatural drowsiness)
frost = frostbite	subs = Substernal (occurring beneath the sternum)
ftg = Fatigue	stup = Stupor
flush = Flushing	sys = System
GI = Gastrointestinal	tingle = tingle limbs
head = Headache	trem – Tremors
hyperpig = Hyperpigmentation	verti = Vertigo
inco = Incoordination	vis dist = Visual disturbance
ing = Ingestion	vomit = Vomiting
inh = Inhalation	weak = Weakness
inj = Injury	
insom = Insomnia	
irrit = Irritation	
irrt = Irritability	

TABLE 1b:

Physical Hazards Known or Suspected On-Site

TABLE 1b			
PHYSICAL HAZARDS KNOWN OR SUSPECTED ON-SITE			
Description of Hazard	Methods to Identify and Minimize	Potential for Occurrence	Potentially Affected Tasks
1. Inclement weather	<ul style="list-style-type: none"> Determine probable weather conditions prior to arrival at site Avoid working during hurricanes, blizzards, persistent heavy rain or snow, close thunderstorms 	Moderate	All on-site tasks
2. Heat/cold Stress	<ul style="list-style-type: none"> Determine probable weather conditions prior to arrival at site Wear proper clothing Monitoring of yourself and team mates Drink plenty of fluids Utilize work breaks as often as necessary Avoid working in extreme cold conditions 	Moderate	All on-site tasks
3. Slip, trip, and fall hazards caused by irregular and loose rocky topography	<ul style="list-style-type: none"> Wear appropriate footwear to increase traction when possible Be aware of surroundings 	Low	All on-site tasks
4. Vehicle Traffic	<ul style="list-style-type: none"> Wear appropriate high visibility clothing Block off the work area to prevent vehicles from entering 	Moderate	Groundwater Sampling, Soil Capping, Waste Management
5. Skin contact with volatile organic compounds, semi volatile organic compounds, metals, TPHs,	<ul style="list-style-type: none"> Wear appropriate protective clothing Follow proper decontamination procedures Report potential exposure symptoms immediately 	Low	Groundwater Sampling, Waste Management, Soil Capping, Decontamination

TABLE 1b
PHYSICAL HAZARDS KNOWN OR SUSPECTED ON-SITE

Description of Hazard	Methods to Identify and Minimize	Potential for Occurrence	Potentially Affected Tasks
6. Operating Heavy Equipment	<ul style="list-style-type: none"> • Utilizing proper equipment operation methods • Maintain safe clearance distances • Wear appropriate eye/ear protection according to manufacturer's recommendations 	Moderate	Soil Capping
5. Utilities	<ul style="list-style-type: none"> • Complete a Call Before You Dig markout prior to the work start date • Obtain buried private lines information from and clear sampling locations with Site Contact • Avoid using heavy equipment in close proximity to overhead utilities • Inspect soil capping areas for Call Before You Dig markings; inspect catch basins and manholes to determine buried pipeline directions prior to sampling 	Moderate	Soil Capping

APPENDIX A

Safety and Logistics Planning Call Log



Date of Call _____
Work Assignment Number / Task _____
DEC Site Name and Number _____

Names of Attendees (and phone #s):

HRP
HRP PM _____
HRP SSO _____
HRP Other _____
HRP Other _____
HRP Other _____

Subcontractors
Driller Contact _____
Utility Survey _____
Surveyor _____
Construction _____
Other _____

DEC DEC PM _____
DEC Other _____

Other _____

Brief Description Scope of Work (Task Specific):

Use additional forms for additional tasks.

Logistics:

Date of Work: _____
Time to Meet: _____
Site Contact (phone): _____
Notification of Site Contact made by: _____
Describe any unusual site-specific conditions/logistics here (if any): _____

Notes below as needed:

Water Needed? Source Confirmed? Y / N
Electricity Needed? Source Confirmed? Y / N
Water Storage Needed? Y / N
Water Discharges? Permits Needed/Attained? Y / N
Air Monitoring - CAMP? Y / N

Will there be intrusive work? Y / N
Locations marked in the field? Y / N
NYS Code Rule 753/Dig Safe System: Ticket Number: _____
Confirmed that mark-out complete? Y / N

Anticipated Subsurface Conditions (Geology, Utilites, etc.): _____
Anticipated Depth to Groundwater: _____
Will NAPL/Product be Present: Y / N Describe: _____

Safety and Logistics Call Log
DEC009808

Will there be any other parties entering the work zones? Describe control measures:

Lab and Equipment:

Equipment: Y / N PID IP Water Level Indicator CAMP Pumps controllers Survey Eq. GPS
Other: _____

Lab Analytical Required: Y / N VOCs SVOCs Metals PFAS 1,4D PCBs Pest/Herb
Other: _____

Media Tested: Soil Sediment Groundwater Surface Water Sub-slab[soil] Vapor Indoor Air
Notes of sample collection methods: _____

Bottle Order Received/ Checked? Y / N
How will samples be conveyed to lab? _____
Sample TAT? Standard 24 hr TAT 48 hr TAT Other: _____

Review Site - Specific Hazards (per Site-Specific HASP to be provided prior to all parties):

Site Constituents of Concern: VOCs SVOCs PFAS 1,4-Dioxane
(circle) HVOCs
AVOCs
metals pesticides herbicides
Asbestos PCBs
Lead Other: _____
Biologicals

Site Setting: Urban Suburban Unoccupied
Traffic Bystanders Crime Plants Animals Vectors
Overhead Utilities Underground Utilities Large Equipment
High Voltage Flood/Tidal Limited Access
Confined Spaces

Task-Specific Chemicals and Hazards (describe): _____
PPE Level (circle): D C B A Modifications: _____
Glove types: _____ Face covering needed? Y/ N
Other specialty PPE: _____

Safe to Work Alone: Y / N
Other Precautions: Y / N Describe: _____

COVID 19 Protocols to be Observed: Y / N

Waste Containment:

How/ where will materials be contained, labelled, stored, or disposed? _____

Miscellaneous:

APPENDIX B

Personnel Log

PERSONNEL LOG				
Name	Representing	Date	Time In	Time Out

APPENDIX C

Supervisor's Investigation Report

WHAT WAS THE NATURE OF THE INJURY OR ILLNESS?	Tell us the body part that was affected and how it was affected – be specific Examples: strained lower back; chemical burn on hand	
WHAT WAS THE ROOT CAUSE OF THE INCIDENT? List other individual involved in Section 3. COULD INCIDENT HAVE BEEN AVOIDED? HOW?	Get all the facts by studying the Job and situation involved. Question by use of WHY - WHAT – WHERE – WHEN – WHO – HOW Were there other factors (e.g., noise, ventilation, illumination, fatigue, age, medical conditions) that contributed to the accident?	
WAS TRAINING FOR THE WORK ACTIVITY PROVIDED: TYPE: DATES:	WERE WARNING SIGNS OR LABELS POSTED:	
WHAT SHOULD BE DONE? HOW CAN INCIDENT BE AVOIDED IN THE FUTURE?	WAS PERSONAL PROTECTIVE EQUIPMENT USED? NEEDED: AVAILABLE: CONTRIBUTED TO INJURY:	
WHAT HAVE YOU DONE THUS FAR?	Take or recommend action, depending upon your authority. Follow up – was action effective?	
HOW WILL THIS IMPROVE OPERATIONS?	OBJECTIVE Eliminate job hindrances	
Completed by:	Reviewed by:	Date

Section 2.0: Complete By Supervisor or Human Resources Manager

Name: Role (witness, observer, injured, participant, etc.):	Address: Phone Number
Name: Role:	Address: Phone Number
Name: Role:	Address: Phone Number
Name: Role:	Address: Phone Number
Name: Role:	Address: Phone Number
Name: Role:	Address: Phone Number

Section 3.0: Corrective Actions (To be Completed by OHSM and CHSO)

Are corrective actions warranted? Yes No If so, proceed with corrective action list

Corrective Actions. List long term actions to be taken as a result of incident (use additional sheets if needed)	How was the corrective action implemented?	Target date of completion

OHSM Name:	CHSO Name:
OHSM Signature:	CHSO Signature:

End of incident report. Section 4.0 is to be completed and maintained by the Human Resources Department.



Section 4.0: Complete By Human Resources Manager

Incident Report Case No. _____

The information on this page is considered CONFIDENTIAL and must be treated as such. This page will only be available to Human Resources Department or the employee's supervisor.

Insured Name:	Employee Hire Dates: Start at Company: Current Position:
Policy Number:	Is employee a company: Owner, Officer, Neither.
Employee Soc. Sec. No.:	Marital Status: Spouse Name:
Was Employee Pay Interrupted, or paid in full for time:	Employee Pay Period: Weekly, Bi-Weekly, Monthly, Other (specify)
Employee Compensated by hourly or salary? Wage Information: (tips, bonuses, commission)	Typical No. of hours worked per day____, hours per week____. Typical Start of day time_____, end of day time_____.
Date of Stop Work: Date Returned to Work:	How often has employee visited doctor/hospital?
Doctor: Authorized by Co.: Y / N Street: City/Town: Zip Code: Phone Number: Authorized by Co.: Y / N	Hospital: Street: City/Town: Zip Code: Phone Number: Authorized by Co.: Y /N
Was the employee treated in an emergency room? <input type="checkbox"/> Yes <input type="checkbox"/> No	Was employee hospitalized overnight as an in-patient? <input type="checkbox"/> Yes <input type="checkbox"/> No If so, for how many days? _____

APPENDIX D

Daily Job Brief Record

JOB BRIEF RECORD

Person Conducting	350-352 Liberty Street Site Site Name/Address	City of Newburgh/NEW6312.RA HRP Client Name/Job #
Justin Starr (NYSDEC) – 518-660-1347 Client Contact/Phone	Bryan Sherman HRP H&S Rep.	Jesse Zahn (518) 877-7101 HRP Supervisor
Date/Time	Number Attending	Weather

Designated Competent Person: _____

Description of Work: _____

Attendees (use additional sheets as needed):

Name	Company	Signature

Emergency Telephone Numbers

Hospital Name & Location:

FIRE / POLICE / AMBULANCE: 911
Montefiore St. Luke's Cornwall Hospital, 350-352 Liberty Street, Newburgh, NY

NYSDEC Spill Line: 1-518-457-7362
 Health & Safety Manager:

National Response Center: 800-424-8802 CBYD: 800-922-4455
 Jake Smith: 864.289.0311 1508

HAZARDS

- | | | | | |
|--------------------------------------|--|---|--|---|
| <input type="checkbox"/> Toxic | <input type="checkbox"/> Extreme Cold/Heat | <input type="checkbox"/> Soil Excavation | <input type="checkbox"/> Vehicle Traffic | <input type="checkbox"/> Powerwashing |
| <input type="checkbox"/> Corrosive | <input type="checkbox"/> Drains/Sumps | <input type="checkbox"/> Tank Excavation | <input type="checkbox"/> Hot Work | <input type="checkbox"/> Elevated Work Area |
| <input type="checkbox"/> Flammable | <input type="checkbox"/> Sharp Objects | <input type="checkbox"/> Trenching | <input type="checkbox"/> Vac Truck | <input type="checkbox"/> Live Electrical Circuits |
| <input type="checkbox"/> Combustible | <input type="checkbox"/> Drilling in Soil | <input type="checkbox"/> Floor Holes | <input type="checkbox"/> Ladders | <input type="checkbox"/> Pneumatic Tools |
| <input type="checkbox"/> Reactive | <input type="checkbox"/> Lighting | <input type="checkbox"/> Working on/near Water | <input type="checkbox"/> Noise | <input type="checkbox"/> Drum Handling |
| <input type="checkbox"/> Path Waste | <input type="checkbox"/> Slips/Trips/Falls | <input type="checkbox"/> Underground/Overhead Utilities | <input type="checkbox"/> Lifting | <input type="checkbox"/> Abrasive Blasting |
| <input type="checkbox"/> Asbestos | <input type="checkbox"/> Lead | | | |

PERSONAL SAFETY

- | | | | |
|---|--|---|---|
| <input type="checkbox"/> Supplied Air Respirator | <input type="checkbox"/> SAR w/Egress Bottle | <input type="checkbox"/> SCBA | <input type="checkbox"/> Air Purifying Respirator Cartridge: _____ |
| <input type="checkbox"/> Fully Encapsulating Suit | <input type="checkbox"/> Flash Suit | <input type="checkbox"/> NOMEX (flam resistant) | <input type="checkbox"/> Protected Coveralls, Type: _____ |
| <input type="checkbox"/> Overboots | <input type="checkbox"/> Lifebelt/Lanyard | <input type="checkbox"/> Hardhats | <input type="checkbox"/> Outer Gloves, Type: _____ |
| <input type="checkbox"/> Safety Glasses | <input type="checkbox"/> Chemical Goggles | <input type="checkbox"/> Face Shield | <input type="checkbox"/> Inner Gloves, Type: _____ |
| <input type="checkbox"/> Reflective Vests | <input type="checkbox"/> Eye Wash | <input type="checkbox"/> Safety Shower | <input type="checkbox"/> First Aid Kit <input type="checkbox"/> PFD's |

- Hearing Protection Evacuation Plan Communications Properly Sloped Trench Excavation/ Ventilation

FIRE SAFETY

- Fire Extinguishers Hot Work Permit Fire Blanket Explosion-Proof Equipment
 Equipment Grounded & Bonded Non-Sparking Tools Eliminate Ignition Sources Area Kept Wet
 Smoking Area Designated Location: _____ Alarm Box in Area, Location: _____
 Fire Hose Laid Out

ISOLATE EQUIPMENT

- Establish Exclusion Zone/Traffic Cones Work Signs
 Stop Transfers Caution Tape Area
 GFCIS Temporary Fencing

ELECTRICAL EQUIPMENT

- LockOut/TagOut Non-Conductive Tools
 Equipment Grounded FR Suits/Coveralls

AIR MONITORING

Type of Meter: _____ Date last calibrated: _____

SUBSTANCE	LEVEL B MAX.	ACTION LEVEL/LEVEL C MAX.	LEVEL D MAX.

Health & Safety Comments / Topics & Safety Rules Reviewed / Questions / Concerns:

Contaminants of Concern: _____

HEALTH & SAFETY SIGNATURE: _____ Date: _____

Is there a Site-Specific or Generic Health & Safety Plan available on-site? Yes No

HAZARD ZONES NOT APPLICABLE, GENERAL WORK AREA

Level D Modified Level D Level C

Anything above Level C, foreman should use a Confined Space Permit/Form.

Note: HOT WORK requires a hot work permit and minimum 20# fire extinguisher. Foreman or HSM must record at least one contaminant of concern above. Toxic plants may be considered a COC if no chemical hazards are expected.

LEVEL C

Respirator Type: _____

Name	Zone	Time In	Time Out	Decon Type

Before performing Level C work, ALL employees must review HRP's Respiratory Protection Program - a copy of which must be on-site along with a HASP.

APPENDIX E

Equipment Calibration Log

EQUIPMENT CALIBRATION LOG		
Instrument	Calibration Date	Calibrated By

APPENDIX F

HRP Safe Work Permit



HRP SAFE WORK PERMIT

GENERAL SOP
No: SOP #

Rev: 01

Page 1 of 5

General Information:			
Project Number:		Project Location*:	
Client: United Illuminating			
	Contact Name		Contact Phone
Contractor (If applicable): CES			
	Contractor Name		Contractor Phone
Site Characterization:			
Include site plan figure within attachments to identify rally point, exits, or known hazards (if available or applicable)			
Purpose and Scope of Work:			
HRP to perform:			
Client or Contractor Required Training or other Site Specific Requirements:			
Created By:		Approved by:	
Reviewed with affected HRP employees:			
Employee Name	Signature	Date	Contact Number

***If the Site is located outside the United States, check the US State Department page for any travel warnings or restrictions**

HRP Standard Operating Procedures (SOPs) to be used during Site Work.	
SOP Number and Revision	SOP Title



Project Hazard Assessment				
Check if Project Involves:	Yes	No	Initial to Verify Completion	Criteria
Alone work/alone travel	<input type="checkbox"/>	<input type="checkbox"/>		Touch base with HRP manager or HRP admin prior to alone work/travel. Communicate when expected back. Communicate once work complete and back home/office.
Hot Work (<i>Welding, Grinding, etc.</i>)	<input type="checkbox"/>	<input type="checkbox"/>		Hot Work Permit Issued – Fire Watch Required
Electrical Work	<input type="checkbox"/>	<input type="checkbox"/>		LOTO, confirm zero energy
Rigging or Heavy Lifting	<input type="checkbox"/>	<input type="checkbox"/>		Load Ratings, Employee Certification
Scaffolds	<input type="checkbox"/>	<input type="checkbox"/>		Competent Person Inspection Required
Confined Space Entry	<input type="checkbox"/>	<input type="checkbox"/>		Permit or Reclassification Form Required
Hazardous Chemicals	<input type="checkbox"/>	<input type="checkbox"/>		Chemical Names and SDS review with Employees
Ladders and/or Stairways	<input type="checkbox"/>	<input type="checkbox"/>		Proper Rating, No Metal Ladders, Current Inspection
Work at Heights	<input type="checkbox"/>	<input type="checkbox"/>		Training (verified), PPE, Approved Anchor Points or Fall Protection
Lockout Tagout	<input type="checkbox"/>	<input type="checkbox"/>		Training (verified), site first lock on
Excavation/Ground Penetration	<input type="checkbox"/>	<input type="checkbox"/>		Line Locate performed (<i>verify UI has performed mark-outs</i>)
Roof Work	<input type="checkbox"/>	<input type="checkbox"/>		Fall protection within 6 feet of edge
Walking/Working Surface Hazards	<input type="checkbox"/>	<input type="checkbox"/>		Special gear/footwear to avoid falls on sloped and/or slick areas & marking fixed stumble-hazards in pathways
Portable Electrical Tools, cords	<input type="checkbox"/>	<input type="checkbox"/>		GFCI used, No damaged cords, Inspected
Fire System Impairment	<input type="checkbox"/>	<input type="checkbox"/>		External notifications made
Blocked Exits, Locked Gates	<input type="checkbox"/>	<input type="checkbox"/>		Post signs and alternate exits, secure access arrangement
Demolition/Construction Site	<input type="checkbox"/>	<input type="checkbox"/>		Training (verified), PPE
Hazardous Materials Abatement/Inspection	<input type="checkbox"/>	<input type="checkbox"/>		Training (verified), PPE
Roadway Traffic	<input type="checkbox"/>	<input type="checkbox"/>		Training (verified), PPE
Ergonomic Concerns	<input type="checkbox"/>	<input type="checkbox"/>		Repetitive motion, uneven or cluttered work surface
Other (list):	<input type="checkbox"/>	<input type="checkbox"/>		
Required Permits		PPE Required for Job or Required by Client		
<input type="checkbox"/> None	<input type="checkbox"/> Subsurface Work	<input type="checkbox"/> Safety Glasses	<input type="checkbox"/> Hearing Protection	
<input type="checkbox"/> Confined Space	<input type="checkbox"/> Scaffold Inspection	<input type="checkbox"/> Safety Toe Shoes	<input type="checkbox"/> Class 2 Safety Vest	
<input type="checkbox"/> Hot Work	<input type="checkbox"/> Working At Heights	<input type="checkbox"/> Metatarsal Guards	<input type="checkbox"/> Class 3 Safety Vest	
<input type="checkbox"/> Excavation Checklist:	<input type="checkbox"/> Other Permits: City of Milford Street Opening Permit	<input type="checkbox"/> Cut Resistant Gloves/Sleeves	<input checked="" type="checkbox"/> Chemical Resistant Gloves	
	<input type="checkbox"/> CT DOT Encroachment Permit	<input type="checkbox"/> Protective Clothing: <input type="checkbox"/> Tyvek, <input type="checkbox"/> Chemical, <input type="checkbox"/> Biological, <input type="checkbox"/> Radiological <input type="checkbox"/> Other:	<input type="checkbox"/> Respirator: <input type="checkbox"/> Face Mask <input type="checkbox"/> Dust Mask <input type="checkbox"/> N95 Respirator** <input type="checkbox"/> Air purifying Respirator**	
		<input type="checkbox"/> Hard hat		
		<input type="checkbox"/> Other PPE Not Listed:		



Special Considerations				
<input type="checkbox"/> Chemical	<input type="checkbox"/> Tight/Crowded Area	<input type="checkbox"/> Laceration/Abrasion	<input type="checkbox"/> Struck By	<input type="checkbox"/> Press
<input type="checkbox"/> Explosion	<input type="checkbox"/> Fire/heat	<input type="checkbox"/> Temperature Extremes (hot/cold)	<input type="checkbox"/> Struck Against	<input type="checkbox"/> Allergies
<input type="checkbox"/> Slip/Trip/Fall	<input type="checkbox"/> High Pressure	<input type="checkbox"/> Noise	<input type="checkbox"/> Automated Equip.	<input type="checkbox"/> Animal Feces
<input type="checkbox"/> Exposed Movement	<input type="checkbox"/> Lighting/Visibility	<input type="checkbox"/> Caught in/on	<input type="checkbox"/> Conveyors	<input type="checkbox"/> Mold
<input type="checkbox"/> Ergonomics <input type="checkbox"/> Repetitive Motion <input type="checkbox"/> Vibration <input type="checkbox"/> Other	<input type="checkbox"/> Dust/Silica <input type="checkbox"/> Working Near Water	<input type="checkbox"/> Lead <input type="checkbox"/> PCB <input type="checkbox"/> Asbestos	<input type="checkbox"/> Insects/pests <input type="checkbox"/> Toxic Plants <input type="checkbox"/> Dangerous Wildlife	<input type="checkbox"/> Electricity <input type="checkbox"/> Radiation <input type="checkbox"/> Poor Cell Reception

** Please consult with Office Health and Safety Manager prior to using respiratory protection.

Emergency Phone Numbers	
Emergency Contact	Phone Number
Project Manager:	
Site Safety Officer:	
Fire, Ambulance, Police Emergency:	
Police Department (routine calls):	
Fire Department (routine calls):	
Hospital: Distance from the work site*:	
Poison Control Center	
National Response Center:	
State/Local Oil and Chemical Spill Reporting:	

*Map and directions to the following medical facility are provided in an attachment to this permit.



REVISION APPROVAL LOG (Project Team)			
REV. #	PREPARED BY	REVIEWED BY	APPROVED BY
00	Date: Name: Sign:	Date: Name: Sign:	Date: Name: Sign:
01	Date: Name: Sign:	Date: Name: Sign:	Date: Name: Sign:
02	Date: Name: Sign:	Date: Name: Sign:	Date: Name: Sign:



REVISION APPROVAL LOG			
REV. #	PREPARED BY	REVIEWED BY	APPROVED BY
00	Date: 1/18/2021 Name: Scot Frost Sign: <i>Scot Frost</i>	Date: 1/20/2021 Name: Jackie Baxley Sign: <i>Jackie Baxley</i>	Date: 1/20/2021 Name: Tad Goetcheus Sign: <i>Tad A. Goetcheus</i>
01	Date: 12/15/2022 Name: Scot Frost Sign: <i>Scot Frost</i>	Date: 12/15/2022 Name: Jackie Baxley Sign: <i>Jackie Baxley</i>	Date: 12/15/2022 Name: Tad Goetcheus Sign: <i>Tad A. Goetcheus</i>
02	Date: Name: Sign:	Date: Name: Sign:	Date: Name: Sign:

CHANGE / REVIEW RECORDS			
REVISION DATE	REVISION LEVEL	REASON / REVISION DESCRIPTION	APPROVED BY
1/20/2021	00	Original Release. Document developed to provide a new hazard assessment "checklist" process for Non-Hazwoper project sites. Replaces the use of former Site HASP document.	Tad Goetcheus
12/15/2022	01	Revision added: new hazard checks with associated criteria to improve the hazard assessment and other project planning details to the form e.g., project number, emergency contact table, worker review for signoff, and SOPs to be referenced.	Tad Goetcheus

APPENDIX G

Safety Data Sheets

(for chemicals brought to the Site)

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**1 Identification of the substance/mixture and of the supplier****1.1 Product identifier****Trade Name:** Alconox**Synonyms:****Product number:** Alconox**1.2 Application of the substance / the mixture :** Cleaning material/Detergent**1.3 Details of the supplier of the Safety Data Sheet**

Manufacturer	Supplier
Alconox, Inc. 30 Glenn Street White Plains, NY 10603 1-914-948-4040	Not Applicable

Emergency telephone number:**ChemTel Inc**

North America: 1-800-255-3924

International: 01-813-248-0585

2 Hazards identification**2.1 Classification of the substance or mixture:**

In compliance with EC regulation No. 1272/2008, 29CFR1910/1200 and GHS Rev. 3 and amendments.

Hazard-determining components of labeling:

Tetrasodium Pyrophosphate
Sodium tripolyphosphate
Sodium Alkylbenzene Sulfonate

2.2 Label elements:

Skin irritation, category 2.
Eye irritation, category 2A.

Hazard pictograms:**Signal word:** Warning**Hazard statements:**

H315 Causes skin irritation.
H319 Causes serious eye irritation.

Precautionary statements:

P264 Wash skin thoroughly after handling.
P280 Wear protective gloves/protective clothing/eye protection/face protection.
P302+P352 If on skin: Wash with soap and water.
P305+P351+P338 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing.
P321 Specific treatment (see supplemental first aid instructions on this label).
P332+P313 If skin irritation occurs: Get medical advice/attention.
P362 Take off contaminated clothing and wash before reuse.
P501 Dispose of contents and container as instructed in Section 13.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**Additional information:** None.**Hazard description****Hazards Not Otherwise Classified (HNOC):** None**Information concerning particular hazards for humans and environment:**

The product has to be labelled due to the calculation procedure of the "General Classification guideline for preparations of the EU" in the latest valid version.

Classification system:

The classification is according to EC regulation No. 1272/2008, 29CFR1910/1200 and GHS Rev. 3 and amendments, and extended by company and literature data. The classification is in accordance with the latest editions of international substances lists, and is supplemented by information from technical literature and by information provided by the company.

3 Composition/information on ingredients**3.1 Chemical characterization :** None**3.2 Description :** None**3.3 Hazardous components (percentages by weight)**

Identification	Chemical Name	Classification	Wt. %
CAS number: 7758-29-4	Sodium tripolyphosphate	Skin Irrit. 2 ; H315 Eye Irrit. 2; H319	12-28
CAS number: 68081-81-2	Sodium Alkylbenzene Sulfonate	Acute Tox. 4; H303 Skin Irrit. 2 ; H315 Eye Irrit. 2; H319	8-22
CAS number: 7722-88-5	Tetrasodium Pyrophosphate	Skin Irrit. 2 ; H315 Eye Irrit. 2; H319	2-16

3.4 Additional Information : None.**4 First aid measures****4.1 Description of first aid measures****General information:** None.**After inhalation:**

Maintain an unobstructed airway.

Loosen clothing as necessary and position individual in a comfortable position.

After skin contact:

Wash affected area with soap and water.

Seek medical attention if symptoms develop or persist.

After eye contact:

Rinse/flush exposed eye(s) gently using water for 15-20 minutes.

Remove contact lens(es) if able to do so during rinsing.

Seek medical attention if irritation persists or if concerned.

After swallowing:

Rinse mouth thoroughly.

Seek medical attention if irritation, discomfort, or vomiting persists.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**4.2 Most important symptoms and effects, both acute and delayed**

None

4.3 Indication of any immediate medical attention and special treatment needed:

No additional information.

5 Firefighting measures**5.1 Extinguishing media****Suitable extinguishing agents:**

Use appropriate fire suppression agents for adjacent combustible materials or sources of ignition.

For safety reasons unsuitable extinguishing agents : None**5.2 Special hazards arising from the substance or mixture :**

Thermal decomposition can lead to release of irritating gases and vapors.

5.3 Advice for firefighters**Protective equipment:**

Wear protective eye wear, gloves and clothing.

Refer to Section 8.

5.4 Additional information :

Avoid inhaling gases, fumes, dust, mist, vapor and aerosols.

Avoid contact with skin, eyes and clothing.

6 Accidental release measures**6.1 Personal precautions, protective equipment and emergency procedures :**

Ensure adequate ventilation.

Ensure air handling systems are operational.

6.2 Environmental precautions :

Should not be released into the environment.

Prevent from reaching drains, sewer or waterway.

6.3 Methods and material for containment and cleaning up :

Wear protective eye wear, gloves and clothing.

6.4 Reference to other sections : None**7 Handling and storage****7.1 Precautions for safe handling :**

Avoid breathing mist or vapor.

Do not eat, drink, smoke or use personal products when handling chemical substances.

7.2 Conditions for safe storage, including any incompatibilities :

Store in a cool, well-ventilated area.

7.3 Specific end use(s):

No additional information.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015

Revision : 12.10.2015

Trade Name: Alconox

8 Exposure controls/personal protection



8.1 Control parameters :

7722-88-5, Tetrasodium Pyrophosphate, OSHA TWA 5 mg/m3.

8.2 Exposure controls

Appropriate engineering controls:

Emergency eye wash fountains and safety showers should be available in the immediate vicinity of use or handling.

Respiratory protection:

Not needed under normal conditions.

Protection of skin:

Select glove material impermeable and resistant to the substance.

Eye protection:

Safety goggles or glasses, or appropriate eye protection.

General hygienic measures:

Wash hands before breaks and at the end of work.

Avoid contact with skin, eyes and clothing.

9 Physical and chemical properties

Appearance (physical state, color):	White and cream colored flakes - powder	Explosion limit lower: Explosion limit upper:	Not determined or not available. Not determined or not available.
Odor:	Not determined or not available.	Vapor pressure at 20°C:	Not determined or not available.
Odor threshold:	Not determined or not available.	Vapor density:	Not determined or not available.
pH-value:	9.5 (aqueous solution)	Relative density:	Not determined or not available.
Melting/Freezing point:	Not determined or not available.	Solubilities:	Not determined or not available.
Boiling point/Boiling range:	Not determined or not available.	Partition coefficient (n-octanol/water):	Not determined or not available.
Flash point (closed cup):	Not determined or not available.	Auto/Self-ignition temperature:	Not determined or not available.
Evaporation rate:	Not determined or not available.	Decomposition temperature:	Not determined or not available.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015

Revision : 12.10.2015

Trade Name: Alconox			
Flammability (solid, gaseous):	Not determined or not available.	Viscosity:	a. Kinematic: Not determined or not available. b. Dynamic: Not determined or not available.
Density at 20°C:	Not determined or not available.		

10 Stability and reactivity

- 10.1 Reactivity :** None
- 10.2 Chemical stability :** None
- 10.3 Possibility hazardous reactions :** None
- 10.4 Conditions to avoid :** None
- 10.5 Incompatible materials :** None
- 10.6 Hazardous decomposition products :** None

11 Toxicological information

11.1 Information on toxicological effects :

Acute Toxicity:

Oral:

: LD50 > 5000 mg/kg oral rat - Product .

Chronic Toxicity: No additional information.

Skin corrosion/irritation:

Sodium Alkylbenzene Sulfonate: Causes skin irritation. .

Serious eye damage/irritation:

Sodium Alkylbenzene Sulfonate: Causes serious eye irritation .

Tetrasodium Pyrophosphate: Rabbit - Risk of serious damage to eyes .

Respiratory or skin sensitization: No additional information.

Carcinogenicity: No additional information.

IARC (International Agency for Research on Cancer): None of the ingredients are listed.

NTP (National Toxicology Program): None of the ingredients are listed.

Germ cell mutagenicity: No additional information.

Reproductive toxicity: No additional information.

STOT-single and repeated exposure: No additional information.

Additional toxicological information: No additional information.

12 Ecological information

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**12.1 Toxicity:**

Sodium Alkylbenzene Sulfonate: Fish, LC50 1.67 mg/l, 96 hours.

Sodium Alkylbenzene Sulfonate: Aquatic invertebrates, EC50 Daphnia 2.4 mg/l, 48 hours.

Sodium Alkylbenzene Sulfonate: Aquatic Plants, EC50 Algae 29 mg/l, 96 hours.

Tetrasodium Pyrophosphate: Fish, LC50 - other fish - 1,380 mg/l - 96 h.

Tetrasodium Pyrophosphate: Aquatic invertebrates, EC50 - Daphnia magna (Water flea) - 391 mg/l - 48 h.

12.2 Persistence and degradability: No additional information.**12.3 Bioaccumulative potential:** No additional information.**12.4 Mobility in soil:** No additional information.**General notes:** No additional information.**12.5 Results of PBT and vPvB assessment:****PBT:** No additional information.**vPvB:** No additional information.**12.6 Other adverse effects:** No additional information.**13 Disposal considerations****13.1 Waste treatment methods (consult local, regional and national authorities for proper disposal)****Relevant Information:**

It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities. (US 40CFR262.11).

14 Transport information**14.1 UN Number:** None
ADR, ADN, DOT, IMDG, IATA**14.2 UN Proper shipping name:** None
ADR, ADN, DOT, IMDG, IATA**14.3 Transport hazard classes:**
ADR, ADN, DOT, IMDG, IATA
Class: None
Label: None
LTD. QTY: None**US DOT****Limited Quantity Exception:** None**Bulk:****RQ (if applicable):** None**Proper shipping Name:** None**Hazard Class:** None**Packing Group:** None**Marine Pollutant (if applicable):** No additional information.**Non Bulk:****RQ (if applicable):** None**Proper shipping Name:** None**Hazard Class:** None**Packing Group:** None**Marine Pollutant (if applicable):** No additional information.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015

Trade Name: Alconox	
Comments: None	Comments: None
14.4 Packing group: ADR, ADN, DOT, IMDG, IATA	None
14.5 Environmental hazards :	None
14.6 Special precautions for user:	None
Danger code (Kemler):	None
EMS number:	None
Segregation groups:	None
14.7 Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code: Not applicable.	
14.8 Transport/Additional information:	
Transport category:	None
Tunnel restriction code:	None
UN "Model Regulation":	None

15 Regulatory information**15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture.**
North American

SARA Section 313 (specific toxic chemical listings): None of the ingredients are listed. Section 302 (extremely hazardous substances): None of the ingredients are listed.
CERCLA (Comprehensive Environmental Response, Clean up and Liability Act) Reportable Spill Quantity: None of the ingredients are listed.
TSCA (Toxic Substances Control Act): Inventory: All ingredients are listed. Rules and Orders: Not applicable.
Proposition 65 (California): Chemicals known to cause cancer: None of the ingredients are listed. Chemicals known to cause reproductive toxicity for females: None of the ingredients are listed. Chemicals known to cause reproductive toxicity for males: None of the ingredients are listed. Chemicals known to cause developmental toxicity: None of the ingredients are listed.

Canadian Canadian Domestic Substances List (DSL): All ingredients are listed.

EU

REACH Article 57 (SVHC): None of the ingredients are listed.

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015**Revision :** 12.10.2015**Trade Name:** Alconox**Germany MAK:** Not classified.**Asia Pacific****Australia****Australian Inventory of Chemical Substances (AICS):** All ingredients are listed.**China****Inventory of Existing Chemical Substances in China (IECSC):** All ingredients are listed.**Japan****Inventory of Existing and New Chemical Substances (ENCS):** All ingredients are listed.**Korea****Existing Chemicals List (ECL):** All ingredients are listed.**New Zealand****New Zealand Inventory of Chemicals (NZOIC):** All ingredients are listed.**Philippines****Philippine Inventory of Chemicals and Chemical Substances (PICCS):** All ingredients are listed.**Taiwan****Taiwan Chemical Substance Inventory (TSCI):** All ingredients are listed.**16 Other Information****Abbreviations and Acronyms:** None**Summary of Phrases****Hazard statements:**

H315 Causes skin irritation.

H319 Causes serious eye irritation.

Precautionary statements:

P264 Wash skin thoroughly after handling.

P280 Wear protective gloves/protective clothing/eye protection/face protection.

P302+P352 If on skin: Wash with soap and water.

P305+P351+P338 If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing.

P321 Specific treatment (see supplemental first aid instructions on this label).

P332+P313 If skin irritation occurs: Get medical advice/attention.

P362 Take off contaminated clothing and wash before reuse.

P501 Dispose of contents and container as instructed in Section 13.

Manufacturer Statement:

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

NFPA: 1-0-0

Safety Data Sheet

according to 1907/2006/EC (REACH), 1272/2008/EC (CLP), 29CFR1910/1200 and GHS Rev. 3

Effective date: 12.08.2015

Revision : 12.10.2015

Trade Name: Alconox

HMIS: 1-0-0

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Distilled water

Product Number : 07-6061

Brand : Katayama OEM Partner

REACH No. : A registration number is not available for this substance as the substance or its uses are exempted from registration, the annual tonnage does not require a registration or the registration is envisaged for a later registration deadline.

CAS-No. : 7732-18-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture**

Not a hazardous substance or mixture.

2.2 GHS Label elements, including precautionary statements

Not a hazardous substance or mixture.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS**3.1 Substances**

Formula : H₂O H₂O

Molecular Weight : 18.02 g/mol

CAS-No. : 7732-18-5

EC-No. : 231-791-2

No ingredients are hazardous according to OSHA criteria.
No components need to be disclosed according to the applicable regulations.

4. FIRST AID MEASURES**4.1 Description of first aid measures****If inhaled**

If not breathing give artificial respiration

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

no data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.

5.2 Special hazards arising from the substance or mixture

no data available

5.3 Advice for firefighters

no data available

5.4 Further information

The product itself does not burn.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

For personal protection see section 8.

6.2 Environmental precautions

no data available

6.3 Methods and materials for containment and cleaning up

Wipe up with absorbent material (e.g. cloth, fleece).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

No special storage conditions required.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice.

Personal protective equipment

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Respiratory protection

No special protective equipment required.

Control of environmental exposure

Prevent product from entering drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid Colour: colourless
b) Odour	no data available
c) Odour Threshold	no data available
d) pH	6.0 - 8.0 at 25 °C (77 °F)
e) Melting point/freezing point	0.0 °C (32.0 °F)
f) Initial boiling point and boiling range	100 °C (212 °F) - lit.
g) Flash point	not applicable
h) Evaporation rate	no data available
i) Flammability (solid, gas)	no data available
j) Upper/lower flammability or explosive limits	no data available
k) Vapour pressure	no data available
l) Vapour density	no data available
m) Relative density	1.000 g/cm ³ at 3.98 °C (39.16 °F)
n) Water solubility	completely miscible
o) Partition coefficient: n-octanol/water	no data available
p) Auto-ignition temperature	no data available
q) Decomposition temperature	no data available
r) Viscosity	no data available
s) Explosive properties	no data available
t) Oxidizing properties	no data available

9.2 Other safety information

no data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

no data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

no data available

10.4 Conditions to avoid

no data available

10.5 Incompatible materials

no data available

10.6 Hazardous decomposition products

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

no data available

Inhalation: no data available

Dermal: no data available

no data available

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitisation

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

no data available

Specific target organ toxicity - single exposure

no data available

Specific target organ toxicity - repeated exposure

no data available

Aspiration hazard

no data available

Additional Information

RTECS: ZC0110000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

no data available

12.2 Persistence and degradability

not applicable

12.3 Bioaccumulative potential

no data available

12.4 Mobility in soil

no data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

no data available

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Taking into account local regulations the product may be disposed of as waste water after neutralisation.

14. TRANSPORT INFORMATION**DOT (US)**

Not dangerous goods

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

REACH No. : A registration number is not available for this substance as the substance or its uses are exempted from registration, the annual tonnage does not require a registration or the registration is envisaged for a later registration deadline.

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

No SARA Hazards

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

Water

CAS-No.
7732-18-5

Revision Date

New Jersey Right To Know Components

Water

CAS-No.
7732-18-5

Revision Date

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

HMIS Rating

Health hazard: 0

Chronic Health Hazard:

Flammability: 0

Physical Hazard 0

NFPA Rating

Health hazard: 0

Fire Hazard: 0

Reactivity Hazard: 0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.2

Revision Date: 02/24/2014

Print Date: 11/13/2016

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 1 of 8

Hydrochloric Acid,ACS

SECTION 1 : Identification of the substance/mixture and of the supplier

Product name : Hydrochloric Acid,ACS

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: S25358

Recommended uses of the product and uses restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific
9 Barnhart Drive, Hanover, PA 17331

Supplier Details:

Fisher Science Education
15 Jet View Drive, Rochester, NY 14624

Emergency telephone number:

Fisher Science Education Emergency Telephone No.: 800-535-5053

SECTION 2 : Hazards identification

Classification of the substance or mixture:



Corrosive

Serious eye damage, category 1
Corrosive to metals, category 1
Skin corrosion, category 1B



Irritant

Specific target organ toxicity following single exposure, category 3

Corr. Metals 1

Corr. Skin 1B

Eye Damage 1

STOT. SE 3

Signal word :Danger

Hazard statements:

May be corrosive to metals

Causes severe skin burns and eye damage

May cause respiratory irritation

Precautionary statements:

If medical advice is needed, have product container or label at hand

Keep out of reach of children

Read label before use

Use only outdoors or in a well-ventilated area

Wear protective gloves/protective clothing/eye protection/face protection

Keep only in original container

Do not get in eyes, on skin, or on clothing

Wash skin thoroughly after handling

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 2 of 8

Hydrochloric Acid,ACS

IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do.
Continue rinsing
Immediately call a POISON CENTER or doctor/physician
Specific treatment (see supplemental first aid instructions on this label)
Wash contaminated clothing before reuse
Absorb spillage to prevent material damage
Store in a well ventilated place. Keep container tightly closed
Store locked up
Store in corrosive resistant stainless steel container with a resistant inner liner
Dispose of contents and container to an approved waste disposal plant

Other Non-GHS Classification:

WHMIS



NFPA/HMIS



NFPA SCALE (0-4)

Health	3
Flammability	0
Physical Hazard	1
Personal Protection	X

HMIS RATINGS (0-4)

SECTION 3 : Composition/information on ingredients

Ingredients:		
CAS 7647-01-0	Hydrochloric Acid, ACS	30-50 %
CAS 7732-18-5	Water	50-70 %
Percentages are by weight		

SECTION 4 : First aid measures

Description of first aid measures

After inhalation: Move exposed individual to fresh air. Loosen clothing as necessary and position individual in a comfortable position. Seek medical attention if irritation or coughing persists.

After skin contact: Wash affected area with soap and water. Immediately remove contaminated clothing and shoes. Rinse thoroughly with plenty of water for at least 15 minutes. Immediately seek medical attention.

After eye contact: Protect unexposed eye. Flush thoroughly with plenty of water for at least 15

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 3 of 8

Hydrochloric Acid,ACS

minutes. Remove contact lenses while rinsing. Continue rinsing eyes during transport to hospital.

After swallowing: Rinse mouth thoroughly. Do not induce vomiting. Have exposed individual drink sips of water. Immediately seek medical attention.

Most important symptoms and effects, both acute and delayed:

Inhalation may cause irritation to nose and upper respiratory tract, ulceration, coughing, chest tightness and shortness of breath. Higher concentrations cause tachypnoea, pulmonary oedema and suffocation. Ingestion may cause corrosion of lips, mouth, oesophagus and stomach, dysphagia and vomiting. Pain, eye ulceration, conjunctival irritation, cataracts and glaucoma may occur following eye exposure. Erythema and skin irritation, as well as chemical burns to skin and mucous membranes may arise following skin exposure. Potential sequelae following ingestion of hydrochloric acid include perforation, scarring of the oesophagus or stomach and stricture formation causing dysphagia or gastric outlet obstruction. In some cases, RADS may develop. Respiratory symptoms may take up to 36 hours to develop. Symptoms of burning sensation, cough, wheezing, laryngitis, shortness of breath, spasm, inflammation, edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema. Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin.

Indication of any immediate medical attention and special treatment needed:

Provide SDS to Physician. Physician should treat symptomatically.

SECTION 5 : Firefighting measures

Extinguishing media

Suitable extinguishing agents: Use water, dry chemical, chemical foam, carbon dioxide, or alcohol-resistant foam.

For safety reasons unsuitable extinguishing agents:

Special hazards arising from the substance or mixture:

Combustion products may include carbon oxides or other toxic vapors. If in contact with metals toxic fumes may be released.

Advice for firefighters:

Protective equipment: Wear protective eyewear, gloves, and clothing. Refer to Section 8. Wear respiratory protection.

Additional information (precautions): Thermal decomposition can produce poisoning chlorine. Hydrochloric acid reacts also with many organic materials with liberation of heat. Avoid inhaling gases, fumes, dust, mist, vapor, and aerosols. Avoid contact with skin, eyes, and clothing.

SECTION 6 : Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Ensure adequate ventilation. Ensure that air-handling systems are operational.

Environmental precautions:

Should not be released into environment. Prevent from reaching drains, sewer, or waterway.

Methods and material for containment and cleaning up:

Always obey local regulations. If necessary use trained response staff or contractor. Evacuate personnel to safe areas. Containerize for disposal. Refer to Section 13. Keep in suitable closed containers for disposal. Soak up with inert absorbent material and dispose of as hazardous waste. Cover spill with soda ash or calcium carbonate. Mix and add water to form slurry. Wear protective eyewear, gloves, and clothing. Refer to Section 8.

Reference to other sections:

SECTION 7 : Handling and storage

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 4 of 8

Hydrochloric Acid,ACS

Precautions for safe handling:

Prevent formation of aerosols. Never use hot water and never add water to the acid. Do not allow contact between hydrochloric acid, metal, and organics. Follow good hygiene procedures when handling chemical materials. Refer to Section 8. Prevent contact with skin, eyes, and clothing. Follow proper disposal methods. Refer to Section 13. Do not eat, drink, smoke, or use personal products when handling chemical substances. Use only in well ventilated areas. Avoid splashes or spray in enclosed areas.

Conditions for safe storage, including any incompatibilities:

Store in a cool location. Keep away from food and beverages. Protect from freezing and physical damage. Store away from incompatible materials. Provide ventilation for containers. Keep container tightly sealed. Containers for hydrochloric acid must be made from corrosion resistant materials: glass, polyethylene, polypropylene, polyvinyl chloride, carbon steel lined with rubber or ebonite.

SECTION 8 : Exposure controls/personal protection



Control Parameters:

7647-01-0, Hydrochloric Acid, ACGIH: 2 ppm Ceiling
7647-01-0, Hydrochloric Acid, NIOSH: 5 ppm Ceiling; 7 mg/m³ Ceiling

Appropriate Engineering controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor and mists below the applicable workplace exposure limits (Occupational Exposure Limits-OELs) indicated above. Emergency eye wash fountains and safety showers should be available in the immediate vicinity of handling.

Respiratory protection:

Not required under normal conditions of use. Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. When necessary use NIOSH approved breathing equipment.

Protection of skin:

Select glove material impermeable and resistant to the substance. Select glove material based on rates of diffusion and degradation. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Use proper glove removal technique without touching outer surface. Avoid skin contact with used gloves. Wear protective clothing.

Eye protection:

Faceshield (8-inch minimum). Tightly fitting safety goggles.

General hygienic measures:

Perform routine housekeeping. Wash hands before breaks and immediately after handling the product. Avoid contact with skin, eyes, and clothing. Before re-wearing wash contaminated clothing.

SECTION 9 : Physical and chemical properties

Appearance (physical state,color):	Clear, colorless liquid.	Explosion limit lower: Explosion limit upper:	Non Explosive Non Explosive
Odor:	Pungent odor	Vapor pressure:	5.7mmHg @ 0C
Odor threshold:	0.3 - 14.9 mg/m ³	Vapor density:	1.27 (Air=1)
pH-value:	< 1	Relative density:	1.0 - 1.2

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 5 of 8

Hydrochloric Acid,ACS

Melting/Freezing point:	- 74 C	Solubilities:	Miscible
Boiling point/Boiling range:	81.5 - 110 C	Partition coefficient (n-octanol/water):	Not Determined
Flash point (closed cup):	Not Applicable	Auto/Self-ignition temperature:	Not Determined
Evaporation rate:	>1.00	Decomposition temperature:	Not Determined
Flammability (solid,gaseous):	non combustible	Viscosity:	a. Kinematic:Not Determined b. Dynamic: Not Determined
Density: Not Determined Hydrochloric Acid: MW is36.46			

SECTION 10 : Stability and reactivity

Reactivity:Reacts violently with bases and is corrosive.

Chemical stability:No decomposition if used and stored according to specifications.

Possible hazardous reactions:Attacks many metals in the presence of water forming flammable explosive gas (hydrogen).Reacts violently with oxidants forming toxic gas (chlorine).

Conditions to avoid:Incompatible materials.

Incompatible materials:Bases, Amines, Alkali metals, Metals, permanganates (potassium permanganate), Fluorine, Metal acetylides, Hexalithium disilicide.

Hazardous decomposition products:Hydrogen chloride gas.Carbon oxides.

SECTION 11 : Toxicological information

Acute Toxicity:		
Inhalation:	7647-01-0	LD50 Rat 3124 ppm/hour
Oral:	7647-01-0	LD50 Rat 238 - 277 mg/kg
Dermal:	7647-01-0	LD50 Rabbit >5010 mg/kg
Chronic Toxicity: No additional information.		
Corrosion Irritation:		
Dermal:	7647-01-0	Skin - rabbit Result: Causes burns.
Ocular:	7647-01-0	Eyes - rabbit Result: Corrosive to eyes
Sensitization: No additional information.		
Single Target Organ (STOT):		7647-01-0: The substance or mixture is classified as specific target organ toxicant, single exposure, category 3 with respiratory tract irritation.
Numerical Measures: No additional information.		
Carcinogenicity: No additional information.		
Mutagenicity: No additional information.		

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 6 of 8

Hydrochloric Acid,ACS

Reproductive Toxicity:

No additional information.

SECTION 12 : Ecological information

Ecotoxicity

7647-01-0: Toxicity to fish LC50 - Gambusia affinis (Mosquito fish) - 282 mg/l - 96 h (Hydrochloric acid)

Persistence and degradability:

Bioaccumulative potential:

Mobility in soil:

Other adverse effects:

SECTION 13 : Disposal considerations

Waste disposal recommendations:

Do not allow product to reach sewage system or open water. It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11). Contact a licensed professional waste disposal service to dispose of this material. Dispose of empty containers as unused product. Product or containers must not be disposed together with household garbage. Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations. Ensure complete and accurate classification.

SECTION 14 : Transport information

UN-Number

1789

UN proper shipping name

HYDROCHLORIC ACID

Transport hazard class(es)



Class:

8 Corrosive substances

Packing group:II

Environmental hazard:

Transport in bulk:

Special precautions for user:

SECTION 15 : Regulatory information

United States (USA)

SARA Section 311/312 (Specific toxic chemical listings):

Acute

SARA Section 313 (Specific toxic chemical listings):

7647-01-0 Hydrochloric Acid

RCRA (hazardous waste code):

None of the ingredients is listed

TSCA (Toxic Substances Control Act):

All ingredients are listed.

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 7 of 8

Hydrochloric Acid,ACS

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

7647-01-0 Hydrochloric Acid 5000 lbs

Proposition 65 (California):

Chemicals known to cause cancer:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for females:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for males:

None of the ingredients is listed

Chemicals known to cause developmental toxicity:

None of the ingredients is listed

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

None of the ingredients is listed

Canadian NPRI Ingredient Disclosure list (limit 1%):

7647-01-0 Hydrochloric Acid

SECTION 16 : Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations. Note: The responsibility to provide a safe workplace remains with the user. The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment. The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material. It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases:

Abbreviations and acronyms:

IMDG: International Maritime Code for Dangerous Goods

PNEC: Predicted No-Effect Concentration (REACH)

CFR: Code of Federal Regulations (USA)

SARA: Superfund Amendments and Reauthorization Act (USA)

RCRA: Resource Conservation and Recovery Act (USA)

TSCA: Toxic Substances Control Act (USA)

NPRI: National Pollutant Release Inventory (Canada)

DOT: US Department of Transportation

IATA: International Air Transport Association

GHS: Globally Harmonized System of Classification and Labelling of Chemicals

ACGIH: American Conference of Governmental Industrial Hygienists

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA)

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 8 of 8

Hydrochloric Acid,ACS

HMIS: Hazardous Materials Identification System (USA)

WHMIS: Workplace Hazardous Materials Information System (Canada)

DNEL: Derived No-Effect Level (REACH)

Effective date : 01.08.2015

Last updated : 03.20.2015

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.29.2014

Page 1 of 7

Nitric Acid, 3M

SECTION 1 : Identification of the substance/mixture and of the supplier

Product name : Nitric Acid, 3M

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: S25860

Recommended uses of the product and uses restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific
9 Barnhart Drive, Hanover, PA 17331

Supplier Details:

Fisher Science Education
15 Jet View Drive, Rochester, NY 14624

Emergency telephone number:

Fisher Science Education Emergency Telephone No.: 800-535-5053

SECTION 2 : Hazards identification

Classification of the substance or mixture:



Oxidizing

Oxidizing liquids, category 3



Corrosive

Serious eye damage, category 1
Skin corrosion, category 1B

Ox. liq. 3

Skin corrosion/irritation - Skin Corr. 1B

Eye Damage 1

Signal word :Danger

Hazard statements:

May intensify fire; oxidizer

Causes severe skin burns and eye damage

Causes serious eye damage

Precautionary statements:

If medical advice is needed, have product container or label at hand

Keep out of reach of children

Read label before use

Keep away from heat/sparks/open flames/hot surfaces. No smoking

Wear protective gloves/protective clothing/eye protection/face protection

Do not breathe dust/fume/gas/mist/vapours/spray

Do not eat, drink or smoke when using this product

Take any precaution to avoid mixing with combustibles

Keep/Store away from clothing/combustible materials

Wash skin thoroughly after handling

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.29.2014

Page 2 of 7

Nitric Acid, 3M

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing
Immediately call a POISON CENTER or doctor/physician
IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower
Wash contaminated clothing before reuse
IF SWALLOWED: Rinse mouth. Do NOT induce vomiting
Specific treatment (see supplemental first aid instructions on this label)
In case of fire: Use agents recommended in section 5 for extinction
Store locked up
Dispose of contents/container to ...

Other Non-GHS Classification:

WHMIS



NFPA/HMIS



NFPA SCALE (0-4)

Health	3
Flammability	0
Physical Hazard	2
Personal Protection	X

HMIS RATINGS (0-4)

SECTION 3 : Composition/information on ingredients

Ingredients:		
CAS 7697-37-2	Nitric Acid	26.03 %
CAS 7732-18-5	Deionized Water	73.97 %
Percentages are by weight		

SECTION 4 : First aid measures

Description of first aid measures

After inhalation: Move exposed individual to fresh air. Loosen clothing as necessary and position individual in a comfortable position. Seek medical advice if discomfort or irritation persists.

After skin contact: Wash affected area with soap and water. Rinse or flush skin/hair gently with water for at least 30 minutes. Seek immediate medical attention

After eye contact: Protect unexposed eye. Remove contact lens(es) if able to do so during rinsing. Rinse or flush eye gently with water for at least 30 minutes, lifting upper and lower lids. Seek immediate medical attention (ophthalmologist)

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.29.2014

Page 3 of 7

Nitric Acid, 3M

After swallowing: Rinse mouth thoroughly. Do not induce vomiting. Have exposed individual drink sips of water. Seek medical attention if irritation, discomfort or vomiting persists.

Most important symptoms and effects, both acute and delayed:

Headache, Shortness of breath.Irritation/burns, all routes of exposure.May cause severe burns, blindness and/or permanent damage. May cause burns, deep penetrating ulcerations of the skin, delayed tissue destruction, redness, pain. May cause gastrointestinal irritation with nausea, vomiting and diarrhea;

Indication of any immediate medical attention and special treatment needed:

If seeking medical attention, provide SDS document to physician.

SECTION 5 : Firefighting measures

Extinguishing media

Suitable extinguishing agents: Does not burn. Use extinguishing media appropriate for surrounding fire.If in laboratory setting, follow laboratory fire suppression procedures. Use appropriate fire suppression agents for adjacent combustible materials or sources of ignition

For safety reasons unsuitable extinguishing agents:

Special hazards arising from the substance or mixture:

Combustion products may include carbon oxides or other toxic vapors.Nitrogen oxides (NOx)

Advice for firefighters:

Protective equipment:

Additional information (precautions): Move product containers away from fire or keep cool with water spray as a protective measure, where feasible.

SECTION 6 : Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Wear protective equipment. Use respiratory protective device against the effects of fumes/dust/aerosol. Keep unprotected persons away. Ensure adequate ventilation.Keep away from ignition sources. Protect from heat.Stop the spill, if possible. Contain spilled material by diking or using inert absorbent. Transfer to a disposal or recovery container.

Environmental precautions:

Prevent from reaching drains, sewer or waterway. Collect contaminated soil for characterization per Section 13

Methods and material for containment and cleaning up:

If in a laboratory setting, follow Chemical Hygiene Plan procedures.Collect liquids using vacuum or by use of absorbents. Place into properly labeled containers for recovery or disposal. If necessary, use trained response staff/contractor.

Reference to other sections:

SECTION 7 : Handling and storage

Precautions for safe handling:

Prevent formation of aerosols. Follow good hygiene procedures when handling chemical materials. Do not eat, drink, smoke, or use personal products when handling chemical substances. If in a laboratory setting, follow Chemical Hygiene Plan.Use only in well ventilated areas.Avoid splashes or spray in enclosed areas.No smoking.Keep away from heat and sources of ignition.

Conditions for safe storage, including any incompatibilities:

Store in a cool location. Provide ventilation for containers. Avoid storage near extreme heat, ignition sources or open flame. Store away from foodstuffs. Store away from oxidizing agents.Store in cool, dry conditions in well sealed containers. Keep container tightly sealed.Store with like hazards. Storage class (TRGS 510): Oxidizing

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.29.2014

Page 4 of 7

Nitric Acid, 3M

hazardous materials

SECTION 8 : Exposure controls/personal protection



Control Parameters:

7697-37-2, Nitric Acid, NIOSH 4 ppm STEL; 10 mg/m³ STEL
7697-37-2, Nitric Acid , NIOSH 2 ppm TWA; 5 mg/m³ TWA
7697-37-2 , Nitric Acid , ACGIH 4 ppm STEL
7697-37-2, Nitric Acid , ACGIH 2 ppm TWA

Appropriate Engineering controls:

Emergency eye wash fountains and safety showers should be available in the immediate vicinity of use/handling. Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor or mists below the applicable workplace exposure limits (Occupational Exposure Limits-OELs) indicated above.

Respiratory protection:

Not required under normal conditions of use. Use suitable respiratory protective device when high concentrations are present. Use suitable respiratory protective device when aerosol or mist is formed. For spills, respiratory protection may be advisable.

Protection of skin:

The glove material has to be impermeable and resistant to the product/ the substance/ the preparation being used/handled. Selection of the glove material on consideration of the penetration times, rates of diffusion and the degradation.

Eye protection:

Safety glasses with side shields or goggles.

General hygienic measures:

The usual precautionary measures are to be adhered to when handling chemicals. Keep away from food, beverages and feed sources. Immediately remove all soiled and contaminated clothing. Wash hands before breaks and at the end of work. Do not inhale gases/fumes/dust/mist/vapor/aerosols. Avoid contact with the eyes and skin.

SECTION 9 : Physical and chemical properties

Appearance (physical state,color):	colorless liquid	Explosion limit lower: Explosion limit upper:	Not Determined Not Determined
Odor:	strong acid	Vapor pressure:	49 hPa (37 mmHg) at 50 °C (122 °F)
Odor threshold:	0.29 ppm	Vapor density:	2.5 (Air = 1)
pH-value:	<1.0	Relative density:	1.413 g/cm ³ at 20 °C (68 °F)
Melting/Freezing point:	-41.6°C (-42.9°F)	Solubilities:	Soluble
Boiling point/Boiling range:	120.5 °C (248.9 °F)	Partition coefficient (n-octanol/water):	Not Determined
Flash point (closed cup):	Not Determined	Auto/Self-ignition temperature:	Not Determined

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.29.2014

Page 5 of 7

Nitric Acid, 3M

Evaporation rate:	Not Determined	Decomposition temperature:	Not Determined
Flammability (solid,gaseous):	Not Determined	Viscosity:	a. Kinematic:Not Determined b. Dynamic: Not Determined
Density: Not Determined			

SECTION 10 : Stability and reactivity

Reactivity:Oxidizer.Reacts violently with alcohol, organic material, turpene, charcoal. Violent reaction with Nitric acid + Acetone and Sulfuric acid. Nitric Acid will react with water or steam to produce heat and toxic, corrosive and flammable vapors. (Nitric acid, fuming)

Chemical stability:No decomposition if used and stored according to specifications.

Possible hazardous reactions:Oxidizer: Contact with combustible/organic material may cause fire

Conditions to avoid:excess heat.combustible materials.Incompatible Materials.

Incompatible materials:Highly reactive with alkalis.Reactive with reducing agents. combustible materials. organic materials,metals. Acids.Reducing agents.aldehydes.

Hazardous decomposition products:Nitrogen oxides (NOx)

SECTION 11 : Toxicological information

Acute Toxicity:		
Inhalation:	67 ppm 4 h	Inhalation LC50 Rat
Chronic Toxicity: No additional information.		
Corrosion Irritation:		
Dermal:		Rabbit: Corrosive
Ocular:		Rabbit: Corrosive to eyes
Dermal:	Section 2	Classified as causing severe skin burns and eye damage.
Ocular:	Section 2	Classified as causing serious eye damage
Sensitization:		No additional information.
Single Target Organ (STOT):		No additional information.
Numerical Measures:		No additional information.
Carcinogenicity:		No additional information.
Mutagenicity:		No additional information.
Reproductive Toxicity:		Experiments have shown reproductive toxicity effects on laboratory animals.

SECTION 12 : Ecological information

Ecotoxicity Persistence and degradability: Readily degradable in the environment.

Bioaccumulative potential:

Mobility in soil: Aqueous solution has high mobility in soil.

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.29.2014

Page 6 of 7

Nitric Acid, 3M

Other adverse effects:

SECTION 13 : Disposal considerations

Waste disposal recommendations:

Product/containers must not be disposed together with household garbage. Do not allow product to reach sewage system or open water. It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11). Consult federal state/ provincial and local regulations regarding the proper disposal of waste material that may incorporate some amount of this product.

SECTION 14 : Transport information

UN-Number

2031

UN proper shipping name

Nitric Acid

Transport hazard class(es)



Class:

8 Corrosive substances

Packing group:II

Environmental hazard:

Transport in bulk:

Special precautions for user:

SECTION 15 : Regulatory information

United States (USA)

SARA Section 311/312 (Specific toxic chemical listings):

Acute, Chronic

SARA Section 313 (Specific toxic chemical listings):

7697-37-2 Nitric Acid

RCRA (hazardous waste code):

None of the ingredients is listed

TSCA (Toxic Substances Control Act):

All ingredients are listed.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

7697-37-2 Nitric acid 1000 lbs

Proposition 65 (California):

Chemicals known to cause cancer:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for females:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for males:

None of the ingredients is listed

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.29.2014

Page 7 of 7

Nitric Acid, 3M

Chemicals known to cause developmental toxicity:

None of the ingredients is listed

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

None of the ingredients is listed

Canadian NPRI Ingredient Disclosure list (limit 1%):

7697-37-2 Nitric Acid

SECTION 16 : Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations. Note: The responsibility to provide a safe workplace remains with the user. The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment. The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material. It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases:

Abbreviations and acronyms:

IMDG: International Maritime Code for Dangerous Goods

PNEC: Predicted No-Effect Concentration (REACH)

CFR: Code of Federal Regulations (USA)

SARA: Superfund Amendments and Reauthorization Act (USA)

RCRA: Resource Conservation and Recovery Act (USA)

TSCA: Toxic Substances Control Act (USA)

NPRI: National Pollutant Release Inventory (Canada)

DOT: US Department of Transportation

IATA: International Air Transport Association

GHS: Globally Harmonized System of Classification and Labelling of Chemicals

ACGIH: American Conference of Governmental Industrial Hygienists

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA)

HMIS: Hazardous Materials Identification System (USA)

WHMIS: Workplace Hazardous Materials Information System (Canada)

DNEL: Derived No-Effect Level (REACH)

Effective date : 12.29.2014

Last updated : 03.23.2015

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 1 of 8

Methanol, Lab Grade, 4L

SECTION 1 : Identification of the substance/mixture and of the supplier

Product name : Methanol, Lab Grade, 4L

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: S25426A

Recommended uses of the product and uses restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific
9 Barnhart Drive, Hanover, PA 17331

Supplier Details:

Fisher Science Education
15 Jet View Drive, Rochester, NY 14624

Emergency telephone number:

Fisher Science Education Emergency Telephone No.: 800-535-5053

SECTION 2 : Hazards identification

Classification of the substance or mixture:



Flammable

Flammable liquids, category 2



Toxic

Acute toxicity (oral, dermal, inhalation), category 3



Health hazard

Specific target organ toxicity following single exposure, category 1

AcTox Dermal. 3

Flammable liq. 2

AcTox Oral. 3

AcTox Inhaln. 3

Stot SE. 1

Signal word :Danger

Hazard statements:

Highly flammable liquid and vapour

Toxic if swallowed

Toxic in contact with skin

Toxic if inhaled

Causes damage to organs

Precautionary statements:

If medical advice is needed, have product container or label at hand

Keep out of reach of children

Read label before use

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 2 of 8

Methanol, Lab Grade, 4L

Wear protective gloves/protective clothing/eye protection/face protection
Wash skin thoroughly after handling
Do not eat, drink or smoke when using this product
Avoid breathing dust/fume/gas/mist/vapours/spray
Keep away from heat/sparks/open flames/hot surfaces. No smoking
Do not breathe dust/fume/gas/mist/vapours/spray
Specific treatment (see supplemental first aid instructions on this label)
IF ON SKIN: Wash with soap and water
Call a POISON CENTER or doctor/physician if you feel unwell
Specific measures (see supplemental first aid instructions on this label)
Take off contaminated clothing and wash before reuse
Wash contaminated clothing before reuse
IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician
IF exposed: Call a POISON CENTER or doctor/physician
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
Store locked up
Store in a well ventilated place. Keep cool
Dispose of contents and container as instructed in Section 13

Other Non-GHS Classification:

WHMIS



NFPA/HMIS



NFPA SCALE (0-4)

Health	2
Flammability	3
Physical Hazard	0
Personal Protection	X

HMIS RATINGS (0-4)

SECTION 3 : Composition/information on ingredients

Ingredients:

CAS 67-56-1	Methanol	>90 %
-------------	----------	-------

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 3 of 8

Methanol, Lab Grade, 4L

Percentages are by weight

SECTION 4 : First aid measures

Description of first aid measures

After inhalation: Move exposed individual to fresh air. Loosen clothing as necessary and position individual in a comfortable position. Get medical assistance. If breathing is difficult, give oxygen

After skin contact: Wash affected area with soap and water. Rinse/flush exposed skin gently using water for 15-20 minutes. Seek medical attention if irritation persists or if concerned.

After eye contact: Protect unexposed eye. Rinse or flush eye gently with water for at least 15-20 minutes, lifting upper and lower lids. Seek medical attention if irritation persists or if concerned

After swallowing: Rinse mouth thoroughly. Do not induce vomiting. Have exposed individual drink sips of water. Dilute mouth with water or milk after rinsing. Get medical assistance.

Most important symptoms and effects, both acute and delayed:

Poison. Toxic by ingestion, absorption through skin and inhalation, potentially causing irreversible effects. Irritating to eyes, skin, and respiratory tract. Irritation- all routes of exposure. Shortness of breath. Nausea. Headache. May be fatal or cause blindness if swallowed. Cannot be made non-poisonous. May cause gastrointestinal irritation, vomiting, and diarrhea. Central nervous system disorders. Skin disorders, preexisting eye disorders, gastrointestinal tract; Toxic: danger of very serious irreversible effects by inhalation, ingestion or absorption through skin. Experiments have shown reproductive toxicity effects on laboratory animals. May cause adverse kidney and liver effects

Indication of any immediate medical attention and special treatment needed:

If seeking medical attention, provide SDS document to physician. Physician should treat symptomatically.

SECTION 5 : Firefighting measures

Extinguishing media

Suitable extinguishing agents: Dry chemical, foam, dry sand, or Carbon Dioxide. Water spray can keep containers cool.

For safety reasons unsuitable extinguishing agents: Water may be ineffective.

Special hazards arising from the substance or mixture:

Risk of ignition. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Containers may explode when heated

Advice for firefighters:

Protective equipment: Wear protective eyewear, gloves, and clothing. Refer to Section 8.

Additional information (precautions): Remove all sources of ignition. Avoid contact with skin, eyes, and clothing. Ensure adequate ventilation. Take precautions against static discharge.

SECTION 6 : Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Use spark-proof tools and explosion-proof equipment. Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor and mists below the applicable workplace exposure limits (Occupational Exposure Limits-OELs) indicated above. Ensure adequate ventilation.

Environmental precautions:

Prevent from reaching drains, sewer or waterway. Should not be released into environment.

Methods and material for containment and cleaning up:

If necessary use trained response staff or contractor. Remove all sources of ignition. Contain spillage and then

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 4 of 8

Methanol, Lab Grade, 4L

collect. Do not flush to sewer. Absorb with a noncombustible absorbent material such as sand or earth and containerize for disposal. Ventilate area of leak or spill. Use spark-proof tools and explosion-proof equipment. Follow proper disposal methods. Refer to Section 13.

Reference to other sections:

SECTION 7 : Handling and storage

Precautions for safe handling:

Use in a chemical fume hood. Wash hands before breaks and immediately after handling the product. Avoid contact with skin, eyes, and clothing. Take precautions against static discharge.

Conditions for safe storage, including any incompatibilities:

Store in a cool location. Provide ventilation for containers. Avoid storage near extreme heat, ignition sources or open flame. Keep container tightly sealed. Store with like hazards. Protect from freezing and physical damage.

SECTION 8 : Exposure controls/personal protection



Control Parameters:

67-56-1, Methanol, ACGIH: 250 ppm STEL; 200 ppm TWA
67-56-1, Methanol, NIOSH: 250 ppm STEL; 325 mg/m³ STEL
67-56-1, Methanol, NIOSH: 200 ppm TWA; 260 mg/m³ TWA

Appropriate Engineering controls:

Emergency eye wash fountains and safety showers should be available in the immediate vicinity of use or handling. Ensure that dust-handling systems (exhaust ducts, dust collectors, vessels, and processing equipment) are designed to prevent the escape of dust into the work area.

Respiratory protection:

Use in a chemical fume hood. If exposure limit is exceeded, a full-face respirator with organic cartridge may be worn.

Protection of skin:

Select glove material impermeable and resistant to the substance. Select glove material based on rates of diffusion and degradation.

Eye protection:

Safety glasses with side shields or goggles.

General hygienic measures:

Wash hands before breaks and at the end of work. Avoid contact with the eyes and skin. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Perform routine housekeeping.

SECTION 9 : Physical and chemical properties

Appearance (physical state,color):	Clear colorless liquid	Explosion limit lower: Explosion limit upper:	6 31
Odor:	Alcohol	Vapor pressure:	128 hPa @ 20°C
Odor threshold:	Not Available	Vapor density:	1.11
pH-value:	Not Available	Relative density:	0.79
Melting/Freezing point:	-98°C	Solubilities:	Miscible at 20 °C

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 5 of 8

Methanol, Lab Grade, 4L

Boiling point/Boiling range:	64.7°C @ 760mmHg	Partition coefficient (n-octanol/water):	Not Available
Flash point (closed cup):	12°C	Auto/Self-ignition temperature:	455°C
Evaporation rate:	5.2	Decomposition temperature:	Not Available
Flammability (solid,gaseous):	Flammable	Viscosity:	a. Kinematic:Not Available b. Dynamic: Not Available
Density: Not Available			

SECTION 10 : Stability and reactivity

Reactivity: Vapours may form explosive mixture with air.

Chemical stability: Stable under normal conditions.

Possible hazardous reactions: None under normal processing.

Conditions to avoid: Excess heat, Incompatible Materials, flames, or sparks.

Incompatible materials: Oxidizing agents, reducing agents, alkali metals, acids, sodium, potassium, metals as powders, acid chlorides, acid anhydrides, powdered magnesium, and aluminum.

Hazardous decomposition products: carbon monoxide, formaldehyde.

SECTION 11 : Toxicological information

Acute Toxicity:		
Dermal:	(rabbit)	LD-50 15800 mg/kg
Oral:	(rat)	LD-50 5628 mg/kg
Inhalation:	(rat)	LC-50 130,7 mg/l
Chronic Toxicity: No additional information.		
Corrosion Irritation:		
Ocular:		Irritating to eyes
Dermal:		Irritating to skin
Sensitization: No additional information.		
Single Target Organ (STOT):		Classified as causing damage to organs: Eyes, skin, optic nerve, gastrointestinal tract, central nervous system, respiratory system, liver, spleen, kidney, blood
Numerical Measures: No additional information.		
Carcinogenicity:		Teratogenicity : has occurred in experimental animals.
Mutagenicity:		Mutagenetic effects have occurred in experimental animals.

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 6 of 8

Methanol, Lab Grade, 4L

Reproductive Toxicity:

Developmental Effects
(Immediate/Delayed) have occurred in
experimental animals

SECTION 12 : Ecological information

Ecotoxicity

Freshwater Fish: 96 Hr LC50 Pimephales promelas: 28200 mg/L

Freshwater Fish: 96 Hr LC50 Oncorhynchus mykiss: 19500 - 20700 mg/L

Freshwater Fish: 96 Hr LC50 Pimephales promelas: >100 mg/L

Freshwater Fish: 96 Hr LC50 Oncorhynchus mykiss: 18 - 20 mL/L

Freshwater Fish: 96 Hr LC50 Lepomis macrochirus: 13500 - 17600 mg/L

Persistence and degradability: Not persistent.

Bioaccumulative potential: Not Bioaccumulative.

Mobility in soil: Aqueous solution has high mobility in soil.

Other adverse effects:

SECTION 13 : Disposal considerations

Waste disposal recommendations:

Methanol RCRA waste code U154. Do not allow product to reach sewage system or open water. It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11). Absorb with a noncombustible absorbent material such as sand or earth and containerize for disposal. Provide ventilation. Have fire extinguishing agent available in case of fire. Eliminate all sources of ignition. Use spark-proof tools and explosion-proof equipment. Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations. Ensure complete and accurate classification.

SECTION 14 : Transport information

UN-Number

UN1230

UN proper shipping name

Methanol

Transport hazard class(es)



Class:
3 Flammable liquids



Class:
6.1 Toxic substances

Packing group: II

Environmental hazard:

Transport in bulk:

Special precautions for user:

SECTION 15 : Regulatory information

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 7 of 8

Methanol, Lab Grade, 4L

United States (USA)

SARA Section 311/312 (Specific toxic chemical listings):

Acute, Chronic, Fire

SARA Section 313 (Specific toxic chemical listings):

67-56-1 Methanol

RCRA (hazardous waste code):

67-56-1 Methanol RCRA waste code U154

TSCA (Toxic Substances Control Act):

All ingredients are listed.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

67-56-1 Methanol 5000 lbs

Proposition 65 (California):

Chemicals known to cause cancer:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for females:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for males:

None of the ingredients is listed

Chemicals known to cause developmental toxicity:

67-56-1 Methanol

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

None of the ingredients is listed

Canadian NPRI Ingredient Disclosure list (limit 1%):

67-56-1 Methanol

SECTION 16 : Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations. Note: The responsibility to provide a safe workplace remains with the user. The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment. The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material. It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases:

Abbreviations and acronyms:

IMDG: International Maritime Code for Dangerous Goods

PNEC: Predicted No-Effect Concentration (REACH)

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 01.08.2015

Page 8 of 8

Methanol, Lab Grade, 4L

CFR: Code of Federal Regulations (USA)

SARA: Superfund Amendments and Reauthorization Act (USA)

RCRA: Resource Conservation and Recovery Act (USA)

TSCA: Toxic Substances Control Act (USA)

NPRI: National Pollutant Release Inventory (Canada)

DOT: US Department of Transportation

IATA: International Air Transport Association

GHS: Globally Harmonized System of Classification and Labelling of Chemicals

ACGIH: American Conference of Governmental Industrial Hygienists

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA)

HMIS: Hazardous Materials Identification System (USA)

WHMIS: Workplace Hazardous Materials Information System (Canada)

DNEL: Derived No-Effect Level (REACH)

Effective date : 01.08.2015

Last updated : 03.27.2015

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.14.2014

Page 1 of 7

Sodium Hydroxide, 0.5M

SECTION 1 : Identification of the substance/mixture and of the supplier

Product name : Sodium Hydroxide, 0.5M

Manufacturer/Supplier Trade name:

Manufacturer/Supplier Article number: S25881

Recommended uses of the product and uses restrictions on use:

Manufacturer Details:

AquaPhoenix Scientific
9 Barnhart Drive, Hanover, PA 17331

Supplier Details:

Fisher Science Education
15 Jet View Drive, Rochester, NY 14624

Emergency telephone number:

Fisher Science Education Emergency Telephone No.: 800-535-5053

SECTION 2 : Hazards identification

Classification of the substance or mixture:



Corrosive

Serious eye damage, category 1
Corrosive to metals, category 1
Skin corrosion, category 1B

Skin Corr. 1B

Eye corr. 1

Metal Corr. 1

Signal word :Danger

Hazard statements:

May be corrosive to metals

Causes severe skin burns and eye damage

Causes serious eye damage

Precautionary statements:

If medical advice is needed, have product container or label at hand

Keep out of reach of children

Read label before use

Keep only in original container

Do not breathe dust/fume/gas/mist/vapours/spray

Wash ... thoroughly after handling

Wear protective gloves/protective clothing/eye protection/face protection

Absorb spillage to prevent material damage

IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do.

Continue rinsing

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting

Wash contaminated clothing before reuse

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.14.2014

Page 2 of 7

Sodium Hydroxide, 0.5M


Immediately call a POISON CENTER or doctor/physician
Store in a corrosive resistant/... container with a resistant inner liner
Store locked up
Dispose of contents/container to ...

Other Non-GHS Classification:

WHMIS



NFPA/HMIS



NFPA SCALE (0-4)

Health	3
Flammability	0
Physical Hazard	0
Personal Protection	X

HMIS RATINGS (0-4)

SECTION 3 : Composition/information on ingredients

Ingredients:		
CAS 1310-73-2	Sodium Hydroxide	2 %
CAS 7732-18-5	Deionized Water	98 %
Percentages are by weight		

SECTION 4 : First aid measures

Description of first aid measures

After inhalation: Move exposed individual to fresh air. Loosen clothing as necessary and position individual in a comfortable position. Seek medical advice if discomfort or irritation persists. If breathing difficult, give oxygen.

After skin contact: Take off contaminated clothing and shoes immediately. Wash affected area with soap and water. Seek medical attention if irritation, discomfort persists.

After eye contact: Protect unexposed eye. Rinse/flush exposed eye(s) gently using water for 15-20 minutes. Remove contact lens(es) if able to do so during rinsing. Immediately get medical assistance.

After swallowing: Rinse mouth thoroughly. Do not induce vomiting. Have exposed individual drink sips of water. Seek medical attention if irritation, discomfort or vomiting persists.

Most important symptoms and effects, both acute and delayed:

Irritation, Nausea, Headache, Shortness of breath.;

Indication of any immediate medical attention and special treatment needed:

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.14.2014

Page 3 of 7

Sodium Hydroxide, 0.5M

If seeking medical attention, provide SDS document to physician.

SECTION 5 : Firefighting measures

Extinguishing media

Suitable extinguishing agents: If in laboratory setting, follow laboratory fire suppression procedures. Use appropriate fire suppression agents for adjacent combustible materials or sources of ignition

For safety reasons unsuitable extinguishing agents:

Special hazards arising from the substance or mixture:

Combustion products may include carbon oxides or other toxic vapors. Thermal decomposition can lead to release of irritating gases and vapors. Sodium oxides.

Advice for firefighters:

Protective equipment: Use NIOSH-approved respiratory protection/breathing apparatus.

Additional information (precautions): Move product containers away from fire or keep cool with water spray as a protective measure, where feasible.

SECTION 6 : Accidental release measures

Personal precautions, protective equipment and emergency procedures:

Wear protective equipment. Transfer to a disposal or recovery container. Use respiratory protective device against the effects of fumes/dust/aerosol. Keep unprotected persons away. Ensure adequate ventilation. Keep away from ignition sources. Protect from heat.

Environmental precautions:

Prevent from reaching drains, sewer or waterway. Collect contaminated soil for characterization per Section 13

Methods and material for containment and cleaning up:

If in a laboratory setting, follow Chemical Hygiene Plan procedures. Place into properly labeled containers for recovery or disposal. If necessary, use trained response staff/contractor. Collect liquid and dilute with water. Neutralize with dilute acid solutions. Decant water to drain with excess water. Absorb with suitable material. Dispose of remaining solid as normal refuse. Always obey local regulations.

Reference to other sections:

SECTION 7 : Handling and storage

Precautions for safe handling:

Absorb spillage to prevent material damage due to corrosiveness to metal. Avoid contact with eyes, skin, and clothing. Wash hands after handling. Do not mix with acids. Follow good hygiene procedures when handling chemical materials. Use only in well ventilated areas.

Conditions for safe storage, including any incompatibilities:

Protect from freezing and physical damage. Provide ventilation for containers. Avoid storage near extreme heat, ignition sources or open flame. Store away from foodstuffs. Store away from oxidizing agents. Store in cool, dry conditions in well sealed containers. Store with Corrosives.

SECTION 8 : Exposure controls/personal protection



Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.14.2014

Page 4 of 7

Sodium Hydroxide, 0.5M

Control Parameters:	1310-73-2, Sodium Hydroxide, OSHA PEL TWA 2 mg/m ³ 1310-73-2, Sodium Hydroxide, ACGIH TLV TWA 2 mg/m ³
Appropriate Engineering controls:	Emergency eye wash fountains and safety showers should be available in the immediate vicinity of use/handling. Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapor or dusts (total/respirable) below the applicable workplace exposure limits (Occupational Exposure Limits-OELs) indicated above.
Respiratory protection:	Not required under normal conditions of use. Use suitable respiratory protective device when high concentrations are present. Use suitable respiratory protective device when aerosol or mist is formed. For spills, respiratory protection may be advisable.
Protection of skin:	The glove material has to be impermeable and resistant to the product/ the substance/ the preparation being used/handled. Selection of the glove material on consideration of the penetration times, rates of diffusion and the degradation.
Eye protection:	Safety glasses with side shields or goggles.
General hygienic measures:	The usual precautionary measures are to be adhered to when handling chemicals. Keep away from food, beverages and feed sources. Immediately remove all soiled and contaminated clothing. Wash hands before breaks and at the end of work. Do not inhale gases/fumes/dust/mist/vapor/aerosols. Avoid contact with the eyes and skin.

SECTION 9 : Physical and chemical properties

Appearance (physical state,color):	Clear, colorless liquid	Explosion limit lower: Explosion limit upper:	Non Explosive Non Explosive
Odor:	Odorless	Vapor pressure:	14mmHg @ 20C
Odor threshold:	Not Determined	Vapor density:	>1
pH-value:	Alkaline	Relative density:	Approx 1
Melting/Freezing point:	Approx 0°C	Solubilities:	Soluble in Water
Boiling point/Boiling range:	Approx 100°C	Partition coefficient (n-octanol/water):	Not Determined
Flash point (closed cup):	Not Determined	Auto/Self-ignition temperature:	Not Determined
Evaporation rate:	Not Determined	Decomposition temperature:	Not Determined
Flammability (solid,gaseous):	Not Determined	Viscosity:	a. Kinematic: Not Determined b. Dynamic: Not Determined
Density: Not Determined			

SECTION 10 : Stability and reactivity

Reactivity:

Chemical stability: No decomposition if used and stored according to specifications.

Possible hazardous reactions:

Conditions to avoid: Incompatible materials, excess heat

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.14.2014

Page 5 of 7

Sodium Hydroxide, 0.5M

Incompatible materials: acids, Organic materials, Chlorinated solvents, Aluminum, Phosphorus, Tin/tin oxides, Zinc

Hazardous decomposition products: sodium oxides, hydrogen. Carbon oxides (CO, CO2).

SECTION 11 : Toxicological information

Acute Toxicity: No additional information.	
Chronic Toxicity: No additional information.	
Corrosion Irritation: No additional information.	
Sensitization:	No additional information.
Single Target Organ (STOT):	No additional information.
Numerical Measures:	No additional information.
Carcinogenicity:	No additional information.
Mutagenicity:	No additional information.
Reproductive Toxicity:	No additional information.

SECTION 12 : Ecological information

Ecotoxicity Persistence and degradability: Readily degradable in the environment.

Bioaccumulative potential: Not Bioaccumulative.

Mobility in soil:

Other adverse effects:

SECTION 13 : Disposal considerations

Waste disposal recommendations:

Product/containers must not be disposed together with household garbage. Do not allow product to reach sewage system or open water. It is the responsibility of the waste generator to properly characterize all waste materials according to applicable regulatory entities (US 40CFR262.11). Consult federal state/ provincial and local regulations regarding the proper disposal of waste material that may incorporate some amount of this product. Neutralize with dilute acid solutions.

SECTION 14 : Transport information

UN-Number

1824

UN proper shipping name

Sodium hydroxide solution

Transport hazard class(es)



Class:

8 Corrosive substances

Packing group: II

Environmental hazard:

Transport in bulk:

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.14.2014

Page 6 of 7

Sodium Hydroxide, 0.5M

Special precautions for user:

SECTION 15 : Regulatory information

United States (USA)

SARA Section 311/312 (Specific toxic chemical listings):

None of the ingredients is listed

SARA Section 313 (Specific toxic chemical listings):

None of the ingredients is listed

RCRA (hazardous waste code):

None of the ingredients is listed

TSCA (Toxic Substances Control Act):

All ingredients are listed.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act):

1310-73-2 Sodium Hydroxide 1000 lb

Proposition 65 (California):

Chemicals known to cause cancer:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for females:

None of the ingredients is listed

Chemicals known to cause reproductive toxicity for males:

None of the ingredients is listed

Chemicals known to cause developmental toxicity:

None of the ingredients is listed

Canada

Canadian Domestic Substances List (DSL):

All ingredients are listed.

Canadian NPRI Ingredient Disclosure list (limit 0.1%):

None of the ingredients is listed

Canadian NPRI Ingredient Disclosure list (limit 1%):

1310-73-2 Sodium Hydroxide

SECTION 16 : Other information

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations. Note: The responsibility to provide a safe workplace remains with the user. The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment. The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material. It is the responsibility of the user to comply with all applicable laws and regulations applicable to this material.

GHS Full Text Phrases:

Safety Data Sheet

according to 29CFR1910/1200 and GHS Rev. 3

Effective date : 12.14.2014

Page 7 of 7

Sodium Hydroxide, 0.5M

Abbreviations and acronyms:

IMDG: International Maritime Code for Dangerous Goods

PNEC: Predicted No-Effect Concentration (REACH)

CFR: Code of Federal Regulations (USA)

SARA: Superfund Amendments and Reauthorization Act (USA)

RCRA: Resource Conservation and Recovery Act (USA)

TSCA: Toxic Substances Control Act (USA)

NPRI: National Pollutant Release Inventory (Canada)

DOT: US Department of Transportation

IATA: International Air Transport Association

GHS: Globally Harmonized System of Classification and Labelling of Chemicals

ACGIH: American Conference of Governmental Industrial Hygienists

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA)

HMIS: Hazardous Materials Identification System (USA)

WHMIS: Workplace Hazardous Materials Information System (Canada)

DNEL: Derived No-Effect Level (REACH)

Effective date : 12.14.2014

Last updated : 03.25.2015

SAFETY DATA SHEET

1. Identification

Product identifier: SODIUM BISULFATE

Other means of identification

Product No.: 7432, 3534

Recommended use and restriction on use

Recommended use: Not available.

Restrictions on use: Not known.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company Name: Avantor Performance Materials, Inc.
Address: 3477 Corporate Parkway, Suite 200
Center Valley, PA 18034

Telephone: Customer Service: 855-282-6867

Fax:
Contact Person: Environmental Health & Safety
e-mail: info@avantormaterials.com

Emergency telephone number:

24 Hour Emergency: 908-859-2151

Chemtrec: 800-424-9300

2. Hazard(s) identification

Hazard classification

Health hazards

Serious eye damage/eye irritation Category 1

Label elements

Hazard symbol:



Signal word: Danger

Hazard statement: Causes serious eye damage.

Precautionary statement

Prevention: Wear eye protection/face protection.

Response: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/physician.

Other hazards which do not result in GHS classification: None.

3. Composition/information on ingredients

Mixtures

Chemical identity	Common name and synonyms	CAS number	Content in percent (%)*
SODIUM BISULFATE (HYDRATED FORM)		10034-88-5	90 - 100%

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First-aid measures

General information: Get medical advice/attention if you feel unwell. Show this safety data sheet to the doctor in attendance.

Ingestion: Rinse mouth thoroughly. Get medical attention if symptoms occur.

Inhalation: Move to fresh air. Get medical attention if symptoms occur.

Skin contact: Wash skin thoroughly with soap and water. Get medical attention if irritation persists after washing.

Eye contact: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a physician or poison control center immediately.

Most important symptoms/effects, acute and delayed

Symptoms: Causes serious eye damage.

Indication of immediate medical attention and special treatment needed

Treatment: Treat symptomatically.

5. Fire-fighting measures

General fire hazards: No unusual fire or explosion hazards noted.

Suitable (and unsuitable) extinguishing media

Suitable extinguishing media: Use fire-extinguishing media appropriate for surrounding materials.

Unsuitable extinguishing media: Avoid water in straight hose stream; will scatter and spread fire.

Specific hazards arising from the chemical: During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Special fire fighting procedures: Move containers from fire area if you can do so without risk. Use water spray to keep fire-exposed containers cool. Cool containers exposed to flames with water until well after the fire is out.

Special protective equipment for fire-fighters: Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures: Keep unauthorized personnel away. Use personal protective equipment. See Section 8 of the MSDS for Personal Protective Equipment.

Methods and material for containment and cleaning up: Sweep up and place in a clearly labeled container for chemical waste. Clean surface thoroughly to remove residual contamination.

Notification Procedures: Prevent entry into waterways, sewer, basements or confined areas. Inform authorities if large amounts are involved.

Environmental precautions: Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling: Use personal protective equipment as required. Avoid contact with eyes, skin, and clothing. Avoid inhalation of dust. Wash thoroughly after handling.

Conditions for safe storage, including any incompatibilities: Keep containers tightly closed. Store in cool, dry place. Store in a well-ventilated place.

8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

None of the components have assigned exposure limits.

Appropriate engineering controls

No data available.

Individual protection measures, such as personal protective equipment

General information: Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Eye/face protection: Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection: Use suitable protective gloves if risk of skin contact.

Other: Wear suitable protective clothing.

Respiratory protection: In case of inadequate ventilation, use respiratory protection.

Hygiene measures: Provide eyewash station and safety shower. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing to remove contaminants. Discard contaminated footwear that cannot be cleaned.

9. Physical and chemical properties

Appearance

Physical state:	Solid
Form:	Crystals or powder.
Color:	Colorless
Odor:	Odorless
Odor threshold:	No data available.
pH:	1.4
Melting point/freezing point:	58 °C
Initial boiling point and boiling range:	No data available.
Flash Point:	No data available.
Evaporation rate:	No data available.
Flammability (solid, gas):	No data available.
Upper/lower limit on flammability or explosive limits	
Flammability limit - upper (%):	No data available.
Flammability limit - lower (%):	No data available.
Explosive limit - upper (%):	No data available.
Explosive limit - lower (%):	No data available.
Vapor pressure:	No data available.
Vapor density:	No data available.
Relative density:	2.1 (20 °C)
Solubility(ies)	
Solubility in water:	670 g/l
Solubility (other):	No data available.
Partition coefficient (n-octanol/water):	No data available.
Auto-ignition temperature:	No data available.
Decomposition temperature:	No data available.
Viscosity:	No data available.
Other information	
Molecular weight:	138.08 g/mol

10. Stability and reactivity

Reactivity:	No dangerous reaction known under conditions of normal use.
Chemical stability:	Material is unstable under normal conditions.
Possibility of hazardous reactions:	Hazardous polymerization does not occur. The substance is hygroscopic and will absorb water by contact with the moisture in the air.
Conditions to avoid:	Contact with incompatible materials. Moisture. Avoid conditions which create dust.
Incompatible materials:	Strong bases.
Hazardous decomposition products:	Sulfur dioxide gas may be liberated from the product.

11. Toxicological information

Information on likely routes of exposure

Ingestion:	May cause irritation of the gastrointestinal tract.
-------------------	---

Inhalation:	May cause irritation to the respiratory system.
Skin contact:	May cause irritation.
Eye contact:	Causes serious eye damage.

Information on toxicological effects**Acute toxicity (list all possible routes of exposure)****Oral****Product:** No data available.**Dermal****Product:** No data available.**Inhalation****Product:** No data available.**Repeated dose toxicity****Product:** No data available.**Skin corrosion/irritation****Product:** May cause skin irritation.**Serious eye damage/eye irritation****Product:** Causes serious eye damage.**Respiratory or skin sensitization****Product:** Not a skin sensitizer.**Carcinogenicity****Product:** This substance has no evidence of carcinogenic properties.**IARC Monographs on the Evaluation of Carcinogenic Risks to Humans:**

No carcinogenic components identified

US. National Toxicology Program (NTP) Report on Carcinogens:

No carcinogenic components identified

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050):

No carcinogenic components identified

Germ cell mutagenicity**In vitro****Product:** No mutagenic components identified**In vivo****Product:** No mutagenic components identified**Reproductive toxicity****Product:** No components toxic to reproduction**Specific target organ toxicity - single exposure****Product:** No data available.**Specific target organ toxicity - repeated exposure****Product:** No data available.**Aspiration hazard****Product:** Not classified**Other effects:** None known.

12. Ecological information**Ecotoxicity:****Acute hazards to the aquatic environment:****Fish****Product:** No data available.**Aquatic invertebrates****Product:** No data available.**Chronic hazards to the aquatic environment:****Fish****Product:** No data available.**Aquatic invertebrates****Product:** No data available.**Toxicity to Aquatic Plants****Product:** No data available.**Persistence and degradability****Biodegradation****Product:** There are no data on the degradability of this product.**BOD/COD ratio****Product:** No data available.**Bioaccumulative potential****Bioconcentration factor (BCF)****Product:** No data available on bioaccumulation.**Partition coefficient n-octanol / water (log Kow)****Product:** No data available.**Mobility in soil:**

The product is water soluble and may spread in water systems.

Other adverse effects:

The product components are not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

13. Disposal considerations**Disposal instructions:**

Discharge, treatment, or disposal may be subject to national, state, or local laws.

Contaminated packaging:

Since emptied containers retain product residue, follow label warnings even after container is emptied.

14. Transport information

DOT

UN number:	UN 3260
UN proper shipping name:	Corrosive solid, acidic, inorganic, n.o.s.(SODIUM BISULFATE)
Transport hazard class(es)	
Class(es):	8
Label(s):	8
Packing group:	III
Marine Pollutant:	No

IMDG

UN number:	UN 3260
UN proper shipping name:	CORROSIVE SOLID, ACIDIC, INORGANIC, N.O.S.(SODIUM BISULFATE)
Transport hazard class(es)	
Class(es):	8
Label(s):	8
EmS No.:	F-A, S-B
Packing group:	III
Marine Pollutant:	No

IATA

UN number:	UN 3260
Proper Shipping Name:	Corrosive solid, acidic, inorganic, n.o.s.(SODIUM BISULFATE)
Transport hazard class(es):	
Class(es):	8
Label(s):	8
Marine Pollutant:	No
Packing group:	III

15. Regulatory information

US federal regulations

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

None present or none present in regulated quantities.

CERCLA Hazardous Substance List (40 CFR 302.4):

None present or none present in regulated quantities.

Superfund amendments and reauthorization act of 1986 (SARA)

Hazard categories

Acute (Immediate) Chronic (Delayed) Fire Reactive Pressure Generating

SARA 302 Extremely hazardous substance

None present or none present in regulated quantities.

SARA 304 Emergency release notification

None present or none present in regulated quantities.

SARA 311/312 Hazardous chemical
Chemical identity Threshold Planning Quantity

SARA 313 (TRI reporting)

None present or none present in regulated quantities.

Clean Water Act Section 311 Hazardous Substances (40 CFR 117.3)

None present or none present in regulated quantities.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130):

None present or none present in regulated quantities.

US state regulations

US. California Proposition 65

No ingredient regulated by CA Prop 65 present.

US. New Jersey Worker and Community Right-to-Know Act

No ingredient regulated by NJ Right-to-Know Law present.

US. Massachusetts RTK - Substance List

No ingredient regulated by MA Right-to-Know Law present.

US. Pennsylvania RTK - Hazardous Substances

No ingredient regulated by PA Right-to-Know Law present.

US. Rhode Island RTK



No ingredient regulated by RI Right-to-Know Law present.

Inventory Status:

Australia AICS:	On or in compliance with the inventory
Canada DSL Inventory List:	On or in compliance with the inventory
EINECS, ELINCS or NLP:	On or in compliance with the inventory
Japan (ENCS) List:	Not in compliance with the inventory.
China Inv. Existing Chemical Substances:	On or in compliance with the inventory
Korea Existing Chemicals Inv. (KECI):	Not in compliance with the inventory.
Canada NDSL Inventory:	Not in compliance with the inventory.
Philippines PICCS:	On or in compliance with the inventory
US TSCA Inventory:	On or in compliance with the inventory
New Zealand Inventory of Chemicals:	On or in compliance with the inventory
Japan ISHL Listing:	Not in compliance with the inventory.
Japan Pharmacopoeia Listing:	Not in compliance with the inventory.

16. Other information, including date of preparation or last revision

NFPA Hazard ID



Hazard rating: 0 - Minimal; 1 - Slight; 2 - Moderate; 3 - Serious; 4 - Severe

Issue date: 05-16-2014

Revision date: No data available.

Version #: 1.0

Further information: No data available.

Disclaimer: THE INFORMATION PRESENTED IN THIS MATERIAL SAFETY DATA SHEET (MSDS/SDS) WAS PREPARED BY TECHNICAL PERSONNEL BASED ON DATA THAT THEY BELIEVE IN THEIR GOOD FAITH JUDGMENT IS ACCURATE. HOWEVER, THE INFORMATION PROVIDED HEREIN IS PROVIDED "AS IS," AND AVANTOR PERFORMANCE MATERIALS MAKES AND GIVES NO REPRESENTATIONS OR WARRANTIES WHATSOEVER, AND EXPRESSLY DISCLAIMS ALL WARRANTIES REGARDING SUCH INFORMATION AND THE PRODUCT TO WHICH IT RELATES, WHETHER EXPRESS, IMPLIED, OR STATUTORY, INCLUDING WITHOUT LIMITATION, WARRANTIES OF ACCURACY, COMPLETENESS, MERCHANTABILITY, NON-INFRINGEMENT, PERFORMANCE, SAFETY, SUITABILITY, STABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, AND ANY WARRANTIES ARISING FROM COURSE OF DEALING, COURSE OF PERFORMANCE, OR USAGE OF TRADE. THIS MSDS/SDS IS INTENDED ONLY AS A GUIDE TO THE APPROPRIATE PRECAUTIONARY HANDLING OF THE MATERIAL BY A PROPERLY TRAINED PERSON USING THIS PRODUCT, AND IS NOT INTENDED TO BE COMPREHENSIVE AS TO THE MANNER AND CONDITIONS OF USE, HANDLING, STORAGE, OR DISPOSAL OF THE PRODUCT. INDIVIDUALS RECEIVING THIS MSDS/SDS MUST ALWAYS EXERCISE THEIR OWN INDEPENDENT JUDGMENT IN DETERMINING THE APPROPRIATENESS OF SUCH ISSUES. ACCORDINGLY, AVANTOR PERFORMANCE MATERIALS ASSUMES NO LIABILITY WHATSOEVER FOR THE USE OF OR RELIANCE UPON THIS INFORMATION. NO SUGGESTIONS FOR USE ARE INTENDED AS, AND NOTHING HEREIN SHALL BE CONSTRUED AS, A RECOMMENDATION TO INFRINGE ANY EXISTING PATENTS OR TO VIOLATE ANY FEDERAL, STATE, LOCAL, OR FOREIGN LAWS. AVANTOR PERFORMANCE MATERIALS REMINDS YOU THAT IT IS YOUR LEGAL DUTY TO MAKE ALL INFORMATION IN THIS MSDS/SDS AVAILABLE TO YOUR EMPLOYEES.