Tritec Construction
of Western New York Corp.
440 Bartell Lane
Webster, New York 14580
585-512-4990 or 585-329-6128

Tank Closure Report

Location:
Harry's Valero
3885 Route 104
Williamson, NY 14589
NYSDEC PBS #8-600152

Prepared by:
Tritec Construction of WNY
440 Bartell Lane
Webster, New York 14580

July 22, 2026

Table of Contents

1.0 INTRODUCTION 1
1.1 Limitations & Expectations 1
2.0 BACKGROUND 1
2.1 Site Description & Features 1
2.2 Physical Setting 1
2.3 Adjacent Property Use 1
2.4 Summary of Previous Studies 2
3.0 OBJECTIVE 2
4.0 METHODOLOGY AND RESULTS 2
4.1 Utility Location 2
4.2 Notifications 2
4.3 Tank Closure 2
4.4 Method of Closure 2
4.5 Environmental Assessment 2
5.0 CONCLUSIONS 3
6.0 SIGNATURES OF REPORT PREPARER 3

Figures Figure 1 – Site Location Map, Figure 2- Test Sample Locations of Tank Pit.

Appendix 1 Soil and Water Test Results, Laboratory Reports

Appendix 2 Tank Disposal Documentation

Appendix 3 Permits and D.E.C. Pre-Work Notification

Appendix 4 Photos of Job Site

1.0 INTRODUCTION

Closure of one (1) 8,000 gallon, two (2) 6,000 gallon gasoline and one (1) 2,000 gallon kerosene underground storage tank (UST) at the property located at 3885 Rt. 104, Town of Williamson, Wayne County, New York 14589, hereinafter referred to as the "Site" (see Figure 1). Note: The address associated with the Site is commonly known as Harry's Valero and the businesses associated with it are listed as such on Google Earth and other online address search sites. According to the Town of Williamson the legal address of the Site is 3885 Rt. 104 Williamson, New York 14589.

This Tank Closure Report summarizes the methodology and findings of the removal of the UST.

1.1 Limitations & Expectations

Work associated with this tank closure was performed in accordance with generally accepted environmental engineering and environmental contracting practices for this region. Tritec Construction of WNY makes no other warranty or representation, either expressed or implied, nor is one intended to be included as parts of its services, proposals, contracts or reports.

In addition, Tritec Construction of WNY cannot provide guarantees, certifications or warranties that the property is or is not free of environmental impairment or other regulated solid wastes. The Client shall be aware that the data and representative samples from any given soil sampling point or monitoring well may represent conditions that apply only at that particular location, and such conditions may not necessarily apply to the General Site as a whole.

2.0 BACKGROUND

2.1 Site Description & Features

The Site consists of one (1) parcel totaling approximately 44,431.2 Sq. Ft. 1.02 acres and is located in a urban area. The Site is occupied with one (1) approximately 5,300 square (sq.) foot (ft.) gas station and convenience store along with a gas canopy and fueling pad.

2.2 Physical Setting

The Site is located at the north side of Route 104 and is in the Town of Williamson, Wayne County, New York.

2.3 Adjacent Property Use

The Site is bordered by the following properties:

Direction	Land Use
North	3880 Railroad Avenue
East	3880 Railroad Avenue
South	Route 104
West	3865 Rt. 104

2.4 Summary of Previous Studies

Tritec Construction of WNY was not provided with nor is aware of previous environmental studies.

3.0 OBJECTIVE

The objective of this Tank Closure is to remediate and remove (1) 8,000 gallon, (2) 6,000 gallon and (1) 2,000 gallon Kerosene UST registered at the Site on the North East side of parking lot in preparation for installation of new UST's.

4.0 METHODOLOGY AND RESULTS

4.1 Utility Location

Prior to the initiation of subsurface work *Dig Safely New York* was contacted to complete a utility stakeout at the Site to locate underground utilities.

4.2 Notifications

A permit to remove the UST was obtained from the Town of Williamson, NY Department of Permit & Inspection Services. A copy of the permit is attached in Appendix 3

A NYSDEC Pre-Work Notification notice was compiled and submitted to the NYSDEC Region 8 PBS unit. A copy of the notification is attached in Appendix 3.

4.3 Tank Closure

The following storage tank was closed and removed as part of this scope of work:

Tank Number:	001	002	003	004
Date of Closure:	June 18, 2026	June 18, 2026	June 18, 2026	June 18, 2026
Method of Closure:	Removal	Removal	Removal	Removal
Capacity (Gallons):	8,000	6,000	6,000	2,000
Product Stored:	Gasoline	Gasoline	Gasoline	Kerosene
Construction:	Steel Tank	Steel Tank	Steel Tank	Steel Tank
Contents:		Residual Gasoline		Residual Kerosene
Condition of Tank:	Fair	Fair	Fair	Fair
Condition of Piping:	Fair	Fair	Fair	Fair

4.4 Method of Closure

The tank closure activities commenced on June 15, 2026. Prior to removal of the tank the product piping was flushed back to the tanks. The tanks was uncovered and residual gasoline was pumped to T&R Environmental Vac Truck pending disposal. During removal the tanks atmospheres were monitored for oxygen concentration and lower explosive limit with a calibrated 4 gas meter. A venturi blower was utilized to purge flammable vapors. The tanks were then removed from the ground, cut, cleaned and transported as scrap steel on flat bed trailer to Alpco Recycling Inc steel scrap yard. 846 Macedon Center Road Macedon NY 14502 for recycling attached in Appendix 2.

4.5 Environmental Assessment

Upon removal of the UST, no petroleum impacted soil or water was encountered in the tank excavation, test samples were taken. Proceeded with installation of new tanks with no further action needed at this time .

Subsequent to removal of the UST, soil samples from the tank pit sidewalls and water on bottom (rock) were observed for visual and olfactory signs of impairment and screened with a Mini- Rae 3000 Photoionization Detector (PID). Petroleum odors or elevated PID readings were not observed in the based or sidewalls of the excavation. Post excavation confirmatory soil samples were collected from the base water and sidewalls of the excavation and were submitted to Paradigm Environmental Services Inc. 179 Lake Avenue Rochester NY 14608 for analysis of Commissioner Policy 51 (CP-51) list volatile organic compounds (VOCs) by USEPA Method 8260. The laboratory report indicates that soil samples and water test did not contain VOCs or SVOCs at concentrations above laboratory reported method detection limits (MDLs). A copy of the laboratory reports are attached in Appendix 1.

Groundwater was encountered in the bottom of excavation and showed no signs of contamination.

5.0 CONCLUSIONS

Tritec Construction removed one (1) 8,000 gallon, two (2) 6,000 gallon gasoline and one (1) 2,000 gallon Kerosene underground storage tank (UST) from Harry's Valero, located at 3885 Route 104, Town of Williamson, Wayne County, New York

Laboratory analysis of post excavation confirmatory soil samples did not detect VOCs or SVOC above laboratory reported method detection limits. Additional investigation or remedial efforts do not appear to be warranted.

A copy of all information collected during this assessment, including maps, notes, analytical data and other material will be kept on file at the offices of Tritec Construction of WNY. This information is available upon the request.

6.0 SIGNATURES OF REPORT PREPARER


Report Prepared By:

Rex Cameron
Partner

FIGURES 1

Site Location Map


Home
Search
Parcel Details
Tools
Abutters
Ontario Midland Railroad
Railroad Ave
409 ft
Tanks Removed
Route 104
State Route 104
104
State Route 104
State Route 104
104
Dollar General
Mark's Pizzeria
50 m
Esri, NASA, NGA, USGS, FEMA | Esri Community Maps Contributors, © OpenStreetMap, Microsoft, Esri, TomTom, Garmin, SafeGraph, GeoTechn…
Powered by Esri

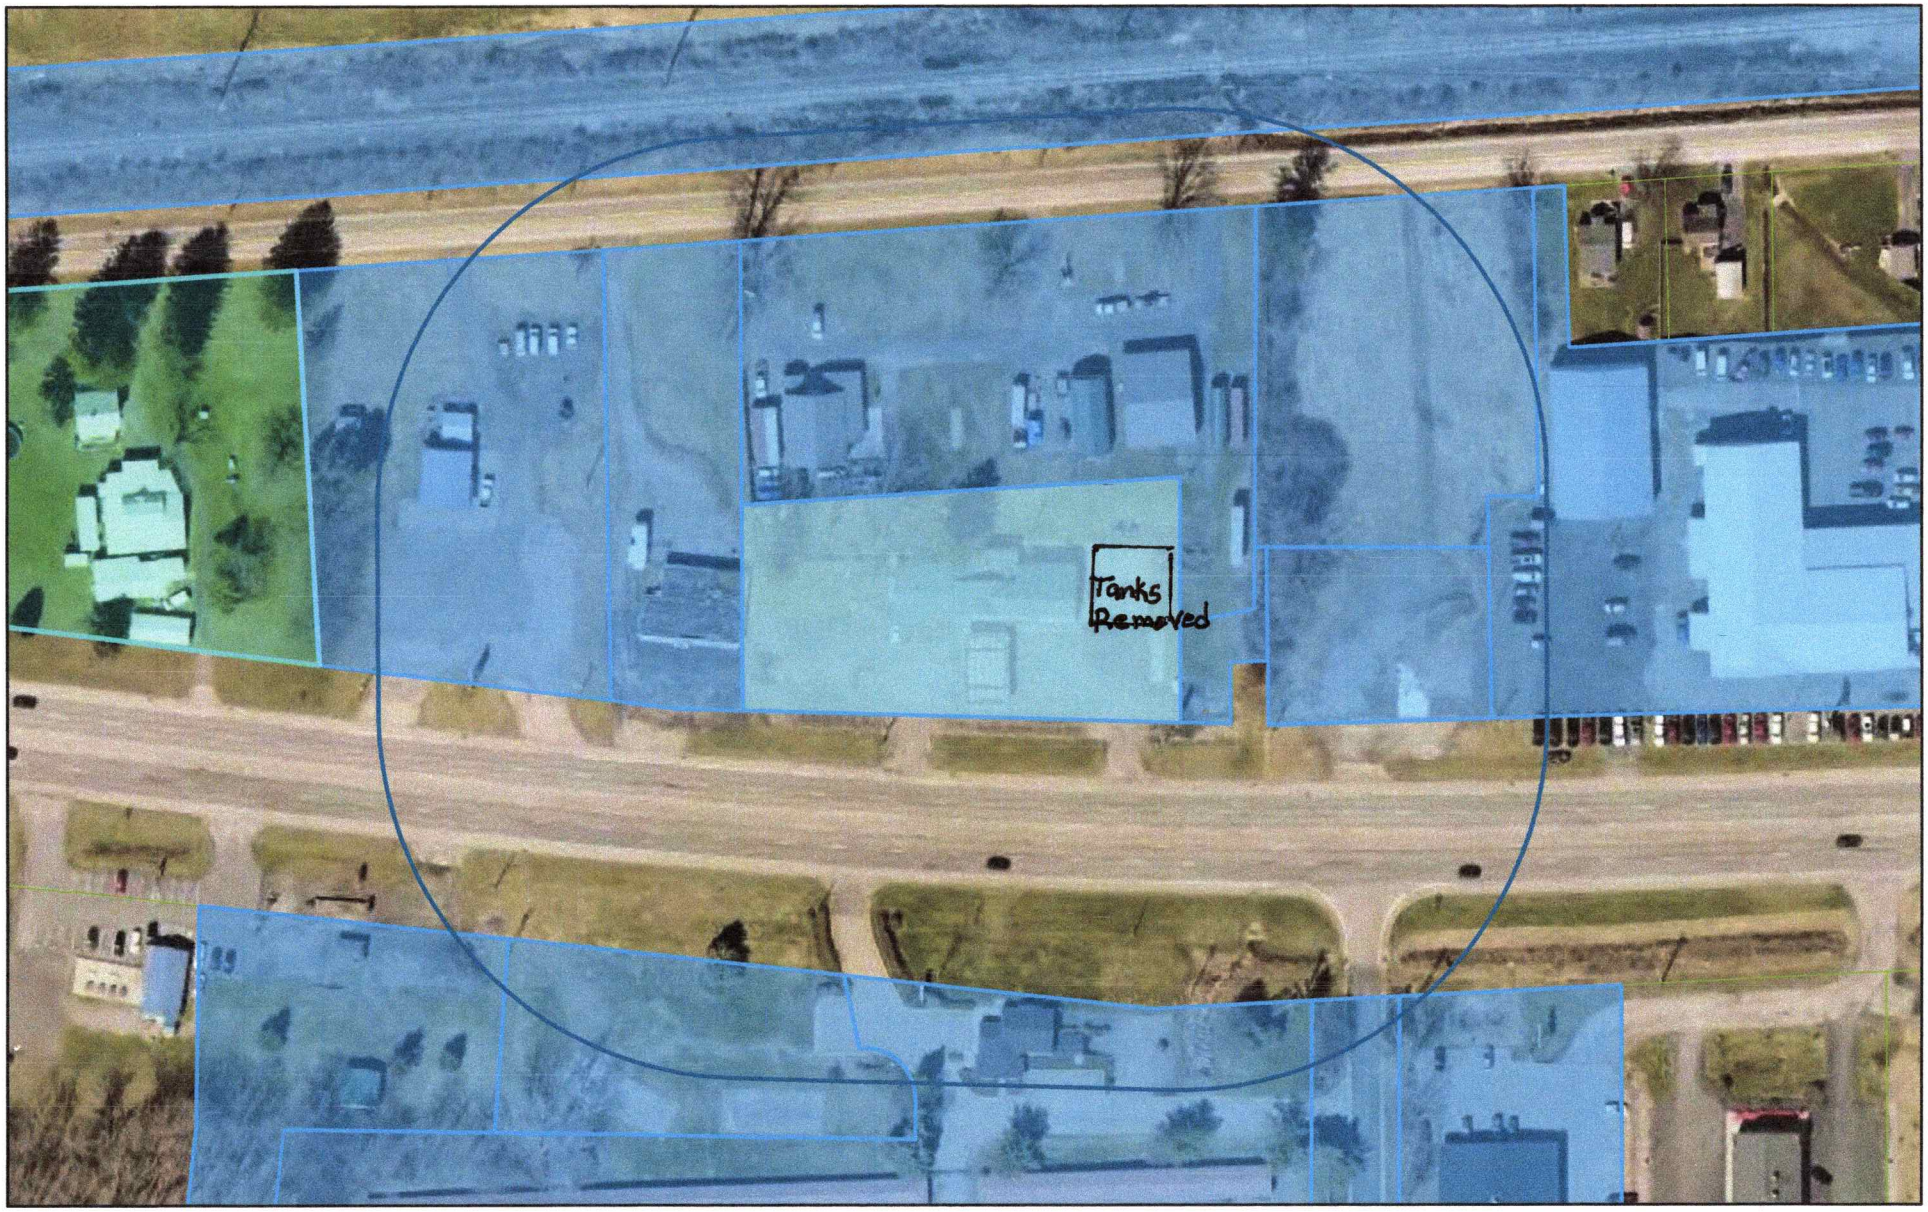


7/28/2026

WayneCounty
Townships
NYS Counties
LatestParcels

1:2,152


0 0.01 0.03 0.05 mi

0 0.02 0.04 0.08 km

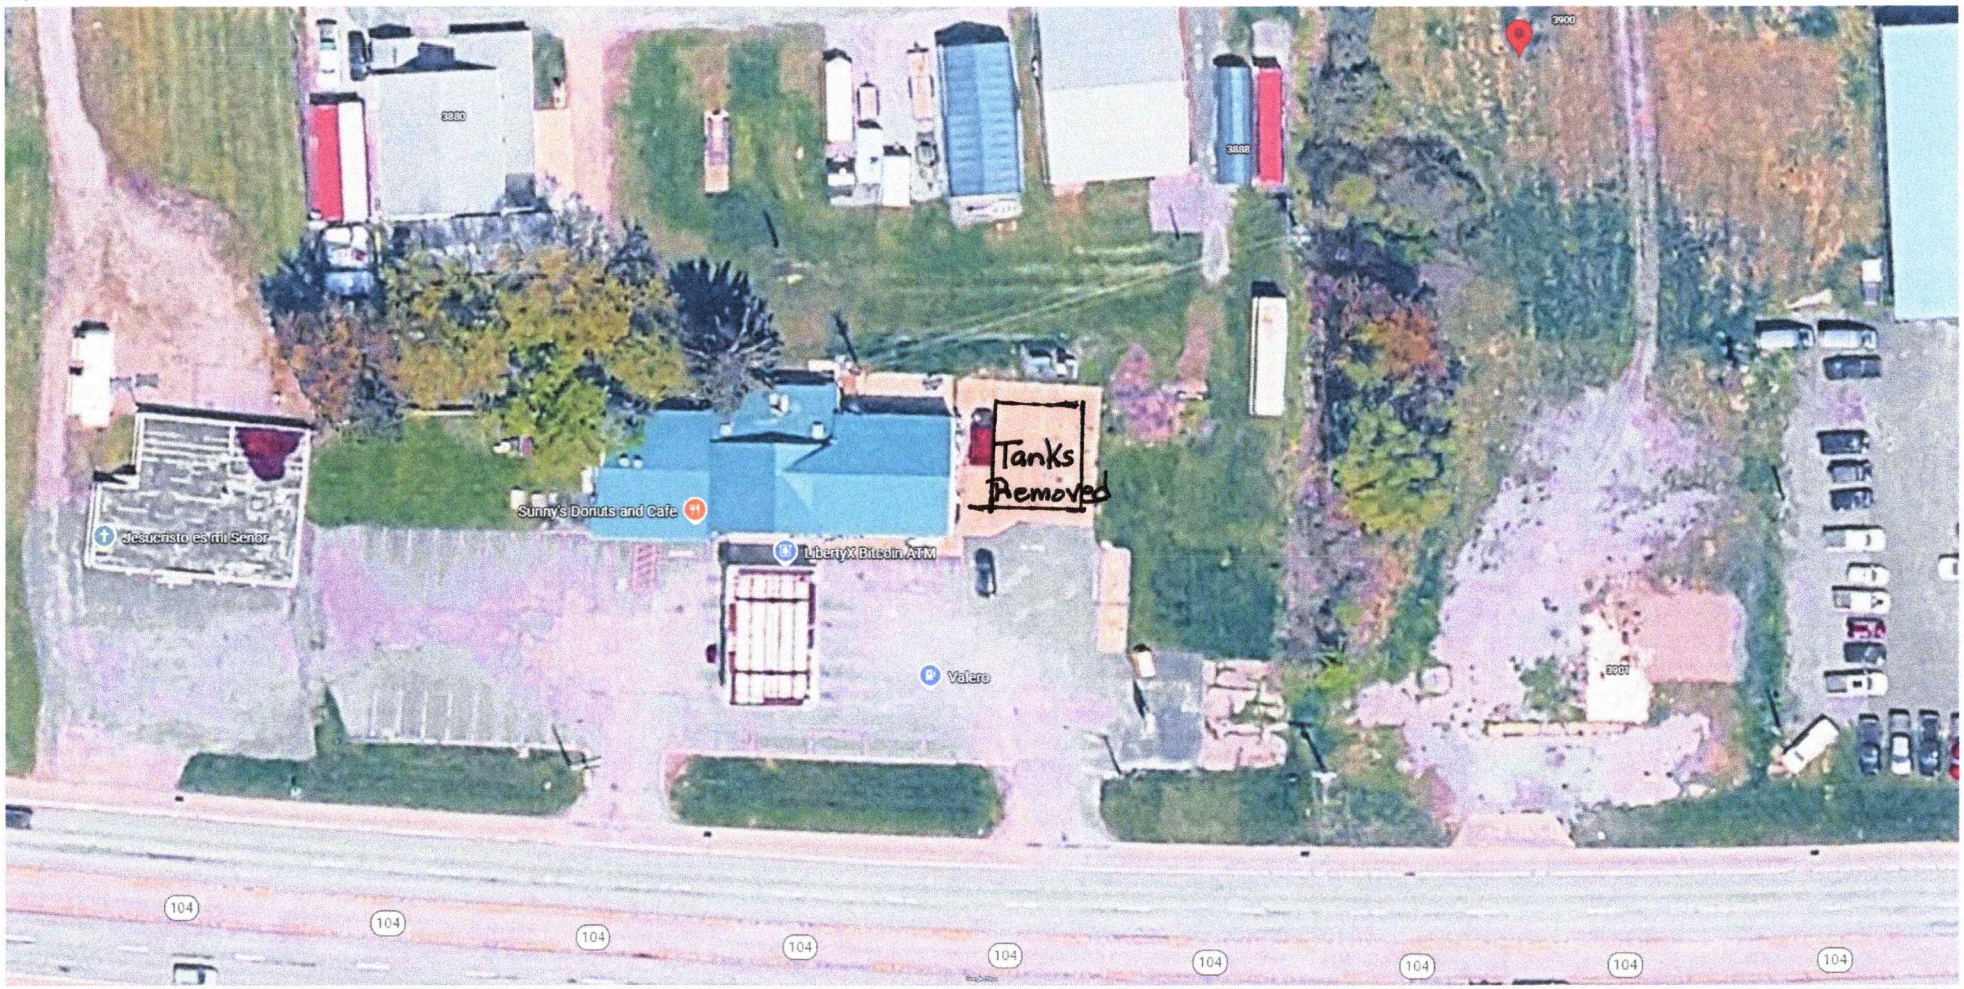
3900
3886
3888
Tanks Removed
Sunny's Donuts and Cafe
Jesucristo es mi Señor
LibertyX Bitcoin ATM
Valero
3891
104
104
104
104
104
104
104
104
104

FIGURES 2

Test Sample Locations of Tank Pit

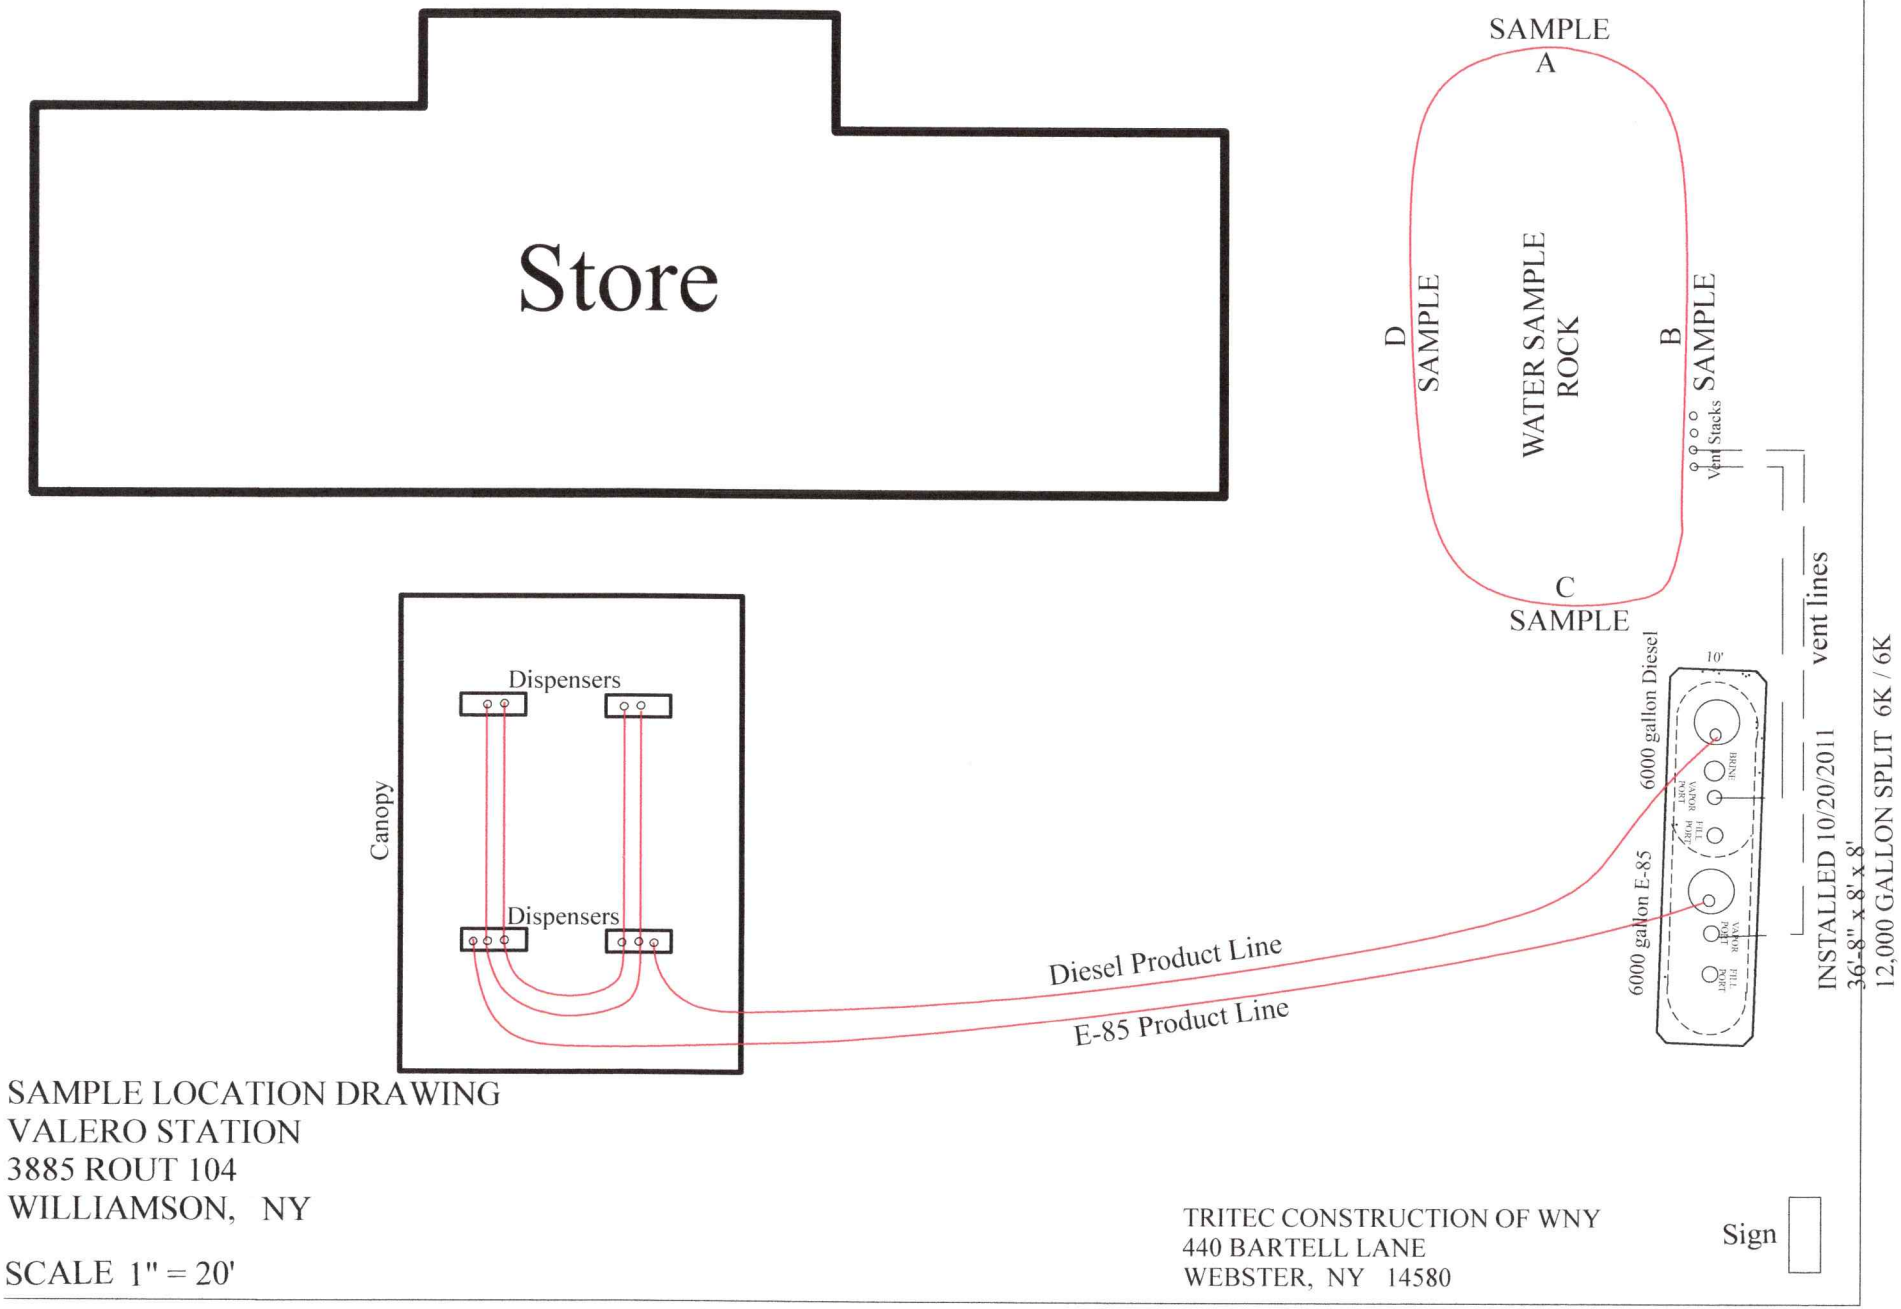

SAMPLE LOCATION DRAWING
VALERO STATION
3885 ROUT 104
WILLIAMSON, NY

SCALE 1" = 20'

TRITEC CONSTRUCTION OF WNY
440 BARTELL LANE
WEBSTER, NY 14580

Sign

Appendix 1

Soil and Water Test Results Laboratory Reports

PARADIGM

Analytical Report For

Tritec Construction

For Lab Project ID

262570

Referencing

3885 RT 104 Williamson

Prepared

Thursday, June 25, 2026

Any noncompliant QC parameters or other notes impacting data interpretation are flagged or documented on the final report or are noted below.

Emily Farmer

Certifies that this report has been approved by the Technical Director or Designee

179 Lake Avenue • Rochester, NY 14608 • (585) 647-2530 • Fax (585) 647-3311 • ELAP ID# 10958

This report is part of a multipage document and should only be reproduced in its entirety. The Client has only provided additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier:	A		
Lab Sample ID:	262570-01	**Date Sampled:** 6/19/2026	13:15
Matrix:	Soil	**Date Received** 6/19/2026	

Percent Solids

Analyte	Result	Units	Qualifier	Date Analyzed
Percent Solids	**84.9**	%		6/22/2026

Method Reference(s): Par%M

ELAP does not offer this test for approval as part of their laboratory certification program.

Semi-Volatile Organics (PAHs)

Analyte	Result	Units	Qualifier	Date Analyzed
Acenaphthene	< 327	ug/Kg		6/23/2026 17:33
Acenaphthylene	< 327	ug/Kg		6/23/2026 17:33
Anthracene	< 327	ug/Kg		6/23/2026 17:33
Benzo (a) anthracene	< 327	ug/Kg		6/23/2026 17:33
Benzo (a) pyrene	< 327	ug/Kg		6/23/2026 17:33
Benzo (b) fluoranthene	< 327	ug/Kg		6/23/2026 17:33
Benzo (g,h,i) perylene	< 327	ug/Kg		6/23/2026 17:33
Benzo (k) fluoranthene	< 327	ug/Kg		6/23/2026 17:33
Chrysene	< 327	ug/Kg		6/23/2026 17:33
Dibenz (a,h) anthracene	< 327	ug/Kg		6/23/2026 17:33
Fluoranthene	< 327	ug/Kg		6/23/2026 17:33
Fluorene	< 327	ug/Kg		6/23/2026 17:33
Indeno (1,2,3-cd) pyrene	< 327	ug/Kg		6/23/2026 17:33
Naphthalene	< 327	ug/Kg		6/23/2026 17:33
Phenanthrene	< 327	ug/Kg		6/23/2026 17:33
Pyrene	< 327	ug/Kg		6/23/2026 17:33

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier: A
Lab Sample ID: 262570-01 **Date Sampled:** 6/19/2026 13:15
Matrix: Soil **Date Received** 6/19/2026

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed
2-Fluorobiphenyl	**58.2**	37.6 - 86.1		6/23/2026 17:33
Nitrobenzene-d5	**53.9**	34.3 - 79.6		6/23/2026 17:33
Terphenyl-d14	**61.7**	44.4 - 103		6/23/2026 17:33

Method Reference(s): EPA 8270D
EPA 3546
Preparation Date: 6/22/2026
Data File: B8350778.D

Volatile Organics (Petroleum)

Analyte	Result	Units	Qualifier	Date Analyzed
1,2,4-Trimethylbenzene	< 8.24	ug/Kg		6/24/2026 15:32
1,3,5-Trimethylbenzene	< 8.24	ug/Kg		6/24/2026 15:32
Benzene	< 8.24	ug/Kg	M	6/24/2026 15:32
Ethylbenzene	< 8.24	ug/Kg	M	6/24/2026 15:32
Isopropylbenzene	< 8.24	ug/Kg		6/24/2026 15:32
m,p-Xylene	< 8.24	ug/Kg		6/24/2026 15:32
Methyl tert-butyl Ether	< 8.24	ug/Kg		6/24/2026 15:32
Naphthalene	< 20.6	ug/Kg		6/24/2026 15:32
n-Butylbenzene	< 8.24	ug/Kg		6/24/2026 15:32
n-Propylbenzene	< 8.24	ug/Kg		6/24/2026 15:32
o-Xylene	< 8.24	ug/Kg		6/24/2026 15:32
p-Isopropyltoluene	< 8.24	ug/Kg		6/24/2026 15:32
sec-Butylbenzene	< 8.24	ug/Kg		6/24/2026 15:32
tert-Butylbenzene	< 8.24	ug/Kg		6/24/2026 15:32
Toluene	< 8.24	ug/Kg	M	6/24/2026 15:32

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM
ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier:	A		
Lab Sample ID:	262570-01	**Date Sampled:** 6/19/2026	13:15
Matrix:	Soil	**Date Received** 6/19/2026	

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed	
1,2-Dichloroethane-d4	**109**	82.7 - 122		6/24/2026	15:32
4-Bromofluorobenzene	**90.1**	74.5 - 117		6/24/2026	15:32
Pentafluorobenzene	**97.9**	85.1 - 114		6/24/2026	15:32
Toluene-D8	**98.7**	86.8 - 113		6/24/2026	15:32

Method Reference(s): EPA 8260C
EPA 5035A - L

Data File: z38633.D

This sample was not collected following SW846 5035A specifications. Accordingly, any Volatiles soil results that are less than 200 ug/Kg, including Non Detects, may be biased low, per ELAP method 5035 guidance document from 11/15/2012.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier:	B		
Lab Sample ID:	262570-02	**Date Sampled:** 6/19/2026	13:15
Matrix:	Soil	**Date Received** 6/19/2026	

Percent Solids

Analyte	Result	Units	Qualifier	Date Analyzed
Percent Solids	**75.1**	%		6/22/2026

Method Reference(s): Par%M

ELAP does not offer this test for approval as part of their laboratory certification program.

Semi-Volatile Organics (PAHs)

Analyte	Result	Units	Qualifier	Date Analyzed
Acenaphthene	< 370	ug/Kg		6/23/2026 18:02
Acenaphthylene	< 370	ug/Kg		6/23/2026 18:02
Anthracene	< 370	ug/Kg		6/23/2026 18:02
Benzo (a) anthracene	< 370	ug/Kg		6/23/2026 18:02
Benzo (a) pyrene	< 370	ug/Kg		6/23/2026 18:02
Benzo (b) fluoranthene	< 370	ug/Kg		6/23/2026 18:02
Benzo (g,h,i) perylene	< 370	ug/Kg		6/23/2026 18:02
Benzo (k) fluoranthene	< 370	ug/Kg		6/23/2026 18:02
Chrysene	< 370	ug/Kg		6/23/2026 18:02
Dibenz (a,h) anthracene	< 370	ug/Kg		6/23/2026 18:02
Fluoranthene	< 370	ug/Kg		6/23/2026 18:02
Fluorene	< 370	ug/Kg		6/23/2026 18:02
Indeno (1,2,3-cd) pyrene	< 370	ug/Kg		6/23/2026 18:02
Naphthalene	< 370	ug/Kg		6/23/2026 18:02
Phenanthrene	< 370	ug/Kg		6/23/2026 18:02
Pyrene	< 370	ug/Kg		6/23/2026 18:02

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier: B
Lab Sample ID: 262570-02 **Date Sampled:** 6/19/2026 13:15
Matrix: Soil **Date Received** 6/19/2026

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed
2-Fluorobiphenyl	**54.6**	37.6 - 86.1		6/23/2026 18:02
Nitrobenzene-d5	**51.4**	34.3 - 79.6		6/23/2026 18:02
Terphenyl-d14	**61.3**	44.4 - 103		6/23/2026 18:02

Method Reference(s): EPA 8270D
EPA 3546
Preparation Date: 6/22/2026
Data File: B8350779.D

Volatile Organics (Petroleum)

Analyte	Result	Units	Qualifier	Date Analyzed
1,2,4-Trimethylbenzene	< 7.40	ug/Kg		6/24/2026 15:51
1,3,5-Trimethylbenzene	< 7.40	ug/Kg		6/24/2026 15:51
Benzene	< 7.40	ug/Kg		6/24/2026 15:51
Ethylbenzene	< 7.40	ug/Kg		6/24/2026 15:51
Isopropylbenzene	< 7.40	ug/Kg		6/24/2026 15:51
m,p-Xylene	< 7.40	ug/Kg		6/24/2026 15:51
Methyl tert-butyl Ether	< 7.40	ug/Kg		6/24/2026 15:51
Naphthalene	< 18.5	ug/Kg		6/24/2026 15:51
n-Butylbenzene	< 7.40	ug/Kg		6/24/2026 15:51
n-Propylbenzene	< 7.40	ug/Kg		6/24/2026 15:51
o-Xylene	< 7.40	ug/Kg		6/24/2026 15:51
p-Isopropyltoluene	< 7.40	ug/Kg		6/24/2026 15:51
sec-Butylbenzene	< 7.40	ug/Kg		6/24/2026 15:51
tert-Butylbenzene	< 7.40	ug/Kg		6/24/2026 15:51
Toluene	< 7.40	ug/Kg		6/24/2026 15:51

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM
ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier:	B		
Lab Sample ID:	262570-02	**Date Sampled:** 6/19/2026	13:15
Matrix:	Soil	**Date Received** 6/19/2026	

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed	
1,2-Dichloroethane-d4	**98.9**	82.7 - 122		6/24/2026	15:51
4-Bromofluorobenzene	**83.9**	74.5 - 117		6/24/2026	15:51
Pentafluorobenzene	**94.2**	85.1 - 114		6/24/2026	15:51
Toluene-D8	**95.1**	86.8 - 113		6/24/2026	15:51

Method Reference(s): EPA 8260C
EPA 5035A - L

Data File: z38634.D

This sample was not collected following SW846 5035A specifications. Accordingly, any Volatiles soil results that are less than 200 ug/Kg, including Non Detects, may be biased low, per ELAP method 5035 guidance document from 11/15/2012.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier:	C		
Lab Sample ID:	262570-03	**Date Sampled:** 6/19/2026	13:15
Matrix:	Soil	**Date Received** 6/19/2026	

Percent Solids

Analyte	Result	Units	Qualifier	Date Analyzed
Percent Solids	**82.7**	%		6/22/2026

Method Reference(s): Par%M

ELAP does not offer this test for approval as part of their laboratory certification program.

Semi-Volatile Organics (PAHs)

Analyte	Result	Units	Qualifier	Date Analyzed
Acenaphthene	< 338	ug/Kg		6/23/2026 18:31
Acenaphthylene	< 338	ug/Kg		6/23/2026 18:31
Anthracene	< 338	ug/Kg		6/23/2026 18:31
Benzo (a) anthracene	< 338	ug/Kg		6/23/2026 18:31
Benzo (a) pyrene	< 338	ug/Kg		6/23/2026 18:31
Benzo (b) fluoranthene	< 338	ug/Kg		6/23/2026 18:31
Benzo (g,h,i) perylene	< 338	ug/Kg		6/23/2026 18:31
Benzo (k) fluoranthene	< 338	ug/Kg		6/23/2026 18:31
Chrysene	< 338	ug/Kg		6/23/2026 18:31
Dibenz (a,h) anthracene	< 338	ug/Kg		6/23/2026 18:31
Fluoranthene	< 338	ug/Kg		6/23/2026 18:31
Fluorene	< 338	ug/Kg		6/23/2026 18:31
Indeno (1,2,3-cd) pyrene	< 338	ug/Kg		6/23/2026 18:31
Naphthalene	< 338	ug/Kg		6/23/2026 18:31
Phenanthrene	< 338	ug/Kg		6/23/2026 18:31
Pyrene	< 338	ug/Kg		6/23/2026 18:31

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier: C
Lab Sample ID: 262570-03 **Date Sampled:** 6/19/2026 13:15
Matrix: Soil **Date Received** 6/19/2026

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed
2-Fluorobiphenyl	**55.9**	37.6 - 86.1		6/23/2026 18:31
Nitrobenzene-d5	**51.0**	34.3 - 79.6		6/23/2026 18:31
Terphenyl-d14	**62.7**	44.4 - 103		6/23/2026 18:31

Method Reference(s): EPA 8270D
EPA 3546
Preparation Date: 6/22/2026
Data File: B8350780.D

Volatile Organics (Petroleum)

Analyte	Result	Units	Qualifier	Date Analyzed
1,2,4-Trimethylbenzene	< 6.17	ug/Kg		6/24/2026 16:12
1,3,5-Trimethylbenzene	< 6.17	ug/Kg		6/24/2026 16:12
Benzene	< 6.17	ug/Kg		6/24/2026 16:12
Ethylbenzene	< 6.17	ug/Kg		6/24/2026 16:12
Isopropylbenzene	< 6.17	ug/Kg		6/24/2026 16:12
m,p-Xylene	< 6.17	ug/Kg		6/24/2026 16:12
Methyl tert-butyl Ether	< 6.17	ug/Kg		6/24/2026 16:12
Naphthalene	< 15.4	ug/Kg		6/24/2026 16:12
n-Butylbenzene	< 6.17	ug/Kg		6/24/2026 16:12
n-Propylbenzene	< 6.17	ug/Kg		6/24/2026 16:12
o-Xylene	< 6.17	ug/Kg		6/24/2026 16:12
p-Isopropyltoluene	< 6.17	ug/Kg		6/24/2026 16:12
sec-Butylbenzene	< 6.17	ug/Kg		6/24/2026 16:12
tert-Butylbenzene	< 6.17	ug/Kg		6/24/2026 16:12
Toluene	< 6.17	ug/Kg		6/24/2026 16:12

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier:	C		
Lab Sample ID:	262570-03	**Date Sampled:** 6/19/2026	13:15
Matrix:	Soil	**Date Received** 6/19/2026	

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed	
1,2-Dichloroethane-d4	**97.7**	82.7 - 122		6/24/2026	16:12
4-Bromofluorobenzene	**80.0**	74.5 - 117		6/24/2026	16:12
Pentafluorobenzene	**90.3**	85.1 - 114		6/24/2026	16:12
Toluene-D8	**91.4**	86.8 - 113		6/24/2026	16:12

Method Reference(s): EPA 8260C
EPA 5035A - L

Data File: z38635.D

This sample was not collected following SW846 5035A specifications. Accordingly, any Volatiles soil results that are less than 200 ug/Kg, including Non Detects, may be biased low, per ELAP method 5035 guidance document from 11/15/2012.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier:	D		
Lab Sample ID:	262570-04	**Date Sampled:** 6/19/2026	13:15
Matrix:	Soil	**Date Received** 6/19/2026	

Percent Solids

Analyte	Result	Units	Qualifier	Date Analyzed
Percent Solids	**78.0**	%		6/22/2026

Method Reference(s): Par%M

ELAP does not offer this test for approval as part of their laboratory certification program.

Semi-Volatile Organics (PAHs)

Analyte	Result	Units	Qualifier	Date Analyzed
Acenaphthene	< 325	ug/Kg		6/23/2026 19:00
Acenaphthylene	< 325	ug/Kg		6/23/2026 19:00
Anthracene	< 325	ug/Kg		6/23/2026 19:00
Benzo (a) anthracene	< 325	ug/Kg		6/23/2026 19:00
Benzo (a) pyrene	< 325	ug/Kg		6/23/2026 19:00
Benzo (b) fluoranthene	< 325	ug/Kg		6/23/2026 19:00
Benzo (g,h,i) perylene	< 325	ug/Kg		6/23/2026 19:00
Benzo (k) fluoranthene	< 325	ug/Kg		6/23/2026 19:00
Chrysene	< 325	ug/Kg		6/23/2026 19:00
Dibenz (a,h) anthracene	< 325	ug/Kg		6/23/2026 19:00
Fluoranthene	< 325	ug/Kg		6/23/2026 19:00
Fluorene	< 325	ug/Kg		6/23/2026 19:00
Indeno (1,2,3-cd) pyrene	< 325	ug/Kg		6/23/2026 19:00
Naphthalene	< 325	ug/Kg		6/23/2026 19:00
Phenanthrene	< 325	ug/Kg		6/23/2026 19:00
Pyrene	< 325	ug/Kg		6/23/2026 19:00

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier: D
Lab Sample ID: 262570-04 **Date Sampled:** 6/19/2026 13:15
Matrix: Soil **Date Received** 6/19/2026

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed
2-Fluorobiphenyl	**47.7**	37.6 - 86.1		6/23/2026 19:00
Nitrobenzene-d5	**46.3**	34.3 - 79.6		6/23/2026 19:00
Terphenyl-d14	**52.5**	44.4 - 103		6/23/2026 19:00

Method Reference(s): EPA 8270D
EPA 3546
Preparation Date: 6/22/2026
Data File: B8350781.D

Volatile Organics (Petroleum)

Analyte	Result	Units	Qualifier	Date Analyzed
1,2,4-Trimethylbenzene	< 7.54	ug/Kg		6/24/2026 16:31
1,3,5-Trimethylbenzene	< 7.54	ug/Kg		6/24/2026 16:31
Benzene	< 7.54	ug/Kg		6/24/2026 16:31
Ethylbenzene	< 7.54	ug/Kg		6/24/2026 16:31
Isopropylbenzene	< 7.54	ug/Kg		6/24/2026 16:31
m,p-Xylene	< 7.54	ug/Kg		6/24/2026 16:31
Methyl tert-butyl Ether	< 7.54	ug/Kg		6/24/2026 16:31
Naphthalene	< 18.9	ug/Kg		6/24/2026 16:31
n-Butylbenzene	< 7.54	ug/Kg		6/24/2026 16:31
n-Propylbenzene	< 7.54	ug/Kg		6/24/2026 16:31
o-Xylene	< 7.54	ug/Kg		6/24/2026 16:31
p-Isopropyltoluene	< 7.54	ug/Kg		6/24/2026 16:31
sec-Butylbenzene	< 7.54	ug/Kg		6/24/2026 16:31
tert-Butylbenzene	< 7.54	ug/Kg		6/24/2026 16:31
Toluene	< 7.54	ug/Kg		6/24/2026 16:31

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM
ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262570

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Sample Identifier:	D		
Lab Sample ID:	262570-04	**Date Sampled:** 6/19/2026	13:15
Matrix:	Soil	**Date Received** 6/19/2026	

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed	
1,2-Dichloroethane-d4	**104**	82.7 - 122		6/24/2026	16:31
4-Bromofluorobenzene	**90.3**	74.5 - 117		6/24/2026	16:31
Pentafluorobenzene	**97.2**	85.1 - 114		6/24/2026	16:31
Toluene-D8	**99.4**	86.8 - 113		6/24/2026	16:31

Method Reference(s): EPA 8260C
EPA 5035A - L

Data File: z38636.D

This sample was not collected following SW846 5035A specifications. Accordingly, any Volatiles soil results that are less than 200 ug/Kg, including Non Detects, may be biased low, per ELAP method 5035 guidance document from 11/15/2012.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Method Blank Report

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Lab Project ID: 262570

Matrix: Soil

Volatile Organics (Petroleum)

Analyte	Result	Units	Qualifier	Date Analyzed
1,2,4-Trimethylbenzene	<2.00	ug/Kg		6/24/2026 14:13
1,3,5-Trimethylbenzene	<2.00	ug/Kg		6/24/2026 14:13
Benzene	<2.00	ug/Kg		6/24/2026 14:13
Ethylbenzene	<2.00	ug/Kg		6/24/2026 14:13
Isopropylbenzene	<2.00	ug/Kg		6/24/2026 14:13
m,p-Xylene	<2.00	ug/Kg		6/24/2026 14:13
Methyl tert-butyl Ether	<2.00	ug/Kg		6/24/2026 14:13
Naphthalene	<5.00	ug/Kg		6/24/2026 14:13
n-Butylbenzene	<2.00	ug/Kg		6/24/2026 14:13
n-Propylbenzene	<2.00	ug/Kg		6/24/2026 14:13
o-Xylene	<2.00	ug/Kg		6/24/2026 14:13
p-Isopropyltoluene	<2.00	ug/Kg		6/24/2026 14:13
sec-Butylbenzene	<2.00	ug/Kg		6/24/2026 14:13
tert-Butylbenzene	<2.00	ug/Kg		6/24/2026 14:13
Toluene	<2.00	ug/Kg		6/24/2026 14:13

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed
1,2-Dichloroethane-d4	**95.3**	82.7 - 122		6/24/2026 14:13
4-Bromofluorobenzene	**82.3**	74.5 - 117		6/24/2026 14:13
Pentafluorobenzene	**94.2**	85.1 - 114		6/24/2026 14:13
Toluene-D8	**91.4**	86.8 - 113		6/24/2026 14:13

Method Reference(s): EPA 8260C
EPA 5035A - L

Data File: z38629.D

QC Batch ID: voaq260624

QC Number: Blk 1

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM
ENVIRONMENTAL SERVICES, INC.

QC Report for Laboratory Control Sample

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson

Lab Project ID: 262570

Matrix: Soil

Volatile Organics (Petroleum)

Analyte	Spike Added	Spike Units	LCS Result	LCS % Recovery	% Rec Limits	LCS Outliers	Date Analyzed
Benzene	20.0	ug/Kg	21.5	108	83.7 - 110		6/24/2026
Ethylbenzene	20.0	ug/Kg	21.9	110	83 - 110	*	6/24/2026
Toluene	20.0	ug/Kg	21.2	106	79.9 - 110		6/24/2026

Method Reference(s): EPA 8260C
EPA 5035A - L
Data File: z38628.D
QC Number: LCS 1
QC Batch ID: voaq260624

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

Report Prepared *Thursday, June 25, 2026*

PARADIGM ENVIRONMENTAL SERVICES, INC.

QC Report for Matrix Spike and Matrix Spike Duplicate

Client: **Tritec Construction** **Lab Project ID:** 262570

Project Reference: 3885 RT 104 Williamson

Lab Sample ID: 262570-01
Sample Identifier: A
Matrix: Soil

Date Sampled: 6/19/2026
Date Received: 6/19/2026
Date Analyzed: 6/24/2026

Volatile Organics (Petroleum)

Analyte	Sample Result	Result Units	MS Added	MS Result	MS % Recovery	MSD Added	MSD Result	MSD % Recovery	% Rec. Limits	MS Outlier	MSD Outlier	Relative % Diff.	RPD Limit	RPD Outlier
Benzene	< 8.24	ug/Kg	221	226	102	258	297	115	83.7 - 110		*	12.1	16.2	
Ethylbenzene	< 8.24	ug/Kg	221	240	108	258	320	124	83 - 110		*	13.3	15.4	
Toluene	< 8.24	ug/Kg	221	226	102	258	300	116	79.9 - 110		*	13.0	16.4	

Method Reference(s): EPA 8260C
EPA 5035A - L
Data File(s): z38639.D
z38640.D
z38633.D
1
QC Batch ID: voaq260624

Any estimated values are displayed, and derived values calculated, based on numeric result only. See primary analytical report for data flags.

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

Report Prepared Thursday, June 25, 2026

Analytical Report Appendix

The reported results relate only to the samples as they have been received by the laboratory.

Each page of this document is part of a multipage report. This document may not be reproduced except in its entirety, without the prior consent of Paradigm Environmental Services, Inc.

All soil/sludge samples have been reported on a dry weight basis, unless qualified "reported as received". Other solids are reported as received.

Low level Volatiles blank reports for soil/solid matrix are based on a nominal 5 gram weight. Sample results and reporting limits are based on actual weight, which may be more or less than 5 grams.

The Chain of Custody provides additional information, including compliance with sample condition requirements upon receipt. Sample condition requirements are defined under the TNI 2016, sections 5.8.6 and 5.8.7

NYSDOH ELAP does not certify for all parameters. Paradigm Environmental Services or the indicated subcontracted laboratory does hold certification for all analytes where certification is offered by ELAP unless otherwise specified. Aliquots separated for certain tests, such as TCLP, are indicated on the Chain of Custody and final reports with an "A" suffix.

Data qualifiers are used, when necessary, to provide additional information about the data. This information may be communicated as a flag or as text at the bottom of the report. Please refer to the following list of analyte-specific, frequently used data flags and their meaning:

"<" = Analyzed for but not detected at or above the quantitation limit.
"E" = Result has been estimated, calibration limit exceeded.
"H" = Denotes a parameter analyzed outside of holding time.
"Z" = See case narrative.
"D" = Sample, Laboratory Control Sample, or Matrix Spike Duplicate results above Relative Percent Difference limit.
"M" = Matrix spike recoveries outside QC limits. Matrix bias indicated.
"B" = Method blank contained trace levels of analyte. Refer to included method blank report.
"J" = Result estimated between the quantitation limit and half the quantitation limit.
"L" = Laboratory Control Sample recovery outside accepted QC limits.
"P" = Concentration differs by more than 40% between the primary and secondary analytical columns.
"NC" = Not calculable. Applicable to RPD if sample or duplicate result is non-detect or estimated (see primary report for data flags). Applicable to MS if sample is greater or equal to ten times the spike added. Applicable to sample surrogates or MS if sample dilution is 10x or higher.
"" = Indicates any recoveries outside associated acceptance windows. Surrogate outliers in samples are presumed matrix effects. LCS demonstrates method compliance unless otherwise noted.*
"(1)" = Indicates data from primary column used for QC calculation.
"A" = denotes a parameter for which ELAP does not offer approval as part of their laboratory certification program.
"F" = denotes a parameter for which Paradigm does not carry certification, the results for which should therefore only be used where ELAP certification is not required, such as personal exposure assessment.

GENERAL TERMS AND CONDITIONS
LABORATORY SERVICES

These Terms and Conditions embody the whole agreement of the parties in the absence of a signed and executed contract between the Laboratory (LAB) and Client. They shall supersede all previous communications, representations, or agreements, either verbal or written, between the parties. The LAB specifically rejects all additional, inconsistent, or conflicting terms, whether printed or otherwise set forth in any purchase order or other communication from the Client to the LAB. The invalidity or unenforceability in whole or in part of any provision, term or condition hereof shall not affect in any way the validity or enforceability of the remainder of the Terms and Conditions. No waiver by LAB of any provision, term, or condition hereof or of any breach by or obligation of the Client hereunder shall constitute a waiver of such provision, term, or condition on any other occasion or a waiver of any other breach by or obligation of the Client. This agreement shall be administered and interpreted under the laws of the state which services are procured.

Warranty. Recognizing that the nature of many samples is unknown and that some may contain potentially hazardous components, LAB warrants only that it will perform testing services, obtain findings, and prepare reports in accordance with generally accepted analytical laboratory principles and practices at the time of performance of services. LAB makes no other warranty, express or implied.

Scope and Compensation. LAB agrees to perform the services described in the chain of custody to which these terms and conditions are attached. Unless the parties agree in writing to the contrary, the duties of LAB shall not be construed to exceed the services specifically described. LAB wi use LAB default method for all tests unless specified otherwise on the Work Order.
Payment terms are net 30 days from the date of invoice. All overdue payments are subject to an interest charge of one and one-half percent (1-1/2%) per month or a portion thereof. Client shall also be responsible for costs of collection, including payment of reasonable attorney fees if such expense is incurred. The prices, unless stated, do not include any sale, use or other taxes. Such taxes will be added to invoice prices when required.

Prices. Compensation for services performed will be based on the current Lab Analytical Fee Schedule or on quotations agreed to in writing by the parties. Turnaround time based charges are determined from the time of resolution of all work order questions. Testimony, court appearances or data compilation for legal action will be charged separately. Evaluation and reporting of initial screening runs may incur additional fees.

Limitations of Liability. In the event of any error, omission, or other professional negligence, the sole and exclusive responsibility of LAB shall be to re-perform the deficient work at its own expense and LAB shall have no other liability whatsoever. All claims shall be deemed waived unless made in writing and received by LAB within ninety (90) days following completion of services.
LAB shall have no liability, obligation, or responsibility of any kind for losses, costs, expenses, or other damages (including but not limited to any special, direct, incidental or consequential damages) with respect to LAB's services or results.
All results provided by LAB are strictly for the use of its clients and LAB is in no way responsible for the use of such results by clients or third parties. All reports should be considered in their entirety, and LAB is not responsible for the separation, detachment, or other use of any portion of these reports. Client may not assign the lab report without the written consent of the LAB.
Client covenants and agrees, at its/his/her sole expense, to indemnify, protect, defend, and save harmless the LAB from and against any and all damages, losses, liabilities, obligations, penalties, claims, litigation, demands, defenses, judgments, suits, actions, proceedings, costs, disbursements and/or expenses (including, without limitation attorneys' and experts' fees and disbursements) of any kind whatsoever which may at any time be imposed upon, incurred by or asserted or awarded against client relating to, resulting from or arising out of (a) the breach of this agreement by this client, (b) the negligence of the client in handling, delivering or disclosing any hazardous substance, (c) the violation of the Client of any applicable law, (d) non-compliance by the Client with any environmental permit or (e) a material misrepresentation in disclosing the materials to be tested.

Hazard Disclosure. Client represents and warrants that any sample delivered to LAB will be preceded or accompanied by complete written disclosure of the presence of any hazardous substances known or suspected by Client. Client further warrants that any sample containing any hazardous substance that is to be delivered to LAB will be packaged, labeled, transported, and delivered properly and in accordance with applicable laws.

Sample Handling. Prior to LAB's acceptance of any sample (or after any revocation of acceptance), the entire risk of loss or of damage to such sample remains with Client. Samples are accepted when receipt is acknowledged on chain of custody documentation. In no event will LAB have any responsibility for the action or inaction of any carrier shipping or delivering any sample to or from LAB premises.
Client authorizes LAB to proceed with the analysis of samples as received by the laboratory, recognizing that any samples not in compliance with all current DOH-ELAP-NELAP requirements for containers, preservation or holding time will be noted as such on th final report.
Disposal of hazardous waste samples is the responsibility of the Client. If the Client does not wish such samples returned, LAB may add storage and disposal fees to the final invoice. Maximum storage time for samples is 30 days after completion of analysis unless modified by applicable state or federal laws. Client will be required to give the LAB written instructions concerning disposal of these samples.
LAB reserves the absolute right, exercisable at any time, to refuse to receive delivery of, refuse to accept, or revoke acceptance of any sample, which, in the sole judgment of LAB (a) is of unsuitable volume, (b) may be or become unsuitable for or may pose a risk in handling, transport, or processing for any health, safety, environmental or other reason whether or not due to the presence in the sample of any hazardous substance, and whether or not such presence has been disclosed to LAB by Client or (c) if the condition or sample date make the sample unsuitable for analysis.

Legal Responsibility. LAB is solely responsible for performance of this contract, and no affiliated company, director, officer, employee, or agent shall have any legal responsibility hereunder, whether in contract or tort including negligence.

Assignment. LAB may assign its performance obligations under this contract to other parties, as it deems necessary. LAB shall disclose to Client any assignee (subcontractor) by ELAP ID # on the submitted final report.

Force Majeure. LAB shall have no responsibility or liability to the Client for any failure or delay in performance by LAB, which results in whole or in part from any cause or circumstance beyond the reasonable control of LAB. Such causes and circumstances shall include, but not limited to, acts of God, acts or orders of any government authority, strikes or other labor disputes, natural disasters, accidents, wars, civil disturbances, difficulties or delays in transportation, mail or delivery services, inability to obtain sufficient services or supplies from LAB's usual suppliers, or any other cause beyond LAB's reasonable control.

Law. This contract shall be continued under the laws of the State of New York without regard to its conflicts of laws provision.

1 of 2

179 Lake Avenue, Rochester, NY 14608 Office (585) 647-2530 Fax (585) 647-3311

CHAIN OF CUSTODY

PARADIGM ENVIRONMENTAL SERVICES

REPORT TO:		INVOICE TO:		
COMPANY:	Tritec Construction	COMPANY:	SAME	LAB PROJECT ID: 262570
address:	440 Bartell LN	ADDRESS:		
CITY:	Webster STATE: NY ZIP: 14580	CITY: STATE: ZIP:		Quotation #:
PHONE:	(585) 512-4990 FAX:	PHONE: FAX:		Email: TritecNY@Aol.com
ATTN:	Charlie	ATTN:		

PROJECT REFERENCE: 3885 RT104 Williamson

Matrix Codes:
AQ - Aqueous Liquid; NQ - Non-Aqueous Liquid; WA - Water; WG - Groundwater; DW - Drinking Water; WW - Wastewater; SO - Soil; SL - Sludge; SD - Solid; PT - Paint; WP - Wipe; CK - Caulk; OL - Oil; AR - Air

REQUESTED ANALYSIS

DATE COLLECTED	TIME COLLECTED	COMPOSITE	GRAB	SAMPLE IDENTIFIER	MATRIX CODES	NUMBER OF CONTAINERS	CP51 VOC	CP51SVOC	REMARKS	PARADIGM LAB SAMPLE NUMBER
6/19/26	1:15		X	A	SO	1	X	X		-01
			X	B	SO	1	X	X		-02
			X	C	SO	1	X	X		-03
			X	D	SO	1	X	X		-04

Turnaround Time		Report Supplements			
Availability contingent upon lab approval; additional fees may apply.					
Standard 5 day	X	None Required		None Required	
10 day		Batch QC		Basic EDD	
Rush 3 day		Category A		NYSDEC EDD	
Rush 2 day		Category B			
Rush 1 day					
Other		Other		Other EDD	
please indicate date needed:		please indicate package needed:		please indicate EDD needed :	

Sampled By: James Davis	Date/Time: 1:15pm 6/19/26	Total Cost:
Relinquished By: Jon Dai	Date/Time: 208 6/19/26	
Received By:	Date/Time: 6.19.26 1408	P.I.F.
Received @ Lab By:	Date/Time: 6/19/26 1439	
20.8°C	6/19/26 1413	

By signing this form, client agrees to Paradigm Terms and Conditions (reverse).

See additional page for sample conditions.

PARADIGM
ENVIRONMENTAL SERVICES

Chain of Custody Supplement

Client: TMC

Lab Project ID: 262570

Completed by: Glenn Pezzulo

Date: 6/19/24

Sample Condition Requirements

Per NELAC/ELAP 210/241/242/243/244

Condition	*NELAC compliance with the sample condition requirements upon receipt* Yes	No	N/A
Container Type	X	5035	
Comments			
Transferred to method-compliant container			X
Headspace (<1 mL)		X VOA	X
Comments			
Preservation			X
Comments			
Chlorine Absent (<0.10 ppm per test strip)			X
Comments			
Holding Time	X		
Comments			
Temperature		X	
Comments	20.8°C		
Compliant Sample Quantity/Type	X		
Comments			

PARADIGM
ENVIRONMENTAL SERVICES, INC

Analytical Report For

Tritec Construction

For Lab Project ID

262618

Referencing

3885 RT 104 Williamson NY

Prepared

Thursday, July 9, 2026

Any noncompliant QC parameters or other notes impacting data interpretation are flagged or documented on the final report or are noted below.

Certifies that this report has been approved by the Technical Director or Designee

179 Lake Avenue • Rochester, NY 14608 • (585) 647-2530 • Fax (585) 647-3311 • ELAP ID# 10958

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262618

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson NY

Sample Identifier:	3885 RT 104 Williamson NY		
Lab Sample ID:	262618-01	**Date Sampled:** 6/23/2026	14:00
Matrix:	Wastewater	**Date Received** 6/23/2026	

Ammonia-N

Analyte	Result	Units	Qualifier	Date Analyzed
Ammonia	<0.2	mg/L		6/30/2026

Method Reference(s): EPA 350.1 Rev 2.0
Subcontractor ELAP ID: 10709

5-Day Biochemical Oxygen Demand

Analyte	Result	Units	Qualifier	Date Analyzed
BOD 5	<4	mg/L		6/24/2026

Method Reference(s): SM 5210 B - 2016
Subcontractor ELAP ID: 10709

Total Cyanide

Analyte	Result	Units	Qualifier	Date Analyzed
Cyanide, Total	<0.010	mg/L		6/26/2026

Method Reference(s): EPA 335.4 Rev 1.0
Subcontractor ELAP ID: 10709

Low Level Mercury

Analyte	Result	Units	Qualifier	Date Analyzed
Mercury	**15.3**	ng/L		6/25/2026

Method Reference(s): EPA 1631E
Subcontractor ELAP ID: 10709

Priority Pollutant Metals (ICP)

Analyte	Result	Units	Qualifier	Date Analyzed
Antimony	< 0.0300	mg/L		6/26/2026 11:06
Arsenic	< 0.00500	mg/L		6/26/2026 11:06
Beryllium	< 0.00250	mg/L		6/26/2026 11:06
Cadmium	< 0.00250	mg/L		6/26/2026 11:06
Chromium	< 0.00500	mg/L		6/26/2026 11:06
Copper	< 0.0100	mg/L		6/26/2026 11:06

Sample Identifier:	3885 RT 104 Williamson NY		
Lab Sample ID:	262618-01	**Date Sampled:** 6/23/2026	14:00
Matrix:	Wastewater	**Date Received** 6/23/2026	

Lead	< 0.00500	mg/L	6/26/2026	11:06
Nickel	< 0.0200	mg/L	6/26/2026	11:06
Selenium	< 0.0100	mg/L	6/26/2026	11:06
Silver	< 0.00500	mg/L	6/26/2026	11:06
Thallium	< 0.0125	mg/L	6/26/2026	11:06
Zinc	< 0.0300	mg/L	6/26/2026	11:06

Method Reference(s): EPA 200.7 Rev 4.4 (1994)
Preparation Date: 6/25/2026
Data File: 260626A

PCBs

Analyte	Result	Units	Qualifier	Date Analyzed
PCB-1016	< 1.00	ug/L		6/25/2026 14:24
PCB-1221	< 1.00	ug/L		6/25/2026 14:24
PCB-1232	< 1.00	ug/L		6/25/2026 14:24
PCB-1242	< 1.00	ug/L		6/25/2026 14:24
PCB-1248	< 1.00	ug/L		6/25/2026 14:24
PCB-1254	< 1.00	ug/L		6/25/2026 14:24
PCB-1260	< 1.00	ug/L		6/25/2026 14:24

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed
Tetrachloro-m-xylene	**60.0**	17.7 - 97.9		6/25/2026 14:24

Method Reference(s): EPA 608.3
Preparation Date: 6/25/2026

Total Phenolics

Analyte	Result	Units	Qualifier	Date Analyzed
Phenolics, Total	<0.05	mg/L		7/9/2026

Method Reference(s): EPA 420.1 (Rev 1978)
Subcontractor ELAP ID: 10709

Semi-Volatile Organics (Acid/Base Neutrals)

Analyte	Result	Units	Qualifier	Date Analyzed
1,2,4-Trichlorobenzene	< 10.0	ug/L		6/25/2026 18:14

Lab Project ID: 262618

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson NY

Sample Identifier: 3885 RT 104 Williamson NY
Lab Sample ID: 262618-01 **Date Sampled:** 6/23/2026 14:00
Matrix: Wastewater **Date Received** 6/23/2026

2,2-Oxybis (1-chloropropane)	< 10.0	ug/L	6/25/2026 18:14
2,4,6-Trichlorophenol	< 10.0	ug/L	6/25/2026 18:14
2,4-Dichlorophenol	< 10.0	ug/L	6/25/2026 18:14
2,4-Dimethylphenol	< 20.0	ug/L	6/25/2026 18:14
2,4-Dinitrophenol	< 20.0	ug/L	6/25/2026 18:14
2,4-Dinitrotoluene	< 10.0	ug/L	6/25/2026 18:14
2,6-Dinitrotoluene	< 10.0	ug/L	6/25/2026 18:14
2-Chloronaphthalene	< 10.0	ug/L	6/25/2026 18:14
2-Chlorophenol	< 10.0	ug/L	6/25/2026 18:14
2-Nitrophenol	< 10.0	ug/L	6/25/2026 18:14
3,3'-Dichlorobenzidine	< 10.0	ug/L	6/25/2026 18:14
4,6-Dinitro-2-methylphenol	< 20.0	ug/L	6/25/2026 18:14
4-Bromophenyl phenyl ether	< 10.0	ug/L	6/25/2026 18:14
4-Chloro-3-methylphenol	< 10.0	ug/L	6/25/2026 18:14
4-Chlorophenyl phenyl ether	< 10.0	ug/L	6/25/2026 18:14
4-Nitrophenol	< 20.0	ug/L	6/25/2026 18:14
Acenaphthene	< 10.0	ug/L	6/25/2026 18:14
Acenaphthylene	< 10.0	ug/L	6/25/2026 18:14
Anthracene	< 10.0	ug/L	6/25/2026 18:14
Benzidine	< 20.0	ug/L	6/25/2026 18:14
Benzo (a) anthracene	< 10.0	ug/L	6/25/2026 18:14
Benzo (a) pyrene	< 10.0	ug/L	6/25/2026 18:14
Benzo (b) fluoranthene	< 10.0	ug/L	6/25/2026 18:14
Benzo (g,h,i) perylene	< 10.0	ug/L	6/25/2026 18:14
Benzo (k) fluoranthene	< 10.0	ug/L	6/25/2026 18:14
Bis (2-chloroethoxy) methane	< 10.0	ug/L	6/25/2026 18:14
Bis (2-chloroethyl) ether	< 10.0	ug/L	6/25/2026 18:14
Bis (2-ethylhexyl) phthalate	< 10.0	ug/L	6/25/2026 18:14
Butylbenzylphthalate	< 10.0	ug/L	6/25/2026 18:14
Chrysene	< 10.0	ug/L	6/25/2026 18:14

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262618

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson NY

Sample Identifier: 3885 RT 104 Williamson NY
Lab Sample ID: 262618-01 **Date Sampled:** 6/23/2026 14:00
Matrix: Wastewater **Date Received** 6/23/2026

Dibenz (a,h) anthracene	< 10.0	ug/L	6/25/2026 18:14
Diethyl phthalate	< 20.0	ug/L	6/25/2026 18:14
Dimethyl phthalate	< 20.0	ug/L	6/25/2026 18:14
Di-n-butyl phthalate	< 20.0	ug/L	6/25/2026 18:14
Di-n-octylphthalate	< 20.0	ug/L	6/25/2026 18:14
Fluoranthene	< 10.0	ug/L	6/25/2026 18:14
Fluorene	< 10.0	ug/L	6/25/2026 18:14
Hexachlorobenzene	< 10.0	ug/L	6/25/2026 18:14
Hexachlorobutadiene	< 10.0	ug/L	6/25/2026 18:14
Hexachlorocyclopentadiene	< 10.0	ug/L	6/25/2026 18:14
Hexachloroethane	< 10.0	ug/L	6/25/2026 18:14
Indeno (1,2,3-cd) pyrene	< 10.0	ug/L	6/25/2026 18:14
Isophorone	< 10.0	ug/L	6/25/2026 18:14
Naphthalene	< 10.0	ug/L	6/25/2026 18:14
Nitrobenzene	< 10.0	ug/L	6/25/2026 18:14
N-Nitrosodimethylamine	< 10.0	ug/L	6/25/2026 18:14
N-Nitroso-di-n-propylamine	< 10.0	ug/L	6/25/2026 18:14
N-Nitrosodiphenylamine	< 10.0	ug/L	6/25/2026 18:14
Pentachlorophenol	< 20.0	ug/L	6/25/2026 18:14
Phenanthrene	< 10.0	ug/L	6/25/2026 18:14
Phenol	< 10.0	ug/L	6/25/2026 18:14
Pyrene	< 10.0	ug/L	6/25/2026 18:14

This report is part of a multipage document and should only be evaluated in its entirety. The Chain of Custody provides additional sample information, including compliance with the sample condition requirements upon receipt.

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262618

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson NY

Sample Identifier: 3885 RT 104 Williamson NY
Lab Sample ID: 262618-01 **Date Sampled:** 6/23/2026 14:00
Matrix: Wastewater **Date Received** 6/23/2026

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed
2,4,6-Tribromophenol	**72.7**	37.4 - 118		6/25/2026 18:14
2-Fluorobiphenyl	**46.9**	12.8 - 102		6/25/2026 18:14
2-Fluorophenol	**39.8**	10 - 102		6/25/2026 18:14
Nitrobenzene-d5	**68.0**	39.6 - 102		6/25/2026 18:14
Phenol-d5	**28.9**	10 - 98		6/25/2026 18:14
Terphenyl-d14	**81.5**	48.1 - 121		6/25/2026 18:14

Method Reference(s): EPA 625.1
Preparation Date: 6/24/2026
Data File: B8350815.D

Total Suspended Solids

Analyte	Result	Units	Qualifier	Date Analyzed
Solids, Suspended	**74.0**	mg/L		6/29/2026

Method Reference(s): SM 2540 D - 2015
Subcontractor ELAP ID: 10709

Volatile Organics

Analyte	Result	Units	Qualifier	Date Analyzed
1,1,1-Trichloroethane	< 2.00	ug/L		6/25/2026 15:08
1,1,2,2-Tetrachloroethane	< 2.00	ug/L		6/25/2026 15:08
1,1,2-Trichloroethane	< 2.00	ug/L		6/25/2026 15:08
1,1-Dichloroethane	< 2.00	ug/L		6/25/2026 15:08
1,1-Dichloroethene	< 2.00	ug/L		6/25/2026 15:08
1,2-Dichlorobenzene	< 2.00	ug/L		6/25/2026 15:08
1,2-Dichloroethane	< 2.00	ug/L		6/25/2026 15:08
1,2-Dichloropropane	< 2.00	ug/L		6/25/2026 15:08
1,3-Dichlorobenzene	< 2.00	ug/L		6/25/2026 15:08
1,4-Dichlorobenzene	< 2.00	ug/L		6/25/2026 15:08
2-Chloroethyl vinyl Ether	< 5.00	ug/L		6/25/2026 15:08
Benzene	< 1.00	ug/L		6/25/2026 15:08
Bromodichloromethane	< 2.00	ug/L		6/25/2026 15:08

PARADIGM ENVIRONMENTAL SERVICES, INC.

Lab Project ID: 262618

Client: **Tritec Construction**

Project Reference: 3885 RT 104 Williamson NY

Sample Identifier: 3885 RT 104 Williamson NY
Lab Sample ID: 262618-01 **Date Sampled:** 6/23/2026 14:00
Matrix: Wastewater **Date Received** 6/23/2026

Bromoform	< 5.00	ug/L		6/25/2026 15:08
Bromomethane	< 2.00	ug/L		6/25/2026 15:08
Carbon Tetrachloride	< 2.00	ug/L		6/25/2026 15:08
Chlorobenzene	< 2.00	ug/L		6/25/2026 15:08
Chloroethane	< 2.00	ug/L		6/25/2026 15:08
Chloroform	< 2.00	ug/L		6/25/2026 15:08
Chloromethane	< 2.00	ug/L		6/25/2026 15:08
cis-1,3-Dichloropropene	< 2.00	ug/L		6/25/2026 15:08
Dibromochloromethane	< 2.00	ug/L		6/25/2026 15:08
Ethylbenzene	< 2.00	ug/L		6/25/2026 15:08
Methylene chloride	< 5.00	ug/L		6/25/2026 15:08
Tetrachloroethene	< 2.00	ug/L		6/25/2026 15:08
Toluene	< 2.00	ug/L		6/25/2026 15:08
trans-1,2-Dichloroethene	< 2.00	ug/L		6/25/2026 15:08
trans-1,3-Dichloropropene	< 2.00	ug/L		6/25/2026 15:08
Trichloroethene	< 2.00	ug/L		6/25/2026 15:08
Trichlorofluoromethane	< 2.00	ug/L		6/25/2026 15:08
Vinyl chloride	< 2.00	ug/L		6/25/2026 15:08

Surrogate	Percent Recovery	Limits	Outliers	Date Analyzed
1,2-Dichloroethane-d4	**105**	82.2 - 122		6/25/2026 15:08
4-Bromofluorobenzene	**91.5**	75.2 - 117		6/25/2026 15:08
Pentafluorobenzene	**99.3**	85.6 - 114		6/25/2026 15:08
Toluene-D8	**100**	87 - 113		6/25/2026 15:08

Method Reference(s): EPA 624.1
Data File: z38658.D
The analyte 2-Chloroethyl vinyl Ether does not recover from acid preserved VOA vials.

Analytical Report Appendix

The reported results relate only to the samples as they have been received by the laboratory.

Each page of this document is part of a multipage report. This document may not be reproduced except in its entirety, without the prior consent of Paradigm Environmental Services, Inc.

All soil/sludge samples have been reported on a dry weight basis, unless qualified "reported as received". Other solids are reported as received.

Low level Volatiles blank reports for soil/solid matrix are based on a nominal 5 gram weight. Sample results and reporting limits are based on actual weight, which may be more or less than 5 grams.

The Chain of Custody provides additional information, including compliance with sample condition requirements upon receipt. Sample condition requirements are defined under the TNI 2016, sections 5.8.6 and 5.8.7

NYSDOH ELAP does not certify for all parameters. Paradigm Environmental Services or the indicated subcontracted laboratory does hold certification for all analytes where certification is offered by ELAP unless otherwise specified. Aliquots separated for certain tests, such as TCLP, are indicated on the Chain of Custody and final reports with an "A" suffix.

Data qualifiers are used, when necessary, to provide additional information about the data. This information may be communicated as a flag or as text at the bottom of the report. Please refer to the following list of analyte-specific, frequently used data flags and their meaning:

"<" = Analyzed for but not detected at or above the quantitation limit.
"E" = Result has been estimated, calibration limit exceeded.
"H" = Denotes a parameter analyzed outside of holding time.
"Z" = See case narrative.
"D" = Sample, Laboratory Control Sample, or Matrix Spike Duplicate results above Relative Percent Difference limit.
"M" = Matrix spike recoveries outside QC limits. Matrix bias indicated.
"B" = Method blank contained trace levels of analyte. Refer to included method blank report.
"J" = Result estimated between the quantitation limit and half the quantitation limit.
"L" = Laboratory Control Sample recovery outside accepted QC limits.
"P" = Concentration differs by more than 40% between the primary and secondary analytical columns.
"NC" = Not calculable. Applicable to RPD if sample or duplicate result is non-detect or estimated (see primary report for data flags). Applicable to MS if sample is greater or equal to ten times the spike added. Applicable to sample surrogates or MS if sample dilution is 10x or higher.
"" = Indicates any recoveries outside associated acceptance windows. Surrogate outliers in samples are presumed matrix effects. LCS demonstrates method compliance unless otherwise noted.*
"(1)" = Indicates data from primary column used for QC calculation.
"A" = denotes a parameter for which ELAP does not offer approval as part of their laboratory certification program.
"F" = denotes a parameter for which Paradigm does not carry certification, the results for which should therefore only be used where ELAP certification is not required, such as personal exposure assessment.

GENERAL TERMS AND CONDITIONS
LABORATORY SERVICES

These Terms and Conditions embody the whole agreement of the parties in the absence of a signed and executed contract between the Laboratory (LAB) and Client. They shall supersede all previous communications, representations, or agreements, either verbal or written, between the parties. The LAB specifically rejects all additional, inconsistent, or conflicting terms, whether printed or otherwise set forth in any purchase order or other communication from the Client to the LAB. The invalidity or unenforceability in whole or in part of any provision, term or condition hereof shall not affect in any way the validity or enforceability of the remainder of the Terms and Conditions. No waiver by LAB of any provision, term, or condition hereof or of any breach by or obligation of the Client hereunder shall constitute a waiver of such provision, term, or condition on any other occasion or a waiver of any other breach by or obligation of the Client. This agreement shall be administered and interpreted under the laws of the state which services are procured.

Warranty. Recognizing that the nature of many samples is unknown and that some may contain potentially hazardous components, LAB warrants only that it will perform testing services, obtain findings, and prepare reports in accordance with generally accepted analytical laboratory principles and practices at the time of performance of services. LAB makes no other warranty, express or implied.

Scope and Compensation. LAB agrees to perform the services described in the chain of custody to which these terms and conditions are attached. Unless the parties agree in writing to the contrary, the duties of LAB shall not be construed to exceed the services specifically described. LAB wi use LAB default method for all tests unless specified otherwise on the Work Order.
Payment terms are net 30 days from the date of invoice. All overdue payments are subject to an interest charge of one and one-half percent (1-1/2%) per month or a portion thereof. Client shall also be responsible for costs of collection, including payment of reasonable attorney fees if such expense is incurred. The prices, unless stated, do not include any sale, use or other taxes. Such taxes will be added to invoice prices when required.

Prices. Compensation for services performed will be based on the current Lab Analytical Fee Schedule or on quotations agreed to in writing by the parties. Turnaround time based charges are determined from the time of resolution of all work order questions. Testimony, court appearances or data compilation for legal action will be charged separately. Evaluation and reporting of initial screening runs may incur additional fees.

Limitations of Liability. In the event of any error, omission, or other professional negligence, the sole and exclusive responsibility of LAB shall be to re-perform the deficient work at its own expense and LAB shall have no other liability whatsoever. All claims shall be deemed waived unless made in writing and received by LAB within ninety (90) days following completion of services.
LAB shall have no liability, obligation, or responsibility of any kind for losses, costs, expenses, or other damages (including but not limited to any special, direct, incidental or consequential damages) with respect to LAB's services or results.
All results provided by LAB are strictly for the use of its clients and LAB is in no way responsible for the use of such results by clients or third parties. All reports should be considered in their entirety, and LAB is not responsible for the separation, detachment, or other use of any portion of these reports. Client may not assign the lab report without the written consent of the LAB.
Client covenants and agrees, at its/his/her sole expense, to indemnify, protect, defend, and save harmless the LAB from and against any and all damages, losses, liabilities, obligations, penalties, claims, litigation, demands, defenses, judgments, suits, actions, proceedings, costs, disbursements and/or expenses (including, without limitation attorneys' and experts' fees and disbursements) of any kind whatsoever which may at any time be imposed upon, incurred by or asserted or awarded against client relating to, resulting from or arising out of (a) the breach of this agreement by this client, (b) the negligence of the client in handling, delivering or disclosing any hazardous substance, (c) the violation of the Client of any applicable law, (d) non-compliance by the Client with any environmental permit or (e) a material misrepresentation in disclosing the materials to be tested.

Hazard Disclosure. Client represents and warrants that any sample delivered to LAB will be preceded or accompanied by complete written disclosure of the presence of any hazardous substances known or suspected by Client. Client further warrants that any sample containing any hazardous substance that is to be delivered to LAB will be packaged, labeled, transported, and delivered properly and in accordance with applicable laws.

Sample Handling. Prior to LAB's acceptance of any sample (or after any revocation of acceptance), the entire risk of loss or of damage to such sample remains with Client. Samples are accepted when receipt is acknowledged on chain of custody documentation. In no event will LAB have any responsibility for the action or inaction of any carrier shipping or delivering any sample to or from LAB premises.
Client authorizes LAB to proceed with the analysis of samples as received by the laboratory, recognizing that any samples not in compliance with all current DOH-ELAP-NELAP requirements for containers, preservation or holding time will be noted as such on th final report.
Disposal of hazardous waste samples is the responsibility of the Client. If the Client does not wish such samples returned, LAB may add storage and disposal fees to the final invoice. Maximum storage time for samples is 30 days after completion of analysis unless modified by applicable state or federal laws. Client will be required to give the LAB written instructions concerning disposal of these samples.
LAB reserves the absolute right, exercisable at any time, to refuse to receive delivery of, refuse to accept, or revoke acceptance of any sample, which, in the sole judgment of LAB (a) is of unsuitable volume, (b) may be or become unsuitable for or may pose a risk in handling, transport, or processing for any health, safety, environmental or other reason whether or not due to the presence in the sample of any hazardous substance, and whether or not such presence has been disclosed to LAB by Client or (c) if the condition or sample date make the sample unsuitable for analysis.

Legal Responsibility. LAB is solely responsible for performance of this contract, and no affiliated company, director, officer, employee, or agent shall have any legal responsibility hereunder, whether in contract or tort including negligence.

Assignment. LAB may assign its performance obligations under this contract to other parties, as it deems necessary. LAB shall disclose to Client any assignee (subcontractor) by ELAP ID # on the submitted final report.

Force Majeure. LAB shall have no responsibility or liability to the Client for any failure or delay in performance by LAB, which results in whole or in part from any cause or circumstance beyond the reasonable control of LAB. Such causes and circumstances shall include, but not limited to, acts of God, acts or orders of any government authority, strikes or other labor disputes, natural disasters, accidents, wars, civil disturbances, difficulties or delays in transportation, mail or delivery services, inability to obtain sufficient services or supplies from LAB's usual suppliers, or any other cause beyond LAB's reasonable control.

Law. This contract shall be continued under the laws of the State of New York without regard to its conflicts of laws provision.

179 Lake Avenue, Rochester, NY 14608 Office (585) 647-2530 Fax (585) 647-3311

CHAIN OF CUSTODY

PARADIGM ENVIRONMENTAL SERVICES

REPORT TO:		INVOICE TO:	
COMPANY:	Tritec Construction	COMPANY:	SAME
address:		ADDRESS:	
CITY:	STATE: ZIP:	CITY:	STATE: ZIP:
PHONE:	512-4990 FAX:	PHONE:	FAX:
ATTN:	Charlie Davis	ATTN:	

LAB PROJECT ID: 262618

Quotation #:

Email: tritecny@aol.com

PROJECT REFERENCE: 3885 RT 104 Williamson NY

Matrix Codes:
AQ - Aqueous Liquid; NQ - Non-Aqueous Liquid; WA - Water; WG - Groundwater; DW - Drinking Water; WW - Wastewater; SO - Soil; SL - Sludge; SD - Solid; PT - Paint; WP - Wipe; CK - Caulk; OL - Oil; AR - Air

REQUESTED ANALYSIS

DATE COLLECTED	TIME COLLECTED	COMPOSITE	GRAB	SAMPLE IDENTIFIER	MATRIX CODES	NUMBER OF CONTAINERS	TSS	BOD	Ammonia (H2SO4)	Cyanide (NaOH)	Phenol (H2SO4)	LL Hg (HCl)	Metals* (HNO3)	PCB 608	625	624	REMARKS	PARADIGM LAB SAMPLE NUMBER
6/23/26	1400			3885 RT 104	WW	13	X	X	X	X	X	X	X	X	X	X	*Sb, As, Be, Cd, Cr, Cu, Pb, Ni, Ag,	-01
per Sampled by LR On 6/23/2026				Williamson NY per Project Reference GP 6/23/26													Se, Tl, Zn	

Turnaround Time		Report Supplements			
Availability contingent upon lab approval; additional fees may apply.					
Standard 5 day	X	None Required		None Required	
10 day Standard if not emailed by 6pm 6/23/26		Batch QC		Basic EDD	
Rush 3 day		Category A		NYSDEC EDD	
Rush 2 day		Category B			
Rush 1 day					
Other (please indicate date needed)		Other (please indicate package needed)		Other EDD (please indicate EDD needed)	

Sampled By	6/23/26 2:00	Total Cost:
Relinquished By	6/23/26 2:54	
Received By	6/23/26 1454	P.I.F.
Received @ Lab By	6/23/2026 1508	

20.3°C @ 1505 6/23/2026

By signing this form, client agrees to Paradigm Terms and Conditions (reverse).

See additional page for sample conditions.

PARADIGM
ENVIRONMENTAL SERVICES

Chain of Custody Supplement

Client: TriTec **Completed by:** Luke DeFazio

Lab Project ID: 262618 **Date:** 6/23/26

Sample Condition Requirements

Per NELAC/ELAP 210/241/242/243/244

Condition	NELAC compliance with the sample condition requirements upon receipt: Yes	No	N/A
Container Type	X		
Comments			
Transferred to method-compliant container			X
Headspace (<1 mL)	X VOA		X
Comments			
Preservation	X HCl (per label) VOA (label) metals, cyanide, Ammonia, Phenol		X
Comments			
Chlorine Absent (<0.10 ppm per test strip)	X 625 608		X
Comments	VOA: Cl⁻ neg.		
Holding Time	X		
Comments			
Temperature		X	X metals (except Hg)
Comments	20.3°C		
Compliant Sample Quantity/Type	X		
Comments			

260624013

179 Lake Avenue, Rochester, NY 14608 Office (585) 647-2530 Fax (585) 647-3311

1 of 1

Tom 6/23/26

CHAIN OF CUSTODY

ELAP ID: 10709

PARADIGM ENVIRONMENTAL SERVICES

REPORT TO:		INVOICE TO:			
COMPANY:	Paradigm Environmental	COMPANY:	Same	LAB PROJECT #:	CLIENT PROJECT #:
ADDRESS:		ADDRESS:			
CITY: STATE: ZIP:		CITY: STATE: ZIP:		TURNAROUND TIME: (WORKING DAYS)	
PHONE: FAX:		PHONE: FAX:		STD OTHER	
PROJECT NAME/SITE NAME:		ATTN:	Reporting	ATTN:	Accounts Payable	1 2 3 5	
		COMMENTS:	Please email results to reporting@paradigmenv.com	Date Due:	7/1/2026

REQUESTED ANALYSIS

	DATE	TIME	COMPOSITE	GRAB	SAMPLE LOCATION/FIELD ID	MATRIX	NUMBER OF CONTAINERS	TSS	BOD	Ammonia	TCN	Phenolics	LL Hg					REMARKS	PARADIGM LAB SAMPLE NUMBER
1	6/23/26	1400			3885 RT 104 Williamson, NY	WW	8	X	X	X	X	X	X					262618-01	
2																			
3																			
4																			
5																			
6																			
7																			
8																			
9																			
10																			

LAB USE ONLY BELOW THIS LINE

Sample Condition: Per NELAC/ELAP 210/241/242/243/244

Receipt Parameter	NELAC Compliance	
Container Type:	Y ☒	N ☐
Comments:		
Preservation:	Y ☒	N ☐
Comments:		
Holding Time:	Y ☒	N ☐
Comments:		
Temperature:	Y ☒	N ☐
Comments:		

Client

	Date/Time	
Sampled By	6/24/2026	0830
Relinquished By	6-24-26	1115
Received By	6/24/26	15:52
Received @ Lab By		

Total Cost:

P.I.F.

APPENDIX 2

Tank Disposal Documentation

ALPCO RECYCLING

846 MACEDON CENTER ROAD
MACEDON NY 14502
(315) 986-8900 DMV#710688

Rec ID: 82921 LASTNAME WENTZ FIRSTNAME TRISTAN
ADD1 4225 FOXWOOD DR ADD2
CITY WILLIAMSON STATE NY ZIP 14589 ClerkID AG
TICKET # 26034941 DATE 6/18/2026 TIME 7:45 AM

CODE	MATERIAL	WEIGHT	UNIT		NET		REMARKS
36T	STEEL-TORCHING	10660	LB			E	fuel tank
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
SUBTOTAL	SUBTOTAL						

I, the undersigned, do hereby guarantee lawful possession of the material/items listed above, and the right to sell the same.

Signature:

ALPCO RECYCLING

846 MACEDON CENTER ROAD
MACEDON NY 14502
(315) 986-8900 DMV#710688

Rec ID: 82921 LASTNAME WENTZ FIRSTNAME TRISTAN
ADD1 4225 FOXWOOD DR ADD2
CITY WILLIAMSON STATE NY ZIP 14589 ClerkID AG
TICKET # 26035007 DATE 6/18/2026 TIME 11:50 AM

CODE	MATERIAL	WEIGHT	UNIT		NET		REMARKS
36T	STEEL-TORCHING	8860	LB			E	FUEL TANK
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
SUBTOTAL	SUBTOTAL						

I, the undersigned, do hereby guarantee lawful possession of the material/items listed above, and the right to sell the same.

Signature:

ALPCO RECYCLING

846 MACEDON CENTER ROAD
MACEDON NY 14502
(315) 986-8900 DMV#710688

Rec ID: 82921 LASTNAME WENTZ FIRSTNAME TRISTAN
ADD1 4225 FOXWOOD DR ADD2
CITY WILLIAMSON STATE NY ZIP 14589 ClerkID AG
TICKET # 26035082 DATE 6/18/2026 TIME 2:55 PM

CODE	MATERIAL	WEIGHT	UNIT		NET		REMARKS
36T	STEEL-TORCHING	8720	LB			E	FUEL TANK
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
SUBTOTAL	SUBTOTAL						

I, the undersigned, do hereby guarantee lawful possession of the material/items listed above, and the right to sell the same.

Signature:

ALPCO RECYCLING

846 MACEDON CENTER ROAD
MACEDON NY 14502
(315) 986-8900 DMV#710688

Rec ID: 82921 LASTNAME WENTZ FIRSTNAME TRISTAN
ADD1 4225 FOXWOOD DR ADD2
CITY WILLIAMSON STATE NY ZIP 14589 ClerkID SP
TICKET # 26034828 DATE 6/17/2026 TIME 2:41 PM

CODE	MATERIAL	WEIGHT	UNIT		NET		REMARKS
36T	STEEL-TORCHING	4160	LB			E	FUEL TANK
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
			LB			E	
SUBTOTAL	SUBTOTAL						

I, the undersigned, do hereby guarantee lawful possession of the material/items listed above, and the right to sell the same.

Signature:

APPENDIX 3

Permits and D.E.C. Pre-Work Notification

Town of Williamson Building Department
6380 Route 21
Williamson, NY 14589
(315)589-0036

Paid
APR 09 2026
GET

BUILDING PERMIT

(Please Post in a Conspicuous Place)

Issued: 04/09/26
Expires: 07/09/27

Permit #: BP26-0033
Fee: $250.00 CK #3096

Project Description: Remove four existing fuel tanks & replace with one 16,000gal fuel tank in same location per code

Location: 3885 Route 104

Property Information:

Tax Map#: 65117-07-679862
Class: 432

Front: 0.00 **Lot:**
Depth: 0.00 **Subdivision:**
Acres: 1.02 **Zone:** C-1

Owner:
Hadibaig Management Co,
3885 Route 104
Williamson, NY 14580

Applicant: Hadibaig Management Co, LLC
3885 Route 104
Williamson, NY 14580

Const Type: **A/B:** **Occupancy:**
PreEng: **Loc:** **Material:**
Est. Project Cost: $218,000.00 **Square Feet:** 0

Contractor:

Permission is hereby granted to proceed with the work as set forth in the plans, specifications or statements now on file in the Code Enforcement Office. Any changes made to the original plans must first be submitted for approval.

The applicant shall notify Town of Williamson Code Enforcement Officer for the following inspections:

Backfill inspection

Final inspection for C of O/C

It is the responsibility of the owner and/or contractor to comply will all applicable Town ordinances. All inspections require a 24-hour minimum advance notice.

To schedule inspections, please call 315-589-0036 Ext 1 or by email: secretarytoassessor@towilliamson.com

04/09/26
Date

Duane Smeatin, Code Enforcement Officer

New York State Department of Environmental Conservation
Pre-Work Notification for Bulk Storage (PBS or CBS) Tank Installation or Closure

This form provides notice to the Department of an upcoming tank installation and/or closure per 6 NYCRR Sections 613-1.9(h) and (f), 613-2.6(b) (1), 613-3.5 (b) (1) and 613-4.5 (b) (1) of the Petroleum Bulk Storage (PBS) Regulations, or 6 NYCRR Sections 596.2(f) and (h) of the Chemical Bulk Storage (CBS) Regulations. Submit the completed form to the DEC regional office at least 30 days prior to the scheduled start of work for PBS tank installation * and permanent closure** ; at least 3 days prior for CBS tank installation *** . For CBS permanent tank closure, a minimum of 3 day prior notice is recommended. **If the schedule for work changes you must notify the Department's Regional Office before work begins. Once the work is complete, the facility (property) owner is responsible for submitting a PBS or CBS application to the Department with the complete tank information including the date the action was completed.** The Owner is also responsible to ensure that all work is completed in compliance with the applicable PBS or CBS regulations (i.e., Parts 613 or 598/599). Any questions, call the Regional Office to which notice was submitted. Information on the Chemical and Petroleum Bulk Storage Programs be found at: http://www.dec.ny.gov/chemical/287.html

*not required for temporary tank system ** unless in response to corrective action *** unless immediate action is required

Check Applicable Program: ☑ PBS ☐ CBS **Facility PBS or CBS Registration No.** 8-600152 or ☐ unregistered

Site Name: Harrys Valero	Contractor: Tritec Construction
Site Address: 3885 State Route 104 Williamson New York 14589	Address: 440 Bartell Ln Webster New York 14580
Site Address (cont):	Address(cont):
Site Contact: Amjad Baig	Contact: Charlie Davis
Phone Number: (585)503-7999 Cell Number:	Phone Number: (585)512-4990 Cell Number:
Email Address:	Email Address: Tritecny@aol.com

Tank Number	Type of Action (Close & Remove, Close in Place, Install)	Proposed Date**** (mm/dd/yy)	Tank Type (AST/ UST, Single-wall/ Double-wall)	Product Stored	Capacity (Gallons)	Spill Number (if applicable)	Reason for Action
001	Remove & Close	6/10/2026	Single wall UST	Gasoline	8,000		Replacement
002	Remove & Close	6/10/2026	Single wall UST	Gasoline	6,000		Replacement
003	Remove & Close	6/10/2026	Single wall UST	Gasoline	6,000		Close
004	Remove & Close	6/10/2026	Single wall UST	Kerosene	2,000		Close
Comments (i.e. piping/dispenser upgrade, preliminary site work for tank removal)	New tank to be installed						

****** Please notify the DEC regional office at least 3 days prior to the work beginning or if the proposed date changes.**

I hereby certify under penalty of law that the information provided on this form is true to the best of my knowledge and belief. False statements made herein are punishable as a Class A misdemeanor pursuant to Section 210.45 of the Penal Law.

Name of Owner or Authorized Representative (print): James (Charlie) Davis Title: Partner

Signature: Jm Dai Date 6/1/2026

APPENDIX 4

Photos of Job Site






VALERO
Clothes
& Shoes
BEAST