

**New York State Department of Environmental Conservation**


**Division of Environmental Remediation**

**Remedial Bureau C, 11th Floor**

625 Broadway, Albany, New York 12233-7014

**Phone:** (518) 402-9662 • **FAX:** (518) 402-9679

**Website:** www.dec.ny.gov



Alexander B. Grannis  
Commissioner

December 17, 2008

Ms. Emery Lawson  
Ecosystems Strategies, Inc.  
24 Davis Avenue  
Poughkeepsie, New York 12603

Re: Revised Supplemental Remedial Investigation Work Plan  
Beacon Terminal, City of Beacon, Dutchess County  
Brownfield Cleanup Agreement Site No. C314117

Dear Ms. Lawson:

The New York State Department of Environmental Conservation (Department) in consultation with the New York State Department of Health (NYSDOH) has completed its review of the revised Supplemental Remedial Investigation Work Plan (SRIWP), sent electronically, dated June 2008, and revised in November, 2008. Since all of the previous comments regarding this SRIWP have been addressed in this revision, the November 2008 SRIWP is hereby approved.

Please provide the department three (3) hard copies of the SRIWP, as well as a field work schedule within fourteen (14) days of the receipt of this letter. The Department requests at least seven (7) days notice before the start of any field work. Thank you for your submission of the work plan. If you or your client have any questions or concerns, please do not hesitate to contact me at (518) 402-9662.

Sincerely,

Kiera Becker  
Project Manager  
Division of Environmental Remediation

cc: A. Perretta - NYSDOH  
D. Lloyds - Beacon Terminal Associates, LP

ec: M. VanValkenburg - NYSDOH  
K. Becker/FILE

# **SUPPLEMENTAL REMEDIAL INVESTIGATION WORKPLAN**

## **Beacon Terminal**

**NYSDEC Brownfields Program Site: C314117**

**Located at**

**555 South Avenue  
City of Beacon  
Dutchess County, New York**

**Date of Preparation: June 2008  
(Revised November 2008)**

**ESI File: BB04157.50**

**Prepared By:**



**Ecosystems Strategies, Inc.**

24 Davis Avenue, Poughkeepsie, NY 12603

phone 845.452.1658 | fax 845.485.7083 | [ecosystemsstrategies.com](http://ecosystemsstrategies.com)

**SUPPLEMENTAL REMEDIAL  
INVESTIGATION WORKPLAN**

Prepared for the

**Beacon Terminal Site**

**NYSDEC Brownfields Program Site: C314117**

Located at

**555 South Avenue  
City of Beacon  
Dutchess County, New York**

**Date of Preparation: June 2008  
(Revised November 2008)**

**ESI File: BB04157.50**

**Prepared By:**

**Ecosystems Strategies, Inc.  
24 Davis Avenue  
Poughkeepsie, New York 12603**

**Prepared For:**

**Beacon Terminal Associates, LLP  
18 East 22<sup>nd</sup> Street  
New York, New York 10010**

The undersigned has reviewed this Supplemental Remedial Investigation Workplan and certifies to Beacon Terminal Associates, LLP that the information provided in this document is accurate as of the date of issuance by this office.

Any and all questions or comments, including requests for additional information, should be submitted to the undersigned.



\_\_\_\_\_  
Paul H. Ciminello  
President

## TABLE OF CONTENTS

<b>1.0</b>	<b>INTRODUCTION.....</b>	<b>1</b>
1.1	Purpose	
1.2	Site Location and History	
1.3	Findings of Initial Remedial Investigation	
1.3.1	Fieldwork Methodology and Observations	
1.3.2	Laboratory Results	
1.3.3	Summary of Significant Findings	
<b>2.0</b>	<b>PROPOSED INVESTIGATION ACTIVITIES.....</b>	<b>6</b>
2.1	Site Preparation Services	
2.1.1	Qualifications of on-site Remedial Personnel	
2.1.2	Health and Safety Plan	
2.1.3	Quality Assurance / Quality Control	
2.1.4	Fieldwork Monitoring	
2.1.5	Notifications	
2.2	Investigative Services	
2.2.1	Soil Borings	
2.2.2	Surface Soil Sampling	
2.2.3	Quality Control Samples	
2.3	Preparation of Final Reports	
2.4	Time Schedule	

### APPENDICES

#### A Figures

- Figure 1: Site Location Map*
- Figure 2: Fieldwork Map (VOCs in Soil)*
- Figure 3: Fieldwork Map (SVOCs in Soil)*
- Figure 4: Fieldwork Map (Metals in Soils)*
- Figure 5: Fieldwork Map (PCBs & Pesticides in Soils)*
- Figure 6: Fieldwork Map (Test Pits)*
- Figure 7: Fieldwork Map (Metals in Groundwater)*
- Figure 8: Proposed Fieldwork Map*

#### B Data Summary Tables

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li><i>Table 1: VOCs in Soil Borings</i></li> <li><i>Table 2: VOCs in Surface Soils</i></li> <li><i>Table 3: VOCs in Test Pits</i></li> <li><i>Table 4: VOCs in Groundwater</i></li> <li><i>Table 5: VOCs in Soil Gas</i></li> <li><i>Table 6: SVOCs in Soil Borings</i></li> <li><i>Table 7: SVOCs in Surface Soils</i></li> <li><i>Table 8: SVOCs in Test Pits</i></li> <li><i>Table 9: SVOCs in Groundwater</i></li> </ul> | <ul style="list-style-type: none"> <li><i>Table 10: Metals in Soil Borings</i></li> <li><i>Table 11: Metals in Surface Soils</i></li> <li><i>Table 12: Metals in Test Pits</i></li> <li><i>Table 13: Metals in Groundwater</i></li> <li><i>Table 14: PCBs in Soil Borings</i></li> <li><i>Table 15: PCBs in Surface Soils</i></li> <li><i>Table 16: PCBs in Test Pits</i></li> <li><i>Table 17: Pesticides in Surface Soils</i></li> <li><i>Table 18: PCBs in Groundwater</i></li> </ul> |
|--|--|

#### C Health and Safety Plan

#### D Community Air Monitoring Plan

#### E Remedial Investigation Workplan

## 1.0 INTRODUCTION

### 1.1 Purpose

This Supplemental Remedial Investigation Workplan (SRIWP) has been prepared by Ecosystems Strategies Inc. (ESI) to provide guidance for additional investigation activities to be conducted at the “Beacon Terminal” NYSDEC Brownfields Cleanup Program Site (BCP ID: C314117). This SRIWP incorporates, by reference, protocols and procedures presented in the NYSDEC approved Remedial Investigation Workplan (RIWP), October 2007) and is designed to supplement on-going investigative activities (a copy of the RIWP is provided as Appendix E). Additional investigative work is proposed to accurately define the nature and extent of previously identified contamination (see Section 1.3), in support of the development of an acceptable Remedial Action Workplan.

### 1.2 Site Location and History

The Site is an approximately 11-acre parcel located adjacent to the northern edge of Fishkill Creek, in the City of Beacon, Dutchess County, New York. Approximately half the Site is improved with eight vacant industrial buildings (B-1, B-2, B-3, B-4, B-5A, B-5B, B-6, B-7, and B-8) formerly used for various manufacturing and warehousing purposes; the remainder of the property includes paved parking areas and undeveloped grassland and woodlands. The Site has been proposed for re-use as a residential condominium complex at the completion of remedial activities. A Site Map is provided as Figure 1 in Appendix A. A detailed account of historical industrial activities at the Site, as well as previous environmental investigations and response actions, is presented in the RIWP, Appendix E.

### 1.3 Findings of Initial Remedial Investigation

Investigation of the Site was conducted between January 30, 2008 and February 28, 2008, following the protocols specified in the approved RIWP. Fieldwork activities included extension of soil borings and test pits, groundwater well installation, and sampling of surface and subsurface soils, groundwater (both existing and newly installed wells), soil gas, surface water, and sediment.

Results of the fieldwork are discussed below; however, a more thorough and comprehensive discussion will be presented in the Remedial Investigation Report to be completed at the conclusion of this proposed supplemental work.

#### 1.3.1 Fieldwork Methodology and Observations

Twenty mechanical borings, eleven surface soil (0-4”) samples, sixteen soil gas samples, and twenty-four test pits were extended in areas identified as potentially impacted by previous historical impacts on-site. Three of the mechanical borings were completed as groundwater monitoring wells (three wells existed on-site prior to investigative activities). See Figures 2 through 7, Appendix A. No significant field evidence of contamination was noted, except for a moderate to strong chemical odor at borings 2B-01A, 2B-01B, 2B-01C, 2B-15, 2B-15A, and 2B-15C. A slight chemical odor was noted at boring 2B-11.

Debris consisting of primarily asphalt, concrete, brick, metal, and miscellaneous trash was noted at test pits 2TP-2, 2TP-3, 2TP-5, 2TP-20, and 2TP-21. In addition, degraded fabric was noted at test pits 2TP-14, 2TP-15, 2TP-17, and 2TP-18. Degraded fabric alone was noted at test pits 2TP-11 and 2TP-12. Demolition debris including concrete block, concrete, and asphalt was noted at test pits 2TP-8 and 2TP-22.

### 1.3.2 Laboratory Results

A summary of the results of the laboratory analyses are presented below. Figures depicting fieldwork activities and Data Summary Tables and are included as Appendix A and Appendix B, respectively.

#### 1.3.2.1 Guidance Levels

Guidance levels for all compounds in soils are based on NYSDEC Remedial Program, Unrestricted Use SCOs, as provided in 6 NYCRR Subpart 375, Table 375-6.8(a). Compounds without a listed SCO are compared to the Recommended Soil Cleanup Objectives (RSCOs) presented in NYSDEC Technical and Administrative Guidance Memorandum #4046 (TAGM 4046), including applicable subsequent NYSDEC memoranda.

Guidance levels for all compounds in water are based on NYSDEC Division of Water Technical and Operational Guidance Series 1.1.1, Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations (TOGS 1.1.1). All data presented in this SRIWP have been analyzed in accordance with applicable guidance levels. Guidance levels for soil are referenced in units of mg/kg (parts per million [ppm]) or µg/kg (parts per billion [ppb]). Guidance levels for groundwater are referenced in units of µg/L.

Guidance levels have not been developed for compounds in soil gas. Background levels are based on the New York State Department of Health (NYSDOH) Guidance for Evaluating Soil & Vapor Intrusion in the State of New York and subsequent memoranda.

#### 1.3.2.2 Volatile Organic Compounds

Sixty-eight media samples were submitted for laboratory analysis of volatile organic compounds (VOCs) utilizing USEPA Method 8260 (soil and water) and Method TO-15 (soil gas).

##### *Soil and Sediment*

Elevated concentrations of toluene (guidance level 700 µg/kg ) were detected in subsurface soils beneath buildings B-5A and B-5B at soil borings 2B-15A[4-5'] (100,000 µg/kg), 2B-15[4-5'] (22,000 µg/kg), and 2B-15C[4-5'] (1,600 µg/kg), and northwest of building B-7 at boring 2B-01C[1-3'] (4,600,000 µg/kg). Elevated concentrations of methyl ethyl ketone (1,400 µg/kg, guidance level 120 µg/kg) were detected at 2B-15A[4-5']. Slightly elevated concentrations of methylene chloride and acetone, potential laboratory contaminants, were detected in several samples. Tentatively identified compounds (TICs) were detected at test pit 2TP-11 (15,050 µg/kg, guidance level for total VOCs 10,000 µg/kg). No other significant VOCs were detected in soil borings, surface soils, or test pits at the Site.

VOCs in soils and sediment are summarized in Figure 2, Appendix A and Table 1 through Table 3, Appendix B.

##### *Groundwater and Surface Water*

No significant VOCs were detected in groundwater and surface water at the Site. VOCs in water are summarized in Table 4, Appendix B.

##### *Soil Gas*

Several VOCs (primarily BTEX compounds) were detected above NYSDOH background concentrations in all soil gas samples. VOCs in soil gas are summarized in Table 5, Appendix B.

### 1.3.2.3 Semi-Volatile Organic Compounds

Forty-four media samples were submitted for laboratory analysis of semi-volatile organic compounds (SVOCs) utilizing USEPA Method 8270.

#### *Soil and Sediment*

Slightly elevated levels of polycyclic aromatic compounds (PAHs) were detected across the Site in surface soils, test pits, and in boring 2B-05[4-5] (western parking area). Detected concentrations are consistent with impacts associated with asphalt paving, which is present throughout the Site and was observed in subsurface test pit areas. Significantly elevated concentrations of total unknown SVOCs were detected at surface soil sample 2HB-06[0-4"] (3,348,120 µg/kg, guidance level for total SVOCs 500,000 µg/kg).

SVOCs in soils and sediment are summarized in Figure 3, Appendix A and Table 6 through Table 8, Appendix B.

#### *Groundwater*

No significant SVOC concentrations were detected in groundwater at the Site. SVOCs in groundwater are summarized in Table 9, Appendix B.

### 1.3.2.4 Target Analyte List (TAL) Metals

Fifty media samples were submitted for laboratory analysis of Target Analyte List (TAL) metals utilizing various USEPA Methods.

#### *Soil and Sediment*

Elevated concentrations of lead (2,830 mg/kg, guidance level 63 mg/kg), chromium (491 mg/kg, guidance level 30 mg/kg) and zinc (854 mg/kg, guidance level 109 mg/kg) were detected at surface soil sample 2HB-02[0-4"]. Elevated concentrations of zinc were detected in surface soil samples 2HB-05[0-4"] (1,930 mg/kg), 2HB-09[0-4"] (819 mg/kg), and background sample 2HB-12[0-4"] (546 mg/kg). An elevated level of mercury (1.6 mg/kg, guidance level 0.18 mg/kg) was detected at surface soil sample 2HB-10(0-4").

Elevated levels of metals were detected in near-surface soils in test pits 2TP-11 and 2TP-11B, in the areas where buried fabric was observed (likely to be from former on-site fabric reclamation activities). Peak concentrations included arsenic (13.1 mg/kg, guidance level 13 mg/kg, 2TP-11), chromium (788 mg/kg, 2TP-11), copper (4,530 mg/kg, guidance level 50 mg/kg, 2TP-11), lead (788 mg/kg, 2TP-11), mercury (4.0 mg/kg, guidance level 0.18 mg/kg, 2TP-11), nickel (80.6 mg/kg, 2TP-11B), silver (15 mg/kg, guidance value 2 mg/kg, 2TP-11) and zinc (706 mg/kg, 2TP-11B). Concentrations generally decreased with depth.

Low-level exceedences of TAL metals were detected in all soil borings and sediment, with the exception of 2B-08[5-6"]. Peak concentrations (excluding levels discussed above) included arsenic (15.8 mg/kg, guidance level 13 mg/kg), lead (148 mg/kg), nickel (35.4 mg/kg, guidance level 30 mg/kg), and zinc (273 mg/kg).

Metals in soils and sediment are summarized in Figure 4, Appendix A and Table 10 through Table 12, Appendix B.

### *Groundwater and Surface Water*

Elevated concentrations of total TAL metals were detected in all wells and surface waters, with peak concentrations of arsenic (110 µg/L, guidance level 100 µg/L), chromium (110 µg/L, guidance level 100 µg/L), copper (280 µg/L, guidance level 50 µg/L), and lead (220 µg/L, guidance level 25 µg/L) detected at MW-05. Additional analysis was completed for dissolved lead (all wells) and dissolved TAL metals (MW-05). All dissolved lead values were below guidance level (25 µg/L). No significant exceedences of dissolved metals were detected MW-5 (elevated total metals at MW-5 appear to be due to suspended solids).

Metals in groundwater are summarized in Figure 7, Appendix A and Table 13, Appendix B.

#### **1.3.2.5 PCBs and Pesticides**

Fifty-four media samples were submitted for laboratory analysis of PCBs and organic pesticides utilizing USEPA Methods 8082 and 8081, respectively.

### *Soil*

Elevated concentrations of PCBs (guidance level 100 µg/kg) were detected in test pit samples 2TP-2 (207 µg/kg), 2TP-11 (7,500 µg/kg), 2TP-11B (1,600 µg/kg), 2TP15 (3,400 µg/kg), and 2TP-15B (1,000 µg/kg); significantly elevated levels were found in areas where fabric was observed (2TP-11 and 2TP-15). A slightly elevated concentration was detected in background surface soil sample 2HB-12 (220 µg/kg). PCBs were detected at or below the SCO in samples 2B-07, 2HB-01, 2HB-03, 2HB-04, 2HB-05, 2HB-06, 2HB-08, 2HB-09, 2HB-10, 2HB-11 (background sample), 2HB-13, and 2SED-1.

Low-level pesticide contamination was detected in surface soils throughout the Site, including peak concentrations of 4,4 DDD (49 µg/kg, guidance level 3.3 µg/kg), 4,4 DDE (66 µg/kg, guidance level 3.3 µg/kg), 4,4 DDT (530 µg/kg, guidance level 3.3 µg/kg), dieldrin (150 µg/kg, guidance level 5.0 µg/kg), and endrin (28 µg/kg, guidance level 14 µg/kg).

PCBs and pesticides in soils are summarized in Figure 5, Appendix A and Table 14 through Table 17, Appendix B.

### *Groundwater and Surface Water*

PCBs were not detected in groundwater or surface water at the Site. PCBs in water are summarized in Table 18.

### 1.3.3 Summary of Significant Findings

Investigative activities at the Site conducted through February 2008 have identified several areas warranting additional investigation/delineation. These are the following:

- An area of toluene impacted soils located northwest of building B-7, near the existing wood/brush line. This area was reputed to be the storage location for the former toluene USTs prior to removal from the Site;
- Toluene impacted soils underneath the northeast corner of Building B-5B, near the former toluene USTs;
- The presence of significant concentrations of unknown SVOCs at surface soil location HB-06; and,
- Metal contamination detected at surface soil location 2HB-02.

## 2.0 PROPOSED INVESTIGATION ACTIVITIES

This section of the SRIWP details activities that are proposed to investigate environmental conditions on the Site, as summarized in Section 1.3, above. All investigative activities will be performed in conformance with the previously approved RIWP (see Appendix E). A Previous Fieldwork Map is provided as Figure 2, and a Proposed Fieldwork Map indicating specific Site characteristics is provided as Figure 3, in Appendix A. All proposed work will be conducted according to the site specific Health and Safety Plan and the Community Air Monitoring Plan, provided as Appendices C and D, respectively.

Section 2.1 provides information on services to be conducted in anticipation of intrusive fieldwork and Section 2.2 provides detailed information on the investigation services that will be conducted by ESI to further assess Site conditions. Project deliverables (i.e., written reports) are described in Section 2.3.

### 2.1 Site Preparation Services

#### 2.1.1 Qualifications of On-site Remedial Personnel

Prior to the initiation of work, the identities and qualifications of the project managers and associated staff will be supplied to the NYSDEC. All on-site staff will be appropriately trained in accordance with Occupational Safety and Health Administration (OSHA) practices (29 CFR, Part 1910). The NYSDEC will also be notified of any changes in the senior on-site personnel. Prior to the initiation of fieldwork, a Site Health and Safety Officer will be designated, and a complete Health and Safety Plan will be provided (see Section 2.1.2, below).

#### 2.1.2 Health and Safety Plan

A site-specific Health and Safety Plan (HASP), incorporating a Community Health and Safety Plan, will be reviewed with site personnel and subcontractors prior to the initiation of specific fieldwork where contaminated media are likely to be encountered. All proposed work will be performed in “Level D” personal protective equipment. Field personnel (including subcontractors) will be prepared to continue services wearing more protective levels of equipment should field conditions warrant. A copy of the HASP is included in Appendix C. Unless determined otherwise, ESI will provide staff to serve as the project’s Health and Safety Officer.

#### 2.1.3 Quality Assurance / Quality Control

##### *Equipment*

Prior to the initiation of fieldwork, all field equipment to be used during the work will be properly decontaminated in accordance with NYSDEC guidelines, and all field instruments will be properly calibrated in accordance with procedures set forth by the equipment manufacturer(s). Unless otherwise specified, a MiniRAE 3000 photo-ionization detector (PID) will be used for site-screening of organic vapors. The PID is calibrated to read parts per million calibration gas equivalents (ppm-cge) of isobutylene. Instrument calibration will be performed no more than 24 hours prior to the commencement of fieldwork, and a written record of calibration results will be provided in the project files.

##### *Laboratory*

All samples will be collected in accordance with applicable NYSDEC guidelines and will be submitted to a New York State Department of Health (NYSDOH) ELAP-certified laboratory using appropriate chain of custody procedures. At this time, it is anticipated that all samples will be transported by courier to Test America Laboratories, Inc. (Test America) of Shelton, Connecticut

(ELAP # 10602). Dedicated, laboratory supplied glassware will be used for sample collection. Field personnel will maintain all samples at cold temperatures and complete all chain of custody forms.

Laboratory reports will include detailed Quality Assurance/Quality Control (QA/QC) analyses, which will be provided in the final Remedial Investigation Report (Section 2.3). In addition, a Data Usability Summary Report (DUSR) will be prepared by a third, independent party, which maintains NYSDOH ELAP CLP Certification. Data validation will be conducted by an independent validator if required by the NYSDEC.

#### **2.1.4 Fieldwork Monitoring**

An assessment of subsurface soil characteristics, including soil type, the presence of foreign materials, and field and/or instrument indications of contamination (e.g., staining, odors, and PID readings) will be made by ESI. ESI will be responsible for identifying any soils that in the opinion of ESI may contain elevated concentrations of contaminants that warrant special handling. Those soils identified by ESI will be containerized for proper disposition. If applicable, ESI will monitor the removal of contaminated soil, including monitoring the trucks and establishing the designated truck routes. ESI will also ensure that any unforeseen environmental conditions are managed in accordance with applicable federal and state regulations.

#### **2.1.5 Notifications**

The NYSDEC will be notified in writing at least two weeks prior to the initiation of any of the on-site work and during the course of the fieldwork if deemed necessary by on-site personnel. Changes to fieldwork scheduling will be provided via facsimile transmission and/or email. All applicable local agencies will also be notified prior to the initiation of Site work.

Prior to the implementation of any of the investigative tasks outlined in Section 2.2, below, a request for a complete utility markout of the subject property will be submitted as required by New York State Department of Labor regulations. Confirmation of underground utility locations will be secured, and a field check of the utility markout will be conducted prior to the initiation of work. Any utilities on the Site will be protected (as necessary) by the contractor or owner.

### **2.2 Investigative Services**

The following investigative tasks will be conducted by ESI and designated subcontractors:

- Additional soil borings will be extended in order to horizontally and vertically delineate the extent of toluene-contaminated soil near exterior boring 2B-01C and under building B-5B near boring 2B-15; and,
- Additional surface soil samples will be collected to define the nature of metals contamination near 2HB-02 and SVOC contamination near 2HB-06. As requested by the NYSDEC, three additional surface samples will be collected in the following areas: near the northwest corner of the Site, under the elevated sewer line, and in an undisturbed area along the “Existing Fisherman’s Trail”.

#### **2.2.1 Soil Borings**

##### **2.2.1.1 Location and Extension of Soil Borings**

Five (5) to ten (10) soil borings will be extended in the area of 2B-01C and three (3) to five (5) soil borings will be extended in the area of 2B-15, as necessary, in order to delineate the vertical and horizontal extent of documented toluene contamination (drills will be utilized, as necessary, to

breach concrete slabs). Anticipated boring locations are depicted on the Proposed Fieldwork Map (Figure 3, Appendix A).

Borings will be extended using a track-mounted Geoprobe rig (equipped with a hollow-core sampler having sample intervals of either four or five feet and disposable, acetate sleeves), under the supervision of ESI personnel. Soil borings will be extended through all overtly impacted strata until clean soil is encountered (based on field screening for odors, PID readings, staining, etc.) or until refusal.

The exact locations of all soil borings will be determined in the field in consultation with NYSDEC representatives. Boring locations will be measured to the nearest 0.5-foot relative to a permanent fixed on-site marker, and will be recorded in logbooks for inclusion in all final maps.

### **2.2.1.2 Soil Sample Collection**

All encountered soils will be properly characterized in the field and findings will be recorded in logbooks. Material selected for sampling will be obtained in a manner consistent with NYSDEC sample collection protocols.

Soils selected for sampling purposes will be composite or grab samples from discreet four- or five-foot core intervals. Soil sampling will be biased towards surface soils (0 to 2 inches below ground surface after removal of the vegetative cover), soils at the groundwater interface, and any soils with elevated PID readings, unusual odors, discoloration, or, any other field evidence of contamination.

### **2.2.1.3 Soil Sample Analysis**

A minimum of one soil sample per boring will be submitted for laboratory analysis based on field screening data. All soil samples will be submitted for laboratory analysis of volatile organic compound (VOCs) via USEPA Method 8260, semi-volatile organic compounds (SVOCs) via USEPA Method 8270, Target Analyte List (TAL) metals via various USEPA Methods, polychlorinated biphenyls (PCBs) via USEPA Method 8082, and pesticides via USEPA Method 8081.

## **2.2.2 Surface Soil Sampling**

One additional surface soil sample (0-2", after the removal of surface vegetation and non-representative, non-matrix material) will be collected in the area of 2HB-02 and one additional surface soil sample will be collected near 2HB-06. In addition, three surface samples will be collected in the following areas: near the northwest corner of the Site, under the elevated sewer line, and in an undisturbed area along the "Existing Fisherman's Trail". Proposed sample locations are identified on Figure 3, Appendix A.

### **2.2.2.1 Surface Soil Sample Collection**

All encountered soils will be properly characterized in the field and findings will be recorded in logbooks. Material selected for sampling will be obtained in a manner consistent with NYSDEC sample collection protocols. Samples will be collected from approximately 0-2 inches below original grade surface, after removal of vegetation and/or breaching of concrete or asphalt. Decontaminated stainless steel trowels and dedicated gloves will be used at each sample location to place the material into laboratory-supplied glassware. Prior to and after the collection of each material sample, the sample collection instrument will be properly decontaminated to avoid cross-contamination between samples.

### 2.2.2.2 Surface Soil Sample Analysis

All surface soil samples will be submitted for laboratory analysis of VOCs via USEPA Method 8260, SVOCs via USEPA Method 8270, TAL metals via various USEPA Methods, PCBs via USEPA Method 8082 and pesticides via USEPA Method 8081.

### 2.2.3 Quality Control Samples

The following QA/QC samples will be included in this investigation:

- One rinse blank will be collected from each piece of non-dedicated equipment for every 20 samples (or each calendar week) collected using that piece of equipment;
- One duplicate sample will be submitted to the laboratory for every 20 samples (or each calendar week);
- One matrix spike sample and one matrix spike duplicate will be submitted to the laboratory for every 20 samples (or each calendar week);
- Every sample cooler will include a trip blank during each day of sampling; and,
- Split samples to be submitted to the NYSDEC for independent analysis, as per request made by the NYSDEC in the field.

## 2.3 Preparation of Final Reports

A final Remedial Investigation Report (RIR) and a Remedial Work Plan (RWP) with an alternatives analysis and a qualitative exposure assessment for human health will be submitted to the NYSDEC following the completion of site investigative services (including this SRIWP), in accordance with Division of Environmental Remediation Draft Technical Guidance for Site Investigation and Remediation requirements. The RIR and RWP will, respectively, 1) summarize and document all investigative activities conducted on the Site, and 2) provide an analysis of potential remedial response actions.

## 2.4 TIME SCHEDULE

The schedule outlined below will be maintained unless revised by mutual consent of the NYSDEC and the Client.

Within 4 weeks of the approval of the SRIWP:


- Completion of all investigative activities

Within 3 months of the approval of the SRIWP:


- Preparation of the final RIR, and RWP with alternatives analysis, and submission to the NYSDEC for review

## APPENDIX A

### *Figures*

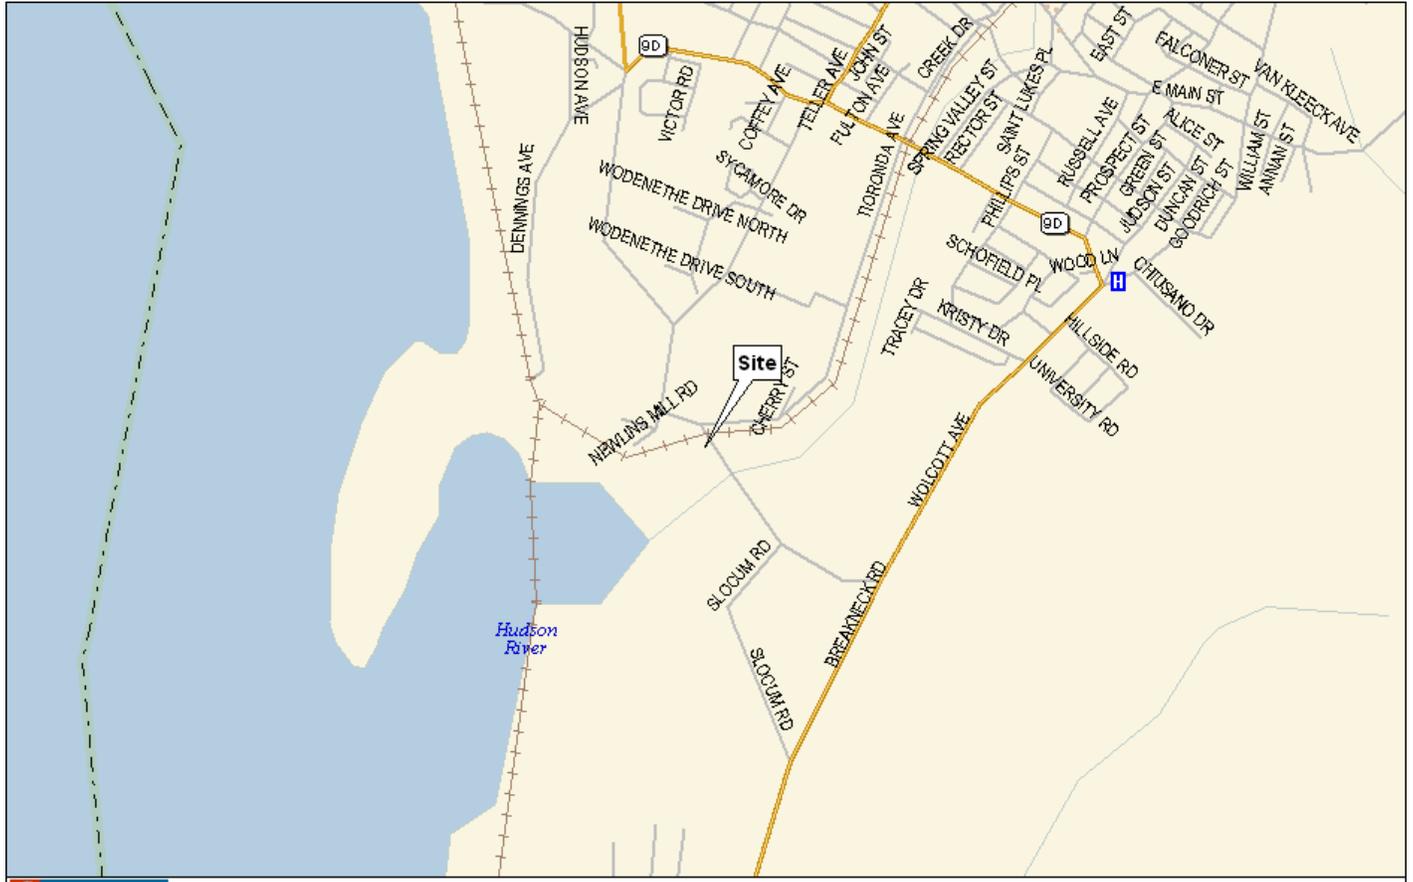

Data use subject to license.  
 © 2004 DeLorme. Street Atlas USA® 2005.  
 www.delorme.com



### Figure 1 - Site Location Map


Beacon Terminal Site  
 Site ID C314117  
 555 South Avenue  
 Beacon, New York




ESI File: BB04157.50

June 2008

Appendix A

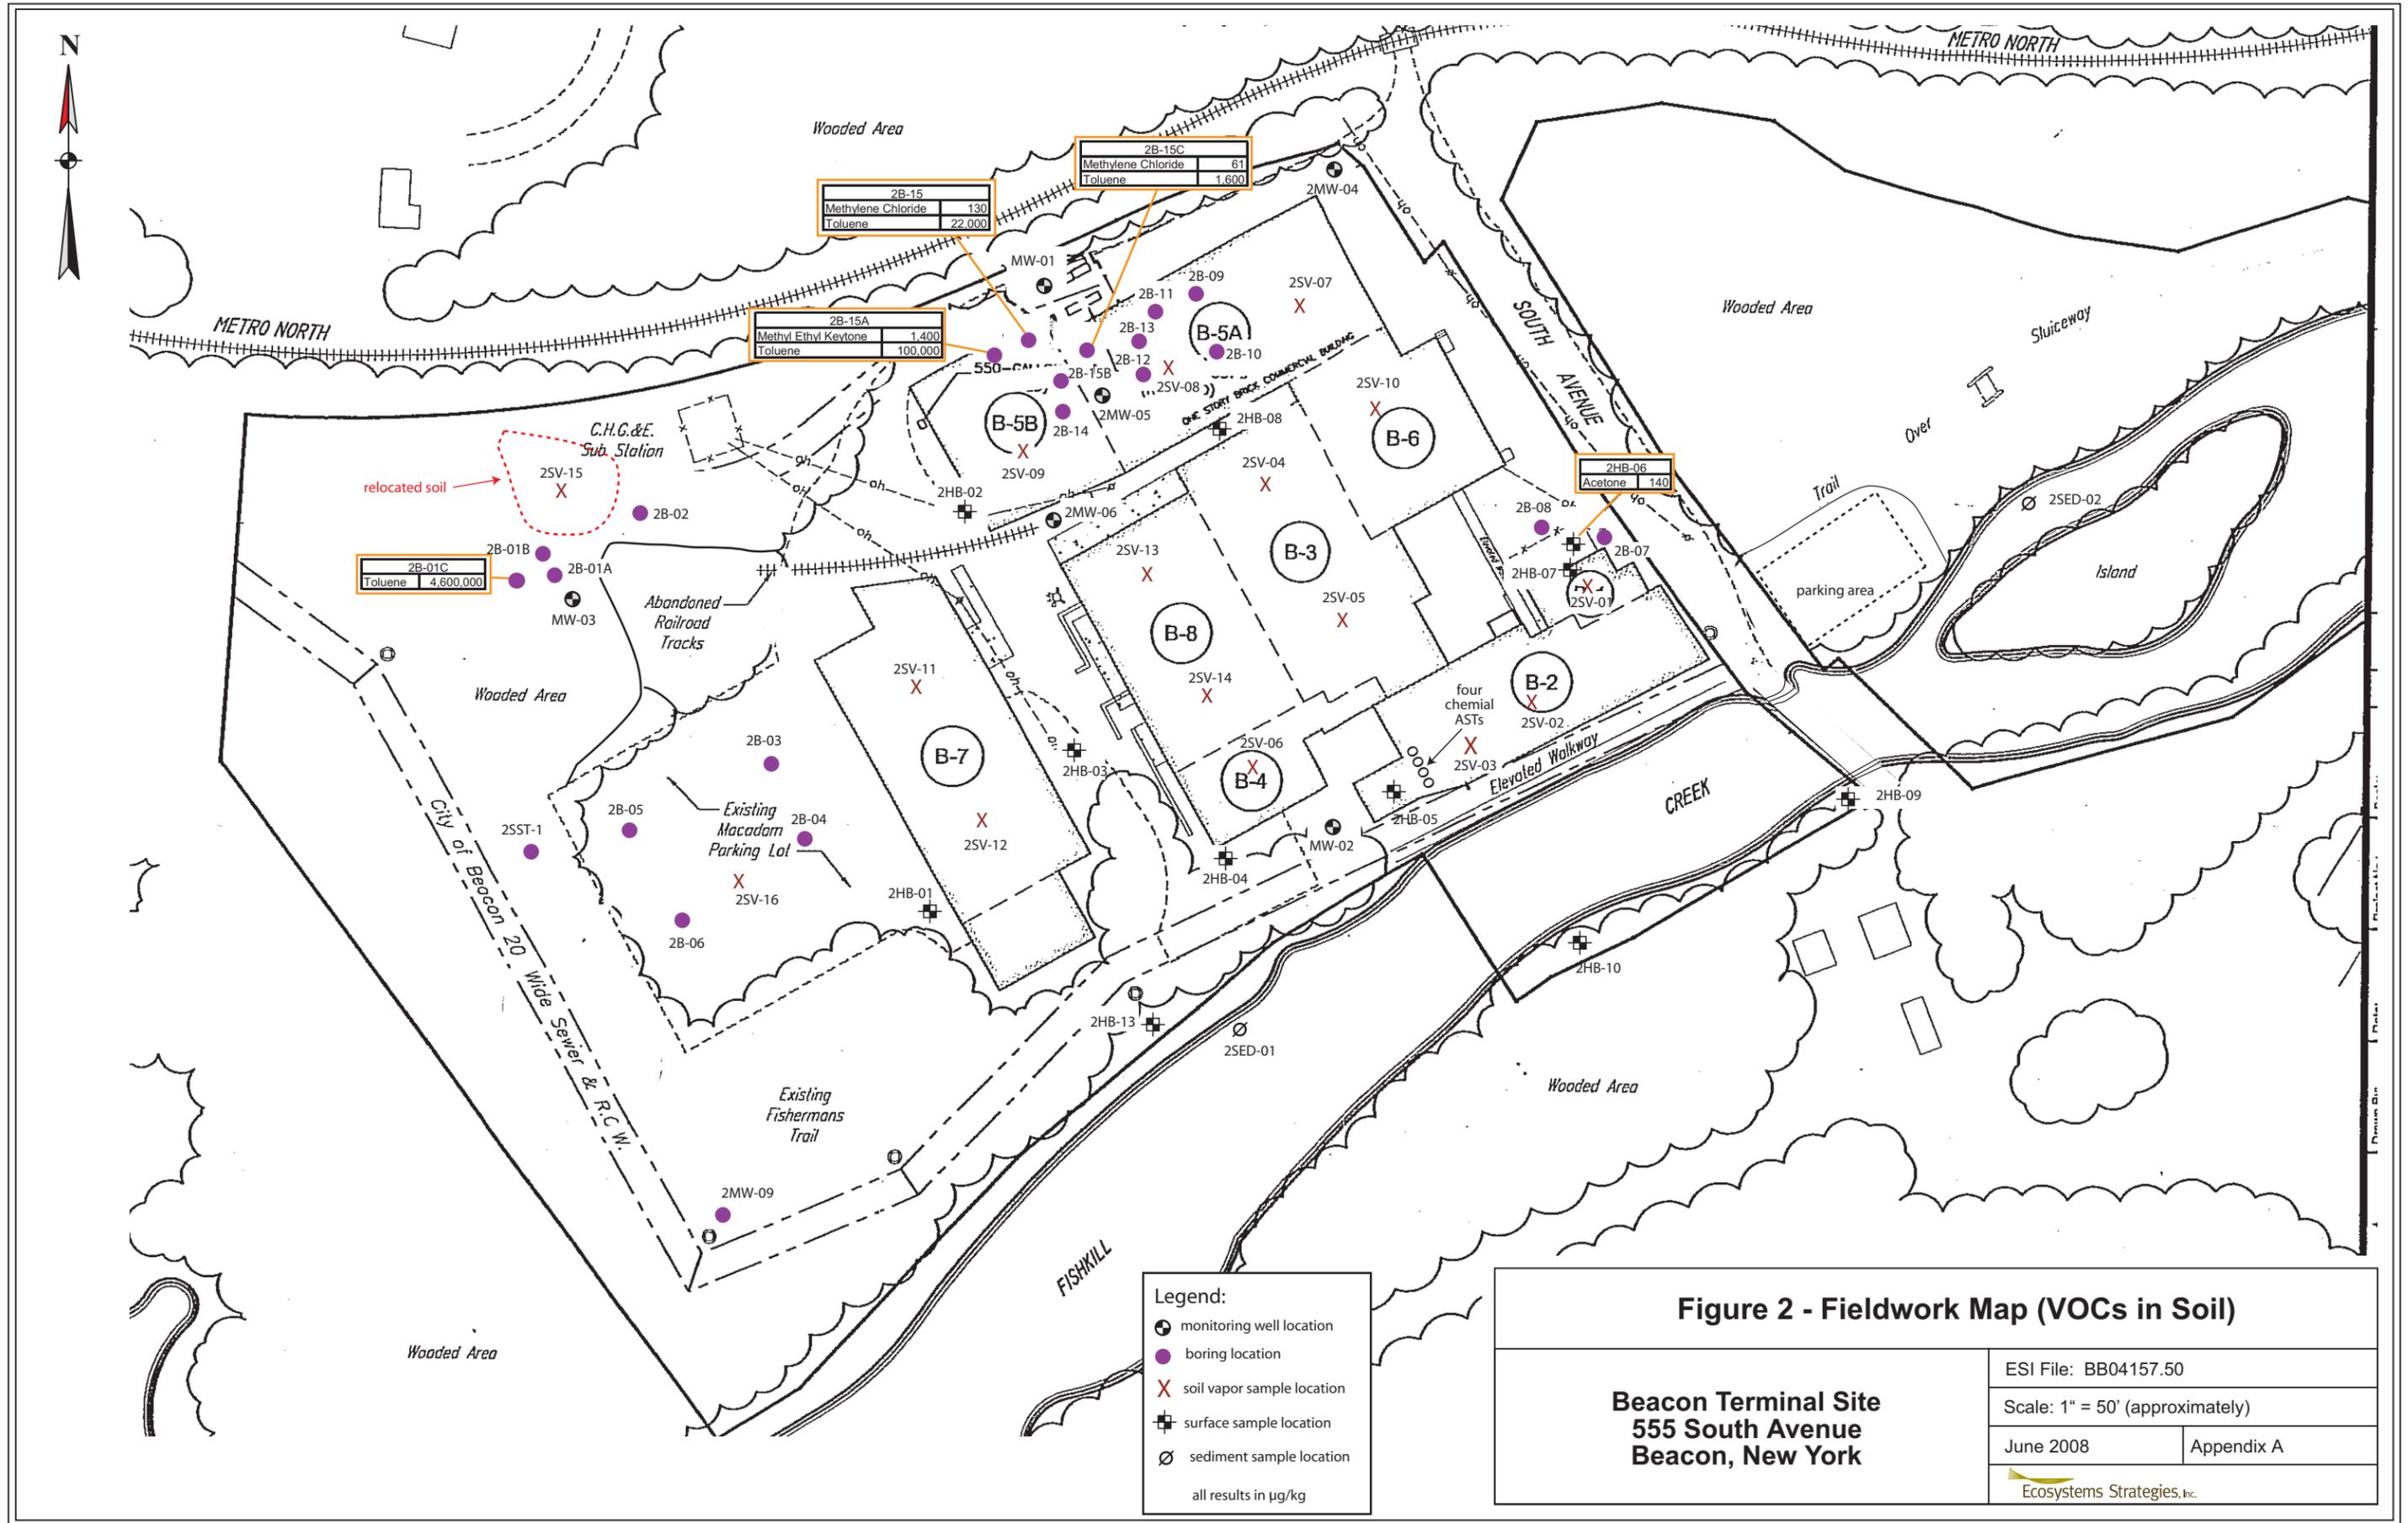

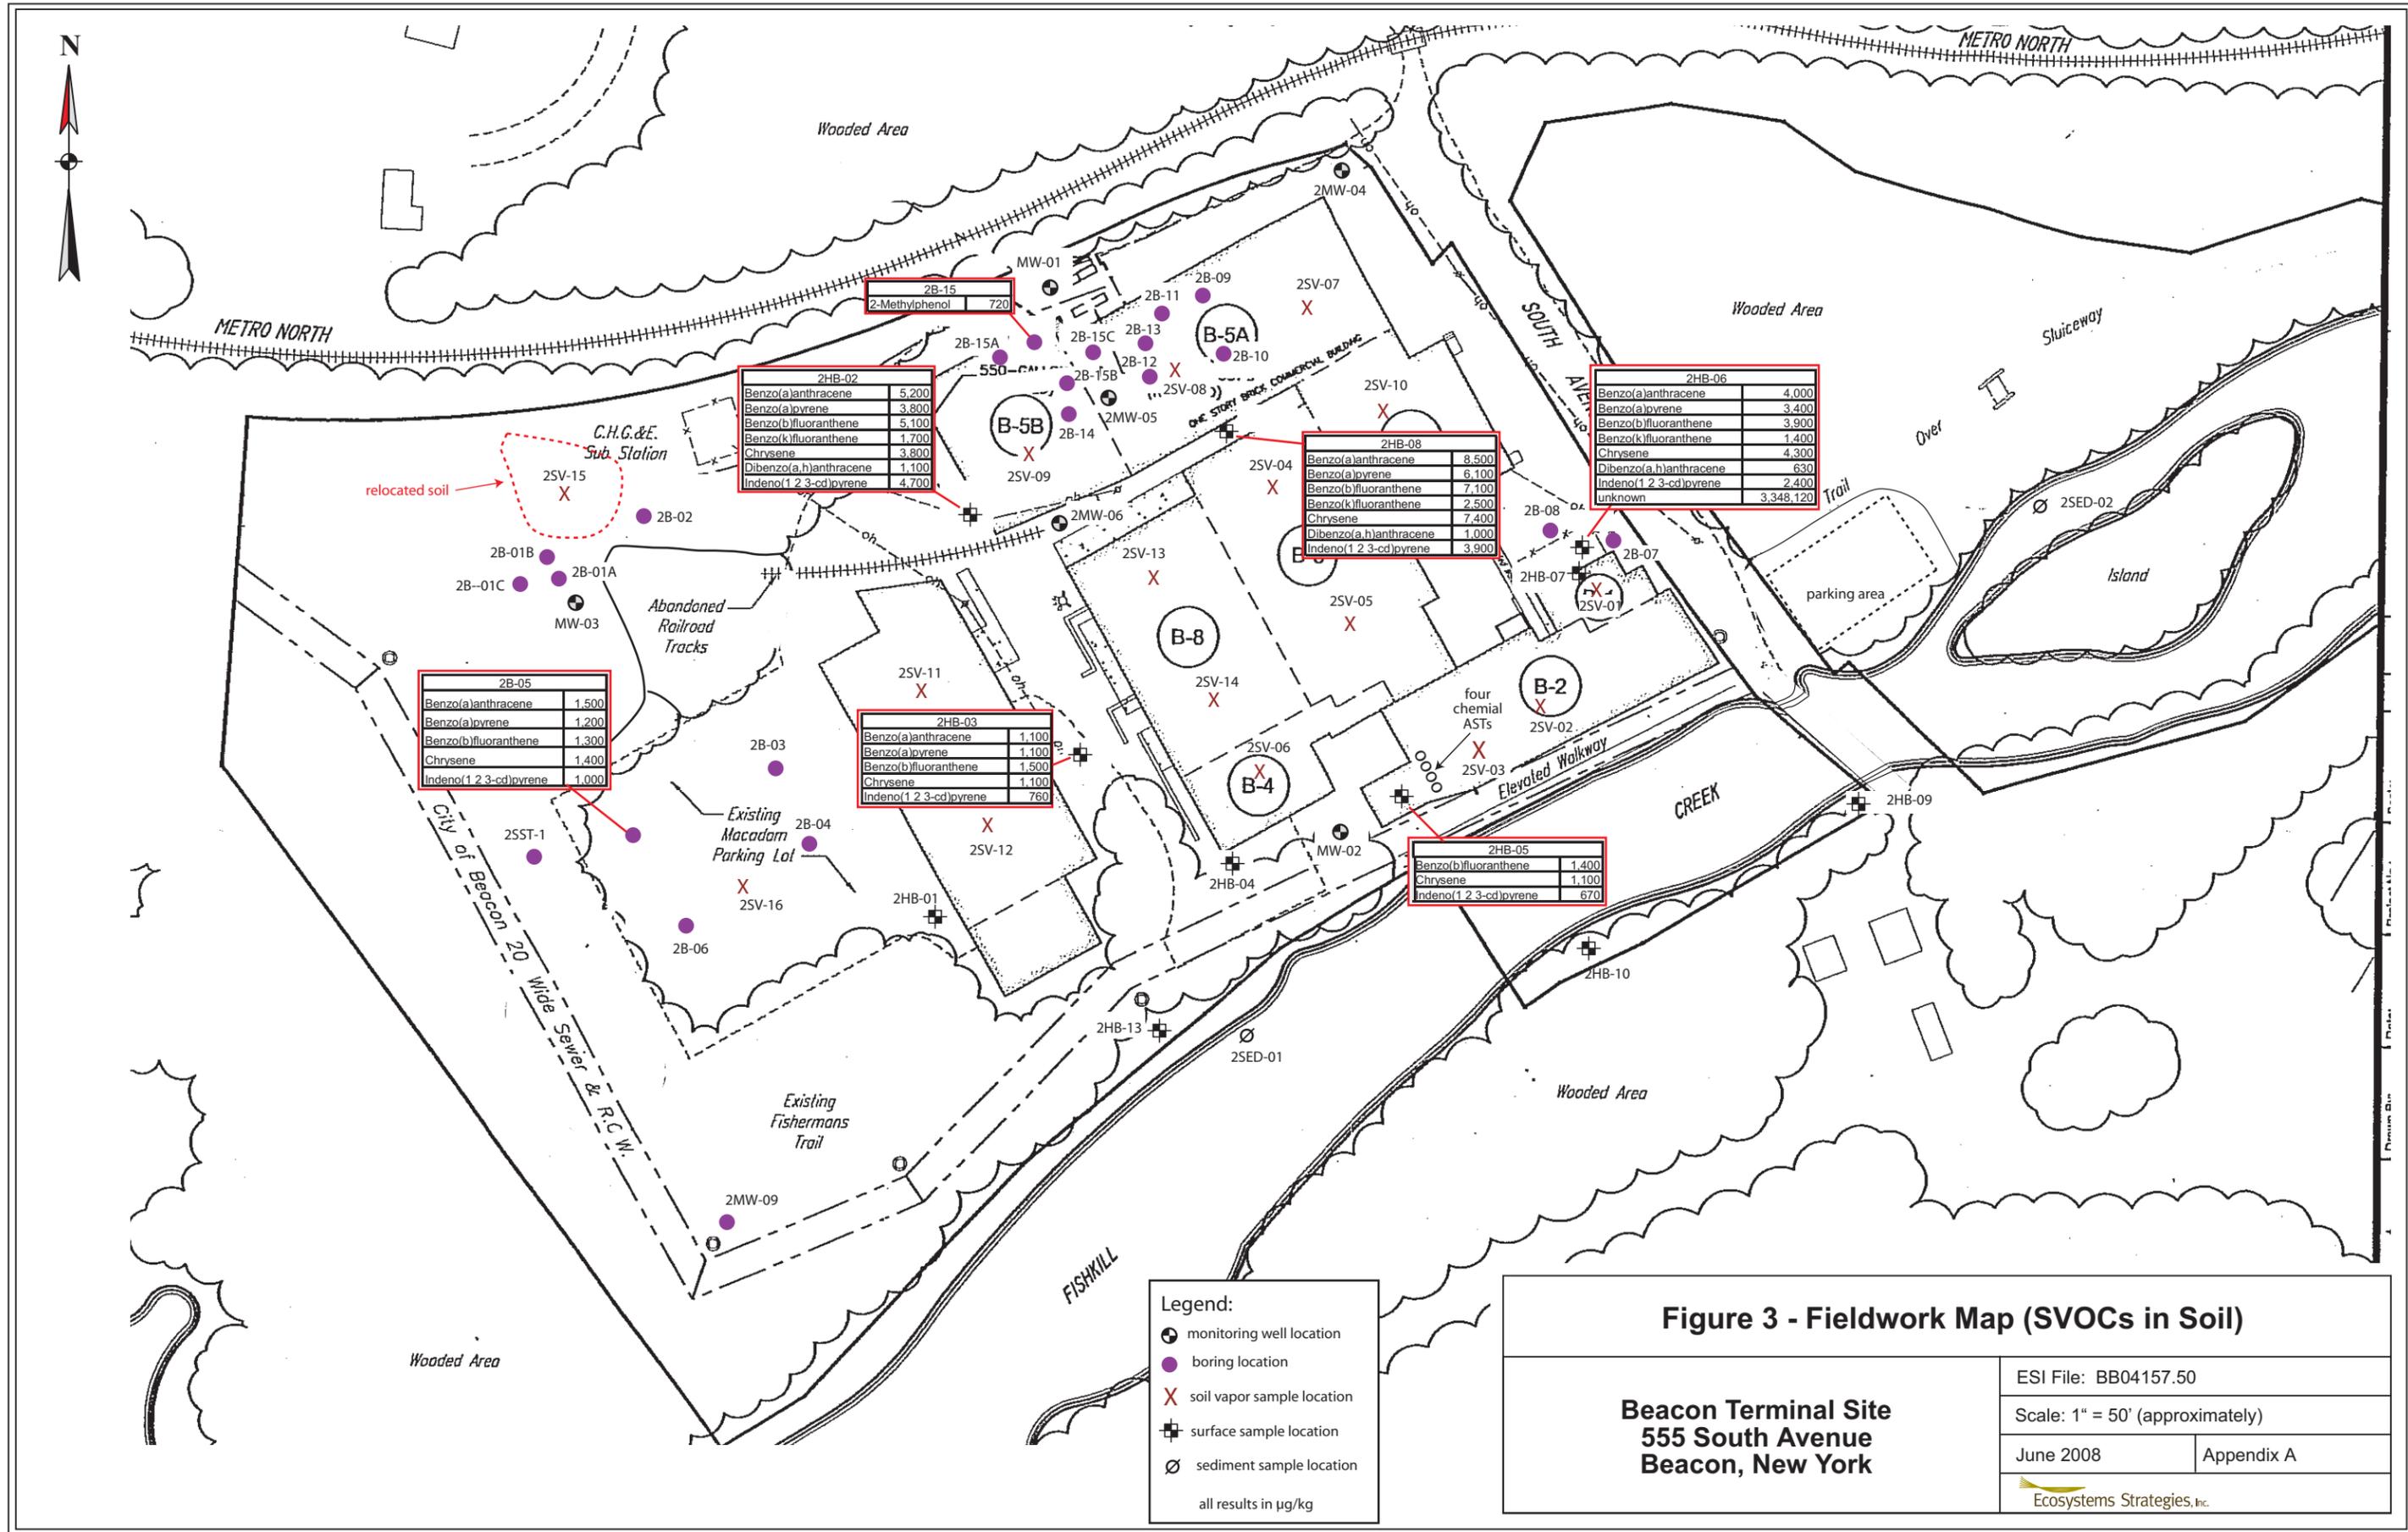

2HB-02	
Benzo(a)anthracene	5,200
Benzo(a)pyrene	3,800
Benzo(b)fluoranthene	5,100
Benzo(k)fluoranthene	1,700
Chrysene	3,800
Dibenzo(a,h)anthracene	1,100
Indeno(1,2,3-cd)pyrene	4,700

2HB-08	
Benzo(a)anthracene	8,500
Benzo(a)pyrene	6,100
Benzo(b)fluoranthene	7,100
Benzo(k)fluoranthene	2,500
Chrysene	7,400
Dibenzo(a,h)anthracene	1,000
Indeno(1,2,3-cd)pyrene	3,900

2HB-06	
Benzo(a)anthracene	4,000
Benzo(a)pyrene	3,400
Benzo(b)fluoranthene	3,900
Benzo(k)fluoranthene	1,400
Chrysene	4,300
Dibenzo(a,h)anthracene	630
Indeno(1,2,3-cd)pyrene	2,400
unknown	3,348,120

2B-05	
Benzo(a)anthracene	1,500
Benzo(a)pyrene	1,200
Benzo(b)fluoranthene	1,300
Chrysene	1,400
Indeno(1,2,3-cd)pyrene	1,000

2HB-03	
Benzo(a)anthracene	1,100
Benzo(a)pyrene	1,100
Benzo(b)fluoranthene	1,500
Chrysene	1,100
Indeno(1,2,3-cd)pyrene	760


2HB-05	
Benzo(b)fluoranthene	1,400
Chrysene	1,100
Indeno(1,2,3-cd)pyrene	670

- Legend:
- monitoring well location
  - boring location
  - X soil vapor sample location
  - ⊕ surface sample location
  - ⊙ sediment sample location
  - all results in µg/kg

**Figure 3 - Fieldwork Map (SVOCs in Soil)**

**Beacon Terminal Site  
555 South Avenue  
Beacon, New York**

ESI File: BB04157.50  
 Scale: 1" = 50' (approximately)  
 June 2008 Appendix A  
 Ecosystems Strategies, Inc.

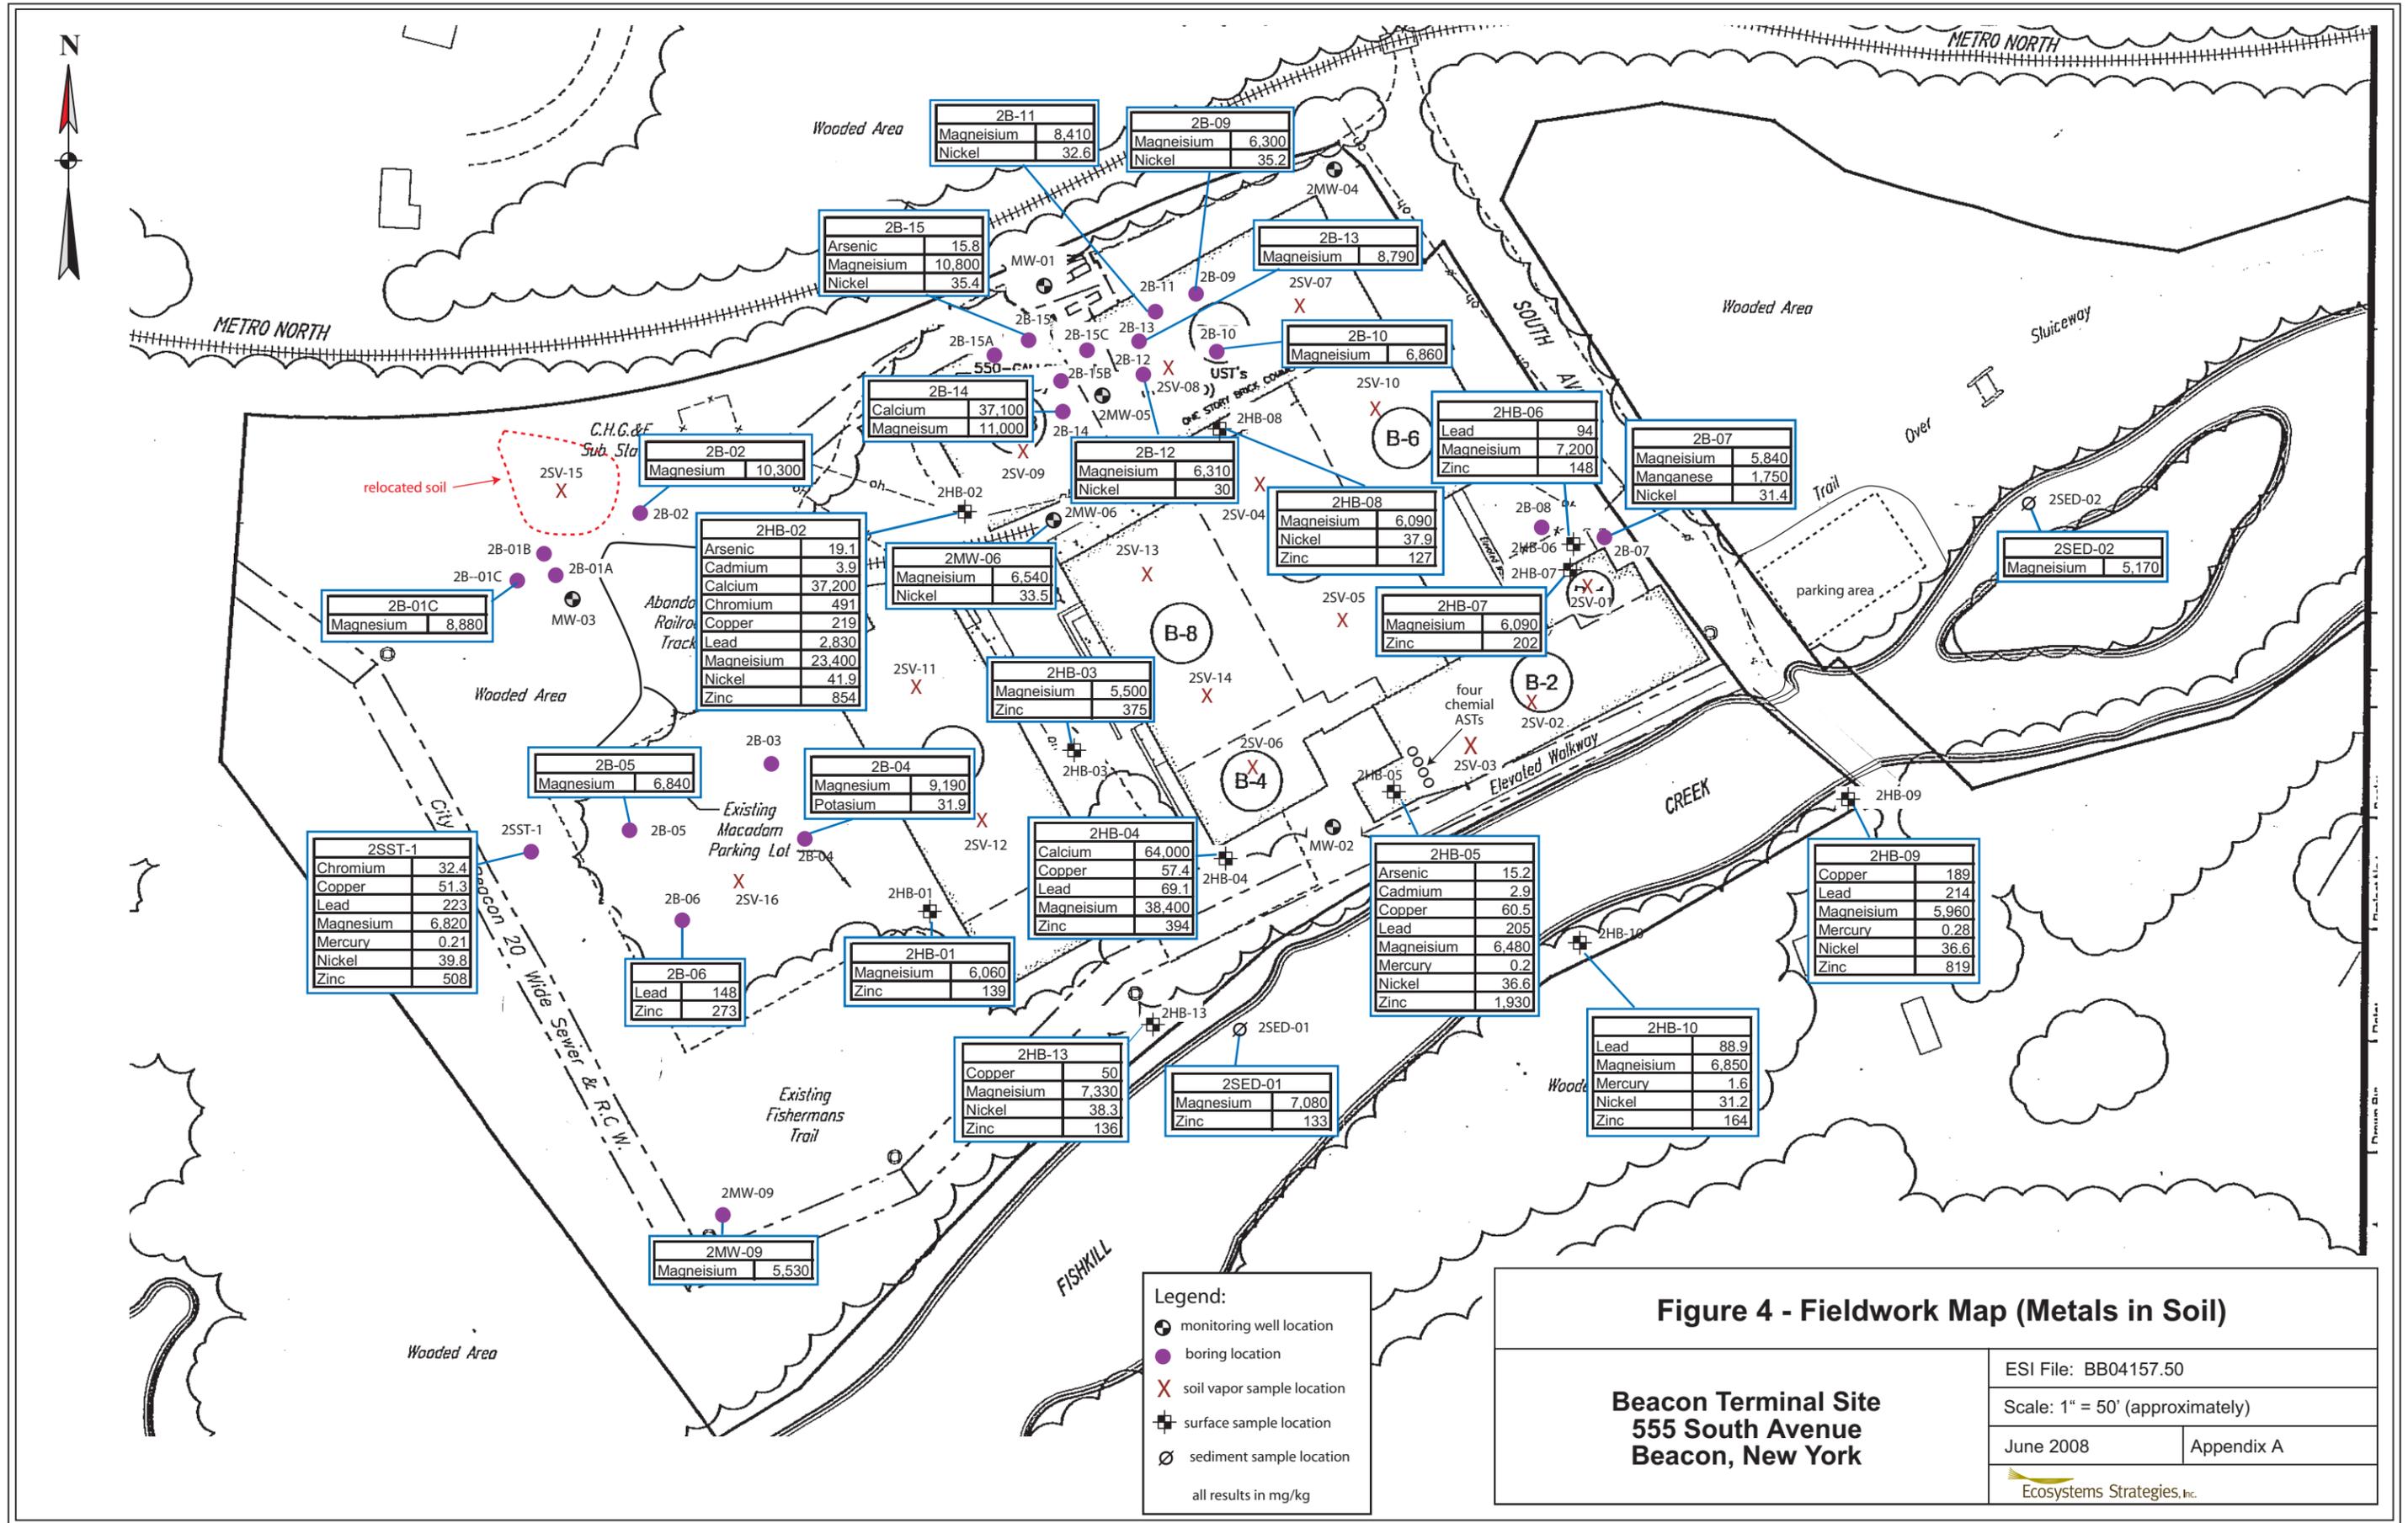

2SST-1	
Chromium	32.4
Copper	51.3
Lead	223
Magnesium	6,820
Mercury	0.21
Nickel	39.8
Zinc	508

2B-06	
Lead	148
Zinc	273

2HB-01	
Magnesium	6,060
Zinc	139

2HB-13	
Copper	50
Magnesium	7,330
Nickel	38.3
Zinc	136

2SED-01	
Magnesium	7,080
Zinc	133

2HB-05	
Arsenic	15.2
Cadmium	2.9
Copper	60.5
Lead	205
Magnesium	6,480
Mercury	0.2
Nickel	36.6
Zinc	1,930

2HB-09	
Copper	189
Lead	214
Magnesium	5,960
Mercury	0.28
Nickel	36.6
Zinc	819


2HB-10	
Lead	88.9
Magnesium	6,850
Mercury	1.6
Nickel	31.2
Zinc	164

- Legend:
- monitoring well location
  - boring location
  - X soil vapor sample location
  - ⊕ surface sample location
  - ⊙ sediment sample location
  - all results in mg/kg

**Figure 4 - Fieldwork Map (Metals in Soil)**

**Beacon Terminal Site  
555 South Avenue  
Beacon, New York**

ESI File: BB04157.50  
 Scale: 1" = 50' (approximately)  
 June 2008 Appendix A  
 Ecosystems Strategies, Inc.

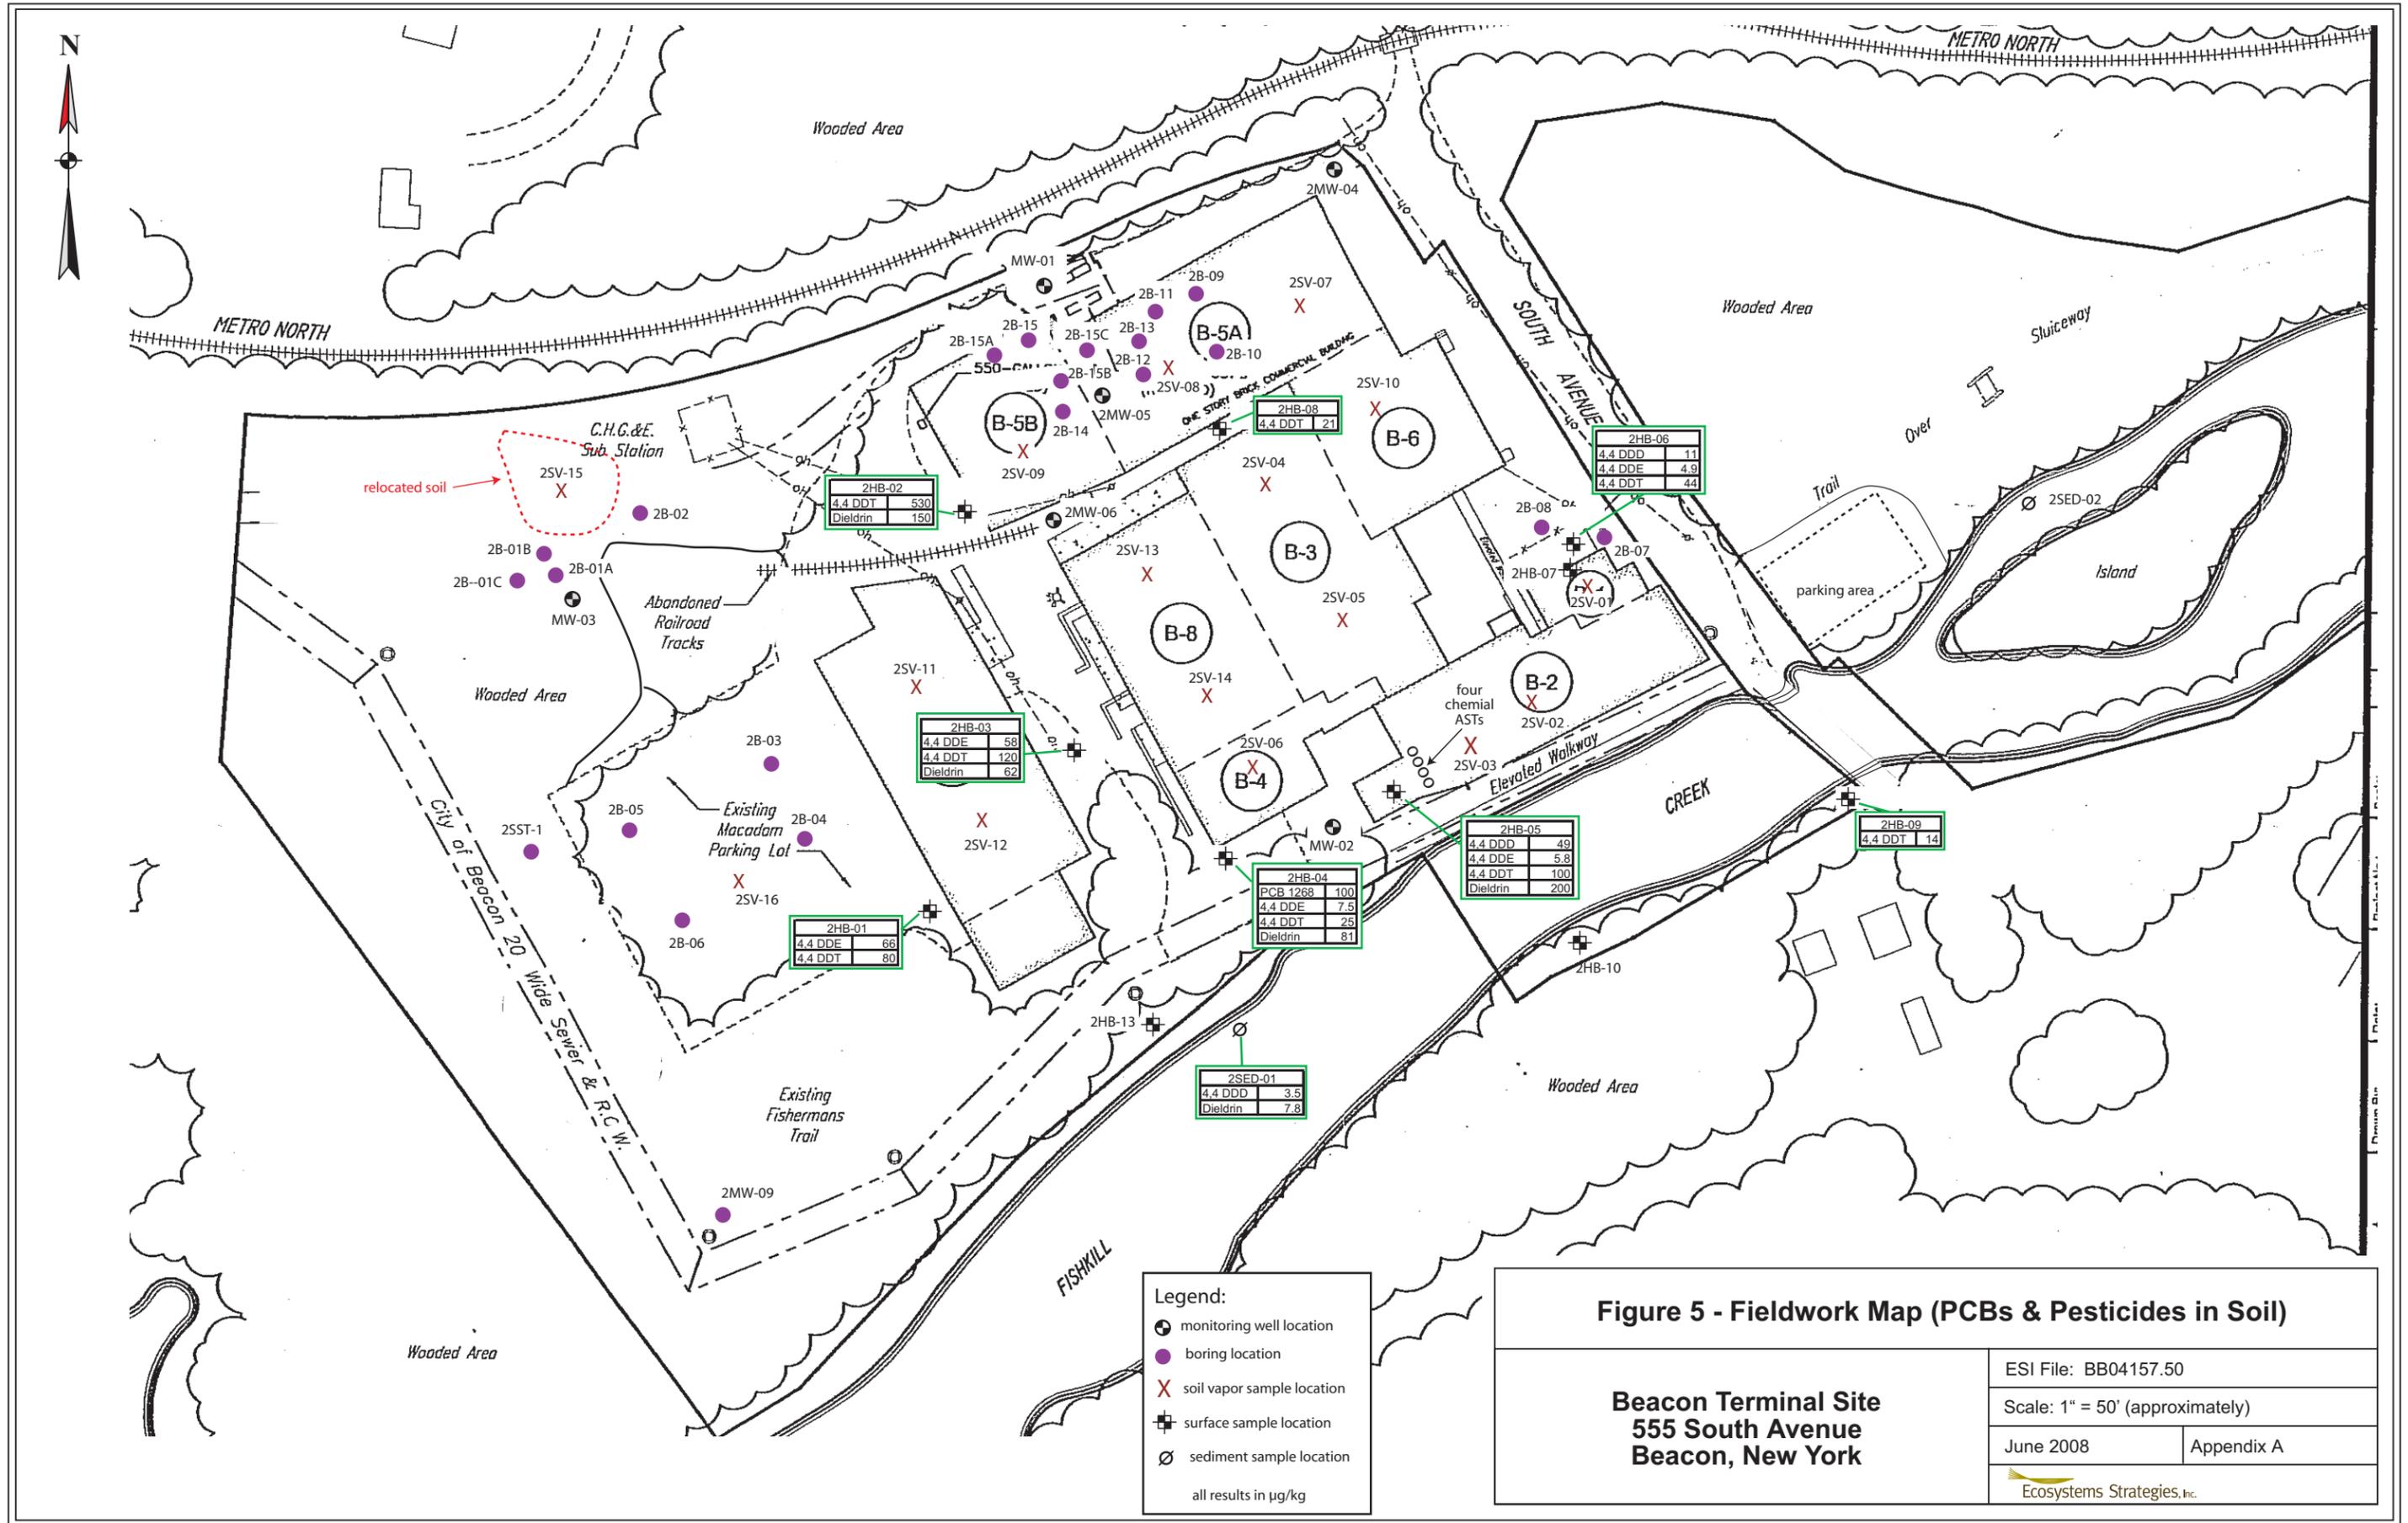

- Legend:**
- monitoring well location
  - boring location
  - X soil vapor sample location
  - ⊕ surface sample location
  - ⊙ sediment sample location
  - all results in µg/kg

**Figure 5 - Fieldwork Map (PCBs & Pesticides in Soil)**

**Beacon Terminal Site  
555 South Avenue  
Beacon, New York**

ESI File: BB04157.50	
Scale: 1" = 50' (approximately)	
June 2008	Appendix A
Ecosystems Strategies, Inc.	

2HB-02

4,4 DDT	530
Dieldrin	150

2HB-03

4,4 DDE	58
4,4 DDT	120
Dieldrin	62

2HB-01

4,4 DDE	66
4,4 DDT	80

2HB-04

PCB 1268	100
4,4 DDE	7.5
4,4 DDT	25
Dieldrin	81

2HB-05

4,4 DDD	49
4,4 DDE	5.8
4,4 DDT	100
Dieldrin	200

2HB-09

4,4 DDT	14
---------	----


2SED-01

4,4 DDD	3.5
Dieldrin	7.8

2HB-06

4,4 DDD	11
4,4 DDE	4.9
4,4 DDT	44


relocated soil

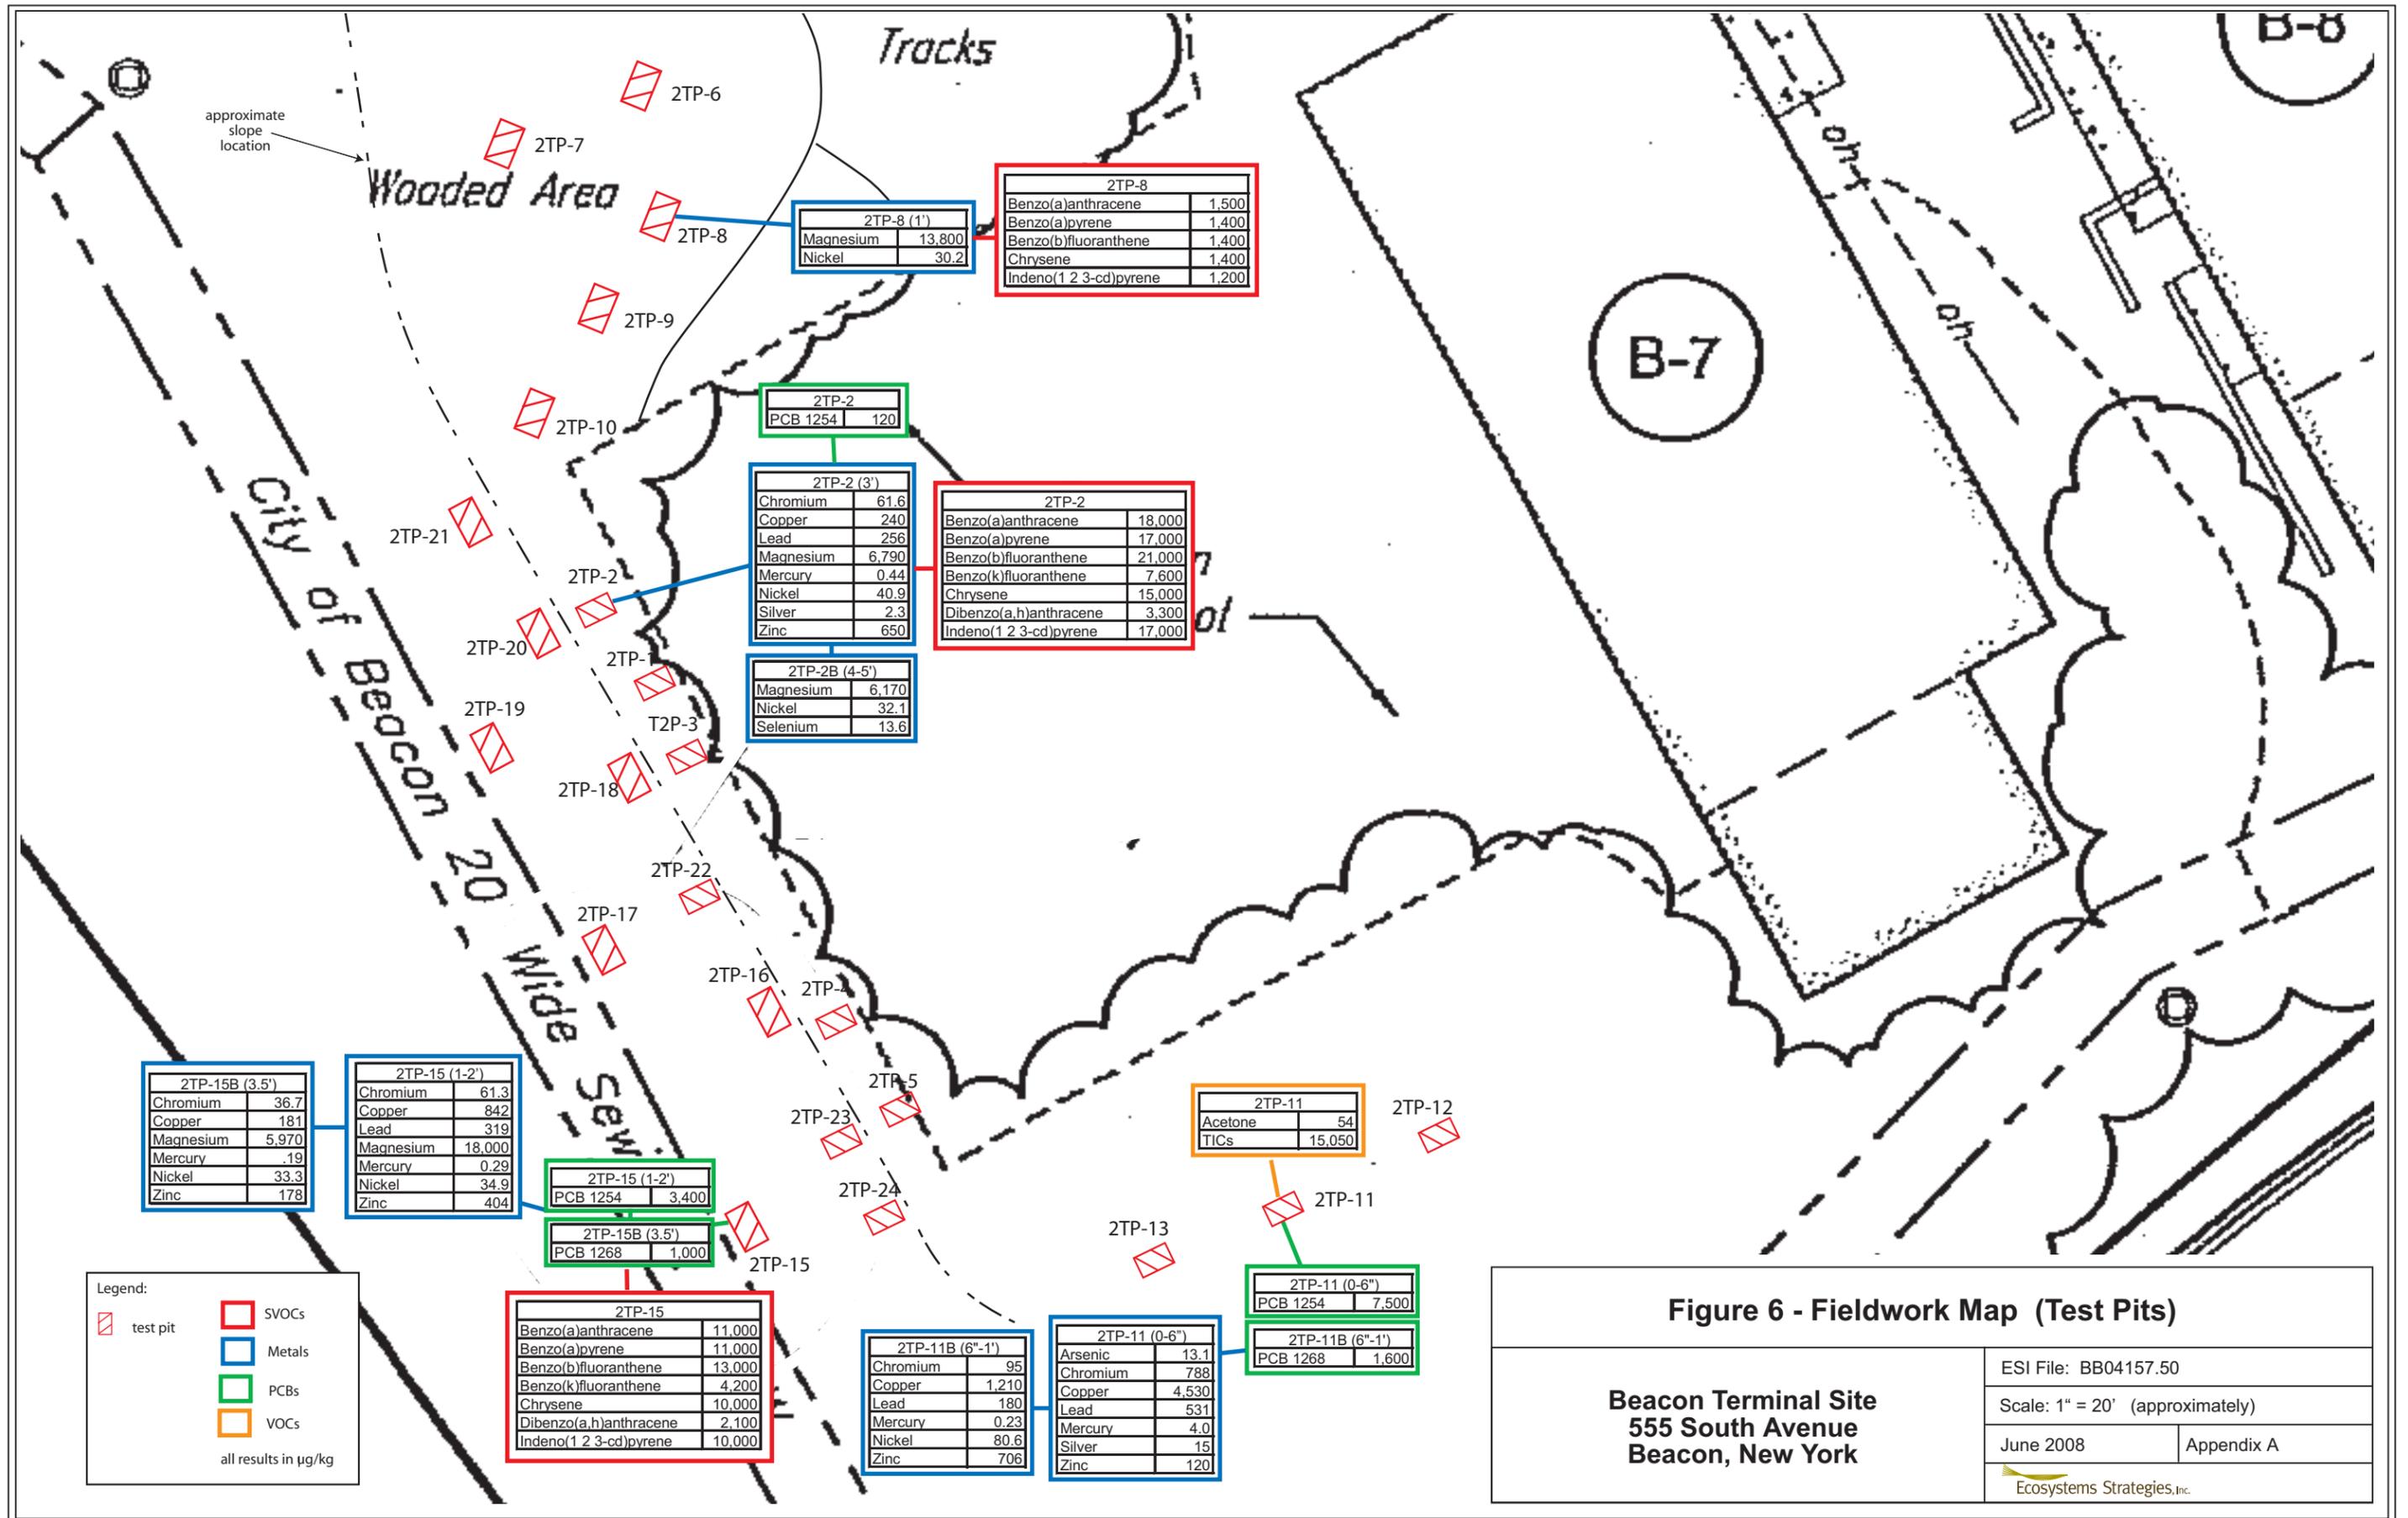

**Figure 6 - Fieldwork Map (Test Pits)**

**Beacon Terminal Site  
555 South Avenue  
Beacon, New York**

ESI File: BB04157.50  
 Scale: 1" = 20' (approximately)  
 June 2008 | Appendix A  
 Ecosystems Strategies, Inc.

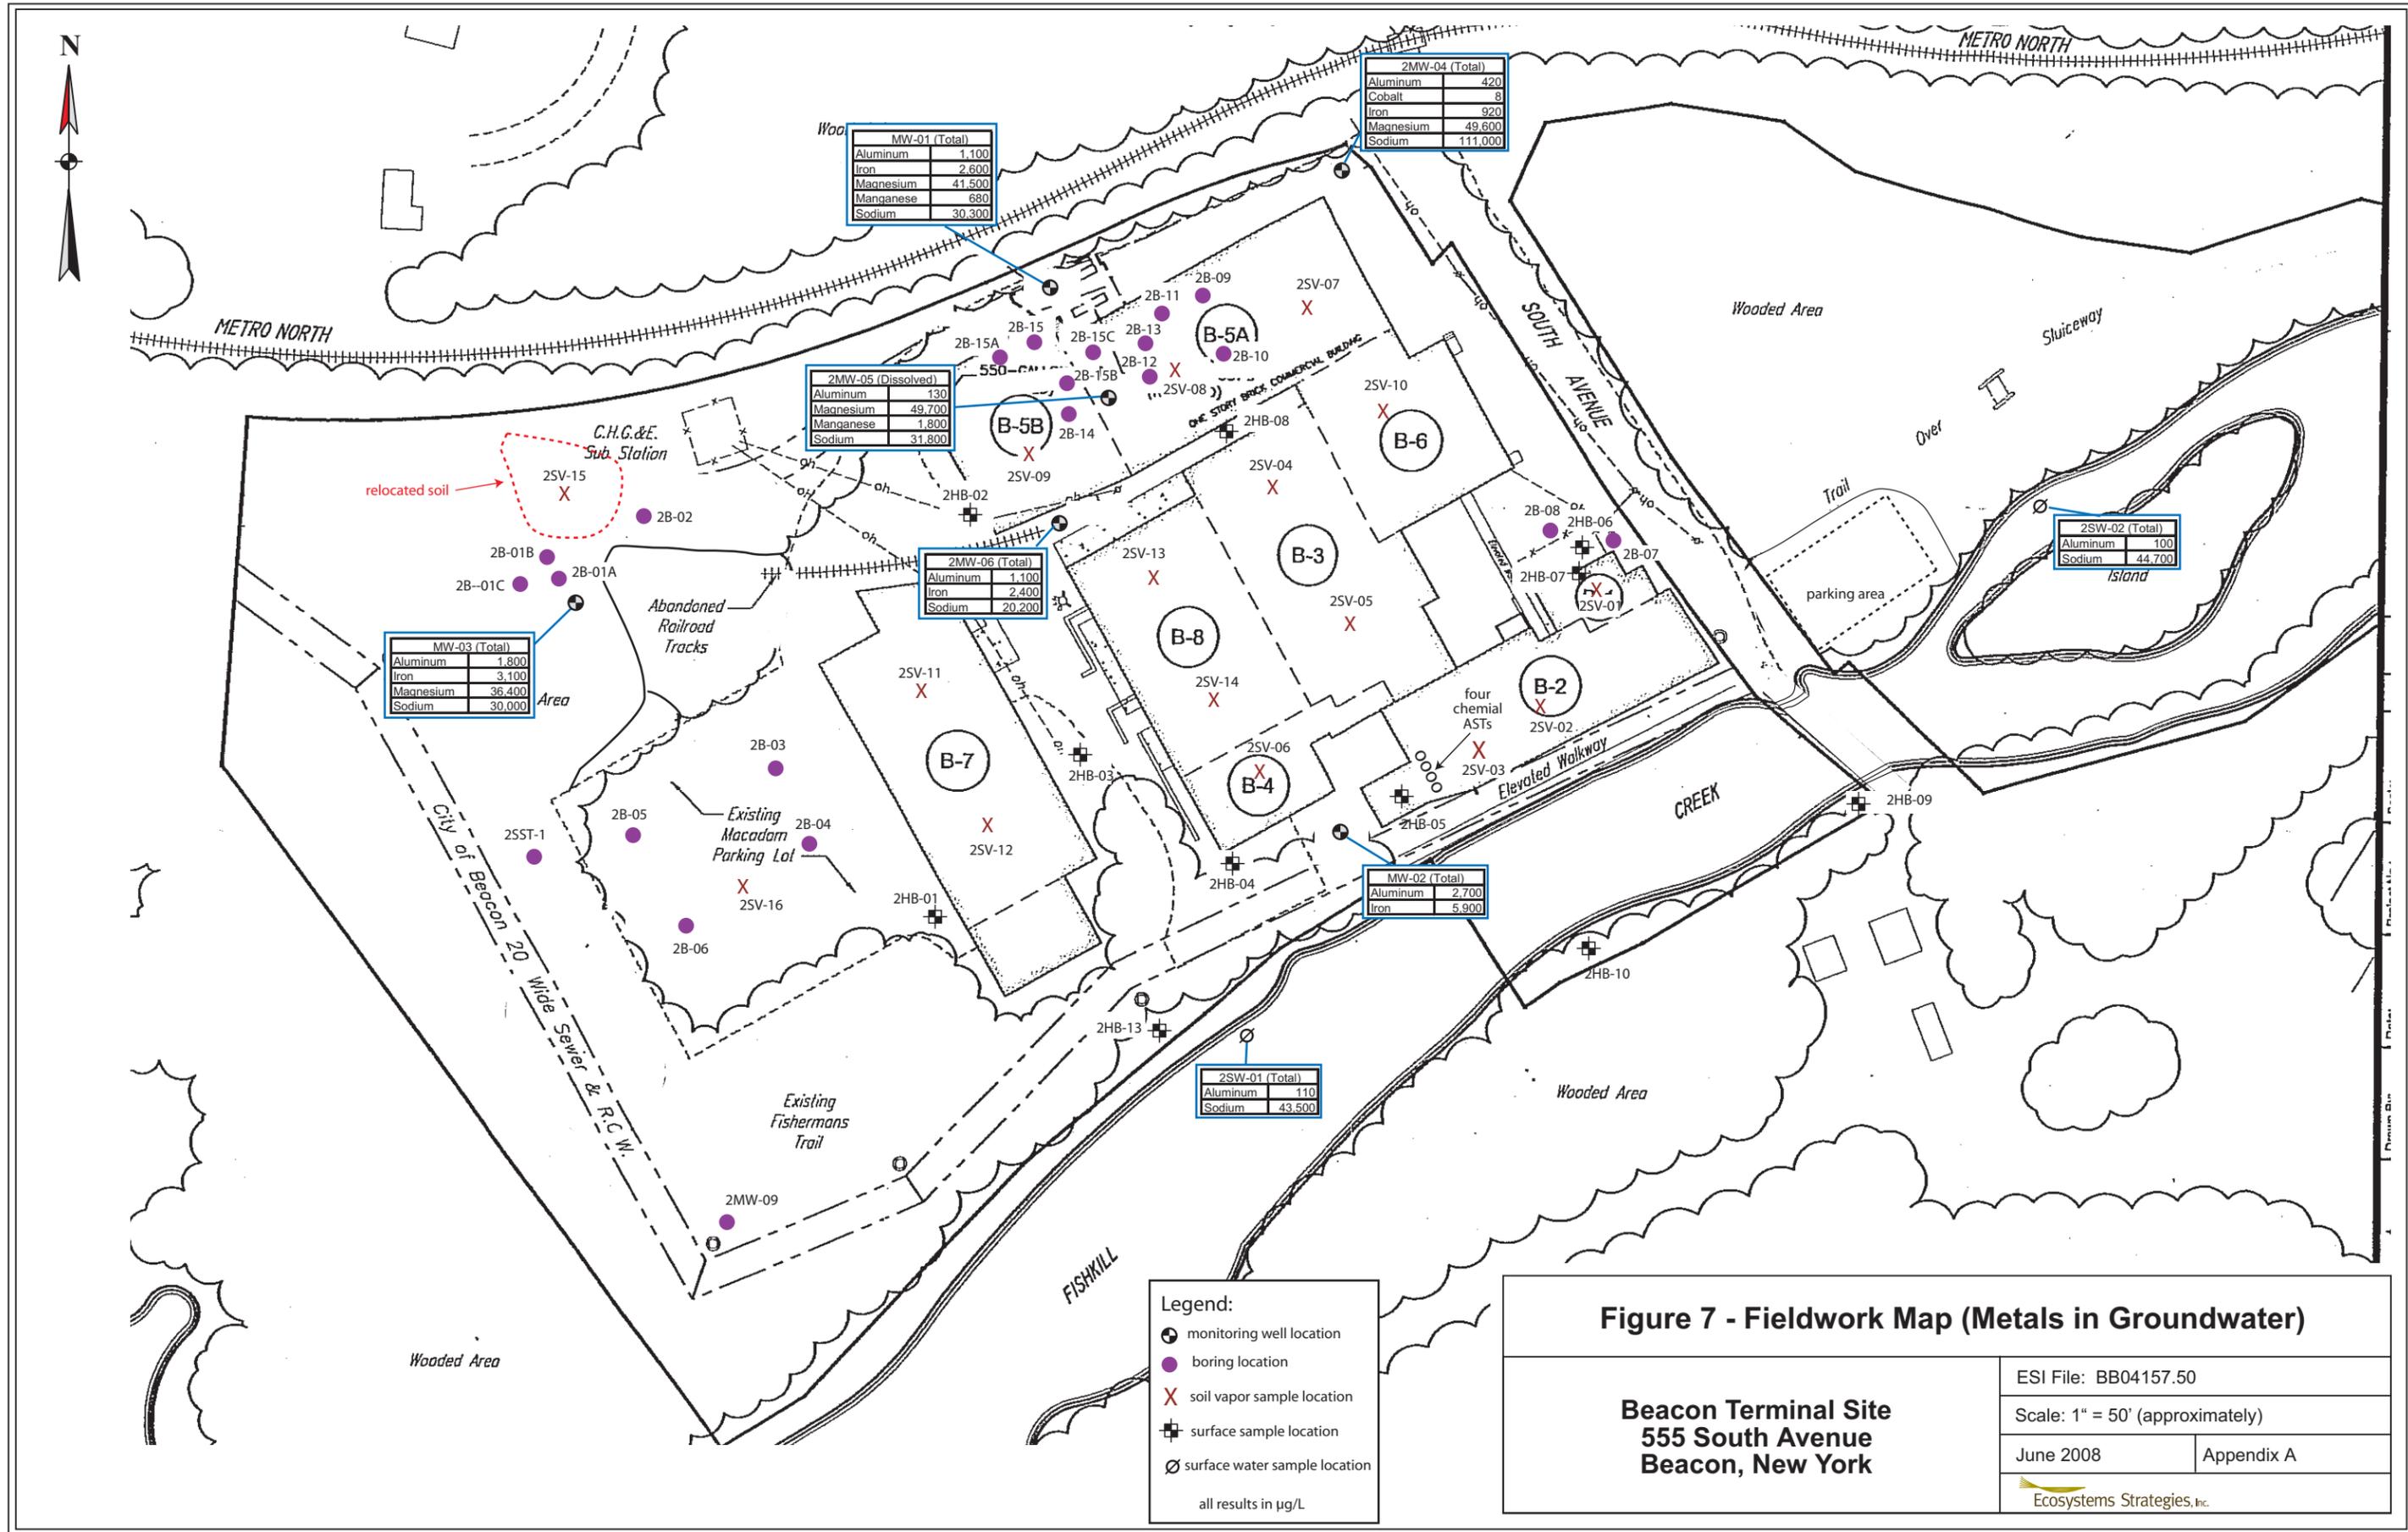

MW-01 (Total)	
Aluminum	1,100
Iron	2,600
Magnesium	41,500
Manganese	680
Sodium	30,300

2MW-04 (Total)	
Aluminum	420
Cobalt	8
Iron	920
Magnesium	49,600
Sodium	111,000

2MW-05 (Dissolved)	
Aluminum	130
Magnesium	49,700
Manganese	1,800
Sodium	31,800

2MW-06 (Total)	
Aluminum	1,100
Iron	2,400
Sodium	20,200

MW-03 (Total)	
Aluminum	1,800
Iron	3,100
Magnesium	36,400
Sodium	30,000

2SW-02 (Total)	
Aluminum	100
Sodium	44,700

MW-02 (Total)	
Aluminum	2,700
Iron	5,900


2SW-01 (Total)	
Aluminum	110
Sodium	43,500

- Legend:
- monitoring well location
  - boring location
  - soil vapor sample location
  - surface sample location
  - surface water sample location
- all results in µg/L

**Figure 7 - Fieldwork Map (Metals in Groundwater)**

**Beacon Terminal Site  
555 South Avenue  
Beacon, New York**

ESI File: BB04157.50  
 Scale: 1" = 50' (approximately)  
 June 2008 Appendix A  
 Ecosystems Strategies, Inc.

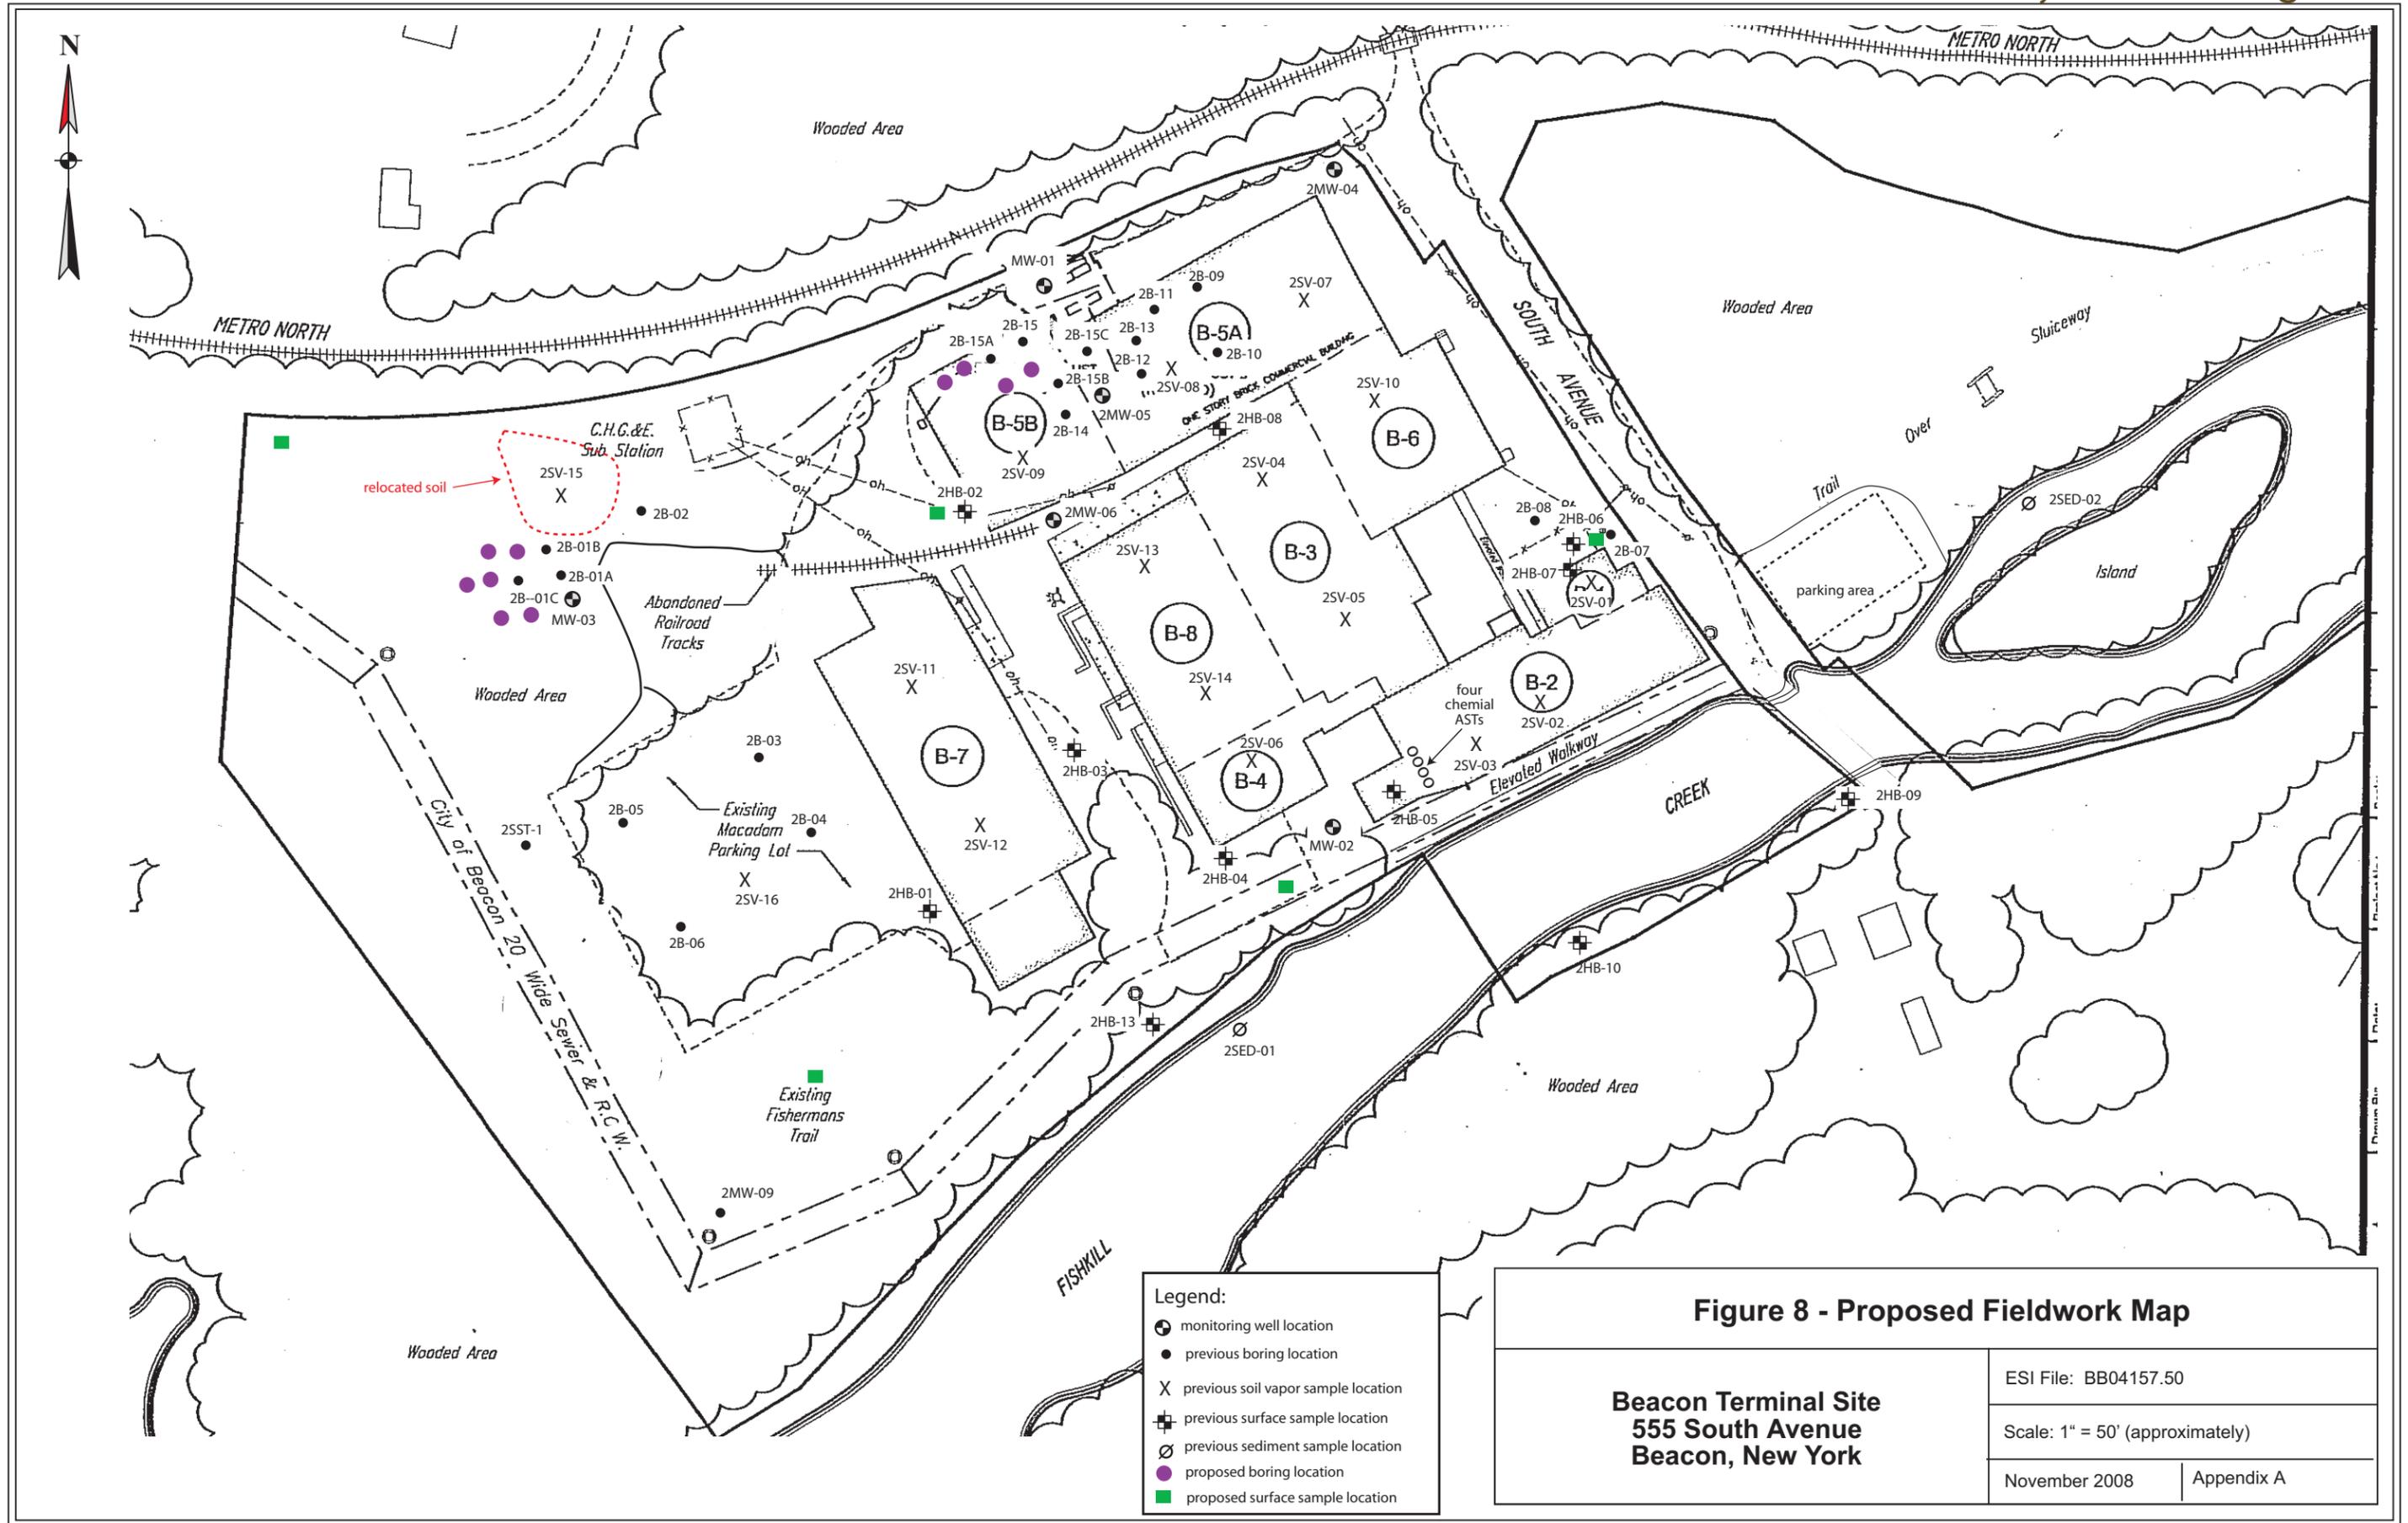

- Legend:**
- monitoring well location
  - previous boring location
  - X previous soil vapor sample location
  - ⊕ previous surface sample location
  - ⊙ previous sediment sample location
  - proposed boring location
  - proposed surface sample location

**Figure 8 - Proposed Fieldwork Map**

<b>Beacon Terminal Site 555 South Avenue Beacon, New York</b>	ESI File: BB04157.50
	Scale: 1" = 50' (approximately)
	November 2008   Appendix A

**APPENDIX B**

***Data Summary Tables***

**Table 1: VOCs in Soil Borings**

All results provided in µg/kg (parts per billion). Results **bold** exceed designated guidance levels.

Compound (USEPA Method 8260)	Guidance Level	Sample Identification																				DUPLICATE (2B-11, 5-7)
		2B-01C (1-3)	2B-02 (10-12)	2B-04 (5-7)	2B-05 (4-5)	2B-06 (4-5)	2B-07 (3-4)	2B-08 (5-6)	2B-09 (6-7)	2B-10 (9-10)	2B-11*** (5-7)	2B-12 (15-17)	2B-13 (23-25)	2B-14 (22-24)	2B-15 (4-5)	2B-15 A (4-5)	2B-15 C (4-5)	2MW-04 (20-21)	2MW-05 (26-28)	2MW-06 (6-6.5)	2MW-09 (2-3.5)	
		Date 2/4/2008	2/5/2008	2/4/2008	1/31/2008	2/4/2008	1/31/2008	1/31/2008	2/5/2008	2/5/2008	2/5/2008	2/5/2008	2/5/2008	2/6/2008	2/6/2008	2/6/2008	2/6/2008	2/6/2008	1/31/2008	2/6/2008	1/31/2008	
1,1,1,2-Tetrachloroethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,1,1-Trichloroethane	680	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,1,2,2-Tetrachloroethane	600*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,1,2-Trichloroethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,1-Dichloroethane	270	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,1-Dichloroethene	330	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,1-Dichloropropane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2,3-Trichlorobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2,3-Trichloropropane	340*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2,4-Trichlorobenzene	3,400*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2,4-Trimethylbenzene	3,600	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dibromo-3-chloropropane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dibromoethane (EDB)	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dichlorobenzene	1,100	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dichloroethane	20	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dichloroethene (total)	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dichloropropane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,3,5-Trimethylbenzene	8,400	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,3-Dichlorobenzene	2,400	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,3-Dichloropropane	300*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,4-Dichlorobenzene	1,800	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1-Chlorohexane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
2,2-Dichloropropane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
2-Chlorotoluene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
2-Hexanone	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
4-Chlorotoluene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
4-Isopropyltoluene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Acetone	50	ND	9.2 J	ND	17 J	28	6.7 J	ND	6.3 J	5.9 J	11 J	3.9 J	7.2 J	6.9 J	ND	ND	7.4 J	6.4 J	ND	3.3 J	8.1 J	
Benzene	60	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Bromobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Bromodichloromethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Bromoform	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Bromomethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Carbon disulfide	2700*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Carbon tetrachloride	760	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chlorobenzene	1,100	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chloroethane	1,900*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chloroform	370	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chloromethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dichloroethylene (cis)	250	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
cis-1,3-Dichloropropene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dibromochloromethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dibromomethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dichlorodifluoromethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	1,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Hexachlorobutadiene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Isopropylbenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
m-4p-Xylenes	260	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Methyl Ethyl Ketone	120	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
methyl isobutyl ketone	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Methyl-tert-butyl-ether (MTBE)	930	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Methylene chloride	50	ND	2 J	4.6 J	ND	4.4 J	2.4 J	1.9 J	ND	2.1 J	4.2 J	2 J	1.7 J	ND	130 J	61 J	1.9 J	ND	ND	4.2 J	1.9 J	
Naphthalene	12,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
n-Butylbenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
n-Propylbenzene	3,900	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
o-Xylene	260	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
sec-Butylbenzene	11,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Styrene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
tert-Butylbenzene	5,900	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Tetrachloroethane	1,300	ND	ND	2.6 J	ND	3.7 J	ND	ND	ND	2 J	4.6 J	ND	ND	ND	ND	ND	ND	ND	ND	1.5 J	ND	9
Toluene	700	4,600,000	1.1 J	2.3 J	ND	2.6 J	ND	ND	7.7	1.5 J	2.9 J	1.1 J	2 J	ND	22,000	100,000	1,600	3.4 J	2.1 J	4.2 J	3.8 J	1 J
1,2-Dichloroethylene (trans)	190	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
trans-1,3-Dichloropropene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Trichloroethane	470	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	340 J	ND	ND	ND	ND	ND	ND	ND	ND
Trichloroethene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Vinyl chloride	20	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
total Xylenes	260	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Total TICs	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	5,450 J	24,000 J	400 J	790 J	1,200 J	ND	ND	ND
Total Unknown Compounds	NE	1,140,000	ND	ND	ND	4.7 J	ND	ND	7.3 J	ND	ND	130 J	ND	17,000 J	6,300 J	12,360 J	ND	110 J	ND	6.4 J	ND	ND
Total VOCs	**	5,740,000	12.3	9.5	17.0	43.4	9.1	1.9	14.0	18.8	22.7	7.0	140.9	6.9	44,920	131,700	14,421	802.7	1,210	114.2	26.7	11.0

Notes:

Guidance levels based on BCP Unrestricted Use SCOs, 6 NYCRR Part 375, Table 375-6.8(b), except as noted.  
 \* = Guidance level based on NYSDECTAGM 4046.  
 \*\* = Guidance level not established TAGM 4046 total individual and sum of VOCs not listed must be less than or equal to 10,000 ppb).  
 \*\*\* Sample with duplicate analysis  
 J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero. The concentration given is an approximate value  
 ND = Not Detected TBD = To Be Determined NA = Not Analyzed

**Table 2: VOCs in Surface Soil**

 All results provided in µg/kg (parts per billion). Results in **bold** exceed designated guidance levels.

Compound (USEPA Method 8260)	Guidance Level	Sample Identification																														
		2HB-01 (0-4")	2HB-02*** (0-4")	2HB-03 (0-4")	2HB-04 (0-4")	2HB-05 (0-4")	2HB-06 (0-4")	2HB-07 (0-4")	2HB-08 (0-4")	2HB-09 (0-4")	2HB-10 (0-4")	2HB-11 (0-4")	2HB-12 (0-4")	2HB-13 (0-4")	2 SED-1	2 SED-2	DUPLICATE (2HB-02, 0-4")															
		Date 2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008															
1,1,1,2-Tetrachloroethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,1,1-Trichloroethane	680	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,1,2,2-Tetrachloroethane	600*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,1,2-Trichloroethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,1-Dichloroethane	270	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,1-Dichloroethene	330	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,1-Dichloropropene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2,3-Trichlorobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2,3-Trichloropropane	340*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2,4-Trichlorobenzene	3,400*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2,4-Trimethylbenzene	3,600	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2-Dibromo-3-chloropropane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2-Dibromoethane (EDB)	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2-Dichlorobenzene	1,100	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2-Dichloroethane	20	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2-Dichloroethene (total)	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2-Dichloropropane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,3,5-Trimethylbenzene	8,400	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,3-Dichlorobenzene	2,400	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,3-Dichloropropane	300*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,4-Dichlorobenzene	1,800	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1-Chlorohexane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2,2-Dichloropropane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2-Chlorotoluene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2-Hexanone	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
4-Chlorotoluene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
4-Isopropyltoluene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
Acetone	50	15	J	9.7	J	ND	ND	9.6	J	140	11	J	11	J	6	J	8.6	J	6.1	J	ND	ND	5.3	J	12	J						
Benzene	60	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Bromobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Bromodichloromethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Bromoform	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Bromomethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Carbon disulfide	2700*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Carbon tetrachloride	760	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Chlorobenzene	1,100	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Chloroethane	1,900*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Chloroform	370	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Chloromethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
1,2-Dichloroethylene (cis)	250	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
cis-1,3-Dichloropropene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Dibromochloromethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Dibromomethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Dichlorodifluoromethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Ethylbenzene	1,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Hexachlorobutadiene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Isopropylbenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
m-&p-Xylenes	260	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Methyl Ethyl Ketone	120	ND	ND	ND	ND	ND	ND	8	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
methyl isobutyl ketone	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Methyl-tert-butyl-ether (MTBE)	930	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Methylene chloride	50	2.6	J	ND	ND	ND	ND	2.9	J	ND	2.3	J	ND	2.1	J	ND	3.6	J	1.9	J	ND	5.4	J	4.8	J	ND						
Naphthalene	12,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
n-Butylbenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
n-Propylbenzene	3,900	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
o-Xylene	260	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
sec-Butylbenzene	11,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Styrene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
tert-Butylbenzene	5,900	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Tetrachloroethene	1,300	3.4	J	ND	1.3	J	ND	ND	ND	2	J	0.93	J	ND	9.1	J	ND	ND	ND	ND	ND	ND	ND	3.9	J	ND						
Toluene	700	3.4	J	ND	ND	ND	ND	2.8	J	ND	0.72	J	0.97	J	ND	ND	ND	ND	ND	ND	ND	ND	0.91	J	ND	ND						
1,2-Dichloroethylene (trans)	190	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
trans-1,3-Dichloropropene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Trichloroethene	470	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Trichlorofluoromethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Vinyl chloride	20	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
total Xylenes	260	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Total TICs	NE	ND	ND	ND	ND	ND	ND	6.6	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Total Unknown Compounds	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND						
Total VOCs	**	24.4		9.7		1.3		ND		9.6		160.3		11		13.3		8.72		12.6		6.1		12.7		1.9		ND		11.61		20.7

Notes:

Guidance levels based on BCP Unrestricted Use SCOs, 6 NYCRR Part 375, Table 375-6.8(b), except as noted.

\* = Guidance level based on NYSDEC TAGM 4046.

\*\* = Guidance level not established (TAGM 4046 total individual and sum of VOCs not listed must be less than or equal to 10,000 ppb).

\*\*\* Sample with duplicate analysis

J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero. The concentration given is an approximate value.

ND = Not Detected TBD = To Be Determined NA = Not Analyzed

**Table 3: VOCs in Test Pits**

 All results provided in µg/kg (parts per billion). Results in **bold** exceed designated guidance levels.

(USEPA Method 8260)	Guidance Level	Sample Identification									
		2SST-1 (0'-4")	2TP-2 (3')	2TP-8 (1')	2TP-11 (0-6")	2TP-15 (1-2')					
		Date	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008				
1,1,1,2-Tetrachloroethane	**	ND	ND	ND	ND	ND					
1,1,1-Trichloroethane	680	ND	ND	ND	ND	ND					
1,1,2,2-Tetrachloroethane	600*	ND	ND	ND	ND	ND					
1,1,2-Trichloroethane	**	ND	ND	ND	ND	ND					
1,1-Dichloroethane	270	ND	ND	ND	ND	ND					
1,1-Dichloroethene	330	ND	ND	ND	ND	ND					
1,1-Dichloropropene	**	ND	ND	ND	ND	ND					
1,2,3-Trichlorobenzene	**	ND	ND	ND	ND	ND					
1,2,3-Trichloropropane	340*	ND	ND	ND	ND	ND					
1,2,4-Trichlorobenzene	3,400*	ND	ND	ND	ND	ND					
1,2,4-Trimethylbenzene	3,600	ND	ND	ND	ND	ND					
1,2-Dibromo-3-chloropropane	**	ND	ND	ND	ND	ND					
1,2-Dibromoethane (EDB)	**	ND	ND	ND	ND	ND					
1,2-Dichlorobenzene	1,100	ND	ND	ND	ND	ND					
1,2-Dichloroethane	20	ND	ND	ND	ND	ND					
1,2-Dichloroethene (total)	**	ND	ND	ND	ND	ND					
1,2-Dichloropropane	**	ND	ND	ND	ND	ND					
1,3,5-Trimethylbenzene	8,400	ND	ND	ND	ND	ND					
1,3-Dichlorobenzene	2,400	ND	ND	ND	ND	ND					
1,3-Dichloropropane	300*	ND	ND	ND	ND	ND					
1,4-Dichlorobenzene	1,800	ND	ND	ND	ND	ND					
1-Chlorohexane	**	ND	ND	ND	ND	ND					
2,2-Dichloropropane	**	ND	ND	ND	ND	ND					
2-Chlorotoluene	**	ND	ND	ND	ND	ND					
2-Hexanone	**	ND	ND	ND	ND	ND					
4-Chlorotoluene	**	ND	ND	ND	ND	ND					
4-Isopropyltoluene	**	ND	ND	ND	ND	ND					
Acetone	50	4.2	J	4.3	J	54.0	J	5.8	J		
Benzene	60	ND	ND	ND	ND	ND	ND	ND	ND		
Bromobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND		
Bromodichloromethane	**	ND	ND	ND	ND	ND	ND	ND	ND		
Bromoform	**	ND	ND	ND	ND	ND	ND	ND	ND		
Bromomethane	**	ND	ND	ND	ND	ND	ND	ND	ND		
Carbon disulfide	2700*	ND	ND	ND	ND	ND	ND	ND	ND		
Carbon tetrachloride	760	ND	ND	ND	ND	ND	ND	ND	ND		
Chlorobenzene	1,100	ND	ND	ND	ND	ND	ND	ND	ND		
Chloroethane	1,900*	ND	ND	ND	ND	ND	ND	ND	ND		
Chloroform	370	ND	ND	ND	ND	ND	ND	ND	ND		
Chloromethane	**	ND	ND	ND	ND	ND	ND	ND	ND		
1,2-Dichloroethylene (cis)	250	ND	ND	ND	ND	ND	ND	ND	ND		
cis-1,3-Dichloropropene	**	ND	ND	ND	ND	ND	ND	ND	ND		
Dibromochloromethane	**	ND	ND	ND	ND	ND	ND	ND	ND		
Dibromomethane	**	ND	ND	ND	ND	ND	ND	ND	ND		
Dichlorodifluoromethane	**	ND	ND	ND	ND	ND	ND	ND	ND		
Ethylbenzene	1,000	ND	ND	ND	ND	ND	ND	ND	ND		
Hexachlorobutadiene	**	ND	ND	ND	ND	ND	ND	ND	ND		
Isopropylbenzene	**	ND	ND	ND	ND	ND	ND	ND	ND		
p-&m-Xylenes	260	ND	ND	ND	ND	ND	ND	ND	ND		
Methyl Ethyl Ketone	120	ND	ND	ND	ND	ND	ND	ND	ND		
methyl isobutyl ketone	**	ND	ND	ND	ND	ND	ND	ND	ND		
Methyl-tert-butyl-ether (MTBE)	930	ND	ND	ND	ND	ND	ND	ND	ND		
Methylene chloride	50	3.2	J	4.4	J	3.3	J	16.0	J	4.8	J
Naphthalene	12,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
n-Butylbenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
n-Propylbenzene	3,900	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
o-Xylene	260	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
sec-Butylbenzene	11,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Styrene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
tert-Butylbenzene	5,900	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Tetrachloroethene	1,300	ND	21.0	4.9	J	42.0	J	15.0	15.0	15.0	J
Toluene	700	ND	ND	ND	ND	ND	ND	1.0	1.0	1.0	J
1,2-Dichloroethylene (trans)	190	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
trans-1,3-Dichloropropene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Trichloroethene	470	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Trichlorofluoromethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Vinyl chloride	20	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
total Xylenes	260	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Total TICs	NE	ND	ND	ND	ND	15,050	J	ND	ND	ND	ND
Total Unknown Compounds	NE	ND	ND	ND	ND	1,730	J	ND	ND	ND	ND
Total VOCs	**	7	30	12	16,892	27	27	27	27	27	27

Notes:

Guidance levels based on BCP Unrestricted Use SCOs, 6 NYCRR Part 375, Table 375-6.8(b), except as noted.

\* = Guidance level based on NYSDEC TAGM 4046.

\*\* = Guidance level not established (TAGM 4046 total individual and sum of VOCs not listed must be less than or equal to 10,000 ppb).

J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero. The concentration given is an approximate value.

ND - Not Detected, TBD - To Be Determined

**Table 4 : VOCs in Groundwater**

All results provided in µg/L. Results in bold exceed designated guidance levels.

(USEPA Method 8260)	Guidance Level	Sample Identification																	
		MW-01		MW-02		MW-03	2MW-04*		2MW-05		2MW-06		2SW-1	2SW-2	Duplicate (2MW-04)	TRIP BLANK	TRIP BLANK 2		
		Date	2/28/2008	6/19/2008	2/28/2008	6/19/2008	2/28/2008	2/28/2008	6/19/2008	2/28/2008	6/19/2008	2/28/2008	6/19/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	
1,1,1,2-Tetrachloroethane	5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	ND	ND	
1,1,1-Trichloroethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,1,2,2-Tetrachloroethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,1,2-Trichloroethane	1	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,1-Dichloroethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,1-Dichloroethene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,1-Dichloropropene	5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
1,2,3-Trichlorobenzene	5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
1,2,3-Trichloropropane	0.04	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,2,4-Trichlorobenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,2,4-Trimethylbenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,2-Dibromo-3-Chloropropane	0.04	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,2-Dibromoethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,2-Dichlorobenzene	3	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,2-Dichloroethane	0.6	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,2-Dichloroethene, Total	5*	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
1,2-Dichloropropane	1	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
1,3,5-Trimethylbenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,3-Dichlorobenzene	3	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,3-Dichloropropane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,4-Dichlorobenzene	3	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1-Chlorohexane	5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
2,2-Dichloropropane	5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
2-Chlorotoluene	5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
2-Hexanone	50	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
4-Chlorotoluene	5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
4-Isopropyltoluene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Acetone	50	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	1.6	J	2.8	J	2.1	J	2.7	J
Benzene	0.7	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Bromobenzene	5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
Bromodichloromethane	50	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Bromoform	50	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Bromomethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Carbon disulfide	NE	ND	0.25	J	ND	ND	ND	ND	0.7	J	ND	ND	ND	ND	ND	ND	ND	ND	
Carbon tetrachloride	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Chlorobenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Chloroethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Chloroform	7	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Chloromethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
cis-1,2-Dichloroethene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
cis-1,3-Dichloropropene	0.4**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Dibromochloromethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Dibromomethane	5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
Dichlorodifluoromethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Ethylbenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Hexachlorobutadiene	0.5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
Isopropylbenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
m&p-Xylene	5***	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Methyl Ethyl Ketone	50	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	5.7	J	7.4	J
methyl isobutyl ketone	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Methyl tert-butyl ether	10	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Methylene Chloride	5	ND	ND	ND	0.45	J	ND	ND	ND	ND	ND	0.32	J	0.28	J	0.33	J	0.69	J
Naphthalene	10	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
n-Butylbenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
N-Propylbenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
o-Xylene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
sec-Butylbenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Styrene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
tert-Butylbenzene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Tetrachloroethene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Toluene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
trans-1,2-Dichloroethene	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
trans-1,3-Dichloropropene	0.4**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Trichloroethene	5	0.31	J	ND	ND	0.31	J	ND	ND	ND	0.43	J	ND	ND	ND	ND	ND	0.46	J
Trichlorofluoromethane	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Vinyl chloride	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Xylenes (total)	5	ND	NA	ND	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	ND	
Total TICs	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Total Unknown Compounds	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Total VOCs	NE	0.31	0.25	ND	0.45	0.31	ND	ND	0.7	ND	0.43	0.32	1.88	ND	3.13	8.49	11.86	ND	

Notes:

Guidance levels based on NYSDEC TOCS 1.1.1.

\*Applies to the individual isomers cis-1,2-Dichloroethene and trans-1,2-Dichloroethene.

\*\*Applies to the sum of cis- and trans-1,3-dichloropropene.

\*\*\* Applies to the individual isomers 1,3-Xylene (m-Xylene) and 1,4-Xylene (p-Xylene).

# Sample with duplicate analysis

J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero.

The concentration given is an approximate value.

ND = Not Detected NE = Not Established

**Table 5: VOCs in Soil Gas**

Results provided in µg/m<sup>3</sup>. Results in bold exceed NYSDOH Background Levels.

Compound	Background	Sample ID															
	Levels	2SV-01	2SV-02	2SV-03	2SV-04	2SV-05	2SV-06	2SV-07	2SV-08	2SV-09	2SV-10	2SV-11	2SV-12	2SV-13	2SV-14	2SV-15	2SV-16
	Location	B-1	B-2	B-2	B-3	B-3	B-4	B-5A	B-5A	B-5B	B-6	B-7	B-7	B-8	B-8	Soil Relocation	Parking lot
1,1,1-Trichloroethane	<0.25 - 1.4	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,1,2,2-Tetrachloroethane	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,1,2-Trichloroethane	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,1-Dichloroethane	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,1-Dichloroethene	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2,4-Trichlorobenzene	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2,4-Trimethylbenzene	0.78 - 4.4	0.84	ND	ND	ND	ND	2.2	1.2	ND	ND	ND	ND	ND	2	ND	ND	ND
1,2-Dibromoethane	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dichlorobenzene	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dichloroethane	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dichloroethene (total)	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dichloropropane	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,2-Dichlorotetrafluoroethane	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,3,5-Trimethylbenzene	<0.25 - 1.7	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,3-Butadiene	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	11
1,3-Dichlorobenzene	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,4-Dichlorobenzene	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
1,4-Dioxane	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
2,2,4-Trimethylpentane	NA	1.7	ND	0.93	ND	0.79	4.1	ND	0.98	ND	ND	ND	ND	ND	ND	2.5	1.8
2-Chlorotoluene	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
3-Chloropropene	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
4-Ethyltoluene	NE	0.98	ND	ND	ND	0.88	2.6	1.2	ND	0.88							
Acetone	10.0 - 46	ND	<b>64</b>	13	ND	<b>48</b>	ND	17	ND	26	<b>290</b>	ND	ND	<b>76</b>	<b>48</b>	ND	24
Benzene	1.2-5.7	<b>6.4</b>	3	3.5	1.7	3.5	<b>15</b>	2.8	3.8	3.5	5.1	2.7	2.9	<b>11</b>	<b>310</b>	<b>5.8</b>	<b>7.7</b>
Bromodichloromethane	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Bromoethene	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Bromoform	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Bromomethane	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Carbon Disulfide	NA	1.7	3.4	1.7	11	3.4	14	1.7	11	ND	ND	ND	ND	ND	ND	2.6	2.6
Carbon Tetrachloride	<0.25 - 0.68	<b>3</b>	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chlorobenzene	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chloroethane	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Chloroform	<0.25	<b>1.3</b>	ND	ND	ND	<b>1.3</b>	ND	ND	ND	<b>1.3</b>	ND	<b>1.8</b>	<b>1.2</b>	ND	ND	ND	ND
Chloromethane	<0.25 - 2.0	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
cis-1,2-Dichloroethene	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
cis-1,3-Dichloropropene	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Cyclohexane	NA	2.2	1.2	1.3	0.89	1	5.2	0.76	5.2	0.89	ND	0.65	ND	2.5	ND	93	1.3
Dibromochloromethane	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Dichlorodifluoromethane	NA	3.1	ND	ND	2.3	ND	2.6	2.1	2.4	2.6	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	0.43-2.8	<b>6.1</b>	<b>3.2</b>	<b>3.9</b>	1.3	<b>3.2</b>	<b>18</b>	2.6	2.3	1.6	ND	1.7	2.3	<b>6.1</b>	<b>8.3</b>	<b>6.1</b>	<b>5.2</b>
Freon TF	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Hexachlorobutadiene	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Isopropyl Alcohol	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	10
Methyl Butyl Ketone	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Methyl Ethyl Ketone	NA	2	2.6	1.9	1.8	3.2	2	2.5	1.4	1.9	ND	1.4	1.3	3.5	ND	ND	3.8
Methyl Isobutyl Ketone	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Methyl tert-Butyl Ether	<0.25 - 6.7	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Methylene Chloride	0.38-6.3	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
n-Heptane	NA	7.8	2.6	4.1	3.2	5.7	18	2.7	5.7	3.2	ND	4.1	2.1	5.3	6.1	13	7.4
n-Hexane	0.63-6.5	<b>14</b>	3.4	<b>6.7</b>	4.2	5.3	<b>25</b>	3	<b>6.7</b>	3.9	ND	4.9	2.6	<b>10</b>	<b>11</b>	6.3	<b>9.5</b>
Styrene	<0.25-0.68	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
tert-Butyl Alcohol	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Tetrachloroethene	<0.25 - 1.2	ND	ND	ND	ND	ND	<b>5.9</b>	ND	ND								
Tetrahydrofuran	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	4.2-25	<b>31</b>	20	20	9.4	24	<b>83</b>	23	21	15	21	16	21	<b>34</b>	<b>150</b>	<b>41</b>	<b>30</b>
trans-1,2-Dichloroethene	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
trans-1,3-Dichloropropene	NA	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Trichloroethene	<0.25	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	<b>86</b>	ND	ND	ND	ND	ND
Trichlorofluoromethane	NA	1.3	ND	ND	ND	ND	ND	ND	ND	0.96	ND	ND	ND	ND	ND	ND	ND
Vinyl Chloride	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Xylene (m,p)	0.52-4.7	<b>20</b>	<b>12</b>	<b>12</b>	4.3	<b>9.6</b>	<b>61</b>	<b>9.6</b>	<b>6.9</b>	<b>5.2</b>	ND	<b>5.6</b>	<b>7.4</b>	<b>27</b>	<b>52</b>	<b>20</b>	<b>17</b>
Xylene (o)	0.39-3.1	<b>3.3</b>	2.4	2	1	2.1	<b>9.6</b>	2.3	1.6	1.3	ND	1.3	1.8	<b>6.5</b>	<b>11</b>	<b>3.9</b>	2.8
Xylene (total)	NE	23	15	14	5.6	12	69	13	8.7	6.9	ND	6.9	9.6	35	65	25	19

Notes:

ND = Not Detected NE = Not Established

**Table 6: SVOCs in Soil Borings**

Results provided in µg/kg (parts per billion). Results shown in **bold** exceed guidance levels.

Compound (USEPA Method 8270)	Guidance Level Date	Sample Identification																																	
		2B-01C (1-3')	2B-02 (10-12')	2B-04 (5-7')	2B-05 (4-5')	2B-06 (4-5')	2B-07 (3-4')	2B-08 (5-6')	2B-09 (6-7')	2B-10 (9-10')	2B-11*** (5-7')	2B-12 (15-17')	2B-13 (23-25')	2B14 (22-24')	2B-15 (4-5')	2MW-06 (6-6.5')	2MW-09 (2-3.5')	DUPLICATE (2B-11, 5-7')																	
		2/4/2008	2/5/2008	2/4/2008	1/31/2008	2/4/2008	1/31/2008	1/31/2008	2/5/2008	2/5/2008	2/5/2008	2/5/2008	2/5/2008	2/6/2008	2/6/2008	1/31/2008	2/5/2008	2/5/2008																	
1,2,4-Trichlorobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
1,2-Dichlorobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
1,3-Dichlorobenzene	2,400	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
1,4-Dichlorobenzene	1,800	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2,2'-oxybis[1-chloropropane]	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2,4,5-Trichlorophenol	100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2,4,6-Trichlorophenol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2,4-Dichlorophenol	400*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2,4-Dimethylphenol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2,4-Dinitrophenol	200*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2,4-Dinitrotoluene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2,6-Dinitrotoluene	1,000*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2-Chloronaphthalene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2-Chlorophenol	800*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2-Methylnaphthalene	36,400*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2-Methylphenol	100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	720	ND	ND	ND	ND																	
2-Nitroaniline	430*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
2-Nitrophenol	330*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
3,3-Dichlorobenzidine	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
3-Nitroaniline	500*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
4,6-Dinitro-2-methylphenol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
4-Bromophenyl phenyl ether	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
4-Chloro-3-methylphenol	240*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
4-Chloroaniline	220*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
4-Chlorophenyl phenyl ether	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
4-Methylphenol	900*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	660	ND	ND	ND	ND																	
4-Nitroaniline	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
4-Nitrophenol	100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Acenaphthene	20,000	ND	ND	ND	430	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Acenaphthylene	100,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	110	J	ND																	
Anthracene	100,000	ND	ND	ND	750	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	120	J	ND																	
Benzo(a)anthracene	1,000	ND	ND	87	J	1,500	ND	74	J	ND	ND	ND	ND	ND	ND	280	J	ND																	
Benzo(a)pyrene	1,000	ND	ND	66	J	1,200	ND	68	J	ND	ND	ND	ND	ND	ND	180	J	ND																	
Benzo(b)fluoranthene	1,000	ND	ND	79	J	1,300	ND	86	J	ND	ND	ND	ND	ND	ND	290	J	ND																	
Benzo(ghi)perylene	100,000	ND	ND	ND	900	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	180	J	ND																	
Benzo(k)fluoranthene	800	ND	ND	ND	590	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	96	J	ND																	
Benzyl alcohol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Bis(2-chloroethoxy)methane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Bis(2-chloroethyl)ether	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Bis(2-ethylhexyl)phthalate	**	110	J	ND	760	250	J	ND	94	J	110	J	ND	ND	ND	140	J	ND																	
Butyl benzyl phthalate	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Carbazole	**	ND	ND	ND	160	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Chrysene	1,000	ND	ND	98	J	1,400	ND	92	J	ND	ND	ND	ND	ND	ND	360	J	ND																	
Dibenzo(a,h)anthracene	330	ND	ND	ND	230	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	57	J	ND																	
Dibenzofuran	6,200*	ND	ND	ND	100	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Diethyl phthalate	7,100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Dimethyl phthalate	2,000*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Di-n-butyl phthalate	8,100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Di-n-octyl phthalate	120,000*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Fluoranthene	100,000	ND	ND	160	J	2,800	ND	140	J	ND	ND	ND	ND	ND	ND	500	ND	ND																	
Fluorene	30,000	ND	ND	ND	290	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Hexachlorobenzene	330	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Hexachlorobutadiene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Hexachlorocyclopentadiene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Hexachloroethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Indeno(1 2 3-cd)pyrene	500	ND	ND	69	J	1,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	210	J	ND																	
Isophorone	440*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Naphthalene	12,000	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Nitrobenzene	200*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
n-Nitroso-di-n-propylamine	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
n-Nitrosodiphenylamine	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Pentachlorophenol	800	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Phenanthrene	100,000	ND	ND	160	J	2,400	ND	110	J	ND	ND	ND	ND	ND	ND	450	ND	ND																	
Phenol	330	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND																	
Pyrene	100,000	ND	ND	150	J	2,400	62	J	160	J	ND	ND	ND	ND	ND	490	ND	ND																	
Total TICs	NE	59,710	J	54,000	J	63,000	J	40,030	J	55,000	J	70,000	J	37,440	J	52,000	J	65,000	J	46,000	J	52,000	J	52,000	J	270	J	66,000	J	57,000	J	1,160	J	53,000	J
Total Unknown Compounds	NE	4,860	J	12,170	J	3,540	J	3,370	J	7,280	J	4,440	J	1,910	J	3,220	J	3,240	J	1,360	J	1,940	J	1,610	J	14,000	J	2,690	J	1,910	J	11,370	J	2,370	J
Total SVOCs	**	64,680		66,170		68,169		61,100		62,342		75,264		39,460		55,220		68,240		47,360		53,940		53,610		14,270		70,070		59,050		15,853		55,434	

Notes:  
 Guidance levels based on BCP Unrestricted Use SCOs, 6 NYCRR Part 375, Table 375-6.8b, except as noted.  
 \* = Guidance level based on NYSDEC TAGM 4046.  
 \*\* cleanup objective not established (individual SVOCs not listed, and total SVOCs, must be less than or equal to 50,000 ppb and 500,000 ppb, respectively)  
 \*\*\* Sample with duplicate analysis  
 J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero. The concentration given is an approximate value.  
 ND = Not Detected

**Table 7: SVOCs in Surface Soils**

Results provided in µg/kg (parts per billion). Results shown in **bold** exceed guidance levels.

Compound (USEPA Method 8270)	Guidance Level	Sample Identification																													
		2HB-01 (0-4")	2HB-02*** (0-4")	2HB-03 (0-4")	2HB-04 (0-4")	2HB-05 (0-4")	2HB-06 (0-4")	2HB-07 (0-4")	2HB-08 (0-4")	2HB-09 (0-4")	2HB-10 (0-4")	2HB-11 (0-4")	2HB-12 (0-4")	2HB-13 (0-4")	2 SED-1	DUPLICATE (2HB-02, 0-4")															
Date		2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008															
1,2,4-Trichlorobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,2-Dichlorobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,3-Dichlorobenzene	2,400	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
1,4-Dichlorobenzene	1,800	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2,2'-oxybis[1-chloropropane]	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2,4,5-Trichlorophenol	100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2,4,6-Trichlorophenol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2,4-Dichlorophenol	400*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2,4-Dimethylphenol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2,4-Dinitrophenol	200*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2,4-Dinitrotoluene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2,6-Dinitrotoluene	1,000*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2-Chloronaphthalene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2-Chlorophenol	800*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND															
2-Methylnaphthalene	36,400*	ND	ND	ND	ND	ND	300	J	ND	370	J	ND	92	J	270	J	ND	550													
2-Methylphenol	100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
2-Nitroaniline	430*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	120	J	ND	ND	ND	ND													
2-Nitrophenol	330*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
3,3-Dichlorobenzidine	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
3-Nitroaniline	500*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
4,6-Dinitro-2-methylphenol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
4-Bromophenyl phenyl ether	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
4-Chloro-3-methylphenol	240*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
4-Chloroaniline	220*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
4-Chlorophenyl phenyl ether	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
4-Methylphenol	900*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
4-Nitroaniline	**	ND	810	J	ND	ND	ND	ND	170	J																					
4-Nitrophenol	100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND												
Acenaphthene	20,000	ND	ND	ND	ND	ND	450	J	ND	2,500	ND	ND	78	J	150	J	ND	140	J												
Acenaphthylene	100,000	ND	1,700	ND	ND	75	J	880	J	ND	ND	830	210	J	ND	ND	ND	190	J												
Anthracene	100,000	120	J	1,300	210	J	ND	180	J	1,900	ND	4,100	61	J	ND	960	260	J	96	J	160	J									
Benzo(a)anthracene	1,000	670	J	<b>5,200</b>	<b>1,100</b>	110	J	820	J	<b>4,000</b>	ND	<b>8,500</b>	310	J	62	J	<b>1,600</b>	500	J	110	J	320	J	150	J						
Benzo(a)pyrene	1,000	620	J	<b>3,800</b>	<b>1,100</b>	130	J	860	J	<b>3,400</b>	ND	<b>6,100</b>	230	J	ND	ND	<b>1,300</b>	460	J	90	J	300	J	140	J						
Benzo(b)fluoranthene	1,000	740	J	<b>5,100</b>	<b>1,500</b>	220	J	<b>1,400</b>	J	<b>3,900</b>	ND	<b>7,100</b>	310	J	ND	ND	<b>1,600</b>	640	J	120	J	360	J	240	J						
Benzo(ghi)perylene	100,000	390	J	3,500	650	99	J	540	J	2,100	ND	2,900	150	J	ND	710	300	J	ND	200	J	93	J	93	J						
Benzo(k)fluoranthene	800	290	J	<b>1,700</b>	540	J	ND	480	J	<b>1,400</b>	J	ND	<b>2,500</b>	120	J	ND	600	180	J	ND	130	J	77	J	77	J					
Benzyl alcohol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Bis(2-chloroethoxy)methane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Bis(2-chloroethyl)ether	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Bis(2-ethylhexyl)phthalate	**	230	J	1,900	370	J	170	J	320	J	ND	53	J	ND	82	J	95	J	89	J	300	J	150	J	130	J	1,500				
Butyl benzyl phthalate	**	ND	ND	ND	ND	ND	74	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Carbazole	**	ND	ND	110	J	ND	130	J	630	J	ND	1,700	J	ND	97	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Chrysene	1,000	630	J	<b>3,800</b>	<b>1,100</b>	180	J	<b>1,100</b>	J	<b>4,300</b>	ND	<b>7,400</b>	290	J	ND	<b>1,500</b>	620	J	100	J	350	J	160	J	160	J					
Dibenzo(a,h)anthracene	330	120	J	<b>1,100</b>	160	J	ND	150	J	<b>630</b>	J	ND	<b>1,000</b>	J	ND	230	J	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Dibenzofuran	6,200*	ND	ND	ND	ND	ND	ND	350	J	ND	880	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Diethyl phthalate	7,100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Dimethyl phthalate	2,000*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Di-n-butyl phthalate	8,100*	ND	870	ND	ND	ND	90	J	ND	ND	ND	ND	ND	ND	ND	ND	120	J	ND	ND	ND	ND	130	J	130	J					
Di-n-octyl phthalate	120,000*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Fluoranthene	100,000	1,100	J	6,700	1,900	280	J	2,000	J	8,400	ND	18,000	340	J	97	J	2,400	850	J	180	J	560	J	260	J	260	J				
Fluorene	30,000	ND	150	J	ND	ND	ND	520	J	ND	1,700	J	ND	150	J	ND	150	J	ND	ND	ND	ND	ND	100	J	100	J				
Hexachlorobenzene	330	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Hexachlorobutadiene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Hexachlorocyclopentadiene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Hexachloroethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Indeno(1,2,3-cd)pyrene	500	480	J	<b>4,700</b>	<b>760</b>	100	J	<b>670</b>	J	<b>2,400</b>	ND	<b>3,900</b>	200	J	ND	<b>830</b>	350	J	80	J	240	J	120	J	120	J					
Isophorone	440*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Naphthalene	12,000	ND	ND	ND	ND	ND	ND	630	J	ND	710	J	ND	ND	140	J	380	J	ND	ND	ND	ND	1,200	J	1,200	J					
Nitrobenzene	200*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
n-Nitroso-di-n-propylamine	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
n-Nitrosodiphenylamine	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	280	J	ND	ND	ND	ND	ND	ND	ND	ND					
Pentachlorophenol	800	ND	ND	86	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND													
Phenanthrene	100,000	450	J	1,900	720	J	140	J	960	J	7,400	ND	16,000	84	J	ND	1,000	630	J	100	J	240	J	220	J	220	J				
Phenol	330	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND					
Pyrene	100,000	920	J	5,800	1,200	J	190	J	1,100	J	6,900	ND	13,000	300	J	85	J	1,900	730	J	170	J	450	J	140	J	140	J			
Total TICs	NE	1,990	J	14,500	J	14,130	J	8,020	J	3,470	J	9,080	J	ND	J	10,200	J	3,510	J	500	J	4,520	J	30,580	J	6,230	J	6,090	J	6,320	J
Total Unknown Compounds	NE	67,250	J	112,000	J	76,610	J	72,300	J	70,140	J	3,348,120	J	73,110	J	78,960	J	66,010	J	64,240	J	47,860	J	127,840	J	71,320	J	61,250	J	76,360	J
Total SVOCs	**	76,000	J	176,530	J	102,246	J	81,939	J	84,559	J	<b>3,407,690</b>	J	73,163	J	187,520	J	71,997	J	65,079	J	68,486	J	165,920	J	78,650	J	70,716	J	88,420	J

Notes:  
 Guidance levels based on BCP Unrestricted Use SCOs, 6 NYCRR Part 375, Table 375-6.8b, except as noted.  
 \* = Guidance level based on NYSDEC TAGM 4046.  
 \*\* cleanup objective not established (individual SVOCs not listed, and total SVOCs, must be less than or equal to 50,000 ppb and 500,000 ppb, respectively)  
 \*\*\* Sample with duplicate analysis  
 J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero. The concentration given is an approximate value.  
 ND = Not Detected

**Table 8: SVOCs in Test Pits**

Results provided in µg/kg (parts per billion). Results shown in **bold** exceed guidance levels.

Compound (USEPA Method 8270)	Guidance Level	Sample Identification									
		2SST-1(0-4")		2TP-2 (3')		2TP-8 (1')		2TP-11 (0-6")		2TP-15 (1-2')	
		Date	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008
1,2,4-Trichlorobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,2-Dichlorobenzene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,3-Dichlorobenzene	2,400	ND	ND	ND	ND	ND	ND	ND	ND	ND	
1,4-Dichlorobenzene	1,800	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2,2'-oxybis[1-chloropropane]	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2,4,5-Trichlorophenol	100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2,4,6-Trichlorophenol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2,4-Dichlorophenol	400*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2,4-Dimethylphenol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2,4-Dinitrophenol	200*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2,4-Dinitrotoluene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2,6-Dinitrotoluene	1,000*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2-Chloronaphthalene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2-Chlorophenol	800*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2-Methylnaphthalene	36,400*	ND	ND	110	J	ND	ND	ND	ND	ND	
2-Methylphenol	100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2-Nitroaniline	430*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
2-Nitrophenol	330*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
3,3-Dichlorobenzidine	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
3-Nitroaniline	500*	ND	ND	ND	ND	150	J	ND	ND	ND	
4,6-Dinitro-2-methylphenol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
4-Bromophenyl phenyl ether	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
4-Chloro-3-methylphenol	240*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
4-Chloroaniline	220*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
4-Chlorophenyl phenyl ether	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
4-Methylphenol	900*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
4-Nitroaniline	**	ND	ND	ND	ND	380	J	ND	ND	ND	
4-Nitrophenol	100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Acenaphthene	20,000	ND	ND	90	J	ND	ND	660	J	ND	
Acenaphthylene	100,000	160	J	3,100	J	740	110	J	2,000	ND	
Anthracene	100,000	180	J	3,600	J	690	130	J	3,400	ND	
Benzo(a)anthracene	1,000	180	J	18,000	J	1,500	250	J	11,000	ND	
Benzo(a)pyrene	1,000	140	J	17,000	J	1,400	350	J	11,000	ND	
Benzo(b)fluoranthene	1,000	250	J	21,000	J	1,400	780	J	13,000	ND	
Benzo(ghi)perylene	100,000	360	J	16,000	J	1,300	420	J	9,400	ND	
Benzo(k)fluoranthene	800	76	J	7,600	J	540	420	J	4,200	ND	
Benzyl alcohol	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Bis(2-chloroethoxy)methane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Bis(2-chloroethyl)ether	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Bis(2-ethylhexyl)phthalate	**	3,500	J	1,300	J	69	J	800	J	470	
Butyl benzyl phthalate	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Carbazole	**	ND	1,000	J	89	J	ND	960	J	ND	
Chrysene	1,000	190	J	15,000	J	1,400	530	J	10,000	ND	
Dibenzo(a,h)anthracene	330	ND	J	3,300	J	300	J	89	J	2,100	
Dibenzofuran	6,200*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Diethyl phthalate	7,100*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Dimethyl phthalate	2,000*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Di-n-butyl phthalate	8,100*	94	J	ND	ND	ND	320	J	ND	ND	
Di-n-octyl phthalate	120,000*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Fluoranthene	100,000	240	J	31,000	J	2,200	310	J	16,000	ND	
Fluorene	30,000	ND	ND	230	J	ND	ND	770	J	ND	
Hexachlorobenzene	330	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Hexachlorobutadiene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Hexachlorocyclopentadiene	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Hexachloroethane	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Indeno(1,2,3-cd)pyrene	500	290	J	17,000	J	1,200	440	J	10,000	ND	
Isophorone	440*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Naphthalene	12,000	ND	ND	100	J	220	J	290	J	ND	
Nitrobenzene	200*	ND	ND	ND	ND	ND	ND	ND	ND	ND	
n-Nitroso-di-n-propylamine	**	ND	ND	ND	ND	ND	ND	ND	ND	ND	
n-Nitrosodiphenylamine	**	ND	ND	ND	ND	110	J	ND	ND	ND	
Pentachlorophenol	800	ND	ND	ND	ND	170	J	ND	ND	ND	
Phenanthrene	100,000	140	J	6,900	J	1,800	200	J	7,600	ND	
Phenol	330	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Pyrene	100,000	260	J	29,000	J	2,600	260	J	17,000	ND	
Total TICs	NE	44,350	J	73,900	J	21,040	J	84,600	J	66,200	
Total Unknown Compounds	NE	15,090	J	58,000	J	4,640	J	61,300	J	21,500	
Total SVOCs	**	65,500	J	322,700	J	43,438	J	152,339	J	207,550	

Notes:

Guidance levels based on BCP Unrestricted Use SCOs, 6 NYCRR Part 375, Table 375-6.8b, except as noted.

\* = Guidance level based on NYSDEC TAGM 4046.

\*\* cleanup objective not established (individual SVOCs not listed, and total SVOCs, must be less than or equal to 50,000 ppb and 500,000 ppb, respectively)

J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero.

The concentration given is an approximate value.

ND = Not Detected NE = Not Established

**Table 9: SVOCs in Groundwater**

All results provided in µg/L (parts per billion). Results in **bold** exceed designated guidance levels.

Compound (USEPA Method 8270)	Guidance Level	Sample Identification							DUPLICATE (2MW-04)						
		MW-01	MW-02	MW-03	2MW-04*	2MW-05	2MW-06								
		Date	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008							
1,2,4-Trichlorobenzene	5	ND	ND	ND	ND	ND	ND	ND	ND						
1,2-Dichlorobenzene	3	ND	ND	ND	ND	ND	ND	ND	ND						
1,3-Dichlorobenzene	3	ND	ND	ND	ND	ND	ND	ND	ND						
1,4-Dichlorobenzene	3	ND	ND	ND	ND	ND	ND	ND	ND						
2,2-oxybis (1-chloropropane)	5	ND	ND	ND	ND	ND	ND	ND	ND						
2,4,5-Trichlorophenol	NE	ND	ND	ND	ND	ND	ND	ND	ND						
2,4,6-Trichlorophenol	NE	ND	ND	ND	ND	ND	ND	ND	ND						
2,4-Dichlorophenol	5	ND	ND	ND	ND	ND	ND	ND	ND						
2,4-Dimethylphenol	50	ND	ND	ND	ND	ND	ND	ND	ND						
2,4-Dinitrophenol	10	ND	ND	ND	ND	ND	ND	ND	ND						
2,4-Dinitrotoluene	5	ND	ND	ND	ND	ND	ND	ND	ND						
2,6-Dinitrotoluene	5	ND	ND	ND	ND	ND	ND	ND	ND						
2-Chloronaphthalene	10	ND	ND	ND	ND	ND	ND	ND	ND						
2-Chlorophenol	NE	ND	ND	ND	ND	ND	ND	ND	ND						
2-Methylnaphthalene	4.7	ND	ND	ND	ND	ND	ND	ND	ND						
2-Methylphenol	NE	ND	ND	ND	ND	ND	ND	ND	ND						
2-Nitroaniline	5	ND	ND	ND	ND	ND	ND	ND	ND						
2-Nitrophenol	NE	ND	ND	ND	ND	ND	ND	ND	ND						
3,3-Dichlorobenzidine	5	ND	ND	ND	ND	ND	ND	ND	ND						
3-Nitroaniline	5	ND	ND	ND	ND	ND	ND	ND	ND						
4,6-Dinitro-2-methylphenol	NE	ND	ND	ND	ND	ND	ND	ND	ND						
4-Bromophenyl phenyl ether	NE	ND	ND	ND	ND	ND	ND	ND	ND						
4-Chloro-3-methylphenol	NE	ND	ND	ND	ND	ND	ND	ND	ND						
4-Chloroaniline	5	ND	ND	ND	ND	ND	ND	ND	ND						
4-Chlorophenyl phenyl ether	NE	ND	ND	ND	ND	ND	ND	ND	ND						
4-Methylphenol	NE	ND	ND	ND	ND	ND	ND	ND	ND						
4-Nitroaniline	5	ND	ND	ND	ND	ND	ND	ND	ND						
4-Nitrophenol	5	ND	ND	ND	ND	ND	ND	ND	ND						
Acenaphthene	20	ND	ND	ND	ND	ND	ND	ND	ND						
Acenaphthylene	NE	ND	ND	ND	ND	ND	ND	ND	ND						
Anthracene	50	ND	ND	ND	ND	ND	ND	ND	ND						
Benzo(a)anthracene	0.002	ND	ND	ND	ND	ND	ND	ND	ND						
Benzo(a)pyrene	NE	ND	ND	ND	ND	ND	ND	ND	ND						
Benzo(b)fluoranthene	0.002	ND	ND	ND	ND	ND	ND	ND	ND						
Benzo(ghi)perylene	NE	ND	ND	ND	ND	ND	ND	ND	ND						
Benzo(k)fluoranthene	0.002	ND	ND	ND	ND	ND	ND	ND	ND						
Benzyl alcohol	NE	ND	ND	ND	ND	ND	ND	ND	ND						
Bis(2-chloroethoxy)methane	5	ND	ND	ND	ND	ND	ND	ND	ND						
Bis(2-chloroethyl)ether	1	ND	ND	ND	ND	ND	ND	ND	ND						
Bis(2-ethylhexyl)phthalate	5	ND	ND	ND	ND	ND	ND	ND	ND						
Butyl benzyl phthalate	50	ND	ND	ND	ND	ND	ND	ND	ND						
Carbazole	NE	ND	ND	ND	ND	ND	ND	ND	ND						
Chrysene	0.002	ND	ND	ND	ND	ND	ND	ND	ND						
Dibenzo(a,h)anthracene	NE	ND	ND	ND	ND	ND	ND	ND	ND						
Dibenzofuran	NE	ND	ND	ND	ND	ND	ND	ND	ND						
Diethyl phthalate	50	ND	ND	ND	ND	ND	ND	ND	ND						
Dimethyl phthalate	50	ND	ND	ND	ND	ND	ND	ND	ND						
Di-n-butyl phthalate	50	ND	ND	ND	ND	ND	ND	ND	ND						
Di-n-octyl phthalate	50	ND	ND	ND	ND	ND	ND	ND	ND						
Fluoranthene	50	ND	ND	ND	ND	ND	ND	ND	ND						
Fluorene	50	ND	ND	ND	ND	ND	ND	ND	ND						
Hexachlorobenzene	0.04	ND	ND	ND	ND	ND	ND	ND	ND						
Hexachlorobutadiene	0.5	ND	ND	ND	ND	ND	ND	ND	ND						
Hexachlorocyclopentadiene	5	ND	ND	ND	ND	ND	ND	ND	ND						
Hexachloroethane	5	ND	ND	ND	ND	ND	ND	ND	ND						
Indeno(1,2,3-cd)pyrene	0.002	ND	ND	ND	ND	ND	ND	ND	ND						
Isophorone	50	ND	ND	ND	ND	ND	ND	ND	ND						
Naphthalene	10	ND	ND	ND	ND	ND	ND	ND	ND						
Nitrobenzene	0.4	ND	ND	ND	ND	ND	ND	ND	ND						
n-Nitroso-di-n-propylamine	NE	ND	ND	ND	ND	ND	ND	ND	ND						
n-Nitrosodimethylamine	NE	ND	ND	ND	ND	ND	ND	ND	ND						
Pentachlorophenol	1	ND	ND	ND	ND	ND	ND	ND	ND						
Phenanthrene	50	ND	ND	ND	ND	ND	ND	ND	ND						
Phenol	5	ND	ND	ND	ND	ND	ND	ND	ND						
Pyrene	50	ND	ND	ND	ND	ND	ND	ND	ND						
Total TICs	NE	21	J	3.1	J	2.7	J	4.9	J	3.7	J	20	J	2.4	J
Total Unknown Compounds	NE	ND		ND		ND		ND		ND		ND		ND	
Total SVOCs	NE	21		3.1		2.7		4.9		3.7		20		2.4	

Notes:

Guidance levels based on NYSDEC TOGS 1.1.1.

\* Sample with duplicate analysis

J - Data indicate the presence of a compound that meets the identification criteria. The result is less limit but greater than zero. The concentration given is an approximate value.

ND = Not Detected NE = Not Established NA = Not Analyzed

**Table 10: Metals in Soil Borings**

Results provided in mg/kg (parts per million). Results shown in **bold** exceed guidance levels.

Metal	Guidance Level	Background Concentrations	Sample Identification																	
			2B-01C (1-3')	2B-02 (10-12')	2B-04 (5-7')	2B-05 (4-5')	2B-06 (4-5')	2B-07 (3-4')	2B-08 (5-6')	2B-09 (6-7')	2B-10 (9-10')	2B-11 (5-7')	2B-12 (15-17')	2B-13 (23-25')	2B14 (22-24')	2B-15 (4-5')	2MW-06 (6-6.5')	2MW-09 (2-3.5')	DUPLICATE (2B-011, 5-7')	
			Date	2/4/2008	2/5/2008	2/4/2008	1/31/2008	2/4/2008	1/31/2008	1/31/2008	2/5/2008	2/5/2008	2/5/2008	2/5/2008	2/5/2008	2/6/2008	2/6/2008	1/31/2008	2/5/2008	2/5/2008
Aluminum	SB*	33,000	13,800	16,000	19,300	15,700	16,200	22,700	15,100	15,500	16,700	16,400	15,200	10,600	8,880	18,100	16,200	22,500	15,100	
Antimony	SB*	NP	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Arsenic	13	7.4 (HV)	5.7 J	7.8 J	6.4 J	7.6 J	6.3 J	8.0 J	12.7	8.8 J	5.6 J	7.8 J	7.9 J	5.7 J	7.3 J	<b>15.8</b>	9.0 J	7.9 J	7.6 J	
Barium	350	81.1 (HV)	61.1	86.8	80.7	73.8	172	134	70.9	72.3	57.0	82.2	64.7	35.8	37.9	103.0	76.0	87.5	78.3	
Beryllium	7.2	0.75 (HV)	0.62 J	0.85 J	1.00 J	0.74 J	0.80 J	1.2 J	1.0 J	0.84 J	0.70 J	0.87 J	0.83 J	0.53 J	ND	1.00 J	0.85 J	0.85 J	0.82 J	
Cadmium	2.5	0.22 (HV)	1.30 J	1.40 J	1.30 J	ND	1.20 J	ND	ND	ND	1.40 J	ND	ND	1.20 J	ND	1.40 J	ND	ND	ND	
Calcium	SB*	130 - 35,000	33,900	27,400	8,670	6,550	1,620	3,240	2,380	3,390	1,840	25,000	2,840	28,200	<b>37,100</b>	23,500	3,290	2,060	11,500	
Chromium	30	20.9 (HV)	18.8	20.8	26.7	20.7	23.8	24.7	22.0	21.0	18.0	27.7	19.8	13.6	11.4	23.9	22.0	23.8	22.3	
Cobalt	30* or SB	2.5 - 60	11.3	13.2	13.9	12.4	10.4	14.3	9.2	14.7	11.0	14.1	13.9	9.5	9.0	17.6	15.1	12.2	14.7	
Copper	50	23.4 (HV)	31.3	32.3	27.0	31.7	35.0	27.8	42.5	36.6	33.6	33.9	34.0	25.0	21.9	35.3	36.4	32.9	33.0	
Iron	2,000* or SB	2,000 - 550,000	29,200	32,800	37,700	29,300	25,100	37,400	40,500	36,000	36,200	34,800	33,700	24,900	20,300	36,800	35,500	33,500	32,200	
Lead	63	72.5** (HV)	13.9	15.0	29.3	38.4	<b>148</b>	24.3	14.3	17.6	19.8	15.3	15.6	10.7	8.5	19.0	16.5	29.9	15.1	
Magnesium	SB*	100 - 5,000	<b>8,880</b>	<b>10,300</b>	<b>9,190</b>	<b>6,840</b>	4,750	<b>5,840</b>	4,470	<b>6,300</b>	<b>6,860</b>	<b>8,410</b>	<b>6,310</b>	<b>8,790</b>	<b>11,000</b>	<b>10,800</b>	<b>6,540</b>	<b>5,530</b>	<b>7,160</b>	
Manganese	1,600	50 - 5,000	662	828	1,080	680	929	<b>1,750</b>	1,010	990	1,120	845	772	964	697	964	894	588	817	
Mercury	0.18	0.24 (HV)	0.035 J	0.027 J	0.036 J	0.043 J	0.065	0.059 J	0.120	0.042 J	0.029 J	0.031 J	0.017 J	0.017 J	0.021 J	0.025 J	0.030 J	0.099	0.025 J	
Nickel	30	21.0 (HV)	29.5	29.8	<b>31.9</b>	26.0	23.3	<b>31.4</b>	27.3	<b>35.2</b>	28.4	<b>32.6</b>	<b>30.0</b>	20.0	17.0	<b>35.4</b>	<b>33.5</b>	26.0	<b>31.3</b>	
Potassium	SB*	8,500 - 43,000	1,420	1,950	987	1,010	949	1,590	1,070	1,330	1,200	1,840	1,540	862	951	2,200	1,600	847	1,590	
Selenium	3.9	1 (HV)	1.8 J	ND	2.5 J	1.8 J	2.0 J	2.3 J	2.3 J	ND	2.0 J	ND	ND	ND	ND	ND	ND	ND	ND	
Silver	2	NP	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Sodium	SB*	6,000 - 8,000	85.6 J	101 J	60.9 J	70.1 J	43.9 J	241 J	128 J	77.7 J	45.1 J	111 J	79.6 J	60.1 J	73.5 J	121 J	98.4 J	47.3 J	104 J	
Thallium	SB*	NP	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
Vanadium	150* or SB	1 - 300	18.7	22.7	28.1	24.1	23.6	27.4	24.4	22.4	18.0	23.7	21.6	14.0	12.0	26.4	23.8	30.0	23.2	
Zinc	109	87.1 (HV)	67.3	76.2	99.2	78.4	<b>273</b>	94.2	76.5	80.2	78.8	77.0	78.9	58.4	50.2	92.1	84.9	98.1	75.1	

Notes:  
 Guidance levels based on BCP Unrestricted Use SCOs, 6 NYCRR Part 375, Table 375-6.8(b), except as noted.  
 HV = Background levels based on NYSDEC data for metals in Lower Hudson Valley soils (90% upper confidence limit).  
 \* = Guidance level based on NYSDEC TAGM 4046.  
 \*\* Background lead concentrations in urban settings typically range from 200 to 500 ppm.  
 J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero. The concentration given is an approximate value.  
 ND = Not Detected NP = Not Provided SB = Site Background NA = Not Available

**Table 11: Metals in Surface Soil**

Results provided in mg/kg (parts per million). Results shown in **bold** exceed guidance levels.

Metal	Guidance Level	Background Concentrations	Sample Identification																															
			2HB-01 (0-4")	2HB-02*** (0-4")	2HB-03 (0-4")	2HB-04 (0-4")	2HB-05 (0-4")	2HB-06 (0-4")	2HB-07 (0-4")	2HB-08 (0-4")	2HB-09 (0-4")	2HB-10 (0-4")	2HB-11 (0-4")	2HB-12 (0-4")	2HB-13 (0-4")	2 SED-1	2 SED-2	DUPLICATE (2HB-02)																
			Date	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008															
Aluminum	SB*	33,000	15,800	11,600	14,600	10,700	12,900	11,200	14,400	19,300	14,300	15,900	9,180	5,060	18,000	10,300	11,200	11,200																
Antimony	SB*	NP	ND	23.9	ND	23.5	J	2.1	J	ND	ND	11	J																					
Arsenic	13	7.4 (HV)	7.3	19.1	6.6	J	6.8	15.2	10.7	6.4	9.8	6.6	5.4	J	6.8	J	25.4	7.9	2.9	J	6.3	15												
Barium	350	81.1 (HV)	83.3	257	81.7	77.6	114	65.9	69.7	112	123	99.6	48.3	480	67.4	32.8	71.3	62.3																
Beryllium	7.2	0.75 (HV)	0.87	J	ND	0.83	J	0.61	J	0.62	J	0.68	J	0.61	J	1.1	J	0.72	J	0.82	J	ND	0.6	J	ND									
Cadmium	2.5	0.22 (HV)	ND	3.9	J	ND	ND	2.9	J	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND												
Calcium	SB*	130 - 35,000	3,050	37,200	8,630	64,000	5,370	23,300	5,020	2,980	2,590	2,890	37,200	19,300	4,330	4,450	2,720	9,510																
Chromium	30	20.9 (HV)	20.9	491	20.4	18.3	27.1	18.3	17.1	27.2	21.9	23	12.1	14.3	28.1	14.8	14.8	22.4																
Cobalt	30* or SB	2.5 - 60	13.9	11.2	14.3	10.3	17.7	9.3	12.5	16.9	13.9	13.7	8.4	6.4	18.4	8.2	9.7	10																
Copper	50	23.4 (HV)	38.1	219	38	57.4	60.5	38.8	26.9	41.3	189	39.1	23.9	49.8	50	45	23.3	79.9																
Iron	2,000* or SB	2,000 - 550,000	31,000	27,100	27,500	21,800	45,100	24,700	28,600	39,000	31,200	29,400	21,000	18,500	38,400	23,700	25,100	27,300																
Lead	63	72.5** (HV)	53.3	2,830	51.6	69.1	205	94	24	25.3	214	88.9	57.9	149	38.3	61.7	33.4	316																
Magnesium	SB*	100 - 5,000	6,060	23,400	5,500	38,400	6,480	7,200	6,090	6,920	5,960	6,850	22,000	2,280	7,330	7,080	5,170	9,910																
Manganese	1,600	50 - 5,000	1,230	702	991	568	1,130	529	1,060	833	709	400	560	439	940	363	623	572																
Mercury	0.18	0.24 (HV)	0.084	0.098	0.13	0.075	0.20	0.078	0.061	0.041	J	0.28	1.6	0.066	0.41	0.091	0.051	J	0.096	0.075														
Nickel	30	21.0 (HV)	29.7	41.9	28.5	22.7	36.6	24.6	26.7	37.9	36.6	31.2	19	40.7	38.3	24	22.1	28.4																
Potassium	SB*	8,500 - 43,000	1,030	1,110	1,300	1,230	1,010	1,040	937	1,710	1,090	1,010	1,250	757	1,460	670	859	839																
Selenium	3.9	1 (HV)	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	5.1	J	ND	ND	ND	ND															
Silver	2	NP	ND	ND	ND	ND	ND	ND	1.2	J	ND	ND	ND	ND	ND	ND	ND	ND																
Sodium	SB*	6,000 - 8,000	42.4	J	109	J	36.4	J	112	J	59.3	J	165	J	67.3	J	76.6	J	61.5	J	91.5	J	82.9	J	80.2	J	42.2	J	55.3	J	98.1	J	43.2	J
Thallium	SB*	NP	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	4.2	J	3.2	J	ND	3.1	J													
Vanadium	150* or SB	1 - 300	34.4	28.6	33.7	28.8	44.2	24.6	17.9	31	24.3	23.8	21.2	78.8	35.8	15	18.3	22.1																
Zinc	109	87.1 (HV)	139	854	375	394	1,930	148	202	127	819	164	85.7	546	136	133	76.8	472																

Notes:  
 Guidance levels based on BCP Unrestricted Use SCOs, 6 NYCRR Part 375, Table 375-6.8(b), except as noted.  
 HV = Background levels based on NYSDEC data for metals in Lower Hudson Valley soils (90% upper confidence limit).  
 \* = Guidance level based on NYSDEC TAGM 4046.  
 \*\* Background lead concentrations in urban settings typically range from 200 to 500 ppm.  
 \*\*\* Sample with duplicate analysis  
 J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero. The concentration given is an approximate value  
 ND = Not Detected NP = Not Provided SB = Site Background NA = Not Available

**Table 12: Metals in Test Pits**

Results provided in mg/kg (parts per million). Results shown in **bold** exceed guidance levels.

Metal	Guidance Level	Background Concentrations	Sample Identification									
			2SST-1 (0-4")	2TP-2 (3')	2TP-2B (4-5')	2TP-8 (1')	2TP-11 (0-6")	2TP-11B (6"-1')	2TP-15 (1-2')	2TP-15B (3.5')		
		Date	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008
Aluminum	SB*	33,000	17,700	9,780	16,600	18,000	3,820	14,100	11,700	17,200		
Antimony	SB*	NP	44.3	ND	2.4	J ND	18.3	ND	8.8	J ND		
Arsenic	13	7.4 (HV)	10.7	12.7	12.7	6.9	J <b>13.1</b>	J 9.9	9.6	J 6.3		
Barium	350	81.1 (HV)	95.1	164.0	96.6	94.1	249.0	103.0	78.0	92.0		
Beryllium	7.2	0.75 (HV)	0.81	J ND	0.84	J 0.84	J ND	0.68	J ND	0.81	J	
Cadmium	2.5	0.22 (HV)	1.7	J 2.0	J ND	ND	ND	1.2	J 2.0	J ND		
Calcium	SB*	130 - 35,000	4,360	21,500	3,070	21,400	389	917	28,400	1,220		
Chromium	30	20.9 (HV)	<b>32.4</b>	<b>61.6</b>	23.4	21.7	<b>788.0</b>	<b>95.0</b>	<b>61.3</b>	<b>36.7</b>		
Cobalt	30* or SB	2.5 - 60	16.0	9.9	15.3	14.2	2.0	J 9.4	9.5	15.0		
Copper	50	23.4 (HV)	<b>51.3</b>	<b>240</b>	36.8	31.4	<b>4,530</b>	<b>1,210</b>	<b>842</b>	<b>181</b>		
Iron	2,000* or SB	2,000 - 550,000	47,600	31,200	37,900	31,200	11,900	26,500	47,400	34,700		
Lead	63	72.5** (HV)	<b>223</b>	<b>256</b>	35.9	28.6	<b>531</b>	<b>180</b>	<b>319</b>	62.8		
Magnesium	SB*	100 - 5,000	<b>6,820</b>	<b>6,790</b>	<b>6,170</b>	<b>13,800</b>	496	4,830	<b>18,000</b>	<b>5,970</b>		
Manganese	1,600	50 - 5,000	1,530	974	973	850	34.2	256	719	747		
Mercury	0.18	0.24 (HV)	<b>0.21</b>	<b>0.44</b>	0.06	0.061	<b>4.0</b>	<b>0.23</b>	<b>0.29</b>	<b>0.19</b>		
Nickel	30	21.0 (HV)	<b>39.8</b>	<b>40.9</b>	<b>32.1</b>	<b>30.2</b>	25.3	<b>80.6</b>	<b>34.9</b>	<b>33.3</b>		
Potassium	SB*	8,500 - 43,000	1,890	1,240	1,540	2,180	278	J 978	1,130	1,370		
Selenium	3.9	1 (HV)	ND	ND	<b>13.6</b>	ND	3.0	J ND	2.4	J ND		
Silver	2	NP	ND	<b>2.3</b>	J ND	ND	<b>15.0</b>	1.5	J 0.97	J ND		
Sodium	SB*	6,000 - 8,000	64.2	J 182.0	J 56.4	J 87.9	J ND	43.6	J 107.0	J 39.4	J	
Thallium	SB*	NP	ND	ND	9.5	ND	ND	2.9	J ND	3.4	J	
Vanadium	150* or SB	1 - 300	36.2	36.8	25.7	32.0	73.2	21.0	34.5	27.1		
Zinc	109	87.1 (HV)	<b>508</b>	<b>650</b>	102	81.8	<b>120</b>	<b>706</b>	<b>404</b>	<b>178</b>		

## Notes:

Guidance levels based on BCP Unrestricted Use SCOs, 6 NYCRR Part 375, Table 375-6.8(b), except as noted.

HV = Background levels based on NYSDEC data for metals in Lower Hudson Valley soils (90% upper confidence limit).

\* = Guidance level based on NYSDEC TAGM 4046.

\*\* Background lead concentrations in urban settings typically range from 200 to 500 ppm.

J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero.

The concentration given is an approximate value.

ND = Not Detected NP = Not Provided SB = Site Background NA = Not Available

**Table 13: Metals in Groundwater**

All results provided in ug/L. Results in **bold** exceed designated guidance levels.

TAL METAL	Guidance Level	Sample Identification																					
		MW-01 (Total)	MW-01 (Dissolved)	MW-02 (Total)	MW-02 (Dissolved)	MW-03 (Total)	MW-03 (Dissolved)	2MW-04** (Total)	2MW-04** (Dissolved)	2MW-05 (Total)	2MW-05 (Dissolved)	2MW-06 (Total)	2MW-06 (Dissolved)	2SW-1 (Total)	2SW-1 (Dissolved)	2SW-2 (Total)	2SW-2 (Dissolved)	DUPLICATE (2MW-04)					
Date	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008					
Aluminum	100	1,100	NA	2,700	NA	1,800	NA	420	J	NA	132,000	130	J	1,100	NA	110	J	NA	100	J	NA	940	
Antimony	3	ND	NA	ND	NA	ND	NA	ND	NA	ND	NA	ND	NA	ND	NA	ND	NA	ND	NA	ND	NA	ND	
Arsenic	25	6	J	NA	ND	NA	NA	ND	NA	ND	NA	110	NA	ND	NA	ND	NA	ND	NA	ND	NA	ND	
Barium	1,000	130	NA	36	NA	66	NA	120	NA	860	73	48	NA	14	NA	14	NA	14	NA	120	120		
Beryllium	3	ND	NA	ND	NA	ND	NA	ND	NA	8	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	NA	ND	
Cadmium	5	ND	NA	ND	NA	ND	NA	ND	NA	11	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	NA	ND	
Calcium	NE	111,000	NA	42,800	NA	88,200	NA	239,000	NA	303,000	140,000	97,700	NA	36,100	NA	34,600	NA	234,000	234,000	234,000	234,000		
Chromium	50	22	NA	14	NA	6	J	NA	11	NA	280	ND	35	NA	ND	NA	ND	NA	ND	NA	22		
Cobalt	5	3	J	NA	4	J	NA	ND	NA	8	J	NA	220	ND	3	J	NA	ND	NA	ND	NA	8	J
Copper	200	14	NA	22	NA	20	NA	9	J	NA	610	ND	11	NA	ND	NA	ND	NA	ND	NA	7	J	
Iron	300*	2,600	NA	5,900	NA	3,100	NA	920	NA	305,000	ND	2,400	NA	230	NA	230	NA	230	NA	1,900	1,900		
Lead	25	25	9	J	22	ND	36	ND	11	6	J	220	ND	39	ND	13	ND	15	ND	10	10		
Magnesium	35,000	41,500	NA	9,000	NA	63,400	NA	49,600	NA	133,000	49,700	25,300	NA	10,900	NA	10,800	NA	48,500	48,500	48,500			
Manganese	300*	680	NA	100	NA	26	NA	150	NA	22,100	1,800	110	NA	41	NA	40	NA	160	160	160			
Mercury	0.7	ND	NA	ND	NA	ND	NA	ND	NA	ND	0.37	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND		
Nickel	100	18	NA	11	NA	7	J	NA	9	J	NA	380	11	23	NA	ND	NA	ND	NA	16	16		
Potassium	NE	2,000	NA	1,700	NA	2,300	NA	1,700	NA	15,400	3,800	2,300	NA	1,200	NA	1,100	NA	1,700	1,700	1,700			
Selenium	10	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND		
Silver	50	ND	NA	ND	NA	ND	NA	2	J	NA	ND	ND	NA	ND	NA	ND	NA	ND	NA	2	J		
Sodium	20,000	30,300	NA	4,700	NA	30,000	NA	111,000	NA	37,000	31,800	20,200	NA	43,500	NA	44,700	NA	107,000	107,000	107,000			
Thallium	0.5	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND	ND	NA	ND	NA	ND	NA	ND	NA	ND	ND		
Vanadium	14	2	J	NA	9	NA	4	J	NA	ND	NA	170	ND	3	J	NA	ND	1	J	NA	2	J	
Zinc	2,000	ND	NA	38	J	NA	21	J	NA	19	J	NA	920	ND	14	J	NA	ND	NA	ND	NA	ND	

Notes:

\*Guidance level for total of iron and manganese is 500 ug/L.

\*\* Sample with duplicate analysis

J - Data indicate the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than zero. The concentration given is an approximate value.

ND = Not Detected NE = Not Established NA = Not Analyzed

**Table 14: PCBs in Soil Borings**

Results provided in µg/kg (parts per billion).

PCB Compound (USEPA Method 8082)	Sample Identification																			
	2B-07 (3-4')		2B-08 (5-6')		2B-09 (6-7')		2B-10 (9-10')		2B-11 (5-7')		2B-12 (15-17')		2B-13 (23-25')		2B14 (22-24')		2B-15 (4-5')		DUPLICATE (2B-11, 5-7')	
Date	1/31/2008		1/31/2008		2/5/2008		2/5/2008		2/5/2008		2/5/2008		2/5/2008		2/6/2008		2/6/2008		2/5/2008	
<b>PCB 1016</b>	ND		ND		ND		ND		ND		ND		ND		ND		ND		ND	
<b>PCB 1221</b>	ND		ND		ND		ND		ND		ND		ND		ND		ND		ND	
<b>PCB 1232</b>	ND		ND		ND		ND		ND		ND		ND		ND		ND		ND	
<b>PCB 1242</b>	ND		ND		ND		ND		ND		ND		ND		ND		ND		ND	
<b>PCB 1248</b>	5.6	J	ND		ND		ND		ND		ND		ND		ND		ND		ND	
<b>PCB 1254</b>	3.6	J	ND		ND		ND		ND		ND		ND		ND		ND		ND	
<b>PCB 1260</b>	ND		ND		ND		ND		ND		ND		ND		ND		ND		ND	
<b>PCB, Total</b>	9		ND		ND		ND		ND		ND		ND		ND		ND		ND	

Notes:

Guidance level = 100 ppb, based on BCP unrestricted SCOs, 6 NYCRR Part 375, Table 375-6.8(b).

ND = Not Detected

**Table 15: PCBs in Surface Soil**

Results provided in µg/kg (parts per billion).

PCB Compound (USEPA Method 8082)	Sample Identification																							
	2HB-01 (0-4")	2HB-02* (0-4")	2HB-03 (0-4")	2HB-04 (0-4")	2HB-05 (0-4")	2HB-06 (0-4")	2HB-07 (0-4")	2HB-08 (0-4")	2HB-09 (0-4")	2HB-10 (0-4")	2HB-11 (0-4")	2HB-12 (0-4")	2HB-13 (0-4")	2 SED-1	2 SED-2	DUPLICATE (2HB-02)								
Date	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008								
<b>PCB 1016</b>	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND								
<b>PCB 1221</b>	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND								
<b>PCB 1232</b>	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND								
<b>PCB 1242</b>	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND								
<b>PCB 1248</b>	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND								
<b>PCB 1254</b>	ND	ND	ND	ND	ND	3.6	J	ND	9.4	J	4.9	J	13	J	3.6	J	100	5.1	J	4.8	J	ND	ND	ND
<b>PCB 1260</b>	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
<b>PCB-1268</b>	40	ND	16	J	100	35	10	J	ND	ND	9.6	J	12	J	ND	120	71	10	J	ND	150	J	150	J
<b>PCB, Total</b>	40	ND	16	100	35	14	ND	9	15	25	4	220	76	15	ND	150	15	ND	150					

Notes:  
 Guidance level = 100 ppb, based on BCP unrestricted SCOs, 6 NYCRR Part 375, Table 375-6.8(b).  
 \* Sample with Duplicate analysis  
 ND = Not Detected

**Table 16: PCBs in Test Pits**

Results provided in µg/kg (parts per billion).

PCB Compound (USEPA Method 8082)	Sample Identification							
	2SST-1 (0-4")	2TP-2 (3')	2TP-2B (4-5')	2TP-8 (1')	2TP-11 (0-6")	2TP-11 B (6"-1')	2TP-15 (1-2')	2TP-15B (3.5')
Date	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008	1/30/2008
PCB 1016	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1221	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1232	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1242	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1248	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1254	53	120	ND	ND	7,500	ND	3,400	ND
PCB 1260	ND	87	ND	ND	ND	ND	ND	ND
PCB 1268	NA	NA	9	J NA	NA	1,600	NA	1,000
PCB, Total	53	207	9	ND	7,500	1,600	3,400	1,000

Notes:

Guidance level = 100 ppb, based on BCP unrestricted SCOs, 6 NYCRR Part 375, Table 375-6.8(b).

ND = Not Detected NA = Not Analyzed

**Table 17: Pesticides in Surface Soils**

Results provided in µg/kg (parts per billion). Results shown in **bold** exceed guidance levels.

Compound (USEPA Method 8081)	Guidance Level	Sample Identification														2 SED-1	DUPLICATE (2HB-02)			
		2HB-01 (0-4")	2HB-02 (0-4")	2HB-03 (0-4")	2HB-04 (0-4")	2HB-05 (0-4")	2HB-06 (0-4")	2HB-07 (0-4")	2HB-08 (0-4")	2HB-09 (0-4")	2HB-10 (0-4")	2HB-11 (0-4")	2HB-12 (0-4")							
Date		2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008	2/25/2008		
4,4'-DDD	3.3	ND	ND	ND	ND	<b>49</b>	<b>11</b>	ND	1.8	J	2.6	J	1.5	J	<b>15</b>	<b>13</b>	<b>3.5</b>	J	ND	
4,4'-DDE	3.3	<b>66</b>	ND	<b>58</b>	<b>7.5</b>	<b>5.8</b>	J	<b>4.9</b>	ND	0.73	J	2.6	J	1.3	J	ND	<b>11</b>	1.4	J	ND
4,4'-DDT	3.3	<b>80</b>	<b>530</b>	<b>120</b>	<b>25</b>	<b>100</b>	<b>44</b>	ND	<b>21</b>	<b>14</b>	1	J	<b>31</b>	<b>26</b>	2.7	J	<b>90</b>			
Aldrin	5	ND	ND	ND	4.2	ND	ND	2.4	J	ND	<b>6.7</b>	J								
alpha-BHC	20	0.65	J	ND	3.6	J	ND	ND	2.7	ND	ND	ND	ND	0.97	J	ND	ND	2.4	J	
alpha-Chlordane	94	7.2	ND	0.82	J	ND	ND	ND	ND	ND	ND	J								
beta-BHC	36	ND	ND	3.6	J	8.2	ND	ND	ND	ND	ND	ND	0.62	J	ND	ND	ND	2.4	J	
delta-BHC	40	0.14	J	ND	0.92	J	ND	ND	1.2	J	ND	0.26	J	0.35	J	ND	0.5	J	2.1	J
Dieldrin	5	2.9	J	<b>150</b>	J	<b>6.2</b>	J	<b>81</b>	<b>200</b>	3.5	J	ND	3.6	J	1.1	J	3.8	J	1.6	J
Endosulfan I	2,400	ND	ND	ND	ND	ND	ND	4.7	ND	ND	0.42	J	ND	ND	ND	2.1	J	ND	ND	
Endosulfan II	2,400	0.34	J	ND	ND	1.3	J	ND	3.9	J	ND	ND	0.39	J	ND	1.1	J	4.4	J	ND
Endosulfan sulfate	2,400	ND	ND	ND	ND	ND	ND	7.4	ND	ND	0.47	J	0.21	J	7.1	4.8	J	ND	ND	
Endrin	14	ND	ND	ND	ND	ND	ND	7.2	ND	ND	ND	ND	ND	ND	ND	ND	ND	<b>28</b>		
Endrin aldehyde	NE	ND	39	J	ND	ND	ND	22	ND	ND	ND	ND	ND	ND	ND	ND	ND	2.5	J	
Endrin ketone	NE	ND	ND	ND	1.8	J	ND	ND	ND	ND	ND	ND	ND							
gamma-BHC (Lindane)	100	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
gamma-Chlordane	14,000*	7.1	ND	2.2	J	ND	ND	1.6	J	ND	1.5	J	1.2	J	0.17	J	2.6	7.4	2.1	J
Heptachlor	42	1.2	J	25	J	ND	4.9	ND	1.7	J	ND	0.54	J	ND	ND	ND	ND	ND	ND	
Heptachlor Epoxide	20*	2.7	ND	ND	6.6	J	0.95	J	ND	ND	0.75	J	ND	ND	1.8	J	1.2	J	0.4	J
Methoxychlor	NE	ND	ND	260	ND	ND	ND	ND	ND	ND	ND									
Toxaphene	NE	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	

Notes:

Guidance levels based on BCP Unrestricted Use SCOs, 6 NYCRR Part 375, Table 375-6.8(b), except as noted.

\*Guidance levels based on NYSDEC TAGM 4046.

ND = Not Detected NE = Not Established

**Table 18: PCBs in Groundwater**

Results provided in µg/kg (parts per billion).

PCB Compound (USEPA Method 8082)	Sample Identification									
	MW-01	MW-02	MW-03	2MW-04*	2MW-05	2MW-06	2SW-1	2SW-2	DUPLICATE (2MW-04)	
Date	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008	2/28/2008
PCB 1016	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1221	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1232	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1242	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1248	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1254	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
PCB 1260	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
PCB, Total	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

Notes:

Guidance level = 0.09 ppb (Total PCB), based on NYSDEC TOGS 1.1.1

\* Sample with duplicate analysis

ND = Not Detected

**APPENDIX C**

***Health and Safety Plan***

**HEALTH AND SAFETY PLAN**  
**FOR**  
**SUPPLEMENTAL REMEDIAL INVESTIGATION**  
**(INCORPORATING COMMUNITY HEALTH AND SAFETY PLAN)**

**Beacon Terminal Site**

555 South Avenue  
City of Beacon  
Dutchess County, New York

**NYSDEC Brownfields Cleanup Program Site ID: C314117**

**June 2008**  
**ESI File: BB04157.50**

**Prepared By**



**Ecosystems Strategies, Inc.**

24 Davis Avenue, Poughkeepsie, NY 12603

phone 845.452.1658 | fax 845.485.7083 | [ecosystemsstrategies.com](http://ecosystemsstrategies.com)



## TABLE OF CONTENTS

1.0	INTRODUCTION .....	1
1.1	Purpose	
1.2	Site Location and Description	
1.3	Work Activities	
2.0	HEALTH AND SAFETY HAZARDS .....	2
2.1	Hazard Overview for On-site Personnel	
2.2	Potential Hazards to the Public from Fieldwork Activities	
3.0	PERSONAL PROTECTIVE EQUIPMENT .....	2
4.0	CONTAMINANT CONTROL .....	3
5.0	MONITORING AND ACTION LEVELS .....	3
6.0	SITE ACCESS AND CONTROL .....	3
7.0	NOISE CONTROL .....	4
8.0	PERSONNEL TRAINING .....	4
9.0	DECONTAMINATION .....	5
10.0	EMERGENCY RESPONSE .....	5
10.1	Notification of Site Emergencies	
10.2	Responsibilities	
10.3	Accidents and Injuries	
10.4	Communication	
10.5	Safe Refuge	
10.6	Site Security and Control	
10.7	Emergency Evacuation	
10.8	Resuming Work	
10.9	Fire Fighting Procedures	
10.10	Emergency Decontamination Procedure	
10.11	Emergency Equipment	
11.0	SPECIAL PRECAUTIONS AND PROCEDURES .....	7
11.1	Heat/Cold Stress	
11.2	Heavy Equipment	
11.3	Additional Safety Practices	
11.4	Daily Log Contents	
12.0	TABLE AND FIGURES .....	8

Table 1: Emergency Response Telephone Numbers

Figure 1: Directions to Hospital

Figure 2: Map to Hospital

## ATTACHMENTS

*Site Location Map*  
*Proposed Fieldwork Map*

## 1.0 INTRODUCTION

### 1.1 Purpose

This Health and Safety Plan (HASP) has been developed to provide the requirements and general procedures to be followed by Ecosystems Strategies, Inc. (ESI) and designated subcontractors while performing supplemental site investigation activities at the “Beacon Terminal” Site located at 555 South Avenue, City of Beacon, Dutchess County, New York.

This HASP incorporates policies, guidelines, and procedures that have the objective of protecting the public health of the community during the performance of fieldwork activities, and therefore serves as a Community Health and Safety Plan (CHASP). The objectives of the CHASP are met by establishing guidelines to minimize community exposure to hazards during fieldwork, and by planning for and responding to emergencies affecting the public.

This HASP describes the responsibilities, training requirements, protective equipment, and standard operating procedures to be utilized by all personnel while on the Site. This HASP incorporates by reference the applicable Occupational Safety and Health Administration (OSHA) requirements in 29 CFR 1910 and 29 CFR 1926.

The requirements and guidelines in this HASP are based on a review of available information and evaluation of potential on-site hazards. This HASP will be discussed with Site personnel and will be available on-site for review while work is underway. On-site personnel will report to the Site Safety and Health Officer (SSHO) in matters of health and safety. The on-site project supervisor(s) are responsible for enforcement and implementation of this HASP.

This HASP is specifically intended for the conduct of activities within the defined scope of work in specified areas of the Site. Changes in site conditions and future actions that may be conducted at this site may necessitate the modification of the requirements of the HASP. Although this HASP can be made available to interested persons for informational purposes, ESI has no responsibility over the interpretations or activities of any other persons or entities other than employees of ESI and designated subcontractors to ESI.

### 1.2 Site Location and Description

The Site as defined in this HASP is the Beacon Terminal Site, located at 555 South Avenue in the City of Beacon. A Site Location Map and a Proposed Fieldwork Map (illustrating the configuration of the Site as well as the areas of proposed investigative activities) are included in the Attachments of this HASP.

### 1.3 Work Activities

Environmental investigation activities are detailed in the Draft Supplemental Remedial Investigation Work Plan (SRIWP) dated May 2008 and in the approved Remedial Investigation Work Plan (RIWP) dated October 2007. The specific tasks detailed in the SRIWP and RIWP are wholly incorporated by reference into this HASP. The SRIWP and RIWP were prepared as a requirement of the Developers participation in the New York State Department of Environmental Conservation (NYSDEC) Brownfields Cleanup Program (BCP), and describe investigative tasks required to adequately characterize on-site environmental conditions. Existing and suspected contamination includes hydrocarbon and metals impacted soils, groundwater and vapor.

The following field tasks will be performed:

- Investigation and sampling of soils using hand-held and mechanized boring equipment.

## 2.0 HEALTH AND SAFETY HAZARDS

### 2.1 Hazard Overview for On-site Personnel

The potential exists for the presence of elevated levels of hydrocarbons and metals in on-site soils and in groundwater. The possibility exists for on-site personnel to have contact with contaminated soils, groundwater, and vapor during site investigative work. Contact with contaminated substances may present a skin contact, inhalation, and/or ingestion hazard. These potential hazards are addressed in Sections 3.0 through 11.0, below.

### 2.2 Potential Hazards to the Public from Fieldwork Activities

The potential exists for the public to be exposed to contaminated soils, groundwater, and vapor, which may present a skin contact, inhalation, and/or ingestion hazard. Additional potential hazards to the public that are associated with fieldwork activities include mechanical/physical hazards, traffic hazards from fieldwork vehicles, and noise impacts associated with operation of mechanical equipment.

Impacts to public health and safety are expected to be limited to hazards that could directly affect on-site visitors and/or trespassers. These effects will be mitigated through site access and control measures (see Section 6.0, below). Specific actions taken to protect the public health (presented in Sections 3.0 through 11, below, and in the Community Air Monitoring Plan) are anticipated to minimize any potential off-site impacts from contaminant migration, noise, and traffic hazards.

## 3.0 PERSONAL PROTECTIVE EQUIPMENT

The levels of protection identified for the services specified in the SRIWP and RIWP represent a best estimate of exposure potential and protective equipment needed for that exposure. Determination of levels was based on data provided by previous studies of the Site and information reviewed on current and past Site usage. The SSHO may recommend revisions to these levels based on an assessment of actual exposures.

The level of protective clothing and equipment selected for this project is Level D. Level D PPE provides minimal skin protection and no respiratory protection, and is used when the atmosphere contains no known hazard, oxygen concentrations are not less than 19.5%, and work activities exclude splashes, immersion, or the potential for unexpected inhalation or contact with hazardous levels of chemicals. Workers will wear Level D protective clothing including, but not limited to, a hard hat, steel-toed boots, nitrile gloves (when handling soils and/or groundwater), hearing protection (foam ear plugs or ear muffs, as required), and safety goggles (in areas of exposed groundwater and when decontaminating equipment). Personal protective equipment (PPE) will be worn at all times, as designated by this HASP. Disposable gloves will be changed immediately following the handling of contaminated soils, water, or equipment. Tyvek suits will be worn during activities likely to excessively expose work clothing to contaminated dust or soil (chemically-resistant over garments will be required in situations where exposures could lead to penetration of clothing and direct dermal contact by contaminants).

The requirement for the use of PPE by official on-site visitors shall be determined by the SHSO, based on the most restrictive PPE requirement for a particular Work Zones (see Section 6 for Work Zone definitions). All on-site visitors shall, at a minimum, be required to wear an approved hardhat and be provided with appropriate hearing protection as necessary.

The need for an upgrade in PPE will be determined based upon encountered Site conditions, including measurements taken in the breathing zone of the work area using a photo-ionization detector (PID). An upgrade to a higher level of protection (Level C) will begin when specific action levels are reached (see Section 5.0, below), or as otherwise required by the SHSO. Level C PPE includes a full-face or half-mask air-purifying respirator (NIOSH approved for the compound[s] of concern), hooded chemical-resistant clothing, outer and inner chemical-resistant gloves, and (as needed) coveralls, outer boots/boot covers, escape mask, and face shield. Level C PPE may be used only when: oxygen concentrations are not less than 19.5%; contaminant contact will not adversely affect any exposed skin; types of air contaminants have been identified, concentrations measured, and a cartridge or canister is available that can remove the contaminant; atmospheric contaminant concentrations do not exceed immediately dangerous to life or health (IDLH) levels; and job functions do not require self-contained breathing apparatus (SCBAs). The need for Level B or Level A PPE is not anticipated for the planned investigative activities at this Site.

If any equipment fails and/or any employee experiences a failure or other alteration of their protective equipment that may affect its protective ability, that person will immediately leave the work area. The Project Manager and the SHSO will be notified and, after reviewing the situation, determine the effect of the failure on the continuation of on-going operations. If the failure affects the safety of personnel, the work site, or the surrounding environment, personnel will be evacuated until appropriate corrective actions have been taken.

#### **4.0 CONTAMINANT CONTROL**

Precautions will be taken during dry weather (e.g., wetting or covering exposed soils) to avoid generating and breathing dust-generated from soils. A PID and a Dust Trak® dust monitor (or equivalent equipment) will be used to monitor potential contaminant levels. Response to the monitoring will be in accordance with the action levels provided in Section 5.0.

#### **5.0 MONITORING AND ACTION LEVELS**

Concentrations of petroleum hydrocarbons and metals in the air are expected to be below the OSHA Permissible Exposure Limits (PELs). A Community Air Monitoring Plan (CAMP) will be implemented for all fieldwork (a copy of the CAMP is provided as an appendix to the SRIWP). Air monitoring will be conducted for VOCs and dust. Monitoring will be conducted at all times that fieldwork activities which are likely to generate emissions are occurring. PID readings consistently in excess of 5 ppm, and dust levels in excess of 150 ug/m<sup>3</sup> will be used as an indication of the need to initiate personnel monitoring, increase worker protective measures, and/or modify or cease on-site operations in order to mitigate off-site community exposure.

PID and/or dust readings that consistently exceed background in the breathing zone (during any of the proposed tasks) will necessitate moving away from the source or implementing a higher PPE level.

#### **6.0 SITE ACCESS AND CONTROL**

Site control procedures will be established to reduce the possibility of worker/visitor contact with compounds present in the soil, to protect the public in the area surrounding the Site and to limit access to the Site to only those persons required to be in the work zone. Notices will be placed near the Site warning the public not to enter fieldwork areas and directing visitors to report to the Project Manager or SHSO. Measures will be taken to limit the entry of unauthorized personnel into the specific areas of field activity and to safely direct and control all vehicular traffic in and near the Site (e.g., placement of traffic cones and warning tape).

The following Work Zones will be established:

**Exclusion Zone (“Hot Zone”)** - The exclusion zone will be that area immediately surrounding the work being performed for remediation purposes (i.e. the area where contaminated media are being handled). Only individuals with appropriate PPE and training are allowed into this zone. It is the responsibility of the Site Health and Safety Officer to prevent unauthorized personnel from entering the exclusion zone. When necessary, such as in high traffic areas, the exclusion zone will be delineated with barricade tape, cones, and/or barricades.

**Contamination Reduction Zone and Support Zone** - Not anticipated being required during the completion of the RAWP.

**Intermediate Zone (Decontamination Zone)** - The intermediate zone, also known as the decontamination zone, is where patient decontamination should take place, if necessary. A degree of contamination still is found in this zone; thus, some PPE is required, although it is usually of a lesser degree than that required for the hot zone.

**Command Zone** - The command zone is located outside the decontamination zone. All exposed individuals and equipment from the “hot zone” and decontamination zone should be decontaminated before entering the command zone. Access to all zones must be controlled. Keeping the media and onlookers well away from the Site is critical and will be the responsibility of both the SSHO and the Project Manager, and other Site personnel as appropriate.

## 7.0 NOISE CONTROL

All fieldwork activities will be conducted in a manner designed to reduce unnecessary noise generation, and to minimize the potential for both on-site and off-site harmful noise levels. The Project Manager and SSHO will establish noise reduction procedures (as appropriate to the Site and the work) to meet these requirements.

## 8.0 PERSONNEL TRAINING

Work zones that will accomplish the general objective stated above will be established by the Project Manager and the SSHO. Site access will be monitored by the SSHO, who will maintain a log-in sheet for personnel that will include, at the minimum, personnel on the Site, their arrival and departure times, and their destination on the Site. All workers will be properly trained in accordance with OSHA requirements (29 CFR 1910). Personnel exiting the work zone(s) will be decontaminated prior to exiting the Site.

Site-specific training will be provided to each employee. Personnel will be briefed by the SSHO as to the potential hazards to be encountered. Topics will include:

- Availability of this HASP;
- General site hazards and specific hazards in the work areas, including those attributable to known or suspect on-site contaminants;
- Selection, use, testing, and care of the body, eye, hand, and foot protection being worn, with the limitations of each;
- Decontamination procedures for personnel, their personal protective equipment, and other equipment used on the Site;

- Emergency response procedures and requirements;
- Emergency alarm systems and other forms of notification, and evacuation routes to be followed; and,
- Methods to obtain emergency assistance and medical attention.

## 9.0 DECONTAMINATION

The SSHO will establish a decontamination system and decontamination procedures (appropriate to the Site and the work) that will prevent potentially hazardous materials from leaving the Site. Trucks will be brushed to remove materials adhering to their surfaces. Sampling equipment will be segregated and, after decontamination, stored separately from splash protection equipment. Decontaminated or clean sampling equipment not in use will be covered with plastic and stored in a designated storage area in the work zone.

## 10.0 EMERGENCY RESPONSE

### 10.1 Notification of Site Emergencies

In the event of an emergency, the SSHO will be immediately notified of the nature and extent of the emergency (the names and contact information for key site safety and management personnel, as well as other site safety contact telephone numbers, shall be posted at the Site).

Table 1 in this HASP contains Emergency Response Telephone Numbers, and immediately following is a map detailing the directions to the nearest hospital emergency room. This information will be maintained at the work Site by the SSHO. The location of the nearest telephone will be determined prior to the initiation of on-site activities. In addition to any permanent phone lines, a cellular phone will be available.

### 10.2 Responsibilities

Prior to the initiation of on-site work activities, the SSHO will:

- Notify individuals, authorities, and/or health care facilities of the potentially hazardous activities and potential wastes that may develop as a result of the investigation.
- Confirm that first aid supplies and a fire extinguisher are available on-site.
- Have a working knowledge of safety equipment available.
- Confirm that a map detailing the most direct route to the hospital is prominently posted with the emergency telephone numbers.

The SSHO will be responsible for directing notification, response, and follow-up actions and for contacting outside response personnel (ambulance, fire department, or others). In the case of an evacuation, the SSHO will account for personnel. A log of individuals entering and leaving the Site will be kept so that everyone can be accounted for in an emergency.

Upon notification of an exposure incident, the SSHO will contact the appropriate emergency response personnel for recommended medical diagnosis and, if necessary, treatment. The SSHO will determine whether and at what levels exposure actually occurred, the cause of such exposure, and the means to prevent similar incidents from occurring.

### **10.3 Accidents and Injuries**

In the event of an accident or injury, measures will be taken to assist those who have been injured or exposed and to protect others from hazards. If an individual is transported to a hospital or doctor, a copy of the HASP will accompany the individual.

The SSHO will be notified and will respond according to the severity of the incident. The SSHO will perform an investigation of the incident and prepare a signed and dated report documenting the investigation. An exposure-incident report will also be completed by the SSHO and the exposed individual. The form will be filed with the employee's medical and safety records to serve as documentation of the incident and the actions taken.

### **10.4 Communication**

No special hand signals will be utilized within the work zone. Field personnel will utilize standard hand signals during the operation of heavy equipment.

### **10.5 Safe Refuge**

Vehicles and on-site structures will serve as the immediate place of refuge in the event of an emergency. If evacuation from the area is necessary, project vehicles will be used to transport on-site personnel to safety.

### **10.6 Site Security and Control**

Site security and control during emergencies, accidents, and incidents will be monitored by the SSHO. The SSHO is responsible for limiting access to the Site to authorized personnel and for oversight of reaction activities.

### **10.7 Emergency Evacuation**

In case of an emergency, personnel will evacuate to the safe refuge identified by the SSHO, both for their personal safety and to prevent the hampering of response/rescue efforts.

### **10.8 Resuming Work**

A determination that it is safe to return to work will be made by the SSHO and/or any personnel assisting in the emergency, e.g., fire department, police department, utility company, etc. No personnel will be allowed to return to the work areas until a full determination has been made by the above-identified personnel that all field activities can continue unobstructed. Such a determination will depend upon the nature of the emergency (e.g., downed power lines -- removal of all lines from the property; fire -- extinguished fire; injury -- safe transport of the injured party to a medical facility with either assurance of acceptable medical care present or completion of medical care; etc.). Before on-site work is resumed following an emergency, necessary emergency equipment will be recharged, refilled, or replaced. Government agencies will be notified as appropriate. An Incident Report Form will be filed.

### **10.9 Fire Fighting Procedures**

A fire extinguisher will be available in the work zone during on-site activities. This extinguisher is intended for small fires. When a fire cannot be controlled with the extinguisher, the area will be evacuated immediately. The SSHO will be responsible for directing notification, response, and follow-up actions and for contacting ambulance and fire department personnel.

## 10.10 Emergency Decontamination Procedure

The extent of emergency decontamination depends on the severity of the injury or illness and the nature of the contamination. Whenever possible, minimum decontamination will consist of washing, rinsing, and/or removal of contaminated outer clothing and equipment. If time does not permit decontamination, the person will be given first aid treatment and then wrapped in plastic or a blanket prior to transport.

## 10.11 Emergency Equipment

The following on-site equipment for safety and emergency response will be maintained in the on-site vehicle of the SSHO:

- Fire extinguisher;
- First-aid kit; and,
- Extra copy of this Health and Safety Plan.

## 11.0 SPECIAL PRECAUTIONS AND PROCEDURES

The activities associated with this investigation may involve potential risks of exposure to both chemical and physical hazards. The potential for chemical exposure to hazardous or regulated substances will be significantly reduced through the use of monitoring, personal protective clothing, engineering controls, and implementation of safe work practices.

### 11.1 Heat/Cold Stress

Training in prevention of heat/cold stress will be provided as part of the site-specific training. The timing of this project is such that heat/cold stress may pose a threat to the health and safety of personnel. Work/rest regimens will be employed, as necessary, so that personnel do not suffer adverse effects from heat/cold stress. Special clothing and appropriate diet and fluid intake regimens will be recommended to personnel to further reduce this temperature-related hazard. Rest periods will be recommended in the event of high/low temperatures and/or humidity to counter the negative effects of heat/cold stress.

### 11.2 Heavy Equipment

Working in the vicinity of heavy equipment is the primary safety hazard at the Site. Physical hazards in working near heavy construction equipment include the following: overhead hazards, slips/trip/falls, hand and foot injuries, moving part hazards, improper lifting/back injuries, and noise. All workers will be properly trained in accordance with OSHA requirements (29 CFR 1910). No workers will be permitted within any excavated areas without proper personal protective equipment (PPE), including, as warranted, respirators, Tyvek suits and/or gloves. Air monitoring for VOCs will be conducted in accordance with the HASP and the Community Air Monitoring Plan ([SRIWP](#) appendix C).

### 11.3 Additional Safety Practices

The following are important safety precautions which will be enforced during this investigation:

- Medicine and alcohol can aggravate the effect of exposure to certain compounds. Controlled substances and alcoholic beverages will not be consumed during investigation activities. Consumption of prescribed drugs will only be at the discretion of a physician familiar with the person's work.

- Eating, drinking, chewing gum or tobacco, smoking, or other practices that increase the probability of hand-to-mouth transfer and ingestion of material is prohibited except in areas designated by the SSHO.
- Contact with potentially contaminated surfaces will be avoided whenever possible. Workers will not unnecessarily walk through puddles, mud, or other discolored surfaces; kneel on the ground; or lean, sit, or place equipment on drums, containers, vehicles, or the ground.
- Personnel and equipment in the work areas will be minimized, consistent with effective site operations.
- Unsafe equipment left unattended will be identified by a "DANGER, DO NOT OPERATE" tag.
- Work areas for various operational activities will be established.

#### 11.4 Daily Log Contents

The SSHO will establish a system appropriate to the Site, the work, and the work zones that will record, at a minimum, the following information:

- Personnel on the Site, their arrival and departure times, and their destination on the Site.
- Incidents and unusual activities that occur on the Site such as, but not limited to, accidents, spills, breaches of security, injuries, equipment failures, and weather-related problems.
- Changes to the HASP.
- Daily information generated such as: changes to work and health and safety plans; work accomplished and the current Site status; and monitoring results.

## 12.0 TABLE AND FIGURES

**Table 1: Emergency Response Telephone Numbers**

Emergency Agencies	Phone Numbers
<b>EMERGENCY</b>	<b>911</b>
St. Luke's Hospital 70 Dubois Street, Newburgh	(845) 561-4400
Beacon Police Department	(845) 831-4111 or 911
Beacon Fire Department	(845) 569-7415 or 911
Beacon City Hall	(845) 838-5000
Beacon City Water/Sewer	(845) 834-5008
Beacon Water and Sewer Maintenance Department	(845) 831-3136




**Figure 1: Directions to Hospital**

	1: Start out going NORTHWEST on SOUTH AVE toward TIORONDA AVE.	<0.1 miles
	2: Turn LEFT to stay on SOUTH AVE.	<0.1 miles
	3: Turn RIGHT to stay on SOUTH AVE.	0.7 miles
	4: Turn LEFT onto NY-9D / WOLCOTT AVE. Continue to follow NY-9D.	1.4 miles
	5: Merge onto I-84 W / NY-52 W via the ramp on the LEFT toward NEWBURGH.	2.4 miles
	6: Take the RT-32 exit- EXIT 10S- toward US-9W S / NEWBURGH.	0.2 miles
	7: Merge onto N PLANK RD / NY-32 toward NEWBURGH / WEST PT.	0.2 miles
	8: Turn RIGHT onto US-9W / NY-32 / ALBANY POST RD. Continue to follow US-9W / NY-32.	0.8 miles
	9: Turn LEFT onto SOUTH ST.	0.2 miles
	10: Turn RIGHT onto DUBOIS ST.	0.2 miles
	11: End at <b>St Luke's Hospital:</b> 70 Dubois St, Newburgh, NY 12550, US	
<b>Total Est. Time:</b> 15 minutes		<b>Total Est. Distance:</b> 6.75 miles




Figure 2: Map to Hospital (overview)



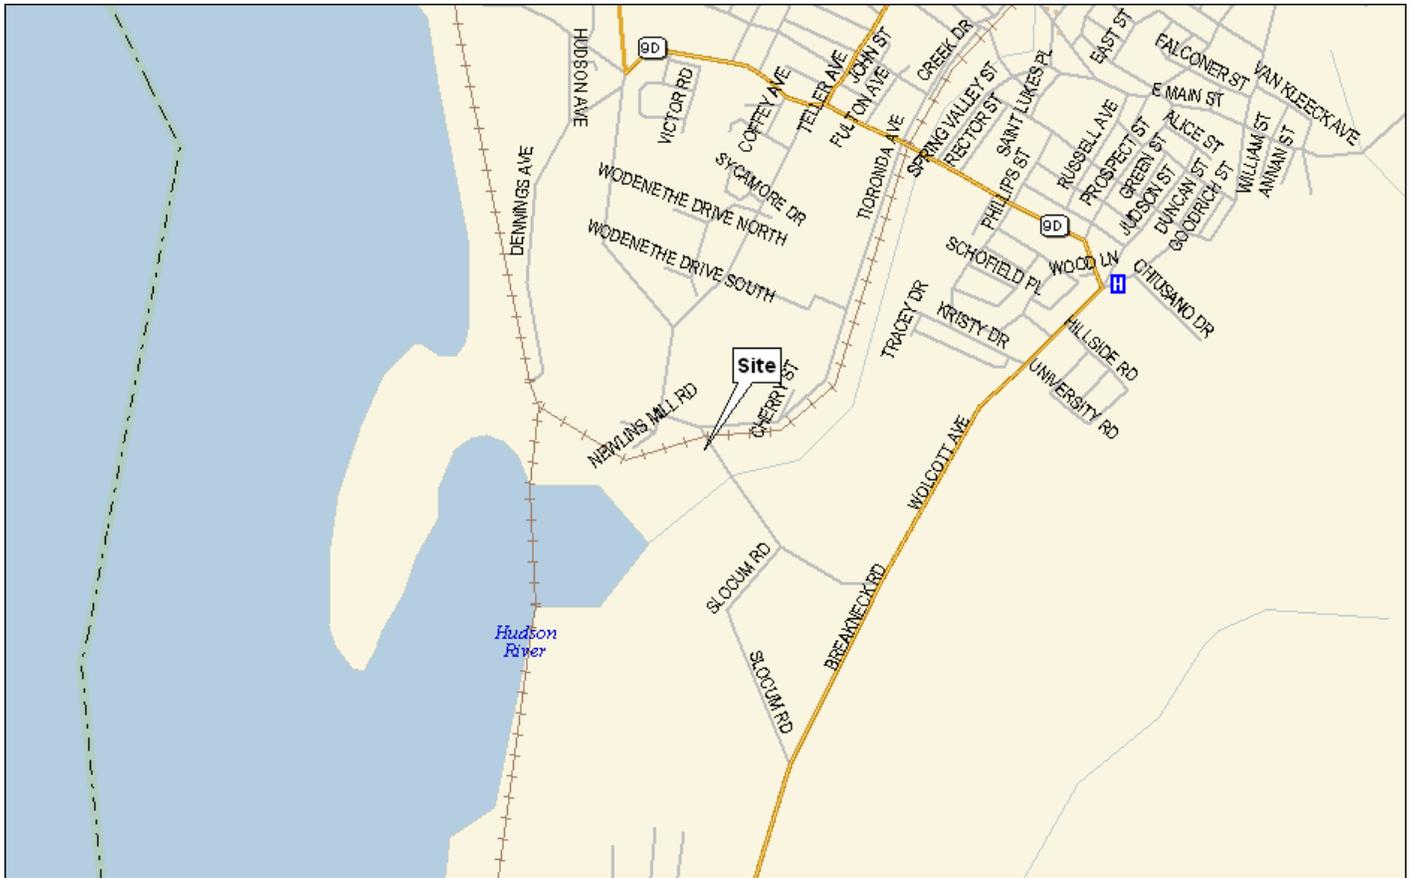

Data use subject to license.  
© 2004 DeLorme. Street Atlas USA® 2005.  
www.delorme.com



### Site Location Map


Beacon Terminal Site  
Site ID C314117  
555 South Avenue  
Beacon, New York



ESI File: BB04157.50

June 2008

Attachment

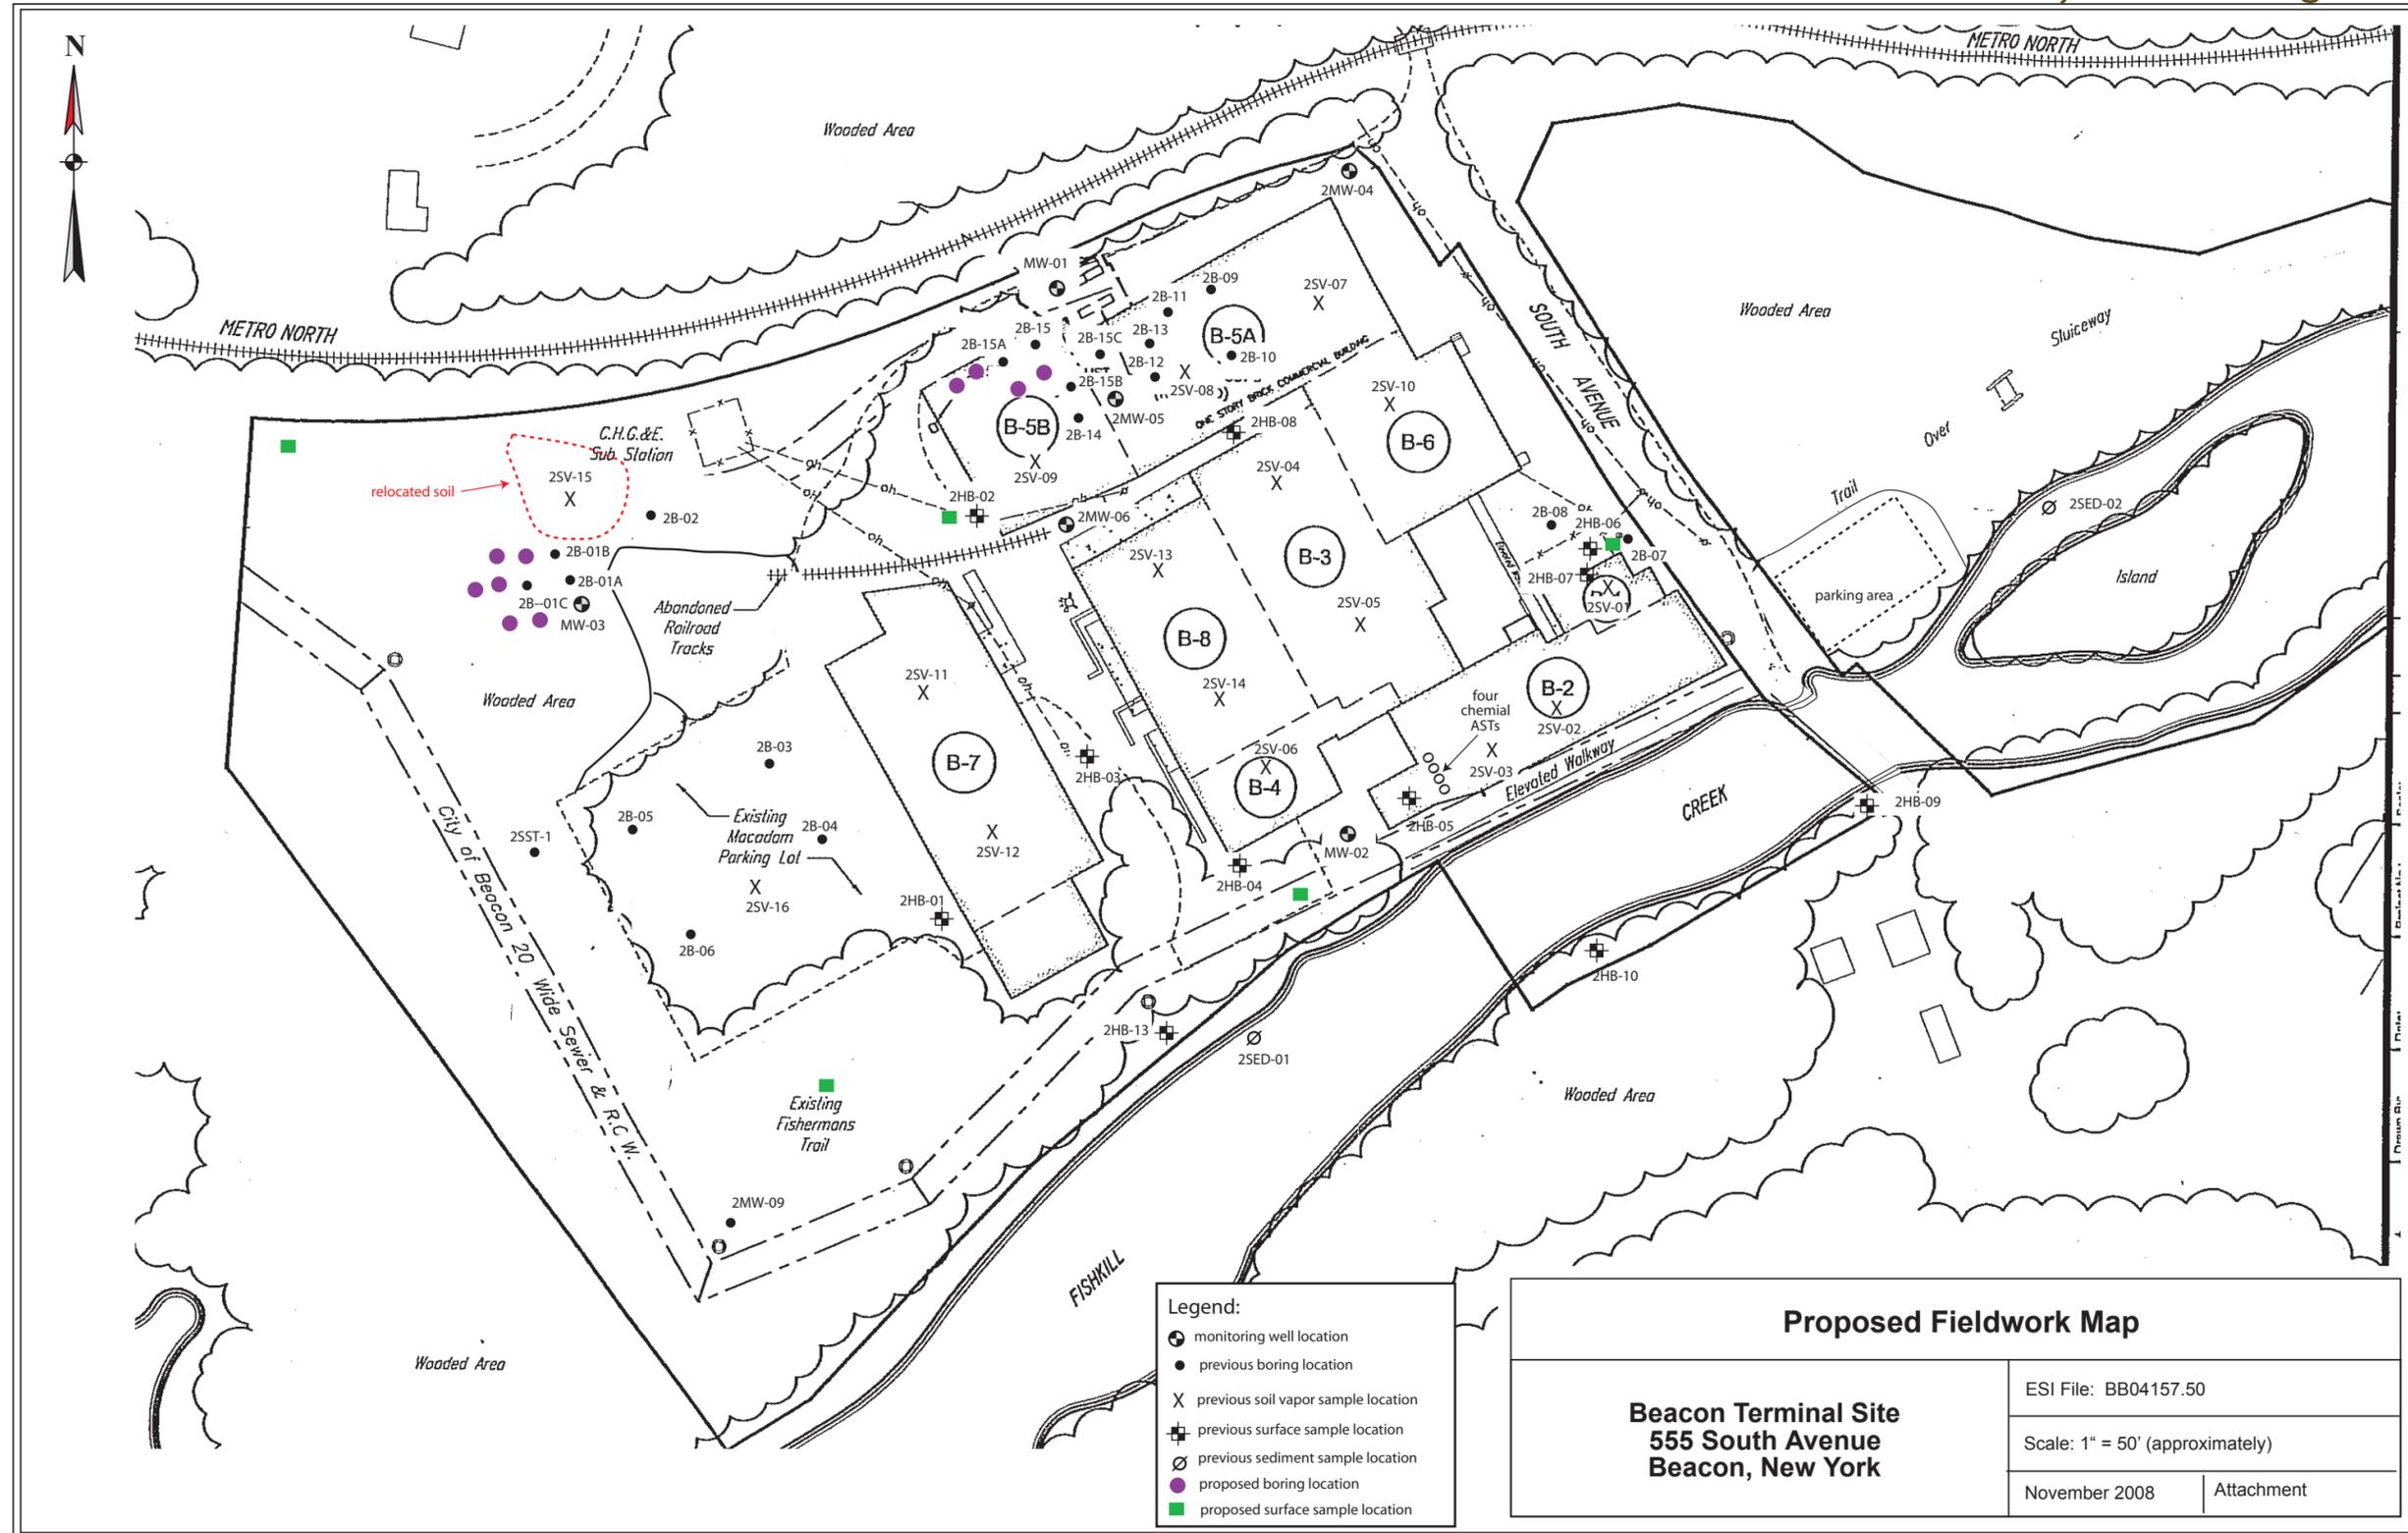

- Legend:**
- monitoring well location
  - previous boring location
  - X previous soil vapor sample location
  - ⊕ previous surface sample location
  - ⊙ previous sediment sample location
  - proposed boring location
  - proposed surface sample location

<b>Proposed Fieldwork Map</b>	
<b>Beacon Terminal Site 555 South Avenue Beacon, New York</b>	
ESI File: BB04157.50	
Scale: 1" = 50' (approximately)	
November 2008	Attachment

**APPENDIX D**

***Community Air Monitoring Plan***



## COMMUNITY AIR MONITORING PLAN

**Beacon Terminal Site (BCP ID: C314117)**  
**555 South Ave**  
**City of Beacon**  
**Dutchess County, New York**  
**ESI File: BB04157**

Real-time air monitoring for volatile organic compounds (VOCs) and dust at the perimeter of the exclusion zone or work area will be necessary.

Dust will be monitored at three locations on the Site: two downwind locations at the property line, and one upwind location at the property line. Specific locations will change daily, depending on the work being conducted and the direction of the wind. Monitoring for dust will be conducted using a digital dust indicator, or equivalent equipment, capable of documenting the presence of dust with particle sizes up to 15 microns. Dust levels in excess of 150  $\mu\text{g}/\text{m}^3$  will be evidence of unacceptable air quality, and proper procedures to reduce dust levels will be immediately instituted by the contractor. Ameliorative procedures may include reducing the surface area of contaminated soil being disturbed at one time, watering exposed soils to reduce fugitive odors, use of suppression substances, or stopping excavation activities.

Periodic monitoring for VOCs will be required during all ground intrusive activities (e.g., the installation of soil borings), and during the collection of soil, and groundwater samples. Periodic monitoring might reasonably consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. In some instances, depending upon the proximity of potentially exposed individuals, continuous monitoring may be required during sampling activities. Examples of such situations include groundwater sampling near roadways or occupied on-site buildings.

### **VOC Monitoring, Response Levels, and Actions**

VOCs must be periodically monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone). Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work should be performed using a photoionization detector (PID) that has been properly calibrated at least daily.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background.
- If the persistent organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.

All PID readings must be recorded and be available for New York State Department of Environmental Conservation (NYSDEC) and New York State Department of Health (NYSDOH) personnel to review.

**APPENDIX E**

***Remedial Investigation Workplan***

# **REMEDIAL INVESTIGATION WORK PLAN**

Prepared for the

**Beacon Terminal Site**  
555 South Avenue  
City of Beacon  
Dutchess County, New York

**NYSDEC Brownfields Program Site: C314117**

**Submitted July 2007**  
**Revised October 2007**

**ESI File: BB04157.50**

**ECOSYSTEMS STRATEGIES, INC.**  
24 Davis Avenue  
Poughkeepsie, New York 12603  
(845) 452-1658

## **REMEDIAL INVESTIGATION WORK PLAN**

**Prepared for the**

**Beacon Terminal Site  
555 South Avenue  
City of Beacon  
Dutchess County, New York**

**NYSDEC Brownfields Program Site: C314117**

**Submitted July 2007  
Revised October 2007**

**ESI File: BB04157.50**

**Prepared By:**

**Ecosystems Strategies, Inc.  
24 Davis Avenue  
Poughkeepsie, New York 12603**

**Prepared For:**

**Beacon Terminal Associates, LLP  
18 East 22<sup>nd</sup> Street  
New York, New York 10010**

The undersigned have reviewed this Draft Remedial Investigation Work Plan and certify to Beacon Terminal Associates, LLP that the information provided in this document is accurate as of the date of issuance by this office.

Any and all questions or comments, including requests for additional information, should be submitted to the undersigned.



---

Paul H. Ciminello  
President

**TABLE OF CONTENTS**

1.0 INTRODUCTION ..... 1

- 1.1 Purpose
- 1.2 Site History and Description
- 1.3 Environmental Areas of Concern
- 1.4 Completed Interim Remedial Measures

2.0 PROPOSED SITE INVESTIGATION SERVICES..... 4

- 2.1 Overview of Proposed Services
- 2.2 Site Preparation Services
  - 2.2.1 Qualifications of On-site Remedial Personnel
  - 2.2.2 Health and Safety Plan
  - 2.2.3 Quality Assurance / Quality Control
  - 2.2.4 Fieldwork Monitoring
  - 2.2.5 Notifications
- 2.3 Proposed Site Investigation Services
  - 2.3.1 Conduct Community Air Monitoring Plan
  - 2.3.2 Extension of Soil Borings
  - 2.3.3 Soil Sampling
  - 2.3.4 Sub-Slab Vapor Sampling
  - 2.3.5 Groundwater Monitoring
  - 2.3.6 Pathway Analysis and Criteria-Specific Analysis
  - 2.3.7 Investigation of the Northern Bank of Fishkill Creek
  - 2.3.8 Excavation of Test Pits
  - 2.3.9 Chemical Storage Tank Inspection
  - 2.3.10 Preparation of Final Reports

3.0 TIME SCHEDULE ..... 15

**APPENDICIES**

- A *Figures:*
  - Figure 1: Site Location Map*
  - Figure 2: Site Map*
  - Figure 3: Previous Fieldwork Map*
  - Figure 4: Proposed Fieldwork Map*
- B *Health & Safety Plan*
- C *Community Air Monitoring Plan*

## 1.0 INTRODUCTION

### 1.1 Purpose

The purpose of this Draft Remedial Investigation Work Plan (RIWP) is to: 1) summarize environmental investigative and interim remedial fieldwork previously performed by Ecosystems Strategies, Inc. (ESI) and other parties on the "Beacon Terminal Site" (hereafter referred to as the "Site"); and, 2) provide guidance on the manner in which additional site investigative services will be conducted, in order to address known and suspected on-site environmental conditions (see Section 1.3, below). It is the intent of this RIWP that, upon completion of all investigative activities, generated environmental data will be of sufficient quality and quantity for the submission of a completed Remedial Investigation Report (RIR) and a Remedial Work Plan (RWP) with an alternatives analysis to the New York State Department of Environmental Conservation (NYSDEC).

### 1.2 Site History and Description

The Site consists of tax parcel: # 751258 (11.07 acres) located in the City of Beacon, Dutchess County, New York (Section 5954, Block 16, Lot 751258). A Site Location Map is provided as Figure 1 in Appendix A. The Site is located adjacent to the northern edge of Fishkill Creek, approximately 2,000 feet east of the Hudson River, and has overall southerly slopes. The Site is presently improved with eight vacant industrial buildings (B-1, B-2, B-3, B-4, B-5A, B-5B, B-6, B-7, and B-8) formerly used for various manufacturing and warehousing purposes. These buildings occupy approximately fifty percent of the Site; the remainder of the property includes paved parking areas and undeveloped grassland and woodlands. A Site Map is provided as Figure 2 in Appendix A.

Floor drains and exterior drains were observed inside of buildings B-7 and B-8 and outside of buildings B-4, B-8, and B-6 by ESI in September 2007. However, the basement floor inside of most of the buildings is obscured with debris making identification of additional floor drains and sumps difficult. During site activities, an effort will be made to further identify sumps, floor drains, and other drainage features. These areas, if identified, will be targeted for the collection of soil, ground water, and/or soil vapor.

The following Environmental History was obtained from review of Site documentation provided by the Beacon Historical Society and previously issued documents:

The Site has a long history of known industrial use. A Site sketch and description, obtained from the Beacon Historical Society, depicts three buildings (now identified as buildings B-1 and B-2) on Site. These buildings were constructed in 1878 as the Tioranda Hat Works. Building B-1 is described as an engine room and boiler house, and building B-2 is described as the main factory housing felting, dyeing, carding, and wool sorting operations. Information regarding specific historical material handling, storage, and disposal is not readily available. However, review of historic Sanborn Maps indicates that the Site was occupied by the Tioranda Hat Works until at least 1919. Three of the present-day buildings (B-1, B-2, and B-4) were on-site at that time, with dyeing operations in the portions of buildings B-2 and B-4 most proximal to Fishkill Creek. Sanborn maps depict on-site hatworks facilities until at least 1946. However, by 1962 the complex, comprising all buildings currently on Site, is called "Beacon Terminal". Six of the buildings are shown as being in use by the Atlas Fiber Company, a fiber reclaimer, while one building (B-5A and B-5B) is occupied by Chemical Rubber Products, Inc. and one building (B-7) is occupied by BASF Colors & Chemicals. From approximately 1972 to 1995, the buildings were used for storage by various occupants. The buildings have remained vacant since at least 1995.

Petroleum products and other chemicals have historically been stored on-site. Four underground storage tanks (USTs) used for the storage of toluene are likely to have been installed in the early 1950s, when building B-5A was constructed. Six aboveground storage tanks (ASTs) used for the storage of lubricating oil, hydrochloric, and sulfuric acids, and at least ten USTs used for the storage of fuel oil, toluene, and other chemicals were documented on the Site in 1993. Neither these tanks nor their closures appear to have been properly documented. In addition, storage drums of varying sizes were found at a number of interior locations.

In 1996, ESI conducted a limited subsurface investigation in the vicinity of the toluene USTs. Ten borings (B-1 through B-10, Figure 3, Appendix A) were completed to a depth ranging from 7.0 feet below surface grade (bsg) to 11.0 feet bsg. Volatile organic compounds (VOCs) (benzene, toluene, and xylene) were detected at levels which exceed current NYSDEC Part 375 Soil Cleanup Objectives (SCOs) for Unrestricted Use. NYSDEC spill #9600893 (currently closed) was recorded for the Site at that time.

Work conducted at the Site in October 2000, as part of the Voluntary Cleanup Program Site #V00443-3, included the removal of four toluene USTs located just beyond the northern wall of Building 5A, at the junction with Building 5B. Post-excavation inspections documented water with a product sheen and numerous small holes in the tanks, and NYSDEC spill #0008142 (currently closed) was reported. Post-excavation soil sampling indicated elevated levels of toluene in sixteen of twenty-four confirmatory samples (levels ranging from 3,220 to 326,000 parts per billion (ppb), TAGM 4046 Recommended Soil Cleanup Objective [RSCO] 1,500 ppb). The majority of samples with elevated toluene levels (ten of sixteen) were drawn from the bottom of the excavation, suggesting deep penetration of the contaminant. Investigation of soils under the buildings or of soil vapor is not known to have been conducted. Although three monitoring wells were installed on Site (Figure 3, Appendix A), groundwater quality data is not available.

Soils from the excavation of the toluene USTs were stockpiled on-site. In May 2001, these stockpiled soils were sampled and found to contain elevated levels of toluene, with concentrations ranging from not detectable to 2,020,000 ppb. Subsequent stockpile sampling, in October 2002, did not find detectable levels of toluene or other organic compounds, indicating the volatilization of toluene over time. In 2005, the soil stockpile was relocated to the northwestern corner of the Site and covered with at least 24 inches of clean cover soil, as documented in a previously submitted Soils Management Plan (May 2005).

Also in October 2000, all ASTs (with the exception of the four chemical holding tanks located in Building 2) were cleaned and removed from the Site, miscellaneous containerized liquids and solids were repackaged and scheduled for removal, and a 550-gallon UST was removed from the western side of Building 5B. The UST was reported to be full of water, with no observed sheen or odor. Photoionization detector (PID) readings were not recorded during the removal of this UST. Post-excavation sampling did not reveal detectable organic compounds. However, somewhat elevated metals were found in this area (lead at over 470 ppm, nickel at over 30 ppm, and zinc at over 100 ppm). These concentrations may be indicative of low-grade metals contamination throughout the Site.

In August 1995, five test pits (TP-1 through TP-5 Figure 3, Appendix A) were excavated east of the Site in the area of former sheds A and B. The test pits were completed to a depth ranging from 1.0 feet bsg to 6.5 feet bsg. Metals (arsenic and mercury) were detected at levels which exceed current NYSDEC Part 375 Soil Cleanup Objectives (SCOs) for Unrestricted Use. Additionally, two test pits were excavated west of the parking area and east of the City of Beacon Sewer, laboratory results; however, are not available.

Potential impacts to sediment in the Fishkill Creek resulting from operations on the Site have not been thoroughly evaluated (samples collected in 1995 revealed elevated levels of lead, ranging from 400 to 3,400 ppm). The tape manufacturer Tuck Industries (USEPA ID: NYD001396894) was formerly located approximately 1500 feet northeast of the Site and upstream on Fishkill Creek. This facility is listed in the USEPA CERCLIS database and was known to store drums of toluene, methyl ethyl ketone, and isopropyl alcohol. This facility may have impacted on-site sediment.

The Site is proposed for re-use as a residential condominium complex at the completion of remedial activities. According to the redevelopment plan, Buildings B-1 and B-2 will remain on Site while all other buildings (B-3, B-4, B-5A, B-5B, B-6, B-7, and B-8) will be razed. Information regarding the location of proposed structures is not available at this time. Upon availability, plans for the proposed construction will be included in the RIR.

### **1.3 Environmental Areas of Concern**

The following Areas of Concern (AOCs) were identified during the Investigation Scoping meeting conducted at the Site on April 3, 2007 with NYSDEC representatives:

- Soil and groundwater quality beneath building B-5A and building B-5B, adjacent to former toluene tank area;
- Identified debris area in the western most portion of the Site;
- Soil and groundwater quality under the western parking lot;
- Soil and groundwater quality near the observed transformers adjacent to building B-1;
- The contents of the four chemical holding tanks located in building B-2;
- Sub-slab vapor quality in each building; and,
- The integrity of surface soil across the Site.

### **1.4 Completed Interim Remedial Measures**

The following interim remedial measures have already been completed:

- Four toluene USTs, adjacent to building B-5A, and one 550 gallon UST adjacent to the western side of building B-5B, were removed from the Site.
- Toluene impacted soil generated during the removal of the four-toluene tanks was stockpiled on-site in the western parking lot. This soil was then buried on-site northeast of the stockpile area in accordance with a NYSDEC approved work plan after testing documented the absence of elevated levels of toluene.
- Three groundwater monitoring wells were installed across the Site.
- With the exception of four chemical holding tanks (of which the contents and quantities are unknown), all other identified ASTs and drums were removed from the Site.

## 2.0 PROPOSED SITE INVESTIGATION SERVICES

This section of the RIWP details proposed environmental investigative activities. A Proposed Fieldwork map, depicting relevant Site features and proposed fieldwork locations, is provided as Figures 4, in Appendix A. All proposed work will be conducted according to a site specific Health and Safety Plan, provided as Appendix B.

Ecosystems Strategies, Inc. (hereafter referred to as the On-Site Coordinator, "OSC") has been retained to oversee the provision of the environmental investigative services specified in this RIWP. The "Volunteer" (as specified in the BCP agreement) is defined as Beacon Terminal Associates, LLP, which will contract with the OSC and other environmental contractors as necessary to provide the services detailed below.

### 2.1 Overview of Proposed Services

The purpose of this RIWP is to provide guidance on the manner in which additional site investigative services will be conducted, in order to address known and suspected on-site environmental conditions (see Section 1.3, above). It is the expressed intent of this RIWP that, upon completion of investigative activities, generated environmental data will be of sufficient quality and quantity for the submission of a completed Remedial Investigation Report (RIR), and a Remedial Work Plan (RWP) with an alternatives analysis, according to the requirements of the NYSDEC.

The following specific tasks will be completed at the Site (see Figure 6, Appendix A):

- 1) Extension of between thirty-five (35) and forty (40) soil borings, including inside of the on-site structures and at selected locations throughout the Site (Section 2.3.2). Soils will be sampled, as appropriate, and submitted for laboratory analysis of contaminants of concern in order to document Site integrity (Section 2.3.3);
- 2) Collection of ten (10) surface soil samples throughout the Site, and collection of two (2) surface soil samples from off-site (Section 2.3.3);
- 3) Collection of sub-slab vapor samples from within each Site structure, and collection of two (2) soil vapor samples on the western side of the Site (Section 2.3.4);
- 4) Completion of six (6) borings as permanent, shallow overburden monitoring wells (Section 2.3.5), capable of providing reliable groundwater quality data throughout the investigative, remedial, and post-remedial phases of the project;
- 5) Collection and laboratory analysis of groundwater samples, in order to document the integrity of on-site groundwater resources (Section 2.3.5);
- 6) A Pathway Analysis and Criteria-Specific Analysis will be completed for the Site in order to determine potential impact to fish and wildlife (Section 2,3.6); and,
- 7) Investigation of the northern bank of Fishkill Creek and the collection of at least one (1) surface water sample, one (1) sediment sample, and one (1) soil sample, and collection of one (1) surface water sample and (1) one sediment sample from off-site (Section 2.3.7).

## **2.2 Site Preparation Services**

### **2.2.1 Qualifications of On-site Remedial Personnel**

Prior to the initiation of work, the identities and qualifications of the project managers and associated staff will be supplied to the NYSDEC. The Volunteer will ensure that qualified contractors are used. All on-site staff will be appropriately trained in accordance with Occupational Safety and Health Administration (OSHA) practices (29 CFR, Part 1910). The NYSDEC will also be notified of any changes in the senior on-site personnel. Prior to the initiation of fieldwork, a Site Health and Safety Officer will be designated by the Volunteer, and a complete Health and Safety Plan will be provided (see Section 2.2.2, below).

### **2.2.2 Health and Safety Plan**

A site-specific Health and Safety Plan (HASP), incorporating a Community Health and Safety Plan, will be reviewed with site personnel and subcontractors prior to the initiation of specific fieldwork where contaminated media are likely to be encountered. All proposed work will be performed in "Level D" personal protective equipment. Field personnel (including subcontractors) will be prepared to continue services wearing more protective levels of equipment should field conditions warrant. A copy of the HASP is included in Appendix B. Unless determined otherwise, the OSC will provide staff to serve as the project's Health and Safety Officer.

### **2.2.3 Quality Assurance / Quality Control**

#### *Equipment*

Prior to the initiation of fieldwork, all field equipment to be used during the work will be properly decontaminated in accordance with NYSDEC guidelines, and all field instruments will be properly calibrated in accordance with procedures set forth by the equipment manufacturer(s). Unless otherwise specified, a MiniRAE 2000 (Model PGM 7600) photo-ionization detector (PID) will be used for site-screening of organic vapors. The PID is calibrated to read parts per million calibration gas equivalents (ppm-cge) of isobutylene. Instrument calibration will be performed no more than 24 hours prior to the commencement of fieldwork, and a written record of calibration results will be provided in the project files.

#### *Laboratory*

All samples will be collected in accordance with applicable NYSDEC guidelines and will be submitted to a New York State Department of Health (NYSDOH) ELAP-certified laboratory using appropriate chain of custody procedures. At this time, it is anticipated that all samples will be transported by courier to Severn Trent Laboratories (STL) of Shelton, Connecticut (ELAP # 10602). Dedicated, laboratory supplied glassware will be used for sample collection. One trip blank and one field blank will be supplied for each day of fieldwork involving sample collection. Field personnel will maintain all samples at cold temperatures and complete all chain of custody forms.

Laboratory reports will include detailed Quality Assurance/Quality Control (QA/QC) analyses, which will be provided in the final RIR (Section 2.3.10). Category B deliverables, as defined in the analytical services protocol (ASP), will be submitted for confirmatory and final delineation samples (Category A or Category Spills laboratory data deliverables will be submitted for analyses conducted at all other locations). In addition, a Data Usability Summary Report (DUSR) will be prepared by a third, independent party, which maintains NYSDOH ELAP CLP Certification. Data validation will be conducted by an independent validator if required by the NYSDEC.

## **2.2.4 Fieldwork Monitoring**

An assessment of subsurface soil characteristics, including soil type, the presence of foreign materials, and field and/or instrument indications of contamination (e.g., staining, odors, PID readings) will be made by the OSC. The OSC will be responsible for identifying any soils that in the opinion of the OSC may contain elevated concentrations of contaminants that warrant special handling. Those soils identified by the OSC will be removed to a specified soil stockpiling area for characterization and proper disposition. If applicable, the OSC will monitor the removal of all contaminated soil, including monitoring the trucks and establishing the designated truck routes. The OSC will also ensure that any unforeseen environmental conditions are managed in accordance with applicable federal and state regulations.

## **2.2.5 Notifications**

The NYSDEC will be notified in writing at least two weeks prior to the initiation of any of the on-site work and during the course of the fieldwork if deemed necessary by on-site personnel. Changes to fieldwork scheduling will be provided via facsimile transmission and/or email. All applicable local agencies will also be notified prior to the initiation of Site work.

Prior to the implementation of any of the investigative tasks outlined in Section 2.3, below, a request for a complete utility markout of the subject property will be submitted as required by New York State Department of Labor regulations. Confirmation of underground utility locations will be secured, and a field check of the utility markout will be conducted prior to the initiation of work. Any utilities on the Site will be protected (as necessary) by the contractor or owner.

## **2.3 Proposed Site Investigation Services**

This section of the RIWP provides a detailed description of the procedural and investigative tasks that will be conducted at the subject property.

### **2.3.1 Conduct Community Air Monitoring Plan**

A Community Air Monitoring Plan (CAMP, see Appendix C) will be initiated during all ground intrusive activities that are reasonably likely to generate significant dust and/or vapors. The implementation of this Plan will document the presence or absence of specific compounds in the air surrounding the work zone, which may migrate off-site due to fieldwork activities. This plan provides guidance on the need for implementing more stringent dust and emission controls based on air quality data. Air monitoring will be conducted for VOCs and for dust.

Monitoring for VOCs will occur within 50 feet of the work zone using a PID. Recorded PID readings consistently in excess of 5 ppm will be considered evidence of unacceptable air emissions and proper procedures to reduce emissions will be immediately instituted. Ameliorative procedures may include reducing the surface area of contaminated soil being disturbed at one time, watering exposed soils to reduce fugitive odors, use of suppression substances, or stopping excavation activities.

Dust will be monitored at three locations on the Site: two downwind locations at the property line, and one upwind location at the property line. Specific locations will change daily, depending on the work being conducted and the direction of the wind. Monitoring for dust will be conducted using a digital dust indicator, or equivalent equipment, capable of documenting the presence of dust with particle sizes ranging from 0.1 to 15 microns. Dust levels in excess of 150  $\mu\text{g}/\text{m}^3$  will be evidence of unacceptable air quality, and proper procedures to reduce dust levels (identified above) will be immediately instituted by the contractor.

Air monitoring will be sensitive to the existing air pollution sources adjoining the Site. The Volunteer may request assistance from the NYSDEC or NYSDOH in modifying the Community Air Monitoring Plan to account for these sources.

### **2.3.2 Extension of Soil Borings**

A total of thirty-five to forty soil borings will be extended throughout the Site, including in on-site structures. Borings will be extended (at a minimum) to the soil/groundwater interface using mechanized equipment or until refusal (drills will be utilized, as necessary, to breach concrete slabs). Borings to be completed as monitoring wells will be extended using a hollow-stem auger; all other borings will utilize direct push sampling technology. Boring equipment will be capable of collecting soil cores at discreet intervals and will utilize disposable acetate sleeves to prevent cross contamination. All equipment will be properly decontaminated according to NYSDEC guidelines. Based on field conditions, additional borings may be extended.

Recovered soil cores and drill tailings will be containerized (disposal of soil materials will be based on the results of laboratory analysis and consultation with NYSDEC personnel). All stored materials will be properly secured and covered to avoid runoff and prevent unauthorized access. Sampling and disposal of this material will be documented in the final RIR (Section 2.3.10).

The exact locations of all soil borings will be determined in the field in consultation with NYSDEC representatives. Boring locations will be measured to the nearest 0.5-foot relative to a permanent fixed on-site marker, and will be recorded in logbooks for inclusion in all final maps. Anticipated boring locations are depicted on the Proposed Fieldwork Map (Figure 4, Appendix A).

### **2.3.3 Soil Sampling**

#### **2.3.3.1 General Protocols**

All encountered soils will be properly characterized in the field and findings will be recorded in logbooks. Material selected for sampling will be obtained in a manner consistent with NYSDEC sample collection protocols. Decontaminated stainless steel trowels and dedicated gloves will be used at each sample location to place the material into laboratory-supplied glassware. Prior to and after the collection of each material sample, the sample collection instrument will be properly decontaminated to avoid cross-contamination between samples.

Soils selected for sampling purposes will be composite or grab samples from discreet four-foot core intervals, grab samples from soils exposed in test pits, or grab samples from surface locations. Soil sampling will be biased towards surface soils (0 to 2 inches below ground surface after removal of the vegetative cover), soils at the groundwater interface, and any soils with elevated PID readings, unusual odors, discoloration, or, any other field evidence of contamination.

#### **2.3.3.2 Surface Sampling Protocols**

Ten surface soil samples will be collected throughout the Site and two surface soil samples will be collected from off-site. On-site sample locations will include areas of expected contamination (e.g., areas of observed overt evidence of contamination, low areas where spills may have accumulated, etc), and additional samples will be collected (as necessary) in order to ensure that there is adequate delineation. Samples will be collected from approximately 0-2 inches below original grade surface, after removal of vegetation (if applicable). Additional surface soil samples may be collected, should field conditions warrant. Proposed sample locations are identified on Figure 4 located in Appendix A.

### **2.3.3.3 Sampling Protocols at Electrical Transformer Area**

Two soil borings will be extended adjacent to the electrical transformer located on the northern edge of Building B1. Soil samples will be collected within two feet of the fence with one sampling location located to the north of the transformer and the other location to the east. Soil borings and screening will be conducted at approximately four-foot intervals. The total sampling depth will be to refusal or the observed groundwater interface. One sample per boring will be submitted for laboratory analysis. Additional soil borings may be extended, if warranted by field conditions (e.g., soil staining or stressed vegetation).

If the transformer is determined to be out of service, one sample will be collected from the fluid inside of the transformer (if accessible).

### **2.3.3.4 Sampling Protocols at the CHG&E Sub Station Area**

As part of the investigation, ownership of the CHG&E Sub Station (sub station) will be confirmed. If it is determined that the sub station is within the Site boundary, two surface soil samples will be collected and two soil borings will be extended near the sub station. The surface soil samples will be obtained from inside of the surrounding fence and the soil borings will be located just outside of the fence. In addition, if it is determined that the sub station is no longer in service and a sample can be obtained, fluid will be collected from inside of the transformer.

### **2.3.3.5 Sampling Protocols within Buildings 5A and 5B**

Seven soil borings will be extended beneath the concrete slab in both buildings in the vicinity of the former toluene USTs. Upon breaching the slab, soil borings will be extended at four-foot intervals until the groundwater interface is reached or until refusal. Sampling will be conducted to fully delineate the vertical and horizontal extent of soil contamination resulting from the former toluene USTs. One sample per boring will be submitted for laboratory analysis. Additional soil borings may be extended, should field conditions warrant.

### **2.3.3.6 Sampling Protocols in Western Parking Area**

Soils in the western parking area have not been investigated. This area was previously used as a staging area for toluene-impacted soils generated during the UST removal and over-excavation adjacent to Buildings 5A and 5B. Approximately four borings will be extended in this area until the groundwater interface is reached or until refusal. One sample from each boring will be submitted for laboratory analysis. Additional soil borings may be extended, should field conditions warrant.

### **2.3.3.7 Sample Submission**

#### *Samples Collected for Surface Soil Screening*

All samples collected for surface soil screening will be analyzed for Target Analyte List (TAL) metals, VOCs via USEPA Method 8260, semi-volatile organic compounds (SVOCs) via USEPA Method 8270, polychlorinated biphenyls (PCBs) via USEPA Method 8082 and pesticides via USEPA Method 8081.

*Samples Collected Adjacent to Electrical Transformer*

Samples collected from soil borings adjacent to the electrical transformers will be submitted for laboratory analysis of VOCs via USEPA Method 8260, SVOCs via USEPA Method 8270, PCBs via USEPA Method 8082 and total weight Resource Conservation and Recovery Act (RCRA) metals via USEPA Method 6010 and Method 7471. Fluid from inside the transformer, if accessible, will be submitted for laboratory analysis of PCBs via USEPA method 8082. Toxicity Characteristic Leaching Procedure (TCLP) analyses will be performed on a select number of samples, determined in consultation with the NYSDEC, for those compounds documented at concentrations greater than 20 times the maximum contaminant level as specified in 40 CFR Part 261.

*Samples Collected Adjacent to the Sub Station*

All soil samples collected from the area of the sub station will be submitted for laboratory analysis of VOCs via USEPA Method 8260, SVOCs via USEPA Method 8270, PCBs via USEPA Method 8082 and total weight RCRA metals via USEPA Method 6010 and Method 7471. Fluid from inside the sub station, if accessible, will be submitted for laboratory analysis of PCBs via USEPA method 8082. Toxicity Characteristic Leaching Procedure (TCLP) analyses will be performed on a select number of samples, determined in consultation with the NYSDEC, for those compounds documented at concentrations greater than 20 times the maximum contaminant level as specified in 40 CFR Part 261.

*Samples Collected within Building 5A and 5B*

Samples collected from soil borings within Building 5A and 5B will be submitted for laboratory analysis of VOCs via USEPA Method 8260, SVOCs via USEPA Method 8270, PCBs via USEPA Method 8082 and total weight RCRA metals via USEPA Method 6010 and Method 7471. Toxicity Characteristic Leaching Procedure (TCLP) analyses will be performed on a select number of samples, determined in consultation with the NYSDEC, for those compounds documented at concentrations greater than 20 times the maximum contaminant level as specified in 40 CFR Part 261.

*Samples Collected in Western Parking Area*

Soil samples collected in the Western Parking Area will be submitted for laboratory analysis of VOCs via USEPA Method 8260, SVOCs via USEPA Method 8270 and total weight RCRA metals via USEPA Method 6010 and Method 7471.

**2.3.4 Sub-Slab Vapor Sampling**

Sub slab vapor screening will be conducted within all on-site structures. Buildings B1, B4, B5-B and B-6 will have one sub-slab sample collection location; all other buildings will have two sampling locations. Two soil vapor samples will also be collected on the western portion of the Site. A tracer gas (e.g., helium) will be used at all soil vapor sampling locations to verify that adequate sampling techniques are being implemented (i.e. to verify the absence of significant infiltration of outside air), in accordance with methodology specified in the NYSDOH's Guidance for Evaluating Soil Vapor Intrusion in the State of New York (October 2006). All proposed sampling locations are identified on Figure 4, Appendix A. All sampling locations are subject to change based upon field conditions (cracks in slab, preferential pathways, etc).

**2.3.4.1 Pre-Sampling Building Inventory and Inspection**

For all sub slab sampling conducted within structures, a building inspection will be conducted in order to 1) inventory any on-site products or equipment that may interfere or influence the sampling, and 2) evaluate the condition of the building and the foundation slab to identify any defects that may affect the proposed sampling or act as preferential pathways.

### **2.3.4.2 Sampling Methodology**

The concrete slab floors will be breached with an electric drill and sub-slab gas sampling will be conducted directly beneath the slab (within any encountered subgrade aggregate fill materials). Sample tubing (0.188 inch inner diameter Teflon) will be inserted below the slab to a depth no greater than two inches into the sub-slab material (actual depth will be dependant on Site conditions and the cause of any significant deviation will be documented). Any space between the borehole and tubing will be sealed off with a non-VOC containing material to prevent surface air from entering the system. Air in the Teflon tubing will be screened for VOCs prior to purging.

For all sampling locations, the exact purge volume will be dependent on the boring depth and subsequent length of tubing. Three borehole and tubing volumes will be purged prior to collection. The purge rate will not exceed 0.2 liters per minute. If warranted, purge gas will be discharged outside of the building, via plastic tubing.

Following purging of ambient air from the collection device, soil gas samples will be collected over a one-hour period (at a rate not exceeding 0.2 liters per minute) into individual laboratory-certified clean Summa canisters equipped with one-hour flow regulators.

### **2.3.4.3 Sample Submission**

Samples will be submitted for laboratory analysis of VOCs via USEPA method TO-15.

### **2.3.5 Groundwater Monitoring**

Six (6) soil boreholes are proposed to be completed as new, shallow overburden groundwater monitoring wells [note: three monitoring wells currently exist on-site and will be used if acceptable to the NYSDEC]. A Proposed Fieldwork Map showing anticipated well locations is provided as Figure 4, in Appendix A. Additional monitoring wells may be installed if warranted by field conditions.

The existing monitoring wells will be evaluated in order to determine their suitability for use during this project. The wells will be compared to the construction logs, if available, to determine if sedimentation has occurred and if the wells should be redeveloped. The surface seal will be inspected and resealed if necessary. If one or more of the existing wells are not viable, new monitoring wells will be installed near the location of the previous wells.

#### **2.3.5.1 Installation of Proposed Monitoring Wells**

All monitoring wells will be constructed of two-inch PVC casing with 0.1-inch slotted PVC well screening across the water table. No glue will be used to thread the casing lengths. The wells will be constructed such that a minimum of 2.0 foot of screening will extend above the water table and approximately 8.0 feet of screening will extend below the water level. The annular space between well screen and the borehole will be backfilled with clean #1 silica sand to a depth of one to two feet above the well screen. A one-foot thick bentonite seal will be poured down the borehole above the sand pack and allowed to hydrate before grouting the remaining annular space with cement. Note: the length of the PVC screen, sand filter, and bentonite seal may be reduced (in that order) in order to accommodate a shallow water table. A locked cap with vent will be installed at the top of the PVC riser.

Wells will be completed as either stickup or drive-over wells, according to Site conditions, and will be protected by locked, metal casings. All monitoring wells will be surveyed vertically to the nearest 0.01 foot and horizontally to an accuracy of one-tenth of a second latitude and longitude. Well locations and other surveyed data will be provided in the final RIR on a certified map prepared by a State certified surveyor. The survey will document the vertical elevations of the top of the casing pipe and the ground surface elevation adjacent to each well.

Well construction logs showing components and details of well casing, well screen, filter pack, annular seal, and associated items will be provided in the final report.

### **2.3.5.2 Monitoring Well Development**

Subsequent to installation, the wells will be developed with a properly decontaminated mechanical pump and dedicated polyethylene tubing in order to clear fine-grained material that may have settled around the well screen and to enhance the natural hydraulic connection between the well screen and the surrounding soils. Prior to development, the monitoring well casing will be opened and the well column immediately screened with a PID to document the presence of any volatile organic vapors. Water removed from the monitoring well will be visually inspected for indications of petroleum contamination. Well water removed in the course of development will be containerized (disposal of collected groundwater will be based on the results of laboratory analysis). This procedure will also be conducted on the three previously installed monitoring wells to ensure proper well development.

Well development will begin at the top of the saturated portion of the screening to prevent clogging of the pump within the casing. The pump will be raised and lowered one to two feet within various portions of the screened interval to force water back and forth through the screen. Repeated surging and pumping at intervals of less than five feet will be performed to the bottom of the screen until the discharged water appears clear. Upon completion, the pump assembly will be removed while the pump is still running to avoid discharge of purged water back into the well. The well will be considered developed when turbidity is determined to be less than 50 NTUs.

### **2.3.5.3 Groundwater Well Sampling**

Groundwater samples will be collected during site investigative activities, and at subsequent quarterly intervals until such monitoring is deemed unnecessary by the NYSDEC. Provided below is a description of the proposed sampling protocol. All relevant data will be recorded in field logbooks:

1. Basic climatological data (e.g., temperature, precipitation, etc.) will be noted;
2. The protective casing on the well will be unlocked and the air in the wellhead will be screened for organic vapors using a calibrated PID;
3. The well's static water level will be measured to the nearest 0.01 foot relative to the top of the PVC casing using a decontaminated water level meter;
4. The volume of standing water in the well will be calculated (using well diameter, total well depth, and the measured depth of the standing water) to determine the amount of water to be purged from the well prior to sampling;
5. The well will be purged a minimum of three well volumes using a properly decontaminated mechanical pump and dedicated polyethylene tubing, or by hand using dedicated, disposable bailers. The purged volumes will be calculated by discharging the well water into a container of known volume. Purged water will be containerized, as necessary. The time at the beginning and the end of purging, and all observations (e.g., turbidity, odor, presence of a sheen, etc.) will be recorded;
6. The presumed least contaminated monitoring well will be sampled first, and sampling shall progress from the least contaminated monitoring well to the most contaminated well. Groundwater samples will be collected from the well using a dedicated, disposal bailer in accordance with procedures outlined according to NYSDEC protocol. During sample collection, the bailer will not touch the ground or any object except for the well casing);

7. The sampling of groundwater for metals analysis will occur when low turbidity conditions are attained (i.e., turbidity less than 50 NTUs) in the well water. If high turbidity conditions are encountered, the well will be redeveloped in order to reach acceptable turbidity conditions, and/or both unfiltered and filtered groundwater samples will be collected and analyzed for total and dissolved metals, respectively;
8. Groundwater samples will be placed in appropriately sized and preserved laboratory supplied glassware, and will be stored and transported at cold temperatures, following proper chain of custody procedures;
9. The protective cap on the well will be replaced and locked. The field sampling crew will move to the next most contaminated well and the process will be repeated.

#### **2.3.5.4 Analysis of Groundwater Samples**

Groundwater samples will be submitted for laboratory analysis of total and dissolved TAL Metals via USEPA method 6010, VOCs via USEPA Method 8260, SVOCs via USEPA Method 8270, and PCBs via USEPA Method 8082.

#### **2.3.5.5 Groundwater Flow Calculations**

The direction of groundwater flow will be determined based on elevations of static groundwater as measured at all on-site wells, measured prior to water quality sample collection. Measurements will be collected with an electronic depth meter with an accuracy of measuring depth to the nearest 0.01 foot. Data will be recorded in field logs for use in generating a Direction of Groundwater Flow Map in the final RIR (Section 2.3.7).

#### **2.3.6 Pathway Analysis and Criteria-Specific Analysis**

A Pathway Analysis and Criteria-Specific Analysis will be completed in order to determine potential impacts to fish and wildlife from existing Site conditions.

#### **2.3.7 Investigation of the Northern Bank of Fishkill Creek**

##### **2.3.7.1 General Protocols**

The sediment along the northern bank of Fishkill Creek will be probed in order to visually inspect for the presence of non-aqueous phase liquid (NAPL) or other contaminants. The area adjacent to the historic mineral oil tanks located between buildings B-4 and B-2 will be of special focus during this inspection.

##### **2.3.7.2 Sampling Methodology**

Sample locations will be determined by the conditions encountered on the Site. Sediment samples will be collected in areas of visual impact; however, if impact is not observed one surface water sample, one sediment (0-6 inches) sample, and one soil (6-12 inches) sample will be taken for comparison to data from sediment samples taken in 1995. The sediment and the soil samples will also be compared to the Division of Fish, Wildlife, and Marine Resources (DFWMR) sediment criteria and the protection of ecological resources values found in 6 NYCRR Part 375 Table 375 6.8b.

In addition, one surface water and one sediment sample will be collected upstream of the Site in order to evaluate background conditions.

### 2.3.7.3 Sample Submission

The surface water samples and the off-site sediment sample will be submitted for laboratory analysis of VOCs via USEPA Method 8260, PCBs via USEPA Method 8082, and USEPA TAL metals.

In order to evaluate impact to fish and wildlife, the on-site sediment sample (0-6 inches) will be submitted for analysis of total organic carbon by the "Lloyd-Kahn" method, VOCs via USEPA Method 8260, SVOCs via USEPA Method 8270, PCBs via USEPA Method 8082, pesticides via USEPA Method 8081 and Method 8141, dioxins/furans via USEPA Method 8280, USEPA TAL metals, and methylene blue active substances (MBAS) via Method 5540C. The on-site soil sample (6-12 inches) will be submitted for analysis of VOCs via USEPA Method 8260, SVOCs via USEPA Method 8270, PCBs via USEPA Method 8082, total cyanide via USEPA Method 9012, and USEPA TAL metals.

## 2.3.8 Excavation of Test Pits

### 2.3.8.1 General Protocols

Test pits will be excavated in the far western portion of the Site, (Figure 7, Appendix A). The purpose of the test pits is to observe the extent of debris and fill material in this area of the Site. During the extension of test pits, observations will be recorded on the material encountered, PID readings, total depth of test pit and any other significant information.

### 2.3.8.2 Test Pit Sampling Methodology

One soil sample will be collected from each test pit and submitted for analysis. Samples will be biased towards soil exhibiting elevated PID readings or visual evidence of contamination. If warranted by field conditions, additional soil samples will be obtained from the test pit locations and submitted for appropriate lab analysis.

### 2.3.8.3 Sample Submission

Samples collected from test pits will be submitted for laboratory analysis of VOCs via USEPA Method 8260, SVOCs via USEPA Method 8270, PCBs via USEPA Method 8082 and total weight RCRA metals via USEPA Method 6010 and Method 7471. Toxicity Characteristic Leaching Procedure (TCLP) analyses will be performed on a select number of samples, determined in consultation with the NYSDEC, for those compounds documented at concentrations greater than 20 times the maximum contaminant level as specified in 40 CFR Part 261.

## 2.3.9 Chemical Storage Tank Inspection

Four ASTs were observed in the western portion of Building B-2 during the scoping meeting. The contents of these ASTs are currently unknown. As part of this RIWP, these ASTs will be inspected to determine the contents and quantities of any residual material in each container. Upon confirmation of this information, arrangements will be made for the proper disposal of any observed material.

### **2.3.10 Preparation of Final Reports**

A final RIR and a RWP with an alternatives analysis and a qualitative exposure assessment for human health will be submitted to the NYSDEC following the completion of site investigative services, in accordance with Division of Environmental Remediation Draft Technical Guidance for Site Investigation and Remediation requirements. The RIR and RWP will, respectively, 1) summarize and document all investigative activities conducted on the Site (including all relevant maps (Site/area of concern base map, sample location map, groundwater elevation contour map, and a map of extent of NAPL zones, if discovered), drawings, summary data tables, and complete laboratory reports), and 2) provide an analysis of potential remedial response actions (for use in developing a Remedial Work Plan RWP or Remedial Design RD, depending on the complexity of the selected remedy).

Quarterly groundwater monitoring reports will be provided to the NYSDEC as data becomes available. Such reports will include applicable maps, physical well data (e.g., groundwater levels), data summary tables and laboratory reports, and a discussion of results and specific recommendations for additional investigation, remediation, or monitoring.

### **3.0 TIME SCHEDULE**

The following schedule is anticipated for this project, subject to revision by mutual consent of both the NYSDEC and the Participant:

Within 3 months of the approval of the RIWP:


- Installation of all monitoring wells
- Completion of all investigative activities

Within 5 months of the approval of the RIWP:

- Preparation of the final RIR, and RWP with alternatives analysis, and submission to the NYSDEC for review

**APPENDIX A**

**Figures**

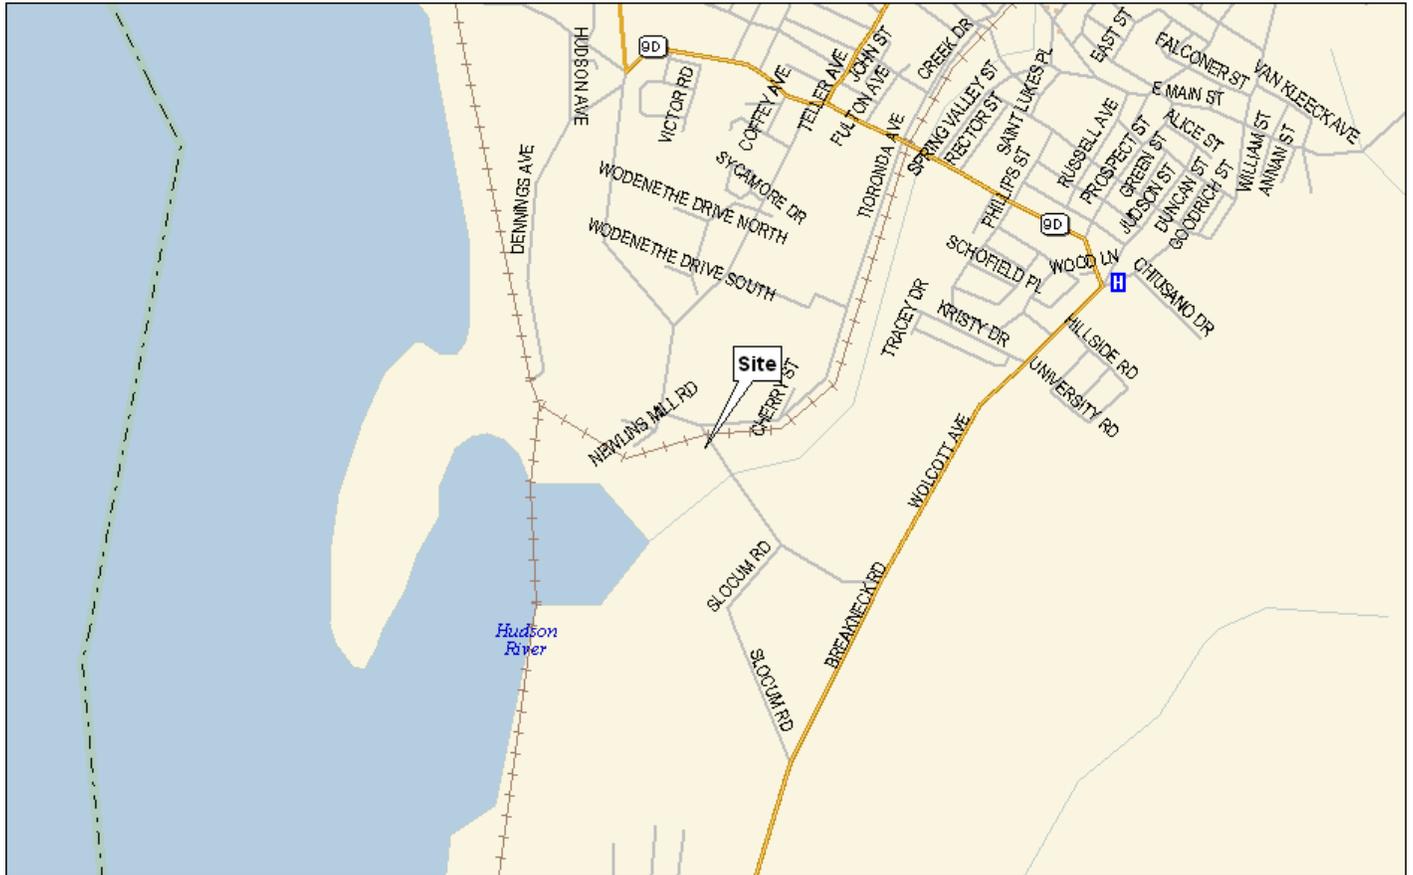

Data use subject to license.  
 © 2004 DeLorme, Street Atlas USA® 2005.  
 www.delorme.com




**Site Location Map**  
 Beacon Terminal Site  
 Site ID C314117  
 555 South Avenue  
 Beacon, New York



ESI File: BB04157.50

Date: October 2007

Attachment

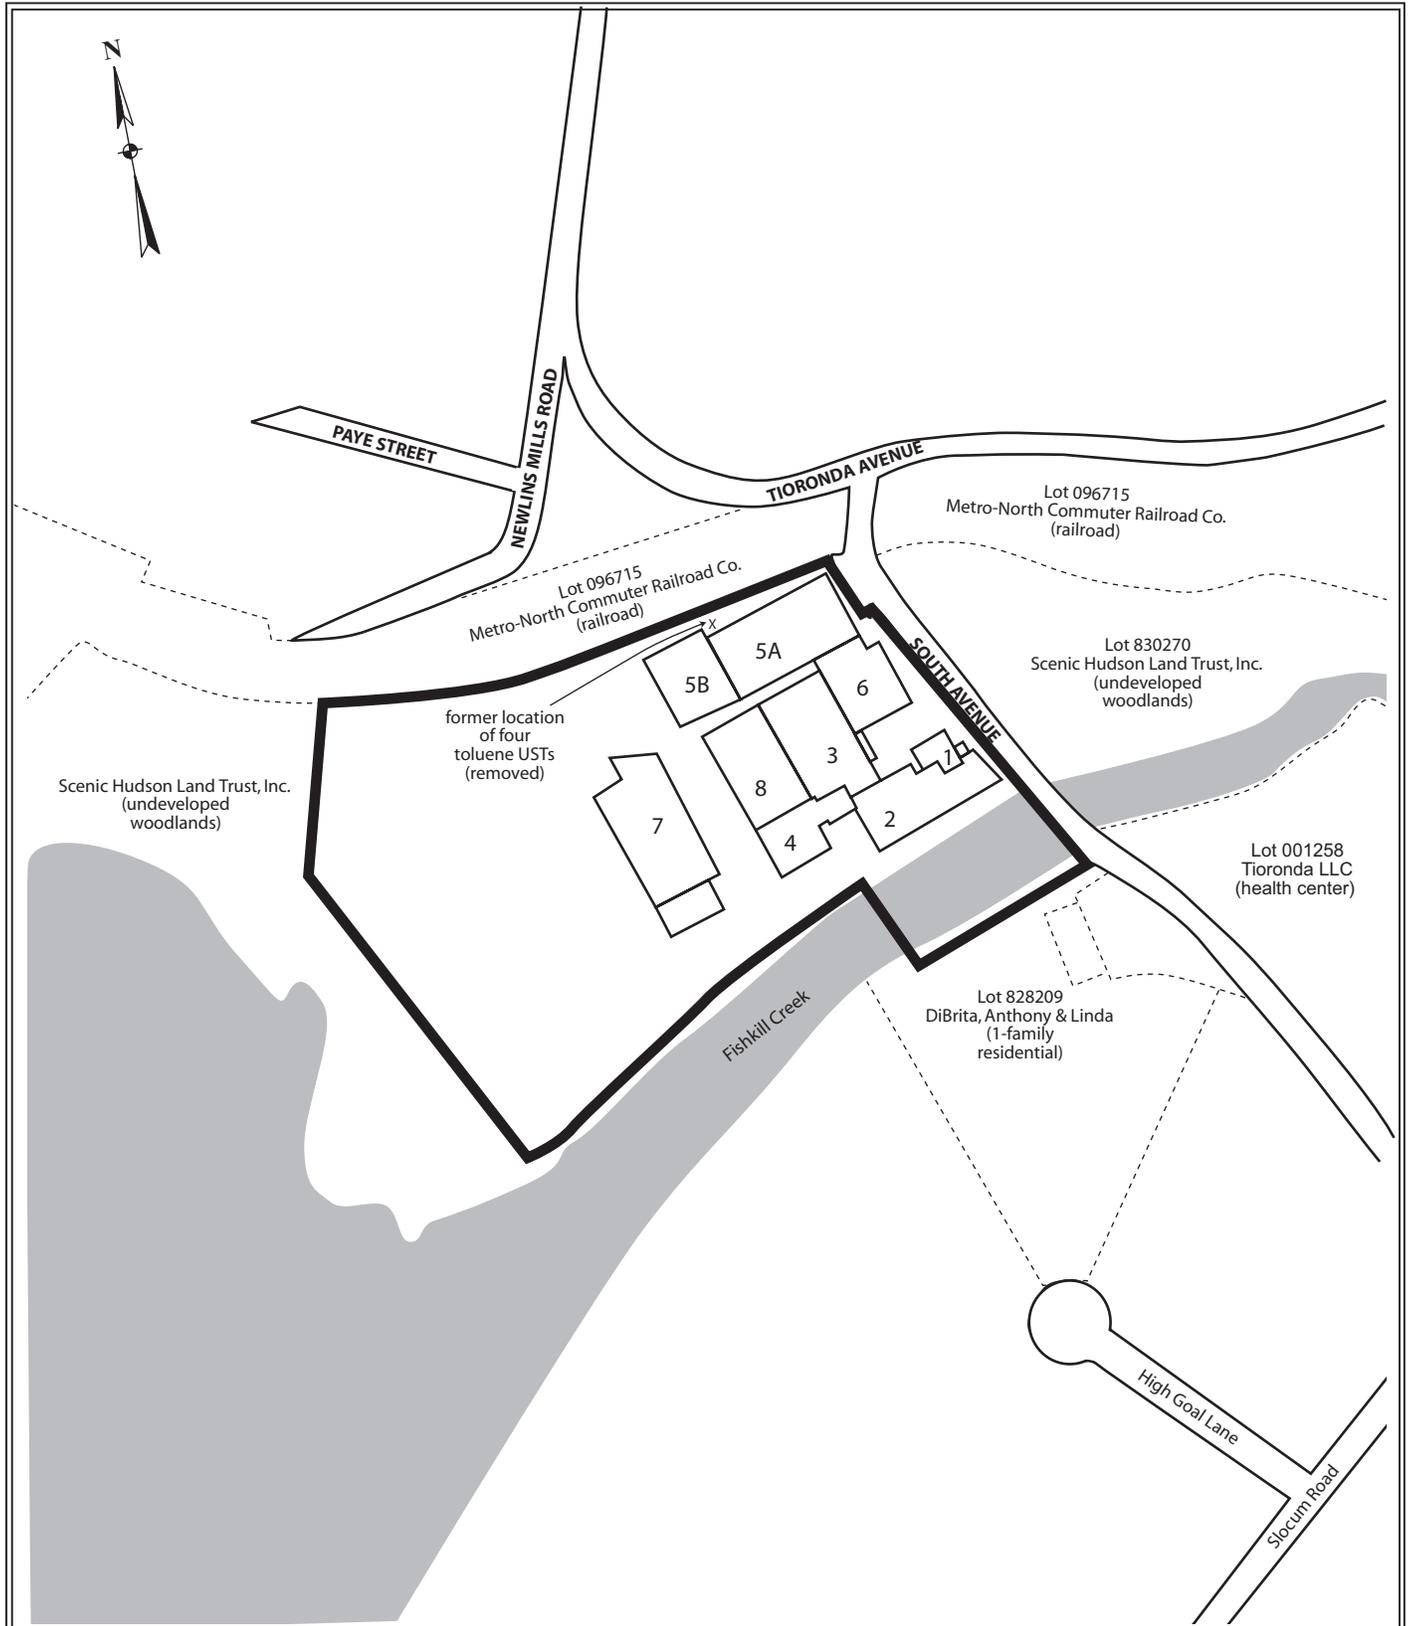

All feature locations are approximate. This map is intended as a schematic to be used in conjunction with the associated report, and it should not be relied upon as a survey for planning or other activities.

**Figure 2 - Site Map**

Beacon Terminal Site  
555 South Avenue  
Beacon, New York

Legend:


 subject property border

ESI File: BB04157.50

September 2007

Scale 1" = 220'


Appendix A

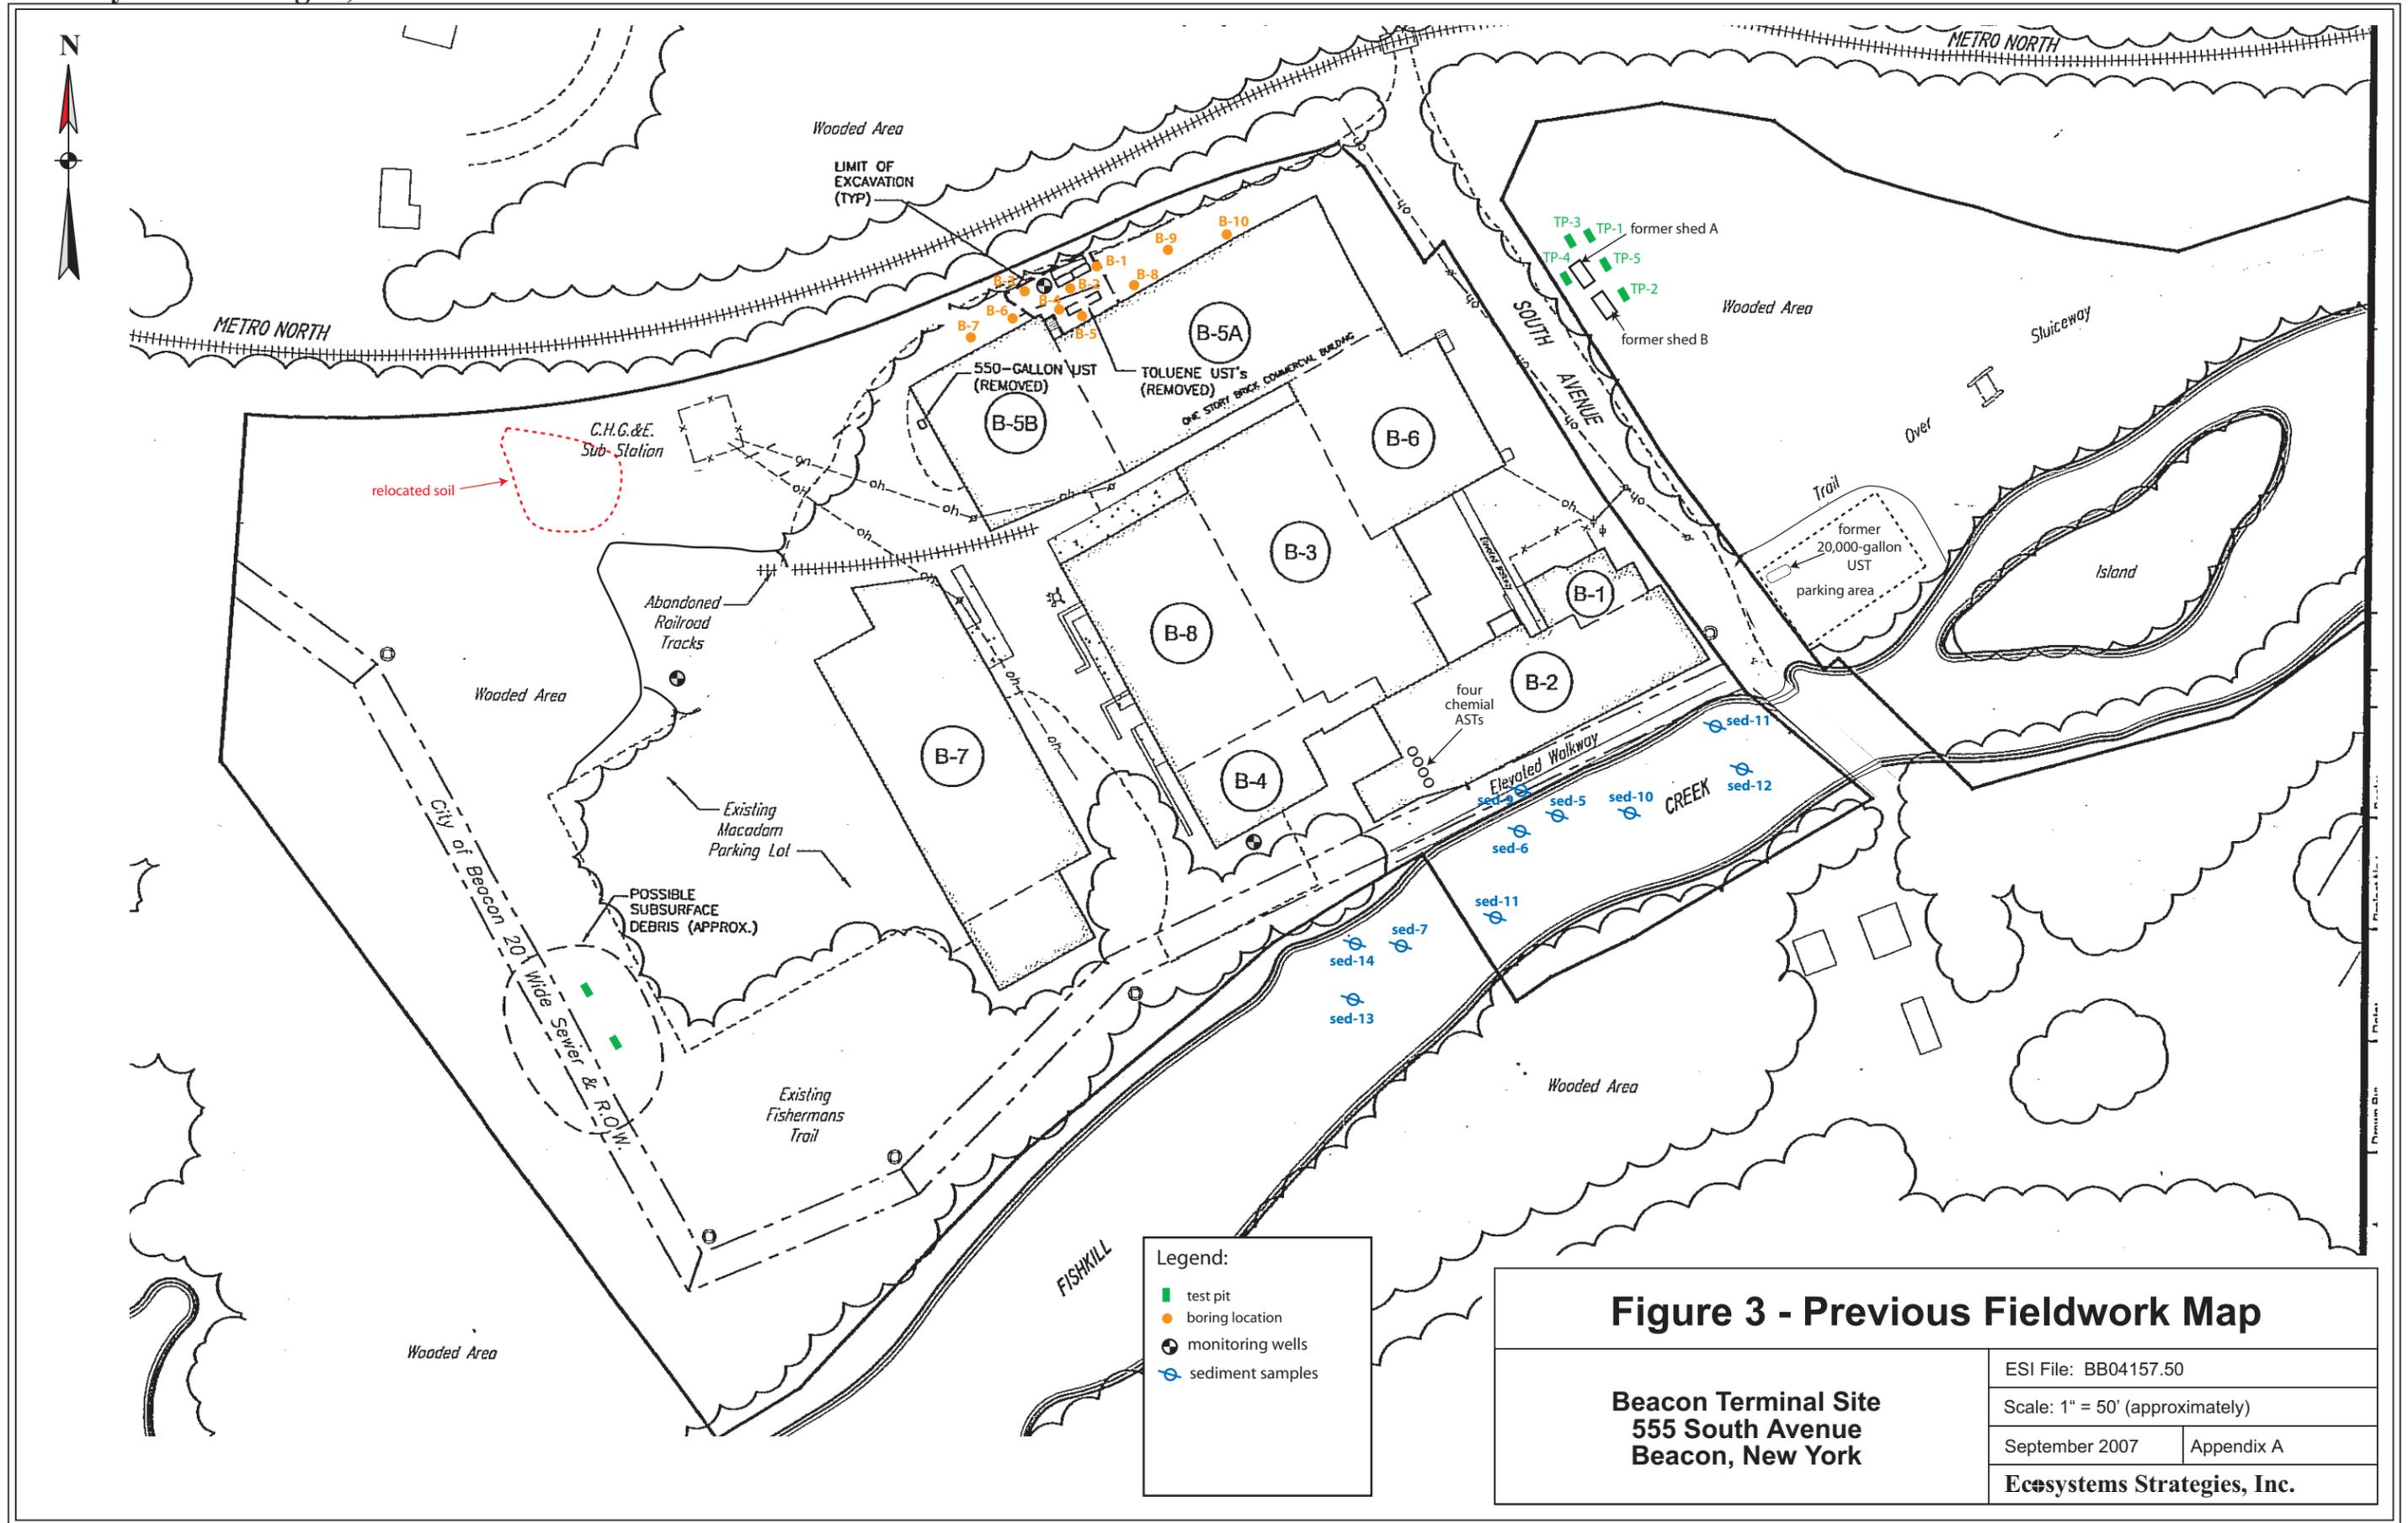

**Figure 3 - Previous Fieldwork Map**

**Beacon Terminal Site  
555 South Avenue  
Beacon, New York**

ESI File: BB04157.50	
Scale: 1" = 50' (approximately)	
September 2007	Appendix A
Ecosystems Strategies, Inc.	

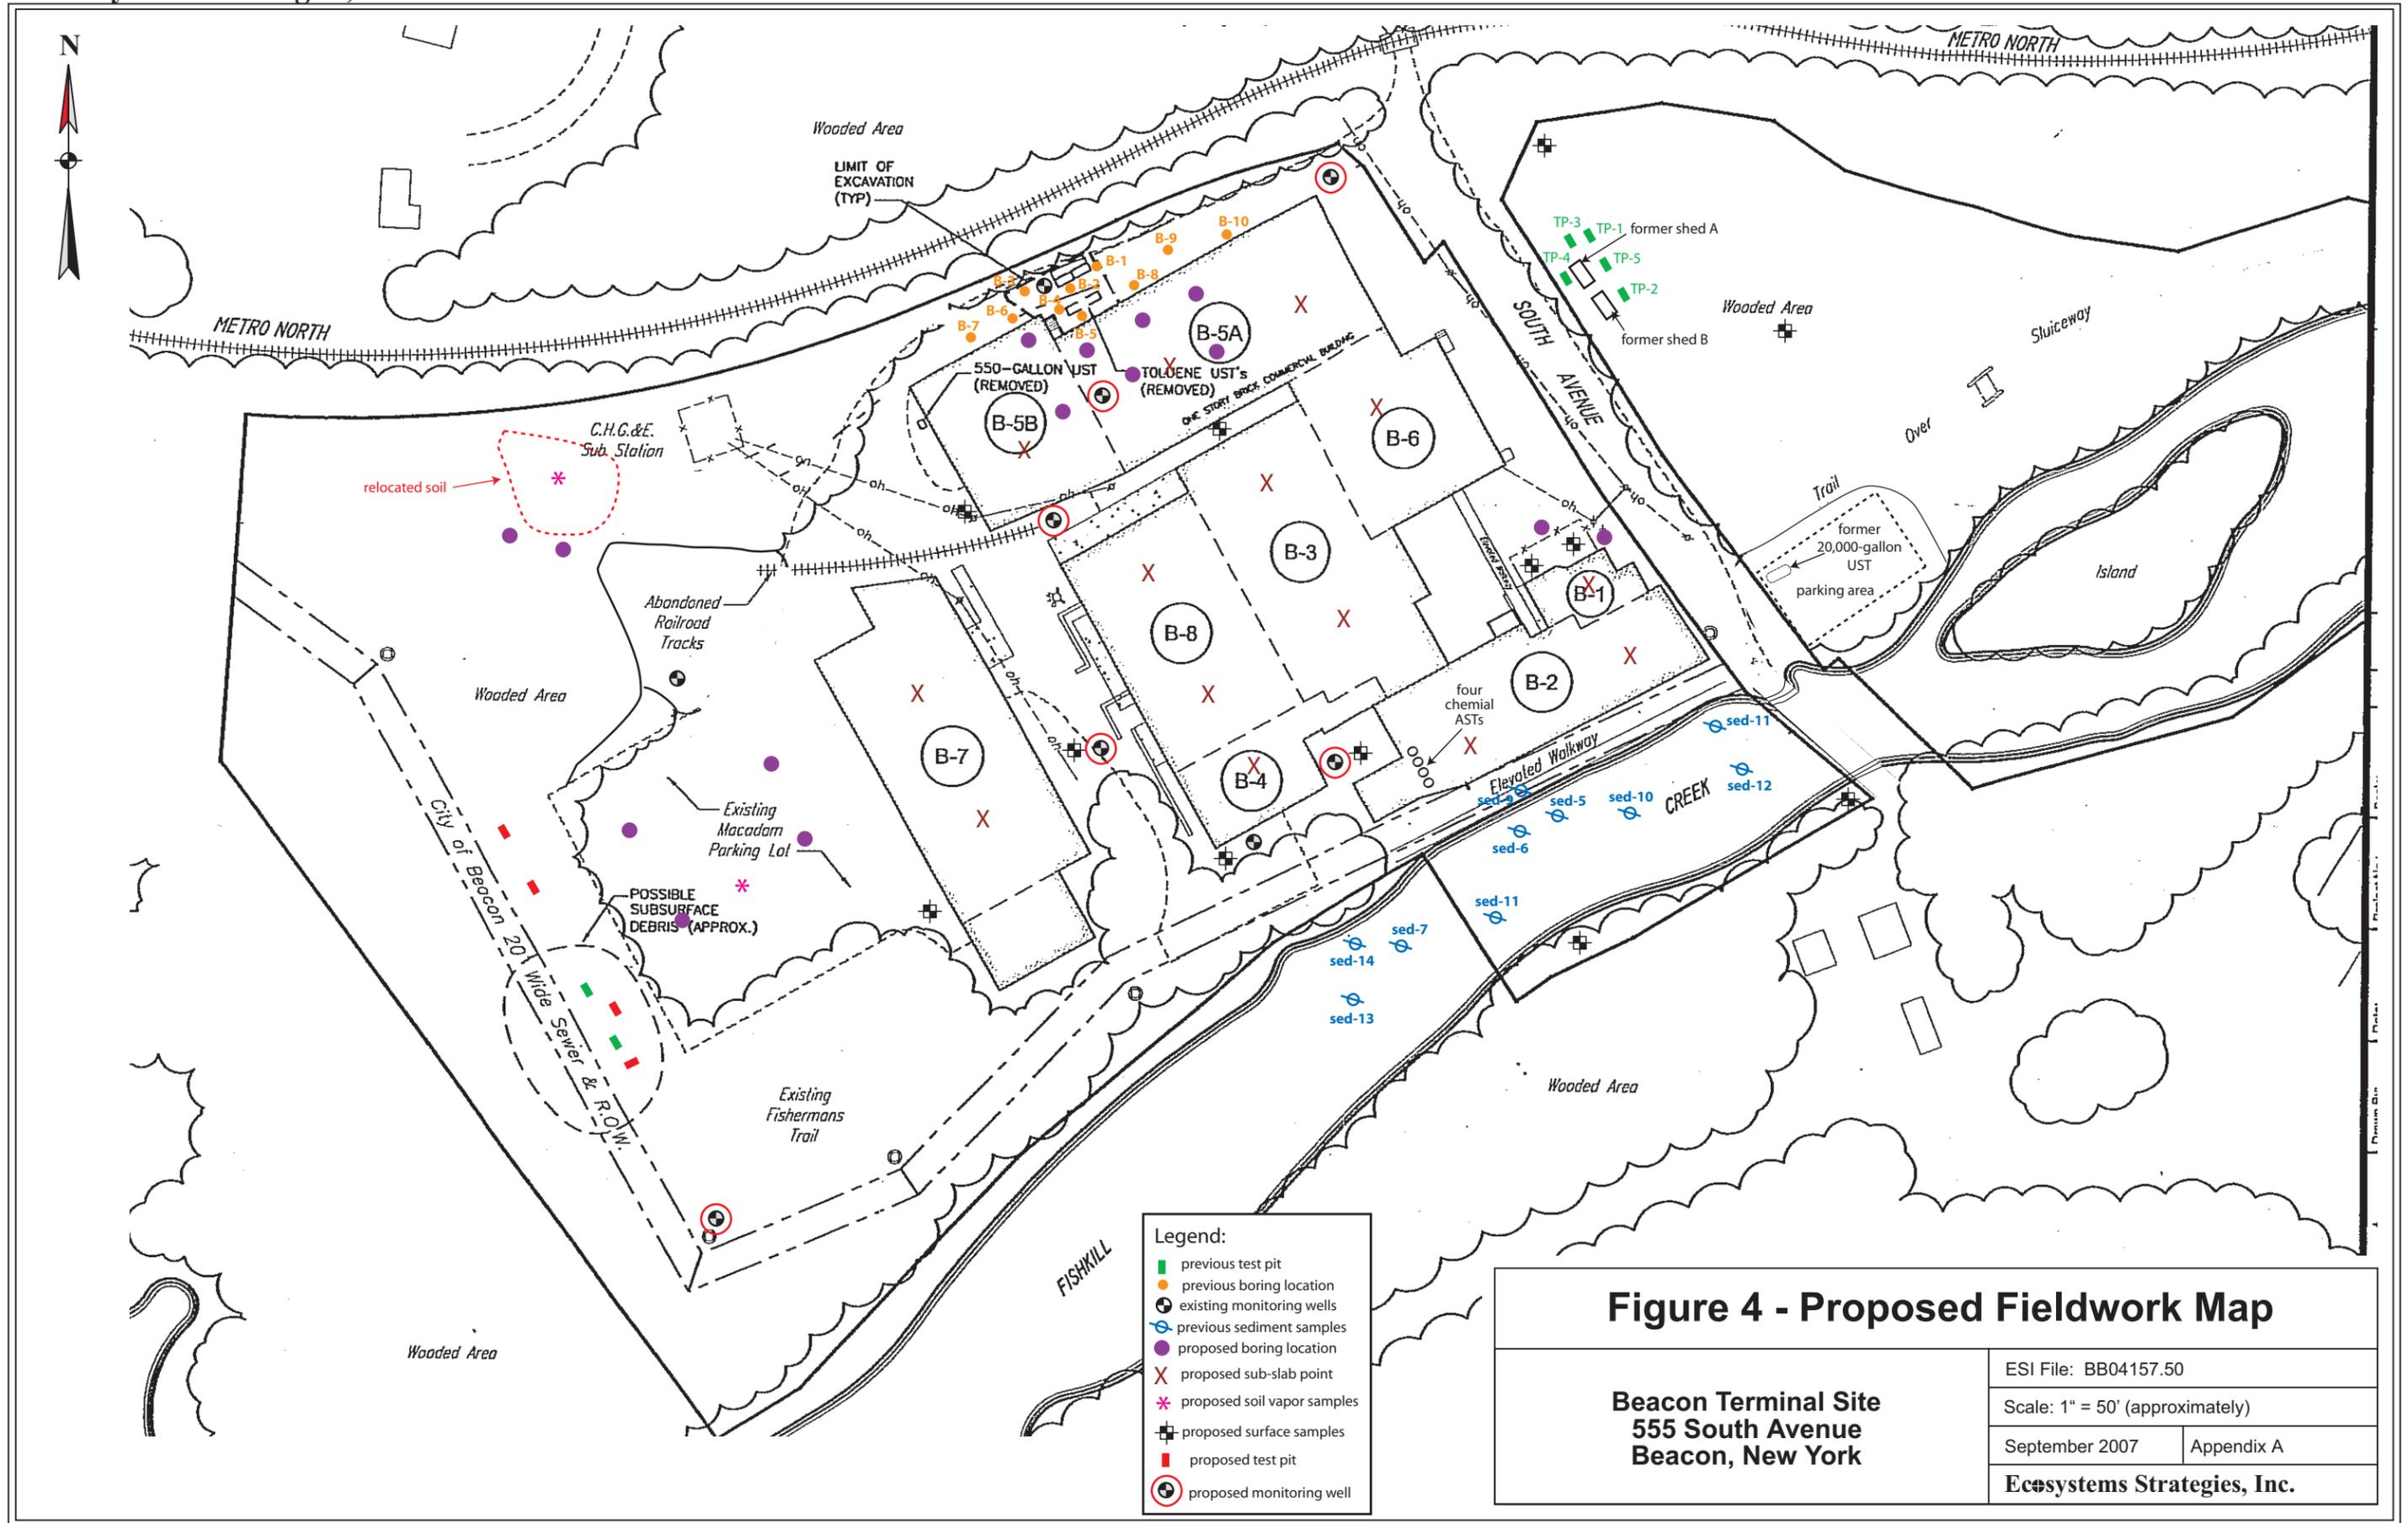

- Legend:**
- previous test pit
  - previous boring location
  - ⊕ existing monitoring wells
  - ⊕ previous sediment samples
  - proposed boring location
  - X proposed sub-slab point
  - \* proposed soil vapor samples
  - ⊕ proposed surface samples
  - proposed test pit
  - ⊕ proposed monitoring well

**Figure 4 - Proposed Fieldwork Map**

**Beacon Terminal Site  
555 South Avenue  
Beacon, New York**

ESI File: BB04157.50	
Scale: 1" = 50' (approximately)	
September 2007	Appendix A
Ecosystems Strategies, Inc.	

**APPENDIX B**  
**Health & Safety Plan**

# **HEALTH AND SAFETY PLAN**

**FOR**

## **SITE INVESTIGATION**

**(INCORPORATING COMMUNITY HEALTH AND SAFETY PLAN)**

### **Beacon Terminal Site**

**555 South Avenue  
City of Beacon  
Dutchess County, New York**

**NYSDEC Brownfields Cleanup Program Site ID: C314117**

**September 2007  
ESI File: BB04157.50**

**Prepared By**

**ECOSYSTEMS STRATEGIES, INC.  
24 Davis Avenue  
Poughkeepsie, New York 12603  
(845) 452-1658**

**TABLE OF CONTENTS**

1.0 INTRODUCTION ..... 1  
1.1 Purpose  
1.2 Site Location and Description  
1.3 Work Activities

2.0 HEALTH AND SAFETY HAZARDS ..... 2  
2.1 Hazard Overview for On-site Personnel  
2.2 Potential Hazards to the Public from Fieldwork Activities

3.0 PERSONAL PROTECTIVE EQUIPMENT ..... 2

4.0 CONTAMINANT CONTROL ..... 3

5.0 MONITORING AND ACTION LEVELS ..... 3

6.0 SITE ACCESS AND CONTROL ..... 3

7.0 NOISE CONTROL ..... 3

8.0 PERSONNEL TRAINING ..... 3

9.0 DECONTAMINATION ..... 4

10.0 EMERGENCY RESPONSE ..... 4  
10.1 Notification of Site Emergencies  
10.2 Responsibilities  
10.3 Accidents and Injuries  
10.4 Communication  
10.5 Safe Refuge  
10.6 Site Security and Control  
10.7 Emergency Evacuation  
10.8 Resuming Work  
10.9 Fire Fighting Procedures  
10.10 Emergency Decontamination Procedure  
10.11 Emergency Equipment

11.0 SPECIAL PRECAUTIONS AND PROCEDURES ..... 6  
11.1 Heat/Cold Stress  
11.2 Heavy Equipment  
11.3 Additional Safety Practices  
11.4 Daily Log Contents

12.0 TABLE AND FIGURES ..... 8

Table 1:Emergency Response Telephone Numbers

Figure 1: Directions to Hospital

Figure 2: Map to Hospital

**ATTACHMENTS**

*Site Location Map*

*Proposed Fieldwork Map*

## **1.0 INTRODUCTION**

### **1.1 Purpose**

This Health and Safety Plan (HASP) has been developed to provide the requirements and general procedures to be followed by Ecosystems Strategies, Inc. (ESI) and designated subcontractors while performing site investigation activities at the “Beacon Terminal” Site located at 555 South Avenue, City of Beacon, Dutchess County, New York.

This HASP incorporates policies, guidelines, and procedures that have the objective of protecting the public health of the community during the performance of fieldwork activities, and therefore serves as a Community Health and Safety Plan (CHASP). The objectives of the CHASP are met by establishing guidelines to minimize community exposure to hazards during fieldwork, and by planning for and responding to emergencies affecting the public.

This HASP describes the responsibilities, training requirements, protective equipment, and standard operating procedures to be utilized by all personnel while on the Site. This HASP incorporates by reference the applicable Occupational Safety and Health Administration (OSHA) requirements in 29 CFR 1910 and 29 CFR 1926.

The requirements and guidelines in this HASP are based on a review of available information and evaluation of potential on-site hazards. This HASP will be discussed with Site personnel and will be available on-site for review while work is underway. On-site personnel will report to the Site Safety and Health Officer (SSHO) in matters of health and safety. The on-site project supervisor(s) are responsible for enforcement and implementation of this HASP.

This HASP is specifically intended for the conduct of activities within the defined scope of work in specified areas of the Site. Changes in site conditions and future actions that may be conducted at this site may necessitate the modification of the requirements of the HASP. Although this HASP can be made available to interested persons for informational purposes, ESI has no responsibility over the interpretations or activities of any other persons or entities other than employees of ESI and designated subcontractors to ESI.

### **1.2 Site Location and Description**

The Site as defined in this HASP is the Beacon Terminal Site, located at 555 South Avenue in the City of Beacon. A Site Location Map and a Proposed Fieldwork Map (illustrating the configuration of the Site as well as the areas of proposed investigative activities) are included in the Attachments of this HASP.

### **1.3 Work Activities**

Environmental investigation activities are detailed in the Draft Remedial Investigation Work Plan (RIWP) dated September 2007. The specific tasks detailed in the RIWP are wholly incorporated by reference into this HASP. The RIWP was prepared as a requirement of the Developers participation in the New York State Department of Environmental Conservation (NYSDEC) Brownfields Cleanup Program (BCP), and describes investigative tasks required to adequately characterize on-site environmental conditions. Existing and suspected contamination includes hydrocarbon and metals impacted soils, groundwater and vapor.

The following field tasks will be performed:

- Investigation and sampling of soils using hand-held and mechanized boring equipment, and (as necessary) excavation machinery;
- Investigation of soil gas at selected boring locations; and,
- Installation and sampling of groundwater-monitoring wells at selected boring locations.

## **2.0 HEALTH AND SAFETY HAZARDS**

### **2.1 Hazard Overview for On-site Personnel**

The potential exists for the presence of elevated levels of hydrocarbons and metals in on-site soils and in groundwater. The possibility exists for on-site personnel to have contact with contaminated soils, groundwater, and vapor during site investigative work. Contact with contaminated substances may present a skin contact, inhalation, and/or ingestion hazard. These potential hazards are addressed in Sections 3.0 through 11.0, below.

### **2.2 Potential Hazards to the Public from Fieldwork Activities**

The potential exists for the public to be exposed to identified contaminated soils, groundwater, and vapor, which may present a skin contact, inhalation, and/or ingestion hazard. Additional potential hazards to the public that are associated with fieldwork activities include mechanical/physical hazards, traffic hazards from fieldwork vehicles, and noise impacts associated with operation of mechanical equipment.

Impacts to public health and safety are expected to be limited to hazards that could directly affect on-site visitors and/or trespassers. These effects will be mitigated through site access and control measures (see Section 6.0, below). Specific actions taken to protect the public health (presented in Sections 3.0 through 11, below, and in the Community Air Monitoring Plan) are anticipated to minimize any potential off-site impacts from contaminant migration, noise, and traffic hazards.

## **3.0 PERSONAL PROTECTIVE EQUIPMENT**

The levels of protection identified for the services specified in the RIWP represent a best estimate of exposure potential and protective equipment needed for that exposure. Determination of levels was based on data provided by previous studies of the Site and information reviewed on current and past Site usage. The SSHO may recommend revisions to these levels based on an assessment of actual exposures.

The level of protective clothing and equipment selected for this project is Level D. Workers will wear Level D protective clothing including, but not limited to, a hard hat, steel-toed boots, latex gloves (when handling soils and/or groundwater), and safety goggles (when decontaminating equipment). Personal protective equipment (PPE) will be worn at all times, as designated by this HASP. The requirement for the use of PPE by official on-site visitors shall be determined by the SSHO. All on-site visitors shall, at a minimum, be required to wear an approved hardhat and be provided with appropriate hearing protection as necessary.

The need for an upgrade in PPE will be determined based upon encountered Site conditions, including measurements taken in the breathing zone of the work area using a photo-ionization detector (PID). An upgrade to a higher level of protection will begin when PID readings above specified limits are measured, or as otherwise required by the SSHO (see Section 5.0, below).

If any equipment fails and/or any employee experiences a failure or other alteration of their protective equipment that may affect its protective ability, that person will immediately leave the work area. The Project Manager and the SSHO will be notified and, after reviewing the situation, determine the effect of the failure on the continuation of on-going operations. If the failure affects the safety of personnel, the work site, or the surrounding environment, personnel will be evacuated until appropriate corrective actions have been taken.

## **4.0 CONTAMINANT CONTROL**

Precautions will be taken during dry weather (e.g., wetting or covering exposed soils) to avoid generating and breathing dust-generated from soils. A PID and a Dust Trak® dust monitor (or equivalent equipment) will be used to monitor potential contaminant levels. Response to the monitoring will be in accordance with the action levels provided in Section 5.0.

## **5.0 MONITORING AND ACTION LEVELS**

Concentrations of petroleum hydrocarbons and metals in the air are expected to be below the OSHA Permissible Exposure Limits (PELs). A Community Air Monitoring Plan (CAMP) will be implemented for all fieldwork (a copy of the CAMP is provided as an appendix to the RIWP). Air monitoring will be conducted for VOCs and dust. Monitoring will be conducted at all times that fieldwork activities which are likely to generate emissions are occurring. PID readings consistently in excess of 5 ppm, and dust levels in excess of 150 ug/m<sup>3</sup> will be used as an indication of the need to initiate personnel monitoring, increase worker protective measures, and/or modify or cease on-site operations in order to mitigate off-site community exposure.

PID and/or dust readings that consistently exceed background in the breathing zone (during any of the proposed tasks) will necessitate moving away from the source or implementing a higher PPE level.

## **6.0 SITE ACCESS AND CONTROL**

Site control procedures will be established to reduce the possibility of worker/visitor contact with compounds present in the soil, to protect the public in the area surrounding the Site and to limit access to the Site to only those persons required to be in the work zone. Notices will be placed near the Site warning the public not to enter fieldwork areas and directing visitors to report to the Project Manager or SSHO. Measures will be taken to limit the entry of unauthorized personnel into the specific areas of field activity and to safely direct and control all vehicular traffic in and near the Site (e.g., placement of traffic cones and warning tape).

## **7.0 NOISE CONTROL**

All fieldwork activities will be conducted in a manner designed to reduce unnecessary noise generation, and to minimize the potential for both on-site and off-site harmful noise levels. The Project Manager and SSHO will establish noise reduction procedures (as appropriate to the Site and the work) to meet these requirements.

## **8.0 PERSONNEL TRAINING**

Work zones that will accomplish the general objective stated above will be established by the Project Manager and the SSHO. Site access will be monitored by the SSHO, who will maintain a log-in sheet for personnel that will include, at the minimum, personnel on the Site, their arrival and departure times, and their destination on the Site. All workers will be properly trained in accordance with OSHA requirements (29 CFR 1910). Personnel exiting the work zone(s) will be decontaminated prior to exiting the Site.

Site-specific training will be provided to each employee. Personnel will be briefed by the SSHO as to the potential hazards to be encountered. Topics will include:

- Availability of this HASP;
- General site hazards and specific hazards in the work areas, including those attributable to known or suspect on-site contaminants;
- Selection, use, testing, and care of the body, eye, hand, and foot protection being worn, with the limitations of each;
- Decontamination procedures for personnel, their personal protective equipment, and other equipment used on the Site;
- Emergency response procedures and requirements;
- Emergency alarm systems and other forms of notification, and evacuation routes to be followed; and,
- Methods to obtain emergency assistance and medical attention.

## **9.0 DECONTAMINATION**

The SSHO will establish a decontamination system and decontamination procedures (appropriate to the Site and the work) that will prevent potentially hazardous materials from leaving the Site. Trucks will be brushed to remove materials adhering to their surfaces. Sampling equipment will be segregated and, after decontamination, stored separately from splash protection equipment. Decontaminated or clean sampling equipment not in use will be covered with plastic and stored in a designated storage area in the work zone.

## **10.0 EMERGENCY RESPONSE**

### **10.1 Notification of Site Emergencies**

In the event of an emergency, the SSHO will be immediately notified of the nature and extent of the emergency (the names and contact information for key site safety and management personnel, as well as other site safety contact telephone numbers, shall be posted at the Site).

Table 1 in this HASP contains Emergency Response Telephone Numbers, and immediately following is a map detailing the directions to the nearest hospital emergency room. This information will be maintained at the work Site by the SSHO. The location of the nearest telephone will be determined prior to the initiation of on-site activities. In addition to any permanent phone lines, a cellular phone will be available.

### **10.2 Responsibilities**

Prior to the initiation of on-site work activities, the SSHO will:

- Notify individuals, authorities, and/or health care facilities of the potentially hazardous activities and potential wastes that may develop as a result of the investigation.
- Confirm that first aid supplies and a fire extinguisher are available on-site.
- Have a working knowledge of safety equipment available.
- Confirm that a map detailing the most direct route to the hospital is prominently posted with the emergency telephone numbers.

The SSHO will be responsible for directing notification, response, and follow-up actions and for contacting outside response personnel (ambulance, fire department, or others). In the case of an evacuation, the SSHO will account for personnel. A log of individuals entering and leaving the Site will be kept so that everyone can be accounted for in an emergency.

Upon notification of an exposure incident, the SSHO will contact the appropriate emergency response personnel for recommended medical diagnosis and, if necessary, treatment. The SSHO will determine whether and at what levels exposure actually occurred, the cause of such exposure, and the means to prevent similar incidents from occurring.

### **10.3 Accidents and Injuries**

In the event of an accident or injury, measures will be taken to assist those who have been injured or exposed and to protect others from hazards. If an individual is transported to a hospital or doctor, a copy of the HASP will accompany the individual.

The SSHO will be notified and will respond according to the severity of the incident. The SSHO will perform an investigation of the incident and prepare a signed and dated report documenting the investigation. An exposure-incident report will also be completed by the SSHO and the exposed individual. The form will be filed with the employee's medical and safety records to serve as documentation of the incident and the actions taken.

### **10.4 Communication**

No special hand signals will be utilized within the work zone. Field personnel will utilize standard hand signals during the operation of heavy equipment.

### **10.5 Safe Refuge**

Vehicles and on-site structures will serve as the immediate place of refuge in the event of an emergency. If evacuation from the area is necessary, project vehicles will be used to transport on-site personnel to safety.

### **10.6 Site Security and Control**

Site security and control during emergencies, accidents, and incidents will be monitored by the SSHO. The SSHO is responsible for limiting access to the Site to authorized personnel and for oversight of reaction activities.

### **10.7 Emergency Evacuation**

In case of an emergency, personnel will evacuate to the safe refuge identified by the SSHO, both for their personal safety and to prevent the hampering of response/rescue efforts.

### **10.8 Resuming Work**

A determination that it is safe to return to work will be made by the SSHO and/or any personnel assisting in the emergency, e.g., fire department, police department, utility company, etc. No personnel will be allowed to return to the work areas until a full determination has been made by the above-identified personnel that all field activities can continue unobstructed. Such a determination will depend upon the nature of the emergency (e.g., downed power lines -- removal of all lines from the property; fire -- extinguished fire; injury -- safe transport of the injured party to a medical facility with either assurance of acceptable medical care present or completion of medical care; etc.).

Before on-site work is resumed following an emergency, necessary emergency equipment will be recharged, refilled, or replaced. Government agencies will be notified as appropriate. An Incident Report Form will be filed.

## **10.9 Fire Fighting Procedures**

A fire extinguisher will be available in the work zone during on-site activities. This extinguisher is intended for small fires. When a fire cannot be controlled with the extinguisher, the area will be evacuated immediately. The SSHO will be responsible for directing notification, response, and follow-up actions and for contacting ambulance and fire department personnel.

## **10.10 Emergency Decontamination Procedure**

The extent of emergency decontamination depends on the severity of the injury or illness and the nature of the contamination. Whenever possible, minimum decontamination will consist of washing, rinsing, and/or removal of contaminated outer clothing and equipment. If time does not permit decontamination, the person will be given first aid treatment and then wrapped in plastic or a blanket prior to transport.

## **10.11 Emergency Equipment**

The following on-site equipment for safety and emergency response will be maintained in the on-site vehicle of the SSHO:

- Fire extinguisher;
- First-aid kit; and,
- Extra copy of this Health and Safety Plan.

## **11.0 SPECIAL PRECAUTIONS AND PROCEDURES**

The activities associated with this investigation may involve potential risks of exposure to both chemical and physical hazards. The potential for chemical exposure to hazardous or regulated substances will be significantly reduced through the use of monitoring, personal protective clothing, engineering controls, and implementation of safe work practices.

### **11.1 Heat/Cold Stress**

Training in prevention of heat/cold stress will be provided as part of the site-specific training. The timing of this project is such that heat/cold stress may pose a threat to the health and safety of personnel.

Work/rest regimens will be employed, as necessary, so that personnel do not suffer adverse effects from heat/cold stress. Special clothing and appropriate diet and fluid intake regimens will be recommended to personnel to further reduce this temperature-related hazard. Rest periods will be recommended in the event of high/low temperatures and/or humidity to counter the negative effects of heat/cold stress.

### **11.2 Heavy Equipment**

Working in the vicinity of heavy equipment is the primary safety hazard at the Site. Physical hazards in working near heavy construction equipment include the following: overhead hazards, slips/trip/falls, hand and foot injuries, moving part hazards, improper lifting/back injuries, and noise. All workers will be properly trained in accordance with OSHA requirements (29 CFR 1910). No workers will be permitted within any excavated areas without proper personal protective equipment (PPE), including, as warranted, respirators, Tyvek suits and/or gloves. Air monitoring for VOCs will be conducted in accordance with the HASP and the Community Air Monitoring Plan (RIWP appendices E and F).

### **11.3 Additional Safety Practices**

The following are important safety precautions which will be enforced during this investigation:

- Medicine and alcohol can aggravate the effect of exposure to certain compounds. Controlled substances and alcoholic beverages will not be consumed during investigation activities. Consumption of prescribed drugs will only be at the discretion of a physician familiar with the person's work.
- Eating, drinking, chewing gum or tobacco, smoking, or other practices that increase the probability of hand-to-mouth transfer and ingestion of material is prohibited except in areas designated by the SSHO.
- Contact with potentially contaminated surfaces will be avoided whenever possible. Workers will not unnecessarily walk through puddles, mud, or other discolored surfaces; kneel on the ground; or lean, sit, or place equipment on drums, containers, vehicles, or the ground.
- Personnel and equipment in the work areas will be minimized, consistent with effective site operations.
- Unsafe equipment left unattended will be identified by a "DANGER, DO NOT OPERATE" tag.
- Work areas for various operational activities will be established.

### **11.4 Daily Log Contents**

The SSHO will establish a system appropriate to the Site, the work, and the work zones that will record, at a minimum, the following information:

- Personnel on the Site, their arrival and departure times, and their destination on the Site.
- Incidents and unusual activities that occur on the Site such as, but not limited to, accidents, spills, breaches of security, injuries, equipment failures, and weather-related problems.
- Changes to the HASP.
- Daily information generated such as: changes to work and health and safety plans; work accomplished and the current Site status; and monitoring results.

## 12.0 TABLE AND FIGURES

**Table 1: Emergency Response Telephone Numbers**

Emergency Agencies	Phone Numbers
<b>EMERGENCY</b>	<b>911</b>
St. Luke's Hospital 70 Dubois Street, Newburgh	(845) 561-4400
Beacon Police Department	(845) 831-4111 or 911
Beacon Fire Department	(845) 569-7415 or 911
Beacon City Hall	(845) 838-5000
Beacon City Water/Sewer	(845) 834-5008
Beacon Water and Sewer Maintenance Department	(845) 831-3136

**Figure 1: Directions to Hospital**




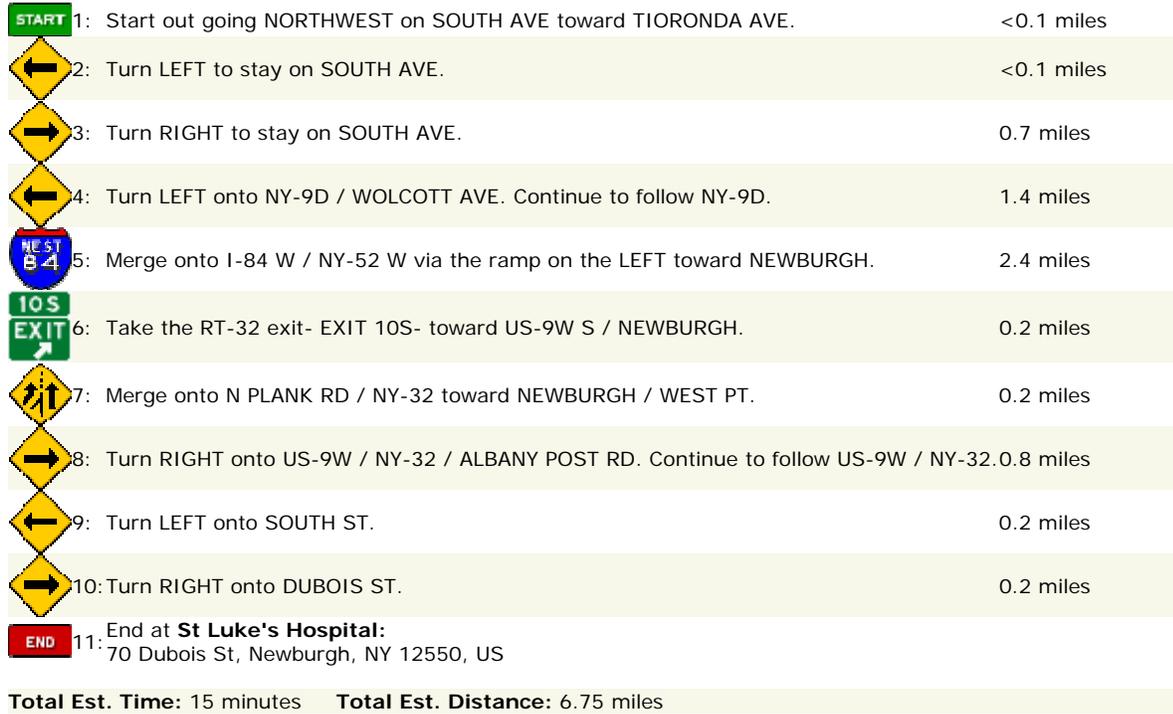


Figure 2: Map to Hospital (overview)

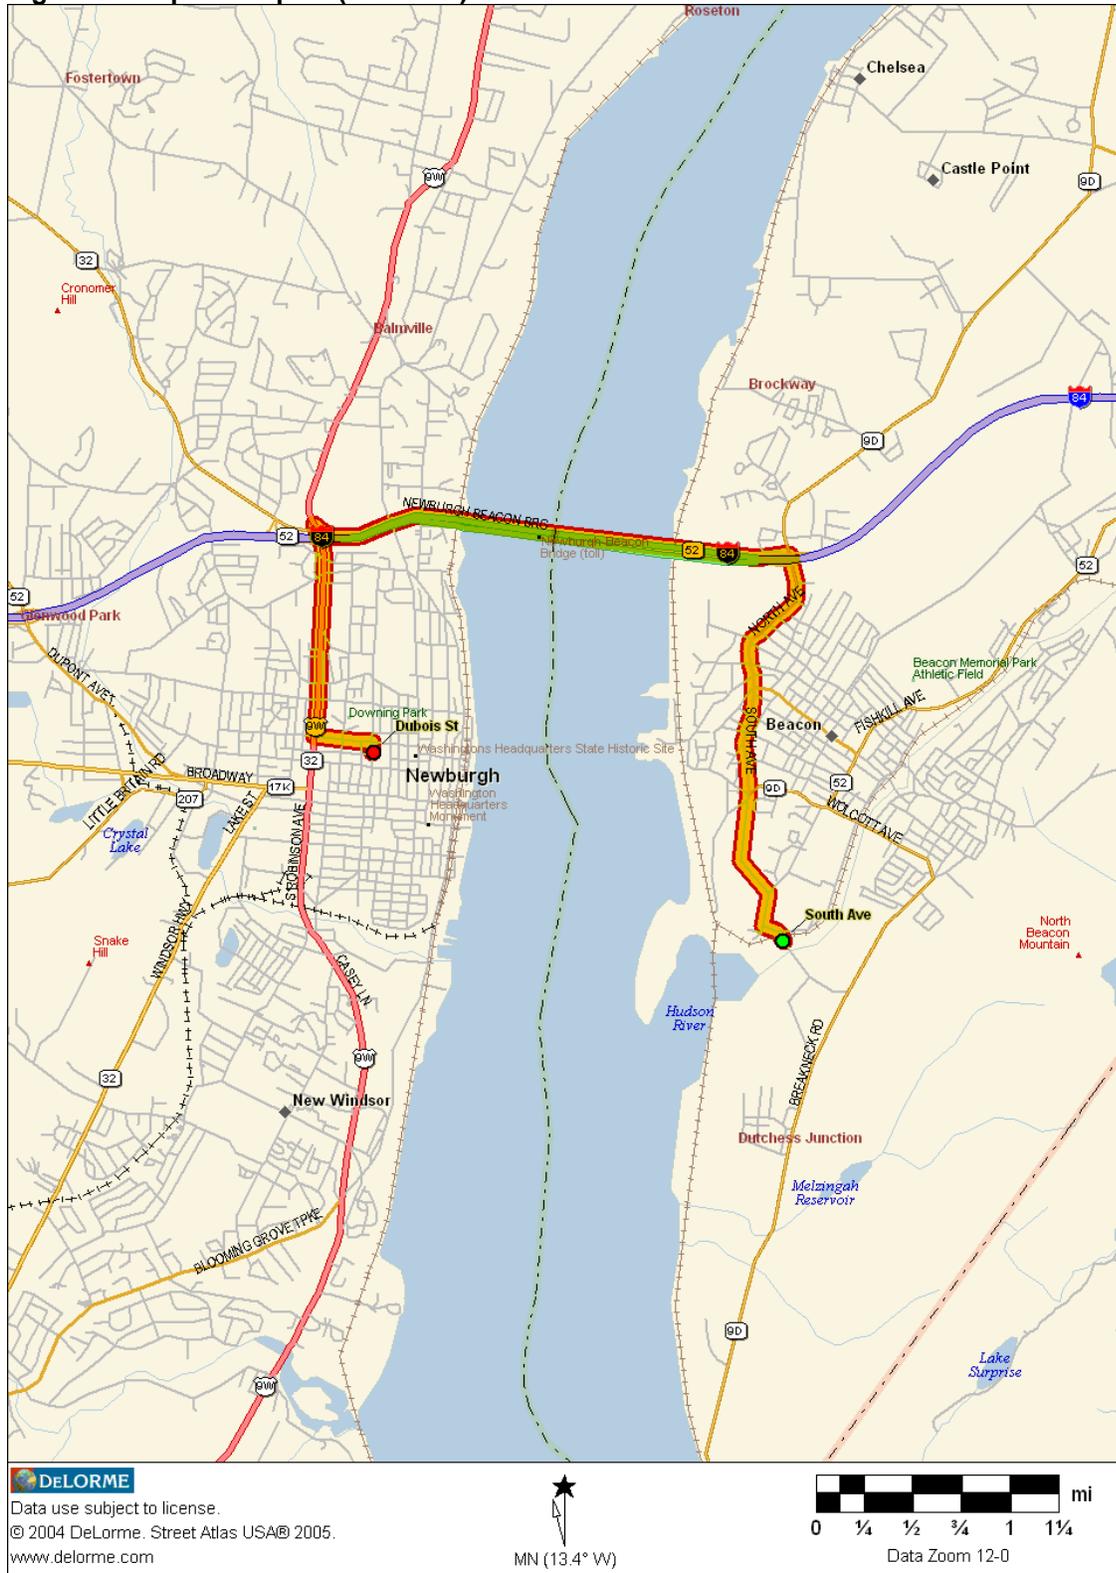

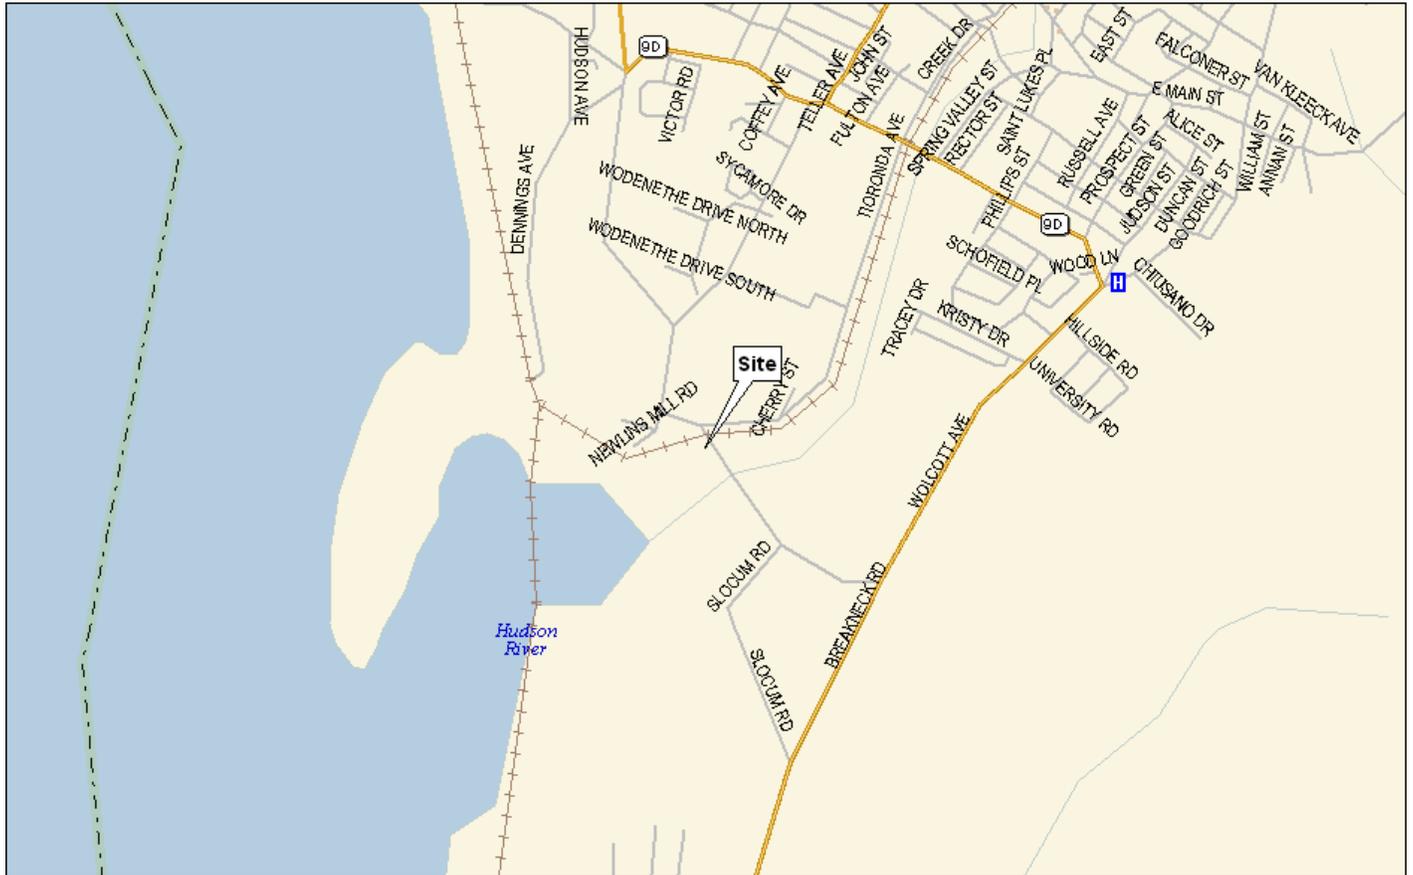

Data use subject to license.  
 © 2004 DeLorme, Street Atlas USA® 2005.  
 www.delorme.com




**Site Location Map**  
 Beacon Terminal Site  
 555 South Avenue  
 Beacon, New York



ESI File: BB04157.50

Date: October 2007

Attachment

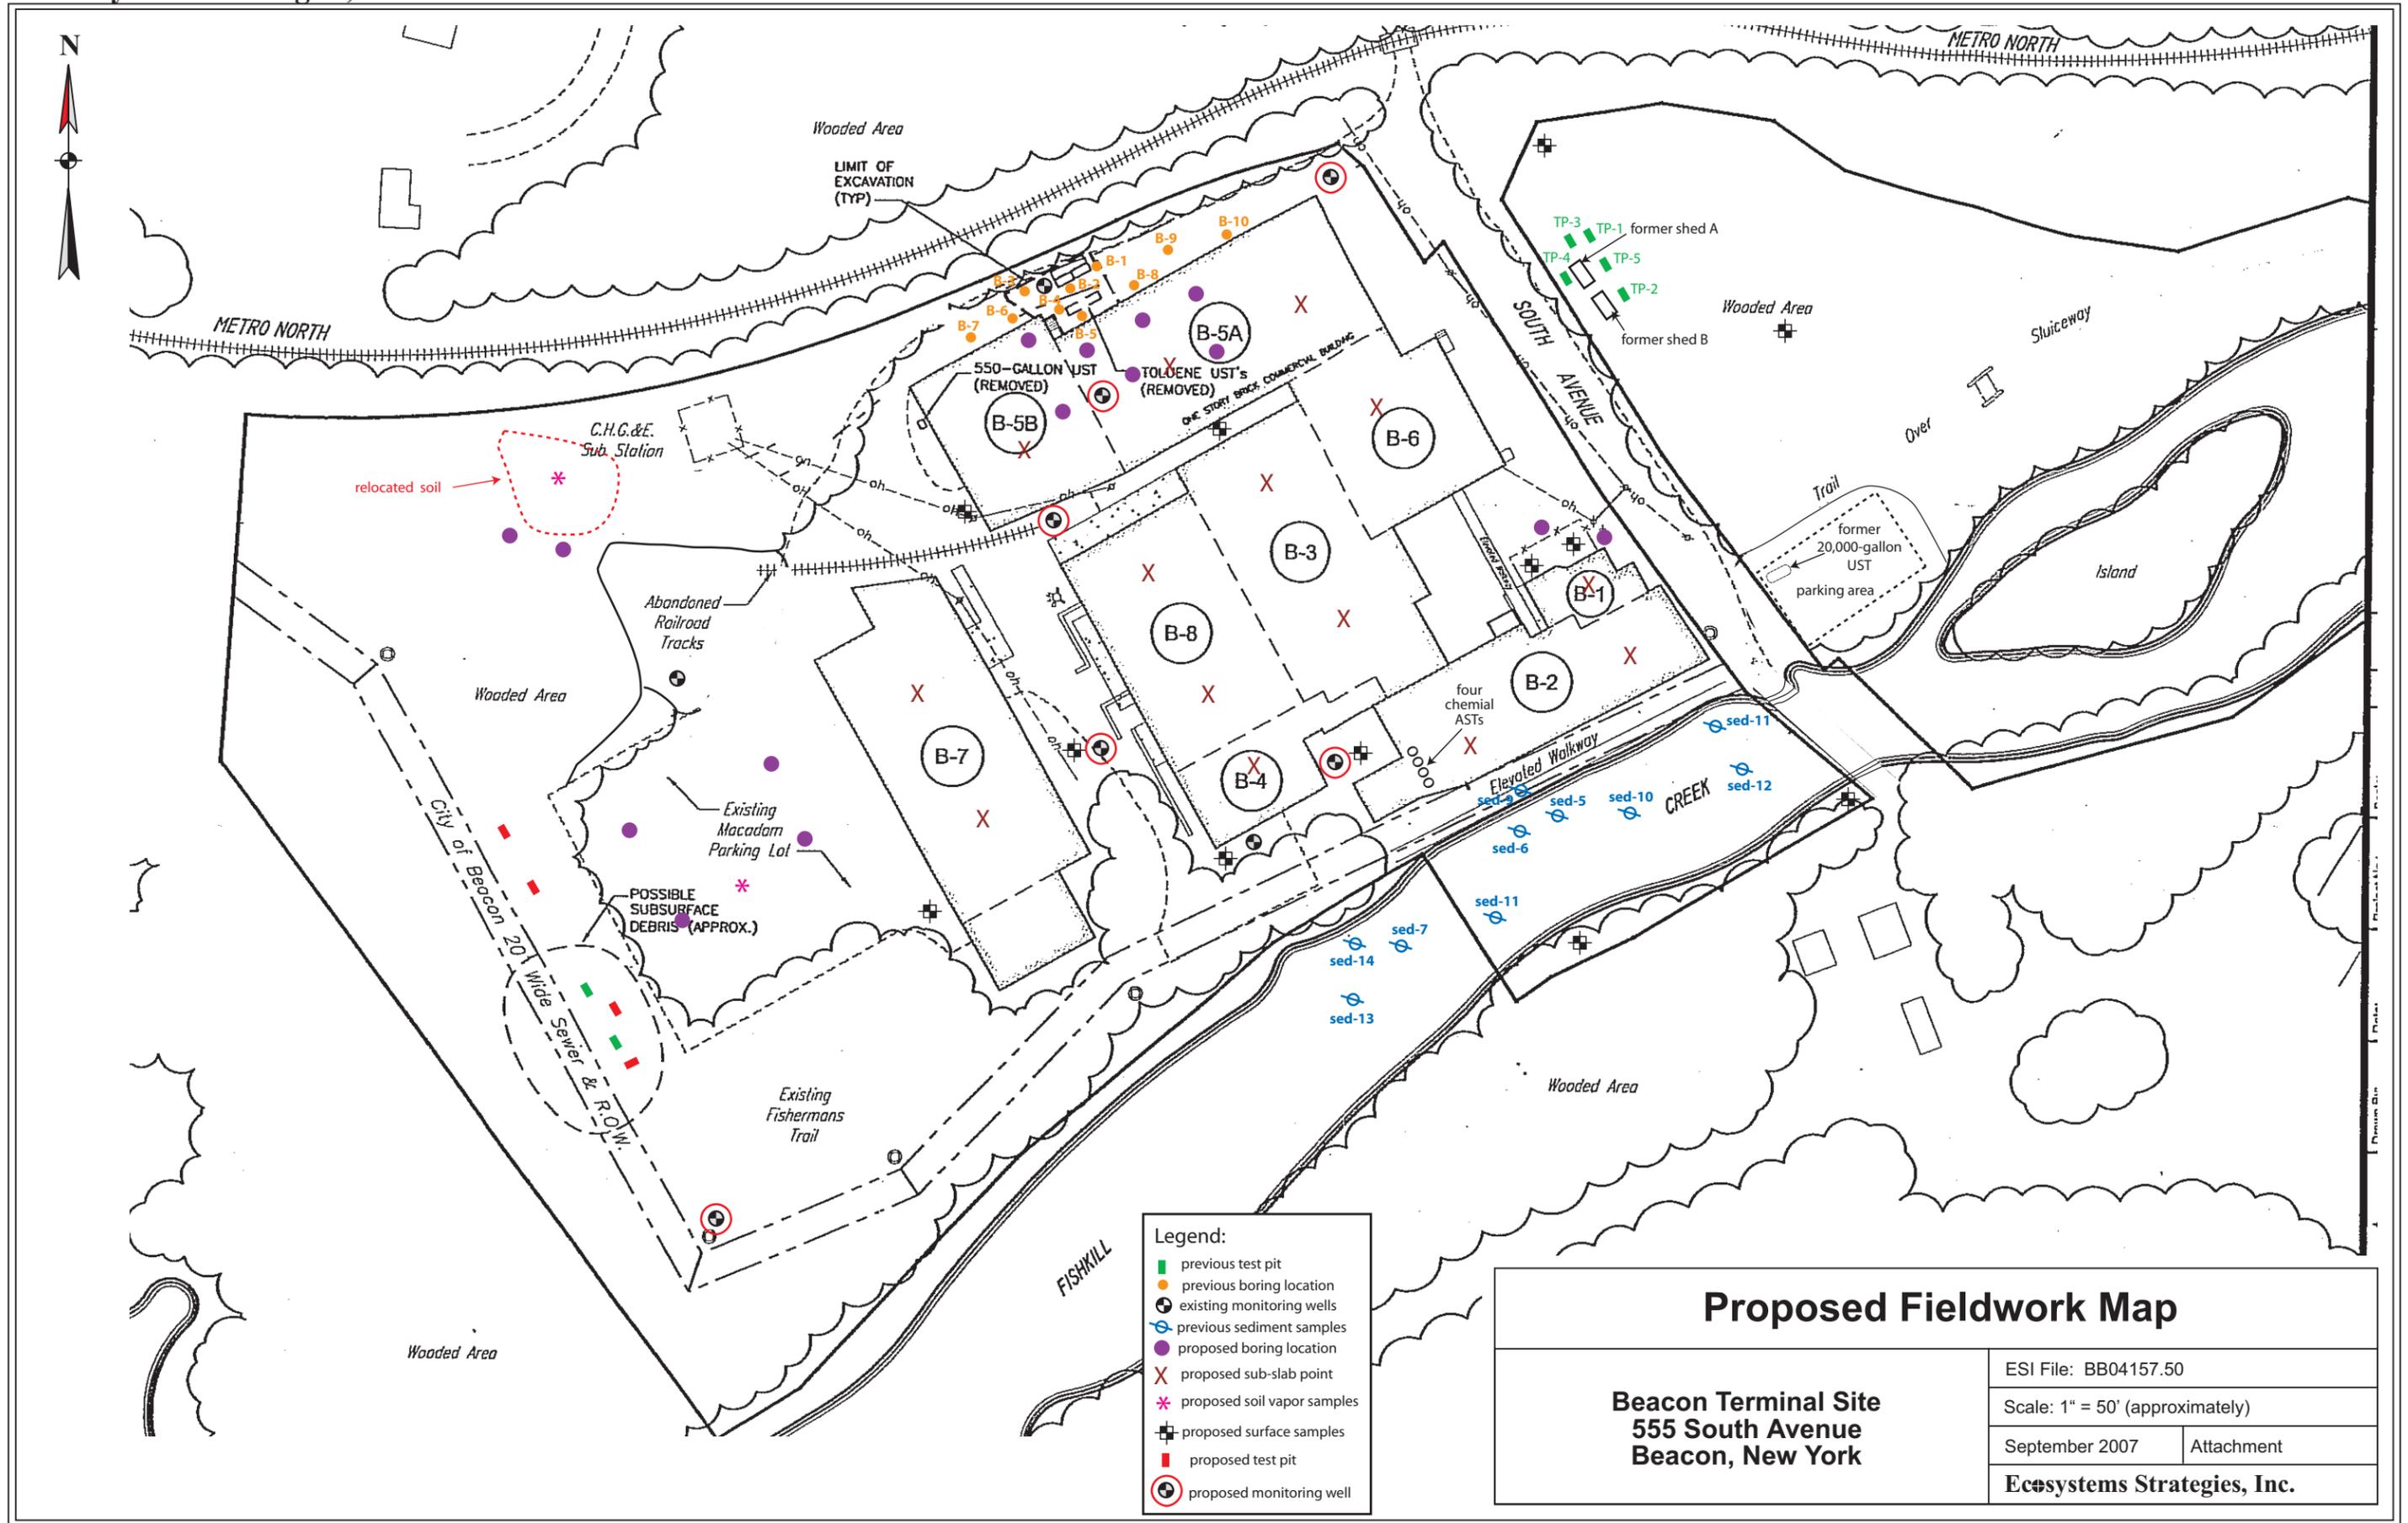

- Legend:**
- previous test pit
  - previous boring location
  - ⊕ existing monitoring wells
  - ⊕ previous sediment samples
  - proposed boring location
  - X proposed sub-slab point
  - \* proposed soil vapor samples
  - ⊕ proposed surface samples
  - proposed test pit
  - ⊕ proposed monitoring well

<b>Proposed Fieldwork Map</b>	
<b>Beacon Terminal Site 555 South Avenue Beacon, New York</b>	
ESI File: BB04157.50	
Scale: 1" = 50' (approximately)	
September 2007	Attachment
<b>Ecosystems Strategies, Inc.</b>	

**APPENDIX C**

**Community Air Monitoring Plan**

**COMMUNITY AIR MONITORING PLAN FOR SITE INVESTIGATIVE ACTIVITIES**

**Beacon Terminal Site  
555 South Ave  
City of Beacon  
Dutchess County, New York  
ESI File: BB04157**

Real-time air monitoring for volatile organic compounds (VOCs) and dust at the perimeter of the exclusion zone or work area will be necessary.

Dust will be monitored at three locations on the Site: two downwind locations at the property line, and one upwind location at the property line. Specific locations will change daily, depending on the work being conducted and the direction of the wind. Monitoring for dust will be conducted using a digital dust indicator, or equivalent equipment, capable of documenting the presence of dust with particle sizes up to 15 microns. Dust levels in excess of 150 ug/m<sup>3</sup> will be evidence of unacceptable air quality, and proper procedures to reduce dust levels will be immediately instituted by the contractor. Ameliorative procedures may include reducing the surface area of contaminated soil being disturbed at one time, watering exposed soils to reduce fugitive odors, use of suppression substances, or stopping excavation activities.

Periodic monitoring for VOCs will be required during all ground intrusive activities (e.g., test pitting and the installation of soil borings an/or monitoring wells), and during the collection of soil, and groundwater samples. Periodic monitoring might reasonably consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. In some instances, depending upon the proximity of potentially exposed individuals, continuous monitoring may be required during sampling activities. Examples of such situations include groundwater sampling near roadways or occupied on-site buildings.

**VOC Monitoring, Response Levels, and Actions**

VOCs must be periodically monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone). Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work should be performed using a photoionization detector (PID) that has been properly calibrated at least daily.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background.
- If the persistent organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.

All PID readings must be recorded and be available for New York State Department of Environmental Conservation (NYSDEC) and New York State Department of Health (NYSDOH) personnel to review.