

**60-Day Advance Notification of Site Change of Use, Transfer of
Certificate of Completion, and/or Ownership**

Required by 6NYCRR Part 375-1.11(d) and 375-1.9(f)

To be submitted at least 60 days prior to change of use to:

Chief, Site Control Section
New York State Department of Environmental Conservation
Division of Environmental Remediation, 625 Broadway
Albany NY 12233-7020

I. Site Name: Gowanus Green **DEC Site ID No.** C224012

II. Contact Information of Person Submitting Notification:

Name: Gerald Nicholls
Address1: 360 West 31st Street, 8th Floor
Address2: New York, NY 10001
Phone: (212) 479-5499 E-mail: gnicholls@langan.com

III. Type of Change and Date: Indicate the Type of Change(s) (check all that apply):

- ☐ Change in Ownership or Change in Remedial Party(ies)
☐ Transfer of Certificate of Completion (CoC)
☒ Other (e.g., any physical alteration or other change of use)

Proposed Date of Change (mm/dd/yyyy): 4/29/2024**IV. Description:** Describe proposed change(s) indicated above and attach maps, drawings, and/or parcel information.

The proposed subsurface investigation consists of geotechnical borings and test pits intended to refine the design parameters for future remediation/development. Proposed boring and test pit locations are included as Attachment A. The subsurface investigation will be performed in compliance with the Excavation Work Plan (EWP), included as Attachment B. The investigation will be completed under the direct supervision of a Langan field engineer and the following compliance activities will be performed at the site:

- Soil/fill will be screened using visual, olfactory, and instrumental methods using a photoionization detector (PID)
- Soil/fill generated from the proposed test pits will be temporarily stockpiled adjacent to each work area to allow for the documentation of subsurface conditions prior to being backfilled into the original excavation areas.
- Soil/fill and fluids generated from the geotechnical subsurface investigation will be containerized in United Nations/Department of Transportation (UN/DOT)-approved steel drums for waste characterization and off-site disposal at a permitted disposal facility in accordance with the EWP.
- Each borehole will be filled using clean grout from the boring termination depth to surface grade.

The subsurface investigation will be completed in accordance with the procedures specified in Langan's Health and Safety Plan (HASP), included as Attachment C, and the Community Air Monitoring Plan, included as Attachment D. The subsurface investigation is a temporary activity, and as such, will not compromise the site's ongoing remedial program. The investigation is anticipated to require up to 30 days to complete.

V. Certification Statement: Where the change of use results in a change in ownership or in responsibility for the proposed, ongoing, or completed remedial program for the site, the following certification must be completed (by owner or designated representative; see §375-1.11(d)(3)(i)):

I hereby certify that the prospective purchaser and/or remedial party has been provided a copy of any order, agreement, Site Management Plan, or State Assistance Contract regarding the Site's remedial program as well as a copy of all approved remedial work plans and reports.

Name: _____
(Signature)

(Date)

(Print Name)

Address1:

Address2:

Phone: _____ E-mail: _____

VI. Contact Information for New Owner, Remedial Party, or CoC Holder: If the site will be sold or there will be a new remedial party, identify the prospective owner(s) or party(ies) along with contact information. If the site is subject to an Environmental Easement, Deed Restriction, or Site Management Plan requiring periodic certification of institutional controls/engineering controls (IC/ECs), indicate who will be the certifying party (attach additional sheets if needed).

☐ Prospective Owner ☐ Prospective Remedial Party ☐ Prospective Owner Representative

Name: _____

Address1:

Address2:

Phone: _____ E-mail: _____

Certifying Party Name:

Address1:

Address2:

Phone: _____ E-mail: _____

VII. Agreement to Notify DEC after Transfer: If Section VI applies, and all or part of the site will be sold, a letter to notify the DEC of the completion of the transfer must be provided. If the current owner is also the holder of the CoC for the site, the CoC should be transferred to the new owner using DEC's form found at <http://www.dec.ny.gov/chemical/54736.html>. This form has its own filing requirements (see 6NYCRR Part 375-1.9(f)).

Signing below indicates that these notices will be provided to the DEC within the specified time frames. If the sale of the site also includes the transfer of a CoC, the DEC agrees to accept the notice given in VII.3 below in satisfaction of the notice required by VII.1 below (which normally must be submitted within 15 days of the sale of the site).

Within 30 days of the sale of the site, I agree to submit to the DEC:

1. the name and contact information for the new owner(s) (see §375-1.11(d)(3)(ii));
2. the name and contact information for any owner representative; and
3. a notice of transfer using the DEC's form found at <http://www.dec.ny.gov/chemical/54736.html> (see §375-1.9(f)).

Name: _____
(Signature)

(Date)

(Print Name)

Address1: _____

Address2: _____

Phone: _____ E-mail: _____

Continuation Sheet

☐ Prospective Owner/Holder ☐ Prospective Remedial Party ☐ Prospective Owner Representative
Name: _____
Address1: _____
Address2: _____
Phone: _____ E-mail: _____

☐ Prospective Owner/Holder ☐ Prospective Remedial Party ☐ Prospective Owner Representative
Name: _____
Address1: _____
Address2: _____
Phone: _____ E-mail: _____

☐ Prospective Owner/Holder ☐ Prospective Remedial Party ☐ Prospective Owner Representative
Name: _____
Address1: _____
Address2: _____
Phone: _____ E-mail: _____

☐ Prospective Owner/Holder ☐ Prospective Remedial Party ☐ Prospective Owner Representative
Name: _____
Address1: _____
Address2: _____
Phone: _____ E-mail: _____

☐ Prospective Owner/Holder ☐ Prospective Remedial Party ☐ Prospective Owner Representative
Name: _____
Address1: _____
Address2: _____
Phone: _____ E-mail: _____

☐ Prospective Owner/Holder ☐ Prospective Remedial Party ☐ Prospective Owner Representative
Name: _____
Address1: _____
Address2: _____
Phone: _____ E-mail: _____



Instructions for Completing the 60-Day Advance Notification of Site Change of Use, Transfer of Certificate of Completion (CoC), and/or Ownership Form

Submit to: Chief, Site Control Section, New York State Department of Environmental Conservation, Division of Environmental Remediation, 625 Broadway, Albany NY 12233-7020

Section I

Description

Site Name

Official DEC site name.
(see <http://www.dec.ny.gov/cfm/external/derexternal/index.cfm?pageid=3>)

DEC Site ID No.

DEC site identification number.

Section II

Contact Information of Person Submitting Notification

Name

Name of person submitting notification of site change of use, transfer of certificate of completion and/or ownership form.

Address1

Street address or P.O. box number of the person submitting notification.

Address2

City, state and zip code of the person submitting notification.

Phone

Phone number of the person submitting notification.

E-mail

E-mail address of the person submitting notification.

Section III

Type of Change and Date

Check Boxes

Check the appropriate box(s) for the type(s) of change about which you are notifying the Department. Check all that apply.

Proposed Date of Change

Date on which the change in ownership or remedial party, transfer of CoC, or other change is expected to occur.

Section IV

Description

Description

For each change checked in Section III, describe the proposed change.
Provide all applicable maps, drawings, and/or parcel information.
If "Other" is checked in Section III, explain how the change may affect the site's proposed, ongoing, or completed remedial program at the site.
Please attach additional sheets, if needed.

Section V Certification Statement

This section must be filled out if the change of use results in a change of ownership or responsibility for the proposed, ongoing, or completed remedial program for the site. When completed, it provides DEC with a certification that the prospective purchaser has been provided a copy of any order, agreement, or State assistance contract as well as a copy of all approved remedial work plans and reports.

Name	The owner of the site property or their designated representative must sign and date the certification statement. Print owner or designated representative's name on the line provided below the signature.
Address1	Owner or designated representative's street address or P.O. Box number.
Address2	Owner or designated representative's city, state and zip code.
Phone	Owner or designated representative's phone number.
E-Mail	Owner or designated representative's E-mail.

Section VI Contact Information for New Owner, Remedial Party, and CoC Holder (if a CoC was issued)

Fill out this section only if the site is to be sold or there will be a new remedial party. Check the appropriate box to indicate whether the information being provided is for a Prospective Owner, CoC Holder (if site was ever issued a COC), Prospective Remedial Party, or Prospective Owner Representative. Identify the prospective owner or party and include contact information. A Continuation Sheet is provided at the end of this form for additional owner/party information.

Name	Name of Prospective Owner, Prospective Remedial Party or Prospective Owner Representative.
Address1	Street address or P.O. Box number for the Prospective Owner, Prospective Remedial Party, or Prospective Owner Representative.
Address2	City, state and zip code for the Prospective Owner, Prospective Remedial Party, or Prospective Owner Representative.
Phone	Phone number for the Prospective Owner, Prospective Remedial Party or Prospective Owner Representative.
E-Mail	E-mail address of the Prospective Owner, Prospective Remedial Party or Prospective Owner Representative.

If the site is subject to an Environmental Easement, Deed Restriction, or Site Management Plan requiring periodic certification of institutional controls/engineering controls (IC/EC), indicate who will be the certifying party(ies). Attach additional sheets, if needed.

Certifying Party

Name Name of Certifying Party.

Address1 Certifying Party's street address or P.O. Box number.

Address2 Certifying Party's city, state and zip code.

Phone Certifying Party's Phone number.

E-Mail Certifying Party's E-mail address.

Section VII Agreement to Notify DEC After Property Transfer/Sale

This section must be filled out for all property transfers of all or part of the site. If the site also has a CoC, then the CoC shall be transferred using DEC's form found at <http://www.dec.ny.gov/chemical/54736.html>


Filling out and signing this section of the form indicates you will comply with the post transfer notifications within the required timeframes specified on the form. If a CoC has been issued for the site, the DEC will allow 30 days for the post transfer notification so that the "Notice of CoC Transfer Form" and proof of it's filing can be included. Normally the required post transfer notification must be submitted within 15 day (per 375-1.11(d)(3)(ii)) when no CoC is involved.

Name Current property owner must sign and date the form on the designated lines. Print owner's name on the line provided.


Address1 Current owner's street address.

Address2 Current owner's city, state and zip code.

ATTACHMENT A
SUBSURFACE INVESTIGATION PLANS

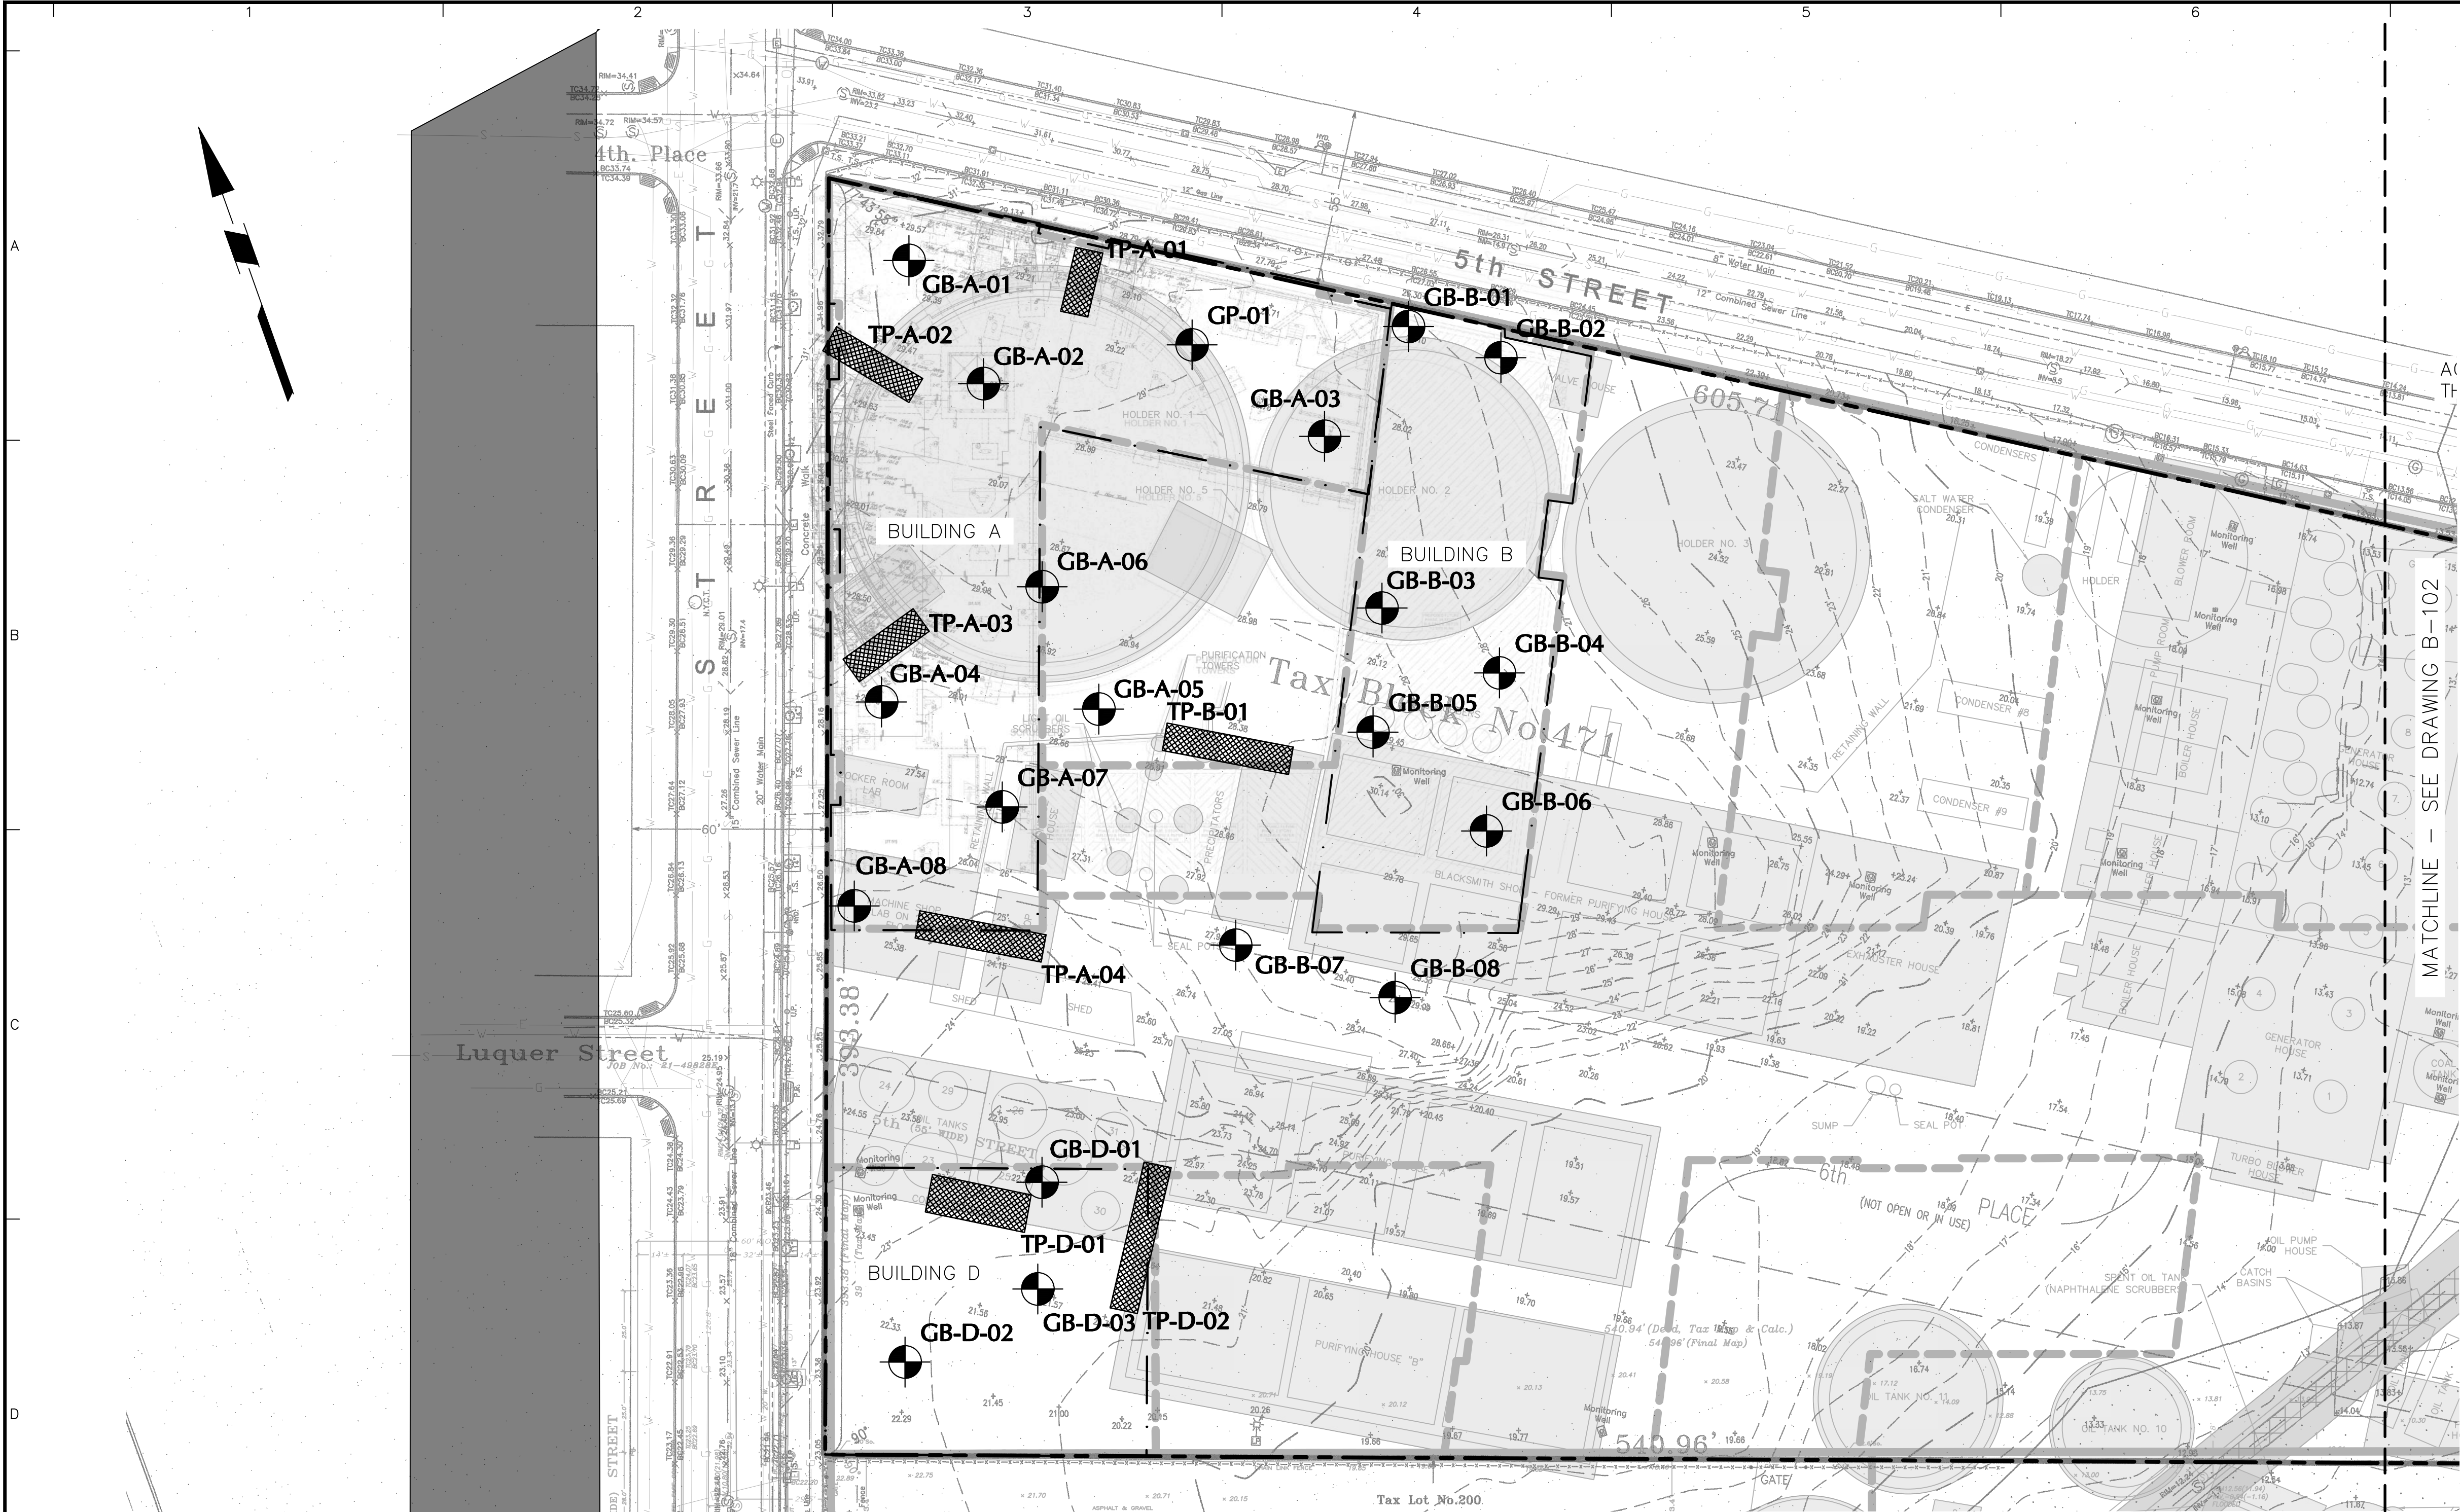

- LEGEND:
- GB-X-XX APPROXIMATE GEOTECHNICAL BORING LOCATION TO ABOUT 100 FT BGS
 - GP-XX APPROXIMATE LOCATION OF GEOTECHNICAL PROBE
 - CGXX-XX APPROXIMATE LOCATION OF HISTORIC BORING
 - TP-XX APPROXIMATE TEST PIT LOCATION TO ABOUT 5 FT BGS
 - TP-X-XX APPROXIMATE TES PIT TRENCH TO ABOUT 5 FT BGS
 - PROPERTY LINE
 - APPROXIMATE LOCATION OF COMBINED SEWER LINE



GENERAL NOTES:

- ALL ELEVATIONS SHOWN HEREIN REFERENCE THE NORTH AMERICAN VERTICAL DATUM OF 1988 (NAVD88), WHICH IS 98.453 FEET BELOW THE NEW YORK CITY TRANSIT DATUM.
- BASE PLANS TAKEN FROM DRAWING ENTITLED "ARCHITECTURAL SURVEY," PREPARED BY LEONARD J. STRANDBERG AND ASSOCIATES, CONSULTING ENGINEERS AND LAND SURVEYORS, P.C., LAST UPDATED AUGUST 2021.
- ALL WORK WILL BE PERFORMED IN ACCORDANCE WITH ALL APPLICABLE CITY, STATE, AND FEDERAL REGULATIONS.
- CONTRACTOR SHALL PLACE "ONE CALL" FOR UTILITY MARK-OUT BEFORE DRILLING.
- ALL DRILLING ACTIVITIES WILL OCCUR UNDER FULL-TIME OBSERVATION OF A LANGAN REPRESENTATIVE.
- UPON COMPLETION, THE CONTRACTOR WILL CLEAN THE AREA OF ALL SPOILS AND WILL REPAIR ALL SURFACES USING COLD PATCH ASPHALT OR CONCRETE TO MATCH EXISTING.
- THE CONTRACTOR WILL COLLECT AND DISPOSE OF ALL ENVIRONMENTALLY IMPACTED DRILL CUTTINGS. ALL SPOILS WILL BE MANAGED IN ACCORDANCE WITH APPLICABLE LOCAL, STATE, AND FEDERAL LAW. IN THE EVENT THAT GROSS CONTAMINATION IS OBSERVED (I.E. FREE-PRODUCT PETROLEUM, ECT.), CONTACT NYSDEC TO REPORT OPEN SPILL AS REQUIRED BY NEW YORK STATE LAW.
- CONTRACTOR WILL PROTECT PEDESTRIANS AND ADJACENT IMPROVEMENTS DURING DRILLING AND EXCAVATING ACTIVITIES. PROVIDE CONES, CAUTION TAPE, BARRIERS, ETC. AS REQUIRED.
- ALL LOCATIONS AND DIMENSIONS PROVIDED HEREIN ARE APPROXIMATE AND SHOULD BE VERIFIED IN FIELD.
- DRILL RIGS AND SMALL EXCAVATORS WILL ACCESS THE BOREHOLE AND TEST PIT LOCATIONS THROUGH LOTS 1 AND LOT 100. DRILLING AND EXCAVATION WILL ONLY TAKE PLACE AT THE DESIGNATED BOREHOLE AND TEST PIT LOCATIONS.

GEOTECHNICAL SPT DRILLING NOTES AND PROCEDURES:

- ALL BORINGS ARE ASSUMED TO BE ACCESSIBLE BY A TRUCK OR TRACK-MOUNTED DRILL RIG.
- AS-DRILLED BORING LOCATIONS MAY VARY DEPENDING ON LIMITATIONS OF EQUIPMENT AND SITE ACCESSIBILITY. ANY DEVIATIONS SHALL BE DOCUMENTED WITH FIELD MEASUREMENTS BY THE INSPECTING GEOTECHNICAL ENGINEER.
- BORINGS SHALL BE DRILLED USING MUD ROTARY DRILLING TECHNIQUES WITH A TRI-CONE ROLLER BIT; 4-INCH STEEL CASING SHALL BE USED FOR SOIL SUPPORT. DRILLING SHALL PROCEED AHEAD OF THE CASSED SECTIONS TO ALLOW FOR IN SITU TESTING AND SAMPLING OF SOILS AND TO BYPASS OBSTRUCTIONS SUCH AS BOULDERS. DRILLING FLUID COMPRISED OF BENTONITE OR POLYMER SLURRY SHALL BE USED TO MAINTAIN BOREHOLE STABILITY IN AREAS THAT HAVE NOT BEEN CASSED. CASING SHALL BE INSTALLED IN INCREMENTS NOT EXCEEDING 5 FEET IN LENGTH FOLLOWING DRILLING AND SAMPLING OF SOILS. CASING WILL BE INSTALLED TO TOP OF BEDROCK, IF ENCOUNTERED, PRIOR TO COMMENCING BEDROCK CORING.
- STANDARD PENETRATION TESTING (SPT) SHALL BE PERFORMED IN GENERAL ACCORDANCE WITH ASTM D1586 USING A SPLIT-SPOON SAMPLER. SAMPLING SHALL BE PERFORMED CONTINUOUSLY IN THE FILL AND AT 5 FOOT INTERVALS THEREAFTER, UNLESS OTHERWISE DIRECTED BY THE INSPECTING GEOTECHNICAL ENGINEER.
- UPON COMPLETION, BORINGS SHALL BE COMPLETELY GROUTED AND SURFACE TO BE PATCHED WITH CEMENT OR ASPHALT TO MATCH EXISTING.
- NYDEP = NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL PROTECTION


GEOTECHNICAL TEST PIT NOTES AND PROCEDURES:

- TEST PITS WILL BE EXCAVATED USING A SMALL EXCAVATOR. THE PITS WILL EXTEND TO ABOUT 5 FEET BELOW GROUND SURFACE AND THE SIDES OF THE EXCAVATION WILL BE SLOPED PER OSHA REQUIREMENTS.
- EXCAVATED SOIL WILL BE SCREENED FOR VISUAL AND OLFACTORY INDICATIONS OF IMPACTS AND WITH A PHOTOIONIZATION DETECTOR (PID). TEST PIT SOILS WILL BE STOCKPILED NEAR THE SIDE OF THE EXCAVATION.
- IF GROSSLY CONTAMINATED MATERIAL IS ENCOUNTERED, THE IMPACTED SPOILS WILL BE SEGREGATED AND STOCKPILED ON TOP OF POLYETHYLENE SHEETING, AND THE STOCKPILE WILL BE COVERED WITH POLYETHYLENE SHEETING AND STAGED ON SITE PENDING CHARACTERIZATION SAMPLING FOR OFF-SITE DISPOSAL.
- IF NO GROSSLY CONTAMINATED MATERIAL IS OBSERVED, THE EXCAVATION WILL BE BACKFILLED USING THE EXCAVATED MATERIAL. THE BACKFILL WILL BE PLACED IN LOOSE LIFTS ABOUT 12-INCHES-THICK AND COMPACTED.

1/19/2024	ADDRESS HPD COMMENTS	1
Date	Description	No.
Revisions		
SIGNATURE		DATE SIGNED
PROFESSIONAL ENGINEER		
STATE LIC. No. 082466		
LANGAN		
Langan Engineering, Environmental, Surveying, Landscape Architecture and Geology, D.P.C.		
21 Penn Plaza, 360 West 31st Street, 8th Floor New York, NY 10001		
T: 212.479.5400 F: 212.479.5444 www.langan.com		
Project		

Draft Print
04/03/2024 5:54:35 PM

KINGS		NEW YORK	
Drawing Title			
GEOTECHNICAL SUBSURFACE INVESTIGATION PLAN (1 OF 2)			
Project No.		DrawingFigure	
170777301		B-101.0	
Date			
04/03/2024			
Drawn By			
JSB			
Checked By		Sheet 1 of 2	
JR			

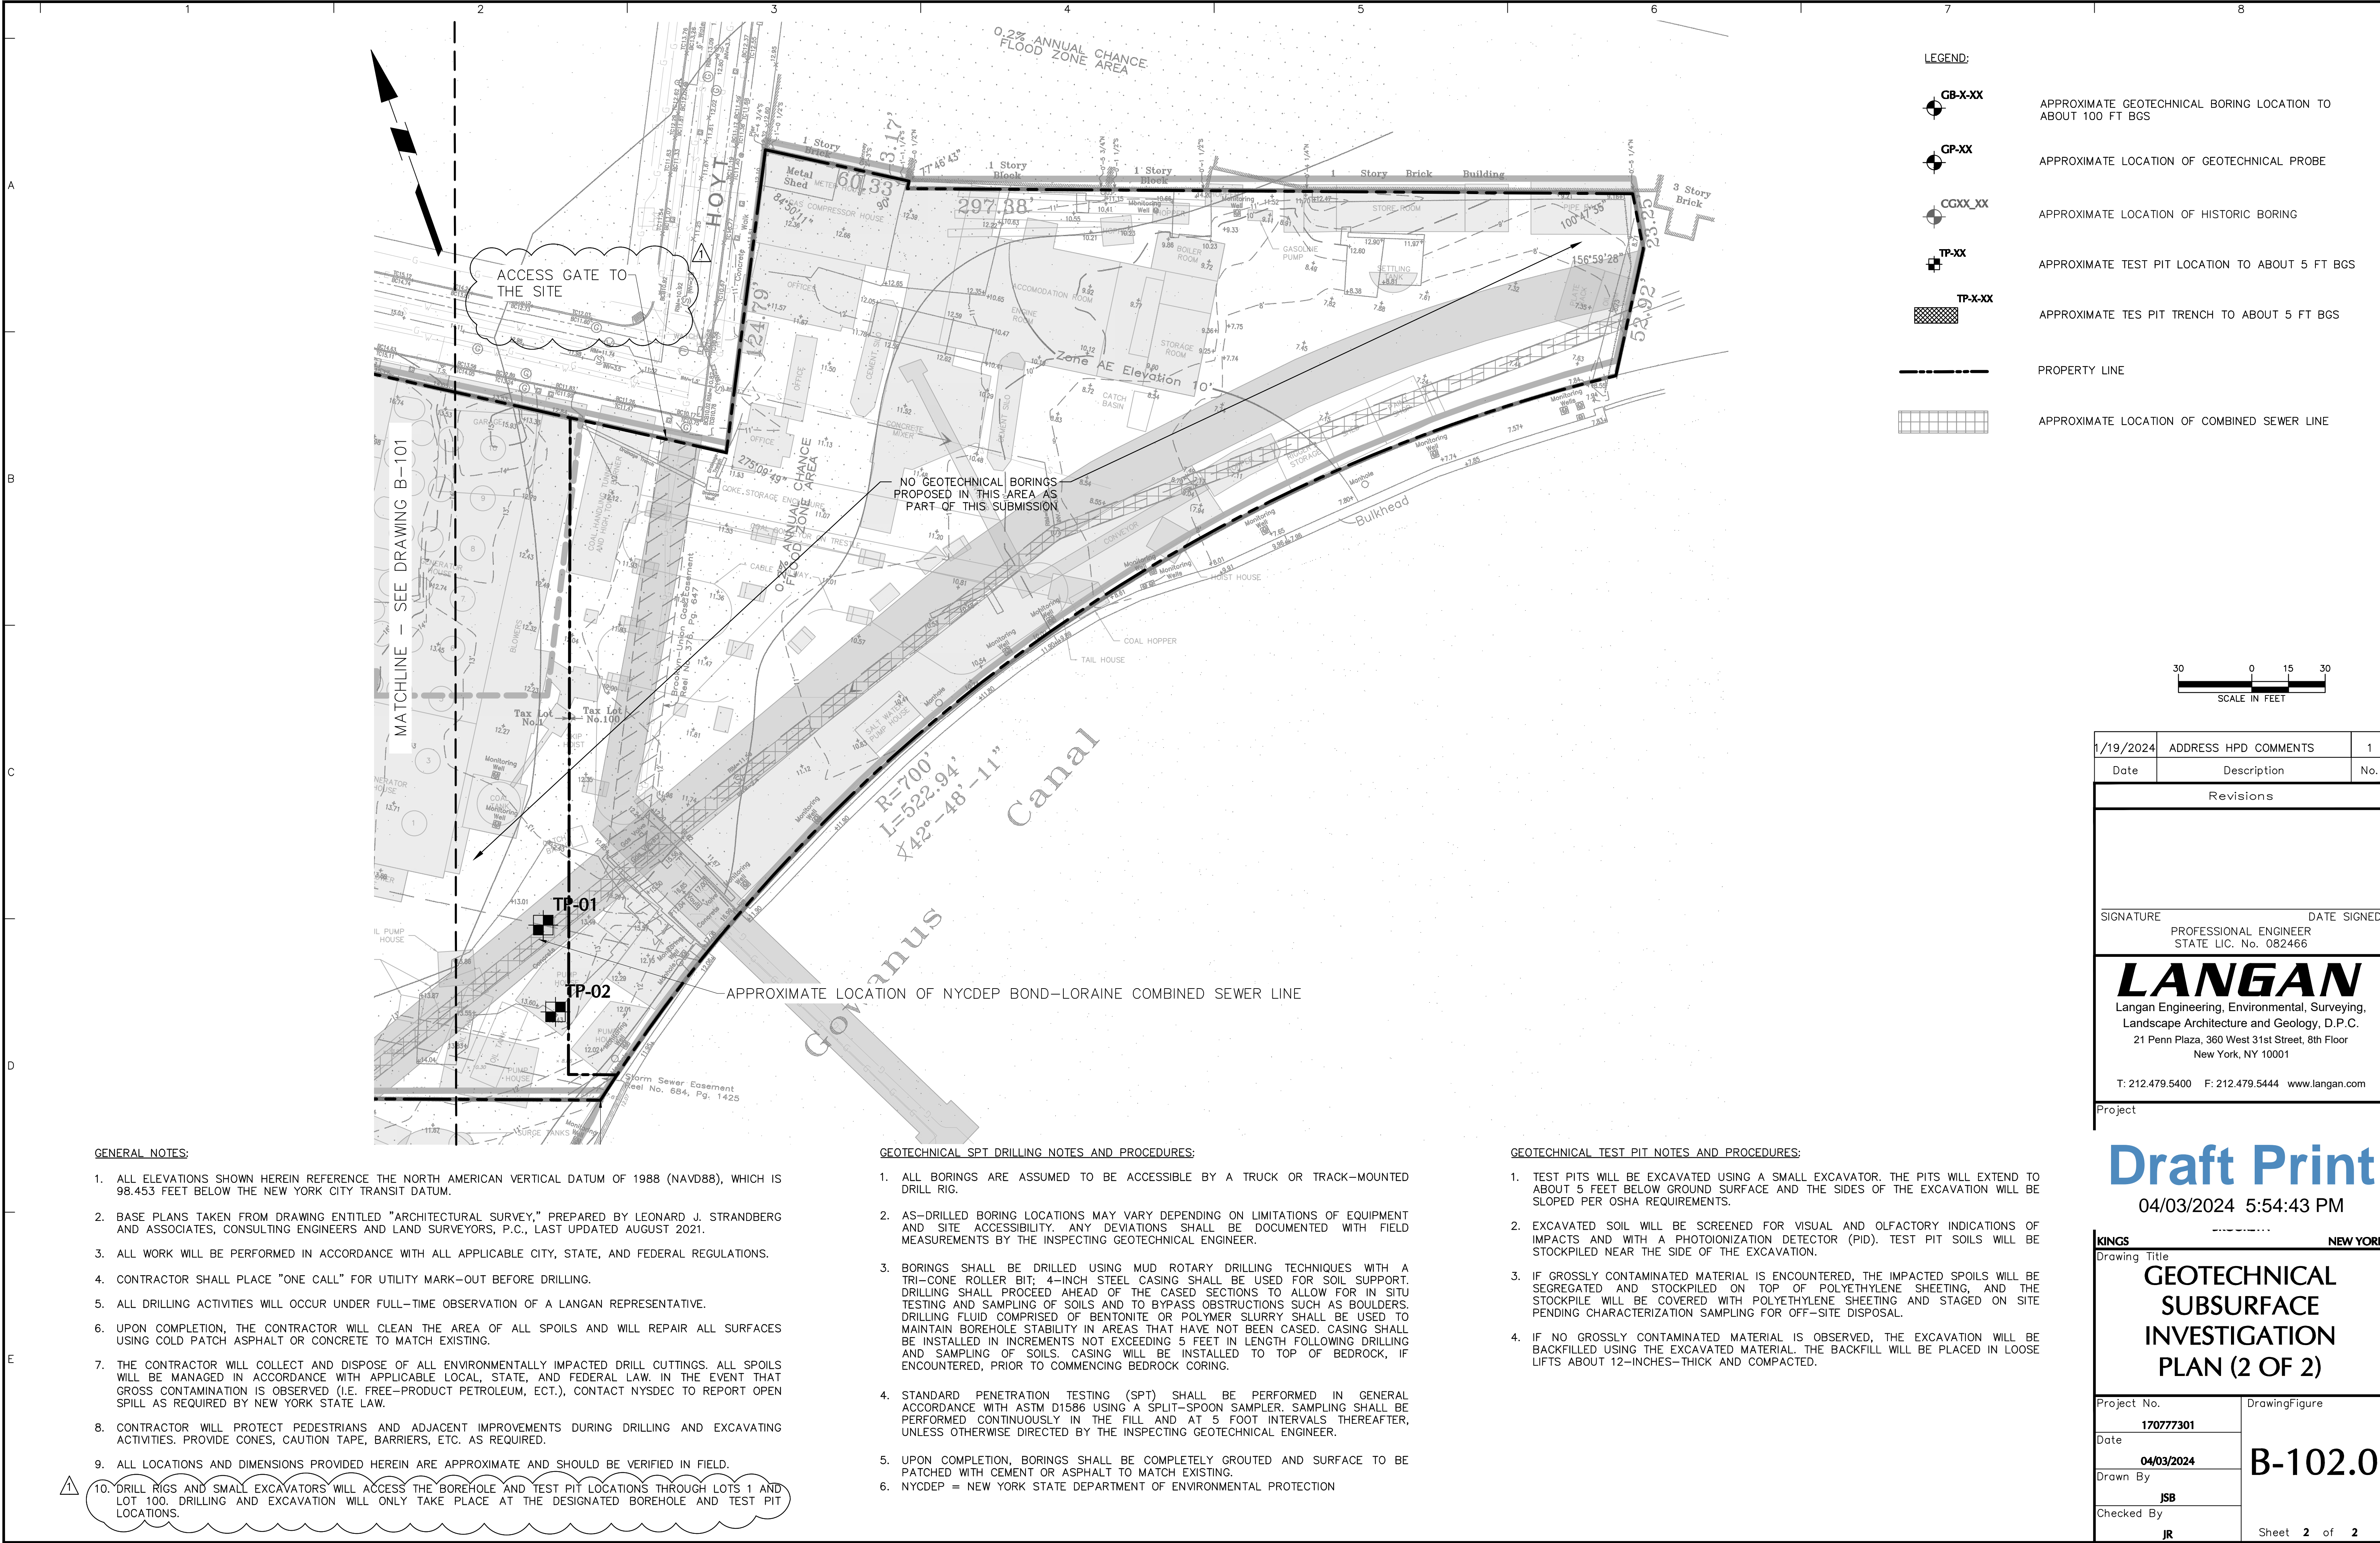

GENERAL NOTES:

- ALL ELEVATIONS SHOWN HEREIN REFERENCE THE NORTH AMERICAN VERTICAL DATUM OF 1988 (NAVD88), WHICH IS 98.453 FEET BELOW THE NEW YORK CITY TRANSIT DATUM.
- BASE PLANS TAKEN FROM DRAWING ENTITLED "ARCHITECTURAL SURVEY," PREPARED BY LEONARD J. STRANDBERG AND ASSOCIATES, CONSULTING ENGINEERS AND LAND SURVEYORS, P.C., LAST UPDATED AUGUST 2021.
- ALL WORK WILL BE PERFORMED IN ACCORDANCE WITH ALL APPLICABLE CITY, STATE, AND FEDERAL REGULATIONS.
- CONTRACTOR SHALL PLACE "ONE CALL" FOR UTILITY MARK-OUT BEFORE DRILLING.
- ALL DRILLING ACTIVITIES WILL OCCUR UNDER FULL-TIME OBSERVATION OF A LANGAN REPRESENTATIVE.
- UPON COMPLETION, THE CONTRACTOR WILL CLEAN THE AREA OF ALL SPOILS AND WILL REPAIR ALL SURFACES USING COLD PATCH ASPHALT OR CONCRETE TO MATCH EXISTING.
- THE CONTRACTOR WILL COLLECT AND DISPOSE OF ALL ENVIRONMENTALLY IMPACTED DRILL CUTTINGS. ALL SPOILS WILL BE MANAGED IN ACCORDANCE WITH APPLICABLE LOCAL, STATE, AND FEDERAL LAW. IN THE EVENT THAT GROSS CONTAMINATION IS OBSERVED (I.E. FREE-PRODUCT PETROLEUM, ECT.), CONTACT NYSDEC TO REPORT OPEN SPILL AS REQUIRED BY NEW YORK STATE LAW.
- CONTRACTOR WILL PROTECT PEDESTRIANS AND ADJACENT IMPROVEMENTS DURING DRILLING AND EXCAVATING ACTIVITIES. PROVIDE CONES, CAUTION TAPE, BARRIERS, ETC. AS REQUIRED.
- ALL LOCATIONS AND DIMENSIONS PROVIDED HEREIN ARE APPROXIMATE AND SHOULD BE VERIFIED IN FIELD.
- DRILL RIGS AND SMALL EXCAVATORS WILL ACCESS THE BOREHOLE AND TEST PIT LOCATIONS THROUGH LOTS 1 AND LOT 100. DRILLING AND EXCAVATION WILL ONLY TAKE PLACE AT THE DESIGNATED BOREHOLE AND TEST PIT LOCATIONS.

GEOTECHNICAL SPT DRILLING NOTES AND PROCEDURES:

- ALL BORINGS ARE ASSUMED TO BE ACCESSIBLE BY A TRUCK OR TRACK-MOUNTED DRILL RIG.
- AS-DRILLED BORING LOCATIONS MAY VARY DEPENDING ON LIMITATIONS OF EQUIPMENT AND SITE ACCESSIBILITY. ANY DEVIATIONS SHALL BE DOCUMENTED WITH FIELD MEASUREMENTS BY THE INSPECTING GEOTECHNICAL ENGINEER.
- BORINGS SHALL BE DRILLED USING MUD ROTARY DRILLING TECHNIQUES WITH A TRI-CONE ROLLER BIT; 4-INCH STEEL CASING SHALL BE USED FOR SOIL SUPPORT. DRILLING SHALL PROCEED AHEAD OF THE CASED SECTIONS TO ALLOW FOR IN SITU TESTING AND SAMPLING OF SOILS AND TO BYPASS OBSTRUCTIONS SUCH AS BOULDERS. DRILLING FLUID COMPRISED OF BENTONITE OR POLYMER SLURRY SHALL BE USED TO MAINTAIN BOREHOLE STABILITY IN AREAS THAT HAVE NOT BEEN CASED. CASING SHALL BE INSTALLED IN INCREMENTS NOT EXCEEDING 5 FEET IN LENGTH FOLLOWING DRILLING AND SAMPLING OF SOILS. CASING WILL BE INSTALLED TO TOP OF BEDROCK, IF ENCOUNTERED, PRIOR TO COMMENCING BEDROCK CORING.
- STANDARD PENETRATION TESTING (SPT) SHALL BE PERFORMED IN GENERAL ACCORDANCE WITH ASTM D1586 USING A SPLIT-SPOON SAMPLER. SAMPLING SHALL BE PERFORMED CONTINUOUSLY IN THE FILL AND AT 5 FOOT INTERVALS THEREAFTER, UNLESS OTHERWISE DIRECTED BY THE INSPECTING GEOTECHNICAL ENGINEER.
- UPON COMPLETION, BORINGS SHALL BE COMPLETELY GROUTED AND SURFACE TO BE PATCHED WITH CEMENT OR ASPHALT TO MATCH EXISTING.
- NYCDEP = NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL PROTECTION

GEOTECHNICAL TEST PIT NOTES AND PROCEDURES:

- TEST PITS WILL BE EXCAVATED USING A SMALL EXCAVATOR. THE PITS WILL EXTEND TO ABOUT 5 FEET BELOW GROUND SURFACE AND THE SIDES OF THE EXCAVATION WILL BE SLOPED PER OSHA REQUIREMENTS.
- EXCAVATED SOIL WILL BE SCREENED FOR VISUAL AND OLFACTORY INDICATIONS OF IMPACTS AND WITH A PHOTOIONIZATION DETECTOR (PID). TEST PIT SOILS WILL BE STOCKPILED NEAR THE SIDE OF THE EXCAVATION.
- IF GROSSLY CONTAMINATED MATERIAL IS ENCOUNTERED, THE IMPACTED SPOILS WILL BE SEGREGATED AND STOCKPILED ON TOP OF POLYETHYLENE SHEETING, AND THE STOCKPILE WILL BE COVERED WITH POLYETHYLENE SHEETING AND STAGED ON SITE PENDING CHARACTERIZATION SAMPLING FOR OFF-SITE DISPOSAL.
- IF NO GROSSLY CONTAMINATED MATERIAL IS OBSERVED, THE EXCAVATION WILL BE BACKFILLED USING THE EXCAVATED MATERIAL. THE BACKFILL WILL BE PLACED IN LOOSE LIFTS ABOUT 12-INCHES-THICK AND COMPACTED.

ATTACHMENT B
EXCAVATION WORK PLAN



Excavation Work Plan

**Former Citizens Gas Works Manufactured Gas Plant
Site**

Borough of Brooklyn, Kings County, New York

NYSDEC Site No. C224012

January 2023

Excavation Work Plan

Former Citizens Gas Works Manufactured Gas Plant Site

Borough of Brooklyn, Kings County, New York

NYSDEC Site No. C224012

January 2023

Prepared By:

Arcadis of New York, Inc.

One Lincoln Center, 110 West Fayette Street, Suite 300

Syracuse

New York 13202

Phone: 315 446 9120

Fax: 315 449 0017

Prepared For:

National Grid USA

175 East Old Country Road

Hicksville, New York 11801

Our Ref:

30004014

Record of Change

Revision No.	Date Submitted	Date Approved By NYSDEC	Description of Change	Reviewed By

Contents

Acronyms and Abbreviations..... v

1 Introduction..... 1

2 Notification 1

3 Soil Screening Methods..... 3

4 Soil Stockpiling Methods..... 3

5 Materials Excavation and Load-Out..... 4

6 Materials Transport Off-Site 4

7 Materials Disposal Off-Site 5

8 Materials Reuse On-Site..... 5

9 Fluids Management 6

10 Fill Materials from Off-Site Sources..... 6

11 Storm Water Pollution Prevention 7

12 Excavation Contingency Plan 7

13 Community Air Monitoring Plan..... 8

14 Odor Control Plan..... 9

15 Dust Control Plan 9

16 Reporting..... 10

17 References 10

Tables

Table 1. Contact Information for Notifications 1

Figures

Figure 1. Truck Traffic Plan

Appendices

Appendix A. Pile Driving Guidance for Remedial Sites

Appendix B. Request to Import/Reuse Fill or Soil Form

Appendix C. Generic Community Air Monitoring Plan

Acronyms and Abbreviations

CFR	Code of Federal Regulations
EWP	Excavation Work Plan
MGP	manufactured gas plant
NAPL	non-aqueous phase liquid
NYCRR	New York Codes, Rules, and Regulations
NYSDEC	New York State Department of Environmental Conservation
NYSDOH	New York State Department of Health
PCB	polychlorinated biphenyl
PE	professional engineer
PFAS	per- and polyfluoroalkyl substances
PFOA	perfluorooctanoic acid
PFOS	perfluorooctanesulfonic acid
PM ₁₀	particulate matter less than 10 micrometers in diameter
SCO	soil cleanup objective
SVOC	semi-volatile organic compound
TAL	target analyte list
TCL	target compound list
VOC	volatile organic compound

1 Introduction

This Excavation Work Plan (EWP) is a component of the *Interim Site Management Plan* (ISMP; Arcadis of New York, Inc. 2023) for Block 471, Lot 1 (hereinafter, “Parcel I”) and Block 471, Lot 100 (hereinafter, “Parcel II”) of the former Citizens Gas Works manufactured gas plant (MGP) site in Brooklyn, New York. Collectively, Parcels I and II of the former Citizens Gas Works MGP site are hereinafter referred to as the “Site”. This EWP describes the specific procedures to be implemented by the property owner or any other party whenever ground-intrusive work is performed at the Site. Examples of ground-intrusive work covered by this EWP include, but are not limited to, the following:

- Repair of existing or installation of new underground utilities;
- Excavation of footings for fence posts, bollards, or utility poles;
- Construction of below-grade foundations for new buildings or structures;
- Removal or replacement of existing sidewalks or pavements;
- Landscaping/tree planting; and
- Any other work performed below the existing level of the ground, or that involves the disturbance of existing earth, regardless of quantity or aerial extent.

2 Notification

At least 15 days prior to the start of any planned ground-intrusive activity at the Site, the property owner, party conducting the ground-intrusive work, or a designated representative will notify both the New York State Department of Environmental Conservation (NYSDEC) and National Grid Project Managers in writing¹. The current contact information for the NYSDEC, New York State Department of Health (NYSDOH), and National Grid Project Managers is provided in Table 1 below.

Table 1. Contact Information for Notifications

Organization and Role	Primary Point-of-Contact	Contact Information
NYSDEC DER Project Manager	Mr. Charles Post	625 Broadway, 12 th Floor Albany, New York 12233-7016 Telephone: (518) 402-9793 E-mail: charles.post@dec.ny.gov

¹ In addition to the 15-day pre-excavation notification, the property owner, party conducting the ground-intrusive work, or a designated representative will notify the National Grid Project Manager in writing at least 45 days prior to the start of any planned ground-intrusive activity to be conducted under this EWP.

Organization and Role	Primary Point-of-Contact	Contact Information
NYSDOH BEEI Project Manager	Mr. Steven Berninger	Empire State Plaza Corning Tower, Room 1787 Albany, New York 12237 Telephone: (518) 402-0443 E-mail: steven.berninger@health.ny.gov
National Grid Project Manager	Mr. Patrick Van Rossem	175 East Old Country Road Hicksville, New York 11801 Telephone: (516) 545-2578 E-mail: patrick.vanrossem@nationalgrid.com

The written notification will include the following:

- A detailed description of the work to be performed, including the location and areal extent of excavation; plans/drawings for re-grading, foundations, footings, intrusive elements, or utilities to be installed below ground; and estimated volumes of impacted soil to be excavated;
- Proposed modifications (if any) to truck traffic routes;
- A summary of environmental conditions anticipated to be encountered in the work areas, including the nature and concentrations of Site-related constituents of concern, potential presence of remaining MGP-related impacts, and plans for any pre-construction sampling;
- A schedule for the work, identifying the anticipated start and completion dates of all ground-intrusive work;
- A summary of the applicable components of this EWP;
- A statement that the work will be performed in compliance with this EWP, Title 29, Section 1910.120 of the Code of Federal Regulations (29 CFR 1910.120), and 29 CFR 1926 Subpart P;
- Copies of the contractor's task-specific Health and Safety Plan and Community Air Monitoring Plan in electronic format;
- As appropriate, a copy of the contractor's Pile Installation Work Plan, prepared in accordance with NYSDEC's Pile Driving Guidance for Remedial Sites (provided in Appendix A of this EWP);
- Identification of disposal facilities for potential waste streams; and
- Identification of sources of any anticipated backfill, along with the required Request to Import/Reuse Fill or Soil form (<http://www.dec.ny.gov/regulations/67386.html>; provided in Appendix B of this EWP) and all supporting documentation including, but not limited to, chemical testing results.

In the case of an emergency repair or action that requires ground-intrusive work, the property owner, party conducting the work, or a designated representative will (at a minimum) verbally notify the NYSDEC and National Grid Project Managers by noon on the day after initiating such emergency work.

3 Soil Screening Methods

Visual, olfactory, and instrument-based (i.e., via photoionization detector) soil screening will be performed during all excavations into areas of known or potential remaining MGP-related impacts by the performing party's qualified environmental professional, as defined in Paragraph 1.2(ak) of Title 6, Part 375 of the New York Codes, Rules, and Regulations (6 NYCRR 375-1.2(ak)), a professional engineer (PE) licensed and registered in the State of New York, or a qualified person who directly reports to a PE licensed and registered in the State of New York. Soil screening will be performed when ground-intrusive work is conducted and will include all excavation and other ground-intrusive work performed during any future development, such as excavations for foundations and utility work.

Soil excavated from areas of potential remaining MGP-related impacts will be segregated based on previous environmental data and screening results into three categories of material: (1) reusable material, which may be reused as subsurface fill material at the Site without sampling/testing; (2) "potentially-reusable" material, which requires additional sampling/testing to determine its suitability for reuse on-Site as fill; and (3) impacted material, which requires off-Site disposal in accordance with Section 7 of this EWP. Excavated soil will be considered reusable if it is removed from within the limits of the previously-completed remedial excavation areas and, based on screening results, is determined to be free of visible non-aqueous phase liquid (NAPL), hardened tar, or sheens. Excavated soil will be considered potentially reusable if it is removed from outside of the remedial excavation limits and, based on previous environmental data and soil screening results, is determined to be free of visible NAPL, hardened tar, or sheens. Stockpiles of potentially-reusable material will be sampled and tested as described in Section 8 of this EWP to evaluate whether it can be reused as subsurface fill material at the Site or requires disposal off-Site.

4 Soil Stockpiling Methods

The anticipated size and location of stockpiles will be identified in the 15-day pre-excavation notification to the NYSDEC and National Grid Project Managers, as described in Section 2 of this EWP. Stockpile locations will be based on the location of Site excavation activities and proximity to nearby Site features.

Stockpiles of excavated material will, at minimum, be placed on top of polyethylene sheeting. If required by NYSDEC, stockpiles of excavated material will be placed within an engineered staging area. Stockpiles will be covered with polyethylene sheeting to reduce potential infiltration of precipitation, migration of wind-blown dust, and direct contact exposures. Stockpiles will be routinely inspected, and damaged polyethylene sheeting will be promptly replaced. During all soil disturbance activities, erosion and sediment controls will be employed in accordance with this EWP and in conformance with applicable laws and regulations (good work practices that require erosion and sediment controls are not limited to potentially impacted areas). Proven soil conservation practices will be incorporated in any such plans to mitigate soil erosion, off-Site sediment migration, and water pollution from erosion. Appropriate temporary erosion and sediment control measures (e.g., silt fencing, hay bales, etc.) will be installed and maintained around all impacted and potentially-impacted soil/fill stockpiles and bare soil surfaces during such activities. Such stockpiles will be graded and compacted as necessary for positive surface water run-off and dust control.

Stockpiles will be inspected not less than once each week and after every storm event by the party performing the work. Inspection results will be recorded in a logbook, which will be maintained at the Site and made available for inspection by NYSDEC.

5 Materials Excavation and Load-Out

All ground-intrusive work and the excavation and load-out of all excavated material will be overseen by the performing party's qualified environmental professional, as defined in 6 NYCRR 375-1.2(ak), a PE licensed and registered in the State of New York, or a qualified person who directly reports to a PE licensed and registered in the State of New York. The owner of the property or other party performing the work and its contractors will be solely responsible for safe execution of all ground-intrusive work and other work performed under this EWP.

The presence of utilities and easements on the Site will be investigated by the performing party's qualified environmental professional. It will be determined whether a risk or impediment to the planned work under this EWP is posed by utilities or easements on the Site. A Site utility stakeout will be completed for all utilities prior to any ground-intrusive activities at the Site.

Queuing of trucks will be performed on-Site to minimize off-Site disturbance. Vehicles transporting excavated material from the Site will be water-tight and structurally sound, will have functional locking tailgates, and will be equipped with tight-fitting water-proof tarpaulins. Loose-fitting, canvas-type tarpaulins are not acceptable to NYSDEC. Prior to loading, the bed and sidewalls of each dump box or trailer will be completely lined with minimum 6-mil polyethylene sheeting. Loaded vehicles leaving the Site will be securely covered and appropriately manifested and placarded in accordance with applicable federal, state, and local laws and regulations.

An area for washing trucks will be established at the Site. The performing party's qualified environmental professional will be responsible for ensuring that all outbound trucks are inspected and cleaned (via acceptable dry or wet methods, as appropriate) of visible soil or debris at the truck wash before leaving the Site until the activities performed under this EWP are complete. Truck wash waters will be contained, collected, and disposed of off-Site in accordance with applicable federal, state, and local laws and regulations.

Locations where vehicles enter or exit the Site will be inspected daily for evidence of off-Site soil tracking. The performing party's qualified environmental professional will be responsible for ensuring that all egress points for truck and equipment transport from the Site are clean of dirt and other materials derived from the Site during all ground-intrusive activities. Cleaning of the adjacent streets will be performed as needed to maintain a clean condition with respect to Site-derived materials. Material generated during the street cleaning and egress cleaning operations will be disposed of off-Site at a permitted landfill facility in accordance with all applicable federal, state, and local laws and regulations.

6 Materials Transport Off-Site

The off-Site transportation of excavated materials will be performed by licensed haulers in accordance with appropriate federal, state, and local laws and regulations, including 6 NYCRR 364. Haulers will be appropriately licensed and trucks will be properly placarded.

Truck transport routes are shown on Figure 1. Unless alternate routes are approved by NYSDEC in writing, all trucks loaded with Site-related materials will exit the vicinity of the Site using only those truck routes shown on Figure 1. The identified truck routes take into account: (1) limiting transport through residential areas and past sensitive sites; (2) use of city-mapped truck routes; (3) limiting total distance to major highways; (4) promoting safety in access to highways; and (5) overall safety in transport. Trucks loaded with Site-related materials are prohibited from stopping and idling in the neighborhood outside the Site.

7 Materials Disposal Off-Site

All material excavated and removed from areas of potential remaining MGP-related impacts at the Site will be treated as impacted and regulated material and, unless determined to be suitable for reuse on-Site in accordance with Section 8 below, will be transported and disposed of off-Site at a permitted facility in accordance with applicable federal, state, and local laws and regulations, including 6 NYCRR 364. If disposal of excavated material from areas of potential remaining MGP-related impacts is proposed for unregulated off-Site disposal (i.e., clean soil removed for development purposes), a formal request with an associated plan will be made in writing to the NYSDEC Project Manager. Unregulated off-Site management of excavated materials will not occur without the formal approval of the NYSDEC Project Manager.

Off-Site treatment/disposal locations for excavated materials will be identified in the pre-excavation notification. This will include estimated quantities and, if appropriate, a breakdown by class of disposal facility (e.g., hazardous waste disposal facility, thermal treatment facility, solid waste landfill, etc.). Actual disposal quantities and associated documentation will be reported to NYSDEC in accordance with Section 16 of this EWP. Such documentation will include, but will not be limited to, waste profiles, laboratory testing results, facility acceptance letters, manifests, bills of lading, and facility receipts.

Non-hazardous historic fill and impacted soils taken off-Site will be handled, at a minimum, as municipal solid waste in accordance with 6 NYCRR 360 through 6 NYCRR 365. Materials that do not meet the soil cleanup objectives (SCOs) for unrestricted use, as set forth in Table 375-6.8(a) of 6 NYCRR 375, are prohibited from being taken to a New York State construction and demolition debris recovery facility (i.e., a facility registered or permitted in accordance with 6 NYCRR 360-15).

8 Materials Reuse On-Site

Material excavated from within the limits of the previously-completed remedial excavation areas may be reused as fill at the Site without sampling/testing if it is placed beneath either: (1) an impermeable surface, such as buildings, pavements, or sidewalks; or (2) a minimum of 2 feet of clean fill material that meets the applicable restricted use SCOs and the restricted residential guidance values for perfluorooctanoic acid (PFOA) and perfluorooctanesulfonic acid (PFOS). As previously described in Section 3 of this EWP, excavated soil will be considered potentially reusable if, based on previous environmental data and soil screening results, such material is determined to be free of visible NAPL, hardened tar, or sheens. Material reuse on-Site will comply with the requirements of Section 5.4(e)4 of NYSDEC's *Technical Guidance for Site Investigation and Remediation* (DER-10; NYSDEC 2010). Any modifications to those requirements must be approved by the NYSDEC Project Manager.

To determine its suitability for reuse as fill at the Site, potentially-reusable material will be sampled and tested for target compound list (TCL) volatile organic compounds (VOCs), TCL semi-volatile organic compounds (SVOCs; including 1,4-dioxane), pesticides, herbicides, polychlorinated biphenyls (PCBs), target analyte list (TAL) metals, hexavalent chromium, total cyanide, and per- and polyfluoroalkyl substances (PFAS). The sampling frequency will be in accordance with Table 5.4(e)10 of DER-10 unless prior approval is obtained from the NYSDEC Project Manager for modification of the sampling frequency. Potentially-reusable material that meets the lower of the restricted use SCOs for protection of human health (restricted residential) or protection of groundwater, as set forth in Table 375-6.8(b) of 6 NYCRR 375, and the restricted residential guidance values for PFOA and PFOS, as identified in NYSDEC's *Sampling, Analysis, and Assessment of Per- and Polyfluoroalkyl Substances (PFAS)*

Under NYSDEC's Part 375 Remedial Programs (NYSDEC 2020), may be reused without restriction at the Site. Material that exceeds the applicable restricted use SCO, but meets the restricted residential guidance values for PFOA and PFOS and has a total polycyclic aromatic hydrocarbon concentration less than 500 milligrams per kilogram, may be reused on-Site, but only beneath either: (1) an impermeable surface, such as buildings, pavements, or sidewalks; or (2) a minimum of 2 feet of clean fill material that meets the applicable restricted use SCO and the restricted residential guidance values for PFOA and PFOS. Material that exceeds the restricted residential guidance value for PFOA or PFOS will not be reused as fill at the Site unless prior approval is obtained from the NYSDEC Project Manager. Potentially-reusable material will not be used as backfill material within landscaping berms or around subsurface utility lines. Potentially-reusable material that does not meet the reuse criteria described above will be removed from the Site and disposed of in accordance with Section 7 of this EWP.

Any demolition material proposed for reuse as fill material at the Site will be sampled and tested for asbestos, and the results will be reported to NYSDEC for acceptance. Concrete crushing or processing will not be performed at the Site without prior NYSDEC approval. Organic matter (e.g., wood, roots, stumps, etc.) or other solid waste derived from clearing and grubbing of the Site will not be reused as fill or landscaping material at the Site.

The performing party's qualified environmental professional will ensure that the procedures for material reuse described in this section of the EWP are followed, and that unacceptable material does not remain at the Site.

9 Fluids Management

Liquids to be removed from the Site, including excavation dewatering, decontamination/truck wash waters, and well purge and development waters, will be handled, transported, and disposed of off-Site at a permitted facility in accordance with applicable federal, state, and local laws and regulations. Discharge of water generated during large-scale construction activities to surface waters (i.e., a local pond, creek, stream, canal, or river), if feasible, will be performed under a State Pollution Discharge Elimination System permit issued by NYSDEC. Run-off from surface discharges (if any) will be controlled. Discharges will not be allowed to enter a surface water body or sewer without proper permits or approvals. Dewatering, decontamination, and well purge/development fluids will not be recharged back to the land surface or subsurface of the Site, but will be managed off-Site, unless prior approval is obtained from NYSDEC.

10 Fill Materials from Off-Site Sources

All off-Site fill materials proposed for use at the Site will be approved by the performing party's qualified environmental professional, as defined in 6 NYCRR 375-1.2(ak), and will comply with the backfill and cover soil quality standards established in 6 NYCRR 375-6.7(d), including the lower of the restricted use SCO for protection of human health (restricted residential) or protection of groundwater, as set forth in Table 375-6.8(b) of 6 NYCRR 375, and the restricted residential guidance values for PFOA and PFOS, as identified in NYSDEC's *Sampling, Analysis, and Assessment of Per- and Polyfluoroalkyl Substances (PFAS) Under NYSDEC's Part 375 Remedial Programs* (NYSDEC 2020). To determine their suitability for use at the Site, off-Site fill materials will be sampled and tested for TCL VOCs, TCL SVOCs (including 1,4-dioxane), pesticides, herbicides, PCBs, TAL metals, hexavalent chromium, total cyanide, and PFAS in accordance with Table 5.4(e)10 of DER-10. A Request to Import/Reuse Fill or Soil form (<http://www.dec.ny.gov/regulations/67386.html>; provided in Appendix B of this EWP) will be prepared and submitted to the NYSDEC Project Manager, allowing a minimum of five business days for review.

Material from industrial sites, spill sites, other environmental remediation sites, or potentially-contaminated sites will not be used as fill material at the Site. Materials that meet “general” fill requirements under 6 NYCRR 360.13, but do not comply with the backfill or cover soil quality standards for the Site, will not be used as fill material at the Site without prior approval by the NYSDEC Project Manager. Solid waste will not be used as fill material at Site.

Trucks entering the Site with off-Site fill material will be securely covered with tight-fitting covers. Off-Site fill material will be stockpiled separately from excavated material, and will be covered to prevent dust releases.

11 Storm Water Pollution Prevention

General storm water pollution prevention activities to be conducted in support of Site excavation activities include the following:

- Silt fencing or hay bale dikes will be installed around the entire perimeter of the construction area;
- Accumulated sediments will be removed as required to keep the silt fencing and hay bale dikes functional;
- All undercutting or erosion of the silt fence toe anchor will be repaired immediately with appropriate backfill materials;
- Manufacturer's recommendations will be followed for replacing silt fencing damaged due to weathering;
- Berms, dikes, and other acceptable methods will be provided to direct storm water around excavations;
- Erosion and sediment control measures identified in the ISMP, if any, will be inspected to ensure that they are operating correctly; and
- Where discharge locations or points are accessible, they must be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to receiving waters.

Temporary erosion and sediment controls will be inspected not less than once per week and after each storm event. Inspection results will be recorded in a logbook, which will be maintained at the Site and made available for inspection by NYSDEC.

12 Excavation Contingency Plan

If underground tanks, pipes, structures, or other previously unidentified sources of environmental impacts are found during subsurface excavations or development-related construction: (1) the NYSDEC and National Grid Project Managers will be promptly notified of the discovery; and (2) excavation activities will be suspended until NYSDEC and/or National Grid complete an assessment of the structure(s) or environmental impacts encountered.

Sampling will be performed on product, sediment, and surrounding soils as necessary to determine the nature of the material and proper disposal method. Sampling and testing will be performed for TCL VOCs, TCL SVOCs (including 1,4-dioxane), pesticides, herbicides, PCBs, TAL metals, hexavalent chromium, total cyanide, and PFAS, unless the Site history and previous sampling results provide a sufficient justification to limit the list of analytes. In this case, a reduced list of analytes will be proposed to the NYSDEC Project Manager for approval prior to sampling.

If encountered, piping or structures containing visible MGP waste in the form of free-phase NAPL, NAPL coatings, or NAPL-saturated soils, together with any surrounding impacted soils, will be excavated and removed to the extent practicable. Where such piping or structures cannot be completely removed due to their proximity to existing infrastructure (e.g., roads, active utilities, etc.), buildings, or facilities, the remaining portions of those

pipes or structures will be cleaned of visible NAPL (to the extent practicable), plugged (if applicable), and abandoned in place. Proposed cleaning and abandonment procedures will be submitted in writing to the NYSDEC Project Manager for approval before proceeding with any removals or abandonments of piping or structures containing visible MGP waste. Existing piping or structures that do not contain visible MGP waste may be abandoned in place unless removal is required to facilitate development-related construction. Any underground tanks will be closed in accordance with NYSDEC regulations and guidance.

Identification of unknown or unexpected contaminated media identified by screening during ground-intrusive work will be promptly communicated by telephone within two hours to both the NYSDEC and National Grid Project Managers. If directed by the NYSDEC Project Manager, reportable quantities of petroleum product will also be reported to the NYSDEC spills hotline. These findings will be also included in the Excavation Summary Report prepared pursuant to Section 16 of this EWP.

13 Community Air Monitoring Plan

Community air monitoring for total VOCs and respirable dust (particulate matter less than 10 micrometers in diameter [PM₁₀]) will be performed in accordance with NYSDOH's *Generic Community Air Monitoring Plan* (GCAMP; NYSDOH 2009; provided in Appendix C of this EWP) during all ground-intrusive or potential dust-generating work. The quantity and locations of community air monitoring stations will be determined in conjunction with NYSDOH, based on the size and location of the proposed excavation; however, at a minimum there will be one upwind and two downwind monitoring locations. Community air monitoring results will be included in the Excavation Summary Report in accordance with Section 16 of this EWP. Exceedances of the action levels identified in the GCAMP will be reported to the NYSDEC, NYSDOH, and National Grid Project Managers.

When work areas are located within 20 feet of potentially exposed populations or occupied structures, the continuous monitoring locations for total VOCs and PM₁₀ will reflect the nearest potentially exposed individuals and the location of ventilation system intakes for nearby structures. The use of engineering controls such as vapor/dust barriers, temporary negative-pressure enclosures, or special ventilation devices will be considered to prevent exposures related to the work activities and to control odors and dust. Consideration will also be given to implementing the planned activities when potentially exposed populations are at a minimum, such as during weekends or evening hours in non-residential settings.

If total VOC concentrations opposite the walls of occupied structures or next to intake vents exceed 1.0 part per million, monitoring will occur within the occupied structure(s). Depending upon the nature of contamination, chemical-specific colorimetric tubes of sufficient sensitivity may be necessary for comparing the exposure point concentrations with appropriate pre-determined response levels (response actions will also be pre-determined). Background readings in the occupied spaces will be taken prior to commencement of the planned work. Any unusual background readings will be discussed with the NYSDOH Project Manager prior to commencement of the work.

If total particulate concentrations opposite the walls of occupied structures or next to intake vents exceed 150 micrograms per cubic meter, work activities will be suspended until controls are implemented and are successful in reducing the total particulate concentration to 150 micrograms per cubic meter or less at the monitoring point.

Depending upon the nature of contamination and remedial activities, other parameters (e.g., explosivity, oxygen, hydrogen sulfide, carbon monoxide, etc.) may also need to be monitored. Response levels and appropriate response actions will be pre-determined and identified in the Community Air Monitoring Plan submitted as part of the pre-excavation notification.

14 Odor Control Plan

This odor control plan is capable of controlling emissions of nuisance odors on- and off-Site. Specific odor control methods to be used on a routine basis are described below and in the GCAMP (Appendix C of this EWP). If nuisance odors are identified at the Site boundary, or if odor complaints are received, work will be halted and the source of odors will be identified and corrected. Work will not resume until all nuisance odors have been abated. The NYSDEC, NYSDOH, and National Grid Project Managers will be notified of all odor events and of any other complaints about the project. Implementation of all odor controls, including the halt of work, is the responsibility of the performing party's qualified environmental professional, and any measures that are implemented will be described in the Excavation Summary Report in accordance with Section 16 for this EWP.

All necessary means will be employed to prevent on- and off-Site odor nuisances. At a minimum, these measures will include: (1) limiting the area of open excavations and size of soil stockpiles; (2) shrouding open excavations with tarps and other covers; and (3) using vapor-suppressant sprays or foams to cover exposed odorous soils. If odors develop and cannot be otherwise controlled, additional means to eliminate odor nuisances will include: (a) direct load-out of soils to trucks for off-Site disposal; (b) use of chemical odorants in spray or misting systems; and (c) use of staff to monitor odors in surrounding neighborhoods.

If nuisance odors develop during ground-intrusive work that cannot be adequately mitigated, or where the control of nuisance odors cannot otherwise be achieved due to on-Site conditions or close proximity to sensitive receptors, odor control will be achieved by sheltering the excavation and handling areas in a temporary containment structure equipped with appropriate air venting/filtering systems.

15 Dust Control Plan

Dust monitoring will be performed during all ground-intrusive or potential dust-generating work in accordance with the GCAMP (Appendix C of this EWP). If ambient air concentrations of PM₁₀ at the Site exceed the thresholds listed in the GCAMP, or if airborne dust is observed on the Site or leaving the Site, the dust suppression techniques listed below will be employed. The party performing the work will also take proactive measures to prevent dust production on the Site.

A dust suppression plan that addresses dust management during the work will include, at a minimum, the following:

- Dust suppression will be achieved by spraying clean water (e.g., from a dedicated on-Site water truck, hose connected to a fire hydrant, etc.) directly onto off-road areas including excavations and stockpiles;
- Clearing and grubbing of larger sites will be done in stages to limit the area of exposed, un-vegetated soils vulnerable to dust production;
- Crushed stone will be used on roadways to provide a clean surface that minimizes dust production;
- On-Site roads will be limited in total area to minimize the area required for water truck sprinkling;
- Vehicle speeds on temporary access roads and active haul routes will be restricted;
- Excavated material and clean fill material will be hauled in properly covered vehicles;
- Shallow excavations and stockpiles of clean fill material will be covered with polyethylene liners (anchored appropriately to resist wind forces) before extended work breaks and at the end of each work day; and
- Paved surfaces over which construction vehicles travel will be cleaned on a periodic basis.

16 Reporting

An Excavation Summary Report will be prepared by the performing party's qualified environmental professional, as defined in 6 NYCRR 375-1.2(ak), to document any ground-intrusive work performed under this EWP. The report will include, at a minimum, the following:

- Date(s) and a detailed description of the work performed, including the actual location and areal extent of excavation; as-built plans/drawings for re-grading, foundations, footings, intrusive elements, or utilities installed below ground; and actual volumes of impacted soil and groundwater generated;
- A description of any deviations from the scope of work identified in the pre-excavation notification;
- A summary of environmental conditions encountered in the work area(s), including the nature and concentrations of Site-related constituents of concern, and presence of MGP-related impacts;
- A listing of off-Site disposal facilities and actual disposal quantities for each waste stream generated during the work;
- Copies of waste profiles, disposal facility acceptance letters, manifests, bills of lading, and disposal facility receipts;
- A listing of off-Site fill sources and actual quantities of each fill material type used to backfill excavations during the work;
- Data summary tables for all samples collected during the work, with listing of all compounds analyzed and comparison to applicable standards with all exceedances highlighted;
- Laboratory data reports for all samples collected during the work;
- A description of the odor, vapor, and dust controls implemented during the work;
- A summary of community air monitoring results, including identification of any action level exceedances or odor complaints received during the work; and
- A written certification, signed by the performing party's qualified environmental professional, stating that (1) the work was performed in compliance with this EWP, 29 CFR 1910.120, and 29 CFR 1926 Subpart P, and (2) all wastes were disposed of in accordance with applicable laws and regulations.

The Excavation Summary Report will be submitted to the NYSDEC, NYSDOH, and National Grid Project Managers within 45 days after completing any ground-intrusive work under this EWP.

17 References


Arcadis of New York, Inc. 2023. *Interim Site Management Plan*. Former Citizens Gas Works MGP Site, Carroll Gardens/Public Place, Brooklyn, New York. Prepared for National Grid. January.

NYSDEC. 2010. *Technical Guidance for Site Investigation and Remediation*. Program Policy DER-10. Division of Environmental Remediation. May.

NYSDEC. 2020. *Sampling, Analysis, and Assessment of Per- and Polyfluoroalkyl Substances (PFAS) Under NYSDEC's Part 375 Remedial Programs*. Division of Environmental Remediation. January 17. Revised February 25, 2020, September 15, 2020, and January 8, 2021.

NYSDOH. 2009. *Generic Community Air Monitoring Plan*. Center for Environmental Health, Bureau of Environmental Exposure Investigation. December.

Figures

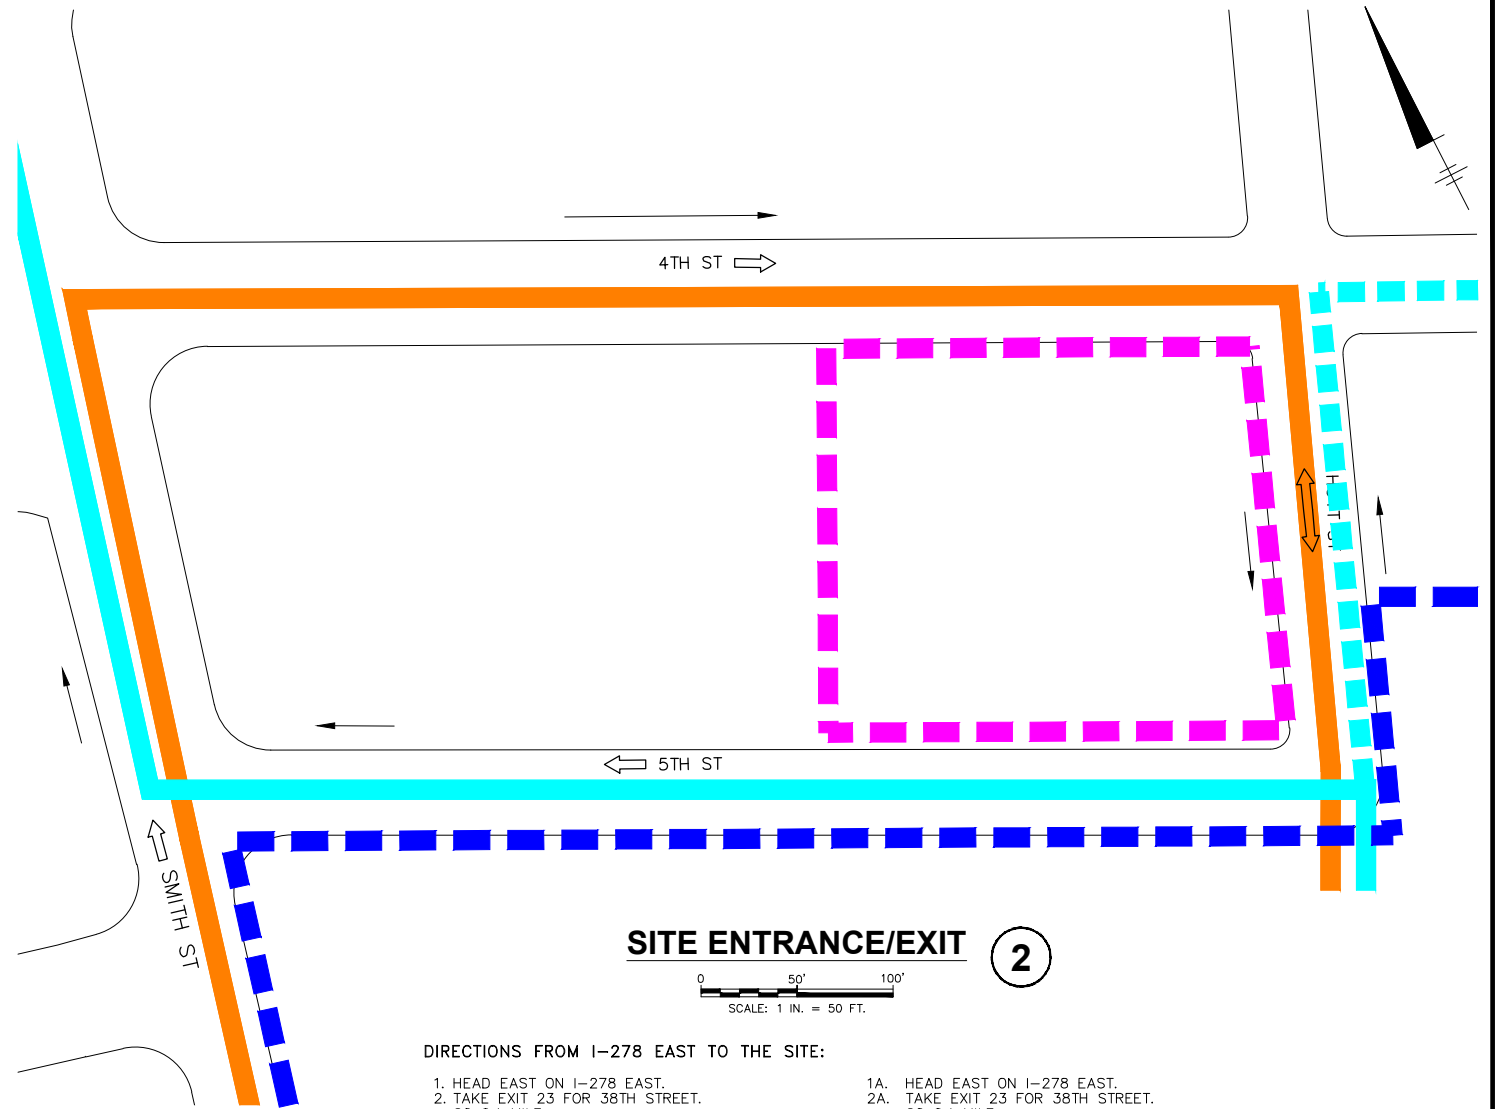

DIRECTIONS FROM I-278 EAST TO THE SITE:

1. HEAD EAST ON I-278 EAST.
2. TAKE EXIT 23 FOR 38TH STREET.
3. CONTINUE ONTO 38TH STREET.
4. TURN LEFT ONTO 4TH AVENUE.
5. TURN LEFT ONTO 9TH STREET.
6. TURN RIGHT ONTO SMITH STREET.
7. TURN RIGHT ONTO 4TH STREET.
8. TURN RIGHT ONTO HOYT STREET.
9. CONTINUE SOUTHWEST ONTO THE SITE.

- 1A. HEAD EAST ON I-278 EAST.
- 2A. TAKE EXIT 23 FOR 38TH STREET.
- 3A. CONTINUE ONTO 38TH STREET.
- 4A. TURN LEFT ONTO 4TH AVENUE.
- 5A. TURN LEFT ONTO PROSPECT AVENUE.
- 6A. CONTINUE ONTO HAMILTON AVENUE.
- 7A. TURN RIGHT ONTO SMITH STREET.
- 8A. TURN RIGHT ONTO 4TH STREET.
- 9A. TURN RIGHT ONTO HOYT STREET.
- 10A. CONTINUE SOUTHWEST ONTO THE SITE.

DIRECTIONS FROM THE SITE TO I-278 WEST:

1. TURN LEFT OUT OF THE SITE ONTO 5TH STREET.
2. TURN RIGHT ONTO SMITH STREET.
3. TURN RIGHT ONTO 3RD STREET.
4. TURN RIGHT ONTO 3RD AVENUE.
5. TAKE SLIGHT RIGHT ONTO I-278 WEST ON-RAMP.

- 1A. HEAD STRAIGHT OUT OF THE SITE ONTO HOYT STREET.
- 2A. TURN RIGHT ONTO 4TH STREET.
- 3A. TURN LEFT ONTO BOND STREET.
- 4A. TURN RIGHT ONTO 3RD STREET.
- 5A. TURN RIGHT ONTO 3RD AVENUE.
- 6A. TAKE SLIGHT RIGHT ONTO I-278 WEST ON-RAMP.

NATIONAL GRID
FORMER CITIZENS GAS WORKS MANUFACTURED GAS PLANT SITE
BOROUGH OF BROOKLYN, KINGS COUNTY, NEW YORK
EXCAVATION WORK PLAN

TRUCK TRAFFIC PLAN



Appendices

Appendix A

Pile Driving Guidance for Remedial Sites

Pile Driving Guidance

Pile installation on remedial sites containing coal tar contamination have the potential create contaminate migration pathways during or due to pile installation. Pile Installation Work Plans must be submitted to NYSDEC project managers for approval prior to pile installation. Plans must address mitigation methods to limit the migration of coal tar during or following pile installation. The following pathways for contaminant migration have been identified:

1. direct transfer of soils at the pile tip, which is a one-time event;
2. flow in the zone disturbed by pile-driving, including the pile/soil interface;
3. flow through the pile material itself; and
4. air deposition of contaminants during pile installation.

To address the direct transfer of soils at the pile tip, pile installation methods to horizontally displace soils shall be implemented in coal tar areas. Piles must be plugged or have a sacrificial point to minimize the vertical migration of contamination within the pile. To mitigate the migration of contamination through the pile material itself, either a sealed/welded plugged pile or solidified cement grout pile shall be installed to ensure piles do not become preferential pathways for coal tar. The work plan must also include methods for minimizing vibrations to eliminate the disruption of the subsurface. Spoils generated through pile installation have the potential to release VOCs and nuisance odors related to site contamination. Community Air Monitoring must be implemented during pile installation. The Pile Installation Work Plan must include methods to minimize pile installation spoils to manage VOCs and nuisance odors from being generated during pile installation. All spoils must be collected and containerized for removal from the site. If coal tar is observed, product must be immediately captured from the drilling area and containerized. Coal tar observations must be reported to the NYSDEC and NYSDOH in the Daily Field Report by noon the following day. If coal tar odor is observed from the pile installation, work must stop until nuisance odors are addressed. Odors must be reported to NYSDEC and NYSDOH in a separate email from the daily field reports.

Appendix B

Request to Import/Reuse Fill or Soil Form



**NEW YORK STATE
DEPARTMENT OF ENVIRONMENTAL CONSERVATION**



Request to Import/Reuse Fill or Soil

This form is based on the information required by DER-10, Section 5.4(e). Use of this form is not a substitute for reading the applicable Technical Guidance document.

SECTION 1 – SITE BACKGROUND

The allowable site use is:

Have Ecological Resources been identified?

Is this soil originating from the site?

How many cubic yards of soil will be imported/reused?

If greater than 1000 cubic yards will be imported, enter volume to be imported:

SECTION 2 – MATERIAL OTHER THAN SOIL

Is the material to be imported gravel, rock or stone?

Does it contain less than 10%, by weight, material that would pass a size 10 sieve?

Does it contain less than 10%, by weight, material that would pass a size 100 sieve?

Is this virgin material from a permitted mine or quarry?

Is this material recycled concrete or brick from a DEC registered processing facility?

SECTION 3 - SAMPLING

Provide a brief description of the number and type of samples collected in the space below:

Example Text: 5 discrete samples were collected and analyzed for VOCs. 2 composite samples were collected and analyzed for SVOCs, Inorganics & PCBs/Pesticides.

If the material meets requirements of DER-10 section 5.4(e)5 (other material), no chemical testing needed.

SECTION 3 CONT'D - SAMPLING

Provide a brief written summary of the sampling results or attach evaluation tables (compare to DER-10, Appendix 5):

Example Text: Arsenic was detected up to 17 ppm in 1 (of 5) samples; the allowable level is 16 ppm.

If Ecological Resources have been identified use the "If Ecological Resources are Present" column in Appendix 5.

SECTION 4 – SOURCE OF FILL

Name of person providing fill and relationship to the source:

Location where fill was obtained:

Identification of any state or local approvals as a fill source:

If no approvals are available, provide a brief history of the use of the property that is the fill source:

Provide a list of supporting documentation included with this request:

The information provided on this form is accurate and complete.

Signature

Date

Print Name

Firm

ATTACHMENT C
HEALTH AND SAFETY PLAN

HEALTH AND SAFETY PLAN

FOR

**GOWANUS GREEN
42 5TH STREET & 431 HOYT STREET
BROOKLYN, NEW YORK
Brooklyn Borough Tax Map
Block 471, Lots 1 & 100**

Prepared for

**Jonathon Rose Companies LLC
551 5th Avenue, 23rd Floor
New York, New York**

Prepared by:

**Langan Engineering, Environmental, Surveying
Landscape Architecture and Geology, D.P.C.
21 Penn Plaza
360 West 31st Street, 8th Floor
New York, New York 10001**

LANGAN

**November 2023
Langan Project No. 170777301**

360 West 31st Street, 8th Floor New York, NY 10001 T: 212.479.5400 F: 212.479.5444 www.langan.com

New Jersey • New York • Connecticut • Massachusetts • Pennsylvania • Ohio • Illinois • North Carolina • Virginia • Washington, DC
California • Texas • Arizona • Utah • Colorado • Washington • Florida | Athens • Calgary • Dubai • London • Panama

TABLE OF CONTENTS

	<u>Page No.</u>
1.0 INTRODUCTION	1
1.1 GENERAL.....	1
1.2 SITE LOCATION AND BACKGROUND	1
1.3 SUMMARY OF WORK TASKS.....	1
1.3.1 Geophysical Investigation - Underground Utility Clearance Policy.....	1
1.3.2 "Soft-Dig" Clearance of Borehole Locations	2
1.3.3 Day Lighting Excavation and Soil Screening	2
1.3.4 Soil Investigation and Sampling	2
1.3.5 Geotechnical Soil Boring	3
1.3.6 Geotechnical Test Pits	3
1.3.7 QA/QC Sampling	4
1.3.8 Equipment Decontamination.....	4
1.3.9 Management of Investigative-Derived Waste	4
1.3.10 Drum Sampling.....	5
1.3.11 Surveying.....	5
2.0 IDENTIFICATION OF KEY PERSONNEL/HEALTH AND SAFETY PERSONNEL	5
2.1 LANGAN PROJECT MANAGER	5
2.2 LANGAN CORPORATE HEALTH AND SAFETY MANAGER.....	5
2.3 LANGAN SITE HEALTH & SAFETY OFFICER	6
2.4 LANGAN FIELD TEAM LEADER RESPONSIBILITIES	6
2.5 CONTRACTOR RESPONSIBILITIES	7
3.0 TASK/OPERATION SAFETY AND HEALTH RISK ANALYSES	7
3.1 SPECIFIC TASK SAFETY ANALYSIS.....	7
3.1.1 Geophysical Survey	7
3.1.2 "Soft Dig" Clearance of Borehole Locations	8
3.1.3 Daylighting Test Pit	8
3.1.4 Indoor Drilling and Excavation	8
3.1.5 Soil Investigation and Sampling	9
3.1.6 Geotechnical Soil Boring Investigation.....	9
3.1.7 Geotechnical Test Pit	9
3.1.8 Drum Sampling.....	10
3.2 RADIATION HAZARDS.....	10
3.3 PHYSICAL HAZARDS.....	10
3.3.1 Explosion	10
3.3.2 Heat Stress.....	10
3.3.3 Cold-Related Illness.....	12
3.3.4 Noise	13
3.3.5 Hand and Power Tools	13
3.3.6 Slips, Trips, and Fall Hazards.....	13
3.3.7 Utilities (Electrocution and Fire Hazards)	14
3.3.8 Adequate Lighting	15
3.3.9 Physical Hazard Considerations for Material Handling.....	15
3.3.10 Hearing Conservation	16

3.3.11	Open Water	16
3.4	BIOLOGICAL HAZARDS	17
3.4.1	Animals	17
3.4.2	Insects	17
3.4.3	Plants	17
3.4.4	Mold	17
3.5	ADDITIONAL SAFETY ANALYSIS	18
3.5.1	Presence of Non-Aqueous Phase Liquids (NAPL)	18
3.6	JOB SAFETY ANALYSIS	18
4.0	PERSONNEL TRAINING	19
4.1	BASIC TRAINING	19
4.2	INITIAL SITE-SPECIFIC TRAINING	19
4.3	TAILGATE SAFETY BRIEFINGS	19
5.0	MEDICAL SURVEILLANCE	19
5.1	MERCURY MONITORING	20
5.2	CORONAVIRUS	20
6.0	PERSONAL PROTECTIVE EQUIPMENT	21
6.1	LEVELS OF PROTECTION	21
6.2	RESPIRATOR FIT-TEST	23
6.3	RESPIRATOR CARTRIDGE CHANGE-OUT SCHEDULE	23
7.0	AIR QUALITY MONITORING AND ACTIONS LEVELS	23
7.1	MONITORING DURING SITE OPERATIONS	23
7.1.1	Volatile Organic Compounds	24
7.1.2	Metals	24
7.1.3	Methane	25
7.2	MONITORING EQUIPMENT CALIBRATION AND MAINTENANCE	25
7.3	DETERMINATION OF BACKGROUND LEVELS	25
8.0	COMMUNITY AIR MONITORING PROGRAM	25
8.1	DUST SUPPRESSION TECHNIQUES	27
9.0	WORK ZONES AND DECONTAMINATION	27
9.1	SITE CONTROL	27
9.2	CONTAMINATION ZONE	28
9.2.1	Personnel Decontamination Station	28
9.2.2	Minimization of Contact with Contaminants	28
9.2.3	Personnel Decontamination Sequence	28
9.2.4	Emergency Decontamination	28
9.2.5	Hand-Held Equipment Decontamination	29
9.2.6	Heavy Equipment Decontamination	29
9.3	SUPPORT ZONE	29
9.4	COMMUNICATIONS	29
9.5	THE BUDDY SYSTEM	30
10.0	NEAREST MEDICAL ASSISTANCE	30
11.0	STANDING ORDERS/SAFE WORK PRACTICES	30

12.0	SITE SECURITY	31
13.0	UNDERGROUND UTILITIES	31
14.0	SITE SAFETY INSPECTION	31
15.0	HAND AND POWER TOOLS	31
16.0	EMERGENCY RESPONSE	32
16.1	GENERAL	32
16.2	RESPONSIBILITIES	33
16.2.1	Health and Safety Officer (HSO)	33
16.2.2	Emergency Coordinator	33
16.2.3	Site Personnel	33
16.3	COMMUNICATIONS	33
16.4	LOCAL EMERGENCY SUPPORT UNITS	34
16.5	PRE-EMERGENCY PLANNING	34
16.6	EMERGENCY MEDICAL TREATMENT	34
16.8	EMERGENCY SITE EVACUATION ROUTES AND PROCEDURES	35
16.8.1	Designated Assembly Locations	35
16.8.2	Accounting for Personnel	36
16.9	FIRE PREVENTION AND PROTECTION	36
16.9.1	Fire Prevention	36
16.10	SIGNIFICANT VAPOR RELEASE	36
16.11	OVERT CHEMICAL EXPOSURE	37
16.12	DECONTAMINATION DURING MEDICAL EMERGENCIES	37
16.13	ADVERSE WEATHER CONDITIONS	37
16.14	SPILL CONTROL AND RESPONSE	38
16.15	EMERGENCY EQUIPMENT	39
16.16	RESTORATION AND SALVAGE	39
16.17	DOCUMENTATION	39
17.0	SPECIAL CONDITIONS	40
17.1	SCOPE	40
17.2	RESPONSIBILITIES	40
17.3	PROCEDURES	40
17.3.1	Ladders	40
17.3.2	First Aid/Cardiopulmonary Resuscitation (CPR)	42
17.3.3	Hydrogen Sulfide	43
17.3.4	Fire Protection/Extinguishers	45
17.3.5	Overhead lines	45
17.3.6	Trade Secret	47
17.3.7	Bloodborne Pathogens	47
18.0	RECORDKEEPING	50
18.1	FIELD CHANGE AUTHORIZATION REQUEST	50
18.2	MEDICAL AND TRAINING RECORDS	50
18.3	ONSITE LOG	50
18.4	DAILY SAFETY MEETINGS ("TAILGATE TALKS")	50
18.5	EXPOSURE RECORDS	50
18.6	HAZARD COMMUNICATION PROGRAM/MSDS-SDS	51
18.7	DOCUMENTATION	51

18.7.1	Accident and Injury Report Forms.....	51
19.0	CONFINED SPACE ENTRY	52
20.0	HASP ACKNOWLEDGEMENT FORM.....	52

LIST OF TABLES

Table 1	Task Hazard Analysis
Table 2	Contaminant Hazards of Concern
Table 3	Summary of Monitoring Equipment
Table 4	Instrumentation Action Levels
Table 5	Emergency Notification List*
Table 6	Suggested Frequency of Physiological Monitoring For Fit and Acclimated Workers
Table 7	Heat Index

LIST OF FIGURES

Figure 1	Site Location Map
Figure 2	Route to Hospital (map with directions) *

LIST OF APPENDICES

Attachment A	Standing Orders*
Attachment B	Decontamination Procedures
Attachment C	Employee Exposure/Injury Incident Report
Attachment D	Calibration Log
Attachment E	Material Data Safety Sheets / Safety Data Sheets*
Attachment F	Jobsite Safety Inspection Checklist
Attachment G	Job Safety Analysis Forms
Attachment H	Tailgate Safety Meeting Log
Attachment I	The City of New York Executive Order No. 74

* Items to be posted prominently on-site or made readily available to personnel.

1.0 INTRODUCTION

1.1 General

This HEALTH AND SAFETY PLAN (HASP) was developed to address disturbance of known and reasonably anticipated subsurface contaminants and comply with Occupational Safety and Health Administration (OSHA) Standard 29 Code of Federal Regulation (CFR) 1910.120(b)(4), Hazardous Waste Operations and Emergency Response during anticipated site for the property defined as being located at 42 5th Street and 431 Hoyt Street in the Carroll Gardens neighborhood of Brooklyn, New York (the Site). The site is identified on the Brooklyn Borough Tax Map as Block 471, Lots 1 and 100.

This HASP provides the minimum requirements for implementing site operations during future remedial measures. All contractors performing work on this site must implement their own HASP that, at a minimum, adheres to this HASP. The contractor is responsible for their own health and safety and that of their subcontractors. Langan personnel will implement this HASP while onsite.

The content of this HASP may change or undergo revision based upon additional information made available to health and safety personnel, monitoring results, or changes in the work plan.

1.2 Site Location and Background

The Site includes properties identified as 42 5th Street and 431 Hoyt Street in the Carroll Gardens neighborhood of the Borough of Brooklyn, Kings County, New York (Figure 1), and comprises two properties, identified on the Brooklyn Borough Tax as Block 471, Lot 1 and Lot 100. The Site and surrounding area were originally part of the wetlands system adjacent to Gowanus Creek. Backfilling of the area began with the construction of the Gowanus Canal in the 1860s. Shortly thereafter, the Citizens Gas Company constructed a coal gasification plant between 5th Street and 6th Street on the northern portions of the Site. In the 1960s, the site was occupied by a concrete plant which closed in 2019.

1.3 Summary of Work Tasks

1.3.1 Geophysical Investigation - Underground Utility Clearance Policy

Prior to the commencement of intrusive field activities (i.e., soil borings); Langan will follow the Langan Underground Utility Clearance Policy including retaining a geophysical consultant to conduct a geophysical survey using ground penetrating radar (GPR) and electromagnetic

detection equipment. The objective of the survey will be to identify any underground storage tank (UST) structures, drains, underground utilities, and other subsurface anomalies that may be encountered during the investigation. During this time Langan personnel will inspect the site and confirm investigation locations are both accessible and free of potential utility or other known or suspected subsurface structures.

1.3.2 “Soft-Dig” Clearance of Borehole Locations

If there is no geophysical survey for utility clearance or the results of the geophysical survey are inconclusive at specific locations subject to intrusive work, or otherwise in compliance with Langan’s Underground Utility Clearance Policy, the drilling contractor may “soft-dig” each proposed drilling location or a separate contractor may be retained to “soft-dig” the locations to confirm they are free of utilities or other known or suspected subsurface structures. The dimensions of each location should extend to a depth of 5-feet and be about 1.5 times the anticipated diameter of the borehole when drilled. Langan personnel will confirm that the “soft dig” activities are completed to these specifications.

1.3.3 Day Lighting Excavation and Soil Screening

Langan may retain an excavation contractor to daylight buried unidentified structures. The purpose of the daylighting is to confirm if these structures are subsurface structures of concern (USTs, utilities sewer lines, storm water drains, electrical, gas or other utility line as well as other artifacts pertinent to the work plan). The excavation contractor will contact the appropriate utility mark-out authority and make available to their staff the verification number and effective dates.

The excavation contractor will employ “soft dig” methods in accordance with the Langan Underground Utility Clearance Policy when excavating. Langan may screen excavated soil for visual, olfactory, and instrumental indicators suggestive of a potential chemical or petroleum release. Instrument screening for the presence of volatile organic compounds (VOC) may be performed with a duly calibrated photoionization detector (PID). Contractors will notify Langan personnel if they identify indications suggestive of a potential chemical or petroleum release. Contaminated material shall be handled, and properly disposed in accordance with federal, state and city regulations, criteria, and guidelines.

1.3.4 Soil Investigation and Sampling

Langan will retain a drilling contractor to advance soil borings to a depth below grade surface (bgs) specified in the work plan. Borings will be installed at the approximate locations indicated in Langan’s work plan but may be moved in the field based on utility clearance and accessibility. The drilling contractor will contact the appropriate utility mark-out authority and make available to

their drilling staff the verification number and effective dates. Langan will record the verification number and effective dates from the drillers. Langan will also note the location of marked out utilities on the site plan and scan the data into the project folder.

Langan personnel will screen soil for visual, olfactory, and instrumental indicators suggestive of a potential petroleum release. Instrument screening for the presence of VOC may be performed with a duly field calibrated PID (or equivalent). Langan personnel will collect soil samples from the proposed soil boring locations following the sampling plan outlined in the work plan. The borings will be filled with clean soil cuttings, clean sand or bentonite grout and capped at grade to match the surrounding surface after samples are collected.

Soil samples will be submitted to a specific lab per the work plan or to a New York State Department of Health (NYSDOH) Environmental Laboratory Approval Program (ELAP)-certified laboratory and analyzed in accordance with work plan specifications.

1.3.5 Geotechnical Soil Boring

Langan may retain a geotechnical drilling contractor to advance geotechnical soil borings to a depth bgs specified in the work plan. Soil boring locations may on shore or advanced from a barge. The locations may be based on the results of the geophysical investigation, site inspection and document review. The drilling contractor will contact the appropriate utility mark-out authority and make available to their drilling staff the verification number and effective dates.

Langan will observe the borehole advancement and record appropriate geotechnical data including the results of Standard Penetration Tests (SPT), soil and stratigraphic identification, and other data as required by the work plan. The geotechnical boring may also be cored in accordance with the work plan if bedrock is encountered. One or more borings may be completed as observation wells to be completed as specified in the work plan. All borings will be backfilled and abandoned in accordance with work plan specifications. Observation wells may be abandoned at a future date.

Langan personnel may collect soil samples for geotechnical evaluation. Soil samples may be submitted to a geotechnical laboratory and analyzed in accordance with work plan specifications.

1.3.6 Geotechnical Test Pits

Langan may retain an excavation contractor to advance geotechnical test pits to a depth below grade surface (bgs) specified in the work plan. Locations will be based on the results of the geophysical survey, the site inspection and document review. The excavation contractor is

responsible for all permits and will contact the appropriate utility mark-out authority and make available to their staff the verification number and effective dates.

The excavation contractor may be required to use a bladed equipped excavation bucket. Langan personnel will confirm this and observe the test pit excavation noting foundation and soil attributes as required by the work plan. Langan personnel may collect soil samples for geotechnical evaluation. The excavation will be filled with soil cuttings after the observations are completed and samples are collected.

Soil samples, if collected, will be submitted to a geotechnical laboratory, and analyzed in accordance with work plan specifications.

1.3.7 QA/QC Sampling

Samples for quality assurance/quality control [QA/QC] may also be collected and submitted to an approved laboratory and analyzed in accordance with work plan specifications. Information regarding the QA/QC samples including required method of analysis may be included in the same COC as the soil samples unless otherwise instructed by the work plan.

1.3.8 Equipment Decontamination

Before the start of the day's sampling and after sampling each run, sampling equipment will be decontaminated by the decontamination process outlined Attachment B - Decontamination Procedures. Decontamination wastes and purge water will be temporarily stored on site pending analytical results.

1.3.9 Management of Investigative-Derived Waste

The investigative-derived waste (IDW) generated during this investigation will be contained in DOT-approved 55-gallon drums. The drums will be temporarily stored on the site or as directed by the client representative. All drums will be filled between to two-thirds full to allow easy maneuvering during drum pickup and disposal. Drum labels are to be provided by Langan (Environmental Closet). All drums will be labeled as "IDW Pending Analysis" until sample data are reported from the laboratory. Drum labels will include date filled and locations where waste was generated along with the standard information required by the labels in accordance with the Langan SOP09, Drum Labeling.

Closed top drums are to be used to store liquids. Debris, including plastic sheeting, polyethylene tubing, personal protection equipment (PPE), decontamination debris, etc. will be segregated from and disposed in large heavy duty garbage bags and disposed of at the site. Excess unused

glassware should be returned to the lab along with the last day of collection samples.

1.3.10 Drum Sampling

Langan personnel may collect drum samples, as required, prior to off-site drum disposal. Samples will be placed into laboratory-supplied batch-certified clean glassware and submitted to an approved laboratory and analyzed in accordance with work plan specifications, if required.

1.3.11 Surveying

Surveying activities may be completed by Langan. Surveying will be conducted by licensed surveyors.

2.0 IDENTIFICATION OF KEY PERSONNEL/HEALTH AND SAFETY PERSONNEL

The following briefly describes the health and safety (H&S) designations and general responsibilities that may be employed for this site. The titles have been established to accommodate the project needs and requirements and ensure the safe conduct of site activities. The H&S personnel requirements for a given work location are based on the proposed site activities.

2.1 Langan Project Manager

The Langan Environmental Project Manager (PM) is Michael and the Geotechnical PM is James Rodger, their responsibilities include:

- Ensuring that this HASP is developed, current, and approved prior to on-site activities.
- Ensuring that the tasks in the project are performed in a manner consistent with Langan's comprehensive *Health and Safety Program for Hazardous Waste Operations* and this HASP.

2.2 Langan Corporate Health and Safety Manager

The Langan Corporate Health and Safety Manager is Tony Moffa. His responsibilities include:

- Updating the *Construction Health and Safety Program for Hazardous Waste Operations*.
- Assisting the site Health and Safety Officer (HSO) with the development of the HASP, updating HASP as dictated by changing conditions, job site inspection results, etc., and approving changes to this HASP.
- Assisting the HSO in the implementation of this HASP and conducting Jobsite Safety

Inspections and assisting with communication of results and correction of shortcomings found.

- Maintaining records on personnel (medical evaluation results, training and certifications, accident investigation results, etc.).

2.3 Langan Site Health & Safety Officer

The Langan site HSO is William Bohrer. His responsibilities include:

- Participating in the development and implementation of this HASP.
- When on-site, assisting the Langan Field Team Leader in conducting Tailgate Safety Meetings and Jobsite Safety Inspections and correcting any shortcomings in a timely manner.
- Ensuring that proper PPE is available, worn by employees, and properly stored and maintained.
- Controlling entry into and exit from the site contaminated areas or zones.
- Monitoring employees for signs of stress, such as heat stress, fatigue, and cold exposure.
- Monitoring site hazards and conditions.
- Knowing (and ensuring that all site personnel also know) emergency procedures, evacuation routes, and the telephone numbers of the ambulance, local hospital, poison control center, fire department, and police department.
- Resolving conflicts that may arise concerning safety requirements and working conditions.
- Reporting all incidents, injuries, and near misses to the Langan Incident/Injury Hotline immediately and the client representative.

2.4 Langan Field Team Leader Responsibilities

The Langan Field Team Leader (FTL) is to be determined prior to the start of field activities. The Field Team Leader's responsibilities include:

- The management of the day-to-day site activities and implementation of this HASP in the field.
- Participating in and/or conducting Tailgate Safety Meetings and Jobsite Safety Inspections and correcting any shortcomings in a timely manner.
- When a Community Air Monitoring Operating Program (CAMP) is part of the scope, the FTL will set up and maintain community air monitoring activities and instruct the responsible contractor to implement organic vapor or dust mitigation when necessary.
- Overseeing the implementation of activities specified in the IRMWP.

2.5 Contractor Responsibilities

The contractor must develop and implement their own HASP for their employees, their subcontractors, and consultants. The contractor is responsible for their own health and safety and that of their subcontractors. Contractors operating on the site must designate their own FTL, HSO, and Health and Safety Manager (HSM). The contractor's HASP will be at least as stringent as this HASP. The contractor must be familiar with and abide by the requirements outlined in their own HASP. A contractor may elect to adopt Langan's HASP as its own provided that it has given written notification to Langan, but where Langan's HASP excludes provisions pertinent to the contractor's work (i.e., confined space entry); the contractor must provide written addendums to this HASP. Additionally, the contractor must:

- Ensure their employees are trained in the use of all appropriate PPE for the tasks involved.
- Notify Langan of any hazardous material brought onto the job site or site-related area, the hazards associated with the material, and must provide a material safety data sheet (MSDS) or safety data sheet (SDS) for the material.
- Have knowledge of, understand, and abide by all current federal, state, and local health and safety regulations pertaining to the work.
- Ensure their employees handling hazardous materials, if identified at the Site, have received current training in the appropriate levels of 29 CFR 1910.120, *Hazardous Waste Operations and Emergency Response* (HAZWOPER) if hazardous waste is identified at the Site.
- Ensure their employees handling hazardous materials, if identified at the Site, have been fit-tested within the year on the type of respirator they will wear; and
- Ensure all air monitoring is in place pertaining to the health and safety of their employees as required by OSHA 1910.120; and
- All contractors must adhere to all federal, state, and local regulatory requirements.

3.0 TASK/OPERATION SAFETY AND HEALTH RISK ANALYSES

A Task-Hazard Analysis (Table 1) was completed for general construction hazards that may be encountered at the Site. The potential contaminants that might be encountered during the field activities and the exposure limits are listed in Table 2 complete inventory of MSDS/SDS for chemical products used on site is included in Attachment E.

3.1 Specific Task Safety Analysis

3.1.1 Geophysical Survey

Langan personnel are not permitted to operate or otherwise handle the geophysical equipment

including any downhole geophysical equipment subsequently used to survey boreholes. When boring locations are surveyed with surface geophysical equipment, the locations of the borings as well as utilities and other artifacts that may interfere with the subsurface investigation are to be marked with indelible paint, flags, or color tape (when marking indoor locations that the client has specifically requested not be marked with indelible paint). This information must also be added to the site map. When applying paint, proper PPE including at a minimum, hand protection should be used.

3.1.2 "Soft Dig" Clearance of Borehole Locations

"Soft-Dig" clearance will be completed by the contractor. Langan personnel are not permitted to operate or otherwise handle the contractor's equipment. Langan will update the site map to include the locations of the cleared borehole locations as well as utilities and other artifacts that may interfere with the subsurface investigation.

3.1.3 Daylighting Test Pit

Excavation daylighting must abide by OSHA excavation standards (Part 1926.651) and conform to the Langan Underground Utility Clearance Policy. Daily inspections of excavations, the adjacent areas, and protective systems shall be made by a competent person for evidence of a situation that could result in cave-ins, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions. An inspection shall be conducted by the competent person prior to the start of work and as needed throughout the shift. Inspections shall also be made after every rainstorm or other hazard increasing occurrence. Sampling the soil requires the donning of chemical resistant gloves in addition to the standard PPE. Langan personnel are not to operate excavation equipment. This task is to be completed by the excavation contractor.

3.1.4 Indoor Drilling and Excavation

The work scope may require indoor excavation where there may not be adequate ventilation sufficient to safely operate any rig or excavation equipment powered by an internal combustion engine. Where possible, all such work should be done by equipment powered by electricity. If such equipment is used and must be directly wired to the buildings electrical system or to an independent system, this work must be completed by a licensed electrician in accordance with all electrical codes applicable to the work.

Indoor work which is to be completed with equipment powered by an internal combustion engine must incorporate air monitoring of carbon monoxide (CO) using calibrated air monitoring equipment (MultiRAE or equivalent). In addition, the work plan should incorporate mitigation for

venting engine exhaust fumes directly to the outdoors and for circulating fresh air into the work area.

The OSHA Time Weighted Average (TWA) Permissible Exposure Limit (PEL) for CO from 50 to 35 parts per million (ppm). Langan will monitor CO with a suitable monitoring device. If CO levels exceed 5 ppm, Langan will instruct contractors to begin mitigation measures. These measures are at a minimum:

- Increase air circulation using industrial size fans to bring additional fresh air into the building or vent exhaust to the outside.
- Modify the passive exhaust method being used to increase venting circulation by using wider diameter tubing or sealing tubing connections; or
- Modify the work schedule where the rig is turned off to allow time for CO levels to fall back to background.

All work must cease if CO levels reach 35 ppm. The Langan engineer is to report to the PM and H&S officer when an action level is reached.

3.1.5 Soil Investigation and Sampling

Sampling the soil requires the donning of chemical resistant gloves in addition to the standard PPE. Langan personnel are not to operate drilling or excavation equipment nor open sampling devices (acetate liners, sonic sample bags, etc.). These tasks are to be completed by the driller or excavation contractor.

3.1.6 Geotechnical Soil Boring Investigation

Handling soil requires the donning of chemical resistant gloves in addition to the standard PPE. Handling cores and the core boxes requires the donning of either work gloves or puncture resistant gloves in addition to chemically resistant gloves (nitrile) which can be placed over the work or puncture resistant gloves. Langan personnel are not to operate drilling equipment nor open sampling devices (split spoons, acetate liners, sonic sample bags, etc.). These tasks are to be completed by the drilling contractor.

3.1.7 Geotechnical Test Pit

Excavation geotechnical test pits must abide by OSHA excavation standards (Part 1926.651). Daily inspections of excavations, the adjacent areas, and protective systems shall be made by a competent person for evidence of a situation that could result in cave-ins, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions. An inspection

shall be conducted by the competent person prior to the start of work and as needed throughout the shift. Inspections shall also be made after every rainstorm or other hazard increasing occurrence. Sampling the soil requires the donning of chemical resistant gloves in addition to the standard PPE. Langan personnel are not to operate excavation equipment. This task is to be completed by the excavation contractor.

3.1.8 Drum Sampling

Drilling fluid, rinse water, grossly contaminated soil samples, and cuttings will be containerized in 55-gallon drums for disposal off-site. Each drum must be labeled in accordance with the Langan Drum Labeling Standard Operating Procedure (SOP09). Sampling drums requires the donning of work gloves when opening the drums and chemical resistant gloves when sampling in addition to standard PPE.

Langan personnel and contractors are not to move or open any orphaned (unlabeled) drum found on the site without approval of the project manager.

3.2 Radiation Hazards

No radiation hazards are known or expected at the site.

3.3 Physical Hazards

Physical hazards, which may be encountered during site operations for this project, are detailed in Table 1.

3.3.1 Explosion

No explosion hazards are expected for the scope of work at this site.

3.3.2 Heat Stress

The use of Level C protective equipment, or greater, may create heat stress. Monitoring of personnel wearing personal protective clothing should commence when the ambient temperature is 72°F or above. Table 6 presents the suggested frequency for such monitoring. Monitoring frequency should increase as ambient temperature increases or as slow recovery rates are observed. Refer to Table 7 to assist in assessing when the risk for heat-related illness is likely. To use this table, the ambient temperature and relative humidity must be obtained (a regional weather report should suffice). Heat stress monitoring should be performed by the HSO or the FTL, who must be able to recognize symptoms related to heat stress.

To monitor the workers, be familiar with the following heat-related disorders and their symptoms:

- **Heat Cramps:** Painful spasms of arm, leg, or abdominal muscles, during or after work
- **Heat Exhaustion:** Headache, nausea, dizziness; cool, clammy, moist skin; heavy sweating; weak, fast pulse; shallow respiration, normal temperature
- **Heat Stroke:** Headache, nausea, weakness, hot dry skin, fever, rapid strong pulse, rapid deep respirations, loss of consciousness, convulsions, coma. *This is a life-threatening condition.*

Do not permit a worker to wear a semi-permeable or impermeable garment when they are showing signs or symptoms of heat-related illness.

To monitor the worker, measure:

- **Heart rate:** Count the radial pulse during a 30-second period as early as possible in the rest period. If the heart rate exceeds 100 beats per minute at the beginning of the rest period, shorten the next work cycle by one-third and keep the rest period the same. If the heart rate still exceeds 100 beats per minute at the next rest period, shorten the following work cycle by one-third. A worker cannot return to work after a rest period until their heart rate is below 100 beats per minute.
- **Oral temperature:** Use a clinical thermometer (3 minutes under the tongue) or a similar device to measure the oral temperature at the end of the work period (before drinking). If oral temperature exceeds 99.6°F (37.6°C), shorten the next work cycle by one-third without changing the rest period. A worker cannot return to work after a rest period until their oral temperature is below 99.6°F. If oral temperature still exceeds 99.6°F (37.6°C) at the beginning of the next rest period, shorten the following cycle by one-third. Do not permit a worker to wear a semi-permeable or impermeable garment when oral temperature exceeds 100.6°F (38.1°C).

Prevention of Heat Stress - Proper training and preventative measures will aid in averting loss of worker productivity and serious illness. Heat stress prevention is particularly important because once a person suffers from heat stroke or heat exhaustion, that person may be predisposed to additional heat-related illnesses. To avoid heat-stress the following steps should be taken:

- Adjust work schedules.
- Mandate work slowdowns as needed.
- Perform work during cooler hours of the day if possible or at night if adequate lighting can be provided.

- Provide shelter (air-conditioned, if possible) or shaded areas to protect personnel during rest periods.
- Maintain worker's body fluids at normal levels. This is necessary to ensure that the cardiovascular system functions adequately. Daily fluid intake must equal the amount of water lost in sweat, i.e., eight fluid ounces (0.23 liters) of water must be ingested for every eight ounces (0.23 kilograms [kg]) of weight lost. The normal thirst mechanism is not sensitive enough to ensure that enough water will be drunk to replace lost sweat. When heavy sweating occurs, encourage the worker to drink more. The following strategies may be useful:
 - Maintain water temperature 50° to 60°F (10° to 16.6°C).
 - Provide small disposal cups that hold about four ounces (0.1 liters).
 - Have workers drink 16 ounces (0.5 liters) of fluid (preferably water or dilute drinks) before beginning work.
 - Urge workers to drink a cup or two every 15 to 20 minutes, or at each monitoring break. A total of 1 to 1.6 gallons (4 to 6 liters) of fluid per day are recommended, but more may be necessary to maintain body weight.
 - Train workers to recognize the symptoms of heat-related illness.

3.3.3 Cold-Related Illness

If work on this project begins in the winter months, thermal injury due to cold exposure can become a problem for field personnel. Systemic cold exposure is referred to as hypothermia. Local cold exposure is called frostbite.

- **Hypothermia** - Hypothermia is defined as a decrease in the patient core temperature below 96°F. The body temperature is normally maintained by a combination of central (brain and spinal cord) and peripheral (skin and muscle) activity. Interference with any of these mechanisms can result in hypothermia, even in the absence of what normally is considered a "cold" ambient temperature. Symptoms of hypothermia include shivering, apathy, listlessness, sleepiness, and unconsciousness.
- **Frostbite** - Frostbite is both a general and medical term given to areas of local cold injury. Unlike systemic hypothermia, frostbite rarely occurs unless the ambient temperatures are less than freezing and usually less than 20°F. Symptoms of frostbite are a sudden blanching or whitening of the skin; the skin has a waxy or white appearance and is firm to the touch; tissues are cold, pale, and solid.

Prevention of Cold-Related Illness - To prevent cold-related illness:

- Educate workers to recognize the symptoms of frostbite and hypothermia.

- Identify and limit known risk factors:
- Assure the availability of an enclosed, heated environment on or adjacent to the site.
- Assure the availability of dry changes of clothing.
- Assure the availability of warm drinks.
- Start (oral) temperature recording at the job site:
- At the FSO or Field Team Leader's discretion when suspicion is based on changes in a worker's performance or mental status.
- At a worker's request.
- As a screening measure, two times per shift, under unusually hazardous conditions (e.g., wind-chill less than 20°F, or wind-chill less than 30°F with precipitation).
- As a screening measure whenever anyone worker on the site develops hypothermia.

Any person developing moderate hypothermia (a core temperature of 92°F) cannot return to work for 48 hours.

3.3.4 Noise

Work during the proposed activities may be conducted at locations with high noise levels from the operation of equipment. Hearing protection will be used, as necessary.

3.3.5 Hand and Power Tools

The use of hand and power tools can present a variety of hazards, including physical harm from being struck by flying objects, being cut, or struck by the tool, fire, and electrocution. All hand and power tools should be inspected for health and safety hazards prior to use. If deemed unserviceable/un-operable, notify the supervisor and tag equipment out of service. Ground Fault Circuit Interrupters (GFCIs) are required for all power tools requiring direct electrical service.

3.3.6 Slips, Trips, and Fall Hazards

Care should be exercised when walking at the site, especially when carrying equipment. The presence of surface debris, uneven surfaces, pits, facility equipment, and soil piles contribute to tripping hazards and fall hazards. To the extent possible, all hazards should be identified and marked on the site, with hazards communicated to all workers in the area.

3.3.7 Utilities (Electrocution and Fire Hazards)

3.3.7.1 Utility Clearance

The possibility of encountering underground utilities poses fire, explosion, and electrocution hazards. All excavation work will be preceded by a review of available utility drawings and by notification of the subsurface work to N.Y. One –Call–Center.

3.3.7.2 Lockout-Tagout

The potential adverse effects of electrical hazards include burns, arc flashes, and electrocution, which could result in serious injury including death. Therefore, there is a procedure that establishes the requirements for the lockout/tag out (LOTO) of energy isolating devices in accordance with the OSHA electrical lockout and tagging requirements as specified in 29CFR1910.147 and 29 CFR 1926.417. This procedure will be used to ensure that all machines and equipment are isolated from potentially hazardous energy. If possible, equipment that could cause injury due to unexpected energizing, start-up, or release of stored energy will be locked/tagged, before field personnel performs work activities.

The facility owner/operator/representative is to be the authorized person that will initiate and perform the LOTO in accordance with applicable rules and practices. Inerting of electrical power sources is to be completed by an authorized and licensed electrician. Langan personnel will follow LOTO protocols and practices including adding a separate lock/signature to the LOTO chain in accordance with said protocols and practices.

SPECIAL NOTE: Project personnel will assume that all electrical equipment at the surface, subsurface, and overhead locations are energized until equipment has been designated and confirmed as de-energized by a utility company representative. Langan will notify the designated utility representative prior to working adjacent to this equipment and will verify that the equipment is energized or de-energized in the vicinity of the work location. No project work shall be performed by Langan personnel or subcontractors near energized electrical lines or equipment.

The FTL shall accompany the designated facility owner/operator/representative or authorized/licensed electrician in surveying to locate and identify all energy-isolating devices. Langan will note which switches, valves or other isolating devices are used for inerting the equipment and how they are set assuring LOTO. The lockout/tagout procedure involves, but is not limited to, electricity, motors, steam, natural gas, compressed air, hydraulic systems, digesters, sewers, etc.

3.3.8 Adequate Lighting

Indoor or night activities must be done under adequate lighting conditions. The Langan field engineer must be able to clearly see the equipment, all controls and have sufficient lighting to detail color labels. Battery operated lights are sufficient provided they cast a wide enough field to provide the required lighting and there are back-up batteries and emergency flashlights available. Electrically powered lights are suitable provided the electrical source is equipped with a ground fault interrupt circuit (GFIC) and the extensions cords are visually inspected and not used if they show cracked or missing insulation. If a generator is supplying the electricity, it must be outdoors and properly vented.

3.3.9 Physical Hazard Considerations for Material Handling

There are moderate to severe risks associated with moving heavy objects at the Site. The following physical hazards should be considered when handling materials at the Site:

- Heavy objects will be lifted and moved by mechanical devices rather than manual effort whenever possible.
- The mechanical devices will be appropriate for the lifting of moving tasks and will be operated only by trained and authorized personnel.
- Objects that require special handling or rigging will only be moved under the guidance of a person who has been specifically trained to move such objects.
- Lifting devices will be inspected, certified, and labeled to confirm their weight capacities. Defective equipment will be taken out of service immediately and repaired or destroyed.
- The wheels of any trucks being loaded or unloaded will be chocked to prevent movement. Outriggers will be fully extended on a flat, firm surface during operation.
- Personnel will not pass under a raised load, nor will a suspended load be left unattended.
- Personnel will not be carried on lifting equipment unless it is specifically designed to carry passengers.
- All reciprocating, rotating, or other moving parts will be guarded at all times.
- Accessible fire extinguishers, currently (monthly) inspected, will be available in all mechanical lifting devices.
- Verify all loads/materials are secure before transportation.

Material handling tasks that are unusual or require specific guidance will need a written addendum to this HASP. The addendum must identify the lifting protocols before the tasks are performed. Upon approval, the plan must be reviewed with all affected employees and documented. Any deviation from a written plan will require approval by the Langan HSM.

3.3.10 Hearing Conservation

Under the construction industry standard, the maximum permissible occupational noise exposure is 90 A-weighted decibels (dbA) (8-hour TWA), and noise levels in excess of 90 dbA must be reduced through feasible administrative and engineering controls (20 CFR 1926.52). Hearing protection is required when working within 15 feet of vacuum extraction equipment and drill rigs.

3.3.11 Open Water

Employees working over or near water, where the danger of drowning exists, must be provided with U.S. Coast Guard-approved life jackets or buoyant work vests. Prior to and after each use, the buoyant work vests or life preservers must be inspected for defects that would alter their strength or buoyancy. Defective units must not be used.

And should a worker fall into the water, OSHA requires (29 CFR 1926.106(c)) that ring buoys with at least 90 feet of the line must be provided and readily available for emergency rescue operations. The distance between ring buoys must not exceed 200 feet. Another remedial action required by OSHA (29 CFR 1926.106(d)) is the use of lifesaving skiffs.

OSHA requires that at least one lifesaving skiff must be immediately available at locations where employees are working over or adjacent to water and must include the following provisions.

- The skiff must be in the water or capable of being quickly launched by one person.
- At least one person must be present and specifically designated to respond to water emergencies and operate the skiff at all times when there are employees above water.
- When the operator is on break another operator must be designated to provide requisite coverage when there are employees above water.
- The designated operator must either have the skiff staffed at all times or have someone remain in the immediate area such that the operator can quickly reach the skiff and perform rescue services.
- The skiff operator may be assigned other tasks provided the tasks do not interfere with the operator's ability to quickly reach the skiff.
- A communication system, such as a walkie-talkie, must be used to inform the skiff operator of an emergency and to inform the skiff operator where the skiff is needed.
- The skiff must be equipped with both a motor and oars.

With regard to the number of skiffs required and the appropriate maximum response time, the following factors must be evaluated:

- The number of work locations where there is a danger of falling into water.
- The distance to each of those locations.

- Water temperature and currents.
- Other hazards such as, but not limited to, rapids, dams, and water intakes.

Other regulations that present H&S practices and PPE for work on or near water include: 29 CFR 1910, Subpart T (401 – 440)

3.4 Biological Hazards

3.4.1 Animals

There is a possibility of encountering wildlife including reptiles, rodents, and other small and medium-size mammals. Langan personnel are to avoid interacting with any wildlife.

3.4.2 Insects

Ticks and other biting or stinging insects may be encountered during site operations. Langan personnel should take necessary precautions including donning long sleeve shirts and insecticide to prevent bites and stings. After fieldwork, Langan personnel should perform a complete visual inspection of their clothing to insure they are not inadvertently harboring ticks. If they do observe a tick bite, they are to contact the HSM or HSO and report the event.

3.4.3 Plants

Poisonous plants may be encountered during site operations. Langan personnel should take necessary precautions including donning long sleeve shirts and applying preventative poison Ivy/Sumac lotion to prevent or limit the effects of exposure. If after fieldwork, Langan employees do observe a reaction to poisonous plant exposure, they are to contact the HSM or HSO and report the event.

3.4.4 Mold

This section is restricted to subsurface investigations where sampling soil, groundwater, soil or sub-slab vapor or ambient air in an indoor environment with slight to moderate mold impact. Mold exposure symptoms include nasal stuffiness, eye irritation, or wheezing.

The Langan field engineer is required to don a ½ face respirator with a minimum p-100 particulate filter and Tyvek™ type overclothing before entering mold impacted indoor work area. The Langan field engineer must be medically cleared and have been properly fitted for a respirator before donning one.

3.5 Additional Safety Analysis

3.5.1 Presence of Non-Aqueous Phase Liquids (NAPL)

Special care and PPE should be considered when NAPL is observed as NAPL is a typically flammable fluid and releases VOCs known to be toxic and/or carcinogenic. If NAPL is present in a monitoring well, vapors from the well casing may contaminate the work area breathing zone with concentrations of VOCs potentially exceeding health and safety action levels. In addition, all equipment used to monitor or sample NAPL (or ground water from wells containing NAPL) must be intrinsically safe. Equipment that directly contacts NAPL must also be resistant to organic solvents.

At a minimum, a PID should be used to monitor for VOCs when NAPL is observed. If NAPL is expected to be observed in an excavation or enclosed area, air monitoring must be started using calibrated air monitoring equipment designed to sound an audio alarm when atmospheric concentrations of VOC are within 10% of the LEL. In normal atmospheric oxygen concentrations, the LEL monitoring may be done with a Wheatstone bridge/catalytic bead type sensor (i.e., MultiRAE). However, in oxygen-depleted atmospheres (confined space), only an LEL designed to work in low-oxygen environments may be used. Best practices require that the LEL monitoring unit be equipped with a long sniffer tube to allow the LEL unit to remain outside the UST excavation.

When NAPL is present, Langan personnel are required to use disposable nitrile gloves at all times to prevent skin contact with contaminated materials. They should also consider having available a respirator and protective clothing (Tyvek® overalls), especially if NAPL is in abundance and there are high concentrations of VOCs.

All contaminated disposables including PPE and sampling equipment must be properly disposed of in labeled 55-gallon drums.

3.6 Job Safety Analysis

A Job Safety Analysis (JSA) is a process to identify existing and potential hazards associated with each job or task so these hazards can be eliminated, controlled, or minimized. A JSA will be performed at the beginning of each workday, and additionally whenever an employee begins a new task or moves to a new location. All JSAs must be developed and reviewed by all parties involved. A blank JSA form and documentation of completed JSAs are in Attachment G.

4.0 PERSONNEL TRAINING

4.1 Basic Training

Completion of an initial 40-hour HAZWOPER training program as detailed in OSHA's 29 CFR 1910.120(e) is required for all employees working on a site engaged in hazardous substance removal or other activities which expose or potentially expose workers to hazardous substances, health hazards, or safety hazards as defined by 29 CFR 1910.120(a). Annual 8-hour refresher training is also required to maintain competencies to ensure a safe work environment. In addition to these training requirements, all employees must complete the OSHA 10-hour Construction Safety and Health training and supervisory personnel must also receive eight additional hours of specialized management training. Training records are maintained by the HSM.

4.2 Initial Site-Specific Training

Training will be provided to specifically address the activities, procedures, monitoring, and equipment for site operations at the beginning of each field mobilization and the beginning of each discrete phase of work. The training will include the site and facility layout, hazards, and emergency services at the site, and will detail all the provisions contained within this HASP. For a HAZWOPER operation, training on the site must be for a minimum of 3 days. Specific issues that will be addressed include the hazards described in Section 3.0.

4.3 Tailgate Safety Briefings

Before starting work each day or as needed, the Langan HSO will conduct a brief tailgate safety meeting to assist site personnel in conducting their activities safely. Tailgate meetings will be documented in Attachment H. Briefings will include the following:

- Work plan for the day.
- Review of safety information relevant to planned tasks and environmental conditions.
- New activities/tasks being conducted.
- Results of Jobsite Safety Inspection Checklist.
- Changes in work practices.
- Safe work practices; and
- Discussion and remedies for noted or observed deficiencies.

5.0 MEDICAL SURVEILLANCE

All personnel who will be performing fieldwork involving potential exposure to toxic and hazardous substances (defined by 29 CFR 1910.120(a)) will be required to have passed an initial

baseline medical examination, with follow-up medical exams thereafter, consistent with 29 CFR 1910.120(f). Medical evaluations will be performed by, or under the direction of, a physician board-certified in occupational medicine.

Additionally, personnel who may be required to perform work while wearing a respirator must receive medical clearance as required under CFR 1910.134(e), *Respiratory Protection*. Medical evaluations will be performed by, or under the direction of, a physician board-certified in occupational medicine. Results of medical evaluations are maintained by the HSM.

5.1 Mercury Monitoring

Langan includes medical monitoring for mercury during the initial baseline and annual physical.

5.2 Coronavirus

General Preventative Measures

Field personnel must follow general proper hygiene measures while in the field including:

- Avoid touching eyes, nose, and mouth.
- Cover coughs or sneezes with tissue and throw in the trash.
- Wash hands often with soap and water for 20 seconds after going to the bathroom, before eating, after blowing nose, coughing, or sneezing.
- Use hand sanitizer with at least 60% alcohol if soap and water are not available.
- Avoid physical contact with other people (e.g., no handshakes).
- Maintain a safe distance of at least six feet from other people (social distancing).
- Wear face coverings when around other workers to minimize the spread of COVID-19. (May be required in certain states or locations.)

Construction Trailers

Employees should avoid the use of shared construction trailers or where employees cannot maintain a safe distance (minimum 6 feet) from other workers. If trailer use is needed, areas such as desks, phones, chairs, and other common areas, should be cleaned and disinfected before and after use. Protocols should be developed to minimize trailer use to essential personnel, restrict use from any workers who are ill or showing symptoms of being ill, use face coverings and ensure a safe distance of six feet can be established between workers.

Communication

Include Coronavirus topics and prevention topics in daily tailgate meetings to ensure Coronavirus awareness is communicated daily. Discussions can focus on general topics including social distancing, prevention measures for field personnel, signs and symptoms, and recent news on the Coronavirus. Site-specific topics should include minimizing face-to-face contact, disinfecting/sterilizing field equipment, use of PPE to reduce exposure, site security, use of face coverings, and other potential exposure issues/concerns.

Sick/Ill Workers

No Langan employee is permitted to be onsite when ill and/or showing potential symptoms of the Coronavirus. Symptoms of the Coronavirus may appear 2-14 days after exposure and can range from mild to severe. The most common symptoms include fever, fatigue, dry cough, shortness of breath chills, repeated shaking with chills, muscle pain, headache, sore throat, or new loss of taste or smell. If an employee or subcontractor is observed being ill or exhibiting symptoms of Coronavirus, employees must immediately utilize their Stop Work Authority and contact their project manager to address the situation. If an employee observes another worker onsite exhibiting symptoms of Coronavirus, immediately utilize Stop Work Authority, notify their project manager, and site construction manager or safety officer. Work should resume when the safety and health of Langan and subcontractors is adequately addressed.

6.0 PERSONAL PROTECTIVE EQUIPMENT

6.1 Levels of Protection

Langan will provide PPE to Langan employees to protect them from the specific hazards they are likely to encounter on-site. Directly hired contractors will provide their employees with equivalent PPE to protect them from the specific hazards likely to be encountered on-site. Selection of the appropriate PPE must take into consideration: (1) identification of the hazards or suspected hazards; (2) potential exposure routes; and (3) the performance of the PPE construction (materials and seams) in providing a barrier to these hazards.

Human exposure to contaminants found in the subsurface can occur through three primary routes:

- Inhalation of gases, vapors, dust, or mists is a common route of exposure. Chemicals can enter and irritate the airways and the lungs. They can become deposited in the airways or can be absorbed through the lungs into the bloodstream.
- Direct contact of contaminants with the skin or eyes is a common route of exposure. Some substances are absorbed through the skin and can enter the bloodstream. Broken, cut, or cracked skin will allow substances to enter the body more easily.

- Ingestion or swallowing of food, drink, or other substances is the third route of exposure. Chemicals that get in or on food, utensils, or hands can be ingested. Substances can be absorbed into the blood.

Based on anticipated site conditions and the proposed work activities to be performed at the site, Level D protection will be used. The upgrading/downgrading of the level of protection will be based on continuous air monitoring results as described in Section 6.0 (when applicable). The decision to modify standard PPE will be made by the site HSO or FTL after conferring with the PM. The levels of protection are described below.

Level D Protection (as needed)

- Safety glasses with side shields or chemical splash goggles
- Safety boots/shoes
- Coveralls (Tyvek® or equivalent)
- Hard hat
- Long sleeve work shirt and work pants
- Nitrile gloves
- Hearing protection
- Reflective safety vest

Level D Protection (Modified, as needed)

- Safety glasses with side shields or chemical splash goggles
- Safety boots/shoes (toe-protected)
- Disposable chemical-resistant boot covers.
- Coveralls (poly-coated Tyvek or equivalent to be worn when contact with wet contaminated soil, groundwater, or non-aqueous phase liquids is anticipated)
- Hard hat
- Long sleeve work shirt and work pants
- Nitrile gloves
- Hearing protection (as needed)
- Personal floatation device (for work within 5 ft of the water)
- Reflective traffic vest

Level C Protection (as needed)

- Full or Half face, air-purifying respirator, with NIOSH approved High-Efficiency Particulate Air (HEPA) filter.

- Inner (latex) and outer (nitrile) chemical-resistant gloves
- Safety glasses with side shields or chemical splash goggles
- Chemical-resistant safety boots/shoes
- Hard hat
- Long sleeve work shirt and work pants
- Coveralls (Tyvek® or equivalent)
- Hearing protection (as needed)
- Reflective safety vest

The action levels used in determining the necessary levels of respiratory protection and upgrading to Level C are summarized in Table 4. The written Respiratory Protection Program is maintained by the HSM and is available if needed. The monitoring procedures and equipment are outlined in Section 6.0 (when applicable).

6.2 Respirator Fit-Test.

All Langan employees who may be exposed to hazardous substances at the work site must be in possession of a full or half face piece air-purifying respirator and have been successfully fit-tested within the past year. Fit-test records are maintained by the HSM.

6.3 Respirator Cartridge Change-Out Schedule

Respiratory protection is required to be worn when certain action levels (Table 2) are reached. A respirator cartridge change-out schedule has been developed to comply with 29 CFR 1910.134. The respirator cartridge change-out schedule for this project is as follows:

- Cartridges must be removed and disposed of at the end of each shift when cartridges become wet or the wearer experiences a breakthrough, whichever occurs first.
- If the humidity exceeds 85%, then cartridges must be removed and disposed of after 4 hours of use.

Respirators must not be stored at the end of the shift with contaminated cartridges left on. Cartridges must not be worn on the second day, no matter how short the time period was the previous day they were used.

7.0 AIR QUALITY MONITORING AND ACTIONS LEVELS

7.1 Monitoring During Site Operations

Atmospheric air monitoring results may be collected and used to provide data to determine when exclusion zones need to be established and when certain levels of personal protective equipment

are required. For all instruments, there are Site-specific action-level criteria that are used in making field health and safety determinations. Other data, such as the visible presence of contamination or the steady state nature of air contaminant concentration, are also used in making field health and safety decisions. Therefore, the HSO may establish an exclusion zone or require a person to wear a respirator even though atmospheric air contaminant concentrations are below established HASP action levels.

During site work involving disturbance of petroleum-impacted or fill material, real-time air monitoring may be conducted for methane and VOCs. A MultiRAE LEL/Oxygen (O₂) meter and FID will be used to monitor the LEL of methane, and a PID and/or FID will be used to monitor concentrations of VOCs at personnel breathing-zone height. Air monitoring will be the responsibility of the HSO or designee. Air monitoring may be conducted during intrusive activities associated with the completion of excavation, debris removal, and soil grading. All manufacturers' instructions for instrumentation and calibration will be available onsite.

Subcontractors' air monitoring plans must be equal to or more stringent than the Langan plan.

An air monitoring calibration log is provided in Attachment D of this HASP.

7.1.1 Volatile Organic Compounds

Monitoring with a PID, such as a MiniRAE 2000 (10.6v) or equivalent may occur during intrusive work in the Areas of Concern (AOCs). Colorimetric Indicator Tubes for benzene may be used as a backup for the PID if measurements remain above background monitor every 2 hours. The HSO will monitor the employee's breathing zone at least every 30 minutes, or whenever there is any indication that concentrations may have changed (odors, visible gases, etc.) since the last measurement. If VOC levels are observed above 5 ppm for longer than 5 minutes or if the site PPE is upgraded to Level C, the HSO will begin monitoring the site perimeter at a location downwind of the AOC every 30 minutes in addition to the employee breathing zone. Instrument action levels for monitored gases are provided in Table 4.

7.1.2 Metals

Based upon the site historical fill, there is a potential for the soils to contain Polycyclic Aromatic Hydrocarbons (PAHs) and metals. During invasive procedures which have the potential for creating airborne dust, such as excavation of dry soils, a real-time airborne dust monitor such as a Mini-Ram may be used to monitor for air particulates. The HSO will monitor the employee's breathing zone at least every 30 minutes, or whenever there is any indication that concentrations may have changed (appearance of visible dust) since the last measurement. If dust levels are observed to be greater than 0.100 milligrams per cubic meter (mg/m³) or visible dust is observed for longer than 15 minutes or if the site PPE is upgraded to Level C, the HSO will begin monitoring

the site perimeter at a location downwind of the AOC every 30 minutes in addition to the employee breathing zone. Instrument action levels for dust monitoring are provided in Table 4.

7.1.3 Methane

During soil excavation or other intrusive activities, direct reading air monitoring will be performed in the excavation area to determine exposure to workers. Monitoring with an LEL/O₂ meter and FID may occur during intrusive work in the AOCs. The HSO will monitor the employee's breathing zone at least hourly during intrusive activities. If LEL levels are observed above 20% the professional engineer (PE) or their designee will stop work and evacuate the area; warn others; and determine source of readings and take corrective actions. The Contractor will be responsible for mitigating explosive gas levels.

7.2 Monitoring Equipment Calibration and Maintenance

Instrument calibration must be documented and included in a dedicated safety and health logbook or on separate calibration pages of the field book. All instruments must be calibrated before and after each shift. Calibration checks may be used during the day to confirm instrument accuracy. Duplicate readings may be taken to confirm individual instrument responses.

All instruments must be operated in accordance with the manufacturers' specifications. Manufacturers' literature, including an operation manual for each piece of monitoring equipment, will be maintained on-site by the HSO for reference.

7.3 Determination of Background Levels

Background (BKD) levels for VOCs, dust, and methane will be established prior to intrusive activities within the AOC at an upwind location. A notation of BKD levels will be referenced in the daily monitoring log. BKD levels are a function of prevailing conditions. BKD levels will be taken in an appropriate upwind location as determined by the HSO.

Table 4 lists the instrument action levels.

8.0 COMMUNITY AIR MONITORING PROGRAM

Community air monitoring may be conducted in compliance with local standards. If conducted, Langan will implement the generic CAMP outlined below amended to comply with local conditions or standards:

Monitoring for dust and odors will be conducted during all ground intrusive activities by the FTL. Continuous monitoring of the perimeter of the work zones for odor, VOCs, and dust may be required for all ground intrusive activities such as soil excavation and handling activities. The

work zone is defined as the general area in which machinery is operating in support of remediation activities. A portable PID will be used to monitor the work zone and for periodic monitoring for VOCs during activities such as soil and groundwater sampling and soil excavation. The site perimeter will be monitored for fugitive dust emissions by visual observations as well as instrumentation measurements (if required). When required, particulate or dust will be monitored continuously with real-time field instrumentation that will meet, at a minimum, the local standards or, default to the performance standards below:

If VOC monitoring is required, the following actions will be taken based on VOC levels measured:

- If total VOC levels exceed 5 ppm above background for the 15-minute average at the perimeter, work activities will be temporarily halted and monitoring continued. If levels readily decrease (per instantaneous readings) below 5 ppm above background, work activities will resume with continued monitoring.
- If total VOC levels at the downwind perimeter of the hot zone persist at levels in excess of 5 ppm above background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps work activities will resume provided that the total organic vapor level is 200 feet downwind of the hot zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less – but in no case less than 20 feet, is below 5 ppm above background for the 15-minute average.
- If the total VOC level is above 25 ppm at the perimeter of the hot zone, activities will be shut down.

If dust monitoring with field instrumentation is required, the following actions will be taken based on instrumentation measurements:

- If the downwind particulate level is 100 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression must be employed. Work may continue with dust suppression techniques provided that downwind particulate matter less than 10 microns (PM10) levels do not exceed 150 $\mu\text{g}/\text{m}^3$ above the background level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM10 levels are greater than 150 $\mu\text{g}/\text{m}^3$ above the background level, work must be stopped, and a re-evaluation of activities initiated. Work can resume provided that dust suppression measures and other controls are successful in reducing the downwind PM10 concentration to within 150 $\mu\text{g}/\text{m}^3$ of the upwind level and in preventing visible dust migration.

8.1 Dust Suppression Techniques

Preventative measures for dust generation may include wetting site fill and soil, construction of an engineered construction entrance with a gravel pad, a truck wash area, covering soils with tarps, and limiting vehicle speeds to five miles per hour.

Work practices to minimize odors and vapors include limiting the time that the excavations remain open, minimizing stockpiling of contaminated-source soil, and minimizing the handling of contaminated material. Offending odor and organic vapor controls may include the application of foam suppressants or tarps over the odor or VOC source areas. Foam suppressants may include biodegradable foams applied over the source material for short-term control of the odor and VOCs.

If odors develop and cannot be otherwise controlled, additional means to eliminate odor nuisances will include direct load-out of soils to trucks for off-site disposal; use of chemical odorants in spray or misting systems; and use of staff to monitor odors in surrounding neighborhoods.

Where odor nuisances have developed during remedial work and cannot be corrected, or where the release of nuisance odors cannot otherwise be avoided due to on-site conditions or proximity to sensitive receptors, odor control will be achieved by sheltering excavation and handling areas under tented containment structures equipped with appropriate air venting/filtering systems.

9.0 WORK ZONES AND DECONTAMINATION

9.1 Site Control

Work zones are intended to control the potential spread of contamination throughout the site and to assure that only authorized individuals are permitted into potentially hazardous areas.

Any person working in an area where the potential for exposure to site contaminants exists will only be allowed access after providing the HSO with proper training and medical documentation.

Exclusion Zone (EZ) - All activities which may involve exposure to site contaminants, hazardous materials, and/or conditions should be considered an EZ. Decontamination of field equipment will also be conducted in the Contaminant Reduction Zone (CRZ) which will be located on the perimeter of the EZ. The EZ and the CRZ will be delineated by cones, tapes, or other means. The HSO may establish more than one EZ where different levels of protection may be employed, or different hazards exist. The size of the EZ must be determined by the HSO allowing adequate space for the activity to be completed, field members, and emergency equipment.

9.2 Contamination Zone

9.2.1 Personnel Decontamination Station

Personal hygiene, coupled with diligent decontamination, will significantly reduce the potential for exposure.

9.2.2 Minimization of Contact with Contaminants

During the completion of all site activities, personnel should attempt to minimize the chance of contact with contaminated materials. This involves a conscientious effort to keep "clean" during site activities. All personnel should minimize kneeling, splash generation, and another physical contact with contamination as PPE is intended to minimize accidental contact. This may minimize the degree of decontamination required and the generation of waste materials from site operations.

Field procedures will be developed to control spray and runoff and to ensure that unprotected personnel working nearby are not affected.

9.2.3 Personnel Decontamination Sequence

Decontamination may be performed by removing all PPE used in EZ and placing it in drums/trash cans at the CRZ. Baby wipes should be available for wiping hands and face. Drums/trash cans will be labeled by the field crews in accordance with all local, state, and federal requirements. Management plans for contaminated PPE, and tools are provided below.

9.2.4 Emergency Decontamination

If circumstances dictate that contaminated clothing cannot be readily removed, then remove gross contamination and wrap injured personnel with clean garments/blankets to avoid contaminating other personnel or transporting equipment. If the injured person can be moved, he/she will be decontaminated by site personnel as described above before emergency responders handle the victim. If the person cannot be moved because of the extent of the injury (a back or neck injury), provisions must be made to ensure that emergency response personnel will be able to respond to the victim without being exposed to potentially hazardous atmospheric conditions. If the potential for inhalation hazards exists, such as with open excavation, this area will be covered with polyethylene sheeting to eliminate any potential inhalation hazards. All emergency personnel should be immediately informed of the injured person's condition, and potential contaminants, and provided with all pertinent data.

9.2.5 Hand-Held Equipment Decontamination

Hand-held equipment includes all monitoring instruments as stated earlier, samples, hand tools, and notebooks. The hand-held equipment is dropped at the first decontamination station to be decontaminated by one of the decontamination team members. These items must be decontaminated or discarded as waste prior to removal from the CRZ.

To aid in decontamination, monitoring instruments can be sealed in plastic bags or wrapped in polyethylene. This will also protect the instruments against contaminants. The instruments will be wiped clean using wipes or paper towels if contamination is visually evident. Sampling equipment, hand tools, etc. will be cleaned with non-phosphorous soap to remove any potentially contaminated soil and rinsed with deionized water. All decontamination fluids will be containerized and stored on-site pending waste characterization sampling and appropriate off-site disposal.

9.2.6 Heavy Equipment Decontamination

All heavy equipment and vehicles arriving at the work site will be free from contamination from offsite sources. Any vehicles arriving to work that are suspected of being impacted will not be permitted on the work site. Potentially contaminated heavy equipment will not be permitted to leave the EZ unless it has been thoroughly decontaminated and visually inspected by the HSO or his designee.

9.3 Support Zone

The support zone or cold zone will include the remaining areas of the job site. Break areas and support facilities (including equipment storage and maintenance areas) will be located in this zone. No equipment or personnel will be permitted to enter the cold zone from the hot zone without passing through the decontamination station in the warm zone (if necessitated). Eating, smoking, and drinking will be allowed only in this area.

9.4 Communications

The following communications equipment will be utilized as appropriate.

- Telephones - A cellular telephone will be located with the HSO for communication with the HSM and emergency support services/facilities.

- Hand Signals - Hand signals must be used by field teams, along with the buddy system. The entire field team must know them before operations commence and their use covered during site-specific training. Typical hand signals are the following:

Hand Signal	Meaning
Hand gripping throat	Out of air, cannot breathe
Grip your partner's wrists or place both hands around the waist	Leave immediately without debate
Hands on top of head	Need assistance
Thumbs up	OK; I am all right; I understand
Thumbs down	No; negative
Simulated "stick" break with fists	Take a break; stop work

9.5 The Buddy System

When working in teams of two or more, workers will use the "buddy system" for all work activities to ensure that rapid assistance can be provided in the event of an emergency. This requires work groups to be organized such that workers can remain close together and maintain visual contact with one another. Workers using the "buddy system" have the following responsibilities:

- Provide his/her partner with assistance.
- Observe his/her partner for signs of chemical or heat exposure.
- Periodically check the integrity of his/her partner's PPE.
- Notify the HSO or other site personnel if emergency service is needed.

10.0 NEAREST MEDICAL ASSISTANCE

The address and telephone number of the nearest hospital:

New York-Presbyterian Brooklyn Methodist Hospital
506 6th Street
Brooklyn, New York
718-780-3000

A map with directions to the hospital is shown in Figure 2. This information will either be posted prominently at the site or will be available to all personnel all of the time. Further, all field personnel, including the HSO & FTL, will know the directions to the hospital.

11.0 STANDING ORDERS/SAFE WORK PRACTICES

The standing orders, which consist of a description of safe work practices that must always be followed while on-site by Langan employees and contractors, are shown in Attachment A. The

site HSO and FTL each have the responsibility for enforcing these practices. The standing orders will be posted prominently at the site or are made available to all personnel at all times. Those who do not abide by these safe work practices will be removed from the site.

12.0 SITE SECURITY

No unauthorized personnel must be permitted access to the work areas.

13.0 UNDERGROUND UTILITIES

As provided in Langan's Underground Utility Clearance Guidelines, the following safe work practices should be followed by Langan personnel and the contractor before and during subsurface work in accordance with federal, state, and local regulations:

- Obtain available utility drawings from the property owner/client or operator.
- Provide utility drawings to the project team.
- In the field, mark the proposed area of subsurface disturbance (when possible).
- Ensure that the utility clearance system has been notified.
- Ensure that utilities are marked before beginning subsurface work.
- Discuss subsurface work locations with the owner/client and contractors.
- Obtain approval from the owner/client and operators for proposed subsurface work locations.
- Use safe digging procedures when applicable.
- Stay at least 10 feet from all equipment performing subsurface work.

14.0 SITE SAFETY INSPECTION

The Langan HSO or alternate will check the work area daily, at the beginning and end of each work shift, or more frequently to ensure safe work conditions. The HSO or alternate must complete the Jobsite Safety Inspection Checklist, found in Attachment F. Any deficiencies must be shared with the FTL, HSM, and PM and will be discussed at the daily tailgate meeting.

15.0 HAND AND POWER TOOLS

All hand- and electric-power tools and similar equipment must be maintained in a safe operating condition. All electric-power tools must be inspected before initial use. Damaged tools must be removed immediately from service or repaired. Tools must be used only for the purpose for which they were designed. All users must be properly trained in their safe operation.

16.0 EMERGENCY RESPONSE

16.1 General

This section establishes procedures and provides information for use during a project emergency. Emergencies happen unexpectedly and quickly, and require an immediate response; therefore, contingency planning and advanced training of staff is essential. Specific elements of emergency support procedures that are addressed in the following subsections include communications, local emergency support units, and preparation for medical emergencies, first aid for injuries incurred on site, record keeping, and emergency site evacuation procedures. In case of emergency, in addition to 911, call WorkCare - Incident Intervention@ at 1-888-479-7787 to report their injuries. For all other communications, contact the Langan Incident Hotline at **973-560-4699** as soon as possible.

Should outside assistance be needed for accidents, fire, or release of hazardous substances, the emergency numbers will be available and posted at the site (Table 5) where a readily accessible telephone is made available for emergency use.

Also, in the event of an incident where a team member becomes exposed or suffers from an acute symptom from contact with site materials and has to be taken to a hospital, a short medical data sheet (Attachment C) for that individual will be made available to the attending physician. The medical data sheet will include the following:

- Name, address, home phone
- Age, height, weight
- Name of person to be notified in case of an accident.
- Allergies
- Particular sensitivities
- Does he/she wear contact lenses?
- Short checklist of previous illness
- Name of personal physician and phone
- Name of company physician and phone
- Prescription and non-prescription medications currently used.

An incident reporting form is included in Attachment C.

16.2 Responsibilities

16.2.1 Health and Safety Officer (HSO)

The HSO is responsible for ensuring that all personnel are evacuated safely, and that machinery and processes are shut down or stabilized in the event of a stop work order or evacuation. The HSO is responsible for ensuring the HSM is notified of all incidents, all injuries, near misses, fires, spills, releases, or equipment damage. The HSO is required to immediately notify the HSM of any fatalities or catastrophes (three or more workers injured and hospitalized) so that the HSM can notify OSHA within the required time limit.

16.2.2 Emergency Coordinator

The HSO or their designated alternate will serve as the Emergency Coordinator. The Emergency Coordinator is responsible for ensuring that all personnel are evacuated safely, and that machinery and processes are shut down or stabilized in the event of a stop work order or evacuation. They are also responsible for ensuring the HSM is notified of all incidents, all injuries, near misses, fires, spills, releases, or equipment damage. The Emergency Coordinator is required to immediately notify the HSM of any fatalities or catastrophes (three or more workers injured and hospitalized).

The Emergency Coordinator must locate emergency phone numbers and identify hospital routes prior to beginning work on the sites. The Emergency Coordinator must make necessary arrangements to be prepared for any emergencies that could occur.

The Emergency Coordinator is responsible for implementing the Emergency Response Plan.

16.2.3 Site Personnel

Project site personnel are responsible for knowing the Emergency Response Plan and the procedures contained herein. All personnel are expected to notify the Emergency Coordinator of situations that could constitute a site emergency. Project site personnel, including all subcontractors, will be trained in the Emergency Response Plan.

16.3 Communications

Once an emergency situation has been stabilized, the injured Langan personnel should contact WorkCare - Incident Intervention® at 1-888-479-7787 to report their injuries. For all other communications, contact the Langan Incident Hotline at **973-560-4699** as soon as possible.

16.4 Local Emergency Support Units

In order to be able to deal with any emergency that might occur during investigative activities at the site, the Emergency Notification Numbers (Table 5) will be posted and provided to all personnel conducting work within the EZ.

Figure 2 shows the hospital route map. Outside emergency number 911 and local ambulance should be relied on for response to medical emergencies and transport to emergency rooms. Always contact first responders when there are serious or life-threatening emergencies on the site. Project personnel are instructed not to drive injured personnel to the Hospital. In the event of an injury, provide first aid and keep the injured party calm and protected from the elements, and treat for shock when necessary.

16.5 Pre-Emergency Planning

Langan will communicate directly with administrative personnel from the emergency room at the hospital to determine whether the hospital has the facilities and personnel needed to treat cases of trauma resulting from any of the contaminants expected to be found on the site. Instructions for finding the hospital will be posted conspicuously in the site office and each site vehicle.

16.6 Emergency Medical Treatment

The procedures and rules in this HASP are designed to prevent employee injury. However, if an injury occurs, no matter how slight, it will be reported to the HSO immediately. First-aid equipment will be available on-site at the following locations:

- First Aid Kit: Contractor Vehicles
- Emergency Eye Wash: Contractor Vehicles

During the site safety briefing, project personnel will be informed of the location of the first aid station(s) that has been set up. Some injuries, such as severe cuts and lacerations or burns, may require immediate treatment. First-aid instructions provided from off-site doctors or paramedics, before an emergency-response squad arrives at the site or before the injured person can be transported to the hospital, will be followed closely. Only in non-emergency situations may an injured person be transported to an urgent care facility. Due to hazards that may be present at the site and the conditions under which operations are conducted, an emergency may develop. Emergencies can be characterized as injury or acute chemical exposure to personnel, fire or explosion, environmental release, or hazardous weather conditions.

16.8 Emergency Site Evacuation Routes and Procedures

All project personnel will be instructed on proper emergency response procedures and locations of emergency telephone numbers during the initial site safety meeting. If an emergency occurs as a result of the site investigation activities, including but not limited to fire, explosion, or significant release of toxic gas into the atmosphere, the Langan Project Manager will be verbally notified immediately. All heavy equipment will be shut down and all personnel will evacuate the work areas and assemble at the nearest intersection to be accounted for and to receive further instructions.

If an emergency arises, the FTL will implement an immediate evacuation of all project personnel due to immediate or impending danger. The FTL will also immediately communicate with the contractor to coordinate any needed evacuation of the property.

The FTL or Site Supervisor will give necessary instructions until the Designated Incident Commander (IC) assumes control. After the emergency has been resolved, the FTL or Site Supervisor will coordinate with the IC and indicate when staff should resume their normal duties. If dangers are present for those at the designated assembly point, another designated location of assembly will be established.

It will be the responsibility of the FTL or Site Supervisor to report a fire or emergency, assess the seriousness of the situation, and initiate emergency measures until the arrival of the local fire fighters or other first responders, should they be necessary. The FTL, working with emergency responders, may also order the closure of the Site for an indefinite period as long as it is deemed necessary.

Under no circumstances will incoming visitors be allowed to proceed to the area of concern once an emergency evacuation has been implemented. Visitors or other persons present in the area of the emergency must be instructed to evacuate the area. The FTL will ensure that access roads are not obstructed and will remain on-site to provide stand-by assistance upon the arrival of emergency personnel.

If it is necessary to temporarily control traffic in the event of an emergency, those persons controlling traffic will wear proper reflection warning vests until the arrival of police or fire personnel.

16.8.1 Designated Assembly Locations

All personnel will evacuate the site and assemble at a designated assembly location. The assembly location will be designated by Langan personnel and discussed during each shift's pre-job safety briefing.

16.8.2 Accounting for Personnel

All contractor and subcontractor supervisors are responsible for the accounting of all personnel assembled at the designed assembly area. The Designated Incident Commander must be notified if personnel are not found.

16.9 Fire Prevention and Protection

In the event of a fire or explosion, procedures will include immediately evacuating the site and notification of the Langan Project Manager of the investigation activities. Portable fire extinguishers will be provided at the work zone. The extinguishers located in the various locations should also be identified prior to the start of work. No personnel will fight a fire beyond the stage where it can be put out with a portable extinguisher (incipient stage).

16.9.1 Fire Prevention

Fires will be prevented by adhering to the following precautions:

- Good housekeeping and storage of materials.
- Storage of flammable liquids and gases away from oxidizers.
- Shutting off engines to refuel.
- Grounding and bonding metal containers during transfer of flammable liquids.
- Use of UL approved flammable storage cans.
- Fire extinguishers rated at least 10 pounds ABC located on all heavy equipment, in all trailers and near all hot work activities.

The person responsible for the control of fuel source hazards and the maintenance of fire prevention and/or control equipment is the HSO.

16.10 Significant Vapor Release

Based on the proposed tasks, the potential for a significant vapor release is low. However, if a release occurs, the following steps will be taken:

- Move all personnel to an upwind location. All non-essential personnel must evacuate.
- Upgrade to Level C Respiratory Protection.
- Downwind perimeter locations must be monitored for volatile organics.
- If the release poses a potential threat to human health or the environment in the community, the Emergency Coordinator must notify the Langan Project Manager.
- Local emergency response coordinators will be notified.

16.11 Overt Chemical Exposure

The following are standard procedures to treat chemical exposures. Other, specific procedures detailed on the Material Safety Data Sheet (MSDS) will be followed, when necessary.

SKIN AND EYE: Use copious amounts of soap and water from eye-wash kits and portable hand-wash stations.

CONTACT: Wash/rinse affected areas thoroughly, then provide appropriate medical attention. Skin must also be rinsed for 15 minutes if contact with caustics, acids, or hydrogen peroxide occurs. Affected items of clothing must also be removed from contact with skin.

Providing wash water and soap will be the responsibility of each individual contractor or subcontractor on-site.

16.12 Decontamination during Medical Emergencies

If emergency lifesaving first aid and/or medical treatment is required, normal decontamination procedures may need to be abbreviated or omitted. The HSO or designee will accompany contaminated victims to the medical facility to advise on matters involving decontamination when necessary. The outer garments can be removed if they do not cause delays, interfere with treatment, or aggravate the problem. Respiratory equipment must always be removed. Protective clothing can be cut away. If the outer contaminated garments cannot be safely removed on site, a plastic barrier placed between the injured individual and clean surfaces should be used to help prevent contamination of the inside of ambulances and/or medical personnel. Outer garments may then be removed at the medical facility. No attempt will be made to wash or rinse the victim if his/her injuries are life threatening unless it is known that the individual has been contaminated with an extremely toxic or corrosive material which could also cause severe injury or loss of life to emergency response personnel. For minor medical problems or injuries, normal decontamination procedures will be followed.

16.13 Adverse Weather Conditions

In the event of adverse weather conditions, the HSO will determine if work will continue without potentially risking the safety of all field workers. Some of the items to be considered prior to determining if work should continue are:

- Potential for heat stress and heat-related injuries.
- Potential for cold stress and cold-related injuries.
- Treacherous weather-related working conditions (hail, rain, snow, ice, high winds).
- Limited visibility (fog).

- Potential for electrical storms.
- Earthquakes.
- Other major incidents.

Site activities will be limited to daylight hours, or when suitable artificial light is provided, and acceptable weather conditions prevail. The HSO will determine the need to cease field operations or observe daily weather reports and evacuate, if necessary, in case of severe inclement weather conditions.

16.14 Spill Control and Response

All small spills/environmental releases must be contained as close to the source as possible. Whenever possible, the MSDS will be consulted to assist in determining proper waste characterization and the best means of containment and cleanup. For small spills, sorbent materials such as sand, sawdust, or commercial sorbents should be placed directly on the substance to contain the spill and aid recovery. Any acid spills should be diluted or neutralized carefully prior to attempting recovery. Berms of earthen or sorbent materials can be used to contain the leading edge of the spills. All spill containment materials will be properly disposed of. An exclusion zone of 50 to 100 feet around the spill area should be established depending on the size of the spill.

All contractor vehicles must have spill kits on them with enough material to contain and absorb the worst-case spill from that vehicle. All vehicles and equipment must be inspected prior to being admitted on-site. Any vehicle or piece of equipment that develops a leak will be taken out of service and removed from the job site.

The following seven steps must be taken by the Emergency Coordinator:

1. Determine the nature, identity, and amounts of major spills.
2. Make sure all unnecessary persons are removed from the spill area.
3. Notify the HSO immediately.
4. Use proper PPE in consultation with the HSO.
5. If a flammable liquid, gas, or vapor is involved, remove all ignition sources, and use non-sparking and/or explosion-proof equipment to contain or clean up the spill (diesel-only vehicles, air-operated pumps, etc.)
6. If possible, try to stop the leak with the appropriate material.
7. Remove all surrounding materials that can react or compound with the spill.

In addition to the spill control and response procedures described in this HASP, Langan personnel will coordinate with the designated project manager relative to spill response and control actions.

Notification to the Project Manager must be immediate and, to the extent possible, include the following information:

- Time and location of the spill.
- Type and nature of the material spilled.
- Amount spilled.
- Whether the spill has affected or has a potential to affect a waterway or sewer.
- A brief description of affected areas/equipment.
- Whether the spill has been contained.
- Expected time of cleanup completion. If spill cleanup cannot be handled by Langan's on-site personnel alone, such fact must be conveyed to the Project Manager immediately.

Langan field personnel must notify the project manager when they observe a spill or encounter conditions suggesting one might have occurred.

16.15 Emergency Equipment

The following minimum emergency equipment must be kept and maintained on site:

- Industrial first aid kit.
- Fire extinguishers (one per site).

16.16 Restoration and Salvage

After an emergency, prompt restoration of utilities, fire protection equipment, medical supplies, and other equipment will reduce the possibility of further losses. Some of the items that may need to be addressed are:

- Refilling fire extinguishers.
- Refilling medical supplies.
- Recharging eyewashes and/or showers.
- Replenishing spill control supplies.

16.17 Documentation

Immediately following an incident or near miss, unless emergency medical treatment is required, either the employee or a coworker must contact the Langan Incident/Injury Hotline at 1-(800)-9-LANGAN (extension 4699) and the client representative to report the incident or near miss. For emergencies involving personnel injury and/or exposure, the HSO and affected employee will complete and submit an Employee Exposure/Injury Incident Report (Attachment C) to the Langan Corporate Health and Safety Manager as soon as possible following the incident.

17.0 SPECIAL CONDITIONS

This guideline contains information and requirements for special conditions that may not be routinely encountered.

17.1 Scope

The guideline applies to the specific projects identified within this document. Additional provisions will be addressed in each Site-Specific Health and Safety Plan (HASP), as needed.

17.2 Responsibilities

Site Personnel - All site personnel must be alert to safety hazards on work sites and take action to minimize such hazards. Personnel must utilize the buddy system, watch for inappropriate behavior, and be alerted to changes in site conditions.

Health and Safety Officer (HSO) - The HSO is responsible for considering these procedures in the development of site-specific HASPs. The HSO must schedule frequent "tail gate" safety briefings to enhance safety awareness and discuss potential problems.

17.3 Procedures

The procedures outlined below must be followed when such conditions are encountered.

17.3.1 Ladders

Langan safety procedures must be used to ensure employee safety when using ladders in the office or work sites. All ladders must be coated or repaired to prevent injury to the employee from punctures or lacerations and to prevent snagging or clothing. Any wood ladders used must have an opaque covering except for identification or warning labels, which may be placed on one face only of a side rail.

17.3.1.1 Ladder Use

Employees must only use ladders for the purposes they were designed for and must not be used as scaffolding. Ladders will be maintained and inspected prior to use for slip hazards including oil and grease. Employees must use ladders only on stable and level surfaces unless the ladder is secured to prevent displacement. Ladders should not be used on slippery surfaces unless secured or provided with slip-resistant feet to prevent accidental displacement. Ladders should not be used in locations where they could be displaced by workplace activities or traffic. Ladder rungs, cleats and steps must be parallel, level and uniformly spaced when the ladder is in the use position.

Employees should not be carrying anything including equipment that could cause injury if there was a fall while utilizing the ladder. The top and bottom of the ladder area must remain clear while in use. When ascending and descending the ladder, employees must face the ladder.

Ladders must not be loaded beyond the maximum intended load for which they were built or the manufacturer's rated capacity.

17.3.1.2 Portable Ladders

Rungs, cleats, and steps for portable ladders and fixed ladders must be spaced not less than 10 inches apart, nor more than 14 inches apart, as measured between center lines of the rungs, cleats, and steps. When used to access an upper landing surface, the ladder side rails must extend at least three feet above the upper landing surface to which the ladder is used to gain access. If this is not possible, due to the length of the ladder, then the top of the ladder must be secured at its top to a rigid support.

17.3.1.3 Step Stools

Rungs, cleats, and steps of step stools must not be less than 8 inches apart, nor more than 12 inches apart, as measured between center lines of the rungs, cleats, and steps.

17.3.1.4 Extension Ladders

Rungs, cleats, and steps of the base section of extension trestle ladders must be spaced not less than 8 inches apart, nor more than 18 inches apart, as measured between center lines of the rungs, cleats, and steps. The rung spacing on the extension section of the extension trestle ladder must not be less than 6 inches nor more than 12 inches, as measured between the center lines of the rungs, cleats and steps. Ladders must be used at an angle such that the horizontal distance from the top support to the foot of the ladder is approximately one-quarter of the working length of the ladder (the distance along the ladder between the foot and the top support).

17.3.1.5 Inspection

Ladders will be inspected for visible defects periodically, prior to utilization or after any occurrence that could have negatively affected the ladder. Portable ladders with defects including broken or missing rungs, cleats, or steps, broken or split rails, corroded components, or other faulty components must not be used. The ladder will be immediately marked as defective, tagged as "Do Not Use" or blocked from being used and removed from service until repaired.

17.3.2 First Aid/Cardiopulmonary Resuscitation (CPR)

Langan field and office personnel will be encouraged to be trained in First Aid and Cardiopulmonary Resuscitation (CPR). Training will be provided free of charge by Langan to all employees. Employees will receive a training certificate that will be kept on file with the Health & Safety Coordinator (HSC). Training and certification will be provided by a credited provider such as American Red Cross or equivalent.

17.3.2.1 Emergency Procedures

Prior to site work, the Langan employees certified in first aid and CPR will be identified in the site-specific HASP. Langan will endeavor to have at least one employee at a job site trained and able to render first aid and CPR. The site-specific HASP will contain first aid information on both potential chemical and physical hazards. Emergency procedures to be followed in case of injury or illnesses are provided in the HASP. The HASP will include emergency contact information including local police and fire departments, hospital emergency rooms, ambulance services, on-site medical personnel, and physicians. The HASP will also include directions and contact information for the nearest emergency facility in case immediate medical attention is required. The emergency contact information will be conspicuously posted at the worksite. Employees that are injured and require immediate medical attention must call either 911 or the local posted emergency contacts. Employees should use ambulatory services to transport injured workers to the nearest facility for emergency medical care. In areas where 911 is not available, the telephone numbers of physicians, hospitals, or ambulances must be conspicuously posted.

17.3.2.2 First Aid Supplies

First aid supplies are readily available to all Langan employees when required. First aid kits are located in each Langan office. Portable first aid kits are available for employees to use at work sites. First aid kits should consist of items needed to treat employees for potential chemical and physical injuries. At a minimum, first aid kits should contain items to allow basic first aid to be rendered. Where the eyes or body of an employee may be exposed to corrosive materials, suitable facilities for quick drenching or flushing of the eyes and body must be provided within the work area for immediate emergency use including eye wash.

First aid kits will be weatherproof with individually sealed packages of each item. All portable first aid kits must be inspected by Langan employees before and after use to ensure all used items are replaced. When out in the field, employees must check first aid kits weekly to ensure used items are replaced.

17.3.3 Hydrogen Sulfide

Langan employees with the potential to be exposed to hydrogen sulfide while at work sites must have training in hydrogen sulfide awareness. The training will include the identification of areas where employees could be exposed to hydrogen sulfide, health effects, permissible exposure limits, first aid procedures, and personnel protective equipment. Langan employees could be exposed to hydrogen sulfide while at job sites including petroleum refineries, hazardous waste treatment, storage and disposal facilities, uncontrolled hazardous waste sites, and remediation projects.

17.3.3.1 Characteristics

Hydrogen sulfide is a colorless gas with a strong odor of rotten eggs that is soluble in water. Hydrogen sulfide is used to test and make other chemicals. It is also found as a by-product of chemical reactions, such as in sewer treatment. It is a highly flammable gas and a dangerous fire hazard. Poisonous gases are produced in fires including sulfur oxides. Hydrogen sulfide is not listed as a carcinogen.

17.3.3.2 Health Effects

Hydrogen Sulfide can affect employees if inhaled or through contact with skin or eyes. Acute (or short-term) health effects of hydrogen sulfide exposure include irritation of the nose and throat, dizziness, confusion, headache, and trouble sleeping. Inhalation of hydrogen sulfide can irritate the lungs causing coughing and/or shortness of breath. Higher levels of exposure can cause a build-up of fluid in the lungs (pulmonary edema), a medical emergency, with severe shortness of breath.

Chronic (or long-term) health effects of low levels of exposure to hydrogen sulfide can cause pain and redness of the eyes with blurred vision. Repeated exposure may cause bronchitis with cough, phlegm, and shortness of breath.

17.3.3.3 Protective Clothing and Equipment

Respirators are required for those operations in which employees will be exposed to hydrogen sulfide above OSHA permissible exposure level. The maximum OSHA permissible exposure limit (PEL) for hydrogen sulfide is 20 parts of hydrogen sulfide vapor per million parts of air (20 ppm) for an 8-hour workday and the maximum short-term exposure limit (STEL) is 10 ppm for any 10-minute period.

Where employees are exposed to levels up to 100 parts of hydrogen sulfide vapor per million parts of air (100 ppm), the following types of respiratory protection are allowed:

- Any powered, air-purifying respirator with cartridge(s).
- Any air-purifying, full-facepiece respirator (gas mask) with a chin style, front- or back-mounted canister.
- Any supplied air system with escape self-contained breathing apparatus, if applicable; and,
- Any self-contained breathing apparatus with a full facepiece.

Respirators used by employees must have joint Mine Safety and Health Administration and the National Institute for Occupational Safety and Health (NIOSH) seal of approval. Cartridges or canisters must be replaced before the end of their service life, or the end of the shift, whichever occurs first. Langan employees that have the potential to be exposed to hydrogen sulfide will be trained in the proper use of respirators. Respirator training is discussed under– Langan’s Respiratory Protection Program.

Employees with potential exposure to hydrogen sulfide, or when required by the client, will wear a portable hydrogen sulfide gas detector. The detector should have an audible, visual, and vibrating alarm. The detector may also provide detection for carbon monoxide, sulfur dioxide, and oxygen-deficient atmospheres. The hydrogen sulfide monitor will, at a minimum, be calibrated to detect hydrogen sulfide at a level of 20 parts of hydrogen sulfide vapor per million parts of air (20 ppm). Many portable gas detectors will have factory defaults with a low-level alarm at 10 ppm and a high-level alarm at 15 ppm. Langan employees must consult clients to determine if any site-specific threshold levels exist.

If the hydrogen sulfide gas detector sounds and employees are not wearing appropriate respiratory protection, employees must immediately vacate the area and meet at the assigned emergency location. Langan employees may not re- enter the site without proper respiratory protection and approval from the client or property owner if needed.

Employees must wear PPE to prevent eye and skin contact with hydrogen sulfide. Employees must wear appropriate protective clothing including boots, gloves, sleeves, and aprons, over any parts of their body that could be exposed to hydrogen sulfide. Non-vented, impact-resistant goggles should be worn when working with or exposed to hydrogen sulfide.

17.3.3.4 Emergency and First Aid Procedures

Eye and Face Exposure

If hydrogen sulfide comes in contact with eyes, it should be washed out immediately with large amounts of water for 30 minutes, occasionally lifting the lower and upper eye lids. Seek medical attention immediately.

Skin Exposure

If hydrogen sulfide contaminates clothing or skin, remove the contaminated clothing immediately and wash the exposed skin with large amounts of water and soap. Seek medical attention immediately. Contaminated clothing should either be disposed of or washed before wearing again.

Breathing

If a Langan employee or other personnel breathe in hydrogen sulfide, immediately get the exposed person to fresh air. If breathing has stopped, artificial respiration should be started. Call for medical assistance or a doctor as soon as possible.

Safety Precautions

Hydrogen sulfide is a highly flammable gas and a dangerous fire hazard. Containers of hydrogen sulfide may explode in a fire situation. Poisonous gases are produced during fires.

Langan employees should contact property owners and operators prior to conducting work onsite to be aware of any site-specific contingency plans, identify where hydrogen sulfide is used at the facility, and be informed about additional safety rules or procedures.

17.3.4 Fire Protection/Extinguishers

Langan field personnel that have been provided with portable fire extinguishers for use at worksites will be trained to familiarize employees with general principles of fire extinguisher use and hazards associated with the incipient stage of firefighting. Training will be provided prior to the initial assignment for field work and annually thereafter.

Portable fire extinguishers must be visually inspected monthly and subjected to an annual maintenance check. Langan will retain records of the annual maintenance date.

17.3.5 Overhead lines

When field work is performed near overhead lines, the lines must be de-energized and grounded, or other protective measures must be provided before the work commences. If overhead lines are to be de-energized, arrangements must be made with the client, property owner, or organization that operates or controls the electric circuits involved to de-energize and ground them. If protective measures, such as guarding, isolating, or insulating, are provided, these precautions must prevent employees from contacting such lines directly with any part of their body or indirectly through conductive materials, tools, or equipment.

When unqualified Langan personnel are working in an elevated position near overhead lines, the location must be such that the person and the longest conductive object they may contact cannot come closer to any unguarded, energized overhead line than the following distances:

1. For voltages to ground 50 kilovolts (kV) or below - 10 feet; and
2. For voltages to ground over 50kV - 10 feet, plus 4 inches for every 10kV over 50kV.

As previously indicated, Langan does not retain qualified employees to perform work on energized equipment.

17.3.5.1 Vehicle and Equipment Clearance

Any vehicle or mechanical equipment capable of having parts of its structure elevated near energized overhead lines must be operated so that a clearance of 10 feet is maintained. If the voltage of the overhead lines is higher than 50kV, the clearance must be increased by 4 inches for every 10kV over that voltage.

If any of the following discussed conditions occur, the clearance may be reduced.

- If the vehicle is in transit with its structure lowered, the clearance may be reduced to 4 ft. If the voltage is higher than 50kV, the clearance must be increased to 4 inches for every 10 kV over that voltage.
- If insulating barriers are installed to prevent contact with the lines, and if the barriers are rated for the voltage of the line being guarded and are not a part of or an attachment to the vehicle or its raised structure, the clearance may be reduced to a distance within the designed working dimensions of the insulating barrier.

Employees standing on the ground may not contact the vehicle or mechanical equipment or any of its attachments unless the employee is using protective equipment rated for the voltage, or the equipment is located so that no uninsulated part of its structure (that portion of the structure that provides a conductive path to employees on the ground) can come closer to the overhead line than permitted.

If any vehicle or mechanical equipment capable of having parts of its structure elevated near energized overhead lines is intentionally grounded, employees working on the ground near the point of grounding may not stand at the grounding location whenever there is a possibility of overhead line contact. Additional precautions, such as the use of barricades or insulation, must be taken to protect employees from hazardous ground potentials, depending on earth resistivity and fault currents, which can develop within the first few feet or more outward from the grounding point.

17.3.6 Trade Secret

Langan employees could potentially be provided trade secret information by the client or property owner when site-specific information is provided about highly hazardous chemicals. Trade secret means any confidential formula, pattern, process, device, information, or compilation of information that is used in an employer's business, and that allows the employer to obtain an advantage over competitors who do not know or use it. Langan employees understand that this information should be kept confidential and if required, may enter into a confidentiality agreement with the client.

17.3.7 Bloodborne Pathogens

Langan employees that can anticipate exposure to blood or other potentially infectious material while at work sites must have training in bloodborne pathogens. Applicable employees would include those trained in first aid and serving a designated role as an emergency medical care provider. Bloodborne pathogens are pathogenic microorganisms that are present in human blood and can cause disease in humans. These pathogens include but are not limited to, hepatitis B virus and human immunodeficiency virus.

17.3.7.1 Training

Langan employees with potential occupational exposure to blood or other potentially infectious material must participate in a training program. Training must be conducted prior to the initial assignment where there would be potential for exposure and annually thereafter within one year of previous training. The training program will be provided to Langan employees at no cost to them and during working hours.

Langan will ensure the training program must consist of the following:

- An accessible copy of the regulatory text of 29 CFR 1910.1030 and an explanation of its contents.
- A general explanation of the epidemiology and symptoms of bloodborne diseases.
- An explanation of the modes of transmission of bloodborne pathogens.
- An explanation of Langan's exposure control plan and how the employee can obtain a copy of the written plan.
- An explanation of the appropriate methods for recognizing tasks and other activities that may involve exposure to blood and other potentially infectious materials.
- An explanation of the use and limitations of personal protective equipment (PPE) to prevent and reduce exposure.
- Information on the types, proper use, location, removal, handling, and disposal of PPE.

- An explanation of the basis for the selection of PPE.
- Information on the hepatitis B vaccine, including information on its efficacy, safety, method of administration, the benefits of being vaccinated, and that the vaccine and vaccination will be offered free of charge.
- Information on the appropriate actions to take and persons to contact in an emergency involving blood or other potentially infectious materials.
- An explanation of the procedure to follow if an exposure incident occurs, including the method of reporting the incident and the medical follow-up that will be made available.
- Information on the post-exposure evaluation and determining whether the employer is required to provide for the employee following an exposure incident.
- An explanation of the signs and labels and/or color coding required by paragraph 29 CFR 1910.1030(g)(1); and
- An opportunity for interactive questions and answers with the person conducting the training session.

Langan will develop and implement a written Exposure Control Plan, which will be designed to eliminate or minimize employee exposure to bloodborne pathogens. The Exposure Control Plan will contain the following elements:

- An exposure determination for employees.
- The schedule and method of implementation for Methods of Compliance (29 CFR 191.1030(d)), Hepatitis B Vaccination and Post-Exposure Evaluation and Follow-up (29 CFR 1910.1030(f)), Communication of Hazards to Employees (29 CFR 1910.1030(g)) and (h) Recordkeeping (29 CFR 1910.1030(h)).
- The procedure for the evaluation of circumstances surrounding exposure incidents.
- Ensure a copy of the Exposure Control Plan will be accessible to employees; and,
- The Exposure Control Plan must be reviewed and updated at least annually.

Langan employees with occupational exposure to bloodborne pathogens include any employees trained in first aid that would be expected to provide emergency medical care. This determination is made without regard to the use of PPE, which could eliminate or minimize exposure.

Universal precautions must be observed to prevent contact with blood or other potentially infectious materials. According to the concept of Universal Precautions, all human blood and certain human body fluids are treated as if known to be infectious for bloodborne pathogens. Under circumstances in which differentiation between body fluid types is difficult or impossible, all body fluids must be considered potentially infectious materials.

Work practice controls must be used to eliminate or minimize employee exposure, if applicable. Since Langan employees will have occupational exposure only during the rendering of first aid,

personnel protective equipment will be utilized to reduce or minimize exposure. PPE that could be available to Langan personnel when administering first aid includes safety glasses, gloves, and Tyvek suits or sleeves. PPE and first aid kits will be provided to employees at no cost to them.

Langan employees that render first aid in office areas will have access to hand-washing facilities or restrooms. For first aid rendered at field locations, first aid kits will contain an appropriate antiseptic hand cleanser and clean cloth/paper towels or antiseptic towelettes. After using antiseptic hand cleansers or towelettes, employees must wash their hands with soap and running water as soon as feasible.

After administering first aid, potentially infectious materials, including towels, personnel protective equipment, clothes, and bandages, must be placed in a container, which prevents leakage during collection, handling, processing, storage, transport, or shipping. All PPE will be disposed of after use. Any equipment or working surfaces which was been exposed to blood or potentially infectious materials due to an injury will be decontaminated prior to reuse.

Langan will make available the hepatitis B vaccine and vaccination series to all employees who have occupational exposure, and post-exposure evaluation and follow-up to all employees who have had an exposure incident. These services will be available to the employee at no cost to them through a medical provider.

17.3.7.2 Recordkeeping

Langan will maintain training and medical records for each employee with occupational exposure to blood or potentially infectious materials. Medical and training records will be maintained by Langan's H&S Department.

Training records will include the following:

- Dates of the training sessions.
- Contents or a summary of the training sessions.
- Names and qualifications of persons conducting the training; and
- Names and job titles of all persons attending the training sessions.

Training records must be maintained for 3 years from the date on which the training occurred. Medical records will be preserved and maintained for the duration of employment plus 30 years.

All records will be made available upon request to employees, the Assistant Secretary of Labor for Occupational Safety and Health, and the Director of the National Institute for Occupational

Safety and Health Director of OSHA for examination and copying. Medical records must have written consent from the employee before releasing.

If Langan ceases to do business, all records must be transferred to the successor employer. The successor employer must receive and maintain these records.

If there will not be a successor, Langan will notify current employees of their rights to access records at least three months prior to the cessation of business.

18.0 RECORDKEEPING

The following is a summary of required health and safety logs, reports, and recordkeeping.

18.1 Field Change Authorization Request

Any changes to the work to be performed that are not included in the HASP will require an addendum that is approved by the Langan project manager and Langan HSM to be prepared. Approved changes will be reviewed with all field personnel at a safety briefing.

18.2 Medical and Training Records

Copies or verification of training (40-hour, 8-hour, supervisor, site-specific training, documentation of three-day on-the-job training (OJT)), and respirator fit-test records) and medical clearance for site work and respirator use will be maintained in the office and available upon request. Records for all subcontractor employees must also be available upon request. All employee medical records will be maintained by the HSM.

18.3 Onsite Log

A log of personnel on-site each day will be kept by the HSO or designee.

18.4 Daily Safety Meetings (“Tailgate Talks”)

Completed safety briefing forms will be maintained by the HSO.

18.5 Exposure Records

All personal monitoring results, laboratory reports, calculations, and air sampling data sheets are part of an employee exposure record. These records will be maintained by the HSO during site work. At the end of the project, they will be maintained according to 29 CFR 1910.1020.

18.6 Hazard Communication Program/MSDS-SDS

Material safety data sheets (MSDS) Safety Data Sheets (SDS) have been obtained for applicable substances and are included in this HASP (Attachment D). Langan's written hazard communication program, in compliance with 29 CFR 1910.1200, is maintained by the HSM.

18.7 Documentation

Immediately following an incident or near miss, unless emergency medical treatment is required, either the employee or a coworker must contact the Langan incident/injury hotline at 1-800-952-6426, extension 4699, and the Project Manager to report the incident or near miss. The Project Manager will contact the client or client representative. A written report must be completed and submitted HSM within 24 hours of the incident. For emergencies involving personnel injury and/or exposure, the employee will complete and submit the Langan incident/injury report to the Langan corporate health and safety manager as soon as possible following the incident. Accidents will be investigated in-depth to identify all causes and to recommend hazard control measures.

18.7.1 Accident and Injury Report Forms

18.7.1.1 Accident/Incident Report

All injuries, no matter how slight, must be reported to the FTL and the PM immediately. The accident/incident report forms, attached in Attachment C, will be filled out on all accidents by the applicable contractor supervision personnel, the FTL, or the HSO. Copies of all accident/incident reports must be kept on-site and available for review. Project personnel will be instructed on the location of the first aid station, hospital, and doctor and ambulance service near the job. The emergency telephone numbers will be conspicuously posted in site vehicles near the work zone. First aid supplies will be centrally located and conspicuously posted between restricted and nonrestricted areas to be readily accessible to all on the site.

18.7.1.2 First Aid Treatment Record

The forms will be used for recording all non-lost time injuries treated by the project first-aid attendant, the local physician or hospital will be entered in detail on this record. "Minor" treatment of scratches, cuts, etc. will receive the same recording attention as treatment of more severe injuries.

18.7.1.3 OSHA Form 300

An OSHA Form 300 will be kept at the Langan Corporate Office in Parsippany, New Jersey. All recordable injuries or illnesses will be recorded on this form. Subcontractor employers must also meet the requirements of maintaining an OSHA 300 form. The Incident Report form used to capture the details of work-related injuries/illnesses meets the requirements of the OSHA Form 301 (supplemental record) and must be maintained with the OSHA Form 300 for all recordable injuries or illnesses. Forms for recording OSHA work-related injuries and illnesses are included in Attachment C.

19.0 CONFINED SPACE ENTRY

Confined spaces are not anticipated at the Site during planned construction activities. If confined spaces are identified, the contractor must implement their own confined space program that all applicable federal, state, and local regulations. Confined spaces **will not** be entered by Langan personnel.

20.0 HASP ACKNOWLEDGEMENT FORM

All Langan personnel and contractors will sign this HASP Compliance Agreement indicating that they have become familiar with this HASP and that they understand it and agree to abide by it.

[illegible]

TABLES

TABLE 1
TASK HAZARD ANALYSES

Task	Hazard	Description	Control Measures	First Aid
1.3.1 – 1.3.11	Contaminated Soil or Groundwater-Dermal Contact	Contaminated water spills on skin, splashes in eyes; contact with contaminated soil/fill during construction activities or sampling.	Wear proper PPE; follow safe practices, maintain safe distance from construction activities	See Table 2, seek medical attention as required
1.3.1 – 1.3.11	Lacerations, abrasions, punctures	Cutting bailer twine, pump tubing, acetate liners, etc. with knife; cuts from sharp site objects or previously cut piles, tanks, etc.; Using tools in tight spaces	Wear proper PPE; follow safe practices	Clean wound, apply pressure and/or bandages; seek medical attention as required.
1.3.1 – 1.3.11	Contaminated Media Inhalation	Opening drums, tanks, wells; vapors for non-aqueous phase liquids or other contaminated site media; dust inhalation during excavation; vapor accumulation in excavation	Follow air monitoring plan; have quick access to respirator, do not move or open unlabeled drums found at the site, maintain safe distance from construction activities	See Table 2, seek medical attention as required
1.3.1 – 1.3.11	Lifting	Improper lifting/carrying of equipment and materials causing strains	Follow safe lifting techniques. Langan employees are not to carry contractor equipment or materials	Rest, ice, compression, elevation; seek medical attention as required
1.3.1 – 1.3.11	Slips, trips, and falls	Slips, trips, and falls due to uneven surfaces, cords, steep slopes, debris, and equipment in work areas	Good housekeeping at site; constant awareness and focus on the task; avoid climbing on stockpiles; maintain safe distance from construction activities and excavations; avoid elevated areas over six feet unless fully accredited in fall protection and wearing an approved fall protection safety apparatus	Rest, ice, compression, elevation; seek medical attention as required
1.3.1 – 1.3.11	Noise	Excavation equipment, hand tools, drilling equipment.	Wear hearing protection; maintain safe distance from construction activities	Seek medical attention as required
1.3.1 – 1.3.11	Falling objects	Soil material, tools, etc. dropping from drill rigs, front-end loaders, etc.	Hard hats to be worn at all times while in work zones; maintain safe distance from construction activities and excavations	Seek medical attention as required
1.3.1 – 1.3.11	Underground/overhead utilities	Excavation equipment, drill rig auger contacts underground object; boom touches overhead utility	"One Call" before dig; follow safe practices; confirm utility locations with contractor; wear proper PPE; maintain safe distance from construction activities and excavations	Seek medical attention as required
1.3.1 – 1.3.11	Insects (bees, wasps, hornet, mosquitoes, and spider)	Sings, bites	Insect Repellent; wear proper protective clothing (work boots, socks, and light-colored pants); field personnel who may have insect allergies (e.g., bee sting) should provide this information to the HSO or FSO prior to commencing work and will have allergy medication on site.	Seek medical attention as required
1.3.1 – 1.3.11	Vehicle traffic / Heavy Equipment Operation	Vehicles unable to see workers on site, operation of heavy equipment in tight spaces, equipment failure, malfunctioning alarms	Wear proper PPE, especially visibility vest; use a buddy system to look for traffic; rope off area of work with cones and caution tape or devices at points of hazard, maintain safe distance from construction activities and equipment	Seek medical attention as required

TABLE 2
CONTAMINANT HAZARDS OF CONCERN

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	1,1'-Biphenyl 1,1-Biphenyl Biphenyl Phenyl benzene Diphenyl	92-52-4	None	1 mg/m ³ 100 mg/m ³	Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, throat; headache, nausea, lassitude (weakness, exhaustion), numb limbs; liver damage	Eye: Irrigate immediately Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	1,1-Dichloroethane Asymmetrical dichloroethane Ethylidene chloride 1,1-Ethylidene dichloride 1,1-DCA	75-34-3	PID	100 ppm 3000 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the skin; central nervous system depression; liver, kidney, lung damage	Eye: Irrigate immediately Skin: Soap flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	1,2,4,5-Tetramethylbenzene Durene	95-93-2	NA	None None	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat, respiratory system; bronchitis; hypochromic anemia; headache, drowsiness, lassitude (weakness, exhaustion), dizziness, nausea, incoordination; vomiting, confusion; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	1,2,4-Trimethylbenzene	95-63-6	PID	None None	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat, respiratory system; bronchitis; hypochromic anemia; headache, drowsiness, lassitude (weakness, exhaustion), dizziness, nausea, incoordination; vomiting, confusion; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	1,2-Dichloroethene 1,2-Dichloroethylene 1,2-DCE trans-1,2-Dichloroethylene Total 1,2-Dichloroethene cis-1,2-Dichloroethylene mixture of cis and trans Acetylene dichloride cis-Acetylene dichloride sym-Dichloroethylene cis-1,2-Dichloroethene cDCE 1,1-dimethyl-;dimethyl1,1-cyclohexane sym-Dichloroethylene Dichloroethylenes trans-1 2-Dichloroethene Total 1,2-Dichloroethene (Cis and Trans)	159-59-2 156-60-5 156-60-2 540-59-0	PID	200 ppm 4000 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	Irritant to eyes, skin, mucous membranes, and respiratory system. May be harmful by ingestion, skin absorption and inhalation	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	1,3,5-Trimethylbenzene Mesitylene sym-Trimethylbenzene	108-67-8	PID	None None	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat, respiratory system; bronchitis; hypochromic anemia; headache, drowsiness, lassitude (weakness, exhaustion), dizziness, nausea, incoordination; vomiting, confusion; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	1,4-Dioxane 1,4-Dioxacyclohexane [1,4]Dioxane p-Dioxane [6]-crown-2 Diethylene dioxide Diethylene ether Dioxan Dioxane 1,4-Dioxane	123-91-1	PID	100 ppm 500 ppm	Groundwater Soil Vapor	Inhalation, ingestion, skin, and/or eye contact	Irritant to eyes, skin, mucous membranes, and respiratory system. May be harmful by ingestion, skin absorption and inhalation	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	2,4-Dimethylphenol 2,4-Xylenol m-Xylenol 1-Hydroxy-2,4- dimethylbenzene 2,4-Dimethylphenol 4-Hydroxy-1,3- dimethylbenzene 4,6-Dimethylphenol 1,3-Dimethyl-4-hydroxybenze	105-67-9	None	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; headache, narcosis, coma; dermatitis; in animals: liver, kidney damage	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	2-Butanone Ethyl methyl ketone MEK Methyl acetone Methyl ethyl ketone	78-93-3	PID	200 ppm 3000 ppm	Soil Groundwater Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose; headache; dizziness; vomiting; dermatitis	Eye: Irrigate immediately Skin: Water wash immediately Breathing: Fresh air Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	2-Hexanone Butyl methyl ketone MBK Methyl butyl ketone Methyl n-butyl ketone	591-78-6	PID	100 ppm 1600 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, nose; peripheral neuropathy: lassitude (weakness, exhaustion), paresthesia; dermatitis; headache, drowsiness	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	2-Methylnaphthalene β-methylnaphthalene	91-57-6	PID	NA NA	Groundwater Soil Vapor	inhalation, ingestion or skin, absorption, eye contact	irritation to the skin, eyes, mucous membranes, and upper respiratory tract. It may also cause headaches, nausea, vomiting, diarrhea, anemia, jaundice, euphoria, dermatitis, visual disturbances, convulsions and comatose	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	4,4'-DDD Dichlorodiphenyldichloroethane 1,1'-(2,2-Dichloroethylidene)bis (4-chlorobenzene) p,p'-DDD	72-54-8	None	NA NA	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin; paresthesia tongue, lips, face; tremor; anxiety, dizziness, confusion, malaise (vague feeling of discomfort), headache, lassitude (weakness, exhaustion); convulsions; paresis hands; vomiting; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	4-Chlorotoluene p-Chlorotoluene 1-Chloro-4-methylbenzene p-Tolyl chloride	106-43-4	PID	NA NA	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation eyes, skin, mucous membrane; dermatitis; drowsiness, incoordination, anesthesia; cough; liver, kidney injury	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	4-Isopropyltoluene 1-Methyl-4-(1-methylethyl)benzene 4-Isopropyltoluene; 4-Methylcumene; 1-Methyl-4-isopropylbenzene Dolcymene Camphogen Paracymene Cymene p-Cymene p-Isopropyltoluene	99-87-6	PID	NA NA	Soil Groundwater Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; dermatitis; headache, narcosis, coma	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	4-Methyl-2-pentanone Hexone Isobutyl methyl ketone Methyl isobutyl ketone MIBK	108-10-1	PID	100 ppm 500 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; headache, narcosis, coma; dermatitis; in animals: liver, kidney damage	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Acenaphthene 1,2-Dihydroacenaphthylene 1,8-Ethylenenaphthalene peri-Ethylenenaphthalene Naphthyleneethylene Tricyclododecapentaene	83-32-9	PID	NA NA	Soil	inhalation, ingestion, skin, and/or eye contact,	irritation to the skin, eyes, mucous membranes, and upper respiratory tract; If ingested, it can cause vomiting	Eye: Irrigate immediately Skin: Soap wash immediately, if redness or irritation develop, seek medical attention immediately Breathing: Move to fresh air Swallow: do not induce vomiting, seek medical attention immediately
1.3.1 – 1.3.11	Acenaphthylene Cyclopental(de)naphthalene, Acenaphthalene	208-96-8	PID	NA NA	Soil	inhalation, ingestion, skin, and/or eye contact	irritation to the skin, eyes, mucous membranes, and upper respiratory tract	Eye: Irrigate immediately, seek medical attention immediately, Skin: Soap wash immediately, if redness or irritation develop, seek medical attention immediately Breathing: Move to fresh air Swallow: do not induce vomiting, seek medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Acetone Dimethyl ketone Ketone propane 2-Propanone	67-64-1	PID	1000 ppm 2500 ppm	Groundwater Soil	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, nose, throat; headache, dizziness, central nervous system depression; dermatitis	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Acetophenone 1-phenylethanone Methyl phenyl ketone Phenylethanone	98-86-2	None	NA NA	Groundwater Soil	inhalation, ingestion, skin, and/or eye contact	irritation to the skin, eyes, mucous membranes, and upper respiratory tract	Eye: Irrigate immediately, seek medical attention immediately, Skin: Soap wash immediately, if redness or irritation develop, seek medical attention immediately Breathing: Move to fresh air Swallow: do not induce vomiting, seek medical attention immediately
1.3.1 – 1.3.11	Alpha-Chlordane Alpha Chlordane a-Chlordane	5103-71- 9	None	0.5 mg/m ³ 100 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	Blurred vision; confusion; ataxia, delirium; cough; abdominal pain, nausea, vomiting, diarrhea; irritability, tremor, convulsions; anuria	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Aluminum	7429-90-5	None	0.5 mg/m ³ 50 mg/m ³	Soil	inhalation, skin, and/or eye contact	irritation to the eyes, skin, respiratory system	Eye: Irrigate immediately Breathing: Fresh air
1.3.1 – 1.3.11	Anthracene	120-12-7	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin, or eye contact, ingestion	irritation to the skin, eyes, mucous membranes, and upper respiratory tract, abdominal pain if ingested.	Eye: Irrigate immediately, seek medical attention immediately, Skin: Soap wash immediately, Breathing: Move to fresh air, refer to medical attention. Swallow: refer to medical attention
1.3.1 – 1.3.11	Antimony	7440-36-0	None	0.5 mg/m ³ 50 mg/m ³	Groundwater Soil	inhalation, ingestion, skin, and/or eye contact	irritation skin, dermatitis; resp distress; diarrhea; muscle tremor, convulsions; possible gastrointestinal tract	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Aroclor 1242	53469-21-9	None	0.5 mg/m ³ 5 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, chloracne	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Aroclor 1254	11097-69-1	None	0.5 mg/m ³ 5 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, chloracne	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Aroclor 1260	11096-82-5	None	0.5 mg/m ³ 5 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, chloracne	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Arsenic	NA	None	0.5 mg/m ³ NA	Groundwater Soil	inhalation, ingestion, skin, and/or eye contact	irritation skin, dermatitis; resp distress; diarrhea; muscle tremor, convulsions; possible gastrointestinal tract	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Barium	10022-31-8	None	0.5 mg/m ³ 50 mg/m ³	Groundwater Soil	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, upper respiratory system; skin, burns; gastroenteritis; muscle spasm; slow pulse	Eye: Irrigate immediately Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Benzene Benzol Phenyl hydride Alkyl benzene isomers	71-43-2	PID	3.19 mg/m ³ 1,595 mg/mg ³	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, respiratory system; dizziness; headache, nausea, staggered gait; lassitude (weakness, exhaustion) [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Benzo(a)anthracene Benzanthracene Benzanthrene 1,2-Benzanthracene Benzo[b]phenanthrene Tetraphene	56-55-3	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, skin, or eye contact, ingestion	dermatitis, bronchitis, [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Benzo(a)pyrene	50-32-8	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin, or eye contact, ingestion	dermatitis, bronchitis, [potential occupational carcinogen]	Eye: Irrigate immediately, seek medical attention Skin: Soap wash immediately. Breathing: move to fresh air. Swallow: Induce vomiting if conscious, seek medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Benzo(b)fluoranthene	205-99-2	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin, or eye contact, ingestion	irritation to eyes and skin, respiratory irritation (dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.11	Benzo(g,h,i)perylene Benzo(ghi)perylene	191-24-2	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin, or eye contact, ingestion	irritation to eyes and skin, respiratory irritation (dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.11	Benzo(k)fluoranthene	207-08-9	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin, or eye contact, ingestion	irritation to eyes and skin, respiratory irritation (dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Benzyl butyl phthalate Butyl benzyl phthalate Butylbenzylphthalate	86-66-7	None	NA NA	Groundwater Soil Vapor	inhalation, skin, or eye contact, ingestion	irritation to eyes and skin, respiratory irritation (dizziness, weakness, fatigue, nausea, headache	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.11	Beryllium	7440-41-7	None	0.002 mg/m ³ 4 mg/m ³	Soil	inhalation, skin, and/or eye contact	berylliosis (chronic exposure): anorexia, weight loss, lassitude (weakness, exhaustion), chest pain, cough, clubbing of fingers, cyanosis, pulmonary insufficiency; irritation to the eyes; dermatitis; [potential occupational carcinogen]	Eye: Irrigate immediately Breathing: Fresh air
1.3.1 – 1.3.11	Beta-Endosulfan Beta Endosulfan Endosulfan II (beta) Endosulfan II	33213-65-9	None	None	NA NA	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation skin; nausea, confusion, agitation, flushing, dry mouth, tremor, convulsions, headache; in animals: kidney, liver injury; decreased testis weight

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Bis(2-ethylhexyl)phthalate Bis(2-Ethylhexyl) Phthalate Di-sec octyl phthalate DEHP Di(2-ethylhexyl)phthalate Octyl phthalate bis(2-ethylexyl)phthalate	117-81-7	None	5 mg/m ³ 5000 mg/m ³	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, mucous membrane; in animals: liver damage; teratogenic effects; [potential occupational carcinogen	Eye: Irrigate immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Bromodichloromethane Dichlorobromomethane Bromo(dichloro)methane	75-27-4	NA	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, upper respiratory system, stomach	Eye: Irrigate immediately Skin: Wash regularly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Cadmium	7440-43- 9	None	0.005 mg/m ³ 9 mg/m ³	Soil	inhalation, ingestion	pulmonary edema, dyspnea (breathing difficulty), cough, chest tightness, substernal (occurring beneath the sternum) pain; headache; chills, muscle aches; nausea, vomiting, diarrhea; anosmia (loss of the sense of smell), emphysema, proteinuria, mild anemia; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Calcium	7440-70-2	None	NA	Groundwater Soil	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, upper resp tract; ulcer, perforation nasal septum; pneumonitis; dermatitis	Eye: Irrigate immediately Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Carbazole 9-azafluorene Dibenzopyrrole Diphenylenimine diphenyleneimide	86-74-8	None	NA NA	Soil	inhalation, skin absorption (liquid), skin, and/or eye contact	irritation to eyes and skin, respiratory irritation	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.11	Carbon disulfide	75-15-0	PID	20 ppm 500 ppm	Soil Groundwater Vapor	inhalation, skin, or eye contact, ingestion	irritation to the eyes, skin, respiratory system	Eye: Irrigate immediately (liquid) Skin: Water flush immediately (liquid) Breathing: Respiratory support
1.3.1 – 1.3.11	Chlordane Chlordan Chlordano 1,2,4,5,6,7,8,8-Octachloro-3a,4,7,7a-tetrahydro-4,7-methanoindane Total Chlordane	57-74-9	None	0.5 mg/m ³ 100 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	Blurred vision; confusion; ataxia, delirium; cough; abdominal pain, nausea, vomiting, diarrhea; irritability, tremor, convulsions; anuria	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Chromium Total Chromium Chromium, Total	7440-47-3	None	1.0 mg/m ³ 250 mg/m ³	Groundwater Soil	inhalation absorption ingestion	irritation to eye, skin, and respiratory	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Chrysene Benzo[a]phenanthrene 1,2-Benzphenanthrene	218-01-9	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, absorption, ingestion, consumption	irritation to eye, skin, and respiratory, gastrointestinal irritation nausea, vomit, diarrhea [potential occupational carcinogen]	Eyes: Irrigate immediately Skin: Soap wash promptly. Breath: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	cis-1,2-Dichloroethylene cis-1,2-Dichloroethene	156-59-2	NA	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	Irritant to eyes, skin, mucous membranes, and respiratory system. May be harmful by ingestion, skin absorption and inhalation	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Cis-Chlordane Cis-Chlordane a-Chlordane alpha Chlordane alpha-chlordane cis-Chlordan CIS-CHLORDANE Chlordane cis-Chlordane cis;ALPHA-CHLORDAN Chlordan, cis-ALPHA-CHLORDANE alpha(cis)-chlordane α-chlordane solution	5102-71-9	None	0.5 mg/m ³ 100 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	Blurred vision; confusion; ataxia, delirium; cough; abdominal pain, nausea, vomiting, diarrhea; irritability, tremor, convulsions; anuria	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Cobalt	7440-48-4	None	0.1mg/m ³ 20 mg/m ³	Soil	inhalation, ingestion, skin, and/or eye contact	Cough, dyspnea (breathing difficulty), wheezing, decreased pulmonary function; weight loss; dermatitis; diffuse nodular fibrosis; resp hypersensitivity, asthma	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Copper	7440-50-8	None	1.0 mg/m ³ 100 mg/m ³	Groundwater Soil	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, nose, metallic taste; dermatitis; anemia	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Cumene Cumol Isopropylbenzene 2-Phenyl propane 1-methylethy lbenzene Isopropyl Benzene	98-82-8	PID	50 ppm 900 ppm	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; dermatitis; headache, narcosis, coma	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Cyanide	57-12-5	None	5 mg/m ³ 25 mg/m ³	Groundwater Soil	inhalation, ingestion, skin, and/or eye contact	Exposure to cyanide can cause weakness, headaches, confusion, dizziness, fatigue, anxiety, sleepiness, nausea and vomiting. Breathing can speed up then become slow and gasping. Coma, and convulsions also occur. If copious amounts of cyanide have been absorbed by the body, the person usually collapses, and death can occur very quickly. Long-term exposure to lower levels of cyanide can cause skin, and nose irritation, itching, rashes and thyroid changes.	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	DDE 4,4-DDE 4,4'-DDE 1,1-bis-(4-chlorophenyl)-2,2-dichloroethene Dichlorodiphenyldichloroethane p,p'-DDE	72-55-9	None	NA NA	Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	Oral ingestion of food is the primary source of exposure for the general population. Acute and chronic ingestion may cause nausea, vomiting, diarrhea, stomach pain, headache, dizziness, disorientation, tingling, sensation, kidney damage, liver damage, convulsions, coma, and death. 4,4' DDE may cross the placenta and can be excreted in breast milk	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	DDT 4,4-DDT 4,4'-DDT p,p'-DDT Dichlorodiphenyltrichloroethane 1,1,1-Trichloro-2,2-bis(p-chlorophenyl)ethane	50-29-3	None	1 mg/m ³ 500 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin; paresthesia tongue, lips, face; tremor; anxiety, dizziness, confusion, malaise (vague feeling of discomfort), headache, lassitude (weakness, exhaustion); convulsions; paresis hands; vomiting; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Dibenz(a,h)anthracene Dibenzo(a,h)anthracene Dibenzo[a,h]anthracene	53-70-3	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, absorption, ingestion, consumption	irritation to eyes, skin, respiratory, and digestion [potential occupational carcinogen]	Eyes: Irrigate immediately Skin: Soap wash promptly. Breath: Respiratory support PID Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Dibenzofuran	132-64-9	None	NA NA	Soil	inhalation, absorption	irritation to eyes, and skin	Eyes: Irrigate immediately Skin: Soap wash promptly.
1.3.1 – 1.3.11	Dibutyl phthalate Di-n-butyl phthalate Butyl phthalate n-Butyl phthalate 1,2-Benzenedicarboxylic acid dibutyl ester o-Benzenedicarboxylic acid dibutyl ester DBP Palatinol C, Elaol Dibutyl-1,2-benzene-dicarboxylate Di-n-butylphthalate	84-74-2	None	5 mg/m ³ 4000 mg/m ³	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, upper respiratory system, stomach	Eye: Irrigate immediately Skin: Wash regularly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Dichlorodifluoromethane Difluorodichloromethane, Fluorocarbon 12 Freon 12 Freon® 12 Genetron® 12 Halon® 122 Propellant 12 Refrigerant 12 Dichlorodifluoromethane	75-71-8	None	1000 pp, 15,000 ppm	Groundwater Soil Vapor	inhalation, skin, and/or eye contact (liquid)	dizziness, tremor, asphyxia, unconsciousness, cardiac arrhythmias, cardiac arrest; liquid: frostbite	Eye: Frostbite Skin: Frostbite Breathing: Respiratory support
1.3.1 – 1.3.11	Dieldrin HEOD 1,2,3,4,10,10-Hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octahydro-1,4-endo-exo-5,8-dimethanonaphthalene	60-57-1	PID	0.25 mg/m ³ 50 mg/m ³	Groundwater Soil Water	inhalation, skin absorption, ingestion, skin, and/or eye contact	headache, dizziness; nausea, vomiting, malaise (vague feeling of discomfort), sweating; myoclonic limb jerks; colonic, tonic convulsions; coma; [potential occupational carcinogen]; in animals: liver, kidney damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Diesel Fuel automotive diesel fuel oil No. 2 distillate diesoline diesel oil diesel oil light diesel oil No. 1-D summer diesel	68334-30-5	PID	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat; burning sensation in chest; headache, nausea, lassitude (weakness, exhaustion), restlessness, incoordination, confusion, drowsiness; vomiting, diarrhea; dermatitis; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Endosulfan sulfate 1,4,5,6,7,7-Hexachloro-5-norbornene-2,3-dimethanol, cyclic sulfate 6,7,8,9,10,10-hexachloro-1,5,5a,9,9a-hexahydro-6,9-methano-2,4,3-benzodioxathiepin-3,3-dioxide	1031-07-8	None	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	Hypersensitive to stimulation, sensation of prickling, tingling, or creeping on skin. Headache, dizziness, nausea, vomiting, incoordination, tremor, mental confusion, hyperexcitable state. In severe cases: convulsions, seizures, coma, and respiratory depression.	Eye: Irrigate immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Endrin 1,2,3,4,10,10-Hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octahydro-1,4-endo,endo-5,8-dimethanonaphthalene; Hexadrin	72-20-8	None	0.1 mg/m ³ 2 mg/m ³	Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	epileptiform convulsions; stupor, headache, dizziness; abdominal discomfort, nausea, vomiting; insomnia; aggressiveness, confusion; drowsiness, lassitude (weakness, exhaustion); anorexia; in animals: liver damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Endrin ketone	53494-70-5	None	0.1 mg/m ³ 2 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	epileptiform convulsions; stupor, headache, dizziness; abdominal discomfort, nausea, vomiting; insomnia; aggressiveness, confusion; drowsiness, lassitude (weakness, exhaustion); anorexia; in animals: liver damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Ethyl benzene Ethylbenzene Ethylbenzol Phenylethane	100-41-4	PID	435 mg/m ³ 3,472 mg/m ³	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; headache; dermatitis; narcosis, coma	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Ethyl ether Diethyl ether Diethyl oxide Ethyl oxide Ether Solvent ether	60-29-7	PID	400 ppm 1900 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, upper respiratory system; dizziness, drowsiness, headache, excited, narcosis; nausea, vomiting	Eye: Irrigate immediately Skin: Water wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Fluoranthene Benzo(j,k)fluorene	206-44-0	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, skin, or eye contact, ingestion	irritation to eyes and skin, respiratory irritation (dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.11	Fluorene	86-73-7	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Soil	inhalation, skin, or eye contact, ingestion	irritation to eyes and skin, respiratory irritation (dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention
1.3.1 – 1.3.11	Fuel Oil No. 2	68476-30-2	PID	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat; burning sensation in chest; headache, nausea, lassitude (weakness, exhaustion), restlessness, incoordination, confusion, drowsiness; vomiting, diarrhea; dermatitis; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	gamma-Chlordane Gamma Chlordane y-Chlordane	5566-34-7	None	0.5 mg/m ³ 100 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	Blurred vision; confusion; ataxia, delirium; cough; abdominal pain, nausea, vomiting, diarrhea; irritability, tremor, convulsions; anuria	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Gasoline	8006-61-9	PID	NA NA	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; dermatitis; headache, lassitude (weakness, exhaustion), blurred vision, dizziness, slurred speech, confusion, convulsions; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Gasoline Range Organics	8006-61-9	PID	NA NA	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; dermatitis; headache, lassitude (weakness, exhaustion), blurred vision, dizziness, slurred speech, confusion, convulsions; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Helium	7440-59-7	Helium Detector	NA NA	NA	inhalation	dizziness, headache, and nausea	Breathing: Respiratory support

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Heptachlor	76-44-8	None	0.5 mg/m ³ 35 mg/m ³	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	In animals: tremor, convulsions; liver damage; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Heptachlor epoxide 1,4,5,6,7,8-Heptachloro-3a,4,7,7a-tetrahydro-4,7-methano-1H-indene	1024-57-3	None	0.5 mg/m ³ 35 mg/m ³	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	In animals: tremor, convulsions; liver damage; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Heptane n-Heptane	142-82-5	PID	500 ppm 750 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	dizziness, stupor, incoordination; loss of appetite, nausea; dermatitis; chemical pneumonitis (aspiration liquid); unconsciousness	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Hexavalent Chromium Chromium VI Chromium, Hexavalent	18540-29-9	None	1.0 mg/m ³ 250 mg/m ³	Groundwater Soil	inhalation absorption ingestion	irritation to eye, skin, and respiratory	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Indeno(1,2,3-cd)pyrene Indeno(1,2,3-c,d)Pyrene Indeno[1,2,3-cd]Pyrene	193-39-5	None	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, absorption, ingestion, consumption	irritation to eyes, skin, respiratory, and digestion [potential occupational carcinogen]	Eyes: Irrigate immediately Skin: Soap wash promptly. Breath: Respiratory support Swallow: Medical attention immediately, wash mouth with water
1.3.1 – 1.3.11	Iron	7439-89-6	None	10 mg/m ³ NA	Groundwater Soil	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; abdominal pain, diarrhea, vomiting	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Isopropyl alcohol Iso-Propyl Alcohol Carbinol IPA Isopropanol 2-Propanol sec-Propyl alcohol Rubbing alcohol Isopropylalcohol	67-63-0	PID	400 ppm 2000 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, nose, throat; drowsiness, dizziness, headache; dry cracking skin; in animals: narcosis	Eye: Irrigate immediately Skin: Water flush Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Lead	7439-92-1	None	0.050 mg/m ³ 100 mg/m ³	Groundwater Soil	inhalation, ingestion, skin, and/or eye contact	lassitude (weakness, exhaustion), insomnia; facial pallor; anorexia, weight loss, malnutrition; constipation, abdominal pain, colic; anemia; gingival lead line; tremor; paralysis wrist, ankles; encephalopathy; kidney disease; irritation to the eyes; hypertension	Eye: Irrigate immediately Skin: Soap flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Lindane Gamma BHC HCH α-Hexachlorocyclohexane gamma isomer of 1,2,3,4,5,6-Hexachlorocyclohexane gamma-Hexachlorocyclohexane	58-89-9	None	0.5 mg/m ³ 50 mg/m ³	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat; headache; nausea; colonic convulsions; resp difficulty; cyanosis; aplastic anemia; muscle spasm; in animals: liver, kidney damage	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Magnesium	7439-95-4	None	15 mg/m ³ NA	Soil	inhalation, skin, and/or eye contact	irritation to the eyes, skin, respiratory system; cough	Eye: Irrigate immediately Breathing: Fresh air
1.3.1 – 1.3.11	Manganese	7439-96-5	None	5 mg/m ³ 500 mg/m ³	Groundwater Soil	inhalation, ingestion	aerosol is irritating to the respiratory tract	Eye: Irrigate immediately Skin: Soap flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	m-Cresol meta-Cresol 3-Cresol m-Cresylic acid 1-Hydroxy-3-methylbenzene 3-Hydroxytoluene 3-Methylphenol 3-Methylphenols	108-39-4	PID	5 ppm 250 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; central nervous system effects: confusion, depression, resp failure; dyspnea (breathing difficulty), irregular rapid respiration, weak pulse; eye, skin, burns; dermatitis; lung, liver, kidney, pancreas damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Mercury	7439-97-6	None	0.1 mg/m ³ 10 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin; cough, chest pain, dyspnea (breathing difficulty), bronchitis, pneumonitis; tremor, insomnia, irritability, headache, lassitude (weakness, exhaustion); stomatitis, salivation; gastrointestinal disturbance, anorexia, weight loss; proteinuria	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Methoxychlor 4,4'-Methoxychlor p,p'-Dimethoxydiphenyltrichloroethane DMDT Methoxy-DDT 2,2-bis(p-Methoxyphenyl)-1,1,1-trichloroethane 1,1,1-Trichloro-2,2-bis-(p-methoxyphenyl)ethane	72-43-5	None	15 mg/m ³ 5000 mg/m ³	Groundwater Soil Vapor	inhalation, ingestion	fasciculation, trembling, convulsions; kidney, liver damage; [potential occupational carcinogen]	Skin: Soap wash Breathing: Fresh air Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Methyl Chloride Chloromethane Monochloromethane Refrigerant-40 R-40	74-87-3	NA	100 ppm 2000 ppm	Groundwater Soil	inhalation, skin, and/or eye contact	dizziness, nausea, vomiting; visual disturbance, stagger, slurred speech, convulsions, coma; liver, kidney damage; liquid: frostbite; reproductive, teratogenic effects; [potential occupational carcinogen]	Eye: Frostbite Skin: Frostbite Breathing: Respiratory support
1.3.1 – 1.3.11	Methylene Chloride Dichloromethane Methylene dichloride	75-09-2	PID	25 ppm 2300 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin; lassitude (weakness, exhaustion), drowsiness, dizziness; numb, tingle limbs; nausea; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Molybdenum	7439-98-7	NA	NA NA	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, respiratory system	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	m-Xylenes 1,3-Dimethylbenzene m-Xylol Metaxylene	108-38-3 179601-23-1	PID	100 ppm 900 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat; dizziness, excitement, drowsiness, incoordination, staggering gait; corneal vacuolization; nausea, vomiting, abdominal pain; dermatitis	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Naphthalene Naphthalin Tar camphor White tar	91-20-3	PID	50 mg/m ³ 250 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes; headache, confusion, excitement, malaise (vague feeling of discomfort); nausea, vomiting, abdominal pain; irritation bladder; profuse sweating; hematuria (blood in the urine); dermatitis, optical neuritis	Eye: Irrigate immediately Skin: Molten flush immediately/solid-liquid soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	n-Butylbenzene Butylbenzene 1-phenylbutane	104-51-8	PID	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin; dry nose, throat; headache; low blood pressure, tachycardia, abnormal cardiovascular system stress; central nervous system, hematopoietic depression; metallic taste; liver, kidney injury	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	n-Hexane Hexane, Hexyl hydride, normal-Hexane	110-54-3	PID	500 ppm 1100 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, nose; nausea, headache; peripheral neuropathy: numb extremities, muscle weak; dermatitis; dizziness; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Nickel	7440-02-0	None	NA 10 mg/m ³	Groundwater Soil	ion, ingestion, skin, and/or eye contact	sensitization dermatitis, allergic asthma, pneumonitis; [potential occupational carcinogen]	Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Non-Flammable Gas Mixture CALGAS (Equipment Calibration Gas : Oxygen Methane Hydrogen Sulfide Carbon Monoxide Nitrogen	7782-44-7 74-82-8 7783-08-4 830-08-0 7727-37-9	Multi-Gas PID	NA/NA NA/NA 10/100 ppm 50/1200 ppm NA/NA	NA	inhalation	dizziness, headache, and nausea	Breathing: Respiratory support
1.3.1 – 1.3.11	Non-Flammable Gas Mixture CALGAS (Equipment Calibration Gas : Oxygen Isobutylene Nitrogen	7782-44-7 115-11-7 7727-37-9	PID	NA/NA NA/NA NA/NA	NA	inhalation	dizziness, headache, and nausea	Breathing: Respiratory support

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	n-Propylbenzene Isocumene Propylbenzene 1-Phenylpropane 1-Propylbenzene Phenylpropane Propylbenzene-n	103-65-1	PID	NA NA	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin; dry nose, throat; headache; low blood pressure, tachycardia, abnormal cardiovascular system stress; central nervous system, hematopoietic depression; metallic taste; liver, kidney injury	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	o-Cresol ortho-Cresol 2-Cresol o-Cresylic acid 1-Hydroxy-2-methylbenzene 2-Hydroxytoluene 2-Methyl phenol 2-Methylphenol	95-48-7	PID	5 ppm 250 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; central nervous system effects: confusion, depression, resp failure; dyspnea (breathing difficulty), irregular rapid respiration, weak pulse; eye, skin, burns; dermatitis; lung, liver, kidney, pancreas damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	o-Xylenes 1,2-Dimethylbenzene ortho-Xylene o-Xylol	95-47-6 179601- 23-1	PID	100 ppm 900 ppm	Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat; dizziness, excitement, drowsiness, incoordination, staggering gait; corneal vacuolization; nausea, vomiting, abdominal pain; dermatitis	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	p-Cresol para-Cresol 4-Cresol p-Cresylic acid 1-Hydroxy-4-methylbenzene 4-Hydroxytoluene 4-Methylphenol 4-Methylphenols	106-44-5	PID	5 ppm 250 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; central nervous system effects: confusion, depression, resp failure; dyspnea (breathing difficulty), irregular rapid respiration, weak pulse; eye, skin, burns; dermatitis; lung, liver, kidney, pancreas damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	p-Diethylbenzene 1,4-Diethylbenzene 1,4-Diethyl benzene	105-05-5	PID	None None	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, respiratory system; skin, burns; in animals: central nervous system depression	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	p-Ethyltoluene 4-Ethyltoluene 1-ethyl-4-methyl-benzene 1-methyl-4-ethylbenzene	622-96-8	NA	NA NA	Soil	ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; headache; dermatitis; narcosis, coma	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Phenanthrene	85-01-8	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, skin, or eye contact, ingestion	irritation to eyes and skin, respiratory irritation (dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.11	Phenol Carbolic acid Hydroxybenzene, Monohydroxybenzene Phenyl alcohol Phenyl hydroxide	108-95-2	PID	5 ppm 250 ppm	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, nose, throat; anorexia, weight loss; lassitude (weakness, exhaustion), muscle ache, pain; dark urine, skin, burns; dermatitis; tremor, convulsions, twitching	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Polycyclic Aromatic Hydrocarbons PAHs	83-32-9	PID	NA	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin; headache, visual disturbance, lassitude (weakness, exhaustion), dizziness, tremor, drowsiness, nausea, vomiting; dermatitis; cardiac arrhythmias, paresthesia; liver injury; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Potassium	7440-09-7	None	NA NA	Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact inhalation, ingestion, skin, and/or eye contact	eye: Causes eye burns. Skin: Causes skin, burns. Reacts with moisture in the skin, to form potassium hydroxide and hydrogen with heat. ingestion: Causes gastrointestinal tract burns. inhalation: May cause irritation of the respiratory tract with burning pain in the nose and throat, coughing, wheezing, shortness of breath and pulmonary edema. Causes chemical burns to the respiratory tract. inhalation may be fatal because of spasm, inflammation, edema of the larynx and bronchi, chemical pneumonitis, and pulmonary edema.	Eyes: Get medical aid immediately Skin: Get medical aid immediately. Immediately flush skin with water for at least 15 minutes while removing contaminated clothing and shoes. Ingestion: If victim is conscious and alert, give 2-4 full cups of milk or water. Get medical aid immediately. inhalation: Get medical aid immediately.
1.3.1 – 1.3.11	p-Xylenes 1,4-Dimethylbenzene para-Xylene p-Xylol	106-42-3	PID	100 ppm 900 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat; dizziness, excitement, drowsiness, incoordination, staggering gait; corneal vacuolization; nausea, vomiting, abdominal pain; dermatitis	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Pyrene benzo[def]phenanthrene	129-00-0	PID	0.2 mg/m ³ 80 mg/m ³ (Coal Pitch Tar)	Groundwater Soil	inhalation, skin, or eye contact, ingestion	irritation to eyes and skin, respiratory irritation (dizziness, weakness, fatigue, nausea, headache)	Eye: Irrigate immediately, refer to medical attention Skin: Soap wash immediately Breathing: move to fresh air Swallow: Medical attention immediately
1.3.1 – 1.3.11	sec-Butylbenzene 2-phenylbutane	135-98-8	PID	10 ppm 100 ppm	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, nose, throat. inhalation: nausea or vomiting	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Selenium	7782-49-2	None	1 mg/m ³ 0.2 mg/m ³	Soil	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat; visual disturbance; headache; chills, fever; dyspnea (breathing difficulty), bronchitis; metallic taste, garlic breath, gastrointestinal disturbance; dermatitis; eye, skin, burns; in animals: anemia; liver necrosis, cirrhosis; kidney, spleen damage	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Silver	7440-22-4	None	0.01 mg/ m ³ 10 mg/m ³	Soil	inhalation, ingestion, skin, and/or eye contact	blue-gray eyes, nasal septum, throat, skin; irritation, ulceration skin; gastrointestinal disturbance	Eye: Irrigate immediately Skin: Water flush Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Sodium	7440-23-5	None	NA NA	Groundwater Soil	ion, ingestion, skin, and/or eye contact	sensitization dermatitis, allergic asthma, pneumonitis; [potential occupational carcinogen]	Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Styrene Ethenyl benzene Phenylethylene Styrene monomer Styrol Vinyl benzene	100-42-5	PID	100 ppm 700 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, nose, respiratory system; headache, lassitude (weakness, exhaustion), dizziness, confusion, malaise (vague feeling of discomfort), drowsiness, unsteady gait; narcosis; defatting dermatitis; liver injury; reproductive effects	Eye: Irrigate immediately Skin: Water flush Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Tert-Butyl Alcohol Tertiary Butyl Alcohol Tert-Butanol Butyl alcohol 2-Methyl-2-propanol Trimethyl carbinol Tert-Butyl Alcohol TBA	75-65-0	PID	100 ppm 1600 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat; drowsiness, narcosis	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	tert-Butylbenzene t-Butylbenzene 2-Methyl-2-phenylpropane Pseudobutylbenzene	98-06-6	PID	10 ppm NA	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	eye, skin, irritation; dry nose, throat; headaches; low blood pressure, tachycardia; abnormal cardiovascular system; central nervous system depression; hematopoietic depression	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Tetrachloroethylene Perchloroethylene Perchloroethylene PCE Perk Tetrachloroethylene Tetrachloroethene	127-18-4	PID	100 ppm 150 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat, respiratory system; nausea; flush face, neck; dizziness, incoordination; headache, drowsiness; skin, erythema (skin, redness); liver damage; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Thallium	7440-28- 0	None	0.1 mg/m ³ 15 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	nausea, diarrhea, abdominal pain, vomiting; ptosis, strabismus; peri neuritis, tremor; retrosternal (occurring behind the sternum) tightness, chest pain, pulmonary edema; convulsions, chorea, psychosis; liver, kidney damage; alopecia; paresthesia legs	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Toluene Methyl benzene Methyl benzol Phenyl methane Toluol	108-88-3	PID	200 ppm 500 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, nose; lassitude (weakness, exhaustion), confusion, euphoria, dizziness, headache; dilated pupils, lacrimation (discharge of tears); anxiety, muscle fatigue, paresthesia; dermatitis	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Total Extractable Petroleum Hydrocarbons TEPH	TEPH	PID	5 mg/m ³ NA	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; dermatitis; headache, lassitude (weakness, exhaustion), blurred vision, dizziness, slurred speech, confusion, convulsions; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Total PCBs Chlorodiphenyl (42% chlorine) Aroclor® 1242 PCB Polychlorinated biphenyl	53469-21-9	None	0.5 mg/m ³ 5 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, chloracne	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Total Petroleum Hydrocarbons TPH	143-07-7	PID	NA NA	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, mucous membrane; dermatitis; headache, lassitude (weakness, exhaustion), blurred vision, dizziness, slurred speech, confusion, convulsions; chemical pneumonitis (aspiration liquid)	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Total Xylenes Dimethylbenzene Xylol	1330-20-7	PID	100 ppm 900 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin, nose, throat; dizziness, excitement, drowsiness, incoordination, staggering gait; corneal vacuolization; nausea, vomiting, abdominal pain; dermatitis	Eye: Irrigate immediately Skin: Soap flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Trans-1,2-Dichloroethene trans-1,2-Dichloroethylene tDEC trans-Acetylene dichloride	156-60-5	PID	200 ppm 4000 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	Irritant to eyes, skin, mucous membranes, and respiratory system. May be harmful by ingestion, skin absorption and inhalation	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Trans-Chlordane	5103-74-2	None	0.5 mg/m ³ 100 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	Blurred vision; confusion; ataxia, delirium; cough; abdominal pain, nausea, vomiting, diarrhea; irritability, tremor, convulsions; anuria	Eye: Irrigate immediately Skin: Soap wash immediately Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Trichloroethylene Trichloroethenylenes Ethylene trichloride TCE Trichloroethene Trilene	79-01-6	PID	100 ppm 1000 ppm	Groundwater Soil Vapor	inhalation, skin absorption, ingestion, skin, and/or eye contact	irritation to the eyes, skin; headache, visual disturbance, lassitude (weakness, exhaustion), dizziness, tremor, drowsiness, nausea, vomiting; dermatitis; cardiac arrhythmias, paresthesia; liver injury; [potential occupational carcinogen]	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Trichlorofluoromethane Fluorotrichloromethane Freon® 11 Monofluorotrichloromethane Refrigerant 11 Trichloromonofluoromethane Freon 11	75-69-4	PID	1000 ppm 2000 ppm	Groundwater Soil Vapor	inhalation, ingestion, skin, and/or eye contact	incoordination, tremor; dermatitis; cardiac arrhythmias, cardiac arrest; asphyxia; liquid: frostbite	Eye: Irrigate immediately Skin: Water flush immediately Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Trivalent Chromium Chromium III Chromium, Trivalent	NA	None	1.0 mg/m ³ 250 mg/m ³	Groundwater Soil	inhalation absorption ingestion	irritation to eye, skin, and respiratory	Eye: Irrigate immediately Skin: Soap wash Breathing: Respiratory support Swallow: Medical attention immediately

Task	Contaminant	CAS Number	Monitoring Device	PEL/ IDLH	Source of Concentration on Site	Route of Exposure	Symptoms	First Aid
1.3.1 – 1.3.11	Vanadium	7440-62-2	None	0.1 mg/m ³ 15 mg/m ³	Groundwater Soil	inhalation, skin absorption, ingestion, skin, and/or eye contact	nausea, diarrhea, abdominal pain, vomiting; ptosis, strabismus; peri neuritis, tremor; retrosternal (occurring behind the sternum) tightness, chest pain, pulmonary edema; convulsions, chorea, psychosis; liver, kidney damage; alopecia; paresthesia legs	Eye: Irrigate immediately Skin: Water flush promptly Breathing: Respiratory support Swallow: Medical attention immediately
1.3.1 – 1.3.11	Vinyl Chloride Chloroethene Chloroethylen Ethylene monochloride Monochloroethene Monochloroethylene VC Vinyl chloride monomer (VCM)	75-01-4	PID	1 ppm NA	Groundwater Soil Vapor	inhalation, skin, and/or eye contact (liquid)	lassitude (weakness, exhaustion); abdominal pain, gastrointestinal bleeding; enlarged liver; pallor or cyanosis of extremities; liquid: frostbite; [potential occupational carcinogen]	Eye: Frostbite Skin: Frostbite Breathing: Respiratory support
1.3.1 – 1.3.11	Zinc	7440-62-2	None	15 mg/m ³ 500 mg/m ³	Groundwater Soil	inhalation	chills, muscle ache, nausea, fever, dry throat, cough; lassitude (weakness, exhaustion); metallic taste; headache; blurred vision; low back pain; vomiting; malaise (vague feeling of discomfort); chest tightness; dyspnea (breathing difficulty), rales, decreased pulmonary function	Eye: Irrigate immediately Skin: Soap wash promptly Breathing: Respiratory support Swallow: Medical attention immediately

EXPLANATION OF ABBREVIATIONS

PID = Photoionization Detector

PEL = Permissible Exposure Limit (8-hour Time Weighted Average)

IDLH = Immediately Dangerous to Life and Health

ppm = part per million

mg/m³ = milligrams per cubic meter

500 mg/m³

TABLE 3
SUMMARY OF MONITORING EQUIPMENT

Instrument	Operation Parameters
Photoionization Detector (PID)	<p>Hazard Monitored: Many organic and some inorganic gases and vapors.</p> <p>Application: Detects total concentration of many organic and some inorganic gases and vapors. Some identification of compounds is possible if more than one probe is measured.</p> <p>Detection Method: Ionizes molecules using UV radiation; produces a current that is proportional to the number of ions.</p> <p>General Care/Maintenance: Recharge or replace battery. Regularly clean lamp window. Regularly clean and maintain the instrument and accessories.</p> <p>Typical Operating Time: 10 hours. 5 hours with strip chart recorder.</p>
Oxygen Meter	<p>Hazard Monitored: Oxygen (O₂).</p> <p>Application: Measures the percentage of O₂ in the air.</p> <p>Detection Method: Uses an electrochemical sensor to measure the partial pressure of O₂ in the air and converts the reading to O₂ concentration.</p> <p>General Care/Maintenance: Replace detector cell according to manufacturer's recommendations. Recharge or replace batteries prior to expiration of the specified interval. If the ambient air is less than 0.5% C O₂, replace the detector cell frequently.</p> <p>Typical Operating Time: 8 – 12 hours.</p>
Additional equipment (if needed, based on site conditions)	
Combustible Gas Indicator (CGI)	<p>Hazard Monitored: Combustible gases and vapors.</p> <p>Application: Measures the concentration of combustible gas or vapor.</p> <p>Detection Method: A filament, usually made of platinum, is heated by burning the combustible gas or vapor. The increase in heat is measured. Gases and vapors are ionized in a flame. A current is produced in proportion to the number of carbon atoms present.</p> <p>General Care/Maintenance: Recharge or replace battery. Calibrate immediately before use.</p> <p>Typical Operating Time: Can be used for as long as the battery lasts, or for the recommended interval between calibrations, whichever is less.</p>
Flame Ionization Detector (FID) with Gas Chromatography Option (i.e., Foxboro Organic Vapor Analyzer (OVA))	<p>Hazard Monitored: Many organic gases and vapors (approved areas only).</p> <p>Application: In survey mode, detects the concentration of many organic gases and vapors. In gas chromatography (GC) mode, identifies and measures specific compounds. In survey mode, all the organic compounds are ionized and detected at the same time. In GC mode, volatile species are separated.</p> <p>General Care/Maintenance: Recharge or replace battery. Monitor fuel and/or combustion air supply gauges. Perform routine maintenance as described in the manual. Check for leaks.</p> <p>Typical Operating Time: 8 hours; 3 hours with strip chart recorder.</p>
Portable Infrared (IR) Spectrophotometer	<p>Hazard Monitored: Many gases and vapors.</p> <p>Application: Measures concentration of many gases and vapors in air. Designed to quantify one or two component mixtures.</p> <p>Detection Method: Passes different frequencies of IR through the sample. The frequencies absorbed are specific for each compound.</p> <p>General Care/Maintenance: As specified by the manufacturer.</p>

Instrument	Operation Parameters
Direct Reading Colorimetric Indicator Tube	<p>Hazard Monitored: Specific gas and vapors.</p> <p>Application: Measures concentration of specific gases and vapors.</p> <p>Detection Method: The compound reacts with the indicator chemical in the tube, producing a stain whose length or color change is proportional to the compound's concentration.</p> <p>General Care/Maintenance: Do not use a previously opened tube even if the indicator chemical is not stained. Check pump for leaks before and after use. Refrigerate before use to maintain a shelf life of about 2 years. Check expiration dates of tubes. Calibrate pump volume at least quarterly. Avoid rough handling which may cause channeling.</p>
Aerosol Monitor	<p>Hazard Monitored: Airborne particulate (dust, mist, fume) concentrations.</p> <p>Application: Measures total concentration of semi-volatile organic compounds, PCBs, and metals.</p> <p>Detection Method: Based on light-scattering properties of particulate matter. Using an internal pump, air sample is drawn into the sensing volume where near infrared light scattering is used to detect particles.</p> <p>General Care/Maintenance: As specified by the mfr. Also, the instrument must be calibrated with particulates of a size and refractive index similar to those to be measured in the ambient air.</p>
Monitox	<p>Hazard Monitored: Gases and vapors.</p> <p>Application: Measures specific gases and vapors.</p> <p>Detection Method: Electrochemical sensor specific for the chemical species in question.</p> <p>General Care/Maintenance: Moisten sponge before use; check the function switch; change the battery when needed.</p>
Gamma Radiation Survey Instrument	<p>Hazard Monitored: Gamma Radiation.</p> <p>Application: Environmental radiation monitor.</p> <p>Detection Method: Scintillation detector.</p> <p>General Care/Maintenance: Must be calibrated annually at a specialized facility.</p> <p>Typical Operating Time: Can be used for as long as the battery lasts, or for the recommended interval between calibrations, whichever is less.</p>

TABLE 4
INSTRUMENTATION ACTION LEVELS

Photoionization Detector Action Levels	Action Required
Background to 5 parts per million (ppm) ¹	No respirator needed; no further action
>5ppm but \leq 15 ppm at the perimeter of the work area	<ul style="list-style-type: none"> • Work temporarily halted and monitoring continues. • If instantaneous readings decrease below 5 ppm above background, work activities will resume with continued monitoring
>5ppm but \leq 25 ppm at the downwind perimeter of the hot zone	<ul style="list-style-type: none"> • Work activities will be halted. • Source of vapors identified. • Corrective actions taken to abate emissions. • Continued monitoring. • Workers will don appropriate respirators and work can resume if vapor levels 200 feet downwind of the hot zone or half the distance to the nearest potential receptor or residential or commercial structure, whichever is less – but in no case less than 20 feet – is below 5 ppm above background for the 15-minute average
>25ppm at the parameter of the hot zone	Activities will shut down

Particulate Monitoring Action Levels	Action Required
Background to 100 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$) ² , no dust observed	No further action
Background to 100 $\mu\text{g}/\text{m}^3$, dust observed leaving the work area	Dust suppression must be employed.
100 to 150 $\mu\text{g}/\text{m}^3$ at the downwind parameter of the hot zone	<ul style="list-style-type: none"> • Work activities will be halted. • Source of dust identified. • Dust suppression activities initiated. • Corrective actions taken to abate emissions. • Continued monitoring. • Workers will don appropriate respirators. • Work can resume provided that dust suppression measures and other controls are successful in reducing the downwind PM₁₀ concentration to within 150 $\mu\text{g}/\text{m}^3$ of the upwind level and in preventing visible dust migration.
>150 $\mu\text{g}/\text{m}^3$ at the parameter of the hot zone	Activities will shut down

¹ VOC concentrations are 15-minute averages above site background (upwind parameter)

² Particulate concentrations are 15-minute averages above site background (upwind parameter)

TABLE 5
EMERGENCY NOTIFICATION LIST

ORGANIZATION	CONTACT	TELEPHONE
Local Police Department		911
Local Fire Department		911
Ambulance/Rescue Squad		911
Hospital	New York-Presbyterian Brooklyn Methodist Hospital	911 or 718-780-3000
Langan Incident Hotline		800-952-6426 extension 4699
Medical Treatment Hotline	WorkCare™	911 or 888-449-7757
Langan Environmental PM	Michael Au	817-715-7723 (cell)
Langan Geotechnical PM	James Rodger	917-693-4173 (cell)
Langan Health and Safety Manager (HSM)	Tony Moffa	215-756-2523 (cell)
Langan Health & Safety Officer (HSO)	William Bohrer	410-984-3068 (cell)
Langan Field Team Leader (FTL)	To Be Determined	
Client's Representative	Andrew Foley	917-542-3696
National Response Center (NRC)		800-424-8802
Chemical Transportation Emergency Center (Chemtrec)		800-424-9300
Center for Disease Control (CDC)		404-639-3534
EPA (RCRA Superfund Hotline)		800-424-9346
TSCA Hotline		202-554-1404
Poison Control Center		800-222-1222

Immediately following an injury, unless immediate emergency medical treatment is required, the injured employee must contact WorkCare - Incident Intervention® at 888-449-7787.

For all other incidents or near misses, unless emergency response is required, either the employee or a coworker must contact the Langan Incident Hotline at 973-560-4699.

TABLE 6
SUGGESTED FREQUENCY OF PHYSIOLOGICAL
MONITORING FOR FIT AND ACCLIMATED
WORKERS^A

Adjusted Temperature^b	Normal Work Ensemble^c	Impermeable Ensemble
90°F or above (32.2°C) or above	After each 45 min. of work	After each 15 min. of work
87.5°F (30.8°-32.2°C)	After each 60 min. of work	After each 30 min. of work
82.5°-87.5°F (28.1°-30.8°C)	After each 90 min. of work	After each 60 min. of work
77.5°-82.5°F (25.3°-28.1°C)	After each 120 min. of work	After each 90 min. of work
72.5°-77.5°F (22.5°-25.3°C)	After each 150 min. of work	After each 120 min. of work

a For work levels of 250 kilocalories/hour.

b Calculate the adjusted air temperature (ta adj) by using this equation: $ta\ adj\ ^\circ F = ta\ ^\circ F + (13 \times \% \text{ sunshine})$. Measure air temperature (ta) with a standard mercury-in-glass thermometer, with the bulb shielded from radiant heat. Estimate percent sunshine by judging what percent time the sun is not covered by clouds that are thick enough to produce a shadow. (100 percent sunshine = no cloud cover and a sharp, distinct shadow; 0 percent sunshine = no shadows.)

c A normal work ensemble consists of cotton coveralls or other cotton clothing with long sleeves and pants.

TABLE 7

HEAT INDEX

RELATIVE HUMIDITY	ENVIRONMENTAL TEMPERATURE (Fahrenheit)										
	70	75	80	85	90	95	100	105	110	115	120
	APPARENT TEMPERATURE*										
0%	64	69	73	78	83	87	91	95	99	103	107
10%	65	70	75	80	85	90	95	100	105	111	116
20%	66	72	77	82	87	93	99	105	112	120	130
30%	67	73	78	84	90	96	104	113	123	135	148
40%	68	74	79	86	93	101	110	123	137	151	
50%	69	75	81	88	96	107	120	135	150		
60%	70	76	82	90	100	114	132	149			
70%	70	77	85	93	106	124	144				
80%	71	78	86	97	113	136					
90%	71	79	88	102	122						
100%	72	80	91	108							

*Combined Index of Heat and Humidity...what it "feels like" to the body

Source: National Oceanic and Atmospheric Administration

How to use Heat Index:

1. Across top locate Environmental Temperature
2. Down left side locate Relative Humidity
3. Follow across and down to find Apparent Temperature
4. Determine Heat Stress Risk on chart at right


Note: Exposure to full sunshine can increase Heat Index values by up to 15 degrees F.

Apparent Temperature	Heat Stress Risk with Physical Activity and/or Prolonged Exposure
90-105	Heat Cramps or Heat Exhaustion Possible
105-130	Heat Cramps or Heat Exhaustion Likely, Heat Stroke Possible
>130	Heatstroke Highly Likely

FIGURES

FIGURE 1

SITE LOCATION MAP

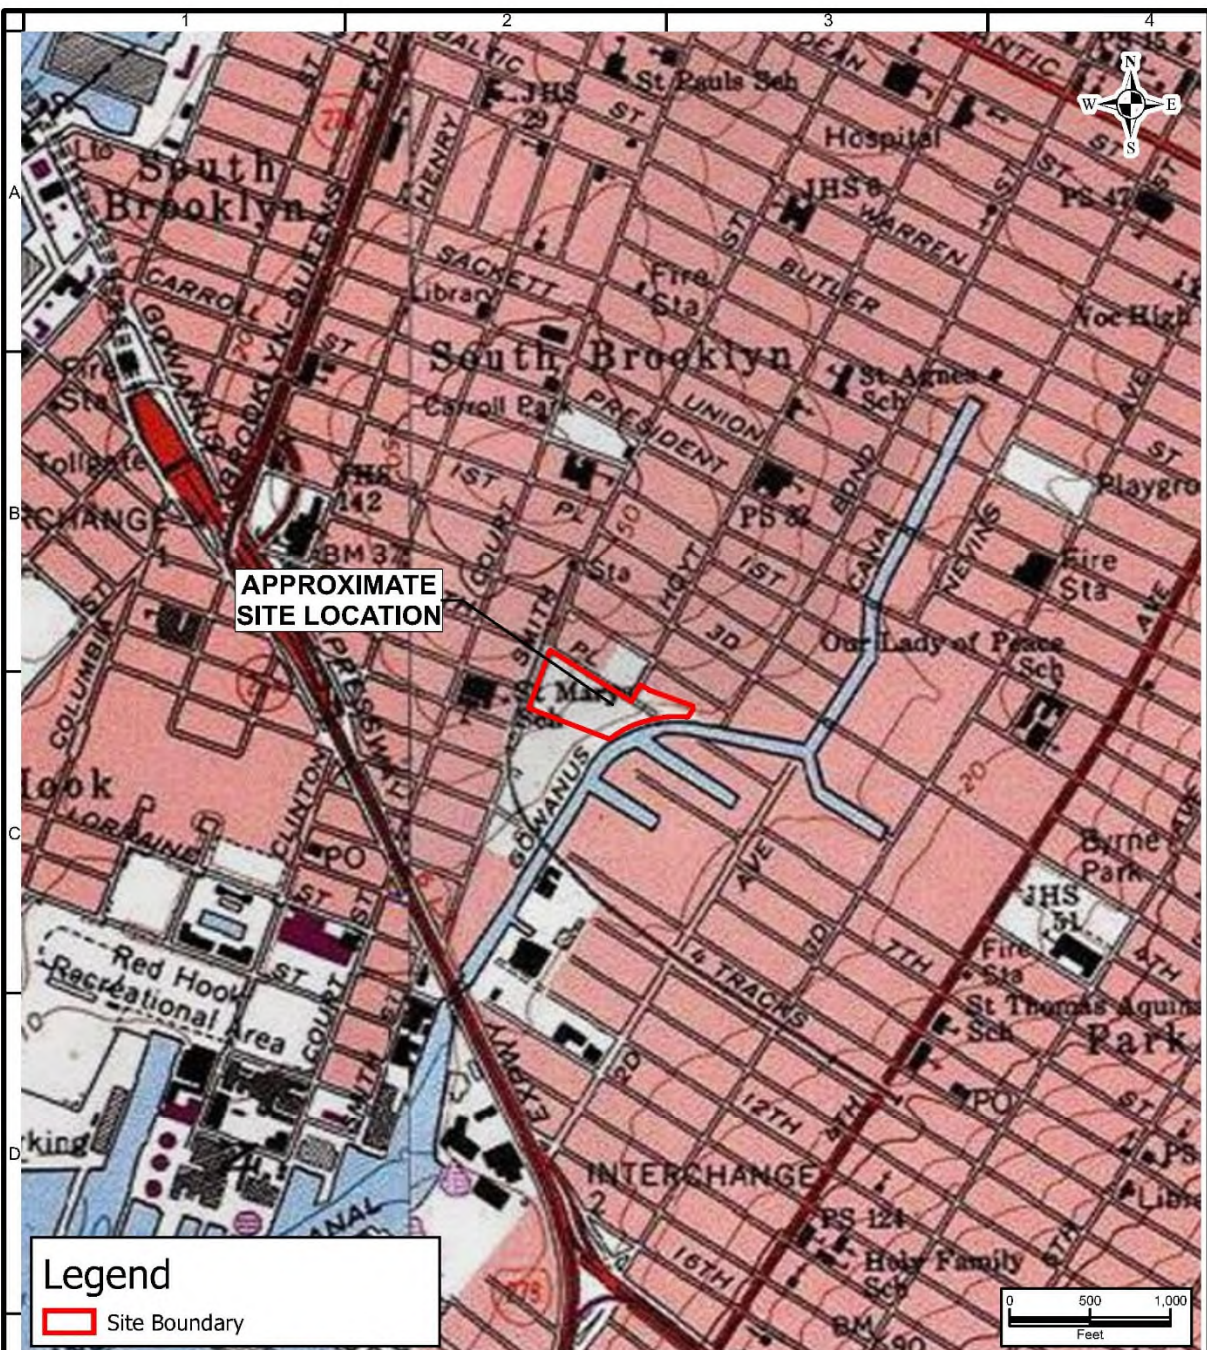

<p>Copyright © 2013 National Geographic Society, Inc.; © 2013 National Geographic Society, Inc.</p>			
<p>LANGAN</p> <p>300 Kimball Drive Parsippany, NJ 07054 T: 973.560.4500 F: 973.560.4501 www.langan.com</p> <p>Langan Engineering & Environmental Services, Inc. Langan Engineering, Environmental, Surveying, Landscape Architecture and Geology, D.P.C. Langan International Collectively known as Langan</p>	<p>Project Gowanus Green</p> <p>BROOKLYN</p> <p>KINGS COUNTY NEW YORK</p>	<p>Drawing Title SITE LOCATION</p>	
		<p>Project No. 170777301</p> <p>Date 11/1/2023</p> <p>Scale 1:1,000</p> <p>Drawn By Site Analyzer</p> <p>Submission Date 11/01/2023</p>	<p>Figure 1</p> <p>Sheet 1 of 1</p>

Disclaimer: This information is produced by an automated system and may not be complete. The absence of a feature is not a confirmation that the feature is not present at the subject location. Information produced is in the public domain and unless noted has not been field verified or provided for any specific use. Users are also cautioned to confirm the information shown is suitable for their intended use.

Spatial Reference: NAD 1983 StatePlane New York Long Island FIPS 3104 Feet

Warning: It is a violation of the NYS Education Law Article 145 for any person, unless acting under the direction of a licensed professional engineer, land surveyor or geologist, to alter this item in any way.

FIGURE 2


HOSPITAL ROUTE PLAN

Hospital Location: New York-Presbyterian Brooklyn Methodist Hospital
506 6th Street
Brooklyn, New York
718-780-3000

START: 42 5th Street, Brooklyn, New York

1. Head northwest on 5th St toward Smith St
2. Turn right onto Smith St
3. Turn right onto 3rd St
4. Turn right onto 6th Ave
5. Turn right at the 3rd cross street onto 6th St, destination will be on the right.

END: New York-Presbyterian Brooklyn Methodist Hospital, 506 6th Street, Brooklyn, NY

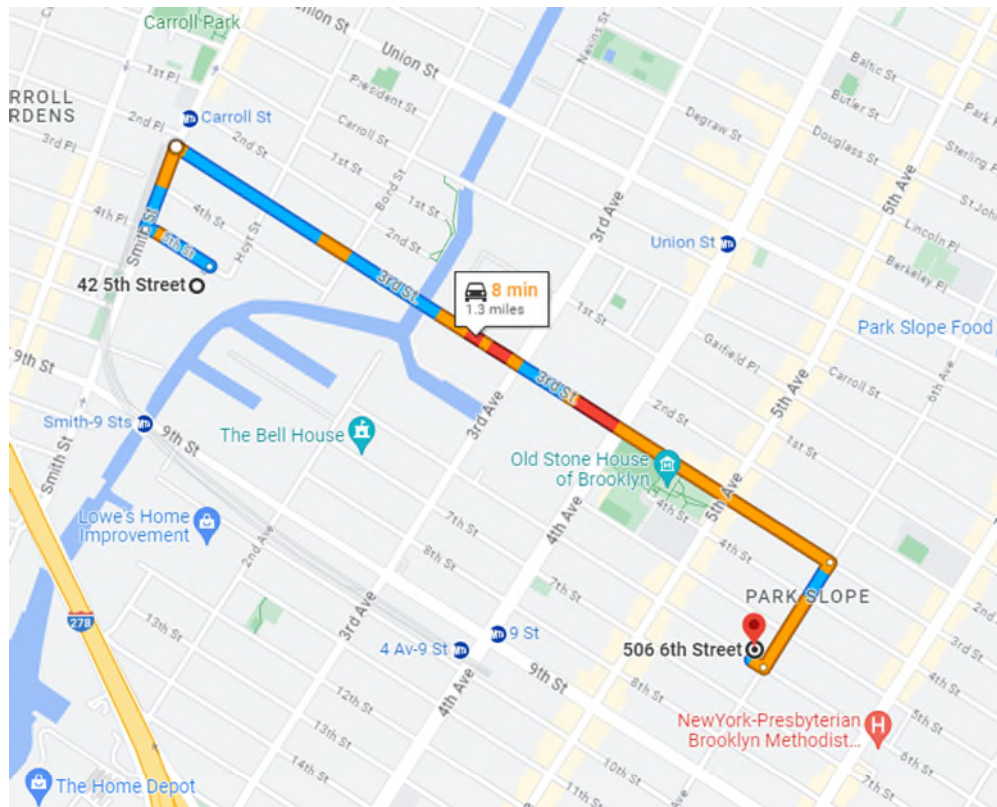

ATTACHMENTS

ATTACHMENT A

STANDING ORDERS

STANDING ORDERS

GENERAL

- No smoking, eating, or drinking in this work zone.
- Upon leaving the work zone, personnel will thoroughly wash their hands and face.
- Minimize contact with contaminated materials through proper planning of work areas and decontamination areas, and by following proper procedures. Do not place equipment on the ground. Do not sit on contaminated materials.
- No open flames in the work zone.
- Only properly trained and equipped personnel are permitted to work in potentially contaminated areas.
- Always use the appropriate level of personal protective equipment (PPE).
- Maintain close contact with your buddy in the work zone.
- Contaminated material will be contained in the Exclusion Zone (EZ).
- Report any unusual conditions.
- Work areas will be kept clear and uncluttered. Debris and other slip, trip, and fall hazards will be removed as frequently as possible.
- The number of personnel and equipment in the work zone will be kept to an essential minimum.
- Be alert to the symptoms of fatigue and heat/cold stress, and their effects on the normal caution and judgment of personnel.
- Conflicting situations which may arise concerning safety requirements and working conditions must be addressed and resolved quickly by the site HSO.

TOOLS AND HEAVY EQUIPMENT

- Do not, under any circumstances, enter or ride in or on any backhoe bucket, materials hoist, or any other device not specifically designed to carry passengers.
- Loose-fitting clothing or loose long hair is prohibited around moving machinery.
- Ensure that heavy equipment operators and all other personnel in the work zone are using the same hand signals to communicate.
- Drilling/excavating within 10 feet in any direction of overhead power lines is prohibited.
- The locations of all underground utilities must be identified and marked out prior to initiating any subsurface activities.
- Check to ensure that the equipment operator has lowered all blades and buckets to the ground before shutting off the vehicle.
- If the equipment has an emergency stop device, have the operator show all personnel its location and how to activate it.
- Help the operator ensure adequate clearances when the equipment must negotiate in tight quarters; serve as a signal operator to direct backing, as necessary.
- Ensure that all heavy equipment that is used in the Exclusion Zone is kept in that zone until the job is done and that such equipment is completely decontaminated before moving it into the clean area of the work zone.
- Samplers must not reach into or get near rotating equipment such as the drill rig. If personnel must work near any tools that could rotate, the equipment operator must completely shut down the rig prior to initiating such work. It may be necessary to use a remote sampling device.

ATTACHMENT B

DECONTAMINATION PROCEDURES

PERSONNEL DECONTAMINATION

LEVEL C DECONTAMINATION

Station 1:	Equipment Drop	1. Deposit equipment used on-site (tools, sampling devices and containers, monitoring instruments, radios, clipboards, etc.) on plastic drop cloths. Segregation at the drop reduces the probability of cross-contamination. During hot weather operations, cool down stations may be set up within this area.
Station 2:	Outer Garment, Boots, and Gloves Wash and Rinse	2. Scrub outer boots, outer gloves, and chemical-resistant splash suit with decon solution or detergent and water. Rinse off using copious amounts of water.
Station 3:	Outer Boot and Glove Removal	3. Remove outer boots and gloves. Deposit in container with plastic liner.
Station 4:	Canister or Mask Change	4. If worker leaves Exclusion Zone to change canister (or mask), this is the last step in the decontamination procedure. Worker's canister is exchanged, new outer gloves and boot covers donned, joints taped, and worker returns to duty.
Station 5:	Boot, Gloves and Outer Garment Removal	5. Boots, chemical-resistant splash suit, inner gloves removed and deposited in separate containers lined with plastic.
Station 6:	Face piece Removal	6. Face piece is removed (avoid touching face with fingers). Face piece deposited on plastic sheets.
Station 7:	Field Wash	7. Hands and face are thoroughly washed. Shower as soon as possible.

LEVEL D DECONTAMINATION

Station 1:	Equipment Drop	1. Deposit equipment used on-site (tools, sampling devices and containers, monitoring instruments, radios, clipboards, etc.) on plastic drop cloths. Segregation at the drop reduces the probability of cross contamination. During hot weather operations, cool down stations may be set up within this area.
Station 2:	Outer Garment, Boots, and Gloves Wash and Rinse	2. Scrub outer boots, outer gloves and chemical-resistant splash suit with decon solution or detergent and water. Rinse off using copious amounts of water.
Station 3:	Outer Boot and Glove Removal	3. Remove outer boots and gloves. Deposit in container with plastic liner.
Station 4:	Boot, Gloves and Outer Garment Removal	4. Boots, chemical-resistant splash suit, inner gloves removed and deposited in separate containers lined with plastic.
Station 5:	Field Wash	5. Hands and face are thoroughly washed. Shower as soon as possible.

EQUIPMENT DECONTAMINATION

GENERAL:

Equipment to be decontaminated during the project may include tools, monitoring equipment, respirators, sampling containers, laboratory equipment, and drilling equipment.

All decontamination will be done by personnel in protective gear, appropriate for the level of decontamination, as determined by the site HSO. The decontamination work tasks will be split or rotated among support and work crews.

Depending on site conditions, backhoes and pumps may be decontaminated over a portable decontamination pad to contain wash water; or wash water may be allowed to run off into a storm sewer system. Equipment needed may include a steam generator with high-pressure water, empty drums, screens, screen support structures, and shovels. Drums will be used to hold contaminated wash water pumped from the lined pit. These drums will be labeled as such.

Miscellaneous tools and equipment will be dropped into a plastic bucket, tub, or other containers. They will be brushed off and rinsed with a detergent solution, and finally rinsed with clean water.

MONITORING EQUIPMENT:

Monitoring equipment will be protected as much as possible from contamination by draping, masking, or otherwise covering as many of the instruments as possible with plastic without hindering the operation of the unit. The PID, HNu, or OVA meter, for example, can be placed in a clear plastic bag, which allows reading of the scale and operation of knobs. The probes can be partially wrapped keeping the sensor tip and discharge port clear.

The contaminated equipment will be taken from the drop area and the protective coverings removed and disposed of in the appropriate containers. Any dirt or obvious contamination will be brushed or wiped with a disposable paper wipe.

RESPIRATORS:

Respirators will be cleaned and disinfected after every use. Taken from the drop area, the masks (with the cartridges removed and disposed of with other used disposable gear) will be immersed in a cleaning solution and scrubbed gently with a soft brush, followed by a rinse in plain warm water, and then allowed to air dry. In the morning, new cartridges will be installed. Personnel will inspect their own masks for serviceability prior to donning them. And, once the mask is on, the wearer will check the respirator for leakage using the negative and positive pressure fit check techniques.

ATTACHMENT C

EMPLOYEE EXPOSURE/INJURY INCIDENT REPORT

EMPLOYEE INCIDENT/INJURY REPORT

LANGAN ENGINEERING & ENVIRONMENTAL SERVICES

(Complete and return to Tony Moffa in the Doylestown Office)

Affected Employee Name: _____

Date: _____

Incident type: ☐ Injury ☐ Report Only/No Injury
☐ Near Miss ☐ Other: _____

EMPLOYEE INFORMATION (Person completing Form)

Employee Name: _____ Employee No: _____

Title: _____ Office Location: _____

Length of time employed or date of hire: _____

Mailing address: _____

Sex: M ☐ F ☐ Birth date: _____

Business phone & extension: _____ Residence/cell phone: _____

ACCIDENT INFORMATION

Project: _____ Project #:

Date & time of incident: _____ Time work started & ended: _____

Site location: _____

Incident Type: Possible Exposure ☐ Exposure ☐ Physical Injury ☐

Names of person(s) who witnessed the incident: _____

Exact location incident occurred:

Describe work being done: _____

Describe what affected employee was doing prior to the incident occurring:

Describe in detail how the incident occurred:

Nature of the incident (List the parts of the body affected):

Person(s) to whom the incident was reported (Time and Date):

List the names of other persons affected during this incident:

Possible causes of the incident (equipment, unsafe work practices, lack of PPE, etc.):

Weather conditions during incident:

MEDICAL CARE INFORMATION

Did affected employee receive medical care? Yes ☐ No ☐

If Yes, when, and where was medical care received:

Provide name of facility (hospital, clinic, etc.):

Length of stay at the facility.

Did the employee miss any work time? Yes ☐ No ☐ Undetermined ☐

Date employee last worked: _____ Date employee returned to work:

Has the employee returned to work? Yes ☐ No ☐

Does the employee have any work limitations or restrictions from the injury? : Yes ☐ No ☐

If Yes, please describe:

Did the exposure/injury result in permanent disability? Yes ☐ No ☐ Unknown ☐

If Yes, please describe:

HEALTH & SAFETY INFORMATION

Was the operation being conducted under an established site-specific Health and Safety Plan?

Yes ☐ No ☐ Not Applicable: ☐

Describe protective equipment and clothing used by the employee:

Did any limitations in safety equipment or protective clothing contribute to or affect exposure/injury? If so, explain:

Employee Signature

Date

Langan Representative

Date

ATTACHMENT D

CALIBRATION LOG

DATE: _____

PROJECT: _____

CALIBRATION LOG

[illegible]

ATTACHMENT E

MATERIAL SAFETY DATA SHEETS

SAFETY DATA SHEETS

All Langan Field Personnel Completing This Work Plan Are To Have Real-Time Accessibility To Material Safety Data Sheets (MSDS) or Safety Data Sheets (SDSs) Through Their Smart Phone.

The link is <http://www.msds.com/>

The login name is "drapehead"

The password is "2angan987"

If You Are Unable To Use the Smart Phone App, You Are To Bring Printed Copies of the MSDS/SDSs to the Site

SAFETY DATA SHEET

Version 4.10
Revision Date 01/28/2016
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Biphenyl

Product Number : W312908
Brand : Aldrich
Index-No. : 601-042-00-8

CAS-No. : 92-52-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H315 Causes skin irritation.
H319 Causes serious eye irritation.
H335 May cause respiratory irritation.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264 Wash skin thoroughly after handling.
P271 Use only outdoors or in a well-ventilated area.

P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₁₂ H ₁₀
Molecular weight	: 154.21 g/mol
CAS-No.	: 92-52-4
EC-No.	: 202-163-5
Index-No.	: 601-042-00-8

Hazardous components

Component	Classification	Concentration
Biphenyl		
	Skin Irrit. 2; Eye Irrit. 2A; STOT SE 3; Aquatic Acute 1; Aquatic Chronic 1; H315, H319, H335, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Biphenyl	92-52-4	TWA	0.2 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Pulmonary function		
		TWA	0.200000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Pulmonary function		

		TWA	0.2 ppm 1 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	0.200000 ppm 1.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	0.2 ppm 1 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	0.200000 ppm 1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested:Butoject® (KCL 897 / Aldrich Z677647, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 30 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: crystalline
Colour: light yellow |
| b) Odour | characteristic |
| c) Odour Threshold | No data available |
| d) pH | 5.5 |
| e) Melting point/freezing point | Melting point/range: 68 - 70 °C (154 - 158 °F) - lit. |
| f) Initial boiling point and boiling range | 255 °C (491 °F) - lit. |
| g) Flash point | 110 °C (230 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | The product is not flammable. - Flammability (solids) |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 5.8 %(V)
Lower explosion limit: 0.6 %(V) |
| k) Vapour pressure | 0.04 hPa (0.03 mmHg) at 20 °C (68 °F)
5.5 hPa (4.1 mmHg) at 100 °C (212 °F)
12.6 hPa (9.5 mmHg) at 115 °C (239 °F)
95.7 hPa (71.8 mmHg) at 166 °C (331 °F) |
| l) Vapour density | No data available |
| m) Relative density | 0.992 g/cm ³ |
| n) Water solubility | 0.0075 g/l at 15 °C (59 °F) |
| o) Partition coefficient: n-octanol/water | log Pow: 4.008 at 25 °C (77 °F) |
| p) Auto-ignition temperature | 566 °C (1,051 °F) at 1,013.0 hPa (759.8 mmHg) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

Inhalation: No data available

LD50 Dermal - Rabbit - > 5,010 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Irritating to skin. - 24 h

(Draize Test)

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

Maximisation Test (GPMT) - Guinea pig

Does not cause skin sensitisation.

(OECD Test Guideline 406)

Germ cell mutagenicity

Ames test

S. typhimurium

Result: negative

Mouse - male and female

Result: negative

Carcinogenicity

Carcinogenicity - Mouse - Oral

Tumorigenic: Equivocal tumorigenic agent by RTECS criteria. Lungs, Thorax, or Respiration: Tumors. Blood: Tumors.

Carcinogenicity - Mouse - Subcutaneous

Tumorigenic: Neoplastic by RTECS criteria. Lungs, Thorax, or Respiration: Tumors. Liver: Tumors.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: DU8050000

Stomach - Irregularities - Based on Human Evidence

12.1 Toxicity

Toxicity to daphnia and other aquatic invertebrates flow-through test EC50 - Daphnia magna (Water flea) - 0.36 mg/l - 48 h

Biodegradability	aerobic - Exposure time 14 d Result: 84 % - Readily biodegradable (OECD Test Guideline 301C)
------------------	--

Bioaccumulation *Leuciscus idus* (Golden orfe) - 3 d
- 50 µg/l

Bioconcentration factor (BCF): 281

No data available

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Very toxic to aquatic life with long lasting effects.

13.1 Waste treatment methods

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Dispose of as unused product.

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Biphenyl)
Reportable Quantity (RQ): 100 lbs
Marine pollutant: yes
Poison Inhalation Hazard: No

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Biphenyl)
Marine pollutant: yes

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Biphenyl)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Biphenyl	92-52-4	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Biphenyl	92-52-4	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Biphenyl	92-52-4	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Biphenyl	92-52-4	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	1
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	1
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.10

Revision Date: 01/28/2016

Print Date: 02/18/2016

SAFETY DATA SHEET

Version 5.3
Revision Date 12/29/2015
Print Date 04/11/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : 1,1-Dichloroethane

Product Number : 48512

Brand : Supelco

Index-No. : 602-011-00-1

CAS-No. : 75-34-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225
Acute toxicity, Oral (Category 4), H302
Eye irritation (Category 2A), H319
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.
H302 Harmful if swallowed.
H319 Causes serious eye irritation.
H335 May cause respiratory irritation.
H412 Harmful to aquatic life with long lasting effects.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell. Rinse mouth.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: Ethylidene chloride
Formula	: C ₂ H ₄ Cl ₂
Molecular weight	: 98.96 g/mol
CAS-No.	: 75-34-3
EC-No.	: 200-863-5
Index-No.	: 602-011-00-1

Hazardous components

Component	Classification	Concentration
1,1-Dichloroethane		
	Flam. Liq. 2; Acute Tox. 4; Eye Irrit. 2A; STOT SE 3; Aquatic Acute 3; Aquatic Chronic 3; H225, H302, H319, H335, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
1,1-Dichloroethane	75-34-3	TWA	100.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Upper Respiratory Tract irritation Eye irritation Liver damage Kidney damage Not classifiable as a human carcinogen		
		TWA	100.000000 ppm 400.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		See Appendix C		
		TWA	100.000000 ppm 400.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 60 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering

controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	-97.99 °C (-144.38 °F)
f) Initial boiling point and boiling range	55.0 - 58.0 °C (131.0 - 136.4 °F)
g) Flash point	-9.99 °C (14.02 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	1.17 g/cm ³
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 725.0 mg/kg

LC50 Inhalation - Rat - 4 h - 13000 ppm

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

Chronic exposure may cause dermatitis.

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: KI0175000

Liver injury may occur., Kidney injury may occur., narcosis, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Central nervous system -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2362 Class: 3 Packing group: II
Proper shipping name: 1,1-Dichloroethane
Reportable Quantity (RQ): 1000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 2362 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: 1,1-DICHLOROETHANE

IATA

UN number: 2362 Class: 3 Packing group: II
Proper shipping name: 1,1-Dichloroethane

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,1-Dichloroethane	75-34-3	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,1-Dichloroethane	75-34-3	2007-07-01

Pennsylvania Right To Know Components

1,1-Dichloroethane

CAS-No.
75-34-3Revision Date
2007-07-01**New Jersey Right To Know Components**

1,1-Dichloroethane

CAS-No.
75-34-3Revision Date
2007-07-01**California Prop. 65 Components**

WARNING! This product contains a chemical known to the State of California to cause cancer.

1,1-Dichloroethane

CAS-No.
75-34-3Revision Date
2007-09-28

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H302	Harmful if swallowed.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.3

Revision Date: 12/29/2015

Print Date: 04/11/2016

SAFETY DATA SHEET

Version 6.5
Revision Date 05/02/2022
Print Date 05/14/2022

SECTION 1: Identification of the substance/mixture and of the company/undertaking**1.1 Product identifiers**

Product name : 1,2,4,5-Tetramethylbenzene

Product Number : T19607
Brand : Aldrich
CAS-No. : 95-93-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 SPRUCE ST
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-
527-3887 CHEMTREC (International) 24
Hours/day; 7 Days/week

SECTION 2: Hazards identification**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable solids (Category 1), H228
Short-term (acute) aquatic hazard (Category 1), H400
Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal Word : Danger

Hazard statement(s)
H228 : Flammable solid.

H410	Very toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P210	Keep away from heat/ sparks/ open flames/ hot surfaces. No smoking.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms	: Durene 1,2,4,5-Tetramethylbenzene
Formula	: C ₁₀ H ₁₄
Molecular weight	: 134.22 g/mol
CAS-No.	: 95-93-2
EC-No.	: 202-465-7

Component	Classification	Concentration
1,2,4,5-tetramethylbenzene		
	Flam. Sol. 1; Aquatic Acute 1; Aquatic Chronic 1; H228, H400, H410 M-Factor - Aquatic Acute: 1 - Aquatic Chronic: 1	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Show this material safety data sheet to the doctor in attendance.

If inhaled

After inhalation: fresh air.

In case of skin contact

In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower.

In case of eye contact

After eye contact: rinse out with plenty of water. Remove contact lenses.

If swallowed

After swallowing: make victim drink water (two glasses at most). Consult doctor if feeling unwell.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures**5.1 Extinguishing media****Suitable extinguishing media**

Water Foam Carbon dioxide (CO₂) Dry powder

Unsuitable extinguishing media

For this substance/mixture no limitations of extinguishing agents are given.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Combustible.

Vapors are heavier than air and may spread along floors.

Forms explosive mixtures with air on intense heating.

Development of hazardous combustion gases or vapours possible in the event of fire.

5.3 Advice for firefighters

In the event of fire, wear self-contained breathing apparatus.

5.4 Further information

Remove container from danger zone and cool with water. Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6: Accidental release measures**6.1 Personal precautions, protective equipment and emergency procedures**

Advice for non-emergency personnel: Avoid inhalation of dusts. Avoid substance contact. Ensure adequate ventilation. Keep away from heat and sources of ignition. Evacuate the danger area, observe emergency procedures, consult an expert.

For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains. Risk of explosion.

6.3 Methods and materials for containment and cleaning up

Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up dry. Dispose of properly. Clean up affected area. Avoid generation of dusts.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on protection against fire and explosion

Keep away from open flames, hot surfaces and sources of ignition. Take precautionary measures against static discharge.

Hygiene measures

Change contaminated clothing. Wash hands after working with substance.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Tightly closed. Keep away from heat and sources of ignition.

Storage class

Storage class (TRGS 510): 4.1B: Flammable solid hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Change contaminated clothing. Wash hands after working with substance.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU). Safety glasses

Skin protection

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: KCL 741 Dermatril® L

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: KCL 741 Dermatril® L

Body Protection

Flame retardant antistatic protective clothing.

Respiratory protection

required when dusts are generated.

Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection system.

Control of environmental exposure

Do not let product enter drains. Risk of explosion.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

a) Appearance	Form: crystals
b) Odor	No data available
c) Odor Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 76 - 80 °C (169 - 176 °F) - lit.
f) Initial boiling point and boiling range	191 - 193 °C 376 - 379 °F
g) Flash point	74 °C (165 °F) - c.c.
h) Evaporation rate	No data available
i) Flammability (solid, gas)	The substance or mixture is a flammable solid with the category 1.
j) Upper/lower flammability or explosive limits	No data available
k) Vapor pressure	No data available
l) Vapor density	No data available
m) Density	0.838 g/mL at 25 °C (77 °F) - lit.
Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Autoignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	none

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

Forms explosive mixtures with air on intense heating.

A range from approx. 15 Kelvin below the flash point is to be rated as critical.

The following applies in general to flammable organic substances and mixtures: in correspondingly fine distribution, when whirled up a dust explosion potential may generally be assumed.

10.2 Chemical stability

The product is chemically stable under standard ambient conditions (room temperature) .

10.3 Possibility of hazardous reactions

Violent reactions possible with:

Oxidizing agents

10.4 Conditions to avoid

Strong heating.

10.5 Incompatible materials

No data available

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 6,700 mg/kg

Remarks: (RTECS)

Inhalation: No data available

Dermal: No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No ingredient of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

11.2 Additional Information

RTECS: DC0500000

The data available to us do not suffice to permit any industrial-toxicological assessment.

Further toxicological data:

Risk of absorption.

Other dangerous properties can not be excluded.

Further data:

Handle in accordance with good industrial hygiene and safety practice.

SECTION 12: Ecological information**12.1 Toxicity**

Toxicity to fish

LC0 - Leuciscus idus (Golden orfe) - 10 mg/l - 48 h
Remarks: (ECOTOX Database)

LC50 - Leuciscus idus (Golden orfe) - 30 mg/l - 48 h
Remarks: (ECOTOX Database)

LC100 - Leuciscus idus (Golden orfe) - 50 mg/l - 48 h
Remarks: (ECOTOX Database)

Toxicity to daphnia
and other aquatic
invertebrates

EC50 - Daphnia magna (Water flea) - 0.47 mg/l - 48 h
Remarks: (External MSDS)

12.2 Persistence and degradability

Not readily biodegradable.

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Endocrine disrupting properties

No data available

12.7 Other adverse effects

Discharge into the environment must be avoided.

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Waste material must be disposed of in accordance with the national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself. See www.retrologistik.com for processes regarding the return of chemicals and containers, or contact us there if you have further questions.

SECTION 14: Transport information

DOT (US)

UN number: 1325 Class: 4.1 Packing group: II
Proper shipping name: Flammable solids, organic, n.o.s. (1,2,4,5-tetramethylbenzene)
Reportable Quantity (RQ):
Poison Inhalation Hazard: No

IMDG

UN number: 1325 Class: 4.1 Packing group: II EMS-No: F-A, S-G
Proper shipping name: FLAMMABLE SOLID, ORGANIC, N.O.S. (1,2,4,5-tetramethylbenzene)
Marine pollutant : yes

IATA

UN number: 1325 Class: 4.1 Packing group: II
Proper shipping name: Flammable solid, organic, n.o.s. (1,2,4,5-tetramethylbenzene)

SECTION 15: Regulatory information

SARA 302 Components

This material does not contain any components with a section 302 EHS TPQ.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

1,2,4,5-tetramethylbenzene

CAS-No.
95-93-2

Revision Date

New Jersey Right To Know Components

1,2,4,5-tetramethylbenzene

CAS-No.
95-93-2

Revision Date

SECTION 16: Other information

Further information

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 6.5

Revision Date: 05/02/2022

Print Date: 05/14/2022

SAFETY DATA SHEET

Creation Date 26-Sep-2009

Revision Date 31-Jan-2023

Revision Number 9

1. Identification

Product Name Mesitylene

Cat No. : AC125580000; AC125580010; AC125580025; AC125580050;
AC125582500

CAS No 108-67-8
Synonyms 1,3,5-Trimethylbenzene

Recommended Use Laboratory chemicals.
Uses advised against Food, drug, pesticide or biocidal product use.

Details of the supplier of the safety data sheet

Company

Fisher Scientific Company
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01 / **Europe** call: +32 14 57 52 11
Emergency Number US:001-201-796-7100 / **Europe:** +32 14 57 52 99
CHEMTREC Tel. No.**US:**001-800-424-9300 / **Europe:**001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids	Category 3
Skin Corrosion/Irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Respiratory system, Central nervous system (CNS).	
Aspiration Toxicity	Category 1

Label Elements

Signal Word
Danger

Hazard Statements

Flammable liquid and vapor
May be fatal if swallowed and enters airways
Causes skin irritation
Causes serious eye irritation
May cause respiratory irritation

**Precautionary Statements****Prevention**

Wash face, hands and any exposed skin thoroughly after handling
Wear protective gloves/protective clothing/eye protection/face protection
Avoid breathing dust/fume/gas/mist/vapors/spray
Use only outdoors or in a well-ventilated area
Keep away from heat/sparks/open flames/hot surfaces. - No smoking
Keep container tightly closed
Ground/bond container and receiving equipment
Use explosion-proof electrical/ventilating/lighting equipment
Use only non-sparking tools
Take precautionary measures against static discharge
Keep cool

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
Call a POISON CENTER or doctor/physician if you feel unwell

Skin

If skin irritation occurs: Get medical advice/attention
IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
Wash contaminated clothing before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
If eye irritation persists: Get medical advice/attention

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician
Do NOT induce vomiting

Fire

In case of fire: Use CO₂, dry chemical, or foam for extinction

Storage

Store locked up
Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Toxic to aquatic life with long lasting effects

3. Composition/Information on Ingredients

Component	CAS No	Weight %
1,3,5-Trimethylbenzene	108-67-8	<100

4. First-aid measures

General Advice	If symptoms persist, call a physician.
Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Get medical attention.
Skin Contact	Wash off immediately with plenty of water for at least 15 minutes. If skin irritation persists, call a physician.
Inhalation	Remove to fresh air. If not breathing, give artificial respiration. Get medical attention if symptoms occur. Risk of serious damage to the lungs (by aspiration).
Ingestion	Clean mouth with water and drink afterwards plenty of water. Do NOT induce vomiting. Call a physician or poison control center immediately. If vomiting occurs naturally, have victim lean forward.
Most important symptoms and effects	None reasonably foreseeable. Vapors may cause drowsiness and dizziness: Symptoms may be delayed: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Water spray, carbon dioxide (CO ₂), dry chemical, alcohol-resistant foam. Water mist may be used to cool closed containers.
Unsuitable Extinguishing Media	No information available
Flash Point	44 °C / 111.2 °F
Method -	No information available
Autoignition Temperature	550 °C / 1022 °F
Explosion Limits	
Upper	6.00%
Lower	1.00%
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Flammable. Containers may explode when heated. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back.

Hazardous Combustion Products

Carbon monoxide (CO). Carbon dioxide (CO₂).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
3

Flammability
2

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment as required. Remove all sources of ignition. Take precautionary measures against static discharges.
Environmental Precautions	Do not flush into surface water or sanitary sewer system.

Methods for Containment and Clean Up Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Handling Wear personal protective equipment/face protection. Ensure adequate ventilation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. Take precautionary measures against static discharges.

Storage. Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat, sparks and flame. Flammables area. Incompatible Materials. Strong oxidizing agents. Nitric acid.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH	Mexico OEL (TWA)
1,3,5-Trimethylbenzene	TWA: 10 ppm		TWA: 25 ppm TWA: 125 mg/m ³	

Legend

ACGIH - American Conference of Governmental Industrial Hygienists
NIOSH: NIOSH - National Institute for Occupational Safety and Health

Engineering Measures Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location. Use explosion-proof electrical/ventilating/lighting equipment.

Personal Protective Equipment

Eye/face Protection Tight sealing safety goggles. Face protection shield.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Recommended Filter type: Organic gases and vapours filter. Type A. Brown. conforming to EN14387.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Liquid
Appearance	Colorless
Odor	aromatic
Odor Threshold	No information available
pH	No information available
Melting Point/Range	-45 °C / -49 °F
Boiling Point/Range	163 - 166 °C / 325.4 - 330.8 °F @ 760 mmHg
Flash Point	44 °C / 111.2 °F
Evaporation Rate	No information available
Flammability (solid,gas)	Not applicable
Flammability or explosive limits	
Upper	6.00%
Lower	1.00%

Vapor Pressure	2.5 mbar @ 20 °C
Vapor Density	4.1 (Air = 1.0)
Specific Gravity	0.868
Solubility	Slightly soluble in water
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	550 °C / 1022 °F
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C9 H12
Molecular Weight	120.19

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products. Excess heat. Keep away from open flames, hot surfaces and sources of ignition.
Incompatible Materials	Strong oxidizing agents, Nitric acid
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
1,3,5-Trimethylbenzene	Not listed	Not listed	LC50 = 24 g/m ³ (Rat) 4 h

Toxicologically Synergistic Products No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation	Irritating to eyes, respiratory system and skin
Sensitization	No information available
Carcinogenicity	The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS No	IARC	NTP	ACGIH	OSHA	Mexico
1,3,5-Trimethylbenzene	108-67-8	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects Not mutagenic in AMES Test

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system Central nervous system (CNS)

STOT - repeated exposure None known

Aspiration hazard Category 1

Symptoms / effects, both acute and delayed Vapors may cause drowsiness and dizziness: Symptoms may be delayed: Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
1,3,5-Trimethylbenzene	Not listed	LC50: = 3.48 mg/L, 96h (Pimephales promelas)	Not listed	Not listed

Persistence and Degradability based on information available. May persist

Bioaccumulation/ Accumulation No information available.

Mobility Is not likely mobile in the environment due its low water solubility.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN2325
 Proper Shipping Name 1,3,5-TRIMETHYLBENZENE
 Hazard Class 3
 Packing Group III

TDG

UN-No UN2325
 Proper Shipping Name 1,3,5-TRIMETHYLBENZENE
 Hazard Class 3
 Packing Group III

IATA

UN-No UN2325
 Proper Shipping Name 1,3,5-TRIMETHYLBENZENE
 Hazard Class 3
 Packing Group III

IMDG/IMO

UN-No UN2325
 Proper Shipping Name 1,3,5-TRIMETHYLBENZENE
 Hazard Class 3
 Packing Group III

15. Regulatory information

United States of America Inventory

Component	CAS No	TSCA	TSCA Inventory notification - Active-Inactive	TSCA - EPA Regulatory Flags
1,3,5-Trimethylbenzene	108-67-8	X	ACTIVE	-

Legend:

TSCA US EPA (TSCA) - Toxic Substances Control Act, (40 CFR Part 710)

X - Listed

- - Not Listed

TSCA - Per 40 CFR 751, Regulation of Certain Chemical Substances & Mixtures, Under TSCA Section 6(h) (PBT)

Not applicable

TSCA 12(b) - Notices of Export

Not applicable

International Inventories

Canada (DSL/NDSL), Europe (EINECS/ELINCS/NLP), Philippines (PICCS), Japan (ENCS), Japan (ISHL), Australia (AICS), China (IECSC), Korea (KECL).

Component	CAS No	DSL	NDSL	EINECS	PICCS	ENCS	ISHL	AICS	IECSC	KECL
1,3,5-Trimethylbenzene	108-67-8	X	-	203-604-4	X	X	X	X	X	KE-34411

KECL - NIER number or KE number (<http://ncis.nier.go.kr/en/main.do>)**U.S. Federal Regulations****SARA 313**

Not applicable

SARA 311/312 Hazard Categories

See section 2 for more information

CWA (Clean Water Act)

Not applicable

Clean Air Act

Not applicable

OSHA - Occupational Safety and Health Administration

Not applicable

CERCLA

Not applicable

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
1,3,5-Trimethylbenzene	X	-	-	-	-

U.S. Department of Transportation

Reportable Quantity (RQ): N

DOT Marine Pollutant Y

DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations**Mexico - Grade**

Moderate risk, Grade 2

Authorisation/Restrictions according to EU REACH

Not applicable

Component	CAS No	REACH (1907/2006) - Annex XIV - Substances Subject to Authorization	REACH (1907/2006) - Annex XVII - Restrictions on Certain Dangerous Substances	REACH Regulation (EC 1907/2006) article 59 - Candidate List of Substances of Very High
1,3,5-Trimethylbenzene	108-67-8			

				Concern (SVHC)
1,3,5-Trimethylbenzene	108-67-8	-	-	-

Safety, health and environmental regulations/legislation specific for the substance or mixture

Component	CAS No	OECD HPV	Persistent Organic Pollutant	Ozone Depletion Potential	Restriction of Hazardous Substances (RoHS)
1,3,5-Trimethylbenzene	108-67-8	Listed	Not applicable	Not applicable	Not applicable

Component	CAS No	Seveso III Directive (2012/18/EC) - Qualifying Quantities for Major Accident Notification	Seveso III Directive (2012/18/EC) - Qualifying Quantities for Safety Report Requirements	Rotterdam Convention (PIC)	Basel Convention (Hazardous Waste)
1,3,5-Trimethylbenzene	108-67-8	Not applicable	Not applicable	Not applicable	Not applicable

16. Other information

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date 26-Sep-2009

Revision Date 31-Jan-2023

Print Date 31-Jan-2023

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text

End of SDS

SAFETY DATA SHEET

Version 5.4
Revision Date 12/01/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : 1,2-Dichloroethylene, mixture of *cis* and *trans*

Product Number : D62403

Brand : Aldrich

Index-No. : 602-026-00-3

CAS-No. : 540-59-0

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225
Acute toxicity, Oral (Category 4), H302
Acute toxicity, Inhalation (Category 4), H332
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H302 + H332

Harmful if swallowed or if inhaled

H412

Harmful to aquatic life with long lasting effects.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312	IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P312	Call a POISON CENTER or doctor/ physician if you feel unwell.
P330	Rinse mouth.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₂ H ₂ Cl ₂
Molecular weight	: 96.94 g/mol
CAS-No.	: 540-59-0
EC-No.	: 208-750-2
Index-No.	: 602-026-00-3

Hazardous components

Component	Classification	Concentration
1,2-Dichloroethylene		
	Flam. Liq. 2; Acute Tox. 4; Aquatic Acute 3; Aquatic Chronic 3; H225, H302 + H332, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Air, light, and moisture sensitive.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,2-Dichloroethylene	540-59-0	TWA	200.000000 ppm 790.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	200.000000 ppm 790.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	The value in mg/m3 is approximate.		
		TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Eye irritation		
		TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Eye irritation		
		TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Eye irritation		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---------------|------------------------------------|
| a) Appearance | Form: liquid
Colour: colourless |
|---------------|------------------------------------|

b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -57 °C (-71 °F) - lit.
f) Initial boiling point and boiling range	48 - 60 °C (118 - 140 °F) - lit.
g) Flash point	6 °C (43 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	1.265 g/cm ³ at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

10.5 Incompatible materials

Strong oxidizing agentsOxidizing agents, Bases

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 770 mg/kg

Dermal: No data available

No data available

Skin corrosion/irritation

Skin - Rabbit

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: KV9360000

prolonged or repeated exposure can cause:., narcosis, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Lepomis macrochirus (Bluegill) - 140.0 mg/l - 96.0 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1150 Class: 3 Packing group: II
Proper shipping name: 1,2-Dichloroethylene

Poison Inhalation Hazard: No

IMDG

UN number: 1150 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: 1,2-DICHLOROETHYLENE

IATA

UN number: 1150 Class: 3 Packing group: II
Proper shipping name: 1,2-Dichloroethylene

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,2-Dichloroethylene	540-59-0	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,2-Dichloroethylene	540-59-0	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,2-Dichloroethylene	540-59-0	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,2-Dichloroethylene	540-59-0	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H302	Harmful if swallowed.
H302 + H332	Harmful if swallowed or if inhaled

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	1
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.4

Revision Date: 12/01/2015

Print Date: 02/18/2016

Material Safety Data Sheet

Version 3.1
Revision Date 04/08/2011
Print Date 12/27/2011

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : 1,3,5-Trimethylbenzene

Product Number : 442236

Brand : Supelco

Supplier : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

Emergency Phone # (For both supplier and manufacturer) : (314) 776-6555

Preparation Information : Sigma-Aldrich Corporation
Product Safety - Americas Region
1-800-521-8956

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Combustible Liquid, Target Organ Effect, Irritant

Target Organs

Peripheral nervous system., Central nervous system, Blood

GHS Classification

Flammable liquids (Category 3)
Acute toxicity, Inhalation (Category 5)
Skin irritation (Category 2)
Eye irritation (Category 2B)
Specific target organ toxicity - single exposure (Category 3)
Acute aquatic toxicity (Category 2)
Chronic aquatic toxicity (Category 2)

GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H226 Flammable liquid and vapour.
H315 + H320 Causes skin and eye irritation.
H333 May be harmful if inhaled.
H335 May cause respiratory irritation.
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P273 Avoid release to the environment.
P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

HMIS Classification

Health hazard: 2
Chronic Health Hazard: *
Flammability: 2
Physical hazards: 0

NFPA Rating

Health hazard: 2
Fire: 2
Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. Causes respiratory tract irritation.
Skin May be harmful if absorbed through skin. Causes skin irritation.
Eyes Causes eye irritation.
Ingestion May be harmful if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : Mesitylene
1,3,5-Trimethylbenzene

Formula : C₉H₁₂
Molecular Weight : 120.19 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
Mesitylene			
108-67-8	203-604-4	601-025-00-5	-

4. FIRST AID MEASURES**General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES**Suitable extinguishing media**

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

Hazardous combustion products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

7. HANDLING AND STORAGE**Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

Conditions for safe storage

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**Components with workplace control parameters**

Components	CAS-No.	Value	Control parameters	Basis
Mesitylene	108-67-8	TWA	25 ppm 125 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	25 ppm 123 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		TWA	25 ppm 125 mg/m3	USA. NIOSH Recommended Exposure Limits

Personal protective equipment**Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Eye protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin and body protection

impervious clothing, Flame retardant antistatic protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES**Appearance**

Form liquid, clear

Colour colourless

Safety data

pH	no data available
Melting point/freezing point	Melting point/range: -45 °C (-49 °F) - lit.
Boiling point	163 - 166 °C (325 - 331 °F) - lit.
Flash point	53.0 °C (127.4 °F) - closed cup
Ignition temperature	550 °C (1,022 °F)
Autoignition temperature	550.0 °C (1,022.0 °F)
Lower explosion limit	0.88 %(V)
Vapour pressure	18.7 hPa (14.0 mmHg) at 55.0 °C (131.0 °F) 3.3 hPa (2.5 mmHg) at 25.0 °C (77.0 °F)
Density	0.864 g/cm ³ at 25 °C (77 °F)
Water solubility	no data available
Partition coefficient: n-octanol/water	no data available
Relative vapour density	no data available
Odour	no data available
Odour Threshold	no data available
Evaporation rate	no data available

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

no data available

Conditions to avoid

Heat, flames and sparks.

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - no data available

11. TOXICOLOGICAL INFORMATION

Acute toxicity

Oral LD50

Inhalation LC50

LC50 Inhalation - rat - 4 h - 24,000 mg/m³

Dermal LD50

no data available

Other information on acute toxicity

no data available

Skin corrosion/irritation

Skin - rabbit - Skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - rabbit - Mild eye irritation - 24 h

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Teratogenicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

May cause respiratory irritation.

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

no data available

Potential health effects

Inhalation	May be harmful if inhaled. Causes respiratory tract irritation.
Ingestion	May be harmful if swallowed.
Skin	May be harmful if absorbed through skin. Causes skin irritation.
Eyes	Causes eye irritation.

Signs and Symptoms of Exposure

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Synergistic effects

no data available

Additional Information

RTECS: OX6825000

12. ECOLOGICAL INFORMATION**Toxicity**

Toxicity to fish	LC50 - Carassius auratus (goldfish) - 12.52 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates.	Immobilization EC50 - Daphnia magna (Water flea) - 6 mg/l - 48 h

Persistence and degradability

no data available

Bioaccumulative potential

no data available

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

Toxic to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

13. DISPOSAL CONSIDERATIONS**Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 2325 Class: 3 Packing group: III

Proper shipping name: 1,3,5-Trimethylbenzene

Marine pollutant: No

Poison Inhalation Hazard: No

IMDG

UN number: 2325 Class: 3 Packing group: III EMS-No: F-E, S-D

Proper shipping name: 1,3,5-TRIMETHYLBENZENE

Marine pollutant: No

IATA

UN number: 2325 Class: 3 Packing group: III

Proper shipping name: 1,3,5-Trimethylbenzene

15. REGULATORY INFORMATION**OSHA Hazards**

Combustible Liquid, Target Organ Effect, Irritant

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Mesitylene	108-67-8	1994-04-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Mesitylene	108-67-8	1994-04-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Mesitylene	108-67-8	1994-04-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Further information**

Copyright 2011 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.

SAFETY DATA SHEET

Version 5.4
Revision Date 03/03/2015
Print Date 04/11/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : 1,4-Dioxane

Product Number : 296309

Brand : Sigma-Aldrich

Index-No. : 603-024-00-5

CAS-No. : 123-91-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225

Eye irritation (Category 2A), H319

Carcinogenicity (Category 2), H351

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.

H319 Causes serious eye irritation.

H335 May cause respiratory irritation.

H351 Suspected of causing cancer.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202 Do not handle until all safety precautions have been read and understood.

P210 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P233 Keep container tightly closed.

P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ eye protection/ face protection.
P281	Use personal protective equipment as required.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides., Repeated exposure may cause skin dryness or cracking.
May form explosive peroxides.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: Dioxane Diethylene oxide
Formula	: C ₄ H ₈ O ₂
Molecular weight	: 88.11 g/mol
CAS-No.	: 123-91-1
EC-No.	: 204-661-8
Index-No.	: 603-024-00-5
Registration number	: 01-2119462837-26-XXXX

Hazardous components

Component	Classification	Concentration
1,4-Dioxane		
	Flam. Liq. 2; Eye Irrit. 2A; Carc. 2; STOT SE 3; H225, H319, H335, H351	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters**

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
1,4-Dioxane	123-91-1	TWA	20.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Liver damage Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		
		TWA	20 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Liver damage Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		
		TWA	25 ppm 90 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		
		TWA	100.000000 ppm 360.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		
		TWA	100 ppm 360 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		
		C	1.000000 ppm 3.600000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A 30 minute ceiling value		

Derived No Effect Level (DNEL)

Application Area	Exposure routes	Health effect	Value
Workers	Inhalation	Long-term local effects	144 mg/m3
Workers	Inhalation	Long-term systemic effects	73 mg/m3
Workers	Skin contact	Long-term systemic effects	21 mg/m3

Predicted No Effect Concentration (PNEC)

Compartment	Value
Soil	0.153 mg/kg
Marine water	0.67 mg/l
Fresh water	10 mg/l
Fresh water sediment	37 mg/kg
Sewage treatment plant	2700 mg/l
Aquatic intermittent release	10 mg/l

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: butyl-rubber

Minimum layer thickness: 0.3 mm

Break through time: 480 min

Material tested: Butoject® (KCL 897 / Aldrich Z677647, Size M)

Splash contact

Material: Chloroprene

Minimum layer thickness: 0.6 mm

Break through time: 35 min

Material tested: Camapren® (KCL 722 / Aldrich Z677493, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

- | | |
|---|--|
| a) Appearance | Form: liquid
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | 6.0 - 8 at 500 g/l at 20 °C (68 °F) |
| e) Melting point/freezing point | Melting point/range: 10 - 12 °C (50 - 54 °F) - lit. |
| f) Initial boiling point and boiling range | 100 - 102 °C (212 - 216 °F) - lit. |
| g) Flash point | 12 °C (54 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 22 %(V)
Lower explosion limit: 2 %(V) |
| k) Vapour pressure | 36 hPa (27 mmHg) at 20 °C (68 °F)
53 hPa (40 mmHg) at 25.20 °C (77.36 °F) |
| l) Vapour density | 3.04 - (Air = 1.0) |

m) Relative density	1.034 g/cm ³ at 25 °C (77 °F)
n) Water solubility	completely miscible
o) Partition coefficient: n-octanol/water	log Pow: -0.27
p) Auto-ignition temperature	300 °C (572 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

Surface tension	36.9 mN/m at 25 °C (77 °F)
Relative vapour density	3.04 - (Air = 1.0)

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air. Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Oxygen, Oxidizing agents, Halogens, Reducing agents, Perchlorates., Trimethylaluminum

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 4,200 mg/kg

LC50 Inhalation - Rat - 2 h - 46,000 mg/m³

Remarks: Sense Organs and Special Senses (Nose, Eye, Ear, and Taste):Eye:Other.

LD50 Dermal - Rabbit - 7,858 mg/kg

No data available

Skin corrosion/irritation

Skin - Human

Remarks: Chronic exposure causes drying effect on the skin and eczema.

Skin - Rabbit

Result: No skin irritation

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (1,4-Dioxane)

NTP: Reasonably anticipated to be a human carcinogen (1,4-Dioxane)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: JG8225000

Nausea, Vomiting, Weakness, Dizziness, Vertigo, Headache, Sweating, loss of appetite, Kidney injury may occur., Liver injury may occur.

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 985 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 8,450 mg/l - 24 h

Toxicity to algae EC50 - Desmodesmus subspicatus (green algae) - > 500 mg/l - 72 h

12.2 Persistence and degradability

Biodegradability Result: < 5 % - Not readily biodegradable.

12.3 Bioaccumulative potential

Does not bioaccumulate.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1165 Class: 3
Proper shipping name: Dioxane
Reportable Quantity (RQ): 100 lbs

Packing group: II

Poison Inhalation Hazard: No

IMDG

UN number: 1165 Class: 3
Proper shipping name: DIOXANE

Packing group: II

EMS-No: F-E, S-D

IATA

UN number: 1165 Class: 3
Proper shipping name: Dioxane

Packing group: II

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
1,4-Dioxane	123-91-1	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,4-Dioxane	123-91-1	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,4-Dioxane	123-91-1	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,4-Dioxane	123-91-1	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
1,4-Dioxane	123-91-1	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
STOT SE	Specific target organ toxicity - single exposure

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.4

Revision Date: 03/03/2015

Print Date: 04/11/2016

SAFETY DATA SHEET

Version 4.5
Revision Date 01/18/2016
Print Date 02/09/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : 2,4-Dimethylphenol

Product Number : D174203

Brand : Aldrich

Index-No. : 604-006-00-X

CAS-No. : 105-67-9

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 3), H301

Acute toxicity, Dermal (Category 3), H311

Skin corrosion (Category 1B), H314

Serious eye damage (Category 1), H318

Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H301 + H311

H314

H401

Toxic if swallowed or in contact with skin

Causes severe skin burns and eye damage.

Toxic to aquatic life.

Precautionary statement(s)

P264

P270

P273

P280

Wash skin thoroughly after handling.

Do not eat, drink or smoke when using this product.

Avoid release to the environment.

Wear protective gloves/ protective clothing/ eye protection/ face

P301 + P310	protection. IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.
P301 + P330 + P331 P303 + P361 + P353	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P310	Immediately call a POISON CENTER or doctor/ physician.
P322	Specific measures (see supplemental first aid instructions on this label).
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 4-Hydroxy-*m*-xylene
asym.-*m*-Xylenol

Formula : C₈H₁₀O
Molecular weight : 122.16 g/mol
CAS-No. : 105-67-9
EC-No. : 203-321-6
Index-No. : 604-006-00-X

Hazardous components

Component	Classification	Concentration
2,4-Xylenol		
	Acute Tox. 3; Skin Corr. 1B; Eye Dam. 1; Aquatic Acute 2; H301 + H311, H314, H401	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Take off contaminated clothing and shoes immediately. Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician. Continue rinsing eyes during transport to hospital.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Tightly fitting safety goggles. Faceshield (8-inch minimum). Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 60 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

- | | |
|---|--|
| a) Appearance | Form: Semi-solid melting to a liquid, clear
Colour: brown |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 22 - 23 °C (72 - 73 °F) - lit. |
| f) Initial boiling point and boiling range | 211 - 212 °C (412 - 414 °F) - lit. |
| g) Flash point | 94.0 °C (201.2 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 0.1 hPa (0.1 mmHg) at 25.0 °C (77.0 °F) |
| l) Vapour density | No data available |

m) Relative density	1.011 g/cm ³ at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 2.35
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Bases, Acid chlorides, Acid anhydrides, Oxidizing agents, Brass, Copper

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 3,200 mg/kg

Inhalation: No data available

LD50 Dermal - Rat - 1,040 mg/kg

No data available

Skin corrosion/irritation

Causes burns.

Serious eye damage/eye irritation

Risk of serious damage to eyes.

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

- ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.
- NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
- OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: ZE5600000

Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 9.2 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates LC50 - Daphnia magna (Water flea) - 2.1 mg/l - 48 h

12.2 Persistence and degradability

12.3 Bioaccumulative potential

Bioaccumulation Lepomis macrochirus (Bluegill) - 28 d
- 0.0102 mg/l

Bioconcentration factor (BCF): 150

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2261 Class: 6.1 Packing group: II
Proper shipping name: Xylenols, solid
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 2261 Class: 6.1 Packing group: II EMS-No: F-A, S-A
Proper shipping name: XYLENOLS, SOLID

IATA

UN number: 2261 Class: 6.1 Packing group: II
Proper shipping name: Xylenols, solid

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
2,4-Xylenol	105-67-9	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
2,4-Xylenol	105-67-9	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
2,4-Xylenol	105-67-9	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
2,4-Xylenol	105-67-9	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Eye Dam.	Serious eye damage
H301	Toxic if swallowed.
H301 + H311	Toxic if swallowed or in contact with skin
H311	Toxic in contact with skin.
H314	Causes severe skin burns and eye damage.

HMIS Rating

Health hazard: 3
Chronic Health Hazard:
Flammability: 1

Physical Hazard 0

NFPA Rating

Health hazard: 3

Fire Hazard: 1

Reactivity Hazard: 0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation

Product Safety – Americas Region

1-800-521-8956

Version: 4.5

Revision Date: 01/18/2016

Print Date: 02/09/2016

MATERIAL SAFETY DATA SHEET

Date Printed: 05/24/2004

Date Updated: 03/10/2004

Version 1.5

Section 1 - Product and Company Information

Product Name	2-BUTANONE, 99.5+%, HPLC GRADE
Product Number	270695
Brand	ALDRICH
Company	Sigma-Aldrich
Street Address	3050 Spruce Street
City, State, Zip, Country	SAINT LOUIS MO 63103 US
Technical Phone:	314 771 5765
Emergency Phone:	414 273 3850 Ext. 5996
Fax:	800 325 5052

Section 2 - Composition/Information on Ingredient

Substance Name	CAS #	SARA 313
2-BUTANONE	78-93-3	Yes
Formula	C4H8O	
Synonyms	Acetone, methyl- * Aethylmethyleketon (German) * Butanone * 2-Butanone (OSHA) * Butanone 2 (French) * 3-Butanone * Ethyl methyl cetone (French) * Ethylmethyleketon (Dutch) * Ketone, ethyl methyl * Meeto * MEK (OSHA) * Methyl acetone * Methyl ethyl ketone (ACGIH:OSHA) * Metiletilchetone (Italian) * Metyloetyloketon (Polish) * RCRA waste number U159	
RTECS Number:	EL6475000	

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Flammable (USA) Highly Flammable (EU). Irritant.
Irritating to respiratory system and skin. Risk of serious damage
to eyes. Vapors may cause drowsiness and dizziness.
Target organ(s): Central nervous system.

HMIS RATING

HEALTH: 2*
FLAMMABILITY: 3
REACTIVITY: 1

NFPA RATING

HEALTH: 2
FLAMMABILITY: 3
REACTIVITY: 1

*additional chronic hazards present.

For additional information on toxicity, please refer to Section 11.

Section 4 - First Aid Measures

ORAL EXPOSURE

If swallowed, wash out mouth with water provided person is conscious. Call a physician.

INHALATION EXPOSURE

If inhaled, remove to fresh air. If not breathing give artificial respiration. If breathing is difficult, give oxygen.

DERMAL EXPOSURE

In case of contact, immediately wash skin with soap and copious amounts of water.

EYE EXPOSURE

In case of contact, immediately flush eyes with copious amounts of water for at least 15 minutes.

Section 5 - Fire Fighting Measures

FLAMMABLE HAZARDS

Flammable Hazards: Yes

EXPLOSION HAZARDS

Vapor may travel considerable distance to source of ignition and flash back. Container explosion may occur under fire conditions.

FLASH POINT

30 °F -1 °C Method: closed cup

EXPLOSION LIMITS

Lower: 1.8 % Upper: 10.1 %

AUTOIGNITION TEMP

516 °C

FLAMMABILITY

N/A

EXTINGUISHING MEDIA

Suitable: Water spray. Carbon dioxide, dry chemical powder, or appropriate foam.

FIREFIGHTING

Protective Equipment: Wear self-contained breathing apparatus and protective clothing to prevent contact with skin and eyes.
Specific Hazard(s): Flammable liquid. Emits toxic fumes under fire conditions.

Section 6 - Accidental Release Measures

PROCEDURE TO BE FOLLOWED IN CASE OF LEAK OR SPILL

Evacuate area. Shut off all sources of ignition. Use nonsparking tools.

PROCEDURE(S) OF PERSONAL PRECAUTION(S)

Wear self-contained breathing apparatus, rubber boots, and heavy rubber gloves.

METHODS FOR CLEANING UP

Cover with dry-lime, sand, or soda ash. Place in covered containers using non-sparking tools and transport outdoors. Ventilate area and wash spill site after material pickup is complete.

Section 7 - Handling and Storage

HANDLING

User Exposure: Do not breathe vapor. Do not get in eyes, on skin, on clothing. Avoid prolonged or repeated exposure.

STORAGE

Suitable: Keep tightly closed. Keep away from heat, sparks, and open flame. Store in a cool dry place. Store under nitrogen.

SPECIAL REQUIREMENTS

Hygroscopic.

Section 8 - Exposure Controls / PPE

ENGINEERING CONTROLS

Safety shower and eye bath. Use nonsparking tools. Mechanical exhaust required.

PERSONAL PROTECTIVE EQUIPMENT

Respiratory: Government approved respirator.

Hand: Compatible chemical-resistant gloves.

Eye: Chemical safety goggles.

GENERAL HYGIENE MEASURES

Remove and wash contaminated clothing promptly. Wash thoroughly after handling.

EXPOSURE LIMITS, RTECS

Country	Source	Type	Value
USA	ACGIH	STEL	300 PPM
USA	ACGIH	TWA	200 PPM
USA	MSHA Standard-air	TWA	200 PPM (590 MG/M3)
USA	OSHA.	PEL	8H TWA 200 PPM (590 MG/M3)
New Zealand OEL			
Remarks: check ACGIH TLV			
USA	NIOSH	TWA	200 PPM
		STEL	300 PPM

EXPOSURE LIMITS

Country	Source	Type	Value
Poland		NDS	200 MG/M3
Poland		NDSch	850 MG/M3
Poland		NDSP	-

Section 9 - Physical/Chemical Properties

Appearance Physical State: Clear liquid
Color: Colorless

Property	Value	At Temperature or Pressure
Molecular Weight	72.11 AMU	
pH	N/A	
BP/BP Range	79 - 80 °C	
MP/MP Range	-87 °C	
Freezing Point	-85.9 °C	
Vapor Pressure	71 mmHg	20 °C
Vapor Density	2.49 g/l	
Saturated Vapor Conc.	N/A	
SG/Density	0.804 g/cm3	

Bulk Density	N/A	
Odor Threshold	5.4 - 1 ppm	
Volatile%	N/A	
VOC Content	N/A	
Water Content	N/A	
Solvent Content	N/A	
Evaporation Rate	N/A	
Viscosity	0.4 Pas	25 °C
Surface Tension	24.6 mN/m	20 °C
Partition Coefficient	Log Kow: 0.29	
Decomposition Temp.	N/A	
Flash Point	30 °F -1 °C	Method: closed cup
Explosion Limits	Lower: 1.8 % Upper: 10.1 %	
Flammability	N/A	
Autoignition Temp	516 °C	
Refractive Index	1.379	
Optical Rotation	N/A	
Miscellaneous Data	N/A	
Solubility	Solubility in Water:soluble Other Solvents: ALCOHOL, ETHER, ACETONE BENZENE	

N/A = not available

Section 10 - Stability and Reactivity

STABILITY

Stable: Stable.

Conditions to Avoid: Protect from moisture.

Materials to Avoid: Oxidizing agents, Strong reducing agents.

HAZARDOUS DECOMPOSITION PRODUCTS

Hazardous Decomposition Products: Carbon monoxide, Carbon dioxide.

HAZARDOUS POLYMERIZATION

Hazardous Polymerization: Will not occur

Section 11 - Toxicological Information

ROUTE OF EXPOSURE

Skin Contact: Causes skin irritation.

Skin Absorption: May be harmful if absorbed through the skin.

Eye Contact: Causes severe eye irritation.

Inhalation: Material is irritating to mucous membranes and upper respiratory tract. May be harmful if inhaled.

Ingestion: May be harmful if swallowed.

TARGET ORGAN(S) OR SYSTEM(S)

Central nervous system.

SIGNS AND SYMPTOMS OF EXPOSURE

Can cause CNS depression. Exposure can cause: Gastrointestinal disturbances. Narcotic effect.

TOXICITY DATA

Oral

Rat

2737 mg/kg

LD50

Inhalation
Rat
23,500 mg/m3
LC50

Intraperitoneal
Rat
607 MG/KG
LD50

Oral
Mouse
4050 mg/kg
LD50

Inhalation
Mouse
32,000 mg/m3
LC50

Intraperitoneal
Mouse
616 MG/KG
LD50

Skin
Rabbit
6480 mg/kg
LD50

Inhalation
Mammal
38,000 mg/m3
LC50

IRRITATION DATA

Eyes
Human
350 ppm

Skin
Rabbit
500 mg
24H
Remarks: Moderate irritation effect

Skin
Rabbit
402 mg
24H
Remarks: Mild irritation effect

Skin
Rabbit
13.78 mg
24H
Remarks: Open irritation test

Eyes
Rabbit
80 mg

CHRONIC EXPOSURE - TERATOGEN

Species: Rat
Dose: 3000 PPM/7H
Route of Application: Inhalation
Exposure Time: (6-15D PREG)
Result: Specific Developmental Abnormalities: Craniofacial (including nose and tongue). Specific Developmental Abnormalities: Urogenital system. Specific Developmental Abnormalities: Homeostasis

Species: Rat
Dose: 1000 PPM/7H
Route of Application: Inhalation
Exposure Time: (6-15D PREG)
Result: Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Specific Developmental Abnormalities: Musculoskeletal system.

Species: Mouse
Dose: 3000 PPM/7H
Route of Application: Inhalation
Exposure Time: (6-15D PREG)
Result: Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

Section 12 - Ecological Information

ACUTE ECOTOXICITY TESTS

Test Type: EC50 Daphnia
Species: Daphnia magna
Time: 24 h
Value: 7,060 mg/l

Test Type: LC50 Fish
Species: Leuciscus idus
Time: 48 h
Value: 4,600 - 4,880 mg/l

Test Type: LC50 Fish
Species: Pimephales promelas (Fathead minnow)
Time: 96 h
Value: 3,130 - 3,320 mg/l

Section 13 - Disposal Considerations

APPROPRIATE METHOD OF DISPOSAL OF SUBSTANCE OR PREPARATION

Contact a licensed professional waste disposal service to dispose of this material. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Observe all federal, state, and local environmental regulations.

Section 14 - Transport Information

DOT

Proper Shipping Name: Ethyl methyl ketone [or] Methyl ethyl ketone
UN#: 1193
Class: 3

Packing Group: Packing Group II
Hazard Label: Flammable liquid
PIH: Not PIH

IATA

Proper Shipping Name: Methyl ethyl ketone
IATA UN Number: 1193
Hazard Class: 3
Packing Group: II

Section 15 - Regulatory Information

EU DIRECTIVES CLASSIFICATION

Symbol of Danger: F Xi
Indication of Danger: Highly Flammable. Irritant.
R: 11 36 66 67
Risk Statements: Highly flammable. Irritating to eyes. Repeated exposure may cause skin dryness or cracking. Vapors may cause drowsiness and dizziness.
S: 9 16
Safety Statements: Keep container in a well-ventilated place. Keep away from sources of ignition - no smoking.

US CLASSIFICATION AND LABEL TEXT

Indication of Danger: Flammable (USA) Highly Flammable (EU). Irritant.
Risk Statements: Irritating to respiratory system and skin. Risk of serious damage to eyes. Vapors may cause drowsiness and dizziness.
Safety Statements: Keep away from sources of ignition - no smoking. Take precautionary measures against static discharges. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Wear eye/face protection.
US Statements: Target organ(s): Central nervous system.

UNITED STATES REGULATORY INFORMATION

SARA LISTED: Yes
DEMINIMIS: 1 %
NOTES: This product is subject to SARA section 313 reporting requirements.
TSCA INVENTORY ITEM: Yes

CANADA REGULATORY INFORMATION

WHMIS Classification: This product has been classified in accordance with the hazard criteria of the CPR, and the MSDS contains all the information required by the CPR.
DSL: Yes
NDSL: No

Section 16 - Other Information


DISCLAIMER

For R&D use only. Not for drug, household or other uses.

WARRANTY

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Inc., shall not be held liable for any damage resulting from handling or

from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.
Copyright 2004 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.



Health	2
Fire	3
Reactivity	0
Personal Protection	H

Material Safety Data Sheet

2-Hexanone MSDS

Section 1: Chemical Product and Company Identification

Product Name: 2-Hexanone

Catalog Codes: SLH2950

CAS#: 591-78-6

RTECS: MP1400000

TSCA: TSCA 8(b) inventory: 2-Hexanone

CI#: Not available.

Synonym: Methyl butyl ketone

Chemical Formula: C₆H₁₂O

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
{2-}Hexanone	591-78-6	100

Toxicological Data on Ingredients: 2-Hexanone: ORAL (LD50): Acute: 2590 mg/kg [Rat]. 2430 mg/kg [Mouse]. DERMAL (LD50): Acute: 4860 mg/kg [Rabbit]. VAPOR (LC50): Acute: 8000 ppm 4 hour(s) [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Very hazardous in case of eye contact (irritant), of inhalation (lung irritant). Hazardous in case of skin contact (irritant), of ingestion, . Slightly hazardous in case of skin contact (permeator). Inflammation of the eye is characterized by redness, watering, and itching.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. Repeated or prolonged exposure is not known to aggravate medical condition.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Do not use an eye ointment. Seek medical attention.

Skin Contact:

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cold water may be used. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

Inhalation: Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

Ingestion:

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 533°C (991.4°F)

Flash Points: CLOSED CUP: 23°C (73.4°F). OPEN CUP: 28°C (82.4°F) (TAG).

Flammable Limits: LOWER: 1.2% UPPER: 8%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances: Flammable in presence of open flames and sparks.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill:

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container.

Large Spill:

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapour/spray. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes.

Storage:

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. A refrigerated room would be preferable for materials with a flash point lower than 37.8°C (100°F).

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 25 CEIL: 40 (ppm) TWA: 100 CEIL: 165 (mg/m³) Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Not available.

Taste: Not available.

Molecular Weight: 100.16 g/mole

Color: Colorless to light yellow.

pH (1% soln/water): Not available.

Boiling Point: 127.5°C (261.5°F)

Melting Point: -56.9°C (-70.4°F)

Critical Temperature: Not available.

Specific Gravity: 0.8113 (Water = 1)

Vapor Pressure: 12 mm of Hg (@ 20°C)

Vapor Density: 3.45 (Air = 1)

Volatility: Not available.

Odor Threshold: 0.18 ppm

Water/Oil Dist. Coeff.: The product is equally soluble in oil and water; log(oil/water) = 0

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water, acetone.

Solubility:

Easily soluble in acetone. Partially soluble in cold water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances: Not available.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: Not available.

Polymerization: No.

Section 11: Toxicological Information

Routes of Entry: Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 2430 mg/kg [Mouse]. Acute dermal toxicity (LD50): 4860 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 8000 ppm 4 hour(s) [Rat].

Chronic Effects on Humans: Not available.

Other Toxic Effects on Humans:

Very hazardous in case of inhalation (lung irritant). Hazardous in case of skin contact (irritant), of ingestion, . Slightly hazardous in case of skin contact (permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: Passes through the placental barrier in animal. Testicular damage in animal.

Special Remarks on other Toxic Effects on Humans: Not available.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are more toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification: Class 3: Flammable liquid.

Identification: : Ketone Liquid, n.o.s.(2-Hexanone) : UN1224 PG: III

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

Rhode Island RTK hazardous substances: 2-Hexanone Pennsylvania RTK: 2-Hexanone Florida: 2-Hexanone Massachusetts RTK: 2-Hexanone New Jersey: 2-Hexanone TSCA 8(b) inventory: 2-Hexanone

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada): CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F).

DSCL (EEC):

R10- Flammable. R37/38- Irritating to respiratory system and skin. R41- Risk of serious damage to eyes.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 3

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 3

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/09/2005 05:43 PM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.



Fisher Scientific

Part of Thermo Fisher Scientific

SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name 2-Methylnaphthalene, 99% (gc)

Cat No. : AC414551000; AC414555000

Synonyms No information available

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company

Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name

Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number

For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Acute oral toxicity	Category 4
Skin Corrosion/irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Respiratory system.	

Label Elements

Signal Word

Warning

Hazard Statements

Harmful if swallowed
Causes skin irritation
Causes serious eye irritation
May cause respiratory irritation

**Precautionary Statements****Prevention**

Wash face, hands and any exposed skin thoroughly after handling
Do not eat, drink or smoke when using this product
Wear protective gloves/protective clothing/eye protection/face protection
Avoid breathing dust/fume/gas/mist/vapors/spray
Use only outdoors or in a well-ventilated area

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
Call a POISON CENTER or doctor/physician if you feel unwell

Skin

IF ON SKIN: Wash with plenty of soap and water
If skin irritation occurs: Get medical advice/attention
Take off contaminated clothing and wash before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
If eye irritation persists: Get medical advice/attention

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell
Rinse mouth

Storage

Store in a well-ventilated place. Keep container tightly closed
Store locked up

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Toxic to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
2-Methylnaphthalene	91-57-6	99.0

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Skin Contact	Wash off immediately with plenty of water for at least 15 minutes.
Inhalation	Move to fresh air.
Ingestion	Do not induce vomiting.
Most important symptoms/effects	No information available.
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media	No information available
---------------------------------------	--------------------------

Flash Point Method - No information available

Autoignition Temperature No information available

Explosion Limits

Upper No data available

Lower No data available

Sensitivity to Mechanical Impact No information available

Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

None known

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
2

Flammability
1

Instability
0

Physical hazards
N/A

6. Accidental release measures**Personal Precautions**

Ensure adequate ventilation. Use personal protective equipment.

Environmental Precautions

See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up No information available.

7. Handling and storage**Handling**

Ensure adequate ventilation.

Storage

Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection**Exposure Guidelines**

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
2-Methylnaphthalene	TWA: 0.5 ppm Skin		

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
2-Methylnaphthalene			TWA: 0.5 ppm Skin

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

Engineering Measures

Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment**Eye/face Protection**

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Solid
Appearance	No information available
Odor	Odorless
Odor Threshold	No information available
pH	
Melting Point/Range	37 38 °C
Boiling Point/Range	°C
Flash Point	
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	< 1 mmHg @ 25 °C
Vapor Density	No information available
Relative Density	1.0000
Solubility	Insoluble in water
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C11H10
Molecular Weight	142.20

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	None under normal use conditions
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity**Component Information**

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
2-Methylnaphthalene	1630 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
2-Methylnaphthalene	91-57-6	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
2-Methylnaphthalene	Not listed	Pimephales promelas: LC50 = 2.5mg/L	Not listed	EC50 = 1.5 mg/L/48h

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility No information available.

Component	log Pow
2-Methylnaphthalene	3.86

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT Not regulated

TDG Not regulated

IATA Not regulated

IMDG/IMO Not regulated

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
2-Methylnaphthalene	X	X	-	202-078-3	-		X	X	X	X	-

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act Not applicable

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable**CERCLA**

Not applicable

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
2-Methylnaphthalene	-	X	-	-	-

U.S. Department of Transportation

Reportable Quantity (RQ): N

DOT Marine Pollutant N

DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D1B Toxic materials

D2B Toxic materials



16. Other information

Prepared By

Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Revision Date

10-Feb-2015

Print Date

10-Feb-2015

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

SAFETY DATA SHEET

Version 5.1
Revision Date 06/26/2014
Print Date 05/11/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : 4,4'-DDD

Product Number : 35486
Brand : Sigma-Aldrich

CAS-No. : 72-54-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 3), H301
Acute toxicity, Dermal (Category 4), H312
Carcinogenicity (Category 2), H351
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H301 Toxic if swallowed.
H312 Harmful in contact with skin.
H351 Suspected of causing cancer.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.

P264 Wash skin thoroughly after handling.
P270 Do not eat, drink or smoke when using this product.

P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P322	Specific measures (see supplemental first aid instructions on this label).
P330	Rinse mouth.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 1,1-Dichloro-2,2-bis(4-chlorophenyl)ethane
TDE

Formula : C₁₄H₁₀Cl₄
Molecular Weight : 320.04 g/mol
CAS-No. : 72-54-8
EC-No. : 200-783-0

Hazardous components

Component	Classification	Concentration
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane		
	Acute Tox. 3; Acute Tox. 4; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H301, H312, H351, H410	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

no data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

Nature of decomposition products not known.

5.3 Advice for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

5.4 Further information

no data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation.

Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

- | | |
|---|---|
| a) Appearance | Form: solid |
| b) Odour | no data available |
| c) Odour Threshold | no data available |
| d) pH | no data available |
| e) Melting point/freezing point | 94.0 - 96.0 °C (201.2 - 204.8 °F) |
| f) Initial boiling point and boiling range | 193.0 °C (379.4 °F) at 1.3 hPa (1.0 mmHg) |
| g) Flash point | no data available |
| h) Evaporation rate | no data available |
| i) Flammability (solid, gas) | no data available |
| j) Upper/lower flammability or explosive limits | no data available |
| k) Vapour pressure | < 0.00001 hPa (< 0.00001 mmHg) at 25.0 °C (77.0 °F) |
| l) Vapour density | no data available |
| m) Relative density | 1.38 g/cm ³ |
| n) Water solubility | no data available |
| o) Partition coefficient: n-octanol/water | log Pow: 6.02 |
| p) Auto-ignition temperature | no data available |
| q) Decomposition temperature | no data available |
| r) Viscosity | no data available |
| s) Explosive properties | no data available |
| t) Oxidizing properties | no data available |

9.2 Other safety information

no data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

no data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

no data available

10.4 Conditions to avoid

no data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - no data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Hamster - > 5,000 mg/kg

TDLo Oral - Human - 428.5 mg/kg

Remarks: Endocrine:Adrenal cortex hypoplasia.

TDLo Oral - rat - 6,000 mg/kg

Remarks: Cardiac:Other changes. Gastrointestinal:Other changes. Kidney, Ureter, Bladder:Changes in both tubules and glomeruli.

TDLo Oral - rat - 14 mg/kg

Remarks: Liver:Changes in liver weight. Endocrine:Estrogenic. Musculoskeletal:Other changes.

TDLo Oral - rat - 2,100 mg/kg

Remarks: Behavioral:Altered sleep time (including change in righting reflex).

Inhalation: no data available

LD50 Dermal - rabbit - 1,200 mg/kg

Remarks: Behavioral:Excitement. Behavioral:Convulsions or effect on seizure threshold. Skin irritation

no data available

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitisation

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as

probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

no data available

Specific target organ toxicity - single exposure

no data available

Specific target organ toxicity - repeated exposure

no data available

Aspiration hazard

no data available

Additional Information

RTECS: KI0700000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - other fish - 1.18 - 9 mg/l - 96.0 h
	LC50 - Lepomis macrochirus (Bluegill) - 0.04 - 0.05 mg/l - 96.0 h
	LC50 - Oncorhynchus mykiss (rainbow trout) - 0.06 - 0.09 mg/l - 96.0 h
	LC50 - Pimephales promelas (fathead minnow) - 3.47 - 5.58 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia pulex (Water flea) - 0.01 mg/l - 48 h

12.2 Persistence and degradability

no data available

12.3 Bioaccumulative potential

Indication of bioaccumulation.

12.4 Mobility in soil

no data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solids, organic, n.o.s. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)
Reportable Quantity (RQ): 1 lbs
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)
Marine pollutant: No

IATA

UN number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solid, organic, n.o.s. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)

15. REGULATORY INFORMATION

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	72-54-8	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	72-54-8	1993-04-24

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer.	72-54-8	2007-09-28
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane		

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H301	Toxic if swallowed.
H312	Harmful in contact with skin.
H351	Suspected of causing cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.1

Revision Date: 06/26/2014

Print Date: 05/11/2016

SAFETY DATA SHEET

Version 4.5
Revision Date 04/24/2015
Print Date 10/25/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : 4-Chlorotoluene

Product Number : 111929
Brand : Aldrich
Index-No. : 602-040-00-X

CAS-No. : 106-43-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226
Acute toxicity, Inhalation (Category 4), H332
Skin sensitisation (Category 1), H317
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H226 Flammable liquid and vapour.
H317 May cause an allergic skin reaction.
H332 Harmful if inhaled.
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. - No smoking.
P233 Keep container tightly closed.
P240 Ground/bond container and receiving equipment.
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P272	Contaminated work clothing should not be allowed out of the workplace.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P363	Wash contaminated clothing before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₇ H ₇ Cl
Molecular weight	: 126.58 g/mol
CAS-No.	: 106-43-4
EC-No.	: 203-397-0
Index-No.	: 602-040-00-X

Hazardous components

Component	Classification	Concentration
4-Chlorotoluene		
	Flam. Liq. 3; Acute Tox. 4; Skin Sens. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H317, H332, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|---|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 6 - 8 °C (43 - 46 °F) - lit. |
| f) Initial boiling point and boiling range | 162 °C (324 °F) - lit. |
| g) Flash point | 53.0 °C (127.4 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |

j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	13.3 hPa (10.0 mmHg) at 45.0 °C (113.0 °F)
l) Vapour density	No data available
m) Relative density	1.07 g/mL at 25 °C (77 °F)
n) Water solubility	slightly soluble
o) Partition coefficient: n-octanol/water	log Pow: 3.32
p) Auto-ignition temperature	570 °C (1,058 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - female - 2,389 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation - 24 h

Respiratory or skin sensitisation

Maximisation Test (GPMT) - Guinea pig

Result: May cause sensitisation by skin contact.

Germ cell mutagenicity

Ames test

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Mouse - male and female

Result: negative

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

Repeated dose toxicity - Rat - male and female - No observed adverse effect level - 200 mg/kg

RTECS: XS9010000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish	LC50 - <i>Oryzias latipes</i> - 6.1 mg/l - 96 h (OECD Test Guideline 203)
Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - <i>Daphnia magna</i> (Water flea) - 2 mg/l - 48 h (OECD Test Guideline 202)
Toxicity to algae	Growth inhibition EC50 - <i>Selenastrum capricornutum</i> (green algae) - 6.1 mg/l - 72 h (OECD Test Guideline 201)

12.2 Persistence and degradability

Biodegradability	aerobic - Exposure time 28 d Result: 1 % - Not biodegradable (OECD Test Guideline 301F)
------------------	---

12.3 Bioaccumulative potential

Bioaccumulation Cyprinus carpio (Carp) - 56 d
- 0.3 mg/l

Bioconcentration factor (BCF): 21.8 - 76.5
(OECD Test Guideline 305C)

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2238 Class: 3 Packing group: III
Proper shipping name: Chlorotoluenes
Reportable Quantity (RQ):

Poison Inhalation Hazard: No

IMDG

UN number: 2238 Class: 3 Packing group: III EMS-No: F-E, S-D
Proper shipping name: CHLOROTOLUENES

IATA

UN number: 2238 Class: 3 Packing group: III
Proper shipping name: Chlorotoluenes

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
4-Chlorotoluene	106-43-4	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
4-Chlorotoluene	106-43-4	1993-04-24

New Jersey Right To Know Components

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H317	May cause an allergic skin reaction.
H332	Harmful if inhaled.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	2
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.5

Revision Date: 04/24/2015

Print Date: 10/25/2016



SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name p-Cymene

Cat No. : AC111760000; AC111760010; AC111760025; AC111760100;
AC111762500

Synonyms Dolcymene; p-Isopropyltoluene

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company	Entity / Business Name	Emergency Telephone Number
Fisher Scientific	Acros Organics	For information US call: 001-800-ACROS-01
One Reagent Lane	One Reagent Lane	/ Europe call: +32 14 57 52 11
Fair Lawn, NJ 07410	Fair Lawn, NJ 07410	Emergency Number US :001-201-796-7100 /
Tel: (201) 796-7100		Europe : +32 14 57 52 99
		CHEMTREC Tel. No. US :001-800-424-9300 /
		Europe :001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids	Category 3
Skin Corrosion/irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Respiratory system.	
Aspiration Toxicity	Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Flammable liquid and vapor
May be fatal if swallowed and enters airways
Causes skin irritation
Causes serious eye irritation
May cause respiratory irritation

**Precautionary Statements****Prevention**

Wash face, hands and any exposed skin thoroughly after handling
Wear protective gloves/protective clothing/eye protection/face protection
Avoid breathing dust/fume/gas/mist/vapors/spray
Use only outdoors or in a well-ventilated area
Keep away from heat/sparks/open flames/hot surfaces. - No smoking
Keep container tightly closed
Ground/bond container and receiving equipment
Use explosion-proof electrical/ventilating/lighting/equipment
Use only non-sparking tools
Take precautionary measures against static discharge
Keep cool

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
Call a POISON CENTER or doctor/physician if you feel unwell

Skin

If skin irritation occurs: Get medical advice/attention
IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower
Wash contaminated clothing before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
If eye irritation persists: Get medical advice/attention

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician
Do NOT induce vomiting

Fire

In case of fire: Use CO₂, dry chemical, or foam for extinction

Storage

Store locked up
Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

None identified

3. Composition / information on ingredients

Component	CAS-No	Weight %
p-Cymene	99-87-6	>95

4. First-aid measures

Eye Contact

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.

Skin Contact

Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes. Obtain medical attention.

Inhalation

Remove from exposure, lie down. Move to fresh air. If breathing is difficult, give oxygen. If

	not breathing, give artificial respiration. Obtain medical attention.
Ingestion	Do not induce vomiting. Clean mouth with water. Get medical attention.
Most important symptoms/effects	Breathing difficulties. Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Water spray. Carbon dioxide (CO ₂). Dry chemical. Use water spray to cool unopened containers. chemical foam.
Unsuitable Extinguishing Media	No information available
Flash Point	47 °C / 116.6 °F
Method -	No information available
Autoignition Temperature	435 °C / 815 °F
Explosion Limits	
Upper	5.60%
Lower	.70%
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Flammable. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Containers may explode when heated.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO₂)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health	Flammability	Instability	Physical hazards
3	2	0	N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment.
Environmental Precautions	See Section 12 for additional ecological information.
Methods for Containment and Clean Up	Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment.

7. Handling and storage

Handling	Avoid contact with skin and eyes. Do not breathe dust. Do not breathe vapors or spray mist. Take precautionary measures against static discharges. Use explosion-proof equipment. Use only non-sparking tools.
Storage	Keep in a dry, cool and well-ventilated place. Keep container tightly closed. Keep away from heat and sources of ignition. Flammables area.

8. Exposure controls / personal protection

Exposure Guidelines	This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.
----------------------------	---

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Liquid
Appearance	Clear
Odor	aromatic
Odor Threshold	No information available
pH	No information available
Melting Point/Range	-68 °C / -90.4 °F
Boiling Point/Range	176 - 178 °C / 348.8 - 352.4 °F @ 760 mmHg
Flash Point	47 °C / 116.6 °F
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	5.60%
Lower	.70%
Vapor Pressure	1.5 mmHg @ 20 °C
Vapor Density	4.62 (Air = 1.0)
Relative Density	0.854
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	435 °C / 815 °F
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C10 H14
Molecular Weight	134.22

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Keep away from open flames, hot surfaces and sources of ignition. Excess heat. Incompatible products.
Incompatible Materials	Strong oxidizing agents, Strong acids, Strong bases
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	No information available.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
p-Cymene	3669 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
p-Cymene	99-87-6	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects Not mutagenic in AMES Test

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Respiratory system

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
p-Cymene	Not listed	LC50: 48 mg/L/96h (sheepshead minnow)	Not listed	LC50: 6.5 mg/L/48h

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility

Component	log Pow
p-Cymene	4.1

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN2046
Hazard Class 3
Packing Group III

TDG

UN-No UN2046
Hazard Class 3
Packing Group III

IATA

UN-No 2046
Proper Shipping Name CYMENES
Hazard Class 3
Packing Group III

IMDG/IMO

UN-No 2046
Proper Shipping Name CYMENES
Hazard Class 3
Packing Group III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
p-Cymene	X	X	-	202-796-7	-		X	X	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	Yes
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act Not applicable

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA

Not applicable

California Proposition 65

This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
p-Cymene	X	-	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations**Mexico - Grade**

No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class

B2 Flammable liquid
D2B Toxic materials

**16. Other information****Prepared By**

Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Revision Date

10-Feb-2015

Print Date

10-Feb-2015


Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



Health	2
Fire	3
Reactivity	0
Personal Protection	H

Material Safety Data Sheet

Methyl isobutyl ketone MSDS

Section 1: Chemical Product and Company Identification

Product Name: Methyl isobutyl ketone

Catalog Codes: SLM3412

CAS#: 108-10-1

RTECS: SA9275000

TSCA: TSCA 8(b) inventory: Methyl isobutyl ketone

CI#: Not available.

Synonym: 4-Methyl-2-pentanone

Chemical Formula: C₆H₁₂O

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Methyl isobutyl ketone	108-10-1	100

Toxicological Data on Ingredients: Methyl isobutyl ketone: ORAL (LD50): Acute: 1600 mg/kg [Guinea pig]. 2671 mg/kg [Mouse]. 2080 mg/kg [Rat]. DERMAL (LD50): Acute: 20001 mg/kg [Rabbit]. VAPOR (LC50): Acute: 8000 ppm 4 hour(s) [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Very hazardous in case of eye contact (irritant), of ingestion, of inhalation. Hazardous in case of skin contact (irritant, permeator). Inflammation of the eye is characterized by redness, watering, and itching.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance is toxic to lungs, the nervous system, mucous membranes. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Do not use an eye ointment. Seek medical attention.

Skin Contact:

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cold water may be used. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

Inhalation: Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

Ingestion:

Do not induce vomiting. Examine the lips and mouth to ascertain whether the tissues are damaged, a possible indication that the toxic material was ingested; the absence of such signs, however, is not conclusive. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 460°C (860°F)

Flash Points: CLOSED CUP: 14°C (57.2°F). OPEN CUP: 23°C (73.4°F).

Flammable Limits: LOWER: 1.4% UPPER: 7.5%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances: Flammable in presence of open flames and sparks.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill:

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container.

Large Spill:

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapour/spray. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes.

Storage:

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. A refrigerated room would be preferable for materials with a flash point lower than 37.8°C (100°F).

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 50 STEL: 75 CEIL: 125 (ppm) from ACGIH (TLV) [1995] TWA: 205 STEL: 300 CEIL: 510 (mg/m³) from ACGIH [1995]
Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Not available.

Taste: Not available.

Molecular Weight: 100.16 g/mole

Color: Not available.

pH (1% soln/water): Not available.

Boiling Point: 115.9°C (240.6°F)

Melting Point: -84°C (-119.2°F)

Critical Temperature: Not available.

Specific Gravity: 0.802 (Water = 1)

Vapor Pressure: 15.7 mm of Hg (@ 20°C)

Vapor Density: 3.45 (Air = 1)

Volatility: Not available.

Odor Threshold: 0.1 ppm

Water/Oil Dist. Coeff.: The product is equally soluble in oil and water; log(oil/water) = 0.1

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water.

Solubility: Partially soluble in cold water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances: Not available.

Corrosivity: Not available.

Special Remarks on Reactivity: Forms explosive peroxides on prolonged storage.

Special Remarks on Corrosivity: Not available.

Polymerization: No.

Section 11: Toxicological Information

Routes of Entry: Dermal contact. Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 1600 mg/kg [Guinea pig]. Acute dermal toxicity (LD50): 20001 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 8000 ppm 4 hour(s) [Rat].

Chronic Effects on Humans: The substance is toxic to lungs, the nervous system, mucous membranes.

Other Toxic Effects on Humans:

Very hazardous in case of ingestion, of inhalation. Hazardous in case of skin contact (irritant, permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: Passes through the placental barrier in human.

Special Remarks on other Toxic Effects on Humans: Not available.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are less toxic than the product itself.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification: Class 3: Flammable liquid.

Identification: : Methyl isobutyl ketone : UN1245 PG: II

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

Pennsylvania RTK: Methyl isobutyl ketone Massachusetts RTK: Methyl isobutyl ketone TSCA 8(b) inventory: Methyl isobutyl ketone SARA 313 toxic chemical notification and release reporting: Methyl isobutyl ketone CERCLA: Hazardous substances.: Methyl isobutyl ketone

Other Regulations: OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

Other Classifications:

WHMIS (Canada): CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F).

DSCL (EEC):

R11- Highly flammable. R38- Irritating to skin. R41- Risk of serious damage to eyes.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 3

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 3

Reactivity: 1

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/10/2005 08:40 PM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Version 5.4
Revision Date 01/02/2015
Print Date 12/11/2015

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Acenaphthene

Product Number : 215376
Brand : Aldrich

CAS-No. : 83-32-9

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Carcinogenicity (Category 1B), H350
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H315 Causes skin irritation.
H319 Causes serious eye irritation.
H335 May cause respiratory irritation.
H350 May cause cancer.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.

P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P281	Use personal protective equipment as required.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: 1,8-Ethylenenaphthalene
Formula	: C ₁₂ H ₁₀
Molecular weight	: 154.21 g/mol
CAS-No.	: 83-32-9
EC-No.	: 201-469-6

Hazardous components

Component	Classification	Concentration
Acenaphthene		
	Skin Irrit. 2; Eye Irrit. 2A; Carc. 1B; STOT SE 3; Aquatic Acute 1; Aquatic Chronic 1; H315, H319, H335, H350, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: solid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 90 - 94 °C (194 - 201 °F) - lit. |
| f) Initial boiling point and boiling range | 279 °C (534 °F) - lit. |
| g) Flash point | 125.0 °C (257.0 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |

k)	Vapour pressure	13.3 hPa (10.0 mmHg) at 131.0 °C (267.8 °F)
l)	Vapour density	No data available
m)	Relative density	No data available
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	log Pow: 3.39 - 4.19
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intraperitoneal - Rat - 600 mg/kg

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Acenaphthene)
ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.
NTP: Reasonably anticipated to be a human carcinogen (Acenaphthene)
OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

Inhalation - May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: AB1000000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Oncorhynchus mykiss (rainbow trout) - 0.67 mg/l - 96.0 h LC50 - Pimephales promelas (fathead minnow) - 0.6 - 1.73 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 1.27 - 3.45 mg/l - 48 h
Toxicity to algae	EC50 - Pseudokirchneriella subcapitata (green algae) - 0.52 - 0.53 mg/l - 96 h

12.2 Persistence and degradability

12.3 Bioaccumulative potential

Bioaccumulation Lepomis macrochirus (Bluegill) - 28 d
- 0.00894 mg/l

Bioconcentration factor (BCF): 387

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Acenaphthene)
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Acenaphthene)
Marine pollutant: yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Acenaphthene)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Acenaphthene	83-32-9	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Acenaphthene	83-32-9	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Acenaphthene	83-32-9	1993-04-24

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer.	83-32-9	2007-09-28
Acenaphthene		

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.

H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	1
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	1
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.4

Revision Date: 01/02/2015

Print Date: 12/11/2015



SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Poly(acenaphthylene)
Cat No. : AC178020000; AC178020050; AC178020100
Synonyms None.
Recommended Use Laboratory chemicals.
Uses advised against No Information available
Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

Classification under 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Based on available data, the classification criteria are not met

Label Elements

None required

Hazards not otherwise classified (HNOC)

None identified

Unknown Acute Toxicity

.? % of the mixture consists of ingredients of unknown toxicity.

3. Composition / information on ingredients

Component	CAS-No	Weight %
Poly(acenaphthylene)	25036-01-5	100

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

	clothes and shoes.
Inhalation	Remove from exposure, lie down. Move to fresh air.
Ingestion	Do not induce vomiting. Never give anything by mouth to an unconscious person. Drink plenty of water. If possible drink milk afterwards.
Most important symptoms/effects	No information available.
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Water spray. Carbon dioxide (CO ₂). Dry chemical. alcohol-resistant foam.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	No information available
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Thermal decomposition can lead to release of irritating gases and vapors Carbon monoxide (CO) Carbon dioxide (CO₂)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

NFPA

Health
0

Flammability
0

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment.
Environmental Precautions	See Section 12 for additional ecological information.

Methods for Containment and Clean Up Sweep up or vacuum up spillage and collect in suitable container for disposal.

7. Handling and storage

Handling	Avoid contact with skin and eyes. Avoid contact with clothing. Remove and wash contaminated clothing before re-use. Avoid breathing vapors or mists. Do not ingest. Wash thoroughly after handling.
Storage	Keep in a dry, cool and well-ventilated place. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines	This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.
----------------------------	---

Engineering Measures Ensure adequate ventilation, especially in confined areas. Ventilation systems.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Wear a NIOSH/MSHA or European Standard EN 149 approved full-facepiece airline respirator in the positive pressure mode with emergency escape provisions.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder Solid
Appearance	Yellow
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	No data available
Boiling Point/Range	No information available
Flash Point	No information available
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	No information available
Vapor Density	No information available
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products.
Incompatible Materials	Oxidizing agents
Hazardous Decomposition Products	Thermal decomposition can lead to release of irritating gases and vapors, Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	No information available.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information No acute toxicity information is available for this product

Oral LD50 Based on ATE data, the classification criteria are not met. ATE > 2000 mg/kg.
Dermal LD50 Based on ATE data, the classification criteria are not met. ATE > 2000 mg/kg.
Mist LC50 Based on ATE data, the classification criteria are not met. ATE > 5 mg/l.

Component Information

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Poly(acenaphthylene)	25036-01-5	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility No information available.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT Not regulated

TDG Not regulated

IATA Not regulated

IMDG/IMO Not regulated

15. Regulatory information

International Inventories

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazardous Categorization

Acute Health Hazard	No
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act Not applicable

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable**CERCLA**

Not applicable

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know Not applicable

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class Non-controlled


16. Other information

Prepared By	Regulatory Affairs Thermo Fisher Scientific Email: EMSDS.RA@thermofisher.com
Revision Date	10-Feb-2015
Print Date	10-Feb-2015
Revision Summary	This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



Health	2
Fire	3
Reactivity	0
Personal Protection	H

Material Safety Data Sheet

Acetone MSDS

Section 1: Chemical Product and Company Identification

Product Name: Acetone

Catalog Codes: SLA3502, SLA1645, SLA3151, SLA3808

CAS#: 67-64-1

RTECS: AL3150000

TSCA: TSCA 8(b) inventory: Acetone

CI#: Not applicable.

Synonym: 2-propanone; Dimethyl Ketone;
Dimethylformaldehyde; Pyroacetic Acid

Chemical Name: Acetone

Chemical Formula: C₃H₆O

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Acetone	67-64-1	100

Toxicological Data on Ingredients: Acetone: ORAL (LD50): Acute: 5800 mg/kg [Rat]. 3000 mg/kg [Mouse]. 5340 mg/kg [Rabbit]. VAPOR (LC50): Acute: 50100 mg/m 8 hours [Rat]. 44000 mg/m 4 hours [Mouse].

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Classified Reproductive system/toxin/female, Reproductive system/toxin/male [SUSPECTED]. The substance is toxic to central nervous system (CNS). The substance may be toxic to kidneys, the reproductive system, liver, skin. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Get medical attention.

Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if symptoms appear.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 465°C (869°F)

Flash Points: CLOSED CUP: -20°C (-4°F). OPEN CUP: -9°C (15.8°F) (Cleveland).

Flammable Limits: LOWER: 2.6% UPPER: 12.8%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances: Highly flammable in presence of open flames and sparks, of heat.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Slightly explosive in presence of open flames and sparks, of oxidizing materials, of acids.

Fire Fighting Media and Instructions:

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog.

Special Remarks on Fire Hazards: Vapor may travel considerable distance to source of ignition and flash back.

Special Remarks on Explosion Hazards:

Forms explosive mixtures with hydrogen peroxide, acetic acid, nitric acid, nitric acid + sulfuric acid, chromic anhydride, chromyl chloride, nitrosyl chloride, hexachloromelamine, nitrosyl perchlorate, nitryl perchlorate, permonosulfuric acid, thiodiglycol + hydrogen peroxide, potassium ter-butoxide, sulfur dichloride, 1-methyl-1,3-butadiene, bromoform, carbon, air, chloroform, thitriazylperchlorate.

Section 6: Accidental Release Measures

Small Spill:

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container.

Large Spill:

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage**Precautions:**

Keep locked up.. Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapor/spray. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, reducing agents, acids, alkalis.

Storage:

Store in a segregated and approved area (flammables area) . Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Keep away from direct sunlight and heat and avoid all possible sources of ignition (spark or flame).

Section 8: Exposure Controls/Personal Protection**Engineering Controls:**

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 500 STEL: 750 (ppm) from ACGIH (TLV) [United States] TWA: 750 STEL: 1000 (ppm) from OSHA (PEL) [United States] TWA: 500 STEL: 1000 [Australia] TWA: 1185 STEL: 2375 (mg/m3) [Australia] TWA: 750 STEL: 1500 (ppm) [United Kingdom (UK)] TWA: 1810 STEL: 3620 (mg/m3) [United Kingdom (UK)] TWA: 1800 STEL: 2400 from OSHA (PEL) [United States] Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid.

Odor: Fruity. Mint-like. Fragrant. Ethereal

Taste: Pungent, Sweetish

Molecular Weight: 58.08 g/mole

Color: Colorless. Clear

pH (1% soln/water): Not available.

Boiling Point: 56.2°C (133.2°F)

Melting Point: -95.35 (-139.6°F)

Critical Temperature: 235°C (455°F)

Specific Gravity: 0.79 (Water = 1)

Vapor Pressure: 24 kPa (@ 20°C)

Vapor Density: 2 (Air = 1)

Volatility: Not available.

Odor Threshold: 62 ppm

Water/Oil Dist. Coeff.: The product is more soluble in water; $\log(\text{oil/water}) = -0.2$

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water.

Solubility: Easily soluble in cold water, hot water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Excess heat, ignition sources, exposure to moisture, air, or water, incompatible materials.

Incompatibility with various substances: Reactive with oxidizing agents, reducing agents, acids, alkalis.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Dermal contact. Eye contact. Inhalation.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 3000 mg/kg [Mouse]. Acute toxicity of the vapor (LC50): 44000 mg/m³ 4 hours [Mouse].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. DEVELOPMENTAL TOXICITY: Classified Reproductive system/toxin/female, Reproductive system/toxin/male [SUSPECTED]. Causes damage to the following organs: central nervous system (CNS). May cause damage to the following organs: kidneys, the reproductive system, liver, skin.

Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans:

May affect genetic material (mutagenicity) based on studies with yeast (*S. cerevisiae*), bacteria, and hamster fibroblast cells. May cause reproductive effects (fertility) based upon animal studies. May contain trace amounts of benzene and formaldehyde which may cancer and birth defects. Human: passes the placental barrier.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: Skin: May cause skin irritation. May be harmful if absorbed through the skin. Eyes: Causes eye irritation, characterized by a burning sensation, redness, tearing, inflammation, and possible corneal injury. Inhalation: Inhalation at high concentrations affects the sense organs, brain and causes respiratory tract irritation. It also may affect the Central Nervous System (behavior) characterized by dizziness, drowsiness, confusion, headache, muscle weakness, and possibly motor incoordination, speech abnormalities, narcotic effects and coma. Inhalation may also affect the gastrointestinal tract (nausea, vomiting). Ingestion: May cause irritation of the digestive (gastrointestinal) tract (nausea, vomiting). It may also

affect the Central Nervous System (behavior), characterized by depression, fatigue, excitement, stupor, coma, headache, altered sleep time, ataxia, tremors as well as the blood, liver, and urinary system (kidney, bladder, ureter) and endocrine system. May also have musculoskeletal effects. Chronic Potential Health Effects: Skin: May cause dermatitis. Eyes: Eye irritation.

Section 12: Ecological Information

Ecotoxicity:

Ecotoxicity in water (LC50): 5540 mg/l 96 hours [Trout]. 8300 mg/l 96 hours [Bluegill]. 7500 mg/l 96 hours [Fathead Minnow]. 0.1 ppm any hours [Water flea].

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The product itself and its products of degradation are not toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 3: Flammable liquid.

Identification: : Acetone UNNA: 1090 PG: II

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause reproductive harm (male) which would require a warning under the statute: Benzene California prop. 65: This product contains the following ingredients for which the State of California has found to cause birth defects which would require a warning under the statute: Benzene California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Benzene, Formaldehyde Connecticut hazardous material survey.: Acetone Illinois toxic substances disclosure to employee act: Acetone Illinois chemical safety act: Acetone New York release reporting list: Acetone Rhode Island RTK hazardous substances: Acetone Pennsylvania RTK: Acetone Florida: Acetone Minnesota: Acetone Massachusetts RTK: Acetone Massachusetts spill list: Acetone New Jersey: Acetone New Jersey spill list: Acetone Louisiana spill reporting: Acetone California List of Hazardous Substances (8 CCR 339): Acetone TSCA 8(b) inventory: Acetone TSCA 4(a) final test rules: Acetone TSCA 8(a) IUR: Acetone

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada):

CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F). CLASS D-2B: Material causing other toxic effects (TOXIC).

DSCL (EEC):

R11- Highly flammable. R36- Irritating to eyes. S9- Keep container in a well-ventilated place. S16- Keep away from sources of ignition - No smoking. S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 3

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 1

Flammability: 3

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information**References:**


-Material safety data sheet issued by: la Commission de la Santé et de la Sécurité du Travail du Québec. -The Sigma-Aldrich Library of Chemical Safety Data, Edition II. -Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987. LOLI, RTECS, HSDB databases. Other MSDSs

Other Special Considerations: Not available.

Created: 10/10/2005 08:13 PM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.



Health	1
Fire	2
Reactivity	0
Personal Protection	J

Material Safety Data Sheet

Acetophenone MSDS

Section 1: Chemical Product and Company Identification

Product Name: Acetophenone

Catalog Codes: SLA2425

CAS#: 98-86-2

RTECS: AM5250000

TSCA: TSCA 8(b) inventory: Acetophenone

CI#: Not applicable.

Synonym: Ketone methyl phenyl

Chemical Name: 1-Phenyl-ethanone

Chemical Formula: C₆H₅COCH₃

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Acetophenone	98-86-2	100

Toxicological Data on Ingredients: Acetophenone: ORAL (LD50): Acute: 815 mg/kg [Rat.]. 740 mg/kg [Mouse]. DERMAL (LD50): Acute: 15900 mg/kg [Rabbit].

Section 3: Hazards Identification

Potential Acute Health Effects:

Very hazardous in case of eye contact (irritant). Hazardous in case of skin contact (irritant). Slightly hazardous in case of ingestion, of inhalation. Inflammation of the eye is characterized by redness, watering, and itching.

Potential Chronic Health Effects:

Very hazardous in case of eye contact (irritant). Hazardous in case of skin contact (irritant). Slightly hazardous in case of ingestion, of inhalation. CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Get medical attention immediately.

Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

Serious Inhalation: Not available.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Combustible.

Auto-Ignition Temperature: 570°C (1058°F)

Flash Points: CLOSED CUP: 77°C (170.6°F). OPEN CUP: 82.2°C (180°F) (Cleveland).

Flammable Limits: Not available.

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances: Flammable in presence of open flames and sparks, of heat, of oxidizing materials.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

Special Remarks on Fire Hazards: Store away from direct sunlight. When heated to decomposition it emits acrid smoke and fumes.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill:

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

Large Spill:

Combustible material. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. If the product is in its solid form: Use a shovel to put the material into a convenient waste disposal container. If the product is in its liquid form:

Absorb with an inert material and put the spilled material in an appropriate waste disposal. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system.

Section 7: Handling and Storage

Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapor/spray. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, reducing agents, alkalis.

Storage:

Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Avoid all possible sources of ignition (spark or flame).

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection: Splash goggles. Lab coat. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Boots. Gloves. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits: Not available.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid. (Liquid.)

Odor: Not available.

Taste: Not available.

Molecular Weight: 120.16 g/mole

Color: Colorless to light yellow.

pH (1% soln/water): 7 [Neutral.]

Boiling Point: 201.7°C (395.1°F)

Melting Point: 19.7°C (67.5°F)

Critical Temperature: Not available.

Specific Gravity: 1.03 (Water = 1)

Vapor Pressure: 0.1 kPa (@ 20°C)

Vapor Density: 4.1 (Air = 1)

Volatility: Not available.

Odor Threshold: Not available.

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water, methanol, diethyl ether.

Solubility:

Soluble in methanol, diethyl ether. Partially soluble in cold water, hot water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances: Reactive with oxidizing agents, reducing agents, alkalis.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Eye contact.

Toxicity to Animals:

Acute oral toxicity (LD50): 740 mg/kg [Mouse]. Acute dermal toxicity (LD50): 15900 mg/kg [Rabbit].

Chronic Effects on Humans: Not available.

Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant). Slightly hazardous in case of ingestion, of inhalation.

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: 0900 Detected in maternal milk in human.

Special Remarks on other Toxic Effects on Humans:

Material is irritating to mucous membranes and upper respiratory tract. Narcotic in high concentrations. Hypnotic.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are more toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification: CLASS 3: Combustible liquid

Identification: : FLAMMABLE LIQUIDS, N.O.S. UNNA: UN1993 PG: Not available.

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

Pennsylvania RTK: Acetophenone Massachusetts RTK: Acetophenone TSCA 8(b) inventory: Acetophenone SARA 313 toxic chemical notification and release reporting: Acetophenone CERCLA: Hazardous substances.: Acetophenone

Other Regulations: OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

Other Classifications:

WHMIS (Canada):

CLASS B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F). CLASS D-2B: Material causing other toxic effects (TOXIC).

DSCL (EEC):

R22- Harmful if swallowed. R38- Irritating to skin. R41- Risk of serious damage to eyes.

HMIS (U.S.A.):

Health Hazard: 1

Fire Hazard: 2

Reactivity: 0

Personal Protection: j

National Fire Protection Association (U.S.A.):

Health: 1

Flammability: 2

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References:

-Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987. -SAX, N.I. Dangerous Properties of Industrial Materials. Toronto, Van Nostrand Reinold, 6e ed. 1984. -The Sigma-Aldrich Library of Chemical Safety Data, Edition II.

Other Special Considerations: Not available.

Created: 10/09/2005 03:36 PM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for

lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Version 4.8

Revision Date 05/03/2017

Print Date 07/13/2017

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : α -Chlordane

Product Number : 442449

Brand : Supelco

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 4), H302

Acute toxicity, Inhalation (Category 4), H332

Skin irritation (Category 2), H315

Eye irritation (Category 2A), H319

Carcinogenicity (Category 2), H351

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H302 + H332

Harmful if swallowed or if inhaled

H315

Causes skin irritation.

H319

Causes serious eye irritation.

H335

May cause respiratory irritation.

H351

Suspected of causing cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202	Do not handle until all safety precautions have been read and understood.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Molecular weight	: 409.8 g/mol
EC-No.	: 225-825-5

Hazardous components

Component	Classification	Concentration
Chlordane		
	Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; Carc. 2; STOT SE 3; Aquatic Acute 1; Aquatic Chronic 1; H302 + H332, H315, H319, H335, H351, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Contains no substances with occupational exposure limit values.

Hazardous components without workplace control parameters

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|---|
| a) Appearance | Form: crystalline
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | 93.0 - 94.0 °C (199.4 - 201.2 °F) |
| f) Initial boiling point and boiling range | No data available |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |

- | | | |
|----|--|-------------------|
| i) | Flammability (solid, gas) | No data available |
| j) | Upper/lower flammability or explosive limits | No data available |
| k) | Vapour pressure | No data available |
| l) | Vapour density | No data available |
| m) | Relative density | No data available |
| n) | Water solubility | No data available |
| o) | Partition coefficient: n-octanol/water | No data available |
| p) | Auto-ignition temperature | No data available |
| q) | Decomposition temperature | No data available |
| r) | Viscosity | No data available |
| s) | Explosive properties | No data available |
| t) | Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 500 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Chlordane)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Lepomis macrochirus (Bluegill) - 0.0074 mg/l - 96 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Lepomis macrochirus (Bluegill) - 24 h
- 0.005 mg/l

Bioconcentration factor (BCF): 322

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Chlordane)
Reportable Quantity (RQ): Marine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Chlordane)
Marine pollutant:yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Chlordane)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Chlordane	5103-71-9	

	CAS-No.	Revision Date
Chlordane	5103-71-9	

New Jersey Right To Know Components

	CAS-No.	Revision Date
Chlordane	5103-71-9	

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H302	Harmful if swallowed.
H302 + H332	Harmful if swallowed or if inhaled
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H335	May cause respiratory irritation.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.8

Revision Date: 05/03/2017

Print Date: 07/13/2017



SAFETY DATA SHEET

1. Identification

Product identifier	ATOMIZED ALUMINUM POWDER
Other means of identification	
SDS number	123
Chemical formula	Al
Version #	08
Revision date	August 11, 2015.
Other means of identification	
Synonyms	All non-alloyed, non-coated nodular aluminum powder containing < 1% trace elements * Grade 13, 101, 102, 104, 101T, 120, 121, 123, 1124, 1202, 1233, 1235, 1401/S2(1406), 1403, 1404, 1407, 1401/S9(1409), 1125, * 4402, 6401, 7123, 7124, 7125, 7401
Recommended use	Various metallurgical/chemical/structural/coating applications
Recommended restrictions	None known.
Manufacturer/Importer/Supplier/Distributor information	
Manufacturer	Alcoa Inc. 201 Isabella Street Pittsburgh, PA USA 15212 Health and Safety Tel: +1-412-553-4649 Health and Safety Fax: +1-412-553-4822 Health and Safety Email: accmsds@alcoa.com Alcoa Inc. Rockdale Operations P.O. Box 472 Rockdale, TX 76567 Tel: +1-512-446-8681 Poços de Caldas Rodovia Poços de Caldas/Andradas, km 10 CEP 37.719-900 Poços de Caldas, Minas Gerais Tel.: (+55 35) 2101-5000 E-mail: pfacomercialprimarios@alcoa.com.br
Emergency Information	CHEMTREC: +1-703-527-3887 +1-800-424-9300 (24 Hour Emergency Telephone, multiple languages spoken); ALCOA: +1-412-553-4001 (24 Hour Emergency Telephone, only English spoken)
Website	For a current Safety Data Sheet, refer to Alcoa websites: www.alcoa.com or internally at my.alcoa.com EHS Community

2. Hazard(s) identification

Physical hazards	Not classified.
Health hazards	Not classified.
Environmental hazards	Not classified.
Authority defined hazards	Combustible dust
Label elements	
Hazard symbol	None.
Signal word	Warning
Hazard statement	May form combustible dust concentrations in air.

Precautionary statement**Prevention**

Care should be taken during bulk handling to prevent accumulation/generation over time of 75 micron or finer particles. Use only non-sparking tools and natural bristle brushes. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Prevent dust accumulation to minimize explosion hazard. Take precautionary measures against static discharge.

Response

In case of fire: Use appropriate media for extinction.

Storage

Store in a dry place and/or in closed container. Keep away from heat, sparks and open flame - No smoking. Do not allow chips, fines or dust to contact water, particularly in enclosed areas.

Disposal

Reuse or recycle material whenever possible. Material that cannot be reused may be sent to a metals reclamation facility that is able to handle fines. Waste material that cannot be reclaimed for metal value should be rendered non-reactive prior to disposal.

Hazard(s) not otherwise classified (HNOC)

None known.

Supplemental information

Powder may ignite readily. Powder or dusts dispersed in the air can be explosive.

Explosion/fire hazards may be present when:

- Powder or dust are dispersed in air.
- Powder or dusts are in contact with water.
- Powder or dusts are in contact with certain metal oxides (e.g., rust, copper oxide).

3. Composition/information on ingredients**Composition comments**

Complete composition is provided below and may include some components classified as non-hazardous.

Substances

Chemical name	Common name and synonyms	CAS number	%
Aluminum powder		7429-90-5	≥99.7

4. First-aid measures**Eye contact**

Dust from processing: Rinse eyes with plenty of water or saline for at least 15 minutes. Consult a physician.

Skin contact

Dust from processing: Wash with soap and water for at least 15 minutes. Get medical attention if irritation develops or persists.

Inhalation

Dust from processing: Remove to fresh air. Check for clear airway, breathing, and presence of pulse. If breathing is difficult, provide oxygen. Loosen any tight clothing on neck or chest. Provide cardiopulmonary resuscitation for persons without pulse or respirations. Consult a physician.

Ingestion

If swallowed, dilute by drinking water. Recommend quantities up to 30 mL (~1 oz.) in children and 250 mL (~9 oz.) in adults. Never give anything by mouth to a victim who is unconscious or is having convulsions. Do NOT induce vomiting. Consult a physician.

Most important symptoms/effects, acute and delayed

Dust from processing: Can cause irritation of the upper respiratory tract. See Section 11 of the SDS for additional information on health hazards.

Medical conditions aggravated by exposure

Asthma, chronic lung disease, and skin rashes.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. In case of shortness of breath, give oxygen.

General information

If exposed or concerned: Get medical advice/attention. In case of shortness of breath, give oxygen.

5. Fire-fighting measures**Suitable extinguishing media**

Use Class D extinguishing agents on fines, dust or molten metal.

Unsuitable extinguishing media

DO NOT USE water, halogenated agents, or ABC dry chemical agents. These fire extinguishing agents will react with the burning material.

Specific hazards arising from the chemical	<p>Alcoa aluminum powders were tested by the United States Department of Interior Bureau of Mines in 1991, under UN criteria and found not to meet the definition of a hazard class 4. Care should be taken, however, during bulk handling to prevent accumulation/generation over time of 75 micron or finer particles.</p> <p>May be a potential hazard under the following conditions:</p> <ul style="list-style-type: none"> • Dust clouds may be explosive. Even a minor dust cloud can explode violently. Dust accumulation on the floor, ledges and beams can present a risk of ignition, flame propagation and secondary explosions. • Powder or dusts in contact with water can generate flammable/explosive hydrogen gas. These gases could present an explosion hazard in confined or poorly ventilated spaces. • Powder or dusts are in contact with certain metal oxides (e.g., rust, copper oxide).
Special protective equipment and precautions for firefighters	Firefighters should wear NIOSH approved, positive pressure, self-contained breathing apparatus and full protective clothing when appropriate.
Fire fighting equipment/instructions	Use gentle surface application of Class D extinguishing agent or dry inert granular material (e.g., sand) to cover and ring the burning material. Avoid mixing of the extinguishing agent with the burning material. Apply extinguishing media carefully to avoid creating airborne dust. Do not disturb the material until completely cool. If possible, isolate the burning material to prevent fire spread, and allow the material to burn itself out. Move undamaged containers away from heat or flame, if possible.
General fire hazards	Dust and fines from processing may ignite readily. Dust or fines dispersed in the air can be explosive.
Explosion data	
Sensitivity to mechanical impact	Not sensitive.
Sensitivity to static discharge	<p>Static electricity and formation of sparks must be prevented. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Use non-sparking handling equipment, tools and natural bristle brushes. Cover and reseal partially empty containers. Provide grounding and bonding where necessary to prevent accumulation of static charges during metal dust handling and transfer operations.</p> <p>Obtain and follow the safety procedures and equipment guides contained in Aluminum Association Bulletin F-1 and National Fire Protection Association (NFPA) Standards listed in Section 16.</p> <p>Use non-sparking handling equipment, tools and natural bristle brushes. Cover and reseal partially empty containers. Provide grounding and bonding where necessary to prevent accumulation of static charges during metal dust handling and transfer operations (See Section 15).</p>

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures	Avoid contact with skin and eyes. Use personal protection recommended in Section 8 of the SDS.
Personal precautions, protective equipment and emergency procedures	
For emergency responders	Avoid contact with skin and eyes. Use personal protection recommended in Section 8 of the SDS.
Evacuation procedures	Keep people away from and upwind of spill/leak. Keep unnecessary personnel away.
Methods and materials for containment and cleaning up	<p>Isolate area. Avoid the generation of dusts during clean-up. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Use only non-sparking tools and natural bristle brushes. Use dry cleanup procedures.</p> <p>Keep material dry. Place carefully in dry, water-tight containers. Seal containers. After complete clean-up by sweeping, area may be washed with large amounts of water if necessary. Material that cannot be reused may be sent to a metals reclamation facility that is able to handle fines. Waste material that cannot be reclaimed for metal value should be rendered non-reactive prior to disposal. For waste disposal, see section 13 of the SDS.</p>
Environmental precautions	No specific precautions.

7. Handling and storage

Handling	Keep away from sources of ignition - No smoking. Avoid contact with skin and eyes. Care should be taken during bulk handling to prevent accumulation/generation over time of 75 micron or finer particles. Keep material dry.
Storage	Keep dry. Storage rooms must be of fire-resistant construction. Do not store powder in same room as other combustible materials.

Requirements for Processes Which Generate Dusts or Fines

Obtain and follow the safety procedures and equipment guides contained in Aluminum Association Bulletin TR-2 and National Fire Protection Association (NFPA) brochures listed in Section 16. Use non-sparking handling equipment, tools and natural bristle brush. Cover and reseal partially empty containers. Provide grounding and bonding where necessary to prevent accumulation of static charges during metal dust handling and transfer operations (See Section 15).

Local ventilation and vacuum systems must be designed to handle explosive dusts. Dry vacuums and electrostatic precipitators must not be used, unless specifically approved for use with flammable/explosive dusts. Dust collection systems must be dedicated to aluminum dust only and should be clearly labeled as such. Do not co-mingle fines of aluminum with fines of iron, iron oxide (rust) or other metal oxides.

Process equipment, storage containers, vessels and buildings should be equipped with explosion/pressure relief valves, panels and windows. Precautions must also be taken to prevent water leakage or seepage which could contact the powder. Refer to NFPA 484.

Avoid all ignition sources. Good housekeeping practices must be maintained. Dust accumulation on the floor, ledges and beams can present a risk of ignition, flame propagation and secondary explosions. Do not use compressed air to remove settled material from floors, beams or equipment. Do not allow fines or dust to contact water, particularly in enclosed areas.

8. Exposure controls/personal protection

Occupational exposure limits

U.S. - OSHA

Components

Type	Value	Form
Aluminum powder (CAS 7429-90-5)	TWA	15 mg/m3 (total dust)

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Material	Type	Value	Form
ATOMIZED ALUMINUM POWDER	PEL	5 mg/m3	Respirable dust.

Components	Type	Value	Form
Aluminum powder (CAS 7429-90-5)	TWA	15 mg/m3	Total dust.
Aluminum powder (CAS 7429-90-5)	TWA	5 mg/m3	Respirable dust.

US ACGIH Threshold Limit Values: Time Weighted Average (TWA): mg/m3, non-standard units

Material	Type	Value	Form
ATOMIZED ALUMINUM POWDER	TWA	1 mg/m3	Respirable fraction.

Components	Type	Value	Form
Aluminum powder (CAS 7429-90-5)	TWA	1 mg/m3	Respirable fraction.

Alcoa

Material	Type	Value	Form
ATOMIZED ALUMINUM POWDER	TWA	3 mg/m3	Respirable fraction

Components	Type	Value	Form
Aluminum powder (CAS 7429-90-5)	TWA	10 mg/m3	Total dust
Aluminum powder (CAS 7429-90-5)	TWA	3 mg/m3	Respirable fraction
		10 mg/m3	Total dust

General

Use personal protective equipment as required.

Appropriate engineering controls

Dust from processing: Use with adequate explosion-proof ventilation designed to handle particulates to meet the limits listed in Section 8, Exposure Guidelines.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields.

Skin protection

Hand protection

Wear impervious gloves to avoid direct skin contact.

Other	Recommend fire resistant cotton or equivalent full-length fire resistant pants and jackets along with electrically conductive safety shoes or grounding straps. Great caution is required to avoid contact with unprotected electrical devices when wearing conductive safety shoes or grounding straps.
Respiratory protection	Use NIOSH-approved respiratory protection as specified by an Industrial Hygienist or other qualified professional if concentrations exceed the limits listed in Section 8. Suggested respiratory protection: N95.
Thermal hazards	Not applicable.
General hygiene considerations	Handle in accordance with good industrial hygiene and safety practice. When using, do not eat, drink or smoke. Wash hands before breaks and immediately after handling the product.
Control parameters	

9. Physical and chemical properties

Form	Solid, powder.
Color	Silvery to gray.
Odor	Odorless
Odor threshold	Not applicable
pH	Not applicable
Density	0.80 - 1.30 g/cm ³
Melting point/freezing point	1194.8 - 1214.6 °F (646 - 657 °C) 1220 °F (660 °C)
Initial boiling point and boiling range	Not determined 4220.6 °F (2327 °C)
Flash point	Not applicable
Evaporation rate	Not applicable
Flammability (solid, gas)	Not applicable.
Upper/lower flammability or explosive limits	
Flammability limit - upper (%)	Not determined
Flammability limit - lower (%)	40 mg/l
Explosive properties	Dust can form an explosive mixture in air. Dust accumulation from this product may present an explosion hazard in the presence of an ignition source.
Dust explosion properties	
St class	Very strong explosion.
Vapor pressure	Not applicable
Vapor density	Not applicable
Relative density	Not determined
Solubility(ies)	Insoluble Insoluble
Partition coefficient (n-octanol/water)	Not applicable. Not applicable
Auto-ignition temperature	1202 °F (650 °C) layered
Decomposition temperature	Not applicable
Viscosity	Not applicable

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Stable under normal conditions of use, storage, and transportation as shipped.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	<ul style="list-style-type: none"> • Water: Slowly generates flammable and explosive hydrogen gas and heat. Generation rate is greatly increased with smaller particles (e.g., fines and dusts). Water/aluminum mixtures may be hazardous when confined. • Heat: Oxidizes at a rate dependent upon temperature and particle size.

Incompatible materials

- Acids and alkalis: Reacts to generate flammable/explosive hydrogen gas. Generation rate is greatly increased with smaller particles (e.g., fines and dusts).
- Strong oxidizers: Violent reaction with considerable heat generation. Can react explosively with nitrates (e.g., ammonium nitrate and fertilizers containing nitrate) when heated or molten.
- Halogenated compounds: Many halogenated hydrocarbons, including halogenated fire extinguishing agents, can react violently with finely divided or molten aluminum.
- Iron oxide (rust) and other metal oxides (e.g., copper and lead oxides): A violent thermite reaction generating considerable heat can occur. Reaction with aluminum fines and dusts requires only very weak ignition sources for initiation.
- Iron powder and water: Explosive reaction forming hydrogen gas when heated above 1470°F (800°C).

Hazardous decomposition products

No hazardous decomposition products are known.

11. Toxicological information**Health effects associated with ingredients**

Aluminum dust/fines and fumes: Low health risk by inhalation. Generally considered to be biologically inert.

Health effects associated with compounds formed during processing

No new/additional compounds are expected to be formed during processing.

Information on likely routes of exposure

Eye contact	Can cause mechanical irritation.
Skin contact	Dust from processing: Can cause mechanical irritation.
Inhalation	Dust from processing: Can cause irritation of the upper respiratory tract.
Ingestion	Can cause irritation of the gastrointestinal tract.

Symptoms related to the physical, chemical and toxicological characteristics

Dust from processing: Can cause mechanical irritation. Dust: Can cause irritation of the upper respiratory tract.

Information on toxicological effects

Acute toxicity	Based on available data, the classification criteria are not met.
Skin corrosion/irritation	Non-corrosive.
Serious eye damage/eye irritation	Can cause mechanical irritation.

Respiratory or skin sensitization

Respiratory sensitization	Not a respiratory sensitizer.
Skin sensitization	Not a skin sensitizer.

Germ cell mutagenicity Based on available data, the classification criteria are not met.

Neurological effects Based on available data, the classification criteria are not met.

Pre-existing conditions aggravated by exposure Asthma, chronic lung disease, and skin rashes.

Carcinogenicity Does not present any cancer hazards.

Reproductive toxicity Does not present any reproductive hazards.

Routes of exposure Inhalation. Skin contact. Eye contact.

Specific target organ toxicity - single exposure Based on available data, the classification criteria are not met.

Specific target organ toxicity - repeated exposure Based on available data, the classification criteria are not met.

Aspiration hazard Not an aspiration hazard.

Chronic effects Not classified.

Further information None known.

12. Ecological information

Ecotoxicity Not expected to be harmful to aquatic organisms.

Product	Species	Test Results
ATOMIZED ALUMINUM POWDER		
Aquatic		
Fish	LC50	Rainbow trout,donaldson trout (Oncorhynchus mykiss)
		0.16 mg/l, 96 hours
Persistence and degradability	The product is not biodegradable.	
Bioaccumulative potential	The product does not contain any substances expected to be bioaccumulating.	
Mobility in soil	Not considered mobile.	
Mobility in general	Not considered mobile.	
Other adverse effects	Not available.	

13. Disposal considerations

Disposal instructions	Reuse or recycle material whenever possible. Material that cannot be reused may be sent to a metals reclamation facility that is able to handle fines. Waste material that cannot be reclaimed for metal value should be rendered non-reactive prior to disposal.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Waste codes	RCRA Status: Not federally regulated in the U.S. if disposed of "as is." RCRA waste codes other than described here may apply depending on use of the product. Status must be determined at the point of waste generation. Refer to 40 CFR 261 or state equivalent in the U.S.
Waste from residues / unused products	If reuse or recycling is not possible, disposal must be made according to local or governmental regulations.
Contaminated packaging	Dispose of in accordance with local regulations.

14. Transport information

General Shipping Information

Basic Shipping Information

ID number	-
Proper shipping name	Not regulated
Hazard class	-
Packing group	-

General Shipping Notes

- This material has been tested under UN criteria and found not to meet the definition of a hazard class 4 and does not meet the definition of any other hazard class.
- Standard Transportation Commodity Code: 33-991-19.
- HTS (Harmonized Tariff Schedule) code: 7603.10.0000.
- The import/export HTS (Harmonized Tariff Schedule) code given above is the United States HTS code provided by Alcoa's Customs Compliance Office in Knoxville, TN. Other country specific HTS codes may apply. If available, more information on the HTS codes will be provided on country specific Material Safety Data Sheets.
- When "Not regulated", enter the proper freight classification, SDS Number and Product Name onto the shipping paperwork.

Disclaimer

This section provides basic classification information and, where relevant, information with respect to specific modal regulations, environmental hazards and special precautions. Otherwise, it is presumed that the information is not available/not relevant

15. Regulatory information

US federal regulations	In reference to Title VI of the Clean Air Act of 1990, this material does not contain nor was it manufactured using ozone-depleting chemicals. All electrical equipment must be suitable for use in hazardous atmospheres involving aluminum powder in accordance with 29 CFR 1910.307. The National Electrical Code, NFPA 70, contains guidelines for determining the type and design of equipment and installation which will meet this requirement.
TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)	Not regulated.
CERCLA Hazardous Substance List (40 CFR 302.4)	Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Section 311/312 hazard categories	Immediate Hazard - No	
	Delayed Hazard - No	
	Fire Hazard - No	
	Pressure Hazard - Yes	If dust clouds are generated
	Reactivity Hazard - No	

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical Yes**SARA 313 (TRI reporting)**

Chemical name	CAS number	% by wt.
Aluminum powder	7429-90-5	≥99.7

US state regulations**US. California Proposition 65**

Not Listed.

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision**SDS Status**

August 11, 2015: Change(s) in Section: 1 and 16.
April 30, 2015 (April 30, 2015 Minor modification 0123usa): Change(s) in Section: 1, 2 Minor modification..
January 7, 2015: Change(s) in Section: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15 and 16.

Origination date: September 17, 1980

Hazardous Materials Control Committee
Preparer: Jim Perriello, +1-865-977-2051.

SDS System Number: 145308

Revision date

August 11, 2015.

Version #

08

Revision Information

Product and Company Identification: Synonyms
Composition / Information on Ingredients: Disclosure Overrides
Physical & Chemical Properties: Multiple Properties
Transport Information: Agency Name, Packaging Type, and Transport Mode Selection
Regulatory Information: United States
HazReg Data: North America
GHS: Classification

Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available.

Other information

- Aluminum Association Bulletin TR-2, "Recommendations for Storage and Handling of Aluminum Pigments and Powders." The Aluminum Association, 1525 Wilson Boulevard, Suite 600, Arlington, Virginia 22209, www.aluminum.org.
- Aluminum Association, "Guidelines for Handling Molten Aluminum, The Aluminum Association, 1525 Wilson Boulevard, Suite 600, Arlington, Virginia 22209, www.aluminum.org.
- NFPA 484, Standard for Combustible Metals (NFPA phone: 800-344-3555)
- NFPA 654, Standard for the Prevention of Fire and Dust Explosions from the Manufacturing, Processing, and Handling of Combustible Particulate Solids
- NFPA 70, Standard for National Electrical Code (Electrical Equipment, Grounding and Bonding)
- NFPA 77, Standard for Static Electricity
- NFPA 68, Standard on Explosion Protection by Deflagration Venting • NFPA 69, Standard on Explosion Prevention Systems

Key/Legend:

ACGIH	American Conference of Governmental Industrial Hygienists
AICS	Australian Inventory of Chemical Substances
CAS	Chemical Abstract Services
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CFR	Code of Federal Regulations
CPR	Cardio-pulmonary Resuscitation
DOT	Department of Transportation
DSL	Domestic Substances List (Canada)
EC	Effective Concentration
ED	Effective Dose
EINECS	European Inventory of Existing Commercial Chemical Substances
ENCS	Japan - Existing and New Chemical Substances
EWC	European Waste Catalogue
EPA	Environmental Protective Agency
IARC	International Agency for Research on Cancer
LC	Lethal Concentration
LD	Lethal Dose
MAK	Maximum Workplace Concentration (Germany) "maximale Arbeitsplatz-Konzentration"
NDSL	Non-Domestic Substances List (Canada)
NIOSH	National Institute for Occupational Safety and Health
NTP	National Toxicology Program
OEL	Occupational Exposure Limit
OSHA	Occupational Safety and Health Administration
PIN	Product Identification Number
PMCC	Pensky Marten Closed Cup
RCRA	Resource Conservation and Recovery Act
SARA	Superfund Amendments and Reauthorization Act
SIMDUT	Système d'Information sur les Matières Dangereuses Utilisées au Travail
STEL	Short Term Exposure Limit
TCLP	Toxic Chemicals Leachate Program
TDG	Transportation of Dangerous Goods
TLV	Threshold Limit Value
TSCA	Toxic Substances Control Act
TWA	Time Weighted Average
WHMIS	Workplace Hazardous Materials Information System
m	meter, cm centimeter, mm millimeter, in inch,
g	gram, kg kilogram, lb pound, µg microgram,
ppm	parts per million, ft feet

*** End of SDS ***

Hazard statement

May form combustible dust concentrations in air.

Precautionary statement

Prevention

Care should be taken during bulk handling to prevent accumulation/generation over time of 75 micron or finer particles. Use only non-sparking tools and natural bristle brushes. Keep away from heat/sparks/open flames/hot surfaces - No smoking. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Prevent dust accumulation to minimize explosion hazard. Take precautionary measures against static discharge.

Response

In case of fire: Use appropriate media for extinction.

Storage

Store in a dry place and/or in closed container. Keep away from heat, sparks and open flame - No smoking. Do not allow chips, fines or dust to contact water, particularly in enclosed areas.

Disposal

Reuse or recycle material whenever possible. Material that cannot be reused may be sent to a metals reclamation facility that is able to handle fines. Waste material that cannot be reclaimed for metal value should be rendered non-reactive prior to disposal.

Warning

Supplemental information

Powder may ignite readily. Powder or dusts dispersed in the air can be explosive.

Explosion/fire hazards may be present when:

- Powder or dust are dispersed in air.
- Powder or dusts are in contact with water.
- Powder or dusts are in contact with certain metal oxides (e.g., rust, copper oxide).

FIRE FIGHTING MEASURES: Use gentle surface application of Class D extinguishing agent or dry inert granular material (e.g., sand) to cover and ring the burning material. Avoid mixing of the extinguishing agent with the burning material. If possible, isolate the burning material to prevent fire spread, and allow the material to burn itself out. Do not disturb the material until completely cool. Move undamaged containers away from heat or flame, if possible.

DO NOT USE water, halogenated agents, or ABC dry chemical agents.

These fire extinguishing agents will react with the burning material.

IN CASE OF SPILL: Avoid dusting of powder to the greatest extent possible. Use only non-sparking tools and natural bristle brushes. ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Prohibit smoking. Use dry cleanup procedures. Place carefully in dry, water-tight containers. Seal containers. After complete clean-up by sweeping, area may be washed with large amounts of water if necessary.

See Alcoa SDS Number 0123.

SAFETY DATA SHEET

Version 4.9
Revision Date 04/20/2015
Print Date 12/11/2015

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Anthracene

Product Number : A89200
Brand : Aldrich

CAS-No. : 120-12-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Skin irritation (Category 2), H315

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H315

Causes skin irritation.

H319

Causes serious eye irritation.

H335

May cause respiratory irritation.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P261

Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264

Wash skin thoroughly after handling.

P271

Use only outdoors or in a well-ventilated area.

P273

Avoid release to the environment.

P280

Wear eye protection/ face protection.

P280	Wear protective gloves.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Photosensitizer., Lachrymator.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₁₄ H ₁₀
Molecular weight	: 178.23 g/mol
CAS-No.	: 120-12-7
EC-No.	: 204-371-1

Hazardous components

Component	Classification	Concentration
Anthracene Included in the Candidate List of Substances of Very High Concern (SVHC) according to Regulation (EC) No. 1907/2006 (REACH)		
	Skin Irrit. 2; Eye Irrit. 2A; STOT SE 3; Aquatic Acute 1; Aquatic Chronic 1; H315, H319, H335, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Anthracene	120-12-7	TWA	0.200000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	1910.1002 As used in §1910.1000 (Table Z-1), coal tar pitch volatiles include the fused polycyclic hydrocarbons which volatilize from the distillation residues of coal, petroleum (excluding asphalt), wood, and other organic matter. Asphalt (CAS 8052-42-4, and CAS 64742-93-4) is not covered under the 'coal tar pitch volatiles' standard OSHA specifically regulated carcinogen		

		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen NIOSH considers coal tar, coal tar pitch, and creosote to be coal tar products. cyclohexane-extractable fraction See Appendix C See Appendix A		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Anthracene	120-12-7	1-Hydroxypyrene (1-HP)		Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Chloroprene

Minimum layer thickness: 0.6 mm

Break through time: 480 min

Material tested:Camapren® (KCL 722 / Aldrich Z677493, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 30 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: crystalline Colour: beige
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 210 - 215 °C (410 - 419 °F) - lit.
f) Initial boiling point and boiling range	340 °C (644 °F) - lit.
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Lower explosion limit: 0.6 %(V)
k) Vapour pressure	1.3 hPa (1.0 mmHg) at 145.0 °C (293.0 °F)
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 4.45
p) Auto-ignition temperature	540.0 °C (1,004.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Hypochlorites

10.6 Hazardous decomposition products

Other decomposition products - No data available

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

Inhalation: No data available

Dermal: No data available

LD50 Intraperitoneal - Mouse - 430 mg/kg

Skin corrosion/irritation

Skin - Mouse

Result: Mild skin irritation

Serious eye damage/eye irritation

Irritating to eyes. The preceding data, or interpretation of data, was determined using Quantitative Structure Activity Relationship (QSAR) modeling.

Respiratory or skin sensitisation

Causes photosensitivity. Exposure to light can result in allergic reactions resulting in dermatologic lesions, which can vary from sunburnlike responses to edematous, vesiculated lesions, or bullae

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Anthracene)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: OSHA specifically regulated carcinogen (Anthracene)

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

Inhalation - May cause respiratory irritation.

The preceding data, or interpretation of data, was determined using Quantitative Structure Activity Relationship (QSAR) modeling.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: CA9350000

Possible tumor promoter., Headache, Nausea, Weakness

Blood -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - *Lepomis macrochirus* (Bluegill) - 0.001 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates EC50 - *Daphnia magna* (Water flea) - 0.10 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Indication of bioaccumulation.

Bioaccumulation Pimephales promelas (fathead minnow) - 42 d
- 0.01191 mg/l

Bioconcentration factor (BCF): 649

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Anthracene)
Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Anthracene)
Marine pollutant: yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Anthracene)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Anthracene	120-12-7	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Anthracene	120-12-7	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Anthracene	120-12-7	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Anthracene	120-12-7	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Anthracene	120-12-7	2007-09-28

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.9

Revision Date: 04/20/2015

Print Date: 12/11/2015

Antimony

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations
Revision Date: 02/12/2014

Version: 1.0

SECTION 1: IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY

1.1. Product Identifier

Product Form: Substance

Product Name: Antimony

Synonyms: Stibium (Sb)

1.2. Intended Use of the Product No additional information available

1.3. Name, Address, and Telephone of the Responsible Party

Company

Atomized Products Group, Inc

3838 Miller Park Dr

Garland, TX 75042

T 972-272-9596

atomizedproductsgroup.com

1.4. Emergency Telephone Number

Emergency Number : 800-255-3924 (CHEMTEL)

SECTION 2: HAZARDS IDENTIFICATION

2.1. Classification of the Substance or Mixture

Classification (GHS-US)

Comb. Dust

Acute Tox. 3 (Oral) H301

Acute Tox. 4 H332

(Inhalation:dust,mist)

Carc. 2 H351

Aquatic Acute 2 H401

Aquatic Chronic 2 H411

2.2. Label Elements

GHS-US Labeling

Hazard Pictograms (GHS-US)



Signal Word (GHS-US)

: Danger

Hazard Statements (GHS-US)

: May form combustible dust concentrations in air

H301 - Toxic if swallowed

H332 - Harmful if inhaled

H351 - Suspected of causing cancer

H401 - Toxic to aquatic life

H411 - Toxic to aquatic life with long lasting effects

Precautionary Statements (GHS-US)

: P201 - Obtain special instructions before use.

P202 - Do not handle until all safety precautions have been read and understood.

P261 - Avoid breathing dust.

P264 - Wash hands, forearms, and other exposed areas thoroughly after handling.

P270 - Do not eat, drink or smoke when using this product.

P271 - Use only outdoors or in a well-ventilated area.

P273 - Avoid release to the environment.

P280 - Wear protective gloves, protective clothing, eye protection, face protection, respiratory protection.

P301+P310 - IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

P304+P340 - IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.

P308+P313 - If exposed or concerned: Get medical advice/attention.

Antimony

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

P312 - Call a POISON CENTER/doctor/physician if you feel unwell.

P321 - Specific treatment (see section 4).

P330 - If swallowed, rinse mouth.

P391 - Collect spillage.

P405 - Store locked up.

P501 - Dispose of contents/container to local, regional, national, territorial, provincial, and international regulations.

2.3. Other Hazards

Other Hazards Not Contributing to the Classification: Exposure may aggravate those with pre-existing eye, skin, or respiratory conditions. May form combustible dust concentrations in air. Exposure may aggravate individuals with pre-existing skin, kidney, liver, and pulmonary disorders. On burning release of harmful/irritant gases/vapours (antimony oxides). Inhalation of dusts and fumes can cause metal fume fever. Symptoms can include a metallic or sweet taste in the mouth, sweating, shivering, headache, throat irritation, fever, chills, thirstiness, muscle aches, nausea, vomiting, weakness, fatigue, and shortness of breath.

2.4. Unknown Acute Toxicity (GHS-US)

No data available

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

3.1. Substance

Name : Antimony

Name	Product identifier	%	Classification (GHS-US)
Antimony	(CAS No) 7440-36-0	100	Comb. Dust Acute Tox. 3 (Oral), H301 Acute Tox. 4 (Inhalation), H332 Carc. 2, H351 Aquatic Acute 2, H401 Aquatic Chronic 2, H411

Full text of H-phrases: see section 16

3.2. Mixture

Not applicable

SECTION 4: FIRST AID MEASURES

4.1. Description of First Aid Measures

First-aid Measures General: Never give anything by mouth to an unconscious person. If you feel unwell, seek medical advice (show the label where possible).

First-aid Measures After Inhalation: When symptoms occur: go into open air and ventilate suspected area. Obtain medical attention if breathing difficulty persists.

First-aid Measures After Skin Contact: Remove contaminated clothing. Drench affected area with water for at least 15 minutes. Obtain medical attention if irritation persists.

First-aid Measures After Eye Contact: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Obtain medical attention if irritation persists.

First-aid Measures After Ingestion: Rinse mouth. Do not induce vomiting. Seek medical attention if a large amount is swallowed.

4.2. Most important symptoms and effects, both acute and delayed

Symptoms/Injuries: Suspected of causing cancer. Toxic if swallowed. Harmful if inhaled.

Symptoms/Injuries After Inhalation: Harmful if inhaled. Respiratory tract irritation.

Symptoms/Injuries After Skin Contact: Prolonged contact with large amounts of dust may cause mechanical irritation.

Symptoms/Injuries After Eye Contact: Prolonged contact with large amounts of dust may cause mechanical irritation.

Symptoms/Injuries After Ingestion: Toxic if swallowed. May cause nausea, vomiting, and diarrhea.

Chronic Symptoms: Prolonged exposure may cause effects in specific organs such as the liver, kidneys, blood, and nervous system.

4.3. Indication of Any Immediate Medical Attention and Special Treatment Needed

If exposed or concerned, get medical advice and attention.

SECTION 5: FIREFIGHTING MEASURES

5.1. Extinguishing Media

Suitable Extinguishing Media: Use extinguishing media appropriate for surrounding fire.

Unsuitable Extinguishing Media: Do not use a heavy water stream. Use of heavy stream of water may spread fire.

Antimony

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

5.2. Special Hazards Arising From the Substance or Mixture

Fire Hazard: Not considered flammable but may burn at high temperatures. Dust explosion hazard in air.

Explosion Hazard: Avoid dust clouds in combination with static electricity. Dust explosion hazard in air.

Reactivity: Hazardous reactions will not occur under normal conditions. Dust clouds can be explosive.

5.3. Advice for Firefighters

Precautionary Measures Fire: Exercise caution when fighting any chemical fire.

Firefighting Instructions: Use water spray or fog for cooling exposed containers. In case of major fire and large quantities: Evacuate area. Fight fire remotely due to the risk of explosion.

Protection During Firefighting: Do not enter fire area without proper protective equipment, including respiratory protection.

Other information: Risk of dust explosion. Do not allow the product to be released into the environment. Do not allow run-off from fire fighting to enter drains or water courses.

SECTION 6: ACCIDENTAL RELEASE MEASURES

6.1. Personal Precautions, Protective Equipment and Emergency Procedures

General Measures: Use special care to avoid static electric charges. Keep away from heat/sparks/open flames/hot surfaces. – No smoking. Handle in accordance with good industrial hygiene and safety practice. Do not breathe dust. Avoid generating dust. Avoid all contact with skin, eyes, or clothing.

6.1.1. For Non-emergency Personnel

Protective Equipment: Use appropriate personal protection equipment (PPE).

Emergency Procedures: Evacuate unnecessary personnel.

6.1.2. For Emergency Responders

Protective Equipment: Equip cleanup crew with proper protection. Use appropriate personal protection equipment (PPE).

Emergency Procedures: Ventilate area.

6.2. Environmental Precautions

Prevent entry to sewers and public waters. Do not allow to enter drains or water courses.

6.3. Methods and Material for Containment and Cleaning Up

For Containment: Avoid generation of dust during clean-up of spills. Use only non-sparking tools.

Methods for Cleaning Up: Clear up spills immediately and dispose of waste safely. Avoid generation of dust during clean-up of spills. Use only non-sparking tools. Use explosion proof vacuum during cleanup, with appropriate filter, do not mix with other materials. Contact competent authorities after a spill.

6.4. Reference to Other Sections

See heading 8, Exposure Controls and Personal Protection.

SECTION 7: HANDLING AND STORAGE

7.1. Precautions for Safe Handling

Additional Hazards When Processed: Avoid dust production. Accumulation and dispersion of dust with an ignition source can cause a combustible dust explosion, keep dust levels to a minimum and follow applicable regulations. Do not pressurize, cut, or weld containers. . On burning: release of harmful/irritant gases/vapours e.g.: (antimony oxides).

Precautions for Safe Handling: Use only non-sparking tools. Keep away from heat/sparks/open flames/hot surfaces. – No smoking. Handle in accordance with good industrial hygiene and safety procedures.

Hygiene Measures: Handle in accordance with good industrial hygiene and safety procedures. Wash hands and other exposed areas with mild soap and water before eating, drinking, or smoking and again when leaving work. Do not eat, drink or smoke when using this product.

7.2. Conditions for Safe Storage, Including Any Incompatibilities

Technical Measures: Proper grounding procedures to avoid static electricity should be followed. Ground/bond container and receiving equipment. Use explosion-proof electrical, ventilating, and lighting equipment. Comply with applicable regulations.

Storage Conditions: Store in a dry, cool and well-ventilated place. Keep container closed when not in use. Keep/Store away from extremely high or low temperatures, ignition sources, incompatible materials.

Incompatible Products: Strong acids. Strong bases. Strong oxidizers.

7.3. Specific End Use(s)

No additional information available

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1. Control Parameters

Antimony (7440-36-0)		
USA ACGIH	ACGIH TWA (mg/m ³)	0.5 mg/m ³
USA NIOSH	NIOSH REL (TWA) (mg/m ³)	0.5 mg/m ³

Antimony

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

USA IDLH	US IDLH (mg/m ³)	50 mg/m ³
USA OSHA	OSHA PEL (TWA) (mg/m ³)	0.5 mg/m ³

8.2. Exposure Controls

Appropriate Engineering Controls

: Ensure all national/local regulations are observed. Proper grounding procedures to avoid static electricity should be followed. Use explosion-proof equipment. Emergency eye wash fountains and safety showers should be available in the immediate vicinity of any potential exposure. Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

: Gloves. Protective goggles. Respiratory protection of the dependent type. Protective clothing.



Materials for Protective Clothing

Hand Protection

: Chemically resistant materials and fabrics.

Eye Protection

: Wear chemically resistant protective gloves.

Skin and Body Protection

: Chemical goggles or safety glasses.

Respiratory Protection

: Wear suitable protective clothing.

: Use NIOSH-approved air-purifying or supplied-air respirator where airborne concentrations of dust are expected to exceed exposure limits.

Thermal Hazard Protection

: Wear suitable protective clothing.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

9.1. Information on Basic Physical and Chemical Properties

Physical State	: Solid
Odor	: No data available
Odor Threshold	: No data available
pH	: No data available
Relative Evaporation Rate (butylacetate=1)	: No data available
Melting Point	: No data available
Freezing Point	: No data available
Boiling Point	: No data available
Flash Point	: No data available
Auto-ignition Temperature	: No data available
Decomposition Temperature	: No data available
Flammability (solid, gas)	: No data available
Vapor Pressure	: No data available
Relative Vapor Density at 20 °C	: No data available
Relative Density	: No data available
Specific Gravity	: No data available
Solubility	: No data available
Log Pow	: No data available
Log Kow	: No data available
Viscosity, Kinematic	: No data available
Viscosity, Dynamic	: No data available
Explosive Properties	: No data available
Oxidizing Properties	: No data available
Explosive Limits	: No data available

Antimony

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

9.2. Other Information No additional information available

SECTION 10: STABILITY AND REACTIVITY

10.1 Reactivity: Hazardous reactions will not occur under normal conditions. Dust clouds can be explosive.

10.2 Chemical Stability: Dust clouds can be explosive.

10.3 Possibility of Hazardous Reactions: Hazardous polymerization will not occur.

10.4 Conditions to Avoid: Direct sunlight. Extremely high or low temperatures. Open flame. Ignition sources. Incompatible materials.

10.5 Incompatible Materials: Strong acids. Strong bases. Strong oxidizers. Halogenated compounds.

10.6 Hazardous Decomposition Products: Antimony and its oxides. Metal oxides. Inhalation of fumes may cause metal fume fever.

SECTION 11: TOXICOLOGICAL INFORMATION

11.1. Information On Toxicological Effects

Acute Toxicity: Toxic if swallowed. Harmful if inhaled.

Antimony	
ATE (Oral)	500.000 mg/kg body weight
ATE (Dust/Mist)	1.500 mg/l/4h
Antimony (7440-36-0)	
LD50 Oral Rat	100 mg/kg
ATE (Oral)	100.000 mg/kg body weight

Skin Corrosion/Irritation: Not classified

Serious Eye Damage/Irritation: Not classified

Respiratory or Skin Sensitization: Not classified

Germ Cell Mutagenicity: Not classified

Carcinogenicity: Suspected of causing cancer.

Reproductive Toxicity: Not classified

Specific Target Organ Toxicity (Single Exposure): Not classified

Specific Target Organ Toxicity (Repeated Exposure): Not classified

Aspiration Hazard: Not classified

Symptoms/Injuries After Inhalation: Harmful if inhaled. Respiratory tract irritation.

Symptoms/Injuries After Skin Contact: Prolonged contact with large amounts of dust may cause mechanical irritation.

Symptoms/Injuries After Eye Contact: Prolonged contact with large amounts of dust may cause mechanical irritation.

Symptoms/Injuries After Ingestion: Toxic if swallowed. May cause nausea, vomiting, and diarrhea.

Chronic Symptoms: Prolonged exposure may cause effects in specific organs such as the liver, kidneys, blood, and nervous system.

SECTION 12: ECOLOGICAL INFORMATION

12.1. Toxicity

Ecology - General : Toxic to aquatic life with long lasting effects.

12.2. Persistence and Degradability

Antimony	
Persistence and Degradability	May cause long-term adverse effects in the environment.

12.3. Bioaccumulative Potential No additional information available

12.4. Mobility in Soil No additional information available

12.5. Other Adverse Effects

Other Information : Avoid release to the environment.

SECTION 13: DISPOSAL CONSIDERATIONS

13.1. Waste treatment methods

Waste Disposal Recommendations: Dispose of waste material in accordance with all local, regional, national, and international regulations.

Additional Information: The materials contained within this product are hazardous to the environment, do not release into the environment.

Antimony

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 14: TRANSPORT INFORMATION

14.1 In Accordance with DOT

Proper Shipping Name : ANTIMONY POWDER
Hazard Class : 6.1
Identification Number : UN2871
Label Codes : 6.1
Packing Group : III
Marine Pollutant : Marine pollutant
ERG Number : 170



14.2 In Accordance with IMDG

Proper Shipping Name : ANTIMONY POWDER
Hazard Class : 6.1
Identification Number : UN2871
Packing Group : III
Label Codes : 6.1
EmS-No. (Fire) : F-A
EmS-No. (Spillage) : S-A
MFAG Number : 171



14.3 In Accordance with IATA

Proper Shipping Name : ANTIMONY POWDER
Packing Group : III
Identification Number : UN2871
Hazard Class : 6
Label Codes : 6.1
ERG Code (IATA) : 6L



SECTION 15: REGULATORY INFORMATION

15.1 US Federal Regulations

Antimony	
SARA Section 311/312 Hazard Classes	Delayed (chronic) health hazard Immediate (acute) health hazard
Antimony (7440-36-0)	
Listed on the United States TSCA (Toxic Substances Control Act) inventory	
Listed on SARA Section 313 (Specific toxic chemical listings)	
SARA Section 313 - Emission Reporting	1.0 %

15.2 US State Regulations

Antimony (7440-36-0)
U.S. - California - Priority Toxic Pollutants - Human Health Criteria U.S. - California - Toxic Air Contaminant List (AB 1807, AB 2728) U.S. - Colorado - Primary Drinking Water Regulations - Maximum Contaminant Level Goals (MCLGs) U.S. - Colorado - Primary Drinking Water Regulations - Maximum Contaminant Levels (MCLs) U.S. - Connecticut - Drinking Water Quality Standards - Maximum Contaminant Levels U.S. - Connecticut - Hazardous Air Pollutants - HLVs (30 min) U.S. - Connecticut - Hazardous Air Pollutants - HLVs (8 hr) U.S. - Connecticut - Water Quality Standards - Consumption of Organisms Only U.S. - Connecticut - Water Quality Standards - Consumption of Water and Organisms U.S. - Connecticut - Water Quality Standards - Health Designations U.S. - Delaware - Pollutant Discharge Requirements - Reportable Quantities U.S. - Florida - Drinking Water Standards - Inorganic Contaminants - Maximum Contaminant Levels (MCLs) U.S. - Georgia - Drinking Water - Maximum Contaminant Levels (MCLs) U.S. - Idaho - Non-Carcinogenic Toxic Air Pollutants - Acceptable Ambient Concentrations U.S. - Idaho - Non-Carcinogenic Toxic Air Pollutants - Emission Levels (ELs) U.S. - Idaho - Occupational Exposure Limits - TWAs

Antimony

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

U.S. - Illinois - Toxic Air Contaminants
U.S. - Louisiana - Reportable Quantity List for Pollutants
U.S. - Maine - Air Pollutants - Hazardous Air Pollutants
U.S. - Maryland - Surface Water Quality Standards - Consumption of Organisms Only
U.S. - Maryland - Surface Water Quality Standards - Consumption of Water and Organisms
U.S. - Massachusetts - Allowable Ambient Limits (AALs)
U.S. - Massachusetts - Allowable Threshold Concentrations (ATCs)
U.S. - Massachusetts - Drinking Water - Maximum Contaminant Levels (MCLs)
U.S. - Massachusetts - Oil & Hazardous Material List - Groundwater Reportable Concentration - Reporting Category 1
U.S. - Massachusetts - Oil & Hazardous Material List - Groundwater Reportable Concentration - Reporting Category 2
U.S. - Massachusetts - Oil & Hazardous Material List - Reportable Quantity
U.S. - Massachusetts - Oil & Hazardous Material List - Soil Reportable Concentration - Reporting Category 1
U.S. - Massachusetts - Oil & Hazardous Material List - Soil Reportable Concentration - Reporting Category 2
U.S. - Massachusetts - Right To Know List
U.S. - Massachusetts - Threshold Effects Exposure Limits (TEELs)
U.S. - Massachusetts - Toxics Use Reduction Act
U.S. - Michigan - Occupational Exposure Limits - TWAs
U.S. - Michigan - Polluting Materials List
U.S. - Minnesota - Chemicals of High Concern
U.S. - Minnesota - Groundwater Health Risk Limits
U.S. - Minnesota - Hazardous Substance List
U.S. - Minnesota - Permissible Exposure Limits - TWAs
U.S. - Missouri - Drinking Water - Maximum Contaminant Levels (MCLs)
U.S. - Nebraska - Drinking Water - Maximum Contaminant Levels (MCLs)
U.S. - New Hampshire - Drinking Water - Maximum Contaminant Levels (MCLs)
U.S. - New Hampshire - Regulated Toxic Air Pollutants - Ambient Air Levels (AALs) - 24-Hour
U.S. - New Hampshire - Regulated Toxic Air Pollutants - Ambient Air Levels (AALs) - Annual
U.S. - New Jersey - Discharge Prevention - List of Hazardous Substances
U.S. - New Jersey - Environmental Hazardous Substances List
U.S. - New Jersey - Primary Drinking Water Standards - Maximum Contaminant Levels - MCLs
U.S. - New Jersey - Right to Know Hazardous Substance List
U.S. - New Jersey - Water Quality - Ground Water Quality Criteria
U.S. - New Jersey - Water Quality - Practical Quantitation Levels (PQLs)
U.S. - New York - Occupational Exposure Limits - TWAs
U.S. - New York - Reporting of Releases Part 597 - List of Hazardous Substances
U.S. - North Dakota - Air Pollutants - Guideline Concentrations - 8-Hour
U.S. - North Dakota - Water Quality Standards - Human Health Value for Class III
U.S. - North Dakota - Water Quality Standards - Human Health Value for Classes I, IA, II
U.S. - Oregon - Permissible Exposure Limits - TWAs
U.S. - Pennsylvania - Drinking Water - Maximum Contaminant Levels (MCLs)
U.S. - Pennsylvania - RTK (Right to Know) - Environmental Hazard List
U.S. - Pennsylvania - RTK (Right to Know) List
U.S. - Rhode Island - Air Toxics - Acceptable Ambient Levels - 24-Hour
U.S. - Rhode Island - Water Quality Standards - Acute Freshwater Aquatic Life Criteria
U.S. - Rhode Island - Water Quality Standards - Chronic Freshwater Aquatic Life Criteria
U.S. - Rhode Island - Water Quality Standards - Human Health Criteria for Consumption of Aquatic Organisms Only
U.S. - Rhode Island - Water Quality Standards - Human Health Criteria for Consumption of Water and Aquatic Organisms
U.S. - South Carolina - Maximum Contaminant Levels (MCLs)
U.S. - Tennessee - Occupational Exposure Limits - TWAs
U.S. - Texas - Drinking Water Standards - Maximum Contaminant Levels (MCLs)
U.S. - Texas - Effects Screening Levels - Long Term
U.S. - Texas - Effects Screening Levels - Short Term
U.S. - Utah - Drinking Water - Maximum Contaminant Levels (MCLs)
U.S. - Vermont - Hazardous Waste - Hazardous Constituents
U.S. - Vermont - Permissible Exposure Limits - TWAs
U.S. - Virginia - Water Quality Standards - Public Water Supply Effluent Limits
U.S. - Virginia - Water Quality Standards - Surface Waters Not Used for the Public Water Supply Effluent Limits

Antimony

Safety Data Sheet

according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

U.S. - Washington - Dangerous Waste - Dangerous Waste Constituents List
U.S. - Washington - Permissible Exposure Limits - STELs
U.S. - Washington - Permissible Exposure Limits - TWAs
U.S. - Wisconsin - Hazardous Air Contaminants - All Sources - Emissions From Stack Heights 25 Feet to Less Than 40 Feet
U.S. - Wisconsin - Hazardous Air Contaminants - All Sources - Emissions From Stack Heights 40 Feet to Less Than 75 Feet
U.S. - Wisconsin - Hazardous Air Contaminants - All Sources - Emissions From Stack Heights 75 Feet or Greater
U.S. - Wisconsin - Hazardous Air Contaminants - All Sources - Emissions From Stack Heights Less Than 25 Feet

SECTION 16: OTHER INFORMATION

Revision date : 02/12/2014
Other Information : This document has been prepared in accordance with the SDS requirements of the OSHA Hazard Communication Standard 29 CFR 1910.1200.

GHS Full Text Phrases:

Acute Tox. 3 (Oral)	Acute toxicity (oral) Category 3
Acute Tox. 4 (Inhalation)	Acute toxicity (inhalation) Category 4
Acute Tox. 4 (Inhalation:dust,mist)	Acute toxicity (inhalation:dust,mist) Category 4
Aquatic Acute 2	Hazardous to the aquatic environment - Acute Hazard Category 2
Aquatic Chronic 2	Hazardous to the aquatic environment - Chronic Hazard Category 2
Carc. 2	Carcinogenicity Category 2
Comb. Dust	Combustible Dust
	May form combustible dust concentrations in air
H301	Toxic if swallowed
H332	Harmful if inhaled
H351	Suspected of causing cancer
H401	Toxic to aquatic life
H411	Toxic to aquatic life with long lasting effects

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.

SDS US (GHS HazCom) - US

Safety Data Sheet acc. to OSHA HCS

Printing date 01/17/2019

Reviewed on 01/17/2019

1 Identification

- **Product identifier**
- **Product Name:** Aroclor 1242
- **Part Number:** PCB-1242
- **Application of the substance / the mixture** Certified Reference Material
- **Details of the supplier of the safety data sheet**
- **Manufacturer/Supplier:**
SPEX CertiPrep, LLC.
203 Norcross Ave, Metuchen,
NJ 08840 USA
- **Information department:** product safety department
- **Emergency telephone number:**
Emergency Phone Number (24 hours)
CHEMTREC (800-424-9300)
Outside US: 703-527-3887

2 Hazard(s) identification

- **Classification of the substance or mixture**



GHS02 Flame

Flam. Liq. 2 H225 Highly flammable liquid and vapor.



GHS08 Health hazard

Repr. 2 H361 Suspected of damaging fertility or the unborn child.

STOT RE 2 H373 May cause damage to organs through prolonged or repeated exposure.

Asp. Tox. 1 H304 May be fatal if swallowed and enters airways.



GHS07

Skin Irrit. 2 H315 Causes skin irritation.

STOT SE 3 H336 May cause drowsiness or dizziness.

- **Label elements**

- **GHS label elements** The product is classified and labeled according to the Globally Harmonized System (GHS).

- **Hazard pictograms**



GHS02



GHS07



GHS08

- **Signal word** Danger

- **Hazard-determining components of labeling:**

n-hexane

- **Hazard statements**

H225 Highly flammable liquid and vapor.

H315 Causes skin irritation.

H361 Suspected of damaging fertility or the unborn child.

H336 May cause drowsiness or dizziness.

H373 May cause damage to organs through prolonged or repeated exposure.

H304 May be fatal if swallowed and enters airways.

- **Precautionary statements**

If medical advice is needed, have product container or label at hand.

Keep out of reach of children.

Read label before use.

If swallowed: Immediately call a poison center/doctor.

Specific treatment (see on this label).

Do NOT induce vomiting.

If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.

(Contd. on page 2)

Safety Data Sheet acc. to OSHA HCS

Printing date 01/17/2019

Reviewed on 01/17/2019

Product Name: Aroclor 1242

(Contd. of page 1)

Take off contaminated clothing and wash it before reuse.
Store locked up.
Dispose of contents/container in accordance with local/regional/national/international regulations.

- **Classification system:**
- **NFPA ratings (scale 0 - 4)**



- **HMIS-ratings (scale 0 - 4)**



- **Other hazards**
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.

3 Composition/information on ingredients

- **Chemical characterization:** Mixtures
- **Description:** Mixture of the substances listed below with nonhazardous additions.

· **Dangerous components:**

110-54-3	n-hexane	99.98%
----------	----------	--------

· **Chemical identification of the substance/preparation**

53469-21-9	Aroclor 1242	0.02%
------------	--------------	-------

4 First-aid measures

- **Description of first aid measures**
- **General information:**
Immediately remove any clothing soiled by the product.
Symptoms of poisoning may even occur after several hours; therefore medical observation for at least 48 hours after the accident.
- **After inhalation:** Supply fresh air; consult doctor in case of complaints.
- **After skin contact:** Immediately rinse with water.
- **After eye contact:** Rinse opened eye for several minutes under running water.
- **After swallowing:** Do not give anything to eat or drink - Do not induce vomiting
- **Information for Doctor:**
- **Most important symptoms and effects, both acute and delayed** No further relevant information available.
- **Indication of any immediate medical attention and special treatment needed** No further relevant information available.

5 Fire-fighting measures

- **Extinguishing media**
- **Suitable extinguishing agents:** CO₂, extinguishing powder or water spray. Fight larger fires with water spray or alcohol resistant foam.
- **For safety reasons unsuitable extinguishing agents:** Water with full jet
- **Special hazards arising from the substance or mixture** During heating or in case of fire poisonous gases are produced.
- **Advice for firefighters**
- **Protective equipment:** Mouth respiratory protective device.

6 Accidental release measures

- **Personal precautions, protective equipment and emergency procedures**
Mount respiratory protective device.
Wear protective equipment. Keep unprotected persons away.
- **Environmental precautions:** Do not allow to enter sewers/ surface or ground water.
- **Methods and material for containment and cleaning up:**
Absorb with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust).
Dispose contaminated material as waste according to item 13.
Ensure adequate ventilation.

(Contd. on page 3)

Safety Data Sheet acc. to OSHA HCS

Printing date 01/17/2019

Reviewed on 01/17/2019

Product Name: Aroclor 1242

(Contd. of page 2)

- **Reference to other sections**
See Section 7 for information on safe handling.
See Section 8 for information on personal protection equipment.
See Section 13 for disposal information.

- **Protective Action Criteria for Chemicals**

- **PAC-1:**

110-54-3	n-hexane	260 ppm
53469-21-9	Aroclor 1242	3 mg/m ³

- **PAC-2:**

110-54-3	n-hexane	2900* ppm
53469-21-9	Aroclor 1242	140 mg/m ³

- **PAC-3:**

110-54-3	n-hexane	8600** ppm
53469-21-9	Aroclor 1242	840 mg/m ³

7 Handling and storage

- **Handling:**
- **Precautions for safe handling**
Ensure good ventilation/exhaustion at the workplace.
Open and handle receptacle with care.
Prevent formation of aerosols.
- **Information about protection against explosions and fires:**
Keep ignition sources away - Do not smoke.
Protect against electrostatic charges.
Keep respiratory protective device available.
- **Conditions for safe storage, including any incompatibilities**
- **Storage:**
- **Requirements to be met by storerooms and receptacles:** Store in a cool location.
- **Information about storage in one common storage facility:** Not required.
- **Further information about storage conditions:**
Keep receptacle tightly sealed.
Store in cool, dry conditions in well sealed receptacles.
- **Specific end use(s)** No further relevant information available.

8 Exposure controls/personal protection

- **Additional information about design of technical systems:** No further data; see item 7.
- **Control parameters**

- **Components with limit values that require monitoring at the workplace:**

110-54-3 n-hexane		
PEL	Long-term value: 1800 mg/m ³ , 500 ppm	
REL	Long-term value: 180 mg/m ³ , 50 ppm	
TLV	Long-term value: 176 mg/m ³ , 50 ppm	
	Skin; BEI	

- **Ingredients with biological limit values:**

110-54-3 n-hexane		
BEI	0.4 mg/L	
	Medium: urine	
	Time: end of shift at end of workweek	
	Parameter: 2,5-Hexanedione without hydrolysis	

- **Additional information:** The lists that were valid during the creation were used as basis.
- **Exposure controls**
- **Personal protective equipment:**
- **General protective and hygienic measures:**
Keep away from foodstuffs, beverages and feed.
Immediately remove all soiled and contaminated clothing.
Wash hands before breaks and at the end of work.
Store protective clothing separately.
- **Respiratory protection:**
In case of brief exposure or low pollution use respiratory filter device. In case of intensive or longer exposure use respiratory protective device that is independent of circulating air.

(Contd. on page 4)

Safety Data Sheet
acc. to OSHA HCS

Printing date 01/17/2019

Reviewed on 01/17/2019

Product Name: Aroclor 1242

(Contd. of page 3)

Protection of hands:

Protective gloves

The glove material has to be impermeable and resistant to the product/ the substance/ the preparation.

Due to missing tests no recommendation to the glove material can be given for the product/ the preparation/ the chemical mixture.

Selection of the glove material on consideration of the penetration times, rates of diffusion and the degradation

Material of gloves

The selection of the suitable gloves does not only depend on the material, but also on further marks of quality and varies from manufacturer to manufacturer. As the product is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application.

Penetration time of glove material

The exact break through time has to be found out by the manufacturer of the protective gloves and has to be observed.

Eye protection:

Tightly sealed goggles

9 Physical and chemical properties

Information on basic physical and chemical properties**General Information****Appearance:**

Form:	Liquid
Color:	Colorless
Odor:	Characteristic
Odour Threshold:	Not applicable.

pH-value: Not applicable.

Change in condition

Melting point/Melting range:	Undetermined.
Boiling point/Boiling range:	69 °C (156.2 °F)

Flash point: < 0 °C (<32 °F)

Flammability (solid, gaseous): Not applicable.

Ignition temperature: 240 °C (464 °F)

Decomposition temperature: Not applicable.

Auto igniting: Product is not selfigniting.

Danger of explosion: Product is not explosive. However, formation of explosive air/vapor mixtures are possible.

Explosion limits:

Lower:	1.2 Vol %
Upper:	7.4 Vol %

Vapor pressure at 20 °C (68 °F): 160 hPa (120 mm Hg)

Density at 20 °C (68 °F) 0.66 g/cm³ (5.5077 lbs/gal)

Relative density Not applicable.

Vapor density Not applicable.

Evaporation rate Not applicable.

Solubility in / Miscibility with

Water: Not miscible or difficult to mix.

Partition coefficient (n-octanol/water): Not applicable.

Viscosity:

Dynamic:	Not applicable.
Kinematic:	Not applicable.

Solvent content:

Organic solvents:	100.0 %
VOC content:	99.98 %

Solids content: 0.0 %

(Contd. on page 5)

Safety Data Sheet acc. to OSHA HCS

Printing date 01/17/2019

Reviewed on 01/17/2019

Product Name: Aroclor 1242

(Contd. of page 4)

· **Other information** No further relevant information available.

10 Stability and reactivity

- **Reactivity** No further relevant information available.
- **Chemical stability**
- **Thermal decomposition / conditions to be avoided:** No decomposition if used according to specifications.
- **Possibility of hazardous reactions** No dangerous reactions known.
- **Conditions to avoid** No further relevant information available.
- **Incompatible materials:** No further relevant information available.
- **Hazardous decomposition products:** No dangerous decomposition products known.

11 Toxicological information

- **Information on toxicological effects**
- **Acute toxicity:**
- **Primary irritant effect:**
- **on the skin:** Irritant to skin and mucous membranes.
- **on the eye:** No irritating effect.
- **Sensitization:** No sensitizing effects known.
- **Additional toxicological information:**
The product shows the following dangers according to internally approved calculation methods for preparations:
Irritant
Product is suspected to cause damage to fertility.
Product is suspected to cause birth defects.

- **Carcinogenic categories**

- **IARC (International Agency for Research on Cancer)**

53469-21-9 Aroclor 1242

2A

- **NTP (National Toxicology Program)**

None of the ingredients is listed.

- **OSHA-Ca (Occupational Safety & Health Administration)**

None of the ingredients is listed.

12 Ecological information

- **Toxicity**
- **Aquatic toxicity:** No further relevant information available.
- **Persistence and degradability** No further relevant information available.
- **Behavior in environmental systems:**
- **Bioaccumulative potential** No further relevant information available.
- **Mobility in soil** No further relevant information available.
- **Additional ecological information:**
- **General notes:**
Water hazard class 2 (Self-assessment): hazardous for water
Do not allow product to reach ground water, water course or sewage system.
Danger to drinking water if even small quantities leak into the ground.
- **Results of PBT and vPvB assessment**
- **PBT:** Not applicable.
- **vPvB:** Not applicable.
- **Other adverse effects** No further relevant information available.

13 Disposal considerations

- **Waste treatment methods**
- **Recommendation:** Must not be disposed of together with household garbage. Do not allow product to reach sewage system.
- **Uncleaned packagings:**
- **Recommendation:** Disposal must be made according to official regulations.

US

(Contd. on page 6)

Safety Data Sheet
acc. to OSHA HCS





Printing date 01/17/2019

Reviewed on 01/17/2019

Product Name: Aroclor 1242

(Contd. of page 5)

14 Transport information

<ul style="list-style-type: none"> · UN-Number · DOT, ADR, IMDG, IATA 	UN1208
<ul style="list-style-type: none"> · UN proper shipping name · DOT · ADR · IMDG · IATA 	Hexanes 1208 Hexanes, ENVIRONMENTALLY HAZARDOUS HEXANES, MARINE POLLUTANT HEXANES
<ul style="list-style-type: none"> · Transport hazard class(es) · DOT 	
<ul style="list-style-type: none"> · Class · Label 	3 Flammable liquids 3
<ul style="list-style-type: none"> · ADR, IMDG 	 
<ul style="list-style-type: none"> · Class · Label 	3 Flammable liquids 3
<ul style="list-style-type: none"> · IATA 	
<ul style="list-style-type: none"> · Class · Label 	3 Flammable liquids 3
<ul style="list-style-type: none"> · Packing group · DOT, ADR, IMDG, IATA 	II
<ul style="list-style-type: none"> · Environmental hazards: · Marine pollutant: · Special marking (ADR): 	Product contains environmentally hazardous substances: n-hexane Symbol (fish and tree) Symbol (fish and tree)
<ul style="list-style-type: none"> · Special precautions for user · Danger code (Kemler): · EMS Number: · Stowage Category 	Warning: Flammable liquids 33 F-E,S-D E
<ul style="list-style-type: none"> · Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code 	Not applicable.
<ul style="list-style-type: none"> · Transport/Additional information: 	
<ul style="list-style-type: none"> · ADR · Excepted quantities (EQ) 	Code: E2 Maximum net quantity per inner packaging: 30 ml Maximum net quantity per outer packaging: 500 ml
<ul style="list-style-type: none"> · IMDG · Limited quantities (LQ) · Excepted quantities (EQ) 	1L Code: E2 Maximum net quantity per inner packaging: 30 ml Maximum net quantity per outer packaging: 500 ml
<ul style="list-style-type: none"> · UN "Model Regulation": 	UN 1208 HEXANES, 3, II, ENVIRONMENTALLY HAZARDOUS

US

(Contd. on page 7)

Safety Data Sheet acc. to OSHA HCS

Printing date 01/17/2019

Reviewed on 01/17/2019

Product Name: Aroclor 1242

(Contd. of page 6)

15 Regulatory information

- Safety, health and environmental regulations/legislation specific for the substance or mixture
- Sara

· Section 313 (Specific toxic chemical listings):

110-54-3 n-hexane

· TSCA (Toxic Substances Control Act):

110-54-3 n-hexane

· Proposition 65

· Chemicals known to cause cancer:

None of the ingredients is listed.

· Chemicals known to cause reproductive toxicity for females:

None of the ingredients is listed.

· Chemicals known to cause reproductive toxicity for males:

110-54-3 n-hexane

· Chemicals known to cause developmental toxicity:

None of the ingredients is listed.

· Carcinogenic categories

· EPA (Environmental Protection Agency)

110-54-3 n-hexane

II

53469-21-9 Aroclor 1242

B2

· TLV (Threshold Limit Value established by ACGIH)

None of the ingredients is listed.

· NIOSH-Ca (National Institute for Occupational Safety and Health)

53469-21-9 Aroclor 1242

· GHS label elements The product is classified and labeled according to the Globally Harmonized System (GHS).

· Hazard pictograms



GHS02



GHS07



GHS08

· Signal word Danger

· Hazard-determining components of labeling:

n-hexane

· Hazard statements

H225 Highly flammable liquid and vapor.

H315 Causes skin irritation.

H361 Suspected of damaging fertility or the unborn child.

H336 May cause drowsiness or dizziness.

H373 May cause damage to organs through prolonged or repeated exposure.

H304 May be fatal if swallowed and enters airways.

· Precautionary statements

If medical advice is needed, have product container or label at hand.

Keep out of reach of children.

Read label before use.

If swallowed: Immediately call a poison center/doctor.

Specific treatment (see on this label).

Do NOT induce vomiting.

If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.

Take off contaminated clothing and wash it before reuse.

Store locked up.

Dispose of contents/container in accordance with local/regional/national/international regulations.

· Chemical safety assessment: A Chemical Safety Assessment has not been carried out.

16 Other information

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

· Department issuing SDS: product safety department

(Contd. on page 8)

US

Safety Data Sheet
acc. to OSHA HCS

Printing date 01/17/2019

Reviewed on 01/17/2019

Product Name: Aroclor 1242

(Contd. of page 7)

· Contact:

SPEX CertiPrep, LLC.
1-732-549-7144

· Date of preparation / last revision 01/17/2019 / -**· Abbreviations and acronyms:**

ADR: Accord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning the International Carriage of Dangerous Goods by Road)

IMDG: International Maritime Code for Dangerous Goods

DOT: US Department of Transportation

IATA: International Air Transport Association

ACGIH: American Conference of Governmental Industrial Hygienists

EINECS: European Inventory of Existing Commercial Chemical Substances

ELINCS: European List of Notified Chemical Substances

CAS: Chemical Abstracts Service (division of the American Chemical Society)

NFPA: National Fire Protection Association (USA)

HMIS: Hazardous Materials Identification System (USA)

VOC: Volatile Organic Compounds (USA, EU)

PBT: Persistent, Bioaccumulative and Toxic

vPvB: very Persistent and very Bioaccumulative

NIOSH: National Institute for Occupational Safety

OSHA: Occupational Safety & Health

TLV: Threshold Limit Value

PEL: Permissible Exposure Limit

REL: Recommended Exposure Limit

BEI: Biological Exposure Limit

Flam. Liq. 2: Flammable liquids – Category 2

Skin Irrit. 2: Skin corrosion/irritation – Category 2

Repr. 2: Reproductive toxicity – Category 2

STOT SE 3: Specific target organ toxicity (single exposure) – Category 3

STOT RE 2: Specific target organ toxicity (repeated exposure) – Category 2

Asp. Tox. 1: Aspiration hazard – Category 1

US

SAFETY DATA SHEET

Version 5.2
Revision Date 02/27/2015
Print Date 05/01/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Aroclor 1254

Product Number : 48586
Brand : Supelco
Index-No. : 602-039-00-4

CAS-No. : 11097-69-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 4), H302
Specific target organ toxicity - repeated exposure (Category 2), H373
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H302 Harmful if swallowed.
H373 May cause damage to organs through prolonged or repeated exposure.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P260 Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264 Wash skin thoroughly after handling.
P270 Do not eat, drink or smoke when using this product.
P273 Avoid release to the environment.
P301 + P312 + P330 IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell. Rinse mouth.

P314 Get medical advice/ attention if you feel unwell.
P391 Collect spillage.
P501 Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

CAS-No. : 11097-69-1
Index-No. : 602-039-00-4

Hazardous components

Component	Classification	Concentration
Aroclor 1254		
	Acute Tox. 4; STOT RE 2; Aquatic Acute 1; Aquatic Chronic 1; H302, H373, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Nature of decomposition products not known.

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Non Combustible Liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Aroclor 1254	11097-69-1	TWA	0.5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	Skin designation		
		TWA	0.500000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation		
		TWA	0.5 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Liver damage Chloracne Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		
		TWA	0.500000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Liver damage Chloracne Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		
		TWA	0.5 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		Skin notation		
		TWA	0.001000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|-------------------|
| a) Appearance | Form: liquid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | No data available |
| f) Initial boiling point and boiling range | No data available |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | No data available |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition | No data available |

temperature

- r) Viscosity No data available
- s) Explosive properties No data available
- t) Oxidizing properties No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 1,010 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

Rat

Liver

Unscheduled DNA synthesis

Rat

Liver

DNA damage

Mouse

fibroblast

Morphological transformation.

Rat

Morphological transformation.

Rat
DNA damage

Rat
DNA damage

Carcinogenicity

Carcinogenicity - Rat - Oral
Tumorigenic: Equivocal tumorigenic agent by RTECS criteria. Gastrointestinal: Tumors.

Carcinogenicity - Rat - Oral
Tumorigenic: Carcinogenic by RTECS criteria. Liver: Tumors.

Carcinogenicity - Mouse - Skin
Tumorigenic: Equivocal tumorigenic agent by RTECS criteria. Skin and Appendages: Other: Tumors.
Tumorigenic: Tumors at site of application.

Carcinogenicity - Rat - Oral
Tumorigenic: Equivocal tumorigenic agent by RTECS criteria. Gastrointestinal: Tumors.

Carcinogenicity - Mouse - Oral
Tumorigenic: Neoplastic by RTECS criteria. Liver: Tumors.

Carcinogenicity - Mouse - Intraperitoneal
Tumorigenic: Equivocal tumorigenic agent by RTECS criteria. Tumorigenic Effects: Uterine tumors. Lungs, Thorax, or Respiration: Tumors.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

Reproductive toxicity - Rabbit - Oral
Effects on Fertility: Post-implantation mortality (e.g., dead and/or resorbed implants per total number of implants).
Effects on Fertility: Abortion. Effects on Embryo or Fetus: Fetal death.

Reproductive toxicity - Rabbit - Oral
Effects on Newborn: Biochemical and metabolic.

Reproductive toxicity - Rat - Oral
Effects on Newborn: Biochemical and metabolic.

Reproductive toxicity - Rat - Oral
Effects on Newborn: Behavioral.

Reproductive toxicity - Rat - Oral
Effects on Newborn: Delayed effects.

Reproductive toxicity - Rat - Intraperitoneal
Maternal Effects: Other effects. Effects on Newborn: Biochemical and metabolic.

Reproductive toxicity - Mouse - Oral
Effects on Newborn: Behavioral.

Reproductive toxicity - Mammal - Oral
Effects on Fertility: Female fertility index (e.g., # females pregnant per # sperm positive females; # females pregnant per # females mated).

No data available

Developmental Toxicity - Rat - Oral

Specific Developmental Abnormalities: Hepatobiliary system.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

May cause damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

Additional Information

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - *Oncorhynchus mykiss* (rainbow trout) - 0.22 µg/l - 96.0 h

Toxicity to algae LC50 - Algae - 0.015 mg/l - 28 h

12.2 Persistence and degradability

12.3 Bioaccumulative potential

Bioaccumulation *Pimephales promelas* (fathead minnow) - 8 Months
- 1.8 µg/l

Bioconcentration factor (BCF): 238,000

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2315 Class: 9 Packing group: II
Proper shipping name: Polychlorinated biphenyls, liquid
Reportable Quantity (RQ): 1 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 2315 Class: 9 Packing group: II EMS-No: F-A, S-A

Proper shipping name: POLYCHLORINATED BIPHENYLS, LIQUID
Marine pollutant: yes
IATA
UN number: 2315 Class: 9 Packing group: II
Proper shipping name: Polychlorinated biphenyls, liquid

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Aroclor 1254	11097-69-1	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Aroclor 1254	11097-69-1	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Aroclor 1254	11097-69-1	1993-04-24

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Aroclor 1254	11097-69-1	1990-06-30

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

	CAS-No.	Revision Date
Aroclor 1254	11097-69-1	1990-06-30

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H302	Harmful if swallowed.
H373	May cause damage to organs through prolonged or repeated exposure.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
STOT RE	Specific target organ toxicity - repeated exposure

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	1
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.2

Revision Date: 02/27/2015

Print Date: 05/01/2016

SAFETY DATA SHEET

Version 5.3
Revision Date 06/25/2015
Print Date 05/11/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : AROCLOR 1260

Product Number : CRM48736

Brand : Supelco

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Carcinogenicity (Category 1B), H350

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H350 : May cause cancer.

Precautionary statement(s)

P201 : Obtain special instructions before use.

P202 : Do not handle until all safety precautions have been read and understood.

P280 : Wear protective gloves/ protective clothing/ eye protection/ face protection.

P308 + P313 : IF exposed or concerned: Get medical advice/ attention.

P405 : Store locked up.

P501 : Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.2 Mixtures

Hazardous components

Component		Classification	Concentration
Distillates (petroleum), hydrotreated middle			
CAS-No.	64742-46-7	Carc. 1B; H350	>= 90 - <= 100 %
EC-No.	265-148-2		
Index-No.	649-221-00-X		
Baseoil - unspecified			
CAS-No.	64742-53-6	Carc. 1B; H350	>= 30 - < 50 %
EC-No.	265-156-6		
Index-No.	649-466-00-2		
2,6-di-tert-Butyl-p-cresol			
CAS-No.	128-37-0	Aquatic Acute 1; Aquatic Chronic 1; H410	>= 0.1 - < 1 %
EC-No.	204-881-4		

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Nature of decomposition products not known.

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Distillates (petroleum), hydrotreated middle	64742-46-7	TWA	500.000000 ppm 2,000.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	The value in mg/m3 is approximate.		

		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5 mg/m3	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	5 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10 mg/m3	USA. NIOSH Recommended Exposure Limits
Baseoil - unspecified	64742-53-6	TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Not classifiable as a human carcinogen		
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	No data available
f) Initial boiling point and boiling range	No data available
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (2,6-di-tert-Butyl-p-cresol)

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Distillates (petroleum), hydrotreated middle)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Nerves. - (Aroclor 1260)

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

Not dangerous goods

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Chronic Health Hazard

Massachusetts Right To Know Components

Distillates (petroleum), hydrotreated middle
Baseoil - unspecified

CAS-No.	Revision Date
64742-46-7	1989-08-11
64742-53-6	1993-04-24

Pennsylvania Right To Know Components

Distillates (petroleum), hydrotreated middle
Baseoil - unspecified

CAS-No.	Revision Date
64742-46-7	1989-08-11
64742-53-6	1993-04-24

New Jersey Right To Know Components

Distillates (petroleum), hydrotreated middle
Baseoil - unspecified

CAS-No.	Revision Date
64742-46-7	1989-08-11
64742-53-6	1993-04-24

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

Aroclor 1260

Distillates (petroleum), hydrotreated middle

CAS-No.	Revision Date
11096-82-5	2008-08-01

64742-46-7	2013-12-20
------------	------------

WARNING: This product contains a chemical known to the

CAS-No.	Revision Date
---------	---------------

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H350	May cause cancer.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.3

Revision Date: 06/25/2015

Print Date: 05/11/2016



**Material Safety
Data Sheets**

Division of Facilities Services

**DOD Hazardous Material Information (ANSI Format)
For Cornell University Convenience Only**

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Section 1 - Product and Company Identification	Section 9 - Physical & Chemical Properties
Section 2 - Composition/Information on Ingredients	Section 10 - Stability & Reactivity Data
Section 3 - Hazards Identification Including Emergency Overview	Section 11 - Toxicological Information
Section 4 - First Aid Measures	Section 12 - Ecological Information
Section 5 - Fire Fighting Measures	Section 13 - Disposal Considerations
Section 6 - Accidental Release Measures	Section 14 - MSDS Transport Information
Section 7 - Handling and Storage	Section 15 - Regulatory Information
Section 8 - Exposure Controls & Personal Protection	Section 16 - Other Information

The information in this document is compiled from information maintained by the United States Department of Defense (DOD). Anyone using this information is solely responsible for the accuracy and applicability of this information to a particular use or situation.

Cornell University does not in any way warrant or imply the applicability, viability or use of this information to any person or for use in any situation.

Section 1 - Product and Company Identification
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Product Identification: ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Date of MSDS: 08/01/1997 **Technical Review Date:** 09/01/1999

FSC: 6810 **NIIN:** LIIN: 00N092040

Submitter: N NF

Status Code: A

MFN: 01

Article: N

Kit Part: N

Manufacturer's Information

Manufacturer's Name: UNITED MINERAL & CHEMICAL CORP
Manufacturer's Address1: 1100 VALLEYBROOK AVE
Manufacturer's Address2: LYNDHURST, NJ 07071
Manufacturer's Country: US
General Information Telephone: 201-507-3300
Emergency Telephone: (800)424-9300
Emergency Telephone: (800)424-9300
Chemtec Telephone: (800)424-9300
Proprietary: N
Reviewed: Y
Published: Y
CAGE: 87730

Contractor Information

Contractor's Name: UNITED MINERAL & CHEMICAL CORP
Contractor's Address1: 1100 VALLEYBROOK AVE
Contractor's Address2: LYNDHURST, NJ 07071
Contractor's Telephone: 201-507-3300
Contractor's CAGE: 87730

Section 2 - Compositon/Information on Ingredients

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Ingredient Name: ARSENIC; (ARSENIC METAL)
Ingredient CAS Number: 7440-38-2 **Ingredient CAS Code:** T
RTECS Number: CG0525000 **RTECS Code:** T
=WT: 100. **=WT Code:** M
=Volume: **=Volume Code:**
>WT: **>WT Code:**
>Volume: **>Volume Code:**
<WT: **<WT Code:**
<Volume: **<Volume Code:**
% Low WT: **% Low WT Code:**
% High WT: **% High WT Code:**
% Low Volume: **% Low Volume Code:**
% High Volume: **% High Volume Code:**
% Text:
% Enviromental Weight:
Other REC Limits: N/P
OSHA PEL: N/P **OSHA PEL Code:**
OSHA STEL: N/P **OSHA STEL Code:**
ACGIH TLV: 0.01 MG/M3 **ACGIH TLV Code:** T
ACGIH STEL: NOT ESTABLISHED **ACGIH STEL Code:** T
EPA Reporting Quantity: 1 LB
DOT Reporting Quantity: 1 LB
Ozone Depleting Chemical: N

Section 3 - Hazards Identification, Including Emergency Overview

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Health Hazards Acute & Chronic: ARSENIC METAL IS NOT AS READILY AVAIL IN THE BODY AS ARSENIC IN THE FORM OF DUST OR VAP OR WHEN PROCESSED INTO ARSENIC CMPDS (ARSENICALS). INORGANIC ARSENICALS ARE MORE TOXIC THAN ORGANIC ARSENICALS. ACUTE EFTS: ARSENIC IS POISON BY SUBCUTANEOUS, INTRAMUSCULAR & INTRAPERITONEAL ROUTES. ACUTE ARSENIC POISONING FROM INGEST RSLTS IN MARKED IRRIT OF STOMACH & INTESTINES W/NAUS, VOMIT & DIARR. IN SEV C ASES STOOLS & VOMIT ARE BLOODY & PATIENT MAY GO INTO COLLAPSE & SHOCK W/WEAK, RAPID PULSE, COLD SWEATS, COMA & DEATH. INHAL MAY CAUSE ULCERATION OF NASAL SEPTUM, RESP IRRIT. SKIN/EYE CNTCT MAY CAUSE DERM, SKIN & EYE (EFTS OF OVEREXP)

Signs & Symptoms of Overexposure:

HLTH HAZS: IRRIT. CHRONIC EFTS: ARSENIC IS CONFIRMED HUMAN CARCIN PRODUCING LIVER TUMORS & AN EXPERIMENTAL TERATOGEN (MAY CAUSE DMG TO DEVELOPING FETUS). CHRONIC ARSENIC POISONING MAY INCL ANY/ALL OF FOLLOWING: DIGEST SYS DISTURBS, LOSS OF APPETITE, CRAMPS, NAUS, CONSTIP, DIARR; LIVER DMG WHICH MAY RSLT IN JAUN; DISTURBS OF BLOOD, KIDNEYS & NERVOUS SYS; SKIN ABNORMS INCL ITCHING, PIGMENTATION & POS S CANCEROUS CHGS. TARGET ORGANS FOR INORGANIC CMPDS AS AS): LIVER, KIDNEYS, SKIN, LUNGS, LYMPHATIC SYS. TLV: 0.01 MG/M3 TWA ARSENIC, ELEMENTAL & INORGANIC CMPDS (EXCEPT ARSINE), AS AS. OSHA PEL: (SUPD AT)

Medical Conditions Aggravated by Exposure:

KNOWN EFFECTS ON OTHER ILLNESSES: GASTROINTESTINAL. NERVOUS SYSTEM. SKIN. LIVER & KIDNEY PROBLEMS. AFTER EXPOSURE HAVE URINE TEST.

LD50 LC50 Mixture: LD50: (ORAL, RAT) 763 MG/M3

Route of Entry Indicators:

Inhalation: YES

Skin: YES

Ingestion: YES

Carcinogenicity Indicators

NTP: YES

IARC: YES

OSHA: YES

Carcinogenicity Explanation: ARSENIC: IARC MONOGRAPHS, SUPPLEMENT, VOL 7, PG 100, 1987: GROUP 1. NTP 8TH ANNUAL REPORT ON CARCINOGENS, 1998: KNOWN TO BE CARCINOGEN. OSHA REGULATED: CFR 29 1910.1018.

Section 4 - First Aid Measures

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

First Aid:

SKIN: FLUSH WITH SOAP AND WATER. AVOID RUBBING INTO SKIN. CONTACT MD IMMEDIATELY. EYES: FLUSH WITH WATER FOR AT LEAST 15 MINUTES. CONTACT PHYSICIAN IMMEDIATELY. INHALATION: REMOVE TO FRESH AIR. PROVIDE OXYGEN IF NECESSARY. CONTACT PHYSICIAN IMMEDIATELY. INGESTION: TREATMENT WITH BAS(DIMERCAPTOL) IS OF QUESTIONABLE EFFECTIVENESS IN TRIVALENT ARSENIC COMPOUNDS. INDUCE VOMITING AND DO GASTRIC LAVAGE. GET PERSONNEL TO HOSPITAL IMMEDIATELY. A PHYSICIAN CAN INITIATE AN EXCHANGE TRANSFUSION AND DIALYSIS. ALSO ABSORPTION AND REMOVAL WITH ANIMAL BONE COAL OR $\text{Fe}(\text{OH})_2$ SHOULD BE DONE.

Section 5 - Fire Fighting Measures

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Fire Fighting Procedures:

USE NIOSH APPRVD SCBA & FULL PROT EQUIP (FP N). RESTRICT PERS NOT WEARING PROT EQUIP FROM AREA. TRY TO SNUFF FIRE W/SAND, DRY MEDIA, FOAM OR CO*2. IF NO OTHER OPTIONS AVAILABLE, USE WATER & ALWAYS WEA R NIOSH APPRVD SCBA OR NIOSH TOXIC VAPOR RESP. POISONOUS GASES ARE PRODUCED IN FIRE, INCLUDING ARSENIC OXIDES.

Unusual Fire or Explosion Hazard:

ARSENIC, WHEN HEATED OR IN CONTACT W/ACID OR ACID FUMES, CAN PRODUCE HIGHLY TOXIC FUMES. ARSENIC REACTS VIGOROUSLY W/OXIDIZING MATLS. ARSENIC IS FLAMMABLE IN FORM OF DUST WHEN EXPOSED TO HEAT OR FLAME OR BY CHEMICAL RXN W/POWERFUL OXIDIZERS. SLIGHT EXPLOSION HAZ EXISTS IN FORM OF DUST WHEN EXPOSED TO (ECOLOGICAL INFO)

Extinguishing Media:

FOAM, CARBON DIOXIDE, DRY CHEMICAL.

Flash Point: Flash Point Text: NONE

Autoignition Temperature:

Autoignition Temperature Text: N/K

Lower Limit(s): N/A

Upper Limit(s): N/A

Section 6 - Accidental Release Measures

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Spill Release Procedures:

RESTRICT PERSONS NOT WEARING PROTECTIVE EQUIPMENT FROM AREA UNTIL CLEANUP IS COMPLETE. WEARING NIOSH APPROVED RESPIRATOR, GLOVES, GOGGLES, LAB COAT, GATHER UP CHUNKS, RODS OR GRANULES WITH VACUUM OR U TENSILS RESERVED FOR POISONOUS SOLIDS. AVOID RAISING DUST. VENTILATE THE AREA AFTER CLEANUP IS COMPLETE.

Section 7 - Handling and Storage

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Handling and Storage Precautions:**Other Precautions:**

Section 8 - Exposure Controls & Personal Protection

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Respiratory Protection:

NIOSH APPROVED, AIR PURIFYING, TOXIC VAPOR RESPIRATOR TO PARTICULATE AND FUME AIR LEVEL. FOR INORGANIC ARSENIC APPLICATIONS, SEE 29 CFR 1910.1018 FOR PROPER RESPIRATOR SELECTION.

Ventilation:

LOC EXHST/MECH (GEN) SCRUBBER OR TRAP IF POSS TO MAINTAIN EXPOS TO LESS THAN PERMISSIBLE LIMITS FOR ELEMENTAL ARSENIC & ANY CMPDS BEING GENERATED.

Protective Gloves:

NEOPRENE OR PLASTIC.

Eye Protection: ANSI APPROVED CHEMICAL WORKERS GOGGLES (FP N).**Other Protective Equipment:** ANSI APPROVED EYE WASH AND DELUGE SHOWER (FP N). LAB COAT.**Work Hygenic Practices:** N/P**Supplemental Health & Safety Information:** EFTS OF OVEREXP: 0.01 MG/M3 AS AS & INORGANIC CMPDS; 0.5 AS AS ORGANIC CMPDS. ACGIH TLV: 0.01 MG/M3 TWA ARSENIC, ELEMENTAL & INORGANIC CMPDS (EXCEPT ARSINE), AS AS. ALSO SEE TOXICOLOGICAL INFO. WASTE DISP METH: HAZ DEPENDING ON LEVEL OF TOX CHARACT OF ARSENIC. SEE 40 CFR 261.24 FOR DETERMINATION. (OTHER INFO)

Section 9 - Physical & Chemical Properties
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

HCC:**NRC/State License Number:****Net Property Weight for Ammo:****Boiling Point:** =612.C, 1133.6F **Boiling Point Text:** SUBLIMES**Melting/Freezing Point:** =814.C, #####F **Melting/Freezing Text:** @ 36 ATM. FP:N/A**Decomposition Point:** **Decomposition Text:** N/P**Vapor Pressure:** 1 MMHG @ 372C **Vapor Density:** N/A**Percent Volatile Organic Content:****Specific Gravity:** 5.727**Volatile Organic Content Pounds per Gallon:****pH:** NONE-0% IN H*2O**Volatile Organic Content Grams per Liter:****Viscosity:** N/P**Evaporation Weight and Reference:** N/A**Solubility in Water:** INSOLUBLE**Appearance and Odor:** SILVER GRAY CRYSTALLINE CHUNKS, RODS OR GRANULES; NO ODOR AS (ECOLOGICAL INFO)**Percent Volatiles by Volume:** N/A (BY WT)**Corrosion Rate:** N/P

Section 10 - Stability & Reactivity Data
ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Stability Indicator: YES**Materials to Avoid:**

INCOMPATIBLE W/BROMINE AZIDE, DIRUBIDIUM ACETYLIDE, HALOGENS, PALLADIUM ZINC, PLATINUM, NCL*3, AGNO*3, CRO*3, NA*2O*2, HEXAFLUOROISOPROPYLIDENEAMINO LITHIUM. CAN REACT W/ACIDS OR ACID FUMES & POWERFUL OXIDIZERS SUCH AS BROM

Stability Condition to Avoid:

AVOID OPEN CONTAINERS AND CONTACT WITH INCOMPATIBLE MATERIALS.

Hazardous Decomposition Products:

ARSENIC FUMES, ARSINE, OTHER ARSENIC COMPOUNDS.

Hazardous Polymerization Indicator: NO**Conditions to Avoid Polymerization:**

N/P

Section 11 - Toxicological Information

ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

Toxicological Information:

LD50: TDLO 605 ?G/KG. ORAL-MAN TDLO 7857 MG/KG/55Y SKIN. DERMAL IRRITATION-RABBIT: UNKNOWN; SUBCUTANEOUS IMPLANT RABBIT LTLO 75 MG/KG. EYE IRRITATION-RABBIT: UNKNOWN.

Section 12 - Ecological Information**ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

Ecological Information:

N/P. EXPLO HAZ: FLAME. IN EVENT OF A FIRE OR SPILL CONTACT THE STATE DEPARTMENT OF THE ENVIRONMENT & YOUR REGIONAL OFFICE OF THE FEDERAL EPA. PHYSICAL DATA - APPEAR/ODOR: METAL AS COMPOUND, ASH*3, HAS GARLIC ODOR. ODOR THRESHOLD: N/A. MATLS TO AVOID: CHLORATES, IODATES, PEROXIDES, LITHIUM, NACL*3, KMNO*3, RB*2C*2, AGNO*4, NOCL, IF*5, CRO*3, CLF*3, CLO, BRF*3, BRF*5, BRN*3, RBC*3BCH, CSC*3BCH.

Section 13 - Disposal Considerations**ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

Waste Disposal Methods:

SOLID WASTES SHOULD BE VITRIFIED, PLACED IN LABELED CNTNR & BURIED IN EPA SUPERVISED FACILITY. ETCHING SOLNS & CUTTING WASTES SHOULD BE PRECIPITATED, CEMENTED/VITRIFIED & PLACED IN METAL/PLASTIC LABEL ED CNTNRS & BURIED IN EPA SUPERVISED FACILITY. PASS GAS THRU POTASSIUM PERMANGANATE, PRECIPITATE & TREAT AS ABOVE. WASTE MAY BE CONSIDERED (SUPDAT)

Section 14 - MSDS Transport Information**ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

Transport Information:

DOT REGULATED: YES. RQ: (NA - PIECES ARE LARGER THAN 100 MICROMETERS IN DIAMETER). IF REGULATED, PROPER SHIPPING NAME: ARSENIC. HAZARD CLASS: (6.1). IDENTIFICATION NO: (UN1558). PACKING GROUP: (III). LABEL REQUIRED: (POISON). INLAND B/L: ARSENIC, 6.1, UN1558, PACKING GROUP II, POISON. EMERGENCY RESPONSE GUIDE NO: (152).

Section 15 - Regulatory Information**ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

SARA Title III Information:

SARA TITLE III, SECT 313: LISTED.

Federal Regulatory Information:

TSCA: WE CERTIFY THAT ALL COMPONENTS OF THIS PRODUCT ARE REGISTERED UNDER THE REGULATIONS OF THE TOXIC SUBSTANCES CONTROL ACT. HMIS: HEALTH (4); FLAMMABILITY (0); REACTIVITY (1).

State Regulatory Information:**Section 16 - Other Information****ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE**

Other Information:

WASTE DISP METH: HAZARDOUS DEPENDING ON LEVEL OF TOXICITY CHARACTERISTIC OF ARSENIC. SEE 40 CFR 261.24 FOR DETERMINATION. RCRA HAZARDOUS WASTE: YES RCRA @: D004; IF TESTED POSITIVE AS CHARACTER OF TOXICITY FOR ARSENIC. CERCLA: YES. RQ (1 LB RQ IS APPLICABLE ONLY IF DIAMETER OF PIECES OF SOLID METAL RELEASED IS LESS THAN 100 MICROMETERS OR 0.004 INCH. THIS PROD FORM IS LARGER THAN 100 MICROMETERS & HAS NO RQ IN ITS CURRENT FORM. IF AS HAZ WASTE CHARACTER OF ARSENIC, THEN RQ=1LB. FOLLOW ALL LOCAL, STATE AND FEDERAL INFO & REGULATIONS.

HAZCOM Label Information

Product Identification: ARSENIC METAL-MBE CHARGES, ARSENIC CHUNK & GRANULE

CAGE: 87730

Assigned Individual: N

Company Name: UNITED MINERAL & CHEMICAL CORP

Company PO Box:

Company Street Address1: 1100 VALLEYBROOK AVE

Company Street Address2: LYNDHURST, NJ 07071 US

Health Emergency Telephone: (800)424-9300

Label Required Indicator: Y

Date Label Reviewed: 09/01/1999

Status Code: A

Manufacturer's Label Number:

Date of Label:

Year Procured: N/K

Organization Code: F

Chronic Hazard Indicator: Y

Eye Protection Indicator: YES

Skin Protection Indicator: YES

Respiratory Protection Indicator: YES

Signal Word: DANGER

Health Hazard: Severe

Contact Hazard: Severe

Fire Hazard: None

Reactivity Hazard: Slight

8/9/2002 10:40:46 AM

MSDS # 84.00

Barium Metal



Section 1: Product and Company Identification

Barium Metal

Synonyms/General Names: Barium**Product Use:** For educational use only**Manufacturer:** Columbus Chemical Industries, Inc., Columbus, WI 53925.

24 Hour Emergency Information Telephone Numbers

CHEMTREC (USA): 800-424-9300**CANUTEC (Canada): 613-424-6666**

Scholar Chemistry; 5100 W. Henrietta Rd, Rochester, NY 14586; (866) 260-0501; www.Scholarchemistry.com

Section 2: Hazards Identification

Soft, silvery, lustrous metal immersed in heavy mineral oil; no odor.

HMIS (0 to 4)

Health	3
Fire Hazard	3
Reactivity	2

WARNING! Flammable solid, dangerous when wet, highly toxic by ingestion.

Flammable solid, keep away from all ignition sources. Contact with water produces flammable gas.

Target organs: Central nervous system, kidneys.

This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Section 3: Composition / Information on Ingredients

Barium Metal (7440-39-3), 100%

Section 4: First Aid Measures

*Always seek professional medical attention after first aid measures are provided.***Eyes:** Immediately flush eyes with excess water for 15 minutes, lifting lower and upper eyelids occasionally.**Skin:** Immediately flush skin with excess water for 15 minutes while removing contaminated clothing.**Ingestion:** Call Poison Control immediately. Rinse mouth with cold water. Give victim 1-2 tbsp of activated charcoal mixed with 8 oz water.**Inhalation:** Remove to fresh air. If not breathing, give artificial respiration.

Section 5: Fire Fighting Measures

Flammable solid. When heated to decomposition, emits acrid fumes and explosive hydrogen gas.

Protective equipment and precautions for firefighters: Do Not Use carbon dioxide, foam, water or halogenated extinguishing agents. Use class D extinguisher or smother with dry sand, dry clay, dry ground limestone or dry graphite. Firefighters should wear full fire fighting turn-out gear and respiratory protection (SCBA).
Material is not sensitive to mechanical impact or static discharge.

Section 6: Accidental Release Measures

Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all ignition sources and ventilate area. Sweep up spill and place material in a dry container for disposal. See Section 13 for disposal information.

Section 7: Handling and Storage

Red**Handling:** Use with adequate ventilation and do not breathe dust or vapor. Avoid contact with skin, eyes, or clothing. Wash hands thoroughly after handling.**Storage:** Store in Flammable Area [Red Storage] with other flammable materials and away from any strong oxidizers. Store in a dedicated flammables cabinet. Store in a cool, dry, well-ventilated, locked store room away from incompatible materials.

Section 8: Exposure Controls / Personal Protection

Use ventilation to keep airborne concentrations below exposure limits. Have approved eyewash facility, safety shower, and fire extinguishers readily available. Wear chemical splash goggles and chemical resistant clothing such as gloves and aprons. Wash hands thoroughly after handling material and before eating or drinking. Use NIOSH-approved respirator with a dust cartridge. Exposure guidelines: Barium compounds: OSHA PEL: 0.5 mg/m³ and ACGIH TLV: 0.5 mg/m³, STEL: N/A.

Section 9: Physical and Chemical Properties

Molecular formula	Ba.	Appearance	Silver metal in heavy mineral oil.
Molecular weight	137.33.	Odor	No odor.
Specific Gravity	3.62 g/mL @ 20°C..	Odor Threshold	N/A.
Vapor Density (air=1)	N/A.	Solubility	Reacts violently with water.
Melting Point	850°C.	Evaporation rate	N/A (<i>Butyl acetate</i> = 1).
Boiling Point/Range	1695°C.	Partition Coefficient	N/A (<i>log P_{OW}</i>).
Vapor Pressure (20°C)	N/A.	pH	N/A.
Flash Point:	N/A.	UEL	N/A.
Autoignition Temp.:	N/A.	LEL	N/A.

N/A = Not available or applicable

Section 10: Stability and Reactivity

Avoid heat and ignition sources

Stability: Stable under normal conditions of use.

Incompatibility: Water, acids, chlorine, iodine, bromine and oxidizing agents.

Shelf life: Indefinite if stored properly.

Section 11: Toxicology Information

Acute Symptoms/Signs of exposure: *Eyes:* Stinging pain, burns, watering of eyes, inflammation of eyelids and conjunctivitis. Avoid looking at burning magnesium. *Skin:* Irritation, redness, burns. Powdered metal ignites readily on skin causing burns. *Ingestion:* Nausea, vomiting and headache. *Inhalation:* Rapid irregular breathing, headache, burns to mucous membranes. Inhalation of dust or fumes causes metal fume fever.

Chronic Effects: Repeated/prolonged skin contact may cause dryness or rashes.

Sensitization: none expected

Barium: LD50 [oral, rat]; Not Available; LC50 [rat]; Not Available; LD50 Dermal [rabbit]; Not Available

Material has not been found to be a carcinogen nor produce genetic, reproductive, or developmental effects.

Section 12: Ecological Information

Ecotoxicity (aquatic and terrestrial): LC50 – 500mg/l – 96h – Cyprinodon variegatus.

Section 13: Disposal Considerations

Check with all applicable local, regional, and national laws and regulations. Local regulations may be more stringent than regional or national regulations. Use a licensed chemical waste disposal firm for proper disposal.

Section 14: Transport Information

DOT Shipping Name:	Barium.	Canada TDG:	Barium .
DOT Hazard Class:	4.3, pg II.	Hazard Class:	4.3, pg II.
Identification Number:	UN1400.	UN Number:	UN1400.

Section 15: Regulatory Information

EINECS: Listed (231-149.1) .

WHMIS Canada: B6:D2B: Reactive Flammable: Toxic Material.

TSCA: All components are listed or are exempt.

California Proposition 65: Not listed.

The product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

Section 16: Other Information

Current Issue Date: September 22, 2012

Disclaimer: Scholar Chemistry and Columbus Chemical Industries, Inc., ("S&C") believes that the information herein is factual but is not intended to be all inclusive. The information relates only to the specific material designated and does not relate to its use in combination with other materials or its use as to any particular process. Because safety standards and regulations are subject to change and because S&C has no continuing control over the material, those handling, storing or using the material should satisfy themselves that they have current information regarding the particular way the material is handled, stored or used and that the same is done in accordance with federal, state and local law. S&C makes no warranty, expressed or implied, including (without limitation) warranties with respect to the completeness or continuing accuracy of the information contained herein or with respect to fitness for any particular use.

SAFETY DATA SHEET

Benzene

Section 1. Identification

GHS product identifier	: Benzene
Chemical name	: benzene
Other means of identification	: benzene, purebenzol; cyclohexatriene; phenyl hydride; phene; coal naphtha; pyrobenzol
Product use	: Synthetic/Analytical chemistry.
Synonym	: benzene, purebenzol; cyclohexatriene; phenyl hydride; phene; coal naphtha; pyrobenzol
SDS #	: 001062
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253
Emergency telephone number (with hours of operation)	: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	: FLAMMABLE LIQUIDS - Category 2 SKIN CORROSION/IRRITATION - Category 2 SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2 GERM CELL MUTAGENICITY - Category 1B CARCINOGENICITY - Category 1 SPECIFIC TARGET ORGAN TOXICITY (REPEATED EXPOSURE) (bone marrow) - Category 1

GHS label elements

Hazard pictograms	: 
--------------------------	---

Signal word	: Danger
Hazard statements	: Highly flammable liquid and vapor. May form explosive mixtures with air. Causes serious eye irritation. Causes skin irritation. May cause genetic defects. May cause cancer. Causes damage to organs through prolonged or repeated exposure. (bone marrow)

Precautionary statements

General	: Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.
----------------	---

Section 2. Hazards identification

- Prevention** : Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Use personal protective equipment as required. Wear protective gloves. Wear eye or face protection. Keep away from heat, sparks, open flames and hot surfaces. - No smoking. Use explosion-proof electrical, ventilating, lighting and all material-handling equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Keep container tightly closed. Do not breathe vapor. Do not eat, drink or smoke when using this product. Wash hands thoroughly after handling.
- Response** : Get medical attention if you feel unwell. IF exposed or concerned: Get medical attention. IF SWALLOWED: Call a POISON CENTER or physician if you feel unwell. Rinse mouth. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water or shower. IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.
- Storage** : Store locked up. Store in a well-ventilated place. Keep cool.
- Disposal** : Dispose of contents and container in accordance with all local, regional, national and international regulations.
- Hazards not otherwise classified** : None known.

Section 3. Composition/information on ingredients

- Substance/mixture** : Substance
- Chemical name** : benzene
- Other means of identification** : benzene, purebenzol; cyclohexatriene; phenyl hydride; phene; coal naphtha; pyrobenzol

CAS number/other identifiers

- CAS number** : 71-43-2
- Product code** : 001062

Ingredient name	%	CAS number
benzene	100	71-43-2

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Section 4. First aid measures

- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Wash contaminated clothing thoroughly with water before removing it, or wear gloves. Continue to rinse for at least 10 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention. If necessary, call a poison center or physician. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

- Eye contact** : Causes serious eye irritation.
- Inhalation** : No known significant effects or critical hazards.
- Skin contact** : Causes skin irritation.
- Frostbite** : Try to warm up the frozen tissues and seek medical attention.
- Ingestion** : Harmful if swallowed. Irritating to mouth, throat and stomach.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media : Use dry chemical, CO₂, water spray (fog) or foam.

Unsuitable extinguishing media : Do not use water jet.

Specific hazards arising from the chemical : Highly flammable liquid and vapor. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. The vapor/gas is heavier than air and will spread along the ground. Vapors may accumulate in low or confined areas or travel a considerable distance to a source of ignition and flash back. Runoff to sewer may create fire or explosion hazard.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.

For emergency responders : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

Large spill : Stop leak if without risk. Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Take precautionary measures against electrostatic discharges. Empty containers retain product residue and can be hazardous. Do not reuse container.

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
benzene	<p>ACGIH TLV (United States, 3/2012). Absorbed through skin. STEL: 8 mg/m³ 15 minutes. STEL: 2.5 ppm 15 minutes. TWA: 1.6 mg/m³ 8 hours. TWA: 0.5 ppm 8 hours.</p> <p>NIOSH REL (United States, 1/2013). STEL: 1 ppm 15 minutes. TWA: 0.1 ppm 10 hours.</p> <p>OSHA PEL (United States, 6/2010). STEL: 5 ppm 15 minutes. TWA: 1 ppm 8 hours.</p> <p>OSHA PEL 1989 (United States, 3/1989). STEL: 5 ppm 15 minutes. TWA: 1 ppm 8 hours.</p> <p>OSHA PEL Z2 (United States, 11/2006). AMP: 50 ppm 10 minutes. CEIL: 25 ppm TWA: 10 ppm 8 hours.</p>

Section 8. Exposure controls/personal protection

Appropriate engineering controls	: Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.
Environmental exposure controls	: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.
<u>Individual protection measures</u>	
Hygiene measures	: Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
Eye/face protection	: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.
<u>Skin protection</u>	
Hand protection	: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
Body protection	: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product. When there is a risk of ignition from static electricity, wear anti-static protective clothing. For the greatest protection from static discharges, clothing should include anti-static overalls, boots and gloves.
Other skin protection	: Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
Respiratory protection	: Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

Physical state	: Liquid. [Watery liquid.]
Color	: Colorless. Yellowish.
Molecular weight	: 78.12 g/mole
Molecular formula	: C ₆ H ₆
Boiling/condensation point	: 80.09°C (176.2°F)
Melting/freezing point	: 5.49°C (41.9°F)
Critical temperature	: 288.95°C (552.1°F)
Odor	: Characteristic.
Odor threshold	: Not available.

Section 9. Physical and chemical properties

pH	: Not available.
Flash point	: Closed cup: -11°C (12.2°F)
Burning time	: Not applicable.
Burning rate	: Not applicable.
Evaporation rate	: 3.5 (butyl acetate = 1)
Flammability (solid, gas)	: Not available.
Lower and upper explosive (flammable) limits	: Lower: 1.2% Upper: 7.8%
Vapor pressure	: 10 kPa (75.006094245 mm Hg) [room temperature]
Vapor density	: 2.7 (Air = 1)
Specific Volume (ft³/lb)	: 1.1403
Gas Density (lb/ft³)	: 0.877 (20°C / 68 to °F)
Relative density	: 0.88
Solubility	: Not available.
Solubility in water	: 1.88 g/l
Partition coefficient: n-octanol/water	: 2.13
Auto-ignition temperature	: 498°C (928.4°F)
Decomposition temperature	: Not available.
SADT	: Not available.
Viscosity	: Dynamic (room temperature): 0.604 mPa·s (0.604 cP)

Section 10. Stability and reactivity

Reactivity	: No specific test data related to reactivity available for this product or its ingredients.
Chemical stability	: The product is stable.
Possibility of hazardous reactions	: Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid	: Avoid all possible sources of ignition (spark or flame). Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Do not allow vapor to accumulate in low or confined areas.
Incompatibility with various substances	: Highly reactive or incompatible with the following materials: oxidizing materials.
Hazardous decomposition products	: Under normal conditions of storage and use, hazardous decomposition products should not be produced.
Hazardous polymerization	: Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
benzene	LC50 Inhalation Gas. LD50 Oral	Rat Rat	10000 ppm 930 mg/kg	7 hours -

Irritation/Corrosion

Product/ingredient name	Result	Species	Score	Exposure	Observation
benzene	Eyes - Moderate irritant	Rabbit	-	88 milligrams	-
	Eyes - Severe irritant	Rabbit	-	24 hours 2 milligrams	-
	Skin - Mild irritant	Rat	-	8 hours 60 microliters	-
	Skin - Mild irritant	Rabbit	-	24 hours 15 milligrams	-
	Skin - Moderate irritant	Rabbit	-	24 hours 20 milligrams	-

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Classification

Product/ingredient name	OSHA	IARC	NTP
benzene	+	1	Known to be a human carcinogen.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Name	Category	Route of exposure	Target organs
benzene	Category 1	Not determined	bone marrow

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : Causes serious eye irritation.

Inhalation : No known significant effects or critical hazards.

Section 11. Toxicological information

- Skin contact** : Causes skin irritation.
- Ingestion** : Harmful if swallowed. Irritating to mouth, throat and stomach.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
pain or irritation
watering
redness
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
irritation
redness
- Ingestion** : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Long term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Potential chronic health effects

Not available.

- General** : Causes damage to organs through prolonged or repeated exposure.
- Carcinogenicity** : May cause cancer. Risk of cancer depends on duration and level of exposure.
- Mutagenicity** : May cause genetic defects.
- Teratogenicity** : No known significant effects or critical hazards.
- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Section 12. Ecological information

Product/ingredient name	LogP _{ow}	BCF	Potential
benzene	2.13	11	low

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.






Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapor from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

United States - RCRA Toxic hazardous waste "U" List

Ingredient	CAS #	Status	Reference number
Benzene (I,T)	71-43-2	Listed	U019

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1114	UN1114	UN114	UN1114	UN1114
UN proper shipping name	BENZENE	BENZENE	BENZENE	BENZENE	BENZENE
Transport hazard class(es)	3 	3 	3 	3 	3 
Packing group	II	II	II	II	II
Environment	No.	No.	No.	No.	No.
Additional information	Reportable quantity 10 lbs / 4.54 kg [1.3675 gal / 5.1767 L] Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements.	Explosive Limit and Limited Quantity Index 1 Passenger Carrying Road or Rail Index 5	-	-	Passenger and Cargo Aircraft Quantity limitation: 5 L Cargo Aircraft Only Quantity limitation: 60 L Limited Quantities - Passenger Aircraft Quantity limitation: 1 L

Section 14. Transport information

	<p>Limited quantity Yes.</p> <p>Packaging instruction Passenger aircraft Quantity limitation: 5 L</p> <p>Cargo aircraft Quantity limitation: 60 L</p> <p>Special provisions IB2, T4, TP1</p>				
--	---	--	--	--	--

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
United States inventory (TSCA 8b): This material is listed or exempted.
Clean Water Act (CWA) 307: benzene
Clean Water Act (CWA) 311: benzene

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Fire hazard
Immediate (acute) health hazard
Delayed (chronic) health hazard

Composition/information on ingredients

Section 15. Regulatory information

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
benzene	100	Yes.	No.	No.	Yes.	Yes.

SARA 313

	Product name	CAS number	%
Form R - Reporting requirements	benzene	71-43-2	100
Supplier notification	benzene	71-43-2	100

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

- Massachusetts** : This material is listed.
New York : This material is listed.
New Jersey : This material is listed.
Pennsylvania : This material is listed.

California Prop. 65

WARNING: This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

Ingredient name	Cancer	Reproductive	No significant risk level	Maximum acceptable dosage level
benzene	Yes.	Yes.	6.4 µg/day (ingestion) 13 µg/day (inhalation)	24 µg/day (ingestion) 49 µg/day (inhalation)

- Canada inventory** : This material is listed or exempted.

International regulations

- International lists** : **Australia inventory (AICS)**: This material is listed or exempted.
China inventory (IECSC): This material is listed or exempted.
Japan inventory: This material is listed or exempted.
Korea inventory: This material is listed or exempted.
Malaysia Inventory (EHS Register): Not determined.
New Zealand Inventory of Chemicals (NZIoC): This material is listed or exempted.
Philippines inventory (PICCS): This material is listed or exempted.
Taiwan inventory (CSNN): Not determined.

- Chemical Weapons Convention List Schedule I Chemicals** : Not listed

- Chemical Weapons Convention List Schedule II Chemicals** : Not listed

- Chemical Weapons Convention List Schedule III Chemicals** : Not listed

Canada

Section 15. Regulatory information

WHMIS (Canada) : Class B-2: Flammable liquid
 Class D-2A: Material causing other toxic effects (Very toxic).
 Class D-2B: Material causing other toxic effects (Toxic).
CEPA Toxic substances: This material is listed.
Canadian ARET: This material is not listed.
Canadian NPRI: This material is listed.
Alberta Designated Substances: This material is not listed.
Ontario Designated Substances: This material is not listed.
Quebec Designated Substances: This material is not listed.

Section 16. Other information

Canada Label requirements : Class B-2: Flammable liquid
 Class D-2A: Material causing other toxic effects (Very toxic).
 Class D-2B: Material causing other toxic effects (Toxic).

Hazardous Material Information System (U.S.A.)

Health	*	2
Flammability		3
Physical hazards		0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

History

Date of printing : 4/26/2015.
Date of issue/Date of revision : 4/26/2015.
Date of previous issue : 10/16/2014.
Version : 0.03

Section 16. Other information

Key to abbreviations

- : ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations
- ACGIH – American Conference of Governmental Industrial Hygienists
- AIHA – American Industrial Hygiene Association
- CAS – Chemical Abstract Services
- CEPA – Canadian Environmental Protection Act
- CERCLA – Comprehensive Environmental Response, Compensation, and Liability Act (EPA)
- CFR – United States Code of Federal Regulations
- CPR – Controlled Products Regulations
- DSL – Domestic Substances List
- GWP – Global Warming Potential
- IARC – International Agency for Research on Cancer
- ICAO – International Civil Aviation Organisation
- Inh – Inhalation
- LC – Lethal concentration
- LD – Lethal dosage
- NDSL – Non-Domestic Substances List
- NIOSH – National Institute for Occupational Safety and Health
- TDG – Canadian Transportation of Dangerous Goods Act and Regulations
- TLV – Threshold Limit Value
- TSCA – Toxic Substances Control Act
- WEEL – Workplace Environmental Exposure Level
- WHMIS – Canadian Workplace Hazardous Material Information System

References

- : Not available.

 Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SAFETY DATA SHEET

Based on Directive 2001/58/EC et seq. of the Commission of the European Communities

BENZO[b]FLUORANTHENE

1. Identification of the substance/preparation and of the company/undertaking

1.1 Identification of the substance or preparation:

Synonyms: benz[e]acephenanthrylene

CAS No.	: 205-99-2	BCR number	: BCR-47
EC index No.	: 601-034-00-4	NFPA code	: N.D.
EINECS No.	: 205-911-9	Molecular weight	: 252.32
RTECS No.	: CU1400000	Formula	: C ₂₀ H ₁₂

1.2 Use of the substance or the preparation:

Certified reference material for laboratory use only

1.3 Company/undertaking identification:

Institute for Reference Materials and Measurements
Retieseweg
B-2440 Geel
Tel. : +32 14 57 12 11
Fax : +32 14 58 42 73

1.4 Telephone number for emergency:

+32 70 245 245
Antigifcentrum
p/a Militair Hospitaal Koningin Astrid, Bruynstraat, B-1120 Brussel

2. Composition/information on ingredients

Hazardous ingredients	CAS No. EINECS No.	Conc. in %	Hazard symbol	Risks (R-phrases)
benzo[b]fluoranthene	205-99-2 205-911-9	100	T;N	45-50/53 (1)

(1) For R-phrases in full: see heading 16

3. Hazards identification

- May cause cancer
- Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

4. First aid measures

4.1 Eye contact:

- Consult a doctor/medical service if irritation persists
- Rinse immediately with water
- Do not apply neutralizing agents

4.2 Skin contact:

- Consult a doctor/medical service if irritation persists
- Wash with water and soap
- Remove clothing before washing
- Do not apply (chemical) neutralizing agents

4.3 After inhalation:

- Consult a doctor/medical service if breathing problems develop
- Remove the victim into fresh air
- Unconscious: maintain adequate airway and respiration

4.4 After ingestion:

- Consult a doctor/medical service if you feel unwell

Printing date : 07-2002
Compiled by : Brandweerinformatiecentrum voor Gevaarlijke Stoffen vzw (BIG)
Technische Schoolstraat 43 A, B-2440 Geel
☎ +32 14 58 45 47 <http://www.big.be> E-mail: info@big.be

1 / 8

MSDS established :
Reference number : BIG\18244GB
Reason for revision : Directive 2001/58/EC

Revision date : 28-02-2002
Revision number : 001

BENZO[b]FLUORANTHENE

- Immediately give lots of water to drink
- Never give water to an unconscious person
- Do not induce vomiting

BENZO[b]FLUORANTHENE

5. Fire-fighting measures

- 5.1 Suitable extinguishing media:**
- Water spray
 - Polymer foam
 - ABC powder
 - Carbon dioxide
- 5.2 Unsuitable extinguishing media:**
- Solid water jet ineffective as extinguishing medium
- 5.3 Special exposure hazards:**
- Not easily combustible
 - Upon combustion CO and CO₂ are formed
- 5.4 Instructions:**
- Take account of toxic firefighting water
 - Use firefighting water moderately and contain it
- 5.5 Special protective equipment for firefighters:**
- Heat/fire exposure: compressed air/oxygen apparatus
 - Dust cloud production: compressed air/oxygen apparatus

6. Accidental release measures

- 6.1 Personal protection/precautions:** see 8.1/8.3/10.3
- 6.2 Environmental precautions:**
- Prevent soil and water pollution
 - Substance must not be discharged into the sewer
 - Dam up the solid spill
- 6.3 Methods for cleaning up:**
- Stop dust cloud by covering with sand/earth
 - Carefully collect the spill/leftovers
 - Scoop solid spill into closing containers
 - Take collected spill to manufacturer/competent authority
 - Clean contaminated surfaces with an excess of water
 - Wash clothing and equipment after handling

7. Handling and storage

- 7.1 Handling:**
- Observe strict hygiene
 - Avoid prolonged and repeated contact with skin
 - Avoid raising dust
 - Do not discharge the waste into the drain
 - Clean contaminated clothing
- 7.2 Storage:**
- Keep container tightly closed.
 - Store in a cool area
 - Store in a dry area
 - Store in a dark area
 - Keep away from: heat sources, ignition sources, oxidizing agents, acids

Storage temperature : N.D. °C
Quantity limits : N.D. kg
Storage life : N.D.
Materials for packaging : N.D.

- 7.3 Specific uses:** N.D.

BENZO[b]FLUORANTHENE

8. Exposure controls/Personal protection

8.1 Exposure limit values:

TLV-TWA : not listed
TLV-STEL : not listed
TLV-Ceiling : not listed

OES-LTEL : not listed
OES-STEL : not listed
MEL-LTEL : not listed
MEL-STEL : not listed

MAK : not listed
TRK : not listed

MAC-TGG 8 h : not listed
MAC-TGG 15 min. : not listed
MAC-Ceiling : not listed

VME-8 h : not listed
VLE-15 min. : not listed

GWBB-8 h : not listed
GWK-15 min. : not listed
Momentary value : not listed

Sampling methods:

- Benzo(b)fluoranthene (Polynuclear aromatic hydrocarbons) NIOSH 5515
- Benzo(b)fluoranthene (Polynuclear aromatic hydrocarbons) NIOSH 5506

8.2 Exposure controls:

8.2.1 Occupational exposure controls:

- Measure the concentration in the air regularly
- Work under local exhaust/ventilation

8.2.2 Environmental exposure controls: see 13

8.3 Personal protection:

8.3.1 respiratory protection:

- Dust production: dust mask with filter type P3
- High dust production: compressed air/oxygen apparatus

8.3.2 hand protection:

- Gloves
- Suitable materials: No data available
- Breakthrough time: N.D.

8.3.3 eye protection:

- Safety glasses
- In case of dust production: protective goggles

8.3.4 skin protection:

- Protective clothing
- In case of dust production: head/neck protection
- Suitable materials: No data available

BENZO[b]FLUORANTHENE

9. Physical and chemical properties

9.1 General information:

Appearance (at 20°C)	: Crystalline solid / Needles
Odour	: Odourless
Colour	: Colourless to off-white

9.2 Important health, safety and environmental information:

pH value	: N.D.	
Boiling point/boiling range	: N.D.	°C
Flashpoint	: N.D.	°C
Explosion limits	: N.D.	vol% (°C)
Vapour pressure (at 20°C)	: 0.00000067	hPa
Vapour pressure (at 50°C)	: N.D.	hPa
Relative density (at 20°C)	: N.D.	
Water solubility	: 0.00000012	g/100 ml
Soluble in	: Acetone, oils/fats	
Relative vapour density	: N.D.	
Viscosity	: N.D.	Pa.s
Partition coefficient n-octanol/water	: 6.57	
Evaporation rate		
ratio butyl acetate	: N.D.	
ratio ether	: N.D.	

9.3 Other information:

Melting point/melting range	: 168	°C
Auto-ignition point	: N.D.	°C
Saturation concentration	: N.D.	g/m ³

10. Stability and reactivity

10.1 Conditions to avoid/reactivity:

- Stable under normal conditions

10.2 Materials to avoid:

- Keep away from: heat sources, ignition sources, oxidizing agents, acids

10.3 Hazardous decomposition products:

- Upon combustion CO and CO₂ are formed
- Reacts violently with (strong) oxidizers
- Decomposes on exposure to (strong) acids

BENZO[b]FLUORANTHENE

11. Toxicological information

11.1 Acute toxicity:

LD50 oral rat	: N.D.	mg/kg
LD50 dermal rat	: N.D.	mg/kg
LD50 dermal rabbit	: N.D.	mg/kg
LC50 inhalation rat	: N.D.	mg/l/4 h
LC50 inhalation rat	: N.D.	ppm/4 h

11.2 Chronic toxicity:

benzo[b]fluoranthene

EC carc. cat.	: 2
EC muta. cat.	: not listed
EC repr. cat.	: not listed
Carcinogenicity (TLV)	: A2
Carcinogenicity (MAC)	: K
Carcinogenicity (VME)	: not listed
Carcinogenicity (GWBB)	: not listed
Carcinogenicity (MAK)	: 2
Mutagenicity (MAK)	: not listed
Teratogenicity (MAK)	: -
IARC classification	: 2B

11.3 Routes of exposure: ingestion, inhalation, eyes and skin
Caution! Substance is absorbed through the skin

11.4 Acute effects/symptoms:

- AFTER SKIN CONTACT
Slight irritation

11.5 Chronic effects:

- Probably human carcinogenic
- Not classified as toxic to reproduction (EC)
- ON CONTINUOUS/REPEATED EXPOSURE/CONTACT:
No specific information available
- SIMILAR PRODUCTS CAUSE FOLLOWING SYMPTOMS:
Feeling of weakness
Cracking of the skin
Skin rash/inflammation
Photoallergy
Skin cancer
Lung tissue affection/degeneration
Enlargement/affection of the liver
Affection of the renal tissue

BENZO[b]FLUORANTHENE

12. Ecological information

12.1 Ecotoxicity:

- - No data available

12.2 Mobility:

- Volatile organic compounds (VOC): 0%
- Photolysis in water
- Forming sediments in water
- Insoluble in water

For other physicochemical properties see heading 9.

12.3 Persistence and degradability:

- | | | | |
|-----------------------------------|---|--------------------------------------|--------|
| - biodegradation BOD ₅ | : | N.D. | % ThOD |
| - water | : | - Not readily biodegradable in water | |
| | | - test: E 1/2 > 100 d. | |
| - soil | : | T 1/2: > 87 | days |

12.4 Bioaccumulative potential:

- log P_{ow} : 6.57
- BCF : 168 h : 2800 (LAMELLIBRANCHIATA)
- Highly bioaccumulative

12.5 Other adverse effects:

- WGK : 3 (Classification based on the R-phrases in compliance with Verwaltungsvorschrift wassergefährdender Stoffe (VwVwS) of 17 May 1999)
- Effect on the ozone layer : Not dangerous for the ozone layer (Council Regulation (EC) No 3093/94, O.J. L333 of 22/12/94)
- Greenhouse effect : no data available
- Effect on waste water purification : no data available

13. Disposal considerations

13.1 Provisions relating to waste:

- Waste material code (91/689/EEC, Council Decision 201/118/EC, O.J. L47 of 16/2/2001): 16 05 06 (laboratory chemicals, consisting of or containing dangerous substances, including mixtures of laboratory)
- Waste material code (Flanders): 001, 045, 691
- Waste code (Germany): 59302
- Hazardous waste (91/689/EEC)

13.2 Disposal methods:

- Dissolve or mix with a combustible solvent
- Remove to an authorized incinerator equipped with an afterburner and a flue gas scrubber
- Do not discharge into surface water (2000/60/EEC, Council Decision 2455/2001/EC, O.J. L331 of 15/12/2001)

13.3 Packaging/Container:

- Waste material code packaging (91/689/EEC, Council Decision 2001/118/EC, O.J. L47 of 16/2/2001): 15 01 10 (packaging containing residues of or contaminated by dangerous substances)

BENZO[b]FLUORANTHENE

14. Transport information

90

3077

14.1 Classification of the substance in compliance with UN Recommendations

UN number	: 3077
CLASS	: 9
SUB RISKS	: -
PACKING	: III
PROPER SHIPPING NAME	: UN 3077, Environmentally hazardous substance, solid, n.o.s. (benz[e]acephenanthrylene)

14.2 ADR (transport by road)

CLASS	: 9
PACKING	: III
DANGER LABEL TANKS	: 9
DANGER LABEL PACKAGES	: 9

14.3 RID (transport by rail)

CLASS	: 9
PACKING	: III
DANGER LABEL TANKS	: 9
DANGER LABEL PACKAGES	: 9

14.4 ADNR (transport by inland waterways)

CLASS	: 9
PACKING	: III
DANGER LABEL TANKS	: 9
DANGER LABEL PACKAGES	: 9

14.5 IMDG (maritime transport)

CLASS	: 9
SUB RISKS	: -
PACKING	: III
MFAG	: -
EMS	: -
MARINE POLLUTANT	: P

14.6 ICAO (air transport)

CLASS	: 9
SUB RISKS	: -
PACKING	: III
PACKING INSTRUCTIONS PASSENGER AIRCRAFT	:
PACKING INSTRUCTIONS CARGO AIRCRAFT	:

14.7 Special precautions in connection with transport : none

When substances and their packaging meet the conditions established by ADR/RID/ADNR in chapter 3.4, **only** the following prescriptions shall be complied with:
each package shall display a diamond-shaped figure with the following inscription:
- 'UN 3077'
or, in the case of different goods with different identification numbers within a single package:
- the letters 'LQ'

BENZO[b]FLUORANTHENE

15. Regulatory information

Enumerated in substance list Annex I of directive 67/548/EEC et sequens



Toxic



Dangerous for the environment

- R45 : May cause cancer
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment
- S53 : Avoid exposure - obtain special instructions before use
S45 : In case of accident or if you feel unwell, seek medical advice (show the label where possible)
S60 : This material and/or its container must be disposed of as hazardous waste
S61 : Avoid release to the environment. Refer to special instructions/safety data sheets.

16. Other information

The information provided on this MSDS is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

N.A. = NOT APPLICABLE
N.D. = NOT DETERMINED
* = INTERNAL CLASSIFICATION

Full text of any R-phrases referred to under heading 2:

- R45 : May cause cancer
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

Exposure limits:

TLV : Threshold Limit Value - ACGIH USA 2000
OES : Occupational Exposure Standards - United Kingdom 1999
MEL : Maximum Exposure Limits - United Kingdom 1999
MAK : Maximale Arbeitsplatzkonzentrationen - Germany 2001
TRK : Technische Richtkonzentrationen - Germany 2001
MAC : Maximale aanvaarde concentratie - The Netherlands 2002
VME : Valeurs limites de Moyenne d'Exposition - France 1999
VLE : Valeurs limites d'Exposition à court terme - France 1999
GWBB : Grenswaarde beroepsmatige blootstelling - Belgium 1998
GWK : Grenswaarde kortstondige blootstelling - Belgium 1998
EC : Indicative occupational exposure limit values - directive 2000/39/EC

Chronic toxicity:

K : List of the carcinogenic substances and processes - The Netherlands 2002

BCR-048R: benzo[k]fluoranthene

1. Identification of the substance/preparation and of the company/undertaking

1.1 Identification of the substance or preparation:

Product name: BCR-048R: benzo[k]fluoranthene
CAS number 207-08-9
EC index number 601-036-00-5
EINECS number 205-916-6
RTECS number DF6350000
Molecular mass 252.32 g/mol
Formula C20H12

1.2 Use of the substance/preparation:

Certified reference material for laboratory use only

1.3 Company/undertaking identification:

Institute for Reference Materials and Measurements
Retieseweg
B-2440 Geel
Tel: +32 14 57 12 11
Fax: +32 14 59 04 06
JRC-IRMM-RM-Sales@ec.europa.eu

1.4 Emergency telephone:

Poison Centre: +32 70 245 245

2. Hazards identification

NFPA: 1-1-2(*)

DSD/DPD

May cause cancer
Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

Other hazards

Its dust is explosive with air
Dust cloud can be ignited by a spark
Slightly irritant to skin
Slightly irritant to eyes
Caution! Substance is absorbed through the skin
No certainty about human mutagenic properties
Highly bioaccumulative
Not readily biodegradable in water

CLP

Carc. 1B May cause cancer. (H350)
Aquatic Acute 1 Very toxic to aquatic life. (H400)
Aquatic Chronic 1 Very toxic to aquatic life with long lasting effects. (H410)

Other hazards

Its dust is explosive with air
Dust cloud can be ignited by a spark
Slightly irritant to skin
Slightly irritant to eyes
Caution! Substance is absorbed through the skin
No certainty about human mutagenic properties
Highly bioaccumulative
Not readily biodegradable in water

BCR-048R: benzo[k]fluoranthene

3. Composition/information on ingredients

Name	CAS No EINECS/ELINCS	Conc.	Classification according to DSD/DPD	Classification according to CLP	Note
benzo[k]fluoranthene	207-08-9 205-916-6		Carc. Cat. 2; R45 N; R50-53	Carc. 1B; H350 Aquatic Acute 1; H400 Aquatic Chronic 1; H410	

4. First aid measures

4.1 After inhalation:

Remove the victim into fresh air
Respiratory problems: consult a doctor/medical service

4.2 Skin contact:

Rinse with water
Do not apply (chemical) neutralizing agents
Take victim to a doctor if irritation persists

4.3 Eye contact:

Rinse with water
Do not apply neutralizing agents
Take victim to an ophthalmologist if irritation persists

4.4 After ingestion:

Rinse mouth with water
Immediately after ingestion: give lots of water to drink
Do not induce vomiting
Consult a doctor/medical service if you feel unwell

5. Fire-fighting measures

5.1 Suitable extinguishing media:

Water spray
Polyvalent foam
ABC powder
Carbon dioxide

5.2 Unsuitable extinguishing media:

No unsuitable extinguishing media known

5.3 Special exposure hazards:

Heating increases the fire hazard
Dust cloud can be ignited by a spark
Upon combustion CO and CO₂ are formed

5.4 Instructions:

Take account of toxic fire-fighting water
Use water moderately and if possible collect or contain it

5.5 Special protective equipment for fire-fighters:

Gloves
Protective clothing
Heat/fire exposure: compressed air/oxygen apparatus

6. Accidental release measures

6.1 Personal precautions:

See heading 8.2

6.2 Environmental precautions:

Dam up the solid spill
Prevent soil and water pollution
Prevent spreading in sewers

BCR-048R: benzo[k]fluoranthene

See heading 13

6.3 Methods for cleaning up:

- Scoop solid spill into closing containers
- Carefully collect the spill/leftovers
- Clean contaminated surfaces with an excess of water
- Take collected spill to manufacturer/competent authority
- Wash clothing and equipment after handling

7. Handling and storage

7.1 Handling:

- Avoid raising dust
- Warning! Avoid exposure
- Keep away from naked flames/heat
- Obtain special instructions before use
- Observe strict hygiene
- Keep container tightly closed
- Do not discharge the waste into the drain

7.2 Storage:

Safe storage requirements:

- Store in a cool area
- Store in a dry area
- Keep container in a well-ventilated place
- Keep locked up
- Unauthorized persons are not admitted
- Meet the legal requirements

Keep away from:

- oxidizing agents
- (strong) acids

7.3 Specific use(s):

See information supplied by the manufacturer for the identified use(s)

8. Exposure controls/Personal protection

8.1 Exposure limit values:

8.1.1 Occupational exposure:

If limit values are applicable and available these will be listed below.

8.1.2 Sampling methods:

Product name	Test	Number	Sampling method	Remarks
Benz(a)Anthracene	OSHA	CSI		
Benz(a)Anthracene (Polynuclear aromatic hydrocarbons)	NIOSH	5506	adsorption tubes	
Benz(a)Anthracene (Polynuclear aromatic hydrocarbons)	NIOSH	5515	adsorption tubes	

8.2 Exposure controls:

8.2.1 Occupational exposure controls:

- Measure the concentration in the air regularly
- Carry operations in the open/under local exhaust/ventilation or with respiratory protection
- Personal protective equipment:

a) Respiratory protection:

Dust production: dust mask with filter type P3

b) Hand protection:

Gloves

c) Eye protection:

Safety glasses

In case of dust production: protective goggles

d) Skin protection:

Protective clothing

8.2.2 Environmental exposure controls:

BCR-048R: benzo[k]fluoranthene

See headings 6.2, 6.3 and 13

9. Physical and chemical properties

9.1 General information:

Physical form	Crystalline solid
	Needles
Colour	Light yellow

9.2 Important health, safety and environmental information:

Boiling point	480 °C
Vapour pressure (20°C)	< 0.00001 hPa
Solubility in water	< 0.00001 g/100 ml
Solubility in solvents	Soluble in ethanol
	Soluble in acetic acid
	Soluble in oils/fats
Log Pow	6.84

9.3 Other information:

Melting point	217 °C
---------------	--------

10. Stability and reactivity

10.1 Conditions to avoid:

Possible fire hazard

heat sources
ignition sources

Stability

No data available

Reactions

Reacts violently with (strong) oxidizers

10.2 Materials to avoid:

oxidizing agents
(strong) acids

10.3 Hazardous decomposition products:

Upon combustion CO and CO₂ are formed

11. Toxicological information

11.1 Acute toxicity:

No (test) data available.

11.2 Chronic toxicity:

Probably human carcinogenic
No certainty about human mutagenic properties
Not classified as toxic to reproduction (EC)

BCR-048R: benzo[k]fluoranthene

EC carc cat	2
Listed in SZW - List of carcinogenic substances	yes
IARC - classification	2B
MAK - Krebserzeugend Kategorie	2
MAK - Keimzellmutagen Kategorie	3B
MAK - Schwangerschaft Gruppe	-
CLP carc cat	category 1B

11.3 Acute effects/symptoms:

Inhalation:

No data available

Skin contact:

Revision number: 0200

Product number: 49287

Reference number: BCR-048R

4 / 8

BCR-048R: benzo[k]fluoranthene

Slight irritation

Eye contact:

Slight irritation

Ingestion:

No data available

11.4 Chronic effects:

ON CONTINUOUS/REPEATED EXPOSURE/CONTACT:

No specific information available

SIMILAR PRODUCTS CAUSE FOLLOWING SYMPTOMS:

Feeling of weakness

Cracking of the skin

Skin rash/inflammation

Photoallergy

Skin cancer

Lung tissue affection/degeneration

Enlargement/affection of the liver

Affection of the renal tissue

12. Ecological information

12.1 Ecotoxicity:

No (test) data available.

12.2 Mobility:

Volatile organic compounds (VOC)

Solubility in/reaction with water

Water physicochemical processes

Soil physicochemical processes

0 %

Insoluble in water

Forming sediments in water

Adsorbs into the soil

12.3 Persistence and degradability:

Water abiotic degradation processes

Half-life soil

Not readily biodegradable in water

Ozonation in water

65 - 1400 days

12.4 Bioaccumulative potential:

Log Pow

Highly bioaccumulative

6.84

12.5 Results of PBT assessment:

Not applicable, based on available data

12.6 Other adverse effects:

Not dangerous for the ozone layer (Council Regulation (EC) no 1005/2009)

13. Disposal considerations

13.1 Provisions relating to waste:

Waste material code (Directive 2008/98/EC, decision 2001/118/EC)

16 05 06* : laboratory chemicals, consisting of or containing dangerous substances, including mixtures of laboratory chemicals

Depending on branch of industry and production process, also other EURAL codes may be applicable

Hazardous waste according to Directive 2008/98/EC

13.2 Disposal methods:

Dissolve or mix with a combustible solvent

Remove to an authorized incinerator equipped with an afterburner and a flue gas scrubber with energy recovery

Remove waste in accordance with local and/or national regulations

Do not discharge into surface water (2000/60/EC, Council decision 2455/2001/EC, O.J. L331 of 15/12/2001)

13.3 Packaging/Container:

Waste material code packaging (Directive 2008/98/EC)

15 01 10* : packaging containing residues of or contaminated by dangerous substances

{13.4 Entsorgung verschmutzter Gebinde:}

BCR-048R: benzo[k]fluoranthene

14. Transport information

ADR

Proper shipping name	Environmentally hazardous substance, solid, n.o.s.
Techn./chem. name ADR	benzo[k]fluoranthene
UN number	3077
Class	9
Packing group	III
Hazard identification number	90
Classification code	M7
Labels	9
Environmentally hazardous substance mark	yes

RID

Proper shipping name	Environmentally hazardous substance, solid, n.o.s.
Techn./chem. name RID	benzo[k]fluoranthene
UN number	3077
Class	9
Packing group	III
Classification code	M7
Labels	9
Environmentally hazardous substance mark	yes

ADNR

Proper shipping name	Environmentally hazardous substance, solid, n.o.s.
Techn./chem. name ADNR	benzo[k]fluoranthene
UN number	3077
Class	9
Packing group	III
Classification code	M7
Labels	9
Environmentally hazardous substance mark	yes

IMO

Proper shipping name	Environmentally hazardous substance, solid, n.o.s.
Techn./chem. name IMO	benzo[k]fluoranthene
UN number	3077
Class	9
Packing group	III
Labels	9
Marine pollutant	P
Environmentally hazardous substance mark	yes

ICAO

Proper shipping name	Environmentally hazardous substance, solid, n.o.s.
Techn./chem. name ICAO	benzo[k]fluoranthene
UN number	3077
Class	9
Packing group	III
Labels	9
Environmentally hazardous substance mark	yes

15. Regulatory information

15.1 EU Legislation:

BCR-048R: benzo[k]fluoranthene

DSD/DPD

Enumerated in substance list Annex I of directive 67/548/EEC et sequens



Dangerous for the environment

R-phrases

45	May cause cancer
50/53	Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

S-phrases

53	Avoid exposure - obtain special instructions before use
45	In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible)
60	This material and its container must be disposed of as hazardous waste
61	Avoid release to the environment. Refer to special instructions/safety data sheets.

Additional recommendations

	Restricted to professional users.
--	-----------------------------------

CLP

Classification and labelling according to Regulation (EC) No 1272/2008 – Annex VI and after evaluation of available test data



Signal word

Dgr	Danger
-----	--------

H-statements

H350	May cause cancer.
H410	Very toxic to aquatic life with long lasting effects.

P-statements

P202	Do not handle until all safety precautions have been read and understood.
P281	Use personal protective equipment as required.
P273	Avoid release to the environment.
P308 + P313	IF exposed or concerned: Get medical advice/attention.
P391	Collect spillage.
P405	Store locked up.

Supplemental information

	Restricted to professional users.
--	-----------------------------------

15.2 National provisions:

15.3 Specific community rules:

Enumerated in Annex XVII of Regulation (EC) No. 1907/2006: Restrictions on the manufacture, placing on the market and use of certain dangerous substances, mixtures and articles.

Legislation

EG/552/2009

EG/552/2009

Reference legislation

See column 1: 28.

See column 1: 50. g)

16. Other information

BCR-048R: benzo[k]fluoranthene

The information in this safety data sheet is based on data and samples provided to BIG. The sheet was written to the best of our ability and according to the state of knowledge at that time. The safety data sheet only constitutes a guideline for the safe handling, use, consumption, storage, transport and disposal of the substances/preparations/mixtures mentioned under point 1. New safety data sheets are written from time to time. Only the most recent versions may be used. Old versions must be destroyed. Unless indicated otherwise word for word on the safety data sheet, the information does not apply to substances/preparations/mixtures in purer form, mixed with other substances or in processes. The safety data sheet offers no quality specification for the substances/preparations/mixtures in question.

Compliance with the instructions in this safety data sheet does not release the user from the obligation to take all measures dictated by common sense, regulations and recommendations or which are necessary and/or useful based on the real applicable circumstances. BIG does not guarantee the accuracy or exhaustiveness of the information provided. Use of this safety data sheet is subject to the licence and liability limiting conditions as stated in your BIG licence agreement. All intellectual property rights to this sheet are the property of BIG and its distribution and reproduction are limited. Consult your BIG licence agreement for details.

(*) = INTERNAL CLASSIFICATION (NFPA)

PBT-substances = persistent, bioaccumulative and toxic substances

DSD Dangerous Substance Directive
DPD Dangerous Preparation Directive
CLP (EU-GHS) Classification, labelling and packaging (Globally Harmonised System in Europe)

Full text of any R-phrases referred to under headings 2 and 3:

R45	May cause cancer
R50/53	Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

Full text of any H-statements referred to under headings 2 and 3:

H350	May cause cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

Full text of any classes referred to under headings 2 and 3:

Aquatic Acute	Hazardous to the aquatic environment - acute
Aquatic Chronic	Hazardous to the aquatic environment - chronic
Carc.	Carcinogenicity

SAFETY DATA SHEET

Based on Directive 2001/58/EC et seq. of the Commission of the European Communities

BENZ[a]ANTHRACENE

1. Identification of the substance/preparation and of the company/undertaking

1.1 Identification of the substance or preparation:

Synonyms: benzo(a)anthracene

CAS No.	: 56-55-3	BCR number	: BCR-271
EC index No.	: 601-033-00-9	NFPA code	: N.D.
EINECS No.	: 200-280-6	Molecular weight	: 228.30
RTECS No.	: CV9275000	Formula	: C18H12

1.2 Use of the substance or the preparation:

Certified reference material for laboratory use only

1.3 Company/undertaking identification:

Institute for Reference Materials and Measurements
Retieseweg
B-2440 Geel
Tel. : +32 14 57 12 11
Fax : +32 14 58 42 73

1.4 Telephone number for emergency:

+32 70 245 245
Antigifcentrum
p/a Militair Hospitaal Koningin Astrid, Bruynstraat, B-1120 Brussel

2. Composition/information on ingredients

Hazardous ingredients	CAS No. EINECS No.	Conc. in %	Hazard symbol	Risks (R-phrases)
Benzo[a]anthracene	56-55-3 200-280-6	100	T;N	45-50/53 (1)

(1) For R-phrases in full: see heading 16

3. Hazards identification

- May cause cancer
- Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

4. First aid measures

4.1 Eye contact:

- Consult a doctor/medical service if irritation persists
- Rinse immediately with water

4.2 Skin contact:

- Consult a doctor/medical service if irritation persists
- Wash with water and soap
- Remove clothing before washing

4.3 After inhalation:

- Consult a doctor/medical service if breathing problems develop
- Remove the victim into fresh air
- Unconscious: maintain adequate airway and respiration

4.4 After ingestion:

- Consult a doctor/medical service if you feel unwell
- Immediately give lots of water to drink
- Never give water to an unconscious person

Printing date : 07-2002
Compiled by : Brandweerinformatiecentrum voor Gevaarlijke Stoffen vzw (BIG)
Technische Schoolstraat 43 A, B-2440 Geel
☎ +32 14 58 45 47 <http://www.big.be> E-mail: info@big.be

1 / 8

MSDS established :
Reference number : BIG\18241GB
Reason for revision : Directive 2001/58/EC
Revision date : 28-03-2002
Revision number : 001

BENZ[a]ANTHRACENE

BENZ[a]ANTHRACENE

5. Fire-fighting measures

5.1 Suitable extinguishing media:

- Water spray
- Alcohol foam
- Polymer foam
- ABC powder
- Carbon dioxide

5.2 Unsuitable extinguishing media:

- Solid water jet ineffective as extinguishing medium

5.3 Special exposure hazards:

- Not easily combustible
- Upon combustion CO and CO₂ are formed

5.4 Instructions:

- Take account of toxic firefighting water
- Use firefighting water moderately and contain it

5.5 Special protective equipment for firefighters:

- Heat/fire exposure: compressed air/oxygen apparatus
- Dust cloud production: compressed air/oxygen apparatus

6. Accidental release measures

6.1 Personal protection/precautions: see heading 8.1/8.3/10.3

6.2 Environmental precautions:

- Prevent soil and water pollution
- Substance must not be discharged into the sewer
- Dam up the solid spill

6.3 Methods for cleaning up:

- Stop dust cloud by covering with sand/earth
- Carefully collect the spill/leftovers
- Scoop solid spill into closing containers
- Take collected spill to manufacturer/competent authority
- Clean contaminated surfaces with an excess of water
- Wash clothing and equipment after handling

7. Handling and storage

7.1 Handling:

- Observe strict hygiene
- Avoid prolonged and repeated contact with skin
- Avoid raising dust
- Do not discharge the waste into the drain
- Remove contaminated clothing immediately

7.2 Storage:

- Keep container tightly closed. Store in a cool area. Store in a dry area.
- Store in a dark area.
- Keep away from: heat sources, ignition sources, oxidizing agents, acids

Storage temperature	: N.D.	°C
Quantity limits	: N.D.	kg
Storage life	: N.D.	
Materials for packaging	:	
- suitable	:no data available	
- to avoid	:no data available	

7.3 Specific uses:

See information supplied by the manufacturer

BENZ[a]ANTHRACENE

8. Exposure controls/Personal protection

8.1 Exposure limit values:

TLV-TWA	:	mg/m ³	-	ppm
TLV-STEL	:	mg/m ³	-	ppm
TLV-Ceiling	:	mg/m ³		ppm
OES-LTEL	:	mg/m ³		ppm
OES-STEL	:	mg/m ³		ppm
MAK	:	mg/m ³		ppm
TRK	:	mg/m ³		ppm
MAC-TGG 8 h	:	mg/m ³		
MAC-TGG 15 min.	:	mg/m ³		
MAC-Ceiling	:	mg/m ³		
VME-8 h	:	mg/m ³		ppm
VLE-15 min.	:	mg/m ³		ppm
GWBB-8 h	:	mg/m ³		ppm
GWK-15 min.	:	mg/m ³		ppm
Momentary value	:	mg/m ³		ppm
EC	:	mg/m ³		ppm
EC-STEL	:	mg/m ³		ppm

Sampling methods:

- | | |
|---|------------|
| - Benz(a)Anthracene (Polynuclear aromatic hydrocarbons) | NIOSH 5506 |
| - Benz(a)Anthracene (Polynuclear aromatic hydrocarbons) | NIOSH 5515 |
| - Benz(a)Anthracene | OSHA CSI |

8.2 Exposure controls:

8.2.1 Occupational exposure controls:

- Measure the concentration in the air regularly
- Work under local exhaust/ventilation

8.2.2 Environmental exposure controls: see heading 13

8.3 Personal protection:

8.3.1 respiratory protection:

- Dust production: dust mask with filter type P3
- High dust production: compressed air/oxygen apparatus

8.3.2 hand protection:

- Gloves
- Suitable materials: No data available
- Breakthrough time: N.D.

8.3.3 eye protection:

- Safety glasses
- In case of dust production: protective goggles

8.3.4 skin protection:

- Protective clothing
- In case of dust production: head/neck protection
- Suitable materials: No data available

BENZ[a]ANTHRACENE

9. Physical and chemical properties

9.1 General information:

Appearance (at 20°C)	: Crystalline solid / Scales
Odour	: Odourless
Colour	: Colourless to fluorescent yellow-green

9.2 Important health, safety and environmental information:

pH value	: N.D.	
Boiling point/boiling range	: N.A.	°C
Flashpoint	: N.D.	°C
Explosion limits	: N.D.	vol% (°C)
Vapour pressure (at 20°C)	: 0.00007	hPa
Vapour pressure (at 50°C)	: N.D.	hPa
Relative density (at 20°C)	: 1.3	
Water solubility	: 0.00001	g/100 ml
Soluble in	: Ether, acetone, oils/fats	
Relative vapour density	: N.D.	
Viscosity	: N.D.	Pa.s
Partition coefficient n-octanol/water	: 5.61/5.79	
Evaporation rate		
ratio to butyl acetate	: N.D.	
ratio to ether	: N.D.	

9.3 Other information:

Melting point/melting range	: 160	°C
Auto-ignition point	: N.D.	°C
Saturation concentration	: N.D.	g/m ³

10. Stability and reactivity

10.1 Conditions to avoid/reactivity:

- Stable under normal conditions

10.2 Materials to avoid:

- Keep away from: heat sources, ignition sources, oxidizing agents, acids

10.3 Hazardous decomposition products:

- Upon combustion CO and CO₂ are formed
- Reacts violently with (strong) oxidizers
- Decomposes on exposure to (strong) acids

11. Toxicological information

11.1 Acute toxicity:

LD50 oral rat	: N.D.	mg/kg
LD50 dermal rat	: N.D.	mg/kg
LD50 dermal rabbit	: N.D.	mg/kg
LC50 inhalation rat	: N.D.	mg/l/4 h
LC50 inhalation rat	: N.D.	ppm/4 h

BENZ[a]ANTHRACENE

11.2 Chronic toxicity:

EC carc. cat. : 2
EC muta. cat. : not listed
EC repr. cat. : not listed

Carcinogenicity (TLV) : A2
Carcinogenicity (MAC) : K
Carcinogenicity (VME) : not listed
Carcinogenicity (GWBB) : not listed

Carcinogenicity (MAK) : 2
Mutagenicity (MAK) : not listed
Teratogenicity (MAK) : -

IARC classification : 2A

11.3 Routes of exposure: ingestion, inhalation, eyes and skin
Caution! Substance is absorbed through the skin

11.4 Acute effects/symptoms:

AFTER SKIN CONTACT
- Slight irritation

11.5 Chronic effects:

- Probably human carcinogenic
- Mutagenicity: AMES test positive
- Probably human mutagenic

ON CONTINUOUS/REPEATED EXPOSURE/CONTACT:
- No specific information available

SIMILAR PRODUCTS CAUSE FOLLOWING SYMPTOMS:
- Feeling of weakness
- Photoallergy
- Skin rash/inflammation
- Cracking of the skin
- Skin cancer
- Lung tissue affection/degeneration
- Enlargement/affection of the liver
- Affection of the renal tissue

12. Ecological information

12.1 Ecotoxicity:

- LC50 (65 h) : 0.0018 mg/l (PIMEPHALES PROMELAS)
- EC50 (96 h) : 0.01 mg/l (DAPHNIA PULEX)

12.2 Mobility:

- Volatile organic compounds (VOC): 0%
- Photolysis in water
- Ozonation in water
- Insoluble in water

For other physicochemical properties see heading 9.

12.3 Persistence and degradability:

- biodegradation BOD₅ : N.D. % ThOD
- water : - Not readily biodegradable in water
- soil : T $\frac{1}{2}$: > 100 days

12.4 Bioaccumulative potential:

- log P_{ow} : 5.61/5.79
- BCF : 72 h : 350 (LEUCISCUS IDUS)
- Highly bioaccumulative

BENZ[a]ANTHRACENE

12.5 Other adverse effects:

- **WGK** : 3 (Classification based on the R-phrases in compliance with Verwaltungsvorschrift wassergefährdender Stoffe (VwVwS) of 17 May 1999)
- **Effect on the ozone layer** : Not dangerous for the ozone layer (Council Regulation (EC) 3093/94)
- **Greenhouse effect** : no data available
- **Effect on waste water purification** : no data available

13. Disposal considerations

13.1 Provisions relating to waste:

- Waste material code (91/689/EEC, Council Decision 2001/118/EC, O.J. L47 of 16/2/2001): 16 05 06 (laboratory chemicals, consisting of or containing dangerous substances, including mixtures of laboratory chemicals)
- Waste material code (Flanders): 001, 045, 691
- Waste code (Germany): 59302
- Hazardous waste (91/689/EEC)

13.2 Disposal methods:

- Dissolve or mix with a combustible solvent
- Remove to an authorized incinerator equipped with an afterburner and a flue gas scrubber
- Do not discharge into surface water (2000/60/EEC, Council Decision 2455/2001/EC)

13.3 Packaging/Container:

- Waste material code packaging (91/689/EEC, Council Decision 2001/118/EC, O.J. L47 of 16/2/2001): 15 01 10 (packaging containing residues of or contaminated by dangerous substances)

BENZ[a]ANTHRACENE

14. Transport information

90

3077

14.1 Classification of the substance in compliance with UN Recommendations

UN number	: 3077
CLASS	: 9
SUB RISKS	: -
PACKING	: III
PROPER SHIPPING NAME	: UN 3077, Environmentally hazardous substance, solid, n.o.s. (benzo[a]anthracene)

14.2 ADR (transport by road)

CLASS	: 9
PACKING	: III
DANGER LABEL TANKS	: 9
DANGER LABEL PACKAGES	: 9

14.3 RID (transport by rail)

CLASS	: 9
PACKING	: III
DANGER LABEL TANKS	: 9
DANGER LABEL PACKAGES	: 9

14.4 ADNR (transport by inland waterways)

CLASS	: 9
PACKING	: III
DANGER LABEL TANKS	: 9
DANGER LABEL PACKAGES	: 9

14.5 IMDG (maritime transport)

CLASS	: 9
SUB RISKS	: -
PACKING	: III
MFAG	: -
EMS	: -
MARINE POLLUTANT	: P

14.6 ICAO (air transport)

CLASS	: 9
SUB RISKS	: -
PACKING	: III
PACKING INSTRUCTIONS PASSENGER AIRCRAFT	:
PACKING INSTRUCTIONS CARGO AIRCRAFT	:

14.7 Special precautions in connection with transport

: none

14.8 Limited quantities (LQ)

:

When substances and their packaging meet the conditions established by ADR/RID/ADNR in chapter 3.4, **only** the following prescriptions shall be complied with:

each package shall display a diamond-shaped figure with the following inscription:

- 'UN 3077'

or, in the case of different goods with different identification numbers within a single package:

- the letters 'LQ'

BENZ[a]ANTHRACENE

15. Regulatory information

Enumerated in substance list Annex I of directive 67/548/EEC et sequens



Toxic



Dangerous for the environment

- R45 : May cause cancer
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment
- S53 : Avoid exposure - obtain special instructions before use
S45 : In case of accident or if you feel unwell, seek medical advice (show the label where possible)
S60 : This material and/or its container must be disposed of as hazardous waste
S61 : Avoid release to the environment. Refer to special instructions/safety data sheets.

16. Other information

The information provided on this MSDS is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

N.A. = NOT APPLICABLE
N.D. = NOT DETERMINED
* = INTERNAL CLASSIFICATION

Full text of any R-phrases referred to under heading 2:

- R45 : May cause cancer
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

Exposure limits:

TLV : Threshold Limit Value - ACGIH USA 2000
OES : Occupational Exposure Standards - United Kingdom 1999
MEL : Maximum Exposure Limits - United Kingdom 1999
MAK : Maximale Arbeitsplatzkonzentrationen - Germany 2001
TRK : Technische Richtkonzentrationen - Germany 2001
MAC : Maximale aanvaarde concentratie - The Netherlands 2002
VME : Valeurs limites de Moyenne d'Exposition - France 1999
VLE : Valeurs limites d'Exposition à court terme - France 1999
GWBB : Grenswaarde beroepsmatige blootstelling - Belgium 1998
GWK : Grenswaarde kortstondige blootstelling - Belgium 1998
EC : Indicative occupational exposure limit values - directive 2000/39/EC

Chronic toxicity:

K : List of the carcinogenic substances and processes - The Netherlands 2002

Material Safety Data Sheet

Benzo[a]pyrene, 98%

ACC# 37175

Section 1 - Chemical Product and Company Identification

MSDS Name: Benzo[a]pyrene, 98%

Catalog Numbers: AC105600000, AC105600010, AC105601000, AC377200000, AC377200010, AC377201000 AC377201000

Synonyms: 3,4-Benzopyrene; 3,4-Benzpyrene; Benzo[def]chrysene.

Company Identification:

Acros Organics N.V.
One Reagent Lane
Fair Lawn, NJ 07410

For information in North America, call: 800-ACROS-01

For emergencies in the US, call CHEMTREC: 800-424-9300

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
50-32-8	Benzo[a]pyrene	>96	200-028-5

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: yellow to brown powder.

Danger! May cause harm to the unborn child. May impair fertility. May cause eye, skin, and respiratory tract irritation. Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Cancer hazard. May cause allergic skin reaction. May cause heritable genetic damage.

Target Organs: Reproductive system, skin.

Potential Health Effects

Eye: May cause eye irritation.

Skin: May cause skin irritation. May be harmful if absorbed through the skin. May cause an allergic reaction in certain individuals.

Ingestion: May cause irritation of the digestive tract. The toxicological properties of this substance have not been fully investigated. May be harmful if swallowed.

Inhalation: May cause respiratory tract irritation. The toxicological properties of this substance have not been fully investigated. May be harmful if inhaled.

Chronic: May cause cancer in humans. May cause reproductive and fetal effects. Laboratory experiments have resulted in mutagenic effects.

Section 4 - First Aid Measures

Eyes: Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.

Skin: Get medical aid. Flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse.

Ingestion: Never give anything by mouth to an unconscious person. Get medical aid. Do NOT induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cupfuls of milk or water.

Inhalation: Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: Treat symptomatically and supportively.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion.

Extinguishing Media: Use water spray, dry chemical, carbon dioxide, or appropriate foam.

Flash Point: Not available.

Autoignition Temperature: Not available.

Explosion Limits, Lower: Not available.

Upper: Not available.

NFPA Rating: (estimated) Health: 2; Flammability: 0; Instability: 0

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks: Clean up spills immediately, observing precautions in the Protective Equipment section. Sweep up, then place into a suitable container for disposal. Avoid generating dusty conditions. Provide ventilation.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Use with adequate ventilation. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Keep container tightly closed. Avoid ingestion and inhalation.

Storage: Store in a tightly closed container. Store in a cool, dry, well-ventilated area away from incompatible substances.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs

Benzo[a]pyrene	0.2 mg/m3 TWA (as benzene soluble aerosol) (listed under Coal tar pitches).	0.1 mg/m3 TWA (cyclohexane-extractable fraction) (listed under Coal tar pitches).80 mg/m3 IDLH (listed under Coal tar pitches).	0.2 mg/m3 TWA (as benzene soluble fraction) (listed under Coal tar pitches).
----------------	---	---	--

OSHA Vacated PELs: Benzo[a]pyrene: No OSHA Vacated PELs are listed for this chemical.

Personal Protective Equipment

Eyes: Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

Section 9 - Physical and Chemical Properties

Physical State: Powder

Appearance: yellow to brown

Odor: faint aromatic odor

pH: Not available.

Vapor Pressure: Not available.

Vapor Density: Not available.

Evaporation Rate:Not available.

Viscosity: Not available.

Boiling Point: 495 deg C @ 760 mm Hg

Freezing/Melting Point:175 - 179 deg C

Decomposition Temperature:Not available.

Solubility: 1.60x10⁻³ mg/l @25°C

Specific Gravity/Density:Not available.

Molecular Formula:C₂₀H₁₂

Molecular Weight:252.31

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.

Conditions to Avoid: Dust generation.

Incompatibilities with Other Materials: Strong oxidizing agents.

Hazardous Decomposition Products: Carbon monoxide, carbon dioxide.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#:

CAS# 50-32-8: DJ3675000

LD50/LC50:

Not available.

Carcinogenicity:

CAS# 50-32-8:

- **ACGIH:** A2 - Suspected Human Carcinogen
- **California:** carcinogen, initial date 7/1/87
- **NTP:** Suspect carcinogen
- **IARC:** Group 1 carcinogen (listed as Coal tar pitches).

Epidemiology: No information found

Teratogenicity: No information found

Reproductive Effects: Adverse reproductive effects have occurred in experimental animals.

Mutagenicity: Mutagenic effects have occurred in humans. Mutagenic effects have occurred in experimental animals.

Neurotoxicity: No information found

Other Studies:

Section 12 - Ecological Information

No information available.

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed.

RCRA U-Series:

CAS# 50-32-8: waste number U022.

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	NOT REGULATED FOR DOMESTIC TRANSPORT	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOL (Benzo{a} pyrene)
Hazard Class:		9
UN Number:		UN3077
Packing Group:		III

Section 15 - Regulatory Information

US FEDERAL

TSCA

CAS# 50-32-8 is listed on the TSCA inventory.

Health & Safety Reporting List

None of the chemicals are on the Health & Safety Reporting List.

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

CAS# 50-32-8: 1 lb final RQ; 0.454 kg final RQ

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPQ.

SARA Codes

CAS # 50-32-8: immediate, delayed.

Section 313

This material contains Benzo[a]pyrene (CAS# 50-32-8, >96%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR

Clean Air Act:

This material does not contain any hazardous air pollutants.

This material does not contain any Class 1 Ozone depleters.

This material does not contain any Class 2 Ozone depleters.

Clean Water Act:

None of the chemicals in this product are listed as Hazardous Substances under the CWA.

CAS# 50-32-8 is listed as a Priority Pollutant under the Clean Water Act.

None of the chemicals in this product are listed as Toxic Pollutants under the CWA.

OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

CAS# 50-32-8 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

California Prop 65

The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act:

WARNING: This product contains Benzo[a]pyrene, a chemical known to the state of California to cause cancer.

California No Significant Risk Level: CAS# 50-32-8: 0.06 æg/day NSRL

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols:

T N

Risk Phrases:

R 43 May cause sensitization by skin contact.

R 45 May cause cancer.

R 46 May cause heritable genetic damage.

R 60 May impair fertility.

R 61 May cause harm to the unborn child.

R 50/53 Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Safety Phrases:

S 45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

S 53 Avoid exposure - obtain special instructions before use.
S 60 This material and its container must be disposed of as hazardous waste.
S 61 Avoid release to the environment. Refer to special instructions /safety data sheets.

WGK (Water Danger/Protection)

CAS# 50-32-8: No information available.

Canada - DSL/NDSL

CAS# 50-32-8 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of D2A.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

CAS# 50-32-8 is listed on the Canadian Ingredient Disclosure List.

Section 16 - Additional Information
--

MSDS Creation Date: 9/02/1997

Revision #7 Date: 6/30/2006

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.



SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Benzo[ghi]perylene

Cat No. : AC105550000; AC105550050; AC105550250; AC105551000

Synonyms 1,12-Benzoperylene

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

Classification under 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Label Elements

None required

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Benzo(ghi)perylene	191-24-2	> 98

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes. Obtain medical attention.

Inhalation	Remove from exposure, lie down. Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. Obtain medical attention.
Ingestion	Clean mouth with water. Get medical attention.
Most important symptoms/effects Notes to Physician	No information available. Treat symptomatically

5. Fire-fighting measures

Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	No information available
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO₂)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
0

Flammability
0

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment.
Environmental Precautions	See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up	Avoid dust formation. Sweep up or vacuum up spillage and collect in suitable container for disposal. Do not let this chemical enter the environment.
---	--

7. Handling and storage

Handling	Avoid contact with skin and eyes. Do not breathe dust. Do not breathe vapors or spray mist.
Storage	Keep in a dry, cool and well-ventilated place. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines	This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.
----------------------------	---

Engineering Measures	Ensure adequate ventilation, especially in confined areas.
-----------------------------	--

Personal Protective Equipment

Eye/face Protection	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
Skin and body protection	Wear appropriate protective gloves and clothing to prevent skin exposure.
Respiratory Protection	Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.
Hygiene Measures	Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Solid
Appearance	Yellow
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	276 - 280 °C / 528.8 - 536 °F
Boiling Point/Range	No information available > @ 760 mmHg
Flash Point	No information available
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	No information available
Vapor Density	No information available
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C22 H12
Molecular Weight	276.33

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable.
Conditions to Avoid	Excess heat. Exposure to light. Incompatible products.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information	No acute toxicity information is available for this product
Component Information	
Toxicologically Synergistic	No information available

Products**Delayed and immediate effects as well as chronic effects from short and long-term exposure**

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Benzo(ghi)perylene	191-24-2	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility .

Component	log Pow
Benzo(ghi)perylene	7.23

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT Not regulated

TDG Not regulated

IATA Not regulated

IMDG/IMO Not regulated

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
-----------	------	-----	------	--------	--------	-----	-------	------	------	-------	------

Benzo(ghi)perylene	-	-	-	205-883-8	-		-	-	-	-	-
--------------------	---	---	---	-----------	---	--	---	---	---	---	---

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations**TSCA 12(b)**

Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Benzo(ghi)perylene	191-24-2	> 98	1.0

SARA 311/312 Hazardous Categorization

Acute Health Hazard	No
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Benzo(ghi)perylene	-	-	X	X

Clean Air Act

Not applicable

OSHA Occupational Safety and Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Benzo(ghi)perylene	5000 lb	-

California Proposition 65

This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Benzo(ghi)perylene	X	X	X	X	-

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class Non-controlled

16. Other information

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Revision Date 10-Feb-2015

Print Date 10-Feb-2015

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

SAFETY DATA SHEET

Version 5.4
Revision Date 01/02/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Benzyl butyl phthalate

Product Number : 308501
Brand : Aldrich
Index-No. : 607-430-00-3

CAS-No. : 85-68-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Reproductive toxicity (Category 1B), H360
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H360

May damage fertility or the unborn child.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P273

Avoid release to the environment.

P281

Use personal protective equipment as required.

P308 + P313

IF exposed or concerned: Get medical advice/ attention.

P391

Collect spillage.

P405

Store locked up.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none**3. COMPOSITION/INFORMATION ON INGREDIENTS****3.1 Substances**

Formula : C₁₉H₂₀O₄
Molecular weight : 312.36 g/mol
CAS-No. : 85-68-7
EC-No. : 201-622-7
Index-No. : 607-430-00-3

Hazardous components

Component	Classification	Concentration
Benzyl butyl phthalate Included in the Candidate List of Substances of Very High Concern (SVHC) according to Regulation (EC) No. 1907/2006 (REACH)		
	Repr. 1B; Aquatic Acute 1; Aquatic Chronic 1; H360, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES**4.1 Description of first aid measures****General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nature latex/chloroprene

Minimum layer thickness: 0.6 mm

Break through time: 60 min

Material tested:Lapren® (KCL 706 / Aldrich Z677558, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: liquid
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/freezing point: < -34.99 °C (< -30.98 °F) |
| f) Initial boiling point and boiling range | 370 °C (698 °F) |
| g) Flash point | 113.0 °C (235.4 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 19.2 hPa (14.4 mmHg) at 250.0 °C (482.0 °F)
0.3 hPa (0.2 mmHg) at 150.0 °C (302.0 °F) |
| l) Vapour density | No data available |
| m) Relative density | 1.1 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | 0.00269 g/l at 25 °C (77 °F) - OECD Test Guideline 105 - slightly soluble |
| o) Partition coefficient: n-octanol/water | log Pow: 4.91 at 20 °C (68 °F) |
| p) Auto-ignition temperature | 232.0 °C (449.6 °F) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |

t) Oxidizing properties No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Strong bases

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - male and female - 2,330 mg/kg
(OECD Test Guideline 401)

Inhalation: No data available

LD50 Dermal - Rabbit - > 10,000 mg/kg

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

- Guinea pig

Result: Does not cause skin sensitisation.

Germ cell mutagenicity

Ames test

S. typhimurium

Result: negative

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Benzyl butyl phthalate)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a

carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

Presumed human reproductive toxicant

Overexposure may cause reproductive disorder(s) based on tests with laboratory animals.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

Repeated dose toxicity - Rat - male - Oral - No observed adverse effect level - 550 mg/kg

RTECS: TH9990000

May cause endocrine disruption.

pancreas -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - <i>Lepomis macrochirus</i> (Bluegill) - 1.7 mg/l - 96.0 h
	NOEC - <i>Oncorhynchus mykiss</i> (rainbow trout) - 0.48 mg/l - 96.0 h
	flow-through test LC50 - <i>Pimephales promelas</i> (fathead minnow) - 2.1 mg/l - 96 h
	(OECD Test Guideline 203)
Toxicity to daphnia and other aquatic invertebrates	static test LC50 - <i>Daphnia magna</i> (Water flea) - 1.8 mg/l - 48 h
Toxicity to algae	Growth inhibition EC50 - <i>Desmodesmus subspicatus</i> (green algae) - 0.31 mg/l - 72 h
	(OECD Test Guideline 201)

12.2 Persistence and degradability

Biodegradability	aerobic - Exposure time 14 d
	Result: 81 % - Readily biodegradable

12.3 Bioaccumulative potential

Bioaccumulation	<i>Lepomis macrochirus</i> (Bluegill) - 21 d
	- 0.00973 mg/l
	Bioconcentration factor (BCF): 663

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

Avoid release to the environment.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3082 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (Benzyl butyl phthalate)
Reportable Quantity (RQ): 100 lbs
Marine pollutant: yes
Poison Inhalation Hazard: No

IMDG

UN number: 3082 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S. (Benzyl butyl phthalate)
Marine pollutant: yes

IATA

UN number: 3082 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (Benzyl butyl phthalate)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Benzyl butyl phthalate	85-68-7	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Benzyl butyl phthalate	85-68-7	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Benzyl butyl phthalate	85-68-7	1993-04-24

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. Benzyl butyl phthalate	85-68-7	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H360	May damage fertility or the unborn child.

H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Repr.	Reproductive toxicity

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	1
Physical Hazard	0

NFPA Rating

Health hazard:	1
Fire Hazard:	1
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.4

Revision Date: 01/02/2015

Print Date: 02/18/2016

SAFETY DATA SHEET

Version 4.6

Revision Date 12/29/2015

Print Date 01/29/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Beryllium

Product Number : 378135
Brand : Aldrich

CAS-No. : 7440-41-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USATelephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301

Acute toxicity, Inhalation (Category 2), H330

Skin irritation (Category 2), H315

Eye irritation (Category 2A), H319

Skin sensitisation (Category 1), H317

Carcinogenicity (Category 1B), H350

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

Specific target organ toxicity - repeated exposure (Category 1), H372

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H301

Toxic if swallowed.

H315

Causes skin irritation.

H317

May cause an allergic skin reaction.

H319

Causes serious eye irritation.

H330

Fatal if inhaled.

H335

May cause respiratory irritation.

H350

May cause cancer.

H372	Causes damage to organs through prolonged or repeated exposure.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P272	Contaminated work clothing should not be allowed out of the workplace.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P284	Wear respiratory protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: Be
Molecular weight	: 9.01 g/mol
CAS-No.	: 7440-41-7
EC-No.	: 231-150-7

Hazardous components

Component	Classification	Concentration
Beryllium foil		
	Acute Tox. 3; Acute Tox. 2; Skin Irrit. 2; Eye Irrit. 2A; Skin Sens. 1; Carc. 1B; STOT SE 3; STOT RE 1; H301, H315, H317, H319, H330, H335, H350, H372	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Beryllium oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Beryllium foil	7440-41-7	TWA	2.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		CEIL	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Peak	25.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	2.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
	Remarks	Z27.29-1970		
		CEIL	5.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	0.000050 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Beryllium sensitization Chronic beryllium disease (berylliosis) Confirmed human carcinogen Danger of cutaneous absorption Sensitizer		
		C	0.000500 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		See Table Z-2		
		TWA	2.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	2.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25.000000 microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		TWA	0.000050 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Beryllium sensitization		

		Chronic beryllium disease (berylliosis) Adopted values or notations enclosed are those for which changes are proposed in the NIC See Notice of Intended Changes (NIC) Confirmed human carcinogen Danger of cutaneous absorption Sensitizer		
		C	0.000500 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		See Table Z-2		
		TWA	2microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		CEIL	5microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		Peak	25microgram per cubic meter	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z27.29-1970		
		C	0.0005 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

a) Appearance	Form: powder Colour: grey
b) Odour	odourless
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 1,278 °C (2,332 °F) - lit.
f) Initial boiling point and boiling range	2,970 °C (5,378 °F) - lit.
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	1.85 g/cm ³ at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY**10.1 Reactivity**

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Alkali metals

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

LD50 Intravenous - Rat - 0.496 mg/kg

Remarks: Liver:Hepatitis (hepatocellular necrosis), zonal.

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

Hamster

Lungs

Result: negative

Carcinogenicity

Carcinogenicity - Rat - Intratracheal

Tumorigenic:Neoplastic by RTECS criteria. Lungs, Thorax, or Respiration:Tumors. Lungs, Thorax, or Respiration:Bronchiogenic carcinoma.

Carcinogenicity - Rabbit - Intravenous

Tumorigenic:Equivocal tumorigenic agent by RTECS criteria. Musculoskeletal:Tumors.

Possible human carcinogen

IARC: 1 - Group 1: Carcinogenic to humans (Beryllium foil)

NTP: Known to be human carcinogen (Beryllium foil)

Known to be human carcinogenThe reference note has been added by TD based on the background information of the NTP. (Beryllium foil)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: DS1750000

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 1567 Class: 6.1 (4.1) Packing group: II
Proper shipping name: Beryllium, powder
Reportable Quantity (RQ): 10 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1567 Class: 6.1 (4.1) Packing group: II EMS-No: F-G, S-G
Proper shipping name: BERYLLIUM POWDER

IATA

UN number: 1567 Class: 6.1 (4.1) Packing group: II
Proper shipping name: Beryllium powder

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Beryllium foil	7440-41-7	1993-04-24

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

Beryllium foil	CAS-No. 7440-41-7	Revision Date 1993-04-24
----------------	----------------------	-----------------------------

Pennsylvania Right To Know Components

Beryllium foil	CAS-No. 7440-41-7	Revision Date 1993-04-24
----------------	----------------------	-----------------------------

New Jersey Right To Know Components

Beryllium foil	CAS-No. 7440-41-7	Revision Date 1993-04-24
----------------	----------------------	-----------------------------

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

Beryllium foil	CAS-No. 7440-41-7	Revision Date 2008-10-10
----------------	----------------------	-----------------------------

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H301	Toxic if swallowed.
H315	Causes skin irritation.
H317	May cause an allergic skin reaction.
H319	Causes serious eye irritation.
H330	Fatal if inhaled.
H335	May cause respiratory irritation.
H350	May cause cancer.
H372	Causes damage to organs through prolonged or repeated exposure.
Skin Irrit.	Skin irritation
Skin Sens.	Skin sensitisation

HMIS Rating

Health hazard:	4
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	4
Fire Hazard:	3
Reactivity Hazard:	3

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

SAFETY DATA SHEET

Version 5.11
Revision Date 06/18/2015
Print Date 02/11/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Bis(2-ethylhexyl) phthalate

Product Number : 80030
Brand : Sigma-Aldrich
Index-No. : 607-317-00-9

CAS-No. : 117-81-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Reproductive toxicity (Category 1B), H360

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)
H360

May damage fertility or the unborn child.

Precautionary statement(s)

P201 : Obtain special instructions before use.
P202 : Do not handle until all safety precautions have been read and understood.
P281 : Use personal protective equipment as required.
P308 + P313 : IF exposed or concerned: Get medical advice/ attention.
P405 : Store locked up.
P501 : Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Endocrine disrupting chemical(s)

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 'Diocetyl' phthalate
Phthalic acid bis(2-ethylhexyl ester)
DEHP

Formula : C₂₄H₃₈O₄
Molecular weight : 390.56 g/mol
CAS-No. : 117-81-7
EC-No. : 204-211-0
Index-No. : 607-317-00-9
Registration number : 01-2119484611-38-XXXX

Hazardous components

Component	Classification	Concentration
bis(2-Ethylhexyl) phthalate Included in the Candidate List of Substances of Very High Concern (SVHC) according to Regulation (EC) No. 1907/2006 (REACH)		
	Repr. 1B; H360	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
bis(2-Ethylhexyl) phthalate	117-81-7	TWA	5.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Lower Respiratory Tract irritation Confirmed animal carcinogen with unknown relevance to humans		
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A		
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 480 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 230 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: liquid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | -50.0 °C (-58.0 °F) |
| f) Initial boiling point and boiling range | 386 °C (727 °F) - lit. |
| g) Flash point | 207.0 °C (404.6 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Lower explosion limit: 0.3 %(V) |
| k) Vapour pressure | 1.6 hPa (1.2 mmHg) at 93.0 °C (199.4 °F) |
| l) Vapour density | No data available |
| m) Relative density | 0.985 g/cm ³ at 20 °C (68 °F) |
| n) Water solubility | insoluble |

- | | |
|---|---------------------|
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | 390.0 °C (734.0 °F) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 30,000 mg/kg

Inhalation: No data available

LD50 Dermal - Rabbit - 25,000 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Mild skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation - 24 h

Respiratory or skin sensitisation

Maximisation Test (GPMT) - Guinea pig

Result: Does not cause skin sensitisation.
(OECD Test Guideline 406)

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (bis(2-Ethylhexyl) phthalate)
NTP: Reasonably anticipated to be a human carcinogen (bis(2-Ethylhexyl) phthalate)
OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

May cause congenital malformation in the fetus.
Presumed human reproductive toxicant

May cause reproductive disorders.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: TI0350000

Effects due to ingestion may include:, Gastrointestinal disturbance

Kidney -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - > 0.67 mg/l - 96 h LC50 - Oncorhynchus mykiss (rainbow trout) - > 0.32 mg/l - 96 h LC50 - Cyprinodon variegatus (sheepshead minnow) - > 0.17 mg/l - 96 h LC50 - Lepomis macrochirus (Bluegill) - > 0.20 mg/l - 96 h NOEC - other fish - > 0.3 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - Daphnia magna (Water flea) - > 0.16 mg/l - 48 h

12.2 Persistence and degradability

Biodegradability	Result: - Readily biodegradable (OECD Test Guideline 301)
------------------	--

12.3 Bioaccumulative potential

Bioaccumulation	Oncorhynchus mykiss (rainbow trout) - 100 d - 0.014 mg/l Bioconcentration factor (BCF): 113 Remarks: Does not bioaccumulate.
-----------------	---

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3082 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (bis(2-Ethylhexyl) phthalate)
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2007-07-01

SARA 311/312 Hazards

Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2009-02-01

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

	CAS-No.	Revision Date
bis(2-Ethylhexyl) phthalate	117-81-7	2009-02-01

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

H360	May damage fertility or the unborn child.
Repr.	Reproductive toxicity

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	1
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	1
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.11

Revision Date: 06/18/2015

Print Date: 02/11/2016

SAFETY DATA SHEET

Version 4.6
Revision Date 12/10/2015
Print Date 02/23/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Bromodichloromethane

Product Number : 139181

Brand : Aldrich

CAS-No. : 75-27-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 4), H302
Skin irritation (Category 2), H315
Serious eye damage (Category 1), H318
Carcinogenicity (Category 2), H351
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H302 Harmful if swallowed.
H315 Causes skin irritation.
H318 Causes serious eye damage.
H335 May cause respiratory irritation.
H351 Suspected of causing cancer.

Precautionary statement(s)

P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.

P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P281	Use personal protective equipment as required.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338 + P310	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/ physician.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: Dichlorobromomethane
Formula	: CHBrCl ₂
Molecular weight	: 163.83 g/mol
CAS-No.	: 75-27-4
EC-No.	: 200-856-7

Hazardous components

Component	Classification	Concentration
Bromodichloromethane		
	Acute Tox. 4; Skin Irrit. 2; Eye Dam. 1; Carc. 2; STOT SE 3; H302, H315, H318, H335, H351	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas, Hydrogen bromide gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Non Combustible Liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Tightly fitting safety goggles. Faceshield (8-inch minimum). Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 120 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -55 °C (-67 °F) - lit. |
| f) Initial boiling point and boiling range | 87 °C (189 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 1.98 g/cm ³ at 25 °C (77 °F) |

- | | | |
|----|--|-------------------|
| n) | Water solubility | insoluble |
| o) | Partition coefficient: n-octanol/water | No data available |
| p) | Auto-ignition temperature | No data available |
| q) | Decomposition temperature | No data available |
| r) | Viscosity | No data available |
| s) | Explosive properties | No data available |
| t) | Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Strong bases, Magnesium

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Mouse - 450.0 mg/kg

Remarks: Brain and Coverings:Changes in circulation (hemorrhage,thrombosis, etc.). Liver:Fatty liver degeneration. Blood: Hemorrhage.

TDLo Oral - Rat - 40 mg/kg

Remarks: Nutritional and Gross Metabolic:Weight loss or decreased weight gain.

TDLo Oral - Rat - 35 mg/kg

Remarks: Liver:Other changes. Kidney, Ureter, Bladder:Other changes.

TDLo Oral - Rat - 20.5 mg/kg

Remarks: Liver:Liver function tests impaired.

TDLo Oral - Rat - 400 mg/kg

Remarks: Biochemical:Enzyme inhibition, induction, or change in blood or tissue levels:Hepatic microsomal mixed oxidase (dealkylation, hydroxylation, etc.). Liver:Other changes.

TDLo Oral - Rat - 2,000 mg/kg

Remarks: Kidney, Ureter, Bladder:Changes in both tubules and glomeruli. Kidney, Ureter, Bladder:Other changes in urine composition.

TDLo Oral - Rat - 9,828 mg/kg

Remarks: Blood:Changes in erythrocyte (RBC) count. Nutritional and Gross Metabolic:Weight loss or decreased weight gain. Biochemical:Enzyme inhibition, induction, or change in blood or tissue levels: Transaminases.

TDLo Oral - Rat - 2,904.6 mg/kg

Remarks: Behavioral:Fluid intake. Nutritional and Gross Metabolic:Weight loss or decreased weight gain. Nutritional and Gross Metabolic:Dehydration.

TDLo Oral - Rat - 5,366.9 mg/kg

Remarks: Kidney, Ureter, Bladder:Changes in kidney weight. Endocrine:Other changes. Skin and Appendages: Other: Hair.

TDLo Oral - Rat - 3,127 mg/kg

Remarks: Behavioral:Fluid intake. Nutritional and Gross Metabolic:Weight loss or decreased weight gain.

TDLo Oral - Rat - 20,075 mg/kg

Remarks: Liver:Fatty liver degeneration. Liver:Other changes. Liver:Changes in liver weight.

TDLo Oral - Rat - 5,670 mg/kg

Remarks: Liver:Changes in liver weight. Blood:Changes in serum composition (e.g., TP, bilirubin, cholesterol). Nutritional and Gross Metabolic:Weight loss or decreased weight gain.

TDLo Oral - Rat - 742 mg/kg

Remarks: Nutritional and Gross Metabolic:Weight loss or decreased weight gain. Behavioral:Food intake (animal).

TDLo Oral - Rat - 2,000 mg/kg

Remarks: Kidney, Ureter, Bladder:Changes in both tubules and glomeruli. Kidney, Ureter, Bladder:Other changes in urine composition.

TDLo Oral - Rat - 375 mg/kg

Remarks: Endocrine:Estrogenic. Blood:Changes in serum composition (e.g., TP, bilirubin, cholesterol).

TDLo Oral - Rat - 750 mg/kg

Remarks: Biochemical:Enzyme inhibition, induction, or change in blood or tissue levels:Hepatic microsomal mixed oxidase (dealkylation, hydroxylation, etc.). Liver:Changes in liver weight. Kidney, Ureter, Bladder:Other changes.

TDLo Oral - Mouse - 1,000 mg/kg

Remarks: Kidney, Ureter, Bladder:Renal function tests depressed. Blood:Changes in serum composition (e.g., TP, bilirubin, cholesterol).

TDLo Oral - Mouse - 750 mg/kg

Remarks: Biochemical:Enzyme inhibition, induction, or change in blood or tissue levels: Dehydrogenases. Biochemical:Enzyme inhibition, induction, or change in blood or tissue levels: Transaminases. Liver:Changes in liver weight.

TDLo Oral - Rabbit - 59.5 mg/kg

Remarks: Behavioral:Fluid intake. Behavioral:Food intake (animal).

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

Irritating to eyes, respiratory system and skin.

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Bromodichloromethane)
ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.
NTP: Reasonably anticipated to be a human carcinogen (Bromodichloromethane)
OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

Inhalation - May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: PA5310000

prolonged or repeated exposure can cause: Nausea, Dizziness, Headache, narcosis

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3082

Class: 9

Packing group: III

Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (Bromodichloromethane)

Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Bromodichloromethane	75-27-4	2009-07-17

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Bromodichloromethane	75-27-4	2009-07-17

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Bromodichloromethane	75-27-4	2009-07-17

New Jersey Right To Know Components

	CAS-No.	Revision Date
Bromodichloromethane	75-27-4	2009-07-17

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Bromodichloromethane	75-27-4	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Carc.	Carcinogenicity
Eye Dam.	Serious eye damage
H302	Harmful if swallowed.
H315	Causes skin irritation.
H318	Causes serious eye damage.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
Skin Irrit.	Skin irritation
STOT SE	Specific target organ toxicity - single exposure

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.


Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 12/10/2015

Print Date: 02/23/2016



Health	3
Fire	1
Reactivity	0
Personal Protection	E

Material Safety Data Sheet

Cadmium MSDS

Section 1: Chemical Product and Company Identification

Product Name: Cadmium

Catalog Codes: SLC3484, SLC5272, SLC2482

CAS#: 7440-43-9

RTECS: EU9800000

TSCA: TSCA 8(b) inventory: Cadmium

CI#: Not applicable.

Synonym:

Chemical Name: Cadmium

Chemical Formula: Cd

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Cadmium	7440-43-9	100

Toxicological Data on Ingredients: Cadmium: ORAL (LD50): Acute: 2330 mg/kg [Rat.]. 890 mg/kg [Mouse]. DUST (LC50): Acute: 50 ppm 4 hour(s) [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of ingestion, of inhalation. Slightly hazardous in case of skin contact (irritant, sensitizer), of eye contact (irritant). Severe over-exposure can result in death.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Classified A2 (Suspected for human.) by ACGIH, 2 (Reasonably anticipated.) by NTP.

MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance is toxic to kidneys, lungs, liver. Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to an highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section 4: First Aid Measures

Eye Contact: No known effect on eye contact, rinse with water for a few minutes.

Skin Contact:

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

Serious Skin Contact: Not available.

Inhalation: Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

Ingestion:

Do not induce vomiting. Examine the lips and mouth to ascertain whether the tissues are damaged, a possible indication that the toxic material was ingested; the absence of such signs, however, is not conclusive. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: May be combustible at high temperature.

Auto-Ignition Temperature: 570°C (1058°F)

Flash Points: Not available.

Flammable Limits: Not available.

Products of Combustion: Some metallic oxides.

Fire Hazards in Presence of Various Substances:

Non-flammable in presence of open flames and sparks, of heat, of oxidizing materials, of reducing materials, of combustible materials, of moisture.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

Special Remarks on Fire Hazards:

Material in powder form, capable of creating a dust explosion. When heated to decomposition it emits toxic fumes.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill: Use appropriate tools to put the spilled solid in a convenient waste disposal container.

Large Spill:

Use a shovel to put the material into a convenient waste disposal container. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep locked up Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk, evaporate the residue under a fume hood. Ground all equipment containing material. Do not ingest. Do not breathe dust. Wear suitable protective clothing In case of insufficient ventilation, wear suitable respiratory equipment If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents.

Storage:

Keep container dry. Keep in a cool place. Ground all equipment containing material. Keep container tightly closed. Keep in a cool, well-ventilated place. Highly toxic or infectious materials should be stored in a separate locked safety storage cabinet or room.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection: Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 0.01 (ppm) Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid. (Lustrous solid.)

Odor: Not available.

Taste: Not available.

Molecular Weight: 112.4 g/mole

Color: Silvery.

pH (1% soln/water): Not applicable.

Boiling Point: 765°C (1409°F)

Melting Point: 320.9°C (609.6°F)

Critical Temperature: Not available.

Specific Gravity: 8.64 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: Not available.

Volatility: Not available.

Odor Threshold: Not available.

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: Not available.

Solubility: Insoluble in cold water, hot water, methanol, diethyl ether, n-octanol.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances: Reactive with oxidizing agents.

Corrosivity: Not considered to be corrosive for metals and glass.

Special Remarks on Reactivity: Reacts violently with potassium.

Special Remarks on Corrosivity: Not available.

Polymerization: No.

Section 11: Toxicological Information

Routes of Entry: Inhalation. Ingestion.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 890 mg/kg [Mouse]. Acute toxicity of the dust (LC50): 229.9 mg/m³ 4 hour(s) [Rat].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: Classified A2 (Suspected for human.) by ACGIH, 2 (Reasonably anticipated.) by NTP. The substance is toxic to kidneys, lungs, liver.

Other Toxic Effects on Humans:

Hazardous in case of ingestion, of inhalation. Slightly hazardous in case of skin contact (irritant, sensitizer).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: An allergen. 0047 Animal: embryotoxic, passes through the placental barrier.

Special Remarks on other Toxic Effects on Humans: May cause allergic reactions, exzema and/or dehydration of the skin.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are as toxic as the original product.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification:

Identification:

Special Provisions for Transport:

Section 15: Other Regulatory Information

Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Cadmium California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Cadmium Pennsylvania RTK: Cadmium Massachusetts RTK: Cadmium TSCA 8(b) inventory: Cadmium SARA 313 toxic chemical notification and release reporting: Cadmium CERCLA: Hazardous substances.: Cadmium

Other Regulations: OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

Other Classifications:

WHMIS (Canada):

CLASS D-1A: Material causing immediate and serious toxic effects (VERY TOXIC). CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

DSCL (EEC):

R26- Very toxic by inhalation. R45- May cause cancer.

HMIS (U.S.A.):

Health Hazard: 3

Fire Hazard: 1

Reactivity: 0

Personal Protection: E

National Fire Protection Association (U.S.A.):

Health: 3

Flammability: 1

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

Section 16: Other Information

References:

-Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987. -Liste des produits purs tératogènes, mutagènes, cancérigènes. Répertoire toxicologique de la Commission de la Santé et de la Sécurité du Travail du Québec. -Material safety data sheet emitted by: la Commission de la Santé et de la Sécurité du Travail du Québec. -SAX, N.I. Dangerous Properties of Industrial Materials. Toronto, Van Nostrand Reinold, 6e ed. 1984. -The Sigma-Aldrich Library of Chemical Safety Data, Edition II. -Guide de la loi et du règlement sur le transport des marchandises dangereuses au Canada. Centre de conformité international Ltée. 1986.

Other Special Considerations: Not available.

Created: 10/09/2005 04:29 PM

Last Updated: 11/01/2010 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.



Material Safety Data Sheet

Calcium

MSDS# 03840

Section 1 - Chemical Product and Company Identification

MSDS Name: Calcium

Catalog Numbers: AC201180000, AC201180050, AC201181000, AC201185000, AC201380000, AC201381000, AC201381000, AC201385000, AC318100000, AC318100050, AC365740000, AC365741000, AC365741000, AC365745000

Synonyms: Calcium metal, turnings, crystals, granular; Calciat.

Company Identification: Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410

For information in the US, call: 201-796-7100

Emergency Number US: 201-796-7100

CHEMTREC Phone Number, US: 800-424-9300

Section 2 - Composition, Information on Ingredients

CAS#: 7440-70-2

Chemical Name: Calcium

%: 99+

EINECS#: 231-179-5

Hazard Symbols: F



Risk Phrases: 15

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Danger! Flammable solid. Causes burns by all exposure routes. Contact with water liberates extremely flammable gases.

Target Organs: Respiratory system, gastrointestinal system, eyes, skin.

Potential Health Effects

Eye: Causes eye burns.

Skin: Causes skin burns. May be harmful if absorbed through the skin.

Ingestion: Causes gastrointestinal tract burns. May be harmful if swallowed.

Inhalation: Causes chemical burns to the respiratory tract. May be harmful if inhaled.

Chronic: No information found.

Section 4 - First Aid Measures

Eyes: Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid immediately.

Skin: Get medical aid immediately. Immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.

Ingestion: Do not induce vomiting. Get medical aid immediately. Call a poison control center.

Get medical aid immediately. Remove from exposure and move to fresh air immediately. If breathing is difficult, give oxygen. Do not use mouth-to-mouth resuscitation if victim ingested or inhaled the substance;

Inhalation: induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.

Notes to
Physician:

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Will burn if involved in a fire. Water reactive. Material will react with water and may release a flammable and/or toxic gas. Flammable solid.

Extinguishing Media: Use foam, dry chemical, or carbon dioxide. DO NOT USE WATER!

Autoignition Temperature: Not applicable.

Flash Point: Not applicable.

Explosion Limits: Not available
Lower:

Explosion Limits: Not available
Upper:

NFPA Rating: ; Special Hazard: -W-

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8.

Vacuum or sweep up material and place into a suitable disposal container. Wear a self contained breathing apparatus and appropriate personal protection. (See Exposure Controls, Personal Protection section).

Spills/Leaks: Avoid generating dusty conditions. Remove all sources of ignition. Use a spark-proof tool. Do not expose spill to water. Place under an inert atmosphere. Do not get water inside containers. Do not let this chemical enter the environment.

Section 7 - Handling and Storage

Handling: Do not allow water to get into the container because of violent reaction. Minimize dust generation and accumulation. Use spark-proof tools and explosion proof equipment. Do not get in eyes, on skin, or on clothing. Keep away from heat, sparks and flame. Do not ingest or inhale. Handle under an inert atmosphere. Do not allow contact with water. Use only in a chemical fume hood.

Storage: Keep away from sources of ignition. Store in a cool, dry place. Store in a tightly closed container. Water free area. Store protected from moisture. Store under an inert atmosphere.

Section 8 - Exposure Controls, Personal Protection

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
Calcium	none listed	none listed	none listed

OSHA Vacated PELs: Calcium: None listed

Engineering Controls:

Use explosion-proof ventilation equipment. Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use only under a chemical fume hood.

Exposure Limits

Personal Protective Equipment

Eyes: Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Section 9 - Physical and Chemical Properties

Physical State: Solid

Color: grey

Odor: none reported

pH: 14 (4g/L aq.sol.)

Vapor Pressure: 13 mbar @ 983 deg C

Vapor Density: Not available

Evaporation Rate: Not available

Viscosity: Not available

Boiling Point: 1484 deg C @ 760 mmHg (2,703.20°F)

Freezing/Melting Point: 845 deg C (1,553.00°F)

Decomposition Temperature: Not available

Solubility in water: Reacts

Specific Gravity/Density: Not available.

Molecular Formula: Ca

Molecular Weight: 40.07

Section 10 - Stability and Reactivity

Chemical Stability: Reacts with water. Water contact produces hydrogen gas.

Conditions to Avoid: Incompatible materials, ignition sources, dust generation, excess heat, exposure to moist air or water.

Incompatibilities with Other Materials: Strong oxidizing agents, acids, alcohols, ammonia, halogens, sulfur, oxygen, phosphorus oxide, mercury, alkali hydroxides, metal oxides, alkali halides, nitrogen oxide.

Hazardous Decomposition Products: Hydrogen gas.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#: CAS# 7440-70-2: EV8500000

LD50/LC50: RTECS: Not available.

Carcinogenicity: Calcium - Not listed as a carcinogen by ACGIH, IARC, NTP, or CA Prop 65.

Other: See actual entry in RTECS for complete information.

Section 12 - Ecological Information

Other: Do not empty into drains.

Section 13 - Disposal Considerations

Dispose of in a manner consistent with federal, state, and local regulations.

Section 14 - Transport Information

US DOT

Shipping Name: CALCIUM

Hazard Class: 4.3

UN Number: UN1401

Packing Group: II

Canada TDG

Shipping Name: CALCIUM

Hazard Class: 4.3

UN Number: UN1401

Packing Group: II

Section 15 - Regulatory Information

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols: F

Risk Phrases:

R 15 Contact with water liberates extremely flammable gases.

Safety Phrases:

S 8 Keep container dry.

S 24/25 Avoid contact with skin and eyes.

S 43C In case of fire, use limestone powder, sodium chloride or dry sand (never use water).

WGK (Water Danger/Protection)

CAS# 7440-70-2: 1

Canada

CAS# 7440-70-2 is listed on Canada's DSL List

Canadian WHMIS Classifications: E, B6

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

CAS# 7440-70-2 is not listed on Canada's Ingredient Disclosure List.

US Federal

TSCA

CAS# 7440-70-2 is listed on the TSCA Inventory.

Section 16 - Other Information

MSDS Creation Date: 5/19/1999

Revision #7 Date 7/20/2009

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall the company be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential, or exemplary damages howsoever arising, even if the company has been advised of the possibility of such damages.

SAFETY DATA SHEET

Version 3.8
Revision Date 10/12/2015
Print Date 01/29/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Carbazole

Product Number : C5132

Brand : Sigma

CAS-No. : 86-74-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Carcinogenicity (Category 2), H351

Chronic aquatic toxicity (Category 4), H413

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H351

Suspected of causing cancer.

H413

May cause long lasting harmful effects to aquatic life.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P273

Avoid release to the environment.

P281

Use personal protective equipment as required.

P308 + P313

IF exposed or concerned: Get medical advice/ attention.

P405

Store locked up.

P501

Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : C₁₂H₉N
Molecular weight : 167.21 g/mol
CAS-No. : 86-74-8
EC-No. : 201-696-0

Hazardous components

Component	Classification	Concentration
Carbazole		
	Carc. 2; Aquatic Chronic 4; H351, H413	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Nitrogen oxides (NO_x)

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

- | | |
|---|--|
| a) Appearance | Form: powder
Colour: beige |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 243 - 246 °C (469 - 475 °F) |
| f) Initial boiling point and boiling range | 355 °C (671 °F) |
| g) Flash point | 220.0 °C (428.0 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | The product is not flammable. |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 533 hPa (400 mmHg) at 323 °C (613 °F) |
| l) Vapour density | No data available |
| m) Relative density | 1.1 g/cm ³ at 18 °C (64 °F) |
| n) Water solubility | 0.00091 g/l at 25 °C (77 °F) |
| o) Partition coefficient: n-octanol/water | log Pow: 3.72 at 22 °C (72 °F) |
| p) Auto-ignition temperature | > 600 °C (> 1,112 °F) at 1,013 hPa (760 mmHg) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY**10.1 Reactivity**

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD₀ Oral - Rat - > 16,000 mg/kg
(OECD Test Guideline 401)

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation
(OECD Test Guideline 404)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Carcinogenicity - Mouse - male and female - Oral
hepatocellular carcinoma

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Carbazole)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: FE3150000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish	LC50 - Pimephales promelas (fathead minnow) - > 0.93 mg/l - 96.0 h Remarks: No toxicity at the limit of solubility
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 2.30 - 4.90 mg/l - 48 h Remarks: No toxicity at the limit of solubility
Toxicity to algae	Growth inhibition NOEC - Scenedesmus acuminatus - > 0.4 mg/l - 96 h Remarks: No toxicity at the limit of solubility

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation	Cyprinus carpio (Carp) - 42 d - 0.05 mg/l Bioconcentration factor (BCF): 241 Cyprinus carpio (Carp) - 42 d - 0.005 mg/l Bioconcentration factor (BCF): 200
-----------------	---

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

Not dangerous goods

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Carbazole)
Marine pollutant: yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Carbazole)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Chronic Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Carbazole	86-74-8	2009-07-17

New Jersey Right To Know Components

	CAS-No.	Revision Date
Carbazole	86-74-8	2009-07-17

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Carbazole	86-74-8	2007-09-28

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H351	Suspected of causing cancer.
H413	May cause long lasting harmful effects to aquatic life.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0
Health hazard:	2
Fire Hazard:	1
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.8

Revision Date: 10/12/2015

Print Date: 01/29/2016

SAFETY DATA SHEET

Version 5.6
Revision Date 12/10/2015
Print Date 02/09/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Carbon disulfide

Product Number : 180173
Brand : Sigma-Aldrich
Index-No. : 006-003-00-3

CAS-No. : 75-15-0

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 2), H225
Acute toxicity, Inhalation (Category 4), H332
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Reproductive toxicity (Category 2), H361
Specific target organ toxicity - repeated exposure, Inhalation (Category 1), H372
Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 : Highly flammable liquid and vapour.
H315 : Causes skin irritation.
H319 : Causes serious eye irritation.
H332 : Harmful if inhaled.
H361 : Suspected of damaging fertility or the unborn child.
H372 : Causes damage to organs through prolonged or repeated exposure if inhaled.

H401	Toxic to aquatic life.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: CS ₂
Molecular weight	: 76.14 g/mol
CAS-No.	: 75-15-0
EC-No.	: 200-843-6
Index-No.	: 006-003-00-3

Hazardous components

Component	Classification	Concentration
Carbon disulphide		
	Flam. Liq. 2; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; Repr. 2; STOT RE 1; Aquatic Acute 2; H225, H315, H319, H332, H361, H372, H401	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Sulphur oxides

Flash back possible over considerable distance., Container explosion may occur under fire conditions., Vapours may form explosive mixture with air., May explode when heated.

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Refrigerate before opening.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Carbon disulphide	75-15-0	TWA	1 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Peripheral Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	1.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Peripheral Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	20.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		CEIL	30.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		Peak	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		TWA	1.000000 ppm 3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		ST	10.000000 ppm 30.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		See Table Z-2		
		TWA	20 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		
		CEIL	30 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		

		Peak	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.3-1968		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Carbon disulphide	75-15-0	2-Thiothiazolidine-4-carboxylic acid (TTCA)	0.5000 mg/g	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid Colour: colourless
b) Odour	Stench.
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -112 °C (-170 °F) - lit.
f) Initial boiling point and boiling range	46 °C (115 °F) - lit.
g) Flash point	-30 °C (-22 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 50 %(V) Lower explosion limit: 1.3 %(V)
k) Vapour pressure	394.956 hPa (296.241 mmHg) at 20 °C (68 °F) 1,342.711 hPa (1,007.116 mmHg) at 55 °C (131 °F)
l) Vapour density	2.63 - (Air = 1.0)
m) Relative density	1.266 g/mL at 25 °C (77 °F)
n) Water solubility	2.9 g/l at 20 °C (68 °F) - OECD Test Guideline 105
o) Partition coefficient: n-octanol/water	log Pow: 2.7 at 25 °C (77 °F)
p) Auto-ignition temperature	97 - 107 °C (207 - 225 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

Surface tension	71.9 mN/m at 19.5 °C (67.1 °F)
Relative vapour density	2.63 - (Air = 1.0)

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Alkali metals, Zinc, Amines, Azides, Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - female - > 2,000 mg/kg

(OECD Test Guideline 423)

LC50 Inhalation - Rat - male and female - 4 h - 10.35 mg/l

(OECD Test Guideline 403)

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

- Mouse

Result: Does not cause skin sensitisation.

(OECD Test Guideline 429)

Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

Ames test

Salmonella typhimurium

Result: negative

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

Suspected human reproductive toxicant

May cause reproductive disorders.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: FF6650000

May cause convulsions.

Liver - Irregularities - Based on Human Evidence

Liver - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - <i>Poecilia reticulata</i> (guppy) - 4 mg/l - 96 h (OECD Test Guideline 203)
Toxicity to daphnia and other aquatic invertebrates	Immobilization EC50 - <i>Daphnia magna</i> (Water flea) - 2.1 mg/l - 48 h (OECD Test Guideline 202)
Toxicity to algae	Growth inhibition EC50 - <i>Chlorella pyrenoidosa</i> - 21 mg/l - 96 h (OECD Test Guideline 201)

12.2 Persistence and degradability

Biodegradability	aerobic - Exposure time 28 d Result: > 80 % - Readily biodegradable (OECD Test Guideline 301D)
------------------	--

12.3 Bioaccumulative potential

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1131 Class: 3 (6.1) Packing group: I
Proper shipping name: Carbon disulfide
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1131 Class: 3 (6.1) Packing group: I EMS-No: F-E, S-D
Proper shipping name: CARBON DISULPHIDE

IATA

UN number: 1131 Class: 3 (6.1)
Proper shipping name: Carbon disulphide
IATA Passenger: Not permitted for transport
IATA Cargo: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components

The following components are subject to reporting levels established by SARA Title III, Section 302:

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2007-07-01

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2007-07-01

California Prop. 65 Components

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

	CAS-No.	Revision Date
Carbon disulphide	75-15-0	2008-06-17

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure if inhaled.
H401	Toxic to aquatic life.
Repr.	Reproductive toxicity

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation

Product Safety – Americas Region

1-800-521-8956

Version: 5.6

Revision Date: 12/10/2015

Print Date: 02/09/2016



Safety Data Sheet

Revision Date: 05/11/15

www.restek.com

1. IDENTIFICATION

Catalog Number / Product Name:	32207, 32207-5XX, & 32307 / alpha-Chlordane Standard
Company:	Restek Corporation
Address:	110 Benner Circle Bellefonte, Pa. 16823
Phone#:	814-353-1300
Fax#:	814-353-1309
Emergency#:	1-800-424-9300 (CHEMTREC) +1 703-741-5970 (Outside the US)
Email:	sds@restek.com
Revision Number:	6
Intended use:	For Laboratory use only

2. HAZARD(S) IDENTIFICATION

Emergency Overview:

GHS Hazard Symbols:



GHS Classification:

Specific Target Organ Systemic Toxicity (STOT) - Single Exposure Category 1
Flammable Liquid Category 2
Acute Toxicity - Inhalation Dust / Mist Category 3
Acute Toxicity - Inhalation Vapour Category 3
Acute Toxicity - Inhalation Gas Category 3
Acute Toxicity - Dermal Category 3
Acute Toxicity - Oral Category 3

GHS Signal Word:

Danger

GHS Hazard:

Highly flammable liquid and vapour.
Toxic if swallowed, in contact with skin or if inhaled.
Toxic if inhaled.
Causes damage to organs.

GHS Precautions:

Safety Precautions:

Keep away from heat/sparks/open flames/hot surfaces. – No smoking.
Ground/bond container and receiving equipment.
Use explosion-proof electrical/ventilation and lighting equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.
Do not breathe dust/fume/gas/mist/vapours/spray.
Wash hands and skin thoroughly after handling.
Do not eat, drink or smoke when using this product.
Use only outdoors or in a well-ventilated area.
Wear protective gloves/protective clothing/eye protection/face protection.

First Aid Measures:

IF SWALLOWED: Immediately call a POISON CENTER/doctor/....
IF ON SKIN: Wash with plenty of soap and water.
IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
IF exposed: Call a POISON CENTER or doctor/physician.
Call a POISON CENTER or doctor/physician if you feel unwell.
Specific treatment see section 4.

Specific measures see section 4.
Rinse mouth.
Remove/Take off immediately all contaminated clothing.
Wash contaminated clothing before reuse.
In case of fire: Use extinguishing media in section 5 for extinction.

Storage: Store in a well-ventilated place. Keep container tightly closed.
Store in a well-ventilated place. Keep cool.
Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

Single Exposure Target Organs: No data available.

Repeated Exposure Target Organs: No data available.

3. COMPOSITION / INFORMATION ON INGREDIENT

Chemical Name	CAS #	EINEC #	% Composition
methanol	67-56-1	200-659-6	99.900000
cis-chlordane	5103-71-9		0.100000

4. FIRST-AID MEASURES

Inhalation: Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not breathing, give artificial respiration and have a trained individual administer oxygen. Get medical attention immediately.

Eyes: Flush eyes with plenty of water for at least 20 minutes retracting eyelids often. Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention.

Skin Contact: Wash with soap and water. Remove contaminated clothing and launder. Get medical attention if irritation develops or persists.

Ingestion: Do not induce vomiting and seek medical attention immediately. Drink two glasses of water or milk to dilute. Provide medical care provider with this SDS.

5. FIRE- FIGHTING MEASURES

Extinguishing Media: Use alcohol resistant foam, carbon dioxide, or dry chemical extinguishing agents. Water may be ineffective but water spray can be used to extinguish a fire if swept across the base of the flames. Water can absorb heat and keep exposed material from being damaged by fire.

Fire and/or Explosion Hazards: Vapors may be ignited by sparks, flames or other sources of ignition if material is above the flash point giving rise to a fire (Class B). Vapors are heavier than air and may travel to a source of ignition and flash back.

Fire Fighting Methods and Protection: Do not enter fire area without proper protection including self-contained breathing apparatus and full protective equipment. Fight fire from a safe distance and a protected location due to the potential of hazardous vapors and decomposition products. Flammable component(s) of this material may be lighter than water and burn while floating on the surface.

Hazardous Combustion Products: Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions and Equipment: Exposure to the spilled material may be severely irritating or toxic. Follow personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including; the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the area responding to the spill. Never exceed any occupational exposure limits.

Methods for Clean-up: Prevent the spread of any spill to minimize harm to human health and the environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal.

evaluation.

7. HANDLING AND STORAGE

Handling Technical Measures and Precautions:	Toxic or severely irritating material. Avoid contacting and avoid breathing the material. Use only in a well ventilated area. Use spark-proof tools and explosion-proof equipment
Storage Technical Measures and Conditions:	Store in a cool dry ventilated location. Isolate from incompatible materials and conditions. Keep container(s) closed. Keep away from sources of ignition

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

United States:

Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
methanol	67-56-1	6000 ppm IDLH	250 ppm STEL	200 ppm TWA	200 ppm TWA; 260 mg/m ³ TWA
cis-chlordane	5103-71-9	ND		No TLV	No data available.

Personal Protection:

Engineering Measures:	Local exhaust ventilation is recommended when generating excessive levels of vapors from handling or thermal processing.
Respiratory Protection:	Respiratory protection may be required to avoid overexposure when handling this product. General or local exhaust ventilation is the preferred means of protection. Use a respirator if general room ventilation is not available or sufficient to eliminate symptoms. If an exposure limit is exceeded or if an operator is experiencing symptoms of inhalation overexposure as explained in Section 3, provide respiratory protection.
Eye Protection:	Wear chemically resistant safety glasses with side shields when handling this product. Do not wear contact lenses.
Skin Protection:	Wear protective gloves. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when leaving work

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color:	No data available.
Odor:	Mild
Physical State:	No data available.
pH:	No data available
Vapor Density:	1.1 (air = 1)
Melting Point:	-98 °C
Flash Point:	52
Flammability:	Highly Flammable
Upper Flammable/Explosive Limit, % in air:	36.0
Lower Flammable/Explosive Limit, % in air:	6.0
Autoignition Temperature:	464 deg C
Decomposition Temperature:	No data available.
Specific Gravity:	0.791 - 0.792 g/cm ³ at 20 °C
Evaporation Rate:	No data available.
Odor Threshold:	No data available.
Solubility:	Moderate; 50-99%
Partition Coefficient: n-octanol in water:	No data available.
VOC % by weight:	99.90
Molecular Weight:	32.04

10. STABILITY AND REACTIVITY

Stability:	Stable under normal conditions.
Conditions to Avoid:	No data available.
Materials to Avoid / Chemical Incompatibility:	Strong oxidizing agents
Hazardous Decomposition Products:	Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry:	Inhalation, Skin Contact, Eye Contact, Ingestion
Target Organs Potentially Affected By Exposure:	Eyes, Central nervous system stimulation, Skin, GI Tract, Respiratory Tract
Chemical Interactions That Change Toxicity:	None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation:	Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.
Inhalation Toxicity:	Harmful! Can cause systemic damage (see "Target Organs")Methanol can cause central nervous system depression and overexposure can cause damage to the optic nerve resulting in visual impairment or blindness.
Skin Contact:	Can cause moderate skin irritation, defatting, and dermatitis. Not likely to cause permanent damage.
Eye Contact:	Can cause moderate irritation, tearing and reddening, but not likely to permanently injure eye tissue.
Ingestion Irritation:	Irritating to mouth, throat, and stomach. Can cause abdominal discomfort, nausea, vomiting and diarrhea.Highly toxic and may be fatal if swallowed.
Ingestion Toxicity:	Toxic if swallowed. May cause target organ failure and/or death.May be fatal if swallowed.

Long-Term (Chronic) Health Effects:

Carcinogenicity:	No data.
Reproductive and Developmental Toxicity:	Contains a known human reproductive and/or developmental hazard.
Inhalation:	Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (see "Target Organs")
Skin Contact:	Upon prolonged or repeated contact, can cause moderate skin irritation, defatting, and dermatitis. Not likely to cause permanent damage.
Ingestion:	Toxic if swallowed. May cause target organ failure and/or death.

Component Toxicological Data:**NIOSH:**

Chemical Name	CAS No.	LD50/LC50
Methanol	67-56-1	Oral LD50 Rat 5628 mg/kg (Source: NLM_CIP); Inhalation LC50 Rat 83.2 mg/L 4 h (Source: IUCLID)

Component Carcinogenic Data:**OSHA:**

Chemical Name	CAS No.
No data available.	

ACGIH:

Chemical Name	CAS No.
No data available.	

NIOSH:

Chemical Name	CAS No.
No data available.	

NTP:

Chemical Name	CAS No.
No data available.	

IARC:

Chemical Name	CAS No.	Group No.
No data.		Group 1
No data.		Group 2A
cis-Chlordane	5103-71-9	Group 2B

12. ECOLOGICAL INFORMATION

Overview:	Moderate ecological hazard. This product may be dangerous to plants and/or wildlife.
Mobility:	No data
Persistence:	No data

Bioaccumulation: No data
Degradability: Biodegrades slowly.
Ecological Toxicity Data: No data available.

13. DISPOSAL CONSIDERATIONS

Waste Description of Spent Product: Spent or discarded material is a hazardous waste.
Disposal Methods: Dispose of by incineration following Federal, State, Local, or Provincial regulations.
Waste Disposal of Packaging: Comply with all Local, State, Federal, and Provincial Environmental Regulations.

14. TRANSPORTATION INFORMATION

United States:
DOT Proper Shipping Name: Methanol
UN Number: UN1230
Hazard Class: 3
Packing Group: II

International:
IATA Proper Shipping Name: Methanol
UN Number: UN1230
Hazard Class: 3 (6.1)
Packing Group: II

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available.			

15. REGULATORY INFORMATION

United States:

Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
methanol	67-56-1	X	X	-	X
cis-chlordane	5103-71-9	X	-	-	-

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS #	Regulation
Methanol	67-56-1	Prop 65 Develop Tox


State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
methanol	67-56-1	X	X	X	X
cis-chlordane	5103-71-9	-	-	-	-

16. OTHER INFORMATION

Prior Version Date: 04/22/14

Disclaimer: Restek Corporation provides the descriptions, data and information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given and accepted at your risk.



Health	2
Fire	1
Reactivity	0
Personal Protection	E

Material Safety Data Sheet

Chromium MSDS

Section 1: Chemical Product and Company Identification

Product Name: Chromium

Catalog Codes: SLC4711, SLC3709

CAS#: 7440-47-3

RTECS: GB4200000

TSCA: TSCA 8(b) inventory: Chromium

CI#: Not applicable.

Synonym: Chromium metal; Chrome; Chromium Metal Chips 2" and finer

Chemical Name: Chromium

Chemical Formula: Cr

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Chromium	7440-47-3	100

Toxicological Data on Ingredients: Chromium LD50: Not available. LC50: Not available.

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of eye contact (irritant), of inhalation. Slightly hazardous in case of ingestion.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH, 3 (Not classifiable for human.) by IARC.

MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to kidneys, lungs, liver, upper respiratory tract. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention.

Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

Serious Inhalation: Not available.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: May be combustible at high temperature.

Auto-Ignition Temperature: 580°C (1076°F)

Flash Points: Not available.

Flammable Limits: Not available.

Products of Combustion: Some metallic oxides.

Fire Hazards in Presence of Various Substances:

Slightly flammable to flammable in presence of open flames and sparks, of heat. Non-flammable in presence of shocks.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

Special Remarks on Fire Hazards:

Moderate fire hazard when it is in the form of a dust (powder) and burns rapidly when heated in flame. Chromium is attacked vigorously by fused potassium chlorate producing vivid incandescence. Pyrophoric chromium unites with nitric oxide with incandescence. Incandescent reaction with nitrogen oxide or sulfur dioxide.

Special Remarks on Explosion Hazards:

Powdered Chromium metal +fused ammonium nitrate may react violently or explosively. Powdered Chromium will explode spontaneously in air.

Section 6: Accidental Release Measures

Small Spill:

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

Large Spill:

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe dust. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, acids, alkalis.

Storage: Keep container tightly closed. Keep container in a cool, well-ventilated area.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection:

Splash goggles. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 0.5 (mg/m³) from ACGIH (TLV) [United States] TWA: 1 (mg/m³) from OSHA (PEL) [United States] TWA: 0.5 (mg/m³) from NIOSH [United States] TWA: 0.5 (mg/m³) [United Kingdom (UK)] TWA: 0.5 (mg/m³) [Canada] Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid. (Metal solid.)

Odor: Odorless.

Taste: Not available.

Molecular Weight: 52 g/mole

Color: Silver-white to Grey.

pH (1% soln/water): Not applicable.

Boiling Point: 2642°C (4787.6°F)

Melting Point: 1900°C (3452°F) +/- 10 deg. C

Critical Temperature: Not available.

Specific Gravity: 7.14 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: Not available.

Volatility: Not available.

Odor Threshold: Not available.

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: Not available.

Solubility:

Insoluble in cold water, hot water. Soluble in acids (except Nitric), and strong alkalies.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Excess heat, incompatible materials

Incompatibility with various substances: Reactive with oxidizing agents, acids, alkalis.

Corrosivity: Not available.

Special Remarks on Reactivity:

Incompatible with molten Lithium at 180 deg. C, hydrogen peroxide, hydrochloric acid, sulfuric acid, most caustic alkalies and alkali carbonates, potassium chlorate, sulfur dioxide, nitrogen oxide, bromine pentafluoride. It may react violently or ignite with bromine pentafluoride. Chromium is rapidly attacked by fused sodium hydroxide + potassium nitrate. Potentially hazardous incompatibility with strong oxidizers.

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Inhalation. Ingestion.

Toxicity to Animals:

LD50: Not available. LC50: Not available.

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH, 3 (Not classifiable for human.) by IARC.

May cause damage to the following organs: kidneys, lungs, liver, upper respiratory tract.

Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant), of inhalation. Slightly hazardous in case of ingestion.

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans:

May cause cancer based on animal data. There is no evidence that exposure to trivalent chromium causes cancer in man.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: May cause skin irritation. Eyes: May cause mechanical eye irritation. Inhalation: May cause irritation of the respiratory tract and mucous membranes of the respiratory tract. Ingestion: May cause gastrointestinal tract irritation with nausea, vomiting, diarrhea. Chronic Potential Health Effects: Inhalation: The effects of chronic exposure include irritation, sneezing, redness of the throat, bronchospasm, asthma, cough, polyps, chronic inflammation, emphysema, chronic bronchitis, pharyngitis, bronchopneumonia, pneumoconiosis. Effects on the nose from chronic chromium exposure include irritation, ulceration, and perforation of the nasal septum. Inflammation and ulceration of the larynx may also occur. Ingestion or Inhalation: Chronic exposure may cause liver and kidney damage.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The product itself and its products of degradation are not toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: Not a DOT controlled material (United States).

Identification: Not applicable.

Special Provisions for Transport: Not applicable.

Section 15: Other Regulatory Information**Federal and State Regulations:**

Connecticut hazardous material survey.: Chromium Illinois toxic substances disclosure to employee act: Chromium Illinois chemical safety act: Chromium New York release reporting list: Chromium Rhode Island RTK hazardous substances: Chromium Pennsylvania RTK: Chromium Minnesota: Chromium Michigan critical material: Chromium Massachusetts RTK: Chromium Massachusetts spill list: Chromium New Jersey: Chromium New Jersey spill list: Chromium Louisiana spill reporting: Chromium California Director's List of Hazardous Substances: Chromium TSCA 8(b) inventory: Chromium SARA 313 toxic chemical notification and release reporting: Chromium CERCLA: Hazardous substances.: Chromium: 5000 lbs. (2268 kg)

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada): Not controlled under WHMIS (Canada).

DSCL (EEC):

R40- Limited evidence of carcinogenic effect S36/37/39- Wear suitable protective clothing, gloves and eye/face protection. S45- In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 1

Reactivity: 0

Personal Protection: E

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 1

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/10/2005 08:16 PM

Last Updated: 11/06/2008 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Based on Directive 2001/58/EC of the Commission of the European Communities

CHRYSENE

1. Identification of the substance/preparation and of the company/undertaking

1.1 Identification of the substance or preparation:

Synonyms: none
CAS No. : 218-01-9 BCR number : BCR-269
EC index No. : 601-048-00-0 NFPA code : N.D.
EINECS No. : 205-923-4 Molecular weight : 228.30
RTECS No. : GC0700000 Formula : C18H12

1.2 Use of the substance or the preparation:

Certified reference material for laboratory use only

1.3 Company/undertaking identification:

Institute for Reference Materials and Measurements
Retieseweg
B-2440 Geel
Tel. : +32 14 57 12 11
Fax : +32 14 58 42 73

1.4 Telephone number for emergency:

+32 70 245 245
Antigifcentrum
p/a Militair Hospitaal Koningin Astrid, Bruynstraat, B-1120 Brussel

2. Composition/information on ingredients

Hazardous ingredients	CAS No. EINECS No.	Conc. in %	Hazard symbol	Risks (R-phrases)
chrysene	218-01-9 205-923-4	100	T;N	45-50/53 (1)

(1) For R-phrases in full: see heading 16

3. Hazards identification

- May cause cancer
- Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

4. First aid measures

4.1 Eye contact:

- Consult a doctor/medical service if irritation persists
- Rinse immediately with water

4.2 Skin contact:

- Consult a doctor/medical service if irritation persists
- Wash with water and soap
- Wipe off dry product from skin
- Remove clothing before washing

4.3 After inhalation:

- Consult a doctor/medical service if breathing problems develop
- Remove the victim into fresh air
- Unconscious: maintain adequate airway and respiration

4.4 After ingestion:

- Consult a doctor/medical service if you feel unwell
- Immediately give lots of water to drink
- Never give water to an unconscious person

Printing date : 07-2002
Compiled by : Brandweerinformatiecentrum voor Gevaarlijke Stoffen vzw (BIG)
Technische Schoolstraat 43 A, B-2440 Geel
☎ +32 14 58 45 47 <http://www.big.be> E-mail: info@big.be

1 / 8

MSDS established :
Reference number : BIG\18207GB
Reason for revision : Directive 2001/58/EC
Revision date : 22-03-2002
Revision number : 001

CHRYSENE

- Do not induce vomiting

CHRYSENE

5. Fire-fighting measures

5.1 Suitable extinguishing media:

- Water spray
- Alcohol foam
- Polymer foam
- ABC powder
- Carbon dioxide

5.2 Unsuitable extinguishing media:

- Solid water jet ineffective as extinguishing medium

5.3 Special exposure hazards:

- Not easily combustible
- Upon combustion CO and CO₂ are formed

5.4 Instructions:

- Take account of toxic firefighting water
- Use firefighting water moderately and contain it

5.5 Special protective equipment for firefighters:

- Heat/fire exposure: compressed air/oxygen apparatus
- Dust cloud production: compressed air/oxygen apparatus

6. Accidental release measures

6.1 Personal protection/precautions: see heading 8.1/8.3/10.3

6.2 Environmental precautions:

- Prevent soil and water pollution
- Substance must not be discharged into the sewer
- Dam up the solid spill

6.3 Methods for cleaning up:

- Stop dust cloud by covering with sand/earth
- Carefully collect the spill/leftovers
- Scoop solid spill into closing containers
- Spill must not return in its original container
- Take collected spill to manufacturer/competent authority
- Clean contaminated surfaces with an excess of water
- Wash clothing and equipment after handling

7. Handling and storage

7.1 Handling:

- Observe strict hygiene
- Avoid prolonged and repeated contact with skin
- Avoid raising dust
- Do not discharge the waste into the drain
- Remove contaminated clothing immediately

7.2 Storage:

- Keep container tightly closed. Store only in a limited quantity. Store in a dry area. Store in a dark area.
- Keep away from: heat sources, ignition sources, oxidizing agents, acids

Storage temperature	: N.D.	°C
Quantity limits	: N.D.	kg
Storage life	: N.D.	
Materials for packaging	:	
- suitable	:no data available	
- to avoid	:no data available	

7.3 Specific uses:

- See information supplied by the manufacturer

CHRYSENE

8. Exposure controls/Personal protection

8.1 Exposure limit values:

TLV-TWA : not listed
TLV-STEL : not listed
TLV-Ceiling : not listed

OES-LTEL : not listed
OES-STEL : not listed
MEL-LTEL : not listed
MEL-STEL : not listed

MAK : not listed
TRK : not listed

MAC-TGG 8 h : not listed
MAC-TGG 15 min. : not listed
MAC-Ceiling : not listed

VME-8 h : not listed
VLE-15 min. : not listed

GWBB-8 h : not listed
GWK-15 min. : not listed
Momentary value : not listed

EC : not listed
EC-STEL : not listed

Sampling methods:

- Chrysene (Polynuclear aromatic Hydrocarbons)	NIOSH 5515
- Chrysene	OSHA 58
- Chrysene (Polynuclear aromatic Hydrocarbons)	NIOSH 5506

8.2 Exposure controls:

8.2.1 Occupational exposure controls:

- Measure the concentration in the air regularly
- Work under local exhaust/ventilation

8.2.2 Environmental exposure controls: see heading 13

8.3 Personal protection:

8.3.1 respiratory protection:

- Dust production: dust mask with filter type P3
- High dust production: compressed air/oxygen apparatus

8.3.2 hand protection:

- Gloves
Suitable materials: No data available
- Breakthrough time: N.D.

8.3.3 eye protection:

- Safety glasses
- In case of dust production: protective goggles

8.3.4 skin protection:

- Protective clothing
- In case of dust production: head/neck protection
Suitable materials: No data available

CHRYSENE

9. Physical and chemical properties

9.1 General information:

Appearance (at 20°C)	: Crystalline solid / Flakes
Odour	: Odourless
Colour	: White

9.2 Important health, safety and environmental information:

pH value	: N.D.	
Boiling point/boiling range	: 448	°C
Flashpoint	: N.D.	°C
Explosion limits	: N.D.	vol% (°C)
Vapour pressure (at 20°C)	: N.D.	hPa
Vapour pressure (at 50°C)	: N.D.	hPa
Relative density (at 20°C)	: 1.27	
Water solubility	: < 0.001	g/100 ml
Soluble in	: N.D.	
Relative vapour density	: N.D.	
Viscosity	: N.D.	Pa.s
Partition coefficient n-octanol/water	: 5.61/5.73	
Evaporation rate		
ratio to butyl acetate	: N.D.	
ratio to ether	: N.D.	

9.3 Other information:

Melting point/melting range	: 256	°C
Auto-ignition point	: N.D.	°C
Saturation concentration	: N.D.	g/m ³

10. Stability and reactivity

10.1 Conditions to avoid/reactivity:

- Stable under normal conditions

10.2 Materials to avoid:

- Keep away from: heat sources, ignition sources, oxidizing agents, acids

10.3 Hazardous decomposition products:

- Upon combustion CO and CO₂ are formed
- Reacts violently with (strong) oxidizers
- Decomposes on exposure to (strong) acids

11. Toxicological information

11.1 Acute toxicity:

LD50 oral rat	: N.D.	mg/kg
LD50 dermal rat	: N.D.	mg/kg
LD50 dermal rabbit	: N.D.	mg/kg
LC50 inhalation rat	: N.D.	mg/l/4 h
LC50 inhalation rat	: N.D.	ppm/4 h

11.2 Chronic toxicity:

EC carc. cat.	:	2
EC muta. cat.	:	3
EC repr. cat.	:	not listed
Carcinogenicity (TLV)	:	A3
Carcinogenicity (MAC)	:	K
Carcinogenicity (VME)	:	not listed
Carcinogenicity (GWBB)	:	not listed
Carcinogenicity (MAK)	:	2
Mutagenicity (MAK)	:	not listed
Teratogenicity (MAK)	:	-
IARC classification	:	3

11.3 Routes of exposure: ingestion, inhalation, eyes and skin
Caution! Substance is absorbed through the skin

11.4 Acute effects/symptoms:

AFTER SKIN CONTACT
- Slight irritation

11.5 Chronic effects:

- Probably human carcinogenic
- No certainty about human mutagenic properties
-
- ON CONTINUOUS/REPEATED EXPOSURE/CONTACT:
- No specific information available
-
- SIMILAR PRODUCTS CAUSE FOLLOWING SYMPTOMS:
- Feeling of weakness
- Photoallergy
- Cracking of the skin
- Skin rash/inflammation
- Skin cancer
- Lung tissue affection/degeneration
- Enlargement/affection of the liver
- Affection of the renal tissue

12. Ecological information

12.1 Ecotoxicity:

- LC50 (24 h) : 0.0007 mg/l (DAPHNIA MAGNA)
- LC50 (24 h) : >6.7 mg/l (RANA SP.)

12.2 Mobility:

- Volatile organic compounds (VOC): N.D. %
- Forming sediments in water
- Adsorbs into the soil
- Insoluble in water

For other physicochemical properties see heading 9.

12.3 Persistence and degradability:

- | | | | |
|-----------------------------------|---|-----------|------------------------------------|
| - biodegradation BOD ₅ | : | N.D. | % ThOD |
| - water | : | - | Not readily biodegradable in water |
| - soil | : | T ½: > 77 | days |

12.4 Bioaccumulative potential:

- log P_{ow} : 5.61/5.73
- BCF : 4440 (LAMELLIBRANCHIATA)
- Highly bioaccumulative

12.5 Other adverse effects:

- **WGK** : 3 (Classification based on the R-phrases in compliance with Verwaltungsvorschrift wassergefährdender Stoffe (VwVwS) of 17 May 1999)
- **Effect on the ozone layer** : Not dangerous for the ozone layer (Council Regulation (EC) 3093/94)
- **Greenhouse effect** : no data available
- **Effect on waste water purification** : no data available

13. Disposal considerations

13.1 Provisions relating to waste:

- Waste material code (91/689/EEC, Council Decision 2001/118/EC, O.J. L47 of 16/2/2001): 16 05 06 (laboratory chemicals, consisting of or containing dangerous substances, including mixtures of laboratory)
- Waste material code (Flanders): 001, 045, 691
- Waste code (Germany): 59302
- Hazardous waste (91/689/EEC)

13.2 Disposal methods:

- Dissolve or mix with a combustible solvent
- Remove to an authorized incinerator equipped with an afterburner and a flue gas scrubber
- Do not discharge into surface water (2000/60/EEC, Council)

13.3 Packaging/Container:

- Waste material code packaging (91/689/EEC, Council Decision 2001/118/EC, O.J. L47 of 16/2/2001): 15 01 10 (packaging containing residues of or contaminated by dangerous substances)

14. Transport information

90
3077

- 14.1 Classification of the substance in compliance with UN Recommendations
- | | |
|----------------------|--|
| UN number | : 3077 |
| CLASS | : 9 |
| SUB RISKS | : - |
| PACKING | : III |
| PROPER SHIPPING NAME | : UN 3077, Environmentally hazardous substance, solid, n.o.s. (chrysene) |
- 14.2 ADR (transport by road)
- | | |
|-----------------------|-------|
| CLASS | : 9 |
| PACKING | : III |
| DANGER LABEL TANKS | : 9 |
| DANGER LABEL PACKAGES | : 9 |
- 14.3 RID (transport by rail)
- | | |
|-----------------------|-------|
| CLASS | : 9 |
| PACKING | : III |
| DANGER LABEL TANKS | : 9 |
| DANGER LABEL PACKAGES | : 9 |
- 14.4 ADNR (transport by inland waterways)
- | | |
|-----------------------|-------|
| CLASS | : 9 |
| PACKING | : III |
| DANGER LABEL TANKS | : 9 |
| DANGER LABEL PACKAGES | : 9 |
- 14.5 IMDG (maritime transport)
- | | |
|------------------|-------|
| CLASS | : 9 |
| SUB RISKS | : - |
| PACKING | : III |
| MFAG | : - |
| EMS | : - |
| MARINE POLLUTANT | : P |
- 14.6 ICAO (air transport)
- | | |
|---|-------|
| CLASS | : 9 |
| SUB RISKS | : - |
| PACKING | : III |
| PACKING INSTRUCTIONS PASSENGER AIRCRAFT | : |
| PACKING INSTRUCTIONS CARGO AIRCRAFT | : |
- 14.7 Special precautions in connection with transport : none
- 14.8 Limited quantities (LQ) :
- When substances and their packaging meet the conditions established by ADR/RID/ADNR in chapter 3.4, **only** the following prescriptions shall be complied with:
- each package shall display a diamond-shaped figure with the following inscription:
- 'UN 3077'
- or, in the case of different goods with different identification numbers within a single package:
- the letters 'LQ'

CHRYSENE

15. Regulatory information

Enumerated in substance list Annex I of directive 67/548/EEC et sequens



Toxic



Dangerous for the environment

- R45 : May cause cancer
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment
- S53 : Avoid exposure - obtain special instructions before use
S45 : In case of accident or if you feel unwell, seek medical advice (show the label where possible)
S60 : This material and/or its container must be disposed of as hazardous waste
S61 : Avoid release to the environment. Refer to special instructions/safety data sheets.

16. Other information

The information provided on this MSDS is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

N.A. = NOT APPLICABLE
N.D. = NOT DETERMINED
* = INTERNAL CLASSIFICATION

Full text of any R-phrases referred to under heading 2:

- R45 : May cause cancer
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment

Exposure limits:

TLV : Threshold Limit Value - ACGIH USA 2000
OES : Occupational Exposure Standards - United Kingdom 1999
MEL : Maximum Exposure Limits - United Kingdom 1999
MAK : Maximale Arbeitsplatzkonzentrationen - Germany 2001
TRK : Technische Richtkonzentrationen - Germany 2001
MAC : Maximale aanvaarde concentratie - The Netherlands 2002
VME : Valeurs limites de Moyenne d'Exposition - France 1999
VLE : Valeurs limites d'Exposition à court terme - France 1999
GWBB : Grenswaarde beroepsmatige blootstelling - Belgium 1998
GWK : Grenswaarde kortstondige blootstelling - Belgium 1998
EC : Indicative occupational exposure limit values - directive 2000/39/EC

Chronic toxicity:

K : List of the carcinogenic substances and processes - The Netherlands 2002

SAFETY DATA SHEET

Version 4.4
Revision Date 12/01/2015
Print Date 02/11/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : cis-Dichloroethylene

Product Number : 48597
Brand : Supelco
Index-No. : 602-026-00-3

CAS-No. : 156-59-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225
Acute toxicity, Inhalation (Category 4), H332
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.
H332 Harmful if inhaled.
H412 Harmful to aquatic life with long lasting effects.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233 Keep container tightly closed.
P240 Ground/bond container and receiving equipment.
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242 Use only non-sparking tools.

P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P312	Call a POISON CENTER or doctor/ physician if you feel unwell.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₂ H ₂ Cl ₂
Molecular weight	: 96.94 g/mol
CAS-No.	: 156-59-2
EC-No.	: 205-859-7
Index-No.	: 602-026-00-3

Hazardous components

Component	Classification	Concentration
cis-Dichloroethylene		
	Flam. Liq. 2; Acute Tox. 4; Aquatic Acute 3; Aquatic Chronic 3; H225, H332, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

Handle and store under inert gas. Air and moisture sensitive. Light sensitive.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
cis-Dichloroethylene	156-59-2	TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Eye irritation		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--------------------------------------|
| a) Appearance | Form: liquid
Colour: light yellow |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | -80.0 °C (-112.0 °F) |
| f) Initial boiling point and boiling range | 60.0 - 61.0 °C (140.0 - 141.8 °F) |
| g) Flash point | 6.0 °C (42.8 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 1.28 g/cm ³ |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |

- | | | |
|----|---------------------------|-------------------|
| p) | Auto-ignition temperature | No data available |
| q) | Decomposition temperature | No data available |
| r) | Viscosity | No data available |
| s) | Explosive properties | No data available |
| t) | Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LC50 Inhalation - Rat - 13700 ppm

Remarks: Behavioral:Somnolence (general depressed activity). Liver:Fatty liver degeneration.

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: KV9420000

narcosis, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 1150 Class: 3 Packing group: II

Proper shipping name: 1,2-Dichloroethylene

Poison Inhalation Hazard: No

IMDG

UN number: 1150 Class: 3 Packing group: II EMS-No: F-E, S-D

Proper shipping name: 1,2-DICHLOROETHYLENE

IATA

UN number: 1150 Class: 3 Packing group: II

Proper shipping name: 1,2-Dichloroethylene

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
cis-Dichloroethylene	156-59-2	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
cis-Dichloroethylene	156-59-2	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
cis-Dichloroethylene	156-59-2	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H332	Harmful if inhaled.
H402	Harmful to aquatic life.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	1

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.4

Revision Date: 12/01/2015

Print Date: 02/11/2016

SAFETY DATA SHEET

Version 4.6
Revision Date 01/26/2016
Print Date 04/01/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : α -Chlordane

Product Number : 442449
Brand : Supelco

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302
Acute toxicity, Inhalation (Category 4), H332
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H302 + H332

Harmful if swallowed or if inhaled

H315

Causes skin irritation.

H319

Causes serious eye irritation.

H335

May cause respiratory irritation.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P261

Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264

Wash skin thoroughly after handling.

P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell. Rinse mouth.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Molecular weight : 208.29 g/mol
EC-No. : 225-825-5

Hazardous components

Component	Classification	Concentration
Chlordane		
	Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; STOT SE 3; Aquatic Acute 1; Aquatic Chronic 1; H302 + H332, H315, H319, H335, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: crystalline
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | 93.0 - 94.0 °C (199.4 - 201.2 °F) |
| f) Initial boiling point and boiling range | No data available |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | No data available |

- | | | |
|----|--|-------------------|
| n) | Water solubility | No data available |
| o) | Partition coefficient: n-octanol/water | No data available |
| p) | Auto-ignition temperature | No data available |
| q) | Decomposition temperature | No data available |
| r) | Viscosity | No data available |
| s) | Explosive properties | No data available |
| t) | Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 500 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Chlordane)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Lepomis macrochirus (Bluegill) - 0.0074 mg/l - 96 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Lepomis macrochirus (Bluegill) - 24 h
- 0.005 mg/l

Bioconcentration factor (BCF): 322

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Chlordane)
Reportable Quantity (RQ): 1 lbs
Marine pollutant: yes
Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Chlordane)
Marine pollutant:yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Chlordane)

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Chlordane	5103-71-9	

New Jersey Right To Know Components

	CAS-No.	Revision Date
Chlordane	5103-71-9	

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Irrit.	Eye irritation
H302	Harmful if swallowed.
H302 + H332	Harmful if swallowed or if inhaled
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 01/26/2016

Print Date: 04/01/2016



Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

*** Section 1 - Chemical Product and Company Identification ***

Chemical Formula: Cobalt (Co), chromium (Cr) and other alloying elements

Product Use: Cast aerospace parts

Other Designations: 694, 98M2, CoCrNiMoFe, ECY 768, F75, FSX 414, G34, How 1, How 3, How 6, How 12, How 19, How 21, How 25 (L605), How 31 (X40), How 36, How F, How J, Mar-M 302, Mar-M 509, Mar-M 918, Merle 72, MP35N, S 816, PT1377, PT1508, WI 52, X 45 and other Cobalt-Based Alloys

Alcoa Inc.
201 Isabella Street
Pittsburgh, PA 15212-5858

Phone: Health and Safety: 1-412-553-4649

Emergency Information: USA: Chemtrec: 1-800-424-9300 or 1-703-527-3887

Alcoa: 1-412-553-4001

Website: For a current MSDS, refer to Alcoa websites: www.alcoa.com or Internally at my.alcoa.com EHS Community

*** Section 2 - Hazards Identification ***

EMERGENCY OVERVIEW

Solid. Metallic appearance. Odorless. Non-combustible as supplied.

Explosion/fire hazards may be present when (See Sections 5, 7 and 10 for additional information):

* Molten metal is in contact with water/moisture.

* Heavily concentrated dust clouds are dispersed in the air.

Dust and fume from processing can cause irritation of eyes, skin and upper respiratory tract.

POTENTIAL HEALTH EFFECTS

The following statements summarize the health effects generally expected in cases of overexposures. User specific situations should be assessed by a qualified individual. Additional health information can be found in Section 11.

The health effects listed below are not likely to occur unless processing or recycling/combustion generate dusts or fumes.

Eyes Dust or fume from processing: Can cause irritation.

Skin Dust or fume from processing: Can cause irritation, sensitization and allergic contact dermatitis.

Inhalation Health effects from mechanical processing (e.g., cutting, grinding): Can cause upper respiratory tract irritation. **Chronic overexposures:** Can cause asthma, respiratory sensitization, scarring of the lungs (pulmonary fibrosis), central nervous system damage, secondary Parkinson's disease and reproductive harm in males.

Additional health effects from elevated temperature processing (e.g., welding, melting): **Acute overexposures:** Can cause nausea, fever, chills, shortness of breath and malaise (metal fume fever). **Chronic overexposures:** Can cause the accumulation of fluid in the lungs (pulmonary edema) and lung cancer.

Carcinogenicity and Reproductive Hazard

Product as shipped: Does not present any cancer or reproductive hazards.

Dust and fumes from mechanical processing: Can present a cancer hazard (nickel, cobalt). Can present a reproductive hazard for males (manganese).

Dust and fumes from welding or elevated temperature processing: Can present a cancer hazard (hexavalent chromium compounds, nickel compounds, welding fumes, cobalt compounds). Can present a reproductive hazard for males (manganese).

Medical Conditions Aggravated By Exposure to Product, Components or Compounds Formed During Processing

Dust or fume from processing: Asthma, chronic lung disease, skin rashes and secondary Parkinson's disease.

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

*** Section 3 - Composition / Information on Ingredients ***

Complete composition is provided below and may include some components classified as non-hazardous.

CAS #	Component	Percent
7440-48-4	Cobalt	35-65
7440-47-3	Chromium	15-35
7440-02-0	Nickel	0-35
7440-33-7	Tungsten	0-25
7439-89-6	Iron	0-20
7439-98-7	Molybdenum	0-15
7440-25-7	Tantalum	0-10
7440-62-2	Vanadium	0-5
7439-96-5	Manganese	0-5
7429-90-5	Aluminum	0-5
7440-03-1	Niobium	0-5
7440-21-3	Silicon	0-5
7440-44-0	Carbon	0-5

Component Information

Additional compounds which may be formed during processing are listed in Section 8.

*** Section 4 - First Aid Measures ***

First Aid: Eyes

Dust or fume from processing: Flush eyes with plenty of water or saline for at least 15 minutes. Consult a physician.

First Aid: Skin

Dust or fume from processing: Wash skin with soap and water for at least 15 minutes. Consult a physician if irritation persists.

First Aid: Inhalation

Dust or fume from processing: Remove to fresh air. If unconscious or severely injured, check for clear airway, breathing and presence of pulse. Perform CPR if there is no pulse or respiration. Consult a physician.

*** Section 5 - Fire Fighting Measures ***

Flammable/Combustible Properties

This product does not present fire or explosion hazards as shipped. Dust and fines may be ignitable.

Fire/Explosion

May be a potential hazard under the following conditions:

* Molten metal in contact with water/moisture. Moisture entrapped by molten metal can be explosive. * Dust or fines dispersed in the air can be explosive. Heavily concentrated dusts in air can be explosive if subjected to a strong ignition source.

Extinguishing Media

Use a Class D agent, fluxing salts, graphite or dry sand on dust or fine fires. Otherwise, use fire fighting methods and materials that are appropriate for surrounding fire.

Unsuitable Extinguishing Media

DO NOT USE:

* Water around molten metal.

These agents will react with the burning material.

Fire Fighting Equipment/Instructions

Fire fighters should wear NIOSH approved, positive pressure, self-contained breathing apparatus and full protective clothing when appropriate.

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

*** Section 6 - Accidental Release Measures ***

Small/Large Spill: Avoid generating dust. Recover using mechanical means. Collect scrap for recycling.

*** Section 7 - Handling and Storage ***

Handling/Storage

Avoid generating dust. Avoid contact with sharp edges or heated metal. Product should be kept dry. Do not eat, drink, apply cosmetics, or smoke when handling or using.

Requirements for Remelting of Scrap Material and/or Ingot

Molten metal and water can be an explosive combination. The risk is greatest when there is sufficient molten metal to entrap or seal off the water. Water and other forms of contamination on or contained in scrap or remelt ingot are known to have caused explosions in melting operations. While the products may have minimal surface roughness and internal voids, there remains the possibility of moisture contamination or entrapment. If confined, even a few drops of water can lead to violent explosions.

During melting operations, the following minimum guidelines should be observed:

- * Inspect all materials prior to furnace charging and completely remove surface contamination such as water, ice, snow, deposits of grease and oil or other surface contamination resulting from weather exposure, shipment, or storage.
- * Store materials in dry, heated areas with any cracks or cavities pointed downwards.
- * Preheat and dry large or heavy items such as ingot adequately before charging into a furnace containing molten metal. This is typically done by use of a drying oven or homogenizing furnace. The drying cycle should bring the internal metal temperature of the coldest item of the batch to 400°F and then hold at that temperature for 6 hours.

*** Section 8 - Exposure Controls / Personal Protection ***

Engineering Controls

If dust or fumes are generated through processing: Use with adequate ventilation to meet the limits listed in Section 8, Exposure Guidelines.

Personal Protective Equipment

Respiratory Protection

If dust or fumes are generated through processing: Use NIOSH-approved respiratory protection as specified by an Industrial Hygienist or other qualified professional if concentrations exceed the limits listed in Section 8, Exposure Guidelines. Suggested respiratory protection: N95

Eye Protection Wear safety glasses/goggles to avoid eye injury.

Skin Protection Wear appropriate gloves to avoid any skin injury.

General

Personnel who handle and work with **molten metal** should utilize primary protective clothing like polycarbonate face shields, fire resistant tapper's jackets, neck shades (snoods), leggings, spats and similar equipment to prevent burn injuries. In addition to primary protection, secondary or day-to-day work clothing that is fire resistant and sheds metal splash is recommended for use with molten metal. Synthetic materials should never be worn even as secondary clothing (undergarments).

Exposure Guidelines

A: General Product Information

No Occupational Exposure Limit has been developed specifically for this product.

Alcoa recommends an Occupational Exposure Limit for **Cobalt** of 0.02 mg/m3 TWA.

Alcoa recommends an Occupational Exposure Limit for **Chromium (VI) Compounds [both soluble and insoluble forms]** of 0.25 ug/m3 TWA as chromium.

Alcoa recommends an Occupational Exposure Limit for **Nickel Compounds** of 0.1 mg/m3 TWA.

Alcoa recommends Occupational Exposure Limits for **Manganese** of 0.05 mg/m3 TWA (total particulate) and 0.02 mg/m3 TWA (respirable fraction).

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

B: Component Exposure Limits

Cobalt (7440-48-4)

ACGIH 0.02 mg/m3 TWA

OSHA 0.1 mg/m3 TWA (dust and fume)

Chromium (7440-47-3)

ACGIH 0.5 mg/m3 TWA

OSHA 1 mg/m3 TWA

Nickel (7440-02-0)

ACGIH 1.5 mg/m3 TWA (inhalable fraction)

OSHA 1 mg/m3 TWA

Tungsten (7440-33-7)

ACGIH 5 mg/m3 TWA

ACGIH 10 mg/m3 STEL

Molybdenum (7439-98-7)

ACGIH 10 mg/m3 TWA (inhalable fraction); 3 mg/m3 TWA (respirable fraction)

OSHA 15 mg/m3 TWA (total dust)

Tantalum (7440-25-7)

ACGIH 5 mg/m3 TWA (dust)

OSHA 5 mg/m3 TWA

Vanadium (7440-62-2)

OSHA 0.5 mg/m3 Ceiling (respirable dust, as V₂O₅); 0.1 mg/m3 Ceiling (fume, as V₂O₅)

Manganese (7439-96-5)

ACGIH 0.2 mg/m3 TWA

OSHA 5 mg/m3 Ceiling (fume)

Aluminum (7429-90-5)

ACGIH 10 mg/m3 TWA (metal dust)

OSHA 15 mg/m3 TWA (total dust); 5 mg/m3 TWA (respirable fraction)

Silicon (7440-21-3)

OSHA 15 mg/m3 TWA (total dust); 5 mg/m3 TWA (respirable fraction)

C: Exposure Limits for Additional Compounds Which May Be Formed During Processing

Chromium (II) compounds (Not Available)

OSHA 0.5 mg/m3 TWA (as Cr)

Chromium (III) Compounds (Not Available)

ACGIH 0.5 mg/m3 TWA (as Cr)

OSHA 0.5 mg/m3 TWA (as Cr)

Chromium (VI) compounds- water soluble (Not Available)

ACGIH 0.05 mg/m3 TWA (as Cr)

Chromium (VI) compounds (certain water insoluble forms) (Not Available)

ACGIH 0.01 mg/m3 TWA (as Cr)

Chromium (VI) (18540-29-9)

OSHA 2.5 µg/m3 Action Level; 5 µg/m3 TWA (Cancer hazard - See 29 CFR 1910.1026)

Nickel insoluble compounds (Not Available)

ACGIH 0.2 mg/m3 TWA (inhalable fraction, as Ni)

OSHA 1 mg/m3 TWA (as Ni)

Tungsten, insoluble compounds (Not Available)

ACGIH 5 mg/m3 TWA (as W)

ACGIH 10 mg/m3 STEL (as W)

Iron oxide (1309-37-1)

ACGIH 5 mg/m3 TWA (respirable fraction)

OSHA 10 mg/m3 TWA

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Molybdenum insoluble compounds (Not Available)

ACGIH 10 mg/m3 TWA (inhalable fraction, as Mo); 3 mg/m3 TWA (respirable fraction, as Mo)

OSHA 15 mg/m3 TWA (total dust)

Tantalum oxide (1314-61-0)

ACGIH 5 mg/m3 TWA (dust, as Ta)

OSHA 5 mg/m3 TWA (dust)

Vanadium pentoxide (1314-62-1)

ACGIH 0.05 mg/m3 TWA (dust or fume, respirable fraction)

OSHA 0.5 mg/m3 Ceiling (respirable dust, as V2O5); 0.1 mg/m3 Ceiling (fume, as V2O5)

Manganese compounds, inorganic (Not Available)

ACGIH 0.2 mg/m3 TWA (as Mn)

OSHA 5 mg/m3 Ceiling (as Mn) (related to Manganese compounds)

Aluminum oxide (1344-28-1)

ACGIH 10 mg/m3 TWA (particulate matter containing no asbestos and <1% crystalline silica)

OSHA 15 mg/m3 TWA (total dust); 5 mg/m3 TWA (respirable fraction)

*** Section 9 - Physical & Chemical Properties ***

Physical State: Solid

Boiling Point: Not determined

Vapor Pressure: Not applicable

Solubility in Water: Not soluble

Density: 550 lb/ft3 (8.8 g/cm3)

Odor: Odorless

Octanol-Water Coefficient: Not applicable

Appearance: Metallic appearance

Melting Point: 2719°F (1493°C) Cobalt

Vapor Density: Not applicable

Specific Gravity: See Density

pH Level: Not applicable

Odor Threshold: Not applicable

*** Section 10 - Chemical Stability & Reactivity Information ***

Stability Stable under normal conditions of use, storage, and transportation.

Conditions to Avoid

In powder form, can react with strong oxidizers such as concentrated nitric acid. Molten metal can react violently/explosively with water or moisture, particularly when the water is entrapped.

*** Section 11 - Toxicological Information ***

Health Effects Associated with Individual Ingredients

Cobalt Can cause irritation of eyes, skin and respiratory tract. Skin contact: Can cause allergic reactions. Acute and chronic overexposures: Can cause respiratory sensitization, asthma, scarring of the lungs (pulmonary fibrosis) and damage to the heart muscle (cardiomyopathy). **Cobalt and certain cobalt compounds** IARC/NTP: Listed as possibly carcinogenic to humans by IARC (Group 2B)*.

Chromium dust and mist Can cause irritation of eyes, skin and respiratory tract. **Chromium and trivalent chromium** IARC/NTP: Listed as "unclassifiable as to carcinogenicity in humans" by IARC (Group 3).

Nickel dust and fumes Can cause irritation of eyes, skin and respiratory tract. Eye contact: Can cause inflammation of the eyes and eyelids (conjunctivitis). Skin contact: Can cause sensitization and allergic contact dermatitis. Chronic overexposures: Can cause perforation of the nasal septum, inflammation of the nasal passages (sinusitis), respiratory sensitization, asthma and scarring of the lungs (pulmonary fibrosis). **Nickel alloys** IARC/NTP: Reviewed but not recommended for listing by the NTP. Listed as possibly carcinogenic to humans by IARC (Group 2B)*.

Tungsten dust Can cause irritation of eyes, skin and upper respiratory tract.

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Molybdenum dust and fumes Can cause irritation of mucous membranes, skin and respiratory tract. Acute overexposures: Can cause headache, backache and sore joints. Chronic overexposures: Can cause deformities of the joints, blood disorders, kidney damage, lung damage and liver damage.

Tantalum and tantalum oxide Can cause mechanical irritation of eyes, skin and upper respiratory tract. Generally of low toxicity.

Manganese dust or fumes Chronic overexposures: Can cause inflammation of the lung tissue, scarring of the lungs (pulmonary fibrosis), central nervous system damage, secondary Parkinson's disease and reproductive harm in males.

Aluminum dust, fines and fumes Low health risk by inhalation. Generally considered to be biologically inert.

Niobium dust and fumes Acute overexposures: Generally of low toxicity. Chronic overexposures: Can cause lung damage.

Silicon, inert dusts Chronic overexposures: Can cause chronic bronchitis and narrowing of the airways.

Health Effects Associated with Individual Compounds Formed During Processing

(The following could be expected if welded, remelted or otherwise processed at elevated temperatures.)

Hexavalent chromium (Chrome VI) Can cause irritation of eyes, skin and respiratory tract. Skin contact: Can cause irritant dermatitis, allergic reactions and skin ulcers. Chronic overexposures: Can cause perforation of the nasal septum, respiratory sensitization, asthma, the accumulation of fluid in the lungs (pulmonary edema), lung damage, kidney damage, lung cancer, nasal cancer and cancer of the gastrointestinal tract. IARC/NTP: Listed as "known to be a human carcinogen" by the NTP. Listed as carcinogenic to humans by IARC (Group 1)*.

Nickel compounds Associated with lung cancer, cancer of the vocal cords and nasal cancer. IARC/NTP: Listed as "known to be a human carcinogen" by the NTP. Listed as carcinogenic to humans by IARC (Group 1)*.

Iron oxide Chronic overexposures: Can cause benign lung disease (siderosis). Ingestion: Can cause irritation of gastrointestinal tract, bleeding, changes in the pH of the body fluids (metabolic acidosis) and liver damage.

Molybdenum trioxide Can cause irritation of eyes, mucous membranes and upper respiratory tract. Chronic overexposures: Can cause reduction in the number of red blood cells (anemia), predisposition to gout, thyroid function changes, liver damage and lung damage. Additional information: Studies with experimental animals by inhalation have found lung cancer.

Vanadium pentoxide Can cause irritation of eyes, skin and respiratory tract. Skin contact (prolonged or repeated): Can cause sensitization and dermatitis. Acute overexposures: Can cause inflammation of the eyes and eyelids (conjunctivitis), bronchitis and the accumulation of fluid in the lungs (pulmonary edema). Effects can be delayed for several days. Chronic overexposures: Can cause kidney damage, blindness, asthma and emphysema. IARC/NTP: Listed as possibly carcinogenic to humans by IARC (Group 2B)*.

Manganese oxide fumes Can cause irritation of eyes, skin and respiratory tract. Acute overexposures: Can cause nausea, fever, chills, shortness of breath and malaise (metal fume fever).

Alumina (aluminum oxide) Low health risk by inhalation. Generally considered to be biologically inert.

Silica, amorphous Acute overexposures: Can cause dryness of eyes, nose and upper respiratory tract.

Acute Toxicity of Ingredients/Formed Compounds

A: General Product Information No information available for product.

B: Component Analysis - LD50/LC50

Cobalt (7440-48-4) Inhalation LC50 Rat: >10 mg/L/1H; Oral LD50 Rat:6170 mg/kg

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Nickel (7440-02-0) Oral LD50 Rat: >9000 mg/kg
Iron (7439-89-6) Oral LD50 Rat: 984 mg/kg
Manganese (7439-96-5) Oral LD50 Rat: 9 g/kg
Silicon (7440-21-3) Oral LD50 Rat: 3160 mg/kg
Carbon (7440-44-0) Oral LD50 Rat: >10000 mg/kg

C: Formed Compound Toxicity - LD50s/LC50s

Iron oxide (1309-37-1) Oral LD50 Rat: >10000 mg/kg
Tantalum oxide (1314-61-0) Oral LD50 Rat: 8 g/kg
Vanadium pentoxide (1314-62-1)
 Inhalation LC50 Rat: 2.21 mg/L/4H; Oral LD50 Rat: 10 mg/kg; Dermal LD50 Rat: >2500 mg/kg
Aluminum oxide (1344-28-1) Oral LD50 Rat: >5000 mg/kg
Silicon dioxide (amorphous) (69012-64-2)
 Oral LD50 Rat: >5000 mg/kg; Inhalation LC50 Rat: >2.2 mg/L/1H; Dermal LD50 Rabbit: >2000 mg/kg (related to Silica, amorphous)

Carcinogenicity of Ingredients

A: Ingredient Carcinogenicity - IARC/NTP

Component	CAS	IARC 1	IARC 2A	IARC 2B	IARC 3	IARC 4	NTP K	NTP RA
Cobalt	7440-48-4	No	No	Yes	No	No	No	No
Chromium	7440-47-3	No	No	No	Yes	No	No	No
Nickel	7440-02-0	No	No	Yes	No	No	No	No

B: Ingredient Carcinogenicity - ACGIH

Cobalt (7440-48-4)
 ACGIH A3 - Confirmed animal carcinogen with unknown relevance to humans
Chromium (7440-47-3)
 ACGIH A4 - Not Classifiable as a Human Carcinogen
Nickel (7440-02-0)
 ACGIH A5 - Not Suspected as a Human Carcinogen

C: Ingredient References

Cobalt (7440-48-4)
 IARC Monograph 86 [2006] (without tungsten carbide), Monograph 52 [1991]
Chromium (7440-47-3)
 IARC Monograph 49 [1990] (listed under Chromium and Chromium compounds), Supplement 7 [1987]
Nickel (7440-02-0)
 IARC Monograph 49 [1990], Supplement 7 [1987]

Carcinogenicity of Compounds Formed During Processing

A: Formed Compound Carcinogenicity - IARC/NTP

Component	CAS	IARC 1	IARC 2A	IARC 2B	IARC 3	IARC 4	NTP K	NTP RA
Chromium (III) Compounds	Not Available	No	No	No	Yes	No	No	No
Chromium (VI) compounds (certain water insoluble forms)	Not Available	Yes	No	No	No	No	Yes	No
Nickel compounds	Not Available	Yes	No	No	No	No	Yes	No
Iron oxide	1309-37-1	No	No	No	Yes	No	No	No
Vanadium pentoxide	1314-62-1	No	No	Yes	No	No	No	No
Silicon dioxide (amorphous) (related to Silica, amorphous)	69012-64-2	No	No	No	Yes	No	No	No

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

B: Formed Compound Carcinogenicity - ACGIH

Chromium (III) Compounds (Not Available)

ACGIH A4 - Not Classifiable as a Human Carcinogen

Chromium (VI) compounds- water soluble (Not Available)

ACGIH A1 - Confirmed Human Carcinogen

Chromium (VI) compounds (certain water insoluble forms) (Not Available)

ACGIH A1 - Confirmed Human Carcinogen

Nickel insoluble compounds (Not Available)

ACGIH A1 - Confirmed Human Carcinogen

Iron oxide (1309-37-1)

ACGIH A4 - Not Classifiable as a Human Carcinogen

Vanadium pentoxide (1314-62-1)

ACGIH A4 - Not Classifiable as a Human Carcinogen (dust and fume)

Aluminum oxide (1344-28-1)

ACGIH A4 - Not Classifiable as a Human Carcinogen

C: Formed Compound References

Chromium (III) Compounds (Not Available)

IARC Monograph 49 [1990] (listed under Chromium and Chromium compounds),
Supplement 7 [1987]

Chromium (VI) compounds (certain water insoluble forms) (Not Available)

IARC Monograph 49 [1990] (evaluated as a group)

Chromium (VI) (18540-29-9)

IARC Monograph 49 [1990] (evaluated as a group)

Nickel compounds (Not Available)

IARC Monograph 49 [1990] (evaluated as a group)

Iron oxide (1309-37-1)

IARC Supplement 7 [1987], Monograph 1 [1972]

Vanadium pentoxide (1314-62-1)

IARC Monograph 86 [2006]

Silicon dioxide (amorphous) (69012-64-2)

IARC Monograph 68 [1997], Supplement 7 [1987] (related to Silica, amorphous)

Descriptions of IARC and NTP Classifications

IARC 1: The agent is carcinogenic to humans. There is sufficient evidence that a causal relationship existed between exposure to the agent and human cancer.

IARC 2A: The agent is probably carcinogenic to humans. Generally includes agents for which there is limited evidence of carcinogenicity in humans and sufficient evidence of carcinogenicity in experimental animals.

IARC 2B: The agent is possibly carcinogenic to humans. Generally includes agents for which there is limited evidence in humans and less than sufficient evidence in experimental animals.

IARC 3: The agent is not classifiable as to its carcinogenicity to humans. Generally includes agents for which there is inadequate evidence in humans and inadequate or limited evidence in experimental animals.

IARC 4: The agent is probably not carcinogenic to humans. Generally includes agents for which there is evidence suggesting lack of carcinogenicity in humans and in experimental animals.

NTP K: Known to be a human carcinogen.

NTP RA: Reasonably anticipated to be a human carcinogen.

*** Section 12 - Ecological Information ***

Ecotoxicity

A: General Product Information No information available for product.

B: Component Analysis - Ecotoxicity - Aquatic Toxicity

Cobalt (7440-48-4) 96 Hr LC50 Brachydanio rerio: >100 mg/L [static]

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Nickel (7440-02-0)

96 Hr LC50 Oncorhynchus mykiss: 31.7 mg/L (adult); 96 Hr LC50 Pimephales promelas: 3.1 mg/L; 96 Hr LC50 Brachydanio rerio: >100 mg/L

72 Hr EC50 freshwater algae (4 species): 0.1 mg/L; 72 Hr EC50 Selenastrum capricornutum: 0.18 mg/L

96 Hr EC50 water flea: 510 µg/L

Iron (7439-89-6) 96 Hr LC50 Morone saxatilis: 13.6 mg/L [static]

Environmental Fate No information available for product.

*** Section 13 - Disposal Considerations ***

Disposal Instructions Reuse or recycle material whenever possible.

US EPA Waste Number & Descriptions

A: General Product Information

If reuse or recycle is not possible, then characterize in accordance with applicable regulations (40 CFR 261 or state equivalent in the U.S.) prior to disposal. TCLP testing is recommended for chromium.

B: Component Waste Numbers

RCRA waste codes other than described under Section A may apply depending on use of product. Refer to 40 CFR 261 or state equivalent in the U.S.

*** Section 14 - Transportation Information ***

Special Transportation

	PSN #1	PSN #2	PSN #3	PSN #4
Notes:	(1)			
UN NA Number:	-			
Proper Shipping Name:	Not regulated			
Hazard Class:	-			
Packing Group:	-			
RQ:	-			
Other - Tech Name:	-			
Other - Marine Pollutant:	-			

Notes:

- (1) When "Not regulated," enter the proper freight classification, "MSDS Number," and "Product Name" on the shipping paperwork.

Canadian Controlled Products Regulation PIN:	Not regulated
--	---------------

*** Section 15 - Regulatory Information ***

US Federal Regulations

A: General Product Information

In reference to Title VI of the Clean Air Act of 1990, this material does not contain nor was it manufactured using ozone-depleting chemicals.

B: Component Analysis

This material contains one or more of the following chemicals required to be identified under SARA Section 302 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65) and/or CERCLA (40 CFR 302.4).

Cobalt (7440-48-4)

SARA 313: 0.1 % de minimis concentration

Chromium (7440-47-3)

SARA 313: 1.0 % de minimis concentration

CERCLA: 5000 lb final RQ (no reporting of releases of this hazardous substance is required if the diameter of the pieces of the solid metal released is larger than 100 micrometers);
2270 kg final RQ (no reporting of releases of this hazardous substance is required if the diameter of the pieces of the solid metal released is larger than 100 micrometers)

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Nickel (7440-02-0)

SARA 313: 0.1 % de minimis concentration

CERCLA: 100 lb final RQ (no reporting of releases of this hazardous substance is required if the diameter of the pieces of the solid metal released is larger than 100 micrometers); 45.4 kg final RQ (no reporting of releases of this hazardous substance is required if the diameter of the pieces of the solid metal released is larger than 100 micrometers)

Vanadium (7440-62-2)

SARA 313: 1.0 % de minimis concentration (except when contained in an alloy)

Manganese (7439-96-5)

SARA 313: 1.0 % de minimis concentration

Aluminum (7429-90-5)

SARA 313: 1.0 % de minimis concentration (dust or fume only)

SARA 311/312 Physical and Health Hazard Categories:

Immediate (acute) Health Hazard: Yes, if particulates/fumes generated during processing

Delayed (chronic) Health Hazard: Yes, if particulates/fumes generated during processing

Fire Hazard: No

Sudden Release of Pressure: No

Reactive: No

State Regulations

A: General Product Information PENNSYLVANIA "Special Hazardous Substance": Chromium, Nickel

Chemical(s) known to the State of California to cause cancer: Chromium (hexavalent compounds), Cobalt metal powder, Nickel (metallic) and nickel compounds

B: Component Analysis - State

The following components appear on one or more of the following state hazardous substances lists:

Component	CAS #	CA	FL	MA	MN	NJ	PA
Cobalt	7440-48-4	Yes	No	Yes	Yes	Yes	Yes
Chromium	7440-47-3	Yes	No	Yes	Yes	Yes	Yes
Nickel	7440-02-0	Yes	No	Yes	Yes	Yes	Yes
Tungsten	7440-33-7	Yes	No	Yes	Yes	Yes	Yes
Iron	7439-89-6	Yes	No	No	No	No	No
Molybdenum	7439-98-7	Yes	No	Yes	Yes	Yes	Yes
Tantalum	7440-25-7	Yes	No	Yes	Yes	Yes	Yes
Vanadium	7440-62-2	Yes	No	Yes	No	Yes	Yes
Manganese	7439-96-5	Yes	No	Yes	Yes	Yes	Yes
Aluminum	7429-90-5	Yes	No	Yes	Yes	Yes	Yes
Silicon	7440-21-3	No	No	Yes	Yes	Yes	Yes

The following statement(s) are provided under the California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65):

WARNING! This product contains a chemical known to the state of California to cause cancer.

Other Regulations

A: General Product Information Material meets the criteria for inclusion in WHMIS Class D2A.

B: Component Analysis - WHMIS IDL

The following components are identified under the Canadian Hazardous Products Act Ingredient Disclosure List:

Component	CAS #	Minimum Concentration
Cobalt	7440-48-4	0.1 %
Chromium	7440-47-3	0.1 %
Nickel	7440-02-0	0.1 %
Tungsten	7440-33-7	1 %
Molybdenum	7439-98-7	1 %
Tantalum	7440-25-7	1 %
Vanadium	7440-62-2	1 %
Manganese	7439-96-5	1 %
Aluminum	7429-90-5	1 %

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

C: Component Analysis - Inventory

Component	CAS #	TSCA	DSL	EINECS	AUST.	MITI
Cobalt	7440-48-4	Yes	Yes	Yes	Yes	No
Chromium	7440-47-3	Yes	Yes	Yes	Yes	No
Nickel	7440-02-0	Yes	Yes	Yes	Yes	No
Tungsten	7440-33-7	Yes	Yes	Yes	Yes	No
Iron	7439-89-6	Yes	Yes	Yes	Yes	No
Molybdenum	7439-98-7	Yes	Yes	Yes	Yes	No
Tantalum	7440-25-7	Yes	Yes	Yes	Yes	No
Vanadium	7440-62-2	Yes	Yes	Yes	Yes	No
Manganese	7439-96-5	Yes	Yes	Yes	Yes	No
Aluminum	7429-90-5	Yes	Yes	Yes	Yes	No
Niobium	7440-03-1	Yes	Yes	Yes	Yes	No
Silicon	7440-21-3	Yes	Yes	Yes	Yes	No
Carbon	7440-44-0	Yes	Yes	Yes	Yes	No

Inventory information

MITI Inventory: Pure metals are not specifically listed by CAS or MITI number on the MITI Inventory. However, the class of compounds for each of these metals is listed.

*** Section 16 - Other Information ***

MSDS History

Original: June 18, 2001

Supersedes: October 11, 2004

Revised: April 22, 2008

MSDS Status

04/22/2008: Reviewed on a periodic basis in accordance with Alcoa policy. Changes in Sections 1, 2, 3, 4, 5, 8, 11, 12, 13, 14 & 15.

10/11/2004: Combined with Alcoa MSDS #'s 1148 and 1149. Changes in Sections 1, 2, 3, 8 and 15. Covers some products formerly on Howmet MSDSs 201, 202, 203, 204, 205, 206 and 504.

06/18/2001: New MSDS; covers some products formerly on Howmet MSDS 201.

Prepared By

Hazardous Materials Control Committee

Preparer: Stephanie Williams, 412-553-1479/Jon N. Peace, 412-553-2293

MSDS System Number

159242

Other Information

* Guide to Occupational Exposure Values-2007, Compiled by the American Conference of Governmental Industrial Hygienists (ACGIH).

* Documentation of the Threshold Limit Values and Biological Exposure Indices, Sixth Edition, 1991, Compiled by the American Conference of Governmental Industrial Hygienists, Inc. (ACGIH).

* NIOSH Pocket Guide to Chemical Hazards, U.S. Department of Health and Human Services, February 2004.

* Patty's Industrial Hygiene and Toxicology: Volume II: Toxicology, 4th ed., 1994, Patty, F. A.; edited by Clayton, G. D. and Clayton, F. E.: New York: John Wiley & Sons, Inc.

* expub, www.expub.com, Expert Publishing, LLC.

Material Safety Data Sheet

Product Name: COBALT-BASED ALLOYS

ID: 1147

Key-Legend:

ACGIH	American Conference of Governmental Industrial Hygienists
AICS	Australian Inventory of Chemical Substances
CAS	Chemical Abstract Service
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CFR	Code of Federal Regulations
CPR	Cardio-pulmonary Resuscitation
DOT	Department of Transportation
DSL	Domestic Substances List (Canada)
EC	Effective Concentration
ED	Effective Dose
EINECS	European Inventory of Existing Commercial Chemical Substances
EPA	Environmental Protection Act
IARC	International Agency for Research on Cancer
LC ₅₀	Lethal concentration (50 percent kill)
LC _{Lo}	Lowest published lethal concentration
LD ₅₀	Lethal dose (50 percent kill)
LD _{Lo}	Lowest published lethal dose
LFL	Lower Flammable Limit
MITI	Ministry of International Trade & Industry
NFPA	National Fire Protection Association
NIOSH	National Institute for Occupational Safety and Health
NORM	Naturally Occurring Radioactive Materials
NTP	National Toxicology Program
OEL	Occupational Exposure Limit
OSHA	Occupational Safety and Health Administration
PEL	Permissible Exposure Limit
PIN	Product Identification Number
PSN	Proper Shipping Name
RCRA	Resource Conservation and Recovery Act
SARA	Superfund Amendments and Reauthorization Act
STEL	Short Term Exposure Limit
TCLP	Toxic Chemicals Leachate Program
TDG	Transportation of Dangerous Goods
TLV	Threshold Limit Value
TSCA	Toxic Substance Control Act
TWA	Time Weighted Average
UFL	Upper Flammable Limit
WHMIS	Workplace Hazardous Materials Information System
atm	atmosphere
cm	centimeter
g, gm	gram
in	inch
kg	kilogram
lb	pound
m	meter
mg	milligram
ml, ML	milliliter
mm	millimeter
mppcf	million particles per cubic foot
n.o.s.	not otherwise specified
ppb	parts per billion
ppm	parts per million
psia	pounds per square inch absolute
u	micron
ug	microgram

INFORMATION HEREIN IS GIVEN IN GOOD FAITH AS AUTHORITATIVE AND VALID; HOWEVER, NO WARRANTY, EXPRESS OR IMPLIED, CAN BE MADE.

This is the end of MSDS # 1147

COBALT-BASED ALLOYS



WARNING

Physical Hazards: Non-combustible as supplied. Dust and fines from processing may be ignitable. Explosion/fire hazards may be present when (1) molten metal is in contact with water or moisture or (2) heavily concentrated dust clouds are dispersed in air.

Health Hazards: Health effects generally expected in cases of overexposures:

EYES: Dust or fume from processing: Can cause irritation.

SKIN: Dust or fume from processing: Can cause irritation, sensitization and allergic contact dermatitis.

INHALATION: Health effects from mechanical processing (e.g., cutting, grinding): Can cause upper respiratory tract irritation. **Chronic overexposures:** Can cause asthma, respiratory sensitization, scarring of the lungs (pulmonary fibrosis), central nervous system damage, secondary Parkinson's disease and reproductive harm in males. Additional health effects from elevated temperature processing (e.g., welding, melting): **Acute overexposures:** Can cause nausea, fever, chills, shortness of breath and malaise (metal fume fever). **Chronic overexposures:** Can cause the accumulation of fluid in the lungs (pulmonary edema) and lung cancer.

WARNING: Cobalt metal powder, Chromium (hexavalent compounds) and nickel (metallic) and nickel compounds are chemicals known to the State of California to cause cancer (Proposition 65).

Precautions: Avoid generating dust. Use with adequate ventilation. Keep material dry. Use appropriate personal protective equipment (safety glasses/gloves) to avoid injury. Use appropriate NIOSH approved respiratory protection (N95) if concentrations exceed the permissible limits.

First Aid (dust or fume from processing): EYES: Flush eyes with plenty of water or saline for at least 15 minutes. Consult a physician. SKIN: Wash skin with soap and water for at least 15 minutes. Consult a physician if irritation persists. INHALATION: Remove to fresh air. If unconscious or severely injured, check for clear airway, breathing and presence of pulse. Perform CPR if there is no pulse or respiration. Consult a physician.

In case of fire: Use a Class D agent, fluxing salts, graphite or dry sand on dust or fine fires. Otherwise, use fire fighting methods and materials that are appropriate for surrounding fire. Do NOT use water around molten metal. This will react with the burning material.

Read Alcoa Material Safety Data Sheet No. 1147 for more information about use and disposal.

Emergency Phone: (412) 553-4001.

INGREDIENTS:	CAS No:
Cobalt	(7440-48-4)
Chromium	(7440-47-3)
Nickel	(7440-02-0)
Tungsten	(7440-33-7)
Iron	(7439-89-6)
Molybdenum	(7439-98-7)
Tantalum	(7440-25-7)

INGREDIENTS:	CAS No:
Vanadium	(7440-62-2)
Manganese	(7439-96-5)
Aluminum	(7429-90-5)
Niobium	(7440-03-1)
Silicon	(7440-21-3)
Carbon	(7440-44-0)

Alcoa Inc.

201 Isabella Street, Pittsburgh, PA 15212-5858 USA

4/08 1147



ERROR: undefined
OFFENDING COMMAND: get

STACK:

/quit
-dictionary-
-mark-

SAFETY DATA SHEET

Version 4.8
Revision Date 12/01/2015
Print Date 05/13/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Cumene

Product Number : 36698
Brand : Sigma-Aldrich
Index-No. : 601-024-00-X

CAS-No. : 98-82-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226
Carcinogenicity (Category 2), H351
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Aspiration hazard (Category 1), H304
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.
H304 May be fatal if swallowed and enters airways.
H335 May cause respiratory irritation.
H351 Suspected of causing cancer.
H411 Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: Isopropylbenzene
Formula	: C ₉ H ₁₂
Molecular weight	: 120.19 g/mol
CAS-No.	: 98-82-8
EC-No.	: 202-704-5
Index-No.	: 601-024-00-X

Hazardous components

Component	Classification	Concentration
Cumene		
	Flam. Liq. 3; Carc. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 2; Aquatic Chronic 2; H226, H304, H335, H351, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Cumene	98-82-8	TWA	50.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Skin irritation		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	50.000000 ppm 245.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation The value in mg/m3 is approximate.		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -96 °C (-141 °F) - lit.
f) Initial boiling point and boiling range	152 - 154 °C (306 - 309 °F) - lit.
g) Flash point	31.0 °C (87.8 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 6.5 %(V) Lower explosion limit: 0.9 %(V)
k) Vapour pressure	10.7 hPa (8.0 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	0.864 g/cm ³ at 25 °C (77 °F)
n) Water solubility	0.06 g/l at 25 °C (77 °F) - slightly soluble
o) Partition coefficient: n-octanol/water	log Pow: 3.55 at 23 °C (73 °F)
p) Auto-ignition temperature	425.0 °C (797.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

Surface tension	27.69 mN/m at 25 °C (77 °F)
-----------------	-----------------------------

10. STABILITY AND REACTIVITY**10.1 Reactivity**

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - male - 2,260 mg/kg

Inhalation: No data available

Dermal: No data available

NOAEL Feed - Rat - male - > 535.8 mg/kg

Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

Respiratory or skin sensitisation

- Guinea pig

Result: Did not cause sensitisation on laboratory animals.

(OECD Test Guideline 406)

Germ cell mutagenicity

in vitro assay

S. typhimurium

Result: negative

Mutagenicity (micronucleus test)

Mouse - male and female

Result: negative

Carcinogenicity

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Cumene)

NTP: Reasonably anticipated to be a human carcinogen (Cumene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

May be fatal if swallowed and enters airways.

Additional Information

RTECS: GR8575000

narcosis, Central nervous system depression, Dermatitis, Gastrointestinal disturbance, Damage to the lungs., Liver injury may occur., Kidney injury may occur.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 4.8 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia (water flea) - 2.14 mg/l - 48 h (OECD Test Guideline 202)

Toxicity to algae EC50 - Pseudokirchneriella subcapitata (green algae) - 2.60 mg/l - 72 h

12.2 Persistence and degradability

Biodegradability Result: - According to the results of tests of biodegradability this product is not readily biodegradable.

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 1918 Class: 3 Packing group: III

Proper shipping name: Isopropylbenzene

Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1918 Class: 3 Packing group: III EMS-No: F-E, S-E

Proper shipping name: ISOPROPYLBENZENE

Marine pollutant: yes

IATA

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Cumene	98-82-8	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Cumene	98-82-8	2010-06-11

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Carc.	Carcinogenicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H335	May cause respiratory irritation.
H351	Suspected of causing cancer.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation

Product Safety – Americas Region

1-800-521-8956

Version: 4.8

Revision Date: 12/01/2015

Print Date: 05/13/2016



Material Safety Data Sheet Cyanide Standard, 1000 ppm

Section 1 - Chemical Product and Company Identification

MSDS Name:

Cyanide Standard, 1000 ppm

Catalog Numbers:

LC13545

Synonyms:

None

Company Identification:LabChem Inc
200 William Pitt Way
Pittsburgh, PA 15238**Company Phone Number:**

(412) 826-5230

Emergency Phone Number:

(800) 424-9300

CHEMTREC Phone Number:

(800) 424-9300

Section 2 – Composition, Information on Ingredients

CAS#	Chemical Name:	Percent
7732-18-5	Water	balance
1310-73-2	Sodium hydroxide	<0.16
151-50-8	Potassium cyanide	0.25

Section 3 - Hazards Identification

Emergency Overview

Appearance: Clear, colorless solution**Danger!** May be fatal if inhaled, swallowed, or absorbed through the skin. Contact with acids liberates toxic gas. May cause long-term effects in the aquatic environment. May cause irritation to eyes, skin, respiratory, and gastrointestinal tracts.**Target Organs:** Central nervous system, lungs, eyes, thyroid, skin

Potential Health Effects

Eye:

Causes eye irritation.

Skin:

Causes skin irritation. If absorbed through the skin, causes symptoms similar to those of ingestion.

Ingestion:

May be fatal if swallowed. Causes tissue anoxia, characterized by weakness, headache, dizziness, confusion, cyanosis, weak and irregular heartbeat, collapse, unconsciousness, convulsions and



Material Safety Data Sheet Cyanide Standard, 1000 ppm

death, sometimes within 1-15 minutes. May cause gastrointestinal irritation with nausea, vomiting and diarrhea.

Inhalation:

Causes respiratory tract irritation. Inhalation of high concentrations of vapors may cause effects similar to those of ingestion.

Chronic:

Exposure to low levels over long periods of time may cause loss of appetite, headache, nausea, dizziness, upper respiratory tract irritation. Prolonged skin contact may cause dermatitis and "cyanide rash" characterized by itching. Prolonged eye contact may cause conjunctivitis and corrosion of cornea.

Section 4 - First Aid Measures

Eyes:

Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower lids until chemical is gone. Get medical aid at once.

Skin:

Immediately flush skin with plenty of soap and water for at least 15 minutes while removing contaminated clothing and shoes. Get medical aid at once.

Ingestion:

SPEEDY ACTION IS CRITICAL. NOTIFY MEDICAL PERSONNEL IMMEDIATELY. Call a poison control center. If conscious, drink water, then induce vomiting with syrup of ipecac. If unconscious, immediately take victim to a physician and do NOT attempt to induce vomiting.

Inhalation:

SPEEDY ACTION IS CRITICAL. NOTIFY MEDICAL PERSONNEL IMMEDIATELY. Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Do NOT use mouth-to-mouth resuscitation.

Notes to Physician:

Exposure should be treated as a cyanide poisoning.

Section 5 - Fire Fighting Measures

General Information:

As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Combustion generates toxic fumes.

Extinguishing Media:

Substance is noncombustible; use agent most appropriate to extinguish surrounding fire. Do NOT use carbon dioxide.

Autoignition Temperature:

Not applicable

Flash Point:

Not applicable

NFPA Rating:

CAS# 7732-18-5: Health- 0, Flammability- 0, Instability- 0.

CAS# 1310-73-2: Health- 3, Flammability- 0, Instability- 1.

CAS# 151-50-8: Health- 4, Flammability- 0, Instability- 1.

Explosion Limits:

Lower: n/a Upper: n/a



Material Safety Data Sheet Cyanide Standard, 1000 ppm

Section 6 - Accidental Release Measures

General Information:

Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks:

Absorb spills with absorbent (vermiculite, sand, fuller's earth) and place in plastic bags for later disposal. Clean up spills immediately, observing precautions in the Protective Equipment section.

Section 7 - Handling and Storage

Handling:

Wash thoroughly after handling. Use with adequate ventilation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Do not ingest or inhale. Wash clothing before reuse.

Storage:

Store in a tightly closed container. Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances. Keep away from acids.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls:

Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations below the permissible exposure limits.

Exposure Limits:

Chemical Name:	ACGIH	NIOSH	OSHA
Water	none listed	none listed	none listed
Sodium hydroxide	2 mg/m3 Ceiling	10 mg/m3 IDLH	2 mg/m3 TWA
Potassium cyanide	5 mg/m3 Ceiling (as CN) (listed as Hydrogen cyanide and cyanide salts)	25 mg/m3 IDLH (as CN)	5 mg/m3 TWA (listed under Cyanide anion)

OSHA Vacated PELs:

None.

Personal Protective Equipment**Eyes:**

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin:

Wear appropriate gloves to prevent skin exposure.

Clothing:

Wear appropriate protective clothing to prevent skin exposure.

Respirators:

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.



Material Safety Data Sheet Cyanide Standard, 1000 ppm

Section 9 - Physical and Chemical Properties

Physical State:	Clear liquid
Color:	Colorless
Odor:	Odorless to slight odor of bitter almond
pH:	Alkaline
Vapor Pressure:	Not available
Vapor Density:	Not available
Evaporation Rate:	Not available
Viscosity:	Not available
Boiling Point:	>100°C (>212°F)
Freezing/Melting Point:	<0°C (<32°F)
Decomposition Temperature:	Not available
Solubility in water:	Soluble
Specific Gravity/Density:	1.0
Molecular Formula:	Not applicable
Molecular Weight:	Not applicable

Section 10 - Stability and Reactivity

Chemical Stability:

Absorbs carbon dioxide from the air.

Conditions to Avoid:

Incompatible materials, excess heat.

Incompatibilities with Other Materials:

Acids, bases, aluminum, chlorates, permanganates, peroxides, zinc, aldehydes, metallic salts, chloral hydrate, iodine.

Hazardous Decomposition Products:

Hydrogen cyanide, nitrogen oxides, potassium oxides.

Hazardous Polymerization:

Has not been reported.

Section 11 - Toxicological Information

RTECS:

CAS# 7732-18-5: ZC0110000.

CAS# 1310-73-2: WB4900000.

CAS# 151-50-8: TS8750000.

LD50/LC50:

CAS# 7732-18-5:

Oral, rat: LD50 = >90 mL/kg.

CAS# 1310-73-2:

Draize test, rabbit, eye: 50ug/24h Severe,

Draize test, rabbit, skin: 500mg/24h Severe

CAS# 151-50-8:

Oral, mouse: LD50 = 8500 ug/kg

Oral, rabbit: LD50 = 5 mg/kg

Oral, rat: LD50 = 5 mg/kg



Material Safety Data Sheet Cyanide Standard, 1000 ppm

Carcinogenicity:

CAS# 7732-18-5: Not listed as a carcinogen by ACGIH, IARC, NIOSH, NTP, OSHA, or CA Prop 65.

CAS# 1310-73-2: Not listed as a carcinogen by ACGIH, IARC, NIOSH, NTP, OSHA, or CA Prop 65.

CAS# 151-50-8: Not listed as a carcinogen by ACGIH, IARC, NIOSH, NTP, OSHA, or CA Prop 65.

Epidemiology:

Workers exposed to cyanide long-term experienced headaches, weakness, changes in taste and smell, irritation of the throat, vomiting, and effort dyspnea. Enlargement of the thyroid occurred in 50% of the workers.

Teratogenicity:

Animal studies have only shown harmful effects in the offspring of animals exposed to doses that also produced significant maternal toxicity.

Reproductive:

See actual entry in RTECS for complete information.

Mutagenicity:

See actual entry in RTECS for complete information.

Neurotoxicity:

No information found

Section 12 - Ecological Information

No information found

Section 13 - Disposal Considerations

Dispose of in accordance with Federal, State, and local regulations.

Section 14 - Transport Information

US DOT

Shipping Name: Not regulated.

Hazard Class:

UN Number:

Packing Group:

Section 15 - Regulatory Information

US Federal

TSCA:

CAS# 7732-18-5 is listed on the TSCA Inventory.

CAS# 1310-73-2 is listed on the TSCA Inventory.

CAS# 151-50-8 is listed on the TSCA Inventory.

SARA Reportable Quantities (RQ):

CAS# 1310-73-2: final RQ = 1000 pounds (454 kg)

CAS# 151-50-8: final RQ = 10 pounds (4.54 kg)

CERCLA/SARA Section 313:

None of the components are on this list.



Material Safety Data Sheet Cyanide Standard, 1000 ppm

OSHA - Highly Hazardous:

None of the chemicals in this product are considered highly hazardous by OSHA.

US State

State Right to Know:

Sodium hydroxide can be found on the following state Right-to-Know lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.

Potassium cyanide can be found on the following state Right-to-Know lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.

California Regulations:

None.

European/International Regulations

Canadian DSL/NDL:

CAS# 7732-18-5 is listed on Canada's DSL List.

CAS# 1310-73-2 is listed on Canada's DSL List.

CAS# 151-50-8 is listed on Canada's DSL List.

Canada Ingredient Disclosure List:

CAS# 7732-18-5 is not listed on Canada's Ingredient Disclosure List.

CAS# 1310-73-2 is listed on Canada's Ingredient Disclosure List.

CAS# 151-50-8 is not listed on Canada's Ingredient Disclosure List as Cyanides, inorganic salts.

Section 16 - Other Information

MSDS Creation Date: July 20, 1998

Revision Date: October 13, 2009

Information in this MSDS is from available published sources and is believed to be accurate. No warranty, express or implied, is made and LabChem Inc. assumes no liability resulting from the use of this MSDS. The user must determine suitability of this information for his application.

Last Revision Date: 1/11/2012

SECTION 1 - CHEMICAL PRODUCT and COMPANY IDENTIFICATION

Catalog Number: M-CSM8080U99
Description: Pesticide Control Sample Mixture in Toluene
Product is: Mixture

Supplied by CHEM SERVICE, Inc. PO BOX 599, WEST CHESTER, PA 19381 (610)-692-3026
EMERGENCY PHONE: 1-610-692-3026

SECTION 2 - COMPOSITION, INFORMATION ON INGREDIENTS

The following compounds are contained in this mixture at the stated concentrations:

<u>CONC</u>	<u>ANALYTE</u>	<u>CAS</u>
100ug/ml	4,4'-DDD	72-54-8
100ug/ml	4,4'-DDT	50-29-3
100ug/ml	b-Endosulfan	33213-65-9
100ug/ml	Endosulfan sulfate	1031-07-8
100ug/ml	Endrin	72-20-8
20ug/ml	Heptachlor	76-44-8
20ug/ml	BHC (alpha isomer)	319-84-6
20ug/ml	BHC (beta isomer)	319-85-7
20ug/ml	a-Endosulfan	959-98-8
20ug/ml	Heptachlor epoxide (Isomer B)	1024-57-3
20ug/ml	Aldrin	309-00-2
20ug/ml	Dieldrin	60-57-1
20ug/ml	4,4'-DDE	72-55-9

SECTION 3 - HAZARDS IDENTIFICATION

Contact lenses should not be worn in the laboratory. All chemicals should be considered hazardous -
Avoid direct physical contact!

For the solvent: Toluene

Can cause eye irritation. Prolonged exposure may cause nausea/headache/dizziness and/or eye damage. May be harmful if inhaled. Dust and/or vapors can cause irritation to respiratory tract. Can be irritating to mucous membranes.

May be harmful if swallowed. Can cause gastro-intestinal disturbances. Can cause blood disorders. Exposure can cause liver damage. Exposure can cause kidney damage.

Can cause skin irritation. May be harmful if absorbed through the skin. May be rapidly absorbed through the skin with potential adverse health effects.

Can cause delayed adverse health effects. Can cause nervous system injury.

Avoid consumption of alcohol before and after handling of this compound because it will increase the toxicity of the compound. Narcotic at high concentrations.

This chemical is considered to cause DEVELOPMENTAL TOXICITY by the state of California.

SECTION 4 - FIRST AID MEASURES

An antidote is a substance intended to counteract the effect of a poison. It should be administered only by a physician or trained emergency personnel. Medical advice can be obtained from a POISON CONTROL CENTER.

For the solvent: Toluene

In case of contact: Flush eyes continuously with water for 15-20 minutes. Flush skin with water for 15-20 minutes. If no burns have occurred-use soap and water to cleanse skin. If inhaled remove patient to fresh air. Administer oxygen if patient is having difficulty breathing. If patient has stopped breathing administer artificial respirations. If patient is in cardiac arrest administer CPR. Continue life supporting measures until medical assistance has arrived. Contact Poison Control Center immediately if necessary.

Remove and wash contaminated clothing. If patient is exhibiting signs of shock - Keep warm and quiet.

If swallowed DO NOT induce vomiting. If taken internally give milk, milk of magnesia or egg whites beaten with water. Do not administer liquids or induce vomiting to an unconscious or convulsing person. If patient is vomiting-watch closely to make sure airway does not become obstructed by vomit.

Get medical attention if necessary.

SECTION 5 - FIRE AND EXPLOSION DATA

For the solvent: Toluene

Flash Point: 4.4°C

Extinguishing Media: Carbon dioxide or dry chemical powder. DO NOT USE WATER!

Lower Explosion Limit: 1.2%

Upper Explosion Limit: 7%

Autoignition Temperature: 535°C

NFPA Scale: 0 - Least, 1 - Slight, 2 - Moderate, 3 - High, 4 - Severe

NFPA Hazard Rating: Health: 2, Reactivity: 0, Flammability: 3

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Spills or Leaks: Evacuate area. Wear appropriate OSHA regulated equipment. Ventilate area. Absorb on vermiculite or similar material. Sweep up and place in an appropriate container. Hold for disposal.

Wash contaminated surfaces to remove any residue.

Remove contaminated clothing and wash before reuse.

SECTION 7 - HANDLING AND STORAGE

Handling: This chemical should be handled only in a hood. Eye shields should be worn. Use appropriate OSHA/MSHA approved safety equipment. Avoid contact with skin, eyes and clothing. Avoid ingestion and inhalation. Wash thoroughly after handling.

Storage: Store in a cool dry place. Store only with compatible chemicals. Keep tightly closed.

SECTION 8 - EXPOSURE CONTROLS/PERSONAL PROTECTION

For the solvent: Toluene

OSHA PEL (TWA): 100 ppm (375mg/m³)

ACGIH TLV (TWA): 50ppm (147mg/m³)

ACGIH TLV (STEL): Data Not Available

Personal Protective Equipment

Eyes: Wear Safety Glasses.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to minimize contact with skin.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 requirements must be followed whenever workplace conditions warrant the use of a respirator.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

For the solvent: Toluene

Color:	Colorless
Phase:	Liquid
Melting Point:	-95°C
Boiling Point:	110.6°C
Specific Gravity:	0.866g/mL @ 20°C
Vapor Density:	2.9
Vapor Pressure:	29.1hPa @ 20°C
Solubility in Water:	Very slightly soluble
Odor:	Aromatic
Evaporation Rate (Butyl acetate=1):	1.9
Molecular Weight:	92.14
Molecular Formula:	C ₇ H ₈

SECTION 10 - STABILITY AND REACTIVITY

For the solvent: Toluene

Flammable. Readily absorbed and retained on clothing and/or shoes.

Volatile. Incompatible with strong oxidizing agents. Decomposition liberates toxic fumes.

Hygroscopic.

SECTION 11 - TOXICOLOGY INFORMATION

Since this solution contains a very low concentration of active component, the primary hazard is from the solvent.

The LD50 for the minor component:

<u>ANALYTE</u>	<u>CAS</u>	<u>LD50</u>
4,4'-DDD	72-54-8	113 mg/kg
4,4'-DDT	50-29-3	87 mg/kg
b-Endosulfan	33213-65-9	240 mg/kg
Endosulfan sulfate	1031-07-8	18 mg/kg
Endrin	72-20-8	8 mg/kg
Heptachlor	76-44-8	40 mg/kg
BHC (alpha isomer)	319-84-6	177 mg/kg
BHC (beta isomer)	319-85-7	6,000 mg/kg
a-Endosulfan	959-98-8	76 mg/kg
Heptachlor epoxide (Isomer B)	1024-57-3	15 mg/kg
Aldrin	309-00-2	38 mg/kg
Dieldrin	60-57-1	38 mg/kg
4,4'-DDE	72-55-9	880 mg/kg

For the solvent: Toluene

RTECS:	XS5250000
Oral Rat or Mouse LD50:	5000.0 mg/kg
Dermal Rat or Mouse LD50:	N/A mg/kg
Rat or Mouse LC50 :	49 g/m ³ (4h)

Carcinogenicity

OSHA:	NO
IARC:	NO Details: 3

NTP: NO
ACGIH: NO Details: A4
NIOSH: NO
Other: NO

Property 65: This chemical is considered to cause DEVELOPMENTAL TOXICITY by the state of California.

Carcinogenicity

For the minor component:

4,4'-DDD	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	Yes	<u>NIOSH</u>	No	<u>ACGIH</u>	No
4,4'-DDT	<u>OSHA</u>	No	<u>NTP</u>	Yes	<u>IARC</u>	Yes	<u>NIOSH</u>	Yes	<u>ACGIH</u>	No
Heptachlor	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	Yes	<u>NIOSH</u>	Yes	<u>ACGIH</u>	Yes
BHC (alpha isomer)	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	Yes	<u>NIOSH</u>	No	<u>ACGIH</u>	No
BHC (beta isomer)	<u>OSHA</u>	No	<u>NTP</u>	Yes	<u>IARC</u>	Yes	<u>NIOSH</u>	No	<u>ACGIH</u>	No
Heptachlor epoxide (Isomer B)	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	Yes	<u>NIOSH</u>	No	<u>ACGIH</u>	No
Aldrin	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	No	<u>NIOSH</u>	Yes	<u>ACGIH</u>	No
Dieldrin	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	No	<u>NIOSH</u>	Yes	<u>ACGIH</u>	No
4,4'-DDE	<u>OSHA</u>	No	<u>NTP</u>	No	<u>IARC</u>	Yes	<u>NIOSH</u>	No	<u>ACGIH</u>	No

SECTION 12 - ECOLOGICAL INFORMATION

Ecotoxicity: Not Available
Environmental Fate: Not Available

SECTION 13 - DISPOSAL CONSIDERATIONS

Disposal: Dispose in accordance with Federal, State and Local regulations.

SECTION 14 - TRANSPORTATION INFORMATION

For the solvent: Toluene

UN Number: UN1294
Class: 3
Packing Group: II
Proper Shipping Name: Toluene

SECTION 15 - REGULATORY INFORMATION

For the solvent: Toluene

European Labeling in Accordance with EC Directives

Hazard Symbols: F, Xn

Risk Phrases:

-R11: Highly Flammable.
-R20: Harmful by inhalation.

Safety Phrases:

-S16: Keep away from sources of ignition - No smoking.
-S25: Avoid contact with the eyes.
-S29: Do not empty into drains.
-S33: Take precautionary measures against static discharges.

SECTION 16 - OTHER INFORMATION

The above information is believed to be correct on the date it was last revised and must not be considered all inclusive. The information has been obtained only by a search of available literature and is only a guide for handling the chemicals. OSHA regulations require that if other hazards become evident, an upgraded MSDS must be made available to the employee within three months. RESPONSIBILITY for updates lies with the employer and not with CHEM SERVICE, Inc.

Persons not specifically and properly trained should not handle this chemical or its container. This product is furnished FOR LABORATORY USE ONLY! Our products may NOT BE USED as drugs, cosmetics, agricultural or pesticide products, food additives or as household chemicals.

This Material Safety Data Sheet (MSDS) is intended only for use with Chem Service, Inc. products and should not be relied on for use with materials from any other supplier even if the chemical name(s) on the product are identical! Whenever using an MSDS for a solution or mixture the user should refer to the MSDS for every component of the solution or mixture. Chem Service warrants that this MSDS is based upon the most current information available to Chem Service at the time it was last revised. THIS WARRANTY IS EXCLUSIVE, AND CHEM SERVICE, INC. MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. This MSDS is provided gratis and CHEM SERVICE, INC. SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR CONTINGENT DAMAGES.

Copyright © 2011 Chem Service, Inc. All rights reserved except that this MSDS may be printed for the use of a customer or prospective customer of Chem Service, Inc provided the entire MSDS is printed. The MSDS may not be placed in any database or otherwise stored or distributed in electronic or any other form.

This product is furnished FOR LABORATORY USE ONLY!

Chem Service Inc. Material Safety Data Sheet

Last Revised On: 11/3/2011

SECTION 1 - CHEMICAL PRODUCT and COMPANY IDENTIFICATION

Catalog Number: S-10875M1
Description: 4,4'-DDE
Product is: Solution
Other Name(s): 1,1-Dichloro-2,2-bis[p-chlorophenyl]ethylene/p,p'-DDE/1,1
-(Dichloroethenylidene)bis[4-chlorobenzene]
Supplied by CHEM SERVICE, Inc. PO BOX 599, WEST CHESTER, PA 19381 (610)-692-3026
EMERGENCY PHONE: 1-610-692-3026

SECTION 2 - COMPOSITION, INFORMATION ON INGREDIENTS

CAS No.: 72-55-9
Description: 4,4'-DDE Solution
Concentration: 100ug/mL in Methanol
EINECS No.: 200-784-6
Hazard Symbols: XN

SECTION 3 - HAZARDS IDENTIFICATION

Contact lenses should not be worn in the laboratory. All chemicals should be considered hazardous -
Avoid direct physical contact!

For the solvent: Methanol

Health Risks: May be fatal if absorbed through the skin! Repeated exposure to vapors and/or dust can cause eye injury. May be fatal if inhaled! Can cause cardiovascular system injury. Exposure can cause liver damage. Exposure can cause kidney damage. May be fatal or cause blindness if swallowed. Can cause gastro-intestinal disturbances. Can cause convulsions.

Property 65: Data Not Available

SECTION 4 - FIRST AID MEASURES

An antidote is a substance intended to counteract the effect of a poison. It should be administered only by a physician or trained emergency personnel. Medical advice can be obtained from a POISON CONTROL CENTER.

For the solvent: Methanol

First Aid: In case of contact: Flush eyes continuously with water for 15-20 minutes. Flush skin with water for 15-20 minutes. If patient has stopped breathing administer artificial respiration. If patient is in cardiac arrest administer CPR. Continue life supporting measures until medical assistance has arrived. Do not wear shoes or clothing until absolutely free of all chemical odors. Get medical attention if necessary. If no burns have occurred-use soap and water to cleanse skin. If inhaled remove patient to fresh air. Administer oxygen if patient is having difficulty breathing. If swallowed do not induce vomiting.

SECTION 5 - FIRE AND EXPLOSION DATA

For the solvent: Methanol

Flash Point: 11°C This is a flammable chemical.

Extinguishing Media: Carbon dioxide or dry chemical powder. DO NOT USE WATER!

Upper Explosion Limit: 36%

Lower Explosion Limit: 6.0%

Autoignition Temperature: 464°C

NFPA Scale: 0 - Least, 1 - Slight, 2 - Moderate, 3 - High, 4 - Severe

NFPA Hazard Rating: Health: 1. Reactivity: 0. Flammability: 3. Special: No Data.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Spills or Leaks: Evacuate area. Wear appropriate OSHA regulated equipment. Ventilate area.

Absorb on vermiculite or similar material. Sweep up and place in an appropriate container.

Hold for disposal.

Wash contaminated surfaces to remove any residue.

Remove contaminated clothing and wash before reuse.

SECTION 7 - HANDLING AND STORAGE

Handling: This chemical should be handled only in a hood. Eye shields should be worn.

Use appropriate OSHA/MSHA approved safety equipment. Avoid contact with skin, eyes and clothing. Avoid ingestion and inhalation. Wash thoroughly after handling.

Storage:

Store in a cool dry place. Store only with compatible chemicals.

Keep tightly closed.

SECTION 8 - EXPOSURE CONTROLS/PERSONAL PROTECTION

For the solvent: Methanol

OSHA PEL (TWA): 200 ppm (260 mg/m³)

ACGIH TLV (TWA): 200 ppm (262 mg/m³)

ACGIH TLV (STEL): Data Not Available

Personal Protective Equipment

Eyes: Wear Safety Glasses.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to minimize contact with skin.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 requirements must be followed whenever workplace conditions warrant a respirators use.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

For the solvent: Methanol

Color: Colorless

Phase: Liquid

Melting Point: -98°C

Boiling Point: 64.6°C

Specific Gravity: 0.791g/mL

Vapor Density: 1.11

Vapor Pressure: 130.3 hPa @ 20°C

Solubility in Water: Completely miscible.

Odor: Data Not Available

Evaporation Rate (Butyl acetate=1): Data Not Available

Molecular Weight: 32.05
Molecular Formula: CH₄O

SECTION 10 - STABILITY AND REACTIVITY

For the solvent: Methanol

Reacts with Acid halides and anhydrides. Flammable. Incompatible with strong acids. Incompatible with strong reducing agents. Incompatible with strong oxidizing agents. Decomposition liberates toxic fumes. Hygroscopic. Incompatible with active metals (e.g. Sodium).

SECTION 11 - TOXICOLOGY INFORMATION

The primary hazards for this solution are predominantly from the solvent.

For the solvent: Methanol

RTECS: PC1400000

Oral Rat or Mouse LD₅₀: 5628 mg/kg

Dermal Rat or Mouse LD₅₀: N/A mg/kg

Rat or Mouse LC₅₀ : 64000 ppm/8H

Carcinogenicity

OSHA: NO

IARC: NO

NTP: NO

ACGIH: NO

NIOSH: NO

Other: NO

Property 65: Data Not Available

SECTION 12 - ECOLOGICAL INFORMATION

Ecotoxicity: Not Available

Environmental Fate: Not Available

SECTION 13 - DISPOSAL CONSIDERATIONS

Disposal: Dispose in accordance with Federal, State and Local regulations.

SECTION 14 - TRANSPORTATION INFORMATION

For the solvent: Methanol

UN Number: UN1230

Class: 3

Packing Group: II

Proper Shipping Name: Methanol

SECTION 15 - REGULATORY INFORMATION

For the solvent: Methanol

European Labeling in Accordance with EC Directives

Hazard Symbols: T F

Risk Phrases

R11 Highly Flammable.

R23/25 Toxic by inhalation and if swallowed.

Safety Phrases

S16 Keep away from sources of ignition- No smoking.

S2 Keep out of reach of children.

S24	Avoid contact with the skin.
S45	In case of accident or if you feel unwell, seek medical advice immediately (show label where possible).
S7	Keep container tightly closed

SECTION 16 - OTHER INFORMATION

The above information is believed to be correct on the date it was last revised and must not be considered all inclusive. The information has been obtained only by a search of available literature and is only a guide for handling the chemicals. OSHA regulations require that if other hazards become evident, an upgraded MSDS must be made available to the employee within three months. RESPONSIBILITY for updates lies with the employer and not with CHEM SERVICE, Inc.

Persons not specifically and properly trained should not handle this chemical or its container. This product is furnished FOR LABORATORY USE ONLY! Our products may NOT BE USED as drugs, cosmetics, agricultural or pesticide products, food additives or as household chemicals.

This Material Safety Data Sheet (MSDS) is intended only for use with Chem Service, Inc. products and should not be relied on for use with materials from any other supplier even if the chemical name(s) on the product are identical! Whenever using an MSDS for a solution or mixture the user should refer to the MSDS for every component of the solution or mixture. Chem Service warrants that this MSDS is based upon the most current information available to Chem Service at the time it was last revised. THIS WARRANTY IS EXCLUSIVE, AND CHEM SERVICE, INC. MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. This MSDS is provided gratis and CHEM SERVICE, INC. SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR CONTINGENT DAMAGES. Copyright © 2011 Chem Service, Inc. All rights reserved except that this MSDS may be printed for the use of a customer or prospective customer of Chem Service, Inc provided the entire MSDS is printed. The MSDS may not be placed in any database or otherwise stored or distributed in electronic or any other form.

This product is furnished FOR LABORATORY USE ONLY!

Safety data for dibenz(a,h)anthracene



[Glossary](#) of terms on this data sheet.

The information on this web page is provided to help you to work safely, but it is intended to be an overview of hazards, not a replacement for a full Material Safety Data Sheet (MSDS). MSDS forms can be downloaded from the web sites of many chemical suppliers.

General

Synonyms: 1,2:5,6-benzanthracene, 1,2:5,6-dibenzanthracene, dibenzo(a,h)anthracene, DBA, 1,2,5,6-DBA

Use: a common pollutant in smoke and used oils

Molecular formula: $C_{22}H_{14}$

CAS No: 53-70-3

EINECS No: 200-181-8

Annex I Index. No: 601-041-00-2

Physical data

Appearance: white to light yellow crystalline solid

Melting point: 266 - 267 C

Boiling point: 524 C

Vapour density:

Vapour pressure:

Density ($g\ cm^{-3}$): 1.28

Flash point:

Explosion limits:

Autoignition temperature:

Water solubility:

Stability

Stable. Combustible. Incompatible with strong oxidizing agents.

Toxicology

Harmful if swallowed or inhaled. Experimental carcinogen, tumorigen and neoplastigen. IARC probable human carcinogen.

Toxicity data

(The meaning of any toxicological abbreviations which appear in this section is given [here.](#))

IVN-MUS LDLO 10 mg kg⁻¹

Risk phrases

(The meaning of any risk phrases which appear in this section is given [here.](#))
R45 R50 R53.

Environmental information

Harmful in the environment - may cause long-term damage.

Transport information

(The meaning of any UN hazard codes which appear in this section is given [here.](#))

Non-hazardous for air, sea and road freight.

Personal protection

Safety glasses, gloves, good ventilation. Handle as a possible carcinogen.

Safety phrases

(The meaning of any safety phrases which appear in this section is given [here.](#))

S45 S53 S60 S61.

[Return to [Physical & Theoretical Chemistry Lab. Safety home page.](#)]

This information was last updated on October 8, 2006. We have tried to make it as accurate and useful as possible, but can take no responsibility for its use, misuse, or accuracy. We have not verified this information, and cannot guarantee that it is up-to-date. **Note also that the information on the PTCL Safety web site, where this page was hosted, has been copied onto many other sites, often without permission. If you have any doubts about the veracity of the information that you are viewing, or have any queries, please check the URL that your web browser displays for this page. If the URL begins "http://msds.chem.ox.ac.uk/" the page is maintained by the Safety Officer in Physical Chemistry at Oxford University. If not, this page is a copy made by some other person and we have no responsibility for it.**

SAFETY DATA SHEET

Version 3.7
Revision Date 11/25/2014
Print Date 01/29/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Dibenzofuran

Product Number : 236373
Brand : Aldrich

CAS-No. : 132-64-9

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 4), H302
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H302

Harmful if swallowed.

H411

Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P264

Wash skin thoroughly after handling.

P270

Do not eat, drink or smoke when using this product.

P273

Avoid release to the environment.

P301 + P312 + P330

IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell. Rinse mouth.

P391

Collect spillage.

P501

Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : Diphenylene oxide

Formula : C₁₂H₈O

Molecular weight : 168.19 g/mol

CAS-No. : 132-64-9

EC-No. : 205-071-3

Hazardous components

Component	Classification	Concentration
Dibenzofuran		
	Acute Tox. 4; Aquatic Acute 2; Aquatic Chronic 2; H302, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatrill® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatrill® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an

industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: crystalline Colour: white, beige
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 80 - 82 °C (176 - 180 °F) - lit.
f) Initial boiling point and boiling range	154 - 155 °C (309 - 311 °F) at 27 hPa (20 mmHg) - lit.
g) Flash point	130.0 °C (266.0 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 3.77
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

The preceding data, or interpretation of data, was determined using Quantitative Structure Activity Relationship (QSAR) modeling.

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: HP4430000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish NOEC - Cyprinodon variegatus (sheepshead minnow) - 1 mg/l - 96.0 h
LC50 - Pimephales promelas (fathead minnow) - 1.05 mg/l - 96.0 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Dibenzofuran)
Reportable Quantity (RQ): 100 lbs
Marine pollutant: yes
Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Dibenzofuran)
Marine pollutant: yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Dibenzofuran)

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:
CAS-No. Revision Date

Dibenzofuran 132-64-9 2007-07-01

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Dibenzofuran	132-64-9	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Dibenzofuran	132-64-9	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Dibenzofuran	132-64-9	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H302	Harmful if swallowed.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	
Flammability:	1
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	1
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.7

Revision Date: 11/25/2014

Print Date: 01/29/2016

SAFETY DATA SHEET

Version 3.11
Revision Date 03/03/2015
Print Date 05/01/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Dibutyl phthalate

Product Number : 152439
Brand : Aldrich
Index-No. : 607-318-00-4

CAS-No. : 84-74-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Reproductive toxicity (Category 1B), H360
Acute aquatic toxicity (Category 1), H400

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H360

May damage fertility or the unborn child.

H400

Very toxic to aquatic life.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P273

Avoid release to the environment.

P281

Use personal protective equipment as required.

P308 + P313

IF exposed or concerned: Get medical advice/ attention.

P391

Collect spillage.

P405

Store locked up.

P501

Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : n-Butyl phthalate
Phthalic acid dibutyl ester
DBP

Formula : C₁₆H₂₂O₄
Molecular weight : 278.34 g/mol
CAS-No. : 84-74-2
EC-No. : 201-557-4
Index-No. : 607-318-00-4
Registration number : 01-2119493042-44-XXXX

Hazardous components

Component	Classification	Concentration
Dibutyl phthalate Included in the Candidate List of Substances of Very High Concern (SVHC) according to Regulation (EC) No. 1907/2006 (REACH)		
	Repr. 1B; Aquatic Acute 1; H360, H400	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Dibutyl phthalate	84-74-2	TWA	5.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Upper Respiratory Tract irritation Eye irritation Testicular damage		
		TWA	5 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Eye irritation Testicular damage		
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nature latex/chloroprene

Minimum layer thickness: 0.6 mm

Break through time: 120 min

Material tested: Lapren® (KCL 706 / Aldrich Z677558, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|---|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -35 °C (-31 °F) - lit. |
| f) Initial boiling point and boiling range | 340 °C (644 °F) - lit. |
| g) Flash point | 171.0 °C (339.8 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower | Lower explosion limit: 0.47 %(V) |

flammability or
explosive limits

- | | | |
|----|--|--|
| k) | Vapour pressure | 1.3 hPa (1.0 mmHg) at 147.0 °C (296.6 °F) |
| l) | Vapour density | No data available |
| m) | Relative density | 1.043 g/cm ³ at 25 °C (77 °F) |
| n) | Water solubility | 0.0114 g/l at 25 °C (77 °F) - OECD Test Guideline 105 - slightly soluble |
| o) | Partition coefficient: n-octanol/water | No data available |
| p) | Auto-ignition temperature | 402.0 °C (755.6 °F) |
| q) | Decomposition temperature | No data available |
| r) | Viscosity | 18.8 mm ² /s at 20 °C (68 °F) - |
| s) | Explosive properties | No data available |
| t) | Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Nitrates, Bases, acids, Chlorine

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 8,000 mg/kg

LC50 Inhalation - Rat - 4,250 mg/m³

LD50 Dermal - Rabbit - > 20,860 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: No skin irritation

(OECD Test Guideline 404)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation

(OECD Test Guideline 405)

Respiratory or skin sensitisation

Maximisation Test (GPMT) - Guinea pig

Result: Does not cause skin sensitisation.
(OECD Test Guideline 406)

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

Presumed human reproductive toxicant

Overexposure may cause reproductive disorder(s) based on tests with laboratory animals.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: TI0875000

Nausea, Dizziness, Headache, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Central nervous system -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 0.85 mg/l - 96.0 h

NOEC - Pimephales promelas (fathead minnow) - 0.32 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates LC50 - Daphnia magna (Water flea) - 3.7 mg/l - 48 h

12.2 Persistence and degradability

Biodegradability Result: 81 % - Readily biodegradable
(C.4-C of the COUNCIL REGULATION (EC) No 440/2008)

12.3 Bioaccumulative potential

Bioaccumulation Pimephales promelas (fathead minnow) - 11 d
- 0.0348 mg/l

Bioconcentration factor (BCF): 2,165
Remarks: Does not bioaccumulate.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3082 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (Dibutyl phthalate)
Reportable Quantity (RQ): 10 lbs
Marine pollutant: yes
Poison Inhalation Hazard: No

IMDG

UN number: 3082 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S. (Dibutyl phthalate)
Marine pollutant: yes

IATA

UN number: 3082 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (Dibutyl phthalate)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Dibutyl phthalate	84-74-2	2007-07-01

SARA 311/312 Hazards

Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Dibutyl phthalate	84-74-2	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Dibutyl phthalate	84-74-2	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Dibutyl phthalate	84-74-2	2007-07-01

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.	84-74-2	2008-06-17

Dibutyl phthalate

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
H360	May damage fertility or the unborn child.
H400	Very toxic to aquatic life.
Repr.	Reproductive toxicity

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	1
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	1
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.11

Revision Date: 03/03/2015

Print Date: 05/01/2016


SAFETY DATA SHEET

Halocarbon R-12 (Dichlorodifluoromethane)

Section 1. Identification

GHS product identifier	: Halocarbon R-12 (Dichlorodifluoromethane)
Chemical name	: dichlorodifluoromethane
Other means of identification	: ASPEN R-12, Methane, dichlorodifluoro-; Refrigerant 12; Propellant 12; Halon 122; Genetron 12; Freon 12; Fluorocarbon 12; Difluorodichloromethane; DICHLORODIFLUOROMETHANE (FC 12); CFC-12
Product use	: Synthetic/Analytical chemistry.
Synonym	: ASPEN R-12, Methane, dichlorodifluoro-; Refrigerant 12; Propellant 12; Halon 122; Genetron 12; Freon 12; Fluorocarbon 12; Difluorodichloromethane; DICHLORODIFLUOROMETHANE (FC 12); CFC-12
SDS #	: 001018
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253
Emergency telephone number (with hours of operation)	: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	: GASES UNDER PRESSURE - Liquefied gas HAZARDOUS TO THE OZONE LAYER - Category 1
GHS label elements	
Hazard pictograms	: 
Signal word	: Warning
Hazard statements	: Contains gas under pressure; may explode if heated. May cause frostbite. May displace oxygen and cause rapid suffocation. Harms public health and the environment by destroying ozone in the upper atmosphere.
Precautionary statements	
General	: Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction. Always keep container in upright position.
Prevention	: Use and store only outdoors or in a well ventilated place.
Response	: Not applicable.
Storage	: Protect from sunlight. Protect from sunlight when ambient temperature exceeds 52°C/125°F. Store in a well-ventilated place.
Disposal	: Refer to manufacturer/supplier for information on recovery/recycling.

Date of issue/Date of revision	: 5/21/2015.	Date of previous issue	: 5/21/2015.	Version	: 2	1/13
---------------------------------------	--------------	-------------------------------	--------------	----------------	-----	------

Section 2. Hazards identification

Hazards not otherwise classified : Liquid can cause burns similar to frostbite.

Section 3. Composition/information on ingredients

Substance/mixture : Substance

Chemical name : dichlorodifluoromethane

Other means of identification : ASPEN R-12, Methane, dichlorodifluoro-; Refrigerant 12; Propellant 12; Halon 122; Genetron 12; Freon 12; Fluorocarbon 12; Difluorodichloromethane; DICHLORODIFLUOROMETHANE (FC 12); CFC-12

CAS number/other identifiers

CAS number : 75-71-8

Product code : 001018

Ingredient name	%	CAS number
Methane, dichlorodifluoro-	100	75-71-8

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

- Eye contact** : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.
- Inhalation** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Skin contact** : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur. In case of contact with liquid, warm frozen tissues slowly with lukewarm water and get medical attention. Do not rub affected area. Wash clothing before reuse. Clean shoes thoroughly before reuse.
- Ingestion** : Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical attention if adverse health effects persist or are severe. Ingestion of liquid can cause burns similar to frostbite. If frostbite occurs, get medical attention. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. As this product rapidly becomes a gas when released, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : Liquid can cause burns similar to frostbite.

Inhalation : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.

Date of issue/Date of revision

: 5/21/2015.

Date of previous issue

: 5/21/2015.

Version : 2

2/13

Section 4. First aid measures

- Skin contact** : Dermal contact with rapidly evaporating liquid could result in freezing of the tissues or frostbite.
- Frostbite** : Try to warm up the frozen tissues and seek medical attention.
- Ingestion** : Ingestion of liquid can cause burns similar to frostbite.

Over-exposure signs/symptoms

- Eye contact** : Adverse symptoms may include the following:
frostbite
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
frostbite
- Ingestion** : Adverse symptoms may include the following:
frostbite

Indication of immediate medical attention and special treatment needed, if necessary

- Notes to physician** : In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Contains gas under pressure. In a fire or if heated, a pressure increase will occur and the container may burst or explode.

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
halogenated compounds
carbonyl halides

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode. For incidents involving large quantities, thermally insulated undergarments and thick textile or leather gloves should be worn.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air). May be harmful to the environment if released in large quantities.

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Do not get in eyes or on skin or clothing. Avoid breathing gas. Avoid release to the environment. Refer to special instructions/safety data sheet. Empty containers retain product residue and can be hazardous. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Keep container tightly closed and sealed until ready for use. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F).

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Section 8. Exposure controls/personal protection

Ingredient name	Exposure limits
Methane, dichlorodifluoro-	ACGIH TLV (United States, 3/2012). TWA: 4950 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. NIOSH REL (United States, 1/2013). TWA: 4950 mg/m ³ 10 hours. TWA: 1000 ppm 10 hours. OSHA PEL (United States, 6/2010). TWA: 4950 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours. OSHA PEL 1989 (United States, 3/1989). TWA: 4950 mg/m ³ 8 hours. TWA: 1000 ppm 8 hours.

Appropriate engineering controls : Good general ventilation should be sufficient to control worker exposure to airborne contaminants.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. If contact with the liquid is possible, insulated gloves suitable for low temperatures should be worn. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

Physical state	: Gas. [Liquefied gas]
Color	: Colorless.
Molecular weight	: 120.91 g/mole
Molecular formula	: C-Cl ₂ -F ₂
Boiling/condensation point	: -29.8°C (-21.6°F)
Melting/freezing point	: -158°C (-252.4°F)
Critical temperature	: 111.85°C (233.3°F)
Odor	: Characteristic.
Odor threshold	: Not available.
pH	: Not available.
Flash point	: [Product does not sustain combustion.]
Burning time	: Not applicable.
Burning rate	: Not applicable.
Evaporation rate	: Not available.
Flammability (solid, gas)	: Not available.
Lower and upper explosive (flammable) limits	: Not available.
Vapor pressure	: 84.9 (psia)
Vapor density	: 4.2 (Air = 1)
Specific Volume (ft ³ /lb)	: 3.1746
Gas Density (lb/ft ³)	: 0.315
Relative density	: Not applicable.
Solubility	: Not available.
Solubility in water	: 0.3 g/l
Partition coefficient: n-octanol/water	: 2.16
Auto-ignition temperature	: Not available.
Decomposition temperature	: Not available.
SADT	: Not available.
Viscosity	: Not applicable.

Section 10. Stability and reactivity

Reactivity	: No specific test data related to reactivity available for this product or its ingredients.
Chemical stability	: The product is stable.
Possibility of hazardous reactions	: Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid	: No specific data.
Hazardous decomposition products	: Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 10. Stability and reactivity

Hazardous polymerization : Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Liquid can cause burns similar to frostbite.
- Inhalation** : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.
- Skin contact** : Dermal contact with rapidly evaporating liquid could result in freezing of the tissues or frostbite.
- Ingestion** : Ingestion of liquid can cause burns similar to frostbite.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
frostbite
- Inhalation** : No specific data.
- Skin contact** : Adverse symptoms may include the following:
frostbite

Section 11. Toxicological information

Ingestion : Adverse symptoms may include the following:
frostbite

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.

Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.

Carcinogenicity : No known significant effects or critical hazards.

Mutagenicity : No known significant effects or critical hazards.

Teratogenicity : No known significant effects or critical hazards.

Developmental effects : No known significant effects or critical hazards.

Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Methane, dichlorodifluoro-	2.16	6.17	low

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.






Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

United States - RCRA Toxic hazardous waste "U" List

Ingredient	CAS #	Status	Reference number
Dichlorodifluoromethane; Methane, dichlorodifluoro-	75-71-8	Listed	U075

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1028	UN1028	UN1028	UN1028	UN1028
UN proper shipping name	DICHLORODIFLUOROMETHANE OR REFRIGERANT GAS R 12	DICHLORODIFLUOROMETHANE; OR REFRIGERANT GAS R 12	DICHLORODIFLUOROMETHANE OR REFRIGERANT GAS R 12	DICHLORODIFLUOROMETHANE (REFRIGERANT GAS R 12)	DICHLORODIFLUOROMETHANE
Transport hazard class(es)	2.2 	2.2 	2.2 	2.2 	2.2 
Packing group	-	-	-	-	-
Environment	No.	No.	No.	No.	No.
Additional information	<u>Reportable quantity</u> 5000 lbs / 2270 kg Package sizes shipped in quantities less than the product reportable quantity are not subject to the RQ (reportable quantity) transportation requirements. <u>Limited quantity</u> Yes. <u>Packaging instruction</u> Passenger aircraft Quantity limitation: 75 kg Cargo aircraft Quantity limitation: 150 kg <u>Special provisions</u> T50	<u>Explosive Limit and Limited Quantity Index</u> 0.125 <u>Passenger Carrying Road or Rail Index</u> 75	-	-	<u>Passenger and Cargo Aircraft</u> Quantity limitation: 75 kg <u>Cargo Aircraft Only</u> Quantity limitation: 150 kg

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Section 14. Transport information

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
TSCA 12(b) annual export notification: dichlorodifluoromethane
United States inventory (TSCA 8b): This material is listed or exempted.

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Sudden release of pressure

Composition/information on ingredients

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
Methane, dichlorodifluoro-	100	No.	Yes.	No.	No.	No.

SARA 313

	Product name	CAS number	%
Form R - Reporting requirements	dichlorodifluoromethane	75-71-8	100
Supplier notification	dichlorodifluoromethane	75-71-8	100

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : This material is listed.

New York : This material is listed.

Section 15. Regulatory information

- New Jersey** : This material is listed.
- Pennsylvania** : This material is listed.
- Canada inventory** : This material is listed or exempted.
- International regulations**
- International lists** :
- Australia inventory (AICS)**: This material is listed or exempted.
 - China inventory (IECSC)**: This material is listed or exempted.
 - Japan inventory**: This material is listed or exempted.
 - Korea inventory**: This material is listed or exempted.
 - Malaysia Inventory (EHS Register)**: Not determined.
 - New Zealand Inventory of Chemicals (NZIoC)**: This material is listed or exempted.
 - Philippines inventory (PICCS)**: This material is listed or exempted.
 - Taiwan inventory (CSNN)**: Not determined.
- Chemical Weapons Convention List Schedule I Chemicals** : Not listed
- Chemical Weapons Convention List Schedule II Chemicals** : Not listed
- Chemical Weapons Convention List Schedule III Chemicals** : Not listed

Canada

- WHMIS (Canada)** : Class A: Compressed gas.
- CEPA Toxic substances**: This material is listed.
- Canadian ARET**: This material is not listed.
- Canadian NPRI**: This material is listed.
- Alberta Designated Substances**: This material is not listed.
- Ontario Designated Substances**: This material is not listed.
- Quebec Designated Substances**: This material is not listed.

Section 16. Other information

- Canada Label requirements** : Class A: Compressed gas.

Hazardous Material Information System (U.S.A.)

Health	1
Flammability	0
Physical hazards	2

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Section 16. Other information

Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

History

Date of printing : 5/21/2015.

Date of issue/Date of revision : 5/21/2015.

Date of previous issue : 5/21/2015.

Version : 2

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations
- ACGIH – American Conference of Governmental Industrial Hygienists
- AIHA – American Industrial Hygiene Association
- CAS – Chemical Abstract Services
- CEPA – Canadian Environmental Protection Act
- CERCLA – Comprehensive Environmental Response, Compensation, and Liability Act (EPA)
- CFR – United States Code of Federal Regulations
- CPR – Controlled Products Regulations
- DSL – Domestic Substances List
- GWP – Global Warming Potential
- IARC – International Agency for Research on Cancer
- ICAO – International Civil Aviation Organisation
- Inh – Inhalation
- LC – Lethal concentration
- LD – Lethal dosage
- NDSL – Non-Domestic Substances List
- NIOSH – National Institute for Occupational Safety and Health
- TDG – Canadian Transportation of Dangerous Goods Act and Regulations
- TLV – Threshold Limit Value
- TSCA – Toxic Substances Control Act
- WEEL – Workplace Environmental Exposure Level
- WHMIS – Canadian Workplace Hazardous Material Information System

References : Not available.

Indicates information that has changed from previously issued version.

Other special considerations : WARNING: Contains (Dichlorodifluoromethane), a substance which harms the public health and environment by destroying ozone in the upper atmosphere.

Notice to reader

Section 16. Other information

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SAFETY DATA SHEET

Version 5.5

Revision Date 02/28/2015

Print Date 02/09/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Dieldrin

Product Number : 291218

Brand : Aldrich

Index-No. : 602-049-00-9

CAS-No. : 60-57-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 2), H300

Acute toxicity, Dermal (Category 3), H311

Carcinogenicity (Category 2), H351

Specific target organ toxicity - repeated exposure, Oral (Category 1), H372

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H300

Fatal if swallowed.

H311

Toxic in contact with skin.

H351

Suspected of causing cancer.

H372

Causes damage to organs through prolonged or repeated exposure if swallowed.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing.
P281	Use personal protective equipment as required.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician. Rinse mouth.
P302 + P352 + P312	IF ON SKIN: Wash with plenty of soap and water. Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 1,2,3,4,10,10-Hexachloro-1,4,4a,5,6,7,8,8a-octahydro-6,7-epoxy-1,4:5,8-dimethanonaphthalene

Formula : C₁₂H₈Cl₆O
Molecular weight : 380.91 g/mol
CAS-No. : 60-57-1
EC-No. : 200-484-5
Index-No. : 602-049-00-9

Hazardous components

Component	Classification	Concentration
Dieldrin		
	Acute Tox. 2; Acute Tox. 3; Carc. 2; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H300, H311, H351, H372, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation.

Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Dieldrin	60-57-1	TWA	0.100000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Liver damage Reproductive effects Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		

		TWA	0.250000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A Potential for dermal absorption		
		TWA	0.250000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--------------------|-------------------|
| a) Appearance | Form: solid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |

d) pH	No data available
e) Melting point/freezing point	Melting point/range: 143 - 144 °C (289 - 291 °F)
f) Initial boiling point and boiling range	No data available
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Mouse - 38.0 mg/kg

LD50 Oral - Dog - 65.0 mg/kg

LD50 Oral - Monkey - 3.0 mg/kg

LD50 Oral - Rabbit - 45.0 mg/kg

LD50 Oral - Pig - 38.0 mg/kg

LD50 Oral - Guinea pig - 49.0 mg/kg

LD50 Oral - Hamster - 60.0 mg/kg

LD50 Oral - Pigeon - 23.7 mg/kg

LD50 Oral - Chicken - 20.0 mg/kg

Remarks: Sense Organs and Special Senses (Nose, Eye, Ear, and Taste):Eye:Miosis (pupillary constriction). Behavioral:Excitement. Behavioral:Food intake (animal).

LD50 Oral - Quail - 10.8 mg/kg

Remarks: Behavioral:Altered sleep time (including change in righting reflex). Behavioral:Somnolence (general depressed activity). Behavioral:Irritability.

LD50 Oral - Duck - 381.0 mg/kg

LD50 Oral - Mammal - 94.0 mg/kg

Remarks: Peripheral Nerve and Sensation:Flaccid paralysis without anesthesia (usually neuromuscular blockage). Behavioral:Tremor. Behavioral:Convulsions or effect on seizure threshold.

LD50 Oral - Bird (wild) - 13.3 mg/kg

LDLO Oral - Rat - 30.0 mg/kg

Remarks: Liver:Other changes.

LDLO Oral - Human - male - 65.0 mg/kg

LDLO Oral - Cat - 500 mg/kg

Remarks: Lungs, Thorax, or Respiration:Chronic pulmonary edema. Liver:Fatty liver degeneration. Kidney, Ureter, Bladder:Other changes.

TDLo Oral - Rat - 140 mg/kg

Remarks: Liver:Other changes. Blood:Other changes. Biochemical:Enzyme inhibition, induction, or change in blood or tissue levels: Other esterases.

TDLo Oral - Rat - 109 mg/kg

Remarks: Liver:Changes in liver weight.

TDLo Oral - Rat - 88 mg/kg

Remarks: Behavioral:Food intake (animal). Nutritional and Gross Metabolic:Weight loss or decreased weight gain. Biochemical:Enzyme inhibition, induction, or change in blood or tissue levels: Phosphatases.

Inhalation: No data available

LD50 Dermal - Rabbit - 250.0 mg/kg

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Dieldrin)
NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

Ingestion - Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

Additional Information

RTECS: IO1750000

Discomfort, Headache, Nausea, Vomiting, Dizziness, Tremors, tonic convulsions, clonic spasms, Coma., respiratory failure, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Blood - Irregularities - Based on Human Evidence

Blood - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish mortality LC50 - *Carassius auratus* (goldfish) - 1.6 µg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - *Daphnia magna* (Water flea) - 79.5 µg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2811 Class: 6.1 Packing group: I
Proper shipping name: Toxic solids, organic, n.o.s. (Dieldrin)
Reportable Quantity (RQ): 1 lbs
Marine pollutant: yes
Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: I EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Dieldrin)
Marine pollutant: yes

IATA

UN number: 2811 Class: 6.1 Packing group: I
Proper shipping name: Toxic solid, organic, n.o.s. (Dieldrin)
IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Dieldrin	60-57-1	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Dieldrin	60-57-1	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Dieldrin	60-57-1	1993-04-24

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer.	60-57-1	2007-09-28
Dieldrin		

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H300	Fatal if swallowed.
H311	Toxic in contact with skin.
H351	Suspected of causing cancer.
H372	Causes damage to organs through prolonged or repeated exposure if swallowed.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	4
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.5

Revision Date: 02/28/2015

Print Date: 02/09/2016

MSDS SUMMARY SHEET

Manufacturer:

Name: PHILLIPS PETROLEUM COMPANY

Address 1:

Address 2:

Address 3:

CSZ: BARTLESVILLE **State:** OK **Zipcode:** 74004

Emergency phone: (800) 424-9300

Business phone: 800-762-0942

Product:

Ferndale MSDS#: 1354 **Version # :** 6

Manufacturer MSDS#: 0041

Current? : 2002

Name:

NO. 2 DIESEL FUEL

Synonyms:

CARB **Diesel** TF3

CARB **Diesel**

CARB **Diesel** 10%

Diesel Fuel Oil

EPA Low Sulfur **Diesel** Fuel

EPA Low Sulfur **Diesel** Fuel – Dyed

EPA Off Road High Sulfur **Diesel** – Dyed

Fuel Oil No. 2 – CAS # 68476-30-2

No. 2 **Diesel** Fuel Oil

No. 2 Fuel Oil – Non Hiway – Dyed

No. 2 High Sulfur **Diesel** – Dyed

No. 2 Low Sulfur **Diesel** - Dyed

No. 2 Low Sulfur **Diesel** - Undyed

Crude column 3rd IR

Crude column 3rd side cut

Atmospheric tower 3rd side cut

Ultra Low Sulfur **Diesel** No. 2

Finished **Diesel**

DHT Reactor Feed

Straight Run **Diesel**

Diesel

Middle Distillate

Product/Catalog Numbers:

MSDS Date: 01/01/2002 (**received:** 01/14/2002)

NFPA codes:

Health: 0 **Flammability:** 2 **Reactivity:** 0

MATERIAL SAFETY DATA SHEET
No. 2 Diesel Fuel**1. PRODUCT AND COMPANY IDENTIFICATION**

Product Name: No. 2 Diesel Fuel
Product Code: Multiple
SAP Code:
Synonyms: 1354
CARB Diesel TF3
CARB Diesel
CARB Diesel 10%
Diesel Fuel Oil
EPA Low Sulfur Diesel Fuel
EPA Low Sulfur Diesel Fuel – Dyed
EPA Off Road High Sulfur Diesel – Dyed
Fuel Oil No. 2 – CAS # 68476-30-2
No. 2 Diesel Fuel Oil
No. 2 Fuel Oil – Non Hiway – Dyed
No. 2 High Sulfur Diesel – Dyed
No. 2 Low Sulfur Diesel - Dyed
No. 2 Low Sulfur Diesel – Undyed
No. 2 Ultra Low Sulfur Diesel – Dyed
No. 2 Ultra Low Sulfur Diesel - Undyed
Intended Use: Fuel

Chemical Family:

Responsible Party: Phillip's Petroleum Company
Bartlesville, Oklahoma 74004

For Additional MSDSs: 800-762-0942

Technical Information:

The intended use of this product is indicated above. If any additional use is known, please contact us at the Technical Information number listed.

EMERGENCY OVERVIEW**24 Hour Emergency Telephone Numbers:**

Spill, Leak, Fire or Accident

California Poison Control System: 800-356-3120

Call CHEMTREC

North America: (800) 424-9300

Others: (703) 527-3887 (collect)

Health Hazards/Precautionary Measures: Causes severe skin irritation. Aspiration hazard if swallowed. Can enter lungs and cause damage. Use with adequate ventilation. Avoid contact with eyes, skin and clothing. Do not taste or swallow. Wash thoroughly after handling.

Physical Hazards/Precautionary Measures: Flammable liquid and vapor. Keep away from heat, sparks, flames, static electricity or other sources of ignition.

Appearance: Straw-colored to dyed red
Physical Form: Liquid
Odor: Characteristic petroleum

HFPA Hazard Class:

Health: 0 (Least)
 Flammability: 2 (Moderate)
 Reactivity: 0 (Least)

HMIS Hazard Class

Not Evaluated

2. COMPOSITION/INFORMATION ON INGREDIENTS

<u>HAZARDOUS COMPONENTS</u>	<u>% VOLUME</u>	<u>Limits</u>	<u>EXPOSURE GUIDELINE</u>	
			<u>Agency</u>	<u>Type</u>
Diesel Fuel No. 2 CAS# 68476-34-6	100	100* mg/m ³	ACGIH	TWA-SKIN
Naphthalene CAS# 91-20-3	<1	10ppm	ACGIH	TWA
		15ppm	ACGIH	STEL
		10ppm	OSHA	TWA
		250ppm	NIOSH	IDLH

All components are listed on the TSCA inventory

Tosco Low Sulfur No. 2 Diesel meets the specifications of 40 CFR 60.41 for low sulfur diesel fuel.

Note: State, local or other agencies or advisory groups may have established more stringent limits. Consult an industrial hygienist or similar professional, or your local agencies, for further information.

*Proposed ACGIH (1999)

3. HAZARDS IDENTIFICATION**Potential Health Effects:**

Eye: Contact may cause mild eye irritation including stinging, watering, and redness.

Skin: Severe skin irritant. Contact may cause redness, itching, burning, and severe skin damage. Prolonged or repeated contact can worsen irritation by causing drying and cracking of the skin, leading to dermatitis (inflammation). Not actually toxic by skin absorption, but prolonged or repeated skin contact may be harmful (see Section 11).

Inhalation (Breathing): No information available. Studies by other exposure routes suggest a low degree of toxicity by inhalation.

Ingestion (Swallowing): Low degree of toxicity by ingestion. ASPIRATION HAZARD – This material can enter lungs during swallowing or vomiting and cause lung inflammation and damage.

Signs and Symptoms: Effects of overexposure may include irritation of the nose and throat, irritation of the digestive tract, nausea, diarrhea and transient excitation followed by signs of nervous system depression (e.g., headache, drowsiness, dizziness, loss of coordination, disorientation and fatigue).

Cancer: Possible skin cancer hazard (see Sections 11 and 14).

Target Organs: There is limited evidence from animal studies that overexposure may cause injury to the kidney (see Section 11).

Developmental: Inadequate data available for this material.

Pre-Existing Medical Conditions: Conditions aggravated by exposure may include skin disorders and kidney disorders.

4. FIRST AID MEASURES

Eye: If irritation or redness develops, move victim away from exposure and into fresh air. Flush eyes with clean water. If symptoms persist, seek medical attention.

Skin: Immediately remove contaminated shoes, clothing, and constrictive jewelry and flush affected area(s) with large amounts of water. If skin surface is damaged, apply a clean dressing and seek immediate medical attention. If skin surface is not damaged, cleanse affected area(s) thoroughly by washing with mild soap and water. If irritation or redness develops, seek immediate medical attention.

Inhalation (Breathing): If respiratory symptoms develop, move victim away from source of exposure and into fresh air. If symptoms persist, seek medical attention. If victim is not breathing, clear airway and immediately begin artificial respiration. If breathing difficulties develop, oxygen should be administered by qualified personnel. Seek immediate medical attention.

Ingestion (Swallowing): Aspiration hazard; Do not induce vomiting or give anything by mouth because this material can enter the lungs and cause severe lung damage. If victim is drowsy or unconscious and vomiting, place on the left side with the head down. If possible, do not leave victim unattended and observe closely for adequacy of breathing. Seek medical attention.

5. FIRE FIGHTING MEASURES

Flammable Properties:

Flash Point: >125°F/>52°

OSHA Flammability Class: Combustible liquid

LEL %: 0.3 / UEL %; 10.0

Autoignition Temperature: 500°F/260°C

Unusual Fire & Explosion Hazards: This material is flammable and can be ignited by heat, sparks, flames, or other sources of ignition (e.g., static electricity, pilot lights, or mechanical/electrical equipment, and electronic devices such as cell phones, computers, calculators, and pagers which have not been certified as intrinsically safe). Vapors may travel considerable distances to a source of ignition where they can ignite, flash back, or explode. May create vapor/air explosion hazard indoors, in confined spaces, outdoors, or in sewers. Vapors are heavier than air and can accumulate in low areas. If container is not properly cooled, it can rupture in the heat of a fire.

Extinguishing Media: Dry chemical, carbon dioxide, or foam is recommended. Water spray is recommended to cool or protect exposed materials or structures. Carbon dioxide can displace oxygen. Use caution when applying carbon dioxide in confined spaces. Water may be ineffective for extinguishment, unless used under favorable conditions by experienced fire fighters.

Fire Fighting Instructions: For fires beyond the incipient stage, emergency responders in the immediate hazard area should wear bunker gear. When the potential chemical hazard is unknown, in enclosed or confined spaces, or when explicitly required by DOT, a self contained breathing apparatus should be worn. In addition, wear other appropriate protective equipment as conditions warrant (see Section 8).

Isolate immediate hazard area, keep unauthorized personnel out. Stop spill/release if it can be done with minimal risk. Move undamaged containers from immediate hazard area if it can be done with minimal risk.

Water spray may be useful in minimizing or dispersing vapors and to protect personnel. Cool equipment exposed to fire with water, if it can be done with minimal risk. Avoid spreading burning liquid with water used for cooling purposes.

6. ACCIDENTAL RELEASE MEASURES

Flammable. Keep all sources of ignition and hot metal surfaces away from spill/release. The use of explosion-proof equipment is recommended.

Stay upwind and away from spill/release. Notify persons down wind of the spill/release, isolate immediate hazard area and keep unauthorized personnel out. Stop spill/release if it can be done with minimal risk. Wear appropriate protective equipment including respiratory protection as conditions warrant (see Section 8).

Prevent spilled material from entering sewers, storm drains, other unauthorized drainage systems, and natural waterways. Dike far ahead of spill for later recovery or disposal. Use foam on spills to minimize vapors (see Section 5). Spilled material may be absorbed into an appropriate material.

Notify fire authorities and appropriate federal, state, and local agencies. Immediate cleanup of any spill is recommended. If spill of any amount is made into or upon navigable waters, the contiguous zone, or adjoining shorelines, notify the National Response Center (phone number 800-424-8802).

7. HANDLING AND STORAGE

Handling: Open container slowly to relieve any pressure. Bond and ground all equipment when transferring from one vessel to another. Can accumulate static charge by flow or agitation. Can be ignited by static discharged. The use of explosion-proof equipment is recommended and may be required (see appropriate fire codes). Refer to NFPA-704 and/or API RP 2003 for specific bonding/grounding requirements.

Do not enter confined spaces such as tanks or pits without following proper entry procedures such as ASTM D-4276 and 29CFR 1910.146. The use of appropriate respiratory protection is advised when concentrations exceed any established exposure limits (see Sections 2 and 8).

Do not wear contaminated clothing or shoes. Keep contaminated clothing away from sources of ignition such as sparks or open flames. Use good personal hygiene practices.

High pressure injection of hydrocarbon fuels, hydraulic oils or greases under the skin may have serious consequences even though no symptoms or injury may be apparent. This can happen accidentally when using high pressure equipment such as high pressure grease guns, fuel injection apparatus or from pinhole leaks in tubing or high pressure hydraulic oil equipment.

“Empty” containers retain residue and may be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, or other sources of ignition. They may explode and cause injury or death. “Empty” drums should be completely drained, properly bunged, and promptly shipped to the supplier or a drum reconditioner. All containers should be disposed of in an environmentally safe manner and in accordance with governmental regulations.

Before working on or in tanks which contain or have contained this material, refer to OSHA regulations, ANSI Z49.1 and other references pertaining to cleaning, repairing, welding, or other contemplated operations.

Storage: Keep container(s) tightly closed. Use and store this material in cool, dry, well-ventilated areas away from heat, direct sunlight, hot metal surfaces, and all sources of ignition. Post area “No Smoking or Open Flame.” Store only in approved containers. Keep away from incompatible material (see Section 10). Protect container(s) against physical damage. Outdoor or detached storage is preferred. Indoor storage should meet OSHA standards and appropriate fire codes.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Engineering controls: If current ventilation practices are not adequate to maintain airborne concentration below the established exposure limits (see Section 2), additional ventilation or exhaust systems may be required. Where explosive mixtures may be present, electrical systems safe for such locations must be used (see appropriate electrical codes).

Personal Protective Equipment (PPE):

Respiratory: A NIOSH certified air purifying respirator with an organic vapor cartridge may be used under conditions where airborne concentrations are expected to exceed exposure limits (see Section 2).

Protection provided by air purifying respirators is limited (see manufacturer's respirator selection guide). Use a positive pressure air supplied respirator if there is a potential for an uncontrolled release, exposure levels are not known, or any other circumstances where air purifying respirators may not provide adequate protection.

A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrants a respirator's use.

Skin: The use of gloves impervious to the specific material handled is advised to prevent skin contact, possible irritation and skin damage (see glove manufacturer literature for information on permeability). Depending on conditions of use, apron and/or arm covers may be necessary.

Eyes/Face: Approved eye protection to safeguard against potential eye contact, irritation, or injury is recommended. Depending on conditions of use, a face shield may be necessary.

Other Protective Equipment: Eye wash and quick-drench shower facilities should be available in the work area. Thoroughly clean shoes and wash contaminated clothing before reuse. It is recommended that impervious clothing be worn when skin contact is possible.

9. PHYSICAL AND CHEMICAL PROPERTIES

Note: Unless otherwise stated, values are determined at 20°C (68°F) and 760 mm Hg (1atm).

Appearance: Straw-colored to dyed red

Physical State: Liquid

Odor: Characteristic petroleum

pH: unavailable

Vapor Pressure (mm Hg): 0.40

Vapor Density (air=1): >3

Boiling Point/Range: 320-700°F / 160-371°C

Freezing/Melting Point: No Data

Solubility in Water: Negligible

Specific Gravity: 0.81-0.88 @ 60°F

Percent Volatile: Negligible

Evaporation Rate (nBuAc=1): <1

Viscosity: 32.6-40.0 SUS @ 100°F

Bulk Density: 7.08 lbs/gal

Flash Point: >125°F / >52°C

Flammable/Explosive Limits (%): LEL: 0.3 / UEL: 10.0

10. STABILITY AND REACTIVITY

Stability: Stable under normal ambient and anticipated storage and handling conditions of temperature and pressure. Flammable liquid and vapor. Vapor can cause flash fire.

Conditions To Avoid: Avoid all possible sources of ignition (see Sections 5 and 7).

Materials to Avoid (Incompatible Materials): Avoid contact with strong oxidants such as liquid chlorine, concentrated oxygen, sodium hypochlorite, calcium hypochlorite, etc.

Hazardous Decomposition Products: The use of hydrocarbon fuels in an area without adequate ventilation may result in hazardous levels of combustion products (e.g., oxides of carbon, sulfur and nitrogen, benzene and other hydrocarbons) and/or dangerously low oxygen levels. ACGIH has included a TLV of 0.05 mg/m³ TWA for diesel exhaust particulate on its 1999 Notice of Intended Changes. See Section 11 for additional information on hazards of engine exhaust.

Hazardous Polymerization: Will not occur.

11. TOXICOLOGICAL INFORMATION

Diesel Fuel No. 2 (CAS# 68476-34-6)

Carcinogenicity: Chronic dermal application of certain middle distillate streams contained in diesel fuel No. 2 resulted in an increased incidence of skin tumors in mice. This material has not been identified as carcinogen by NTP, IARC, or OSHA. Diesel exhaust is a probable cancer hazard based on tests with laboratory animals.

Target Organ(s): Limited evidence of renal impairment has been noted from a few case reports involving excessive exposure to diesel fuel No. 2.

Naphthalene (CAS# 91-20-3)

Carcinogenicity: Naphthalene has been evaluated in two year inhalation studies in both rats and mice. The National Toxicology Program (NTP) concluded that there is clear evidence of carcinogenicity in male and female rats based on increased incidences of respiratory epithelial adenomas and olfactory epithelial neuroblastomas of the nose. NTP found some evidence of carcinogenicity in female mice (alveolar adenomas) and no evidence of carcinogenicity in male mice. Naphthalene has not been identified as a carcinogen by IARC or OSHA.

12. ECOLOGICAL INFORMATION

Not evaluated at this time

13. DISPOSAL CONSIDERATIONS

This material, if discarded as produced, would be a RCRA "characteristic" hazardous waste due to the characteristic(s) of ignitability (D001) and benzene (D018). If the material is spilled to soil or water, characteristic testing of the contaminated materials is recommended. Further, this material, once it becomes a waste, is subject to the land disposal restrictions in 40 CFR 268.40 and may require treatment prior to disposal to meet specific standards. Consult state and local regulations to determine whether they are more stringent than the federal requirements.

Container contents should be completely used and containers should be emptied prior to discard. Container ?insate? could be considered a RCRA hazardous waste and must be disposed of with care and in compliance with federal, state and local regulations. Large empty containers, such as drums, should be returned to the distributor or to a drum reconditioner. To assure proper disposal of smaller containers, consult with state and local regulations and disposal authorities.

14. TRANSPORT INFORMATION

DOT Shipping Description: Diesel Fuel, NA1983
Non-Bulk Package Marking: Diesel Fuel, 3, NA 1993, III

15. REGULATORY INFORMATION

EPA SARA 311/312 (Title III Hazard Categories):

Acute Health:	Yes
Chronic Health:	Yes
Fire Hazard:	Yes
Pressure Hazard:	No
Reactive Hazard:	No

SARA 313 and 40 CFR 372:

This material contains the following chemicals subject to the reporting requirements of SARA 313 and 40 CFR 372:

Component	CAS Number	Weight %
-----------	------------	----------

-- None known --

California Proposition 65:

Warning: This material contains the following chemicals which are known to the state of California to cause cancer, birth defects or other reproductive harm, and are subject to the requirements of California Proposition 65 (CA Health & Safety Code Section 25249.5):

Component	Effect
Benzene	Cancer, Developmental and Reproductive Toxicant
Toluene	Developmental Toxicant

Diesel engine exhaust, while not a component of this material, is on the Proposition 65 list of chemicals known to the State of California to cause cancer.

Carcinogen Identification:

This material has not been identified as a carcinogen by NTP, IARC, or OSHA. See Section 11 for carcinogenicity information of individual components, if any. Diesel exhaust is a probable cancer hazard based on tests in laboratory animals. It has been identified as carcinogen by IARC.

EPA (CERCLA Reportable Quantity): None

16. OTHER INFORMATION

Issue Date: 01/01/02

Previous Issue Date: 05/15/01

Product Code: Multiple

Revised Sections: None

Previous Product Code: Multiple

MSDS Number: 0041

Disclaimer of Expressed and Implied Warranties:

The information presented in this Material Data Safety Sheet is based on data believed to be accurate as of the date this Material Data Sheet was prepared. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY OTHER WARRANTY IS EXPRESSED OR IS TO BE IMPLIED REGARDING THE ACCURACY OR COMPLETENESS OF THE INFORMATION PROVIDED ABOVE, THE RESULTS TO BE OBTAINED FROM THE USE OF THIS INFORMATION OR THE PRODUCT, THE SAFETY OF THE PRODUCT, OR THE HAZARDS RELATED TO ITS USE. No responsibility is assumed for any damage or injury resulting from abnormal use or from any failure to adhere to recommended practices. The information provided above, and the product, are furnished on the condition that the person receiving them shall make their own determination as to the suitability of the product for their particular purpose and on the condition that they assume the risk of their use. In addition, no authorization is given nor implied to practice any patented invention without a license.

Tosco Refining Company
Ferndale Refinery
UltraLow Sulfur Diesel Product Specification

Ferndale Product Code:34380xx (5) Product Code: ULSD2

(COMETS)

Specification	Unit	Limit	Test Procedure	Typical
Appearance				
Water & Sediment	Vol %	0.05 Max	D 2709	
Color	Number	3.0 Max	D 1500	
Haze Rating	Rating	2 Max	D 4176	
Composition				
Carbon Residue (Ramsbottom)	Wt %	0.35 Max	D 524, D 189	
Volatility				
90% Recovered	Deg; F	540 Min	D 86	
	Deg; F	640 Min	D 86	
Flash Point	Deg; F	125 Min (1)	D 93	130 F
Gravity	API	30 Min	D 287, D4052	
Fluidity				
Pour Point	Deg; F	See Season Table (6)	D 97	
Cloud Point	Deg; F	See Season Table (6)	D 2500	10 F
Viscosity @ 104F	cSt	1.9 Min	D 445	
	cSt	4.1 Max	D 445	
Lubricity, SLBOCLE	grams	3100 Min	D 6078	3300gm
Lubricity, HFRR	mm	.45	D 6079	
Combustion				
Cetane Index or Cetane Number (3,4)	Number	40.0 Min	D 976, D613	47.0
Corrosion				
Copper Strip, 3hr @ 50 deg C	Number	3 Max (2)	D 130	
Aromatics (4)	Vol %	35 Max	D 1319	25 %
Contaminants				
Total Sulfur	PPM	30 Max	D 2622, D4294	15-20ppm
Water & Sediment	Vol %	0.05 Max	D 1796	
Ash	Wt %	0.01 Max	D 482	
Additives				
Cetane Improver	Lb/MBbl	675 Max		
Dye		Undyed		

1. Minimum release specification is 125 deg. F. The refinery should target 135 deg. F.
2. Test result reported as a number and letter (e.g. 1a). Any letter is allowable as long as the number meets the spec shown.
3. Either specification must be met.
4. Either cetane index minimum or aromatics maximum must be met.
5. Winter cloud and pour specifications may be relaxed to the summer specifications by agreement with the customer.
6. Season Table

Month	Product Code	Pour Point	Cloud Point
Jan, Feb, Nov, Dec	WI	0 max (5)	14 max (5)
Mar - Oct	SU	15 max	24 max

SAFETY DATA SHEET

Version 5.2
Revision Date 06/27/2014
Print Date 11/17/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Endosulfan II (beta)

Product Number : 48578
Brand : Supelco

CAS-No. : 33213-65-9

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H301 : Toxic if swallowed.
H410 : Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P264 : Wash skin thoroughly after handling.
P270 : Do not eat, drink or smoke when using this product.
P273 : Avoid release to the environment.
P301 + P310 : IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.
P321 : Specific treatment (see supplemental first aid instructions on this label).
P330 : Rinse mouth.
P391 : Collect spillage.
P405 : Store locked up.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none**3. COMPOSITION/INFORMATION ON INGREDIENTS****3.1 Substances**Synonyms : β -EndosulfanFormula : C₉H₆Cl₆O₃S

Molecular Weight : 406.93 g/mol

CAS-No. : 33213-65-9

Hazardous components

Component	Classification	Concentration
β-Endosulfan		
	Acute Tox. 3; Aquatic Acute 1; Aquatic Chronic 1; H301, H410	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES**4.1 Description of first aid measures****General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

no data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Sulphur oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

5.4 Further information

no data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N99 (US) or type P2 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

- | | |
|---|-------------------|
| a) Appearance | Form: solid |
| b) Odour | no data available |
| c) Odour Threshold | no data available |
| d) pH | no data available |
| e) Melting point/freezing point | no data available |
| f) Initial boiling point and boiling range | no data available |
| g) Flash point | no data available |
| h) Evaporation rate | no data available |
| i) Flammability (solid, gas) | no data available |
| j) Upper/lower flammability or explosive limits | no data available |
| k) Vapour pressure | no data available |
| l) Vapour density | no data available |
| m) Relative density | no data available |
| n) Water solubility | no data available |
| o) Partition coefficient: n-octanol/water | no data available |
| p) Auto-ignition temperature | no data available |
| q) Decomposition temperature | no data available |
| r) Viscosity | no data available |
| s) Explosive properties | no data available |
| t) Oxidizing properties | no data available |

9.2 Other safety information

no data available

10. STABILITY AND REACTIVITY**10.1 Reactivity**

no data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

no data available

10.4 Conditions to avoid

no data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - no data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - rat - 240.0 mg/kg

Inhalation: no data available

Dermal: no data available

no data available

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitisation

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

no data available

Specific target organ toxicity - single exposure

no data available

Specific target organ toxicity - repeated exposure

no data available

Aspiration hazard

no data available

Additional Information

RTECS: RB9875200

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - other fish - 0.0066 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates LC50 - Daphnia magna (Water flea) - > 0.1 - < 1 mg/l - 48 h

12.2 Persistence and degradability

no data available

12.3 Bioaccumulative potential

Bioaccumulation other fish - 21 d
- 0.0001 mg/l

Bioconcentration factor (BCF): 9,908

12.4 Mobility in soil

no data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solids, organic, n.o.s. (β-Endosulfan)
Reportable Quantity (RQ): 1 lbs
Marine pollutant: Marine pollutant
Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (β-Endosulfan)
Marine pollutant: No

IATA

UN number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solid, organic, n.o.s. (β-Endosulfan)

15. REGULATORY INFORMATION

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
β-Endosulfan	33213-65-9	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
β-Endosulfan	33213-65-9	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
β-Endosulfan	33213-65-9	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H301	Toxic if swallowed.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.2

Revision Date: 06/27/2014

Print Date: 11/17/2016

SAFETY DATA SHEET

Version 5.1
Revision Date 06/27/2014
Print Date 04/20/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Endosulfan sulfate

Product Number : 36676

Brand : Sigma

CAS-No. : 1031-07-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 2), H300

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H300

Fatal if swallowed.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P264

Wash skin thoroughly after handling.

P270

Do not eat, drink or smoke when using this product.

P273

Avoid release to the environment.

P301 + P310

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

P321

Specific treatment (see supplemental first aid instructions on this label).

P330

Rinse mouth.

P391

Collect spillage.

P405

Store locked up.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS**3.1 Substances**

Formula : $\text{C}_9\text{H}_6\text{Cl}_6\text{O}_4\text{S}$
Molecular Weight : 422.92 g/mol
CAS-No. : 1031-07-8

Hazardous components

Component	Classification	Concentration
Endosulfan sulfate		
	Acute Tox. 2; Aquatic Acute 1; Aquatic Chronic 1; H300, H410	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES**4.1 Description of first aid measures****General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

no data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Sulphur oxides

5.3 Advice for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

5.4 Further information

no data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection. For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

- | | |
|---|-------------------------------------|
| a) Appearance | Form: solid |
| b) Odour | no data available |
| c) Odour Threshold | no data available |
| d) pH | no data available |
| e) Melting point/freezing point | 179.0 - 182.0 °C (354.2 - 359.6 °F) |
| f) Initial boiling point and boiling range | no data available |
| g) Flash point | no data available |
| h) Evaporation rate | no data available |
| i) Flammability (solid, gas) | no data available |
| j) Upper/lower flammability or explosive limits | no data available |
| k) Vapour pressure | no data available |
| l) Vapour density | no data available |
| m) Relative density | no data available |
| n) Water solubility | insoluble |
| o) Partition coefficient: n-octanol/water | log Pow: 3.66 |
| p) Auto-ignition temperature | no data available |
| q) Decomposition temperature | no data available |
| r) Viscosity | no data available |
| s) Explosive properties | no data available |
| t) Oxidizing properties | no data available |

9.2 Other safety information

no data available

10. STABILITY AND REACTIVITY**10.1 Reactivity**

no data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

no data available

10.4 Conditions to avoid

no data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - no data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - rat - 18.0 mg/kg

Inhalation: no data available

Dermal: no data available

no data available

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitisation

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

no data available

Specific target organ toxicity - single exposure

no data available

Specific target organ toxicity - repeated exposure

no data available

Aspiration hazard

no data available

Additional Information

RTECS: RB9150000

Cholinesterase inhibitors can cause heavy salivation and secretion in the lungs, lachrymation, blurred vision, involuntary defecation, diarrhea, tremor, ataxia, sweating, hypothermia, lowered heart rate, and/or a fall in blood pressure as a result of their action at cholinergic nerve sites., Headache, Nausea, Vomiting, Dizziness, Drowsiness, Confusion., Weakness, Muscle cramps/spasms., Change in pupil size., Fever, Seizures., Incoordination., Convulsions, Coma.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - Carassius auratus (goldfish) - > 0.01 - < 0.1 mg/l - 48.0 h
	LC50 - Leuciscus idus (Golden orfe) - > 0.01 - < 0.1 mg/l - 48.0 h
	LC50 - other fish - > 0.001 - < 0.01 mg/l - 48.0 h
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 0.76 mg/l - 48 h
	LC50 - Daphnia magna (Water flea) - > 0.1 - < 1 mg/l - 48 h

12.2 Persistence and degradability

no data available

12.3 Bioaccumulative potential

no data available

12.4 Mobility in soil

no data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2811	Class: 6.1	Packing group: II
Proper shipping name: Toxic solids, organic, n.o.s. (Endosulfan sulfate)		
Reportable Quantity (RQ): 1 lbs		
Marine pollutant: No		
Poison Inhalation Hazard: No		

IMDG

UN number: 2811	Class: 6.1	Packing group: II	EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Endosulfan sulfate)			
Marine pollutant: No			

IATA

UN number: 2811	Class: 6.1	Packing group: II
Proper shipping name: Toxic solid, organic, n.o.s. (Endosulfan sulfate)		

15. REGULATORY INFORMATION

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Endosulfan sulfate	1031-07-8	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Endosulfan sulfate	1031-07-8	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Endosulfan sulfate	1031-07-8	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H300	Fatal if swallowed.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.1

Revision Date: 06/27/2014

Print Date: 04/20/2016

SAFETY DATA SHEET

Version 5.3
Revision Date 01/03/2015
Print Date 07/12/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Endrin ketone

Product Number : PS772

Brand : Supelco

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 2), H300

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H300 : Fatal if swallowed.

Precautionary statement(s)

P264 : Wash skin thoroughly after handling.

P270 : Do not eat, drink or smoke when using this product.

P301 + P310 : IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

P321 : Specific treatment (see supplemental first aid instructions on this label).

P330 : Rinse mouth.

P405 : Store locked up.

P501 : Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Supelco - PS772

Molecular weight : 380.91 g/mol

Hazardous components

Component	Classification	Concentration
Endrin ketone		
	Acute Tox. 2; H300	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Provide appropriate exhaust ventilation at places where dust is formed. For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Handle and store under inert gas.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|-------------------|
| a) Appearance | Form: solid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | 285 °C (545 °F) |
| f) Initial boiling point and boiling range | No data available |
| g) Flash point | No data available |

h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	No data available
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	No data available
p)	Auto-ignition temperature	523.0 °C (973.4 °F)
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 10.0 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 1,640.00 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 3,600.00 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2811 Class: 6.1 Packing group: II
Proper shipping name: Toxic solids, organic, n.o.s. (Endrin ketone)
Reportable Quantity (RQ): 1 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: II EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Endrin ketone)

IATA

UN number: 2811 Class: 6.1 Packing group: II
Proper shipping name: Toxic solid, organic, n.o.s. (Endrin ketone)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Endrin ketone	53494-70-5	1989-08-11

New Jersey Right To Know Components

	CAS-No.	Revision Date
Endrin ketone	53494-70-5	1989-08-11

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
H300	Fatal if swallowed.

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.3

Revision Date: 01/03/2015

Print Date: 07/12/2016

SAFETY DATA SHEET

Version 5.5
Revision Date 08/09/2016
Print Date 07/31/2019

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Endrin

Product Number : 49032
Brand : Supelco
Index-No. : 602-051-00-X

CAS-No. : 72-20-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 1), H300
Acute toxicity, Dermal (Category 2), H310
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H300 + H310
H410

Fatal if swallowed or in contact with skin
Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P262
P264
P270
P273
P280
P301 + P310 + P330

Do not get in eyes, on skin, or on clothing.
Wash skin thoroughly after handling.
Do not eat, drink or smoke when using this product.
Avoid release to the environment.
Wear protective gloves/ protective clothing.
IF SWALLOWED: Immediately call a POISON CENTER/doctor. Rinse

P302 + P350 + P310	mouth. IF ON SKIN: Gently wash with plenty of soap and water. Immediately call a POISON CENTER or doctor/ physician.
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₁₂ H ₈ Cl ₆ O
Molecular weight	: 380.91 g/mol
CAS-No.	: 72-20-8
EC-No.	: 200-775-7
Index-No.	: 602-051-00-X

Hazardous components

Component	Classification	Concentration
Endrin		
	Acute Tox. 1; Acute Tox. 2; Aquatic Acute 1; Aquatic Chronic 1; H300 + H310, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Endrin	72-20-8	TWA	0.100000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Headache Liver damage Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	0.100000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		
		TWA	0.100000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation		

		PEL	0.1 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		Skin		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---------------------------------|-----------------------------------|
| a) Appearance | Form: solid
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | No data available |

f)	Initial boiling point and boiling range	No data available
g)	Flash point	No data available
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	No data available
k)	Vapour pressure	No data available
l)	Vapour density	No data available
m)	Relative density	No data available
n)	Water solubility	insoluble
o)	Partition coefficient: n-octanol/water	log Pow: 5.20
p)	Auto-ignition temperature	No data available
q)	Decomposition temperature	226.0 °C (438.8 °F) -
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 3.0 mg/kg

Inhalation: No data available

LD50 Dermal - Rabbit - 60.0 mg/kg

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Central nervous system -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - *Oncorhynchus mykiss* (rainbow trout) - < 0.001 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates EC50 - *Daphnia pulex* (Water flea) - 0.02 mg/l - 48 h

Immobilization EC50 - *Daphnia magna* (Water flea) - 0.0042 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation *Pimephales promelas* (fathead minnow) - 56 d
- 0.63 mg/l

Bioconcentration factor (BCF): 13,000

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2811 Class: 6.1 Packing group: I
Proper shipping name: Toxic solids, organic, n.o.s. (Endrin)
Reportable Quantity (RQ): 1 lbs
Marine pollutant: yes
Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: I EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Endrin)
Marine pollutant: yes

IATA

UN number: 2811 Class: 6.1 Packing group: I
Proper shipping name: Toxic solid, organic, n.o.s. (Endrin)

15. REGULATORY INFORMATION

SARA 302 Components

The following components are subject to reporting levels established by SARA Title III, Section 302:

	CAS-No.	Revision Date
Endrin	72-20-8	2007-07-01

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Endrin	72-20-8	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Endrin	72-20-8	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Endrin	72-20-8	2007-07-01

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING: This product contains a chemical known to the		

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H300	Fatal if swallowed.
H300 + H310	Fatal if swallowed or in contact with skin
H310	Fatal in contact with skin.

HMIS Rating

Health hazard:	4
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.


Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.5

Revision Date: 08/09/2016

Print Date: 07/31/2019



Health	2
Fire	4
Reactivity	0
Personal Protection	H

Material Safety Data Sheet

Ethyl ether MSDS

Section 1: Chemical Product and Company Identification

Product Name: Ethyl ether

Catalog Codes: SLE2170, SLE1783, SLE1465

CAS#: 60-29-7

RTECS: KI5775000

TSCA: TSCA 8(b) inventory: Ethyl ether

CI#: Not available.

Synonym: Diethyl Ether; Ether

Chemical Name: Ethyl Ether

Chemical Formula: C₄H₁₀O

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Ethyl ether	60-29-7	100

Toxicological Data on Ingredients: Ethyl ether: ORAL (LD50): Acute: 1215 mg/kg [Rat]. VAPOR (LC50): Acute: 73000 ppm 2 hours [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to skin, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Cold water may be used. Get medical attention.

Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if symptoms appear.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 180°C (356°F)

Flash Points: CLOSED CUP: -45°C (-49°F).

Flammable Limits: LOWER: 1.9% UPPER: 36%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances:

Extremely flammable in presence of open flames and sparks, of heat. Slightly flammable to flammable in presence of oxidizing materials, of acids.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Highly explosive in presence of open flames and sparks, of heat. Slightly explosive in presence of oxidizing materials.

Fire Fighting Media and Instructions:

Flammable liquid, soluble or dispersed in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use alcohol foam, water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

Special Remarks on Fire Hazards:

Highly flammable. Will be easily ignited by heat, sparks, and flames. Vapors may travel to source of ignition and flash back. Most vapors are heavier than air. Burns with smokey greenish flame. Violent reaction or ignition on contact with halogens (e.g., bromine, chlorine), interhalogens (e.g., iodine heptafluoride), oxidants (e.g., silver perchlorate, nitrosyl perchlorate, nitryl perchlorate, chromyl chloride, fluorine nitrate, permanganic acid, nitric acid, hydrogen peroxide, peroxodisulfuric acid, iodine (VII) oxide, sodium peroxide, ozone, and liquid air), sulfur and sulfur compounds (e.g., sulfur when dried with peroxidized ether, sulfuryl chloride).

Special Remarks on Explosion Hazards:

Vapors may form explosive mixtures with air. Vapor explosion hazard indoors, outdoors, or in sewers. Run off to sewer may create a fire or explosion hazard. Containers may explode when heated. Tends to form explosive peroxides under influence of light and air and evaporated to dryness. Explosive reaction with boron triazide, bromine trifluoride, bromine pentafluoride,

perchloric acid, uranyl nitrate + light, wood pulp extracts + heat. Only electrical equipment of explosion proof type (group C classification) is permitted to be operated in ether areas. May explode when brought in contact with anhydrous nitric acid.

Section 6: Accidental Release Measures

Small Spill:

Dilute with water and mop up, or absorb with an inert dry material and place in an appropriate waste disposal container.

Large Spill:

Flammable liquid. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapor/spray. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, acids, moisture.

Storage:

Store in a segregated and approved area. Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Avoid all possible sources of ignition (spark or flame). Do not store above 30°C (86°F). Hygroscopic; keep container tightly closed. Air Sensitive Sensitive to light.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 400 (ppm) from OSHA (PEL) [United States] TWA: 400 STEL: 500 CEIL: 500 (ppm) from ACGIH (TLV) [United States] TWA: 1200 STEL: 1520 CEIL: 1500 (mg/m³) from ACGIH (TLV) [United States] STEL: 500 (ppm) [Australia] TWA: 1200 (mg/m³) from OSHA (PEL) [United States] Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid. (volatile, mobile liquid)

Odor: Sweetish. Pungent. Ethereal.

Taste: Burning. Sweet.

Molecular Weight: 74.12g/mole

Color: Clear Colorless.

pH (1% soln/water): Not available.

Boiling Point: 34.6°C (94.3°F)

Melting Point: -116.3°C (-177.3°F)

Critical Temperature: 192.7°C (378.9°F)

Specific Gravity: 0.7134 (Water = 1)

Vapor Pressure: 58.6 kPa (@ 20°C)

Vapor Density: 2.56 (Air = 1)

Volatility: Not available.

Odor Threshold: 0.83 ppm

Water/Oil Dist. Coeff.: The product is more soluble in oil; log(oil/water) = 0.9

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water, acetone.

Solubility:

Soluble in acetone. Partially soluble in cold water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Heat, ignition sources, incompatible materials, light, air.

Incompatibility with various substances: Highly reactive with oxidizing agents, acids.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity:

Air and light sensitive. Hygroscopic. Also incompatible with bromoazide, chlorine, chlorine trifluoride, chromic anhydride, chromyl chloride, lithium aluminum hydride, nitrosyl perchlorate, nitryl perchlorate, ozone, perchloric acid, permanganated, sulfuric acid, potassium peroxide, sodium peroxide, triethyl aluminum trimethyl aluminum, bromine, iodine heptafluoride, silver perchlorate, fluorine nitrate, permanganic acid, nitric acid, hydrogen peroxide, peroxodisulfuric acid, iodine (VII) oxide, peat soils, thiotriazyl perchlorate, sulfonyl chloride, sulfur, uranyl nitrate, acetyl peroxide, and wood pulp extracts. Can react vigorously with acetyl peroxide, air, bromoazide, ClF₃, CrO₃, Cr(OCIO)₂, LiAlH₄, NOClO₄, O₂, NClO₂, (H₂SO₄ + permanganates), K₂O₂, [(C₂H₅)₃Al + air], [(CH₃)₃Al + air].

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Eye contact. Inhalation.

Toxicity to Animals:

WARNING: THE LC₅₀ VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD₅₀): 1215 mg/kg [Rat]. Acute toxicity of the vapor (LC₅₀): 31000 0.5 hours [Mouse].

Chronic Effects on Humans:

MUTAGENIC EFFECTS: Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. May cause damage to the following organs: skin, central nervous system (CNS).

Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Special Remarks on Toxicity to Animals:

LD50 [Rabbit] -Route: Skin; Dose: >20 ml/kg LDL[Man] - Route: Oral; Dose: 260 mg/kg

Special Remarks on Chronic Effects on Humans: May affect genetic material (mutagenic) based on animal data.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: Skin: Causes skin irritation. It is not appreciably absorbed through intact skin. Eyes: Causes eye irritation. Can cause slight, reversible eye injury from contact with liquid or vapor. Inhalation: It is rapidly absorbed through lungs. Vapor mist causes irritation of the respiratory tract and mucous membranes. Affects behavior, sense organs, peripheral and central nervous systems, liver and metabolism, cardiovascular system. Symptoms may include excitement, drowsiness, headache, nausea, vomiting, paleness, decreased pulse and temperature, irregular respiration, coughing, bronchodilation, increase in respiratory rate, increase in heart rate, excessive salivation, muscle relaxation, anesthetic effects, and possible kidney irritation or injury, and temporarily abnormal liver function tests. Ingestion: May be harmful if swallowed. May cause gastrointestinal tract irritation with nausea, vomiting

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are less toxic than the product itself.

Special Remarks on the Products of Biodegradation:

WHEN RELEASED INTO THE SOIL, THIS MATERIAL IS EXPECTED TO QUICKLY EVAPORATE. WHEN RELEASED INTO THE SOIL, THIS MATERIAL IS EXPECTED TO LEACH INTO GROUNDWATER. WHEN RELEASED INTO THE SOIL, THIS MATERIAL IS NOT EXPECTED TO BIODEGRADE. WHEN RELEASED INTO WATER, THIS MATERIAL IS NOT EXPECTED TO BIODEGRADE. WHEN RELEASED INTO THE WATER, THIS MATERIAL IS EXPECTED TO HAVE HALF-LIFE OF LESS THAN 1 DAY. WHEN RELEASED TO WATER, THIS MATERIAL IS EXPECTED TO QUICKLY EVAPORATE. THIS MATERIAL IS NOT EXPECTED TO SIGNIFICANTLY BIOACCUMULATE. THIS MATERIAL HAS A LOG OCTANOL-WATER PARTITION COEFFICIENT LESS THAN 3.0. WHEN RELEASED INTO THE AIR, THIS MATERIAL IS EXPECTED TO BE READILY DEGRADED BY REACTION WITH PHOTOCHEMICALLY PRODUCED HYDROXYL RADICAL. WHEN RELEASED INTO THE AIR, THIS MATERIAL IS NOT EXPECTED TO BE DEGRADED BY PHOTOLYSIS. WHEN RELEASED INTO THE AIR, THIS MATERIAL IS EXPECTED TO HAVE HALF-LIFE BETWEEN 1 AND 10 DAYS.

Section 13: Disposal Considerations

Waste Disposal:

Consult with Local and Regional (State) authorities (waste regulators). Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 3: Flammable liquid.

Identification: : Diethyl ether UNNA: 1155 PG: I

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

Connecticut hazardous material survey.: Ethyl ether Illinois toxic substances disclosure to employee act: Ethyl ether Illinois chemical safety act: Ethyl ether New York release reporting list: Ethyl ether Rhode Island RTK hazardous substances: Ethyl ether Pennsylvania RTK: Ethyl ether Florida: Ethyl ether Minnesota: Ethyl ether Massachusetts RTK: Ethyl ether Massachusetts spill list: Ethyl ether New Jersey: Ethyl ether New Jersey toxic catastrophe prevention act: Ethyl ether Louisiana spill reporting: Ethyl ether California Director's List of Hazardous Substances: Ethyl ether TSCA 8(b) inventory: Ethyl ether TSCA 4(a) proposed test rules: Ethyl ether TSCA 8(a) PAIR: Ethyl ether

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada): CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F).

DSCL (EEC):

R12- Extremely flammable. R19- May form explosive peroxides. R22- Harmful if swallowed. S9- Keep container in a well-ventilated place. S16- Keep away from sources of ignition - No smoking. S29- Do not empty into drains. S33- Take precautionary measures against static discharges.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 4

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 1

Flammability: 4

Reactivity: 1

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/10/2005 08:18 PM

Last Updated: 05/21/2013 12:00 PM


The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

Safety Data Sheets (SDS)

SECTION 1-IDENTIFICATION

Product name: Ethylbenzene
Other names: —
Proper shipping name: Ethylbenzene
Recommended use of the chemical and restrictions on use: The main use of ethylbenzene is to manufacture styrene, a compound used to make plastics. Ethylbenzene is also found in gasoline, paints, inks, insecticides, carpet glues and tobacco products.
Manufacturer/Supplier Name: Taiwan SM Corp., Kaohsiung plant Address: NO.7, Industrial 1st Rd, Lin-Yuan Kaohsiung County 83203, Taiwan, R.O.C. Phone No.: 886-7-6414511
Emergency phone No./Fax No.: 886-7-6414511 Ext. 221 (on duty), 886-7-6414517 (off duty)/886-7-6423828

SECTION 2-HAZARDS IDENTIFICATION

GHS Classification:	Flammable Liquid Category 2 Acute Toxicity (Inhalation) Category 4 Skin Corrosion/Irritation Category 3 Serious Eye Damage/Eye Irritation Category 2 Carcinogenicity Category 2 Reproductive Toxicity Category 2 Specific Target Organ Toxicity Repeated Exposure Category 2 Aspiration Hazard Category 1
GHS Label elements:	
Hazard symbols	
Signal word	Danger
Hazard statements	Flammable liquid and vapor Harmful if inhaled Causes skin irritation Causes serious eye irritation Suspected of causing cancer May damage the unborn child May be harmful to organs by prolonged and repeated exposure May be fatal if swallowed and enters airways
Precautionary statements	Use only in well ventilated area. Control of exposure by mechanical ventilation in an unventilated or confined space Avoid breathing vapors and contact with skin and eyes. Wear breathing apparatus/protective gloves/face protection. Store in well-ventilated place. Disposal must be in accordance with applicable federal, state, or local regulations.
Other hazards: —	

SECTION 3-COMPOSITION/INFORMATION ON INGREDIENTS

CAS No.	Chemical Name	wt% by weight	EINECS No.
00100-41-4	Ethylbenzene	99.0 min.	202-849-4
Synonyms	Phenylethane 、 EB 、 Ethylbenzol		

SECTION 4-FIRST AID MEASURES

Description of necessary first aid measures

Eye:

1. Flush eye with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids.
2. Get medical aid immediately.

Skin:

1. Washing affected area thoroughly with soap and water for at least 20 minutes.
2. Call a Physician if irritation develops or persists.
3. Removing contaminated clothing, shoes, and leathery wearings, cleaning procedure is available before reused or waste treatment.

Ingestion:

1. If victim is conscious and alert, give 2~4 cupfuls of milk/water to dilute the substance in stomach.
2. Never give anything by mouth to an unconscious person.
3. Don't induce vomiting unless directed to do so by medical person.
4. Then seek for medical attention.

Inhalation:

1. Remove from further exposure and flush thoroughly with air.
2. If not breathing, give artificial respiration. If breathing is difficult, give Oxygen.
3. If respiratory irritation, seek immediate medical assistance and call a physician.

Most important symptoms/effects, acute and delayed

Headaches, dizziness, fatigue, eye, nose and throat irritation. Target organs: Eyes, upper respiratory system, skin, CNS, lung, liver, kidney, skin (dermatitis), eye (conjunctivitis and other eye injuries), upper respiratory system disorders, and central nervous system disorders.

Indication of immediate medical attention and special treatment needed, if necessary

For acute or short term repeated exposures to Ethylbenzene:

Inhalation:

1. Severe exposures should have cardiac monitoring to detect arrhythmia.
2. If bronchospasm and wheezing occur, consider treatment with inhaled sympathomimetic agents.
3. If pulmonary edema (noncardiogenic) occurs, then maintain ventilation and oxygenation with close arterial blood gas monitoring. Early use of PEEP and mechanical ventilation may be needed to maintain pO₂ greater than 50 mmHG with FIO₂ less than 60%.

Ingestion:

1. Induction of emesis is not recommended.
2. Cautious gastric lavage followed by administration of activated charcoal may be of benefit if the patient is seen soon after the exposure.

SECTION 5-FIRE FIGHTING MEASURES

Extinguishing media

Foam · CO₂ · Dry chemical powder · Water spray or fog – Large fires only.

Specific hazards arising from the chemical

1. Liquid and vapor are flammable.
2. Moderate fire hazard when exposed to heat or flame.
3. Vapor forms an explosive mixture with air.
4. Moderate explosion hazard when exposed to heat or flame.
5. Vapor may travel a considerable distance to source of ignition.
6. Heating may cause expansion or decomposition leading to violent rupture of containers.
7. On combustion, may emit toxic fumes of carbon monoxide (CO).

Special protective equipment and precautions for fire-fighters

1. Must wear MSHA/NOISH approved positive self-contained breathing apparatus (SCBA) and protective clothing.
2. Withdrawing and isolation the possible dangerous sources, fire fighting at safe distance and suitable protection area. Keep toxic vapors and decompositions away from inhalation, when standing at upper-wind area as well.
3. Stop leakage before fire extinguishing, otherwise it may explode again because of vapors above leakage. However, it's not well extinguishment at nondangerous circumstance, preferring to burning up.
4. Water spray may not work effectively in terms of lower flash point. Better fire fighting performed by experienced people.
5. In huge fire at larger area, automatic water spray system should be recommended. If extinguishing is not available, evacuating people back as soon as possible.
6. Out off the space immediately, if vessel collapsed or pressure relief valve went pop.

SECTION 6-ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedure

1. Personal protective equipment (specified in Section 8)
Eyes : Chemical safety goggles are recommended, and a face shield is added when needed.
Skin : Wear appropriate protective gloves to avoid skin contact.
Clothing : When direct contact is likely, Use rubberized clothings, apron and boots.
Respiratory : When limits are exceeded, wear a respirator approved by NIOSH/MSHA for protection against organic dust, mists and vapors.
2. Remove all sources of ignition. No smoking, naked lights or ignition sources. Ventilate area of leak or spill.
3. Keep unnecessary and unprotected personnel from entering. Evacuate personnel from the danger area. Consult with an expert about the emergency procedures.

Environmental precautions

1. Prevent spillage from entering drains, surface, and groundwater.
2. Contain and recover liquid when possible. Use non-sparking tools and equipment.
3. Collect liquid in an appropriate container or absorb with an inert material (e.g. vermiculite, dry sand, earth), and place in a chemical waste container.
4. Report the accidental spill/release to Local/State government.

Methods and materials for containment and cleaning up

Minor spill:

1. Remove all ignition sources.
2. Clean up all spills immediately.
3. Avoid breathing vapors and contact with skin and eyes.
4. Control personal contact by using protective equipment.
5. Contain and absorb small quantities with vermiculite or other absorbent material.
6. Wipe up.
7. Collect residues in a flammable waste container.

Major spill

1. Clear area of personnel and move upwind.
2. Alert emergency responders and tell them location and nature of hazard.
3. May be violently or explosively reactive.
4. Wear breathing apparatus plus protective gloves.
5. Prevent spillage from entering drains or water course.
6. No smoking, naked lights or ignition sources. Increase ventilation.
7. Stop leak if safe to do so.
8. Water spray or fog may be used to disperse/absorb vapor.
9. Contain spill with sand, earth or vermiculite.
10. Use only spark-free shovels and explosion proof equipment.
11. Collect recoverable product into labeled containers for recycling..
12. Absorb remaining product with sand, earth or vermiculite.
13. Collect solid residues and seal in labeled drums for disposal.
14. Wash area and prevent runoff into drains.
15. If contamination of drains or waterways occurs, advise emergency services.

SECTION 7-HANDLING AND STORAGE

Precautions for safe handling

1. Wash thoroughly after handling.
2. Use only in well ventilated area.
3. Ground and bond containers when transferring.
4. Use spark-free tools and explosion proof equipment.
5. Empty containers retain product residue (liquid/vapor), and can be dangerous.
6. Do not pressurize, cut, weld, braze, solder, drill, or expose empty containers to heat, sparks or open flames.

Conditions for safe storage, including any incompatibilities

1. Iron, galvanized iron, and steel are suitable metals for tanks.
2. Storage should be located away from any area subject to fire hazards. Storage tanks located in the open or underground minimize the danger of fire, vapor and health problems.
3. All openings in the system should terminate outdoors and be protected by flash screen.
4. Electrical installation should conform to the National Electrical Code.
5. Storage tanks should be electrically bonded and grounded to prevent dangerous accumulations of static electricity. (see NFPA pamphlet "Static Electricity")
6. Natural ventilation is all that is needed for outdoor storage installation.
7. For indoor storage : Good natural ventilation may be sufficient. The generally considered maximum allowable concentration is 100 ppm by volume in air for an eight-hour working exposure. If other than natural ventilation is required,

the ventilation equipment should be designed to handle the heavy ethylbenzene vapor. Since ethylbenzene vapor is heavier than air, a down draft mechanical exhaust is indicated in those operation in which general ventilation should be to ensure a substantial air flow away from the work area. All ventilating systems require periodic inspection.

SECTION 8-EXPOSURE CONTROLS, PERSONAL PROTECTION

Control parameters

OSHA- Final PELs : 100 ppm TWA.

ACGIH TLV-TEL : 100 ppm.

ACGIH TLV-STEEL : 125 ppm.

Taiwan TWA : 100 ppm (skin).

Taiwan STEEL : 125 ppm (skin).

Taiwan Ceiling : -----.

Taiwan BEI : 1 mg/l (before on duty).

Engineering control

1. Process should be located at least 17 meter (50 feet) away from open flames and all high temperature operations likely to cause ignition of the ethylbenzene vapor.
2. In venting ethylbenzene vapors, consideration should be given to possible halogenation of the vapors by low concentrations of free chlorine and bromine with the resultant formation of lacrimations.
3. Process should be designed so that the operator is not exposed to direct contact with ethylbenzene or the vapor. The technical problems of designing equipment, providing adequate ventilation and operating procedures which promise maximum security and economy, can best be handled by competent engineers.
4. It is essential for safety that equipment be used and maintained as recommended by the manufacturer.
5. Tanks used to store or process ethylbenzene should be closed vessels vented to a safe point of discharge in the outside atmosphere away from operating stations, roadways, and at least 17 meter (50 feet) from possible sources of ignitions. All sparks, flames, heated surface, or other sources of ignition should be kept away from all vents. It is advisable, to provide suction on vessels when inspection or observation openings are made, to minimize or eliminate escape of vapors.

Personal protective equipment

Personal respirators (NIOSH Approved):

If the exposure limit is exceeded, a half-face organic vapor respirator may be worn for up to ten times the exposure limit or the maximum use concentration specified by the appropriate regulatory agency or respirator supplier, whichever is lowest. A full-face piece organic vapor respirator may be worn up to 50 times the exposure limit or the maximum use concentration specified by the appropriate regulatory agency or respirator supplier, whichever is lowest. For emergencies or instances where the exposure levels are not known, use a full-face piece positive-pressure, air-supplied respirator.

(Warning: Air-purifying respirators do not protect workers in oxygen-deficient atmospheres.)

Skin protection:

Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Eye Protection:

Use chemical safety goggles and/or a full face shield where splashing is possible. Maintain eye wash fountain and quick-drench facilities in work area.

SECTION 9-PHYSICAL AND CHEMICAL PROPERTIES

Appearance : Transparent liquid	Upper/lower explosive limits : 1.0% ~ 6.7%
Odor: Aromatic odor	Vapor Pressure : 7.1 mmHg @ 20°C / 68°F
Odor threshold : 0.092 ~ 0.6 ppm	Vapor Density : 3.66 (air=1)
PH : Not available	Relative density : 0.864 (water=1)
Melting/Freezing Point : -94.9°C	Solubility : 0.015 @ 25°C in water
Initial boiling point/boiling range : 132.6°C	Partition coefficient : 3.15 (n-octanol/water)
Flash point : 21°C	Auto-ignition temperature : 432°C
Evaporation Rate : 0.84 (BuAc=1)	Decomposition temperature : Not available
Flammability (solid/gas) : Not available	Viscosity : Not available
Molecular Formula : C ₈ H ₁₀	Molecular Weight : 106.7

SECTION 10-STABILITY AND REACTIVITY

Reactivity

The product is stable. Vapor is explosive when exposed to heat or flame.

Chemical stability

Stable under normal temperatures and pressures.

Possibility of hazardous reaction

Has not been reported.

Condition to avoid Incompatible materials, ignition sources, excess heat.
Incompatible materials Oxidizing agents.
Hazardous decomposition products Carbon dioxide and carbon monoxide may form when heated to decomposition.

SECTION 11-TOXICOLOGICAL INFORMATION

Routes of exposure Eye, Skin, inhalation, Ingestion.
Symptoms (treatments as indicated in Section 4) <p>Eye: May cause irritation, redness, pain, and corneal damage.</p> <p>Skin: Causes irritation to skin. Symptoms include redness, itching, and pain. May produce blisters. May be absorbed through the skin.</p> <p>Ingestion: May cause irritation to the gastrointestinal tract. Symptoms may include nausea, vomiting and diarrhea. May cause central nervous system depression. Symptoms may include giddiness, headache, dizziness, nausea, anaesthetic effects, slowed reaction time, slurred speech and may progress to unconsciousness. Serious poisonings may result in respiratory depression and may be fatal.</p> <p>Inhalation: Inhalation of high concentrations of gas/vapor causes lung irritation with coughing and nausea, central nervous depression with headache and dizziness, slowing of reflexes, fatigue and inco-ordination. Central nervous system (CNS) depression may include general discomfort, symptoms of giddiness, headache, dizziness, nausea, anaesthetic effects, slowed reaction time, slurred speech and may progress to unconsciousness. Serious poisonings may result in respiratory depression and may be fatal. If exposure to highly concentrated solvent atmosphere is prolonged this may lead to narcosis, unconsciousness, even coma and possible death.</p> <p>Chronic exposure: There has been some concern that this material can cause cancer or mutations but there is not enough data to make an assessment. Limited evidence suggests that repeated or long-term occupational exposure may produce cumulative health effects involving organs or biochemical systems. Chronic solvent inhalation exposures may result in nervous system impairment and liver and blood changes.</p> <p>Aggravation of pre-existing conditions: Persons with pre-existing skin disorders, eye problems, liver disease, central nervous system disorders, or impaired respiratory function may be more susceptible to the effects of the substance.</p>
Toxicity LD50: 3500 mg/kg (rat, oral) LC50: 4000 ppm/4h (rat, inhalation)
Irritation Skin (rabbit): 15 mg/24h Mild Eye (rabbit): 500 mg- SEVERE
Chronic effect Carcinogenicity: ACGIH : A3- Proven for animals. OSHA : Classified None. IARC : Group 2B carcinogen.
Epidemiology: Not available.
Teratogenicity: Not available.
Reproductive Effects: Not available.

Neurotoxicity: Not available
Mutagenicity: Mutation in mammalian somatic cells (Rodent, mouse) Lymphocyte=80mg/L.




SECTION 12-ECOLOGICAL INFORMATION



Ecotoxicity LC ₅₀ (96 hr.) Fish: 32.0~97.1 mg/l EC ₅₀ (48 hr.) Water flea: Not available Biocencentration factor (BCF): Not available
Persistence and degradability 1. In the atmosphere, it exists primarily in the vapor phase based on its vapor pressure. It photochemically degrades by reaction with hydroxyl radicals (half-life 0.5 to 2 days) and partially returns to the earth in rain. 2. Degradation occurs faster under smog conditions. Photooxidation products include ethylphenol, benzaldehyde, acetophenone and m- and p- ethylnitrobenzene. 3. In water, ethylbenzene's concentration decreases by evaporation and biodegradation. The rate of decrease is dependent on the season. Half-lives in water range from several days to 2 weeks. 4. Some ethylbenzene is absorbed by sediment, but bioconcentration in fish is not expected to be significant. Half-life (Air): 8.56~85.6 hr Half-life (Surface water): 72~240 hr Half-life (Ground water): 144~5472 hr Half-life (Soil): 7.2~240 hr
Bioaccumulative potential This material is not expected to significantly bioaccumulate.
Mobility in soil Ethylbenzene is adsorbed moderately by soil. It does not significantly hydrolyze in either water or soil.
Other adverse effects: —

SECTION 13-DISPOSAL CONSIDERATIONS

Residues and spilled material are hazardous waste due to ignitability. Disposal must be in accordance with applicable federal, state, or local regulations.
The container for this product can present explosion or fire hazards, even when emptied. To avoid risk of injury, do not cut, puncture, or weld on or near this container. Since the emptied containers retain product residue, follow label warnings even after container is emptied.

SECTION 14-TRANSPORTATION INFORMATION

US DOT	Shipping Name	ETHYLBENZENE	Hazard Labels	
	Hazard Class	3		
	UN Number	1175		
	Packing Group	II		
Sea(IMO/IMDG)	Shipping Name	ETHYLBENZENE	Hazard Labels	
	Hazard Class	3.2		
	UN Number	1175		
	Packing Group	II		
Air(ICA0/IATA)	Shipping Name	ETHYLBENZENE	Hazard Labels	
	Hazard Class	3		
	Subsidiary Class	1175		
	Packing Group	II		

EUROPEAN RID/ADR (ADR/RID)	Shipping Name	ETHYLBENZENE	Hazard Labels	
	Hazard Class	3		
	UN Number	1175		
Canadian TDG	Shipping Name	ETHYLBENZENE	Hazard Labels	
	Hazard Class	3		
	UN Number	1175		
	Packing Group	II		
	Subsidiary Class	9.2		

SECTION 15-REGULATORY INFORMATION

US FEDERAL	
TSCA	<p>CAS# 100-41-4 is listed on the TSCA inventory. Health & Safety Reporting List CAS# 100-41-4 : Effective Date : June 19, 1987 ; Sunset Date : June 19, 1997 Chemical Test Rules None of the chemicals in this product are under a Chemical Test Rule. Section 12b None of the chemicals are listed under TSCA section 12b. TSCA Significant New Use Rule None of the chemicals in this material have a SNUR under TSCA.</p>
SARA	<p>Section 302 (RQ) CAS# 100-41-4 : final RQ = 1000 pounds (454 kg) Section 302 (TPQ) None of the chemicals in this product have a TPQ. SARA Codes CAS# 100-41-4 : acute, chronic, flammable. Section 313 This material contains Ethylbenzene (CAS# 100-41-4, 99.0%) ,which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 372.</p>
Clean Air Act	<p>CAS# 100-41-4 is listed as a hazardous air pollutant (HAP) . This material does not contain any class 1 Ozone depleters. This material does not contain any class 2 Ozone depleters.</p>
Clean Water Act	<p>CAS# 100-41-4 is listed as a hazardous Substance under the CWA. CAS# 100-41-4 is listed as a Priority Pollutant under the Clean Water Act. CAS# 100-41-4 is listed as a Toxic Pollutant under the Clean Water Act.</p>
OSHA	<p>None of the chemicals in this product are considered highly hazardous by OSHA.</p>
STATE	
Ethylbenzene can be found on the following state right to know lists : California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.	
California No Significant Risk Level : None of the chemicals in this product are listed.	
European/International Regulations	
European Labeling in Accordance with EC Directives	<p>Hazard Symbols : XN F Risk Phrases : R 11 Highly flammable. R 20 Harmful by inhalation. Safety Phrases : S 16 Keep away from sources of ignition-No smoking. S 24/25 Avoid contact with skin and eyes. S 29 Do not empty into drains.</p>
CANADA	<p>CAS# 100-41-4 is listed on Canada's DSL/NDSL list. This product has a WHMIS classification of B2, D2B.</p>

SECTION 16-OTHER INFORMATION**References and sources**

1. CHEMINFO Data Bank, CCINFO CD, 2005-3
2. HSDB Data Bank, TOMES PLUS CD, Vol.65,2005
3. RETECS Data Bank, TOMES PLUS CD, Vol.65, 2000
4. Hazardous Substance Data Bank, Environment Protection, Administration, Executive Yuan, ROC (Taiwan)
5. Chemwatch Data Bank, 2005-1
6. SDS, GHS in Taiwan, Council of Labor Affairs, Executive Yuan, ROC (Taiwan)

Version	Date	Remark
Version 1	06/01/1998	Original Version.
Version 2	04/20/2001	Updated 10 sections to 16 sections.
Version 3	08/01/2003	Updated "SECTION 9-PHYSICAL AND CHEMICAL PROPERTIES".
Version 4	01/01/2006	Updated "SECTION 14-TRANSPORTATION INFORMATION".
Version 5	08/21/2008	Updated each section by GHS SDS.
Version 6	08/01/2011	Checked each section by SHE
Prepared by	Safety & Environment Protection Section, Taiwan SM Corporation Kaohsiung Plant.	

MATERIAL SAFETY DATA SHEET

Prepared to U.S. OSHA, CMA, ANSI and Canadian WHMIS Standards

1. PRODUCT IDENTIFICATION

CHEMICAL NAME; CLASS: NON-FLAMMABLE GAS MIXTURE

Containing One or More of the Following Components in a Nitrogen Balance Gas:Oxygen, 0.0015-23.5%;Methane, 0.0005-2.5%;Carbon Monoxide, 0.0005-1.0%; Hydrogen Sulfide, 0.001-0.025%

SYNONYMS: Not Applicable

CHEMICAL FAMILY NAME: Not Applicable

FORMULA: Not Applicable

Document Number: 50018

Note: The Material Safety Data Sheet is for this gas mixture supplied in cylinders with 33 cubic feet (935 liters) or less gas capacity (DOT - 39 cylinders). This MSDS has been developed for various gas mixtures with the composition of components within the ranges listed in Section 2 (Composition and Information on Ingredients). Refer to the product label for information on the actual composition of the product.

PRODUCT USE:	Calibration of Monitoring and Research Equipment
SUPPLIER/MANUFACTURER'S NAME:	CALGAZ
ADDRESS:	821 Chesapeake Drive Cambridge, MD 21613
EMERGENCY PHONE:	CHEMTREC: 1-800-424-9300
BUSINESS PHONE:	1-410-228-6400
	General MSDS Information 1-713/868-0440
	Fax on Demand: 1-800/231-1366

2. COMPOSITION and INFORMATION ON INGREDIENTS

CHEMICAL NAME	CAS #	mole %	EXPOSURE LIMITS IN AIR					
			ACGIH		OSHA		NIOSH IDLH ppm	OTHER ppm
			TLV ppm	STEL ppm	PEL ppm	STEL ppm		
Oxygen	7782-44-7	0.0015 - 23.5%	There are no specific exposure limits for Oxygen. Oxygen levels should be maintained above 19.5%.					
Methane	74-82-8	0.0005 - 2.5%	There are no specific exposure limits for Methane. Methane is a simple asphyxiant (SA). Oxygen levels should be maintained above 19.5%.					
Hydrogen Sulfide	7783-06-4	0.001- 0.025 %	10 (NIC = 5)	15	10 (Vacated 1989 PEL)	20 (ceiling); 50 (ceiling, 10 min. peak once per 8-hour shift 15 (vacated 1989 PEL)	100	NIOSH REL: STEL = 10 (ceiling) 10 minutes DFG-MAKs: TWA = 10 PEAK = 2•MAK, 10 min., momentary value
Carbon Monoxide	630-08-0	0.0005 - 1.0%	25	NE	50 35 (Vacated 1989 PEL)	200 [ceiling] (Vacated 1989 PEL)	1200	NIOSH RELS: TWA = 35 STEL = 200 (ceiling) DFG MAKs: TWA = 30 PEAK = 2•MAK, 15 min., average value DFG MAK Pregnancy Risk Classification: B
Nitrogen	7727-37-9	Balance	There are no specific exposure limits for Nitrogen. Nitrogen is a simple asphyxiant (SA). Oxygen levels should be maintained above 19.5%.					

NE = Not Established. NIC = Notice of Intended Change See Section 16 for Definitions of Terms Used.
NOTE (1): ALL WHMIS required information is included in appropriate sections based on the ANSI Z400.1-1998 format. This gas mixture has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

3. HAZARD IDENTIFICATION

EMERGENCY OVERVIEW: This gas mixture is a colorless gas which has a rotten-egg odor (due to the presence of Hydrogen Sulfide). The odor cannot be relied on as an adequate warning of the presence of this gas mixture, because olfactory fatigue occurs after over-exposure to Hydrogen Sulfide. Hydrogen Sulfide and Carbon Monoxide (another component of this gas mixture) are toxic to humans in relatively low concentrations. Over-exposure to this gas mixture can cause skin or eye irritation, nausea, dizziness, headaches, collapse, unconsciousness, coma, and death. Additionally, releases of this gas mixture may produce oxygen-deficient atmospheres (especially in small confined spaces or other poorly-ventilated environments); individuals in such atmospheres may be asphyxiated.

SYMPTOMS OF OVER-EXPOSURE BY ROUTE OF EXPOSURE: The most significant route of over-exposure for this gas mixture is by inhalation.

INHALATION: Due to the small size of an individual cylinder of this gas mixture, no unusual health effects from over-exposure to the product are anticipated under routine circumstances of use. A potential health hazard associated with this gas mixture is the potential of inhalation of Hydrogen Sulfide, a component of this gas mixture. Such over-exposures may occur if this gas mixture is used in a confined space or other poorly-ventilated area. Over-exposures to Hydrogen Sulfide can cause dizziness, headache, and nausea. Over-exposure to this gas could result in respiratory arrest, coma, or unconsciousness, due to the presence of Hydrogen Sulfide. Continuous inhalation of low concentrations of Hydrogen Sulfide may cause olfactory fatigue, so that the odor is no longer an effective warning of the presence of this gas. A summary of exposure concentrations and observed effects are as follows:

CONCENTRATION OF HYDROGEN SULFIDE

0.3-30 ppm
50 ppm
Slightly higher than 50 ppm
100-150 ppm
200-250 ppm

300-500
500 ppm

> 600 ppm
> 1000 ppm

NOTE:

here are presented to delineate the complete health effects which have been observed for humans after exposure to Hydrogen Sulfide.

OBSERVED EFFECT

Odor is unpleasant.
Eye irritation. Dryness and irritation of nose, throat.
Irritation of the respiratory system.
Temporary loss of smell.
Headache, vomiting nausea. Prolonged exposure may lead to lung damage. Exposures of 4-8 hours can be fatal.
Swifter onset of symptoms. Death occurs in 1-4 hours.
Headache, excitement, staggering, and stomach ache after brief exposure. Death occurs within 0.5 - 1 hour of exposure.
Rapid onset of unconsciousness, coma, death.
Immediate respiratory arrest.

This gas mixture contains a maximum of 250 ppm Hydrogen Sulfide. The higher concentration values here are presented to delineate the complete health effects which have been observed for humans after exposure to Hydrogen Sulfide.

HAZARDOUS MATERIAL IDENTIFICATION SYSTEM			
HEALTH HAZARD	(BLUE)	3	
FLAMMABILITY HAZARD	(RED)	0	
PHYSICAL HAZARD	(YELLOW)	0	
PROTECTIVE EQUIPMENT			
EYES	RESPIRATORY	HANDS	BODY
See Section 8			
For Routine Industrial Use and Handling Applications			

3. HAZARD IDENTIFICATION (continued)

Inhalation over-exposures to atmospheres containing more than the Threshold Limit Value of Carbon Monoxide (25 ppm), another component of this gas mixture, can result in serious health consequences. Carbon Monoxide is classified as a chemical asphyxiant, producing a toxic action by combining with the hemoglobin of the blood and replacing the available oxygen. Through this replacement, the body is deprived of the required oxygen, and asphyxiation occurs. Since the affinity of Carbon Monoxide for hemoglobin is about 200-300 times that of oxygen, only a small amount of Carbon Monoxide will cause a toxic reaction to occur. Carbon Monoxide exposures in excess of 50 ppm will produce symptoms of poisoning if breathed for a sufficiently long time. If this gas mixture is released in a small, poorly ventilated area (i.e. an enclosed or confined space), symptoms which may develop include the following:

CONCENTRATION OF CARBON MONOXIDE

All exposure levels:

200 ppm:
400 ppm:
1,000 -2000 ppm:

200-2500 ppm:

>2500 ppm:

Additionally, if mixtures of this gas mixture contain less than 19.5% Oxygen and are released in a small, poorly ventilated area (i.e. an enclosed or confined space), an oxygen-deficient environment may occur. Individuals breathing such an atmosphere may experience symptoms which include headaches, ringing in ears, dizziness, drowsiness, unconsciousness, nausea, vomiting, and depression of all the senses. Under some circumstances of over-exposure, death may occur. The following effects associated with various levels of oxygen are as follows:

CONCENTRATION OF OXYGEN

12-16% Oxygen:
10-14% Oxygen:
6-10% Oxygen:
Below 6%:

OBSERVED EFFECT

Over-exposure to Carbon Monoxide can be indicated by the lips and fingernails turning bright red.
Slight symptoms (i.e. headache) after several hours of exposure.
Headache and discomfort experienced within 2-3 hours of exposure.
Within 30 minutes, slight palpitations of the heart occurs. Within 1.5 hours, there is a tendency to stagger.
Within 2 hours, there is mental confusion, headaches, and nausea. Unconsciousness within 30 minutes.

Potential for collapse and death before warning symptoms.

OBSERVED EFFECT

Breathing and pulse rate increased, muscular coordination slightly disturbed.
Emotional upset, abnormal fatigue, disturbed respiration.
Nausea, vomiting, collapse, or loss of consciousness.
Convulsive movements, possible respiratory collapse, and death.

SKIN and EYE CONTACT: Hydrogen Sulfide, a component of this gas mixture, may be irritating to the skin. Inflammation and irritation of the eyes can occur at very low airborne concentration of Hydrogen Sulfide (less than 10 ppm). Exposure over several hours may result in "gas eyes" or "sore eyes" with symptoms of scratchiness, irritation, tearing and burning. Above 50 ppm of Hydrogen Sulfide, there is an intense tearing, blurring of vision, and pain when looking at light. Over-exposed individuals may see rings around bright lights. Most symptoms disappear when exposure ceases. However, in serious cases, the eye can be permanently damaged.

HEALTH EFFECTS OR RISKS FROM EXPOSURE: An Explanation in Lay Terms. Over-exposure to this gas mixture may cause the following health effects:

ACUTE: Due to the small size of the individual cylinder of this gas mixture, no unusual health effects from exposure to the product are anticipated under routine circumstances of use. However the Hydrogen Sulfide and Carbon Monoxide components of this gas mixture are toxic to humans. Over-exposure to this gas mixture can cause nausea, dizziness, headaches, collapse, unconsciousness, coma, and death. Due to the presence of Hydrogen Sulfide, over-exposures to this gas mixture can also irritate the skin and eyes; severe eye contamination can result in blindness.

CHRONIC: Severe over-exposures to the Hydrogen Sulfide component of this gas mixture, which do not result in death, may cause long-term symptoms such as memory loss, paralysis of facial muscles, or nerve tissue damage. In serious cases of over-exposure, the eyes can be permanently damaged. Skin disorders and respiratory conditions may be aggravated by repeated over-exposures to this gas product. Refer to Section 11 (Toxicology Information) for additional information on the components of this gas mixture. Chronic exposure to oxygen-deficient atmospheres (below 18% oxygen in air) may affect the heart and nervous system.

TARGET ORGANS: ACUTE: Respiratory system, blood system, central nervous system effects, cardiovascular system, skin, eyes. CHRONIC: Neurological system, reproductive system, eyes.

4. FIRST-AID MEASURES

RESCUERS SHOULD NOT ATTEMPT TO RETRIEVE VICTIMS OF EXPOSURE TO THIS GAS MIXTURE WITHOUT ADEQUATE PERSONAL PROTECTIVE EQUIPMENT. At a minimum, **Self-Contained Breathing Apparatus must be worn.** Victim(s) who experience any adverse effect after over-exposure to this gas mixture must be taken for medical attention. Rescuers should be taken for medical attention if necessary. Take a copy of the label and the MSDS to physician or other health professional with victim(s).

No unusual health effects are anticipated after exposure to this gas mixture, due to the small cylinder size. If any adverse symptom develops after over-exposure to this gas mixture, remove victim(s) to fresh air as quickly as possible. Only trained personnel should administer supplemental oxygen and/or cardio-pulmonary resuscitation if necessary.

SKIN EXPOSURE: If irritation of the skin develops after exposure to this gas mixture, immediately begin decontamination with running water. Minimum flushing is for 15 minutes. Remove exposed or contaminated clothing, taking care not to contaminate eyes. Victim must seek immediate medical attention.

EYE EXPOSURE: If irritation of the eye develops after exposure to this gas mixture, open victim's eyes while under gentle running water. Use sufficient force to open eyelids. Have victim "roll" eyes. Minimum flushing is for 15 minutes. Seek medical assistance immediately, preferably an ophthalmologist.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Pre-existing respiratory conditions may be aggravated by over-exposure to this gas mixture. Carbon Monoxide, a component of this gas mixture, can aggravate some diseases of the cardiovascular system, such as coronary artery disease and angina pectoris. Because of the presence of Hydrogen Sulfide, eye disorders or skin problems may be aggravated by over-exposure to this gas mixture.

RECOMMENDATIONS TO PHYSICIANS: Treat symptoms and eliminate over-exposure. Hyperbaric oxygen is the most efficient antidote to Carbon Monoxide poisoning, the optimum range being 2-2.5 atm. A special mask, or, preferably, a compression chamber to utilize oxygen at these pressures is required. Avoid administering stimulant drugs. Be observant for initial signs of pulmonary edema in the event of severe inhalation over-exposures.

5. FIRE-FIGHTING MEASURES

FLASH POINT: Not applicable.

AUTOIGNITION TEMPERATURE: Not applicable.

FLAMMABLE LIMITS (in air by volume, %):

Lower (LEL): Not applicable.

Upper (UEL): Not applicable.

FIRE EXTINGUISHING MATERIALS: Non-flammable gas mixture. Use extinguishing media appropriate for surrounding fire.


UNUSUAL FIRE AND EXPLOSION HAZARDS: This gas mixture contains toxic gases, Hydrogen Sulfide and Carbon Monoxide, and presents an health hazard to firefighters. This gas mixture is not flammable; however, containers, when involved in fire, may rupture or burst in the heat of the fire.

Explosion Sensitivity to Mechanical Impact: Not Sensitive.

Explosion Sensitivity to Static Discharge: Not Sensitive.

SPECIAL FIRE-FIGHTING PROCEDURES: Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment.

NFPA RATING

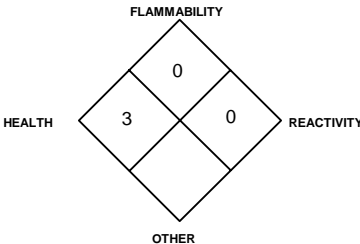

6. ACCIDENTAL RELEASE MEASURES

LEAK RESPONSE: Due to the small size and content of the cylinder, an accidental release of this gas mixture presents significantly less risk of over-exposure to Hydrogen Sulfide and Carbon Monoxide, the toxic components of this gas mixture, and other safety hazards related to the remaining components of this gas mixture, than a similar release from a larger cylinder. However, as with any chemical release, extreme caution must be used during emergency response procedures. In the event of a release in which the atmosphere is unknown, and in which other chemicals are potentially involved, evacuate immediate area. Such releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a leak, clear the affected area, protect people, and respond with trained personnel. For emergency disposal,

6. ACCIDENTAL RELEASE MEASURES (continued)

secure the cylinder and slowly discharge the gas to the atmosphere in a well-ventilated area or outdoors. Allow the gas mixture to dissipate. If necessary, monitor the surrounding area (and the original area of the release) for Hydrogen Sulfide, Carbon Monoxide, and Oxygen. Hydrogen Sulfide and Carbon Monoxide level must be below exposure level listed in Section 2 (Composition and Information on Ingredients) and Oxygen levels must be above 19.5% before non-emergency personnel are allowed to re-enter area. If leaking incidentally from the cylinder, contact your supplier.

7. HANDLING and USE

WORK PRACTICES AND HYGIENE PRACTICES: Be aware of any signs of dizziness or fatigue, especially if work is done in a poorly ventilated area; exposures to fatal concentrations of this gas mixture could occur without any significant warning symptoms, due to olfactory fatigue or oxygen deficiency. Do not attempt to repair, adjust, or in any other way modify cylinders containing a gas mixture with Hydrogen Sulfide or Carbon Monoxide. If there is a malfunction or another type of operational problem, contact nearest distributor immediately. Eye wash stations/safety showers should be near areas where this gas mixture is used or stored. All work operations should be monitored in such a way that emergency personnel can be immediately contacted in the event of a release. All work practices should minimize releases of Hydrogen Sulfide and Carbon Monoxide-containing gas mixtures.

STORAGE AND HANDLING PRACTICES: Cylinders should be firmly secured to prevent falling or being knocked-over. Cylinders must be protected from the environment, and preferably kept at room temperature (approximately 21°C (70°F)). Cylinders should be stored in dry, well-ventilated areas, away from sources of heat, ignition, and direct sunlight. Protect cylinders against physical damage. Full and empty cylinders should be segregated. Use a first-in, first-out inventory system to prevent full containers from being stored for long periods of time. These cylinders are not refillable. **WARNING! Do not refill DOT 39 cylinders. To do so may cause personal injury or property damage.**

SPECIAL PRECAUTIONS FOR HANDLING GAS CYLINDERS: WARNING! Compressed gases can present significant safety hazards. During cylinder use, use equipment designed for these specific cylinders. Ensure all lines and equipment are rated for proper service pressure.

PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT: Follow practices indicated in Section 6 (Accidental Release Measures). Make certain that application equipment is locked and tagged-out safely. Always use product in areas where adequate ventilation is provided.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

VENTILATION AND ENGINEERING CONTROLS: No special ventilation systems or engineering controls are needed under normal circumstances of use. As with all chemicals, use this gas mixture in well-ventilated areas. If this gas mixture is used in a poorly-ventilated area, install automatic monitoring equipment to detect the levels of Oxygen, Hydrogen Sulfide, and Carbon Monoxide.

RESPIRATORY PROTECTION: No special respiratory protection is required under normal circumstances of use. Use supplied air respiratory protection if the levels of components exceeds exposure limits presented in Section 2 (Composition and Information of Ingredients) and Oxygen levels are below 19.5%, or unknown, during emergency response to a release of this gas mixture. If respiratory protection is needed, use only protection authorized in the U.S. Federal OSHA Standard (29 CFR 1910.134), applicable U.S. State regulations, or the Canadian CSA Standard Z94.4-93 and applicable standards of Canadian Provinces. Oxygen levels below 19.16.33% are considered IDLH by OSHA. In such atmospheres, use of a full-facepiece pressure/demand SCBA or a full facepiece, supplied air respirator with auxiliary self-contained air supply is required under OSHA's Respiratory Protection Standard (1910.134-1998). The following NIOSH respiratory protection recommendations for Hydrogen Sulfide and Carbon Monoxide are provided for further information.

NIOSH/OSHA RECOMMENDATIONS FOR HYDROGEN SULFIDE CONCENTRATIONS IN AIR:
Up to 100 ppm: Powered air-purifying respirator with cartridge(s) to protect against hydrogen sulfide; gas mask with canister to protect against hydrogen sulfide; or SAR; or full-facepiece SCBA.
Emergency or Planned Entry into Unknown Concentration or IDLH Conditions: Positive pressure, full-facepiece SCBA; or positive pressure, full-facepiece SAR with an auxiliary positive pressure SCBA.
Escape: Gas mask with canister to protect against hydrogen sulfide; or escape-type SCBA
NOTE: The IDLH concentration for Hydrogen Sulfide is 100 ppm.

NIOSH/OSHA RECOMMENDATIONS FOR CARBON MONOXIDE CONCENTRATIONS IN AIR:
Up to 350 ppm Supplied Air Respirator (SAR)
Up to 875 ppm Supplied Air Respirator (SAR) operated in a continuous flow mode.
Up to 1200 ppm Gas mask with canister to protect against carbon monoxide; or full-facepiece SCBA; or full-facepiece Supplied Air Respirator (SAR).
Emergency or Planned Entry into Unknown Concentration or IDLH Conditions: Positive pressure, full-facepiece SCBA; or positive pressure, full-facepiece Supplied Air Respirator (SAR) with an auxiliary positive pressure SCBA.
Escape: Gas mask with canister to protect against carbon monoxide; or escape-type SCBA.
NOTE: End of Service Life Indicator (ESLI) required for gas masks.
NOTE: The IDLH concentration for Carbon Monoxide is 1200 ppm.

EYE PROTECTION: Safety glasses. If necessary, refer to U.S. OSHA 29 CFR 1910.133 or appropriate Canadian Standards.

HAND PROTECTION: Wear leather gloves when handling cylinders. Chemically resistant gloves should be worn when using this gas mixture. If necessary, refer to U.S. OSHA 29 CFR 1910.138 or appropriate Standards of Canada.

BODY PROTECTION: No special protection is needed under normal circumstances of use. If a hazard of injury to the feet exists due to falling objects, rolling objects, where objects may pierce the soles of the feet or where employee's feet may be exposed to electrical hazards, use foot protection, as described in U.S. OSHA 29 CFR 1910.136.

9. PHYSICAL and CHEMICAL PROPERTIES

The following information is for Nitrogen, the main component of this gas mixture.

GAS DENSITY @ 32°F (0°C) and 1 atm: .072 lbs/ ft ³ (1.153 kg/m ³)	BOILING POINT: -320.4°F (-195.8°C)
FREEZING/MELTING POINT @ 10 psig: -345.8°F (-210°C)	pH: Not applicable.
SPECIFIC GRAVITY (air = 1) @ 70°F (21.1°C): 0.906	MOLECULAR WEIGHT: 28.01
SOLUBILITY IN WATER vol/vol @ 32°F (0°C) and 1 atm: 0.023	EXPANSION RATIO: Not applicable.
EVAPORATION RATE (nBuAc = 1): Not applicable.	SPECIFIC VOLUME (ft³/lb): 13.8
VAPOR PRESSURE @ 70°F (21.1°C) (psig): Not applicable.	
COEFFICIENT WATER/OIL DISTRIBUTION: Not applicable.	

The following information is for this gas mixture.

ODOR THRESHOLD: 0.13 ppm (Hydrogen Sulfide)
APPEARANCE AND COLOR: This gas mixture is a colorless gas which has an rotten egg-like odor, due to the presence of Hydrogen Sulfide.
HOW TO DETECT THIS SUBSTANCE (warning properties): Continuous inhalation of low concentrations of this gas mixture may cause olfactory fatigue, due to the presence of Hydrogen Sulfide, so the odor is not a good warning property of a release of this gas mixture. In terms of leak detection, fittings and joints can be painted with a soap solution to detect leaks, which will be indicated by a bubble formation. Wet lead acetate paper can be used for leak detection. The paper turns black in the presence of Hydrogen Sulfide. Cadmium chloride solutions can also be used. Cadmium solutions will turn yellow upon contact with Hydrogen Sulfide.

10. STABILITY and REACTIVITY

STABILITY: Normally stable in gaseous state.
DECOMPOSITION PRODUCTS: The thermal decomposition products of Methane include carbon oxides. The decomposition products of Hydrogen Sulfide include water and sulfur oxides. The other components of this gas mixture do not decompose, per se, but can react with other compounds in the heat of a fire.
MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Titanium will burn in Nitrogen (the main component of this gas mixture). Lithium reacts slowly with Nitrogen at ambient temperatures. Components of this gas mixture (Hydrogen Sulfide, Methane) are also incompatible with strong oxidizers (i.e. chlorine, bromine pentafluoride, oxygen, oxygen difluoride, and nitrogen trifluoride). Carbon Monoxide is mildly corrosive to nickel and iron (especially at high temperatures and pressures). Hydrogen Sulfide is corrosive to most metals, because it reacts with these substances to form metal sulfides.
HAZARDOUS POLYMERIZATION: Will not occur.
CONDITIONS TO AVOID: Contact with incompatible materials. Cylinders exposed to high temperatures or direct flame can rupture or burst.

11. TOXICOLOGICAL INFORMATION

TOXICITY DATA: The following toxicology data are available for the components of this gas mixture:

NITROGEN:

There are no specific toxicology data for Nitrogen. Nitrogen is a simple asphyxiant, which acts to displace oxygen in the environment.

METHANE:

There are no specific toxicology data for Methane. Methane is a simple asphyxiant, which acts to displace oxygen in the environment.

CARBON MONOXIDE:

LC₅₀ (Inhalation-Rat) 1807 ppm/4 hours
LC₅₀ (Inhalation-Mouse) 2444 ppm/4 hours
LC₅₀ (Inhalation-Guinea Pig) 5718 ppm/4 hours
LC₅₀ (Inhalation-wild bird species) 1334 ppm
LCLo (Inhalation-Human) 4 mg/m³/12 hours:
Behavioral: coma; Vascular: BP lowering not characterized in autonomic section; Blood: methemoglobinemia-carboxyhemoglobin
LCLo (Inhalation-Man) 4000 ppm/30 minutes
LCLo (Inhalation-Human) 5000 ppm/5 minutes
LCLo (Inhalation-Dog) 4000 ppm/46 minutes
LCLo (Inhalation-Rabbit) 4000 ppm
LCLo (Inhalation-Mammal-species unspecified) 5000 ppm/5 minutes
TCLo (Inhalation-Human) 600 mg/m³/10 minutes:
Behavioral: headache
TCLo (Inhalation-Man) 650 ppm/45 minutes: Blood: methemoglobinemia-carboxyhemoglobin;
Behavioral: changes in psychophysiological tests
TCLo (Inhalation-Rat) 1800 ppm/1 hour/14 days-intermittent: Cardiac: other changes
TCLo (Inhalation-Rat) 30 mg/m³/8 hours/10 weeks-intermittent: Brain and Coverings: other degenerative changes; Behavioral: muscle contraction or spasticity
TCLo (Inhalation-Rat) 96 ppm/24 hours/90 days-continuous: Blood: pigmented or nucleated red blood cells, other changes
TCLo (Inhalation-Rat) 250 ppm/5 hours/20 days-intermittent: Blood :pigmented or nucleated red blood cells, changes in other cell count (unspecified), changes in erythrocyte (RBC) count
TDLo (Subcutaneous-Rat) 5983 mg/kg/18 weeks-intermittent: Blood: changes in serum composition (e.g. TP, bilirubin, cholesterol)
TCLo (Inhalation-Monkey) 200 ppm/24 hours/90 days-continuous: Blood: pigmented or nucleated red blood cells, other changes
TCLo (Inhalation-Rabbit) 200 mg/m³/3 hours/13 weeks-intermittent: Brain and Coverings: other degenerative changes; Cardiac: other changes; Blood: hemorrhage
TCLo (Inhalation-Guinea Pig) 200 mg/m³/5 hours/30 weeks-continuous: Cardiac: arrhythmias (including changes in conduction), EKG changes not diagnostic of specified effects, pulse rate increase, without fall in BP

CARBON MONOXIDE (continued):

TCLo (Inhalation-Mouse) 50 ppm/30 days-intermittent: Lungs, Thorax, or Respiration: structural or functional change in trachea or bronchi
TCLo (Inhalation-Guinea Pig) 200 mg/m³/5 hours/4 weeks-intermittent: Endocrine: hyperglycemia
TCLo (Inhalation-Guinea Pig) 200 ppm/24 hours/90 days-continuous: Blood: pigmented or nucleated red blood cells, other changes
TCLo (Inhalation-Rat) 75 ppm/24 hours: female 0-20 day(s) after conception: Reproductive: Maternal Effects: other effects; Effects on Newborn: behavioral
TCLo (Inhalation-Rat) 150 ppm/24 hours: female 1-22 day(s) after conception: Reproductive: Specific Developmental Abnormalities: cardiovascular (circulatory) system
TCLo (Inhalation-Rat) 150 ppm/24 hours: female 1-22 day(s) after conception: Reproductive: Effects on Newborn: growth statistics (e.g.%, reduced weight gain), behavioral
TCLo (Inhalation-Rat) 1 mg/m³/24 hours: female 72 day(s) pre-mating: Reproductive: Maternal Effects: menstrual cycle changes or disorders, parturition; Fertility: female fertility index (e.g. # females pregnant per # sperm positive females; # females pregnant per # females mated)
TCLo (Inhalation-Rat) 150 ppm/24 hours: female 0-20 day(s) after conception: Reproductive: Effects on Newborn: behavioral
TCLo (Inhalation-Rat) 75 ppm/24 hours: female 0-20 day(s) after conception: Reproductive: Specific Developmental Abnormalities: immune and reticuloendothelial system
TCLo (Inhalation-Mouse) 65 ppm/24 hours: female 7-18 day(s) after conception: Reproductive: Effects on Newborn: behavioral
TCLo (Inhalation-Mouse) 250 ppm/7 hours: female 6-15 day(s) after conception: Reproductive: Fertility: post-implantation mortality (e.g. dead and/or resorbed implants per total number of implants); Specific Developmental Abnormalities: musculoskeletal system
TCLo (Inhalation-Mouse) 125 ppm/24 hours: female 7-18 day(s) after conception: Reproductive: Effects on Embryo or Fetus: fetotoxicity (except death, e.g., stunted fetus)
TCLo (Inhalation-Mouse) 8 pph/1 hour: female 8 day(s) after conception: Reproductive: Fertility: litter size (e.g. # fetuses per litter; measured before birth); Effects on Embryo or Fetus: fetotoxicity (except death, e.g., stunted fetus), fetal death

CARBON MONOXIDE (continued):

TCLo (Inhalation-Rabbit) 50 ppm/24 hours/8 weeks-continuous: Blood: changes in platelet count
TCLo (Inhalation-Mouse) 8 pph/1 hour: female 8 day(s) after conception: Reproductive: Specific Developmental Abnormalities: Central Nervous System
TCLo (Inhalation-Rabbit) 180 ppm/24 hours: female 1-30 day(s) after conception: Reproductive: Effects on Newborn: stillbirth, viability index (e.g., # alive at day 4 per # born alive)
Micronucleus Test (Inhalation-Mouse)1500 ppm/10 minutes
Sister Chromatid Exchange (Inhalation-Mouse) 2500 ppm/10 minutes
HYDROGEN SULFIDE:
LC₅₀ (Inhalation-Rat) 444 ppm: Lungs, Thorax, or Respiration: other changes; Gastrointestinal: hypermotility, diarrhea; Kidney, Ureter, Bladder: urine volume increased
LC₅₀ (Inhalation-Mouse) 634 ppm/1 hour
LCLo (Inhalation-Human) 600 ppm/30 minutes
LCLo (Inhalation-Man) 5700 µg/kg: Behavioral: coma; Lungs, Thorax, or Respiration: chronic pulmonary edema
LCLo (Inhalation-Human) 800 ppm/5 minutes
LCLo (Inhalation-Mammal-species unspecified) 800 ppm/5 minutes
TCLo (Inhalation-Rat) 30 ppm/6 hours/10 weeks-intermittent: Sense Organs and Special Senses (Olfaction): olfactory nerve change, effect, not otherwise specified
TCLo (Inhalation-Rat) 1200 mg/m³/2 hours/5 days-intermittent: Brain and Coverings: other degenerative changes; Biochemical: Enzyme inhibition, induction, or change in blood or tissue levels: true cholinesterase
TCLo (Inhalation-Rat) 100 ppm/8 hours/5 weeks-intermittent: Brain and Coverings: other degenerative changes; Lungs, Thorax, or Respiration: other changes; Biochemical: Enzyme inhibition, induction, or change in blood or tissue levels: cytochrome oxidases (including oxidative phosphorylation)
TCLo (Inhalation-Rat) 80 ppm/6 hours/90 days-intermittent: Brain and Coverings: changes in brain weight; Nutritional and Gross Metabolic: weight loss or decreased weight gain
TCLo (Inhalation-Rat) 20 ppm: female 6-22 day(s) after conception lactating female 21 day(s) post-birth: Reproductive: Effects on Newborn: physical
TCLo (Inhalation-Mouse) 80 ppm/6 hours/90 days-intermittent: Nutritional and Gross Metabolic: weight loss or decreased weight gain; Related to Chronic Data: death
TCLo (Inhalation-Rabbit) 40 mg/m³/5 hours/30 weeks-intermittent: Sense Organs and Special Senses (Eye): conjunctive irritation

SUSPECTED CANCER AGENT: The components of this gas mixture are not found on the following lists: FEDERAL OSHA Z LIST, NTP, CAL/OSHA, and IARC; therefore, they are not considered to be, nor suspected to be, cancer-causing agents by these agencies.

IRRITANCY OF PRODUCT: This gas mixture is irritating to the eyes, and may be irritating to the skin.

SENSITIZATION OF PRODUCT: The components of this gas mixture are not known to be skin or respiratory sensitizers.

REPRODUCTIVE TOXICITY INFORMATION: Listed below is information concerning the effects of this gas mixture on the human reproductive system.

Mutagenicity: The components of this gas mixture are not reported to cause mutagenic effects in humans.

REPRODUCTIVE TOXICITY INFORMATION (continued):

Embryotoxicity: This gas mixture contains components that may cause embryotoxic effects in humans; however, due to the small total amount of the components, embryotoxic effects are not expected to occur.

Teratogenicity: This gas mixture is not expected to cause teratogenic effects in humans due to the small cylinder size and small total amount of all components. The Carbon Monoxide component of this gas mixture which exists up to 1%, can cause teratogenic effects in humans. Severe exposure to Carbon Monoxide during pregnancy has caused adverse effects and the death of the fetus. In general, maternal symptoms are an indicator of the potential risk to the fetus since Carbon Monoxide is toxic to the mother before it is toxic to the fetus.

Reproductive Toxicity: The components of this gas mixture are not reported to cause adverse reproductive effects in humans.

A *mutagen* is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate through generation lines. An *embryotoxin* is a chemical which causes damage to a developing embryo (i.e. within the first eight weeks of pregnancy in humans), but the damage does not propagate across generational lines. A *teratogen* is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A *reproductive toxin* is any substance which interferes in any way with the reproductive process.

BIOLOGICAL EXPOSURE INDICES (BEIs): Biological Exposure Indices (BEIs) have been determined for components of this gas mixture, as follows:

CHEMICAL DETERMINANT	SAMPLING TIME	BEI
CARBON MONOXIDE • Carboxyhemoglobin in blood • Carbon monoxide in end-exhaled air	• End of shift • End of shift	• 3.5% of hemoglobin • 20 ppm

12. ECOLOGICAL INFORMATION

ENVIRONMENTAL STABILITY: The gas will be dissipated rapidly in well-ventilated areas. The following environmental data are applicable to the components of this gas mixture.

CARBON MONOXIDE:

Atmospheric Fate: A photochemical model was used to quantify the sensitivity of the tropospheric oxidants ozone (O₃) and OH to changes in methane (CH₄), Carbon Monoxide (CO), and NO emissions and to perturbations in climate and stratospheric chemistry. In most cases, increased CH₄ and CO emissions will suppress OH (negative coefficients) in increased O₃ (positive coefficients) except in areas where NO and O₃ influenced by pollution are sufficient to increased OH. In most regions, NO, CO, and CH₄ emission increased will suppress OH and increased O₃, but these trends may be opposed by stratospheric O3 depletion and climate change.

HYDROGEN SULFIDE:

Water Solubility = 1 g/242 mL at 20°C.
Plant toxicity: Continuous fumigation of plants with 300 or 3000 ppb Hydrogen Sulfide caused leaf lesions, defoliation, and reduced growth with severity of injury correlated to dose. At higher (3.25 and 5.03 ppm) Hydrogen Sulfide, significant reductions in leaf CO2 and water vapor exchanges occurred, and stomatal openings were depressed. When Hydrogen Sulfide gas was applied to 29 species of green plants for 5 hours, young, rapidly elongating tissues were more sensitive to injury than older tissues. Symptoms included scorching of young shoots and

12. ECOLOGICAL INFORMATION(continued)

leaves, basal and marginal scorching of older leaves. Mature leaves were unaffected. Seeds exposed to Hydrogen Sulfide gas showed delay in germination.

Persistence: Converts to elemental sulfur upon standing in water.

Major Species Threatened: Aquatic and animal life plants may be injured if exposed to 5 ppm in air over 24 hours.

Biodegradation: Microorganisms in soil and water are involved in oxidation-reduction reactions that oxidize hydrogen sulfide to elemental sulfur. Members of the genera Beggiatoa, Thioploca, and Thiotrix function in transition zones between aerobic and anaerobic conditions where both molecular oxygen and hydrogen sulfide are found. Also, some photosynthetic bacteria oxidize hydrogen sulfide to elemental sulfur. Members of the families Chlorobiaceae and Chromatiaceae (purple sulfur bacteria) are obligate aerobes and are phototrophic, and are found in waters with high H₂S concentrations. The interactions of these organisms form part of the global sulfur cycle.

Bioconcentration: Does not have bioaccumulation or food chain contamination potential.

NITROGEN: Water Solubility = 2.4 volumes Nitrogen/100 volumes water at 0°C; 1.6 volumes Nitrogen/100 volumes water at 20°C.

EFFECT OF MATERIAL ON PLANTS or ANIMALS: No evidence is currently available on this gas mixture's effects on plant and animal life. Hydrogen Sulfide and Carbon Monoxide, components of this gas mixture, can be deadly to exposed animal life, producing symptoms similar to those experienced by humans. This gas mixture may also be harmful to plant life.

EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on this gas mixture's effects on aquatic life. The presence of more than a trace of the Carbon Monoxide component of this gas mixture is a hazard to fish. The following aquatic toxicity data are available for the Hydrogen Sulfide component of this gas mixture:

HYDROGEN SULFIDE:	HYDROGEN SULFIDE (continued):	HYDROGEN SULFIDE (continued):
LC ₅₀ (<i>Asellus</i> arthropods) 96 hours = 0.111 mg/L	LC ₅₀ ,F (bluegill, 35-day-old fry) 96 hours = 0.0131 mg/L	Lethal (goldfish) 96 hours = 10 mg/L
LC ₅₀ (<i>Crangon</i> arthropods) 96 hours = 1.07 mg/L	LC ₅₀ ,F (bluegill, juveniles) 96 hours = 0.0478 mg/L	Toxic (carp) 24 hours = 3.3 mg/L
LC ₅₀ (<i>Gammarus</i> arthropods) 96 hours = 0.84 mg/L	LC ₅₀ ,F (bluegill, adults) 96 hours = 0.0448 mg/L	Toxic (goldfish) 24 hours = 4.3 mg/L
LC ₅₀ (Ephemera) 96 hours = 0.316 mg/L	LC ₅₀ ,F (fathead minnows) 96 hours = 0.0071-0.55 mg/L	Toxic (sunfish) 1 hour = 4.9 to 5.3 mg/L
LC ₅₀ (Inhalation-Flies) > 960 minutes = 380 mg/m ³	LC ₅₀ ,F (bluegill) 96 hours = 0.0090-0.0140 mg/L	Toxic (goldfish) 200 hours = 5 mg/L
LC ₅₀ (Inhalation-Flies) 7 minutes = 1,500 mg/m ³	LC ₅₀ ,F (brook trout) 96 hours = 0.0216-0.0308 mg/L	Toxic (minnows) 24 hours = 5-6 mg/L
LC ₅₀ ,F (bluegill, eggs) 72 hours = 0.0190 mg/L	Toxic (goldfish) = 100 mg/L	Toxic (carp) 24 hours = 6-25 mg/L
		Toxic (trout) 15 minutes = 10 mg/L
		Toxic (goldfish) 24 hours = 25 mg/L
		Toxic (tench) 3 hours = 100 mg/L
		MATC,F (fathead minnows) 0.0037 mg/L
		MATC,F (bluegill) 0.0004 mg/L
		MATC,F (brook trout) 0.055 mg/L

13. DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL PREPARING WASTES FOR DISPOSAL: Waste disposal must be in accordance with appropriate Federal, State, and local regulations. Cylinders with undesired residual product may be safely vented outdoors with the proper regulator. For further information, refer to Section 16 (Other Information).

14. TRANSPORTATION INFORMATION

THIS GAS MIXTURE IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

PROPER SHIPPING NAME: Compressed gases, n.o.s. (*Oxygen, Nitrogen)*or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not Applicable

DOT LABEL(S) REQUIRED: Non-Flammable Gas

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

U.S. DEPARTMENT OF TRANSPORTATION INFORMATION (continued):

MARINE POLLUTANT: The components of this gas mixture are not classified by the DOT as Marine Pollutants (as defined by 49 CFR 172.101, Appendix B).

SPECIAL SHIPPING INFORMATION: Cylinders should be transported in a secure position, in a well-ventilated vehicle. The transportation of compressed gas cylinders in automobiles or in closed-body vehicles can present serious safety hazards. If transporting these cylinders in vehicles, ensure these cylinders are not exposed to extremely high temperatures (as may occur in an enclosed vehicle on a hot day). Additionally, the vehicle should be well-ventilated during transportation.

Note: DOT 39 Cylinders ship in a strong outer carton (overpack). Pertinent shipping information goes on the outside of the overpack. DOT 39 Cylinders do not have transportation information on the cylinder itself.

TRANSPORT CANADA TRANSPORTATION OF DANGEROUS GOODS REGULATIONS: This gas mixture is considered as Dangerous Goods, per regulations of Transport Canada.

PROPER SHIPPING NAME: Compressed gases, n.o.s. (*Oxygen, Nitrogen)*or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not Applicable

HAZARD LABEL: Class 2.2 (Non-Flammable Gas)

SPECIAL PROVISIONS: None

EXPLOSIVE LIMIT AND LIMITED QUANTITY INDEX: 0.12

ERAP INDEX: 3000

PASSENGER CARRYING SHIP INDEX: Forbidden

PASSENGER CARRYING ROAD VEHICLE OR PASSENGER CARRYING RAILWAY VEHICLE INDEX: Forbidden

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

NOTE: Shipment of compressed gas cylinders via Public Passenger Road Vehicle is a violation of Canadian law (Transport Canada Transportation of Dangerous Goods Act, 1992).

15. REGULATORY INFORMATION

ADDITIONAL U.S. REGULATIONS:

U.S. SARA REPORTING REQUIREMENTS: This gas mixture is subject to the reporting requirements of Sections 302, 304, and 313 of Title III of the Superfund Amendments and Reauthorization Act, as follows:

CHEMICAL NAME	SARA 302 (40 CFR 355, Appendix A)	SARA 304 (40 CFR Table 302.4)	SARA 313 (40 CFR 372.65)
Hydrogen Sulfide	YES	YES	YES

U.S. SARA THRESHOLD PLANNING QUANTITY: Hydrogen Sulfide = 500 lb (227 kg)

U.S. TSCA INVENTORY STATUS: The components of this gas mixture are listed on the TSCA Inventory.

U.S. CERCLA REPORTABLE QUANTITY (RQ): Hydrogen Sulfide = 100 lb (45 kg)

OTHER U.S. FEDERAL REGULATIONS:

- Hydrogen Sulfide and Carbon Monoxide are subject to the reporting requirements of CFR 29 1910.1000.
- Hydrogen Sulfide and Methane are subject to the reporting requirements of Section 112(r) of the Clean Air Act. The Threshold Quantity for each of these gases is 10,000 pounds and so this mixture will not be affected by the regulation.
- Depending on specific operations involving the use of this gas mixture, the regulations of the Process Safety Management of Highly Hazardous Chemicals may be applicable (29 CFR 1910.119). Hydrogen Sulfide is listed in Appendix A of this regulation. The Threshold Quantity for Hydrogen Sulfide under this regulation is 1500 lbs (and so one cylinder of this gas mixture will not be affected by this regulation).
- This gas mixture does not contain any Class I or Class II ozone depleting chemicals (40 CFR part 82).
- Nitrogen and Oxygen are not listed Regulated Substances, per 40 CFR, Part 68, of the Risk Management for Chemical Releases. Hydrogen Sulfide is listed under this regulation in Table 1 as a Regulated Substance (Toxic Substance), in quantities of 10,000 lbs (4,553 kg) or greater.

15. REGULATORY INFORMATION(continued)

Carbon Monoxide and Methane are listed under this regulation in Table 3, as Regulated Substances (Flammable), in quantities of 10,000 lbs (4,553 kg) or greater, and so this mixture will not be affected by the regulation.

U.S. STATE REGULATORY INFORMATION: The components of this gas mixture are covered under the following specific State regulations:

Alaska - Designated Toxic and Hazardous Substances: Carbon Monoxide, Hydrogen Sulfide, Methane.	Michigan - Critical Materials Register: No.	Pennsylvania - Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Hydrogen Sulfide, Methane.
California - Permissible Exposure Limits for Chemical Contaminants: Carbon Monoxide, Nitrogen, Hydrogen Sulfide, Methane.	Minnesota - List of Hazardous Substances: Carbon Monoxide, Hydrogen Sulfide, Methane.	Rhode Island - Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Hydrogen Sulfide, Methane.
Florida - Substance List: Oxygen, Carbon Monoxide, Hydrogen Sulfide	Missouri - Employer Information/Toxic Substance List t: Hydrogen Sulfide, Methane.	Texas - Hazardous Substance List: Hydrogen Sulfide.
Illinois - Toxic Substance List: Carbon Monoxide, Methane, Hydrogen Sulfide.	New Jersey - Right to Know Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Methane.	West Virginia - Hazardous Substance List: Hydrogen Sulfide.
Kansas - Section 302/313 List: No.	North Dakota - List of Hazardous Chemicals, Reportable Quantities: Hydrogen Sulfide.	Wisconsin - Toxic and Hazardous Substances: Hydrogen Sulfide
Massachusetts - Substance List: Oxygen, Carbon Monoxide, Hydrogen Sulfide, Methane.		

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): The Carbon Monoxide component of this gas mixture is on the California Proposition 65 lists. WARNING! This gas mixture contains a compound known to the State of California to cause birth defects or other reproductive harm.

ADDITIONAL CANADIAN REGULATIONS:
CANADIAN DSL/NDL INVENTORY STATUS: The components of this gas mixture are listed on the DSL Inventory.
CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA) PRIORITIES SUBSTANCES LISTS: The components of this gas mixture are not on the CEPA Priorities Substances Lists.
CANADIAN WHMIS CLASSIFICATION: This gas mixture is categorized as a Controlled Product, Hazard Classes A and D2A, as per the Controlled Product Regulations.

16. OTHER INFORMATION

INFORMATION ABOUT DOT-39 NRC (Non-Refillable Cylinder) PRODUCTS

DOT 39 cylinders ship as hazardous materials when full. Once the cylinders are relieved of pressure (empty) they are not considered hazardous material or waste. Residual gas in this type of cylinder is not an issue because toxic gas mixtures are prohibited. Calibration gas mixtures typically packaged in these cylinders are Nonflammable n.o.s., UN 1956. A small percentage of calibration gases packaged in DOT 39 cylinders are flammable or oxidizing gas mixtures.

For disposal of used DOT-39 cylinders, it is acceptable to place them in a landfill if local laws permit. Their disposal is no different than that employed with other DOT containers such as spray paint cans, household aerosols, or disposable cylinders of propane (for camping, torch etc.). When feasible, we recommended recycling for scrap metal content. CALGAZ will do this for any customer that wishes to return cylinders to us prepaid. All that is required is a phone call to make arrangements so we may anticipate arrival. Scrapping cylinders involves some preparation before the metal dealer may accept them. We perform this operation as a service to valued customers who want to participate.

MIXTURES: When two or more gases or liquefied gases are mixed, their hazardous properties may combine to create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an Industrial Hygienist or other trained person when you make your safety evaluation of the end product. Remember, gases and liquids have properties which can cause serious injury or death.

Further information about the handling of compressed gases can be found in the following pamphlets published by: Compressed Gas Association Inc. (CGA), 1725 Jefferson Davis Highway, Suite 1004, Arlington, VA 22202-4102. Telephone: (703) 412-0900.

- P-1 "Safe Handling of Compressed Gases in Containers"
- AV-1 "Safe Handling and Storage of Compressed Gases"
- "Handbook of Compressed Gases"

PREPARED BY: CHEMICAL SAFETY ASSOCIATES, Inc.
PO Box 3519, La Mesa, CA 91944-3519
619/670-0609

Fax on Demand: 1-800/231-1366



This Material Safety Data Sheet is offered pursuant to OSHA's Hazard Communication Standard, 29 CFR, 1910.1200. Other government regulations must be reviewed for applicability to this gas mixture. To the best of CALGAZ knowledge, the information contained herein is reliable and accurate as of this date; however, accuracy, suitability or completeness are not guaranteed and no warranties of any type, either express or implied, are provided. The information contained herein relates only to this specific product. If this gas mixture is combined with other materials, all component properties must be considered. Data may be changed from time to time. Be sure to consult the latest edition.

SAFETY DATA SHEET

Helium

Section 1. Identification

GHS product identifier	: Helium
Chemical name	: Helium
Other means of identification	: helium (dot); Helium-4; He; o-Helium; UN 1046
Product use	: Synthetic/Analytical chemistry.
Synonym	: helium (dot); Helium-4; He; o-Helium; UN 1046
SDS #	: 001025
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253
Emergency telephone number (with hours of operation)	: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	: GASES UNDER PRESSURE - Compressed gas

GHS label elements

Hazard pictograms



Signal word

: Warning

Hazard statements

: Contains gas under pressure; may explode if heated.
May displace oxygen and cause rapid suffocation.

Precautionary statements

General

: Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction.

Prevention

: Use and store only outdoors or in a well ventilated place.

Response

: Not applicable.

Storage

: Protect from sunlight. Protect from sunlight when ambient temperature exceeds 52°C/125°F. Store in a well-ventilated place.

Disposal

: Not applicable.

Hazards not otherwise classified

: In addition to any other important health or physical hazards, this product may displace oxygen and cause rapid suffocation.

Section 3. Composition/information on ingredients

Substance/mixture : Substance
Chemical name : Helium
Other means of identification : helium (dot); Helium-4; He; o-Helium; UN 1046

CAS number/other identifiers

CAS number : 7440-59-7
Product code : 001025

Ingredient name	%	CAS number
Helium	100	7440-59-7

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.

Inhalation : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Skin contact : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur. Wash clothing before reuse. Clean shoes thoroughly before reuse.

Ingestion : As this product is a gas, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : Contact with rapidly expanding gas may cause burns or frostbite.
Inhalation : No known significant effects or critical hazards.
Skin contact : Contact with rapidly expanding gas may cause burns or frostbite.
Frostbite : Try to warm up the frozen tissues and seek medical attention.
Ingestion : As this product is a gas, refer to the inhalation section.

Over-exposure signs/symptoms

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

Date of issue/Date of revision : 10/15/2014. **Date of previous issue** : 10/2/2014. **Version** : 0.02 2/11

Section 4. First aid measures

- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Contains gas under pressure. In a fire or if heated, a pressure increase will occur and the container may burst or explode.
- Hazardous thermal decomposition products** : No specific data.

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Avoid contact with eyes, skin and clothing. Avoid breathing gas. Empty containers retain product residue and can be hazardous. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Keep container tightly closed and sealed until ready for use. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F).

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Helium	Oxygen Depletion [Asphyxiant]

Appropriate engineering controls : Good general ventilation should be sufficient to control worker exposure to airborne contaminants.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Section 8. Exposure controls/personal protection

- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Gas. [Compressed gas.]
- Color** : Colorless.
- Molecular weight** : 4 g/mole
- Molecular formula** : He
- Boiling/condensation point** : -268.9°C (-452°F)
- Melting/freezing point** : -272.2°C (-458°F)
- Critical temperature** : -267.9°C (-450.2°F)
- Odor** : Odorless.
- Odor threshold** : Not available.
- pH** : Not available.
- Flash point** : [Product does not sustain combustion.]
- Burning time** : Not applicable.
- Burning rate** : Not applicable.
- Evaporation rate** : Not available.
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.
- Vapor pressure** : Not available.
- Vapor density** : 0.14 (Air = 1) Liquid Density@BP: 7.8 lb/ft³ (125 kg/m³)
- Specific Volume (ft³/lb)** : 96.1538
- Gas Density (lb/ft³)** : 0.0104
- Relative density** : Not applicable.
- Solubility** : Not available.
- Solubility in water** : Not available.
- Partition coefficient: n-octanol/water** : 0.28
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.

Section 9. Physical and chemical properties

SADT : Not available.

Viscosity : Not applicable.

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.

Chemical stability : The product is stable.

Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Hazardous polymerization : Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Section 11. Toxicological information

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : Contact with rapidly expanding gas may cause burns or frostbite.
Inhalation : No known significant effects or critical hazards.
Skin contact : Contact with rapidly expanding gas may cause burns or frostbite.
Ingestion : As this product is a gas, refer to the inhalation section.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.
Carcinogenicity : No known significant effects or critical hazards.
Mutagenicity : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Section 12. Ecological information

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Helium	0.28	-	low

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1046	UN1046	UN1046	UN1046	UN1046
UN proper shipping name	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED
Transport hazard class(es)	2.2 	2.2 	2.2 	2.2 	2.2 
Packing group	-	-	-	-	-
Environment	No.	No.	No.	No.	No.
Additional information	Limited quantity Yes. Packaging instruction Passenger aircraft Quantity limitation: 75 kg Cargo aircraft Quantity limitation: 150 kg	Explosive Limit and Limited Quantity Index 0.125 Passenger Carrying Road or Rail Index 75	-	-	Passenger and Cargo Aircraft Quantity limitation: 75 kg Cargo Aircraft Only Quantity limitation: 150 kg

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Section 14. Transport information

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
United States inventory (TSCA 8b): This material is listed or exempted.

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Sudden release of pressure

Composition/information on ingredients

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
Helium	100	No.	Yes.	No.	No.	No.

State regulations

Massachusetts : This material is listed.

New York : This material is not listed.

New Jersey : This material is listed.

Pennsylvania : This material is listed.

Canada inventory : This material is listed or exempted.

International regulations

Section 15. Regulatory information

International lists :

- Australia inventory (AICS):** This material is listed or exempted.
- China inventory (IECSC):** This material is listed or exempted.
- Japan inventory:** Not determined.
- Korea inventory:** This material is listed or exempted.
- Malaysia Inventory (EHS Register):** Not determined.
- New Zealand Inventory of Chemicals (NZIoC):** This material is listed or exempted.
- Philippines inventory (PICCS):** This material is listed or exempted.
- Taiwan inventory (CSNN):** Not determined.

Chemical Weapons Convention List Schedule I Chemicals : Not listed

Chemical Weapons Convention List Schedule II Chemicals : Not listed

Chemical Weapons Convention List Schedule III Chemicals : Not listed

Canada

WHMIS (Canada) : Class A: Compressed gas.

CEPA Toxic substances: This material is not listed.

Canadian ARET: This material is not listed.

Canadian NPRI: This material is not listed.

Alberta Designated Substances: This material is not listed.

Ontario Designated Substances: This material is not listed.

Quebec Designated Substances: This material is not listed.

Section 16. Other information

Canada Label requirements : Class A: Compressed gas.

Hazardous Material Information System (U.S.A.)

Health	0
Flammability	0
Physical hazards	0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Section 16. Other information

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

History

Date of printing : 10/15/2014.

Date of issue/Date of revision : 10/15/2014.

Date of previous issue : 10/2/2014.

Version : 0.02

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations
- ACGIH – American Conference of Governmental Industrial Hygienists
- AIHA – American Industrial Hygiene Association
- CAS – Chemical Abstract Services
- CEPA – Canadian Environmental Protection Act
- CERCLA – Comprehensive Environmental Response, Compensation, and Liability Act (EPA)
- CFR – United States Code of Federal Regulations
- CPR – Controlled Products Regulations
- DSL – Domestic Substances List
- GWP – Global Warming Potential
- IARC – International Agency for Research on Cancer
- ICAO – International Civil Aviation Organisation
- Inh – Inhalation
- LC – Lethal concentration
- LD – Lethal dosage
- NDSL – Non-Domestic Substances List
- NIOSH – National Institute for Occupational Safety and Health
- TDG – Canadian Transportation of Dangerous Goods Act and Regulations
- TLV – Threshold Limit Value
- TSCA – Toxic Substances Control Act
- WEEL – Workplace Environmental Exposure Level
- WHMIS – Canadian Workplace Hazardous Material Information System

References : Not available.

Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

MATERIAL SAFETY DATA SHEET
HORIBA INSTRUMENTS, INC.
17671 Armstrong Avenue, Irvine, CA 92614
(949) 250-4811

REVISION DATE MAY 2003

SECTION I: MATERIAL IDENTIFICATION

IDENTITY: Potassium hydrogen phthalate
P/N 350623, 527033, 696138-1, 9003001600, 100-4

CHEMICAL FORMULA: $C_6H_4(COOK)(COOH)$ ~1% in water

GENERIC NAME: pH 4 Buffer Solution

CHEMICAL FAMILY: Salt solution

OTHER DESIGNATION: pH 4 Standard Solution, Autocal solution, 100-4

IN CASE OF EMERGENCY CONTACT YOUR REGIONAL PLANT MANAGER

SECTION II: HAZARDOUS INGREDIENTS

Irritant: Eyes, nose and throat, skin.

This product contains the following toxic chemical(s) subject to Section 313
Title III reporting requirements (40 CFR Part 372): NONE

SECTION III: PHYSICAL DATA

MELTING POINT (*): 295-300 °C	SPECIFIC GRAVITY (H ₂ O = 1): 1.636	
VAPOR PRESSURE: N/A	PERCENT, VOLATILE BY VOLUME (%): None	
SOLUBILITY IN WATER v/v @°C:	1.2% (cool water)	CAS #: 877-24-7
APPEARANCE AND ODOR:	Colorless liquid	

SECTION IV: PHYSICAL DATA

FLASH POINT AND METHOD:	N/A
FLAMMABLE LIMITS:	None
EXTINGUISHING MEDIA:	Determine based on surrounding combustibles.
SPECIAL FIRE FIGHTING PROCEDURES:	None
UNUSUAL FIRE AND EXPLOSION HAZARDS:	N/A

SECTION V: REACTIVITY DATA

STABILITY: Stable at normal temperature

INCOMPATIBILITY (MATERIALS TO AVOID):	None
HAZARDOUS DECOMPOSITION PRODUCTS:	None
HAZARDOUS POLYMERIZATION:	None

SECTION VI: HEALTH HAZARD DATA

EMERGENCY AND FIRST AID PROCEDURES:

Eyes: Wash eyes with clean water flowing for 10-15 minutes. Call doctor immediately.
Skin: Take off contaminated clothing and wash skin with water.
Inhaled: Move the patient into clear air. Keep patient warm and stable. Loosen clothing and use artificial respiration if necessary. Call doctor immediately.
Swallowed: Give patient plenty of warm water/milk. Induce vomiting. Call doctor immediately. If patient is unconscious, do not give water/milk, but call doctor immediately.

SECTION VII: SPILL OR LEAK PROCEDURES Highway or railway spills call Chemtrec
(800) 424-9300

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED:

Collect as much material as possible. The place of leakage should be washed with plenty of water.

WASTE DISPOSAL METHOD:

Dispose as chemical waste.

SECTION VIII: SPECIAL PROTECTION INFORMATION

RESPIRATORY PROTECTION (SPECIFY TYPE): Not normally required.

VENTILATION: Not normally required.

OTHER PROTECTIVE EQUIPMENT: Optional - eye mask, gloves and long-sleeve working clothes.

SECTION IX: SPECIAL PRECAUTIONS

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING:

After working, wash hands thoroughly.

OTHER PRECAUTIONS: None.

For the following RAE Part Numbers:

600-0001-000, 600-0002-000

600-0002-001, 600-0026-000

600-0027-000, 600-0069-000



AIR LIQUIDE

MATERIAL SAFETY DATA SHEET

Prepared to U.S. OSHA, CMA, ANSI and Canadian WHMIS Standards

1. PRODUCT IDENTIFICATION

CHEMICAL NAME; CLASS: NONFLAMMABLE GAS MIXTURE

Containing One or More of the Following Components in a Nitrogen Balance Gas:

Oxygen 0-23.5%; Isobutylene, 0.0005-0.9%

SYNONYMS: Not Applicable

CHEMICAL FAMILY NAME: Not Applicable

FORMULA: Not Applicable

Document Number: 50054

Note: The Material Safety Data Sheet is for this gas mixture supplied in cylinders with 33 cubic feet (935 liters) or less gas capacity (DOT - 39 cylinders). This MSDS has been developed for various gas mixtures with the composition of components within the ranges listed in Section 2 (Composition and Information on Ingredients). Refer to the product label for information on the actual composition of the product.

PRODUCT USE: Calibration of Monitoring and Research Equipment

SUPPLIER/MANUFACTURER'S NAME: CALGAZ

ADDRESS: 821 Chesapeake Drive

Cambridge, MD 21613

EMERGENCY PHONE: CHEMTREC: 1-800-424-9300

BUSINESS PHONE: 1-410-228-6400

General MSDS Information: 1-713/868-0440

Fax on Demand: 1-800/231-1366

2. COMPOSITION and INFORMATION ON INGREDIENTS

CHEMICAL NAME	CAS #	mole %	EXPOSURE LIMITS IN AIR					
			ACGIH-TLV		OSHA-PEL		NIOSH	OTHER
			TWA	STEL	TWA	STEL	IDLH	
			ppm	ppm	ppm	ppm	ppm	ppm
Isobutylene	115-11-7	0.0005-0.9%	There are no specific exposure limits for Isobutylene.					
Oxygen	7782-44-7	0-23.5%	There are no specific exposure limits for Oxygen.					
Nitrogen	7727-37-9	Balance	There are no specific exposure limits for Nitrogen. Nitrogen is a simple asphyxiant (SA). Oxygen levels should be maintained above 19.5%.					

NE = Not Established.

See Section 16 for Definitions of Terms Used.

NOTE (1): ALL WHMIS required information is included in appropriate sections based on the ANSI Z400.1-1998 format. This gas mixture has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

3. HAZARD IDENTIFICATION

EMERGENCY OVERVIEW: This is a colorless, odorless gas mixture. Releases of this gas mixture may produce oxygen-deficient atmospheres (especially in confined spaces or other poorly-ventilated environments); individuals in such atmospheres may be asphyxiated. Isobutylene, a component of this gas mixture, may cause drowsiness and other central nervous system effects in high concentrations; however, due to its low concentration in this gas mixture, this is unlikely to occur.

SYMPTOMS OF OVER-EXPOSURE BY ROUTE OF EXPOSURE: The most significant route of over-exposure for this gas mixture is by inhalation.

INHALATION: Due to the small size of an individual cylinder of this gas mixture, no unusual health effects from over-exposure to the product are anticipated under routine circumstances of use. The chief health hazard associated with this gas mixture is when this gas mixture contains less than 19.5% Oxygen and is released in a small, poorly-ventilated area (i.e. an enclosed or confined space). Under this circumstance, an oxygen-deficient environment may occur. Individuals breathing such an atmosphere may experience symptoms which include headaches, ringing in ears, dizziness, drowsiness, unconsciousness, nausea, vomiting, and depression of all the senses. Under some circumstances of over-exposure, death may occur. The effects associated with various levels of oxygen are as follows:

CONCENTRATION OF OXYGEN

12-16% Oxygen:

10-14% Oxygen:

6-10% Oxygen:

Below 6%:

OBSERVED EFFECT

Breathing and pulse rate increase, muscular coordination slightly disturbed.

Emotional upset, abnormal fatigue, disturbed respiration.

Nausea, vomiting, collapse, or loss of consciousness.

Convulsive movements, possible respiratory collapse, and death.

HEALTH EFFECTS OR RISKS FROM EXPOSURE: An Explanation in Lay Terms. Over-exposure to this gas mixture may cause the following health effects:

ACUTE: Due to the small size of the individual cylinder of this gas mixture, no unusual health effects from exposure to the product are anticipated under routine circumstances of use. The most significant hazard associated with this gas mixture when it contains less than 19.5% oxygen is the potential for exposure to oxygen-deficient atmospheres. Symptoms of oxygen deficiency include respiratory difficulty, ringing in ears, headaches, shortness of breath, wheezing, headache, dizziness, indigestion, nausea, unconsciousness, and death. The skin of a victim of over-exposure may have a blue color. Additionally, Isobutylene, a component of this gas mixture, may cause drowsiness or central nervous system effects in high concentrations; however, due to its low concentration in this gas mixture, this is unlikely to occur.

CHRONIC: Chronic exposure to oxygen-deficient atmospheres (below 18% oxygen in air) may affect the heart and nervous system.

TARGET ORGANS: ACUTE: Respiratory system, eyes. CHRONIC: Heart, cardiovascular system, central nervous system.

HAZARDOUS MATERIAL IDENTIFICATION SYSTEM

HEALTH HAZARD

(BLUE)

1

FLAMMABILITY HAZARD

(RED)

0

PHYSICAL HAZARD

(YELLOW)

0

PROTECTIVE EQUIPMENT

EYES

RESPIRATORY

HANDS

BODY

See Section 8

For Routine Industrial Use and Handling Applications

4. FIRST-AID MEASURES

RESCUERS SHOULD NOT ATTEMPT TO RETRIEVE VICTIMS OF EXPOSURE TO THIS GAS MIXTURE WITHOUT ADEQUATE PERSONAL PROTECTIVE EQUIPMENT. At a minimum, Self-Contained Breathing Apparatus must be worn.

No unusual health effects are anticipated after exposure to this gas mixture, due to the small cylinder size. If any adverse symptom develops after over-exposure to this gas mixture, remove victim(s) to fresh air as quickly as possible. Only trained personnel should administer supplemental oxygen and/or cardio-pulmonary resuscitation if necessary. Victim(s) who experience any adverse effect after over-exposure to this gas mixture must be taken for medical attention. Rescuers should be taken for medical attention if necessary. Take a copy of the label and the MSDS to physician or other health professional with victim(s).

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Acute or chronic respiratory conditions may be aggravated by over-exposure to this gas mixture.

RECOMMENDATIONS TO PHYSICIANS: Administer oxygen, if necessary; treat symptoms and eliminate exposure.

5. FIRE-FIGHTING MEASURES

FLASH POINT: Not applicable.

AUTOIGNITION TEMPERATURE: Not applicable.

FLAMMABLE LIMITS (in air by volume, %):

Lower (LEL): Not applicable.

Upper (UEL): Not applicable.

FIRE EXTINGUISHING MATERIALS: Non-flammable gas mixture. Use extinguishing media appropriate for surrounding fire.


UNUSUAL FIRE AND EXPLOSION HAZARDS: This gas mixture is not flammable; however, containers, when involved in fire, may rupture or burst in the heat of the fire.

Explosion Sensitivity to Mechanical Impact: Not sensitive.

Explosion Sensitivity to Static Discharge: Not sensitive.

SPECIAL FIRE-FIGHTING PROCEDURES: Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment.

NFPA RATING



6. ACCIDENTAL RELEASE MEASURES

LEAK RESPONSE: Due to the small size and content of the cylinder, an accidental release of this gas mixture presents significantly less risk of an oxygen deficient environment and other safety hazards than a similar release from a larger cylinder. However, as with any chemical release, extreme caution must be used during emergency response procedures. In the event of a release in which the atmosphere is unknown, and in which other chemicals are potentially involved, evacuate immediate area. Such releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a leak, clear the affected area, protect people, and respond with trained personnel.

Allow the gas mixture to dissipate. If necessary, monitor the surrounding area (and the original area of the release) for oxygen. Oxygen levels must be above 19.5% before non-emergency personnel are allowed to re-enter area.

If leaking incidentally from the cylinder, contact your supplier.

7. HANDLING and USE

WORK PRACTICES AND HYGIENE PRACTICES: Be aware of any signs of dizziness or fatigue; exposures to fatal concentrations of this gas mixture could occur without any significant warning symptoms, due to oxygen deficiency. Do not attempt to repair, adjust, or in any other way modify the cylinders containing this gas mixture. If there is a malfunction or another type of operational problem, contact nearest distributor immediately.

STORAGE AND HANDLING PRACTICES: Cylinders should be firmly secured to prevent falling or being knocked-over. Cylinders must be protected from the environment, and preferably kept at room temperature (approximately 21°C [70°F]). Cylinders should be stored in dry, well-ventilated areas, away from sources of heat, ignition, and direct sunlight. Protect cylinders against physical damage. Full and empty cylinders should be segregated. Use a first-in, first-out inventory system to prevent full containers from being stored for long periods of time. These cylinders are not refillable. **WARNING! Do not refill DOT 39 cylinders. To do so may cause personal injury or property damage.**

SPECIAL PRECAUTIONS FOR HANDLING GAS CYLINDERS: WARNING! Compressed gases can present significant safety hazards. During cylinder use, use equipment designed for these specific cylinders. Ensure all lines and equipment are rated for proper service pressure.

PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT: Follow practices indicated in Section 6 (Accidental Release Measures). Make certain that application equipment is locked and tagged-out safely. Always use product in areas where adequate ventilation is provided.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

VENTILATION AND ENGINEERING CONTROLS: No special ventilation systems or engineering controls are needed under normal circumstances of use. As with all chemicals, use this gas mixture in well-ventilated areas. If this gas mixture is used in a poorly-ventilated area, install automatic monitoring equipment to detect the levels of Nitrous Oxide and Oxygen.

RESPIRATORY PROTECTION: No special respiratory protection is required under normal circumstances of use. Maintain oxygen levels above 19.5% in the workplace. Use supplied air respiratory protection when oxygen levels are below 19.5%, or during emergency response to a release of this gas mixture. During an emergency situation, before entering the area, check the concentration of Methane and Oxygen. If respiratory protection is needed, use only protection authorized in the U.S. Federal OSHA Standard (29 CFR 1910.134), applicable U.S. State regulations, or the Canadian CSA Standard Z94.4-93 and applicable standards of Canadian Provinces. Oxygen levels below 19.5% are considered IDLH by OSHA. In such atmospheres, use of a full-facepiece pressure/demand SCBA or a full facepiece, supplied air respirator with auxiliary self-contained air supply is required under OSHA's Respiratory Protection Standard (1910.134-1998).

EYE PROTECTION: Safety glasses. If necessary, refer to U.S. OSHA 29 CFR 1910.133 or appropriate Canadian Standards.

HAND PROTECTION: Wear leather gloves when handling cylinders. Chemically resistant gloves should be worn when using this gas mixture. If necessary, refer to U.S. OSHA 29 CFR 1910.138 or appropriate Standards of Canada.

BODY PROTECTION: No special protection is needed under normal circumstances of use. If a hazard of injury to the feet exists due to falling objects, rolling objects, where objects may pierce the soles of the feet or where employee's feet may be exposed to electrical hazards, use foot protection, as described in U.S. OSHA 29 CFR 1910.136.

9. PHYSICAL and CHEMICAL PROPERTIES

The following information is for Nitrogen, a main component of this gas mixture.

GAS DENSITY @ 32°F (0°C) and 1 atm: 0.072 lbs/ ft³ (1.153 kg/m³)

BOILING POINT: -195.8°C (-320.4°F)

SPECIFIC GRAVITY (air = 1) @ 70°F (21.1°C): 0.906

SOLUBILITY IN WATER vol/vol @ 32°F (0°C) and 1 atm: 0.023

EVAPORATION RATE (nBuAc = 1): Not applicable.

ODOR THRESHOLD: Not applicable.

VAPOR PRESSURE @ 70°F (21.1°C) psig: Not applicable.

The following information is for Oxygen, a main component of this gas mixture.

GAS DENSITY @ 32°F (0°C) and 1 atm: 0.083 lb/cu ft (1.326 kg/m³)

FREEZING/MELTING POINT @ 10 psig: -218.8°C (-361.8°F)

SPECIFIC GRAVITY (air = 1) @ 70°F (21.1°C): 1.105

SOLUBILITY IN WATER vol/vol at 32°F (0°C) and 1 atm: 0.0491

EVAPORATION RATE (nBuAc = 1): Not applicable.

ODOR THRESHOLD: Not applicable.

VAPOR PRESSURE @ 70°F (21.1°C) psig: Not applicable.

The following information is for the gas mixture.

APPEARANCE AND COLOR: This is a colorless, odorless gas mixture.

HOW TO DETECT THIS SUBSTANCE (warning properties): There are no unusual warning properties associated with a release of this gas mixture. In terms of leak detection, fittings and joints can be painted with a soap solution to detect leaks, which will be indicated by a bubble formation.

FREEZING/MELTING POINT @ 10 psig: -210°C (-345.8°F)

pH: Not applicable.

MOLECULAR WEIGHT: 28.01

EXPANSION RATIO: Not applicable.

SPECIFIC VOLUME (ft³/lb): 13.8

COEFFICIENT WATER/OIL DISTRIBUTION: Not applicable.

BOILING POINT: -183.0°C (-297.4°F)

pH: Not applicable.

MOLECULAR WEIGHT: 32.00

EXPANSION RATIO: Not applicable.

VOLUME (ft³/lb): 12.1

COEFFICIENT WATER/OIL DISTRIBUTION: Not applicable.

10. STABILITY and REACTIVITY

STABILITY: Normally stable in gaseous state.

DECOMPOSITION PRODUCTS: The thermal decomposition products of Isobutylene include carbon oxides. The other components of this gas mixture do not decompose, per se, but can react with other compounds in the heat of a fire.

MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Titanium will burn in the Nitrogen component of this gas mixture. Lithium reacts slowly with Nitrogen at ambient temperatures. The Isobutylene component of this gas mixture is also incompatible with strong oxidizers (i.e. chlorine, bromine pentafluoride, oxygen difluoride, and nitrogen trifluoride).

HAZARDOUS POLYMERIZATION: Will not occur.

CONDITIONS TO AVOID: Contact with incompatible materials. Cylinders exposed to high temperatures or direct flame can rupture or burst.

11. TOXICOLOGICAL INFORMATION

TOXICITY DATA: The following toxicology data are available for the components of this gas mixture:

ISOBUTYLENE:

LC₅₀ (inhalation, rat) = 620,000 mg/kg/4 hours

LC₅₀ (inhalation, mouse) = 415,000 mg/kg

NITROGEN:

There are no specific toxicology data for Nitrogen. Nitrogen is a simple asphyxiant, which acts to displace oxygen in the environment.

SUSPECTED CANCER AGENT: The components of this gas mixture are not found on the following lists: FEDERAL OSHA Z LIST, NTP, CAL/OSHA, and IARC; therefore, they are not considered to be, nor suspected to be, cancer-causing agents by these agencies.

IRRITANCY OF PRODUCT: Contact with rapidly expanding gases can be irritating to exposed skin and eyes.

SENSITIZATION TO THE PRODUCT: The components of this gas mixture are not known to cause human skin or respiratory sensitization.

REPRODUCTIVE TOXICITY INFORMATION: Listed below is information concerning the effects of this gas mixture and its components on the human reproductive system.

Mutagenicity: No mutagenicity effects have been described for the components in this gas mixture.

Embryotoxicity: No embryotoxic effects have been described for the components in this gas mixture.

Teratogenicity: No teratogenicity effects have been described for the components in this gas mixture.

Reproductive Toxicity: No reproductive toxicity effects have been described for the components in gas mixture.

A *mutagen* is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate through generation lines. An *embryotoxin* is a chemical which causes damage to a developing embryo (i.e. within the first eight weeks of pregnancy in humans), but the damage does not propagate across generational lines. A *teratogen* is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A *reproductive toxin* is any substance which interferes in any way with the reproductive process.

BIOLOGICAL EXPOSURE INDICES (BEIs): Currently, Biological Exposure Indices (BEIs) are not applicable for the components of this gas mixture.

12. ECOLOGICAL INFORMATION

ENVIRONMENTAL STABILITY: The components of this gas mixture occur naturally in the atmosphere. The gas will be dissipated rapidly in well-ventilated areas. The following environmental data are applicable to the components of this gas mixture.

OXYGEN: Water Solubility = 1 volume Oxygen/32 volumes water at 20°C. Log K_{ow} = -0.65

NITROGEN: Water Solubility = 2.4 volumes Nitrogen/100 volumes water at 0°C. 1.6 volumes Nitrogen/100 volumes water at 20°C.

EFFECT OF MATERIAL ON PLANTS or ANIMALS: No evidence is currently available on the effects of this gas mixture on plant and animal life.

EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on the effects of this gas mixture on aquatic life.

13. DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL PREPARING WASTES FOR DISPOSAL: Waste disposal must be in accordance with appropriate Federal, State, and local regulations. Cylinders with undesired residual product may be safely vented outdoors with the proper regulator. For further information, refer to Section 16 (Other Information).

14. TRANSPORTATION INFORMATION

THIS GAS MIXTURE IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

PROPER SHIPPING NAME: Compressed gases, n.o.s. ("Oxygen, Nitrogen") or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not applicable.

DOT LABEL(S) REQUIRED: Class 2.2 (Non-Flammable Gas)

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

MARINE POLLUTANT: The components of this gas mixture are not classified by the DOT as Marine Pollutants (as defined by 49 CFR 172.101, Appendix B).

SPECIAL SHIPPING INFORMATION: Cylinders should be transported in a secure position, in a well-ventilated vehicle. The transportation of compressed gas cylinders in automobiles or in closed-body vehicles can present serious safety hazards. If transporting these cylinders in vehicles, ensure these cylinders are not exposed to extremely high temperatures (as may occur in an enclosed vehicle on a hot day). Additionally, the vehicle should be well-ventilated during transportation.

Note: DOT 39 Cylinders ship in a strong outer carton (overpack). Pertinent shipping information goes on the outside of the overpack. DOT 39 Cylinders do not have transportation information on the cylinder itself.

TRANSPORT CANADA TRANSPORTATION OF DANGEROUS GOODS REGULATIONS: This gas is considered as Dangerous Goods, per regulations of Transport Canada.

PROPER SHIPPING NAME: Compressed gases, n.o.s. ("Oxygen, Nitrogen") or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not Applicable

HAZARD LABEL: Class 2.2 (Non-Flammable Gas)

SPECIAL PROVISIONS: None

EXPLOSIVE LIMIT AND LIMITED QUANTITY INDEX: 0.12

ERAP INDEX: None

PASSENGER CARRYING SHIP INDEX: None

PASSENGER CARRYING ROAD VEHICLE OR PASSENGER CARRYING RAILWAY VEHICLE INDEX: 75

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

NOTE: Shipment of compressed gas cylinders via Public Passenger Road Vehicle is a violation of Canadian law (Transport Canada Transportation of Dangerous Goods Act, 1992).

15. REGULATORY INFORMATION

ADDITIONAL U.S. REGULATIONS:

U.S. SARA REPORTING REQUIREMENTS: The components of this gas mixture are not subject to the reporting requirements of Sections 302, 304, and 313 of Title III of the Superfund Amendments and Reauthorization Act.

U.S. SARA THRESHOLD PLANNING QUANTITY: There are no specific Threshold Planning Quantities for this gas mixture. The default Federal MSDS submission and inventory requirement filing threshold of 10,000 lb (4,540 kg) may apply, per 40 CFR 370.20.

U.S. TSCA INVENTORY STATUS: The components of this gas mixture are listed on the TSCA Inventory.

U.S. CERCLA REPORTABLE QUANTITY (RQ): Not applicable.

OTHER U.S. FEDERAL REGULATIONS:

- No component of this gas mixture is subject to the requirements of CFR 29 1910.1000 (under the 1989 PELs).
- Isobutylene is subject to the reporting requirements of Section 112(r) of the Clean Air Act. The Threshold Quantity for this gas is 10,000 pounds.
- The regulations of the Process Safety Management of Highly Hazardous Chemicals are not applicable (29 CFR 1910.119).
- This gas mixture does not contain any Class I or Class II ozone depleting chemicals (40 CFR Part 82).

15. REGULATORY INFORMATION (continued)

- Nitrogen and Oxygen are not listed as Regulated Substances, per 40 CFR, Part 68, of the Risk Management for Chemical Releases. Isobutylene is listed under this regulation in Table 3 as Regulated Substances (Flammable Substances), in quantities of 10,000 lbs (4,554 kg) or greater.

U.S. STATE REGULATORY INFORMATION: The components of this gas mixture are covered under the following specific State regulations:

Alaska - Designated Toxic and Hazardous Substances: No.
California - Permissible Exposure Limits for Chemical Contaminants: Nitrogen.
Florida - Substance List: Oxygen, Isobutylene.
Illinois - Toxic Substance List: No.
Kansas - Section 302/313 List: No.
Massachusetts - Substance List: Oxygen, Isobutylene.
Michigan - Critical Materials Register: No.
Minnesota - List of Hazardous Substances: No.
Missouri - Employer Information/Toxic Substance List: No.
New Jersey - Right to Know Hazardous Substance List: Oxygen, Nitrogen, Isobutylene.
North Dakota - List of Hazardous Chemicals, Reportable Quantities: No.
Pennsylvania - Hazardous Substance List: Oxygen, Nitrogen, Isobutylene.
Rhode Island - Hazardous Substance List: Oxygen, Nitrogen.
Texas - Hazardous Substance List: No.
West Virginia - Hazardous Substance List: No.
Wisconsin - Toxic and Hazardous Substances: : No.

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): No component of this gas mixture is on the California Proposition 65 lists.

ADDITIONAL CANADIAN REGULATIONS:

CANADIAN DSL/NDL INVENTORY STATUS: The components of this gas mixture are listed on the DSL Inventory.

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA) PRIORITIES SUBSTANCES LISTS: The components of this gas mixture are not on the CEPA Priorities Substances Lists.

CANADIAN WHMIS REGULATIONS: This gas mixture is categorized as a Controlled Product, Hazard Class A, as per the Controlled Product Regulations.

16. OTHER INFORMATION

INFORMATION ABOUT DOT-39 NRC (Non-Refillable Cylinder) PRODUCTS

DOT 39 cylinders ship as hazardous materials when full. Once the cylinders are relieved of pressure (empty) they are not considered hazardous material or waste. Residual gas in this type of cylinder is not an issue because toxic gas mixtures are prohibited. Calibration gas mixtures typically packaged in these cylinders are Nonflammable n.o.s., UN 1956. A small percentage of calibration gases packaged in DOT 39 cylinders are flammable or oxidizing gas mixtures.

For disposal of used DOT-39 cylinders, it is acceptable to place them in a landfill if local laws permit. Their disposal is no different than that employed with other DOT containers such as spray paint cans, household aerosols, or disposable cylinders of propane (for camping, torch etc.). When feasible, we recommended recycling for scrap metal content. CALGAZ will do this for any customer that wishes to return cylinders to us prepaid. All that is required is a phone call to make arrangements so we may anticipate arrival. Scrapping cylinders involves some preparation before the metal dealer may accept them. We perform this operation as a service to valued customers who want to participate.

MIXTURES: When two or more gases or liquefied gases are mixed, their hazardous properties may combine to create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an Industrial Hygienist or other trained person when you make your safety evaluation of the end product. Remember, gases and liquids have properties which can cause serious injury or death.

Further information about the handling of compressed gases can be found in the following pamphlets published by: Compressed Gas Association Inc. (CGA), 1725 Jefferson Davis Highway, Suite 1004, Arlington, VA 22202-4102. Telephone: (703) 412-0900.

P-1	"Safe Handling of Compressed Gases in Containers"
AV-1	"Safe Handling and Storage of Compressed Gases"
	"Handbook of Compressed Gases"

PREPARED BY: CHEMICAL SAFETY ASSOCIATES, Inc.
PO Box 3519, La Mesa, CA 91944-3519
619/670-0609
Fax on Demand: 1-800/231-1366



This Material Safety Data Sheet is offered pursuant to OSHA's Hazard Communication Standard, 29 CFR, 1910.1200. Other government regulations must be reviewed for applicability to this gas mixture. To the best of CALGAZ knowledge, the information contained herein is reliable and accurate as of this date; however, accuracy, suitability or completeness are not guaranteed and no warranties of any type, either express or implied, are provided. The information contained herein relates only to this specific product. If this gas mixture is combined with other materials, all component properties must be considered. Data may be changed from time to time. Be sure to consult the latest edition.



SAFETY DATA SHEET

Creation Date 08-Nov-2010

Revision Date 18-Jun-2015

Revision Number 2

1. Identification

Product Name Fluoranthene

Cat No. : AC119170000; AC119170250; AC119171000; AC119175000

Synonyms Benzo[j,k]fluorene

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Acute oral toxicity

Category 4

Label Elements

Signal Word

Warning

Hazard Statements

Harmful if swallowed



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling
Do not eat, drink or smoke when using this product

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

Rinse mouth

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Fluoranthene	206-44-0	>95

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
Skin Contact	Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes. Obtain medical attention.
Inhalation	Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.
Ingestion	Do not induce vomiting. Get medical attention.
Most important symptoms/effects Notes to Physician	No information available. Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Water spray. Carbon dioxide (CO ₂). Dry chemical. alcohol-resistant foam.
Unsuitable Extinguishing Media	No information available
Flash Point	100 °C / 212 °F
Method -	No information available
Autoignition Temperature	No information available
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO₂)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
2

Flammability
0

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment.
-----------------------------	---

Environmental Precautions See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up Sweep up or vacuum up spillage and collect in suitable container for disposal.

7. Handling and storage

Handling Ensure adequate ventilation. Wear personal protective equipment. Avoid contact with skin and eyes. Do not breathe dust. Do not breathe vapors or spray mist. Avoid dust formation.

Storage Keep in a dry, cool and well-ventilated place. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment

Eye/face Protection Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder Solid
Appearance	Light green
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	109 - 111 °C / 228.2 - 231.8 °F
Boiling Point/Range	384 - 34 °C / 723.2 - 93.2 °F
Flash Point	100 °C / 212 °F
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	No information available
Vapor Density	No information available
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C16 H10
Molecular Weight	202.25

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information No acute toxicity information is available for this product

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Fluoranthene	2 g/kg (Rat)	3180 mg/kg (Rabbit)	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation	No information available
Sensitization	No information available
Carcinogenicity	The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Fluoranthene	206-44-0	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Fluoranthene	Not listed	Oncorhynchus mykiss: LC50=0.0077 mg/L 96h	Not listed	EC50: 0.78 mg/L 20h

Persistence and Degradability No information available
Bioaccumulation/ Accumulation No information available.

Mobility

Component	log Pow
Fluoranthene	5.33

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Fluoranthene - 206-44-0	U120	-

14. Transport information

DOT

UN-No UN3077
Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE,SOLID, N.O.S.
Proper technical name (Fluoranthene)
Hazard Class 9
Packing Group III

TDG

UN-No UN3077
Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE,SOLID, N.O.S.
Hazard Class 9
Packing Group III

IATA

UN-No UN3077
Proper Shipping Name Environmentally hazardous substance, solid, n.o.s
Hazard Class 9
Packing Group III

IMDG/IMO

UN-No UN3077
Proper Shipping Name Environmentally hazardous substance, solid, n.o.s
Hazard Class 9
Packing Group III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Fluoranthene	X	-	X	205-912-4	-		-	X	X	X	-

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Fluoranthene	206-44-0	>95	1.0 0.1

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Fluoranthene	-	-	X	X

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Fluoranthene	100 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Fluoranthene	X	X	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D1B Toxic materials



16. Other information

Prepared By

Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date

08-Nov-2010

Revision Date

18-Jun-2015

Print Date

18-Jun-2015

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Fluorene

Cat No. : AC156130000; AC156130250; AC156131000; AC156135000

Synonyms Diphenylenemethane

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

Classification under 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Label Elements

None required

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects
May form combustible dust concentrations in air

3. Composition / information on ingredients

Component	CAS-No	Weight %
Fluorene	86-73-7	98

4. First-aid measures

Eye Contact Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.

Skin Contact Wash off immediately with soap and plenty of water while removing all contaminated

	clothes and shoes. Obtain medical attention.
Inhalation	Remove from exposure, lie down. Move to fresh air. Obtain medical attention.
Ingestion	Clean mouth with water. Get medical attention.
Most important symptoms/effects	No information available.
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Water spray. Carbon dioxide (CO ₂). Dry chemical. chemical foam.
Unsuitable Extinguishing Media	No information available
Flash Point	151 °C / 303.8 °F
Method -	No information available
Autoignition Temperature	Not applicable
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Dust can form an explosive mixture in air. Do not allow run-off from fire fighting to enter drains or water courses.

Hazardous Combustion Products

None known

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
0

Flammability
1

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment.
Environmental Precautions	Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained.
Methods for Containment and Clean Up	Sweep up or vacuum up spillage and collect in suitable container for disposal. Do not let this chemical enter the environment.

7. Handling and storage

Handling	Avoid contact with skin and eyes. Do not breathe dust. Do not ingest.
Storage	Keep in a dry, cool and well-ventilated place. Keep container tightly closed.

8. Exposure controls / personal protection

Exposure Guidelines	This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.
----------------------------	---

Engineering Measures	Ensure adequate ventilation, especially in confined areas.
-----------------------------	--

Personal Protective Equipment

Eye/face Protection	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
Skin and body protection	Wear appropriate protective gloves and clothing to prevent skin exposure.
Respiratory Protection	No protective equipment is needed under normal use conditions.
Hygiene Measures	Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder Solid
Appearance	Beige
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	112 - 116 °C / 233.6 - 240.8 °F
Boiling Point/Range	298 °C / 568.4 °F @ 760 mmHg
Flash Point	151 °C / 303.8 °F
Evaporation Rate	Not applicable
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	13 hPa @ 146 °C
Vapor Density	Not applicable
Relative Density	1.200
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	Not applicable
Decomposition Temperature	No information available
Viscosity	Not applicable
Molecular Formula	C13 H10
Molecular Weight	166.22

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	None under normal use conditions
Hazardous Polymerization	No information available.
Hazardous Reactions	None under normal processing.

11. Toxicological information**Acute Toxicity**

Product Information	No acute toxicity information is available for this product
Component Information	

Toxicologically Synergistic Products No information available
Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Fluorene	86-73-7	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Persistence and Degradability Insoluble in water May persist

Bioaccumulation/ Accumulation No information available.

Mobility . Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Fluorene	4.18

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT Not regulated

TDG Not regulated

IATA

UN-No 3077

Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.*

Hazard Class 9

Packing Group III

IMDG/IMO

UN-No 3077
Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.
Hazard Class 9
Packing Group III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Fluorene	X	X	-	201-695-5	-		X	X	X	X	-

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazardous Categorization

Acute Health Hazard	No
Chronic Health Hazard	No
Fire Hazard	Yes
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Fluorene	-	-	X	X

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Fluorene	5000 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Fluorene	X	X	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class B4 Flammable solid

**16. Other information**

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Revision Date 10-Feb-2015

Print Date 10-Feb-2015

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088
EU/CLP GHS

Synonyms: #2 Heating Oil; 2 Oil; Off-road Diesel Fuel

*** Section 1 - Product and Company Identification ***

Manufacturer Information

Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

Phone: 732-750-6000 Corporate EHS
Emergency # 800-424-9300 CHEMTREC
www.hess.com (Environment, Health, Safety Internet Website)

*** Section 2 - Hazards Identification ***

GHS Classification:

Flammable Liquids - Category 3
Acute Toxicity, Inhalation - Category 4
Skin Corrosion/Irritation – Category 2
Eye Damage/Irritation – Category 2
Carcinogenicity - Category 2
Specific Target Organ Toxicity (Single Exposure) – Category 3 (respiratory irritation, narcosis)
Aspiration Hazard – Category 1
Hazardous to the Aquatic Environment, Acute Hazard – Category 3

GHS LABEL ELEMENTS

Symbol(s)



Signal Word

DANGER

Hazard Statements

Flammable liquid and vapor.
Harmful if inhaled.
Causes skin irritation.
Causes eye irritation.
Suspected of causing cancer.
Suspected of causing genetic defects.
May cause respiratory irritation.
May cause drowsiness or dizziness.
May be fatal if swallowed and enters airways.
Harmful to aquatic life.

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

Precautionary Statements

Prevention

Keep away from heat/sparks/open flames/hot surfaces. No smoking
Keep container tightly closed.
Ground/bond container and receiving equipment.
Use explosion-proof electrical/ventilating/lighting/equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.
Wear protective gloves/protective clothing/eye protection/face protection.
Avoid breathing fume/mist/vapors/spray.
Use only outdoors or in a well-ventilated area.
Wash hands and forearms thoroughly after handling.
Obtain special instructions before use.
Do not handle until all safety precautions have been read and understood.
Avoid release to the environment.

Response

In case of fire: Use water spray, fog or foam.
If on skin (or hair): Wash with plenty of soap and water. Take off immediately all contaminated clothing and wash it before reuse. If skin irritation occurs, get medical advice/attention.
If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center or doctor if you feel unwell.
If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.
If exposed or concerned: Get medical advice/attention.
If swallowed: Immediately call a poison center or doctor/physician if you feel unwell. Do NOT induce vomiting.

Storage

Store in a well ventilated place.
Keep cool. Keep container tightly closed.
Store locked up.

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

* * * Section 3 - Composition / Information on Ingredients * * *

CAS #	Component	Percent
68476-30-2	Fuel oil No. 2	100
91-20-3	Naphthalene	<0.1

A complex combination of hydrocarbons with carbon numbers in the range C9 and higher produced from the distillation of petroleum crude oil.

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

*** Section 4 - First Aid Measures ***

First Aid: Eyes

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

First Aid: Skin

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or with waterless hand cleanser. Obtain medical attention if irritation or redness develops.

First Aid: Ingestion

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Monitor for breathing difficulties. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

First Aid: Inhalation

Remove person to fresh air. If person is not breathing, provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

*** Section 5 - Fire Fighting Measures ***

General Fire Hazards

See Section 9 for Flammability Properties.

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

Hazardous Combustion Products

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke).

Extinguishing Media

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO2, water spray, fire fighting foam, or gaseous extinguishing agent.

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

Unsuitable Extinguishing Media

None

Fire Fighting Equipment/Instructions

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment. Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing. Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

*** Section 6 - Accidental Release Measures ***

Recovery and Neutralization

Carefully contain and stop the source of the spill, if safe to do so.

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

Materials and Methods for Clean-Up

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal.

Emergency Measures

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact.

Personal Precautions and Protective Equipment

Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

Environmental Precautions

Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection.

Prevention of Secondary Hazards

None

*** Section 7 - Handling and Storage ***

Handling Procedures

Handle as a combustible liquid. Keep away from heat, sparks, excessive temperatures and open flame! No smoking or open flame in storage, use or handling areas. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when this product is loaded into tanks previously containing low flash point products (such as gasoline) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents."

Storage Procedures

Keep containers closed and clearly labeled. Use approved vented storage containers. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks."

Incompatibilities

Keep away from strong oxidizers; Fluorel ®

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

*** Section 8 - Exposure Controls / Personal Protection ***

Component Exposure Limits

Fuel oil No. 2 (270-671-4)

- ACGIH: 100 mg/m³ TWA (inhalable fraction and vapor, as total hydrocarbons, listed under Diesel fuel)
Skin - potential significant contribution to overall exposure by the cutaneous route (listed under Diesel fuel)
- Belgium: 100 mg/m³ TWA (as total hydrocarbon, aerosol and vapor)
Skin (listed under Gas oil)
- Portugal: 100 mg/m³ TWA [VLE-MP] (aerosol and vapor, as total Hydrocarbons, listed under Fuel diesel)

Naphthalene (202-049-5)

- ACGIH: 15 ppm STEL
10 ppm TWA
Skin - potential significant contribution to overall exposure by the cutaneous route
- Austria: 10 ppm TWA [TMW]; 50 mg/m³ TWA [TMW]
skin notation
- Belgium: 15 ppm STEL; 80 mg/m³ STEL
10 ppm TWA; 53 mg/m³ TWA
Skin
- Denmark: 10 ppm TWA; 50 mg/m³ TWA
- Finland: 2 ppm STEL; 10 mg/m³ STEL
1 ppm TWA; 5 mg/m³ TWA
- France: 10 ppm TWA [VME]; 50 mg/m³ TWA [VME]
- Germany: 0.1 ppm TWA AGW (The risk of damage to the embryo or fetus can be excluded when MAK and BAT values are observed, inhalable fraction, exposure factor 1); 0.5 mg/m³ TWA AGW (The risk of damage to the embryo or fetus can be excluded when MAK and BAT values are observed, inhalable fraction, exposure factor 1)
- Greece: 10 ppm TWA; 50 mg/m³ TWA
- Ireland: 15 ppm STEL; 75 mg/m³ STEL
10 ppm TWA; 50 mg/m³ TWA
- Netherlands: 80 mg/m³ STEL
50 mg/m³ TWA
- Portugal: 10 ppm TWA [VLE-MP]
- Spain: 15 ppm STEL [VLA-EC]; 80 mg/m³ STEL [VLA-EC]
10 ppm TWA [VLA-ED]; 53 mg/m³ TWA [VLA-ED]
skin - potential for cutaneous exposure
- Sweden: 10 ppm LLV; 50 mg/m³ LLV
15 ppm STV; 80 mg/m³ STV

Engineering Measures

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

Personal Protective Equipment: Respiratory

A NIOSH/MSHA-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited.

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

Personal Protective Equipment: Hands

Gloves constructed of nitrile, neoprene, or PVC are recommended.

Personal Protective Equipment: Eyes

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

Personal Protective Equipment: Skin and Body

Chemical protective clothing such as of E.I. DuPont TyChem®, Saranex® or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

*** Section 9 - Physical & Chemical Properties ***

Appearance: Red or reddish/orange colored (dyed)

Odor: Mild, petroleum distillate odor

Physical State: Liquid

pH: ND

Vapor Pressure: 0.009 psia @ 70 °F (21 °C)

Vapor Density: >1.0

Boiling Point: 340 to 700 °F (171 to 371 °C)

Melting Point: ND

Solubility (H2O): Negligible

Specific Gravity: AP 0.823-0871

Evaporation Rate: Slow; varies with conditions

VOC: ND

Octanol/H2O Coeff.: ND

Flash Point: 100 °F (38 °C) minimum

Flash Point Method: PMCC

Upper Flammability Limit 7.5

(UFL):

Lower Flammability Limit 0.6

Burning Rate: ND

(LFL):

Auto Ignition: 494°F (257°C)

*** Section 10 - Chemical Stability & Reactivity Information ***

Chemical Stability

This is a stable material.

Hazardous Reaction Potential

Will not occur.

Conditions to Avoid

Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources.

Incompatible Products

Keep away from strong oxidizers; Fluorel®

Hazardous Decomposition Products

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke).

*** Section 11 - Toxicological Information ***

Acute Toxicity

A: General Product Information

Harmful if swallowed.

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

B: Component Analysis - LD50/LC50

Fuel oil No. 2 (68476-30-2)

Oral LD50 Rat 12 g/kg; Dermal LD50 Rabbit 4720 µL/kg; Dermal LD50 Rabbit >2000 mg/kg; Inhalation LC50 Rat 4.6 mg/L 4 h

Naphthalene (91-20-3)

Inhalation LC50 Rat >340 mg/m³ 1 h; Oral LD50 Rat 490 mg/kg; Dermal LD50 Rat >2500 mg/kg; Dermal LD50 Rabbit >20 g/kg

Product Mixture

Oral LD50 Rat 14.5 ml/kg; Dermal LD50 Rabbit >5 mL/kg; Guinea Pig Sensitization: negative; Primary dermal irritation: moderately irritating (Draize mean irritation score - 3.98 rabbits); Draize eye irritation: mildly irritating (Draize score, 48 hours, unwashed - 2.0 rabbits)

Potential Health Effects: Skin Corrosion Property/Stimulativeness

Practically non-toxic if absorbed following acute (single) exposure. May cause skin irritation with prolonged or repeated contact. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are repeatedly exposed.

Potential Health Effects: Eye Critical Damage/ Stimulativeness

Contact with eyes may cause mild irritation.

Potential Health Effects: Ingestion

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.

Potential Health Effects: Inhalation

Excessive exposure may cause irritations to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

WARNING: the burning of any hydrocarbon as a fuel in an area without adequate ventilation may result in hazardous levels of combustion products, including carbon monoxide, and inadequate oxygen levels, which may cause unconsciousness, suffocation, and death.

Respiratory Organs Sensitization/Skin Sensitization

This product is not reported to have any skin sensitization effects.

Generative Cell Mutagenicity

This product is not reported to have any mutagenic effects. Material of similar composition has been positive in a mutagenicity study.

Carcinogenicity

A: General Product Information

Suspected of causing cancer.

Dermal carcinogenicity: positive - mice

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

Studies have shown that similar products produce skin tumors in laboratory animals following repeated applications without washing or removal. The significance of this finding to human exposure has not been determined. Other studies with active skin carcinogens have shown that washing the animal's skin with soap and water between applications reduced tumor formation.

This product is similar to Diesel Fuel. IARC classifies whole diesel fuel exhaust particulates as probably carcinogenic to humans (Group 2A) and NIOSH regards it as a potential cause of occupational lung cancer based on animal studies and limited evidence in humans.

B: Component Carcinogenicity

Fuel oil No. 2 (68476-30-2)

ACGIH: A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans (listed under Diesel fuel)

Naphthalene (91-20-3)

ACGIH: A4 - Not Classifiable as a Human Carcinogen

NTP: Reasonably Anticipated To Be A Human Carcinogen (Possible Select Carcinogen)

IARC: Monograph 82 [2002] (Group 2B (possibly carcinogenic to humans))

Reproductive Toxicity

This product is not reported to have any reproductive toxicity effects.

Specified Target Organ General Toxicity: Single Exposure

This product is not reported to have any specific target organ general toxicity single exposure effects.

Specified Target Organ General Toxicity: Repeated Exposure

This product is not reported to have any specific target organ general toxicity repeat exposure effects.

Aspiration Respiratory Organs Hazard

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

* * * Section 12 - Ecological Information * * *

Ecotoxicity

A: General Product Information

Very toxic to aquatic life with long lasting effects. Keep out of sewers, drainage areas and waterways. Report spills and releases, as applicable, under Federal and State regulations.

B: Component Analysis - Ecotoxicity - Aquatic Toxicity

Fuel oil No. 2 (68476-30-2)

Test & Species

96 Hr LC50 Pimephales promelas

35 mg/L [flow-through]

Conditions

Naphthalene (91-20-3)

Test & Species

96 Hr LC50 Pimephales promelas

5.74-6.44 mg/L [flow-through]

Conditions

96 Hr LC50 Oncorhynchus mykiss

1.6 mg/L [flow-through]

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

96 Hr LC50 Oncorhynchus mykiss	0.91-2.82 mg/L [static]
96 Hr LC50 Pimephales promelas	1.99 mg/L [static]
96 Hr LC50 Lepomis macrochirus	31.0265 mg/L [static]
72 Hr EC50 Skeletonema costatum	0.4 mg/L
48 Hr LC50 Daphnia magna	2.16 mg/L
48 Hr EC50 Daphnia magna	1.96 mg/L [Flow through]
48 Hr EC50 Daphnia magna	1.09 - 3.4 mg/L [Static]

Persistence/Degradability

No information available.

Bioaccumulation

No information available.

Mobility in Soil

No information available.

*** Section 13 - Disposal Considerations ***

Waste Disposal Instructions

See Section 7 for Handling Procedures. See Section 8 for Personal Protective Equipment recommendations.

Disposal of Contaminated Containers or Packaging

Dispose of contents/container in accordance with local/regional/national/international regulations.

*** Section 14 - Transportation Information ***

IATA Information

Shipping Name: Heating oil, light

UN #: 1202 **Hazard Class:** 3 **Packing Group:** III

ICAO Information

Shipping Name: Heating oil, light

UN #: 1202 **Hazard Class:** 3 **Packing Group:** III

IMDG Information

Shipping Name: Heating oil, light

UN #: 1202 **Hazard Class:** 3 **Packing Group:** III

Safety Data Sheet

Material Name: Fuel Oil No. 2

SDS No. 0088

*** Section 15 - Regulatory Information ***

Regulatory Information

Component Analysis – Inventory

Component/CAS	EC #	EEC	CAN	TSCA
Fuel oil No. 2 68476-30-2	270-671-4	EINECS	DSL	Yes
Naphthalene 91-20-3	202-049-5	EINECS	DSL	Yes

*** Section 16 - Other Information ***

Key/Legend

ACGIH = American Conference of Governmental Industrial Hygienists; ADG = Australian Code for the Transport of Dangerous Goods by Road and Rail; ADR/RID = European Agreement of Dangerous Goods by Road/Rail; AS = Standards Australia; DFG = Deutsche Forschungsgemeinschaft; DOT = Department of Transportation; DSL = Domestic Substances List; EEC = European Economic Community; EINECS = European Inventory of Existing Commercial Chemical Substances; ELINCS = European List of Notified Chemical Substances; EU = European Union; HMIS = Hazardous Materials Identification System; IARC = International Agency for Research on Cancer; IMO = International Maritime Organization; IATA = International Air Transport Association; MAK = Maximum Concentration Value in the Workplace; NDSL = Non-Domestic Substances List; NFPA = National Fire Protection Association; NOHSC = National Occupational Health & Safety Commission; NTP = National Toxicology Program; STEL = Short-term Exposure Limit; TDG = Transportation of Dangerous Goods; TLV = Threshold Limit Value; TSCA = Toxic Substances Control Act; TWA = Time Weighted Average

Literature References

None

Other Information

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.

End of Sheet

SAFETY DATA SHEET

according to Regulation (EC) No. 1907/2006

Version 6.2

Revision Date 23.06.2020

Print Date 19.06.2021

GENERIC EU MSDS - NO COUNTRY SPECIFIC DATA - NO OEL DATA

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifiers

Product name : trans-Chlordane

Product Number : ERC-004

Brand : Cerilliant

REACH No. : A registration number is not available for this substance as the substance or its uses are exempted from registration, the annual tonnage does not require a registration or the registration is envisaged for a later registration deadline.

CAS-No. : 5103-74-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 SPRUCE ST
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-527-3887 CHEMTREC (International) 24 Hours/day; 7 Days/week

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

Classification according to Regulation (EC) No 1272/2008

Acute toxicity, Oral (Category 3), H301
Acute toxicity, Inhalation (Category 4), H332
Carcinogenicity (Category 2), H351
Short-term (acute) aquatic hazard (Category 1), H400
Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 Label elements

Labelling according Regulation (EC) No 1272/2008



Pictogram



Signal word

Danger

Hazard statement(s)

H301 Toxic if swallowed.
H332 Harmful if inhaled.
H351 Suspected of causing cancer.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.
P273 Avoid release to the environment.
P301 + P310 + P330 IF SWALLOWED: Immediately call a POISON CENTER/ doctor. Rinse mouth.
P304 + P340 + P312 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/ doctor if you feel unwell.

Supplemental Hazard Statements

none

2.3 Other hazards

This substance/mixture contains no components considered to be either persistent, bioaccumulative and toxic (PBT), or very persistent and very bioaccumulative (vPvB) at levels of 0.1% or higher.

SECTION 3: Composition/information on ingredients

3.1 Substances

Molecular weight : 409,78 g/mol
CAS-No. : 5103-74-2
EC-No. : 225-826-0

Component	Classification	Concentration
trans-Chlordane	Acute Tox. 3; Acute Tox. 4; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H301, H332, H351, H400, H410 M-Factor - Aquatic Acute: 10	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Consult a physician. Show this material safety data sheet to the doctor in attendance.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.



In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

SECTION 6: Accidental release measures**6.1 Personal precautions, protective equipment and emergency procedures**

Wear respiratory protection. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust. For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Provide appropriate exhaust ventilation at places where dust is formed. For precautions see section 2.2.



7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Store in cool place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

The selected protective gloves have to satisfy the specifications of Regulation (EU) 2016/425 and the standard EN 374 derived from it.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

- | | |
|---------------|-----------------------------------|
| a) Appearance | Form: crystalline
Color: white |
| b) Odor | odorless |



c) Odor Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	No data available
f) Initial boiling point and boiling range	No data available
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapor pressure	No data available
l) Vapor density	No data available
m) Relative density	1,590 g/cm ³
n) Water solubility	insoluble
o) Partition coefficient: n-octanol/water	No data available
p) Autoignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available



Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 200 mg/kg

LD50 Oral - Mouse - 145 mg/kg

Inhalation: (Regulation (EC) No 1272/2008, Annex VI)

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

Carcinogenicity

Suspected of causing cancer.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (trans-Chlordane)

Reproductive toxicity

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish

LC50 - Oncorhynchus mykiss (rainbow trout) - 0,044 mg/l - 96,0 h
Remarks: (in analogy to similar products)

LOEC - Pimephales promelas (fathead minnow) - 0,025 mg/l - 48,0 h

Remarks: (in analogy to similar products)



Toxicity to daphnia and other aquatic invertebrates	LOEC - Daphnia magna (Water flea) - 0,07 mg/l - 48 h Remarks: (in analogy to similar products)
	LC50 - Daphnia magna (Water flea) - 0,0984 mg/l - 48 h Remarks: (in analogy to similar products)

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

This substance/mixture contains no components considered to be either persistent, bioaccumulative and toxic (PBT), or very persistent and very bioaccumulative (vPvB) at levels of 0.1% or higher.

12.6 Other adverse effects

Very toxic to aquatic life with long lasting effects.
No data available

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber. Waste material must be disposed of in accordance with the Directive on waste 2008/98/EC as well as other national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself.

Contaminated packaging

Dispose of as unused product.

SECTION 14: Transport information

14.1 UN number

ADR/RID: 3077

IMDG: 3077

IATA: 3077

14.2 UN proper shipping name

ADR/RID: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (trans-Chlordane)

IMDG: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (trans-Chlordane)

IATA: Environmentally hazardous substance, solid, n.o.s. (trans-Chlordane)

14.3 Transport hazard class(es)

ADR/RID: 9

IMDG: 9

IATA: 9

14.4 Packaging group

ADR/RID: III

IMDG: III

IATA: III

14.5 Environmental hazards

ADR/RID: yes

IMDG Marine pollutant: yes

IATA: yes



14.6 Special precautions for user

No data available

SECTION 15: Regulatory information

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

This material safety data sheet complies with the requirements of Regulation (EC) No. 1907/2006.

15.2 Chemical Safety Assessment

For this product a chemical safety assessment was not carried out

SECTION 16: Other information

Full text of H-Statements referred to under sections 2 and 3.

H301	Toxic if swallowed.
H332	Harmful if inhaled.
H351	Suspected of causing cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

Further information

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.





SAFETY DATA SHEET

SDS ID NO.: 0127MAR019
Revision Date: 06/01/2016

1. IDENTIFICATION

Product Name: Marathon Petroleum Gasoline - All Grades

Synonym: Gasoline; Regular Unleaded Gasoline; Conventional Regular Unleaded Gasoline; Mid Grade Unleaded Gasoline; Conventional Mid Grade Unleaded Gasoline; Premium Unleaded Gasoline; Conventional Premium Unleaded Gasoline; Sub-Octane Gasoline; Regular RBOB; Super RBOB; Premium RBOB; RBOB; Reformulated Blend Stock For Oxygenated Blending; 84 Octane Gasoline; CBOB; Premium CBOB; Conventional Blend Stock for Oxygenate Blending; Recreational Gasoline; Recreational Gasoline; Recreational Unleaded Gasoline; 89 Recreational Gasoline; Brand 89 Recreational Gasoline; 7.0 Max RVP 89 Recreational Gasoline; BR 7.0 Max RVP 89 Recreational Gasoline; 90 Recreational Gasoline; 90 Marina Gasoline; Brand 91 Recreational Gasoline; 91 Recreational Gasoline; 91 Marina Gasoline; 90 Octane Midgrade Gasoline with No Ethanol; 0125MAR019; 0126MAR019; 0134MAR019; 0313MAR019; 0314MAR019

Chemical Family: Complex Hydrocarbon Substance

Recommended Use: Fuel.

Restrictions on Use: All others.

Manufacturer, Importer, or Responsible Party Name and Address:
MARATHON PETROLEUM COMPANY LP
539 South Main Street
Findlay, OH 45840

SDS information: 1-419-421-3070

Emergency Telephone: 1-877-627-5463

2. HAZARD IDENTIFICATION

Classification

OSHA Regulatory Status

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids	Category 1
Skin corrosion/irritation	Category 2
Germ cell mutagenicity	Category 1B
Carcinogenicity	Category 1B
Reproductive toxicity	Category 2
Specific target organ toxicity (single exposure)	Category 3
Aspiration toxicity	Category 1
Acute aquatic toxicity	Category 2
Chronic aquatic toxicity	Category 2

Hazards Not Otherwise Classified (HNOC)

Static accumulating flammable liquid

Label elements

EMERGENCY OVERVIEW

Danger

EXTREMELY FLAMMABLE LIQUID AND VAPOR

May accumulate electrostatic charge and ignite or explode

May be fatal if swallowed and enters airways

Causes skin irritation

May cause respiratory irritation

May cause drowsiness or dizziness

May cause genetic defects

May cause cancer

Suspected of damaging fertility or the unborn child

Toxic to aquatic life with long lasting effects



Appearance Clear yellow liquid

Physical State Liquid

Odor Hydrocarbon

Precautionary Statements - Prevention

Obtain special instructions before use

Do not handle until all safety precautions have been read and understood

Keep away from heat/sparks/open flames/hot surfaces. - No smoking

Keep container tightly closed

Ground/bond container and receiving equipment

Use explosion-proof electrical/ventilating/lighting/equipment

Use only non-sparking tools.

Take precautionary measures against static discharge

Avoid breathing mist/vapors/spray

Use only outdoors or in a well-ventilated area

Wear protective gloves/protective clothing/eye protection/face protection

Wash hands and any possibly exposed skin thoroughly after handling

Avoid release to the environment

Precautionary Statements - Response

IF exposed or concerned: Get medical attention

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

If skin irritation occurs: Get medical attention

Wash contaminated clothing before reuse

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Call a POISON CENTER or doctor if you feel unwell

IF SWALLOWED: Immediately call a POISON CENTER or doctor

Do NOT induce vomiting

In case of fire: Use water spray, fog or regular foam for extinction

Collect spillage

Precautionary Statements - Storage

Store in a well-ventilated place. Keep container tightly closed

Keep cool

Store locked up

Precautionary Statements - Disposal

Dispose of contents/container at an approved waste disposal plant

3. COMPOSITION/INFORMATION ON INGREDIENTS

Gasoline is a complex combination of hydrocarbons consisting of paraffins, cycloparaffins, aromatic and olefinic hydrocarbons having molecular chains ranging in length from four to ten carbons. May contain small amounts of dye and other additives (>0.02%) which are not considered hazardous at the concentrations used.

Composition Information:

Name	CAS Number	% Concentration
Gasoline	86290-81-5	100
Heptane (mixed isomers)	142-82-5	2.5-26
Pentane (mixed isomers)	78-78-4	6.5-19
Butane (mixed isomers)	106-97-8	0.5-14
Hexane Isomers (other than n-Hexane)	107-83-5	2-12
Toluene	108-88-3	3-9.5
Xylene (mixed isomers)	1330-20-7	3.5-9.5
n-Hexane	110-54-3	0.1-4.5
Cumene	98-82-8	0-4
1,2,4 Trimethylbenzene	95-63-6	1-4
Ethylbenzene	100-41-4	0.5-2.5
Benzene	71-43-2	0.1-1.5
Cyclohexane	110-82-7	0-1.5
Octane	111-65-9	0-1.5
1,2,3-trimethylbenzene	526-73-8	0-1
Naphthalene	91-20-3	0.1-0.5

All concentrations are percent by weight unless material is a gas. Gas concentrations are in percent by volume.

4. FIRST AID MEASURES**First Aid Measures****General Advice:**

In case of accident or if you feel unwell, seek medical advice immediately (show directions for use or safety data sheet if possible).

Inhalation:

Remove to fresh air. If not breathing, institute rescue breathing. If breathing is difficult, ensure airway is clear, give oxygen and continue to monitor. If heart has stopped, immediately begin cardiopulmonary resuscitation (CPR). Keep affected person warm and at rest. If symptoms occur get medical attention.

Skin Contact:

Immediately wash exposed skin with plenty of soap and water while removing contaminated clothing and shoes. May be absorbed through the skin in harmful amounts. Get medical attention if irritation persists. Any injection injury from high pressure equipment should be evaluated immediately by a physician as potentially serious (See NOTES TO PHYSICIAN).

Place contaminated clothing in closed container until cleaned or discarded. If clothing is to be laundered, inform the person performing the operation of contaminant's hazardous properties. Destroy contaminated, non-chemical resistant footwear.

Eye Contact:

Flush immediately with large amounts of water for at least 15 minutes. Eyelids should be held away from the eyeball to ensure thorough rinsing. Gently remove contacts while flushing. Get medical attention if irritation persists.

Ingestion: Do not induce vomiting because of danger of aspirating liquid into lungs, causing serious damage and chemical pneumonitis. If spontaneous vomiting occurs, keep head below hips, or if patient is lying down, turn body and head to side to prevent aspiration and monitor for breathing difficulty. Never give anything by mouth to an unconscious person. Keep affected person warm and at rest. GET IMMEDIATE MEDICAL ATTENTION.

Most important signs and symptoms, both short-term and delayed with overexposure

Adverse Effects: Irritating to the skin and mucous membranes. Symptoms may include redness, itching, and inflammation. May cause nausea, vomiting, diarrhea, and signs of nervous system depression: headache, drowsiness, dizziness, loss of coordination, disorientation and fatigue. Aspiration hazard. May cause coughing, chest pains, shortness of breath, pulmonary edema and/or chemical pneumonitis. Repeated or prolonged skin contact may cause drying, reddening, itching and cracking.

Indication of any immediate medical attention and special treatment needed

Notes To Physician:

INHALATION: This material (or a component) sensitizes the myocardium to the effects of sympathomimetic amines. Epinephrine and other sympathomimetic drugs may initiate cardiac arrhythmias in individuals exposed to this material. Administration of sympathomimetic drugs should be avoided.

SKIN: Leaks or accidents involving high-pressure equipment may inject a stream of material through the skin and initially produce an injury that may not appear serious. Only a small puncture wound may appear on the skin surface but, without proper treatment and depending on the nature, original pressure, volume, and location of the injected material, can compromise blood supply to an affected body part. Prompt surgical debridement of the wound may be necessary to prevent irreversible loss of function and/or the affected body part. High pressure injection injuries may be SERIOUS SURGICAL EMERGENCIES.

INGESTION: This material represents a significant aspiration and chemical pneumonitis hazard. Induction of emesis is not recommended.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

For small fires, Class B fire extinguishing media such as CO₂, dry chemical, foam (AFFF/ATC) or water spray can be used. For large fires, water spray, fog or foam (AFFF/ATC) can be used. Firefighting should be attempted only by those who are adequately trained and equipped with proper protective equipment.

Unsuitable extinguishing media

Do not use straight water streams to avoid spreading fire.

Specific hazards arising from the chemical

This product has been determined to be an extremely flammable liquid per the OSHA Hazard Communication Standard and should be handled accordingly. May accumulate electrostatic charge and ignite or explode. Vapors may travel along the ground or be moved by ventilation and ignited by many sources such as pilot lights, sparks, electric motors, static discharge, or other ignition sources at locations distant from material handling. Flashback can occur along vapor trail. For additional fire related information, see NFPA 30 or the Emergency Response Guidebook 128.

Hazardous combustion products

Smoke, carbon monoxide, and other products of incomplete combustion.

Explosion data

Sensitivity to Mechanical Impact No.

Sensitivity to Static Discharge Yes.

Special protective equipment and precautions for firefighters

Firefighters should wear full protective clothing and positive-pressure self-contained breathing apparatus (SCBA) with a full face-piece, as appropriate. Avoid using straight water streams. Water may be ineffective in extinguishing low flash point fires, but can be used to cool exposed surfaces. Avoid excessive water spray application. Water spray and foam (AFFF/ATC) must be applied carefully to avoid frothing and from as far a distance as possible. Keep run-off water out of sewers and water sources.

Additional firefighting tactics

FIRES INVOLVING TANKS OR CAR/TRAILER LOADS: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles. Cool containers with flooding quantities of water until well after the fire is out. Do not direct water at source of leak or safety devices; icing may occur. Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank. ALWAYS stay away from tanks engulfed in fire. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

EVACUATION: Consider initial downwind evacuation for at least 1000 feet. If tank, rail car or tank truck is involved in a fire, ISOLATE for 5280 feet (1 mile) in all directions; also, consider initial evacuation of 5280 feet (1 mile) in all directions.

NFPA Health 1 Flammability 3 Instability 0 Special Hazard -

6. ACCIDENTAL RELEASE MEASURES

Personal precautions:	Keep public away. Isolate and evacuate area. Shut off source if safe to do so. Eliminate all ignition sources.
Protective equipment:	Use personal protection measures as recommended in Section 8.
Emergency procedures:	Advise authorities and National Response Center (800-424-8802) if the product has entered a water course or sewer. Notify local health and pollution control agencies, if appropriate.
Environmental precautions:	Avoid release to the environment. Avoid subsoil penetration. Ethanol in gasoline phase separates in contact with water. Monitor downstream for dissolved ethanol or other appropriate indicators.
Methods and materials for containment:	Contain liquid with sand or soil. Prevent spilled material from entering storm drains, sewers, and open waterways.
Methods and materials for cleaning up:	Use suitable absorbent materials such as vermiculite, sand, or clay to clean up residual liquids. Recover and return free product to proper containers. When recovering free liquids ensure all equipment is grounded and bonded. Use only non-sparking tools.

7. HANDLING AND STORAGE

Safe Handling Precautions:

NEVER SIPHON THIS PRODUCT BY MOUTH. Use appropriate grounding and bonding practices. Static accumulating flammable liquid. Bonding and grounding may be insufficient to eliminate the hazard from static electricity. Do not expose to heat, open flames, strong oxidizers or other sources of ignition. Vapors may travel along the ground or be moved by ventilation. Flashback may occur along vapor trails. No smoking. Use only non-sparking tools. Avoid contact with skin, eyes and clothing. Avoid breathing fumes, gas, or vapors. Use only with adequate ventilation. Avoid repeated and prolonged skin contact. Use personal protection measures as recommended in Section 8. Exercise good personal hygiene including removal of soiled clothing and prompt washing with soap and water. Do not cut, drill, grind or weld on empty containers since explosive residues may remain. Refer to applicable EPA, OSHA, NFPA and consistent state and local requirements.

Hydrocarbons are basically non-conductors of electricity and can become electrostatically charged during mixing, filtering, pumping at high flow rates or loading and transfer operations. If this charge reaches a sufficiently high level, sparks can form that may ignite the vapors of flammable liquids. Sudden release of hot organic chemical vapors or mists from process equipment operating under elevated temperature and pressure, or sudden ingress of air into vacuum equipment may result in ignition of vapors or mists without the presence of obvious ignition sources. Nozzle spouts must be kept in contact with the containers or tank during the entire filling operation.

Portable containers should never be filled while in or on a motor vehicle or marine craft. Containers should be placed on the ground. Static electric discharge can ignite fuel vapors when filling non-grounded containers or vehicles on trailers. The nozzle spout must be kept in contact with the container before and during the entire filling operation. Use only approved containers.

A buildup of static electricity can occur upon re-entry into a vehicle during fueling especially in cold or dry climate conditions. The charge is generated by the action of dissimilar fabrics (i.e., clothing and upholstery) rubbing across each other as a person enters/exits the vehicle. A flash fire can result from this discharge if sufficient flammable vapors are present. Therefore, do not get back in your vehicle while refueling.

Cellular phones and other electronic devices may have the potential to emit electrical charges (sparks). Sparks in potentially explosive atmospheres (including fueling areas such as gas stations) could cause an explosion if sufficient flammable vapors are present. Therefore, turn off cellular phones and other electronic devices when working in potentially explosive atmospheres or keep devices inside your vehicle during refueling.

High-pressure injection of any material through the skin is a serious medical emergency even though the small entrance wound at the injection site may not initially appear serious. These injection injuries can occur from high-pressure equipment such as paint spray or grease or guns, fuel injectors, or pinhole leaks in hoses or hydraulic lines and should all be considered serious. High pressure injection injuries may be SERIOUS SURGICAL EMERGENCIES (See First Aid Section 4).

Storage Conditions:

Store in properly closed containers that are appropriately labeled and in a cool, well-ventilated area. Do not store near an open flame, heat or other sources of ignition.

Incompatible Materials

Strong oxidizing agents.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Name	ACGIH TLV	OSHA PELs:	OSHA - Vacated PELs	NIOSH IDLH
Gasoline 86290-81-5	300 ppm TWA 500 ppm STEL	-	300 ppm TWA 900 mg/m ³ TWA 500 ppm STEL 1500 mg/m ³ STEL	-

Heptane (mixed isomers) 142-82-5	400 ppm TWA 500 ppm STEL	TWA: 500 ppm TWA: 2000 mg/m ³	400 ppm TWA 1600 mg/m ³ TWA 500 ppm STEL 2000 mg/m ³ STEL	750 ppm
Pentane (mixed isomers) 78-78-4	1000 ppm TWA	-	-	-
Butane (mixed isomers) 106-97-8	1000 ppm STEL	-	800 ppm TWA 1900 mg/m ³ TWA	-
Hexane Isomers (other than n-Hexane) 107-83-5	500 ppm TWA 1000 ppm STEL	-	500 ppm TWA 1800 mg/m ³ TWA 1000 ppm STEL 3600 mg/m ³ STEL	-
Toluene 108-88-3	20 ppm TWA	TWA: 200 ppm Ceiling: 300 ppm	100 ppm TWA 375 mg/m ³ TWA 150 ppm STEL 560 mg/m ³ STEL	500 ppm
Xylene (mixed isomers) 1330-20-7	100 ppm TWA 150 ppm STEL	TWA: 100 ppm TWA: 435 mg/m ³	100 ppm TWA 435 mg/m ³ TWA 150 ppm STEL 655 mg/m ³ STEL	900 ppm
n-Hexane 110-54-3	50 ppm TWA Skin - potential significant contribution to overall exposure by the cutaneous route	TWA: 500 ppm TWA: 1800 mg/m ³	50 ppm TWA 180 mg/m ³ TWA	1100 ppm
Cumene 98-82-8	50 ppm TWA	TWA: 50 ppm TWA: 245 mg/m ³ Skin	50 ppm TWA 245 mg/m ³ TWA Limit applies to skin	900 ppm
1,2,4 Trimethylbenzene 95-63-6	25 ppm TWA	-	25 ppm TWA 125 mg/m ³ TWA	-
Ethylbenzene 100-41-4	20 ppm TWA	TWA: 100 ppm TWA: 435 mg/m ³	100 ppm TWA 435 mg/m ³ TWA 125 ppm STEL 545 mg/m ³ STEL	800 ppm
Benzene 71-43-2	0.5 ppm TWA 2.5 ppm STEL Skin - potential significant contribution to overall exposure by the cutaneous route	TWA: 10 ppm (applies to industry segments exempt from the benzene standard) TWA: 1 ppm STEL: 5 ppm (see 29 CFR 1910.1028)	25 ppm Ceiling 1 ppm TWA 5 ppm STEL	500 ppm
Cyclohexane 110-82-7	100 ppm TWA	TWA: 300 ppm TWA: 1050 mg/m ³	300 ppm TWA 1050 mg/m ³ TWA	1300 ppm
Octane 111-65-9	300 ppm TWA	TWA: 500 ppm TWA: 2350 mg/m ³	300 ppm TWA 1450 mg/m ³ TWA 375 ppm STEL 1800 mg/m ³ STEL	1000 ppm
1,2,3-trimethylbenzene 526-73-8	25 ppm TWA	-	25 ppm TWA 125 mg/m ³ TWA	-
Naphthalene 91-20-3	10 ppm TWA Skin - potential significant contribution to overall exposure by the cutaneous route	TWA: 10 ppm TWA: 50 mg/m ³	10 ppm TWA 50 mg/m ³ TWA 15 ppm STEL 75 mg/m ³ STEL	250 ppm

Notes:

The manufacturer has voluntarily elected to provide exposure limits contained in OSHA's 1989 air contaminants standard in its SDSs, even though certain of those exposure limits were vacated in 1992.

Engineering measures:

Local or general exhaust required in an enclosed area or when there is inadequate ventilation. Use mechanical ventilation equipment that is explosion-proof.

Personal protective equipment

Eye protection:	Use goggles or face-shield if the potential for splashing exists.
Skin and body protection:	Use nitrile rubber, Viton® or PVA gloves for repeated or prolonged skin exposure. Glove suitability is based on workplace conditions and usage. Contact the glove manufacturer for specific advice on glove selection and breakthrough times.
Respiratory protection:	Use a NIOSH approved organic vapor chemical cartridge or supplied air respirators when there is the potential for airborne exposures to exceed permissible exposure limits or if excessive vapors are generated. Observe respirator assigned protection factors (APFs) criteria cited in federal OSHA 29 CFR 1910.134. Self-contained breathing apparatus should be used for fire fighting.
Hygiene measures:	Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes and clothing.

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

Physical State	Liquid
Appearance	Clear yellow liquid
Color	Yellow
Odor	Hydrocarbon
Odor Threshold	No data available.

<u>Property</u>	<u>Values (Method)</u>
Melting Point / Freezing Point	No data available.
Initial Boiling Point / Boiling Range	24-210 °C / 75-410 °F (ASTM D86)
Flash Point	-43 °C / -45 °F
Evaporation Rate	No data available.
Flammability (solid, gas)	Not applicable.
Flammability Limit in Air (%):	
Upper Flammability Limit:	7.6
Lower Flammability Limit:	1.4
Explosion limits:	No data available.
Vapor Pressure	5.5-15 psi (ASTM D4814)
Vapor Density	3-4
Specific Gravity / Relative Density	0.70-0.76
Water Solubility	No data available.
Solubility in other solvents	No data available.
Partition Coefficient	2.13-4.5
Decomposition temperature	No data available.
pH:	Not applicable
Autoignition Temperature	280 °C / 536 °F
Kinematic Viscosity	No data available.
Dynamic Viscosity	No data available.
Explosive Properties	No data available.
VOC Content (%)	100%
Density	No data available.
Bulk Density	Not applicable.

10. STABILITY AND REACTIVITY

<u>Reactivity</u>	The product is non-reactive under normal conditions.
<u>Chemical stability</u>	The material is stable at 70°F, 760 mmHg pressure.
<u>Possibility of hazardous reactions</u>	None under normal processing.
<u>Hazardous polymerization</u>	Will not occur.

Conditions to avoid

Excessive heat, sources of ignition, open flame.

Incompatible Materials

Strong oxidizing agents.

Hazardous decomposition products

None known under normal conditions of use.

11. TOXICOLOGICAL INFORMATION**Potential short-term adverse effects from overexposures**

Inhalation	May cause irritation of respiratory tract. May cause drowsiness or dizziness. Breathing high concentrations of this material in a confined space or by intentional abuse can cause irregular heartbeats which can cause death.
Eye contact	Exposure to vapor or contact with liquid may cause mild eye irritation, including tearing, stinging, and redness.
Skin contact	Causes skin irritation. Effects may become more serious with repeated or prolonged contact. May be absorbed through the skin in harmful amounts.
Ingestion	May be fatal if swallowed or vomited and enters airways. May cause irritation of the mouth, throat and gastrointestinal tract.

Acute toxicological data

Name	Oral LD50	Dermal LD50	Inhalation LC50
Gasoline 86290-81-5	14000 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	> 5.2 mg/L (Rat) 4 h
Heptane (mixed isomers) 142-82-5	-	3000 mg/kg (Rabbit)	103 g/m ³ (Rat) 4 h
Pentane (mixed isomers) 78-78-4	-	-	450 mg/L (Mouse) 2 h
Butane (mixed isomers) 106-97-8	-	-	658 mg/L (Rat) 4 h
Hexane Isomers (other than n-Hexane) 107-83-5	> 5000 mg/kg (Rat)	-	-
Toluene 108-88-3	> 2000 mg/kg (Rat)	8390 mg/kg (Rabbit)	12.5 mg/L (Rat) 4 h
Xylene (mixed isomers) 1330-20-7	> 2000 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	> 5.04 mg/L (Rat) 4 h
n-Hexane 110-54-3	15000 mg/kg (Rat)	3000 mg/kg (Rabbit)	48000 ppm (Rat) 4 h
Cumene 98-82-8	> 2000 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	> 20 mg/L (Rat) 6 h
1,2,4 Trimethylbenzene 95-63-6	3280 mg/kg (Rat)	> 3160 mg/kg (Rabbit)	18,000 mg/m ³ (Rat) 4 h
Ethylbenzene 100-41-4	> 2000 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	17.2 mg/L (Rat) 4 h
Benzene 71-43-2	> 2000 mg/kg (Rat)	> 5000 mg/kg (Rabbit)	> 20 mg/l (Rat) 4 h
Cyclohexane 110-82-7	> 5000 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	13.9 mg/L (Rat) 4 h
Octane 111-65-9	-	-	118 g/m ³ (Rat) 4 h
1,2,3-trimethylbenzene 526-73-8	-	-	-
Naphthalene 91-20-3	490 mg/kg (Rat)	> 2000 mg/kg (Rabbit)	> 340 mg/m ³ (Rat) 1 h

Delayed and immediate effects as well as chronic effects from short and long-term exposure

NAPHTHAS: In a large epidemiological study on over 15,000 employees at several petroleum refineries and amongst residents located near these refineries, no increased risk of kidney cancer was observed in association with gasoline exposures (a similar material). In a similar study, no increased risk of kidney cancer was observed among petroleum refinery workers, but there was a slight trend in the incidence of kidney cancers among service station employees, especially after a 30-year latency period. Altered mental state, drowsiness, peripheral motor neuropathy, irreversible brain damage (so-called Petrol Sniffer's Encephalopathy), delirium, seizures, and sudden death have been reported from repeated overexposure to some hydrocarbon solvents, naphthas, and gasoline.

ISOPARAFFINS: Studies in laboratory animals have shown that long-term exposure to similar materials (isoparaaffins) can cause kidney damage and kidney cancer in male laboratory rats. However, in-depth research indicates that these findings are unique to the male rat, and that these effects are not relevant to humans.

C9 AROMATIC HYDROCARBONS: A developmental inhalation study was conducted in laboratory mice. Increased implantation losses, reduced fetal weights, delayed ossification and an increased incidence of cleft palate were observed at the highest exposure level (1,500 ppm). This exposure level was extremely toxic to pregnant female mice (44% mortality). Reduced fetal body weights were also observed at 500 ppm. A multi-generation reproduction inhalation study was conducted in laboratory rats. Reductions in pup weights, pup weight gain, litter size, and pup survival were observed at 1,500 ppm, an exposure level at which significant maternal toxicity was observed. Reduced pup weight gain was also observed at 500 ppm.

PENTANES: Studies of pentane isomers in laboratory animals indicate exposure to extremely high levels (roughly 10 vol.%) may induce cardiac arrhythmias (irregular heartbeats) which may be serious or fatal.

BUTANES: Studies in laboratory animals indicate exposure to extremely high levels of butanes (1-10 or higher vol.% in air) may cause cardiac arrhythmias (irregular heartbeats) which may be serious or fatal.

TOLUENE: Case studies of persons abusing toluene suggest isolated incidences of adverse effects on the fetus including birth defects. Abuse of toluene at high concentrations (e.g., glue sniffing and solvent abuse) has been associated with adverse effects on the liver, kidney and nervous system, and can cause CNS depression, cardiac arrhythmias, and death. Studies of workers indicate longterm exposure may be related to impaired color vision and hearing. Some studies of workers suggest longterm exposure may be related to neurobehavioral and cognitive changes. Some of these effects have been observed in laboratory animals following repeated exposure to high levels of toluene. Several studies of workers suggest longterm exposure may be related to small increases in spontaneous abortions and changes in some gonadotropic hormones. However, the weight of evidence does not indicate toluene is a reproductive hazard to humans. Studies in laboratory animals indicate some changes in reproductive organs following high levels of exposure, but no significant effects on mating performance or reproduction were observed. Case studies of persons abusing toluene suggest isolated incidences of adverse effects on the fetus including birth defects. Findings in laboratory animals have been largely negative. Positive findings include small increases in minor skeletal and visceral malformations and developmental delays following very high levels of maternal exposure. Studies of workers indicate long-term exposure may be related to effects on the liver, kidney and blood, but these appear to be limited to changes in serum enzymes and decreased leukocyte counts. Adverse effects on the liver, kidney, thymus and nervous system were observed in animal studies following very high levels of exposure. The relevance of these findings to humans is not clear at this time.

XYLENES, ALL ISOMERS: Overexposure to xylene may cause upper respiratory tract irritation, headache, cyanosis, blood serum changes, nervous system damage and narcosis. Effects may be increased by the use of alcoholic beverages. Evidence of liver and kidney impairment were reported in workers recovering from a gross overexposure. Effects from Prolonged or Repeated Exposure: Impaired neurological function was reported

in workers exposed to solvents including xylene. Studies in laboratory animals have shown evidence of impaired hearing following high levels of exposure. Studies in laboratory animals suggest some changes in reproductive organs following high levels of exposure but no significant effects on reproduction were observed. Studies in laboratory animals indicate skeletal and visceral malformations, developmental delays, and increased fetal resorptions following extremely high levels of maternal exposure with evidence of maternal toxicity. The relevance of these observations to humans is not clear at this time. Adverse effects on the liver, kidney, bone marrow (changes in blood cell parameters) were observed in laboratory animals following high levels of exposure. The relevance of these observations to humans is not clear at this time.

1,2,4-TRIMETHYLBENZENE: The following information pertains to a mixture of C9 aromatic hydrocarbons, over 40% of which was composed of 1,2,4-trimethylbenzene. A developmental inhalation study was conducted in laboratory mice. Increased implantation losses, reduced fetal weights, delayed ossification and an increased incidence of cleft palate were observed at the highest exposure level (1,500 ppm). This exposure level was extremely toxic to pregnant female mice (44% mortality). Reduced fetal body weights were also observed at 500 ppm. A multi-generation reproduction inhalation study was conducted in laboratory rats. Reductions in pup weights, pup weight gain, litter size, and pup survival were observed at 1,500 ppm, an exposure level at which significant maternal toxicity was observed. Reduced pup weight gain was also observed at 500 ppm. Embryotoxicity has been reported in studies of laboratory animals. Adverse effects included increased implantation losses, reduced fetal weights, delayed ossification and an increased incidence of cleft palate.<n><n>

N-HEXANE: Long-term or repeated exposure to n-hexane can cause peripheral nerve damage. Initial symptoms are numbness of the fingers and toes. Also, motor weakness can occur in the digits, but may also involve muscles of the arms, thighs and forearms. The onset of these symptoms may be delayed for several months to a year after the beginning of exposure. Testicular atrophy and partial to full loss of the germ cell line were observed in sub-chronic high-dose inhalation studies of laboratory rodents. These effects appeared irreversible. Rodent reproduction studies have shown evidence of reduced fetal weight but no frank malformations.

CUMENE: Overexposure to cumene may cause upper respiratory tract irritation and CNS depression. Studies in laboratory animals indicate evidence of respiratory tract hyperplasia, and adverse effects on the liver, kidney and adrenal glands following high level exposure. The relevance of these findings to humans is not clear at this time. Findings from lifetime laboratory rodent inhalation studies were as follows: In F344/N rats: an increased incidence of renal carcinomas and adenomas, respiratory epithelial adenomas, and interstitial cell adenomas of the testes. In B6C3F1 mice: an increased incidence of carcinomas and adenomas of the bronchi and lung, liver neoplasms, hemangiosarcomas of the spleen, and adenomas of the thyroid.

ETHYLBENZENE: Findings from a 2-year inhalation study in rodents conducted by NTP were as follows: Effects were observed only at the highest exposure level (750 ppm). At this level the incidence of renal tumors was elevated in male rats (tubular carcinomas) and female rats (tubular adenomas). The incidence of tumors was also elevated in male mice (alveolar and bronchiolar carcinomas) and female mice (hepatocellular carcinomas). IARC has classified ethyl benzene as "possibly carcinogenic to humans" (Group 2B). Studies in laboratory animals indicate some evidence of post-implantation deaths following high levels of maternal exposure. The relevance of these findings to humans is not clear at this time. Studies in laboratory animals indicate limited evidence of renal malformations, resorptions, and developmental delays following high levels of maternal exposure with evidence of maternal toxicity. The relevance of these findings to humans is not clear at this time. Studies in laboratory animals have demonstrated evidence of ototoxicity (hearing loss) following exposure levels as low as 300 ppm for 5 days. Studies in laboratory animals indicate some evidence of adverse effects on the liver, kidney, thyroid, and pituitary gland.

BENZENE: Studies of workers exposed to benzene show clear evidence that overexposure can cause cancer and other diseases of the blood forming organs including Acute

Myelogenous Leukemia (AML), and Aplastic Anemia (AA), an often fatal disease. Some studies suggest overexposure to benzene may also be associated with Myelodysplastic Syndrome (MDS). Findings from a case control study of workers exposed to benzene was reported during the 2009 Benzene Symposium in Munich included an increase in Acute Myeloid Leukemias and Non-Hodgkins Lymphoid Neoplasms (NHLN) of the subtype follicular lymphoma (FL) in some occupational categories. Some studies of workers exposed to benzene have shown an association with increased rates of chromosome aberrations in circulating lymphocytes. One study of women workers exposed to benzene suggested a weak association with irregular menstruation. However, other studies of workers exposed to benzene have not demonstrated clear evidence of an effect on fertility or reproductive outcome in humans. Benzene can cross the placenta and affect the developing fetus. Cases of AA have been reported in the offspring of persons severely overexposed to benzene. Studies in laboratory animals indicate that prolonged, repeated exposure to high levels of benzene vapor can cause bone marrow suppression and cancer in multiple organ systems. Studies in laboratory animals show evidence of adverse effects on male reproductive organs following high levels of exposure but no significant effects on reproduction have been observed. Embryotoxicity has been reported in studies of laboratory animals but effects were limited to reduced fetal weight and minor skeletal variations. Benzene has been classified as a proven human carcinogen by OSHA and a Group 1 (Carcinogenic to Humans) material by IARC. The current proposed IARC classification for benzene is summarized as follows: Sufficient evidence for Acute Myeloid Leukemia; limited evidence for Acute Lymphatic Leukemia, Chronic Lymphatic Leukemia, Non-Hodgkin Lymphoma, and Multiple Myeloma.

NAPHTHALENE: Severe jaundice, neurotoxicity (kernicterus) and fatalities have been reported in young children and infants as a result of hemolytic anemia from overexposure to naphthalene. Persons with glucose 6-phosphate dehydrogenase (G6PD) deficiency are more prone to the hemolytic effects of naphthalene. Adverse effects on the kidney have been reported in persons overexposed to naphthalene but these effects are believed to be a consequence of hemolytic anemia, and not a direct effect. Hemolytic anemia has been observed in laboratory animals exposed to naphthalene. Laboratory rodents exposed to naphthalene vapor for 2 years (lifetime studies) developed non-neoplastic and neoplastic tumors and inflammatory lesions of the nasal and respiratory tract. Cataracts and other adverse effects on the eye have been observed in laboratory animals exposed to high levels of naphthalene. Findings from a large number of bacterial and mammalian cell mutation assays have been negative. A few studies have shown chromosomal effects (elevated levels of Sister Chromatid Exchange or chromosomal aberrations) in vitro. Naphthalene has been classified as Possibly Carcinogenic to Humans (2B) by IARC, based on findings from studies in laboratory animals.

CARBON MONOXIDE: is a chemical asphyxiant with no warning properties (such as odor). At 400-500 ppm for 1 hour headache and dyspnea may occur. If activity is increased, symptoms of overexposure may include nausea, irritability, increased respiration, tinnitus, sweating, chest pain, confusion, impaired judgement, dizziness, weakness, drowsiness, ataxia, irregular heart beat, cyanosis and pallor. Levels in excess of 1000 ppm can result in collapse, loss of consciousness, respiratory failure and death. Extremely high concentrations (12,800 ppm) can cause immediate unconsciousness and death in 1-3 minutes. Repeated anoxia can lead to central nervous system damage and peripheral neuropathy, with loss of sensation in the fingers, amnesia, and mental deterioration and possible congestive heart failure. Damage may also occur to the fetus, lung, liver, kidney, spleen, cardiovascular system and other organs.

WHOLLY-VAPORIZED UNLEADED GASOLINE: Lifetime exposure to wholly vaporized unleaded gasoline produced an increased incidence of liver tumors in female mice exposed to the highest exposure concentration (2056 ppm) and α -2 urinary globulin-mediated kidney tumors in male rats. No exposure-related tumors were observed in male mice or female rats. The male-specific rat kidney tumors are not considered relevant to human health. Mice receiving lifetime repeated skin application of various petroleum naphthas exhibited an irritation-dependent increased incidence of skin tumors. Additional studies suggest that these tumors occur through a mechanism that may not be relevant to human health. Epidemiological data from over 18,000 petroleum marketing and distribution workers

showed no increased risk of leukemia, multiple myeloma, or kidney cancer resulting from gasoline exposure. Unleaded gasoline has been identified as possibly carcinogenic to humans (2B) by the International Agency for Research on Cancer (IARC).

COMBUSTION ENGINE EXHAUST: Chronic inhalation studies of gasoline engine exhaust in mice, rats and hamsters did not produce any carcinogenic effects. Condensates/extracts of gasoline engine exhaust produced an increase in tumors compared to controls when testing by skin painting, subcutaneous injection, intratracheal instillation or implantation into the lungs. Gasoline exhaust has been classified as possibly carcinogenic to humans (2B) by the International Agency for Research on Cancer (IARC).

Adverse effects related to the physical, chemical and toxicological characteristics

Signs and Symptoms

Irritating to the skin and mucous membranes. Symptoms may include redness, itching, and inflammation. May cause nausea, vomiting, diarrhea, and signs of nervous system depression: headache, drowsiness, dizziness, loss of coordination, disorientation and fatigue. Aspiration hazard. May cause coughing, chest pains, shortness of breath, pulmonary edema and/or chemical pneumonitis. Repeated or prolonged skin contact may cause drying, reddening, itching and cracking.

Sensitization

Not expected to be a skin or respiratory sensitizer.

Mutagenic effects

May cause genetic defects.

Carcinogenicity

May cause cancer.

Cancer designations are listed in the table below

Name	ACGIH (Class)	IARC (Class)	NTP	OSHA
Gasoline 86290-81-5	Confirmed animal carcinogen (A3)	Possible human carcinogen (2B)	Not Listed	Not Listed
Heptane (mixed isomers) 142-82-5	Not Listed	Not Listed	Not Listed	Not Listed
Pentane (mixed isomers) 78-78-4	Not Listed	Not Listed	Not Listed	Not Listed
Butane (mixed isomers) 106-97-8	Not Listed	Not Listed	Not Listed	Not Listed
Hexane Isomers (other than n-Hexane) 107-83-5	Not Listed	Not Listed	Not Listed	Not Listed
Toluene 108-88-3	Not Classifiable (A4)	Not Classifiable (3)	Not Listed	Not Listed
Xylene (mixed isomers) 1330-20-7	Not classifiable (A4)	Not classifiable (3)	Not Listed	Not Listed
n-Hexane 110-54-3	Not Listed	Not Listed	Not Listed	Not Listed
Cumene 98-82-8	Not listed	Possible human carcinogen (2B)	Reasonably anticipated to be a human carcinogen	Not listed
1,2,4 Trimethylbenzene 95-63-6	Not Listed	Not Listed	Not Listed	Not Listed
Ethylbenzene 100-41-4	Confirmed animal carcinogen (A3)	Possible human carcinogen (2B)	Not Listed	Not Listed
Benzene 71-43-2	Confirmed human carcinogen (A1)	Carcinogenic to humans (1)	Known to be human carcinogen	Known carcinogen
Cyclohexane 110-82-7	Not Listed	Not Listed	Not Listed	Not Listed
Octane 111-65-9	Not Listed	Not Listed	Not Listed	Not Listed
1,2,3-trimethylbenzene 526-73-8	Not Listed	Not Listed	Not Listed	Not Listed
Naphthalene 91-20-3	Confirmed animal carcinogen (A3)	Possible human carcinogen (2B)	Reasonably anticipated to be a human carcinogen	Not Listed

Reproductive toxicity

Suspected of damaging fertility or the unborn child.

Specific Target Organ Toxicity (STOT) - single exposure Respiratory system. Central nervous system.

Specific Target Organ Toxicity (STOT) - repeated exposure Not classified.

Aspiration hazard May be fatal if swallowed or vomited and enters airways.

12. ECOLOGICAL INFORMATION

Ecotoxicity This product should be considered toxic to aquatic organisms, with the potential to cause long lasting adverse effects in the aquatic environment.

Name	Algae/aquatic plants	Fish	Toxicity to Microorganisms	Crustacea
Gasoline 86290-81-5	72-hr EC50 = 56 mg/l Algae	96-hr LC50 = 11 mg/l Rainbow trout (static)	-	48-hr LC50 = 7.6 mg/l Daphnia magna
Heptane (mixed isomers) 142-82-5	-	96-hr LC50 = 375 mg/L Tilapia	-	-
Pentane (mixed isomers) 78-78-4	-	96-hr LC50 = 3.1 mg/L Rainbow trout	-	48-hr EC50 = >1 - <10 mg/L Daphnia magna
Butane (mixed isomers) 106-97-8	-	-	-	-
Hexane Isomers (other than n-Hexane) 107-83-5	-	-	-	-
Toluene 108-88-3	72-hr EC50 = 12.5 mg/l Algae	96-hr LC50 ≤ 10 mg/l Rainbow trout	-	48-hr EC50 = 5.46-9.83 mg/l Daphnia magna 48-hr EC50 = 11.5 mg/l Daphnia magna (Static)
Xylene (mixed isomers) 1330-20-7	72-hr EC50 = 11 mg/l Algae	96-hr LC50 = 8 mg/l Rainbow trout	-	48-hr LC50 = 3.82 mg/l Daphnia magna
n-Hexane 110-54-3	-	96-hr LC50 = 2.5 mg/l Fathead minnow	-	-
Cumene 98-82-8	72-hr EC50 = 2.6 mg/l Algae	96-hr LC50 = 6.04-6.61 mg/l Fathead minnow (Flow-through) 96-hr LC50 = 2.7 mg/l Rainbow trout (semi-static)	-	48-hr EC50 = 7.9-14.1 mg/l Daphnia magna (static)
1,2,4 Trimethylbenzene 95-63-6	-	96-hr LC50 = 7.19-8.28 mg/l Fathead minnow (flow-through)	-	48-hr EC50 = 6.14 mg/L Daphnia magna
Ethylbenzene 100-41-4	72-hr EC50 = 1.7-7.6 mg/l Algae	96-hr LC50 = 4 mg/L Rainbow trout	-	48-hr EC50 = 1-4 mg/L Daphnia magna
Benzene 71-43-2	72-hr EC50 = 29 mg/l Algae	96-hr LC50 = 5.3 mg/l Rainbow trout (flow-through)	-	48-hr EC50 = 8.76-15.6 mg/l Daphnia magna (Static)
Cyclohexane 110-82-7	72-hr EC50 = 500 mg/l Algae	96-hr LC50 = 3.96-5.18 mg/l Fathead minnow	-	48-hr EC50 = 1.7-3.5 mg/L Bay shrimp
Octane 111-65-9	-	-	-	48-hr LC50 = 0.38 mg/l Daphnia magna
1,2,3-trimethylbenzene 526-73-8	-	96-hr LC50 = 7.72 mg/l Fathead Minnow (flow-through)	-	-
Naphthalene 91-20-3	-	96-hr LC50 = 0.91-2.82 mg/l Rainbow trout (static) 96-hr LC50 = 1.99 mg/l Fathead minnow (static)	-	48-hr LC50 = 1.6 mg/l Daphnia magna

Persistence and degradability Expected to be inherently biodegradable. The presence of ethanol in this product may impede the biodegradation of benzene, toluene, ethylbenzene and xylene in groundwater, resulting in elongated plumes of these constituents.

Bioaccumulation Has the potential to bioaccumulate.

Mobility in soil May partition into air, soil and water.

Other adverse effects No information available.

13. DISPOSAL CONSIDERATIONS

Description of Waste Residues

This material may be a flammable liquid waste.

Safe Handling of Wastes

Handle in accordance with applicable local, state, and federal regulations. Use personal protection measures as required. Use appropriate grounding and bonding practices. Use only non-sparking tools. Do not expose to heat, open flames, strong oxidizers or other sources of ignition. No smoking.

Disposal of Wastes / Methods of Disposal

The user is responsible for determining if any discarded material is a hazardous waste (40 CFR 262.11). Dispose of in accordance with federal, state and local regulations.

Methods of Contaminated Packaging Disposal

Empty containers should be completely drained and then discarded or recycled, if possible. Do not cut, drill, grind or weld on empty containers since explosive residues may be present. Dispose of in accordance with federal, state and local regulations.

14. TRANSPORT INFORMATION

DOT (49 CFR 172.101):

UN Proper Shipping Name:	Gasoline
UN/Identification No:	UN 1203
Transport Hazard Class(es):	3
Packing Group:	II

TDG (Canada):

UN Proper Shipping Name:	Gasoline
UN/Identification No:	UN 1203
Transport Hazard Class(es):	3
Packing Group:	II

15. REGULATORY INFORMATION

US Federal Regulatory Information:

US TSCA Chemical Inventory Section 8(b):

This product and/or its components are listed on the TSCA Chemical Inventory.

EPA Superfund Amendment & Reauthorization Act (SARA):

SARA Section 302: This product does not contain any component(s) included on EPA's Extremely Hazardous Substance (EHS) List.

Name	CERCLA/SARA - Section 302 Extremely Hazardous Substances and TPQs
Gasoline	NA
Heptane (mixed isomers)	NA
Pentane (mixed isomers)	NA
Butane (mixed isomers)	NA
Hexane Isomers (other than n-Hexane)	NA
Toluene	NA
Xylene (mixed isomers)	NA

n-Hexane	NA
Cumene	NA
1,2,4 Trimethylbenzene	NA
Ethylbenzene	NA
Benzene	NA
Cyclohexane	NA
Octane	NA
1,2,3-trimethylbenzene	NA
Naphthalene	NA

SARA Section 304: This product may contain component(s) identified either as an EHS or a CERCLA Hazardous substance which in case of a spill or release may be subject to SARA reporting requirements:

Name	Hazardous Substances RQs
Gasoline	NA
Heptane (mixed isomers)	NA
Pentane (mixed isomers)	NA
Butane (mixed isomers)	NA
Hexane Isomers (other than n-Hexane)	NA
Toluene	1000 lb final RQ 454 kg final RQ
Xylene (mixed isomers)	100 lb final RQ 45.4 kg final RQ
n-Hexane	5000 lb final RQ 2270 kg final RQ
Cumene	5000 lb final RQ 2270 kg final RQ
1,2,4 Trimethylbenzene	NA
Ethylbenzene	1000 lb final RQ 454 kg final RQ
Benzene	10 lb final RQ 4.54 kg final RQ
Cyclohexane	1000 lb final RQ 454 kg final RQ
Octane	NA
1,2,3-trimethylbenzene	NA
Naphthalene	100 lb final RQ 45.4 kg final RQ

SARA: The following EPA hazard categories apply to this product:

Acute Health Hazard
Chronic Health Hazard
Fire Hazard

SARA Section 313: This product may contain component(s), which if in exceedance of the de minimus threshold, may be subject to the reporting requirements of SARA Title III Section 313 Toxic Release Reporting (Form R).

Name	CERCLA/SARA 313 Emission reporting:
Gasoline	None
Heptane (mixed isomers)	None
Pentane (mixed isomers)	None
Butane (mixed isomers)	None
Hexane Isomers (other than n-Hexane)	None
Toluene	1.0 % de minimis concentration
Xylene (mixed isomers)	1.0 % de minimis concentration
n-Hexane	1.0 % de minimis concentration
Cumene	1.0 % de minimis concentration

1,2,4 Trimethylbenzene	1.0 % de minimis concentration
Ethylbenzene	0.1 % de minimis concentration
Benzene	0.1 % de minimis concentration
Cyclohexane	1.0 % de minimis concentration
Octane	None
1,2,3-trimethylbenzene	None
Naphthalene	0.1 % de minimis concentration

State and Community Right-To-Know Regulations:

The following component(s) of this material are identified on the regulatory lists below:

Gasoline

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 0957
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Not Listed
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Carcinogen; Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	SN 0957 TPQ: 10000 lb (Under N.J.A.C. 7:1G, environmental hazardous substances in mixtures such as gasoline or new and used petroleum oil may be reported under these categories)
Illinois - Toxic Air Contaminants:	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed

Heptane (mixed isomers)

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 1339
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	Not Listed
Illinois - Toxic Air Contaminants:	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed

Pentane (mixed isomers)

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 1064
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Not Listed
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed

California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Flammable - fourth degree
New Jersey - Environmental Hazardous Substances List:	SN 1064 TPQ: 500 lb
Illinois - Toxic Air Contaminants:	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed
Butane (mixed isomers)	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 0273
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Flammable - fourth degree
New Jersey - Environmental Hazardous Substances List:	SN 0273 TPQ: 500 lb
Illinois - Toxic Air Contaminants:	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed
Hexane Isomers (other than n-Hexane)	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 1285
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Not Listed
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	Not Listed
Illinois - Toxic Air Contaminants:	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed
Toluene	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Developmental toxicity, initial date 1/1/91 Female reproductive toxicity, initial date 8/7/09
New Jersey Right-To-Know:	SN 1866
Pennsylvania Right-To-Know:	Environmental hazard
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic (skin); Flammable (skin)
Michigan Critical Materials Register List:	100 lb Annual usage threshold
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed

New Jersey - Special Hazardous Substances:	Flammable - third degree; Teratogen
New Jersey - Environmental Hazardous Substances List:	SN 1866 TPQ: 500 lb
Illinois - Toxic Air Contaminants:	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	1000 lb RQ (air); 1 lb RQ (land/water)
Xylene (mixed isomers)	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 2014
Pennsylvania Right-To-Know:	Environmental hazard
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic (skin); Flammable (skin)
Michigan Critical Materials Register List:	100 lb Annual usage threshold all isomers
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	SN 2014 TPQ: 500 lb
Illinois - Toxic Air Contaminants:	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	1000 lb RQ (air); 1 lb RQ (land/water)
n-Hexane	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 1340
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	SN 1340 TPQ: 500 lb
Illinois - Toxic Air Contaminants:	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	1 lb RQ (air); 1 lb RQ (land/water)
Cumene	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Carcinogen, initial date 4/6/10
New Jersey Right-To-Know:	SN 0542
Pennsylvania Right-To-Know:	Environmental hazard
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic (skin); Flammable (skin)
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	SN 0542 TPQ: 500 lb
Illinois - Toxic Air Contaminants:	Present

New York - Reporting of Releases Part 597 - List of Hazardous Substances:	5000 lb RQ (air); 1 lb RQ (land/water)
1,2,4 Trimethylbenzene	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 1929
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To-Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Not Listed
New Jersey - Environmental Hazardous Substances List:	Not Listed
Illinois - Toxic Air Contaminants:	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed
Ethylbenzene	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Carcinogen, initial date 6/11/04
New Jersey Right-To-Know:	SN 0851
Pennsylvania Right-To-Know:	Environmental hazard
Massachusetts Right-To-Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Carcinogen; flammable - Third degree
New Jersey - Environmental Hazardous Substances List:	SN 0851 TPQ: 500 lb
Illinois - Toxic Air Contaminants:	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	1000 lb RQ (air); 1 lb RQ (land/water)
Benzene	
Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Carcinogen, initial date 2/27/87
	Developmental toxicity, initial date 12/26/97
	Male reproductive toxicity, initial date 12/26/97
New Jersey Right-To-Know:	SN 0197
Pennsylvania Right-To-Know:	Environmental hazard; Special hazardous substance
Massachusetts Right-To-Know:	Carcinogen; Extraordinarily hazardous
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic (skin); Flammable (skin); Carcinogen (skin)
Michigan Critical Materials Register List:	100 lb Annual usage threshold
Massachusetts Extraordinarily Hazardous Substances:	Carcinogen; Extraordinarily hazardous
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Present
New Jersey - Special Hazardous Substances:	Carcinogen; Flammable - third degree; Mutagen
New Jersey - Environmental Hazardous Substances List:	SN 0197 TPQ: 500 lb
Illinois - Toxic Air Contaminants:	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	10 lb RQ (air); 1 lb RQ (land/water)

Cyclohexane

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 0565
Pennsylvania Right-To-Know:	Environmental hazard
Massachusetts Right-To-Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	SN 0565 TPQ: 500 lb
Illinois - Toxic Air Contaminants:	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	1000 lb RQ (air); 1 lb RQ (land/water)

Octane

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 1434
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To-Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Flammable - third degree
New Jersey - Environmental Hazardous Substances List:	Not Listed
Illinois - Toxic Air Contaminants:	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed

1,2,3-trimethylbenzene

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	SN 1929
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To-Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Not Listed
New Jersey - Environmental Hazardous Substances List:	Not Listed
Illinois - Toxic Air Contaminants:	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed

Naphthalene

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Carcinogen, initial date 4/19/02
New Jersey Right-To-Know:	SN 1322 SN 3758

Pennsylvania Right-To-Know:	Environmental hazard Present (particulate)
Massachusetts Right-To Know:	Present
Florida Substance List:	Not Listed
Rhode Island Right-To-Know:	Toxic; Flammable
Michigan Critical Materials Register List:	Not Listed
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Carcinogen
New Jersey - Environmental Hazardous Substances List:	SN 1322 TPQ: 500 lb (Reportable at the de minimis quantity of >0.1%)
Illinois - Toxic Air Contaminants:	Present
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	100 lb RQ (air); 1 lb RQ (land/water)

Canada DSL/NDL Inventory: This product and/or its components are listed either on the Domestic Substances List (DSL) or are exempt.

Canadian Regulatory Information: This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the (M)SDS contains all the information required by the Controlled Products Regulations.

Name	Canada - WHMIS: Classifications of Substances:	Canada - WHMIS: Ingredient Disclosure:
Gasoline	B2,D2A,D2B	0.1%
Heptane (mixed isomers)	B2,D2B	1%
Pentane (mixed isomers)	B2	1%
Butane (mixed isomers)	A,B1	1%
Hexane Isomers (other than n-Hexane)	B2	1%
Toluene	B2,D2A,D2B	0.1%
Xylene (mixed isomers)	B2,D2A,D2B	m-, o-isomers 1.0%; p-isomer 0.1%
n-Hexane	B2,D2A,D2B	1%
Cumene	B2,D2A	0.1%
1,2,4 Trimethylbenzene	B3,D2B	1%
Ethylbenzene	B2,D2A,D2B	0.1%
Benzene	B2,D2A,D2B	0.1%
Cyclohexane	B2,D2B	1%
Octane	B2,D2B	1%
1,2,3-trimethylbenzene	B3	1%
Naphthalene	B4,D2A	0.1%



Note: Not applicable.

16. OTHER INFORMATION

Prepared By Toxicology and Product Safety

Revision Date: 06/01/2016

Revision Note:

Revised Sections

The following sections (§) have been updated:

1. IDENTIFICATION
2. HAZARD IDENTIFICATION
3. COMPOSITION/INFORMATION ON INGREDIENTS
4. FIRST AID MEASURES
6. ACCIDENTAL RELEASE MEASURES
7. HANDLING AND STORAGE
8. EXPOSURE CONTROLS/PERSONAL PROTECTION
9. PHYSICAL AND CHEMICAL PROPERTIES
11. TOXICOLOGICAL INFORMATION
12. ECOLOGICAL INFORMATION
15. REGULATORY INFORMATION

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information is intended as guidance for safe handling, use, processing, storage, transportation, accidental release, clean-up and disposal and is not considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

SAFETY DATA SHEET

Helium

Section 1. Identification

GHS product identifier	: Helium
Chemical name	: Helium
Other means of identification	: helium (dot); Helium-4; He; o-Helium; UN 1046
Product use	: Synthetic/Analytical chemistry.
Synonym	: helium (dot); Helium-4; He; o-Helium; UN 1046
SDS #	: 001025
Supplier's details	: Airgas USA, LLC and its affiliates 259 North Radnor-Chester Road Suite 100 Radnor, PA 19087-5283 1-610-687-5253
Emergency telephone number (with hours of operation)	: 1-866-734-3438

Section 2. Hazards identification

OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	: GASES UNDER PRESSURE - Compressed gas

GHS label elements

Hazard pictograms



Signal word

: Warning

Hazard statements

: Contains gas under pressure; may explode if heated.
May displace oxygen and cause rapid suffocation.

Precautionary statements

General

: Read and follow all Safety Data Sheets (SDS'S) before use. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Close valve after each use and when empty. Use equipment rated for cylinder pressure. Do not open valve until connected to equipment prepared for use. Use a back flow preventative device in the piping. Use only equipment of compatible materials of construction.

Prevention

: Use and store only outdoors or in a well ventilated place.

Response

: Not applicable.

Storage

: Protect from sunlight. Protect from sunlight when ambient temperature exceeds 52°C/125°F. Store in a well-ventilated place.

Disposal

: Not applicable.

Hazards not otherwise classified

: In addition to any other important health or physical hazards, this product may displace oxygen and cause rapid suffocation.

Section 3. Composition/information on ingredients

Substance/mixture : Substance
Chemical name : Helium
Other means of identification : helium (dot); Helium-4; He; o-Helium; UN 1046

CAS number/other identifiers

CAS number : 7440-59-7
Product code : 001025

Ingredient name	%	CAS number
Helium	100	7440-59-7

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 10 minutes. Get medical attention if irritation occurs.

Inhalation : Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Skin contact : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur. Wash clothing before reuse. Clean shoes thoroughly before reuse.

Ingestion : As this product is a gas, refer to the inhalation section.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : Contact with rapidly expanding gas may cause burns or frostbite.
Inhalation : No known significant effects or critical hazards.
Skin contact : Contact with rapidly expanding gas may cause burns or frostbite.
Frostbite : Try to warm up the frozen tissues and seek medical attention.
Ingestion : As this product is a gas, refer to the inhalation section.

Over-exposure signs/symptoms

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

Date of issue/Date of revision : 10/15/2014. **Date of previous issue** : 10/2/2014. **Version** : 0.02 2/11

Section 4. First aid measures

- Specific treatments** : No specific treatment.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

- Suitable extinguishing media** : Use an extinguishing agent suitable for the surrounding fire.
- Unsuitable extinguishing media** : None known.

- Specific hazards arising from the chemical** : Contains gas under pressure. In a fire or if heated, a pressure increase will occur and the container may burst or explode.
- Hazardous thermal decomposition products** : No specific data.

- Special protective actions for fire-fighters** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialised clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

- Environmental precautions** : Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Immediately contact emergency personnel. Stop leak if without risk.
- Large spill** : Immediately contact emergency personnel. Stop leak if without risk. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

Protective measures : Put on appropriate personal protective equipment (see Section 8). Contains gas under pressure. Avoid contact with eyes, skin and clothing. Avoid breathing gas. Empty containers retain product residue and can be hazardous. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.

Advice on general occupational hygiene : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in a segregated and approved area. Store away from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10). Keep container tightly closed and sealed until ready for use. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F).

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Helium	Oxygen Depletion [Asphyxiant]

Appropriate engineering controls : Good general ventilation should be sufficient to control worker exposure to airborne contaminants.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields.

Skin protection

Section 8. Exposure controls/personal protection

- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Section 9. Physical and chemical properties

Appearance

- Physical state** : Gas. [Compressed gas.]
- Color** : Colorless.
- Molecular weight** : 4 g/mole
- Molecular formula** : He
- Boiling/condensation point** : -268.9°C (-452°F)
- Melting/freezing point** : -272.2°C (-458°F)
- Critical temperature** : -267.9°C (-450.2°F)
- Odor** : Odorless.
- Odor threshold** : Not available.
- pH** : Not available.
- Flash point** : [Product does not sustain combustion.]
- Burning time** : Not applicable.
- Burning rate** : Not applicable.
- Evaporation rate** : Not available.
- Flammability (solid, gas)** : Not available.
- Lower and upper explosive (flammable) limits** : Not available.
- Vapor pressure** : Not available.
- Vapor density** : 0.14 (Air = 1) Liquid Density@BP: 7.8 lb/ft³ (125 kg/m³)
- Specific Volume (ft³/lb)** : 96.1538
- Gas Density (lb/ft³)** : 0.0104
- Relative density** : Not applicable.
- Solubility** : Not available.
- Solubility in water** : Not available.
- Partition coefficient: n-octanol/water** : 0.28
- Auto-ignition temperature** : Not available.
- Decomposition temperature** : Not available.

Section 9. Physical and chemical properties

SADT : Not available.

Viscosity : Not applicable.

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.

Chemical stability : The product is stable.

Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid : No specific data.

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Hazardous polymerization : Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Section 11. Toxicological information

Information on the likely routes of exposure : Not available.

Potential acute health effects

Eye contact : Contact with rapidly expanding gas may cause burns or frostbite.
Inhalation : No known significant effects or critical hazards.
Skin contact : Contact with rapidly expanding gas may cause burns or frostbite.
Ingestion : As this product is a gas, refer to the inhalation section.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : No specific data.
Inhalation : No specific data.
Skin contact : No specific data.
Ingestion : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Long term exposure

Potential immediate effects : Not available.
Potential delayed effects : Not available.

Potential chronic health effects

Not available.

General : No known significant effects or critical hazards.
Carcinogenicity : No known significant effects or critical hazards.
Mutagenicity : No known significant effects or critical hazards.
Teratogenicity : No known significant effects or critical hazards.
Developmental effects : No known significant effects or critical hazards.
Fertility effects : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Not available.

Section 12. Ecological information

Toxicity

Not available.

Persistence and degradability

Not available.

Section 12. Ecological information

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Helium	0.28	-	low

Mobility in soil






Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Empty Airgas-owned pressure vessels should be returned to Airgas. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Do not puncture or incinerate container.

Section 14. Transport information

	DOT	TDG	Mexico	IMDG	IATA
UN number	UN1046	UN1046	UN1046	UN1046	UN1046
UN proper shipping name	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED	HELIUM, COMPRESSED
Transport hazard class(es)	2.2 	2.2 	2.2 	2.2 	2.2 
Packing group	-	-	-	-	-
Environment	No.	No.	No.	No.	No.
Additional information	Limited quantity Yes. Packaging instruction Passenger aircraft Quantity limitation: 75 kg Cargo aircraft Quantity limitation: 150 kg	Explosive Limit and Limited Quantity Index 0.125 Passenger Carrying Road or Rail Index 75	-	-	Passenger and Cargo Aircraft Quantity limitation: 75 kg Cargo Aircraft Only Quantity limitation: 150 kg

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Section 14. Transport information

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
United States inventory (TSCA 8b): This material is listed or exempted.

Clean Air Act Section 112 (b) Hazardous Air Pollutants (HAPs) : Not listed

Clean Air Act Section 602 Class I Substances : Not listed

Clean Air Act Section 602 Class II Substances : Not listed

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.

SARA 311/312

Classification : Sudden release of pressure

Composition/information on ingredients

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
Helium	100	No.	Yes.	No.	No.	No.

State regulations

Massachusetts : This material is listed.

New York : This material is not listed.

New Jersey : This material is listed.

Pennsylvania : This material is listed.

Canada inventory : This material is listed or exempted.

International regulations

Section 15. Regulatory information

International lists :

- Australia inventory (AICS):** This material is listed or exempted.
- China inventory (IECSC):** This material is listed or exempted.
- Japan inventory:** Not determined.
- Korea inventory:** This material is listed or exempted.
- Malaysia Inventory (EHS Register):** Not determined.
- New Zealand Inventory of Chemicals (NZIoC):** This material is listed or exempted.
- Philippines inventory (PICCS):** This material is listed or exempted.
- Taiwan inventory (CSNN):** Not determined.

Chemical Weapons Convention List Schedule I Chemicals : Not listed

Chemical Weapons Convention List Schedule II Chemicals : Not listed

Chemical Weapons Convention List Schedule III Chemicals : Not listed

Canada

WHMIS (Canada) : Class A: Compressed gas.

- CEPA Toxic substances:** This material is not listed.
- Canadian ARET:** This material is not listed.
- Canadian NPRI:** This material is not listed.
- Alberta Designated Substances:** This material is not listed.
- Ontario Designated Substances:** This material is not listed.
- Quebec Designated Substances:** This material is not listed.

Section 16. Other information

Canada Label requirements : Class A: Compressed gas.

Hazardous Material Information System (U.S.A.)

Health	0
Flammability	0
Physical hazards	0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)



Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Section 16. Other information

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

History

Date of printing : 10/15/2014.

Date of issue/Date of revision : 10/15/2014.

Date of previous issue : 10/2/2014.

Version : 0.02

Key to abbreviations :

- ATE = Acute Toxicity Estimate
- BCF = Bioconcentration Factor
- GHS = Globally Harmonized System of Classification and Labelling of Chemicals
- IATA = International Air Transport Association
- IBC = Intermediate Bulk Container
- IMDG = International Maritime Dangerous Goods
- LogPow = logarithm of the octanol/water partition coefficient
- MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
- UN = United Nations
- ACGIH – American Conference of Governmental Industrial Hygienists
- AIHA – American Industrial Hygiene Association
- CAS – Chemical Abstract Services
- CEPA – Canadian Environmental Protection Act
- CERCLA – Comprehensive Environmental Response, Compensation, and Liability Act (EPA)
- CFR – United States Code of Federal Regulations
- CPR – Controlled Products Regulations
- DSL – Domestic Substances List
- GWP – Global Warming Potential
- IARC – International Agency for Research on Cancer
- ICAO – International Civil Aviation Organisation
- Inh – Inhalation
- LC – Lethal concentration
- LD – Lethal dosage
- NDSL – Non-Domestic Substances List
- NIOSH – National Institute for Occupational Safety and Health
- TDG – Canadian Transportation of Dangerous Goods Act and Regulations
- TLV – Threshold Limit Value
- TSCA – Toxic Substances Control Act
- WEEL – Workplace Environmental Exposure Level
- WHMIS – Canadian Workplace Hazardous Material Information System

References : Not available.

Indicates information that has changed from previously issued version.

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SAFETY DATA SHEET

Version 5.3
Revision Date 04/24/2015
Print Date 04/02/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Heptachlor epoxide

Product Number : 49042
Brand : Supelco
Index-No. : 602-063-00-5

CAS-No. : 1024-57-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 2), H300
Carcinogenicity (Category 2), H351
Specific target organ toxicity - repeated exposure (Category 2), H373
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H300 Fatal if swallowed.
H351 Suspected of causing cancer.
H373 May cause damage to organs through prolonged or repeated exposure.
H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.
P202 Do not handle until all safety precautions have been read and understood.
P260 Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.

P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P281	Use personal protective equipment as required.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. Rinse mouth.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: Heptachlor exo-epoxide HCE exo-1,4,5,6,7,8,8-Heptachloro-2,3-epoxy-4,7-methano-3a,4,7,7a-tetrahydroindane
Formula	: C ₁₀ H ₅ Cl ₇ O
Molecular weight	: 389.32 g/mol
CAS-No.	: 1024-57-3
EC-No.	: 213-831-0
Index-No.	: 602-063-00-5

Hazardous components

Component	Classification	Concentration
Heptachlor epoxide		
	Acute Tox. 2; Carc. 2; STOT RE 2; Aquatic Acute 1; Aquatic Chronic 1; H300, H351, H373, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation.

Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Heptachlor epoxide	1024-57-3	TWA	0.05 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Liver damage Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|-------------------------------------|
| a) Appearance | Form: solid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | 157.0 - 161.0 °C (314.6 - 321.8 °F) |
| f) Initial boiling point and boiling range | No data available |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |

- | | |
|---|-------------------|
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | No data available |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | log Pow: 5.40 |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

Bulk density	1,100 kg/m ³
--------------	-------------------------

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 15.0 mg/kg

Inhalation: No data available

Dermal: No data available

LD50 Intracerebral - Mouse - 8 mg/kg

Remarks: Behavioral: Convulsions or effect on seizure threshold.

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Heptachlor epoxide)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: PB9450000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Blood -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - *Oncorhynchus mykiss* (rainbow trout) - 0.02 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates LC50 - *Daphnia magna* (Water flea) - 0.24 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Pimephales promelas (fathead minnow) - 32 d
- 0.0013 mg/l

Bioconcentration factor (BCF): 14,400

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2811 Class: 6.1 Packing group: II
Proper shipping name: Toxic solids, organic, n.o.s. (Heptachlor epoxide)
Reportable Quantity (RQ): 1 lbs
Marine pollutant: yes
Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: II EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Heptachlor epoxide)

IATA

UN number: 2811 Class: 6.1 Packing group: II
Proper shipping name: Toxic solid, organic, n.o.s. (Heptachlor epoxide)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Heptachlor epoxide	1024-57-3	1994-04-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Heptachlor epoxide	1024-57-3	1994-04-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Heptachlor epoxide	1024-57-3	1994-04-01

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Heptachlor epoxide	1024-57-3	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H300	Fatal if swallowed.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	4
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.3

Revision Date: 04/24/2015

Print Date: 04/02/2016

SAFETY DATA SHEET

Version 5.6
Revision Date 04/24/2015
Print Date 02/09/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Heptachlor

Product Number : PS78
Brand : Supelco
Index-No. : 602-046-00-2

CAS-No. : 76-44-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 2), H300
Acute toxicity, Dermal (Category 2), H310
Carcinogenicity (Category 2), H351
Specific target organ toxicity - repeated exposure (Category 2), H373
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H300 + H310

Fatal if swallowed or in contact with skin

H351

Suspected of causing cancer.

H373

May cause damage to organs through prolonged or repeated exposure.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P262	Do not get in eyes, on skin, or on clothing.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P302 + P350	IF ON SKIN: Gently wash with plenty of soap and water.
P310	Immediately call a POISON CENTER or doctor/ physician.
P322	Specific measures (see supplemental first aid instructions on this label).
P330	Rinse mouth.
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: 1,4,5,6,7,8,8-Heptachloro-3a,4,7,7a-tetrahydro-4,7-methanoindene
Formula	: C ₁₀ H ₅ Cl ₇
Molecular weight	: 373.32 g/mol
CAS-No.	: 76-44-8
EC-No.	: 200-962-3
Index-No.	: 602-046-00-2

Hazardous components

Component	Classification	Concentration
Heptachlor		
	Acute Tox. 2; Carc. 2; STOT RE 2; Aquatic Acute 1; Aquatic Chronic 1; H300 + H310, H351, H373, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation.

Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Heptachlor	76-44-8	TWA	0.050000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Skin contact does contribute to exposure. Confirmed animal carcinogen with unknown relevance to humans		
		TWA	0.5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation		

		TWA	0.500000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Skin designation		
		TWA	0.500000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Potential Occupational Carcinogen See Appendix A Potential for dermal absorption		
		TWA	0.05 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Liver damage Confirmed animal carcinogen with unknown relevance to humans Danger of cutaneous absorption		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: solid
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	No data available
f) Initial boiling point and boiling range	No data available
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 40.0 mg/kg

Inhalation: No data available

LD50 Dermal - Rat - 119.0 mg/kg

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Heptachlor)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: PC0700000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 0.007 mg/l - 96.0 h

Toxicity to daphnia and other aquatic LC50 - Daphnia magna (Water flea) - 0.078 mg/l - 48 h

invertebrates

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation Pimephales promelas (fathead minnow) - 276 d
- 0.00043 mg/l

Bioconcentration factor (BCF): 23,814

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2811 Class: 6.1 Packing group: II
Proper shipping name: Toxic solids, organic, n.o.s. (Heptachlor)
Reportable Quantity (RQ): 1 lbs
Marine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 2811 Class: 6.1 Packing group: II EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (Heptachlor)
Marine pollutant:yes

IATA

UN number: 2811 Class: 6.1 Packing group: II
Proper shipping name: Toxic solid, organic, n.o.s. (Heptachlor)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

Heptachlor

CAS-No.
76-44-8

Revision Date
2007-03-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Heptachlor	76-44-8	2007-03-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Heptachlor	76-44-8	2007-03-01

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Heptachlor	76-44-8	2007-09-28

	CAS-No.	Revision Date
WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm. Heptachlor	76-44-8	2007-09-28

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H300	Fatal if swallowed.
H300 + H310	Fatal if swallowed or in contact with skin
H310	Fatal in contact with skin.
H351	Suspected of causing cancer.
H373	May cause damage to organs through prolonged or repeated exposure.

HMIS Rating

Health hazard:	4
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.6

Revision Date: 04/24/2015

Print Date: 02/09/2016

SAFETY DATA SHEET

Version 5.7
Revision Date 11/03/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Heptane

Product Number : 246654
Brand : Sigma-Aldrich
Index-No. : 601-008-00-2

CAS-No. : 142-82-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225
Skin irritation (Category 2), H315
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336
Aspiration hazard (Category 1), H304
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H225 : Highly flammable liquid and vapour.
H304 : May be fatal if swallowed and enters airways.
H315 : Causes skin irritation.
H336 : May cause drowsiness or dizziness.
H410 : Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₇ H ₁₆
Molecular weight	: 100.20 g/mol
CAS-No.	: 142-82-5
EC-No.	: 205-563-8
Index-No.	: 601-008-00-2
Registration number	: 01-2119457603-38-XXXX

Hazardous components

Component	Classification	Concentration
Heptane		
	Flam. Liq. 2; Skin Irrit. 2; STOT SE 3; Asp. Tox. 1; Aquatic Acute 1; Aquatic Chronic 1; H225, H304, H315, H336, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Flash back possible over considerable distance.

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

In case of fire: Evacuate area. Fight fire remotely due to the risk of explosion. Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Store under inert gas. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Heptane	142-82-5	TWA	85.000000 ppm 350.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		C	440.000000 ppm 1,800.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
	Remarks	15 minute ceiling value		
		TWA	500.000000 ppm 2,000.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	400.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		TWA	400.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		TWA	400 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		
		STEL	500 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 65 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: liquid |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -91 °C (-132 °F) |
| f) Initial boiling point and boiling range | 98 °C (208 °F) |
| g) Flash point | -3.99 °C (24.82 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 7 %(V)
Lower explosion limit: 1.1 %(V) |
| k) Vapour pressure | 110.7 hPa (83.0 mmHg) at 37.7 °C (99.9 °F)
53.3 hPa (40.0 mmHg) at 20.0 °C (68.0 °F) |
| l) Vapour density | No data available |

m) Relative density	0.684 g/mL at 25 °C (77 °F)
n) Water solubility	insoluble
o) Partition coefficient: n-octanol/water	log Pow: > 3.000
p) Auto-ignition temperature	223.0 °C (433.4 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

LC50 Inhalation - Rat - 4 h - 103,000 mg/m³

Inhalation: Irritating to respiratory system.

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

Eyes - Rabbit

Result: No eye irritation
(OECD Test Guideline 405)

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

No data available

May cause drowsiness or dizziness.

No data available

May be fatal if swallowed and enters airways.

RTECS: MI77000000

Prolonged or repeated exposure to skin causes defatting and dermatitis., Central nervous system depression, narcosis, Damage to the lungs.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12.1 Toxicity

Toxicity to fish LC50 - *Carassius auratus* (goldfish) - 4 mg/l - 24.0 h

LC50 - *Tilapia mossambica* - 375 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 1.50 mg/l - 48 h

Ratio BOD/ThBOD	3.5 %
-----------------	-------

Indication of bioaccumulation.

No data available

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

Do not empty into drains. Avoid release to the environment.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1206 Class: 3 Packing group: II
Proper shipping name: Heptanes
Reportable Quantity (RQ):
Marine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 1206 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: HEPTANES
Marine pollutant:yes

IATA

UN number: 1206 Class: 3 Packing group: II
Proper shipping name: Heptanes

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Heptane	142-82-5	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Heptane	142-82-5	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Heptane	142-82-5	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity

Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Skin Irrit.	Skin irritation

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.7

Revision Date: 11/03/2015

Print Date: 02/18/2016

MATERIAL SAFETY DATA SHEET

ERA A Waters Company

SECTION 1: PRODUCT AND COMPANY IDENTIFICATION


MANUFACTURER: ERA (Environmental Resource Associates) **BUSINESS PHONE:** 303-431-8454
ADDRESS: 6000 W. 54th Avenue **FAX:** 303-421-0159 **EMAIL:** info@eraqc.com
Arvada, CO, 80002 U.S.A. **CHEMICAL EMERGENCY PHONE:** 352-535-5053 (INFOTRAC)

Product Name(s): Hexavalent Chromium 1000 mg/L
Catalog / Part Number(s): 019, 973, 186004178
MSDS Creation Date: November 22, 2005
Revision Date: September 29, 2009 **MSDS Reference Number:** 019

SECTION 2: HAZARDS IDENTIFICATION

Toxic. Harmful by inhalation. May cause cancer. Risk of cancer depends on duration and level of exposure. The matrix of each standard is a K2Cr2O7/water mixture listed below which is classified as dangerous by Directive 199/45/EC. Use only as directed and in accordance with good laboratory practices.

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

CHEMICAL INGREDIENT NAME				EXPOSURE LIMITS		EU LABEL
	CAS NUMBER	EC NUMBER	% BY WT.	OSHA	ACGIH	HAZARD LABEL
Potassium dichromate	7778-50-9	231-906-6	≤0.1	0.1 mg/m3 PEL	0.05 mg/m3	

Notes: This standard is 125 mL of a mixture containing potassium dichromate salt with the balance being ≥99.9% water. Hexavalent chromium is a known human carcinogen. Exposure Limits are 8-Hour TWA (Time Weighted Average) unless designated C (Ceiling) or STEL (Short Term Exposure Limit). Other components considered Non-Hazardous under OSHA 1910.1200 (HazCom) as they are not present in concentrations exceeding 1% (or 0.1% if considered a known or potential carcinogen). Material Use: Analytical reagent or certified reference material used in laboratories. Uses also include research and development.

SECTION 4: FIRST-AID MEASURES

Inhalation: Remove to fresh air.
Skin Contact: Flush with water.
Eye Contact: Immediately flush with water for a minimum of 15 minutes.
Ingestion: Get medical attention
After following first aid measures, seek medical attention.

SECTION 5: FIRE-FIGHTING MEASURES

Flammable Properties: Not flammable.
Extinguishing Media: Dry chemical, carbon dioxide or appropriate foam.
Unique Aspects Contributing To a Fire: None.
Special Fire Fighting Procedures: None.
Note: As in any fire, wear self-contained breathing apparatus, and full protective gear.

SECTION 6: ACCIDENTAL RELEASE MEASURES

Absorb liquid with spill pillow or other absorbent. Ventilate and wash spill site after material pick up is complete. Place wastes into closed containers for proper disposal.

SECTION 7: HANDLING AND STORAGE

Handle in accordance with good laboratory practices. Store in a dry well-ventilated place. This product is intended for use only by people trained in the safety and handling of chemicals and laboratory preparations.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

Handle in accordance with good laboratory practices. Wash thoroughly after handling.
Respiratory Protection: Not normally needed. If exposure limits are exceeded, use approved respirator.
Eye Protection: Safety glasses with side shields or safety goggles
Skin Protection: Neoprene or other chemical resistant gloves.
Engineering Controls: Not normally needed. If exposure limits are exceeded, work in a fume hood.

MATERIAL SAFETY DATA SHEET

ERA A Waters Company

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

DATA FOR MATRIX:

Appearance:	Clear to yellow	Specific Gravity:	NA	Melting Point:	NA
Physical State:	Liquid	Flash Point:	NA	Vapor Pressure:	NA
Odor:	NA	Explosion Limits:	NA	Vapor Density (air=1):	NA
pH:	NA	Boiling Point:	NA	Solubility in Water:	Soluble

SECTION 10: STABILITY AND REACTIVITY

Hazardous Polymerization Will Not Occur ☒ May Occur ☐ Stability: Stable ☒ Unstable ☐
Hazardous Decomposition/Combustion Products: NA
Conditions and Materials to Avoid: Oxidizing agents.

SECTION 11: TOXICOLOGICAL INFORMATION

Primary Route(s) of Exposure Under Normal Use: Skin contact: may cause skin irritation or be harmful if absorbed through skin. Eye contact: may cause eye irritation. Inhalation: harmful if inhaled, may be irritation to mucous membranes and upper respiratory tract. Ingestion: harmful if swallowed.

Target Organ(s): Lungs, kidneys, blood.

Acute Effects: Harmful by inhalation. May cause sensitization by inhalation and skin contact. Ingestion can cause vomiting.
Potassium dichromate: Oral, child: LDLO=26 mg/kg; Oral, man: LDLO=143 mg/kg; Oral, rat: LD50=25 mg/kg; Skin, rabbit: LD50=14 mg/kg.

Chronic Effects: Carcinogen; Teratogen; May cause heritable genetic damage. Reproductive hazard; May impair fertility. May cause harm to the unborn child.

Other Information: Chemical Ingredient(s) potassium dichromate is classified as carcinogen(s) by OSHA, IARC (Group 1), NTP, ACGIH (A1), or California. California Prop-65: This product is or contains chemicals known to the state of California to cause cancer.

SECTION 12: ECOLOGICAL INFORMATION

Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Avoid release into the environment.

SECTION 13: DISPOSAL CONSIDERATIONS

To determine proper disposal, consult applicable federal, state and local environmental control regulations.

SECTION 14: TRANSPORT INFORMATION

Shipment Name/Type: Non-hazardous for transport.
UN Number: NA Shipping/Hazardous Class: NA Packing Group: NA
Shipping regulations are based on combinations of criteria such as quantity, class and packaging according to DOT, IATA and (49) CFR.

SECTION 15: REGULATORY INFORMATION

EU Symbol of Danger: Toxic (T) concentration ≤ 0.1 C $< 0.2\%$
EU Risk Phrases: May cause cancer [R45]; May cause heritable genetic damage [R46]; Harmful by inhalation [R20].

U.S. TSCA: Listed
Canada: This product has been classified according to the hazard criteria of the CPR and this MSDS contains all the information required by the CPR.

SECTION 16: OTHER INFORMATION

United States EPA Regulatory Information:	NFPA Rating:	Health: 3	Flammability: 0	Reactivity: 0
SARA 313: Yes (0.1% deminimis)	HMIS Rating:	Health: 3	Flammability: 0	Physical Hazard: 0
CERCLA RQ: 10 lbs				

NOTE: NA = Data not available, not established, determined or not pertinent.

DISCLAIMER: The information contained herein has been compiled from data presented in various technical sources believed to be accurate. This information is intended to be used only as a guide and does not purport to be complete. ERA makes no warranties and assumes no liability in connection with the use of this information. It is the user's responsibility to determine the suitability of this information and to assure the adoption of necessary precautions.

Safety data for indeno[1,2,3-cd]pyrene

[Glossary](#) of terms on this data sheet.

The information on this web page is provided to help you to work safely, but it is intended to be an overview of hazards, not a replacement for a full Material Safety Data Sheet (MSDS). MSDS forms can be downloaded from the web sites of many chemical suppliers.

General

Synonyms: 1,10-(1,2-phenylene)pyrene, 1,10-(o-phenylene)pyrene, o-phenylenepyrene, 2,3-phenylenepyrene, 2,3,o-phenylenepyrene, IP
Use:

Molecular formula: C₂₂H₁₂

CAS No: 193-39-5

EINECS No: 205-893-2

Physical data

Appearance: solid

Melting point: 161 - 163 C

Boiling point: 536 C

Vapour density:

Vapour pressure:

Density (g cm⁻³):

Flash point:

Explosion limits:

Autoignition temperature:

Water solubility:

Stability

Stable. Incompatible with strong oxidizing agents.

Toxicology

Limited evidence that this material may be carcinogenic.

Toxicity data

(The meaning of any toxicological abbreviations which appear in this section is given [here](#).)

Risk phrases

(The meaning of any risk phrases which appear in this section is given [here.](#))
R40.

Transport information

(The meaning of any UN hazard codes which appear in this section is given [here.](#))
Non-hazardous for air, sea and road freight.

Personal protection

Treat as potentially hazardous - many multi-ring aromatic compounds are suspected carcinogens.


Safety phrases

(The meaning of any safety phrases which appear in this section is given [here.](#))
S36 S37 S45.

[Return to [Physical & Theoretical Chemistry Lab. Safety home page.](#)]

This information was last updated on May 10, 2005. We have tried to make it as accurate and useful as possible, but can take no responsibility for its use, misuse, or accuracy. We have not verified this information, and cannot guarantee that it is up-to-date.

Note also that the information on the PTCL Safety web site, where this page was hosted, has been copied onto many other sites, often without permission. If you have any doubts about the veracity of the information that you are viewing, or have any queries, please check the URL that your web browser displays for this page. If the URL **begins** "http://msds.chem.ox.ac.uk/" the page is maintained by the Safety Officer in Physical Chemistry at Oxford University. If not, this page is a copy made by some other person and we have no responsibility for it.



Health	1
Fire	2
Reactivity	1
Personal Protection	E

Material Safety Data Sheet

Iron Metal MSDS

Section 1: Chemical Product and Company Identification

Product Name: Iron Metal

Catalog Codes: SLI2047, SLI1996

CAS#: 7439-89-6

RTECS: NO4565500

TSCA: TSCA 8(b) inventory: Iron Metal

CI#: Not applicable.

Synonym:

Chemical Name: Iron

Chemical Formula: Fe

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Iron Metal, powder	7439-89-6	100

Toxicological Data on Ingredients: Not applicable.

Section 3: Hazards Identification

Potential Acute Health Effects: Slightly hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to liver, cardiovascular system, upper respiratory tract, pancreas. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

Skin Contact: Wash with soap and water. Get medical attention if irritation develops.

Serious Skin Contact: Not available.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

Serious Inhalation: Not available.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: Not available.

Flash Points: Not available.

Flammable Limits: Not available.

Products of Combustion: Some metallic oxides.

Fire Hazards in Presence of Various Substances: Flammable in presence of heat.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Explosive in presence of open flames and sparks, of heat.

Fire Fighting Media and Instructions:

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

Special Remarks on Fire Hazards:

Chlorine Trifluoride reacts with iron with incandescence. Powdered iron reacts with fluorine below redness with incandescence. Reduced iron decomposes with nitrogen dioxide @ ordinary temperature with incandescence. Reacting mass formed by mixture of phosphorus and iron can become incandescent when heated. This material is flammable in powder form only.

Special Remarks on Explosion Hazards: Material in powdered form can explode when exposed to heat or flame

Section 6: Accidental Release Measures

Small Spill:

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

Large Spill:

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system.

Section 7: Handling and Storage

Precautions:

Do not ingest. Do not breathe dust. If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents, acids.

Storage: Keep container tightly closed. Keep container in a cool, well-ventilated area. Moisture sensitive.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection: Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits: Not available.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid. (Solid metallic powder.)

Odor: Odorless.

Taste: Tasteless.

Molecular Weight: 55.85 g/mole

Color: Black to Grey.

pH (1% soln/water): Not applicable.

Boiling Point: 3000°C (5432°F)

Melting Point: 1535°C (2795°F)

Critical Temperature: Not available.

Specific Gravity: Density: 7.86 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: Not available.

Volatility: Not available.

Odor Threshold: Not available.

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: Not available.

Solubility: Insoluble in cold water, hot water, diethyl ether.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Excess heat, ignition sources, incompatible materials, water/moisture, air, dust generation.

Incompatibility with various substances:

Reactive with oxidizing agents, acids. Slightly reactive to reactive with moisture.

Corrosivity: Not considered to be corrosive for metals and glass.

Special Remarks on Reactivity:

Hot iron(wire) burns in Chlorine gas. Violent decomposition of hydrogen peroxide (53% by weight or greater) may be caused by contact with iron. Readily oxidizes in moist air forming rust. Reactive with halogens. Incompatible with acetaldehyde, ammonium peroxodisulfate, chloroformamidine, chloric acid, ammonium nitrate, dinitrogen tetroxide, nitryl fluoride, polystyrene, sodium acetylide, potassium dichromate, peroxyformic acid, sulfuric acid, sodium carbide. Readily attacked by dilute mineral acids and or attacked or dissolved by organic acids. Not appreciably attacked by cold sulfuric acid, or nitric acid, but is attacked by hot acids.

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Inhalation. Ingestion.

Toxicity to Animals: Acute oral toxicity (LD50): 30000 mg/kg [Rat].

Chronic Effects on Humans: May cause damage to the following organs: liver, cardiovascular system, upper respiratory tract, pancreas.

Other Toxic Effects on Humans: Slightly hazardous in case of skin contact (irritant), of ingestion, of inhalation.

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: Not available.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: Skin: Iron metal filings or dust: May cause skin irritation by mechanical action. Iron metal wire: Not likely to cause skin irritation. Eyes: Iron metal filings or dust: Can irritate eyes by mechanical action. Iron metal wire: No hazard. Will not cause eye irritation. Inhalation: Iron dust: Can irritate the respiratory tract by mechanical action. Iron metal wire or filings: Not an inhalation hazard unless metal is heated. If metal is heated, fumes will be released. Inhalation of these fumes may cause "fume metal fever", which is characterized by flu-like symptoms. Symptoms may include metallic taste, fever, nausea, vomiting, chills, cough, weakness, chest pain, generalized muscle pain/aches, and increased white blood cell count. Ingestion: Iron metal wire: Not an ingestion hazard. Iron metal filings or dust: The amount of ingested iron which constitutes a toxic dose is not well defined. Proposed toxic doses of elemental iron are 20 mg/kg for gastrointestinal irritation to greater than 60 mg/kg for systemic toxicity. Gastrointestinal effects are the first signs to appear, with hemorrhagic vomiting and diarrhea, hematochezia, abdominal pain, lethargy, metabolic acidosis, coagulopathy, shock, coma and convulsions developing from 0 to 6 hours after ingestion. Leukocytosis may also occur. An asymptomatic phase may ensue at 6 to 12 hours postingestion, followed by hypoglycemia or hyperglycemia, hepatic and renal failure, severe acidosis, cyanosis, fever, CNS depression (lethargy, restlessness and/or confusion seizures), hypotension, and cardiovascular collapse/cardiac failure in 12 to 48 hours. Hepatic cirrhosis, gastrointestinal scarring and/or strictures may arise in 2 to 6 weeks. It may also cause an anaphylactoid reaction. Non-cardiogenic pulmonary edema also develop in severe cases of iron intoxication. Chronic Potential Health Effects: Inhalation: Chronic inhalation of iron dust can lead to accumulation in the lungs and a characteristic stippled appearance on X-rays. This condition, called SIDEROSIS, is considered benign in that it does not interfere with lung function and does not predispose to other disease. Chronic inhalation of iron dust may also cause fibrosis in the lungs. Ingestion: Clinical signs of iron overload appear when the total body iron is 5 to 10 times higher than normal. Neurobehavioral defects including depression, decreased activity, habituation, reflex startle, and conditioned avoidance response performance may occur. However, similar effects were also seen in iron deficiency. It is therefore likely that these behavioral effects are secondary to general toxicity. High serum iron levels may be associated with an increased risk of fatal acute myocardial infarction (MI). Skin: Prolonged or repeated contact may cause hypersensitivity.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The product itself and its products of degradation are not toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 4.1: Flammable solid.

Identification: : Metal powder, flammable, n.o.s. (Iron metal powder) UNNA: 3089 PG: III

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

California Director's List of Hazardous Substances: Iron Metal TSCA 8(b) inventory: Iron Metal

Other Regulations: EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada): CLASS B-4: Flammable solid.

DSCL (EEC):

R11- Highly flammable. S16- Keep away from sources of ignition - No smoking. S22- Do not breathe dust.

HMIS (U.S.A.):

Health Hazard: 1

Fire Hazard: 2

Reactivity: 1

Personal Protection: E

National Fire Protection Association (U.S.A.):

Health: 1

Flammability: 2

Reactivity: 1

Specific hazard:

Protective Equipment:

Gloves Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/09/2005 05:52 PM

Last Updated: 11/06/2008 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Version 5.8
Revision Date 03/06/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Isopropyl alcohol

Product Number : W292907
Brand : Aldrich
Index-No. : 603-117-00-0

CAS-No. : 67-63-0

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225

Highly flammable liquid and vapour.

H319

Causes serious eye irritation.

H336

May cause drowsiness or dizziness.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P261

Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P312	Call a POISON CENTER or doctor/ physician if you feel unwell.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : 2-Propanol
sec-Propyl alcohol
Isopropyl alcohol
Isopropanol

Formula : C₃H₈O
Molecular weight : 60.10 g/mol
CAS-No. : 67-63-0
EC-No. : 200-661-7
Index-No. : 603-117-00-0

Hazardous components

Component	Classification	Concentration
2-Propanol		
	Flam. Liq. 2; Eye Irrit. 2A; STOT SE 3; H225, H319, H336	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Move out of dangerous area. Consult a physician. Show this safety data sheet to the doctor in attendance.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Handle and store under inert gas. hygroscopic

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
2-Propanol	67-63-0	TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment		

		Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	400 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	400.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	400.000000 ppm 980.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	400.000000 ppm 980.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	500.000000 ppm 1,225.000000 mg/m3	USA. NIOSH Recommended Exposure Limits

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
2-Propanol	67-63-0	Acetone	40.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 60 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|---|
| a) Appearance | Form: liquid
Colour: colourless |
| b) Odour | alcohol-like |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -89.5 °C (-129.1 °F) - lit. |
| f) Initial boiling point and boiling range | 82 °C (180 °F) - lit. |
| g) Flash point | 12.0 °C (53.6 °F) - closed cup |
| h) Evaporation rate | 3.0 |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or | Upper explosion limit: 12.7 %(V)
Lower explosion limit: 2 %(V) |

explosive limits

- | | |
|---|--|
| k) Vapour pressure | 43.2 hPa (32.4 mmHg) at 20.0 °C (68.0 °F)
58.7 hPa (44.0 mmHg) at 25.0 °C (77.0 °F) |
| l) Vapour density | No data available |
| m) Relative density | 0.785 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | completely soluble |
| o) Partition coefficient: n-octanol/water | log Pow: 0.05 |
| p) Auto-ignition temperature | 425.0 °C (797.0 °F) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

Surface tension	20.8 mN/m at 25.0 °C (77.0 °F)
-----------------	--------------------------------

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year. Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

10.5 Incompatible materials

Oxidizing agents, Acid anhydrides, Aluminium, Halogenated compounds, Acids

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 5,045 mg/kg

Remarks: Behavioral: Altered sleep time (including change in righting reflex). Behavioral: Somnolence (general depressed activity).

LC50 Inhalation - Rat - 8 h - 16000 ppm

LD50 Dermal - Rabbit - 12,800 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Mild skin irritation

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (2-Propanol)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

Inhalation, Oral - May cause drowsiness or dizziness.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: NT8050000

Central nervous system depression, prolonged or repeated exposure can cause:, Nausea, Headache, Vomiting, narcosis, Drowsiness, Overexposure may cause mild, reversible liver effects., Aspiration may lead to:, Lung oedema, Pneumonia

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney - Irregularities - Based on Human Evidence

Kidney - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 9,640.00 mg/l - 96 h

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 5,102.00 mg/l - 24 h

Immobilization EC50 - Daphnia magna (Water flea) - 6,851 mg/l - 24 h

Toxicity to algae EC50 - Desmodesmus subspicatus (green algae) - > 2,000.00 mg/l - 72 h

EC50 - Algae - > 1,000.00 mg/l - 24 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No bioaccumulation is to be expected (log Pow <= 4).

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1219 Class: 3 Packing group: II
Proper shipping name: Isopropanol
Reportable Quantity (RQ):

Poison Inhalation Hazard: No

IMDG

UN number: 1219 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: ISOPROPANOL

IATA

UN number: 1219 Class: 3 Packing group: II
Proper shipping name: Isopropanol

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
2-Propanol	67-63-0	1987-01-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
2-Propanol	67-63-0	1987-01-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
2-Propanol	67-63-0	1987-01-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
2-Propanol	67-63-0	1987-01-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
STOT SE	Specific target organ toxicity - single exposure

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.8

Revision Date: 03/06/2015

Print Date: 02/18/2016

SAFETY DATA SHEET

Version 4.7
Revision Date 12/29/2015
Print Date 02/07/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Lead

Product Number : 391352

Brand : Aldrich

CAS-No. : 7439-92-1

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Oral (Category 4), H302

Carcinogenicity (Category 2), H351

Reproductive toxicity (Category 2), H361

Specific target organ toxicity - repeated exposure (Category 2), H373

Acute aquatic toxicity (Category 1), H400

Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H302 Harmful if swallowed.

H351 Suspected of causing cancer.

H361 Suspected of damaging fertility or the unborn child.

H373 May cause damage to organs through prolonged or repeated exposure.

H410 Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201 Obtain special instructions before use.

P202 Do not handle until all safety precautions have been read and

	understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P312 + P330	IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell. Rinse mouth.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: Pb
Molecular weight	: 207.20 g/mol
CAS-No.	: 7439-92-1
EC-No.	: 231-100-4

Hazardous components

Component	Classification	Concentration
Lead		
	Acute Tox. 4; Carc. 2; Repr. 2; STOT RE 2; Aquatic Acute 1; Aquatic Chronic 1; H302, H351, H361, H373, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Lead oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

Storage class (TRGS 510): Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
	Remarks	See 1910.1025		
Lead	7439-92-1	TWA	0.05 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
		Confirmed animal carcinogen with unknown relevance to humans		
		TWA	0.05 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Hematologic effects Peripheral Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Confirmed animal carcinogen with unknown relevance to humans		

		TWA	0.05 mg/m ³	USA. NIOSH Recommended Exposure Limits
		See Appendix C		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Lead	7439-92-1	Lead	30µg/ 100 ml	In blood	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Not critical			
		Lead	30µg/ 100 ml	In blood	ACGIH - Biological Exposure Indices (BEI)
		Not critical			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: powder
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 327.4 °C (621.3 °F) - lit.
f) Initial boiling point and boiling range	1,740 °C (3,164 °F) - lit.
g) Flash point	Not applicable
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	No data available
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong acids

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

Rat

Cytogenetic analysis

Carcinogenicity

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Lead)

NTP: Reasonably anticipated to be a human carcinogen (Lead)

Reasonably anticipated to be a human carcinogen The reference note has been added by TD based on the background information of the NTP. (Lead)

OSHA: 1910.1025 (Lead)

OSHA specifically regulated carcinogen (Lead)

Reproductive toxicity

Suspected human reproductive toxicant

Reproductive toxicity - Rat - Inhalation

Effects on Newborn: Biochemical and metabolic.

Reproductive toxicity - Rat - Oral

Effects on Newborn: Behavioral.

Reproductive toxicity - Mouse - Oral

Effects on Fertility: Female fertility index (e.g., # females pregnant per # sperm positive females; # females pregnant per # females mated). Effects on Fertility: Pre-implantation mortality (e.g., reduction in number of implants per female; total number of implants per corpora lutea).

Developmental Toxicity - Rat - Inhalation

Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Specific Developmental Abnormalities: Blood and lymphatic system (including spleen and marrow).

Developmental Toxicity - Rat - Oral

Specific Developmental Abnormalities: Blood and lymphatic system (including spleen and marrow). Effects on Newborn: Growth statistics (e.g., reduced weight gain).

Developmental Toxicity - Rat - Oral

Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Effects on Embryo or Fetus: Fetal death.

Developmental Toxicity - Mouse - Oral

Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus). Effects on Embryo or Fetus: Fetal death.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

May cause damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

Additional Information

RTECS: OF7525000

anemia

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish	mortality LOEC - Oncorhynchus mykiss (rainbow trout) - 1.19 mg/l - 96.0 h
	LC50 - Micropterus dolomieu - 2.2 mg/l - 96.0 h
	mortality NOEC - Salvelinus fontinalis - 1.7 mg/l - 10.0 d
Toxicity to daphnia and other aquatic invertebrates	mortality LOEC - Daphnia (water flea) - 0.17 mg/l - 24 h
	mortality NOEC - Daphnia (water flea) - 0.099 mg/l - 24 h
Toxicity to algae	mortality EC50 - Skeletonema costatum - 7.94 mg/l - 10 d

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Bioaccumulation	Oncorhynchus kisutch - 2 Weeks - 150 µg/l
	Bioconcentration factor (BCF): 12

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 3077	Class: 9	Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Lead)		
Reportable Quantity (RQ): 10 lbs		

Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Lead)
Marine pollutant: yes

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Lead)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Lead	7439-92-1	1994-04-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Lead	7439-92-1	1994-04-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Lead	7439-92-1	1994-04-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Lead	7439-92-1	1994-04-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Lead	7439-92-1	1989-07-10

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

	CAS-No.	Revision Date
Lead	7439-92-1	1989-07-10

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H302	Harmful if swallowed.
H351	Suspected of causing cancer.
H361	Suspected of damaging fertility or the unborn child.
H373	May cause damage to organs through prolonged or repeated exposure.

H400 Very toxic to aquatic life.
H410 Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard: 1
Chronic Health Hazard: *
Flammability: 0
Physical Hazard 0

NFPA Rating

Health hazard: 1
Fire Hazard: 0
Reactivity Hazard: 0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.7

Revision Date: 12/29/2015

Print Date: 02/07/2016

SAFETY DATA SHEET

Version 4.6
Revision Date 03/02/2015
Print Date 02/07/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Manganese

Product Number : 463728
Brand : Aldrich

CAS-No. : 7439-96-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Substances and mixtures, which in contact with water, emit flammable gases (Category 1), H260
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H260

In contact with water releases flammable gases which may ignite spontaneously.

H412

Harmful to aquatic life with long lasting effects.

Precautionary statement(s)

P223

Keep away from any possible contact with water, because of violent reaction and possible flash fire.

P231 + P232

Handle under inert gas. Protect from moisture.

P273

Avoid release to the environment.

P280

Wear protective gloves/ protective clothing/ eye protection/ face protection.

P335 + P334

Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.

P370 + P378

In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.

P402 + P404
P501

Store in a dry place. Store in a closed container.

Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : Mn
Molecular weight : 54.94 g/mol
CAS-No. : 7439-96-5
EC-No. : 231-105-1

Hazardous components

Component	Classification	Concentration
Manganese		
	Water-react. 1; Aquatic Acute 3; Aquatic Chronic 3; H260, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Dry powder Carbon dioxide (CO₂)

Unsuitable extinguishing media

Water

5.2 Special hazards arising from the substance or mixture

Manganese/manganese oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.
Provide appropriate exhaust ventilation at places where dust is formed. Keep away from sources of ignition - No smoking.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.
Never allow product to get in contact with water during storage.

Moisture sensitive. Keep in a dry place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Manganese	7439-96-5	TWA	0.200000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Adopted values or notations enclosed are those for which changes are proposed in the NIC See Notice of Intended Changes (NIC)		
		C	5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Ceiling limit is to be determined from breathing-zone air samples.		
		C	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Ceiling limit is to be determined from breathing-zone air samples.		

		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		C	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Ceiling limit is to be determined from breathing-zone air samples.		
		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	0.200000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Adopted values or notations enclosed are those for which changes are proposed in the NIC See Notice of Intended Changes (NIC) varies		
		TWA	0.100000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment 2014 Adoption varies		
		TWA	0.020000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment 2014 Adoption varies		
		TWA	0.1 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment varies		
		TWA	0.02 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment varies		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

impervious clothing, Flame retardant protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

a) Appearance	Form: powder Colour: grey
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 1,244 °C (2,271 °F) - lit.
f) Initial boiling point and boiling range	1,962 °C (3,564 °F) - lit.
g) Flash point	Not applicable
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	7.3 g/mL at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY**10.1 Reactivity**

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Reacts violently with water.

10.4 Conditions to avoid

Exposure to moisture

10.5 Incompatible materials

acids, Halogens, Bases, Phosphorus, Sulphur oxides, Peroxides

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 9,000 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Mild skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation - 24 h

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Carcinogenicity - Rat - Intramuscular

Tumorigenic: Equivocal tumorigenic agent by RTECS criteria. Tumorigenic: Tumors at site of application.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

May cause reproductive disorders.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: OO9275000

Men exposed to manganese dusts showed a decrease in fertility. Chronic manganese poisoning primarily involves the central nervous system. Early symptoms include languor, sleepiness and weakness in the legs. A stolid mask-like appearance of the face, emotional disturbances such as uncontrollable laughter and a spastic gait with tendency to fall in walking are findings in more advanced cases. High incidence of pneumonia has been found in workers exposed to the dust or fume of some manganese compounds.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 40 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3208 Class: 4.3 Packing group: I
Proper shipping name: Metallic substance, water-reactive, n.o.s. (Manganese)

Poison Inhalation Hazard: No

IMDG

UN number: 3208 Class: 4.3 Packing group: I EMS-No: F-G, S-N
Proper shipping name: METALLIC SUBSTANCE, WATER-REACTIVE, N.O.S. (Manganese)

IATA

UN number: 3208 Class: 4.3 Packing group: I
Proper shipping name: Metallic substance, water-reactive, n.o.s. (Manganese)
IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

Manganese	CAS-No. 7439-96-5	Revision Date 2007-07-01
-----------	----------------------	-----------------------------

SARA 311/312 Hazards

Reactivity Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

Manganese	CAS-No. 7439-96-5	Revision Date 2007-07-01
-----------	----------------------	-----------------------------

Pennsylvania Right To Know Components

Manganese	CAS-No. 7439-96-5	Revision Date 2007-07-01
-----------	----------------------	-----------------------------

New Jersey Right To Know Components

Manganese	CAS-No. 7439-96-5	Revision Date 2007-07-01
-----------	----------------------	-----------------------------

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H260	In contact with water releases flammable gases which may ignite spontaneously.
H402	Harmful to aquatic life.
H412	Harmful to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	2

NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	2
Special hazard.I:	W

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 03/02/2015

Print Date: 02/07/2016

SAFETY DATA SHEET

Version 4.6
Revision Date 03/02/2015
Print Date 02/07/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Manganese

Product Number : 463728
Brand : Aldrich

CAS-No. : 7439-96-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Substances and mixtures, which in contact with water, emit flammable gases (Category 1), H260
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H260

In contact with water releases flammable gases which may ignite spontaneously.

H412

Harmful to aquatic life with long lasting effects.

Precautionary statement(s)

P223

Keep away from any possible contact with water, because of violent reaction and possible flash fire.

P231 + P232

Handle under inert gas. Protect from moisture.

P273

Avoid release to the environment.

P280

Wear protective gloves/ protective clothing/ eye protection/ face protection.

P335 + P334

Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.

P370 + P378

In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.

P402 + P404
P501

Store in a dry place. Store in a closed container.

Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : Mn
Molecular weight : 54.94 g/mol
CAS-No. : 7439-96-5
EC-No. : 231-105-1

Hazardous components

Component	Classification	Concentration
Manganese		
	Water-react. 1; Aquatic Acute 3; Aquatic Chronic 3; H260, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Dry powder Carbon dioxide (CO₂)

Unsuitable extinguishing media

Water

5.2 Special hazards arising from the substance or mixture

Manganese/manganese oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.
Provide appropriate exhaust ventilation at places where dust is formed. Keep away from sources of ignition - No smoking.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.
Never allow product to get in contact with water during storage.

Moisture sensitive. Keep in a dry place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Manganese	7439-96-5	TWA	0.200000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Adopted values or notations enclosed are those for which changes are proposed in the NIC See Notice of Intended Changes (NIC)		
		C	5 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Ceiling limit is to be determined from breathing-zone air samples.		
		C	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Ceiling limit is to be determined from breathing-zone air samples.		

		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		C	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Ceiling limit is to be determined from breathing-zone air samples.		
		TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	0.200000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Adopted values or notations enclosed are those for which changes are proposed in the NIC See Notice of Intended Changes (NIC) varies		
		TWA	0.100000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment 2014 Adoption varies		
		TWA	0.020000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment 2014 Adoption varies		
		TWA	0.1 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment varies		
		TWA	0.02 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment varies		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

impervious clothing, Flame retardant protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

- | | |
|---|---|
| a) Appearance | Form: powder
Colour: grey |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 1,244 °C (2,271 °F) - lit. |
| f) Initial boiling point and boiling range | 1,962 °C (3,564 °F) - lit. |
| g) Flash point | Not applicable |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 7.3 g/mL at 25 °C (77 °F) |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY**10.1 Reactivity**

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Reacts violently with water.

10.4 Conditions to avoid

Exposure to moisture

10.5 Incompatible materials

acids, Halogens, Bases, Phosphorus, Sulphur oxides, Peroxides

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 9,000 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Mild skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation - 24 h

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Carcinogenicity - Rat - Intramuscular

Tumorigenic: Equivocal tumorigenic agent by RTECS criteria. Tumorigenic: Tumors at site of application.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

May cause reproductive disorders.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: OO9275000

Men exposed to manganese dusts showed a decrease in fertility. Chronic manganese poisoning primarily involves the central nervous system. Early symptoms include languor, sleepiness and weakness in the legs. A stolid mask-like appearance of the face, emotional disturbances such as uncontrollable laughter and a spastic gait with tendency to fall in walking are findings in more advanced cases. High incidence of pneumonia has been found in workers exposed to the dust or fume of some manganese compounds.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 40 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3208 Class: 4.3 Packing group: I
Proper shipping name: Metallic substance, water-reactive, n.o.s. (Manganese)

Poison Inhalation Hazard: No

IMDG

UN number: 3208 Class: 4.3 Packing group: I EMS-No: F-G, S-N
Proper shipping name: METALLIC SUBSTANCE, WATER-REACTIVE, N.O.S. (Manganese)

IATA

UN number: 3208 Class: 4.3 Packing group: I
Proper shipping name: Metallic substance, water-reactive, n.o.s. (Manganese)
IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

Manganese	CAS-No. 7439-96-5	Revision Date 2007-07-01
-----------	----------------------	-----------------------------

SARA 311/312 Hazards

Reactivity Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

Manganese	CAS-No. 7439-96-5	Revision Date 2007-07-01
-----------	----------------------	-----------------------------

Pennsylvania Right To Know Components

Manganese	CAS-No. 7439-96-5	Revision Date 2007-07-01
-----------	----------------------	-----------------------------

New Jersey Right To Know Components

Manganese	CAS-No. 7439-96-5	Revision Date 2007-07-01
-----------	----------------------	-----------------------------

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H260	In contact with water releases flammable gases which may ignite spontaneously.
H402	Harmful to aquatic life.
H412	Harmful to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	2

NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	2
Special hazard.I:	W

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 03/02/2015

Print Date: 02/07/2016

MATERIAL SAFETY DATA SHEET

Date Printed: 02.04.2016

Date Updated: 07.08.2012

Version 1.9

Section 1 - Product and Company Information

Product Name	M-CRESOL APPROX 99%
Product Number	C5015
Brand	SIGMA
Company	Sigma-Aldrich
Address	3050 Spruce Street SAINT LOUIS MO 63103 US
Technical Phone:	800-325-5832
Fax:	800-325-5052
Emergency Phone:	314-776-6555

Section 2 - Composition/Information on Ingredient

Substance Name	CAS #	SARA 313
M-CRESOL	108-39-4	Yes
Formula	C7H8O	
Synonyms	3-Cresol * m-Cresol (ACGIH:OSHA) * m-Cresole * m-Cresylic acid * 1-Hydroxy-3-methylbenzene * m-Hydroxytoluene * 3-Hydroxytoluene * m-Kresol * m-Methylphenol * 3-Methylphenol * m-Oxytoluene * Phenol, 3-methyl- (9CI) * RCRA waste number U052 * m-Toluol	
RTECS Number:	GO6125000	

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Toxic.

Toxic in contact with skin and if swallowed. Causes burns.

Readily absorbed through skin. Combustible. Target organ(s):

Central nervous system. Lungs.

HMIS RATING

HEALTH: 3*

FLAMMABILITY: 2

REACTIVITY: 1

NFPA RATING

HEALTH: 3

FLAMMABILITY: 2

REACTIVITY: 1

*additional chronic hazards present.

For additional information on toxicity, please refer to Section 11.

Section 4 - First Aid Measures

ORAL EXPOSURE

If swallowed, wash out mouth with water provided person is conscious. Call a physician immediately. Do not induce vomiting.

INHALATION EXPOSURE

If inhaled, remove to fresh air. If not breathing give artificial respiration. If breathing is difficult, give oxygen.

DERMAL EXPOSURE

In case of skin contact, flush with copious amounts of water for at least 15 minutes. Remove contaminated clothing and shoes. Call a physician.

EYE EXPOSURE

In case of contact with eyes, flush with copious amounts of water for at least 15 minutes. Assure adequate flushing by separating the eyelids with fingers. Call a physician.

Section 5 - Fire Fighting Measures

FLASH POINT

186,800 °F 86,000 °C Method: closed cup

EXPLOSION LIMITS

Lower: 1,060 % Upper: 1,350 %

AUTOIGNITION TEMP

558,00 °C

FLAMMABILITY

N/A

EXTINGUISHING MEDIA

Suitable: Carbon dioxide, dry chemical powder, or appropriate foam.

FIREFIGHTING

Protective Equipment: Wear self-contained breathing apparatus and protective clothing to prevent contact with skin and eyes. Specific Hazard(s): Combustible liquid. Emits toxic fumes under fire conditions.

Section 6 - Accidental Release Measures

PROCEDURE TO BE FOLLOWED IN CASE OF LEAK OR SPILL

Evacuate area.

PROCEDURE(S) OF PERSONAL PRECAUTION(S)

Wear self-contained breathing apparatus, rubber boots, and heavy rubber gloves.

METHODS FOR CLEANING UP

Cover with dry lime or soda ash, pick up, keep in a closed container, and hold for waste disposal. Ventilate area and wash spill site after material pickup is complete.

Section 7 - Handling and Storage

HANDLING

User Exposure: Do not breathe vapor. Do not get in eyes, on

skin, on clothing. Avoid prolonged or repeated exposure.

STORAGE

Suitable: Keep tightly closed. Keep away from heat and open flame. Store in a cool dry place.

Unsuitable: May discolor on exposure to air and light.

Section 8 - Exposure Controls / PPE

ENGINEERING CONTROLS

Use only in a chemical fume hood. Safety shower and eye bath.

PERSONAL PROTECTIVE EQUIPMENT

Respiratory: Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU). Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator.

Hand: Compatible chemical-resistant gloves.

Eye: Chemical safety goggles.

Other: Faceshield (8-inch minimum).

GENERAL HYGIENE MEASURES

Wash contaminated clothing before reuse. Discard contaminated shoes. Wash thoroughly after handling.

EXPOSURE LIMITS, RTECS

Country	Source	Type	Value
USA	ACGIH	TWA	5 PPM
Remarks: Skin			
USA	MSHA Standard-air	TWA	5 PPM (22 MG/M3)
USA	OSHA.	PEL	8H TWA 5 PPM (22 MG/M3) (SKIN)
New Zealand OEL			
Remarks: check ACGIH TLV			
USA	NIOSH	TWA	2.3 PPM

Section 9 - Physical/Chemical Properties

Appearance	Physical State: Liquid	
Property	Value	At Temperature or Pressure
Molecular Weight	108,1400 AMU	
pH	N/A	
BP/BP Range	200,000. - 203,000 °C.	
MP/MP Range	8,000. - 10,000 °C.	
Freezing Point	N/A	
Vapor Pressure	< 1,000000000 mmHg	20,00 °C
Vapor Density	3,720 g/l	
Saturated Vapor Conc.	N/A	
SG/Density	1,0340 g/cm3	
Bulk Density	N/A	
Odor Threshold	N/A	
Volatile%	N/A	
VOC Content	N/A	
Water Content	N/A	
Solvent Content	N/A	

Evaporation Rate	N/A	
Viscosity	12,900 Pas	25,000 °C
Surface Tension	N/A	
Partition Coefficient	N/A	
Decomposition Temp.	N/A	
Flash Point	186,800 °F	Method: closed cup
	86,000 °C	
Explosion Limits	Lower: 1,060 %	
	Upper: 1,350 %	
Flammability	N/A	
Autoignition Temp	558,00 °C	
Refractive Index	1,5420	
Optical Rotation	N/A	
Miscellaneous Data	N/A	
Solubility	Other Solvents: SOLUBLE IN ACETONE, ETHANOL, MISCIBLE IN ALCOHOL, ETHER	

N/A = not available

Section 10 - Stability and Reactivity

STABILITY

Stable: Stable.

Materials to Avoid: Oxidizing agents, Bases.

HAZARDOUS DECOMPOSITION PRODUCTS

Hazardous Decomposition Products: Carbon monoxide, Carbon dioxide.

HAZARDOUS POLYMERIZATION

Hazardous Polymerization: Will not occur

Section 11 - Toxicological Information

ROUTE OF EXPOSURE

Skin Contact: Causes burns.

Skin Absorption: Toxic if absorbed through skin. Readily absorbed through skin.

Eye Contact: Causes burns.

Inhalation: May be harmful if inhaled. Material is extremely destructive to the tissue of the mucous membranes and upper respiratory tract.

Ingestion: Toxic if swallowed.

TARGET ORGAN(S) OR SYSTEM(S)

Central nervous system. Eyes. Liver. Kidneys. Lungs.

SIGNS AND SYMPTOMS OF EXPOSURE

Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin.

Inhalation may result in spasm, inflammation and edema of the larynx and bronchi, chemical pneumonitis, and pulmonary edema.

Symptoms of exposure may include burning sensation, coughing, wheezing, laryngitis, shortness of breath, headache, nausea, and vomiting. Exposure can cause: Damage to the eyes. Damage to the kidneys. To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

TOXICITY DATA

Oral
Rat
242,000000 mg/kg
LD50
Remarks: Behavioral:Somnolence (general depressed activity).
Behavioral:Convulsions or effect on seizure threshold.
Gastrointestinal:Peritonitis.

Inhalation
Rat
> 710,000 mg/m3
LC50

Skin
Rat
1100,000000 mg/kg
LD50

Oral
Mouse
828,000000 mg/kg
LD50

Intraperitoneal
Mouse
168 MG/KG
LD50

Skin
Rabbit
2050,000000 mg/kg
LD50
Remarks: Behavioral:Convulsions or effect on seizure threshold.
Sense Organs and Special Senses (Nose, Eye, Ear, and
Taste):Eye:Lacrimation. Gastrointestinal:Changes in structure or
function of salivary glands.

IRRITATION DATA

Skin
Rabbit
517,000000 mg
24H
Remarks: Severe irritation effect

Eyes
Rabbit
103,000000 mg
Remarks: Severe irritation effect

CHRONIC EXPOSURE - CARCINOGEN

Species: Mouse
Route of Application: Skin
Dose: 2280 MG/KG
Exposure Time: 20W
Frequency: I
Result: Tumorigenic:Neoplastic by RTECS criteria. Skin and
Appendages: Other: Tumors.

CHRONIC EXPOSURE - TERATOGEN

Species: Rabbit
Dose: 134 GM/KG
Route of Application: Subcutaneous
Exposure Time: (6-18D PREG)
Result: Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

CHRONIC EXPOSURE - MUTAGEN

Species: Human
Dose: 10 UMOL/L
Exposure Time: 4H
Cell Type: HeLa cell
Mutation test: DNA inhibition

Section 12 - Ecological Information

ACUTE ECOTOXICITY TESTS

Test Type: EC50 Algae
Time: 24,0 h
Value: 110,000 mg/l

Test Type: EC50 Daphnia
Species: Daphnia magna
Time: 24,0 h
Value: 25,000 mg/l

Test Type: LC50 Fish
Species: Leuciscus idus
Time: 48,0 h
Value: 17,000. - 19,000 mg/l.

Test Type: LC50 Fish
Species: Onchorhynchus mykiss (Rainbow trout)
Time: 96,0 h
Value: 8,900 mg/l

Section 13 - Disposal Considerations

APPROPRIATE METHOD OF DISPOSAL OF SUBSTANCE OR PREPARATION

This combustible material may be burned in a chemical incinerator equipped with an afterburner and scrubber. Observe all federal, state, and local environmental regulations.

Section 14 - Transport Information

DOT

Proper Shipping Name: Cresols
UN#: 2076
Class: 6.1
Packing Group: Packing Group II
Hazard Label: Toxic substances.
Hazard Label: Corrosive
PIH: Not PIH

IATA

Proper Shipping Name: Cresols, liquid (o-, m-, p-)

IATA UN Number: 2076
Hazard Class: 6.1
Packing Group: II

Section 15 - Regulatory Information

EU DIRECTIVES CLASSIFICATION

Symbol of Danger: T
Indication of Danger: Toxic.
R: 24/25-34
Risk Statements: Toxic in contact with skin and if swallowed.
Causes burns.
S: 36/37/39-45
Safety Statements: Wear suitable protective clothing, gloves, and eye/face protection. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

US CLASSIFICATION AND LABEL TEXT

Indication of Danger: Toxic.
Risk Statements: Toxic in contact with skin and if swallowed.
Causes burns.
Safety Statements: In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Wear suitable protective clothing, gloves, and eye/face protection. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).
US Statements: Readily absorbed through skin. Combustible.
Target organ(s): Central nervous system. Lungs.

UNITED STATES REGULATORY INFORMATION

SARA LISTED: Yes
DEMINIMIS: 1,000 %
TSCA INVENTORY ITEM: Yes

CANADA REGULATORY INFORMATION

WHMIS Classification: This product has been classified in accordance with the hazard criteria of the CPR, and the MSDS contains all the information required by the CPR.
DSL: Yes
NDSL: No

Section 16 - Other Information

DISCLAIMER

For R&D use only. Not for drug, household or other uses.

WARRANTY

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Inc., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.
Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

SAFETY DATA SHEET

Version 6.5
Revision Date 02/07/2023
Print Date 02/07/2023

SECTION 1: Identification of the substance/mixture and of the company/undertaking**1.1 Product identifiers**

Product name : Mercury

Product Number : 215457
Brand : SIGALD
Index-No. : 080-001-00-0
CAS-No. : 7439-97-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Scientific research and development, Reagent for analysis

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 SPRUCE ST
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-
527-3887 CHEMTREC (International) 24
Hours/day; 7 Days/week

SECTION 2: Hazards identification**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Acute toxicity, Inhalation (Category 2), H330
Reproductive toxicity (Category 1B), H360
Specific target organ toxicity - repeated exposure (Category 1), H372
Short-term (acute) aquatic hazard (Category 1), H400
Long-term (chronic) aquatic hazard (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal Word

Danger

Hazard statement(s)	
H330	Fatal if inhaled.
H360	May damage fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H410	Very toxic to aquatic life with long lasting effects.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P260	Do not breathe dust/ fume/ gas/ mist/ vapors/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P284	Wear respiratory protection.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER/ doctor.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Formula	: Hg
Molecular weight	: 200.59 g/mol
CAS-No.	: 7439-97-6
EC-No.	: 231-106-7
Index-No.	: 080-001-00-0

Component	Classification	Concentration
mercury		
	Acute Tox. 2; Repr. 1B; STOT RE 1; Aquatic Acute 1; Aquatic Chronic 1; H330, H360, H372, H400, H410 M-Factor - Aquatic Acute: 1 - Aquatic Chronic: 100	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

First aiders need to protect themselves. Show this material safety data sheet to the doctor in attendance.

If inhaled

After inhalation: fresh air. Immediately call in physician. If breathing stops: immediately apply artificial respiration, if necessary also oxygen.

In case of skin contact

In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower. Consult a physician.

In case of eye contact

After eye contact: rinse out with plenty of water. Call in ophthalmologist. Remove contact lenses.

If swallowed

After swallowing: immediately make victim drink water (two glasses at most). Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.

Unsuitable extinguishing media

For this substance/mixture no limitations of extinguishing agents are given.

5.2 Special hazards arising from the substance or mixture

Mercury/mercury oxides.

Not combustible.

Ambient fire may liberate hazardous vapours.

5.3 Advice for firefighters

Stay in danger area only with self-contained breathing apparatus. Prevent skin contact by keeping a safe distance or by wearing suitable protective clothing.

5.4 Further information

Suppress (knock down) gases/vapors/mists with a water spray jet. Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Advice for non-emergency personnel: Do not breathe vapors, aerosols. Avoid substance contact. Ensure adequate ventilation. Evacuate the danger area, observe emergency procedures, consult an expert.

For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal. In some instances, a mercury spill kit may be used. Please consult with your site EHS representative to determine the most appropriate clean up method. Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up carefully with liquid-absorbent material (e.g. Chemizorb®). Dispose of properly. Clean up affected area.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on safe handling

Work under hood. Do not inhale substance/mixture. Avoid generation of vapours/aerosols.

Hygiene measures

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Tightly closed. Keep in a well-ventilated place. Keep locked up or in an area accessible only to qualified or authorized persons.

Store under inert gas.

Storage class

Storage class (TRGS 510): 6.1B: Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
mercury	7439-97-6	C	0.1 mg/m ³	USA. NIOSH Recommended Exposure Limits
	Remarks	Potential for dermal absorption		
		CEIL	1.0mg/10m ³	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	0.05 mg/m ³	USA. Table Z-1-A Limits for Air Contaminants (1989 vacated values)
		Skin notation		
		TWA	0.025 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Kidney damage Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen Danger of cutaneous absorption		
		TWA	0.05 mg/m ³	USA. NIOSH Recommended Exposure Limits
		Potential for dermal absorption		

8.2 Exposure controls

Appropriate engineering controls

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU). Safety glasses

Skin protection

This recommendation applies only to the product stated in the safety data sheet, supplied by us and for the designated use. When dissolving in or mixing with other substances and under conditions deviating from those stated in EN374 please contact the supplier of CE-approved gloves (e.g. KCL GmbH, D-36124 Eichenzell, Internet: www.kcl.de).

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:KCL 741 Dermatril® L

This recommendation applies only to the product stated in the safety data sheet, supplied by us and for the designated use. When dissolving in or mixing with other substances and under conditions deviating from those stated in EN374 please contact the supplier of CE-approved gloves (e.g. KCL GmbH, D-36124 Eichenzell, Internet: www.kcl.de).

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested:KCL 741 Dermatril® L

Body Protection

protective clothing

Respiratory protection

required when vapours/aerosols are generated.

Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection system.

Control of environmental exposure

Do not let product enter drains.

SECTION 9: Physical and chemical properties**9.1 Information on basic physical and chemical properties**

a) Appearance	Form: liquid Color: silver, white
b) Odor	odorless
c) Odor Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -38.87 °C (-37.97 °F) - lit.
f) Initial boiling point and boiling range	356.6 °C 673.9 °F - lit.
g) Flash point	()Not applicable
h) Evaporation rate	No data available
i) Flammability (solid, gas)	The product is not flammable.
j) Upper/lower flammability or explosive limits	No data available
k) Vapor pressure	< 0.01 hPa at 20 °C (68 °F) 1 hPa at 126 °C(259 °F)
l) Vapor density	6.93 - (Air = 1.0)
m) Density	13.55 g/cm ³ at 25 °C (77 °F)
Relative density	No data available
n) Water solubility	0.00006 g/l at 25 °C (77 °F)
o) Partition coefficient: n-octanol/water	Not applicable for inorganic substances
p) Autoignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available

s) Explosive properties No data available

t) Oxidizing properties none

9.2 Other safety information

Relative vapor density 6.93 - (Air = 1.0)

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

The product is chemically stable under standard ambient conditions (room temperature) .

10.3 Possibility of hazardous reactions

Risk of explosion with:

Acetylene

Alkali metals

Aluminum

Amines

Ammonia

chlorine dioxide

Potassium

sodium

oxalic acid

perchlorates

Risk of ignition or formation of inflammable gases or vapours with:

Chlorine

silanes

Oxygen

Generates dangerous gases or fumes in contact with:

Nitric acid

Exothermic reaction with:

Bromine

Metals

acetylidene

Oxygen

10.4 Conditions to avoid

no information available

10.5 Incompatible materials

Aluminum, Lead, Copper, silver, Zinc, zinc alloys, Tin

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

Oral: No data available

LC50 Inhalation - Rat - male - 2 h - < 27 mg/m³ - vapor

Dermal: No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitization

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No ingredient of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No ingredient of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity

Presumed human reproductive toxicant

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

11.2 Additional Information

RTECS: OV4550000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

SECTION 12: Ecological information

12.1 Toxicity

Toxicity to fish mortality LC50 - Cyprinus carpio (Carp) - 0.160 mg/l - 96 h

Toxicity to Remarks: No data available
fish(Chronic toxicity) (mercury)

12.2 Persistence and degradability

The methods for determining biodegradability are not applicable to inorganic substances.

12.3 Bioaccumulative potential

Bioaccumulation Carassius auratus (goldfish) - 1,789 d
 - 0.25 µg/l(mercury)

Bioconcentration factor (BCF): 155,986

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Endocrine disrupting properties

No data available

12.7 Other adverse effects

No data available

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Waste material must be disposed of in accordance with the national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself. See www.retrologistik.com for processes regarding the return of chemicals and containers, or contact us there if you have further questions.

SECTION 14: Transport information

DOT (US)

UN number: 2809 Class: 8 (6.1) Packing group: III
Proper shipping name: Mercury
Reportable Quantity (RQ): 1 lbs
Reportable Quantity (RQ): 1 lbs
Poison Inhalation Hazard: No

IMDG

UN number: 2809 Class: 8 (6.1) Packing group: III EMS-No: F-A, S-B
Proper shipping name: MERCURY
Marine pollutant : yes

IATA

SIGALD - 215457

Page 9 of 11

SECTION 15: Regulatory information

SARA 302 Components

This material does not contain any components with a section 302 EHS TPQ.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
mercury	7439-97-6	2015-11-23

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

:

Reportable Quantity D009 lbs

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
mercury	7439-97-6	2015-11-23

California Prop. 65 Components

, which is/are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/mercury

CAS-No.	Revision Date
7439-97-6	2013-12-20

SECTION 16: Other information

Further information

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

MATERIAL SAFETY DATA SHEET

Date Printed: 23.02.2016

Date Updated: 31.05.2012

Version 1.6

Section 1 - Product and Company Information

Product Name	METHOXYCHLOR
Product Number	M1501
Brand	SIGMA
Company	Sigma-Aldrich
Address	3050 Spruce Street SAINT LOUIS MO 63103 US
Technical Phone:	800-325-5832
Fax:	800-325-5052
Emergency Phone:	314-776-6555

Section 2 - Composition/Information on Ingredient

Substance Name	CAS #	SARA 313
METHOXYCHLOR	72-43-5	Yes

Formula C16H15Cl3O2

Synonyms Benzene,
 1,1'-(2,2,2-trichloroethylidene)bis(4-methoxy- *
 2,2-Bis(p-anisyl)-1,1,1-trichloroethane *
 1,1-Bis(p-methoxyphenyl)-2,2,2-trichloroethane *
 2,2-Bis(p-methoxyphenyl)-1,1,1-trichloroethane *
 Dianisyltrichlorethane *
 2,2-Di-p-anisyl-1,1,1-trichloroethane *
 Dimethoxy-DDT *
 p,p'-Dimethoxydiphenyltrichloroethane *
 2,2-Di-(p-methoxyphenyl)-1,1,1-trichloroethane *
 Di(p-methoxyphenyl)-trichloromethyl methane *
 DMDT * p,p'-Dwumetoksydwufenylotrojchloroetan
 (Polish) * ENT 1,716 * Ethane,
 2,2-bis(p-anisyl)-1,1,1-trichloro- * Higalmetox *
 Marlate * Methoxcide * Methoxychlor (ACGIH:OSHA)
 * p,p'-Methoxychlor * Methoxychlor 2 EC *
 Methoxy-DDT * Metoksychlor (Polish) * Metox *
 Mezox K * Moxie * NCI-C00497 * OMS 466 * RCRA
 waste number U247 *
 1,1,1-Trichlor-2,2-bis(4-methoxy-phenyl)-aethan
 (German) *
 1,1,1-Trichloro-2,2-bis(p-anisyl)ethane *
 1,1'-(2,2,2-Trichloroethylidene)bis(4-methoxybenze
 ne) *
 1,1,1-Trichloro-2,2-bis(p-methoxyphenyl)ethane *
 1,1,1-Trichloro-2,2-bis(4-methoxyphenyl)ethane *
 2,2,2-Trichloro-1,1-bis(4-methoxyphenyl)ethane *
 1,1,1-Trichloro-2,2-di(4-methoxyphenyl)ethane *
 4,4-(2,2,2-Trichloroethylidene)dianisole

RTECS Number: KJ3675000

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Harmful.

Harmful by inhalation, in contact with skin and if swallowed.

Limited evidence of a carcinogenic effect.

Possible mutagen. Reproductive hazard. Target organ(s): Nerves.

Kidneys.

For additional information on toxicity, please refer to Section 11.

Section 4 - First Aid Measures

ORAL EXPOSURE

If swallowed, wash out mouth with water provided person is conscious. Call a physician.

INHALATION EXPOSURE

If inhaled, remove to fresh air. If not breathing give artificial respiration. If breathing is difficult, give oxygen.

EYE EXPOSURE

Assure adequate flushing of the eyes by separating the eyelids with fingers.

Section 5 - Fire Fighting Measures

FLASH POINT

N/A

AUTOIGNITION TEMP

N/A

FLAMMABILITY

N/A

EXTINGUISHING MEDIA

Suitable: Water spray. Carbon dioxide, dry chemical powder, or appropriate foam.

FIREFIGHTING

Protective Equipment: Wear self-contained breathing apparatus and protective clothing to prevent contact with skin and eyes.
Specific Hazard(s): Emits toxic fumes under fire conditions.

EXPOSURE HAZARD(S)

Material: Harmful solid.

Section 6 - Accidental Release Measures

PROCEDURE(S) OF PERSONAL PRECAUTION(S)

Wear self-contained breathing apparatus, rubber boots, and heavy rubber gloves.

METHODS FOR CLEANING UP

Sweep up, place in a bag and hold for waste disposal. Avoid raising dust. Ventilate area and wash spill site after material pickup is complete.

Section 7 - Handling and Storage

HANDLING

User Exposure: Avoid inhalation. Do not get in eyes, on skin, on clothing. Avoid prolonged or repeated exposure.

STORAGE

Suitable: Keep tightly closed. Store in a cool dry place.

Section 8 - Exposure Controls / PPE

ENGINEERING CONTROLS

Use only in a chemical fume hood. Safety shower and eye bath.

PERSONAL PROTECTIVE EQUIPMENT

Other: Wear appropriate government approved respirator, chemical-resistant gloves, safety goggles, other protective clothing.

GENERAL HYGIENE MEASURES

Wash thoroughly after handling. Wash contaminated clothing before reuse.

EXPOSURE LIMITS, RTECS

Country	Source	Type	Value
USA	ACGIH	TWA	10 MG/M3
USA	MSHA Standard-air	TWA	10 MG/M3
USA	OSHA.	PEL	8H TWA 15 MG/M3, TOTAL DUST
New Zealand OEL			
Remarks: check ACGIH TLV			
USA	NIOSH		(0.07 MG/M3 LOQ)

EXPOSURE LIMITS

Country	Source	Type	Value
Poland		NDS	10 MG/M3
Poland		NDSch	-
Poland		NDSP	-

Section 9 - Physical/Chemical Properties

Appearance	Physical State: Solid	
Property	Value	At Temperature or Pressure
Molecular Weight	345,6600 AMU	
pH	N/A	
BP/BP Range	N/A	
MP/MP Range	86,000. - 88,000 °C.	
Freezing Point	N/A	
Vapor Pressure	N/A	
Vapor Density	N/A	
Saturated Vapor Conc.	N/A	
Bulk Density	N/A	
Odor Threshold	N/A	
Volatile%	N/A	
VOC Content	N/A	
Water Content	N/A	
Solvent Content	N/A	
Evaporation Rate	N/A	
Viscosity	N/A	

Surface Tension	N/A
Partition Coefficient	N/A
Decomposition Temp.	N/A
Flash Point	N/A
Explosion Limits	N/A
Flammability	N/A
Autoignition Temp	N/A
Refractive Index	N/A
Optical Rotation	N/A
Miscellaneous Data	N/A
Solubility	N/A

N/A = not available

Section 10 - Stability and Reactivity

STABILITY

Materials to Avoid: Strong oxidizing agents.

HAZARDOUS DECOMPOSITION PRODUCTS

Hazardous Decomposition Products: Carbon monoxide, Carbon dioxide, Hydrogen chloride gas.

Section 11 - Toxicological Information

ROUTE OF EXPOSURE

Multiple Routes: May cause irritation. Harmful if swallowed, inhaled, or absorbed through skin.

TARGET ORGAN(S) OR SYSTEM(S)

Kidneys. Central nervous system.

TOXICITY DATA

Oral

Human

6430,000000 mg/kg

LDLO

Oral

Rat

1855,000000 mg/kg

LD50

Remarks: Behavioral:Excitement. Behavioral:Convulsions or effect on seizure threshold. Behavioral:Ataxia.

Skin

Rat

> 6000,000000 mg/kg

LD50

Oral

Mouse

510,000000 mg/kg

LD50

Remarks: Behavioral:Convulsions or effect on seizure threshold. Behavioral:Ataxia. Behavioral:Excitement.

Oral

Rabbit

> 6000,000000 mg/kg
LD50

Skin
Rabbit
> 6000,000000 mg/kg
LD50

Intraperitoneal
Hamster
500 MG/KG
LD50

Oral
Duck
> 2000,000000 mg/kg
LD50

CHRONIC EXPOSURE - CARCINOGEN

Species: Rat
Route of Application: Oral
Dose: 18200 MG/KG
Exposure Time: 2Y
Frequency: C
Result: Tumorigenic: Carcinogenic by RTECS criteria. Tumorigenic
Effects: Prostate tumors.

Species: Mouse
Route of Application: Oral
Dose: 56700 MG/KG
Exposure Time: 90W
Frequency: C
Result: Tumorigenic: Carcinogenic by RTECS criteria. Lungs,
Thorax, or Respiration: Tumors. Tumorigenic Effects: Testicular
tumors.

Species: Dog
Route of Application: Oral
Dose: 383 GM/KG
Exposure Time: 3Y
Frequency: C
Result: Tumorigenic: Equivocal tumorigenic agent by RTECS
criteria. Liver: Tumors.

Species: Rat
Route of Application: Oral
Dose: 41 GM/KG
Exposure Time: 2Y
Frequency: C
Result: Tumorigenic: Equivocal tumorigenic agent by RTECS
criteria. Liver: Multiple effects. Lungs, Thorax, or
Respiration: Other changes.

Species: Mouse
Route of Application: Oral
Dose: 62622 MG/KG
Exposure Time: 2Y
Frequency: C
Result: Liver: Tumors. Tumorigenic: Equivocal tumorigenic agent by

RTECS criteria.

Species: Rat
Route of Application: Oral
Dose: 80 GM/KG
Exposure Time: 2Y
Frequency: C
Result: Liver:Tumors. Tumorigenic:Carcinogenic by RTECS
criteria. Tumorigenic Effects: Ovarian tumors.

Species: Rat
Route of Application: Oral
Dose: 72800 MG/KG
Exposure Time: 2Y
Frequency: C
Result: Liver:Tumors. Tumorigenic:Carcinogenic by RTECS criteria.

Species: Rat
Route of Application: Oral
Dose: 87360 MG/KG
Exposure Time: 2Y
Frequency: C
Result: Tumorigenic:Carcinogenic by RTECS criteria. Liver:Tumors.

Species: Rat
Route of Application: Oral
Dose: 10920 MG/KG
Exposure Time: 1Y
Frequency: C
Result: Blood:Lymphomas including Hodgkin's disease.
Tumorigenic:Equivocal tumorigenic agent by RTECS criteria.

Species: Rat
Route of Application: Oral
Dose: 45500 MG/KG
Exposure Time: 1Y
Frequency: C
Result: Blood:Lymphomas including Hodgkin's disease.
Tumorigenic:Equivocal tumorigenic agent by RTECS criteria.

IARC CARCINOGEN LIST

Rating: Group 3

NTP CARCINOGEN LIST

Rating: No evidence.
Species: Mouse/rat
Route: Feed

ACGIH CARCINOGEN LIST

Rating: A4

CHRONIC EXPOSURE - TERATOGEN

Species: Rat
Dose: 2 GM/KG
Route of Application: Oral
Exposure Time: (6-15D PREG)

Result: Specific Developmental Abnormalities: Musculoskeletal system.

Species: Mouse

Dose: 3 GM/KG

Route of Application: Oral

Exposure Time: (6-15D PREG)

Result: Effects on Embryo or Fetus: Fetal death.

CHRONIC EXPOSURE - MUTAGEN

Species: Rat

Dose: 150 UMOL/L

Cell Type: liver

Mutation test: DNA damage

Species: Rat

Route: Oral

Dose: 28 GM/KG

Exposure Time: 10W

Mutation test: sperm

Species: Mouse

Dose: 10 MG/L (+S9)

Cell Type: lymphocyte

Mutation test: Mutation in microorganisms

Species: Mouse

Dose: 2 MG/L

Cell Type: fibroblast

Mutation test: Morphological transformation.

Species: Mouse

Route: Oral

Dose: 6 MG/KG

Exposure Time: 50D

Mutation test: Cytogenetic analysis

Species: Hamster

Dose: 10 MG/L

Cell Type: Embryo

Mutation test: Morphological transformation.

Species: Hamster

Route: Intraperitoneal

Dose: 50 MG/KG

Mutation test: Cytogenetic analysis

CHRONIC EXPOSURE - REPRODUCTIVE HAZARD

Result: Overexposure may cause reproductive disorder(s) based on tests with laboratory animals.

Species: Rat

Dose: 66 GM/KG

Route of Application: Oral

Exposure Time: (33D MALE)

Result: Paternal Effects: Testes, epididymis, sperm duct.

Paternal Effects: Prostate, seminal vessicle, Cowper's gland, accessory glands.

Species: Rat
Dose: 2 GM/KG
Route of Application: Oral
Exposure Time: (6-15D PREG)
Result: Effects on Fertility: Litter size (e.g.; # fetuses per litter; measured before birth). Effects on Fertility: Post-implantation mortality (e.g., dead and/or resorbed implants per total number of implants). Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

Species: Rat
Dose: 4250 MG/KG
Route of Application: Oral
Exposure Time: (42D PRE-21D POST)
Result: Effects on Newborn: Physical. Maternal Effects: Ovaries, fallopian tubes. Effects on Newborn: Delayed effects.

Species: Rat
Dose: 10625 MG/KG
Route of Application: Oral
Exposure Time: (42D PRE-21D POST)
Result: Effects on Fertility: Mating performance (e.g., # sperm positive females per # females mated; # copulations per # estrus cycles). Maternal Effects: Uterus, cervix, vagina. Effects on Fertility: Female fertility index (e.g., # females pregnant per # sperm positive females; # females pregnant per # females mated).

Species: Rat
Dose: 7 GM/KG
Route of Application: Unreported
Exposure Time: (70D MALE)
Result: Paternal Effects: Spermatogenesis (including genetic material, sperm morphology, motility, and count).

Species: Rat
Dose: 2100 MG/KG
Route of Application: Unreported
Exposure Time: (21D PRE)
Result: Maternal Effects: Oogenesis.

Species: Rat
Dose: 9100 MG/KG
Route of Application: Unreported
Exposure Time: (70D MALE/21D PRE)
Result: Effects on Fertility: Mating performance (e.g., # sperm positive females per # females mated; # copulations per # estrus cycles).

Species: Mouse
Dose: 1 GM/KG
Route of Application: Oral
Exposure Time: (20D PREG)
Result: Maternal Effects: Ovaries, fallopian tubes.

Species: Mouse
Dose: 900 MG/KG
Route of Application: Oral
Exposure Time: (6-8D PREG)
Result: Maternal Effects: Uterus, cervix, vagina.

Species: Mouse
Dose: 2 GM/KG
Route of Application: Oral
Exposure Time: (6-15D PREG)
Result: Maternal Effects: Parturition.

Species: Mouse
Dose: 800 MG/KG
Route of Application: Intraperitoneal
Exposure Time: (1D PREG)
Result: Effects on Fertility: Pre-implantation mortality (e.g., reduction in number of implants per female; total number of implants per corpora lutea). Effects on Embryo or Fetus: Fetotoxicity (except death, e.g., stunted fetus).

Species: Mouse
Dose: 99 MG/KG
Route of Application: Subcutaneous
Exposure Time: (5-7D PREG)
Result: Effects on Newborn: Behavioral. Effects on Newborn: Biochemical and metabolic.

Species: Rabbit
Dose: 330 MG/KG
Route of Application: Oral
Exposure Time: (6-27D PREG)
Result: Maternal Effects: Other effects. Specific Developmental Abnormalities: Musculoskeletal system.

Section 12 - Ecological Information

No data available.

Section 13 - Disposal Considerations

APPROPRIATE METHOD OF DISPOSAL OF SUBSTANCE OR PREPARATION

Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber. Observe all federal, state, and local environmental regulations.

Section 14 - Transport Information

DOT

Proper Shipping Name: Environmentally hazardous substances, solid, n.o.s.
UN#: 3077
Class: 9
Packing Group: Packing Group III
Hazard Label: Class 9
PIH: Not PIH

IATA

Non-Hazardous for Air Transport: Non-hazardous for air transport.

Section 15 - Regulatory Information

EU ADDITIONAL CLASSIFICATION

Symbol of Danger: Xn

Indication of Danger: Harmful.

R: 20/21/22-40

Risk Statements: Harmful by inhalation, in contact with skin and if swallowed. Limited evidence of a carcinogenic effect.

S: 7-23-36/37/39-45

Safety Statements: Keep container tightly closed. Do not breathe fumes. Wear suitable protective clothing, gloves, and eye/face protection. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

US CLASSIFICATION AND LABEL TEXT

Indication of Danger: Harmful.

Risk Statements: Harmful by inhalation, in contact with skin and if swallowed. Limited evidence of a carcinogenic effect.

Safety Statements: Keep container tightly closed. In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). Do not breathe fumes. Wear suitable protective clothing, gloves, and eye/face protection.

US Statements: Possible mutagen. Reproductive hazard. Target organ(s): Nerves. Kidneys.

UNITED STATES REGULATORY INFORMATION

SARA LISTED: Yes

NOTES: This product is subject to SARA section 313 reporting requirements.

CANADA REGULATORY INFORMATION

WHMIS Classification: This product has been classified in accordance with the hazard criteria of the CPR, and the MSDS contains all the information required by the CPR.

DSL: Yes

NDSL: No

Section 16 - Other Information

DISCLAIMER

For R&D use only. Not for drug, household or other uses.

WARRANTY

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Inc., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale. Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

Methyl chloride (Refrigerant gas R 40)

Safety Data Sheet P-4622

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.

Date of issue: 01/01/1980

Revision date: 10/17/2016

Supersedes: 10/14/2015

SECTION: 1. Product and company identification

1.1. Product identifier

Product form : Substance
Name : Methyl chloride (Refrigerant gas R 40)
CAS No : 74-87-3
Formula : CH₃Cl
Other means of identification : methylchloride, halocarbon 40, monochloromethane

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Industrial use. Use as directed.

1.3. Details of the supplier of the safety data sheet

Praxair, Inc.
10 Riverview Drive
Danbury, CT 06810-6268 - USA
T 1-800-772-9247 (1-800-PRAXAIR) - F 1-716-879-2146
www.praxair.com

1.4. Emergency telephone number

Emergency number : Onsite Emergency: 1-800-645-4633

CHEMTREC, 24hr/day 7days/week
— Within USA: 1-800-424-9300, Outside USA: 001-703-527-3887
(collect calls accepted, Contract 17729)

SECTION 2: Hazard identification

2.1. Classification of the substance or mixture

GHS-US classification

Flam. Gas 1 H220
Liquefied gas H280
Acute Tox. 4 (Inhalation:gas) H332
Carc. 2 H351
STOT RE 2 H373

2.2. Label elements

GHS-US labeling

Hazard pictograms (GHS-US) :



Signal word (GHS-US) : DANGER

Hazard statements (GHS-US) :
H220 - **EXTREMELY FLAMMABLE GAS**
H280 - CONTAINS GAS UNDER PRESSURE; MAY EXPLODE IF HEATED
H332 - HARMFUL IF INHALED
H351 - SUSPECTED OF CAUSING CANCER
H373 - MAY CAUSE DAMAGE TO ORGANS (LUNG, KIDNEYS, LIVER, CENTRAL NERVOUS SYSTEM) THROUGH PROLONGED OR REPEATED EXPOSURE
CGA-HG04 - MAY FORM EXPLOSIVE MIXTURES WITH AIR
CGA-HG01 - MAY CAUSE FROSTBITE

Precautionary statements (GHS-US) :
P201 - Obtain special instructions before use
P202 - Do not handle until all safety precautions have been read and understood
P210 - Keep away from Heat, Open flames, Sparks, Hot surfaces. - No smoking
P260 - Do not breathe gas

Methyl chloride (Refrigerant gas R 40)

Safety Data Sheet P-4622

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.

Date of issue: 01/01/1980 Revision date: 10/17/2016 Supersedes: 10/14/2015

P262 - Do not get in eyes, on skin, or on clothing
P271+P403 - Use and store only outdoors or in a well-ventilated place
P280+P284 - Wear protective gloves, protective clothing, eye protection, respiratory protection, and/or face protection
P377 - Leaking gas fire: Do not extinguish, unless leak can be stopped safely
P381 - Eliminate all ignition sources if safe to do so
P405 - Store locked up
P501 - Dispose of contents/container in accordance with container Supplier/owner instructions
CGA-PG05 - Use a back flow preventive device in the piping
CGA-PG12 - Do not open valve until connected to equipment prepared for use
CGA-PG06 - Close valve after each use and when empty
CGA-PG02 - Protect from sunlight when ambient temperature exceeds 52°C (125°F)

2.3. Other hazards

Other hazards not contributing to the classification : Contact with liquid may cause cold burns/frostbite.

2.4. Unknown acute toxicity (GHS US)

No data available

SECTION 3: Composition/Information on ingredients

3.1. Substance

Name	Product identifier	%
Methyl chloride (Refrigerant gas R 40) (Main constituent)	(CAS No) 74-87-3	100

3.2. Mixture

Not applicable

SECTION 4: First aid measures

4.1. Description of first aid measures

First-aid measures after inhalation : Remove to fresh air and keep at rest in a position comfortable for breathing. If not breathing, give artificial respiration. If breathing is difficult, trained personnel should give oxygen. Call a physician.

First-aid measures after skin contact : The liquid may cause frostbite. For exposure to liquid, immediately warm frostbite area with warm water not to exceed 105°F (41°C). Water temperature should be tolerable to normal skin. Maintain skin warming for at least 15 minutes or until normal coloring and sensation have returned to the affected area. In case of massive exposure, remove clothing while showering with warm water. Seek medical evaluation and treatment as soon as possible.

First-aid measures after eye contact : Immediately flush eyes thoroughly with water for at least 15 minutes. Hold the eyelids open and away from the eyeballs to ensure that all surfaces are flushed thoroughly. Contact an ophthalmologist immediately.

First-aid measures after ingestion : Ingestion is not considered a potential route of exposure.

4.2. Most important symptoms and effects, both acute and delayed

No additional information available

4.3. Indication of any immediate medical attention and special treatment needed

Obtain medical assistance.

SECTION 5: Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media : Carbon dioxide, Dry chemical, Water spray or fog. Use extinguishing media appropriate for surrounding fire.

5.2. Special hazards arising from the substance or mixture

Fire hazard : **EXTREMELY FLAMMABLE GAS.** If venting or leaking gas catches fire, do not extinguish flames. Flammable vapors may spread from leak, creating an explosive reignition hazard. Vapors can be ignited by pilot lights, other flames, smoking, sparks, heaters, electrical equipment, static discharge, or other ignition sources at locations distant from product handling point. Explosive atmospheres may linger. Before entering an area, especially a confined area, check the atmosphere with an appropriate device.

Methyl chloride (Refrigerant gas R 40)

Safety Data Sheet P-4622

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.

Date of issue: 01/01/1980 Revision date: 10/17/2016 Supersedes: 10/14/2015

Explosion hazard : **EXTREMELY FLAMMABLE GAS.** Forms explosive mixtures with air and oxidizing agents.
Reactivity : No reactivity hazard other than the effects described in sub-sections below.

5.3. Advice for firefighters

Firefighting instructions : **DANGER! Toxic, flammable liquefied gas**

Evacuate all personnel from the danger area. Use self-contained breathing apparatus (SCBA) and protective clothing. Immediately cool containers with water from maximum distance. Stop flow of gas if safe to do so, while continuing cooling water spray. Remove ignition sources if safe to do so. Remove containers from area of fire if safe to do so. On-site fire brigades must comply with OSHA 29 CFR 1910.156 and applicable standards under 29 CFR 1910 Subpart L—Fire Protection.

Special protective equipment for fire fighters : Standard protective clothing and equipment (Self Contained Breathing Apparatus) for fire fighters.

Other information : Containers are equipped with a pressure relief device. (Exceptions may exist where authorized by DOT.).

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures : **DANGER: Flammable, liquefied gas. FORMS EXPLOSIVE MIXTURES WITH AIR.** Immediately evacuate all personnel from danger area. Use self-contained breathing apparatus where needed. Remove all sources of ignition if safe to do so. Reduce vapors with fog or fine water spray, taking care not to spread liquid with water. Shut off flow if safe to do so. Ventilate area or move container to a well-ventilated area. Flammable vapors may spread from leak and could explode if reignited by sparks or flames. Explosive atmospheres may linger. Before entering area, especially confined areas, check atmosphere with an appropriate device.

6.1.1. For non-emergency personnel

No additional information available

6.1.2. For emergency responders

No additional information available

6.2. Environmental precautions

Prevent waste from contaminating the surrounding environment. Prevent soil and water pollution. Dispose of contents/container in accordance with local/regional/national/international regulations. Contact supplier for any special requirements.

6.3. Methods and material for containment and cleaning up

No additional information available

6.4. Reference to other sections

See also sections 8 and 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling : Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Use only non-sparking tools. Use only explosion-proof equipment

Wear leather safety gloves and safety shoes when handling cylinders. Protect cylinders from physical damage; do not drag, roll, slide or drop. While moving cylinder, always keep in place removable valve cover. Never attempt to lift a cylinder by its cap; the cap is intended solely to protect the valve. When moving cylinders, even for short distances, use a cart (trolley, hand truck, etc.) designed to transport cylinders. Never insert an object (e.g. wrench, screwdriver, pry bar) into cap openings; doing so may damage the valve and cause a leak. Use an adjustable strap wrench to remove over-tight or rusted caps. Slowly open the valve. If the valve is hard to open, discontinue use and contact your supplier. Close the container valve after each use; keep closed even when empty. Never apply flame or localized heat directly to any part of the container. High temperatures may damage the container and could cause the pressure relief device to fail prematurely, venting the container contents. For other precautions in using this product, see section 16.

Methyl chloride (Refrigerant gas R 40)

Safety Data Sheet P-4622

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.

Date of issue: 01/01/1980 Revision date: 10/17/2016 Supersedes: 10/14/2015

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions : Store only where temperature will not exceed 125°F (52°C). Post "No Smoking/No Open Flames" signs in storage and use areas. There must be no sources of ignition. Separate packages and protect against potential fire and/or explosion damage following appropriate codes and requirements (e.g., NFPA 30, NFPA 55, NFPA 70, and/or NFPA 221 in the U.S.) or according to requirements determined by the Authority Having Jurisdiction (AHJ). Always secure containers upright to keep them from falling or being knocked over. Install valve protection cap, if provided, firmly in place by hand when the container is not in use. Store full and empty containers separately. Use a first-in, first-out inventory system to prevent storing full containers for long periods. For other precautions in using this product, see section 16

OTHER PRECAUTIONS FOR HANDLING, STORAGE, AND USE: When handling product under pressure, use piping and equipment adequately designed to withstand the pressures to be encountered. Never work on a pressurized system. Use a back flow preventive device in the piping. Gases can cause rapid suffocation because of oxygen deficiency; store and use with adequate ventilation. If a leak occurs, close the container valve and blow down the system in a safe and environmentally correct manner in compliance with all international, federal/national, state/provincial, and local laws; then repair the leak. Never place a container where it may become part of an electrical circuit.

7.3. Specific end use(s)

None.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Methyl chloride (Refrigerant gas R 40) (74-87-3)		
ACGIH	ACGIH TLV-TWA (ppm)	50 ppm
ACGIH	ACGIH TLV-STEL (ppm)	100 ppm
USA OSHA	OSHA PEL (TWA) (ppm)	100 ppm
USA OSHA	OSHA PEL (Ceiling) (ppm)	200 ppm
USA IDLH	US IDLH (mg/m ³)	≈ mg/m ³
USA IDLH	US IDLH (ppm)	2000 ppm

8.2. Exposure controls

Appropriate engineering controls : Use an explosion-proof local exhaust system. Local exhaust and general ventilation must be adequate to meet exposure standards. MECHANICAL (GENERAL): **Inadequate - Use only in a closed system.** Use explosion proof equipment and lighting. A canopy-type, forced-draft fume hood is preferred.

Eye protection : Wear safety glasses when handling cylinders; vapor-proof goggles and a face shield during cylinder changeout or whenever contact with product is possible. Select eye protection in accordance with OSHA 29 CFR 1910.133.

Skin and body protection : Wear metatarsal shoes and work gloves for cylinder handling, and protective clothing where needed. Wear appropriate chemical gloves during cylinder changeout or wherever contact with product is possible. Select per OSHA 29 CFR 1910.132, 1910.136, and 1910.138.

Respiratory protection : When workplace conditions warrant respirator use, follow a respiratory protection program that meets OSHA 29 CFR 1910.134, ANSI Z88.2, or MSHA 30 CFR 72.710 (where applicable). Use an air-supplied or air-purifying cartridge if the action level is exceeded. Ensure that the respirator has the appropriate protection factor for the exposure level. If cartridge type respirators are used, the cartridge must be appropriate for the chemical exposure. For emergencies or instances with unknown exposure levels, use a self-contained breathing apparatus (SCBA).

Thermal hazard protection : Wear cold insulating gloves when transfilling or breaking transfer connections.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state : Gas

Appearance : Colorless gas.

Molecular mass : 50.5 g/mol

Color : Colorless.

Methyl chloride (Refrigerant gas R 40)

Safety Data Sheet P-4622

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.

Date of issue: 01/01/1980

Revision date: 10/17/2016

Supersedes: 10/14/2015

Odor	: Sweetish. Ethereal.
Odor threshold	: < 0.01 ppm
pH	: Not applicable.
Relative evaporation rate (butyl acetate=1)	: No data available
Relative evaporation rate (ether=1)	: Not applicable.
Melting point	: -97.7 °C (-143.86°F)
Freezing point	: No data available
Boiling point	: -24.2 °C (-11.6°F)
Flash point	: Not applicable.
Critical temperature	: 143.1 °C (289.6°F)
Auto-ignition temperature	: 632 °C (1170°F)
Decomposition temperature	: No data available
Flammability (solid, gas)	: 8.1 - 17.4 vol %
Vapor pressure	: 5.1 bar (73.4 psia)(@21.1°C/70°F)
Critical pressure	: 66.5 bar (966 psia)
Relative vapor density at 20 °C	: No data available
Relative density	: 0.92 (at 20°C/68°F)
Density	: 0.921 g/cm ³ (at 20 °C)
Relative gas density	: 1.743 (at 21.1°C/70°F, 1 atm)
Solubility	: Water: 6310 mg/l
Log Pow	: 0.91
Log Kow	: Not applicable.
Viscosity, kinematic	: Not applicable.
Viscosity, dynamic	: Not applicable.
Explosive properties	: Not applicable.
Oxidizing properties	: None.
Explosion limits	: No data available

9.2. Other information

Gas group	: Liquefied gas
Additional information	: Gas/vapor heavier than air. May accumulate in confined spaces, particularly at or below ground level

SECTION 10: Stability and reactivity

10.1. Reactivity

No reactivity hazard other than the effects described in sub-sections below.

10.2. Chemical stability

Stable under normal conditions.

10.3. Possibility of hazardous reactions

May occur.

10.4. Conditions to avoid

Avoid temperature above 752°F (400°C).

10.5. Incompatible materials

May react with aluminium. Reaction with aluminum may form pyrophoric trimethyl aluminum or aluminum alkyls. Oxidizing agents. Magnesium. Zinc. Potassium. Sodium. Aluminum chloride. Ethylene. Moisture. Rubber.

10.6. Hazardous decomposition products

Carbon dioxide. Carbon monoxide. Chlorine. On heating/burning: release of toxic and corrosive gases/vapors hydrogen chloride : formation of small quantities of phosgene.

Methyl chloride (Refrigerant gas R 40)

Safety Data Sheet P-4622

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.

Date of issue: 01/01/1980 Revision date: 10/17/2016 Supersedes: 10/14/2015

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Inhalation:gas: HARMFUL IF INHALED.

Methyl chloride (Refrigerant gas R 40) (1f)74-87-3	
LD50 oral rat	1800 mg/kg
LC50 inhalation rat (mg/l)	5300 mg/m ³ (Exposure time: 4 h)
LC50 inhalation rat (ppm)	8300 ppm/1h
ATE US (oral)	1800.000 mg/kg body weight
ATE US (gases)	8300.000 ppm/1h

Skin corrosion/irritation : Not classified
pH: Not applicable.

Serious eye damage/irritation : Not classified
pH: Not applicable.

Respiratory or skin sensitization : Not classified

Germ cell mutagenicity : Not classified

Carcinogenicity : SUSPECTED OF CAUSING CANCER.

Methyl chloride (Refrigerant gas R 40) (74-87-3)	
IARC group	3 - Not classifiable
Reproductive toxicity	: Not classified
Specific target organ toxicity (single exposure)	: Not classified
Specific target organ toxicity (repeated exposure)	: MAY CAUSE DAMAGE TO ORGANS (LUNG, KIDNEYS, LIVER, CENTRAL NERVOUS SYSTEM) THROUGH PROLONGED OR REPEATED EXPOSURE.
Aspiration hazard	: Not classified

SECTION 12: Ecological information

12.1. Toxicity

Ecology - general : No known ecological damage caused by this product.

Methyl chloride (Refrigerant gas R 40) (74-87-3)	
LC50 fish 1	550 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus [static])

12.2. Persistence and degradability

Methyl chloride (Refrigerant gas R 40) (74-87-3)	
Persistence and degradability	The substance is biodegradable. Unlikely to persist.

12.3. Bioaccumulative potential

Methyl chloride (Refrigerant gas R 40) (74-87-3)	
Log Pow	0.91
Log Kow	Not applicable.
Bioaccumulative potential	Not expected to bioaccumulate due to the low log Kow (log Kow < 4). Refer to section 9.

12.4. Mobility in soil

Methyl chloride (Refrigerant gas R 40) (74-87-3)	
Mobility in soil	No data available.
Ecology - soil	Because of its high volatility, the product is unlikely to cause ground or water pollution.

12.5. Other adverse effects

Other adverse effects : May cause pH changes in aqueous ecological systems.
Effect on ozone layer : None
Global warming potential [CO₂=1] : 13
Effect on the global warming : Contains Fluorinated greenhouse gases covered by the Kyoto protocol

Methyl chloride (Refrigerant gas R 40)

Safety Data Sheet P-4622

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.

Date of issue: 01/01/1980 Revision date: 10/17/2016 Supersedes: 10/14/2015

SECTION 13: Disposal considerations

13.1. Waste treatment methods

- Regional legislation (waste) : U.S. - RCRA (Resource Conservation & Recovery Act) - Basis for Listing - Appendix VII. U.S. - RCRA (Resource Conservation & Recovery Act) - Constituents for Detection Monitoring. U.S. - RCRA (Resource Conservation & Recovery Act) - Hazardous Constituents - Appendix VIII to 40 CFR 261. U.S. - RCRA (Resource Conservation & Recovery Act) - List for Hazardous Constituents. U.S. - RCRA (Resource Conservation & Recovery Act) - Part 268 Appendix III - Halogenated Organic Compounds (HOCs). U.S. - RCRA (Resource Conservation & Recovery Act) - Phase 4 LDR Rule - Universal Treatment Standards. U.S. - RCRA (Resource Conservation & Recovery Act) - TSD Facilities Ground Water Monitoring. U.S. - RCRA (Resource Conservation & Recovery Act) - U Series Wastes - Acutely Toxic Wastes & Other Hazardous Characteristics.
- Waste disposal recommendations : Do not attempt to dispose of residual or unused quantities. Return container to supplier.

SECTION 14: Transport information

- In accordance with DOT
- Transport document description : UN1063 Methyl chloride, 2.1
- UN-No.(DOT) : UN1063
- Proper Shipping Name (DOT) : Methyl chloride
- Class (DOT) : 2.1 - Class 2.1 - Flammable gas 49 CFR 173.115
- Hazard labels (DOT) : 2.1 - Flammable gas



- DOT Special Provisions (49 CFR 172.102) : N86 - UN pressure receptacles made of aluminum alloy are not authorized
T50 - When portable tank instruction T50 is referenced in Column (7) of the 172.101 Table, the applicable liquefied compressed gases are authorized to be transported in portable tanks in accordance with the requirements of 173.313 of this subchapter

Additional information

- Emergency Response Guide (ERG) Number : 115
- Other information : No supplementary information available.
- Special transport precautions : Avoid transport on vehicles where the load space is not separated from the driver's compartment. Ensure vehicle driver is aware of the potential hazards of the load and knows what to do in the event of an accident or an emergency. Before transporting product containers:
- Ensure there is adequate ventilation. - Ensure that containers are firmly secured. - Ensure cylinder valve is closed and not leaking. - Ensure valve outlet cap nut or plug (where provided) is correctly fitted. - Ensure valve protection device (where provided) is correctly fitted.

Transport by sea

- UN-No. (IMDG) : 1063
- Proper Shipping Name (IMDG) : METHYL CHLORIDE (REFRIGERANT GAS R 40)
- Class (IMDG) : 2 - Gases
- MFAG-No : 115

Air transport

- UN-No. (IATA) : 1063
- Proper Shipping Name (IATA) : Methyl chloride
- Class (IATA) : 2
- Civil Aeronautics Law : Gases under pressure/Gases flammable under pressure

Methyl chloride (Refrigerant gas R 40)

Safety Data Sheet P-4622

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.

Date of issue: 01/01/1980 Revision date: 10/17/2016 Supersedes: 10/14/2015

SECTION 15: Regulatory information

15.1. US Federal regulations

Methyl chloride (Refrigerant gas R 40) (74-87-3)	
Listed on the United States TSCA (Toxic Substances Control Act) inventory	
Subject to reporting requirements of United States SARA Section 313	
CERCLA RQ	100 lb
SARA Section 311/312 Hazard Classes	Immediate (acute) health hazard Delayed (chronic) health hazard Sudden release of pressure hazard Fire hazard
SARA Section 313 - Emission Reporting	1.0 %

15.2. International regulations

CANADA

Methyl chloride (Refrigerant gas R 40) (74-87-3)
Listed on the Canadian DSL (Domestic Substances List)

EU-Regulations

Methyl chloride (Refrigerant gas R 40) (74-87-3)
Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances)

15.2.2. National regulations

Methyl chloride (Refrigerant gas R 40) (74-87-3)
Listed on the AICS (Australian Inventory of Chemical Substances)
Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China)
Listed on the Japanese ENCS (Existing & New Chemical Substances) inventory
Listed on the Korean ECL (Existing Chemicals List)
Listed on NZIoC (New Zealand Inventory of Chemicals)
Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances)
Japanese Poisonous and Deleterious Substances Control Law
Japanese Pollutant Release and Transfer Register Law (PRTR Law)
Listed on the Canadian IDL (Ingredient Disclosure List)
Listed on INSQ (Mexican National Inventory of Chemical Substances)

15.3. US State regulations

Methyl chloride (Refrigerant gas R 40)(74-87-3)	
U.S. - California - Proposition 65 - Carcinogens List	No
U.S. - California - Proposition 65 - Developmental Toxicity	Yes
U.S. - California - Proposition 65 - Reproductive Toxicity - Female	No
U.S. - California - Proposition 65 - Reproductive Toxicity - Male	Yes
State or local regulations	U.S. - Massachusetts - Right To Know List U.S. - New Jersey - Right to Know Hazardous Substance List U.S. - Pennsylvania - RTK (Right to Know) - Environmental Hazard List U.S. - Pennsylvania - RTK (Right to Know) List

Methyl chloride (Refrigerant gas R 40)

Safety Data Sheet P-4622

This SDS conforms to U.S. Code of Federal Regulations 29 CFR 1910.1200, Hazard Communication.

Date of issue: 01/01/1980 Revision date: 10/17/2016 Supersedes: 10/14/2015

SECTION 16: Other information

Other information

: When you mix two or more chemicals, you can create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an industrial hygienist or other trained person when you evaluate the end product. Before using any plastics, confirm their compatibility with this product

Praxair asks users of this product to study this SDS and become aware of the product hazards and safety information. To promote safe use of this product, a user should (1) notify employees, agents, and contractors of the information in this SDS and of any other known product hazards and safety information, (2) furnish this information to each purchaser of the product, and (3) ask each purchaser to notify its employees and customers of the product hazards and safety information

The opinions expressed herein are those of qualified experts within Praxair, Inc. We believe that the information contained herein is current as of the date of this Safety Data Sheet. Since the use of this information and the conditions of use are not within the control of Praxair, Inc, it is the user's obligation to determine the conditions of safe use of the product

Praxair SDSs are furnished on sale or delivery by Praxair or the independent distributors and suppliers who package and sell our products. To obtain current SDSs for these products, contact your Praxair sales representative, local distributor, or supplier, or download from www.praxair.com. If you have questions regarding Praxair SDSs, would like the document number and date of the latest SDS, or would like the names of the Praxair suppliers in your area, phone or write the Praxair Call Center (Phone: 1-800-PRAXAIR/1-800-772-9247; Address: Praxair Call Center, Praxair, Inc, P.O. Box 44, Tonawanda, NY 14151-0044)

PRAXAIR and the Flowing Airstream design are trademarks or registered trademarks of Praxair Technology, Inc. in the United States and/or other countries.

NFPA health hazard


: 2 - Intense or continued exposure could cause temporary incapacitation or possible residual injury unless prompt medical attention is given.

NFPA fire hazard

: 4 - Will rapidly or completely vaporize at normal pressure and temperature, or is readily dispersed in air and will burn readily.

NFPA reactivity

: 1 - Normally stable, but can become unstable at elevated temperatures and pressures or may react with water with some release of energy, but not violently.



HMIS III Rating

Health

: 2 Moderate Hazard - Temporary or minor injury may occur

Flammability

: 4 Severe Hazard

Physical

: 2 Moderate Hazard

SDS US (GHS HazCom 2012) - Praxair

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.



Fisher Scientific

Part of Thermo Fisher Scientific

SAFETY DATA SHEET

Creation Date 27-Jan-2010

Revision Date 02-Oct-2015

Revision Number 2

1. Identification

Product Name Methylene chloride

Cat No. : D37-1; D37-4; D37-20; D37-200; D37-200LC; D37-500; D37FB-19; D37FB-50; D37FB-115; D37FB-200; D37POP-19; D37POP-50; D37POP-200; D37RB-19; D37RB-50; D37RB-115; D37RB-200; D37RS-19; D37RS-28; D37RS-50; D37RS-115; D37RS-200; D37SK-4; D37SK-4LC; D37SS-28; D37SS-50; D37SS-115; D37SS-200; D37SS-1350

Synonyms Dichloromethane; DCM

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company

Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Emergency Telephone Number

CHEMTREC®, Inside the USA: 800-424-9300
CHEMTREC®, Outside the USA: 001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin Corrosion/irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Carcinogenicity	Category 1B
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Central nervous system (CNS), Respiratory system.	
Specific target organ toxicity - (repeated exposure)	Category 2
Target Organs - Liver, Kidney, Blood.	

Label Elements

Signal Word

Danger

Hazard Statements

Causes skin irritation
Causes serious eye irritation

May cause respiratory irritation
May cause drowsiness or dizziness
May cause cancer
May cause damage to organs through prolonged or repeated exposure

**Precautionary Statements****Prevention**

Obtain special instructions before use
Do not handle until all safety precautions have been read and understood
Use personal protective equipment as required
Wash face, hands and any exposed skin thoroughly after handling
Wear eye/face protection
Do not breathe dust/fume/gas/mist/vapors/spray
Use only outdoors or in a well-ventilated area

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

IF ON SKIN: Wash with plenty of soap and water
If skin irritation occurs: Get medical advice/attention
Take off contaminated clothing and wash before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
If eye irritation persists: Get medical advice/attention

Storage

Store locked up
Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

WARNING! This product contains a chemical known in the State of California to cause cancer, birth defects or other reproductive harm.

3. Composition / information on ingredients

Component	CAS-No	Weight %
Methylene chloride	75-09-2	>99.5
Methyl alcohol	67-56-1	0 - 0.4
Cyclohexene	110-83-8	0 - 0.01
2-Methyl-2-butene	513-35-9	0 - 0.01

4. First-aid measures

General Advice

If symptoms persist, call a physician.

Eye Contact

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.

Skin Contact

Wash off immediately with plenty of water for at least 15 minutes. Obtain medical attention.

Inhalation	Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.
Ingestion	Do not induce vomiting. Call a physician or Poison Control Center immediately.
Most important symptoms/effects	Breathing difficulties. . Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	556 °C / 1032.8 °F
Explosion Limits	
Upper	23 vol %
Lower	13 vol %
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Thermal decomposition can lead to release of irritating gases and vapors. Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO₂) Hydrogen chloride gas Phosgene

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
2

Flammability
1

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Use personal protective equipment. Ensure adequate ventilation. Avoid contact with skin, eyes and clothing. Keep people away from and upwind of spill/leak.
Environmental Precautions	Should not be released into the environment. See Section 12 for additional ecological information.

Methods for Containment and Clean Up Soak up with inert absorbent material. Keep in suitable, closed containers for disposal.

7. Handling and storage

Handling	Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Use only under a chemical fume hood.
Storage	Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Methylene chloride	TWA: 50 ppm	(Vacated) TWA: 500 ppm (Vacated) STEL: 2000 ppm (Vacated) Ceiling: 1000 ppm TWA: 25 ppm STEL: 125 ppm	IDLH: 2300 ppm
Methyl alcohol	TWA: 200 ppm STEL: 250 ppm Skin	(Vacated) TWA: 200 ppm (Vacated) TWA: 260 mg/m ³ (Vacated) STEL: 250 ppm (Vacated) STEL: 325 mg/m ³ Skin TWA: 200 ppm TWA: 260 mg/m ³	IDLH: 6000 ppm TWA: 200 ppm TWA: 260 mg/m ³ STEL: 250 ppm STEL: 325 mg/m ³
Cyclohexene	TWA: 300 ppm	(Vacated) TWA: 300 ppm (Vacated) TWA: 1015 mg/m ³ TWA: 300 ppm TWA: 1015 mg/m ³	IDLH: 2000 ppm TWA: 300 ppm TWA: 1015 mg/m ³

Component	Quebec	Mexico OEL (TWA)	Ontario TWA/EV
Methylene chloride	TWA: 50 ppm TWA: 174 mg/m ³	TWA: 100 ppm TWA: 330 mg/m ³ STEL: 500 ppm STEL: 1740 mg/m ³	TWA: 50 ppm
Methyl alcohol	TWA: 200 ppm TWA: 262 mg/m ³ STEL: 250 ppm STEL: 328 mg/m ³ Skin	TWA: 200 ppm TWA: 260 mg/m ³ STEL: 250 ppm STEL: 310 mg/m ³	TWA: 200 ppm STEL: 250 ppm Skin
Cyclohexene	TWA: 300 ppm TWA: 1010 mg/m ³	TWA: 300 ppm TWA: 1015 mg/m ³	TWA: 300 ppm

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures

Use only under a chemical fume hood. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment**Eye/face Protection**

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State

Liquid

Appearance

Colorless

Odor

sweet

Odor Threshold

No information available

pH

Not applicable

Melting Point/Range

-97 °C / -142.6 °F

Boiling Point/Range

39 °C / 102.2 °F

Flash Point

No information available

Evaporation Rate	No information available
Flammability (solid,gas)	Not applicable
Flammability or explosive limits	
Upper	23 vol %
Lower	13 vol %
Vapor Pressure	20 mmHg @ 3502°C
Vapor Density	2.93 (Air = 1.0)
Specific Gravity	1.33
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	556 °C / 1032.8 °F
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C H ₂ Cl ₂
Molecular Weight	84.93

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products. Excess heat.
Incompatible Materials	Strong oxidizing agents, Strong acids, Amines
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂), Hydrogen chloride gas, Phosgene
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Methylene chloride	> 2000 mg/kg (Rat)	> 2000 mg/kg (Rat)	53 mg/L (Rat) 6 h 76000 mg/m ³ (Rat) 4 h
Methyl alcohol	LD50 = 6200 mg/kg (Rat)	LD50 = 15800 mg/kg (Rabbit)	64000 ppm (Rat) 4 h 83.2 mg/L (Rat) 4 h
Cyclohexene	LD50 = 2400 µL/kg (Rat)	>200 mg/kg (Rat)	>21.6 mg/L/4h (rat)
2-Methyl-2-butene	700-2600 mg/kg (Rat)	>2000 mg/kg (Rat)	LC50 > 61000 ppm (Rat) 4 h

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation	Irritating to eyes and skin
Sensitization	No information available
Carcinogenicity	The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Methylene chloride	75-09-2	Group 2A	Reasonably Anticipated	A3	X	A3
Methyl alcohol	67-56-1	Not listed	Not listed	Not listed	Not listed	Not listed

Cyclohexene	110-83-8	Not listed	Not listed	Not listed	Not listed	Not listed
2-Methyl-2-butene	513-35-9	Not listed	Not listed	Not listed	Not listed	Not listed

IARC: (International Agency for Research on Cancer)

IARC: (International Agency for Research on Cancer)

NTP: (National Toxicity Program)

Group 1 - Carcinogenic to Humans

Group 2A - Probably Carcinogenic to Humans

Group 2B - Possibly Carcinogenic to Humans

NTP: (National Toxicity Program)

Known - Known Carcinogen

Reasonably Anticipated - Reasonably Anticipated to be a Human Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

A1 - Known Human Carcinogen

A2 - Suspected Human Carcinogen

A3 - Animal Carcinogen

ACGIH: (American Conference of Governmental Industrial Hygienists)

Mexico - Occupational Exposure Limits - Carcinogens

Mexico - Occupational Exposure Limits - Carcinogens

A1 - Confirmed Human Carcinogen

A2 - Suspected Human Carcinogen

A3 - Confirmed Animal Carcinogen

A4 - Not Classifiable as a Human Carcinogen

A5 - Not Suspected as a Human Carcinogen

Mutagenic Effects

Mutagenic effects have occurred in microorganisms.

Reproductive Effects

Experiments have shown reproductive toxicity effects on laboratory animals.

Developmental Effects

Developmental effects have occurred in experimental animals.

Teratogenicity

No information available.

STOT - single exposure

Central nervous system (CNS) Respiratory system

STOT - repeated exposure

Liver Kidney Blood

Aspiration hazard

No information available

Symptoms / effects, both acute and delayed

Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting

Endocrine Disruptor Information

No information available

Other Adverse Effects

Tumorigenic effects have been reported in experimental animals. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Methylene chloride	EC50: >660 mg/L/96h	Pimephales promelas: LC50: 193 mg/L/96h	EC50: 1 mg/L/24 h EC50: 2.88 mg/L/15 min	EC50: 140 mg/L/48h
Methyl alcohol	Not listed	Pimephales promelas: LC50 > 10000 mg/L 96h	EC50 = 39000 mg/L 25 min EC50 = 40000 mg/L 15 min EC50 = 43000 mg/L 5 min	EC50 > 10000 mg/L 24h
Cyclohexene	Not listed	Poecillia reticulata: 7.1 mg/L/96h	Not listed	Daphnia: EC50: 5.3 mg/L/48h
2-Methyl-2-butene	Not listed	Not listed	Not listed	EC50: = 3 mg/L, 48h (Daphnia magna)

**Persistence and Degradability
Bioaccumulation/ Accumulation**

Persistence is unlikely based on information available.

No information available.

Mobility

Will likely be mobile in the environment due to its volatility.

Component	log Pow
Methylene chloride	1.25
Methyl alcohol	-0.74

Cyclohexene	3.27
-------------	------

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

Component	RCRA - U Series Wastes	RCRA - P Series Wastes
Methylene chloride - 75-09-2	U080	-
Methyl alcohol - 67-56-1	U154	-

14. Transport information

DOT

UN-No UN1593
 Proper Shipping Name DICHLOROMETHANE
 Hazard Class 6.1
 Packing Group III

TDG

UN-No UN1593
 Proper Shipping Name DICHLOROMETHANE
 Hazard Class 6.1
 Packing Group III

IATA

UN-No UN1593
 Proper Shipping Name Dichloromethane
 Hazard Class 6.1
 Packing Group III

IMDG/IMO

UN-No UN1593
 Proper Shipping Name Dichloromethane
 Hazard Class 6.1
 Packing Group III

15. Regulatory information

All of the components in the product are on the following Inventory lists: X = listed

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Methylene chloride	X	X	-	200-838-9	-		X	X	X	X	X
Methyl alcohol	X	X	-	200-659-6	-		X	X	X	X	X
Cyclohexene	X	X	-	203-807-8	-		X	X	X	X	X
2-Methyl-2-butene	X	X	-	208-156-3	-		X	X	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b)

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Methylene chloride	75-09-2	>99.5	0.1
Methyl alcohol	67-56-1	0 - 0.4	1.0

SARA 311/312 Hazard Categories

Acute Health Hazard	Yes
Chronic Health Hazard	Yes
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

CWA (Clean Water Act)

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Methylene chloride	-	-	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Methylene chloride	X		-
Methyl alcohol	X		-

OSHA Occupational Safety and Health Administration

Component	Specifically Regulated Chemicals	Highly Hazardous Chemicals
Methylene chloride	125 ppm STEL 12.5 ppm Action Level 25 ppm TWA	-

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Methylene chloride	1000 lb 1 lb	-
Methyl alcohol	5000 lb	-

California Proposition 65

This product contains the following proposition 65 chemicals

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Methylene chloride	75-09-2	Carcinogen	200 µg/day 50 µg/day	Carcinogen
Methyl alcohol	67-56-1	Developmental	-	Developmental

U.S. State Right-to-Know Regulations

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Methylene chloride	X	X	X	X	X
Methyl alcohol	X	X	X	X	X
Cyclohexene	X	X	X	-	X
2-Methyl-2-butene	X	X	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ):	Y
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D1B Toxic materials
D2A Very toxic materials

**16. Other information**

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date 27-Jan-2010
Revision Date 02-Oct-2015
Print Date 02-Oct-2015
Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

SAFETY DATA SHEET

Version 4.8
Revision Date 05/23/2016
Print Date 12/11/2017

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Molybdenum

Product Number : 203823
Brand : Aldrich

CAS-No. : 7439-98-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

Not a hazardous substance or mixture.

2.2 GHS Label elements, including precautionary statements

Not a hazardous substance or mixture.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : Mo
Molecular weight : 95.94 g/mol
CAS-No. : 7439-98-7
EC-No. : 231-107-2

Hazardous components

Component	Classification	Concentration
Molybdenum		
		<= 100 %

4. FIRST AID MEASURES

4.1 Description of first aid measures

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration.

In case of skin contact

Wash off with soap and plenty of water.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Avoid dust formation. Avoid breathing vapours, mist or gas.

For personal protection see section 8.

6.2 Environmental precautions

No special environmental precautions required.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Keep in a dry place.

Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters**

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Molybdenum	7439-98-7	TWA	10.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		TWA	3.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	See Appendix D - Substances with No Established RELs		
		TWA	10.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		TWA	3.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		TWA	15 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	10 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		TWA	3 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		PEL	10 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		PEL	3 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

8.2 Exposure controls

Appropriate engineering controls

General industrial hygiene practice.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatrill® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatrill® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place. The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

No special environmental precautions required.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

a) Appearance	Form: powder Colour: grey, black, silver
b) Odour	odourless
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: 2,617 °C (4,743 °F) - lit.
f) Initial boiling point and boiling range	4,612 °C (8,334 °F) - lit.
g) Flash point	Not applicable
h) Evaporation rate	No data available
i) Flammability (solid, gas)	The product is not flammable. - Flammability (solids)
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	1 hPa (1 mmHg) at 3,102 °C (5,616 °F)
l) Vapour density	No data available
m) Relative density	10.3 g/cm ³ at 25 °C (77 °F)
n) Water solubility	insoluble
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY**10.1 Reactivity**

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Bromine trifluoride, Chlorine trifluoride, Fluorine, lead oxide

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Molybdenum oxides

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - > 5,000 mg/kg

(OECD Test Guideline 401)

LD50 Inhalation - Rat - 4 h - > 5.84 mg/l

(OECD Test Guideline 403)

LD50 Dermal - Rat - > 2,000 mg/kg

(OECD Test Guideline 402)

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: QA4680000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 800 mg/l - 96 h
mortality LOEC - Oncorhynchus mykiss (rainbow trout) - 500 mg/l - 96 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

Not dangerous goods

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

No SARA Hazards

Massachusetts Right To Know Components

Molybdenum

CAS-No.
7439-98-7

Revision Date
1993-04-24

Pennsylvania Right To Know Components

Molybdenum

CAS-No.
7439-98-7

Revision Date
1993-04-24

New Jersey Right To Know Components

Molybdenum

CAS-No.
7439-98-7

Revision Date
1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**HMIS Rating**

Health hazard:	0
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.8

Revision Date: 05/23/2016

Print Date: 12/11/2017

SAFETY DATA SHEET

Version 5.5
Revision Date 06/02/2016
Print Date 06/21/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : *m*-Xylene

Product Number : 95670
Brand : Sigma-Aldrich
Index-No. : 601-022-00-9

CAS-No. : 108-38-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226
Acute toxicity, Dermal (Category 4), H312
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335
Aspiration hazard (Category 1), H304
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H226 : Flammable liquid and vapour.
H304 : May be fatal if swallowed and enters airways.
H312 : Harmful in contact with skin.
H315 : Causes skin irritation.
H319 : Causes serious eye irritation.
H335 : May cause respiratory irritation.

H412	Harmful to aquatic life with long lasting effects.
Precautionary statement(s)	
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER/doctor.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P331	Do NOT induce vomiting.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: 1,3-Dimethylbenzene
Formula	: C ₈ H ₁₀
Molecular weight	: 106.17 g/mol
CAS-No.	: 108-38-3
EC-No.	: 203-576-3
Index-No.	: 601-022-00-9

Hazardous components

Component	Classification	Concentration
m-Xylene		
	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; STOT SE 3; Asp. Tox. 1; Aquatic Acute 3; Aquatic Chronic 3; H226, H304, H312, H315, H319, H335, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
m-Xylene	108-38-3	TWA	100.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Eye & Upper Respiratory Tract irritation Central Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	150.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Eye & Upper Respiratory Tract irritation Central Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	100.000000 ppm 435.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	150.000000 ppm 655.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	100.000000 ppm 435.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		
		TWA	100.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	150.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section)		

		Not classifiable as a human carcinogen		
		TWA	100 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	150 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Eye irritation Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	100 ppm 435 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
m-Xylene	108-38-3	Methylhippuric acids	1.5g/g creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
		Methylhippuric acids	1,500.000 0 mg/g	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: liquid Colour: colourless
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -48 °C (-54 °F) - lit.
f) Initial boiling point and boiling range	138 - 139 °C (280 - 282 °F) - lit.
g) Flash point	25.0 °C (77.0 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 7 %(V) Lower explosion limit: 1.1 %(V)
k) Vapour pressure	8.0 hPa (6.0 mmHg) at 20.0 °C (68.0 °F) 21.3 hPa (16.0 mmHg) at 37.7 °C (99.9 °F)
l) Vapour density	No data available
m) Relative density	0.868 g/mL at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 3.2 at 20 °C (68 °F)
p) Auto-ignition temperature	465.0 °C (869.0 °F) 528.0 °C (982.4 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available

t) Oxidizing properties No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - male - 6,602 mg/kg
(OECD Test Guideline 401)

LC50 Inhalation - Rat - male - 4 h - 6700 ppm
(Directive 67/548/EEC, Annex V, B.2.)

LD50 Dermal - Rabbit - male - 12,126 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Severe eye irritation - 24 h

Respiratory or skin sensitisation

- Mouse

Result: Does not cause skin sensitisation.
(OECD Test Guideline 429)

Germ cell mutagenicity

No data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (m-Xylene)

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

Overexposure may cause reproductive disorder(s) based on tests with laboratory animals.

Specific target organ toxicity - single exposure

Inhalation - May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

May be fatal if swallowed and enters airways.

Additional Information

RTECS: ZE2275000

Liver injury may occur., Kidney injury may occur., Blood disorders, burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, narcosis, Lung irritation, chest pain, pulmonary edema, Central nervous system depression, Dermatitis, Gastrointestinal disturbance

Kidney -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish mortality LC50 - Fish - 11.23 mg/l - 96 h
(OECD Test Guideline 203)

Toxicity to daphnia and Remarks: No data available
other aquatic
invertebrates

Toxicity to algae Remarks: No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Due to the distribution coefficient n-octanol/water, accumulation in organisms is not expected.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life with long lasting effects.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1307 Class: 3 Packing group: III
Proper shipping name: Xylenes
Reportable Quantity (RQ): 1000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1307 Class: 3 Packing group: III EMS-No: F-E, S-D
Proper shipping name: XYLENES

IATA

UN number: 1307 Class: 3 Packing group: III
Proper shipping name: Xylenes

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
m-Xylene	108-38-3	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
m-Xylene	108-38-3	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
m-Xylene	108-38-3	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
m-Xylene	108-38-3	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Asp. Tox.	Aspiration hazard
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.

H304	May be fatal if swallowed and enters airways.
H312	Harmful in contact with skin.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.


Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.5

Revision Date: 06/02/2016

Print Date: 06/21/2016



Health	2
Fire	2
Reactivity	0
Personal Protection	E

Material Safety Data Sheet

Naphthalene MSDS

Section 1: Chemical Product and Company Identification

Product Name: Naphthalene

Catalog Codes: SLN1789, SLN2401

CAS#: 91-20-3

RTECS: QJ0525000

TSCA: TSCA 8(b) inventory: Naphthalene

CI#: Not available.

Synonym:

Chemical Name: Not available.

Chemical Formula: C₁₀H₈

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Naphthalene	91-20-3	100

Toxicological Data on Ingredients: Naphthalene: ORAL (LD50): Acute: 490 mg/kg [Rat]. 533 mg/kg [Mouse]. 1200 mg/kg [Guinea pig]. DERMAL (LD50): Acute: 20001 mg/kg [Rabbit]. VAPOR (LC50): Acute: 170 ppm 4 hour(s) [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Very hazardous in case of ingestion. Hazardous in case of eye contact (irritant), of inhalation. Slightly hazardous in case of skin contact (irritant, permeator). Severe over-exposure can result in death.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. MUTAGENIC EFFECTS: Not available. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Classified Development toxin [POSSIBLE]. The substance is toxic to blood, kidneys, the nervous system, the reproductive system, liver, mucous membranes, gastrointestinal tract, upper respiratory tract, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to an highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Do not use an eye ointment. Seek medical attention.

Skin Contact:

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

Serious Skin Contact: Not available.

Inhalation: Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

Ingestion:

Do not induce vomiting. Examine the lips and mouth to ascertain whether the tissues are damaged, a possible indication that the toxic material was ingested; the absence of such signs, however, is not conclusive. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 567°C (1052.6°F)

Flash Points: CLOSED CUP: 88°C (190.4°F). OPEN CUP: 79°C (174.2°F).

Flammable Limits: LOWER: 0.9% UPPER: 5.9%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances: Not available.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

Flammable solid. **SMALL FIRE:** Use DRY chemical powder. **LARGE FIRE:** Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill: Use appropriate tools to put the spilled solid in a convenient waste disposal container.

Large Spill:

Flammable solid. Stop leak if without risk. Do not touch spilled material. Use water spray curtain to divert vapor drift. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage

Precautions:

Keep locked up Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe dust. Avoid contact with eyes Wear suitable protective clothing In case of insufficient ventilation, wear suitable respiratory equipment If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents.

Storage:

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. Keep container dry. Keep in a cool place.

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection:

Splash goggles. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

Israel: TWA: 10 (ppm) TWA: 10 STEL: 15 (ppm) from ACGIH (TLV) [1995] TWA: 52 STEL: 79 (mg/m³) from ACGIH [1995]
Australia: STEL: 15 (ppm) Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid. (Crystalline solid.)

Odor: Aromatic.

Taste: Not available.

Molecular Weight: 128.19 g/mole

Color: White.

pH (1% soln/water): Not available.

Boiling Point: 218°C (424.4°F)

Melting Point: 80.2°C (176.4°F)

Critical Temperature: Not available.

Specific Gravity: 1.162 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: 4.4 (Air = 1)

Volatility: Not available.

Odor Threshold: 0.038 ppm

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties:

Partially dispersed in hot water, methanol, n-octanol. Very slightly dispersed in cold water. See solubility in methanol, n-octanol.

Solubility:

Partially soluble in methanol, n-octanol. Very slightly soluble in cold water, hot water.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Not available.

Incompatibility with various substances: Highly reactive with oxidizing agents.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: May attack some forms of rubber and plastic

Polymerization: No.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Dermal contact. Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 490 mg/kg [Rat]. Acute dermal toxicity (LD50): 20001 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 170 ppm 4 hour(s) [Rat].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH. DEVELOPMENTAL TOXICITY: Classified Development toxin [POSSIBLE]. The substance is toxic to blood, kidneys, the nervous system, the reproductive system, liver, mucous membranes, gastrointestinal tract, upper respiratory tract, central nervous system (CNS).

Other Toxic Effects on Humans:

Very hazardous in case of ingestion. Hazardous in case of inhalation. Slightly hazardous in case of skin contact (irritant, permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: Not available.

Special Remarks on other Toxic Effects on Humans: Not available.

Section 12: Ecological Information

Ecotoxicity: Ecotoxicity in water (LC50): 305.2 ppm 96 hour(s) [Trout].

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are more toxic.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Section 14: Transport Information

DOT Classification: CLASS 4.1: Flammable solid.

Identification: : Naphthalene, refined : UN1334 PG: III

Special Provisions for Transport: Marine Pollutant

Section 15: Other Regulatory Information

Federal and State Regulations:

Rhode Island RTK hazardous substances: Naphthalene Pennsylvania RTK: Naphthalene Florida: Naphthalene Minnesota: Naphthalene Massachusetts RTK: Naphthalene TSCA 8(b) inventory: Naphthalene TSCA 8(a) PAIR: Naphthalene TSCA 8(d) H and S data reporting: Naphthalene: 06/01/87 SARA 313 toxic chemical notification and release reporting: Naphthalene: 1% CERCLA: Hazardous substances.: Naphthalene: 100 lbs. (45.36 kg)

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada):

CLASS B-4: Flammable solid. CLASS D-1B: Material causing immediate and serious toxic effects (TOXIC). CLASS D-2B: Material causing other toxic effects (TOXIC).

DSCL (EEC):

R36- Irritating to eyes. R40- Possible risks of irreversible effects. R48/22- Harmful: danger of serious damage to health by prolonged exposure if swallowed. R48/23- Toxic: danger of serious damage to health by prolonged exposure through inhalation. R63- Possible risk of harm to the unborn child.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 2

Reactivity: 0

Personal Protection: E

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 2

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/11/2005 01:30 PM

Last Updated: 11/06/2008 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

SAFETY DATA SHEET

Version 4.4
Revision Date 11/04/2015
Print Date 12/17/2015

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Butylbenzene

Product Number : B90203
Brand : Aldrich

CAS-No. : 104-51-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H226

Flammable liquid and vapour.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P273

Avoid release to the environment.

P280

Wear protective gloves/ protective clothing/ eye protection/ face

P303 + P361 + P353	protection. IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: 1-Phenylbutane
Formula	: C ₁₀ H ₁₄
Molecular weight	: 134.22 g/mol
CAS-No.	: 104-51-8
EC-No.	: 203-209-7

Hazardous components

Component	Classification	Concentration
Butylbenzene		
	Flam. Liq. 3; Aquatic Acute 1; Aquatic Chronic 1; H226, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.
Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Fluorinated rubber
Minimum layer thickness: 0.7 mm
Break through time: 480 min
Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -88 °C (-126 °F) - lit. |
| f) Initial boiling point and boiling range | 183 °C (361 °F) - lit. |
| g) Flash point | 59.0 °C (138.2 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | Upper explosion limit: 5.8 %(V)
Lower explosion limit: 0.8 %(V) |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 0.86 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | insoluble |
| o) Partition coefficient: n-octanol/water | log Pow: 4.26 |
| p) Auto-ignition temperature | 412.0 °C (773.6 °F) |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |

- s) Explosive properties No data available
- t) Oxidizing properties No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: CY9070000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - Daphnia magna (Water flea) - 0.34 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 2709 Class: 3 Packing group: III

Proper shipping name: Butyl benzenes

Marine pollutant: yes

Poison Inhalation Hazard: No

IMDG

UN number: 2709 Class: 3 Packing group: III EMS-No: F-E, S-D

Proper shipping name: BUTYLBENZENES

Marine pollutant: yes

IATA

UN number: 2709 Class: 3 Packing group: III

Proper shipping name: Butylbenzenes

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Butylbenzene	104-51-8	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Butylbenzene	104-51-8	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Butylbenzene	104-51-8	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.4

Revision Date: 11/04/2015

Print Date: 12/17/2015



SAFETY DATA SHEET

Creation Date 26-Oct-2009

Revision Date 02-Apr-2014

Revision Number 1

1. Identification

Product Name n-Hexane

Cat No. : AC326920000; AC326920010; AC326920025; AC326921000; AC326922500

Synonyms Hex

Recommended Use Laboratory chemicals

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company	Entity / Business Name	Emergency Telephone Number
Fisher Scientific	Acros Organics	For information US call: 001-800-ACROS-01 /
One Reagent Lane	One Reagent Lane	Europe call: +32 14 57 52 11
Fair Lawn, NJ 07410	Fair Lawn, NJ 07410	Emergency Number US :001-201-796-7100 /
Tel: (201) 796-7100		Europe : +32 14 57 52 99
		CHEMTREC Tel. No. US :001-800-424-9300 /
		Europe :001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Flammable liquids	Category 2
Skin Corrosion/irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Reproductive Toxicity	Category 2
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Respiratory system, Central nervous system (CNS).	
Specific target organ toxicity - (repeated exposure)	Category 1
Target Organs - Liver, Heart, Blood.	
Aspiration Toxicity	Category 1

Label Elements

Signal Word

Danger

Hazard Statements

Highly flammable liquid and vapor

May be fatal if swallowed and enters airways
Causes skin irritation
Causes serious eye irritation
May cause respiratory irritation
May cause drowsiness or dizziness
Suspected of damaging fertility
Causes damage to organs through prolonged or repeated exposure

**Precautionary Statements****Prevention**

Obtain special instructions before use
Do not handle until all safety precautions have been read and understood
Use personal protective equipment as required
Wash face, hands and any exposed skin thoroughly after handling
Wear eye/face protection
Do not breathe dust/fume/gas/mist/vapors/spray
Do not eat, drink or smoke when using this product
Use only outdoors or in a well-ventilated area
Keep away from heat/sparks/open flames/hot surfaces. - No smoking
Keep container tightly closed
Ground/bond container and receiving equipment
Use explosion-proof electrical/ventilating/lighting/equipment
Use only non-sparking tools
Take precautionary measures against static discharge
Keep cool

Response

IF exposed or concerned: Get medical attention/advice

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

If skin irritation occurs: Get medical advice/attention

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower

Wash contaminated clothing before reuse

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing

If eye irritation persists: Get medical advice/attention.

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Do NOT induce vomiting

Fire

In case of fire: Use CO₂, dry chemical, or foam for extinction

Storage

Store locked up

Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Toxic to aquatic life with long lasting effects

3. Composition / Information on ingredients

Haz/Non-haz

Component	CAS-No	Weight %
Hexane	110-54-3	>95

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
Skin Contact	Wash off immediately with plenty of water for at least 15 minutes. Obtain medical attention.
Inhalation	Move to fresh air. If breathing is difficult, give oxygen. Do not use mouth-to-mouth resuscitation if victim ingested or inhaled the substance; induce artificial respiration with a respiratory medical device. Obtain medical attention. Aspiration into lungs can produce severe lung damage.
Ingestion	Do not induce vomiting. Call a physician or Poison Control Center immediately. If vomiting occurs, lean victim forward to reduce the risk of aspiration.
Most important symptoms/effects	Breathing difficulties. . Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting.
Notes to Physician	Treat symptomatically.

5. Fire-fighting measures

Suitable Extinguishing Media	CO ₂ , dry chemical, dry sand, alcohol-resistant foam. Cool closed containers exposed to fire with water spray.
Unsuitable Extinguishing Media	Water may be ineffective, This material is lighter than water and insoluble in water. The fire could easily be spread by the use of water in an area where the water cannot be contained.
Flash Point	-22°C / -7.6°F
Method -	No information available
Autoignition Temperature	223°C / 433.4°F
Explosion Limits	
Upper	7.5 vol %
Lower	1.1 vol %
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Flammable. Risk of ignition. Vapors may form explosive mixtures with air. Vapors may travel to source of ignition and flash back. Containers may explode when heated.

Hazardous Combustion Products Carbon monoxide (CO), Carbon dioxide (CO₂).

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

NFPAHealth
2Flammability
3Instability
0Physical hazards
N/A**6. Accidental release measures****Personal Precautions**

Use personal protective equipment. Ensure adequate ventilation. Evacuate personnel to safe areas. Remove all sources of ignition. Take precautionary measures against static discharges.

Environmental Precautions

Do not flush into surface water or sanitary sewer system. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up

Soak up with inert absorbent material. Keep in suitable, closed containers for disposal. Remove all sources of ignition. Use spark-proof tools and explosion-proof equipment. Take precautionary measures against static discharges.

7. Handling and storage**Handling**

Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Do not breathe vapors or spray mist. Keep away from open flames, hot surfaces and sources of ignition. Use only non-sparking tools. Use explosion-proof equipment. Take precautionary measures against static discharges. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded.

Storage

Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat and sources of ignition. Flammables area.

8. Exposure controls / personal protection**Exposure Guidelines**

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Hexane	TWA: 50 ppm Skin	(Vacated) TWA: 50 ppm (Vacated) TWA: 180 mg/m ³ TWA: 500 ppm TWA: 1800 mg/m ³	IDLH: 1100 ppm TWA: 50 ppm TWA: 180 mg/m ³

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Hexane	TWA: 50 ppm TWA: 176 mg/m ³ Skin	TWA: 50 ppm TWA: 176 mg/m ³	TWA: 50 ppm Skin

Legend

ACGIH - American Conference of Governmental Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures

Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location. Use explosion-proof electrical/ventilating/lighting/equipment.

Personal Protective Equipment**Eye/face Protection**

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice

9. Physical and chemical properties

Physical State	Liquid
Appearance	Colorless
Odor	Petroleum distillates
Odor Threshold	No information available.
pH	No information available.
Melting Point/Range	-95°C / -139°F
Boiling Point/Range	69°C / 156.2°F @ 760 mmHg
Flash Point	-22°C / -7.6°F
Evaporation Rate	No information available.
Flammability (solid,gas)	Not applicable
Flammability or explosive limits	
Upper	7.5 vol %
Lower	1.1 vol %
Vapor Pressure	160 mbar @ 20 °C
Vapor Density	2.97
Relative Density	0.659
Solubility	Insoluble in water
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	223°C / 433.4°F
Decomposition temperature	No information available.
Viscosity	0.31 mPa s at 20 °C
Molecular Formula	C6 H14
Molecular Weight	86.18

10. Stability and reactivity

Reactive Hazard	None known, based on information available.
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products. Heat, flames and sparks. Exposure to light. Keep away from open flames, hot surfaces and sources of ignition.
Incompatible Materials	Strong oxidizing agents, Halogens
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	Hazardous polymerization does not occur
Hazardous Reactions	None under normal processing

11. Toxicological information

Acute Toxicity**Product Information****Component Information**

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Hexane	25 g/kg (Rat)	3000 mg/kg (Rabbit)	48000 ppm (Rat) 4 h

Toxicologically Synergistic Products No information available.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Irritating to eyes and skin

Sensitization No information available.

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Hexane	110-54-3	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects Mutagenic effects have occurred in experimental animals.

Reproductive Effects Experiments have shown reproductive toxicity effects on laboratory animals.

Developmental Effects Developmental effects have occurred in experimental animals.

Teratogenicity Teratogenic effects have occurred in experimental animals..

STOT - single exposure Respiratory system, Central nervous system (CNS).

STOT - repeated exposure Liver, Heart, Blood.

Aspiration hazard No information available.

Symptoms / effects, both acute and delayed Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. Inhalation of high vapor concentrations may cause symptoms like headache, dizziness, tiredness, nausea and vomiting.

Endocrine Disruptor Information No information available

Other Adverse Effects Tumorigenic effects have been reported in experimental animals.. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Hexane	Not listed	2.1 - 2.98 mg/L LC50 96 h	Not listed	EC50: 3.87 mg/L/48h

Persistence and Degradability Persistence is unlikely, based on information available.

Bioaccumulation/ Accumulation No information available

Mobility Will likely be mobile in the environment due to its volatility.

Component	log Pow
Hexane	4.11

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN1208
 Proper Shipping Name Hexanes
 Hazard Class 3
 Packing Group II

TDG

UN-No UN1208
 Proper Shipping Name HEXANES
 Hazard Class 3
 Packing Group II

IATA

UN-No UN1208
 Proper Shipping Name Hexanes
 Hazard Class 3
 Packing Group II

IMDG/IMO

UN-No UN1208
 Proper Shipping Name Hexanes
 Hazard Class 3
 Packing Group II

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Hexane	X	X	-	203-777-6	-		X	X	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b)

Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Hexane	110-54-3	>95	1.0

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	Yes
Fire Hazard	Yes
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act Not applicable

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Hexane	X		-

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Hexane	5000 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals.

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Hexane	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): Y
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.


Other International Regulations

Mexico - Grade Serious risk, Grade 3

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR.

WHMIS Hazard Class B2 Flammable liquid
D2A Very toxic materials

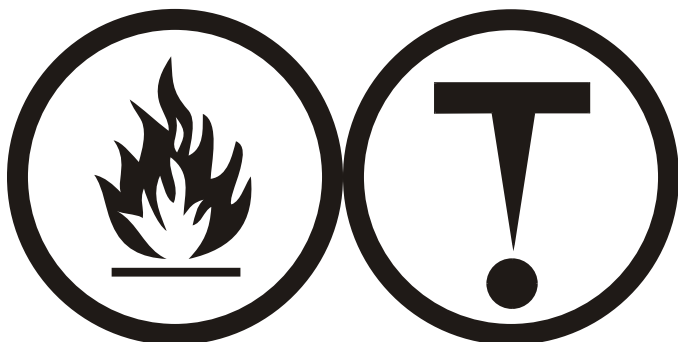

16. Other information

Prepared By

Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date

26-Oct-2009

Revision Date

02-Apr-2014

Print Date

02-Apr-2014

Revision Summary

This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



SAFETY DATA SHEET

Creation Date 04-Oct-2010

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Nickel, powder

Cat No. : AC193610000; AC193610250; AC193611000; AC193615000

Synonyms Raney alloy

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin Sensitization	Category 1
Carcinogenicity	Category 2
Specific target organ toxicity - (repeated exposure)	Category 1
Target Organs - Kidney, Blood.	

Label Elements

Signal Word
Danger

Hazard Statements

May cause an allergic skin reaction
Causes damage to organs through prolonged or repeated exposure
Suspected of causing cancer



Precautionary Statements

Prevention

Obtain special instructions before use
Do not handle until all safety precautions have been read and understood
Wear protective gloves/protective clothing/eye protection/face protection
Do not breathe dust/fume/gas/mist/vapors/spray
Wash face, hands and any exposed skin thoroughly after handling
Do not eat, drink or smoke when using this product
Contaminated work clothing should not be allowed out of the workplace

Response

IF exposed or concerned: Get medical attention/advice

Skin

IF ON SKIN: Wash with plenty of soap and water
If skin irritation or rash occurs: Get medical advice/attention
Wash contaminated clothing before reuse

Storage

Store locked up

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Harmful to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Nickel powder	7440-02-0	>95

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Immediate medical attention is required.
Skin Contact	Wash off immediately with plenty of water for at least 15 minutes. Immediate medical attention is required.
Inhalation	Move to fresh air. If breathing is difficult, give oxygen. Do not use mouth-to-mouth resuscitation if victim ingested or inhaled the substance; induce artificial respiration with a respiratory medical device. Immediate medical attention is required.
Ingestion	Do not induce vomiting. Call a physician or Poison Control Center immediately.
Most important symptoms/effects	May cause allergic skin reaction. Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	400 °C / 752 °F
Explosion Limits	
Upper	No data available
Lower	No data available

Sensitivity to Mechanical Impact No information available
Sensitivity to Static Discharge No information available

Specific Hazards Arising from the Chemical

Combustible material.

Hazardous Combustion Products

Nickel oxides.

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

NFPA

Health
3

Flammability
1

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions

Ensure adequate ventilation. Use personal protective equipment. Keep people away from and upwind of spill/leak. Evacuate personnel to safe areas. Avoid dust formation.

Environmental Precautions

Should not be released into the environment. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up

Sweep up or vacuum up spillage and collect in suitable container for disposal. Avoid dust formation.

7. Handling and storage

Handling

Use only under a chemical fume hood. Wear personal protective equipment. Do not get in eyes, on skin, or on clothing. Avoid dust formation. Do not breathe vapors/dust. Do not ingest.

Storage

Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Nickel powder	TWA: 1.5 mg/m ³	(Vacated) TWA: 1 mg/m ³ TWA: 1 mg/m ³	IDLH: 10 mg/m ³ TWA: 0.015 mg/m ³

Component	Quebec	Mexico OEL (TWA)	Ontario TWAEV
Nickel powder	TWA: 1 mg/m ³	TWA: 1 mg/m ³	TWA: 1 mg/m ³

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures

Use only under a chemical fume hood. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment

Eye/face Protection

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Solid
Appearance	Brown
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	1455 °C / 2651 °F
Boiling Point/Range	2730 °C / 4946 °F
Flash Point	No information available
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	1 mmHg @ 1810 °C
Vapor Density	No information available
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	400 °C / 752 °F
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	Ni
Molecular Weight	58.7

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products. Excess heat. Avoid dust formation.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	Nickel oxides
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity**Component Information**

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Nickel powder	9000 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization May cause sensitization by skin contact Nickel and nickel compounds may cause a form of dermatitis known as nickel itch. May cause an allergic skin reaction

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Nickel powder	7440-02-0	Group 2B	Reasonably Anticipated	Not listed	X	Not listed

IARC: (International Agency for Research on Cancer)

Group 2B - Possibly Carcinogenic to Humans

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure Kidney Blood

Aspiration hazard No information available

Symptoms / effects, both acute and delayed Symptoms of allergic reaction may include rash, itching, swelling, trouble breathing, tingling of the hands and feet, dizziness, lightheadedness, chest pain, muscle pain or flushing

Endocrine Disruptor Information No information available

Other Adverse Effects See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Do not empty into drains. Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Nickel powder	0.18 mg/L EC50 = 72 h 0.174 - 0.311 mg/L EC50 96 h	10.4 mg/L LC50 96 h 1.3 mg/L LC50 96 h 100 mg/L LC50 96 h	Not listed	1 mg/L EC50 = 48 h 100 mg/L EC50 > 48 h

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility No information available.

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN3089
 Proper Shipping Name METAL POWDERS, FLAMMABLE, N.O.S.
 Hazard Class 4.1
 Packing Group II

TDG

UN-No UN3089
 Proper Shipping Name METAL POWDERS, FLAMMABLE, N.O.S.
 Hazard Class 4.1
 Packing Group II

IATA

UN-No 3089
 Proper Shipping Name METAL POWDERS, FLAMMABLE, N.O.S.
 Hazard Class 4.1
 Packing Group II

IMDG/IMO

UN-No 3089
 Proper Shipping Name METAL POWDERS, FLAMMABLE, N.O.S.
 Hazard Class 4.1
 Packing Group II

15. Regulatory information**International Inventories**

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Nickel powder	X	X	-	231-111-4	-		X	-	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Nickel powder	7440-02-0	>95	0.1

SARA 311/312 Hazardous Categorization

Acute Health Hazard Yes
 Chronic Health Hazard Yes
 Fire Hazard No
 Sudden Release of Pressure Hazard No
 Reactive Hazard No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Nickel powder	-	-	X	X

Clean Air Act

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Nickel powder	X		-

OSHA Occupational Safety and Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive

Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Nickel powder	100 lb	-

California Proposition 65 This product contains the following Proposition 65 chemicals:

Component	CAS-No	California Prop. 65	Prop 65 NSRL	Category
Nickel powder	7440-02-0	Carcinogen	-	Carcinogen

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Nickel powder	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D2A Very toxic materials



16. Other information

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date 04-Oct-2010
Revision Date 10-Feb-2015
Print Date 10-Feb-2015
Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

Material Safety Data Sheet

Version 4.0

Revision Date 07/28/2010

Print Date 12/27/2011

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : Propylbenzene

Product Number : P52407

Brand : Aldrich

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Combustible Liquid

Target Organs

Lungs, Eyes, Kidney

GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)

H226 Flammable liquid and vapour.

H304 May be fatal if swallowed and enters airways.

H335 May cause respiratory irritation.

H401 Toxic to aquatic life.

Precautionary statement(s)

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.

P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.

P331 Do NOT induce vomiting.

HMIS Classification

Health hazard: 0

Chronic Health Hazard: *

Flammability: 2

Physical hazards: 0

NFPA Rating

Health hazard: 1

Fire: 2

Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. May cause respiratory tract irritation.

Skin May be harmful if absorbed through skin. May cause skin irritation.

Eyes May cause eye irritation.

Ingestion

Aspiration hazard if swallowed - can enter lungs and cause damage. May be harmful if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : 1-Phenylpropane

Formula : C₉H₁₂

Molecular Weight : 120.19 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
Propylbenzene			
103-65-1	203-132-9	601-024-00-X	-

4. FIRST AID MEASURES**General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES**Suitable extinguishing media**

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**Personal precautions**

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13). Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE**Precautions for safe handling**

Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Store in cool place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Contains no substances with occupational exposure limit values.

Personal protective equipment

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

For prolonged or repeated contact use protective gloves.

Eye protection

Face shield and safety glasses

Skin and body protection

Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form	liquid, clear
Colour	colourless

Safety data

pH	no data available
Melting point	-99 °C (-146 °F) - lit.
Boiling point	159 °C (318 °F) - lit.
Flash point	42.0 °C (107.6 °F) - closed cup
Ignition temperature	450 °C (842 °F)
Lower explosion limit	0.8 %(V)
Upper explosion limit	6 %(V)
Density	0.862 g/cm ³ at 25 °C (77 °F)
Water solubility	slightly soluble

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

Vapours may form explosive mixture with air.

Conditions to avoid

Heat, flames and sparks.

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

11. TOXICOLOGICAL INFORMATION**Acute toxicity**

LD50 Oral - rat - 6,040 mg/kg

Remarks: Behavioral:Somnolence (general depressed activity).

LC50 Inhalation - rat - 2 h - 65000 ppm

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

May cause respiratory irritation.

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

May be fatal if swallowed and enters airways.

Potential health effects**Inhalation**

May be harmful if inhaled. May cause respiratory tract irritation.

Ingestion

Aspiration hazard if swallowed - can enter lungs and cause damage. May be harmful if swallowed.

Skin

May be harmful if absorbed through skin. May cause skin irritation.

Eyes

May cause eye irritation.

Signs and Symptoms of Exposure

Damage to the lungs., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Additional Information

RTECS: DA8750000

12. ECOLOGICAL INFORMATION**Toxicity**

Toxicity to fish

LC50 - Oncorhynchus mykiss (rainbow trout) - 1.55 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates. Immobilization EC50 - Daphnia magna (Water flea) - 2 mg/l - 24 h

Persistence and degradability

no data available

Bioaccumulative potential

no data available

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Avoid release to the environment.

13. DISPOSAL CONSIDERATIONS

Product

This combustible material may be burned in a chemical incinerator equipped with an afterburner and scrubber. Observe all federal, state, and local environmental regulations. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN-Number: 2364 Class: 3 Packing group: III
Proper shipping name: n-Propyl benzene
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

UN-Number: 2364 Class: 3 Packing group: III EMS-No: F-E, S-D
Proper shipping name: PROPYLBENZENE
Marine pollutant: No

IATA

UN-Number: 2364 Class: 3 Packing group: III
Proper shipping name: n-Propylbenzene

15. REGULATORY INFORMATION

OSHA Hazards

Combustible Liquid

DSL Status

All components of this product are on the Canadian DSL list.

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

Propylbenzene

CAS-No.
103-65-1Revision Date
2007-03-01**Pennsylvania Right To Know Components**

Propylbenzene

CAS-No.
103-65-1Revision Date
2007-03-01**New Jersey Right To Know Components**

Propylbenzene

CAS-No.
103-65-1Revision Date
2007-03-01**California Prop. 65 Components**

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Further information**

Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.

SAFETY DATA SHEET

Version 4.7

Revision Date 05/27/2015

Print Date 04/01/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : o-Cresol

Product Number : C85700
Brand : Sigma-Aldrich
Index-No. : 604-004-00-9

CAS-No. : 95-48-7

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USATelephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)Acute toxicity, Oral (Category 3), H301
Acute toxicity, Dermal (Category 3), H311
Skin corrosion (Category 1B), H314
Serious eye damage (Category 1), H318
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H301 + H311

Toxic if swallowed or in contact with skin

H314

Causes severe skin burns and eye damage.

H318

Causes serious eye damage.

H411

Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P260

Do not breathe dust or mist.

P264

Wash skin thoroughly after handling.

P270

Do not eat, drink or smoke when using this product.

P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310 + P330	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician. Rinse mouth.
P301 + P330 + P331	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P310	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P305 + P351 + P338 + P310	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/ physician.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: 2-Methylphenol
Formula	: C ₇ H ₈ O
Molecular weight	: 108.14 g/mol
CAS-No.	: 95-48-7
EC-No.	: 202-423-8
Index-No.	: 604-004-00-9

Hazardous components

Component	Classification	Concentration
o-Cresol		
	Acute Tox. 3; Skin Corr. 1B; Eye Dam. 1; Aquatic Acute 2; Aquatic Chronic 2; H301 + H311, H314, H318, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Take off contaminated clothing and shoes immediately. Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician. Continue rinsing eyes during transport to hospital.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Air and light sensitive. Keep in a dry place.

Storage class (TRGS 510): Non-combustible, acute toxic Cat. 1 and 2 / very toxic hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
o-Cresol	95-48-7	TWA	5.000000 ppm 22.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	Skin contact does contribute to exposure.		

		TWA	5.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Eye, skin, & Upper Respiratory Tract irritation Adopted values or notations enclosed are those for which changes are proposed in the NIC 2010 Revision or addition to the notice of intended changes See Notice of Intended Changes (NIC) Danger of cutaneous absorption		
		TWA	2.300000 ppm 10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	20.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Not classifiable as a human carcinogen Danger of cutaneous absorption		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 30 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: powder Colour: white
b) Odour	No data available
c) Odour Threshold	No data available
d) pH	4.5 at 25.00000 g/l
e) Melting point/freezing point	Melting point/range: 29 - 31 °C (84 - 88 °F) - lit.
f) Initial boiling point and boiling range	191 °C (376 °F) - lit.
g) Flash point	81.0 °C (177.8 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 58 %(V) Lower explosion limit: 1.3 %(V)
k) Vapour pressure	3.1 hPa (2.3 mmHg) at 60.0 °C (140.0 °F) 1.3 hPa (1.0 mmHg) at 38.2 °C (100.8 °F) 0.4 hPa (0.3 mmHg) at 20.0 °C (68.0 °F)
l) Vapour density	No data available
m) Relative density	1.05 g/cm ³ at 20.00 °C (68.00 °F)
n) Water solubility	25 g/l at 20 °C (68 °F)
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	599.0 °C (1,110.2 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 121.0 mg/kg

Remarks: Behavioral:Convulsions or effect on seizure threshold. Lungs, Thorax, or Respiration:Dyspnea.

Gastrointestinal:Ulceration or bleeding from stomach.

LC50 Inhalation - Rat - 1 h - > 1,220 mg/m³

Remarks: Sense Organs and Special Senses (Nose, Eye, Ear, and Taste):Eye:Lacrimation. Behavioral:Somnolence (general depressed activity).

LD50 Dermal - Rabbit - 890.0 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Severe skin irritation - 24 h

(Draize Test)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Severe eye irritation

(Draize Test)

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: GO6300000

Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, Central nervous system depression, Diarrhoea, Gastrointestinal disturbance

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Leuciscus idus (Golden orfe) - 10.00 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates Immobilization EC50 - Daphnia magna (Water flea) - 15.8 mg/l - 48 h
Toxicity to algae EC50 - SELENASTRUM - 100.00 mg/l - 72 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life with long lasting effects.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3455 Class: 6.1 (8) Packing group: II
Proper shipping name: Cresols, solid
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 3455 Class: 6.1 (8) Packing group: II EMS-No: F-A, S-B
Proper shipping name: CRESOLS, SOLID

IATA

UN number: 3455 Class: 6.1 (8) Packing group: II
Proper shipping name: Cresols, solid

15. REGULATORY INFORMATION

SARA 302 Components

The following components are subject to reporting levels established by SARA Title III, Section 302:

	CAS-No.	Revision Date
o-Cresol	95-48-7	2007-07-01

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
o-Cresol	95-48-7	2007-07-01

Massachusetts Right To Know Components

	CAS-No.	Revision Date
o-Cresol	95-48-7	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
o-Cresol	95-48-7	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
o-Cresol	95-48-7	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Dam.	Serious eye damage
H301	Toxic if swallowed.
H301 + H311	Toxic if swallowed or in contact with skin
H311	Toxic in contact with skin.
H314	Causes severe skin burns and eye damage.
H318	Causes serious eye damage.

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.7

Revision Date: 05/27/2015

Print Date: 04/01/2016

Material Safety Data Sheet

Version 5.0
Revision Date 11/13/2012
Print Date 03/19/2014

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : o-Xylene

Product Number : 95660

Brand : Fluka

Supplier : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

Emergency Phone # (For both supplier and manufacturer) : (314) 776-6555

Preparation Information : Sigma-Aldrich Corporation
Product Safety - Americas Region
1-800-521-8956

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Flammable liquid, Harmful by skin absorption., Irritant, Reproductive hazard

Target Organs

Liver, Kidney, Nerves.

GHS Classification

Flammable liquids (Category 3)
Acute toxicity, Inhalation (Category 4)
Acute toxicity, Dermal (Category 4)
Skin irritation (Category 2)
Acute aquatic toxicity (Category 2)

GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H226 Flammable liquid and vapour.
H312 + H332 Harmful in contact with skin or if inhaled
H315 Causes skin irritation.
H401 Toxic to aquatic life.

Precautionary statement(s)

P280 Wear protective gloves/ protective clothing.

HMIS Classification

Health hazard: 2
Chronic Health Hazard: *
Flammability: 3
Physical hazards: 1

NFPA Rating
Health hazard: 2
Fire: 3
Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. Causes respiratory tract irritation.
Skin Causes skin irritation.
Eyes Causes eye irritation.
Ingestion May be harmful if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : 1,2-Dimethylbenzene

Formula : C₈H₁₀

Molecular Weight : 106.17 g/mol

Component		Concentration
o-Xylene		
CAS-No.	95-47-6	-
EC-No.	202-422-2	
Index-No.	601-022-00-9	

4. FIRST AID MEASURES

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIREFIGHTING MEASURES

Conditions of flammability

Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking.

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

Special protective equipment for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

Hazardous combustion products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

7. HANDLING AND STORAGE**Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**Components with workplace control parameters**

Components	CAS-No.	Value	Control parameters	Basis
o-Xylene	95-47-6	STEL	150 ppm 655 mg/m ³	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	100 ppm 435 mg/m ³	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	100 ppm 434 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
Remarks	Not classifiable as a human carcinogen			
		TWA	100 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Eye & Upper Respiratory Tract irritation Central Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen			
		STEL	150 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Eye & Upper Respiratory Tract irritation Central Nervous System impairment Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen			
		TWA	100 ppm 435 mg/m ³	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	100 ppm 435 mg/m ³	USA. NIOSH Recommended Exposure Limits
		ST	150 ppm 655 mg/m ³	USA. NIOSH Recommended Exposure Limits

Personal protective equipment**Respiratory protection**

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: > 480 min

Material tested: Vitoject® (Aldrich Z677698, Size M)

Splash protection

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: > 30 min

Material tested: Camatril® (Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an Industrial Hygienist familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Eye protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin and body protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form	liquid
Colour	colourless

Safety data

pH	no data available
Melting point/freezing point	Melting point/range: -26 - -23 °C (-15 - -9 °F) - lit.
Boiling point	143 - 145 °C (289 - 293 °F) - lit.
Flash point	31.0 °C (87.8 °F) - closed cup
Ignition temperature	464 °C (867 °F)
Autoignition temperature	464.0 °C (867.2 °F)
Lower explosion limit	0.9 %(V)
Upper explosion limit	6.7 %(V)
Vapour pressure	21.3 hPa (16.0 mmHg) at 37.7 °C (99.9 °F) 8.8 hPa (6.6 mmHg) at 25.0 °C (77.0 °F)
Density	0.879 g/mL at 20 °C (68 °F)
Water solubility	no data available
Partition coefficient:	log Pow: 3.12

n-octanol/water	
Relative vapour density	no data available
Odour	no data available
Odour Threshold	no data available
Evaporation rate	no data available

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

Vapours may form explosive mixture with air.

Conditions to avoid

Heat, flames and sparks.

Materials to avoid

Oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - no data available

11. TOXICOLOGICAL INFORMATION

Acute toxicity

Oral LD50

no data available

Inhalation LC50

no data available

Dermal LD50

no data available

Other information on acute toxicity

LD50 Intraperitoneal - mouse - 1,364 mg/kg

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (o-Xylene)

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a

known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

Overexposure may cause reproductive disorder(s) based on tests with laboratory animals.

Suspected human reproductive toxicant

Teratogenicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

no data available

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

no data available

Potential health effects

Inhalation	May be harmful if inhaled. Causes respiratory tract irritation.
Ingestion	May be harmful if swallowed.
Skin	Causes skin irritation.
Eyes	Causes eye irritation.

Signs and Symptoms of Exposure

narcosis, Lung irritation, chest pain, pulmonary edema, Central nervous system depression, Dermatitis, Gastrointestinal disturbance, Liver injury may occur., Kidney injury may occur., Blood disorders

Synergistic effects

no data available

Additional Information

RTECS: ZE2450000

12. ECOLOGICAL INFORMATION

Toxicity

Toxicity to fish	LC50 - <i>Lepomis macrochirus</i> (Bluegill) - 16.10 mg/l - 96 h LC50 - <i>Carassius auratus</i> (goldfish) - 13.00 mg/l - 24 h
Toxicity to daphnia and other aquatic invertebrates	EC50 - <i>Daphnia magna</i> (Water flea) - 1.39 - 1.87 mg/l - 48 h
Toxicity to algae	EC50 - <i>Pseudokirchneriella subcapitata</i> (green algae) - 4.70 mg/l - 72 h EC50 - <i>Chlorella vulgaris</i> (Fresh water algae) - 55.00 mg/l - 24 h

Persistence and degradability

no data available

Bioaccumulative potential

no data available

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS**Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 1307 Class: 3 Packing group: III
Proper shipping name: Xylenes
Reportable Quantity (RQ): 100 lbs
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

UN number: 1307 Class: 3 Packing group: III EMS-No: F-E, S-D
Proper shipping name: XYLENES
Marine pollutant: No

IATA

UN number: 1307 Class: 3 Packing group: III
Proper shipping name: Xylenes

15. REGULATORY INFORMATION**OSHA Hazards**

Flammable liquid, Harmful by skin absorption., Irritant, Reproductive hazard

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
o-Xylene	95-47-6	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
o-Xylene	95-47-6	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
o-Xylene	95-47-6	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
o-Xylene	95-47-6	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Further information**

Copyright 2012 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

SAFETY DATA SHEET

Version 4.10
Revision Date 11/12/2015
Print Date 02/07/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : *p*-Cresol

Product Number : W233706

Brand : Aldrich

Index-No. : 604-004-00-9

CAS-No. : 106-44-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 3), H301

Acute toxicity, Dermal (Category 3), H311

Skin corrosion (Category 1B), H314

Serious eye damage (Category 1), H318

Acute aquatic toxicity (Category 2), H401

Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H301 + H311

H314

H411

Toxic if swallowed or in contact with skin

Causes severe skin burns and eye damage.

Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P260

P264

P270

Do not breathe dust or mist.

Wash skin thoroughly after handling.

Do not eat, drink or smoke when using this product.

P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P301 + P310	IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P301 + P330 + P331	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P310	Immediately call a POISON CENTER or doctor/ physician.
P322	Specific measures (see supplemental first aid instructions on this label).
P361	Remove/Take off immediately all contaminated clothing.
P363	Wash contaminated clothing before reuse.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: 4-Methylphenol
Formula	: C ₇ H ₈ O
Molecular weight	: 108.14 g/mol
CAS-No.	: 106-44-5
EC-No.	: 203-398-6
Index-No.	: 604-004-00-9

Hazardous components

Component	Classification	Concentration
p-Cresol		
	Acute Tox. 3; Skin Corr. 1B; Eye Dam. 1; Aquatic Acute 2; Aquatic Chronic 2; H301 + H311, H314, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear respiratory protection. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols. Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

hygroscopic Air and light sensitive. Handle and store under inert gas.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
p-Cresol	106-44-5	TWA	2.3 ppm 10 mg/m ³	USA. NIOSH Recommended Exposure Limits
		TWA	5 ppm 22 mg/m ³	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
	Remarks	Skin designation The value in mg/m ³ is approximate.		

		TWA	20 mg/m ³	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Not classifiable as a human carcinogen Danger of cutaneous absorption		

8.2 Exposure controls

Appropriate engineering controls

Avoid contact with skin, eyes and clothing. Wash hands before breaks and immediately after handling the product.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 30 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---------------------------|--|
| a) Appearance | Form: crystalline
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing | Melting point/range: 31 - 37 °C (88 - 99 °F) |

	point	Melting point/range: 32 - 34 °C (90 - 93 °F) - lit.
f)	Initial boiling point and boiling range	202 °C (396 °F) - lit.
g)	Flash point	85.0 °C (185.0 °F) - closed cup
h)	Evaporation rate	No data available
i)	Flammability (solid, gas)	No data available
j)	Upper/lower flammability or explosive limits	Lower explosion limit: 1.1 %(V)
k)	Vapour pressure	1.3 hPa (1.0 mmHg) at 20.0 °C (68.0 °F)
l)	Vapour density	No data available
m)	Relative density	1.034 g/cm ³ at 25 °C (77 °F)
n)	Water solubility	No data available
o)	Partition coefficient: n-octanol/water	log Pow: 1.94
p)	Auto-ignition temperature	559.0 °C (1,038.2 °F)
q)	Decomposition temperature	No data available
r)	Viscosity	No data available
s)	Explosive properties	No data available
t)	Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents, Bases

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 207.0 mg/kg

Remarks: Sense Organs and Special Senses (Nose, Eye, Ear, and Taste):Olfaction:Other changes.

Behavioral:Convulsions or effect on seizure threshold. Gastrointestinal:Ulceration or bleeding from stomach.

LC50 Inhalation - Rat - 1 h - > 710 mg/m³

LD50 Dermal - Rabbit - 301.0 mg/kg

Remarks: Behavioral:Tremor. Gastrointestinal:Changes in structure or function of salivary glands. Kidney, Ureter, Bladder:Other changes.

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Severe skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Severe eye irritation

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: GO6475000

Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, laryngitis, Dizziness, Cardiovascular effects., Muscle cramps/spasms., Symptoms of exposure may include burning sensation, coughing, wheezing, laryngitis, shortness of breath, headache, nausea, and vomiting.

Kidney -

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish	LC50 - other fish - 16.00 - 24.00 mg/l - 24 h
	LC50 - Oncorhynchus mykiss (rainbow trout) - 7.9 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates	LC50 - Daphnia magna (Water flea) - 1.4 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Does not bioaccumulate.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life.

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3455 Class: 6.1 (8) Packing group: II
Proper shipping name: Cresols, solid
Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 3455 Class: 6.1 (8) Packing group: II EMS-No: F-A, S-B
Proper shipping name: CRESOLS, SOLID

IATA

UN number: 3455 Class: 6.1 (8) Packing group: II
Proper shipping name: Cresols, solid

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
p-Cresol	106-44-5	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
p-Cresol	106-44-5	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
p-Cresol	106-44-5	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
p-Cresol	106-44-5	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Dam.	Serious eye damage
H301	Toxic if swallowed.
H301 + H311	Toxic if swallowed or in contact with skin
H311	Toxic in contact with skin.
H314	Causes severe skin burns and eye damage.

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	3
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.10

Revision Date: 11/12/2015

Print Date: 02/07/2016

SAFETY DATA SHEET

Version 4.2
Revision Date 07/09/2014
Print Date 04/20/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : 1,4-Diethylbenzene

Product Number : D91004

Brand : Aldrich

CAS-No. : 105-05-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable liquids (Category 3), H226

Skin irritation (Category 2), H315

Eye irritation (Category 2A), H319

Specific target organ toxicity - single exposure (Category 3), Respiratory system, H335

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H226

Flammable liquid and vapour.

H315

Causes skin irritation.

H319

Causes serious eye irritation.

H335

May cause respiratory irritation.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P312	Call a POISON CENTER or doctor/ physician if you feel unwell.
P321	Specific treatment (see supplemental first aid instructions on this label).
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₁₀ H ₁₄
Molecular Weight	: 134.22 g/mol
CAS-No.	: 105-05-5
EC-No.	: 203-265-2

Hazardous components

Component	Classification	Concentration
1,4-Diethylbenzene		
	Flam. Liq. 3; Skin Irrit. 2; Eye Irrit. 2A; STOT SE 3; H226, H315, H319, H335	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

- 4.3 Indication of any immediate medical attention and special treatment needed**
no data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 30 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

impervious clothing, Flame retardant antistatic protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|---|
| a) Appearance | Form: clear, liquid
Colour: colourless |
| b) Odour | no data available |
| c) Odour Threshold | no data available |
| d) pH | no data available |
| e) Melting point/freezing point | Melting point/range: -43 °C (-45 °F) - lit. |
| f) Initial boiling point and boiling range | 184 °C (363 °F) - lit. |
| g) Flash point | 55 °C (131 °F) - closed cup |
| h) Evaporation rate | no data available |
| i) Flammability (solid, gas) | no data available |
| j) Upper/lower flammability or | no data available |

explosive limits

- | | | |
|----|--|--|
| k) | Vapour pressure | no data available |
| l) | Vapour density | 4.63 - (Air = 1.0) |
| m) | Relative density | 0.862 g/cm ³ at 25 °C (77 °F) |
| n) | Water solubility | no data available |
| o) | Partition coefficient: n-octanol/water | no data available |
| p) | Auto-ignition temperature | no data available |
| q) | Decomposition temperature | no data available |
| r) | Viscosity | no data available |
| s) | Explosive properties | no data available |
| t) | Oxidizing properties | no data available |

9.2 Other safety information

Relative vapour density 4.63 - (Air = 1.0)

10. STABILITY AND REACTIVITY

10.1 Reactivity

no data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

no data available

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - no data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

no data available

Dermal: no data available

no data available

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitisation

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

- IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
- ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.
- NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
- OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

no data available

Specific target organ toxicity - single exposure

Inhalation - May cause respiratory irritation.

Specific target organ toxicity - repeated exposure

no data available

Aspiration hazard

no data available

Additional Information

RTECS: Not available

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Stomach - Irregularities - Based on Human Evidence

Stomach - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION

12.1 Toxicity

no data available

12.2 Persistence and degradability

no data available

12.3 Bioaccumulative potential

no data available

12.4 Mobility in soil

no data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

no data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2049 Class: 3 Packing group: III
Proper shipping name: Diethylbenzene
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

UN number: 2049 Class: 3 Packing group: III EMS-No: F-E, S-D
Proper shipping name: DIETHYLBENZENE
Marine pollutant: No

IATA

UN number: 2049 Class: 3 Packing group: III
Proper shipping name: Diethylbenzene

15. REGULATORY INFORMATION

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
1,4-Diethylbenzene	105-05-5	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
1,4-Diethylbenzene	105-05-5	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
1,4-Diethylbenzene	105-05-5	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H335	May cause respiratory irritation.
Skin Irrit.	Skin irritation
STOT SE	Specific target organ toxicity - single exposure

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	2
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	2

Reactivity Hazard: 0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.2

Revision Date: 07/09/2014

Print Date: 04/20/2016

SAFETY DATA SHEET

Version 4.5
Revision Date 07/08/2014
Print Date 10/12/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : 4-Ethyltoluene

Product Number : E49800
Brand : Aldrich

CAS-No. : 622-96-8

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226

Aspiration hazard (Category 1), H304

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)

H226

Flammable liquid and vapour.

H304

May be fatal if swallowed and enters airways.

Precautionary statement(s)

P210

Keep away from heat/sparks/open flames/hot surfaces. - No smoking.

P233

Keep container tightly closed.

P240

Ground/bond container and receiving equipment.

P241

Use explosion-proof electrical/ ventilating/ lighting/ equipment.

P242

Use only non-sparking tools.

P243

Take precautionary measures against static discharge.

P280

Wear protective gloves/ protective clothing/ eye protection/ face protection.

P301 + P310

IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.

P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P331	Do NOT induce vomiting.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: C ₉ H ₁₂
Molecular Weight	: 120.19 g/mol
CAS-No.	: 622-96-8
EC-No.	: 210-761-2

Hazardous components

Component	Classification	Concentration
4-Ethyltoluene		
	Flam. Liq. 3; Asp. Tox. 1; H226, H304	-

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

no data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self contained breathing apparatus for fire fighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: clear, liquid
Colour: light yellow |
| b) Odour | no data available |
| c) Odour Threshold | no data available |
| d) pH | no data available |
| e) Melting point/freezing point | no data available |
| f) Initial boiling point and boiling range | 162 °C (324 °F) - lit. |
| g) Flash point | 43 °C (109 °F) - closed cup |
| h) Evaporation rate | no data available |
| i) Flammability (solid, gas) | no data available |
| j) Upper/lower flammability or explosive limits | no data available |
| k) Vapour pressure | no data available |
| l) Vapour density | no data available |
| m) Relative density | 0.861 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | no data available |
| o) Partition coefficient: n-octanol/water | no data available |
| p) Auto-ignition temperature | no data available |
| q) Decomposition temperature | no data available |
| r) Viscosity | no data available |
| s) Explosive properties | no data available |

t) Oxidizing properties no data available

9.2 Other safety information

no data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

no data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

no data available

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - no data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - rat - 4,850 mg/kg

Remarks: Behavioral:Convulsions or effect on seizure threshold. Behavioral:Ataxia.

Inhalation: no data available

Dermal: no data available

no data available

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitisation

no data available

Germ cell mutagenicity

mouse

Sister chromatid exchange

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Reproductive toxicity - rat - Oral

Maternal Effects: Other effects. Effects on Fertility: Post-implantation mortality (e.g., dead and/or resorbed implants per total number of implants).

no data available

Specific target organ toxicity - single exposure

no data available

Specific target organ toxicity - repeated exposure

no data available

Aspiration hazard

The substance or mixture is known to cause human aspiration toxicity hazards or has to be regarded as if it causes a human aspiration toxicity hazard.

Additional Information

RTECS: XT2550000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

no data available

12.2 Persistence and degradability

no data available

12.3 Bioaccumulative potential

no data available

12.4 Mobility in soil

no data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

no data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3295 Class: 3 Packing group: III

Proper shipping name: Hydrocarbons, liquid, n.o.s.

Marine pollutant: No

Poison Inhalation Hazard: No

IMDG

UN number: 3295 Class: 3 Packing group: III

Proper shipping name: HYDROCARBONS, LIQUID, N.O.S.

Marine pollutant: No

EMS-No: F-E, S-D

IATA

15. REGULATORY INFORMATION

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
4-Ethyltoluene	622-96-8	

New Jersey Right To Know Components

	CAS-No.	Revision Date
4-Ethyltoluene	622-96-8	

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Asp. Tox.	Aspiration hazard
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H304	May be fatal if swallowed and enters airways.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	
Flammability:	2
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	2
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956



SAFETY DATA SHEET

Creation Date 01-May-2012

Revision Date 11-Aug-2014

Revision Number 1

1. Identification

Product Name Phenanthrene

Cat No. : AC130090000; AC130090050; AC130090500; AC130095000

Synonyms No information available

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Acute oral toxicity

Category 4

Label Elements

Signal Word

Warning

Hazard Statements

Harmful if swallowed



Precautionary Statements

Prevention

Wash face, hands and any exposed skin thoroughly after handling

Do not eat, drink or smoke when using this product

Ingestion

IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell

Rinse mouth

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Phenanthrene	85-01-8	>95

4. First-aid measures

General Advice	If symptoms persist, call a physician.
Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
Skin Contact	Obtain medical attention. Wash off immediately with plenty of water for at least 15 minutes.
Inhalation	Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.
Ingestion	Clean mouth with water and drink afterwards plenty of water. Get medical attention if symptoms occur.
Most important symptoms/effects	None reasonably foreseeable.
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	Not applicable
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Do not allow run-off from fire fighting to enter drains or water courses.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO₂)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
1

Flammability
1

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment. Avoid dust formation.
-----------------------------	---

Environmental Precautions Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system. Prevent product from entering drains. Local authorities should be advised if significant spillages cannot be contained. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up Sweep up or vacuum up spillage and collect in suitable container for disposal. Keep in suitable, closed containers for disposal.

7. Handling and storage

Handling Wear personal protective equipment. Ensure adequate ventilation. Do not get in eyes, on skin, or on clothing. Avoid ingestion and inhalation. Avoid dust formation.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.

Engineering Measures Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/face Protection

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection Long sleeved clothing.

Respiratory Protection Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Solid
Appearance	Beige
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	95 - 101 °C / 203 - 213.8 °F
Boiling Point/Range	336 °C / 636.8 °F
Flash Point	No information available
Evaporation Rate	Not applicable
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	1 mmHg @ 116 °C
Vapor Density	Not applicable
Relative Density	1.063
Solubility	Insoluble in water
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	Not applicable
Decomposition temperature	No information available
Viscosity	Not applicable
Molecular Formula	C14 H10
Molecular Weight	178.23

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products. Excess heat. Avoid dust formation.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Phenanthrene	1.8 g/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation No information available

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Phenanthrene	85-01-8	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure None known

STOT - repeated exposure None known

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. The product contains following substances which are hazardous for the environment.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
-----------	------------------	-----------------	----------	------------

Phenanthrene	Not listed	LC50 = 3.2 mg/L 96h	Not listed	LC50 = 0.35 mg/L 48h
--------------	------------	---------------------	------------	----------------------

Persistence and Degradability Insoluble in water May persist

Bioaccumulation/ Accumulation No information available.

Mobility . Is not likely mobile in the environment due its low water solubility.

Component	log Pow
Phenanthrene	4.46

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN3077
 Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE,SOLID, N.O.S.
 Hazard Class 9
 Packing Group III

TDG

UN-No UN3077
 Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE,SOLID, N.O.S.
 Hazard Class 9
 Packing Group III

IATA

UN-No UN3077
 Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.*
 Hazard Class 9
 Packing Group III

IMDG/IMO

UN-No UN3077
 Proper Shipping Name ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.
 Hazard Class 9
 Packing Group III

15. Regulatory information

All of the components in the product are on the following Inventory lists: X = listed

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Phenanthrene	X	X	-	201-581-5	-		X	X	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Phenanthrene	85-01-8	>95	1.0

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Phenanthrene	-	-	X	X

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Phenanthrene	5000 lb	-

California Proposition 65 This product does not contain any Proposition 65 chemicals**State Right-to-Know**

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Phenanthrene	X	X	X	-	-

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations**Mexico - Grade** No information available**Canada**

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class Non-controlled**16. Other information****Prepared By** Regulatory Affairs

Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date 01-May-2012

Revision Date 11-Aug-2014


Print Date 11-Aug-2014

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



Health	3
Fire	2
Reactivity	0
Personal Protection	J

Material Safety Data Sheet

Phenol MSDS

Section 1: Chemical Product and Company Identification

Product Name: Phenol

Catalog Codes: SLP4453, SLP5251

CAS#: 108-95-2

RTECS: SJ3325000

TSCA: TSCA 8(b) inventory: Phenol

CI#: Not available.

Synonym: Monohydroxybenzene; Benzenol; Phenyl hydroxide; Phenyllic acid

Chemical Name: Carboic Acid

Chemical Formula: C₆H₅OH

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Phenol	108-95-2	100

Toxicological Data on Ingredients: Phenol: ORAL (LD50): Acute: 317 mg/kg [Rat]. 270 mg/kg [Mouse]. DERMAL (LD50): Acute: 630 mg/kg [Rabbit]. 669 mg/kg [Rat].

Section 3: Hazards Identification

Potential Acute Health Effects:

Very hazardous in case of skin contact (corrosive, irritant), of eye contact (irritant), of ingestion, of inhalation. Hazardous in case of skin contact (sensitizer, permeator). The amount of tissue damage depends on length of contact. Eye contact can result in corneal damage or blindness. Skin contact can produce inflammation and blistering. Inhalation of dust will produce irritation to gastro-intestinal or respiratory tract, characterized by burning, sneezing and coughing. Severe over-exposure can produce lung damage, choking, unconsciousness or death. Inflammation of the eye is characterized by redness, watering, and itching. Skin inflammation is characterized by itching, scaling, reddening, or, occasionally, blistering.

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH, 3 (Not classifiable for human.) by IARC. MUTAGENIC EFFECTS: Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to kidneys, liver, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage. Repeated

exposure of the eyes to a low level of dust can produce eye irritation. Repeated skin exposure can produce local skin destruction, or dermatitis. Repeated inhalation of dust can produce varying degree of respiratory irritation or lung damage. Repeated exposure to a highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Cold water may be used. Get medical attention immediately.

Skin Contact:

In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Cover the irritated skin with an emollient. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention immediately.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention immediately.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: May be combustible at high temperature.

Auto-Ignition Temperature: 715°C (1319°F)

Flash Points: CLOSED CUP: 79°C (174.2°F). OPEN CUP: 85°C (185°F).

Flammable Limits: LOWER: 1.7% UPPER: 8.6%

Products of Combustion: These products are carbon oxides (CO, CO₂).

Fire Hazards in Presence of Various Substances:

Flammable in presence of open flames and sparks, of heat. Non-flammable in presence of shocks.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

Special Remarks on Fire Hazards:

Phenol + nitrides results in heat and flammable gas generation. Phenol + mineral oxidizing acids results in fire. Phenol + calcium hypochlorite is an exothermic reaction producing toxic fumes which may ignite.

Special Remarks on Explosion Hazards:

Phenol + sodium nitrite causes explosion on heating. Peroxydisulfuric acid + phenol causes explosion.

Section 6: Accidental Release Measures

Small Spill: Use appropriate tools to put the spilled solid in a convenient waste disposal container.

Large Spill:

Corrosive solid. Stop leak if without risk. Do not get water inside container. Do not touch spilled material. Use water spray to reduce vapors. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

Section 7: Handling and Storage**Precautions:**

Keep locked up.. Keep container dry. Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk, evaporate the residue under a fume hood. Ground all equipment containing material. Do not ingest. Do not breathe dust. Never add water to this product. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents, acids.

Storage:

Air Sensitive. Sensitive to light. Store in light-resistant containers. Moisture sensitive. Keep container tightly closed. Keep container in a cool, well-ventilated area.

Section 8: Exposure Controls/Personal Protection**Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection:

Splash goggles. Synthetic apron. Vapor and dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor and dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits:

TWA: 5 (ppm) from ACGIH (TLV) [United States] SKIN TWA: 19 (mg/m3) from ACGIH (TLV) [United States] SKIN TWA: 5 from NIOSH [United States] TWA: 19 (mg/m3) from NIOSH [United States] TWA: 5 (ppm) from OSHA (PEL) [United States] TWA: 19 (mg/m3) from OSHA (PEL) [United States] TWA: 5 (ppm) [Canada] TWA: 19 (mg/m3) [Canada] Consult local authorities for acceptable exposure limits.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid.

Odor:

Distinct, aromatic, somewhat sickening sweet and acrid

Taste: Burning.

Molecular Weight: 94.11 g/mole

Color: Colorless to light pink

pH (1% soln/water): Not available.

Boiling Point: 182°C (359.6°F)

Melting Point: 42°C (107.6°F)

Critical Temperature: 694.2 (1281.6°F)

Specific Gravity: 1.057 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: 3.24 (Air = 1)

Volatility: Not available.

Odor Threshold: 0.048 ppm

Water/Oil Dist. Coeff.: The product is more soluble in oil; $\log(\text{oil/water}) = 1.5$

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water, methanol, diethyl ether, acetone.

Solubility:

Easily soluble in methanol, diethyl ether. Soluble in cold water, acetone. Solubility in water: 1g/15 ml water. Soluble in benzene. Very soluble in alcohol, chloroform, glycerol, petroleum, carbon disulfide, volatile and fixed oils, aqueous alkali hydroxides, carbon tetrachloride, acetic acid, liquid sulfur dioxide. Almost insoluble in petroleum ether. Miscible in acetone. Sparingly soluble in mineral oil.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Heat, ignition sources (flames, sparks), light, incompatible materials

Incompatibility with various substances: Reactive with oxidizing agents, metals, acids, alkalis.

Corrosivity:

Extremely corrosive in presence of copper. Slightly corrosive in presence of stainless steel(304), of stainless steel(316). Non-corrosive in presence of glass, of aluminum.

Special Remarks on Reactivity:

Air and light sensitive. Prone to redden on exposure to light and air. Incompatible with aluminum chloride, peroxydisulfuric acid, acetaldehyde, sodium nitrite, boron trifluoride diethyl ether + 1,3-butadiene, isocyanates, nitrides, mineral oxidizing acids, calcium hypochlorite, halogens, formaldehyde, metals and alloys, lead, zinc, magnesium and their alloys, plastics, rubber, coatings, sodium nitrate + trifluoroacetic acid. Phenol + isocyanates results in heat generation, and violent polymerization. Phenol + 1,3-butadiene and boron trifluoride diethyl ether complex results in intense exothermic reaction. Phenol + acetaldehyde results in violent condensation.

Special Remarks on Corrosivity:

Minor corrosive effect on bronze. Severe corrosive effect on brass.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Dermal contact. Eye contact. Inhalation. Ingestion.

Toxicity to Animals:

Acute oral toxicity (LD50): 270 mg/kg [Mouse]. Acute dermal toxicity (LD50): 630 mg/kg [Rabbit].

Chronic Effects on Humans:

CARCINOGENIC EFFECTS: A4 (Not classifiable for human or animal.) by ACGIH, 3 (Not classifiable for human.) by IARC.

MUTAGENIC EFFECTS: Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. May cause damage to the following organs: kidneys, liver, central nervous system (CNS).

Other Toxic Effects on Humans:

Very hazardous in case of skin contact (corrosive, irritant), of ingestion, . Hazardous in case of skin contact (sensitizer, permeator), of eye contact (corrosive), of inhalation (lung corrosive).

Special Remarks on Toxicity to Animals:

Lowest Published Lethal Dose: LDL [Human] - Route: Oral; Dose: 140 mg/kg LDL [Infant] - Route: Oral; Dose: 10,000 mg/kg

Special Remarks on Chronic Effects on Humans:

Animal: passes through the placental barrier. May cause adverse reproductive effects and birth defects (teratogenic) Embryotoxic and/or foetotoxic in animal. May affect genetic material (mutagenic).

Special Remarks on other Toxic Effects on Humans:**Section 12: Ecological Information****Ecotoxicity:**

Ecotoxicity in water (LC50): 125 mg/l 24 hours [Fish (Goldfish)]. >50 mg/l 1 hours [Fish (Fathead minnow)]. >50 mg/l 24 hours [Fish (Fathead minnow)]. >33 mg/l 72 hours [Fish (Fathead minnow)]. >33 ppm 96 hours [Fish (Fathead minnow)].

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are less toxic than the product itself.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 6.1: Poisonous material.

Identification: : Phenol, solid UNNA: 1671 PG: II

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information**Federal and State Regulations:**

Connecticut hazardous material survey.: Phenol Illinois toxic substances disclosure to employee act: Phenol Illinois chemical safety act: Phenol New York release reporting list: Phenol Rhode Island RTK hazardous substances: Phenol Pennsylvania RTK: Phenol Minnesota: Phenol Massachusetts RTK: Phenol Massachusetts spill list: Phenol New Jersey: Phenol New Jersey spill list: Phenol Louisiana RTK reporting list: Phenol Louisiana spill reporting: Phenol TSCA 8(b) inventory: Phenol TSCA 4(a) proposed test rules: Phenol TSCA 8(a) IUR: Phenol TSCA 8(d) H and S data reporting: Phenol: effective: 6/1/87; sunset:

6/01/97 SARA 302/304/311/312 extremely hazardous substances: Phenol SARA 313 toxic chemical notification and release reporting: Phenol CERCLA: Hazardous substances.: Phenol: 1000 lbs. (453.6 kg)

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada):

CLASS D-1A: Material causing immediate and serious toxic effects (VERY TOXIC). CLASS D-2A: Material causing other toxic effects (VERY TOXIC). CLASS E: Corrosive solid.

DSCL (EEC):

R24/25- Toxic in contact with skin and if swallowed. R34- Causes burns. R40- Possible risks of irreversible effects. R43- May cause sensitization by skin contact. R52- Harmful to aquatic organisms. S1/2- Keep locked up and out of the reach of children. S24- Avoid contact with skin. S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S28- After contact with skin, wash immediately with plenty of water S37/39- Wear suitable gloves and eye/face protection. S45- In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). S46- If swallowed, seek medical advice immediately and show this container or label. S56- Dispose of this material and its container at hazardous or special waste collection point.

HMIS (U.S.A.):

Health Hazard: 3

Fire Hazard: 2

Reactivity: 0

Personal Protection: j

National Fire Protection Association (U.S.A.):

Health: 4

Flammability: 2

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves. Synthetic apron. Vapor and dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.


Created: 10/10/2005 11:17 AM

Last Updated: 05/21/2013 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

MSDS # 578.00

Potassium

**Section 1: Product and Company Identification****Potassium****Synonyms/General Names:** Kalium**Product Use:** For educational use only**Manufacturer:** Columbus Chemical Industries, Inc., Columbus, WI 53925.**24 Hour Emergency Information Telephone Numbers****CHEMTREC (USA): 800-424-9300****CANUTEC (Canada): 613-424-6666**

Scholar Chemistry; 5100 W. Henrietta Rd, Rochester, NY 14586; (866) 260-0501; www.Scholarchemistry.com

Section 2: Hazards Identification*Soft, silvery metal, turning grey on exposure to air, no odor.***HMIS (0 to 4)**

Health	3
Fire Hazard	4
Reactivity	3

DANGER! Flammable solid, contact with water produces heat, flammable hydrogen gas and possibly fire.

Dangerous fire risk. Toxic by ingestion and corrosive to body tissue.

Target organs: None available

This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).

Section 3: Composition / Information on Ingredients

Potassium (7440-09-7), >99%

Section 4: First Aid Measures*Always seek professional medical attention after first aid measures are provided.***Eyes:** Immediately flush eyes with excess water for 15 minutes, lifting lower and upper eyelids occasionally.**Skin:** Immediately flush skin with excess water for 15 minutes while removing contaminated clothing.**Ingestion:** Call Poison Control immediately. Rinse mouth with cold water. Give victim 1-2 tbsp of activated charcoal mixed with 8 oz water.**Inhalation:** Remove to fresh air. If not breathing, give artificial respiration.**Section 5: Fire Fighting Measures**

Flammable solid and water reactive. When heated to decomposition, emits acrid fumes of KOx.

Protective equipment and precautions for firefighters: Do Not Use carbon dioxide, foam, water or halogenated extinguishing agents. Use class D extinguisher or smother with soda ash, dry sand, dry clay, dry sodium chloride or dry graphite. Firefighters should wear full fire fighting turn-out gear and respiratory protection (SCBA).

Material is not sensitive to mechanical impact or static discharge.

**Section 6: Accidental Release Measures**

Use personal protection recommended in Section 8. Isolate the hazard area and deny entry to unnecessary and unprotected personnel. Remove all ignition sources and ventilate area. Water-reactive metal – keep away from all water. Pick up pieces and place material in a dry container and cover completely with pure mineral oil for disposal.

See Section 13 for disposal information.

Section 7: Handling and Storage**Red****Handling: Water-Reactive,** keep away from water. Use with adequate ventilation and do not breathe dust or vapor. Avoid contact with skin, eyes, or clothing. Wash hands thoroughly after handling.**Storage:** Store in Flammable Area [Red Storage] with other flammable materials and away from any strong oxidizers. Store in a dedicated flammables cabinet. Store in a cool, dry, well-ventilated, locked store room away from incompatible materials. Keep potassium metal immersed in mineral oil.**Section 8: Exposure Controls / Personal Protection**

Use ventilation to keep airborne concentrations below exposure limits. Have approved eyewash facility, safety shower, and fire extinguishers readily available. Wear chemical splash goggles and chemical resistant clothing such as gloves and aprons. Wash hands thoroughly after handling material and before eating or drinking. Exposure guidelines: Potassium: OSHA PEL: N/A and ACGIH TLV: N/A, STEL: N/A.

Section 9: Physical and Chemical Properties

Molecular formula	K.	Appearance	Soft, silvery-metal cubes, lumps.
Molecular weight	39.10.	Odor	No odor.
Specific Gravity	0.89 g/mL @ 20°C.	Odor Threshold	N/A.
Vapor Density (air=1)	N/A.	Solubility	Reacts violently.
Melting Point	63°C.	Evaporation rate	N/A. (<i>Butyl acetate</i> = 1).
Boiling Point/Range	774°C.	Partition Coefficient	N/A. (<i>log P_{OW}</i>).
Vapor Pressure (20°C)	N/A.	pH	N/A.
Flash Point:	N/A.	LEL	N/A.
Autoignition Temp.:	N/A.	UEL	N/A.

N/A = Not available or applicable

Section 10: Stability and Reactivity

Avoid heat, water, and ignition sources. Contact with water produces heat and flammable hydrogen gas.

Stability: Stable under normal conditions of use.

Incompatibility: Water, acids, oxidizing agents, oxygen, nitrogen and carbon dioxide.

Shelf life: Fair shelf live. Will form explosive peroxides with age. If surface contains yellow areas – do not use.

Section 11: Toxicology Information

Acute Symptoms/Signs of exposure: *Eyes:* Stinging pain, burns, watering of eyes, inflammation of eyelids and conjunctivitis. Avoid looking at burning magnesium. *Skin:* Irritation, redness, burns. Powdered metal reacts readily on skin causing burns. *Ingestion:* Nausea, vomiting and headache. *Inhalation:* Rapid irregular breathing, headache, burns to mucous membranes. Inhalation of dust or fumes causes metal fume fever.

Chronic Effects: Repeated/prolonged skin contact may cause dryness or rashes.

Sensitization: none expected

Potassium: LD50 [oral, rat]; N/A; LC50 [rat]; N/A; LD50 Dermal [rabbit]; N/A

Material has not been found to be a carcinogen nor produce genetic, reproductive, or developmental effects.

Section 12: Ecological Information

Ecotoxicity (aquatic and terrestrial): Ecological impact has not been determined.

Section 13: Disposal Considerations

Check with all applicable local, regional, and national laws and regulations. Local regulations may be more stringent than regional or national regulations. Use a licensed chemical waste disposal firm for proper disposal.

Section 14: Transport Information

DOT Shipping Name:	Potassium.	Canada TDG:	Potassium.
DOT Hazard Class:	4.3, pg I.	Hazard Class:	4.3, pg I.
Identification Number:	UN2257.	UN Number:	UN2257.

Section 15: Regulatory Information

EINECS: Listed (231-119-8) .

WHMIS Canada: B6, E: Reactive flammable material, Corrosive.

TSCA: All components are listed or are exempt.

California Proposition 65: Not listed.

The product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

Section 16: Other Information

Current Issue Date: September 22, 2012

Disclaimer: Scholar Chemistry and Columbus Chemical Industries, Inc., ("S&C") believes that the information herein is factual but is not intended to be all inclusive. The information relates only to the specific material designated and does not relate to its use in combination with other materials or its use as to any particular process. Because safety standards and regulations are subject to change and because S&C has no continuing control over the material, those handling, storing or using the material should satisfy themselves that they have current information regarding the particular way the material is handled, stored or used and that the same is done in accordance with federal, state and local law. S&C makes no warranty, expressed or implied, including (without limitation) warranties with respect to the completeness or continuing accuracy of the information contained herein or with respect to fitness for any particular use.

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

Version: **3.0 en**

Replaces version of: 04.07.2016

Version: (2)

date of compilation: 11.05.2015

Revision: 11.04.2019

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifier

Identification of the substance

p-Xylene

Article number

8817

Registration number (REACH)

It is not required to list the identified uses because the substance is not subject to registration according to REACH (< 1 t/a)

Index No

601-022-00-9

EC number

203-396-5

CAS number

106-42-3

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses:

laboratory chemical
laboratory and analytical use

1.3 Details of the supplier of the safety data sheet

Carl Roth GmbH + Co KG
Schoemperlenstr. 3-5
D-76185 Karlsruhe
Germany

Telephone: +49 (0) 721 - 56 06 0

Telefax: +49 (0) 721 - 56 06 149

e-mail: sicherheit@carlroth.de

Website: www.carlroth.de

Competent person responsible for the safety data sheet : Department Health, Safety and Environment

e-mail (competent person)

: sicherheit@carlroth.de

1.4 Emergency telephone number

Emergency information service

Poison Centre Munich: +49/(0)89 19240

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

Classification according to Regulation (EC) No 1272/2008 (CLP)

Classification acc. to GHS			
Section	Hazard class	Hazard class and category	Hazard statement
2.6	flammable liquid	(Flam. Liq. 3)	H226
3.1D	acute toxicity (dermal)	(Acute Tox. 4)	H312
3.1I	acute toxicity (inhal.)	(Acute Tox. 4)	H332
3.2	skin corrosion/irritation	(Skin Irrit. 2)	H315

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

Classification acc. to GHS			
Section	Hazard class	Hazard class and category	Hazard statement
3.3	serious eye damage/eye irritation	(Eye Irrit. 2)	H319
3.8R	specific target organ toxicity - single exposure (respiratory tract irritation)	(STOT SE 3)	H335
3.10	aspiration hazard	(Asp. Tox. 1)	H304

2.2 Label elements

Labelling according to Regulation (EC) No 1272/2008 (CLP)

Signal word

Danger

Pictograms

GHS02, GHS07,
GHS08



Hazard statements

H226 Flammable liquid and vapour
H304 May be fatal if swallowed and enters airways
H312+H332 Harmful in contact with skin or if inhaled
H315 Causes skin irritation
H319 Causes serious eye irritation
H335 May cause respiratory irritation

Precautionary statements

Precautionary statements - prevention

P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
P280 Wear protective gloves/protective clothing/eye protection/face protection.

Precautionary statements - response

P301+P310 IF SWALLOWED: Immediately call a doctor.
P302+P352 IF ON SKIN: Wash with plenty of water/...
P304+P340 IF INHALED: Remove person to fresh air and keep comfortable for breathing.
P331 Do NOT induce vomiting.

Labelling of packages where the contents do not exceed 125 ml

Signal word: **Danger**

Symbol(s)



H304 May be fatal if swallowed and enters airways.
P301+P310 IF SWALLOWED: Immediately call a doctor.
P331 Do NOT induce vomiting.

2.3 Other hazards

There is no additional information.

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

SECTION 3: Composition/information on ingredients

3.1 Substances

Name of substance	1,4-Dimethylbenzene
Index No	601-022-00-9
EC number	203-396-5
CAS number	106-42-3
Molecular formula	C ₈ H ₁₀
Molar mass	106,2 g/mol

SECTION 4: First aid measures

4.1 Description of first aid measures



General notes

Take off contaminated clothing.

Following inhalation

Provide fresh air. In all cases of doubt, or when symptoms persist, seek medical advice.

Following skin contact

Rinse skin with water/shower. In case of skin irritation, consult a physician.

Following eye contact

Irrigate copiously with clean, fresh water for at least 10 minutes, holding the eyelids apart. In case of eye irritation consult an ophthalmologist.

Following ingestion

Rinse mouth immediately and drink plenty of water. Observe aspiration hazard if vomiting occurs. Call a physician immediately.

4.2 Most important symptoms and effects, both acute and delayed

Irritant effects. Vertigo. Dizziness. Unconsciousness. Aspiration hazard. Headache. Cough. Breathing difficulties. Nausea. Vomiting.

4.3 Indication of any immediate medical attention and special treatment needed

none

SECTION 5: Firefighting measures

5.1 Extinguishing media



Suitable extinguishing media

Co-ordinate fire-fighting measures to the fire surroundings

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

water spray, foam, dry extinguishing powder, carbon dioxide (CO₂)

Unsuitable extinguishing media

water jet

5.2 Special hazards arising from the substance or mixture

Combustible. Vapours can form explosive mixtures with air.

Hazardous combustion products

In case of fire may be liberated: carbon monoxide (CO), carbon dioxide (CO₂)

5.3 Advice for firefighters

Vapours are heavier than air. Beware of reignition. Fight fire with normal precautions from a reasonable distance. Wear self-contained breathing apparatus.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures



For non-emergency personnel

Use personal protective equipment as required. Avoid contact with skin, eyes and clothes. Do not breathe vapour/spray. Avoidance of ignition sources.

6.2 Environmental precautions

Keep away from drains, surface and ground water. Explosive properties.

6.3 Methods and material for containment and cleaning up

Advices on how to contain a spill

Covering of drains.

Advices on how to clean up a spill

Absorb with liquid-binding material (e.g. sand, diatomaceous earth, acid- or universal binding agents).

Other information relating to spills and releases

Place in appropriate containers for disposal. Ventilate affected area.

6.4 Reference to other sections

Hazardous combustion products: see section 5. Personal protective equipment: see section 8. Incompatible materials: see section 10. Disposal considerations: see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Provide adequate ventilation as well as local exhaustion at critical locations. Avoid exposure. When not in use, keep containers tightly closed.

• Measures to prevent fire as well as aerosol and dust generation



Keep away from sources of ignition - No smoking.

Take precautionary measures against static discharge.

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

Advice on general occupational hygiene

Wash hands before breaks and after work. Keep away from food, drink and animal feedingstuffs. When using do not smoke.

7.2 Conditions for safe storage, including any incompatibilities

Store in a well-ventilated place. Keep container tightly closed. Protect from sunlight.

Incompatible substances or mixtures

Observe hints for combined storage.

Consideration of other advice

Ground/bond container and receiving equipment.

• Ventilation requirements

Use local and general ventilation.

• Specific designs for storage rooms or vessels

Recommended storage temperature: 15 – 25 °C.

7.3 Specific end use(s)

No information available.

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

National limit values

Occupational exposure limit values (Workplace Exposure Limits)

Coun-try	Name of agent	CAS No	Identifier	TWA [ppm]	TWA [mg/m ³]	STEL [ppm]	STEL [mg/m ³]	Source
EU	p-xylene	106-42-3	IOELV	50	221	100	442	2000/39/EC
MT	p-xylene	106-42-3	OELV	50	221	100	442	CAP. 424

Notation

STEL Short-term exposure limit: a limit value above which exposure should not occur and which is related to a 15-minute period (unless otherwise specified)

TWA Time-weighted average (long-term exposure limit): measured or calculated in relation to a reference period of 8 hours time-weighted average (unless otherwise specified)

Relevant DNELs/DMELs/PNECs and other threshold levels

• human health values

Endpoint	Threshold level	Protection goal, route of exposure	Used in	Exposure time
DNEL	221 mg/m ³	human, inhalatory	worker (industry)	chronic - systemic effects
DNEL	442 mg/m ³	human, inhalatory	worker (industry)	acute - systemic effects
DNEL	221 mg/m ³	human, inhalatory	worker (industry)	chronic - local effects
DNEL	442 mg/m ³	human, inhalatory	worker (industry)	acute - local effects
DNEL	212 mg/kg bw/day	human, dermal	worker (industry)	chronic - systemic effects

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene $\geq 99\%$, for synthesis

article number: **8817**

• environmental values

Endpoint	Threshold level	Environmental compartment	Exposure time
PNEC	0,25 mg/l	water	intermittent release
PNEC	0,044 mg/l	freshwater	short-term (single instance)
PNEC	0,004 mg/l	marine water	short-term (single instance)
PNEC	1,6 mg/l	sewage treatment plant (STP)	short-term (single instance)
PNEC	2,52 mg/kg	freshwater sediment	short-term (single instance)
PNEC	0,252 mg/kg	marine sediment	short-term (single instance)
PNEC	0,852 mg/kg	soil	short-term (single instance)

8.2 Exposure controls

Individual protection measures (personal protective equipment)

Eye/face protection



Use safety goggles with side protection.

Skin protection



• hand protection

Wear suitable gloves. Chemical protection gloves are suitable, which are tested according to EN 374. For special purposes, it is recommended to check the resistance to chemicals of the protective gloves mentioned above together with the supplier of these gloves.

• type of material

FKM (fluoro rubber)

• material thickness

0,4 mm.

• breakthrough times of the glove material

>480 minutes (permeation: level 6)

• other protection measures

Take recovery periods for skin regeneration. Preventive skin protection (barrier creams/ointments) is recommended.

Respiratory protection



Respiratory protection necessary at: Aerosol or mist formation. Type: A (against organic gases and vapours with a boiling point of $> 65\text{ }^{\circ}\text{C}$, colour code: Brown).

Environmental exposure controls

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

Keep away from drains, surface and ground water.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

Appearance

Physical state	liquid (fluid)
Colour	colourless
Odour	characteristic
Odour threshold	No data available

Other physical and chemical parameters

pH (value)	This information is not available.
Melting point/freezing point	13,25 °C at 1.013 hPa
Initial boiling point and boiling range	138,2 °C at 1.013 hPa
Flash point	27 °C at 1.013 hPa
Evaporation rate	no data available
Flammability (solid, gas)	not relevant (fluid)
<u>Explosive limits</u>	
• lower explosion limit (LEL)	0,9 vol%
• upper explosion limit (UEL)	7 vol%
Explosion limits of dust clouds	not relevant
Vapour pressure	8,7 hPa at 20 °C
Density	0,86 g/cm ³ at 25 °C
Vapour density	This information is not available.
Bulk density	Not applicable
Relative density	Information on this property is not available.
<u>Solubility(ies)</u>	
Water solubility	170,5 mg/l at 25 °C
<u>Partition coefficient</u>	
n-octanol/water (log KOW)	3,15 (pH value: 7, 20 °C) (ECHA)
Soil organic carbon/water (log KOC)	2,73 (ECHA)
Auto-ignition temperature	528 °C at 1.013 hPa - ECHA
Decomposition temperature	no data available
Viscosity	
• kinematic viscosity	0,7012 mm ² /s
• dynamic viscosity	0,603 mPa s at 25 °C
Explosive properties	Shall not be classified as explosive

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

Oxidising properties none

9.2 Other information

Surface tension 28,01 mN/m (25 °C)

Temperature class (EU, acc. to ATEX) T1 (Maximum permissible surface temperature on the equipment: 450°C)

SECTION 10: Stability and reactivity

10.1 Reactivity

Risk of ignition. In case of warming: Vapours can form explosive mixtures with air.

10.2 Chemical stability

The material is stable under normal ambient and anticipated storage and handling conditions of temperature and pressure.

10.3 Possibility of hazardous reactions

Violent reaction with: Oxidisers, Nitric acid, Sulphuric acid, Sulphur

10.4 Conditions to avoid

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

10.5 Incompatible materials

Rubber articles, different plastics

10.6 Hazardous decomposition products

Hazardous combustion products: see section 5.

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

Exposure route	Endpoint	Value	Species	Source
inhalation: vapour	LC50	19,8 mg/l/4h	rat	GESTIS
oral	LD50	3.523 mg/kg	rat	ECHA
dermal	LD50	12.126 mg/kg	rabbit	ECHA

Skin corrosion/irritation

Causes skin irritation.

Serious eye damage/eye irritation

Causes serious eye irritation.

Respiratory or skin sensitisation

Shall not be classified as a respiratory or skin sensitiser.

Summary of evaluation of the CMR properties

Shall not be classified as germ cell mutagenic, carcinogenic nor as a reproductive toxicant

• Specific target organ toxicity - single exposure

May cause respiratory irritation.

• Specific target organ toxicity - repeated exposure

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

Shall not be classified as a specific target organ toxicant (repeated exposure).

Aspiration hazard

May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics

• If swallowed

vomiting, aspiration hazard

• If in eyes

Causes serious eye irritation

• If inhaled

irritant effects, cough, breathing difficulties, pulmonary oedema

• If on skin

causes skin irritation, risk of absorption via the skin

Other information

Other adverse effects: Headache, Vertigo, Dizziness, Nausea, Unconsciousness, Liver and kidney damage, Symptoms can occur only after several hours

SECTION 12: Ecological information

12.1 Toxicity

acc. to 1272/2008/EC: Shall not be classified as hazardous to the aquatic environment.

Aquatic toxicity (acute)

Endpoint	Value	Species	Source	Exposure time
LC50	2,6 mg/l	fish	ECHA	96 h
ErC50	4,7 mg/l	algae	ECHA	72 h

Aquatic toxicity (chronic)

Endpoint	Value	Species	Source	Exposure time
EC50	2,2 mg/l	algae	ECHA	73 h
NOEC	1,57 mg/l	aquatic invertebrates	ECHA	21 d
NOEC	0,44 mg/l	algae	ECHA	73 h
growth rate (ErCx) 10%	1,9 mg/l	algae	ECHA	73 h

12.2 Process of degradability

The substance is readily biodegradable.
Theoretical Oxygen Demand: 3,165 mg/mg
Theoretical Carbon Dioxide: 3,316 mg/mg

Process	Degradation rate	Time
carbon dioxide generation	50 %	13 d
oxygen depletion	90 %	28 d

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

12.3 Bioaccumulative potential

Does not significantly accumulate in organisms.

n-octanol/water (log KOW)

3,15 (pH value: 7, 20 °C)

BCF

>5,5 – <12,2 (ECHA)

12.4 Mobility in soil

Henry's law constant

623 Pa m³/mol at 25 °C

The Organic Carbon normalised adsorption coefficient

2,73

12.5 Results of PBT and vPvB assessment

Data are not available.

12.6 Other adverse effects

Data are not available.

SECTION 13: Disposal considerations

13.1 Waste treatment methods



This material and its container must be disposed of as hazardous waste. Dispose of contents/container in accordance with local/regional/national/international regulations.

Sewage disposal-relevant information

Do not empty into drains.

Waste treatment of containers/packagings

It is a dangerous waste; only packagings which are approved (e.g. acc. to ADR) may be used.

Sewage disposal-relevant information

Do not empty into drains.

Waste treatment of containers/packagings

It is a dangerous waste; only packagings which are approved (e.g. acc. to ADR) may be used.

13.2 Relevant provisions relating to waste

The allocation of waste identity numbers/waste descriptions must be carried out according to the EEC, specific to the industry and process.

13.3 Remarks

Waste shall be separated into the categories that can be handled separately by the local or national waste management facilities. Please consider the relevant national or regional provisions.

Safety data sheet



according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

SECTION 14: Transport information

14.1	UN number	1307
14.2	UN proper shipping name	XYLENES
	Hazardous ingredients	p-Xylene
14.3	Transport hazard class(es)	
	Class	3 (flammable liquids)
14.4	Packing group	III (substance presenting low danger)
14.5	Environmental hazards	none (non-environmentally hazardous acc. to the dangerous goods regulations)
14.6	Special precautions for user	
	Provisions for dangerous goods (ADR) should be complied within the premises.	
14.7	Transport in bulk according to Annex II of MARPOL and the IBC Code	
	The cargo is not intended to be carried in bulk.	
14.8	Information for each of the UN Model Regulations	
	• Transport of dangerous goods by road, rail and inland waterway (ADR/RID/ADN)	
	UN number	1307
	Proper shipping name	XYLENES
	Particulars in the transport document	UN1307, XYLENES, 3, III, (D/E)
	Class	3
	Classification code	F1
	Packing group	III
	Danger label(s)	3
		
	Excepted quantities (EQ)	E1
	Limited quantities (LQ)	5 L
	Transport category (TC)	3
	Tunnel restriction code (TRC)	D/E
	Hazard identification No	30
	• International Maritime Dangerous Goods Code (IMDG)	
	UN number	1307
	Proper shipping name	XYLENES
	Particulars in the shipper's declaration	UN1307, XYLENES, 3, III, 27°C c.c.
	Class	3

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

Marine pollutant	-
Packing group	III
Danger label(s)	3



Special provisions (SP)	223
Excepted quantities (EQ)	E1
Limited quantities (LQ)	5 L
EmS	F-E, S-D
Stowage category	A

• International Civil Aviation Organization (ICAO-IATA/DGR)

UN number	1307
Proper shipping name	Xylenes
Particulars in the shipper's declaration	UN1307, Xylenes, 3, III
Class	3
Packing group	III
Danger label(s)	3



Special provisions (SP)	A3
Excepted quantities (EQ)	E1
Limited quantities (LQ)	10 L

SECTION 15: Regulatory information

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

Relevant provisions of the European Union (EU)

• Regulation 649/2012/EU concerning the export and import of hazardous chemicals (PIC)

Not listed.

• Regulation 1005/2009/EC on substances that deplete the ozone layer (ODS)

Not listed.

• Regulation 850/2004/EC on persistent organic pollutants (POP)

Not listed.

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

• Restrictions according to REACH, Annex XVII

Name of substance	CAS No	Wt%	Type of registration	Conditions of restriction	No
p-Xylene		100	1907/2006/EC annex XVII	R3	3
p-Xylene		100	1907/2006/EC annex XVII	R40	40

Legend

R3

1. Shall not be used in:
 - ornamental articles intended to produce light or colour effects by means of different phases, for example in ornamental lamps and ashtrays,
 - tricks and jokes,
 - games for one or more participants, or any article intended to be used as such, even with ornamental aspects,
2. Articles not complying with paragraph 1 shall not be placed on the market.
3. Shall not be placed on the market if they contain a colouring agent, unless required for fiscal reasons, or perfume, or both, if they:
 - can be used as fuel in decorative oil lamps for supply to the general public, and,
 - present an aspiration hazard and are labelled with R65 or H304,
4. Decorative oil lamps for supply to the general public shall not be placed on the market unless they conform to the European Standard on Decorative oil lamps (EN 14059) adopted by the European Committee for Standardisation (CEN).
5. Without prejudice to the implementation of other Community provisions relating to the classification, packaging and labelling of dangerous substances and mixtures, suppliers shall ensure, before the placing on the market, that the following requirements are met:
 - (a) lamp oils, labelled with R65 or H304, intended for supply to the general public are visibly, legibly and indelibly marked as follows: 'Keep lamps filled with this liquid out of the reach of children'; and, by 1 December 2010, 'Just a sip of lamp oil - or even sucking the wick of lamps - may lead to life-threatening lung damage';
 - (b) grill lighter fluids, labelled with R65 or H304, intended for supply to the general public are legibly and indelibly marked by 1 December 2010 as follows: 'Just a sip of grill lighter may lead to life threatening lung damage';
 - (c) lamp oils and grill lighters, labelled with R65 or H304, intended for supply to the general public are packaged in black opaque containers not exceeding 1 litre by 1 December 2010.
6. No later than 1 June 2014, the Commission shall request the European Chemicals Agency to prepare a dossier, in accordance with Article 69 of the present Regulation with a view to ban, if appropriate, grill lighter fluids and fuel for decorative lamps, labelled R65 or H304, intended for supply to the general public.
7. Natural or legal persons placing on the market for the first time lamp oils and grill lighter fluids, labelled with R65 or H304, shall by 1 December 2011, and annually thereafter, provide data on alternatives to lamp oils and grill lighter fluids labelled R65 or H304 to the competent authority in the Member State concerned. Member States shall make those data available to the Commission.

R40

1. Shall not be used, as substance or as mixtures in aerosol dispensers where these aerosol dispensers are intended for supply to the general public for entertainment and decorative purposes such as the following:
 - metallic glitter intended mainly for decoration,
 - artificial snow and frost,
 - 'whoopie' cushions,
 - silly string aerosols,
 - imitation excrement,
 - horns for parties,
 - decorative flakes and foams,
 - artificial cobwebs,
 - stink bombs.
2. Without prejudice to the application of other Community provisions on the classification, packaging and labelling of substances, suppliers shall ensure before the placing on the market that the packaging of aerosol dispensers referred to above is marked visibly, legibly and indelibly with:
'For professional users only'.
3. By way of derogation, paragraphs 1 and 2 shall not apply to the aerosol dispensers referred to Article 8 (1a) of Council Directive 75/324/EEC (2).
4. The aerosol dispensers referred to in paragraphs 1 and 2 shall not be placed on the market unless they conform to the requirements indicated.

• Restrictions according to REACH, Title VIII

None.

• **List of substances subject to authorisation (REACH, Annex XIV)/SVHC - candidate list**
not listed

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

• Seveso Directive

2012/18/EU (Seveso III)

No	Dangerous substance/hazard categories	Qualifying quantity (tonnes) for the application of lower and upper-tier requirements		Notes
P5c	flammable liquids (cat. 2, 3)	5.000	50.000	51)

Notation

51) Flammable liquids, categories 2 or 3 not covered by P5a and P5b

• Directive 75/324/EEC relating to aerosol dispensers

Filling batch

Deco-Paint Directive (2004/42/EC)

VOC content	100 % 860 g/l
-------------	------------------

Directive on industrial emissions (VOCs, 2010/75/EU)

VOC content	100 %
VOC content	860 g/l

Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS) - Annex II

not listed

Regulation 166/2006/EC concerning the establishment of a European Pollutant Release and Transfer Register (PRTR)

not listed

Directive 2000/60/EC establishing a framework for Community action in the field of water policy (WFD)

not listed

Regulation 98/2013/EU on the marketing and use of explosives precursors

not listed

Regulation 111/2005/EC laying down rules for the monitoring of trade between the Community and third countries in drug precursors

not listed

National inventories

Substance is listed in the following national inventories:

Country	National inventories	Status
AU	AICS	substance is listed
CA	DSL	substance is listed
CN	IECSC	substance is listed
EU	ECSI	substance is listed
EU	REACH Reg.	substance is listed
JP	CSCL-ENCS	substance is listed

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

Country	National inventories	Status
JP	ISHA-ENCS	substance is listed
KR	KECI	substance is listed
MX	INSQ	substance is listed
NZ	NZIoC	substance is listed
PH	PICCS	substance is listed
TR	CICR	substance is listed
TW	TCSI	substance is listed
US	TSCA	substance is listed

Legend

AICS	Australian Inventory of Chemical Substances
CICR	Chemical Inventory and Control Regulation
CSCL-ENCS	List of Existing and New Chemical Substances (CSCL-ENCS)
DSL	Domestic Substances List (DSL)
ECSC	EC Substance Inventory (EINECS, ELINCS, NLP)
IECSC	Inventory of Existing Chemical Substances Produced or Imported in China
INSQ	National Inventory of Chemical Substances
ISHA-ENCS	Inventory of Existing and New Chemical Substances (ISHA-ENCS)
KECI	Korea Existing Chemicals Inventory
NZIoC	New Zealand Inventory of Chemicals
PICCS	Philippine Inventory of Chemicals and Chemical Substances
REACH Reg.	REACH registered substances
TCSI	Taiwan Chemical Substance Inventory
TSCA	Toxic Substance Control Act

15.2 Chemical Safety Assessment

No Chemical Safety Assessment has been carried out for this substance.

SECTION 16: Other information

Abbreviations and acronyms

Abbr.	Descriptions of used abbreviations
2000/39/EC	Commission Directive establishing a first list of indicative occupational exposure limit values in implementation of Council Directive 98/24/EC
ADN	Accord européen relatif au transport international des marchandises dangereuses par voies de navigation intérieures (European Agreement concerning the International Carriage of Dangerous Goods by Inland Waterways)
ADR	Accord européen relatif au transport international des marchandises dangereuses par route (European Agreement concerning the International Carriage of Dangerous Goods by Road)
BCF	bioconcentration factor
CAP. 424	Occupational Health and Safety Authority Act (CAP. 424)
CAS	Chemical Abstracts Service (service that maintains the most comprehensive list of chemical substances)
CLP	Regulation (EC) No 1272/2008 on classification, labelling and packaging of substances and mixtures
CMR	Carcinogenic, Mutagenic or toxic for Reproduction
DGR	Dangerous Goods Regulations (see IATA/DGR)
DMEL	Derived Minimal Effect Level
DNEL	Derived No-Effect Level
EINECS	European Inventory of Existing Commercial Chemical Substances
ELINCS	European List of Notified Chemical Substances

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene ≥99 %, for synthesis

article number: **8817**

Abbr.	Descriptions of used abbreviations
EmS	Emergency Schedule
GHS	"Globally Harmonized System of Classification and Labelling of Chemicals" developed by the United Nations
IATA	International Air Transport Association
IATA/DGR	Dangerous Goods Regulations (DGR) for the air transport (IATA)
ICAO	International Civil Aviation Organization
IMDG	International Maritime Dangerous Goods Code
index No	the Index number is the identification code given to the substance in Part 3 of Annex VI to Regulation (EC) No 1272/2008
IOELV	indicative occupational exposure limit value
MARPOL	International Convention for the Prevention of Pollution from Ships (abbr. of "Marine Pollutant")
NLP	No-Longer Polymer
PBT	Persistent, Bioaccumulative and Toxic
PNEC	Predicted No-Effect Concentration
ppm	parts per million
REACH	Registration, Evaluation, Authorisation and Restriction of Chemicals
RID	Règlement concernant le transport International ferroviaire des marchandises Dangereuses (Regulations concerning the International carriage of Dangerous goods by Rail)
STEL	short-term exposure limit
SVHC	Substance of Very High Concern
TWA	time-weighted average
VOC	Volatile Organic Compounds
vPvB	very Persistent and very Bioaccumulative

Key literature references and sources for data

- Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU
- Regulation (EC) No. 1272/2008 (CLP, EU GHS)
- Dangerous Goods Regulations (DGR) for the air transport (IATA)
- International Maritime Dangerous Goods Code (IMDG)

List of relevant phrases (code and full text as stated in chapter 2 and 3)

Code	Text
H226	flammable liquid and vapour
H304	may be fatal if swallowed and enters airways
H312	harmful in contact with skin
H315	causes skin irritation
H319	causes serious eye irritation
H332	harmful if inhaled
H335	may cause respiratory irritation

Safety data sheet

according to Regulation (EC) No. 1907/2006 (REACH), amended by 2015/830/EU



p-Xylene $\geq 99\%$, for synthesis

article number: **8817**

Disclaimer

The above information describes exclusively the safety requirements of the product and is based on our present-day knowledge. The information is intended to give you advice about the safe handling of the product named in this safety data sheet, for storage, processing, transport and disposal. The information cannot be transferred to other products. In the case of mixing the product with other products or in the case of processing, the information on this safety data sheet is not necessarily valid for the new made-up material.



SAFETY DATA SHEET

Creation Date 01-Jul-2010

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Pyrene

Cat No. : AC180830000; AC180830250; AC180831000; AC180835000

Synonyms Benzo[def]phenanthrene

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Skin Corrosion/irritation	Category 2
Serious Eye Damage/Eye Irritation	Category 2
Specific target organ toxicity (single exposure)	Category 3
Target Organs - Central nervous system (CNS).	
Specific target organ toxicity - (repeated exposure)	Category 2
Target Organs - Liver.	

Label Elements

Signal Word

Warning

Hazard Statements

Causes skin irritation
Causes serious eye irritation
May cause drowsiness or dizziness
May cause damage to organs through prolonged or repeated exposure



Precautionary Statements

Prevention

Wear protective gloves/protective clothing/eye protection/face protection

Use only outdoors or in a well-ventilated area

Do not breathe dust/fume/gas/mist/vapors/spray

Wash face, hands and any exposed skin thoroughly after handling

Do not get in eyes, on skin, or on clothing

Response

Get medical attention/advice if you feel unwell

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing

Skin

IF ON SKIN: Wash with plenty of soap and water

Take off contaminated clothing and wash before reuse

If skin irritation occurs: Get medical advice/attention

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

If eye irritation persists: Get medical advice/attention

Storage

Storage
Store in a well-ventilated place. Keep container tightly closed

Store locked up

Disposal

Dispose:
Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Very toxic to aquatic life with long lasting effects

3. Composition / information on ingredients

Component	CAS-No	Weight %
Pyrene	129-00-0	>95

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
Skin Contact	Wash off immediately with plenty of water for at least 15 minutes. Obtain medical attention.
Inhalation	Move to fresh air. If breathing is difficult, give oxygen. Obtain medical attention.
Ingestion	Do not induce vomiting. Obtain medical attention.
Most important symptoms/effects	No information available.
Notes to Physician	Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Unsuitable Extinguishing Media	No information available

Flash Point	210 °C / 410 °F
Method -	No information available
Autoignition Temperature	No information available
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Keep product and empty container away from heat and sources of ignition.

Hazardous Combustion Products

Carbon monoxide (CO) Carbon dioxide (CO₂)

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear. Thermal decomposition can lead to release of irritating gases and vapors.

NFPA

Health
2

Flammability
1

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions	Ensure adequate ventilation. Use personal protective equipment. Avoid dust formation.
Environmental Precautions	Should not be released into the environment. See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up	Sweep up or vacuum up spillage and collect in suitable container for disposal. Avoid dust formation.
---	--

7. Handling and storage

Handling	Ensure adequate ventilation. Wear personal protective equipment. Avoid contact with skin, eyes and clothing. Avoid dust formation. Avoid breathing dust/fume/gas/mist/vapours/spray. Avoid ingestion and inhalation.
Storage	Keep containers tightly closed in a dry, cool and well-ventilated place.

8. Exposure controls / personal protection

Exposure Guidelines	This product does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies.
----------------------------	---

Engineering Measures	Ensure adequate ventilation, especially in confined areas. Ensure that eyewash stations and safety showers are close to the workstation location.
-----------------------------	---

Personal Protective Equipment

Eye/face Protection	Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.
Skin and body protection	Wear appropriate protective gloves and clothing to prevent skin exposure.
Respiratory Protection	Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Solid
Appearance	Yellow
Odor	Odorless
Odor Threshold	No information available
pH	No information available
Melting Point/Range	148 - 152 °C / 298 - 306 °F
Boiling Point/Range	393 °C / 739.4 °F @ 760 mmHg
Flash Point	210 °C / 410 °F
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	No information available
Vapor Density	No information available
Relative Density	No information available
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	C16 H10
Molecular Weight	202.25

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products. Excess heat. Avoid dust formation.
Incompatible Materials	Strong oxidizing agents
Hazardous Decomposition Products	Carbon monoxide (CO), Carbon dioxide (CO ₂)
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information**Acute Toxicity**

Product Information No acute toxicity information is available for this product

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Pyrene	2700 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic No information available

Products

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation Irritating to eyes and skin

Sensitization No information available

Carcinogenicity The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Pyrene	129-00-0	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects No information available

Reproductive Effects No information available.

Developmental Effects No information available.

Teratogenicity No information available.

STOT - single exposure Central nervous system (CNS)

STOT - repeated exposure Liver

Aspiration hazard No information available

Symptoms / effects, both acute and delayed No information available

Endocrine Disruptor Information No information available

Other Adverse Effects Tumorigenic effects have been reported in experimental animals. The toxicological properties have not been fully investigated. See actual entry in RTECS for complete information.

12. Ecological information

Ecotoxicity

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Do not empty into drains. Do not flush into surface water or sanitary sewer system. Do not allow material to contaminate ground water system.

Component	Freshwater Algae	Freshwater Fish	Microtox	Water Flea
Pyrene	Not listed	Oncorhynchus mykiss: LC50 > 2mg/L 96h	Not listed	EC50 48h 1.8 mg/L EC50 48h 0.002-0.003 mg/L

Persistence and Degradability No information available

Bioaccumulation/ Accumulation No information available.

Mobility .

Component	log Pow
Pyrene	4.88

13. Disposal considerations

Waste Disposal Methods Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.

14. Transport information

DOT

UN-No UN3077
 Proper Shipping Name Environmentally hazardous substance, solid, n.o.s
 Proper technical name Pyrene
 Hazard Class 9
 Packing Group III

TDG

UN-No UN3077
 Proper Shipping Name Environmentally hazardous substance, solid, n.o.s.
 Hazard Class 9
 Packing Group III

IATA

UN-No UN3077
 Proper Shipping Name Environmentally hazardous substance, solid, n.o.s
 Hazard Class 9
 Packing Group III

IMDG/IMO

UN-No UN3077
 Proper Shipping Name Environmentally hazardous substance, solid, n.o.s
 Hazard Class 9
 Packing Group III

15. Regulatory information**International Inventories**

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Pyrene	X	X	-	204-927-3	-		X	X	X	X	-

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations

TSCA 12(b) Not applicable

SARA 313 Not applicable

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	Yes
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Pyrene	-	-	X	X

Clean Air Act Not applicable

OSHA Occupational Safety and Health Administration
 Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Pyrene	5000 lb	5000 lb

California Proposition 65 This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Pyrene	X	X	X	X	-

U.S. Department of Transportation

Reportable Quantity (RQ): N
DOT Marine Pollutant N
DOT Severe Marine Pollutant N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D2B Toxic materials

**16. Other information**

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Creation Date 01-Jul-2010
Revision Date 10-Feb-2015
Print Date 10-Feb-2015
Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS



Material Safety Data Sheet

sec-Butylbenzene, 99+%

MSDS# 73785

Section 1 - Chemical Product and Company Identification

MSDS Name: sec-Butylbenzene, 99+%

Catalog Numbers: AC107860000, AC107860050, AC107860500, AC107861000, AC107862500, AC107865000

Synonyms: 2-Phenylbutane; Benzene, (1-methylpropyl)-; (1-Methylpropyl)benzene; Benzene, sec-butyl-

Company Identification: Acros Organics BVBA
Janssen Pharmaceuticaaan 3a
2440 Geel, Belgium

Company Identification: (USA) Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

For information in the US, call: 800-ACROS-01

For information in Europe, call: +32 14 57 52 11

Emergency Number, Europe: +32 14 57 52 99

Emergency Number US: 201-796-7100

CHEMTREC Phone Number, US: 800-424-9300

CHEMTREC Phone Number, Europe: 703-527-3887

Section 2 - Composition, Information on Ingredients

CAS#: 135-98-8

Chemical Name: sec-Butylbenzene

%: 99+

EINECS#: 205-227-0

Hazard Symbols: XI



Risk Phrases: 10 36/37/38

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Warning! Flammable liquid and vapor. May cause central nervous system depression. Causes eye, skin, and respiratory tract irritation. Target Organs: Central nervous system.

Potential Health Effects

Eye: Causes eye irritation.

Skin: Causes skin irritation.

Ingestion: May cause gastrointestinal irritation with nausea, vomiting and diarrhea. Ingestion of large amounts may cause CNS depression.

Inhalation: Causes respiratory tract irritation.

Chronic: Prolonged or repeated skin contact may cause dermatitis.

Section 4 - First Aid Measures

Eyes:	Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.
Skin:	Get medical aid. Flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse.
Ingestion:	Do not induce vomiting. If victim is conscious and alert, give 2-4 cupfuls of milk or water. Never give anything by mouth to an unconscious person. Get medical aid.
Inhalation:	Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.
Notes to Physician:	Treat symptomatically and supportively.

Section 5 - Fire Fighting Measures

General Information:	As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Vapors may form an explosive mixture with air. Vapors can travel to a source of ignition and flash back. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion. Will burn if involved in a fire. Use water spray to keep fire-exposed containers cool. Containers may explode in the heat of a fire. Flammable liquid and vapor.
Extinguishing Media:	For small fires, use dry chemical, carbon dioxide, water spray or alcohol-resistant foam. For large fires, use water spray, fog, or alcohol-resistant foam. Use water spray to cool fire-exposed containers. Water may be ineffective. Use agent most appropriate to extinguish fire. Do NOT use straight streams of water.
Autoignition Temperature:	415 deg C (779.00 deg F)
Flash Point:	45 deg C (113.00 deg F)
Explosion Limits: Lower:	0.80 vol %
Explosion Limits: Upper:	6.90 vol %
NFPA Rating:	health: 2; flammability: 2; instability: 0;

Section 6 - Accidental Release Measures

General Information:	Use proper personal protective equipment as indicated in Section 8.
Spills/Leaks:	Absorb spill with inert material (e.g. vermiculite, sand or earth), then place in suitable container. Clean up spills immediately, observing precautions in the Protective Equipment section. Remove all sources of ignition. Use a spark-proof tool. Provide ventilation. A vapor suppressing foam may be used to reduce vapors.

Section 7 - Handling and Storage

Handling:	Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use only in a well-ventilated area. Ground and bond containers when transferring material. Use spark-proof tools and explosion proof equipment. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Keep container tightly closed. Keep away from heat, sparks and flame. Avoid ingestion and inhalation. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames.
Storage:	Keep away from sources of ignition. Store in a tightly closed container. Store in a cool, dry, well-ventilated area away from incompatible substances. Flammables-area.

Section 8 - Exposure Controls, Personal Protection

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
sec-Butylbenzene	none listed	none listed	none listed

OSHA Vacated PELs: sec-Butylbenzene: None listed

Engineering Controls:

Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate general or local explosion-proof ventilation to keep airborne levels to acceptable levels.

Exposure Limits

Personal Protective Equipment

Eyes: Wear chemical splash goggles.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

Section 9 - Physical and Chemical Properties

Physical State: Liquid

Color: clear colorless

Odor: None reported.

pH: Not available

Vapor Pressure: 4 mm Hg @ 37.7 deg C

Vapor Density: 4.62

Evaporation Rate: Not available

Viscosity: Not available

Boiling Point: 173 - 174 deg C @ 760 mm Hg

Freezing/Melting Point: -75 deg C (-103.00°F)

Decomposition Temperature: Not available

Solubility in water: 0.015 g/L water

Specific Gravity/Density: 0.8630 g/cm³

Molecular Formula: C₁₀H₁₄

Molecular Weight: 134.22

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.

Conditions to Avoid: Ignition sources, excess heat.

Incompatibilities with Other Materials: Strong oxidizing agents.

Hazardous Decomposition Products: Carbon monoxide, carbon monoxide, carbon dioxide.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#: CAS# 135-98-8: CY9100000

RTECS:

CAS# 135-98-8: Draize test, rabbit, eye: 500 mg/24H Mild;

Draize test, rabbit, skin: 100 mg/24H Moderate;

LD50/LC50: Oral, mouse: LD50 = 8700 mg/kg;

Oral, rat: LD50 = 2240 uL/kg;

Oral, rat: LD50 = 6300 mg/kg;

Skin, rabbit: LD50 = >16 mL/kg;

.

Carcinogenicity: sec-Butylbenzene - Not listed as a carcinogen by ACGIH, IARC, NTP, or CA Prop 65.

Other: See actual entry in RTECS for complete information.

Section 12 - Ecological Information

Not available

Section 13 - Disposal Considerations

Dispose of in a manner consistent with federal, state, and local regulations.

Section 14 - Transport Information

US DOT

Shipping Name: BUTYL BENZENES

Hazard Class: 3

UN Number: UN2709

Packing Group: III

Canada TDG

Shipping Name: Not available
Hazard Class:
UN Number:
Packing Group:

Section 15 - Regulatory Information

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols: XI

Risk Phrases:

R 10 Flammable.

R 36/37/38 Irritating to eyes, respiratory system and skin.

Safety Phrases:

S 9 Keep container in a well-ventilated place.

S 16 Keep away from sources of ignition - No smoking.

S 33 Take precautionary measures against static discharges.

WGK (Water Danger/Protection)

CAS# 135-98-8: 1

Canada

CAS# 135-98-8 is listed on Canada's DSL List

Canadian WHMIS Classifications: B3, D2B

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

CAS# 135-98-8 is not listed on Canada's Ingredient Disclosure List.

US Federal

TSCA

CAS# 135-98-8 is listed on the TSCA
Inventory.

Section 16 - Other Information

MSDS Creation Date: 9/02/1997

Revision #9 Date 7/20/2009

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall the company be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential, or exemplary damages howsoever arising, even if the company has been advised of the possibility of such damages.



SAFETY DATA SHEET

Revision Date 10-Feb-2015

Revision Number 1

1. Identification

Product Name Selenium

Cat No. : AC419270000; AC419271000; AC419275000

Synonyms None

Recommended Use Laboratory chemicals.

Uses advised against No Information available

Details of the supplier of the safety data sheet

Company
Fisher Scientific
One Reagent Lane
Fair Lawn, NJ 07410
Tel: (201) 796-7100

Entity / Business Name
Acros Organics
One Reagent Lane
Fair Lawn, NJ 07410

Emergency Telephone Number
For information **US** call: 001-800-ACROS-01
/ **Europe** call: +32 14 57 52 11
Emergency Number **US**:001-201-796-7100 /
Europe: +32 14 57 52 99
CHEMTREC Tel. No.**US**:001-800-424-9300 /
Europe:001-703-527-3887

2. Hazard(s) identification

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Acute oral toxicity	Category 3
Acute Inhalation Toxicity - Dusts and Mists	Category 3
Specific target organ toxicity - (repeated exposure)	Category 2

Label Elements

Signal Word
Danger

Hazard Statements

Toxic if swallowed
Toxic if inhaled
May cause damage to organs through prolonged or repeated exposure



Precautionary Statements
Prevention

Wash face, hands and any exposed skin thoroughly after handling
Do not eat, drink or smoke when using this product
Use only outdoors or in a well-ventilated area
Do not breathe dust/fume/gas/mist/vapors/spray

Response

Get medical attention/advice if you feel unwell

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing
Call a POISON CENTER or doctor/physician

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician
Rinse mouth

Storage

Store locked up
Store in a well-ventilated place. Keep container tightly closed

Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

May cause long lasting harmful effects to aquatic life

3. Composition / information on ingredients

Component	CAS-No	Weight %
Selenium	7782-49-2	> 99.5

4. First-aid measures

Eye Contact	Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Skin Contact	Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes.
Inhalation	Remove from exposure, lie down. Move to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. Immediate medical attention is required.
Ingestion	Do not induce vomiting. Never give anything by mouth to an unconscious person. Drink plenty of water. Call a physician immediately. If possible drink milk afterwards.
Most important symptoms/effects Notes to Physician	No information available. Treat symptomatically

5. Fire-fighting measures

Suitable Extinguishing Media	Water spray. Carbon dioxide (CO ₂). Dry chemical. chemical foam.
Unsuitable Extinguishing Media	No information available
Flash Point	No information available
Method -	No information available
Autoignition Temperature	No information available
Explosion Limits	
Upper	No data available
Lower	No data available
Sensitivity to Mechanical Impact	No information available
Sensitivity to Static Discharge	No information available

Specific Hazards Arising from the Chemical

Vapors may form explosive mixtures with air.

Hazardous Combustion Products

None known

Protective Equipment and Precautions for Firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

NFPA

Health
3

Flammability
0

Instability
0

Physical hazards
N/A

6. Accidental release measures

Personal Precautions

Ensure adequate ventilation. Use personal protective equipment.

Environmental Precautions

See Section 12 for additional ecological information. Avoid release to the environment. Collect spillage.

Methods for Containment and Clean Up Sweep up or vacuum up spillage and collect in suitable container for disposal.

7. Handling and storage

Handling

Avoid contact with skin and eyes. Do not breathe dust. Do not breathe vapors or spray mist. Use only in area provided with appropriate exhaust ventilation.

Storage

Keep in a dry, cool and well-ventilated place. Keep container tightly closed. Keep under nitrogen.

8. Exposure controls / personal protection

Exposure Guidelines

Component	ACGIH TLV	OSHA PEL	NIOSH IDLH
Selenium	TWA: 0.2 mg/m ³	(Vacated) TWA: 0.2 mg/m ³	IDLH: 1 mg/m ³ TWA: 0.2 mg/m ³

Component	Quebec	Mexico OEL (TWA)	Ontario TWA EV
Selenium	TWA: 0.2 mg/m ³	TWA: 0.2 mg/m ³	TWA: 0.2 mg/m ³

Legend

ACGIH - American Conference of Governmental Industrial Hygienists

OSHA - Occupational Safety and Health Administration

NIOSH IDLH: The National Institute for Occupational Safety and Health Immediately Dangerous to Life or Health

Engineering Measures

Ensure that eyewash stations and safety showers are close to the workstation location.

Personal Protective Equipment

Eye/face Protection

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin and body protection

Wear appropriate protective gloves and clothing to prevent skin exposure.

Respiratory Protection

A NIOSH/MSHA approved air purifying dust or mist respirator or European Standard EN 149.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice.

9. Physical and chemical properties

Physical State	Powder Solid
Appearance	Grey
Odor	No information available
Odor Threshold	No information available
pH	No information available
Melting Point/Range	217 - 222 °C / 422.6 - 431.6 °F
Boiling Point/Range	685 °C / 1265 °F
Flash Point	No information available
Evaporation Rate	No information available
Flammability (solid,gas)	No information available
Flammability or explosive limits	
Upper	No data available
Lower	No data available
Vapor Pressure	1 mmHg @ 345 °C
Vapor Density	No information available
Relative Density	4.810
Solubility	No information available
Partition coefficient; n-octanol/water	No data available
Autoignition Temperature	No information available
Decomposition Temperature	No information available
Viscosity	No information available
Molecular Formula	Se
Molecular Weight	78.96

10. Stability and reactivity

Reactive Hazard	None known, based on information available
Stability	Stable under normal conditions.
Conditions to Avoid	Incompatible products.
Incompatible Materials	Acids, Strong oxidizing agents, Fluorine, oxygen, Metals
Hazardous Decomposition Products	None under normal use conditions
Hazardous Polymerization	Hazardous polymerization does not occur.
Hazardous Reactions	None under normal processing.

11. Toxicological information

Acute Toxicity

Product Information No acute toxicity information is available for this product

Component Information

Component	LD50 Oral	LD50 Dermal	LC50 Inhalation
Selenium	6700 mg/kg (Rat)	Not listed	Not listed

Toxicologically Synergistic Products No information available

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Irritation	No information available
Sensitization	No information available
Carcinogenicity	The table below indicates whether each agency has listed any ingredient as a carcinogen.

Component	CAS-No	IARC	NTP	ACGIH	OSHA	Mexico
Selenium	7782-49-2	Not listed	Not listed	Not listed	Not listed	Not listed

Mutagenic Effects	No information available
Reproductive Effects	No information available.
Developmental Effects	No information available.
Teratogenicity	No information available.
STOT - single exposure	None known
STOT - repeated exposure	None known
Aspiration hazard	No information available
Symptoms / effects, both acute and delayed	No information available
Endocrine Disruptor Information	No information available
Other Adverse Effects	The toxicological properties have not been fully investigated.

12. Ecological information

Ecotoxicity

Do not empty into drains.

Persistence and Degradability	No information available
Bioaccumulation/ Accumulation	No information available.
Mobility	No information available.

13. Disposal considerations

Waste Disposal Methods	Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. Chemical waste generators must also consult local, regional, and national hazardous waste regulations to ensure complete and accurate classification.
-------------------------------	---

14. Transport information

DOT

UN-No	UN3283
Hazard Class	6.1
Packing Group	III

TDG

UN-No	UN3283
Hazard Class	6.1
Packing Group	III

IATA

UN-No	3283
Proper Shipping Name	SELENIUM COMPOUND, SOLID, N.O.S.
Hazard Class	6.1
Packing Group	III

IMDG/IMO

UN-No	3283
Proper Shipping Name	SELENIUM COMPOUND, SOLID, N.O.S.
Hazard Class	6.1
Packing Group	III

15. Regulatory information

International Inventories

Component	TSCA	DSL	NDSL	EINECS	ELINCS	NLP	PICCS	ENCS	AICS	IECSC	KECL
Selenium	X	X	-	231-957-4	-		X	-	X	X	X

Legend:

X - Listed

E - Indicates a substance that is the subject of a Section 5(e) Consent order under TSCA.

F - Indicates a substance that is the subject of a Section 5(f) Rule under TSCA.

N - Indicates a polymeric substance containing no free-radical initiator in its inventory name but is considered to cover the designated polymer made with any free-radical initiator regardless of the amount used.

P - Indicates a commenced PMN substance

R - Indicates a substance that is the subject of a Section 6 risk management rule under TSCA.

S - Indicates a substance that is identified in a proposed or final Significant New Use Rule

T - Indicates a substance that is the subject of a Section 4 test rule under TSCA.

XU - Indicates a substance exempt from reporting under the Inventory Update Rule, i.e. Partial Updating of the TSCA Inventory Data Base Production and Site Reports (40 CFR 710(B)).

Y1 - Indicates an exempt polymer that has a number-average molecular weight of 1,000 or greater.

Y2 - Indicates an exempt polymer that is a polyester and is made only from reactants included in a specified list of low concern reactants that comprises one of the eligibility criteria for the exemption rule.

U.S. Federal Regulations**TSCA 12(b)**

Not applicable

SARA 313

Component	CAS-No	Weight %	SARA 313 - Threshold Values %
Selenium	7782-49-2	> 99.5	1.0

SARA 311/312 Hazardous Categorization

Acute Health Hazard	Yes
Chronic Health Hazard	Yes
Fire Hazard	No
Sudden Release of Pressure Hazard	No
Reactive Hazard	No

Clean Water Act

Component	CWA - Hazardous Substances	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants
Selenium	-	-	X	X

Clean Air Act

Not applicable

Component	HAPS Data	Class 1 Ozone Depletors	Class 2 Ozone Depletors
Selenium	X		-

OSHA Occupational Safety and Health Administration

Not applicable

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Component	Hazardous Substances RQs	CERCLA EHS RQs
Selenium	100 lb	-

California Proposition 65

This product does not contain any Proposition 65 chemicals

State Right-to-Know

Component	Massachusetts	New Jersey	Pennsylvania	Illinois	Rhode Island
Selenium	X	X	X	X	X

U.S. Department of Transportation

Reportable Quantity (RQ):	N
DOT Marine Pollutant	N
DOT Severe Marine Pollutant	N

U.S. Department of Homeland Security

This product does not contain any DHS chemicals.

Other International Regulations

Mexico - Grade No information available

Canada

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR

WHMIS Hazard Class D1A Very toxic materials
D2B Toxic materials

**16. Other information**

Prepared By Regulatory Affairs
Thermo Fisher Scientific
Email: EMSDS.RA@thermofisher.com

Revision Date 10-Feb-2015

Print Date 10-Feb-2015

Revision Summary This document has been updated to comply with the US OSHA HazCom 2012 Standard replacing the current legislation under 29 CFR 1910.1200 to align with the Globally Harmonized System of Classification and Labeling of Chemicals (GHS)

Disclaimer

The information provided on this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guide for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered as a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other material or in any process, unless specified in the text.

End of SDS

SAFETY DATA SHEET

Version 4.6
Revision Date 12/02/2015
Print Date 02/09/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Silver

Product Number : 327093
Brand : Aldrich

CAS-No. : 7440-22-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

Not a hazardous substance or mixture.

2.2 GHS Label elements, including precautionary statements

Not a hazardous substance or mixture.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : Ag
Molecular weight : 107.87 g/mol
CAS-No. : 7440-22-4
EC-No. : 231-131-3

Hazardous components

Component	Classification	Concentration
Silver		
		<= 100 %

4. FIRST AID MEASURES

4.1 Description of first aid measures

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration.

In case of skin contact

Wash off with soap and plenty of water.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Silver/silver oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Avoid dust formation. Avoid breathing vapours, mist or gas.
For personal protection see section 8.

6.2 Environmental precautions

No special environmental precautions required.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Air sensitive. Store under inert gas. Keep in a dry place.

Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters**

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Silver	7440-22-4	TWA	0.010000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.010000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.100000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Argyria		
		TWA	0.010000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	0.010000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	0.010000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	0.100000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Argyria		
		TWA	0.010000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	0.1 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Argyria		
		TWA	0.01 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants

8.2 Exposure controls

Appropriate engineering controls

General industrial hygiene practice.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

No special environmental precautions required.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

- | | |
|---|---|
| a) Appearance | Form: powder |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 960 °C (1,760 °F) - lit. |
| f) Initial boiling point and boiling range | 2,212 °C (4,014 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 10.49 g/cm3 |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY**10.1 Reactivity**

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxygen, Strong acids and strong bases

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - male - > 5,000 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Carcinogenicity - Rat - Unreported

Tumorigenic: Tumors at site of application.

Carcinogenicity classification not possible from current data.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

May cause argyria (a slate-gray or bluish discoloration of the skin and deep tissues due to the deposit of insoluble albuminate of silver).

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9

Packing group: III

Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Silver)

Reportable Quantity (RQ): 1 lbs

Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Silver	7440-22-4	1993-04-24

SARA 311/312 Hazards

No SARA Hazards

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Silver	7440-22-4	1993-04-24

Pennsylvania Right To Know Components

CAS-No.	Revision Date
---------	---------------

Silver

7440-22-4

1993-04-24

New Jersey Right To Know Components

Silver

CAS-No.
7440-22-4

Revision Date
1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

HMIS Rating

Health hazard:	0
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	0
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 12/02/2015

Print Date: 02/09/2016

SAFETY DATA SHEET

Version 4.11
Revision Date 03/05/2015
Print Date 02/07/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Sodium

Product Number : 483745
Brand : Aldrich

CAS-No. : 7440-23-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Substances and mixtures, which in contact with water, emit flammable gases (Category 1), H260
Skin corrosion (Category 1B), H314
Serious eye damage (Category 1), H318
Carcinogenicity (Category 1A), H350

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Danger

Hazard statement(s)
H260

In contact with water releases flammable gases which may ignite spontaneously.

H314 : Causes severe skin burns and eye damage.
H318 : Causes serious eye damage.
H350 : May cause cancer.

Precautionary statement(s)

P201 : Obtain special instructions before use.
P202 : Do not handle until all safety precautions have been read and understood.

P223 : Keep away from any possible contact with water, because of violent reaction and possible flash fire.

P231 + P232	Handle under inert gas. Protect from moisture.
P260	Do not breathe dust or mist.
P264	Wash skin thoroughly after handling.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P281	Use personal protective equipment as required.
P301 + P330 + P331	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P310	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Immediately call a POISON CENTER or doctor/ physician.
P305 + P351 + P338 + P310	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/ physician.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P335 + P334	Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.
P363	Wash contaminated clothing before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P402 + P404	Store in a dry place. Store in a closed container.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Reacts violently with water.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.2 Mixtures

Formula : Na
Molecular weight : 22.99 g/mol

Hazardous components

Component		Classification	Concentration
Sodium			
CAS-No.	7440-23-5	Water-react. 1; Skin Corr. 1B; Eye Dam. 1; H260, H314	>= 90 - <= 100 %
EC-No.	231-132-9		
Index-No.	011-001-00-0		
Paraffin oils			
CAS-No.	8012-95-1	Carc. 1A; H350	>= 90 - <= 100 %
EC-No.	232-384-2		

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Take off contaminated clothing and shoes immediately. Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician. Continue rinsing eyes during transport to hospital.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Dry powder

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid formation of dust and aerosols. Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed. Keep away from sources of ignition - No smoking.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Never allow product to get in contact with water during storage.

Handle and store under inert gas. Air sensitive.

Storage class (TRGS 510): Hazardous materials, which set free flammable gases upon contact with water

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Paraffin oils	8012-95-1	STEL	10.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Upper Respiratory Tract irritation 2014 Adoption Not classifiable as a human carcinogen		
		Upper Respiratory Tract irritation 2014 Adoption Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		TWA	5.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		Upper Respiratory Tract irritation Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		
		TWA	5.000000 mg/m3	USA. ACGIH Threshold Limit Values (TLV)
		Upper Respiratory Tract irritation Not classifiable as a human carcinogen		
		TWA	5.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	10.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		Upper Respiratory Tract irritation Exposure by all routes should be carefully controlled to levels as low as possible. Suspected human carcinogen		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|--|
| a) Appearance | Form: Pieces |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 97.8 °C (208.0 °F) - lit. |
| f) Initial boiling point and boiling range | 883 °C (1,621 °F) - lit. |
| g) Flash point | 82 °C (180 °F) |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 0.97 g/cm3 |

- | | | |
|----|--|-------------------|
| n) | Water solubility | No data available |
| o) | Partition coefficient: n-octanol/water | No data available |
| p) | Auto-ignition temperature | No data available |
| q) | Decomposition temperature | No data available |
| r) | Viscosity | No data available |
| s) | Explosive properties | No data available |
| t) | Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Reacts violently with water.

10.4 Conditions to avoid

Air Do not allow water to enter container.
Exposure to moisture

10.5 Incompatible materials

Oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: 1 - Group 1: Carcinogenic to humans (Paraffin oils)

NTP: Known to be human carcinogenThe reference note has been added by TD based on the background information of the NTP. (Paraffin oils)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available
No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, spasm, inflammation and edema of the larynx, spasm, inflammation and edema of the bronchi, pneumonitis, pulmonary edema, Material is extremely destructive to tissue of the mucous membranes and upper respiratory tract, eyes, and skin., Aspiration may lead to:, lipid pneumonia, Effects due to ingestion may include:, laxative effect, Gastrointestinal disturbance, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1428 Class: 4.3
Proper shipping name: Sodium
Reportable Quantity (RQ): 10 lbs

Packing group: I

Poison Inhalation Hazard: No

IMDG

UN number: 1428 Class: 4.3

Packing group: I

EMS-No: F-G, S-N

Proper shipping name: SODIUM

IATA

UN number: 1428 Class: 4.3

Packing group: I

Proper shipping name: Sodium

IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Reactivity Hazard, Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Sodium	7440-23-5	1993-04-24
Paraffin oils	8012-95-1	2007-03-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Sodium	7440-23-5	1993-04-24
Paraffin oils	8012-95-1	2007-03-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Sodium	7440-23-5	1993-04-24
Paraffin oils	8012-95-1	2007-03-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

	CAS-No.	Revision Date
Paraffin oils	8012-95-1	1987-02-27

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Carc.	Carcinogenicity
Eye Dam.	Serious eye damage
H260	In contact with water releases flammable gases which may ignite spontaneously.
H314	Causes severe skin burns and eye damage.
H318	Causes serious eye damage.
H350	May cause cancer.
Skin Corr.	Skin corrosion
Water-react.	Substances and mixtures, which in contact with water, emit flammable gases

HMIS Rating

Health hazard:	3
Chronic Health Hazard:	*
Flammability:	4
Physical Hazard	2

NFPA Rating

Health hazard:	3
Fire Hazard:	4
Reactivity Hazard:	2
Special hazard.I:	W

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.11

Revision Date: 03/05/2015

Print Date: 02/07/2016

SAFETY DATA SHEET

Version 3.14
Revision Date 12/02/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Styrene

Product Number : 240869
Brand : Aldrich
Index-No. : 601-026-00-0

CAS-No. : 100-42-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226
Acute toxicity, Inhalation (Category 4), H332
Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Carcinogenicity (Category 2), H351
Reproductive toxicity (Category 2), H361
Specific target organ toxicity - repeated exposure (Category 1), H372
Acute aquatic toxicity (Category 2), H401

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.
H315 Causes skin irritation.
H319 Causes serious eye irritation.
H332 Harmful if inhaled.
H351 Suspected of causing cancer.
H361 Suspected of damaging fertility or the unborn child.

H372	Causes damage to organs through prolonged or repeated exposure.
H401	Toxic to aquatic life.
Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P210	Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233	Keep container tightly closed.
P240	Ground/bond container and receiving equipment.
P241	Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242	Use only non-sparking tools.
P243	Take precautionary measures against static discharge.
P260	Do not breathe dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P270	Do not eat, drink or smoke when using this product.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P403 + P235	Store in a well-ventilated place. Keep cool.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Lachrymator.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: Phenylethylene Vinylbenzene
Formula	: C ₈ H ₈ C ₈ H ₈
Molecular weight	: 104.15 g/mol
CAS-No.	: 100-42-5
EC-No.	: 202-851-5
Index-No.	: 601-026-00-0

Hazardous components

Component	Classification	Concentration
Styrene		
	Flam. Liq. 3; Acute Tox. 4; Skin Irrit. 2; Eye Irrit. 2A; Carc. 2; Repr. 2; STOT RE 1; Aquatic Acute 2; H226, H315, H319, H332, H351, H361, H372, H401	<= 100 %

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Take victim immediately to hospital. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Container explosion may occur under fire conditions., Vapours may form explosive mixture with air.

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

Light sensitive.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Styrene	100-42-5	TWA	50.000000 ppm 215.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	100.000000 ppm 425.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
	Remarks	See Table Z-2		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		
		Peak	600.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		
		TWA	20.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Peripheral neuropathy Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		STEL	40.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Upper Respiratory Tract irritation Peripheral neuropathy Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Not classifiable as a human carcinogen		
		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		

		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		
		Peak	600 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.15-1969		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Styrene	100-42-5	Mandelic acid plus phenylglyoxylic acid	400mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift (As soon as possible after exposure ceases)			
		Styrene	0.2000 mg/l	In venous blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		Mandelic acid plus phenylglyoxylic acid	400mg/g Creatinine	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			
		Styrene	40 µg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
		End of shift (As soon as possible after exposure ceases)			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 32 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES**9.1 Information on basic physical and chemical properties**

a) Appearance	Form: liquid, clear Colour: colourless
b) Odour	sweet
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	Melting point/range: -31 °C (-24 °F) - lit.
f) Initial boiling point and boiling range	145 - 146 °C (293 - 295 °F) - lit.
g) Flash point	32.0 °C (89.6 °F) - closed cup
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	Upper explosion limit: 8.9 %(V) Lower explosion limit: 1.1 %(V)
k) Vapour pressure	6 hPa (5 mmHg) at 20 °C (68 °F)
l) Vapour density	3.6
m) Relative density	0.906 g/cm ³ at 25 °C (77 °F)
n) Water solubility	0.05 g/l at 25 °C (77 °F) - slightly soluble
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	490.0 °C (914.0 °F) 480.0 °C (896.0 °F)
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

Relative vapour density 3.6

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

Test for peroxide formation before distillation or evaporation. Test for peroxide formation or discard after 1 year.

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air. Vapours may form explosive mixture with air.

10.4 Conditions to avoid

May polymerize on exposure to light.

Heat, flames and sparks.

10.5 Incompatible materials

Oxidizing agents, Copper

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - > 6,000 mg/kg

LC50 Inhalation - Rat - 4 h - 12,000 mg/m³

LD50 Dermal - Rat - male and female - > 2,000 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation

(OECD Test Guideline 404)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

Respiratory or skin sensitisation

Maximisation Test (GPMT) - Guinea pig

Does not cause skin sensitisation.

(OECD Test Guideline 406)

Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 2B - Group 2B: Possibly carcinogenic to humans (Styrene)

NTP: Reasonably anticipated to be a human carcinogen (Styrene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

Suspected of damaging the unborn child. Suspected human reproductive toxicant

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard

No data available

Additional Information

RTECS: WL3675000

Dermatitis, Central nervous system depression, Nausea, Dizziness, Headache, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Endocrine system. -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish	NOEC - Pimephales promelas (fathead minnow) - 4 mg/l - 96 h
	LC50 - Pimephales promelas (fathead minnow) - 32 mg/l - 96 h
	LOEC - Pimephales promelas (fathead minnow) - 7.6 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates	EC50 - Daphnia magna (Water flea) - 4.7 mg/l - 48 h (OECD Test Guideline 202)
Toxicity to algae	IC50 - Pseudokirchneriella subcapitata (green algae) - 1.4 mg/l - 72 h

12.2 Persistence and degradability

Biodegradability aerobic - Exposure time 28 d
Result: > 60 % - Readily biodegradable

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life.

No data available

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 2055 Class: 3 Packing group: III
Proper shipping name: Styrene monomer, stabilized
Reportable Quantity (RQ): 1000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 2055 Class: 3 Packing group: III EMS-No: F-E, S-D
Proper shipping name: STYRENE MONOMER, STABILIZED

IATA

UN number: 2055 Class: 3 Packing group: III
Proper shipping name: Styrene monomer, stabilized

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Styrene	100-42-5	2007-07-01

SARA 311/312 Hazards

Fire Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Styrene	100-42-5	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Styrene	100-42-5	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Styrene	100-42-5	2007-07-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids
H226	Flammable liquid and vapour.
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H332	Harmful if inhaled.
H351	Suspected of causing cancer.
H361	Suspected of damaging fertility or the unborn child.
H372	Causes damage to organs through prolonged or repeated exposure.
H401	Toxic to aquatic life.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.14

Revision Date: 12/02/2015

Print Date: 02/18/2016

MATERIAL SAFETY DATA SHEET

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

MATHESON TRI-GAS, INC.
150 Allen Road Suite 302
Basking Ridge, New Jersey 07920
Information: 1-800-416-2505

Emergency Contact:
CHEMTREC 1-800-424-9300
Calls Originating Outside the US:
703-527-3887 (Collect Calls Accepted)

SUBSTANCE: TERT-BUTANOL

TRADE NAMES/SYNONYMS:

T-BUTANOL; 1,1-DIMETHYLETHANOL; TRIMETHYLCARBINOL; TRIMETHYLMETHANOL;
TRIMETHYL METHANOL; BUTYL ALCOHOL; 2-METHYL-2-PROPANOL; TERT-BUTYL
ALCOHOL; TRIMETHYL CARBINOL; UN 1120; C4H10O; 00230215; RTECS EO1925000

CHEMICAL FAMILY: aliphatic, alcohols

CREATION DATE: Dec 01 2003

REVISION DATE: Dec 11 2008

2. COMPOSITION, INFORMATION ON INGREDIENTS

COMPONENT: TERT-BUTANOL
CAS NUMBER: 75-65-0
PERCENTAGE: 100

3. HAZARDS IDENTIFICATION

NFPA RATINGS (SCALE 0-4): HEALTH=2 FIRE=3 REACTIVITY=0



EMERGENCY OVERVIEW:

CHANGE IN APPEARANCE: hygroscopic

COLOR: colorless

PHYSICAL FORM: crystals, liquid

ODOR: pungent odor

MAJOR HEALTH HAZARDS: respiratory tract irritation, eye irritation, central nervous system depression

PHYSICAL HAZARDS: Flammable liquid and vapor. Vapor may cause flash fire.

POTENTIAL HEALTH EFFECTS:

INHALATION:

SHORT TERM EXPOSURE: irritation, nausea, vomiting, difficulty breathing, headache, drowsiness, dizziness, loss of coordination, blurred vision

LONG TERM EXPOSURE: no information on significant adverse effects

SKIN CONTACT:

SHORT TERM EXPOSURE: irritation

LONG TERM EXPOSURE: irritation

EYE CONTACT:

SHORT TERM EXPOSURE: irritation, blurred vision

LONG TERM EXPOSURE: irritation

INGESTION:

SHORT TERM EXPOSURE: nausea, vomiting, diarrhea, stomach pain, headache, drowsiness, dizziness, loss of coordination, unconsciousness

LONG TERM EXPOSURE: no information on significant adverse effects

4. FIRST AID MEASURES

INHALATION: If adverse effects occur, remove to uncontaminated area. Give artificial respiration if not breathing. If breathing is difficult, oxygen should be administered by qualified personnel. Get immediate medical attention.

SKIN CONTACT: Wash skin with soap and water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention, if needed. Thoroughly clean and dry contaminated clothing and shoes before reuse.

EYE CONTACT: Flush eyes with plenty of water for at least 15 minutes. Then get immediate medical attention.

INGESTION: If a large amount is swallowed, get medical attention.

NOTE TO PHYSICIAN: For inhalation, consider oxygen.

5. FIRE FIGHTING MEASURES

FIRE AND EXPLOSION HAZARDS: Severe fire hazard. The vapor is heavier than air. Vapors or gases may ignite at distant ignition sources and flash back. Vapor/air mixtures are explosive.

EXTINGUISHING MEDIA: alcohol-resistant foam, carbon dioxide, regular dry chemical, water

Large fires: Use alcohol-resistant foam or flood with fine water spray.

FIRE FIGHTING: Move container from fire area if it can be done without risk. Dike for later disposal. Do not scatter spilled material with high-pressure water streams. Cool containers with water spray until well after the fire is out. Stay away from the ends of tanks. Withdraw immediately in case of rising sound from

venting safety device or any discoloration of tanks due to fire. For tank, rail car or tank truck, evacuation radius: 800 meters (1/2 mile). Do not attempt to extinguish fire unless flow of material can be stopped first. Flood with fine water spray. Do not scatter spilled material with high-pressure water streams. Cool containers with water spray until well after the fire is out. Apply water from a protected location or from a safe distance. Avoid inhalation of material or combustion by-products. Stay upwind and keep out of low areas.

FLASH POINT: 52 F (11 C) (CC)

LOWER FLAMMABLE LIMIT: 2.4%

UPPER FLAMMABLE LIMIT: 8.0%

AUTOIGNITION: 892 F (478 C)

FLAMMABILITY CLASS (OSHA): IB

6. ACCIDENTAL RELEASE MEASURES

OCCUPATIONAL RELEASE:

Avoid heat, flames, sparks and other sources of ignition. Remove sources of ignition. Stop leak if possible without personal risk. Reduce vapors with water spray. Small spills: Absorb with sand or other non-combustible material. Collect spilled material in appropriate container for disposal. Large spills: Dike for later disposal. Keep unnecessary people away, isolate hazard area and deny entry. Stay upwind and keep out of low areas.

7. HANDLING AND STORAGE

STORAGE: Store and handle in accordance with all current regulations and standards. Subject to storage regulations: U.S. OSHA 29 CFR 1910.106. Grounding and bonding required. Keep separated from incompatible substances.

8. EXPOSURE CONTROLS, PERSONAL PROTECTION

EXPOSURE LIMITS:

TERT-BUTANOL:

TERT-BUTYL ALCOHOL:

100 ppm (300 mg/m³) OSHA TWA

150 ppm (450 mg/m³) OSHA STEL (vacated by 58 FR 35338, June 30, 1993)

100 ppm ACGIH TWA

100 ppm (300 mg/m³) NIOSH recommended TWA 10 hour(s)

150 ppm (450 mg/m³) NIOSH recommended STEL

VENTILATION: Ventilation equipment should be explosion-resistant if explosive concentrations of material are present. Provide local exhaust ventilation system. Ensure compliance with applicable exposure limits.

EYE PROTECTION: Wear splash resistant safety goggles with a faceshield. Provide an emergency eye wash fountain and quick drench shower in the immediate work area.

CLOTHING: Wear appropriate chemical resistant clothing.

GLOVES: Wear appropriate chemical resistant gloves.

RESPIRATOR: The following respirators and maximum use concentrations are drawn from NIOSH and/or OSHA.

1600 ppm

Any supplied-air respirator operated in a continuous-flow mode.

Any powered, air-purifying respirator with organic vapor cartridge(s).

Any air-purifying respirator with a full facepiece and an organic vapor canister.

Any air-purifying full-facepiece respirator (gas mask) with a chin-style, front-mounted or back-mounted organic vapor canister.

Any self-contained breathing apparatus with a full facepiece.

Any supplied-air respirator with a full facepiece.

Emergency or planned entry into unknown concentrations or IDLH conditions -

Any self-contained breathing apparatus that has a full facepiece and is operated in a pressure-demand or other positive-pressure mode.

Any supplied-air respirator with a full facepiece that is operated in a pressure-demand or other positive-pressure mode in combination with an auxiliary self-contained breathing apparatus operated in pressure-demand or other positive-pressure mode.

Escape -

Any air-purifying full-facepiece respirator (gas mask) with a chin-style, front-mounted or back-mounted organic vapor canister.

Any appropriate escape-type, self-contained breathing apparatus.

9. PHYSICAL AND CHEMICAL PROPERTIES

PHYSICAL STATE: liquid

COLOR: colorless

CHANGE IN APPEARANCE: hygroscopic

PHYSICAL FORM: crystals, liquid

ODOR: pungent odor

MOLECULAR WEIGHT: 74.12

MOLECULAR FORMULA: (C-H₃)₃-C-O-H

BOILING POINT: 180 F (82 C)

MELTING POINT: 79 F (26 C)

VAPOR PRESSURE: 31 mmHg @ 20 C

VAPOR DENSITY (air=1): 2.6

SPECIFIC GRAVITY (water=1): 0.7887

WATER SOLUBILITY: soluble

PH: Not available

VOLATILITY: Not available

ODOR THRESHOLD: 73 ppm

EVAPORATION RATE: 1.05 (butyl acetate=1)

VISCOSITY: 3.3 cP @ 30 C

COEFFICIENT OF WATER/OIL DISTRIBUTION: Not available

SOLVENT SOLUBILITY:

Soluble: alcohol, ether, acetone, benzene

10. STABILITY AND REACTIVITY

REACTIVITY: Stable at normal temperatures and pressure.

CONDITIONS TO AVOID: Avoid heat, flames, sparks and other sources of ignition. Containers may rupture or explode if exposed to heat.

INCOMPATIBILITIES: metals, acids, oxidizing materials, combustible materials, metal salts

HAZARDOUS DECOMPOSITION:

Thermal decomposition products: oxides of carbon

POLYMERIZATION: Will not polymerize.

11. TOXICOLOGICAL INFORMATION

TERT-BUTANOL:

IRRITATION DATA: 500 ul/24 hour(s) skin-rabbit mild; 100 ul/24 hour(s) eyes-rabbit severe

TOXICITY DATA: >10000 ppm/4 hour(s) inhalation-rat LC50; >2 gm/kg skin-rabbit LD50; 2743 mg/kg oral-rat LD50

CARCINOGEN STATUS: ACGIH: A4 -Not Classifiable as a Human Carcinogen

LOCAL EFFECTS:

Irritant: inhalation, eye

ACUTE TOXICITY LEVEL:

Moderately Toxic: ingestion

TARGET ORGANS: central nervous system

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: kidney disorders, liver disorders, respiratory disorders, skin disorders and allergies

TUMORIGENIC DATA: Available.

MUTAGENIC DATA: Available.

REPRODUCTIVE EFFECTS DATA: Available.

ADDITIONAL DATA: Alcohol may enhance the toxic effects.

12. ECOLOGICAL INFORMATION

ECOTOXICITY DATA:

FISH TOXICITY: 6410000 ug/L 96 hour(s) LC50 (Mortality) Fathead minnow (*Pimephales promelas*)

INVERTEBRATE TOXICITY: 5504000 ug/L 48 hour(s) EC50 (Immobilization) Water flea (Daphnia magna)

OTHER TOXICITY: 2450000 ug/L 48 hour(s) LC50 (Mortality) Clawed toad (Xenopus laevis)

13. DISPOSAL CONSIDERATIONS

Dispose in accordance with all applicable regulations. Subject to disposal regulations: U.S. EPA 40 CFR 262. Hazardous Waste Number(s): D001.

14. TRANSPORT INFORMATION

U.S. DOT 49 CFR 172.101:
PROPER SHIPPING NAME: Butanols
ID NUMBER: UN1120
HAZARD CLASS OR DIVISION: 3
PACKING GROUP: II
LABELING REQUIREMENTS: 3



CANADIAN TRANSPORTATION OF DANGEROUS GOODS:
SHIPPING NAME: Butanols
UN NUMBER: UN1120
CLASS: 3
PACKING GROUP/CATEGORY: II

15. REGULATORY INFORMATION

U.S. REGULATIONS:
CERCLA SECTIONS 102a/103 HAZARDOUS SUBSTANCES (40 CFR 302.4): Not regulated.

SARA TITLE III SECTION 302 EXTREMELY HAZARDOUS SUBSTANCES (40 CFR 355 Subpart B): Not regulated.

SARA TITLE III SECTION 304 EXTREMELY HAZARDOUS SUBSTANCES (40 CFR 355 Subpart C): Not regulated.

SARA TITLE III SARA SECTIONS 311/312 HAZARDOUS CATEGORIES (40 CFR 370 Subparts B and C):

ACUTE: Yes

CHRONIC: No

FIRE: Yes

REACTIVE: No

SUDDEN RELEASE: No

SARA TITLE III SECTION 313 (40 CFR 372.65):
TERT-BUTYL ALCOHOL

OSHA PROCESS SAFETY (29 CFR 1910.119): Not regulated.

STATE REGULATIONS:

California Proposition 65: Not regulated.

CANADIAN REGULATIONS:

WHMIS CLASSIFICATION: Not determined.

NATIONAL INVENTORY STATUS:

U.S. INVENTORY (TSCA): Listed on inventory.

TSCA 12(b) EXPORT NOTIFICATION: Not listed.

CANADA INVENTORY (DSL/NDSL): Not determined.

16. OTHER INFORMATION

“RTECS®” is a United States trademark owned and licensed under authority of the U.S. Government, by and through Symyx Software, Inc. Portions ©Copyright 2001, U.S. Government. All rights reserved.

©Copyright 1984-2009 ChemADVISOR, Inc. All rights reserved.

MATHESON TRI-GAS, INC. MAKES NO EXPRESS OR IMPLIED WARRANTIES, GUARANTEES OR REPRESENTATIONS REGARDING THE PRODUCT OR THE INFORMATION HEREIN, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR USE. MATHESON TRI-GAS, INC. SHALL NOT BE LIABLE FOR ANY PERSONAL INJURY, PROPERTY OR OTHER DAMAGES OF ANY NATURE, WHETHER COMPENSATORY, CONSEQUENTIAL, EXEMPLARY, OR OTHERWISE, RESULTING FROM ANY PUBLICATION, USE OR RELIANCE UPON THE INFORMATION HEREIN.

SAFETY DATA SHEET

Version 3.5
Revision Date 11/04/2015
Print Date 02/22/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : *tert*-Butylbenzene

Product Number : B90602
Brand : Aldrich

CAS-No. : 98-06-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 3), H226
Eye irritation (Category 2A), H319
Acute aquatic toxicity (Category 2), H401
Chronic aquatic toxicity (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H226
H319
H411

Flammable liquid and vapour.
Causes serious eye irritation.
Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P210
P233
P240
P241
P242
P243

Keep away from heat/sparks/open flames/hot surfaces. No smoking.
Keep container tightly closed.
Ground/bond container and receiving equipment.
Use explosion-proof electrical/ ventilating/ lighting/ equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.

P264	Wash skin thoroughly after handling.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P391	Collect spillage.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: 2-Methyl-2-phenylpropane
Formula	: C ₁₀ H ₁₄
Molecular weight	: 134.22 g/mol
CAS-No.	: 98-06-6
EC-No.	: 202-632-4

Hazardous components

Component	Classification	Concentration
tert-Butylbenzene		
	Flam. Liq. 3; Eye Irrit. 2A; Aquatic Acute 2; Aquatic Chronic 2; H226, H319, H411	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Store in cool place. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Impervious clothing, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|---|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -58 °C (-72 °F) - lit. |
| f) Initial boiling point and boiling range | 169 °C (336 °F) - lit. |
| g) Flash point | 34.0 °C (93.2 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower | Lower explosion limit: 0.8 %(V) |

flammability or
explosive limits

- | | | |
|----|--|--|
| k) | Vapour pressure | No data available |
| l) | Vapour density | No data available |
| m) | Relative density | 0.867 g/cm ³ at 25 °C (77 °F) |
| n) | Water solubility | No data available |
| o) | Partition coefficient: n-octanol/water | log Pow: 3.80 |
| p) | Auto-ignition temperature | 450.0 °C (842.0 °F) |
| q) | Decomposition temperature | No data available |
| r) | Viscosity | No data available |
| s) | Explosive properties | No data available |
| t) | Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 3,045 mg/kg

Remarks: Behavioral:Somnolence (general depressed activity). Behavioral:Tremor. Gastrointestinal:Changes in structure or function of salivary glands.

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

- IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.
- ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.
- NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
- OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: CY9120000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

- | | |
|---|--|
| Toxicity to fish | LC0 - Leuciscus idus (Golden orfe) - 44 mg/l - 48.0 h |
| | LC50 - Leuciscus idus (Golden orfe) - 65 mg/l - 48.0 h |
| Toxicity to daphnia and other aquatic invertebrates | LC50 - Daphnia magna (Water flea) - 41 mg/l - 24 h |

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 2709 Class: 3 Packing group: III
Proper shipping name: Butyl benzenes
Marine pollutant:yes
Poison Inhalation Hazard: No

IMDG

UN number: 2709 Class: 3 Packing group: III EMS-No: F-E, S-D
Proper shipping name: BUTYLBENZENES
Marine pollutant:yes

IATA

UN number: 2709 Class: 3 Packing group: III
Proper shipping name: Butylbenzenes

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
tert-Butylbenzene	98-06-6	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
tert-Butylbenzene	98-06-6	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Eye Irrit.	Eye irritation
Flam. Liq.	Flammable liquids

H226	Flammable liquid and vapour.
H319	Causes serious eye irritation.
H401	Toxic to aquatic life.
H411	Toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.5

Revision Date: 11/04/2015

Print Date: 02/22/2016

SAFETY DATA SHEET

Version 8.6
Revision Date 02/07/2023
Print Date 02/15/2023

SECTION 1: Identification of the substance/mixture and of the company/undertaking**1.1 Product identifiers**

Product name : Tetrachloroethylene

Product Number : 371696
Brand : Sigma-Aldrich
Index-No. : 602-028-00-4
CAS-No. : 127-18-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich Inc.
3050 SPRUCE ST
ST. LOUIS MO 63103
UNITED STATES

Telephone : +1 314 771-5765
Fax : +1 800 325-5052

1.4 Emergency telephone

Emergency Phone # : 800-424-9300 CHEMTREC (USA) +1-703-
527-3887 CHEMTREC (International) 24
Hours/day; 7 Days/week

SECTION 2: Hazards identification**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Skin sensitization (Category 1), H317
Carcinogenicity (Category 2), H351
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336
Short-term (acute) aquatic hazard (Category 2), H401
Long-term (chronic) aquatic hazard (Category 2), H411

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal Word

Warning

Hazard statement(s)

H315	Causes skin irritation.
H317	May cause an allergic skin reaction.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H351	Suspected of causing cancer.
H411	Toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P261	Avoid breathing mist or vapors.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P272	Contaminated work clothing must not be allowed out of the workplace.
P273	Avoid release to the environment.
P280	Wear protective gloves/ protective clothing/ eye protection/ face protection.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/ doctor if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P333 + P313	If skin irritation or rash occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P391	Collect spillage.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

SECTION 3: Composition/information on ingredients

3.1 Substances

Synonyms	:	Perchloroethylene PCE
Formula	:	C ₂ Cl ₄
Molecular weight	:	165.83 g/mol
CAS-No.	:	127-18-4
EC-No.	:	204-825-9
Index-No.	:	602-028-00-4

Sigma-Aldrich - 371696

Page 2 of 12

Component	Classification	Concentration
Tetrachlorethylene		
	Skin Irrit. 2; Eye Irrit. 2A; Skin Sens. 1; Carc. 2; STOT SE 3; Aquatic Acute 2; Aquatic Chronic 2; H315, H319, H317, H351, H336, H401, H411 Concentration limits: >= 20 %: STOT SE 3, H336;	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

SECTION 4: First aid measures

4.1 Description of first-aid measures

General advice

Show this material safety data sheet to the doctor in attendance.

If inhaled

After inhalation: fresh air. Call in physician.

In case of skin contact

In case of skin contact: Take off immediately all contaminated clothing. Rinse skin with water/ shower. Consult a physician.

In case of eye contact

After eye contact: rinse out with plenty of water. Call in ophthalmologist. Remove contact lenses.

If swallowed

After swallowing: immediately make victim drink water (two glasses at most). Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media

Water Foam Carbon dioxide (CO₂) Dry powder

Unsuitable extinguishing media

For this substance/mixture no limitations of extinguishing agents are given.

5.2 Special hazards arising from the substance or mixture

Carbon oxides

Hydrogen chloride gas

Combustible.

Development of hazardous combustion gases or vapours possible in the event of fire.

5.3 Advice for firefighters

Stay in danger area only with self-contained breathing apparatus. Prevent skin contact by keeping a safe distance or by wearing suitable protective clothing.

5.4 Further information

Suppress (knock down) gases/vapors/mists with a water spray jet. Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6: Accidental release measures

6.1 Personal precautions, protective equipment and emergency procedures

Advice for non-emergency personnel: Do not breathe vapors, aerosols. Avoid substance contact. Ensure adequate ventilation. Evacuate the danger area, observe emergency procedures, consult an expert.

For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Cover drains. Collect, bind, and pump off spills. Observe possible material restrictions (see sections 7 and 10). Take up with liquid-absorbent material (e.g. Chemisorb®). Dispose of properly. Clean up affected area.

6.4 Reference to other sections

For disposal see section 13.

SECTION 7: Handling and storage

7.1 Precautions for safe handling

Advice on safe handling

Work under hood. Do not inhale substance/mixture. Avoid generation of vapours/aerosols.

Hygiene measures

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Storage conditions

Tightly closed. Keep in a well-ventilated place. Keep locked up or in an area accessible only to qualified or authorized persons.

Storage class

Storage class (TRGS 510): 6.1C: Combustible, acute toxic Cat.3 / toxic compounds or compounds which causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

SECTION 8: Exposure controls/personal protection

8.1 Control parameters

Ingredients with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Tetrachlorethylen	127-18-4	TWA	25 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Confirmed animal carcinogen with unknown relevance to humans		
		STEL	100 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Confirmed animal carcinogen with unknown relevance to humans		
		Potential Occupational Carcinogen		
		TWA	100 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		CEIL	200 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Peak	300 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		TWA	25 ppm 170 mg/m3	USA. Table Z-1-A Limits for Air Contaminants (1989 vacated values)
		PEL	25 ppm 170 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		STEL	100 ppm 685 mg/m3	California permissible exposure limits for chemical contaminants (Title 8, Article 107)
		C	300 ppm	California permissible exposure limits for chemical contaminants (Title 8, Article 107)

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Tetrachlorethylen	127-18-4	Tetrachloro ethylene	3parts per million	In end-exhaled air	ACGIH - Biological Exposure Indices (BEI)
	Remarks	Prior to shift (16 hours after exposure ceases)			
		Tetrachloro ethylene	0.5 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		Prior to shift (16 hours after exposure ceases)			

8.2 Exposure controls

Appropriate engineering controls

Immediately change contaminated clothing. Apply preventive skin protection. Wash hands and face after working with substance.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU). Safety glasses

Skin protection

This recommendation applies only to the product stated in the safety data sheet, supplied by us and for the designated use. When dissolving in or mixing with other substances and under conditions deviating from those stated in EN374 please contact the supplier of CE-approved gloves (e.g. KCL GmbH, D-36124 Eichenzell, Internet: www.kcl.de).

Full contact

Material: Viton®

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

This recommendation applies only to the product stated in the safety data sheet, supplied by us and for the designated use. When dissolving in or mixing with other substances and under conditions deviating from those stated in EN374 please contact the supplier of CE-approved gloves (e.g. KCL GmbH, D-36124 Eichenzell, Internet: www.kcl.de).

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 240 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Body Protection

protective clothing

Respiratory protection

required when vapours/aerosols are generated. Our recommendations on filtering respiratory protection are based on the following standards: DIN EN 143, DIN 14387 and other accompanying standards relating to the used respiratory protection system.

Control of environmental exposure

Do not let product enter drains.

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

- | | |
|-------------------|---|
| a) Appearance | Form: liquid, clear
Color: colorless |
| b) Odor | No data available |
| c) Odor Threshold | No data available |
| d) pH | No data available |

e) Melting point/freezing point	Melting point/range: -22 °C (-8 °F) - lit.
f) Initial boiling point and boiling range	121 °C 250 °F - lit.
g) Flash point	()No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapor pressure	25.3 hPa at 25.0 °C (77.0 °F) 17.3 hPa at 20.0 °C(68.0 °F)
l) Vapor density	No data available
m) Density	1.623 g/cm ³ at 25 °C (77 °F) - lit.
Relative density	No data available
n) Water solubility	0.15 g/l at 25 °C (77 °F)
o) Partition coefficient: n-octanol/water	log Pow: 2.53 at 23 °C (73 °F) - Bioaccumulation is not expected.
p) Autoignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

Surface tension	32.1 mN/m at 20 °C (68 °F)
-----------------	----------------------------

SECTION 10: Stability and reactivity

10.1 Reactivity

No data available

10.2 Chemical stability

The product is chemically stable under standard ambient conditions (room temperature) .

10.3 Possibility of hazardous reactions

Risk of explosion with:

Alkali metals

Aluminum

sodium amide

Barium

nitrogen dioxide

Oxygen

Sigma-Aldrich - 371696

Page 7 of 12

with
alkali hydroxides
Exothermic reaction with:
strong alkalis
Alkaline earth metals
strong alkalis
Light metals
Powdered metals
Oxidizing agents
Strong acids
Strong bases
nitrous gases
Risk of ignition or formation of inflammable gases or vapours with:
zinc oxide
with
Aluminum

10.4 Conditions to avoid

no information available

10.5 Incompatible materials

various plastics

10.6 Hazardous decomposition products

In the event of fire: see section 5

SECTION 11: Toxicological information

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - male and female - 3,420 mg/kg
(OECD Test Guideline 401)

Remarks: (ECHA)

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation - 4 h

(OECD Test Guideline 404)

Remarks: (ECHA)

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Mild eye irritation - 24 h

(Draize Test)

Remarks: (RTECS)

Respiratory or skin sensitization

Local lymph node assay (LLNA) - Mouse

Result: May cause sensitization by skin contact.

(OECD Test Guideline 429)

Remarks: (ECHA)

Germ cell mutagenicity

Test Type: Chromosome aberration test in vitro

Test system: Chinese hamster ovary cells

Metabolic activation: with and without metabolic activation

Method: OECD Test Guideline 473

Result: negative

Remarks: (ECHA)

Test Type: Ames test

Test system: Salmonella typhimurium

Metabolic activation: without metabolic activation

Method: OECD Test Guideline 471

Result: negative

Remarks: (ECHA)

Test Type: Micronucleus test

Species: Mouse

Application Route: Intraperitoneal

Method: OECD Test Guideline 474

Result: negative

Remarks: (ECHA)

Carcinogenicity

Suspected of causing cancer.

IARC: 2A - Group 2A: Probably carcinogenic to humans (Tetrachlorethylene)

NTP: RAHC - Reasonably anticipated to be a human carcinogen (Tetrachlorethylene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is on OSHA's list of regulated carcinogens.

Reproductive toxicity

No data available

Specific target organ toxicity - single exposure

May cause drowsiness or dizziness.

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

11.2 Additional Information

Repeated dose toxicity - Mouse - female - Oral - LOAEL (Lowest observed adverse effect level) - 390 mg/kg

RTECS: KX3850000

narcosis, Liver injury may occur., Kidney injury may occur.

SECTION 12: Ecological information**12.1 Toxicity**

Toxicity to fish

flow-through test LC50 - Oncorhynchus mykiss (rainbow trout) - 5 mg/l - 96 h

Sigma-Aldrich - 371696

Page 9 of 12

Remarks: (ECHA)

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 7.50 mg/l - 48 h

Toxicity to algae ErC50 - Chlamydomonas reinhardtii (green algae) - 3.64 mg/l - 72 h
Remarks: (ECHA)

Toxicity to fish(Chronic toxicity) flow-through test NOEC - Jordanella floridae - 1.99 mg/l - 10 d
Remarks: (ECHA)

Toxicity to daphnia and other aquatic invertebrates(Chronic toxicity) semi-static test NOEC - Daphnia magna (Water flea) - 0.51 mg/l - 28 d
Remarks: (ECHA)

12.2 Persistence and degradability

Biodegradability aerobic - Exposure time 28 d
Result: 11 % - Not readily biodegradable.
(OECD Test Guideline 301C)

12.3 Bioaccumulative potential

Bioaccumulation Lepomis macrochirus (Bluegill) - 21 d
- 0.00343 mg/l(Tetrachlorethylene)

Bioconcentration factor (BCF): 49

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Endocrine disrupting properties

No data available

12.7 Other adverse effects

No data available

SECTION 13: Disposal considerations

13.1 Waste treatment methods

Product

Waste material must be disposed of in accordance with the national and local regulations. Leave chemicals in original containers. No mixing with other waste. Handle uncleaned containers like the product itself.

SECTION 14: Transport information

DOT (US)

UN number: 1897 Class: 6.1

Packing group: III

Sigma-Aldrich - 371696

Page 10 of 12

Proper shipping name: Tetrachloroethylene
Reportable Quantity (RQ): 100 lbs
Reportable Quantity (RQ): 100 lbs
Reportable Quantity (RQ): 10 lbs
Reportable Quantity (RQ): 10 lbs
Poison Inhalation Hazard: No

IMDG

UN number: 1897 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TETRACHLOROETHYLENE
Marine pollutant : yes

IATA

UN number: 1897 Class: 6.1 Packing group: III
Proper shipping name: Tetrachloroethylene

SECTION 15: Regulatory information

SARA 302 Components

This material does not contain any components with a section 302 EHS TPQ.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Tetrachlorethylene	127-18-4	2020-07-14

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

:
Reportable Quantity D039 lbs
 F001 lbs
 F002 lbs

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Tetrachlorethylene	127-18-4	2020-07-14

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Tetrachlorethylene	127-18-4	2020-07-14

California Prop. 65 Components

	CAS-No.	Revision Date
, which is/are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .Tetrachlorethylene	127-18-4	2017-04-11

SECTION 16: Other information

Further information

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Copyright 2020 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The branding on the header and/or footer of this document may temporarily not visually match the product purchased as we transition our branding. However, all of the information in the document regarding the product remains unchanged and matches the product ordered. For further information please contact mlsbranding@sial.com.

Version: 8.6

Revision Date: 02/07/2023

Print Date: 02/15/2023

Thallium



SAFETY DATA SHEET

1 PRODUCT AND SUPPLIER IDENTIFICATION

Product Name: Thallium Solid

Formula: TI

Supplier: ESPI Metals

1050 Benson Way

Ashland, OR 97520

Telephone: 800-638-2581

Fax: 541-488-8313

Email: sales@espimetals.com

Emergency: Infotrac 800-535-5053 (US) or 352-323-3500 (24 hour)

Recommended Uses: Scientific Research

2 HAZARDS IDENTIFICATION

GHS Classification (29 CFR 1910.1200): Acute toxicity - oral, category 2.

GHS Label Elements:



Signal Word: Danger

Hazard Statements: H300 Fatal if swallowed.

Precautionary Statements: P264 Wash hands thoroughly after handling, P270 Do not eat, drink or smoke when using this product, P301+P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician, P330 Rinse mouth, P405 Store locked up, P501 Dispose of contents/container in accordance with local, state or federal regulations.

3 COMPOSITION/INFORMATION ON INGREDIENTS

Ingredient: Thallium
CAS#: 7440-28-0
%: 100
EC#: 231-138-1

4 FIRST AID MEASURES

General Measures: Emergency responders should take care to avoid secondary exposure to thallium if it is present. Wear appropriate protective equipment.

INHALATION: Remove to fresh air, keep warm and quiet, give oxygen if breathing is difficult. Seek immediate medical attention. If mouth-to-mouth is necessary always use a barrier or bag-valve-mask device.

INGESTION: Rinse mouth with water. Do not induce vomiting. Seek immediate medical attention. Never induce vomiting or give anything by mouth to an unconscious person.

SKIN: Remove contaminated clothing, wash affected area with soap and water taking care not to break the skin and to cover all open wounds. Seek medical attention. Contaminated clothing should be safely contained and properly disposed of.

EYES: Flush eyes with lukewarm water, including under upper and lower eyelids, for at least 15 minutes. Seek medical attention immediately.

Most Important Symptoms/Effects, Acute and Delayed: Symptoms are usually delayed and include gastrointestinal distress and neurological symptoms. See section 11 for more information.

Indication of Immediate Medical Attention and Special Treatment: No other information available.

5 FIREFIGHTING MEASURES

Extinguishing Media: Use extinguishing media suitable for surrounding materials and type of fire.

Unsuitable Extinguishing Media: No further information available.

Specific Hazards Arising from the Material: Under fire conditions, thallium may release highly toxic fumes or gases.

Special Protective Equipment and Precautions for Firefighters: Full face, self-contained breathing apparatus and full protective clothing.

6 ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment, and Emergency Procedures: Wear appropriate respiratory and protective equipment specified in section 8. Isolate spill area and provide ventilation. Avoid breathing dust or fume. Avoid contact with skin and eyes. Eliminate all sources of ignition.

Methods and Materials for Containment and Cleaning Up: Scoop up or vacuum with a system utilizing a HEPA filtration system and place in properly labeled sealed containers. Special precautions must be taken when changing filters on HEPA vacuum cleaners used to clean up hazardous materials. Avoid creating dusts. Avoid contamination of air and water.

Environmental Precautions: Do not allow to enter drains or to be released to the environment.

7 HANDLING AND STORAGE

Precautions for Safe Handling: Wear appropriate respiratory and protective equipment specified in section 8. Only trained personnel should work with this product. Handle in a well-ventilated area. Avoid exposure to high temperature. Avoid breathing fumes. Avoid contact with skin and eyes. Wash thoroughly before eating or smoking.

Conditions for Safe Storage, Including Any Incompatibilities: Store under dry, inert gas such as argon, or can also be stored under deaerated water. Store in sealed unbreakable containers; the original labeled shipping container when possible. Store in an area that is cool, dry and temperature-controlled, away from direct sunlight, heat and ignition sources or where freezing is possible. Do not store together with acids, halogens or oxidizers. See section 10 for more information on incompatible materials.

8 EXPOSURE CONTROLS AND PERSONAL PROTECTION

Exposure Limits: Thallium (Soluble compounds, as TI)

OSHA/PEL: 0.1 mg/m³

ACGIH/TLV: 0.02 mg/m³(inhalable)

Appropriate Engineering Controls: Handle in an enclosed, controlled process under dry argon. Whenever possible the use of local exhaust ventilation, process enclosure or other engineering controls is the preferred method of controlling exposure to meet established occupational exposure limits. Use good housekeeping and sanitation practices. Do not use tobacco or food in work area. Wash thoroughly before eating or smoking. Clothing worn in areas of exposure to thallium dust or vapor should be restricted to the workplace and stored in special lockers.

Individual Protection Measures, Such as Personal Protective Equipment:

Respiratory Protection: When potential exposures are above the occupational limits, approved respirators must be used.

Eye Protection: Splash goggles or safety glasses.

Skin Protection: Wear impermeable gloves, protective work clothing as necessary.

9 PHYSICAL AND CHEMICAL PROPERTIES

Appearance:

Form: Rod

Color: Gray metallic

Odor: Odorless

Odor Threshold: Not determined

pH: N/A

Melting Point: 303.5 °C

Boiling Point: 1457±10 °C

Flash Point: N/A

Evaporation Rate: N/A

Flammability: No data

Upper Flammable Limit: No data

Lower Flammable Limit: No data

Vapor Pressure: 1 mm Hg @ 825 °C

Vapor Density: N/A

Relative Density (Specific Gravity): 11.85 g/cc

Solubility in H₂O: Insoluble

Partition Coefficient (n-octanol/water): Not determined

Autoignition Temperature: No data

Decomposition Temperature: No data

Viscosity: N/A

10 STABILITY AND REACTIVITY

Reactivity: No data

Chemical Stability: Stable under recommended storage conditions.

Possibility of Hazardous Reactions: High temperatures will generate toxic thallium oxide fumes.

Conditions to Avoid: Avoid high temperatures, reacts slowly with moist air.

Incompatible Materials: Oxidizing agents, strong acids, halogens, air and moisture.

Hazardous Decomposition Products: Thallium oxide fume.

11 TOXICOLOGICAL INFORMATION

Likely Routes of Exposure: Inhalation, skin and eyes.

Symptoms of Exposure: Abdominal pain and vomiting, extreme pain in the extremities, lethargy, hair loss.

Acute and Chronic Effects: Almost all of the available information refers to ingestion of thallium compounds, largely due to accidental ingestion, intentional poisoning and suicide attempts. Adverse reactions are dose dependent and occur in 3 stages. Massive doses may cause gastrointestinal distress (nausea, vomiting and abdominal pain) within 30 minutes but symptoms are usually delayed for 8 hours or longer. Gastrointestinal symptoms from smaller doses may

be delayed 24-48 hours. This is followed by neurological effects 2-5 days or even longer after ingestion, although it may occur as early as 12 hours after massive exposure. Other effects include hair loss, severe pain in the extremities, lethargy, ataxia, back pain, abnormal reflexes, neuropathy, muscle weakness, mental abnormalities, tremors, abnormal vision, headache, coma, convulsion, and death. There was no information available for exposure to thallium metal specifically rather than thallium compounds, and little conclusive information regarding exposure via inhalation.

Acute Toxicity: No data

Carcinogenicity: **NTP:** Not identified as carcinogenic **IARC:** Not identified as carcinogenic

To the best of our knowledge the chemical, physical and toxicological characteristics of the substance are not fully known.

12 ECOLOGICAL INFORMATION

Ecotoxicity: LC50 - Cyprinodon variegatus (sheepshead minnow) - 21.0 mg/l - 96.0 h

Persistence and Degradability: No data

Bioaccumulative Potential: No data

Mobility in Soil: No data

Other Adverse Effects: Do not allow material to be released to the environment. No further relevant information available.

13 DISPOSAL CONSIDERATIONS

Waste Disposal Method:

Product: Dispose of in accordance with Federal, State and Local regulations.

Packaging: Dispose of in accordance with Federal, State and Local regulations.

14 TRANSPORT INFORMATION

UN Number: UN3288

UN Proper Shipping Name: Toxic solid, inorganic, n.o.s. (Thallium)

Transport Hazard Class: 6.1

Packing Group: II

Marine Pollutant: Yes

15 REGULATORY INFORMATION

TSCA Listed: All components are listed.

Regulation (EC) No 1272/2008 (CLP): Acute toxicity - oral, category 2, Hazardous to the aquatic environment - acute hazard, category 3, Hazardous to the aquatic environment - chronic hazard, category 3.

Canada WHMIS Classification (CPR, SOR/88-66): Acute toxicity.

HMIS Ratings: Health: 3 Flammability: 0 Physical: 0

NFPA Ratings: Health: 3 Flammability: 0 Instability: 0

Chemical Safety Assessment: A chemical safety assessment has not been carried out.

16 OTHER INFORMATION

The information contained in this document is based on the state of our knowledge at the time of publication and is believed to be correct, but does not purport to be all inclusive and shall be used only as a guide. ESPI Metals makes no representation, warranty, or guarantee of any kind with respect to the information contained in this document or any use of the product based on this information. ESPI Metals shall not be held liable for any damages resulting from handling or from contact with the above product. Users should satisfy themselves that they have all current data relevant to their particular use.

Prepared by: ESPI Metals


Revised/Reviewed: July 2015

Safety Data Sheets (SDS)

SECTION 1-IDENTIFICATION

Product name: Toluene
Other names:-
Proper shipping name: Toluene
Recommended use of the chemical and restrictions on use: The major use of toluene is as a mixture added to gasoline to improve octane ratings. Used as a solvent for paint, resins, lacquers inks & adhesives. Component of solvent blends and thinners. Used in the manufacture of chemicals, dyes, explosives, benzoic acid. Some grades of toluene may contain traces of xylene and benzene. The use of a quantity of material in an unventilated or confined space may result in increased exposure and an irritating atmosphere developing. Before starting consider control of exposure by mechanical ventilation. WARNING: Intentional misuse by concentrating/inhaling contents may be lethal.
Manufacturer/Supplier Name: Taiwan SM Corp., Kaohsiung plant Address: NO.7, Industrial 1st Rd, Lin-Yuan Kaohsiung County 83203, Taiwan, R.O.C. Phone No.: 886-7-6414511
Emergency phone No./Fax No.: 886-7-6414511 Ext. 221 (on duty), 886-7-6414517 (off duty)/886-7-6423828

SECTION 2-HAZARDS IDENTIFICATION

GHS Classification:	Flammable Liquid Category 2 Acute Toxicity (Oral) Category 4 Skin Corrosion/ Irritation Category 2 Serious Eye Damage/ Eye Irritation Category 2 Specific Target Organ Toxicity Repeated Exposure Category 2 Hazardous To The Aquatic Environment (Acute) Category 3 Aspiration Hazard Category 1
GHS Label elements:	
Hazard symbols	
Signal word	Danger
Hazard statements	Highly flammable liquid and vapor Harmful if inhaled Causes skin irritation Causes serious eye irritation May cause damage to organs through prolonged or repeated exposure. May cause long lasting harmful effects to aquatic life. May be fatal if swallowed and enters airways.
Precautionary statements	Use only in well ventilated area. Control of exposure by mechanical ventilation in an unventilated or confined space. Avoid breathing vapors and contact with skin and eyes. Wear breathing apparatus/protective gloves/face protection. Store in well-ventilated place. Disposal must be in accordance with applicable federal, state, or local regulations.
Other hazards: —	

SECTION 3-COMPOSITION/INFORMATION ON INGREDIENTS

CAS No.	Chemical Name	wt% by weight	EINECS No.
00108-88-3	Toluene	97.0 min.	203-625-9
Synonyms	Methylbenzol; Methylbenzene; Toluol; Phenylmethane		

SECTION 4-FIRST AID MEASURES

Description of necessary first aid measures

Eye:

1. Flush immediately with warm water for at least 20 minutes.
2. Ensure complete irrigation of the eye by keeping eyelids apart and away from eye and moving the eyelids by occasionally lifting the upper and lower lids.
3. If pain persists or recurs seek medical attention.
4. Removal of contact lenses after an eye injury should only be undertaken by skilled personnel.

Skin:

1. Removing contaminated clothing, shoes, and leathery wearings, cleaning procedure is available before reused or waste treatment.
2. Washing affected area thoroughly with soap and water for at least 20 minutes.
3. Call a Physician if irritation develops or persists.

Ingestion:

1. If spontaneous vomiting appears imminent or occurs, hold patient's head down, lower than their hips to help avoid possible aspiration of vomits.
2. If victim is conscious and alert, give 2~4 cupfuls of milk/water to dilute the substance in stomach.
3. Never give anything by mouth to an unconscious person.
4. Don't induce vomiting unless directed to do so by medical person.
5. If vomiting occurs, lean patient forward or place on left side (head-down position, if possible) to maintain open airway and prevent aspiration.
6. Then seek for medical attention.

Inhalation:

1. Remove from further exposure and flush thoroughly with air.
2. Lay patient down. Keep warm and rested.
3. Prostheses such as false teeth, which may block airway, should be removed, where possible, prior to initiating first aid procedures.
4. If respiratory irritation, seek immediate medical assistance and call a physician.

Most important symptoms/effects, acute and delayed

Headache, fatigue, drowsiness, insomnia, anorexia and pain in limbs, nervousness, impairment of memory.

Indication of immediate medical attention and special treatment needed, if necessary

For acute or short term repeated exposures to toluene:

Inhalation:

1. Inhalation overexposure can produce toxic effects. Monitor for respiratory distress.
2. If cough or difficulty in breathing develops, evaluate for upper respiratory tract inflammation, bronchitis, and pneumonitis. Administer supplemental oxygen with assisted ventilation, as required.
3. This material (or a component) sensitizes the heart to the effects of sympathomimetic amines. Epinephrine and other sympathomimetic drugs may initiate cardiac arrhythmias in individuals exposed to this material.
4. Administration of sympathomimetic drugs should be avoided.

Ingestion:

1. If ingested, this material presents a significant aspiration and chemical pneumonitis hazard.
2. Induction of emesis is not recommended.
3. Consider activated charcoal and/or gastric lavage.
4. If patient is obtunded, protect the airway by cuffed endotracheal intubation or by placement of the body in a Trendelenburg and left lateral decubitus position.

SECTION 5-FIRE FIGHTING MEASURES

Extinguishing media

Foam 、CO₂ 、Dry chemical 、Water fog.

Specific hazards arising from the chemical

1. Liquid and vapor are highly flammable.
2. Severe fire hazard when exposed to heat, flame and/or oxidizers.
3. Vapor may travel a considerable distance to source of ignition.
4. Heating may cause expansion or decomposition leading to violent rupture of containers.
5. On combustion, may emit toxic fumes of carbon monoxide (CO).

Special protective equipment and precautions for fire-fighters

1. Firefighters must use full bunker gear including NIOSH-approved positive pressure self-contained breathing apparatus to protect against potential hazardous combustion or decomposition products and oxygen deficiencies.
2. Evacuate area and fight the fire from a maximum distance or use unmanned hose holders or monitor nozzles.
3. Cover pooling liquid with foam.
4. Containers can build pressure if exposed to radiant heat; cool adjacent containers with flooding quantities of water until well after the fire is out.
5. Withdraw immediately from the area if there is a rising sound from a venting safety device or discoloration of vessels, tanks, or pipelines.
6. Be aware that burning liquid will float on water.
7. Notify appropriate authorities of potential fire and explosion hazard if liquid enter sewers or waterways

SECTION 6-ACCIDENTAL RELEASE MEASURES**Personal precautions, protective equipment and emergency procedure**

1. Personal protective equipment (specified in Section 8)
Eyes : Chemical safety goggles are recommended, and a face shield is added when needed.
Skin : Wear appropriate protective gloves to avoid skin contact.
Clothing: When direct contact is likely, use rubberized clothings, apron and boots.
Respiratory : When limits are exceeded, wear a respirator approved by NIOSH/MSHA for protection against organic dust, mists and vapors.
2. Remove all sources of ignition. No smoking, naked lights or ignition sources. Ventilate area of leak or spill.
3. Keep unnecessary and unprotected personnel from entering. Evacuate personnel from the danger area. Consult with an expert about the emergency procedures.

Environmental precautions

1. Prevent spillage from entering drains, surface, and groundwater.
2. Contain and recover liquid when possible. Use non-sparking tools and equipment.
3. Collect liquid in an appropriate container or absorb with an inert material (e.g. vermiculite, dry sand, earth), and place in a chemical waste container.
4. Report the accidental spill/release to Local/State government.

Methods and materials for containment and cleaning up**Minor spill:**

1. Remove all ignition sources.
2. Clean up all spills immediately.
3. Avoid breathing vapors and contact with skin and eyes.
4. Control personal contact by using protective equipment.
5. Contain and absorb small quantities with vermiculite or other absorbent material.
6. Wipe up.
7. Collect residues in a flammable waste container.

Major spill

1. Clear area of personnel and move upwind.
2. Alert emergency responders and tell them location and nature of hazard.
3. May be violently or explosively reactive.
4. Wear breathing apparatus plus protective gloves.
5. Prevent spillage from entering drains or water course.
6. No smoking, naked lights or ignition sources. Increase ventilation.
7. Stop leak if safe to do so.
8. Water spray or fog may be used to disperse/absorb vapor.
9. Contain spill with sand, earth or vermiculite.
10. Use only spark-free shovels and explosion proof equipment.
11. Collect recoverable product into labeled containers for recycling..
12. Absorb remaining product with sand, earth or vermiculite.
13. Collect solid residues and seal in labeled drums for disposal.
14. Wash area and prevent runoff into drains.
15. If contamination of drains or waterways occurs, advise emergency services.

SECTION 7-HANDLING AND STORAGE**Precautions for safe handling**

1. Wash thoroughly after handling.
2. Use only in well ventilated area.
3. Ground and bond containers when transferring.
4. Use spark-free tools and explosion proof equipment.
5. Empty containers retain product residue (liquid/vapor), and can be dangerous.
6. Do not pressurize, cut, weld, braze, solder, drill, or expose empty containers to heat, sparks or open flames.

Conditions for safe storage, including any incompatibilities

1. Store in original containers in approved flame-proof area.
2. No smoking, naked lights, heat or ignition sources.
3. DO NOT store in pits, depressions, basements or areas where vapors may be trapped.
4. Keep containers securely sealed.
5. Store away from incompatible materials in a cool, dry well ventilated area.
6. Protect containers against physical damage and check regularly for leaks.
7. Keep containers tightly closed and store in a cool, dry, well-ventilated place, plainly labeled, and out of closed vehicles.
8. Ground all equipment containing this material.
9. Observe manufacturer's storing and handling recommendations.
10. Containers should be able to withstand pressures expected from warming and cooling in storage. This flammable liquid should be stored in a separate safety cabinet or room. A refrigerated room is preferable for materials with a flash point temperature lower than 70°F (21°C).

SECTION 8-EXPOSURE CONTROLS, PERSONAL PROTECTION

OSHA - Final PELs : 200 ppm TWA.

OSHA Ceiling : 300ppm.

ACGIH : 50 ppm, skin -potential forcutaneous absorption.

NIOSH : 100 ppm TWA; 375 mg/m³ TWA; 500 ppm IDLH.

Taiwan TWA : 100 ppm (skin).

Taiwan STEL : 125 ppm (skin).

Taiwan Ceiling : -----.

Taiwan BEI : 1 mg/l (before on duty).

Engineering control

1. Process should be located at least 17 meter (50 feet) away from open flames and all high temperature operations likely to cause ignition of the styrene monomer vapor.
2. In venting styrene monomer vapors, consideration should be given to possible halogenation of the vapors by low concentrations of free chlorine and bromine with the resultant formation of lacrimations.
3. Process should be designed so that the operator is not exposed to direct contact with Toluene or the vapor. The technical problems of designing equipment, providing adequate ventilation and operating procedures which promise maximum security and economy, can best be handled by competent engineers.
4. It is essential for safety that equipment be used and maintained as recommended by the manufacturer.
5. Tanks used to store or process Toluene should be closed vessels vented to a safe point of discharge in the outside atmosphere away from operating stations, roadways, and at least 17 meter (50 feet) from possible sources of ignitions. All sparks, flames, heated surface, or other sources of ignition should be kept away from all vents. It is advisable, to provide suction on vessels when inspection or observation openings are made, to minimize or eliminate escape of vapors.

Personal protective equipment**Eye Protection:**

Safety glasses equipped with side shields are recommended as minimum protection in industrial settings. Chemical goggles should be worn during transfer operations or when there is a likelihood of misting, splashing, or spraying of this material. A suitable emergency eye wash water and safety shower should be located near the work station.

Skin protection:

Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Clothing:

Avoid skin contact. Wear long-sleeved fire-retardant garments (e.g., Nomex®) while working with flammable and combustible liquids. Additional chemical-resistant protective gear may be required if splashing or spraying conditions exist. This may include an apron, boots and additional facial protection. If product comes in contact with clothing, immediately remove soaked clothing and shower. Promptly remove and discard contaminated leather goods.

Respirators:

For known vapor concentrations above the occupational exposure guidelines (see below), use a NIOSH-approved organic vapor respirator if adequate protection is provided. Protection factors vary depending upon the type of respirator used. Respirators should be used in accordance with OSHA requirements (29 CFR 1910.134). For airborne vapor concentrations that exceed the recommended protection factors for organic vapor respirators, use a full-face, positive-pressure, supplied air respirator. Due to fire and explosion hazards, do not enter atmospheres containing concentrations greater than 10% of the lower flammable limit of this product.

SECTION 9-PHYSICAL AND CHEMICAL PROPERTIES

Appearance : Transparent liquid	Upper/lower explosive limits : 1.2% ~ 7.1%
Odour : pleasant aromatic petroleum odour	Vapor Pressure : 22 mmHg @20°C /68°F
Odour threshold : 0.16~37 ppm (detect) 1.9~69 ppm (recognition)	Vapor Density : 3.1 (air=1)
PH : Not available	Relative density : 0.86 (water=1)
Melting/Freezing Point : -95 °C	Solubility in water : 54~58 mg/100 ml
Initial boiling point/boiling range : 110.6 °C	Partition coefficient : 2.73 (n-octanol/water)
Flash point : 4.4 °C (closed cup)	Auto-ignition temperature : 480°C
Evaporation Rate : 2.24 (BuAc=1)	Decomposition temperature : Not available
Flammability (solid/gas) : Not available	Viscosity : 0.6 mPa.s max @20°C
Molecular Formula : C ₆ H ₅ CH ₃	Molecular Weight : 92.056

SECTION 10-STABILITY AND REACTIVITY

Reactivity Vapor is explosive when exposed to heat or flame
Chemical stability Stable at room temperature in closed containers under normal storage and handling conditions.
Possibility of hazardous reaction Has not been reported.
Condition to avoid Product is highly flammable – Keep away from sources of ignition. Avoid the higher temperatures. Keep away from open fire, heating elements and heat radiating surface and prevent from forming of the vapours mixtures with air in explosion limits.
Incompatible materials Heat, flame, strong oxidizers, nitric and sulfuric acids, chlorine, nitrogen tetraoxide; will attack some forms of plastics, rubber, coatings.
Hazardous decomposition products Carbon monoxide, carbon dioxide, hydrocarbons.

SECTION 11-TOXICOLOGICAL INFORMATION

Routes of exposure Eye, Skin, inhalation, Ingestion.
Symptoms (treatments as indicated in Section 4) Eye: The liquid produces a high level of eye discomfort and is capable of causing pain and severe conjunctivitis. Corneal injury may develop, with possible permanent impairment of vision, if not promptly and adequately treated. There is evidence that material may produce eye irritation in some persons and produce eye damage 24 hours or more after instillation. Severe inflammation may be expected with pain. There may be damage to the cornea. Unless treatment is prompt and adequate there may be permanent loss of vision. Conjunctivitis can occur following repeated exposure. Skin: Contact with the material may damage the health of the individual; systemic effects may result following absorption. The material may cause moderate inflammation of the skin either following direct contact or after a delay of some time. Repeated exposure can cause contact dermatitis which is characterized by redness, swelling and blistering. Entry into the blood-stream, through, for example, cuts, abrasions or lesions, may produce systemic injury with harmful effects. Examine the skin prior to the use of the material and ensure that any external damage is suitably protected. Ingestion: Accidental ingestion of the material may be harmful; animal experiments indicate that ingestion of less than 150 gram may be fatal or may produce serious damage to the health of the individual. Swallowing of the liquid may cause aspiration into the lungs with the risk of chemical pneumonitis; serious consequences may result. (ICSC13733). Considered an unlikely route of entry in commercial/industrial environments. The liquid may produce gastrointestinal discomfort and may be harmful if swallowed. Ingestion may result in nausea, pain and vomiting. Vomit entering the lungs by aspiration may cause potentially lethal chemical pneumonitis. Inhalation: Inhalation of vapours or aerosols (mists, fumes), generated by the material during the course of normal handling, may be damaging to the health of the individual. There is some evidence to suggest that the material can cause respiratory irritation in some persons. The body's response to such irritation can cause further lung damage. Inhalation of vapours may cause drowsiness and dizziness. This may be accompanied by sleepiness, reduced alertness, loss of reflexes, lack of co-ordination, and vertigo. Inhalation of high concentrations of gas/vapour causes lung irritation with coughing and nausea, central nervous depression with headache and dizziness, slowing of reflexes, fatigue and inco-ordination. If exposure to highly concentrated solvent atmosphere is prolonged this may lead to narcosis, unconsciousness, even coma and possible death. The use of a quantity of material in an unventilated or confined space may result in increased exposure and an irritating atmosphere developing. Before starting consider control of exposure by mechanical ventilation.

Chronic exposure: There has been some concern that this material can cause cancer or mutations but there is not enough data to make an assessment. Substance accumulation, in the human body, may occur and may cause some concern following repeated or long-term occupational exposure.
Toxicity LD50: <870 mg/kg (rat, oral) LC50: 6000 ppm/6h (rat, inhalation)
Chronic effect Carcinogenicity: ACGIH : A4-Not classifiable as a Human Carcinogen. OSHA : Possible select carcinogen. IARC : Group 3 carcinogen. Epidemiology: Not available. Teratogenicity: Teratogenic effects have occurred in experimental animals. Reproductive Effects: Adverse reproductive effects have occurred in experimental animals. Neurotoxicity: Not available. Mutagenicity: Not available.





SECTION 12-ECOLOGICAL INFORMATION

Ecotoxicity LC ₅₀ (96 hr.) Fish: 7.3~22.8 mg/l EC ₅₀ (48 hr.) Water flea: — Biocentration factor (BCF): 1.67~380
Persistence and degradability <ol style="list-style-type: none"> The material are expected to form a slick on the surface of waters after release in calm sea conditions. This is expected to evaporate and enter the atmosphere where it will be degraded through reaction with hydroxyl radicals. Some of the material will become associated with benthic sediments, and it is likely to be spread over a fairly wide area of sea floor. Marine sediments may be either aerobic or anaerobic. The material, in probability, is biodegradable, under aerobic conditions. Evidence also suggests that the hydrocarbons may be degradable under anaerobic conditions although such degradation in benthic sediments may be a relatively slow process. Under aerobic conditions the material will degrade to water and carbon dioxide, while under anaerobic processes it will produce water, methane, carbon dioxide and carbon dioxide. Based on test results, as well as theoretical considerations, the potential for bioaccumulation may be high. Toxic effects are often observed in species such as blue mussel, daphnia, freshwater green algae, marine copepods and amphipods. Half-life (Air): 10~104 hr Half-life (Surface water): 96~528 hr Half-life (Ground water): 168~672 hr Half-life (Soil): 96~528 hr
Bioaccumulative potential This material is not expected to significantly bioaccumulate.
Mobility in soil: —
Other adverse effects: —

SECTION 13-DISPOSAL CONSIDERATIONS

Residues and spilled material are hazardous waste due to ignitability. Disposal must be in accordance with applicable federal, state, or local regulations. The container for this product can present explosion or fire hazards, even when emptied. To avoid risk of injury, do not cut, puncture, or weld on or near this container. Since the emptied containers retain product residue, follow label warnings even after container is emptied.

SECTION 14-TRANSPORTATION INFORMATION

US DOT	Shipping Name	Toluene	Hazard Labels	
	Hazard Class	3		
	UN Number	1294		
	Packing Group	II		
Sea(IMO/IMDG)	Shipping Name	Toluene	Hazard Labels	
	Hazard Class	3.2		
	UN Number	1294		
	Packing Group	II		
	IMDG Code Page	3285		
	MARPOL	Not a DOT "Marine Pollutant" per 49 CFR 171.8.		
Air(ICA0/IATA)	Shipping Name	Toluene	Hazard Labels	
	Hazard Class	3.2		
	Subsidiary Class	1294		
	Packing Group	II		
RID/ ADR	No information available.			
Canadian TDG	Shipping Name	Toluene	Hazard Labels	
	Hazard Class	3		
	UN Number	1294		
	Packing Group	II		
	Subsidiary Class	9.2		

SECTION 15-REGULATORY INFORMATION**US FEDERAL****TSCA**

CAS# 108-88-3 is listed on the TSCA inventory.

Health & Safety Reporting List

CAS# 108-88-3: Effective Date: 10/4/82; Sunset Date: 10/4/92

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

SARA**Section 302 (RQ)**

CAS# 108-88-3 : final RQ = 1000 pounds (454 kg)

Section 302 (TPQ)

None of the chemicals in this material have a TPQ.

SARA Codes

CAS# 108-88-3 : acute, flammable.

Section 313

This material contains Toluene (CAS# 108-88-3, 99% & 100%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 372.

Clean Air Act

CAS# 108-88-3 is listed as a hazardous air pollutant (HAP).

This material does not contain any Class 1 Ozone depleters.

This material does not contain any Class 2 Ozone depleters.

<p>Clean Water Act</p> <p>CAS# 108-88-3 is listed as a Hazardous Substance under the CWA.</p> <p>CAS# 108-88-3 is listed as a Priority Pollutant under the Clean Water Act.</p> <p>CAS# 108-88-3 is listed as a Toxic Pollutant under the Clean Water Act.</p>
<p>OSHA</p> <p>None of the chemicals in this product are considered highly hazardous by OSHA.</p>
<p>STATE</p> <p>Toluene can be found on the following state right to know lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.</p> <p>WARNING: This product contains Toluene, a chemical known to the state of California to cause birth defects or other reproductive harm.</p> <p>California No Significant Risk Level: None of the chemicals in this product are listed.</p>
<p>European/International Regulations</p>
<p>European Labeling in Accordance with EC Directives</p> <p>Hazard Symbols: XN F</p> <p>Risk Phrases : R 10 Flammable.</p> <p>R 20 Harmful by inhalation.</p> <p>Safety Phrases : S 9 Keep container in a well-ventilated place.</p> <p>S 16 Keep away from sources of ignition - No smoking.</p> <p>S 25 Avoid contact with eyes.</p> <p>S 29 Do not empty into drains.</p> <p>S 33 Take precautionary measures against static discharges.</p>
<p>WGK (Water Danger/Protection)</p> <p>CAS# 108-88-3: 2</p>
<p>United Kingdom Occupational Exposure Limits</p> <p>CAS# 108-88-3: OES-United Kingdom, TWA 50 ppm TWA; 191 mg/m³ TWA.</p> <p>CAS# 108-88-3: OES-United Kingdom, STEL 150 ppm STEL; 574 mg/m³ STEL.</p>
<p>CANADA</p> <p>CAS#100-42-5 is listed on Canada's DSL/NDSL list.</p> <p>This product has a WHMIS classification of B2, D2A (99%)/B3, D2A (100%).</p> <p>CAS# 105-05-5 is not listed on Canada's Ingredient Disclosure List.</p>
<p>Exposure Limits</p> <ul style="list-style-type: none"> ▪ CAS# 108-88-3: OEL-AUSTRALIA:TWA 100 ppm (375 mg/m³);STEL 150 ppm (560 mg/m³) ▪ OEL-BELGIUM:TWA 100 ppm (377 mg/m³);STEL 150 ppm (565 mg/m³) ▪ OEL-CZECHOSLOVAKIA:TWA 200 mg/m³;STEL 1000 mg/m³ ▪ OEL-DENMARK:TWA 50 ppm (190 mg/m³);Skin ▪ OEL-FINLAND:TWA 100 ppm (375 mg/m³);STEL 150 ppm; Skin ▪ OEL-FRANCE:TWA 100 ppm (375 mg/m³);STEL 150 ppm (560 mg/m³) ▪ OEL-GERMANY:TWA 100 ppm (380 mg/m³) ▪ OEL-HUNGARY:TWA 100 mg/m³;STEL 300 mg/m³;Skin ▪ OEL-JAPAN:TWA 100 ppm (380 mg/m³) ▪ OEL-THE NETHERLANDS:TWA 100 ppm (375 mg/m³);Skin ▪ OEL-THE PHILIPPINES:TWA 100 ppm (375 mg/m³) ▪ OEL-POLAND:TWA 100 mg/m³ ▪ OEL-RUSSIA:TWA 100 ppm; STEL 50 mg/m³ ▪ OEL-SWEDEN:TWA 50 ppm (200 mg/m³);STEL 100 ppm (400 mg/m³);Skin ▪ OEL-SWITZERLAND:TWA 100 ppm (380 mg/m³);STEL 500 ppm ▪ OEL-THAILAND:TWA 200 ppm; STEL 300 ppm ▪ OEL-TURKEY:TWA 200 ppm (750 mg/m³) ▪ OEL-UNITED KINGDOM:TWA 100 ppm (375 mg/m³);STEL 150 ppm; Skin OEL IN BULGARIA, COLOMBIA, JORDAN, KOREA check ACGIH TLV OEL IN NEW ZEALAND, SINGAPORE, VIETNAM check ACGI TLV

SECTION 16-OTHER INFORMATION

References and sources

1. CHEMINFO Data Bank, CCINFO CD, 2005-3
2. HAZARD TEXT Data Bank, TOMES PLUS CD, Vol.65, 2005
3. RETECS Data Bank, TOMES CPS CD, Vol.65, 2005
4. HSDB Data Bank, TOMES CPS CD, Vol.65, 2005
5. Hazardous Substance Data Bank, Environment Protection, Administration, Executive Yuan, ROC (Taiwan)
6. Chemwatch Data Bank, 2005-1
7. SDS, GHS in Taiwan, Council of Labor Affairs, Executive Yuan, ROC (Taiwan)

Version	Date	Remark
Version 1	06/01/1998	Original Version.
Version 2	04/20/2001	Updated 10 sections to 16 sections.
Version 3	08/01/2003	Updated "SECTION 9-PHYSICAL AND CHEMICAL PROPERTIES".
Version 4	01/01/2006	Updated "SECTION 14-TRANSPORTATION INFORMATION".
Version 5	08/05/2008	Updated each section by GHS SDS.
Prepared by	Safety & Environment Protection Section, Taiwan SM Corporation Kaohsiung Plant.	



MATERIAL SAFETY DATA SHEET

(POLYCHLORINATED BIPHENYLS)

COMPOSITION/INFORMATION ON INGREDIENTS

Ingredients Name: polychlorinated biphenyls (PCBs)

HAZARD IDENTIFICATION

Reports of Carcinogenicity: YES

HEALTH HAZARDS ACUTE AND CHRONIC

- **Eyes**: Moderately irritating to eye tissues.
- **Skin**: Can be absorbed through intact skin, may cause de-fatting, potential for chloracne.
- **Inhalation**: Possible liver injury.
- **Ingestion**: Slightly toxic; reasonably anticipated to be carcinogenic.

EFFECTS OF OVER-EXPOSURE

Can cause dermatological symptoms; however, these are reversible upon removal of exposure source.

FIRST AID MEASURES

- **Eyes**: Irrigate immediately with copious quantities of running water for at least 15 minutes if liquid or solid PCBs get into them.
- **Skin**: Contaminated clothing should be removed and the skin washed thoroughly with soap and water. Hot PCBs may cause thermal burns.
- **Inhalation**: Remove to fresh air; if skin rash or respiratory irritation persists, consult a physician (if electrical equipment arcs over, PCBs may decompose to produce hydrochloric acid).
- **Ingestion**: Consult a physician. Do not induce vomiting or give any oily laxatives. (If large amounts are ingested, gastric lavage is suggested).

FIRE FIGHTING MEASURES: Flash Point: >141 °C (285.8 °F)

EXTINGUISHING MEDIA: PCBs are fire-resistant compounds.


FIRE-FIGHTING PROCEDURES

Standard fire-fighting wearing apparel and self-contained breathing apparatus should be worn when fighting fires that involve possible exposure to chemical combustion products. Fire fighting equipment should be thoroughly cleaned and decontaminated after use.


UNUSUAL FIRE/EXPLOSION HAZARD

If a PCB transformer is involved in a fire-related incident, the owner of the transformer is required to report the incident. Consult and follow appropriate federal, provincial and local regulations.

Note: When askarel liquid becomes involved in a fire, toxic by-products of combustion are typically produced including polychlorinated dibenzofurans and polychlorinated dibenzodioxins, both known carcinogens. The structures of these chemical species are as follows:

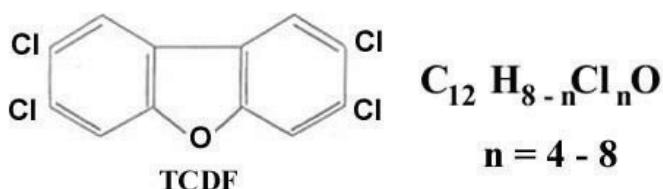

2,3,7,8-tetrachlorodibenzofuran

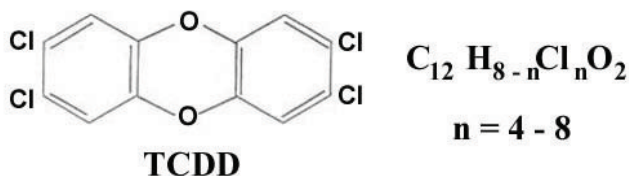

2,3,7,8-tetrachloro-dibenzo-p-dioxin

Note: 2,3,7,8-tetrachloro-dibenzo-p-dioxin is one of the most potent teratogenic, mutagenic and carcinogenic agents known to man.

SPILL RELEASE PROCEDURES

Cleanup & disposal of liquid PCBs are strictly regulated by the federal government. Ventilate area. Contain spill/leak. Remove spill by means of absorptive material. Spill clean-up personnel should use proper protective clothing. All wastes and residues containing PCBs should be collected, containerized, marked and disposed of in the manner prescribed by applicable federal, provincial and local laws.

HANDLING AND STORAGE PRECAUTIONS

Care should be taken to prevent entry into the environment through spills, leakage, use, vaporization, or disposal of liquid. Avoid prolonged breathing of vapours or mists. Avoid contact with eyes or prolonged contact with skin. Comply with all federal, provincial and local regulations.

OTHER PRECAUTIONS

Federal regulations require PCBs, PCB items, storage areas, transformer vaults, and transport vehicles to be appropriately labelled.

RESPIRATORY PROTECTION

Use OSHA approved equipment when airborne exposure limits are exceeded. Full facepiece equipment is recommended and, if used, replaces need for face shield and/or chemical splash goggles. The respirator use limitations specified by the manufacturer must be observed.

VENTILATION

Provide natural or mechanical ventilation to control exposure levels below airborne exposure levels.

PROTECTIVE GLOVES: Wear appropriate chemical resistant gloves to prevent skin contact.

EYE PROTECTION: Wear chemical splash goggles and have eye baths available.

OTHER PROTECTIVE EQUIPMENT

Wear appropriate protective clothing. Provide a safety shower at any location where skin contact can occur.

WORK HYGIENIC PRACTICES

Wash thoroughly after handling. Supplemental safety and health : none

PHYSICAL/CHEMICAL PROPERTIES

- **Vapour pressure:** (mm Hg @100 °F) 0.005 - 0.00006
- **Viscosity:** (CENTISTOKES) 3.6 - 540
- **Stability indicator/materials to avoid:** Yes
- **Stability Condition to Avoid:** PCBs are very stable, fire-resistant compounds.

HAZARDOUS DECOMPOSITION PRODUCTS

Carbon monoxide, carbon dioxide, hydrogen chloride, phenolics, aldehydes, furans, dioxins

WASTE DISPOSAL METHODS

Consult the applicable PCB regulations prior to any disposal of PCBs or PCB-contaminated items.

Issuing Date 03-Nov-2015

Revision Date 21-Jul-2015

Revision Number 1

1. IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND OF THE COMPANY/UNDERTAKING**Product identifier**

Product Number 601
Product Name Total Petroleum Hydrocarbons (TPH) in Water #2
Synonyms None

Recommended use of the chemical and restrictions on use

Recommended Use Laboratory use only
Uses advised against No information available

Details of the supplier of the safety data sheet


Supplier ERA a Waters Company
Supplier Address 16341 Table Mountain Parkway, Golden, CO 80403 USA
Non-Emergency Telephone Number +1-303-431-8454
Supplier Email sdsinfo@waters.com
Emergency telephone number
Company Emergency Phone Number In case of EMERGENCY call CHEMTREC Day or Night
Within USA and Canada: 800-424-9300
International Call Collect: +1-703-527-3887

2. HAZARDS IDENTIFICATION**Classification**

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200).

Skin corrosion/irritation	Category 1
Serious eye damage/eye irritation	Category 1

GHS Label elements, including precautionary statements**Emergency Overview**

Signal word Danger	
Hazard Statements Causes severe skin burns and eye damage	
	
Appearance Clear, colorless	Physical state Liquid->Liquid
	Odor Odorless

Precautionary Statements - Prevention

Do not breathe dust/fume/gas/mist/vapors/spray
Wash face, hands and any exposed skin thoroughly after handling
Wear protective gloves/protective clothing/eye protection/face protection

Precautionary Statements - Response

Immediately call a POISON CENTER or doctor/physician
Specific treatment (see supplemental first aid instructions on this label)

Eyes

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/physician.

Skin

IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. Wash contaminated clothing before reuse.

Inhalation

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Immediately call a POISON CENTER or doctor/physician.

Ingestion

IF SWALLOWED: Rinse mouth. DO NOT induce vomiting.

Precautionary Statements - Storage

Store locked up.

Precautionary Statements - Disposal

Dispose of contents/container to an approved waste disposal plant.

Hazards not otherwise classified (HNOC)

Not applicable.

Unknown Toxicity

0 % of the mixture consists of ingredient(s) of unknown toxicity.

Other information

No information available.

Interactions with Other Chemicals

No information available.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Note: only the components contributing to the product's GHS hazard classification are listed in this section.

Chemical Name	CAS-No	Percent
Hydrochloric Acid	7647-01-0	0.09

4. FIRST AID MEASURES

First aid measures**General Advice**

Immediate medical attention is required. Show this safety data sheet to the doctor in attendance.

Eye contact

Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Keep eye wide open while rinsing. Do not rub affected area. Remove contact lenses, if present and easy to do. Continue rinsing. Seek immediate medical attention/advice.

Skin contact

Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes. Seek immediate medical attention/advice.

Inhalation

Remove to fresh air. If breathing has stopped, give artificial respiration. Get medical attention immediately. Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. If breathing is difficult, (trained personnel should) give oxygen. Delayed pulmonary edema may occur. Get medical attention immediately if symptoms occur.

Ingestion

Do NOT induce vomiting. Rinse mouth immediately and drink plenty of water. Never give anything by mouth to an unconscious person. Call a physician or poison control center immediately.

Self-protection of the first aider

Ensure that medical personnel are aware of the material(s) involved, take precautions to protect themselves and prevent spread of contamination. Avoid contact with skin, eyes or clothing. Avoid direct contact with skin. Use barrier to give mouth-to-mouth resuscitation. Use personal protective equipment as required. Wear personal protective clothing (see section 8).

Most important symptoms and effects, both acute and delayed

Most Important Symptoms and Effects Burning sensation.

Indication of any immediate medical attention and special treatment needed

Notes to Physician Product is a corrosive material. Use of gastric lavage or emesis is contraindicated. Possible perforation of stomach or esophagus should be investigated. Do not give chemical antidotes. Asphyxia from glottal edema may occur. Marked decrease in blood pressure may occur with moist rales, frothy sputum, and high pulse pressure.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.

Unsuitable Extinguishing Media

CAUTION: Use of water spray when fighting fire may be inefficient.

Specific hazards arising from the chemical

The product causes burns of eyes, skin and mucous membranes. Thermal decomposition can lead to release of irritating gases and vapors.

Uniform Fire Code Corrosive: Other--Liquid

Hazardous Combustion Products

Carbon oxides.

Explosion Data

Sensitivity to Mechanical Impact No.

Sensitivity to Static Discharge No.

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Personal precautions Attention! Corrosive material. Avoid contact with skin, eyes or clothing. Ensure adequate ventilation. Use personal protective equipment as required. Evacuate personnel to safe areas. Keep people away from and upwind of spill/leak.

Other Information Refer to protective measures listed in Sections 7 and 8.

Environmental precautions

Environmental precautions Refer to protective measures listed in Sections 7 and 8. Prevent further leakage or spillage if safe to do so. Should not be released into the environment. Do not allow to enter into soil/subsoil. Prevent product from entering drains.

Methods and material for containment and cleaning up

Methods for containment Prevent further leakage or spillage if safe to do so.

Methods for cleaning up Pick up and transfer to properly labeled containers. Soak up with inert absorbent material.

7. HANDLING AND STORAGE

Precautions for safe handling

Handling Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes or clothing. In case of insufficient ventilation, wear suitable respiratory equipment. Use only with adequate ventilation and in closed systems. Do not eat, drink or smoke when using this product. Take off contaminated clothing and wash before reuse.

Conditions for safe storage, including any incompatibilities

Storage Keep containers tightly closed in a dry, cool and well-ventilated place. Protect from moisture. Store locked up. Keep out of the reach of children. Store away from other materials.

Incompatible Products Acids. Bases. Oxidizing agent.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

Exposure Guidelines

This product, as supplied, does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies

Chemical Name	ACGIH TLV	OSHA PEL	NIOSH IDLH
Hydrochloric Acid 7647-01-0	Ceiling: 2 ppm	(vacated) Ceiling: 5 ppm (vacated) Ceiling: 7 mg/m ³ Ceiling: 5 ppm Ceiling: 7 mg/m ³	IDLH: 50 ppm Ceiling: 5 ppm Ceiling: 7 mg/m ³

Other Exposure Guidelines

Vacated limits revoked by the Court of Appeals decision in AFL-CIO v. OSHA, 965 F.2d 962 (11th Cir., 1992)

Appropriate engineering controls

Engineering Measures

Showers
Eyewash stations
Ventilation systems

Individual protection measures, such as personal protective equipment

Eye/face protection

Face protection shield.

Skin and body protection

Wear protective gloves and protective clothing. Long sleeved clothing. Chemical resistant apron. Impervious gloves.

Respiratory protection

No protective equipment is needed under normal use conditions. If exposure limits are exceeded or irritation is experienced, ventilation and evacuation may be required.

Hygiene Measures

Handle in accordance with good industrial hygiene and safety practice. Avoid contact with skin, eyes or clothing. Wear suitable gloves and eye/face protection. Do not eat, drink or smoke when using this product. Take off contaminated clothing and wash before reuse. Contaminated work clothing should not be allowed out of the workplace. Regular cleaning of equipment, work area and clothing is recommended. Wash hands before breaks and immediately after handling the product. For environmental protection, remove and wash all contaminated protective equipment before re-use.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical and Chemical Properties

Physical state

Liquid->Liquid

Appearance

Clear, colorless

Color

No information available

Odor

Odorless

Odor Threshold

No information available

Property

Values

Remarks Method

pH

<=2

None known

Melting / freezing point

no data available

None known

Boiling point / boiling range

no data available

None known

Flash Point

no data available

None known

Evaporation Rate

no data available

None known

Flammability (solid, gas)

no data available

None known

Flammability Limit in Air

None known

Upper flammability limit

no data available

Lower flammability limit

no data available

Vapor pressure

no data available

None known

Vapor density

no data available

None known

Specific Gravity

1

None known

Water Solubility

Soluble in water

None known

Solubility in other solvents

no data available

None known

Partition coefficient: n-octanol/water

no data available

None known

Autoignition temperature

no data available

None known

Decomposition temperature

no data available

None known

Kinematic viscosity

no data available

None known

Dynamic viscosity

no data available

None known

Explosive properties no data available
Oxidizing properties no data available

Other Information

Softening Point no data available
Particle Size no data available
Particle Size Distribution

10. STABILITY AND REACTIVITY

Reactivity

no data available.

Chemical stability

Stable under recommended storage conditions.

Possibility of Hazardous Reactions

None under normal processing.

Hazardous Polymerization

Hazardous polymerization does not occur.

Conditions to avoid

Exposure to air or moisture over prolonged periods.

Incompatible materials

Acids. Bases. Oxidizing agent.

Hazardous Decomposition Products

Carbon oxides.

11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Product Information

Inhalation

Specific test data for the substance or mixture is not available. Corrosive by inhalation. (based on components). Inhalation of corrosive fumes/gases may cause coughing, choking, headache, dizziness, and weakness for several hours. Pulmonary edema may occur with tightness in the chest, shortness of breath, bluish skin, decreased blood pressure, and increased heart rate. Inhaled corrosive substances can lead to a toxic edema of the lungs. Pulmonary edema can be fatal. May cause irritation of respiratory tract.

Eye contact

Specific test data for the substance or mixture is not available. Causes burns. (based on components). Corrosive to the eyes and may cause severe damage including blindness. Causes serious eye damage. May cause irreversible damage to eyes.

Skin contact

Specific test data for the substance or mixture is not available. May cause irritation. Prolonged contact may cause redness and irritation.

Ingestion

Specific test data for the substance or mixture is not available. Causes burns. (based on components). Ingestion causes burns of the upper digestive and respiratory tracts. May cause severe burning pain in the mouth and stomach with vomiting and diarrhea of dark blood. Blood pressure may decrease. Brownish or yellowish stains may be seen around the mouth. Swelling of the throat may cause shortness of breath and choking. May cause lung damage if swallowed. May be fatal if swallowed and enters airways. Ingestion may cause irritation to mucous membranes. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea.

Component Information

Chemical Name	Oral LD50	Dermal LD50	Inhalation LC50
Hydrochloric Acid 7647-01-0	238 - 277 mg/kg (Rat)	> 5010 mg/kg (Rabbit)	= 1.68 mg/L (Rat) 1 h

Information on toxicological effects

Symptoms

Erythema (skin redness). Burning. May cause blindness. Coughing and/ or wheezing.

Delayed and immediate effects as well as chronic effects from short and long-term exposure**Sensitization**

No information available.

Carcinogenicity

The table below indicates whether each agency has listed any ingredient as a carcinogen.

Chemical Name	ACGIH	IARC	NTP	OSHA
Hydrochloric Acid 7647-01-0		Group 1 Group 3		X

Reproductive toxicity

No information available.

STOT - single exposure

No information available.

STOT - repeated exposure

No information available.

Chronic toxicity

No known effect based on information supplied. Chronic exposure to corrosive fumes/gases may cause erosion of the teeth followed by jaw necrosis. Bronchial irritation with chronic cough and frequent attacks of pneumonia are common. Gastrointestinal disturbances may also be seen.

Target Organ Effects

Respiratory system. Eyes. Skin. Gastrointestinal tract (GI).

Aspiration Hazard

No information available.

Numerical measures of toxicity Product Information

The following values are calculated based on chapter 3.1 of the GHS document

Not applicable

12. ECOLOGICAL INFORMATION**Ecotoxicity**

Harmful to aquatic life.

Chemical Name	Toxicity to Algae	Toxicity to Fish	Toxicity to Microorganisms	Daphnia Magna (Water Flea)
Hydrochloric Acid 7647-01-0		96h LC50: = 282 mg/L (Gambusia affinis)		

Persistence and Degradability

No information available.

Bioaccumulation

No information available

Other adverse effects

No information available.

13. DISPOSAL CONSIDERATIONS**Waste treatment methods****Disposal methods**

This material, as supplied, is a hazardous waste according to federal regulations (40 CFR 261).

Contaminated Packaging

Dispose of contents/containers in accordance with local regulations.

US EPA Waste Number

D002

California Hazardous Waste Codes 791

14. TRANSPORT INFORMATION**DOT**

Proper Shipping Name
Hazard Class

Not regulated
NON REGULATED
N/A

TDG

Not regulated

MEX

Not regulated

ICAO	Not regulated
IATA	Not regulated
Proper Shipping Name	NON REGULATED
Special Provisions	None
IMDG	Not regulated
Special Provisions	None
Marine Pollutant	Not applicable
RID	Not regulated
Special Provisions	None
ADR	Not regulated
Special Provisions	None
ADN	Not regulated

15. REGULATORY INFORMATION

International Inventories

TSCA	Complies
DSL	All components are listed either on the DSL or NDSL.
ENCS	Contact supplier for inventory compliance status
KECL	Contact supplier for inventory compliance status
PICCS	Contact supplier for inventory compliance status
AICS	Contact supplier for inventory compliance status

TSCA - United States Toxic Substances Control Act Section 8(b) Inventory

DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances

ENCS - Japan Existing and New Chemical Substances

IECSC - China Inventory of Existing Chemical Substances

KECL - Korean Existing and Evaluated Chemical Substances

PICCS - Philippines Inventory of Chemicals and Chemical Substances

AICS - Australian Inventory of Chemical Substances

US Federal Regulations

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

Chemical Name	CAS-No	Percent	SARA 313 - Threshold Values %
Hydrochloric Acid - 7647-01-0	7647-01-0	0.09	1.0

SARA 311/312 Hazard Categories

Acute Health Hazard	Yes
Chronic Health Hazard	No
Fire Hazard	No
Sudden release of pressure hazard	No
Reactive Hazard	No

CWA (Clean Water Act)

This product does not contain any substances regulated as pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

Chemical Name	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants	CWA - Hazardous Substances
Hydrochloric Acid 7647-01-0	5000 lb			X

CERCLA

This material, as supplied, does not contain any substances regulated as hazardous substances under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302) or the Superfund Amendments and Reauthorization Act (SARA) (40 CFR 355). There may be specific reporting requirements at the local, regional, or state level

pertaining to releases of this material

Chemical Name	Hazardous Substances RQs	Extremely Hazardous Substances RQs	RQ
Hydrochloric Acid 7647-01-0	5000 lb	5000 lb	RQ 5000 lb final RQ RQ 2270 kg final RQ

US State Regulations

California Proposition 65

This product does not contain any Proposition 65 chemicals.

U.S. State Right-to-Know Regulations

International Regulations

Component	Carcinogen Status	Exposure Limits
Hydrochloric Acid 7647-01-0 (0.09)		Mexico: Ceiling 5 ppm Mexico: Ceiling 7 mg/m ³

Canada

WHMIS Hazard Class

Not determined

16. OTHER INFORMATION

NFPA	Health Hazards 3	Flammability 0	Instability 0	Physical and Chemical Hazards -
HMIS	Health Hazards 3	Flammability 0	Physical Hazard 0	Personal Protection X

Prepared By

Product Stewardship
23 British American Blvd.
Latham, NY 12110
1-800-572-6501

Issuing Date

03-Nov-2015

Revision Date

21-Jul-2015

Revision Note

No information available

Disclaimer

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text



The supplier identified below generated this SDS using the UL SDS template. UL did not test, certify, or approve the substance described in this SDS, and all information in this SDS was provided by the supplier or was reproduced from publically available regulatory data sources. UL makes no representations or warranties regarding the completeness or accuracy of the information in this SDS and disclaims all liability in connection with the use of this information or the substance described in this SDS. The layout, appearance and format of this SDS is © 2014 UL LLC. All rights reserved

End of Safety Data Sheet



SAFETY DATA SHEET

Xylene

SECTION 1: Identification of the substance/mixture and of the company/undertaking

Date issued 11.11.2013

1.1. Product identifier

Product name Xylene
Chemical name Xylene
Synonyms Xylol, dimethyl benzene, xylenol
REACH Reg No. 01-2119488216-32-0000
CAS no. 1330-20-7
EC no. 215-535-7
Index no. 601-022-00-9
Article no. 13000000

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/preparation For the preparation of paints and as a solvent. General purpose cleaner.

1.3. Details of the supplier of the safety data sheet

Manufacturer

Company name Fred Holmberg & Co AB
Office address Geijersgatan 8
Postal address Box 60056
Postcode S-216 10
City Limhamn
Country Sweden
Tel +46 (0)40 15 79 20
Fax +46 (0)40 16 22 95
E-mail info@holmberg.se
Website <http://www.holmberg.se/en/>

1.4. Emergency telephone number

Emergency telephone 112 (Europe)

SECTION 2: Hazards identification

2.1. Classification of substance or mixture

Classification according to Xi; R38
67/548/EEC or 1999/45/EC Xn; R20/21
R10
Classification according to Flam. Liq. 3; H226;
Regulation (EC) No 1272/2008 Acute tox. 4; H312;
[CLP/GHS] Skin Irrit. 2; H315;
Acute tox. 4; H332;

2.2. Label elements

Hazard Pictograms (CLP)



Signal word	Danger
Hazard statements	H226 Flammable liquid and vapour. H312 Harmful in contact with skin. H315 Causes skin irritation. H332 Harmful if inhaled.
Precautionary statements	P210 Keep away from heat/sparks/open flames/hot surfaces. – No smoking. P233 Keep container tightly closed. P243 Take precautionary measures against static discharge. P280 Wear protective gloves/protective clothing/eye protection/face protection. P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. P303 + P361 + P353 IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower. P331 Do NOT induce vomiting. P403 + P235 Store in a well-ventilated place. Keep cool.

2.3. Other hazards

Other hazards	Not known.
---------------	------------

SECTION 3: Composition/information on ingredients

3.2. Mixtures

Substance	Identification	Classification	Contents
Xylene	CAS no.: 1330-20-7 EC no.: 215-535-7 Index no.: 601-022-00-9	R10 Xn; R20/21 Xi; R38 Flam. Liq. 3; H226 Acute tox. 4; H332 Acute tox. 4; H312 Skin Irrit. 2; H315 Note : C	75 - 90 %
Ethylbenzene	CAS no.: 100-41-4 EC no.: 202-849-4 Index no.: 601-023-00-4 Synonyms: Ethylbenzene	F; R11 Xn; R20 Flam. Liq. 2; H225 Acute tox. 4; H332	10 - 25 %

Column headings	CAS no. = Chemical Abstracts Service; EU (Einecs or Elincs number) = European inventory of Existing Commercial Chemical Substances; Ingredient name = Name as specified in the substance list (substances that are not included in the substance list must be translated, if possible). Contents given in; %, %wt/wt, %vol/wt, %vol/vol, mg/m3, ppb, ppm, weight%, vol%
HH/HF/HE	T+ = Very toxic, T = Toxic, C = Corrosive, Xn = Harmful, Xi = Irritating, E = Explosive, O = Oxidizing, F+ = Extremely flammable, F = Very flammable, N = Environmental hazard

SECTION 4: First aid measures

4.1. Description of first aid measures

Inhalation	Move the exposed person to fresh air at once. Get medical attention if any discomfort continues.
Skin contact	Remove contaminated clothes and rinse skin thoroughly with water.
Eye contact	Immediately flush with plenty of water for up to 15 minutes. Remove any contact lenses and open eyes wide apart. Get medical attention if any discomfort continues.
Ingestion	NEVER MAKE AN UNCONSCIOUS PERSON VOMIT OR DRINK FLUIDS! Do not induce vomiting. Rinse mouth with water. Get medical attention.

4.2. Most important symptoms and effects, both acute and delayed

Information for health personnel	Treat Symptomatically. Do not give victim anything to drink if he is
----------------------------------	--

unconscious.

4.3. Indication of any immediate medical attention and special treatment needed

Specific details on antidotes

No recommendation given.

SECTION 5: Firefighting measures**5.1. Extinguishing media**

Suitable extinguishing media

Extinguish with alcohol-resistant foam, carbon dioxide, dry powder or water fog.

5.2. Special hazards arising from the substance or mixture

Fire and explosion hazards

Solvent vapours may form explosive mixtures with air.

Hazardous combustion products

Fire creates: Carbon monoxide (CO). Carbon dioxide (CO₂).**5.3. Advice for firefighters**

Fire fighting procedures

No specific fire fighting procedure given.

SECTION 6: Accidental release measures**6.1. Personal precautions, protective equipment and emergency procedures**

Personal protection measures

Ensure suitable personal protection (including respiratory protection) during removal of spillages in a confined area. Ventilate well. Stop leak if possible without risk. Avoid contact with skin and eyes. Do not breathe vapour.

6.2. Environmental precautions

Environmental precautionary measures

Avoid discharge into drains, water courses or onto the ground.

6.3. Methods and material for containment and cleaning up

Cleaning method

Dam and absorb spillages with sand, earth or other non-combustible material.

6.4. Reference to other sections

Other instructions

No recommendation given.

SECTION 7: Handling and storage**7.1. Precautions for safe handling**

Handling

Keep away from heat, sparks and open flame. Take precautionary measures against static discharges. Mechanical ventilation may be required.

Protective Safety Measures

Advice on general occupational hygiene

Provide easy access to water supply and eye wash facilities.

7.2. Conditions for safe storage, including any incompatibilities

Storage

Keep away from heat, sparks and open flame. Ground container and transfer equipment to eliminate static electric sparks. Store in a cool and well-ventilated place.

7.3. Specific end use(s)

Specific use(s)

Not entered.

SECTION 8: Exposure controls/personal protection**8.1. Control parameters****DNEL / PNEC**

Method of testing

Contents

DNEL

Group: Industrial

Exposure route: Inhalation

Exposure frequency: Short term (acute)

Critical Component: Etylbenzen

Value: 289 mg/kg/dag

DNEL	Group: Industrial Exposure route: Inhalation Exposure frequency: Long term (repeated) Critical Component: Etylbenzen Type of effect: Systemic effect Value: 77 mg/kg/dag
DNEL	Group: Industrial Exposure route: Dermal Exposure frequency: Long term (repeated) Critical Component: Etylbenzen Type of effect: Systemic effect Value: 180 mg/kg/dag
DNEL	Group: Consumer Exposure route: Inhalation Exposure frequency: Long term (repeated) Critical Component: Etylbenzen Type of effect: Systemic effect Value: 14,8 mg/kg/dag
DNEL	Group: Consumer Exposure route: Dermal Exposure frequency: Long term (repeated) Critical Component: Etylbenzen Type of effect: Systemic effect Value: 108 mg/kg/dag
DNEL	Group: Consumer Exposure route: Oral Exposure frequency: Long term (repeated) Critical Component: Etylbenzen Type of effect: Systemic effect Value: 1,6 mg/kg/dag
DNEL	Group: Industrial Exposure route: Inhalation Exposure frequency: Short term (acute) Critical Component: xylen Value: 442 mg/kg/dag
DNEL	Group: Industrial Exposure route: Inhalation Exposure frequency: Long term (repeated) Critical Component: xylen Type of effect: Systemic effect Value: 221 mg/kg/dag
DNEL	Group: Industrial Exposure route: Dermal Exposure frequency: Long term (repeated) Critical Component: xylen Type of effect: Systemic effect Value: 3182 mg/kg/dag
DNEL	Group: Consumer Exposure route: Inhalation Exposure frequency: Short term (acute) Critical Component: xylen Value: 260 mg/kg/dag
DNEL	Group: Consumer Exposure route: Inhalation Exposure frequency: Long term (repeated) Critical Component: xylen Type of effect: Systemic effect

DNEL	Value: 65,3 mg/kg/dag Group: Consumer Exposure route: Dermal Exposure frequency: Long term (repeated) Critical Component: xylene Type of effect: Systemic effect
DNEL	Value: 1872 mg/kg/dag Group: Consumer Exposure route: Oral Exposure frequency: Long term (repeated) Critical Component: xylene Type of effect: Systemic effect
Exposure guidelines	Value: 12,5 mg/kg/dag Country of origin: Sverige Limit value type: NGV 200 mg/m ³ OEL Short Term Value: 450 mg/m ³ Source: Nationella hygieniska gränsvärden, AFS 2005:17 Ovanstående NGV resp. KTV gäller både xylene och etylbenzen
Other Information	

8.2. Exposure controls

Occupational exposure limits	Provide adequate ventilation. Observe Occupational Exposure Limits and minimise the risk of inhalation of vapours. Protective gloves and goggles are recommended. Provide eyewash, quick drench.
------------------------------	--

Safety signs



Respiratory protection

Respiratory protection	Respiratory protection must be used if air contamination exceeds acceptable level. Use respiratory equipment with gas filter, type A2.
------------------------	--

Hand protection

Hand protection	Use protective gloves. Chemical resistant gloves required for prolonged or repeated contact. Gloves of nitrile rubber, PVA or Viton are recommended.
-----------------	--

Eye / face protection

Eye protection	Use safety goggles or face shield in case of splash risk.
----------------	---

Skin protection

Skin protection (except hands)	Wear appropriate clothing to prevent any possibility of skin contact.
--------------------------------	---

Hygiene / Environmental

Specific hygiene measures	Wash hands after contact.
---------------------------	---------------------------

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state	Fluid.
Colour	Colourless.
Odour	Aromatic.
Comments, pH (as supplied)	Not relevant.
Melting point/melting range	Value: < -48 °C
Boiling point / boiling range	Value: 136-145 °C
Flash point	Value: 27 °C
Evaporation rate	Value: 13,5
Explosion limit	Value: 1-7,1 %
Vapour pressure	Value: 1 kPa Test temperature: 20 °C

Vapour density	Value: 3,7
Specific gravity	Value: 0,870 kg/m ³ Test temperature: 20 °C
Solubility description	Soluble in: Organic solvents. Not soluble in water.
Partition coefficient: n-octanol/water	Value: 3,15
Spontaneous combustability	Value: > 432-530 °C
Viscosity	Value: < 0,90 mPas Method of testing: Kinematisk Test temperature: 25 °C

9.2. Other information

SECTION 10: Stability and reactivity

10.1. Reactivity

Reactivity	Heating may cause a fire.
------------	---------------------------

10.2. Chemical stability

Stability	Stable under the prescribed storage conditions.
-----------	---

10.3. Possibility of hazardous reactions

Possibility of hazardous reactions	Not known.
------------------------------------	------------

10.4. Conditions to avoid

Conditions to avoid	Avoid heat, flames and other sources of ignition.
---------------------	---

10.5. Incompatible materials

Materials to avoid	Avoid contact with oxidising agents (e.g. nitric acid, peroxides and chromates). Strong acids.
--------------------	--

10.6. Hazardous decomposition products

Hazardous decomposition products	Fire creates: Carbon monoxide (CO). Carbon dioxide (CO ₂).
----------------------------------	--

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Toxicological Information:

Other toxicological data	Acute Toxicity (Oral LD ₅₀): mg/kg (oral rat) > 2000 Acute Toxicity (Inhalation LC ₅₀): mg/l (vapours) (4h) > 20 Acute Toxicity (Dermal LD ₅₀): mg/kg Rabbit > 2000
--------------------------	---

Toxicological data for substances

Potential acute effects

Inhalation	In high concentrations, vapours are narcotic and may cause headache, fatigue, dizziness and nausea. Ikke klassificerad som aspirationstoxisk (Not classified as asp. tox.)
Skin contact	Prolonged or frequent contact may cause redness, itching, eczema and skin cracking. Defats the skin.
Eye contact	May irritate and cause redness and pain.
Ingestion	Ingestion of large amounts may cause unconsciousness. However, ingestion may cause nausea, headache, dizziness and intoxication. Ingestion may cause irritation of the gastrointestinal tract, vomiting and diarrhoea. May cause irritation to the mouth and throat.

Delayed effects / repeated exposure

Sensitisation	Not known.
Chronic effects	None known.

Carcinogenic, Mutagenic or Reprotoxic

Carcinogenicity	None.
Mutagenicity	Not known.
Teratogenic properties	Suspected of damaging the unborn child

Reproductive toxicity Not known.

SECTION 12: Ecological information

12.1. Toxicity

Acute aquatic, fish	Value: 2 mg/l Method of testing: LC50 Fish, species: <i>Roccus saxatilis</i> Duration: 96h
Acute aquatic, algae	Value: > 3,2 mg/l Method of testing: IC50 Algae, species: <i>Selenastrum Capricornum</i> Duration: 72h
Acute aquatic, Daphnia	Value: 8,5 mg/l Method of testing: EC50 Daphnia, species: <i>Daphnia magna</i> Duration: 48h

12.2. Persistence and degradability

Persistence and degradability description	Lättnedbrytbar av biologiska organismer.
Chemical oxygen demand (COD)	Value: 5 Method of testing: COD
Biological oxygen demand (BOD)	Value: 0,55 Method of testing: BOD

12.3. Bioaccumulative potential

Bioaccumulative potential	Will not bio-accumulate.
Bioconcentration factor (BCF)	Value: 22 Method of testing: BCF

12.4. Mobility in soil

Mobility	The product is insoluble in water and will spread on the water surface.
----------	---

12.5. Results of PBT and vPvB assessment

PBT assessment results	This substance is not classified as PBT or vPvB.
------------------------	--

12.6. Other adverse effects

Other adverse effects / Remarks	None known.
---------------------------------	-------------

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Specify the appropriate methods of disposal	Confirm disposal procedures with environmental engineer and local regulations. Absorb in vermiculite or dry sand and dispose of at a licenced hazardous waste collection point. Liquid components can be disposed of by incineration.
Product classified as hazardous waste	Yes
Packaging classified as hazardous waste	Yes

SECTION 14: Transport information

14.1. UN number

ADR	1307
RID	1307
IMDG	1307
ICAO/IATA	1307

14.2. UN proper shipping name

ADR	XYLENES
-----	---------

RID	XYLENES
IMDG	XYLENES
ICAO/IATA	XYLENES

14.3. Transport hazard class(es)

ADR	3
Hazard no.	30
RID	3
ADN	33
IMDG	3
ICAO/IATA	3

14.4. Packing group

ADR	III
RID	III
IMDG	III
ICAO/IATA	III

14.5. Environmental hazards

Comment	Not relevant.
---------	---------------

14.6. Special precautions for user

EmS	F-E, S-D
-----	----------

14.7. Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code**SECTION 15: Regulatory information**

EC no.	215-535-7
--------	-----------

15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture

Other Label Information	Regulation (EC) No 1272/2008 of the European Parliament and of the Council of 16 December 2008 on classification, labelling and packaging of substances and mixtures, amending and repealing Directives 67/548/EEC and 1999/45/EC, and amending Regulation (EC) No 1907/2006 with amendments.
Legislation and regulations	Dangerous Substance Directive 67/548/EEC. The Chemicals (Hazard Information and Packaging for Supply) Regulations 2009 (S.I. 2009 No. 716). The List of Wastes (England) (Amendment) Regulations 2005. (SI 2005 No. 895). Avfallsförordningen (2011:927).

15.2. Chemical safety assessment**SECTION 16: Other information****Hazard symbol**

R-phrases	R10 Flammable. R38 Irritating to skin. R20/22 Harmful by inhalation and if swallowed. R38 Irritating to skin.
S-phrases	S7 Keep container tightly closed. S16 Keep away from sources of ignition - No smoking.
Classification according to Regulation (EC) No 1272/2008 [CLP/GHS]	Flam. Liq. 3; H226; Acute tox. 4; H312; Skin Irrit. 2; H315;

List of relevant R-phrases (under headings 2 and 3).	Acute tox. 4; H332; R38 Irritating to skin. R11 Highly flammable. R10 Flammable. R20/21 Harmful by inhalation and in contact with skin. R20 Harmful by inhalation.
List of relevant H-phrases (Section 2 and 3).	H332 Harmful if inhaled. H312 Harmful in contact with skin. H225 Highly flammable liquid and vapour. H226 Flammable liquid and vapour. H315 Causes skin irritation.
Responsible for safety data sheet	Fred Holmberg & Co AB

SAFETY DATA SHEET

Version 4.10
Revision Date 05/27/2016
Print Date 01/23/2017

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : *trans*-1,2-Dichloroethene

Product Number : 48527
Brand : Supelco
Index-No. : 602-026-00-3

CAS-No. : 156-60-5

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : +1-703-527-3887 (CHEMTREC)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Flammable liquids (Category 2), H225
Acute toxicity, Inhalation (Category 4), H332
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H225 Highly flammable liquid and vapour.
H332 Harmful if inhaled.
H412 Harmful to aquatic life with long lasting effects.

Precautionary statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P233 Keep container tightly closed.
P240 Ground/bond container and receiving equipment.
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.
P242 Use only non-sparking tools.

P243	Take precautionary measures against static discharge.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear protective gloves/ eye protection/ face protection.
P303 + P361 + P353	IF ON SKIN (or hair): Remove/ Take off immediately all contaminated clothing. Rinse skin with water/ shower.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam for extinction.
P403 + P235	Store in a well-ventilated place. Keep cool.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : *trans*-1,2-Dichloroethene
trans-1,2-Dichloroethylene
trans-Acetylene dichloride

Formula : C₂H₂Cl₂
Molecular weight : 96.94 g/mol
CAS-No. : 156-60-5
EC-No. : 205-860-2
Index-No. : 602-026-00-3

Hazardous components

Component	Classification	Concentration
trans-Dichloroethylene		
	Flam. Liq. 2; Acute Tox. 4; Aquatic Acute 3; Aquatic Chronic 3; H225, H332, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

No data available

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Recommended storage temperature 2 - 8 °C

Light sensitive. Air and moisture sensitive. Refrigerate before opening.

Storage class (TRGS 510): Flammable liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
trans-Dichloroethylene	156-60-5	TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment Eye irritation		

		TWA	200.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Eye irritation		
		TWA	200 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment Eye irritation		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|---|
| a) Appearance | Form: liquid, clear
Colour: light yellow |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -50 °C (-58 °F) - lit. |
| f) Initial boiling point and boiling range | 48 °C (118 °F) - lit. |
| g) Flash point | 6.0 °C (42.8 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or | Upper explosion limit: 12.8 %(V)
Lower explosion limit: 9.7 %(V) |

explosive limits

- | | |
|---|--|
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 1.257 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Vapours may form explosive mixture with air.

10.4 Conditions to avoid

Heat, flames and sparks.

10.5 Incompatible materials

Oxidizing agents, Bases

10.6 Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides, Hydrogen chloride gas

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 1,235 mg/kg

LD50 Oral - Mouse - 2,122 mg/kg

Remarks: Behavioral: Altered sleep time (including change in righting reflex). Behavioral: Somnolence (general depressed activity). Behavioral: Ataxia.

LC50 Inhalation - Rat - 24100 ppm

Remarks: Behavioral: Somnolence (general depressed activity).

LD50 Dermal - Rabbit - > 5,000 mg/kg

Remarks: Prolonged skin contact may cause skin irritation and/or dermatitis. Nutritional and Gross Metabolic: Weight loss or decreased weight gain.

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

prolonged or repeated exposure can cause: narcosis, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Kidney -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 220.00 mg/l - 48 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life with long lasting effects.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1150 Class: 3 Packing group: II
Proper shipping name: 1,2-Dichloroethylene
Reportable Quantity (RQ): 1000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1150 Class: 3 Packing group: II EMS-No: F-E, S-D
Proper shipping name: 1,2-DICHLOROETHYLENE

IATA

UN number: 1150 Class: 3 Packing group: II
Proper shipping name: 1,2-Dichloroethylene

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
trans-Dichloroethylene	156-60-5	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
trans-Dichloroethylene	156-60-5	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
trans-Dichloroethylene	156-60-5	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Flam. Liq.	Flammable liquids
H225	Highly flammable liquid and vapour.
H332	Harmful if inhaled.
H402	Harmful to aquatic life.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	3
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	3
Reactivity Hazard:	0

Further information

Copyright 2016 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.10

Revision Date: 05/27/2016

Print Date: 01/23/2017

SAFETY DATA SHEET

Version 5.5
Revision Date 08/14/2014
Print Date 04/13/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : trans-Chlordane

Product Number : PS752

Brand : Supelco

CAS-No. : 5103-74-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Oral (Category 4), H302
Carcinogenicity (Category 2), H351
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H302

Harmful if swallowed.

H351

Suspected of causing cancer.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P201

Obtain special instructions before use.

P202

Do not handle until all safety precautions have been read and understood.

P264

Wash skin thoroughly after handling.

P270

Do not eat, drink or smoke when using this product.

P273

Avoid release to the environment.

P281

Use personal protective equipment as required.

P301 + P312	IF SWALLOWED: Call a POISON CENTER or doctor/ physician if you feel unwell.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P330	Rinse mouth.
P391	Collect spillage.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Molecular weight	: 409.76 g/mol
CAS-No.	: 5103-74-2
EC-No.	: 225-826-0

Hazardous components

Component	Classification	Concentration
trans-Chlordane		
	Acute Tox. 4; Carc. 2; Aquatic Acute 1; Aquatic Chronic 1; H302, H351, H410	90 - 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas. Avoid breathing dust.
For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

a) Appearance	Form: crystalline Colour: white
b) Odour	odourless
c) Odour Threshold	No data available
d) pH	No data available
e) Melting point/freezing point	No data available
f) Initial boiling point and boiling range	No data available
g) Flash point	No data available
h) Evaporation rate	No data available
i) Flammability (solid, gas)	No data available
j) Upper/lower flammability or explosive limits	No data available
k) Vapour pressure	No data available
l) Vapour density	No data available
m) Relative density	1.590 g/cm ³
n) Water solubility	insoluble
o) Partition coefficient: n-octanol/water	No data available
p) Auto-ignition temperature	No data available
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Mouse - 275 mg/kg

LD50 Oral - Rat - 1,100 mg/kg

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Limited evidence of carcinogenicity in animal studies

IARC: 2B - Group 2B: Possibly carcinogenic to humans (trans-Chlordane)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: Not available

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - *Lepomis macrochirus* - 0.05 mg/l - 96 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (trans-Chlordane)
Reportable Quantity (RQ):
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

UN number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (trans-Chlordane)
Marine pollutant: Marine pollutant

IATA

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (trans-Chlordane)

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
trans-Chlordane	5103-74-2	

New Jersey Right To Know Components

	CAS-No.	Revision Date
trans-Chlordane	5103-74-2	

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
H302	Harmful if swallowed.
H351	Suspected of causing cancer.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2014 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 5.5

Revision Date: 08/14/2014

Print Date: 04/13/2016

SAFETY DATA SHEET

Version 4.6
Revision Date 03/02/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Trichloroethylene

Product Number : 251402
Brand : Sigma-Aldrich
Index-No. : 602-027-00-9

CAS-No. : 79-01-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Skin irritation (Category 2), H315
Eye irritation (Category 2A), H319
Germ cell mutagenicity (Category 2), H341
Carcinogenicity (Category 1B), H350
Specific target organ toxicity - single exposure (Category 3), Central nervous system, H336
Acute aquatic toxicity (Category 3), H402
Chronic aquatic toxicity (Category 3), H412

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H315	Causes skin irritation.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H412	Harmful to aquatic life with long lasting effects.

Precautionary statement(s)	
P201	Obtain special instructions before use.
P202	Do not handle until all safety precautions have been read and understood.
P261	Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P264	Wash skin thoroughly after handling.
P271	Use only outdoors or in a well-ventilated area.
P273	Avoid release to the environment.
P280	Wear eye protection/ face protection.
P280	Wear protective gloves.
P281	Use personal protective equipment as required.
P302 + P352	IF ON SKIN: Wash with plenty of soap and water.
P304 + P340 + P312	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/ physician if you feel unwell.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308 + P313	IF exposed or concerned: Get medical advice/ attention.
P332 + P313	If skin irritation occurs: Get medical advice/ attention.
P337 + P313	If eye irritation persists: Get medical advice/ attention.
P362	Take off contaminated clothing and wash before reuse.
P403 + P233	Store in a well-ventilated place. Keep container tightly closed.
P405	Store locked up.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms	: TCE Trichloroethene
Formula	: C ₂ HCl ₃
Molecular weight	: 131.39 g/mol
CAS-No.	: 79-01-6
EC-No.	: 201-167-4
Index-No.	: 602-027-00-9

Hazardous components

Component	Classification	Concentration
Trichloroethylene Included in the Candidate List of Substances of Very High Concern (SVHC) according to Regulation (EC) No. 1907/2006 (REACH)		
	Skin Irrit. 2; Eye Irrit. 2A; Muta. 2; Carc. 1B; STOT SE 3; Aquatic Acute 3; Aquatic Chronic 3; H315, H319, H336, H341, H350, H412	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Light sensitive. Handle and store under inert gas.

Storage class (TRGS 510): Non-combustible, acute toxic Cat.3 / toxic hazardous materials or hazardous materials causing chronic effects

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters****Components with workplace control parameters**

Component	CAS-No.	Value	Control parameters	Basis
Trichloroethylene	79-01-6	TWA	10.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		STEL	25.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
		Central Nervous System impairment cognitive decrement Renal toxicity Substances for which there is a Biological Exposure Index or Indices (see BEI® section) Suspected human carcinogen		
		Potential Occupational Carcinogen See Appendix C See Appendix A		
		See Table Z-2		
		TWA	100.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		CEIL	200.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		
		Peak	300.000000 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-2
		Z37.19-1967		

Biological occupational exposure limits

Component	CAS-No.	Parameters	Value	Biological specimen	Basis
Trichloroethylene	79-01-6	Trichloroacetic acid	15.0000 mg/l	Urine	ACGIH - Biological Exposure Indices (BEI)
	Remarks	End of shift at end of workweek			
		Trichloroethanol	0.5000 mg/l	In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In blood	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			
		Trichloroethylene		In end-exhaled air	ACGIH - Biological Exposure Indices (BEI)
		End of shift at end of workweek			

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 480 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|--|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -84.8 °C (-120.6 °F) - lit. |
| f) Initial boiling point and boiling range | 86.7 °C (188.1 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower | Upper explosion limit: 10.5 %(V) |

flammability or
explosive limits Lower explosion limit: 8 %(V)

- | | | |
|----|--|---|
| k) | Vapour pressure | 81.3 hPa (61.0 mmHg) at 20.0 °C (68.0 °F) |
| l) | Vapour density | No data available |
| m) | Relative density | 1.463 g/mL at 25 °C (77 °F) |
| n) | Water solubility | No data available |
| o) | Partition coefficient: n-octanol/water | log Pow: 2.29log Pow: 5 |
| p) | Auto-ignition temperature | 410.0 °C (770.0 °F) |
| q) | Decomposition temperature | No data available |
| r) | Viscosity | No data available |
| s) | Explosive properties | No data available |
| t) | Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Oxidizing agents, Strong bases, Magnesium

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - 4,920 mg/kg

LC50 Inhalation - Mouse - 4 h - 8450 ppm

LD50 Dermal - Rabbit - > 20,000 mg/kg

No data available

Skin corrosion/irritation

Skin - Rabbit

Result: Severe skin irritation - 24 h

Serious eye damage/eye irritation

Eyes - Rabbit

Result: Eye irritation - 24 h

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

In vitro tests showed mutagenic effects

Carcinogenicity

This product is or contains a component that has been reported to be probably carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Possible human carcinogen

IARC: 1 - Group 1: Carcinogenic to humans (Trichloroethylene)

NTP: Reasonably anticipated to be a human carcinogen (Trichloroethylene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: KX4550000

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, Exposure to and/or consumption of alcohol may increase toxic effects., Gastrointestinal disturbance, Kidney injury may occur., narcosis
To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

Toxicity to fish LC50 - Pimephales promelas (fathead minnow) - 41 mg/l - 96.0 h

LOEC - other fish - 11 mg/l - 10.0 d

NOEC - Oryzias latipes - 40 mg/l - 10.0 d

Toxicity to daphnia and other aquatic invertebrates EC50 - Daphnia magna (Water flea) - 18.00 mg/l - 48 h

Toxicity to algae IC50 - Pseudokirchneriella subcapitata (green algae) - 175.00 mg/l - 96 h

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

Does not bioaccumulate.

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Harmful to aquatic life with long lasting effects.

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1710 Class: 6.1 Packing group: III

Proper shipping name: Trichloroethylene

Reportable Quantity (RQ): 100 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1710 Class: 6.1 Packing group: III EMS-No: F-A, S-A

Proper shipping name: TRICHLOROETHYLENE

IATA

UN number: 1710 Class: 6.1 Packing group: III

Proper shipping name: Trichloroethylene

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Trichloroethylene	79-01-6	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

Trichloroethylene

CAS-No.	Revision Date
79-01-6	2011-09-01

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

CAS-No.	Revision Date
79-01-6	2011-09-01

16. OTHER INFORMATION**Full text of H-Statements referred to under sections 2 and 3.**

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
Carc.	Carcinogenicity
Eye Irrit.	Eye irritation
H315	Causes skin irritation.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness.
H341	Suspected of causing genetic defects.
H350	May cause cancer.
H402	Harmful to aquatic life.

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	2
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 03/02/2015

Print Date: 02/18/2016

SAFETY DATA SHEET

Version 4.17
Revision Date 03/03/2015
Print Date 02/19/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Trichlorofluoromethane

Product Number : 254991

Brand : Aldrich

CAS-No. : 75-69-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832

Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Acute toxicity, Dermal (Category 4), H312

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word : Warning

Hazard statement(s)

H312 : Harmful in contact with skin.

Precautionary statement(s)

P280 : Wear protective gloves/ protective clothing.

P302 + P352 + P312 : IF ON SKIN: Wash with plenty of soap and water. Call a POISON CENTER or doctor/ physician if you feel unwell.

P363 : Wash contaminated clothing before reuse.

P501 : Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : Fluorotrichloromethane
CFC-11

Formula : CCl₃F CCl₃F
Molecular weight : 137.37 g/mol
CAS-No. : 75-69-4
EC-No. : 200-892-3

Hazardous components

Component	Classification	Concentration
Trichlorofluoromethane		
	Acute Tox. 4; H312	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas, Hydrogen fluoride

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation.
For personal protection see section 8.

6.2 Environmental precautions

Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Soak up with inert absorbent material and dispose of as hazardous waste. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Recommended storage temperature 2 - 8 °C

Contents under pressure.

Storage class (TRGS 510): Non Combustible Liquids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Trichlorofluoromethane	75-69-4	C	1,000.000000 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Cardiac sensitization Not classifiable as a human carcinogen		
		C	1,000.000000 ppm 5,600.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		TWA	1,000.000000 ppm 5,600.000000 mg/m3	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		The value in mg/m3 is approximate.		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.4 mm

Break through time: 480 min

Material tested: Camatril® (KCL 730 / Aldrich Z677442, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.2 mm

Break through time: 30 min

Material tested: Dermatril® P (KCL 743 / Aldrich Z677388, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: liquid, clear
Colour: colourless |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | -110.99 - -109.99 °C (-167.78 - -165.98 °F) |
| f) Initial boiling point and boiling range | 23.7 °C (74.7 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 885.7 hPa (664.3 mmHg) at 20.0 °C (68.0 °F)
2,701.2 hPa (2,026.1 mmHg) at 55.0 °C (131.0 °F) |
| l) Vapour density | No data available |
| m) Relative density | 1.494 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | 1 g/l |
| o) Partition coefficient: n-octanol/water | log Pow: 2.53 |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |

t) Oxidizing properties No data available

9.2 Other safety information

Surface tension 18.0 mN/m at 25.0 °C (77.0 °F)

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong oxidizing agents, Sodium/sodium oxides, Potassium, Magnesium, Aluminum, Zinc

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

LD50 Oral - Rat - > 15,000 mg/kg

LC50 Inhalation - Rat - 0.3 h - 130000 ppm

Remarks: Behavioral:Tremor. Behavioral:Convulsions or effect on seizure threshold. Respiratory disorder

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: PB6125000

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated., Nausea, Dizziness, Headache, Vomiting, Diarrhoea, Abdominal pain, Weakness, Unconsciousness

Liver -

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

13. DISPOSAL CONSIDERATIONS**13.1 Waste treatment methods****Product**

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

UN number: 3082

Class: 9

Packing group: III

Proper shipping name: Environmentally hazardous substance, liquid, n.o.s. (Trichlorofluoromethane)

Reportable Quantity (RQ): 5000 lbs

Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION**SARA 302 Components**

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Trichlorofluoromethane	75-69-4	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

Trichlorofluoromethane	CAS-No. 75-69-4	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

Pennsylvania Right To Know Components

Trichlorofluoromethane	CAS-No. 75-69-4	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

New Jersey Right To Know Components

Trichlorofluoromethane	CAS-No. 75-69-4	Revision Date 2007-07-01
------------------------	--------------------	-----------------------------

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Acute Tox.	Acute toxicity
H312	Harmful in contact with skin.

HMIS Rating

Health hazard:	1
Chronic Health Hazard:	
Flammability:	0
Physical Hazard	0

NFPA Rating

Health hazard:	1
Fire Hazard:	0
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.17

Revision Date: 03/03/2015

Print Date: 02/19/2016



HEALTH	*	3
FLAMMABILITY		0
PHYSICAL HAZ.		0
PPE		X



Printed: 12/03/2010
Revision: 12/03/2010
Supersedes Revision: 11/02/2010
Date Created: 07/13/2009

1. Product and Company Identification

Product Code: 3007
Product Name: SIFCO Process Trivalent Chromium Conversion
Manufacturer Information
Company Name: SIFCO Applied Surface Concepts
 Division of SIFCO Industries, Inc.
 5708 E. Schaaf Road
 Independence, OH 44131
Phone Number: (216)524-0099
Fax Number: (216)524-6331
Emergency Contact: CHEMTREC (United States) (800)424-9300
Information: CHEMTREC (International-Collect) +1 (703)527-3887
Web site address: <http://www.SIFCOASC.com>
Email address: info@sifcoasc.com

2. Hazards Identification

Emergency Overview

Blue liquid with no characteristic odor.

Caution! May cause eye and skin burns. May be harmful if swallowed.

Contains materials that can cause target organ damage. Contains materials which can cause cancer. Emergency Response Guide #171

Route(s) of Entry: Inhalation? Yes Skin? Yes Eyes? Yes Ingestion? Yes

Health Hazards (Acute and Chronic)

INHALATION: May give off gas, vapor or dust that is irritating to the respiratory system. Exposure to decomposition products may cause a health hazard.

INGESTION: Harmful if swallowed. May cause burns to mouth, throat and stomach.

EYE: May be corrosive to eyes. May cause burns.

SKIN CONTACT: May be corrosive to the skin. May cause burns.

CHRONIC EFFECTS: Contains material that may cause target organ damage.

Signs and Symptoms Of Exposure

Dependant on route(s) of entry. See section above for details.

3. Composition/Information on Ingredients

Hazardous Components (Chemical Name)	CAS #	Concentration	Formula	RTECS #
1. Sodium nitrate	7631-99-4	1.0 -3.0 %	NaNO3	WC5600000
2. Chromium hydroxide sulphate (Cr(OH)(SO4))	12336-95-7	1.0 -3.0 %	CrHO5S	GB6240000
3. Cobalt sulfate heptahydrate	10026-24-1	0.3 -1.0 %	CoSO4.7H2O	GG3200000
4. Ammonium bifluoride	1341-49-7	0.3 -1.0 %	F2H5N	BQ9200000
5. Water	7732-18-5	92.0 -97.4 %	H2O	ZC0110000

4. First Aid Measures

Emergency and First Aid Procedures

First aid providers must take proper precautions for their own safety before entering contaminated areas to assist chemical accident victims and handling their contaminated clothing and equipment. Another person should immediately call the Emergency Medical Service, 911-Operator, Hospital, Physician, Ophthalmologist or Poison Control Center, as applicable. Give the following information: Location of the accident, your phone number, description of the accident, name of chemical agent and product, number and condition of casualties, what is

being done for the victims.

Stay on the phone until the other party hangs up! Remove victim from contaminated area to a clean, quiet, ventilated area. Keep them calm and warm.

EYES: Hold eyelids apart and flush eyes with plenty of water for at least 15 minutes.

SKIN: Immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Thoroughly decontaminate (or discard) clothing and shoes.

INHALATION: Remove to fresh air. Lay victim down, legs raised. Loosen tight clothing, cover with a blanket. If not breathing, give artificial respiration.

INGESTION: DO NOT induce vomiting, unless advised by EMS. Give large quantities of water. Never give anything by mouth to an unconscious person.

5. Fire Fighting Measures

Flammability Classification: Material will not burn

Flash Pt:

Explosive Limits: LEL: UEL:

Special Fire Fighting Procedures

Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Unusual Fire and Explosion Hazards

Suitable Extinguishing Media

Use an extinguishing agent suitable for the surrounding fire.

Unsuitable Extinguishing Media

None known.

6. Accidental Release Measures

Steps To Be Taken In Case Material Is Released Or Spilled

Do not touch or walk through spilled material. Isolate hazard area and keep people away. Notify your facility emergency coordinator. Eliminate all sources of ignition. Provide maximum ventilation. Do not release into soil, sewers, or natural bodies of water. Wear proper personal protective equipment (PPE). Carefully mop up or vacuum spill and triple rinse with water into suitable plastic container. Release of a reportable quantity (RQ) requires notification of proper authorities. Dispose of according to local, state, and federal regulations.

7. Handling and Storage

Precautions To Be Taken in Handling

Put on appropriate personal protective equipment. Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking.

Do not get in eyes or on skin or clothing. Do not breathe vapor or mist. Do not ingest. If during normal use the material presents a respiratory hazard, use only with adequate ventilation or wear appropriate respirator. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.

Precautions To Be Taken in Storing

Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

8. Exposure Controls/Personal Protection

Hazardous Components (Chemical Name)	CAS #	OSHA PEL	ACGIH TLV	Other Limits
1. Sodium nitrate	7631-99-4		10 mg/m3	
2. Chromium hydroxide sulphate (Cr(OH)(SO4))	12336-95-7			
3. Cobalt sulfate heptahydrate	10026-24-1			
4. Ammonium bifluoride	1341-49-7			
5. Water	7732-18-5			

Respiratory Equipment (Specify Type)

If engineering controls are not feasible, the respiratory protection program must comply with OSHA 29 CFR 1910.134

Eye Protection

Face shield and safety glasses w/side shields or splash-proof chemical goggles. Do not wear contact lenses. Eye wash station, safety shower, washing facilities near work area.

Protective Gloves

Nitrile gloves.

Ventilation

If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.

Work/Hygienic/Maintenance Practices

Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

9. Physical and Chemical Properties

Physical States:	[] Gas	[X] Liquid	[] Solid
Explosive Limits:	LEL:		UEL:
Specific Gravity (Water = 1):	1.045 - 1.050		
Density:	1.03 - 1.07		
pH:	2.0 - 2.5		
Appearance and Odor			

Blue liquid with no characteristic odor.

10. Stability and Reactivity

Stability:	Unstable []	Stable [X]
Conditions To Avoid - Instability		
Incompatibility - Materials To Avoid		
Hazardous Decomposition Or Byproducts		
Possibility of Hazardous Reactions:	Will occur []	Will not occur [X]
Conditions To Avoid - Hazardous Reactions		

Avoid exposure - obtain special instructions before use.

11. Toxicological Information

Inhalation : May give off gas, vapor or dust that is irritating or corrosive to the respiratory system. Exposure to decomposition products may cause a health hazard.

Ingestion : Harmful if swallowed. May cause burns to mouth, throat and stomach.

Skin : May be corrosive to the skin. May cause burns.

Eyes : May be corrosive to eyes. May cause burns.

Carcinogenicity/Other Information

Hazardous Components (Chemical Name)	CAS #	NTP	IARC	ACGIH	OSHA
1. Sodium nitrate	7631-99-4				
2. Chromium hydroxide sulphate (Cr(OH)(SO ₄))	12336-95-7				
3. Cobalt sulfate heptahydrate	10026-24-1		2B	A3	
4. Ammonium bifluoride	1341-49-7				
5. Water	7732-18-5				

Carcinogenicity: NTP? Unknown IARC Monographs? Unknown OSHA Regulated?
Unknown

12. Ecological Information

No known significant effects or critical hazards.

13. Disposal Considerations

Waste Disposal Method

Ship to approved treatment/disposal facility. Dispose of according to local, state, and federal regulations. Follow the applicable regulations for disposal of empty containers and rinsate. The disposal information applies to the material as manufactured. Contamination may affect the disposal requirements. The responsibility for proper waste disposal is with the generator of the waste.

14. Transport Information

LAND TRANSPORT (US DOT)

DOT Proper Shipping Name UN3082, Environmentally hazardous substances, liquid, n.o.s.
(Chromium Sulphate) PG III - ERG 171

DOT Hazard Class: 9

DOT Hazard Label: CLASS 9

UN/NA Number: UN3082

Packing Group: III

LAND TRANSPORT (Canadian TDG)

UN Number: 3082

Packing Group: III

LAND TRANSPORT (European ADR/RID)

UN Number: 3082

Packing Group: III

AIR TRANSPORT (ICAO/IATA)

UN Number: 3082

Packing Group: III

IATA Classification: 9

MARINE TRANSPORT (IMDG/IMO)

UN Number: 3082

Packing Group: III

Marine Pollutant: No

15. Regulatory Information

US EPA SARA Title III

Hazardous Components (Chemical Name)	CAS #	Sec.302 (EHS)	Sec.304 RQ	Sec.313 (TRI)	Sec.110
1. Sodium nitrate	7631-99-4	No	No	Yes-Cat. N511	No
2. Chromium hydroxide sulphate (Cr(OH)(SO ₄))	12336-95-7	No	No	Yes-Cat. N090	No
3. Cobalt sulfate heptahydrate	10026-24-1	No	No	No	No
4. Ammonium bifluoride	1341-49-7	No	Yes 100 LB	No	No

Hazardous Components (Chemical Name)	CAS #	Sec.302 (EHS)	Sec.304 RQ	Sec.313 (TRI)	Sec.110
5. Water	7732-18-5	No	No	No	No

US EPA CAA, CWA, TSCA

Hazardous Components (Chemical Name)	CAS #	EPA CAA	EPA CWA NPDES	EPA TSCA	CA PROP 65
1. Sodium nitrate	7631-99-4	HAP, ODC ()	No	Inventory, 8A CAIR	No
2. Chromium hydroxide sulphate (Cr(OH)(SO4))	12336-95-7	HAP, ODC ()	No	Inventory	No
3. Cobalt sulfate heptahydrate	10026-24-1	HAP, ODC ()	No	No	Yes
4. Ammonium bifluoride	1341-49-7	HAP, ODC ()	No	Inventory	No
5. Water	7732-18-5	HAP, ODC ()	No	Inventory	No

**SARA (Superfund Amendments and
Reauthorization Act of 1986) Lists:**

Sec.302:	EPA SARA Title III Section 302 Extremely Hazardous Chemical with TPQ. * indicates 10000 LB TPQ if not volatile.
Sec.304:	EPA SARA Title III Section 304: CERCLA Reportable + Sec.302 with Reportable Quantity. ** indicates statutory RQ.
Sec.313:	EPA SARA Title III Section 313 Toxic Release Inventory. Note: -Cat indicates a member of a chemical category.
Sec.110:	EPA SARA 110 Superfund Site Priority Contaminant List

**TSCA (Toxic Substances Control
Act) Lists:**

Inventory:	Chemical Listed in the TSCA Inventory.
5A(2):	Chemical Subject to Significant New Rules (SNURS)
6A:	Commercial Chemical Control Rules
8A:	Toxic Substances Subject To Information Rules on Production
8A CAIR:	Comprehensive Assessment Information Rules - (CAIR)
8A PAIR:	Preliminary Assessment Information Rules - (PAIR)
8C:	Records of Allegations of Significant Adverse Reactions
8D:	Health and Safety Data Reporting Rules
8D TERM:	Health and Safety Data Reporting Rule Terminations
12(b):	Notice of Export

Other Important Lists:

CWA NPDES:	EPA Clean Water Act NPDES Permit Chemical
CAA HAP:	EPA Clean Air Act Hazardous Air Pollutant
CAA ODC:	EPA Clean Air Act Ozone Depleting Chemical (1=CFC, 2=HCFC)
CA PROP 65:	California Proposition 65

International Regulatory Lists:

EPA Hazard Categories:

This material meets the EPA 'Hazard Categories' defined for SARA Title III Sections 311/312 as indicated:

<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Acute (immediate) Health Hazard
<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	Chronic (delayed) Health Hazard
<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	Fire Hazard
<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	Sudden Release of Pressure Hazard
<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	Reactive Hazard

Regulatory Information

U.S. FEDERAL REGULATIONS:

1. Supplier Notification about toxic Chemicals.

SIFCO Applied Surface Concepts is required to inform you, that this product contains a toxic chemical or chemicals subject to the reporting requirements of Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 and 40 CFR Part 372, if specified annual thresholds are met or exceeded.

Toxic Chemical	CAS #	Wt.% (Maximum)
Chromium Sulphate	- 12336-95-7	- 3%

Your other suppliers of trade name products or mixtures containing section 313 chemicals must also notify you. If you repackage or otherwise redistribute this product to industrial customers you are required to furnish similar notification to them.

2. CERCLA and EPCRA:

Threshold Planning Quantity: N/A
(Release) Reportable Quantity: N/A
Extremely Hazardous Substance: None

3. EPCRA Hazard Categories:

Immediate (Acute) Health: Yes
Delayed (Chronic) Health: Yes
Fire: No
Sudden release of Pressure: No
Reactivity: No

4. TSCA Statement.

All ingredients of this product are listed under the Toxic Substances Control Act (TSCA).

5. ODS Certification.

This product does not contain and is not manufactured with Ozone Depleting Substances (ODS).

6. VOC Certification.

This product does not contain any Volatile Organic Compounds (VOC).

7. PCB Certification.

This product does not contain any polychlorinated biphenyls (PCB).

STATE REGULATIONS:

California Prop. 65:

WARNING! This product contains chemicals known to the state of California to cause cancer, birth defects, or other reproductive harm.

INTERNATIONAL REGULATIONS:

WHMIS Classification.

Class D-2B

16. Other Information

Company Policy or Disclaimer

DISCLAIMER:

This information is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes.

SAFETY DATA SHEET

Version 4.6
Revision Date 04/24/2015
Print Date 02/08/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Vanadium

Product Number : 262935
Brand : Aldrich

CAS-No. : 7440-62-2

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Manufacture of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

Not a hazardous substance or mixture.

2.2 GHS Label elements, including precautionary statements

Not a hazardous substance or mixture.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS - none

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula : V
Molecular weight : 50.94 g/mol
CAS-No. : 7440-62-2
EC-No. : 231-171-1

Hazardous components

Component	Classification	Concentration
Vanadium		
		<= 100 %

4. FIRST AID MEASURES

4.1 Description of first aid measures

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration.

In case of skin contact

Wash off with soap and plenty of water.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES**5.1 Extinguishing media****Suitable extinguishing media**

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Vanadium/vanadium oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES**6.1 Personal precautions, protective equipment and emergency procedures**

Avoid dust formation. Avoid breathing vapours, mist or gas.
For personal protection see section 8.

6.2 Environmental precautions

No special environmental precautions required.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Keep in suitable, closed containers for disposal.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE**7.1 Precautions for safe handling**

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.
Provide appropriate exhaust ventilation at places where dust is formed.
For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Handle and store under inert gas. Keep in a dry place.
Storage class (TRGS 510): Non Combustible Solids

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**8.1 Control parameters**

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Vanadium	7440-62-2	TWA	1.000000 mg/m3	USA. NIOSH Recommended Exposure Limits
		ST	3.000000 mg/m3	USA. NIOSH Recommended Exposure Limits

8.2 Exposure controls

Appropriate engineering controls

General industrial hygiene practice.

Personal protective equipment

Eye/face protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatril® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

No special environmental precautions required.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---------------------------|---|
| a) Appearance | Form: powder
Colour: grey |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing | Melting point/range: 1,890 °C (3,434 °F) - lit. |

point

- | | | |
|----|--|--|
| f) | Initial boiling point and boiling range | 3,380 °C (6,116 °F) - lit. |
| g) | Flash point | No data available |
| h) | Evaporation rate | No data available |
| i) | Flammability (solid, gas) | No data available |
| j) | Upper/lower flammability or explosive limits | No data available |
| k) | Vapour pressure | 10.67 hPa (8.00 mmHg) at 20 °C (68 °F) |
| l) | Vapour density | No data available |
| m) | Relative density | 6.11 g/mL at 25 °C (77 °F) |
| n) | Water solubility | No data available |
| o) | Partition coefficient: n-octanol/water | No data available |
| p) | Auto-ignition temperature | No data available |
| q) | Decomposition temperature | No data available |
| r) | Viscosity | No data available |
| s) | Explosive properties | No data available |
| t) | Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

No data available

10.5 Incompatible materials

Strong acids, Strong oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

Carcinogenicity - Rat - Intramuscular

Tumorigenic: Equivocal tumorigenic agent by RTECS criteria. Tumorigenic: Tumors at site of application.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: YW1355000

metallic taste, greenish-black discoloration of the tongue, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

Not dangerous goods

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Vanadium	7440-62-2	2007-03-01

SARA 311/312 Hazards

No SARA Hazards

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Vanadium	7440-62-2	2007-03-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Vanadium	7440-62-2	2007-03-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Vanadium	7440-62-2	2007-03-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

HMIS Rating

Health hazard: 0

Chronic Health Hazard:

Flammability: 0

Physical Hazard 0

NFPA Rating

Health hazard: 0

Fire Hazard: 0

Reactivity Hazard: 0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 4.6

Revision Date: 04/24/2015

Print Date: 02/08/2016

SAFETY DATA SHEET

Version 3.11
Revision Date 12/01/2015
Print Date 02/18/2016

1. PRODUCT AND COMPANY IDENTIFICATION**1.1 Product identifiers**

Product name : Vinyl chloride

Product Number : 387622
Brand : Aldrich
Index-No. : 602-023-00-7

CAS-No. : 75-01-4

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**2.1 Classification of the substance or mixture****GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**

Flammable gases (Category 1), H220
Gases under pressure (Liquefied gas), H280
Carcinogenicity (Category 1A), H350

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H220 : Extremely flammable gas.
H280 : Contains gas under pressure; may explode if heated.
H350 : May cause cancer.

Precautionary statement(s)

P201 : Obtain special instructions before use.
P202 : Do not handle until all safety precautions have been read and understood.
P210 : Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P281 : Use personal protective equipment as required.
P308 + P313 : IF exposed or concerned: Get medical advice/ attention.

P377	Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
P381	Eliminate all ignition sources if safe to do so.
P405	Store locked up.
P410 + P403	Protect from sunlight. Store in a well-ventilated place.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

May form explosive peroxides.

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Synonyms : Chloroethylene

Formula : C₂H₃Cl

Molecular weight : 62.50 g/mol

CAS-No. : 75-01-4

EC-No. : 200-831-0

Index-No. : 602-023-00-7

Hazardous components

Component	Classification	Concentration
Vinyl chloride		
	Flam. Gas 1; Press. Gas Liquefied gas; Carc. 1A; SA ; H220, H280, H350,	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

5.2 Special hazards arising from the substance or mixture

Carbon oxides, Hydrogen chloride gas

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Use personal protective equipment. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

6.3 Methods and materials for containment and cleaning up

Clean up promptly by sweeping or vacuum.

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Avoid inhalation of vapour or mist.

Use explosion-proof equipment. Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Contents under pressure. Light sensitive.

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Component	CAS-No.	Value	Control parameters	Basis
Vinyl chloride	75-01-4	TWA	1 ppm	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	1 ppm	USA. ACGIH Threshold Limit Values (TLV)
	Remarks	Liver damage Lung cancer Confirmed human carcinogen		
		STEL	5 ppm	USA. OSHA - TABLE Z-1 Limits for Air Contaminants - 1910.1000
		TWA	1 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		STEL	5 ppm	USA. Occupational Exposure Limits (OSHA) - Table Z-1 Limits for Air Contaminants
		See 1910.1017		
		Potential Occupational Carcinogen See Appendix A		

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Splash contact

Material: Fluorinated rubber

Minimum layer thickness: 0.7 mm

Break through time: 120 min

Material tested: Vitoject® (KCL 890 / Aldrich Z677698, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Complete suit protecting against chemicals, Flame retardant antistatic protective clothing., The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type AXBEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|--|---|
| a) Appearance | Form: Liquefied gas |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: -153.8 °C (-244.8 °F) - lit. |
| f) Initial boiling point and boiling range | -13.4 °C (7.9 °F) - lit. |
| g) Flash point | -61.0 °C (-77.8 °F) - closed cup |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | No data available |
| j) Upper/lower flammability or | Upper explosion limit: 33 %(V)
Lower explosion limit: 3.6 %(V) |

explosive limits

- | | |
|---|--|
| k) Vapour pressure | No data available |
| l) Vapour density | No data available |
| m) Relative density | 0.911 g/cm ³ at 25 °C (77 °F) |
| n) Water solubility | No data available |
| o) Partition coefficient: n-octanol/water | No data available |
| p) Auto-ignition temperature | No data available |
| q) Decomposition temperature | No data available |
| r) Viscosity | No data available |
| s) Explosive properties | No data available |
| t) Oxidizing properties | No data available |

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

Contains the following stabiliser(s):

Hydroquinone (≥ 0 - ≤ 0.0001 %)

Phenol (≥ 0 - ≤ 0.01 %)

10.3 Possibility of hazardous reactions

No data available

10.4 Conditions to avoid

Heat, flames and sparks. Extremes of temperature and direct sunlight.

10.5 Incompatible materials

Chemically active metals, Copper

10.6 Hazardous decomposition products

Other decomposition products - No data available

In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

LC50 Inhalation - Rat - 0.3 h - 180000 ppm

Remarks: Behavioral:Tremor. Behavioral:Convulsions or effect on seizure threshold. Respiratory disorder

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

This is or contains a component that has been reported to be carcinogenic based on its IARC, OSHA, ACGIH, NTP, or EPA classification.

Human carcinogen.

IARC: 1 - Group 1: Carcinogenic to humans (Vinyl chloride)

NTP: Known to be human carcinogen (Vinyl chloride)

OSHA: OSHA specifically regulated carcinogen (Vinyl chloride)

Reproductive toxicity

No data available

Overexposure may cause reproductive disorder(s) based on tests with laboratory animals.

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: KU9625000

burning sensation, Cough, wheezing, laryngitis, Shortness of breath, Headache, Nausea, Vomiting, To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Central nervous system -

Stomach - Irregularities - Based on Human Evidence (Phenol)

Liver - Irregularities - Based on Human Evidence

12. ECOLOGICAL INFORMATION**12.1 Toxicity**

No data available

12.2 Persistence and degradability

No data available

12.3 Bioaccumulative potential

No data available

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

No data available

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1086 Class: 2.1
Proper shipping name: Vinyl chloride, stabilized
Reportable Quantity (RQ): 1 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1086 Class: 2.1
Proper shipping name: VINYL CHLORIDE, STABILIZED

EMS-No: F-D, S-U

IATA

UN number: 1086 Class: 2.1
Proper shipping name: Vinyl chloride, stabilized
IATA Passenger: Not permitted for transport

15. REGULATORY INFORMATION

SARA 302 Components

The following components are subject to reporting levels established by SARA Title III, Section 302:

	CAS-No.	Revision Date
Phenol	108-95-2	2007-07-01
Hydroquinone	123-31-9	2007-07-01

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Vinyl chloride	75-01-4	2007-07-01

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Vinyl chloride	75-01-4	2007-07-01
Phenol	108-95-2	2007-07-01
Hydroquinone	123-31-9	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Vinyl chloride	75-01-4	2007-07-01
Phenol	108-95-2	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Vinyl chloride	75-01-4	2007-07-01

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer.

Vinyl chloride

CAS-No.	Revision Date
75-01-4	2007-09-28

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

	May displace oxygen and cause rapid suffocation.
Carc.	Carcinogenicity
Flam. Gas	Flammable gases
H220	Extremely flammable gas.
H280	Contains gas under pressure; may explode if heated.
H350	May cause cancer.
Press. Gas	Gases under pressure
SA	Simple Asphyxiant

HMIS Rating

Health hazard:	2
Chronic Health Hazard:	*
Flammability:	4
Physical Hazard	3

NFPA Rating

Health hazard:	2
Fire Hazard:	4
Reactivity Hazard:	0

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.
The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation
Product Safety – Americas Region
1-800-521-8956

Version: 3.11

Revision Date: 12/01/2015

Print Date: 02/18/2016

SAFETY DATA SHEET

Version 4.9
Revision Date 08/24/2015
Print Date 02/07/2016

1. PRODUCT AND COMPANY IDENTIFICATION

1.1 Product identifiers

Product name : Zinc

Product Number : 324930
Brand : Aldrich
Index-No. : 030-001-00-1

CAS-No. : 7440-66-6

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses : Laboratory chemicals, Synthesis of substances

1.3 Details of the supplier of the safety data sheet

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052

1.4 Emergency telephone number

Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

Self-heating substances and mixtures (Category 1), H251
Substances and mixtures, which in contact with water, emit flammable gases (Category 1), H260
Acute aquatic toxicity (Category 1), H400
Chronic aquatic toxicity (Category 1), H410

For the full text of the H-Statements mentioned in this Section, see Section 16.

2.2 GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H251

Self-heating: may catch fire.

H260

In contact with water releases flammable gases which may ignite spontaneously.

H410

Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P223

Do not allow contact with water.

P231 + P232

Handle under inert gas. Protect from moisture.

P235 + P410

Keep cool. Protect from sunlight.

P273

Avoid release to the environment.

P280	Wear protective gloves/ eye protection/ face protection.
P335 + P334	Brush off loose particles from skin. Immerse in cool water/ wrap in wet bandages.
P370 + P378	In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.
P391	Collect spillage.
P402 + P404	Store in a dry place. Store in a closed container.
P407	Maintain air gap between stacks/ pallets.
P413	Store bulk masses greater than .? kg/ .? lbs at temperatures not exceeding .? °C/ .? °F.
P420	Store away from other materials.
P501	Dispose of contents/ container to an approved waste disposal plant.

2.3 Hazards not otherwise classified (HNOC) or not covered by GHS

Combustible dust

3. COMPOSITION/INFORMATION ON INGREDIENTS

3.1 Substances

Formula	: Zn
Molecular weight	: 65.39 g/mol
CAS-No.	: 7440-66-6
EC-No.	: 231-175-3
Index-No.	: 030-001-00-1

Hazardous components

Component	Classification	Concentration
Zinc powder (pyrophoric)		
	Self-heat. 1; Water-react. 1; Aquatic Acute 1; Aquatic Chronic 1; H251, H260, H410	<= 100 %

For the full text of the H-Statements mentioned in this Section, see Section 16.

4. FIRST AID MEASURES

4.1 Description of first aid measures

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

4.2 Most important symptoms and effects, both acute and delayed

The most important known symptoms and effects are described in the labelling (see section 2.2) and/or in section 11

4.3 Indication of any immediate medical attention and special treatment needed

No data available

5. FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media

Dry powder

5.2 Special hazards arising from the substance or mixture

Zinc/zinc oxides

5.3 Advice for firefighters

Wear self-contained breathing apparatus for firefighting if necessary.

5.4 Further information

No data available

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Avoid dust formation. Avoid breathing vapours, mist or gas. Ensure adequate ventilation. Evacuate personnel to safe areas.

For personal protection see section 8.

6.2 Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

6.3 Methods and materials for containment and cleaning up

Sweep up and shovel. Contain spillage, and then collect with an electrically protected vacuum cleaner or by wet-brushing and place in container for disposal according to local regulations (see section 13). Do not flush with water. Keep in suitable, closed containers for disposal. Contain spillage, pick up with an electrically protected vacuum cleaner or by wet-brushing and transfer to a container for disposal according to local regulations (see section 13).

6.4 Reference to other sections

For disposal see section 13.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Further processing of solid materials may result in the formation of combustible dusts. The potential for combustible dust formation should be taken into consideration before additional processing occurs.

Provide appropriate exhaust ventilation at places where dust is formed. Keep away from sources of ignition - No smoking.

For precautions see section 2.2.

7.2 Conditions for safe storage, including any incompatibilities

Keep container tightly closed in a dry and well-ventilated place.

Never allow product to get in contact with water during storage.

Keep in a dry place.

Storage class (TRGS 510): Pyrophoric and self-heating hazardous materials

7.3 Specific end use(s)

Apart from the uses mentioned in section 1.2 no other specific uses are stipulated

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

8.1 Control parameters

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

8.2 Exposure controls

Appropriate engineering controls

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

Personal protective equipment

Eye/face protection

Face shield and safety glasses Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Protective gloves against thermal risks

Full contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatrill® (KCL 740 / Aldrich Z677272, Size M)

Splash contact

Material: Nitrile rubber

Minimum layer thickness: 0.11 mm

Break through time: 480 min

Material tested: Dermatrill® (KCL 740 / Aldrich Z677272, Size M)

data source: KCL GmbH, D-36124 Eichenzell, phone +49 (0)6659 87300, e-mail sales@kcl.de, test method: EN374

If used in solution, or mixed with other substances, and under conditions which differ from EN 374, contact the supplier of the CE approved gloves. This recommendation is advisory only and must be evaluated by an industrial hygienist and safety officer familiar with the specific situation of anticipated use by our customers. It should not be construed as offering an approval for any specific use scenario.

Body Protection

Flame retardant protective clothing, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face particle respirator type N100 (US) or type P3 (EN 143) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Control of environmental exposure

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

- | | |
|---|---|
| a) Appearance | Form: powder
Colour: grey |
| b) Odour | No data available |
| c) Odour Threshold | No data available |
| d) pH | No data available |
| e) Melting point/freezing point | Melting point/range: 420 °C (788 °F) - lit. |
| f) Initial boiling point and boiling range | 907 °C (1,665 °F) - lit. |
| g) Flash point | No data available |
| h) Evaporation rate | No data available |
| i) Flammability (solid, gas) | May form combustible dust concentrations in air |
| j) Upper/lower flammability or explosive limits | No data available |
| k) Vapour pressure | 1 hPa (1 mmHg) at 487 °C (909 °F) |

l) Vapour density	No data available
m) Relative density	7.133 g/mL at 25 °C (77 °F)
n) Water solubility	No data available
o) Partition coefficient: n-octanol/water	log Pow: 5
p) Auto-ignition temperature	The substance or mixture is classified as self heating with the category 1.
q) Decomposition temperature	No data available
r) Viscosity	No data available
s) Explosive properties	No data available
t) Oxidizing properties	No data available

9.2 Other safety information

No data available

10. STABILITY AND REACTIVITY

10.1 Reactivity

No data available

10.2 Chemical stability

Stable under recommended storage conditions.

10.3 Possibility of hazardous reactions

Reacts violently with water.

10.4 Conditions to avoid

Exposure to moisture

10.5 Incompatible materials

Strong acids and oxidizing agents

10.6 Hazardous decomposition products

Other decomposition products - No data available
In the event of fire: see section 5

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity

No data available

Inhalation: No data available

Dermal: No data available

No data available

Skin corrosion/irritation

No data available

Serious eye damage/eye irritation

No data available

Respiratory or skin sensitisation

Did not cause sensitisation on laboratory animals.

Germ cell mutagenicity

No data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as

probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

No data available

No data available

Specific target organ toxicity - single exposure

No data available

Specific target organ toxicity - repeated exposure

No data available

Aspiration hazard

No data available

Additional Information

RTECS: ZG8600000

chills, dry throat, sweet taste, Fever, Cough, Nausea, Vomiting, Weakness

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

Toxicity to fish LC50 - Cyprinus carpio (Carp) - 450.0 µg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates LC50 - Daphnia magna (Water flea) - 0.068 mg/l - 48 h

mortality NOEC - Daphnia (water flea) - 0.101 - 0.14 mg/l - 7 d

12.2 Persistence and degradability

12.3 Bioaccumulative potential

Bioaccumulation Algae - 7 d
at 16 °C - 5 µg/l

Bioconcentration factor (BCF): 466

12.4 Mobility in soil

No data available

12.5 Results of PBT and vPvB assessment

PBT/vPvB assessment not available as chemical safety assessment not required/not conducted

12.6 Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.
Very toxic to aquatic life.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Product

Contact a licensed professional waste disposal service to dispose of this material. Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging
Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 1436 Class: 4.3 (4.2) Packing group: II
Proper shipping name: Zinc powder
Reportable Quantity (RQ): 1000 lbs

Poison Inhalation Hazard: No

IMDG

UN number: 1436 Class: 4.3 (4.2) Packing group: II EMS-No: F-G, S-O
Proper shipping name: ZINC POWDER
Marine pollutant: yes

IATA

UN number: 1436 Class: 4.3 (4.2) Packing group: II
Proper shipping name: Zinc powder

15. REGULATORY INFORMATION

SARA 302 Components

No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

SARA 311/312 Hazards

Reactivity Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

New Jersey Right To Know Components

	CAS-No.	Revision Date
Zinc powder (pyrophoric)	7440-66-6	1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Full text of H-Statements referred to under sections 2 and 3.

Aquatic Acute	Acute aquatic toxicity
Aquatic Chronic	Chronic aquatic toxicity
H251	Self-heating: may catch fire.
H260	In contact with water releases flammable gases which may ignite spontaneously.
H400	Very toxic to aquatic life.
H410	Very toxic to aquatic life with long lasting effects.
Self-heat.	Self-heating substances and mixtures

HMIS Rating

Health hazard: 0

Chronic Health Hazard:

Flammability: 3

Physical Hazard 1

NFPA Rating

Health hazard: 0

Fire Hazard: 3

Reactivity Hazard: 1

Special hazard.I: W

Further information

Copyright 2015 Sigma-Aldrich Co. LLC. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Corporation and its Affiliates shall not be held liable for any damage resulting from handling or from contact with the above product. See www.sigma-aldrich.com and/or the reverse side of invoice or packing slip for additional terms and conditions of sale.

Preparation Information

Sigma-Aldrich Corporation

Product Safety – Americas Region

1-800-521-8956

Version: 4.9

Revision Date: 08/24/2015

Print Date: 02/07/2016

ATTACHMENT F

JOB SITE SAFETY INSPECTION CHECKLIST

Jobsite Safety Inspection Checklist

Date: _____ **Inspected By:** _____

Location: _____ **Project #:** _____

Check one of the following: **A:** Acceptable **NA:** Not Applicable **D:** Deficiency

	A	NA	D	Remark
1. HASP available onsite for inspection?				
2. Health & Safety Compliance agreement (in HASP) appropriately signed by Langan employees and contractors?				
3. Hospital route map with directions posted on site?				
4. Emergency Notification List posted on site?				
5. First Aid kit available and properly stocked?				
6. Personnel trained in CPR/First Aid on site?				
7. MSDSs readily available, and all workers knowledgeable about the specific chemicals and compounds to which they may be exposed?				
8 Appropriate PPE being worn by Langan employees and contractors?				
9. Project site safe practices ("Standing Orders") posted?				
10. Project staff have 40-hr./8-hr./Supervisor HAZWOPER training?				
11. Project staff medically cleared to work in hazardous waste sites and fit-tested to wear respirators, if needed?				
12. Respiratory protection readily available?				
13. Health & Safety Incident Report forms available?				
14. Air monitoring instruments calibrated daily, and results recorded on the Daily Instrument Calibration check sheet?				
15. Air monitoring readings recorded on the air monitoring data sheet/field logbook?				
16. Subcontract workers have received 40-hr./8-hr./Spvsr. HAZWOPER training, as appropriate?				
17. Subcontract workers medically cleared to work on site, and fit-tested for respirator wear?				
18. Subcontract workers have respirators readily available?				
19. Mark outs of underground utilities done prior to initiating any subsurface activities?				
20. Decontamination procedures being followed as outlined in HASP?				
21. Are tools in good condition and properly used?				
22. Drilling performed in areas free from underground objects including utilities?				

23. Adequate size/type fire extinguisher supplied?				
24. Equipment at least 20 feet from overhead powerlines?				
25. Evidence that drilling operator is responsible for the safety of his rig.				
26. Trench sides shored, layer back, or boxed?				
27. Underground utilities located, and authorities contacted before digging?				
28. Ladders in trench (25-foot spacing)?				
29. Excavated material placed more than 2 feet away from excavation edge?				
30. Public protected from exposure to open excavation?				
31. People entering the excavation regarding it as a permit-required confined space and following appropriate procedures?				
32. Confined space entry permit is completed and posted?				
33. All persons knowledgeable about the conditions and characteristics of the confined space?				
34. All persons engaged in confined space operations have been trained in safe entry and rescue (non-entry)?				
35. Full body harnesses, lifelines, and hoisting apparatus available for rescue needs?				
36. Attendant and/or supervisor certified in basic first aid and CPR?				
37. Confined space atmosphere checked before entry and continuously while the work is going on?				
38. Results of confined space atmosphere testing recorded?				
39. Evidence of coordination with off-site rescue services to perform entry rescue, if needed?				
40. Are extension cords rated for this work being used and are they properly maintained?				
41. Are GFCIs provided and being used?				

Unsafe Acts: _____

Notes: _____

ATTACHMENT G

JOB SAFETY ANALYSIS FORM

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA TITLE:

DATE CREATED:

CREATED BY:

JSA NUMBER:

REVISION DATE:

REVISED BY:

Langan employees must review and revise the Job Safety Analysis (JSA) as needed to address the any site-specific hazards not identified. Employees must provide their signatures on the last page of the JSA indicating they have review the JSA and are aware the potential hazards associated with this work and will follow the provided preventive or corrective measures.

PERSONAL PROTECTIVE EQUIPMENT REQUIRED: (PPE): ☐ Required ☒ As Needed

☐ Steel-toed boots

☐ Nitrile gloves

☐ Dermal Protection (Specify)

☐ Long-sleeved shirt

☐ Leather/ Cut-resistant gloves

☐ High visibility vest/clothing

☐ Safety glasses

☐ Face Shield

☐ Hard hat

ADDITIONAL PERSONAL PROTECTIVE EQUIPMENT NEEDED (Provide specific type(s) or descriptions)

☐ Air Monitoring:

☐ Respirators:

☐ Other:

☐ Dermal Protection:

☐ Cartridges:

☐ Other:

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE OR CORRECTIVE ACTION
1.	1. 2.	1a. 1b. 2a. 2b.
2.	1.	1
Additional items identified in the field.		
Additional Items.		

If additional items are identified during daily work activities, please notify all relevant personnel about the change and document on this JSA.

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA Title: COVID-19 Awareness – Site Work

JSA Number: JSA046-00

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventive/corrective actions. Prior to the start of any work “TAKE 5” and conduct a Last-Minute Risk Assessment.



S – Stop, what has changed?
T – Think about the task
E – Evaluate potential hazards
P – Plan safe approach
S – Start task / Stop & regroup

PERSONAL PROTECTIVE EQUIPMENT (Required or to be worn as needed):

<input checked="" type="checkbox"/> Safety Boots	<input type="checkbox"/> Long Sleeves	<input type="checkbox"/> Safety Vest (Class 2)	<input type="checkbox"/> Hard Hat	<input type="checkbox"/> Hearing Protection
<input type="checkbox"/> Safety Glasses	<input type="checkbox"/> Safety Goggles	<input type="checkbox"/> Face Shield	<input type="checkbox"/> Nitrile Gloves	<input type="checkbox"/> PVC Gloves
<input type="checkbox"/> Leather Gloves	<input type="checkbox"/> Cut Resist. Gloves	<input type="checkbox"/> Fall Protection	<input type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input type="checkbox"/> Insect/Animal Repellent	<input type="checkbox"/> Ivy Blocker/Cleaner	<input type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	
<input checked="" type="checkbox"/> Other: Alcohol-based hand sanitizer, disinfectant wipes/spray				

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
1. All Activities	1. Transmittal/exposure of COVID-19	1. Ask yourself and your managers – is this work essential? Can this be done remotely? 2. Stay home if sick or showing symptoms of COVID-19 (e.g., fever, cough, etc.). 3. Carry nitrile gloves, alcohol-based hand sanitizer, face coverings and disinfectant wipes/spray during field work. 4. Check federal, state, and/or local travel restrictions prior to travel. Many states, counties, and cities are passing strict “shelter-in-place” or business restrictions in response to COVID-19. 5. Immediately notify Beverly Williams or Rory Johnston (Supervisor if employee chooses) if you display symptoms of COVID-19. Symptoms include fever (over 100.4 F), cough, and shortness of breath. 6. Notify Beverly Williams or Rory Johnston, Supervisor and Coronavirus Task Force if you had close contact with an individual who tested positive or displayed symptoms of COVID-19. 7. Do not touch your face, to the extent possible. 8. Wear face coverings when around other worker to minimize spread of COVID-19. (May be required in certain states or locations.)

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
		9. Practice social distancing, maintaining at least 6 feet of distance between yourself and others. Avoid gatherings of more than 10 people. Limit, to the extent possible, contact with public items/objects. 10. Clean your hands frequently with soap and water for at least 20 seconds especially after you have been in a public place, or after blowing your nose, coughing, sneezing, or using the rest room. 11. If soap and water are not readily available, use a hand sanitizer that contains at least 60% alcohol. Cover all surfaces of your hands and rub them together until they feel dry. 12. Cover your mouth and nose with a tissue when you cough or sneeze or use the inside of your elbow. 13. Clean and disinfect frequently touched surfaces daily, for example, cell phones, computer equipment, headsets, tables, doorknobs, light switches, countertops, handles, desks, toilets, faucets, and sinks.
2. Travel to Jobsite	1. Transmittal/exposure of COVID-19 between passengers 2. Transmittal/exposure of COVID-19 from previous occupants (rental and fleet vehicles) 3. Transmittal/exposure of COVID-19 while refueling	1. Limit the number of occupants to each vehicle to 2 people. Employees should sit as far away from each other as possible. 2. Disinfect high "hand-traffic" areas of the vehicle: Door handles, steering wheel, turn signal and control rods, dashboard controls, seatbelts, armrests, etc. To the extent possible, do not use recycled air for heat/AC and travel with the windows open. 3. Use hand sanitizer before and after pumping gas and only return to the inside of the vehicle after refueling is complete. 4. Wear nitrile gloves if available or disinfect the keypad, pump handle, and fuel grade button prior to use. 5. Recommend face coverings are worn to minimize spread of COVID-19.
3. Conduct Tailgate Safety Meeting & Complete H&S Paperwork	1. Transmittal/exposure of COVID-19 between meeting participants	1. Practice social distancing, maintaining at least 6 feet of distance between yourself and others. 2. Recommend face coverings are worn when around other workers to minimize spread of COVID-19, 3. Hold meetings outside and keep in mind wind direction. To the extent possible, remain crosswind from other people. 4. Designate a single person to maintain sign-in sheets/permits throughout the day to limit the passing of pens/clipboards between people. 5. Each person should complete their own JSA, even if they are completing similar tasks as others in order to limit the passing of paper/pens/clipboards between people. 6. Include COVID-19 topics and prevention measures in safety meetings.
4. Conduct Site Work	1. Transmittal/exposure of COVID-19 between site workers and public.	1. Practice social distancing maintaining 6 feet of distance between yourself and others. 2. Recommend face coverings are worn when around other workers to minimize spread of COVID-19, 3. To the extent possible, do not interact with the public. If it is necessary, politely explain you are practicing social distance and request they stay at least 6 feet away and they do not attempt to pass objects to you. 4. Wear nitrile gloves during site work underneath the appropriate gloves for your task. Utilize appropriate decontamination procedures, securely bag all waste (including nitrile gloves) generated during site work and dispose of.

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
		5. Do not share tools. Each person should be equipped with the tools to complete their task or tasks should be divided to remove the need to share tools. If tools must be shared, surfaces should be disinfected. 6. Clean and disinfect surfaces of rental tools and equipment upon receipt. To the extent possible rent equipment from Langan's internal equipment reservation center, where cleaning/disinfecting procedures can be verified.
5. Use of Construction Trailers	1. Transmittal/exposure of COVID-19 between site workers and others.	1. Avoid use of shared trailers, if possible. Minimize trailer use to essential personnel. 2. Practice social distancing; maintaining 6 feet of distance between yourself and others in trailer. 3. Clean and disinfect areas including desks, phones, chairs, and other common areas, before and after use.
6. Purchasing Food from a Restaurant	1. Transmittal/exposure of COVID-19 from other customers, staff, surfaces.	1. To the extent possible, bring your own food. 2. If you must visit a restaurant, call ahead for take-out or "contactless delivery." Do not dine in. When picking up food, follow guidelines for <u>Job Step #8: Purchasing Supplies at Retail/Shipping Centers</u> . 3. Wash hands before and after eating.
7. Smoking Cigarettes	1. Transmittal/exposure of COVID-19 by touching mouth with hands	1. Cigarette smokers are at greater risk of complications arising from COVID-19. Nicotine patches/lozenges/gum, smoking cessation programs, and prescription medications may aid in "kicking the habit" if you decide to quit. 2. Wash hands thoroughly before and after smoking. 3. Discard cigarette butts properly. Do not light cigarettes from others and do not give cigarettes to others.
8. Hotel Stay	1. Transmittal/exposure of COVID-19 from previous occupants, hotel staff, common areas.	1. Verify the hotel chain/brand has modified cleaning procedures to reflect risk of COVID-19. Most hotel companies have issued statements on their websites and in email blasts reflecting these new procedures. 2. Use the front door, and not peripheral entrances. Front doors of hotels are usually automatic. 3. Request ground floor room to avoid elevator use and a room that has not be utilized in 48-72 hours. 4. If elevator use is required, do not directly touch elevator buttons with your hands. Do not ride elevators with other people, to the extent possible. 5. Bring disinfecting wipes or sanitizing spray. Upon arrival, disinfect high "hand-traffic" areas of the hotel room: Door handles, light switches, shower/sink faucet handles, TV remote, curtain/blind handles. Clean these surfaces daily. 6. Place the "Do Not Disturb" Sign on your door to prevent people (housekeeping) from entering your room. 7. Avoid common spaces and hotel sponsored events where crowds will be present. 8. Confirm hotel cleaning procedures have been modified to address COVID-19. Confirm no COVID-19 cases have occurred in hotel
9. Purchasing Supplies at Retail/Shipping Centers	1. Transmittal/exposure of COVID-19 from other customers, staff, surfaces.	1. Plan your travel to limit the need to visit retail/shipping centers. 2. Practice social distancing, maintaining at least 6 feet of distance between yourself and others. If the store is too crowded/small, consider visiting another store or returning at a different time. 3. Avoid high "hand-traffic" items/areas like door handles (i.e. use your shoulder, hip/butt, or open with a disposable napkin/paper towel), credit cards terminals (i.e. use Apple/Android pay if available), shopping carts/baskets (i.e. bring your own shopping

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA Title: Environmental Sampling

JSA Number: JSA021-01

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventive/corrective actions. Prior to the start of any work "TAKE 5" and conduct a Last-Minute Risk Assessment.



S – Stop, what has changed?
T – Think about the task
E – Evaluate potential hazards
P – Plan safe approach
S – Start task / Stop & regroup

PERSONAL PROTECTIVE EQUIPMENT (Required or to be worn as needed):

<input checked="" type="checkbox"/> Safety Shoes	<input checked="" type="checkbox"/> Long Sleeves	<input checked="" type="checkbox"/> Safety Vest (Class 2)	<input checked="" type="checkbox"/> Hard Hat	<input type="checkbox"/> Hearing Protection
<input checked="" type="checkbox"/> Safety Glasses	<input type="checkbox"/> Safety Goggles	<input type="checkbox"/> Face Shield	<input checked="" type="checkbox"/> Nitrile Gloves	<input type="checkbox"/> PVC Gloves
<input type="checkbox"/> Leather Gloves	<input type="checkbox"/> Cut Resist. Gloves	<input type="checkbox"/> Fall Protection	<input checked="" type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input checked="" type="checkbox"/> Insect/Animal Repellent	<input checked="" type="checkbox"/> Ivy Blocker/Cleaner	<input type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	
<input checked="" type="checkbox"/> Other: Tyvek Sleeves				

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
1. Drive to sample location	1. Rough/Off Road terrain	1. Pay attention to road conditions such as road erosion, unprotected embankments, and soft road conditions.
2. Sample Collection (Walking)	1. Slip/Trips/Falls 2. Back strains 3. Wildlife (Insects, Stray animals, rodents) 4. Poisonous vegetation	1. Minimize distance to sample area/ Plan route and check surface prior to carrying heavy equipment/ Locate safest access point/ Follow good housekeeping procedures/ Mark significant below grade hazards (holes, trenches) with spray paint or cones/ Wear foot protection with ankle support and gripping soles. 2. Use proper lifting techniques/ Use wheeled transport/ Obtain assistance where and when needed/ Consider load weight when evaluating what is safe and unsafe to carry. 3. Be aware of surroundings for the presence of wildlife. Do not approach stray animals. Carry and use animal repellent when needed/ Use bug spray when needed. 4. Keep skin covered/ Identify and avoid poisonous vegetation/ Clean areas after contact with suspected vegetation.
3. Sample Collection (Water)	1. Drowning Hazards 2. Chemical burns (when adding acid preservative to sample) 3. Back Strains 4. Ergonomic issues 5. Slip/Trips/Falls	1. Use buddy system/ Wear flotation vest if water is deeper than 2 feet or swift moving/ Select working area with stable footing. Do not attempt to cross or stand in swift moving water. 2. Wear proper PPE (Nitrile gloves, Tyvek Sleeves) 3. Use proper lifting techniques/ Use wheeled transport/ Obtain assistance where and when needed/ Consider load weight when evaluating what is safe or unsafe to carry. 4. When possible, avoid bending over for long periods of time/ Use a small stool for sitting or knee pad for kneeling.

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
		5. Minimize distance to sample area/ Plan route and check surface prior to carrying heavy equipment/ Locate safest access point/ Follow good housekeeping procedures/ Mark significant below grade hazards (holes, trenches) with spray paint or cones/ Wear foot protection with ankle support and gripping soles/ Avoid standing water or slippery terrain.
4.All activities	1. Slips/ Trips/ Falls 2. Hand injuries, cuts, or lacerations during manual handling of materials 3. Foot injuries 4. Back injuries 5. Traffic 6. Wildlife: Stray dogs, Mice/rats, Vectors (i.e., mosquitoes, bees, etc.) 7. High Noise levels 8. Overhead hazards 9. Heat Stress/ Cold Stress 10. Eye Injuries	1. Be aware of potential trip hazards / Follow good housekeeping procedures/ Mark significant hazards 2. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery, or dirty objects before handling / Wear leather/ cut-resistant gloves 3. Wear Langan approved safety shoes 4. Use proper lifting techniques / Consider load location, task repetition, and load weigh when evaluating what is safe or unsafe to lift / Obtain assistance when possible 5. Wear high visibility clothing & vest / Use cones or signs to designate work area 6. Be aware of surroundings at all times, including the presence of wildlife/ Do not approach stray dogs / Carry/use dog/animal repellant / Use bug spray when needed 7. Wear hearing protection 8. Wear hard hat / Avoid areas where overhead hazards exist. 9. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather) / Drink plenty of fluids to avoid dehydration / Takes breaks as necessary to avoid heat/cold stress 10. Wear safety glasses
Additional items.		
Additional Items identified while in the field. (Delete row if not needed.)		

<u>Print Name</u>	<u>Sign Name</u>	<u>Date</u>
<u>Prepared by:</u>		
<u>Reviewed by:</u>		

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA Title: Subsurface Investigation
JSA Number: JSA030-01

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventive/corrective actions. Prior to the start of any work "TAKE 5" and conduct a Last-Minute Risk Assessment.



S – Stop, what has changed?
T – Think about the task
E – Evaluate potential hazards
P – Plan safe approach
S – Start task / Stop & regroup

PERSONAL PROTECTIVE EQUIPMENT (Required or to be worn as needed):

<input checked="" type="checkbox"/> Safety Shoes	<input checked="" type="checkbox"/> Long Sleeves	<input checked="" type="checkbox"/> Safety Vest (Class 2)	<input checked="" type="checkbox"/> Hard Hat	<input checked="" type="checkbox"/> Hearing Protection
<input checked="" type="checkbox"/> Safety Glasses	<input checked="" type="checkbox"/> Safety Goggles	<input type="checkbox"/> Face Shield	<input type="checkbox"/> Nitrile Gloves	<input type="checkbox"/> PVC Gloves
<input checked="" type="checkbox"/> Leather Gloves	<input checked="" type="checkbox"/> Cut Resist. Gloves	<input type="checkbox"/> Fall Protection	<input type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input type="checkbox"/> Insect/Animal Repellent	<input type="checkbox"/> Ivy Blocker/Cleaner	<input type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	

☒ Other: Dielectric Overshoes, Sun Block

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
5. Transport equipment to work area	2. Back/strain 3. Slip/Trip/Falls 4. Traffic 5. Cuts/abrasions/contusions from equipment 6. Accidents due to vehicle operations	1. Use proper lifting techniques/Use wheeled transport 2. Minimize distance to work area/unobstructed path to work area/follow good housekeeping procedures 3. Wear proper PPE (high visibility vest or clothing) 4. Wear proper PPE (leather gloves, long sleeves, Langan approved safety shoes) 5. Observe posted speed limits/ Wear seat belts at all times
6. Traffic	1. Hit by moving vehicle	1. Use traffic cones and signage/ Use High visibility traffic vests and clothing/ Caution tape when working near active roadways.
7. Field Work (drilling, resistivity testing, and inspection)	1. Biological Hazards: insects, rats, snakes, poisonous plants, and other animals 2. Heat stress/injuries 3. Cold Stress/injuries 4. High Energy Transmission Lines 5. Underground Utilities 6. Electrical (soil resistivity testing)	1. Inspect work area to identify biological hazards. Wear light colored long sleeve shirt and long pants/ Use insect repellant as necessary/ Beware of tall grass, bushes, woods, and other areas where ticks may live/ Avoid leaving garbage on site to prevent attracting animals/ Identify and avoid contact with poisonous plants/Beware of rats, snakes, or stray animals. 2. Wear proper clothing (light colored)/ drink plenty of water/ take regular breaks/use sun block. 3. Wear proper clothing/ dress in layers/ take regular breaks. 4. Avoid direct contact with high energy transmission lines/ position equipment at least 15 feet or as required by PSE&G from the transmission lines/ wear proper PPE (dielectric overshoes 15 kV minimum rating).

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
		5. Call one-call service before performing intrusive field work/ Review utility mark-outs and available utility drawings (with respect to proposed work locations)/ Follow Underground Utility Guidelines 6. See AGI Sting R1 operating manual for specific concerns during operating instrument
8.All activities	1. Slips/ Trips/ Falls 2. Hand injuries, cuts, or lacerations during manual handling of materials 3. Foot injuries 4. Back injuries 5. Traffic 6. Wildlife: Stray dogs, Mice/rats, Vectors (i.e., mosquitoes, bees, etc.) 7. High Noise levels 8. Overhead hazards 9. Heat Stress/ Cold Stress 10. Eye Injuries	7. Be aware of potential trip hazards / Follow good housekeeping procedures/ Mark significant hazards. 8. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery, or dirty objects before handling / Wear leather/ cut-resistant gloves. 9. Wear Langan approved safety shoes. 10. Use proper lifting techniques / Consider load location, task repetition, and load weigh when evaluating what is safe or unsafe to lift / Obtain assistance when possible. 11. Wear high visibility clothing & vest / Use cones or signs to designate work area. 12. Be aware of surroundings at all times, including the presence of wildlife/ Do not approach stray dogs / Carry/use dog/animal repellant / Use bug spray when needed. 13. Wear proper hearing protection. 14. Wear hard hat / Avoid areas where overhead hazards exist. 15. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather) / Drink plenty of fluids to avoid dehydration / Takes breaks as necessary to avoid heat/cold stress. 16. Wear safety glasses
Additional items.		
Additional Items identified while in the field. (Delete row if not needed.)		

<u>Print Name</u>	<u>Sign Name</u>	<u>Date</u>
<u>Prepared by:</u>		
<u>Reviewed by:</u>		

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA Title: Field Sampling
JSA Number: JSA022-01

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventive/corrective actions. Prior to the start of any work "TAKE 5" and conduct a Last-Minute Risk Assessment.



S – Stop, what has changed?
T – Think about the task
E – Evaluate potential hazards
P – Plan safe approach
S – Start task / Stop & regroup

PERSONAL PROTECTIVE EQUIPMENT (Required or to be worn as needed):

<input checked="" type="checkbox"/> Safety Shoes	<input checked="" type="checkbox"/> Long Sleeves	<input type="checkbox"/> Safety Vest (Class 2)	<input checked="" type="checkbox"/> Hard Hat	<input checked="" type="checkbox"/> Hearing Protection
<input checked="" type="checkbox"/> Safety Glasses	<input type="checkbox"/> Safety Goggles	<input type="checkbox"/> Face Shield	<input checked="" type="checkbox"/> Nitrile Gloves	<input type="checkbox"/> PVC Gloves
<input checked="" type="checkbox"/> Leather Gloves	<input type="checkbox"/> Cut Resist. Gloves	<input type="checkbox"/> Fall Protection	<input type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input type="checkbox"/> Insect/Animal Repellent	<input type="checkbox"/> Ivy Blocker/Cleaner	<input checked="" type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	
<input type="checkbox"/> Other:				

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
9. Unpack/Transport equipment to work area.	7. Back Strains 8. Slip/Trips/Falls 9. Cuts/Abrasions from equipment 10. Contusions from dropped equipment	6. Use proper lifting techniques/Use wheeled transport. 7. Minimize distance to work area/Unobstructed path to work area/follow good housekeeping procedures. Mark slip/trip/fall hazards with orange safety cones. 8. Wear proper PPE (leather gloves, long sleeves). 9. Wear proper PPE (Langan approved safety shoes).
10. Initial Site Arrival-Site Assessment	5. Traffic	5. Situational awareness (be alert of your surroundings). Secure area from through traffic.
11. Surface Water Sampling	6. Contaminated media. Skin/eye contact with biological agents and/or chemicals.	6. Wear appropriate PPE (Safety glasses, appropriate gloves). Review (M)SDS for all chemicals being.
12. Sampling from bridges	1. Struck by vehicles	1. Wear appropriate PPE (Safety Vest). Use buddy system and orange safety cones.
13. Icing of Samples/Transporting coolers/equipment from work area.	11. Back Strains 12. Slips/Trips/Falls 13. Cuts/Abrasions from equipment 14. Pinch/Crushing Hazards.	17. Drain coolers of water. Use proper lifting techniques. Use wheeled transport. 18. Have unobstructed path from work area. Aware of surroundings. 19. Wear proper PPE (Leather gloves, long sleeves) 20. Wear proper PPE (Leather gloves, long sleeves)
14. Site Departure	1. Contaminated PPE/Vehicle	1. Contaminated PPE should be disposed of on-site. Remove boots and soiled clothing for secure storage in trunk. Wash hands promptly.

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
15. All activities	1. Slips/ Trips/ Falls 2. Hand injuries, cuts, or lacerations during manual handling of materials 3. Foot injuries 4. Back injuries 15. Traffic 16. Wildlife: Stray dogs, Mice/rats, Vectors (i.e., mosquitoes, bees, etc.) 17. High Noise levels 18. Overhead hazards 19. Heat Stress/ Cold Stress 20. Eye Injuries	1. Be aware of potential trip hazards / Follow good housekeeping procedures/ Mark significant hazards 2. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery, or dirty objects before handling / Wear leather/ cut-resistant gloves 3. Wear Langan approved safety shoes 4. Use proper lifting techniques / Consider load location, task repetition, and load weigh when evaluating what is safe or unsafe to lift / Obtain assistance when possible 21. Wear high visibility clothing & vest / Use cones or signs to designate work area. 22. Be aware of surroundings at all times, including the presence of wildlife/ Do not approach stray dogs / Carry/use dog/animal repellant / Use bug spray when needed. 23. Wear hearing protection 24. Wear hard hat / Avoid areas where overhead hazards exist. 25. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather) / Drink plenty of fluids to avoid dehydration / Takes breaks as necessary to avoid heat/cold stress. 26. Wear safety glasses
Additional items.		
Additional Items identified while in the field. (Delete row if not needed.)		

<u>Print Name</u>	<u>Sign Name</u>	<u>Date</u>
<u>Prepared by:</u>		
<u>Reviewed by:</u>		

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA Title: Equipment Transportation and Set-up
JSA Number: JSA012-01

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventive/corrective actions. Prior to the start of any work "TAKE 5" and conduct a Last-Minute Risk Assessment.



S – *Stop*, what has changed?
T – *Think* about the task
E – *Evaluate* potential hazards
P – *Plan* safe approach
S – *Start* task / *Stop* & regroup

PERSONAL PROTECTIVE EQUIPMENT (Required or to be worn as needed):

<input checked="" type="checkbox"/> Safety Shoes	<input checked="" type="checkbox"/> Long Sleeves	<input checked="" type="checkbox"/> Safety Vest (Class 2)	<input checked="" type="checkbox"/> Hard Hat	<input checked="" type="checkbox"/> Hearing Protection
<input checked="" type="checkbox"/> Safety Glasses	<input type="checkbox"/> Safety Goggles	<input type="checkbox"/> Face Shield	<input type="checkbox"/> Nitrile Gloves	<input type="checkbox"/> PVC Gloves
<input checked="" type="checkbox"/> Leather Gloves	<input type="checkbox"/> Cut Resist. Gloves	<input type="checkbox"/> Fall Protection	<input type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input type="checkbox"/> Insect/Animal Repellent	<input type="checkbox"/> Ivy Blocker/Cleaner	<input type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	

☐ Other:

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
16. Transport equipment to work area	11. Back Strain 12. Slips/ Trips/ Falls 13. Traffic 14. Cuts/abrasions from equipment 15. Contusions from dropped equipment	1. Use proper lifting techniques / Use wheeled transport. 2. Minimize distance to work area / Have unobstructed path to work area / Follow good housekeeping procedures. 3. Wear proper PPE (high visibility vest or clothing) 4. Wear proper PPE (leather gloves, long sleeves) 5. Wear proper PPE (safety shoes)
17. Moving equipment to its planned location	6. Pinch Hazard 7. Slips/ Trips/ Falls	1. Wear proper PPE (leather gloves) 2. Be aware of potential trip hazards / Practice good housekeeping procedures / Mark significant below-grade hazards (i.e., holes, trenches) with safety cones or spray paint
18. Equipment Set-up	7. Pinch Hazard 8. Cuts/abrasions to knuckles/hands. 9. Back Strain	1. Wear proper PPE (leather gloves) 2. Wear proper PPE (leather gloves) 3. Use proper lifting techniques / Use wheeled transport
19. All activities	21. Slips/ Trips/ Falls 22. Hand injuries, cuts, or lacerations during manual handling of materials 23. Foot injuries 24. Back injuries 25. Traffic 26. Wildlife: Stray dogs, Mice/rats, Vectors (i.e., mosquitoes, bees, etc.)	27. Be aware of potential trip hazards / Follow good housekeeping procedures/ Mark significant hazards. 28. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery, or dirty objects before handling / Wear leather/ cut-resistant gloves. 29. Wear Langan approved safety shoes.

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
4. All activities (cont'd)	27. High Noise levels 28. Overhead hazards 29. Heat Stress/ Cold Stress 30. Eye Injuries	30. Use proper lifting techniques / Consider load location, task repetition, and load weigh when evaluating what is safe or unsafe to lift / Obtain assistance when possible. 31. Wear high visibility clothing & vest / Use cones or signs to designate work area. 32. Be aware of surroundings at all times, including the presence of wildlife/ Do not approach stray dogs / Carry/use dog/animal repellant / Use bug spray when needed. 33. Wear hearing protection 34. Wear hard hat / Avoid areas where overhead hazards exist. 35. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather) / Drink plenty of fluids to avoid dehydration / Takes breaks as necessary to avoid heat/cold stress. 36. Wear safety glasses
Additional items.		
Additional Items identified while in the field.		
(Delete row if not needed.)		

<u>Print Name</u>	<u>Sign Name</u>	<u>Date</u>
<u>Prepared by:</u>		
<u>Reviewed by:</u>		

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA Title: 55-gallon Drum Sampling
JSA Number: JSA043-01

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventive/corrective actions. Prior to the start of any work "TAKE 5" and conduct a Last-Minute Risk Assessment.



S – Stop, what has changed?
T – Think about the task
E – Evaluate potential hazards
P – Plan safe approach
S – Start task / Stop & regroup

PERSONAL PROTECTIVE EQUIPMENT (Required or to be worn as needed):

<input checked="" type="checkbox"/> Safety Shoes	<input checked="" type="checkbox"/> Long Sleeves	<input checked="" type="checkbox"/> Safety Vest (Class 2)	<input checked="" type="checkbox"/> Hard Hat	<input type="checkbox"/> Hearing Protection
<input checked="" type="checkbox"/> Safety Glasses	<input checked="" type="checkbox"/> Safety Goggles	<input checked="" type="checkbox"/> Face Shield	<input checked="" type="checkbox"/> Nitrile Gloves	<input checked="" type="checkbox"/> PVC Gloves
<input checked="" type="checkbox"/> Leather Gloves	<input type="checkbox"/> Cut Resist. Gloves	<input type="checkbox"/> Fall Protection	<input type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input type="checkbox"/> Insect/Animal Repellent	<input type="checkbox"/> Ivy Blocker/Cleaner	<input type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	
<input checked="" type="checkbox"/> Other: All Drums are required to be labeled. Langan employees do not open or move undocumented drums or unlabeled drums without proper project manager authorization.				

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
20. Unpack/Transport equipment to work area.	16. Back Strains 17. Slip/Trips/Falls 18. Cuts/Abrasions from equipment 4. Contusions from dropped equipment	10. Use proper lifting techniques/Use wheeled transport. 11. Minimize distance to work area/Unobstructed path to work area/follow good housekeeping procedures. Mark slip/trip/fall hazards with orange safety cones. 12. Wear proper PPE (leather gloves, long sleeves). 4. Wear proper PPE (Langan approved safety shoes).
21. Open Drums	1. Hand Injuries, cuts or lacerations when untightening drum locking bolt, removing drum lid strap, or removing lid. 2. Pressure from drums.	1. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery, or dirty objects before handling / Wear leather/ cut-resistant gloves. Use non-metallic mallet and non-sparking tools/wrenches. 2. Open drum slowly to relieve pressure. Wear proper PPE: face shield and goggles; correct gloves; and over garments.
22. Collecting Soil/Fluid Sample	8. Irritation to eye from vapor, soil dust, or splashing. 9. Irritation to exposed skin	6. Wear proper eye protection including safety glasses/ face shield/goggles and when necessary, splash guard. If dust or vapor phase is present, wear appropriate safety breathing gear (1/2 mask or full face mask with correct filter) 7. Wear proper skin protection including nitrile gloves.
23. Closing Drums	1. Hand Injuries, cuts or lacerations when untightening drum locking bolt, removing drum lid strap, or removing lid.	7. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery, or dirty objects before handling / Wear leather/ cut-resistant gloves. Use non-metallic mallet and non-sparking tools/wrenches.

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
24. Moving Drums	2. Hand Injuries, cuts or lacerations when untightening drum locking bolt, removing drum lid strap, or removing lid. 3. Back Strains	2. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery, or dirty objects before handling / Wear leather/ cut-resistant gloves. Use non-metallic mallet and non-sparking tools/wrenches. 3. Use proper lifting techniques/Use wheeled transport.
25. All activities	31. Slips/ Trips/ Falls 32. Hand injuries, cuts, or lacerations during manual handling of materials 33. Foot injuries 34. Back injuries 35. Traffic 36. Wildlife: Stray dogs, Mice/rats, Vectors (i.e., mosquitoes, bees, etc.) 37. High Noise levels 38. Overhead hazards 39. Heat Stress/ Cold Stress 40. Eye Injuries	37. Be aware of potential trip hazards / Follow good housekeeping procedures/ Mark significant hazards. 38. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery, or dirty objects before handling / Wear leather/ cut-resistant gloves. 39. Wear Langan approved safety shoes. 40. Use proper lifting techniques / Consider load location, task repetition, and load weigh when evaluating what is safe or unsafe to lift / Obtain assistance when possible. 41. Wear high visibility clothing & vest / Use cones or signs to designate work area. 42. Be aware of surroundings at all times, including the presence of wildlife/ Do not approach stray dogs / Carry/use dog/animal repellant / Use bug spray when needed. 43. Wear hearing protection 44. Wear hard hat / Avoid areas where overhead hazards exist. 45. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather) / Drink plenty of fluids to avoid dehydration / Takes breaks as necessary to avoid heat/cold stress. 46. Wear safety glasses
Additional items.		
Additional Items identified while in the field. (Delete row if not needed.)		

<u>Print Name</u>	<u>Sign Name</u>	<u>Date</u>
<u>Prepared by:</u>		
<u>Reviewed by:</u>		

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA Title: Direct-Push Soil Borings
JSA Number: JSA004-01

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventive/corrective actions. Prior to the start of any work "TAKE 5" and conduct a Last-Minute Risk Assessment.



S – Stop, what has changed?
T – Think about the task
E – Evaluate potential hazards
P – Plan safe approach
S – Start task / Stop & regroup

PERSONAL PROTECTIVE EQUIPMENT REQUIRED:

<input checked="" type="checkbox"/> Safety Shoes	<input checked="" type="checkbox"/> Long Sleeves	<input checked="" type="checkbox"/> Safety Vest (Class 2)	<input checked="" type="checkbox"/> Hard Hat	<input checked="" type="checkbox"/> Hearing Protection
<input checked="" type="checkbox"/> Safety Glasses	<input type="checkbox"/> Safety Goggles	<input type="checkbox"/> Face Shield	<input checked="" type="checkbox"/> Nitrile Gloves	<input type="checkbox"/> PVC Gloves
<input checked="" type="checkbox"/> Leather Gloves	<input checked="" type="checkbox"/> Cut Resist. Gloves	<input type="checkbox"/> Fall Protection	<input type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input type="checkbox"/> Insect/Animal Repellent	<input type="checkbox"/> Ivy Blocker/Cleaner	<input type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	
<input checked="" type="checkbox"/> Other: Half-face respirator, dust cartridges, PID (if applicable)				

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
26. Move equipment to work site	19. Back strain when lifting equipment. 20. Slips/ Trips/ Falls while moving equipment. 21. Traffic (if applicable) 22. Pinched fingers or running over toes during GeoProbe set-up. 23. Overturn drilling rig while transporting to loading dock on flat-bed tow truck	13. Use proper lifting technique (use legs for bending and lifting and not the back)/ Use wheeled transport for heavy equipment / Get assistance when handling loads greater than 50 lbs. / Minimize distance to vehicle 14. Use proper lifting technique (use legs for bending and lifting and not the back) / Use wheeled transport for heavy equipment / Get assistance when handling loads greater than 50 lbs. / Minimize distance to vehicle / Have unobstructed path to vehicle or collection point / Do not lift/walk with boxes that are heavy/difficult to lift 15. Wear high visibility safety vests or clothing / Exercise caution 16. Wear proper PPE (cut-resistant gloves) / Stay alert, be aware of geoprobe rig at all times 17. Drill rig should be parked in center of flat-bed tow truck / Emergency brake shall be used at all times during transport on the flat-bed truck/ All unnecessary personnel should stay away from the flat-bed truck during moving activities
27. Calibration of monitoring equipment	10. Skin or eye contact with calibration chemicals 11. Pinch fingers in monitoring equipment	8. Wear proper PPE (safety glasses/ goggles) 9. Wear proper PPE (leather gloves)
28. Set-up GeoProbe rig	10. Geoprobe rig movement	8. All field personnel should stay clear of the GeoProbe rig while moving / Use a spotter when backing up the GeoProbe
29. Advance GeoProbe rods below ground surface to desired depth	4. Underground utilities 5. High noise levels	4. Clean all subsurface soil borings to a minimum of 5 feet below grade. 5. Wear proper PPE (hearing protection)
30. Remove and open acetate liner.	41. Pinched fingers while removing macrocore.	1. Wear proper PPE (nitrile gloves, cut-resistant or leather gloves) 2. Wear proper PPE (cut-resistant or leather gloves)

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
5. Remove and open acetate liner (cont'd)	42. Cuts/lacerations when cutting acetate liner open. 43. Exposure to hazardous vapors 44. Skin contacts with contaminated soil	3. Do not place face over acetate liner when opening / Monitor hazardous vapors in air with PID / Upgrade PPE as necessary based on levels contained in the Health and Safety Plan 4. Wear proper PPE (nitrile gloves)
31. Sample Collections a) Monitor parameters. b) Prepare sample containers and labels	1. Contact with potentially contaminated soil. 2. Lacerations from broken sample bottles 3. Back strain while transporting full coolers. 4. Internal exposure to contaminants and metals through inhalation of dust 5. Slips/ Trips/ Falls	1. Use monitoring devices / Wear proper PPE (safety glasses, nitrile gloves) 2. Do not over-tighten bottle caps / Handle bottles safely to prevent breakage. 6. Use proper lifting techniques / Do not lift heavy loads without assistance. 7. Avoid creating dust / If necessary, wear a half mask respirator with applicable dust cartridge / Inspect respirator for damage and cleanliness prior to use / Clean respirator after each use and store in a clean, secure location. 8. Be alert / Follow good housekeeping procedures
32. Remove excess soil from acetate liner and place in 55-gallon drum (IF NOT PERFORMED BY LANGAN, REMOVE!)	1. Cuts/lacerations from acetate liner 2. Pinched fingers/hand while opening/closing drum. 3. Skin contacts with contaminated soil 4. Soil debris in eyes	1. Wear proper PPE (cut-resistant or leather gloves) 2. Wear proper PPE (cut-resistant or leather gloves) 3. Wear proper PPE (nitrile gloves) 4. Wear proper PPE (safety glasses)

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
8. Transport drums to central staging location (IF NOT PERFORMED BY LANGAN, REMOVE!)	1. Back, arm or shoulder strain from moving drums. 2. Pinch fingers/hand in drum cart when moving drums. 3. Pinch fingers/hand when operating lift-gate on vehicle. 4. Contact with potentially contaminated groundwater when moving improperly sealed drums. 5. Slips when moving drums. 6. Drop drum on feet/toes	47. Use drum cart for moving drums / Use proper lifting techniques / Do not lift heavy loads without assistance. 48. Wear proper PPE (cut-resistant or leather gloves) 49. Wear proper PPE (cut-resistant or leather gloves) 50. Wear proper PPE (nitrile gloves underneath work gloves) 51. Follow good housekeeping procedures / Ensure route to move drum and storage space is free from obstructions. 52. Wear proper PPE (safety shoes) / Work in a safe manner to prevent dropped drum
9. All activities	1. Slips/ Trips/ Falls 2. Hand injuries, cuts, or lacerations during manual handling of materials 3. Foot injuries 4. Back injuries 5. Traffic 6. Wildlife: Stray dogs, Mice/rats, Vectors (i.e., mosquitoes, bees, etc.) 7. High Noise levels 8. Overhead hazards 9. Heat Stress/ Cold Stress	1. Be aware of potential trip hazards / Follow good housekeeping procedures/ Mark significant hazards. 2. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery, or dirty objects before handling / Wear leather/ cut-resistant gloves. 3. Wear Langan approved safety shoes. 4. Use proper lifting techniques / Consider load location, task repetition, and load weigh when evaluating what is safe or unsafe to lift / Obtain assistance when possible. 5. Wear high visibility clothing & vest / Use cones or signs to designate work area. 6. Be aware of surroundings at all times, including the presence of wildlife/ Do not approach stray dogs / Carry/use dog/animal repellant / Use bug spray when needed. 7. Wear hearing protection 8. Wear hard hat / Avoid areas where overhead hazards exist. 9. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather) / Drink plenty of fluids to avoid dehydration / Takes breaks as necessary to avoid heat/cold stress. 10. Wear safety glasses
9. All activities (cont'd)	10. Eye Injuries	
Additional items.		
Additional Items identified while in the field. (Delete row if not needed.)		

<u>Print Name</u>	<u>Sign Name</u>	<u>Date</u>
-------------------	------------------	-------------

[illegible]

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA Title: Geophysical Investigation
JSA Number: JSA023-01

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventive/corrective actions. Prior to the start of any work "TAKE 5" and conduct a Last-Minute Risk Assessment.



S – Stop, what has changed?
T – Think about the task
E – Evaluate potential hazards
P – Plan safe approach
S – Start task / Stop & regroup

PERSONAL PROTECTIVE EQUIPMENT (Required or to be worn as needed):

<input checked="" type="checkbox"/> Safety Shoes	<input checked="" type="checkbox"/> Long Sleeves	<input checked="" type="checkbox"/> Safety Vest (Class 2)	<input checked="" type="checkbox"/> Hard Hat	<input checked="" type="checkbox"/> Hearing Protection
<input checked="" type="checkbox"/> Safety Glasses	<input type="checkbox"/> Safety Goggles	<input type="checkbox"/> Face Shield	<input checked="" type="checkbox"/> Nitrile Gloves	<input type="checkbox"/> PVC Gloves
<input checked="" type="checkbox"/> Leather Gloves	<input checked="" type="checkbox"/> Cut Resist. Gloves	<input type="checkbox"/> Fall Protection	<input type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input type="checkbox"/> Insect/Animal Repellent	<input type="checkbox"/> Ivy Blocker/Cleaner	<input type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	
<input type="checkbox"/> Other:				

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
33. Transport equipment to work area	24. Back/strain 25. Slip/Trip/Falls 26. Traffic 27. Cuts/abrasions/contusions from equipment	18. Use proper lifting techniques/Use wheeled transport 19. Minimize distance to work area/unobstructed path to work area/follow good housekeeping procedures 20. Wear proper PPE (high visibility vest or clothing) 21. Wear proper PPE (leather gloves, long sleeves, Langan approved safety shoes)
34. Supervision of subcontractor and all other activities	12. Slip/Trips/Falls 13. Hand injuries 14. Foot injuries 15. Back injuries/Strains 16. Traffic 17. Wildlife a. Wildlife b. Mice/rats c. Vectors (i.e., mosquitoes, bees, etc.) 7. Heat/Cold Stress	10. Be aware of potential trip hazards/follow good housekeeping procedures/mark significant below-grade hazards (i.e., holes, trenches, wires, ropes) with safety cones or spray paint. 11. Wear proper PPE (leather gloves)/watch wear you place your hands/inspect material or equipment for jagged, rough, or slippery surfaces/ watch for pinch points/ wipe off slippery, wet, or dirty items prior to handling. 12. Wear proper PPE (Langan approved safety shoes)/ Be aware of uneven terrain) 13. Use proper lifting techniques/ Buddy system when lifting/ use wheeled transport. 14. Wear proper PPE (high-visibility shirts and vests)/ use cones if appropriate/ notify equipment operators of work area. 15. Be aware of surroundings at all times for the presence of wildlife. a. Do not approach stray animals. b. Carry animal repellent/ use if situation arises. c. Use bug spray when needed. 7. Wear proper attire for weather conditions (sunscreen, protective clothing in

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
		sunlight or layer clothing in cold weather)/ drink plenty of fluids/ take regular breaks.
35. All activities	45. Slips/ Trips/ Falls 46. Hand injuries, cuts, or lacerations during manual handling of materials 47. Foot injuries 48. Back injuries 49. Traffic 50. Wildlife: Stray dogs, Mice/rats, Vectors (i.e., mosquitoes, bees, etc.) 51. High Noise levels 52. Overhead hazards 53. Heat Stress/ Cold Stress 54. Eye Injuries	53. Be aware of potential trip hazards / Follow good housekeeping procedures/ Mark significant hazards. 54. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery, or dirty objects before handling / Wear leather/ cut-resistant gloves. 55. Wear Langan approved safety shoes. 56. Use proper lifting techniques / Consider load location, task repetition, and load weigh when evaluating what is safe or unsafe to lift / Obtain assistance when possible. 57. Wear high visibility clothing & vest / Use cones or signs to designate work area. 58. Be aware of surroundings at all times, including the presence of wildlife/ Do not approach stray dogs / Carry/use dog/animal repellant / Use bug spray when needed. 59. Wear proper hearing protection. 60. Wear hard hat / Avoid areas where overhead hazards exist. 61. Wear proper attire for weather conditions (sunscreen or protective clothing in sunlight, layers for cold weather) / Drink plenty of fluids to avoid dehydration / Takes breaks as necessary to avoid heat/cold stress. 62. Wear safety glasses
Additional items.		
Additional Items identified while in the field. (Delete row if not needed.)		

<u>Print Name</u>	<u>Sign Name</u>	<u>Date</u>
<u>Prepared by:</u>		
<u>Reviewed by:</u>		

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA Title: Geotechnical Drilling

JSA Number: JSA014-01

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventive/corrective actions. Prior to the start of any work "TAKE 5" and conduct a Last-Minute Risk Assessment.



S – Stop, what has changed?
T – Think about the task
E – Evaluate potential hazards
P – Plan safe approach
S – Start task / Stop & regroup

PERSONAL PROTECTIVE EQUIPMENT (Required or to be worn as needed):

<input checked="" type="checkbox"/> Safety Shoes	<input checked="" type="checkbox"/> Long Sleeves	<input checked="" type="checkbox"/> Safety Vest (Class 2)	<input checked="" type="checkbox"/> Hard Hat	<input checked="" type="checkbox"/> Hearing Protection
<input checked="" type="checkbox"/> Safety Glasses	<input type="checkbox"/> Safety Goggles	<input checked="" type="checkbox"/> Face Shield	<input checked="" type="checkbox"/> Nitrile Gloves	<input type="checkbox"/> PVC Gloves
<input checked="" type="checkbox"/> Leather Gloves	<input type="checkbox"/> Cut Resist. Gloves	<input type="checkbox"/> Fall Protection	<input type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input type="checkbox"/> Insect/Animal Repellent	<input type="checkbox"/> Ivy Blocker/Cleaner	<input type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	
<input checked="" type="checkbox"/> Other: NomeX (as needed)				

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
36. Transport equipment to work area	28. Back Strain 29. Slips/ Trips/ Falls 30. Traffic 31. Cuts/abrasions from equipment 32. Contusions from dropped equipment	6. Use proper lifting techniques / Use wheeled transport. 7. Minimize distance to work area / Have unobstructed path to work area / Follow good housekeeping procedures. 8. Wear proper PPE (high visibility vest or clothing) 9. Wear proper PPE (leather gloves, long sleeves) 10. Wear proper PPE (safety shoes)
37. Set-up HSA/SPT rig	18. Slips/ Trips/ Falls 19. Pinch Hazards 20. High noise levels 21. Clothing entanglement 22. Electrocution/falling equipment and debris from raising HSA/SPT rig mast. 23. Carbon monoxide poisoning 24. HSA/SPT rig roll-over 25. HSA/SPT rig movement	3. Be aware of potential trip hazards / Follow good housekeeping procedures / Mark significant below-grade hazards (i.e., holes, trenches) with safety cones or spray paint 4. Wear proper PPE (leather gloves) 5. Wear proper PPE (hearing protection) 6. Wear proper attire for HSA/SPT rig (no loose clothing, strings, etc.) 7. Wear proper PPE (hard hats) / Be aware of locations at all times / Look up, down and around before raising mast / Check HSA/SPT drill rig mast for loose objects/debris before raising 8. Stand upwind of rig engine 9. Do not move rig with mast raised / Set stabilizers prior to raising mast / Inspect work area / If area appears unstable, the boring locations should be moved. 10. All field personnel should stay clear of rig while moving / Use a spotter when backing up the rig
38. Advance HSA/SPT rods, augers, and casing below ground surface	11. Strain wrist/bruise palm 12. Pinched fingers 13. Back strain	5. Wear proper PPE (leather gloves) / Use proper technique for preparing rods / Use second person, if necessary 6. Wear proper PPE (leather gloves)

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
39. Advance HSA/SPT rods, augers, and casing below ground surface (cont'd)	14. Clothing entanglement 15. Carbon monoxide poisoning 16. Bruised/Broken toes/feet 17. High noise levels	7. Use proper lifting techniques / Obtain assistance if needed 8. Wear proper attire for HSA/SPT rig (no loose clothing, strings, etc.) 9. Stand upwind of the rig 10. Wear proper PPE (safety shoes) 11. Wear proper PPE (hearing protection)
40. Remove and open split spoon	6. Pinched fingers 7. Cuts/lacerations 8. Skin contact with contaminated soil and groundwater	1. Wear proper PPE (nitrile and leather gloves) 2. Wear proper PPE (leather gloves) 3. Wear proper PPE (nitrile gloves, safety glasses)
41. Repeat steps 3 and 4 until desired depth is reached	1. See steps 3 and 4	1. See steps 3 and 4
42. Remove HSA/SPT rods, augers and casing and place in storage rack	1. Clothing entanglement 2. Back strain 3. Pinched fingers 4. Carbon monoxide poisoning 5. High noise levels	1. Wear proper attire for HSA/SPT rig (no loose clothing, strings, etc.) 2. Use proper lifting techniques / Obtain assistance if needed 3. Wear proper PPE (leather gloves) 4. Stand upwind of rig engine 5. Wear proper PPE (hearing protection)
43. Tremie-grout borehole with a cement-bentonite grout mixture	1. Splash cement/bentonite grout on face/eyes 2. Back strain 3. Pinched fingers	1. Wear proper PPE (safety glasses) 2. Use proper lifting techniques / Obtain assistance if needed 3. Wear proper PPE (nitrile gloves, leather gloves)
44. Decontaminate equipment	1. Contact with potentially impacted material 2. Contact with sharp pieces of equipment	1. Wear proper PPE (safety glasses, nitrile gloves) 2. Wear proper PPE (leather gloves)
45. Patch soil boring location to return to pre-existing conditions (i.e. concrete, asphalt, grass)	1. Cuts/lacerations 2. Splashed concrete on face/eyes 3. Hammer fingers/hands when patching asphalt	1. Wear proper PPE (leather gloves) / Use scissors for cutting 2. Use proper PPE (safety glasses) 3. Be aware of hands/fingers during hammering / Wear proper PPE (leather gloves)
46. All activities	55. Slips/ Trips/ Falls 56. Hand injuries, cuts, or lacerations during manual handling of materials 57. Foot injuries 58. Back injuries 59. Traffic 60. Wildlife: Stray dogs, Mice/rats, Vectors (i.e. mosquitoes, bees, etc.) 61. High Noise levels 62. Overhead hazards 63. Heat Stress/ Cold Stress 64. Eye Injuries	63. Be aware of potential trip hazards / Follow good housekeeping procedures/ Mark significant hazards 64. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery or dirty objects before handling / Wear leather/ cut-resistant gloves 65. Wear Langan approved safety shoes 66. Use proper lifting techniques / Consider load location, task repetition, and load weigh when evaluating what is safe or unsafe to lift / Obtain assistance when possible 67. Wear high visibility clothing & vest / Use cones or signs to designate work area 68. Be aware of surroundings at all times, including the presence of wildlife/ Do not approach stray dogs / Carry/use dog/animal repellant / Use bug spray when needed 69. Wear hearing protection 70. Wear hard hat / Avoid areas where overhead hazards exist.

LANGAN

Job Safety Analysis (JSA) Health and Safety

JSA Title: Test Pits
JSA Number: JSA016-01

A Job Safety Analysis (JSA) must identify all job steps required to complete the task, the potential hazards employees could be exposed to while performing the job step and the preventative/corrective actions required to reduce/mitigate the identified potential hazards. Employees must certify that they have either prepared the JSA or have reviewed the JSA and are aware of the potential hazards associated with this task and will follow the provided preventive/corrective actions. Prior to the start of any work "TAKE 5" and conduct a Last Minute Risk Assessment.



S – Stop, what has changed?
T – Think about the task
E – Evaluate potential hazards
P – Plan safe approach
S – Start task / Stop & regroup

PERSONAL PROTECTIVE EQUIPMENT (Required or to be worn as needed):

<input checked="" type="checkbox"/> Safety Shoes	<input checked="" type="checkbox"/> Long Sleeves	<input checked="" type="checkbox"/> Safety Vest (Class 2)	<input checked="" type="checkbox"/> Hard Hat	<input checked="" type="checkbox"/> Hearing Protection
<input checked="" type="checkbox"/> Safety Glasses	<input type="checkbox"/> Safety Goggles	<input type="checkbox"/> Face Shield	<input type="checkbox"/> Nitrile Gloves	<input type="checkbox"/> PVC Gloves
<input checked="" type="checkbox"/> Leather Gloves	<input type="checkbox"/> Cut Resist. Gloves	<input type="checkbox"/> Fall Protection	<input type="checkbox"/> Fire Resistant Clothing	<input type="checkbox"/> Rubber Boots
<input type="checkbox"/> Insect/Animal Repellent	<input type="checkbox"/> Ivy Blocker/Cleaner	<input type="checkbox"/> Traffic Cones/Signs	<input type="checkbox"/> Life Vest/Jacket	
<input type="checkbox"/> Other:				

JOB STEPS	POTENTIAL HAZARDS	PREVENTATIVE / CORRECTIVE ACTION
47. Transport equipment to work area	33. Back Strain 34. Slips/ Trips/ Falls 35. Traffic 36. Cuts/abrasions from equipment 37. Contusions from dropped equipment	11. Use proper lifting techniques / Use wheeled transport 12. Minimize distance to work area / Have unobstructed path to work area / Follow good housekeeping procedures 13. Wear proper PPE (high visibility vest or clothing) 14. Wear proper PPE (leather gloves, long sleeves) 15. Wear proper PPE (safety shoes)
48. Digging Test Pit	26. Back Strain 27. Unstable walls of excavation	11. Observe proper digging technique. Ensure spoil pile and equipment are at least 2 feet from edge of excavation. 12. Excavate test pit in a stepped manor.
49. All activities	65. Slips/ Trips/ Falls 66. Hand injuries, cuts, or lacerations during manual handling of materials 67. Foot injuries 68. Back injuries 69. Traffic 70. Wildlife: Stray dogs, Mice/rats, Vectors (i.e. mosquitoes, bees, etc.) 71. High Noise levels 72. Overhead hazards 73. Heat Stress/ Cold Stress 74. Eye Injuries	73. Be aware of potential trip hazards / Follow good housekeeping procedures/ Mark significant hazards 74. Inspect for jagged/sharp edges, and rough or slippery surfaces / Keep fingers away from pinch points / Wipe off greasy, wet, slippery or dirty objects before handling / Wear leather/ cut-resistant gloves 75. Wear Langan approved safety shoes 76. Use proper lifting techniques / Consider load location, task repetition, and load weigh when evaluating what is safe or unsafe to lift / Obtain assistance when possible 77. Wear high visibility clothing & vest / Use cones or signs to designate work area 78. Be aware of surroundings at all times, including the presence of wildlife/ Do not approach stray dogs / Carry/use dog/animal repellent / Use bug spray when needed.

ATTACHMENT H

TAILGATE SAFETY BRIEFING FORM

LANGAN TAILGATE SAFETY BRIEFING

Date: _____

Time: _____

Leader: _____

Location: _____

Work Task:

SAFETY TOPICS (provide some detail of discussion points)

Chemical Exposure Hazards and Control: _____

Physical Hazards and Control: _____

Air Monitoring: _____

PPE: _____

Communications: _____

Safe Work Practices: _____

Emergency Response: _____

Hospital/Medical Center Location: _____

Phone Nos.: _____

Other: _____

FOR FOLLOW-UP (the issues, responsibilities, due dates, etc.)

ATTENDEES

PRINT NAME	COMPANY	SIGNATURE

ATTACHMENT I

THE CITY OF NEW YORK EXECUTIVE ORDER NO. 74

Langan employees and their direct hire contractors will comply with all provisions of the New York City Executive Order No. 74 as signed by the Mayor on July 31, 2021. Specifically, effective August 2, 2021

- Will don face masks while on-site at all times; and
- Provide proof upon demand of full vaccination status.

A copy of the New York City Executive Order No. 74 is provided on the following pages.

ATTACHMENT D
COMMUNITY AIR MONITORING PLAN

Appendix 1A

New York State Department of Health Generic Community Air Monitoring Plan

Overview

A Community Air Monitoring Plan (CAMP) requires real-time monitoring for volatile organic compounds (VOCs) and particulates (i.e., dust) at the downwind perimeter of each designated work area when certain activities are in progress at contaminated sites. The CAMP is not intended for use in establishing action levels for worker respiratory protection. Rather, its intent is to provide a measure of protection for the downwind community (i.e., off-site receptors including residences and businesses and on-site workers not directly involved with the subject work activities) from potential airborne contaminant releases as a direct result of investigative and remedial work activities. The action levels specified herein require increased monitoring, corrective actions to abate emissions, and/or work shutdown. Additionally, the CAMP helps to confirm that work activities did not spread contamination off-site through the air.

The generic CAMP presented below will be sufficient to cover many, if not most, sites. Specific requirements should be reviewed for each situation in consultation with NYSDOH to ensure proper applicability. In some cases, a separate site-specific CAMP or supplement may be required. Depending upon the nature of contamination, chemical- specific monitoring with appropriately-sensitive methods may be required. Depending upon the proximity of potentially exposed individuals, more stringent monitoring or response levels than those presented below may be required. Special requirements will be necessary for work within 20 feet of potentially exposed individuals or structures and for indoor work with co-located residences or facilities. These requirements should be determined in consultation with NYSDOH.

Reliance on the CAMP should not preclude simple, common-sense measures to keep VOCs, dust, and odors at a minimum around the work areas.

Community Air Monitoring Plan

Depending upon the nature of known or potential contaminants at each site, real-time air monitoring for VOCs and/or particulate levels at the perimeter of the exclusion zone or work area will be necessary. Most sites will involve VOC and particulate monitoring; sites known to be contaminated with heavy metals alone may only require particulate monitoring. If radiological contamination is a concern, additional monitoring requirements may be necessary per consultation with appropriate DEC/NYSDOH staff.

Continuous monitoring will be required for all ground intrusive activities and during the demolition of contaminated or potentially contaminated structures. Ground intrusive activities include, but are not limited to, soil/waste excavation and handling, test pitting or trenching, and the installation of soil borings or monitoring wells.

Periodic monitoring for VOCs will be required during non-intrusive activities such as the collection of soil and sediment samples or the collection of groundwater samples from existing monitoring wells. "Periodic" monitoring during sample collection might reasonably consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or

overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. In some instances, depending upon the proximity of potentially exposed individuals, continuous monitoring may be required during sampling activities. Examples of such situations include groundwater sampling at wells on the curb of a busy urban street, in the midst of a public park, or adjacent to a school or residence.

VOC Monitoring, Response Levels, and Actions

Volatile organic compounds (VOCs) must be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis or as otherwise specified. Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions, particularly if wind direction changes. The monitoring work should be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment should be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment should be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

1. If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
2. If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
3. If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown.
4. All 15-minute readings must be recorded and be available for State (DEC and NYSDOH) personnel to review. Instantaneous readings, if any, used for decision purposes should also be recorded.

Particulate Monitoring, Response Levels, and Actions

Particulate concentrations should be monitored continuously at the upwind and downwind perimeters of the exclusion zone at temporary particulate monitoring stations. The particulate monitoring should be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment must be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during all work activities.

1. If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m^3) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques must be employed. Work may continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed $150 \text{ mcg}/\text{m}^3$ above the upwind level and provided that no visible dust is migrating from the work area.

2. If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than $150 \text{ mcg}/\text{m}^3$ above the upwind level, work must be stopped and a re-evaluation of activities initiated. Work can resume provided that dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within $150 \text{ mcg}/\text{m}^3$ of the upwind level and in preventing visible dust migration.

3. All readings must be recorded and be available for State (DEC and NYSDOH) and County Health personnel to review.

December 2009