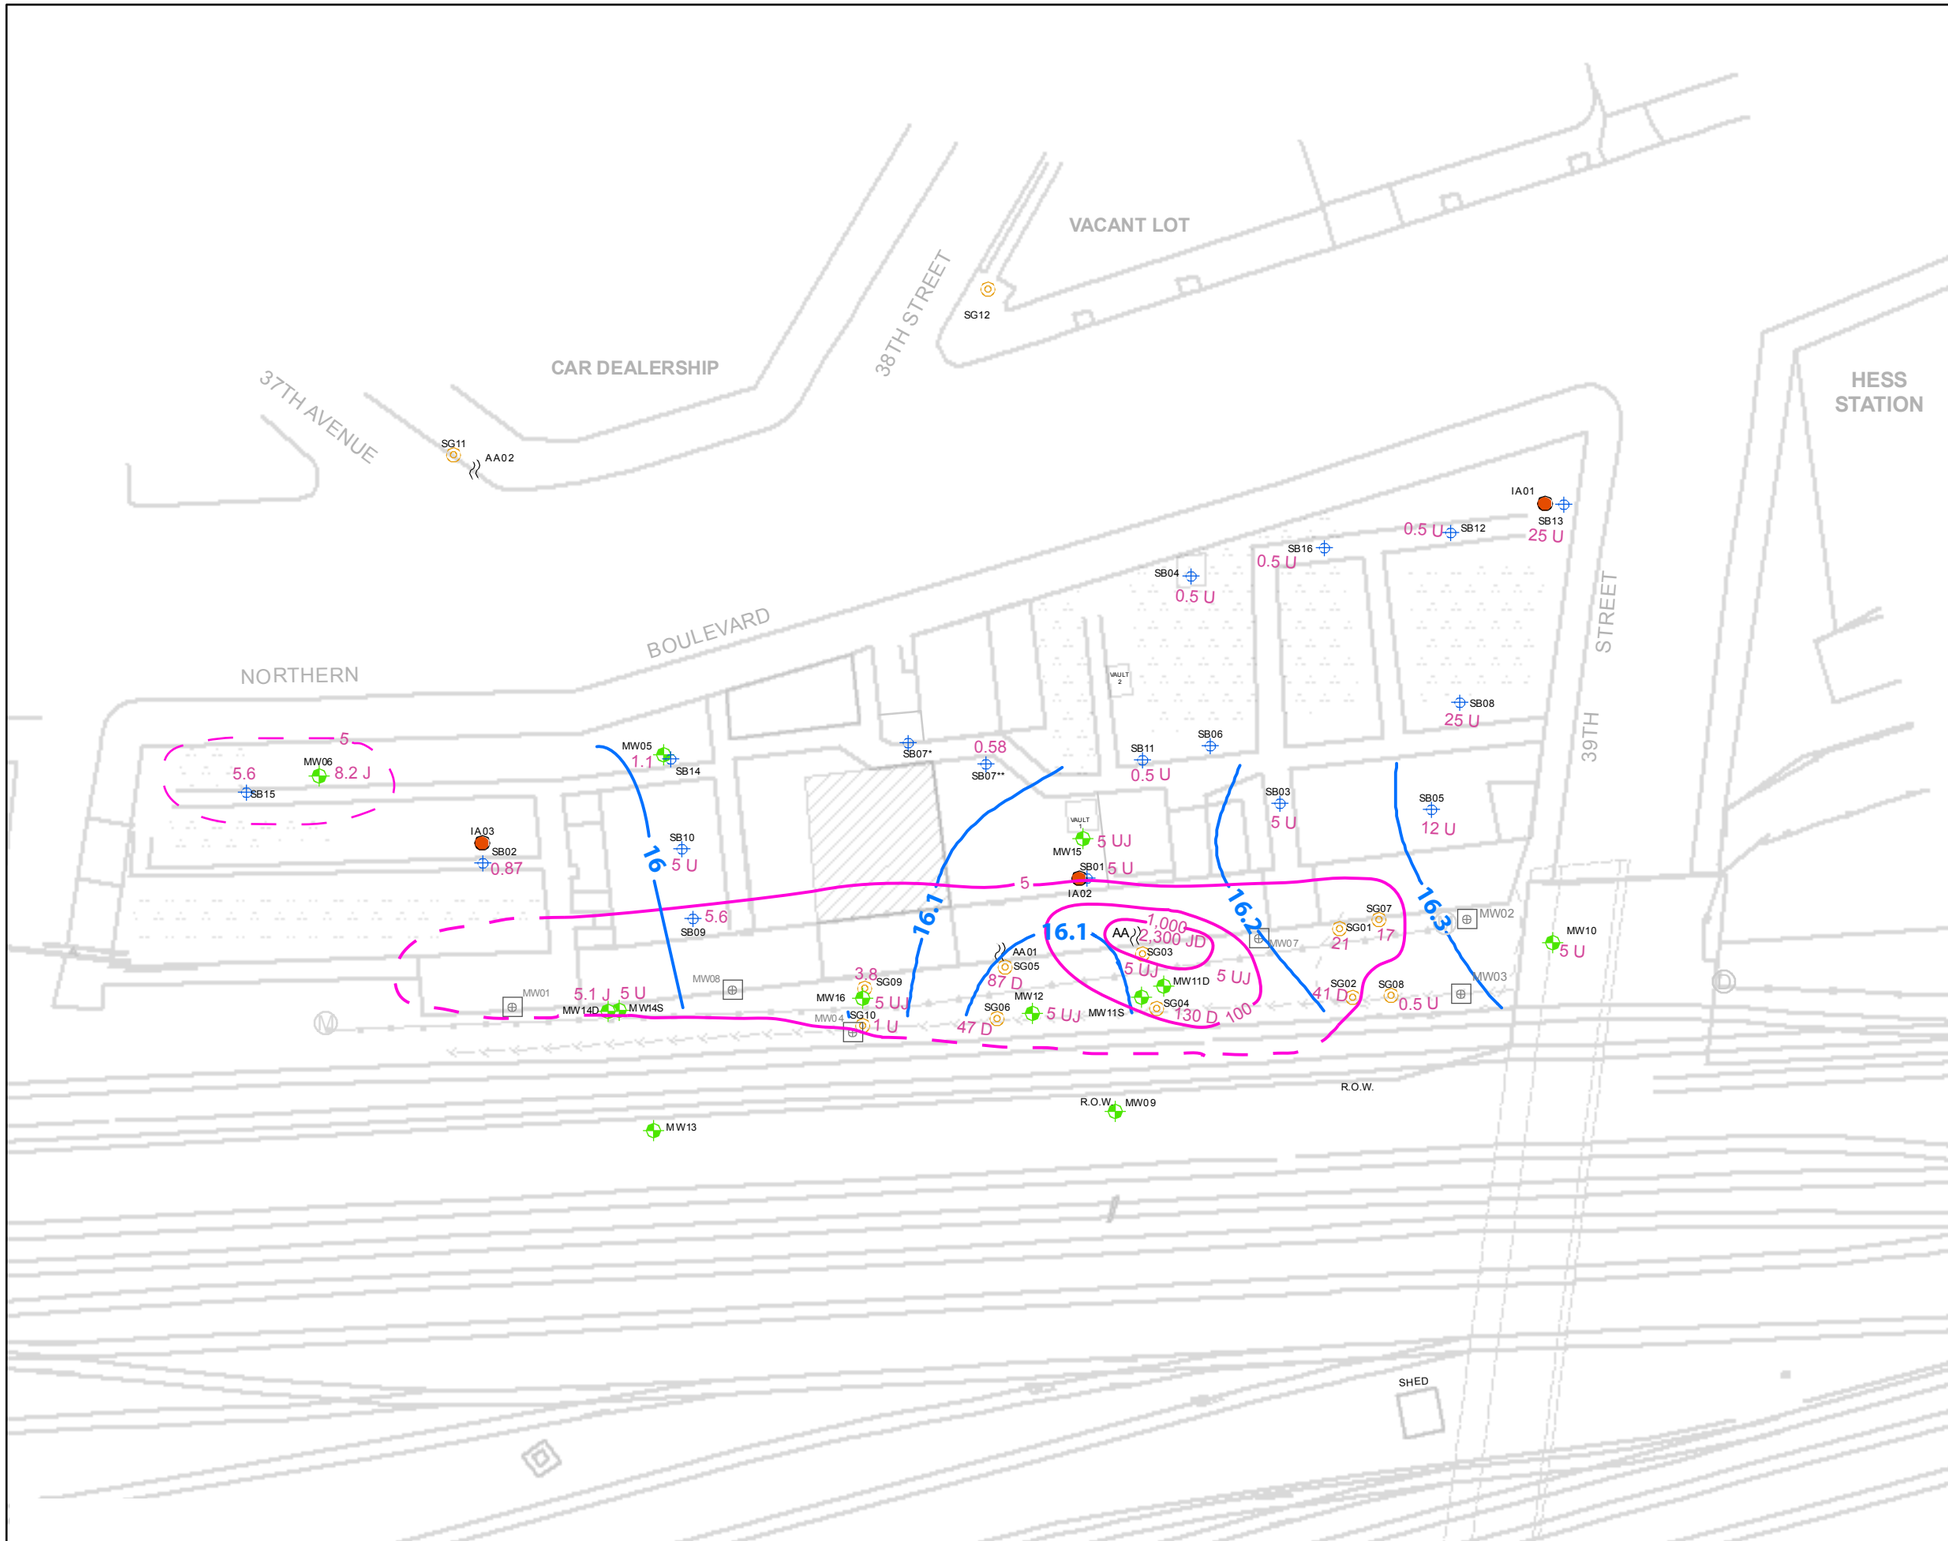

INDOOR AIR (IA) SAMPLE LOCATION

AMBIENT AIR (AA) SAMPLE LOCATION

DESTROYED MONITORING WELLS (MW)

MONITORING WELL (MW)

SUB-SLAB (SB) SAMPLE LOCATION

SOIL GAS (SG) SAMPLE LOCATION

SEWER MANHOLE (APPROX 12' DEEP)

APPROX LOCATION OF DRAIN SPOUT

R.O.W. RIGHT OF WAY

FENCE LINE

UNDERGROUND STORM SEWER

BUILDING - PROCESS EQUIPMENT

APPROX. VICINITY OF PREVIOUSLY EXCAVATED SOILS

16.3 POTENTIOMETRIC CONTOUR, FEET AMSL

TCE ISOCONCENTRATION CONTOUR (MICROGRAMS/LITER) (MAXIMUM TOTAL TCE CONCENTRATION AT EACH LOCATION WERE USED TO CREATE CONTOURS)

2,300 JD TCE, MICROGRAMS/LITER

D DILUTED SAMPLE

U NOT DETECTED, VALUE REPORTED IS THE DETECTION LIMIT

J ESTIMATED CONCENTRATION

NOTES:
SB07* - AIR SAMPLE
SB07** - SOIL/GW SAMPLE

DRAFTED BY: BK	**PHASE IV TCE GROUNDWATER ISOCONCENTRATION CONTOUR MAP**
CHECKED BY: JD	**COMPREHENSIVE REMEDIAL INVESTIGATION REPORT STANDARD MOTOR PRODUCTS, INC. SITE LONG ISLAND CITY, NEW YORK**
REVIEWED BY: MW	CDM
NORTH	Feet 50 — DATE 6-18-08 — FIGURE 4-10