

SITE OBSERVATION REPORT

PROJECT No.: 170381202	CLIENT: 250 Seaport District, LLC c/o The Howard Hughes Corporation	DATE: Thursday, September 7, 2023
PROJECT: 250 Water Street		WEATHER: Sunny, 82 – 92° F Wind: ESE @ 0.1 – 1.7 mph
LOCATION: New York, NY		TIME: 5:45am – 4:30pm
BCP SITE ID: C231127		MONITOR Jack Millman

EQUIPMENT: CAT 335 Excavator CAT 328 Excavator Komatsu PC138 Excavator Delmag Drill Rig Bauer RTG RG 27S Bauer BG45 Drill Rig Jerome J505 Mercury Vapor Analyzer RKI GX-6000 Photoionization Detector (PID) Aeroqual ASQ1 Air Monitoring Station	PRESENT AT SITE: Day 198 Langan (Environmental/Geotechnical) Jack Millman, Michael Cole, Jack Frey, Pradeep Pandey Suffolk Construction (Suffolk) (General Contractor) Anthony Galu, Wyatt Favia East Coast Drilling, Inc. (ECD) (Foundation Contractor) Danny Rodgers New York State Department of Environmental Conservation (NYSDEC) Meghan Medwig
--	---

OBSERVATIONS, DISCUSSIONS, TEST RESULTS, ETC.:

Langan was present to document remediation activities in accordance with the NYSDEC-approved November 2021 Remedial Action Work Plan (RAWP) at the 250 Water Street site (NYSDEC Brownfield Cleanup Program [BCP] Site No C231127).

Site Activities

- ECD excavated an about 35-foot-long by 20-foot-wide area to a maximum depth of about 7 feet below grade surface (bgs) in the western part of the site (waste characterization cells WC02 and WC03) to install timber lagging for the SOE system.
 - Excavated soil/fill was screened for odors, staining, organic vapors, and mercury vapor using a handheld photoionization detector (PID) and handheld Jerome® J505 mercury vapor analyzer, respectively. No evidence of impacts was observed and the excavated soil/fill was live-loaded into securely covered tri-axle dump trucks for off-site disposal.
- ECD continued installation of the concrete guide wall in the northern and eastern parts of the site (along Pearl Street and Peck Slip, respectively). The concrete guide wall will be used to facilitate installation of support-of-excavation (SOE) along the perimeter of the site.

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey, S. Simpson	By:	Jack Millman
		LANGAN	

SITE OBSERVATION REPORT

Material Tracking

- ECD exported ten truckloads (about 200 cubic yards [CY]) of hazardous lead-impacted soil/fill for off-site disposal at the Cycle Chem, Inc. facility, located in Elizabeth, NJ.
- No material was imported to the site.

Material Import Summary

Facility Name Location Type of Material	Stone Industries, Inc. Haledon, NJ 1.5/2.5-inch Virgin Stone		Stone Industries, Inc. Haledon, NJ 0.75-inch Virgin Stone		Impact Reuse & Recovery Center or Impact Materials Jersey City, Lyndhurst/Jersey City, NJ 1.5-inch Clean Bluestone		Impact Reuse & Recovery Center, Lyndhurst, NJ General Fill	
Quantities	No. of Loads	Approx. Volume (Tons)	No. of Loads	Approx. Volume (Tons)	No. of Loads	Approx. Volume (Tons)	No. of Loads	Approx. Volume (Tons)
Today	0	0	0	0	0	0	0	0
Project Total	12	283.91	0	0	15	339.65	374	9,157.85
NYSDEC Approved:	1,800 tons*			720 tons*		19,500 tons*		

*0.75-inch, 1.5-inch, and 2.5-inch virgin stone from the Stone Industries, Inc. facility and 1.5-inch clean bluestone from the Impact Reuse & Recovery Center (IRRC) facility were approved for import of 1,000 cubic yards (CY) and 400 CY, respectively. Assuming a conversion factor of 1.8, each quantity was converted to tons in order to accurately compare with import weight tickets. General fill from the IRRC facility was approved for import of 13,000 CY and a conversion factor of 1.5 is applied.

Material Export Summary (1 of 3)

Facility Name Location Type of Material	Allocco Recycling Brooklyn, NY Construction & Demolition (C&D) Debris		IRRC Lyndhurst, NJ C&D Debris		Earth Efficient MSM East Stroudsburg, PA C&D Debris		Clean Earth of North Jersey Kearny, NJ Hazardous Lead-Impacted Soil/Fill	
Quantities	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)
Today	0	0	0	0	0	0	0	0
Project Total	5	85	42	840	30	600	95	1,900

Material Export Summary (2 of 3)

Facility Name Location Type of Material	Middlesex County Landfill East Brunswick, NJ Non-hazardous Soil/Fill		Bayshore Soil Management Keasbey, NJ Petroleum-Impacted Soil/Fill		Clean Earth of Carteret, NJ Carteret, NJ Non-hazardous Soil/Fill	
Quantities	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)
Today	0	0	0	0	0	0
Project Total	273	5,460	267	5,340	66	1,320

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey, S. Simpson	By:	Jack Millman LANGAN
-----	---	-----	-------------------------------

SITE OBSERVATION REPORT

Material Export Summary (3 of 3)				
Facility Name Location Type of Material	Clean Earth of North Jersey Kearny, NJ Non-hazardous Soil/Fill		Cycle Chem, Inc. Elizabeth, NJ Hazardous Lead -Impacted Soil/Fill	
Quantities	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)
Today	0	0	10	200
Project Total	201	4,020	10	200

Sampling

- No samples were collected.

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey, S. Simpson	By:	Jack Millman LANGAN
-----	---	-----	-------------------------------

SITE OBSERVATION REPORT

CAMP Activities

Langan performed air monitoring at the perimeter of the site, at the northern sidewalk of Pearl Street, at the western sidewalk of Beekman Street, at the eastern sidewalk of Peck Slip, and at the southern sidewalk of Water Street at eight total locations for mercury vapor, volatile organic compounds (VOCs), and particulate matter less than 10 microns in diameter (PM10) from about 6:52am to 3:22pm. There were no fifteen-minute average concentrations for mercury vapor, VOCs or PM10 that approached or exceeded the action levels established by the CAMP (1.00 µg/m³, 5.0 ppm, or 0.100 mg/m³, respectively).

Background Concentrations

Prior to implementation of CAMP, instantaneous background concentrations of mercury vapor and VOCs were recorded using a handheld Jerome® J505 mercury vapor analyzer and a handheld PID, respectively.

- Background concentrations of mercury vapor at each CAMP station were recorded at 0.00 µg/m³.
- Background concentrations of VOCs at each CAMP station were recorded at 0.0 ppm.

Perimeter and Work Zone Concentrations

Daily Average Concentrations

Station ID	Particulate (mg/m ³)	Organic Vapor (ppm)	Mercury Vapor (µg/m ³)
PM-1	0.016	0.06	0.01
PM-2	0.013	0.03	0.01
PM-3	0.015	0.05	0.01
PM-4	0.014	0.04	0.02
WZ-1	0.013	0.04	0.00
WZ-2	0.012	0.03	0.00
WZ-3	0.012	0.04	0.01
WZ-4	0.013	0.05	0.02

Maximum 15-Minute-Average Concentrations

Station ID	Particulate (mg/m ³)	Organic Vapor (ppm)	Mercury Vapor (µg/m ³)
PM-1	0.038	0.25	0.03
PM-2	0.019	0.13	0.02
PM-3	0.028	0.16	0.03
PM-4	0.031	0.15	0.04
WZ-1	0.021	0.14	0.00
WZ-2	0.025	0.16	0.01
WZ-3	0.018	0.18	0.02
WZ-4	0.020	0.22	0.04

•mg/m³ = milligrams per cubic meter •ppm = parts per million •µg/m³ = micrograms per cubic meter

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey, S. Simpson	By:	Jack Millman
			LANGAN

SITE OBSERVATION REPORT

Ambient Air (Handheld Jerome® J505 and Handheld PID)

- The dedicated mobile monitor (Langan) used a handheld Jerome® J505 mercury vapor analyzer to monitor ambient air conditions at various heights throughout the site. Instantaneous mercury vapor concentrations throughout the site ranged from 0.00 µg/m³ to 0.15 µg/m³.
- The dedicated mobile monitor (Langan) used a handheld PID to monitor VOC concentrations throughout the site. Instantaneous VOC concentrations were not detected above background concentrations throughout the workday.

Off-site CAMP Stations

- CAMP station WZ-1 was placed on the western sidewalk of Beekman Street from about 6:37am to 3:39pm.
- CAMP station WZ-2 was placed on the southern sidewalk of Water Street from about 6:39am to 3:43pm.
- CAMP station WZ-3 was placed on the eastern sidewalk of Peck Slip from about 6:42am to 3:42pm.
- CAMP station WZ-4 was placed on the northern sidewalk of Pearl Street from about 6:44am to 4:01pm.

Prior to CAMP Shutdown

Prior to discontinuing CAMP, mercury vapor and VOC concentrations were confirmed to return to background conditions at each perimeter station using the handheld Jerome® J505 mercury vapor analyzer and handheld PID, respectively. Perimeter CAMP stations were discontinued sequentially between 3:22pm and 3:33pm.


- Background concentrations of mercury vapor at each CAMP station were recorded at 0.00 µg/m³.
- Background concentrations of VOCs at each CAMP station were recorded at 0.0 ppm.

Anticipated Activities

- ECD will continue exporting C&D and soil/fill from the western part of the site for off-site disposal.
- ECD will continue installing soil mix columns and/or soldier piles for SOE installation along Pearl Street and Peck Slip.
- ECD will continue installation of timber lagging for the SOE system in the western part of the site.

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey, S. Simpson	By:	Jack Millman LANGAN
-----	---	-----	-------------------------------

SITE OBSERVATION REPORT

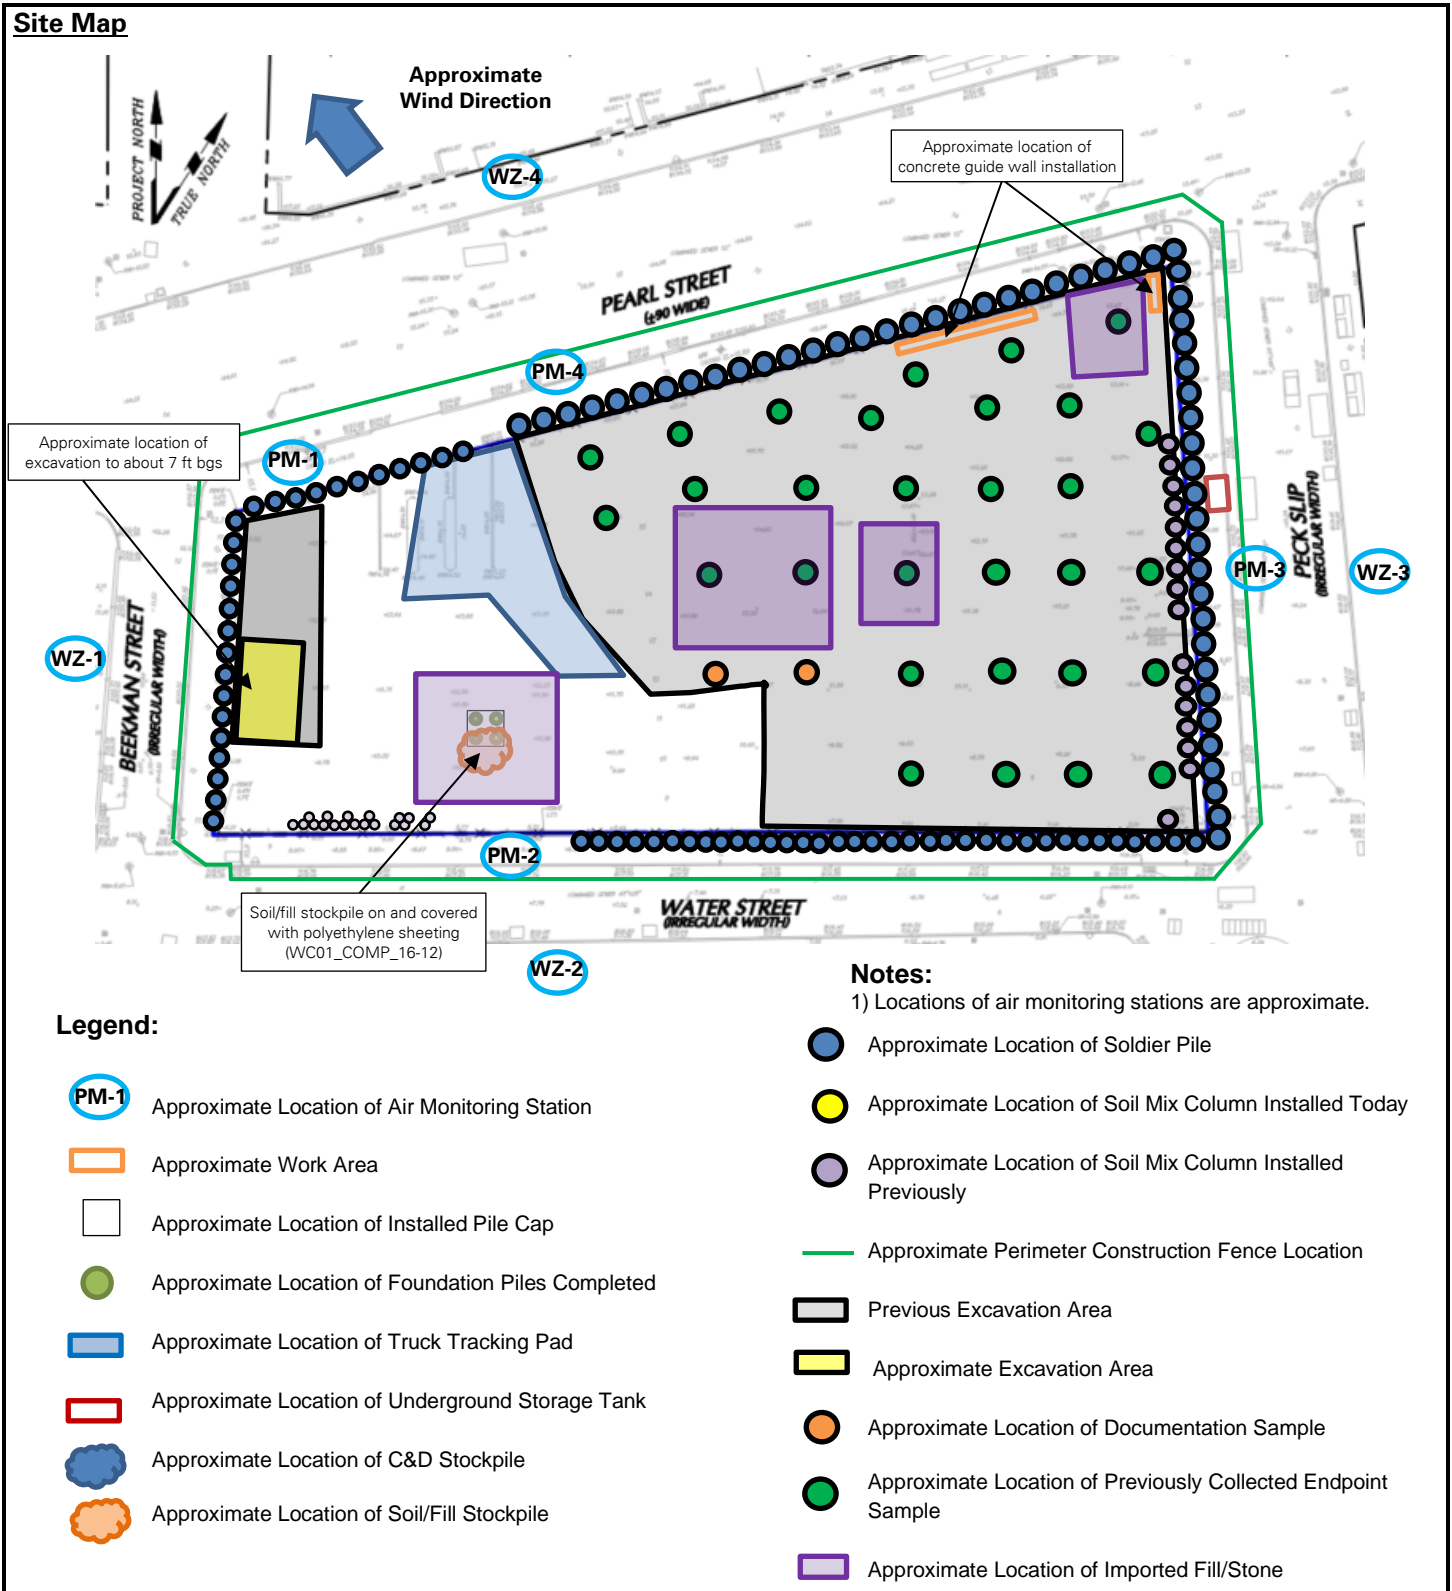

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey, S. Simpson	By:	Jack Millman LANGAN
-----	--	-----	-------------------------------

SITE OBSERVATION REPORT

Select Site Photographs:



Photo 1: ECD loading a dump truck with soil/fill from the western part of the site for off-site disposal (facing northeast)

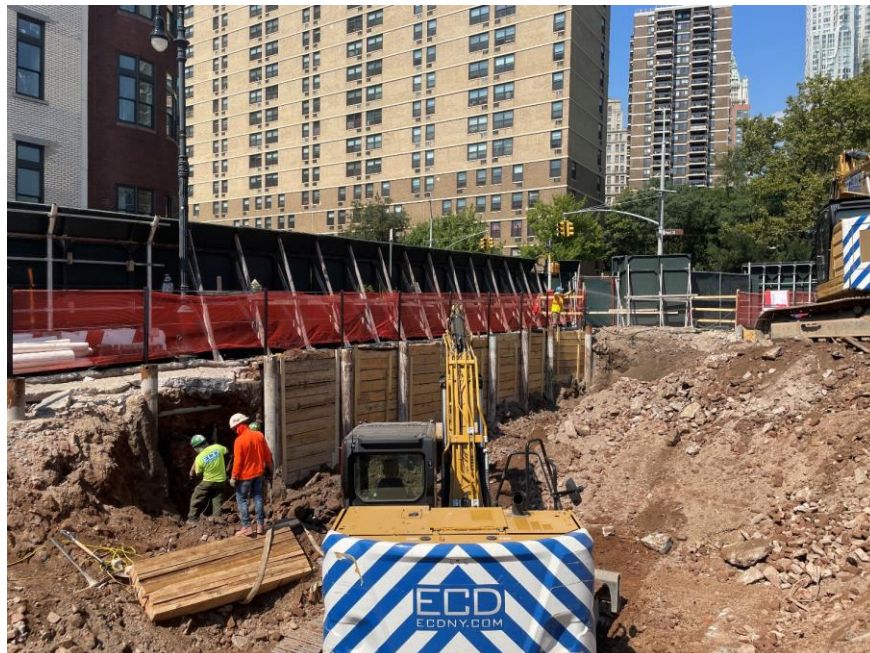


Photo 2: ECD installing timber lagging along the western boundary of the site (facing northwest)

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey, S. Simpson	By:	Jack Millman LANGAN
-----	--	-----	-------------------------------